



COMPLETE
METALWORKING
SOLUTIONS

(800) 991-4225


www.ahbinc.com

ISO Certified

customerservice@ahbinc.com

VALUE AT THE SPINDLE®

2022–2023 Global Product Catalog

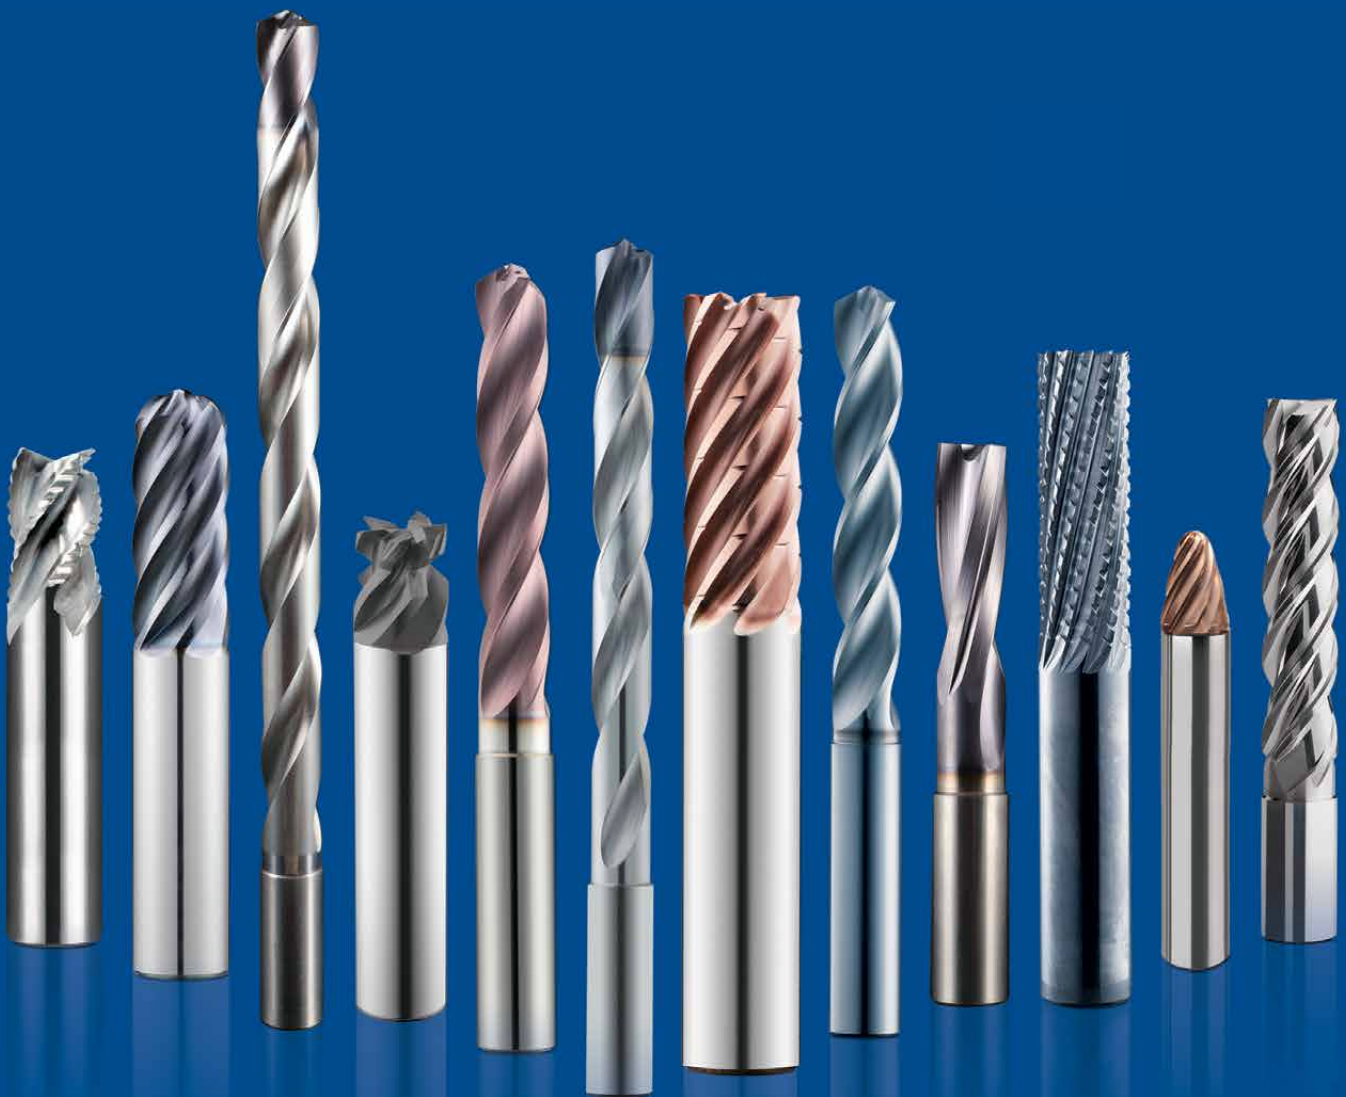

www.kyocera-sgstool.com

ISO 9001:2015 Certified



VALUE AT THE SPINDLE®

KYOCERA SGS Precision Tools (KSPT) is an ISO 9001:2015 Certified manufacturer of industry leading round solid carbide cutting tools. State of the art manufacturing and warehouse facilities have the capacity and processes to meet the quality and delivery demands of customers in all markets around the world. Complete inspections performed within its metallurgical lab and manufacturing quality departments ensure the use of high quality carbide and reliable manufacturing consistency regardless of when a cutting tool is produced.

KSPT is proud to have pioneered some of the world's most advanced cutting technologies due to rigorous testing of tools, coatings, and materials within its Global Innovation Center. It is this commitment to innovation that has launched patented products and technologies like the Z-Carb with its variable geometry and cutting edge preparation, Series 43 APR® and APF® ultra high performance aluminum cutting tools, and the JetStream coolant technology.

SGS has become an important part of the KYOCERA Precision Tools family, and while the name has changed, one thing has not. Its dedicated people and their relentless commitment to the customer. KSPT Technical Sales Engineers, Application Specialists, and Distribution Partners blanket the globe, delivering reliable service and support to all market segments. It is these people and products that drive innovative application strategies and cutting tool technologies into the end user, continually exceeding expectations and providing the most Value at the Spindle®.



Table of Contents

KYOCERA SGS Precision Tools	2
KYOCERA SGS Precision Tools Europe Ltd. . .	4
Global Innovation Center	5
Tooling Services.....	6
Tech Hub	7
Medical Division	8
Tool Wizard®	9

OVERVIEW

Common Legend.....	10
End Mill Legend.....	12
Drill Legend.....	13
Router Legend	14

COATINGS	15
----------------	----

MILLING

High Performance End Mills.....	16
End Mill Matrix.....	22
High Performance Aluminum End Mills . . .	128
General Application End Mills	272

HOLE MAKING

High Performance Drills	178
Drill Matrix	182
General Application Drills.....	332
General Application Countersinks	358
General Application Reamers	374

ROUTING

High Performance Routers.....	386
General Application Routers	396

TECHNICAL INFORMATION

EDP Index	400
KSPT Reference Information	421
Decimal Equivalent Chart	422
Hardness Conversion Chart	423





MORE THAN JUST ANOTHER CUTTING TOOL SUPPLIER

KYOCERA SGS PRECISION TOOLS EUROPE, LTD.

The state of the art KYOCERA SGS Precision Tools Europe facility is located in Wokingham, England and is focused on the manufacture of special cutting tools, high accuracy form tools, tool modifications and regrinds. A highly skilled team of professionals specialize in the supply and support of high performance tools for the Aerospace, Medical, Power Generation and Motorsport markets.




KYOCERA SGS Precision Tools Europe also offers a full range of end mill and drill products as follows:

- Multi-Million Euro Warehouse Stocking Full Range of Catalog Products
- Same Day Shipment on Stock Items
- Multi-Lingual Sales and Technical Support
- Online Portal for Stock Availability
- High Performance Product and Application Training, Including the New KYOCERA SGS Tool Clinic

Additional services provided at this facility include:

- A Fast Track for Special Tools Via Our Rapid Response Centre
- Product Research and Development
- Product Engineering and Tool Application Support
- CAD/CAM Software Support

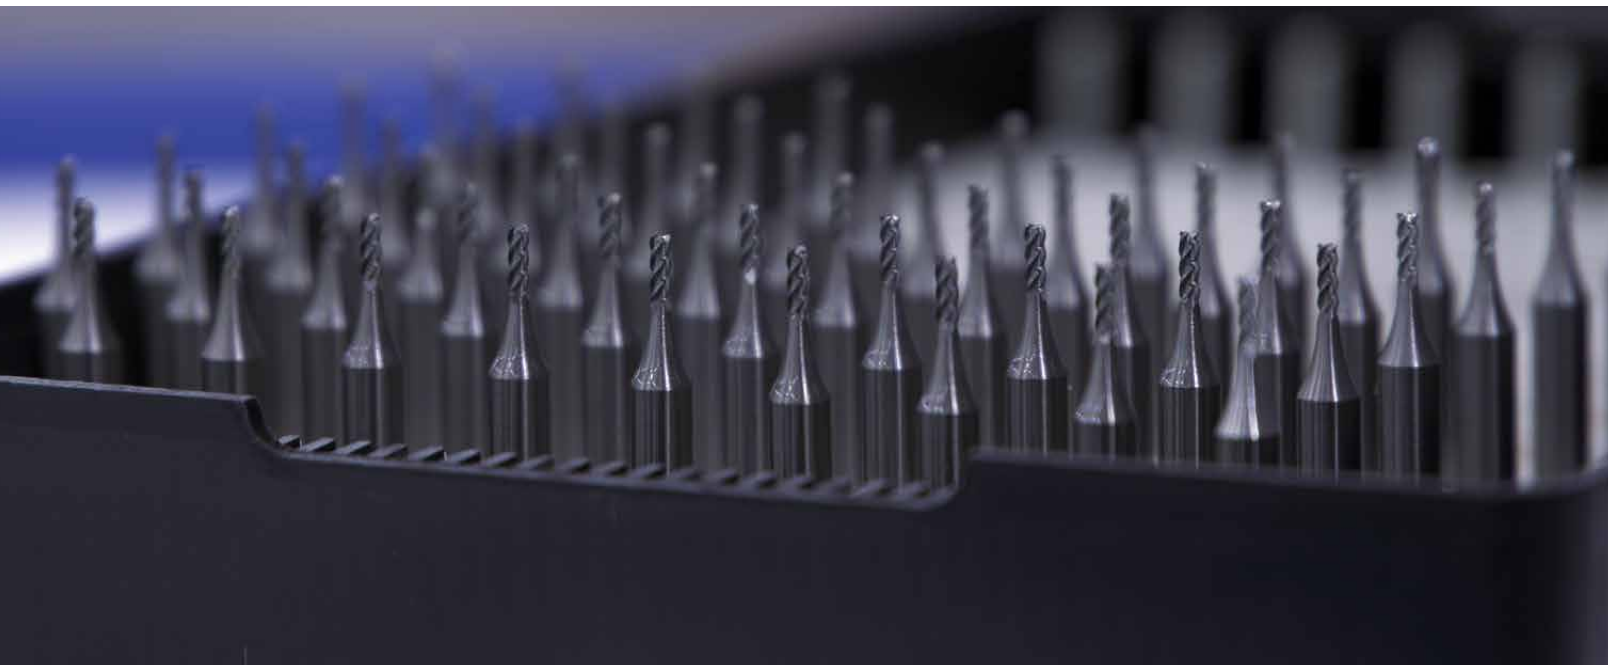



GLOBAL INNOVATION CENTER

CUTTING TOOL INNOVATION

One of the main goals of the KSPT Global Innovation Center is to bring value to the customer's spindle; one of the ways this is achieved is by producing innovative cutting tool geometries. Using the most advanced technology and techniques available in today's market, KSPT is dedicated to developing new products that will take the industry to the next level.

- State of the art cutting tool measuring and monitoring technology
- Continuous market research and training to stay up to date
- Unique and complex tool designs

TECHNICAL TRAINING & EDUCATION

The KSPT Global Innovation Center sets out to involve our trainees in engaging and challenging training regardless of where they are at in their career with a balance of demonstrations, presentations, and hands-on challenges.

- Our own KSPT team members go through the same core training we provide to our valued distribution partners
- Two levels of KSPT Campus tool clinics available
- On-site and online customer training

APPLICATION SUPPORT AND TESTING

At the KSPT Global Innovation Center, we understand that every application comes with its own challenges and at the end of the day, the customer wants to minimize the cost. This is where our R&D lab, engineers, and range of machining elements come into play. We can closely replicate the customer's application and provide feedback on how we suggest approaching it, all without the need to halt production in their own shop.

- A wide range of tool holding, fixturing, material, coolants/delivery methods, and machines
- Technical support and troubleshooting by phone, email, or web call
- Research and development



TOOLING SERVICES

KSPT is committed to providing superior tooling services in the areas of Reconditioning, Recoating, Regrinding, Specials and Alterations. These services are offered to provide unique solutions and enhanced tool life with involvement from the KSPT Technical Support Team.

KSPT proudly offers Tooling Services in North America and Europe.



KSPT TOOLING SERVICES FACILITIES

UNITED STATES OF AMERICA KSPT

150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
fax - US & Canada: (800) 447-4017
international fax: (330) 686-2146

KYOCERA SGS Precision Tools West Coast Service Center

1832 W. Collins Ave.
Orange, California 92867
phone: (714) 363-3701
fax: (714) 363-3711
email: sgswest@kyocera-sgstool.com

EUROPE KSPTE


10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com

KYOCERA SGS Precision Tools Tech Hub

149 Slayton Avenue
Danville, Virginia 24540
US and Canada: (434) 791-2020
Fax US & Canada: (434) 791-2044
web: www.kyocera-sgstool.com/tech-hub



BEFORE

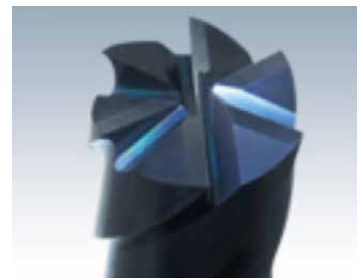

AFTER

KYOCERA SGS Tech Hub



The KYOCERA SGS Tech Hub (KSTH) is a division of KYOCERA SGS Precision Tools Inc. created to focus on custom high-performance cutting tool solutions. The state-of-the-art custom facility is designed with the purpose and resources to provide MORE than a cutting tool. KSTH provides a complete scope of services and works with customers to tailor solutions from conception to application and beyond.

CUSTOM CUTTING TOOL SOLUTIONS

KSTH considers each opportunity as a priority project and understands the challenges special tailored tooling present to our end users. Our sole focus is supporting a culture required for applying custom solutions yielding a return on investment with our technical expertise, resources, and structure. Besides KSTH providing quotation requests typically within a 24-hour period, we also offer:

- Competitive Deliveries
- Improved Value Proposition
- Global Resources and Technology
- Full Project Proposal and Management
- Approval Drawings
- Solid Models
- Process Plans
- Cutting Strategies and Simulations
- Quality Assurance Documentation (ISO 9001:2015 Certified)
- Strategic Industry Partnerships for Complete Solution Proposals
- Onsite Application and Optimization Support
- Cradle to Grave Product Support
- Constant Access to KSTH Staff

The Tech Hub division was created with the vision of providing a specialized facility, staff, resources, and culture around developing and providing custom tailored solution to customers on an application by application basis. Each solution designed and optimized for an application not a market, not a material, and not a part, but specific to the unique demands of each application. Making the extraordinary, ordinary at the Tech Hub!

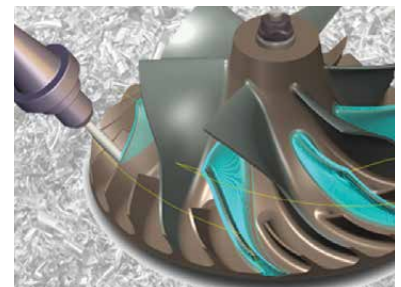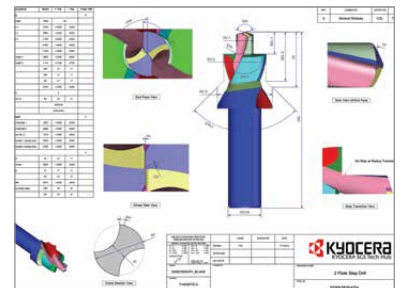

KYOCERA SGS Tech Hub

149 Slayton Avenue
Danville, Virginia 24540
US and Canada: (434) 791-2020
Fax US & Canada: (434) 791-2044
web: www.kyocera-techhub.com





KYOCERA SGS Precision Tools Medical Division

WHO WE ARE

With over 20 years of industry experience, KSPT Medical produces unique, customer designed orthopedic devices using highly trained engineers dedicated to new technology. KSPT Medical is a division of KYOCERA SGS Precision Tools, who proudly pioneered some of the world's most advanced metal cutting technology and sells to more than 60 countries. With over 20 years of industry experience, KSPT Medical Division is ISO 13485:2016 Certified and is FDA Registered in the production of medical devices in the orthopedic marketplace.

ENGINEERING

We approach each opportunity as a project and manage it as such. We pride ourselves on engineering each project to the specific needs of our customers. Providing quotes often within 24 hours and following through with detailed drawings, solid models, process plans, and program simulations if needed. Our goal is to work hand in hand with the end user and maintain constant communication to customize our support to their needs.

MACHINING CAPABILITIES

- GRINDING
- MILLING
- TURNING
- PROFILING
- BENDING
- Services Offered; Welding, Various Coatings, Anodizing, Passivation, Electropolishing, Laser Etching and HeatTreating

KYOCERA SGS Precision Tools Medical Division

201 S. Towerview Dr.
Columbia City, Indiana 46725
phone: (260) 244-7677
fax: (260) 244-7466
www.ksptmedical.com

To Request a Quote:
rfq@kyocera-sgstool.com

Customer Service and Orders:
salesmd@kyocera-sgstool.com



REGISTERED ISO 13485:2016 Certified



VALUE AT THE SPINDLE®

An interactive and dynamic platform to help select the correct SGS tool for the operation and provide optimal machining parameters.

- A quick and reliable 3 step process:
 1. Choose the material
 2. Enter the application
 3. From the list of recommended results, choose the tool that best fits your machining needs
- Speed & Feed rates will be generated based on application parameters combined with the selected tool's capabilities in the desired material.

TO SIGN UP FOR THE TOOLWIZARD®:

1. Visit Toolwizard.kyocera-sgstool.com
2. Register for an account
3. Start calculating
4. Start saving!





Common Legend



Leyenda habitual



Légende commune



Gemeinsame Legende

TO ORDER: Please specify quantity and EDP number.

PARA SU PEDIDO: Por favor especifique cantidad y número de EDP.

POUR COMMANDER: Veuillez préciser la quantité et le code article EDP.

BESTELLEN: Bitte Menge und EDV-Nummer angeben.

RETURN POLICY: An RMA number must accompany all product returns.
Contact your Customer Service Representative for an RMA number.

DEVOLUCIONES: Todo material devuelto debe ir acompañado de un número de RMA correspondiente.
Para solicitarlo, póngase en contacto con su Representante de Atención al Cliente.

POLITIQUE DE RETOUR: Tous les produits retournés doivent être accompagnés d'un numéro RMA.
Contacter votre interlocuteur commercial pour obtenir un numéro RMA.

RÜCKNAHMEGARANTIE: Eine RMA-Nummer (Rücksendegenehmigung) muss bei allen Produktrücksendungen beiliegen.
Wenden Sie sich bitte an Ihren Kundendienstmitarbeiter für RMA-Nummer.

REGULATION SAFETY GLASSES SHOULD ALWAYS BE WORN WHEN USING HIGH-SPEED CUTTING EQUIPMENT

DEBEN USARSE GAFAS PROTECTORAS CUANDO SE UTILICEN EQUIPOS DE ALTA VELOCIDAD

DES LUNETTES DE SÉCURITÉ DOIVENT ÊTRE IMPÉRATIVEMENT PORTÉES LORS D'UTILISATION D'OUTILS À GRANDE VITESSE

BEI SCHNELL LAUFENDEN SPANABHEBENDEN MASCHINEN MÜSSEN IMMER DIE VORGESCHRIEBENEN SICHERHEITSBRILLEN GETRAGEN WERDEN



WARNING: This product can expose you to chemicals including Cobalt, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov



ADVERTENCIA: Este producto puede exponerlo a químicos como el Cobalto, reconocido como cancerígeno en el estado de California. Para más información visite esta página web: www.p65warnings.ca.gov



ATTENTION: Ce produit vous expose aux produits chimiques incluant le Cobalt, qui est reconnu par l'Etat de Californie à être une cause de cancer. Pour plus d'information veuillez regarder sur: www.p65warnings.ca.gov



WARNUNG: Dieses Produkt kann Sie mit Chemikalien wie Kobalt aussetzen, das dem Staat Kalifornien als krebserregend bekannt ist. Für weitere Informationen, besuchen Sie: www.p65warnings.ca.gov

**INTELLECTUAL PROPERTY
PROPIEDAD INTELECTUAL
PROPRIÉTÉ INTELLECTUELLE
GEISTIGES EIGENTUM**

KYOCERA SGS Precision Tools holds more than 20 patents globally. Please visit our website at www.kyocera-sgstool.com to learn more.

KYOCERA SGS Precision Tools posee más de 20 patentes a nivel mundial. Para más información, visite nuestra página web www.kyocera-sgstool.com.

KYOCERA SGS Precision Tools possède plus de 20 brevets mondialement reconnus. Pour plus d'information, veuillez consulter notre site web www.kyocera-sgstool.com.

KYOCERA SGS Precision Tools besitzt mehr als 20 Patente weltweit. Bitte besuchen Sie unsere Webseite www.kyocera-sgstool.com für weitere Informationen.

Common Legend

Leyenda habitual

Légende commune

Gemeinsame Legende

MATERIALS MATERIALES MATÉRIAUX WERKSTOFFE



Steels (P)
Aceros
Aciers
Stähle



Stainless Steels (M)
Aceros Inoxidables
Aciers inoxydables
Nichtrostende Stähle



Cast Iron (K)
Acero de Fundición
Fonte
Grauguss



Non-Ferrous (N)
No Férricos
Non Ferreux
Nichteisenmetalle



High Temp Alloys (S)
Aleaciones Termorresistentes
Alliages hautes températures
Warmfeste Legierungen



Hardened Steels (H)
Aceros Endurecidos
Aciers Trempés
Gehärteter Stahl

TOOL LENGTH LONGITUDES DE HERRAMIENTAS LONGUEUR DE L'OUTIL WERKZEUGLÄNGE



Stub
Corta
Court
Kurze Bauform



Regular
Media
Moyen
Standard



Long
Larga
Long
Lang



Long Reach Neck
Larga con cuello
Détalonnage longue
portée
Freischliff



Extra Long
Extra-larga
Extra-long
Extra-Lang

FLUTES FILOS DENTS SCHNEIDEN



2 Flutes
2 Filos
2 Dents
2 Schneiden



3 Flutes
3 Filos
3 Dents
3 Schneiden



4 Flutes
4 Filos
4 Dents
4 Schneiden



5 Flutes
5 Filos
5 Dents
5 Schneiden



6 Flutes
6 Filos
6 Dents
6 Schneiden



7 Flutes
7 Filos
7 Dents
7 Schneiden



8 Flutes
8 Filos
8 Dents
8 Schneiden



9 Flutes
9 Filos
9 Dents
9 Schneiden



10 Flutes
10 Filos
10 Dents
10 Schneiden



11 Flutes
11 Filos
11 Dents
11 Schneiden



12 Flutes
12 Filos
12 Dents
12 Schneiden

End Mill Legend **Leyenda fresas** **Légende fraise** **Fräser-Legende**

END CONFIGURATIONS CONFIGURACIONES DE LA PUNTA FORME DE L'OUTIL EN BOUT ENDENAUSFÜHRUNG



Ball
Esférica
Boule
Kugelkopf



Corner
Plana con
borde romo
Rayon
mit Eckenradius



Square
Plana
Non rayonné
Scharfkantig



Linear taper
Perfil Cónico
Conique Droit
Linear Kegel



Tapered Circle
Segment
Perfil Cónico de
Segmento Circular
Conique Segment
de Cercle
Tonnen Segment



Picatinny Recoil
Groove
Fresa Riel Picatinny
Rainure Décalée
Picatinny
Picatinny Rückstoss
Nut



Picatinny Dovetail
Form
Fresa de Forma
Picatinny Cola de
Milano
Queue d'aronde
Picatinny
Picatinny Schwal-
benschwanz Form

SHANK TYPE TIPO DE VÁSTAGO TYPE DE QUEUE SCHAFTART



Common
Normal
Dégagée
Standard



Straight
Recto
Cylindrique
Gerade



WELDON
Drive Flat
Plano en el zanco
Entrainement
méplat
Spannfläche



DIN6535 HB
Drive Flat
DIN 6535 HB
Plano en el zanco
DIN 6535 HB
Entrainement
méplat DIN 6535 HB
Spannfläche
DIN 6535 HB



Right Spiral
Hélice con corte
a la derecha
Hélice droite
Rechtsspirale



Left Spiral
Hélice con corte
a la izquierda
Hélice gauche
Linksspirale



Variable Right Spiral
Hélice con corte a
la derecha y ángulo
variable
Hélice droite variable
Rechtsspirale,
variabel

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFOUILLISSEMENT KÜHLSCHMIERMittel-Optionen



Internal Coolant
Refrigeración interna
Refrondissement
interne
Innenkühlung



JetStream Coolant
Slots
Ranuras de refriger-
ación JetStream
Fentes de refroid-
issement JetStream
JetStream-
Kühlmittelschlitze



Positive
Positivo
Positif
Positiv



Neutral
Neutro
Neutre
Neutral



Negative
Negativo
Négatif
Negativ



Variable
Variable
Variable
Variabel



Flute Spacing
Unequal
Espaciado
desigual de los
filos
Denture décalée
Nutenabstand
Ungleich



Chip Breaker
Rompevirutas
Brise-copeaux
Spanteiler

RAKE ANGLE ANGULO DE DESPRENDIMIENTO ANGLE DE COUPE SPANWINKEL

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFOUILLISSEMENT KÜHLSCHMIERMittel-Optionen

ADDITIONAL GEOMETRY GEOMETRÍAS ADICIONALES GÉOMÉTRIE SUPPLÉMENTAIRE WEITERE BAUFORMEN

All tools are in Right Cut Direction unless noted
Todas las herramientas son con corte a la derecha a menos que se indique lo contrario
Tous les outils ont une coupe à droite, sauf indications contraires
Alle Werkzeuge sind rechtsschneidend, soweit nicht anders angegeben

All tools are straight or non-tapered unless noted
Todas las herramientas son rectas o no cónicas a menos que se indique lo contrario
Tous les outils sont droits ou non coniques, sauf indication contraire
Alle Werkzeuge sind gerade oder nicht konisch, sofern nicht anders angegeben

Drill Legend

Leyenda brocas

Légende perçage

Bohrer-Legende

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE SCHAFTART



Common
Normal
Dégagée
Standard



Straight
Recto
Cylindrique
Gerade

REACH ALCANCE LONGUEUR NUTZLÄNGE

3xD

3xD Reach
Alcance 3xD
Longueur 3xD
3xD Nutzlänge

5xD

5xD Reach
Alcance 5xD
Longueur 5xD
5xD Nutzlänge

8xD

8xD Reach
Alcance 8xD
Longueur 8xD
8xD Nutzlänge

12xD

12xD Reach
Alcance 12xD
Longueur 12xD
12xD Nutzlänge

HELIX ANGLES ANGULOS DE LAS HELICES ANGLES DE L'HÉLICE SPANWINKEL



Right Spiral
Hélice con corte
a la derecha
Hélice à droite
Rechtsspirale



None
Ninguno
Aucun
gerade genutet

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFROIDISSEMENT KÜHLSCHMIERMITTEL-OPTIONEN



Internal Coolant
Refrigeración interna
Refroidissement interne
Innenkühlung



External Coolant
Refrigeración externa
Refroidissement externe
Auskühlung

POINT ANGLE ÁNGULO DE PUNTA POINT D'ANGLE SPITZENWINKEL



Drill Point
Angulo de la Punta
Point de perçage
Bohrspitze



Point Angle
Ángulo de punta
Angle de pointe
Spitzenwinkel

CHAMFER ANGLE ÁNGULO DE CHAFLÁN ANGLE DE CHANFREIN FASENWINKEL



Chamfer Angle
Ángulo de chaflán
Angle de chanfrein
Fasenwinkel

NUMBER OF MARGINS NÚMERO DE MÁRGENES NOMBRE DE MARGES ANZAHL DER RÄNDER



2 Margins
2 Márgenes
2 Marges
2 Ränder



3 Margins
3 Márgenes
3 Marges
3 Ränder



4 Margins
4 Márgenes
4 Marges
4 Ränder

NUMBER OF FLUTES FILOS DENTS SCHNEIDEN



1 Flute
1 Filo
1 Dent
1 Schneiden



2 Flutes
2 Filos
2 Dents
2 Schneiden



3 Flutes
3 Filos
3 Dents
3 Schneiden

Router Legend Leyenda ranuradores Légende détourage Konturenfräser-Legende

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE SCHAFTART



Straight
 Recto
 Cylindrique
 Gerade

RAKE ANGLE ANGULO DE DESPRENDIMIENTO ANGLE DE PENTE SPANWINKEL



Positive
 Positivo
 Positif
 Positiv



Neutral
 Neutro
 Neutre
 Neutral



Negative
 Negativo
 Négatif
 Negativ



Variable
 Variable
 Variable
 Variabel

HELIX ANGLES ANGULOS DE LAS HELICES ANGLES DE L'HELICE SPANWINKEL



Right Spiral
 Hélice con corte
 a la derecha
 Hélice à droite
 Rechtsspirale



Left Spiral
 Hélice con corte
 a la izquierda
 Hélice à gauche
 Linksspirale

ADDITIONAL GEOMETRY GEOMETRÍAS ADICIONALES GÉOMÉTRIE SUPPLÉMENTAIRE WEITERE BAUFORMEN



Left Hand Cut Direction
 Fresado sentido izquierda
 Coupe vers la gauche
 Rechtsschneidend



Right Hand Cut Direction
 Fresado sentido derecha
 Coupe vers la droite
 Linksschneidend



Chip Breaker
 Rompevirutas
 Brise-copeaux
 Spanbrecher

Ti-NAMITE® and Di-NAMITE® Tool Coatings are specifically engineered for KSPT solid carbide rotary tools. The coating lineup includes proprietary processes that result in optimized tool life and increased speed and feed rates in a variety of applications.



	Coating	Identifying Color	Layer Structure	Thickness	Hardness (HV)	Coefficient of Friction (Fretting)	Thermal Stability	General Information
	Titanium Nitride (TiN)	gold	Multilayer	1–5 microns	2200	0.40–0.65	600°C / 1112°F	A general purpose coating with good adhesion and abrasion resistant properties. Suitable for a wide variety of materials.
	Aluminum Titanium Nitride (AlTiN)	dark grey	Nano structure	1–5 microns	3700	0.30	1100°C / 2010°F	Excellent thermal and chemical resistance allows for dry cutting and improvements in performance of carbide. The coating has a high hardness giving great protection against abrasive wear and erosion.
	Titanium DiBoride (TiB2)	light grey-silver	Monolayer	1–2 microns	4000	0.10–0.20	850°C / 1562°F	This ceramic based coating ensures a smooth surface and a low affinity to cold welding or edge build up, which makes it optimal for aluminum and copper applications. It has high toughness and high hardness.
	Titanium Carbonitride (TiCN)	pink-red	Multilayer	1–5 microns	3000	0.30–0.45	400°C / 752°F	A very wear resistant coating with high toughness and shock resistance. Good in interrupted cuts found in applications like milling.
	Proprietary (TX)	black	Nano Composite	1–5 microns	3600	0.45	1150°C / 2100°F	The structural design of Ti-Namite-X is adapted to meet a diverse range of applications; everything from high- and low-alloy steels to hardened materials (up to 65 HRC core hardness). Ti-Namite-X is suitable for operations which require high cutting speeds, high temperatures at the cutting edge, and high metal removal rates.
	Crystalline Diamond (Diamond)	black	Monolayer	6–20 microns	>8000	0.15–0.20	800°C / 1470°F	This is the hardest coating available with the best abrasion resistance. It is carbon based so it is limited in application capabilities. This coating is suitable for machining highly abrasive, non-ferrous materials such as CFRP and graphite.
	Proprietary (TM)	copper	Nano Composite	1–5 microns	3600	0.45	1150°C / 2100°F	Features include high wear resistance, reduced friction, and excellent prevention of edge build up. This coating provides superior material removal rates and tool life when used in high performance operations with difficult to machine materials like titanium.
	Proprietary (TH)	copper	Nano Composite	1–5 microns	3800	0.30	1100°C / 2010°F	This coating demonstrates a superior combination of hardness and adhesion in hard machining of molds and dies and machining high-alloy stainless steels for high temperature applications such as turbines. The smooth surface ensures optimum surface quality and decreases the temperature in the cutting zone by reducing friction.

Other coatings available upon request.



VALUE AT THE SPINDLE®

High Performance End Mills



Milling

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Z-Carb-HPR	Z5	5 Flute Rougher Square End Fractional	30	35
	Z5CR	5 Flute Rougher Corner Radius Fractional	30	35
	Z5MCR	5 Flute Rougher Corner Radius Metric	37	39
Z-Carb-AP	Z1PCR	4 Flute Variable Rake Corner Radius Fractional	41	46
	Z1PLC	4 Flute Variable Rake Long Reach Corner Radius Fractional	44	46
	Z1PLB	4 Flute Variable Rake Ball End Long Reach Fractional	45	46
	Z1MPCR	4 Flute Variable Rake Corner Radius Metric	48	51
	Z1MPIC	4 Flute Variable Rake Intermediate Reach Corner Radius Metric	50	51
	Z1MPLC	4 Flute Variable Rake Long Reach Corner Radius Metric	50	51
Z-Carb	Z1	4 Flute Variable Geometry Square End Fractional	41	46
	Z16CR	4 Flute Variable Geometry Corner Radius Fractional	41	46
	Z1B	4 Flute Variable Geometry Ball End Fractional	53	54
	Z1M	4 Flute Variable Geometry Square End Metric	48	51
	Z1MB	4 Flute Variable Geometry Ball End Metric	56	57
Z-Carb-HTA	ZH1CR	4 Flute Variable Geometry High Temp Alloys Corner Radius Fractional	59	60
	ZH1MCR	4 Flute Variable Geometry High Temp Alloys Corner Radius Metric	61	62
	ZH1MCRS	4 Flute Variable Geometry High Temp Alloys Stub Corner Radius Metric	61	62
Z-Carb-MD	ZD1CR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Fractional	63	64
	ZD1MCR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Metric	63	64
V-Carb	55	5 Flute Finisher & Semi-Finisher Square End Fractional	65	68
	55CR	5 Flute Finisher & Semi-Finisher Corner Radius Fractional	65	68
	55M	5 Flute Finisher & Semi-Finisher Square End Metric	70	74
	55MCR	5 Flute Finisher & Semi-Finisher Corner Radius Metric	70	74
	55B	5 Flute Finisher & Semi-Finisher Ball End Fractional	67	68
	55MB	5 Flute Finisher & Semi-Finisher Ball End Metric	73	74
T-Carb®	51	6 Flute High Speed Machining Square End Fractional	76	79
	51CR	6 Flute High Speed Machining Corner Radius Fractional	76	79
	51L	6 Flute High Speed Machining Square End Long Reach Fractional	77	79
	51LC	6 Flute High Speed Machining Long Reach Corner Radius Fractional	77	79
	51B	6 Flute High Speed Machining Ball End Fractional	78	79
	51LB	6 Flute High Speed Machining Ball End Long Reach Fractional	78	79
	51M	6 Flute High Speed Machining Square End Metric	81	84
	51MCR	6 Flute High Speed Machining Corner Radius Metric	81	84
	51ML	6 Flute High Speed Machining Square End Long Reach Metric	82	84
	51MLC	6 Flute High Speed Machining Long Reach Corner Radius Metric	82	84

Speed & Feed Recommendations listed after each series

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
H-Carb	51MB	6 Flute High Speed Machining Ball End Metric	83	84
	51MLB	6 Flute High Speed Machining Ball End Long Reach Metric	83	84
	77	7 Flute High Efficiency Square End Fractional	86	88
	77CR	7 Flute High Efficiency Corner Radius Fractional	86	88
	77M	7 Flute High Efficiency Square End Metric	90	92
	77MCR	7 Flute High Efficiency Corner Radius Metric	90	92
Multi-Carb	66	Multi-Flute Finisher Square End Fractional	94	95
	66CR	Multi-Flute Finisher Corner Radius Fractional	94	95
	66M	Multi-Flute Finisher Square End Metric	97	99
	66MCR	Multi-Flute Finisher Corner Radius Metric	97	99
Series 33	67B	Multi-Flute Finisher Tapered Circle Segment Barrel Tool Metric	101	102
	33CR	3 Flute Difficult to Machine Materials Corner Radius Fractional	103	104
	33MCR	3 Flute Difficult to Machine Materials Corner Radius Metric	106	107
Series 7	7	4 Flute Variable Geometry Long Length Square End Fractional	109	111
	7M	4 Flute Variable Geometry Long Length Square End Metric	112	113
	7B	4 Flute Variable Geometry Long Length Ball End Fractional	110	111
	7MB	4 Flute Variable Geometry Long Length Ball End Metric	112	113
Turbo-Carb	56B	2 Flute Contouring Long Reach Ball End Fractional	114	115
	56MB	2 Flute Contouring Long Reach Ball End Metric	114	115
Power-Carb®	57	6 Flute Finisher Square End Fractional	116	117
	57M	6 Flute Finisher Square End Metric	116	118
CFRP Slow Helix	27	4 Flute Slow Helix Square End Fractional	119	120
	27M	4 Flute Slow Helix Square End Metric	119	121
Picatinny Rail Tools	PRT	3 Flute Non-Ferrous Recoil Groove Tool Fractional	122	124
	PRT	5 Flute Non-Ferrous Dovetail Form Tool Fractional	125	127
	PRT	3 Flute Ferrous Recoil Groove Tool Fractional	122	123
	PRT	5 Flute Ferrous Dovetail Form Tool Fractional	125	126

Speed & Feed Recommendations listed after each series

FRESAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Z-Carb-HPR	Z5	5 filos, desbastador, punta cuadrada, fraccional	30	35
	Z5CR	5 filos, desbastador, radio angulado, fraccional	30	35
	Z5MCR	5 filos, desbastador, radio angulado, métrico	37	39
Z-Carb-AP	Z1PCR	4 filos, inclinación variable, radio angulado, fraccional	41	46
	Z1PLC	4 filos, inclinación variable, largo alcance, radio angulado, fraccional	44	46
	Z1PLB	4 filos, inclinación variable, punta esférica, largo alcance, fraccional	45	46
	Z1MPCR	4 filos, inclinación variable, radio angulado, métrico	48	51
	Z1MPIC	4 filos, inclinación variable, medio alcance, radio angulado, métrico	50	51
	Z1MPLC	4 filos, inclinación variable, largo alcance, radio angulado, métrico	50	51
	Z1	4 filos, geometría variable, punta cuadrada, fraccional	41	46
	Z16CR	4 filos, geometría variable, radio angulado, fraccional	41	46
Z-Carb	Z1B	4 filos, geometría variable, punta esférica, fraccional	53	54
	Z1M	4 filos, geometría variable, punta cuadrada, métrico	48	51
	Z1MB	4 filos, geometría variable, punta esférica, métrico	56	57
Z-Carb-HTA	ZH1CR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, fraccional	59	60
	ZH1MCR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, métrico	61	62
	ZH1MCRS	4 filos, geometría variable, aleaciones termorresistentes, versión corta, radio angulado, métrico	61	62
Z-Carb-MD	ZD1CR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, fraccional	63	64
	ZD1MCR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, métrico	63	64
V-Carb	55	5 filos, acabador y semiacabador, punta cuadrada, fraccional	65	68
	55CR	5 filos, acabador y semiacabador, radio angulado, fraccional	65	68
	55M	5 filos, acabador y semiacabador, punta cuadrada, métrico	70	74
	55MCR	5 filos, acabador y semiacabador, radio angulado, métrico	70	74
	55B	5 filos, acabador y semiacabador, punta esférica, fraccional	67	68
	55MB	5 filos, acabador y semiacabador, punta esférica, métrico	73	74
T-Carb®	51	6 filos, mecanizado de alta velocidad, punta cuadrada, fraccional	76	79
	51CR	6 filos mecanizado de alta velocidad, radio angulado, fraccional	76	79
	51L	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, fraccional	77	79
	51LC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, fraccional	77	79
	51B	6 filos, fresa esférica para mecanizados de alta velocidad, fraccional	78	79
	51LB	6 filos, fresa esférica larga para mecanizados de alta velocidad, fraccional	78	79
	51M	6 filos, mecanizado de alta velocidad, punta cuadrada, métrico	81	84
	51MCR	6 filos mecanizado de alta velocidad, radio angulado, métrico	81	84
	51ML	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, métrico	82	84
	51MLC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, métrico	82	84
	51MB	6 filos, fresa esférica para mecanizados de alta velocidad, métrico	83	84
	51MLB	6 filos, fresa esférica larga para mecanizados de alta velocidad, métrico	83	84
H-Carb	77	7 filos de alta eficiencia, punta cuadrada, fraccional	86	88
	77CR	7 filos de alta eficiencia, radio angulado, fraccional	86	88
	77M	7 filos métrica de alta eficiencia, punta cuadrada, métrico	90	92
	77MCR	7 filos métrica de alta eficiencia, radio angulado, métrico	90	92
Multi-Carb	66	Filo múltiple, acabador, punta cuadrada, fraccional	94	95
	66CR	Filo múltiple, acabador, radio angulado, fraccional	94	95
	66M	Filo múltiple, acabador, punta cuadrada, métrico	97	99
	66MCR	Filo múltiple, acabador, radio angulado, métrico	97	99
	67B	Fresa cónica circular multi-filos tipo barril, métrica	101	102
Serie 33	33CR	3 filos, materiales difíciles de mecanizar, radio angulado, fraccional	103	104
	33MCR	3 filos, materiales difíciles de mecanizar, radio angulado, métrico	106	107
Serie 7	7	4 filos, geometría variable, longitud larga, punta cuadrada, fraccional	109	111
	7M	4 filos, geometría variable, longitud larga, punta cuadrada, métrico	112	113
	7B	4 filos, geometría variable, longitud larga, punta esférica, fraccional	110	111
	7MB	4 filos, geometría variable, longitud larga, punta esférica, métrico	112	113
Turbo-Carb	56B	2 filos, contorneado, largo alcance, punta esférica, fraccional	114	115
	56MB	2 filos, contorneado, largo alcance, punta esférica, métrico	114	115
Power-Carb®	57	6 filos, acabador, punta cuadrada, fraccional	116	117
	57M	6 filos, acabador, punta cuadrada, métrico	116	118
Helicoidal de avance lento CFRP	27	4 filos, helicoidal de avance lento, punta cuadrada, fraccional	119	120
	27M	4 filos, helicoidal de avance lento, punta cuadrada, métrico	119	121
Herramientas de riel Picatinny	PRT	Herramienta de ranura de retroceso no ferrosa de 3 filos fraccional	122	124
	PRT	Herramienta de forma de cola de milano no ferrosa de 5 filos fraccional	125	127
	PRT	Herramienta de ranura de retroceso ferrosa de 3 filos fraccional	122	123
	PRT	Herramienta de cola de milano ferrosa de 5 filos fraccional	125	126

Recomendaciones de velocidades y avances mostradas tras cada serie


FRAISES A DETOURER UNIVERSELLES	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Z-Carb-HPR	Z5	5 dents non rayonné pour l'ébauche (fractionnel)	30	35
	Z5CR	5 dents rayonnée pour l'ébauche (fractionnel)	30	35
	Z5MCR	5 dents rayonnée pour l'ébauche (métrique)	37	39
Z-Carb-AP	Z1PCR	4 dents pas décalé et hélice variable rayonnés (fractionnel)	41	46
	Z1PLC	4 dents pas décalé et hélice variable rayonnés (fractionnel)	44	46
	Z1PLB	4 dents à vague de coupe variable longue portée à bout hémisphérique (fractionnel)	45	46
	Z1MPCR	4 dents pas décalé et hélice variable rayonnés (métrique)	48	51
	Z1MPIC	4 dents pas décalé, hélice variable, détalonné, rayonnés (métrique)	50	51
	Z1MPLC	4 dents pas décalé et hélice variable rayonnés (métrique)	50	51
	Z1	4 dents géométrie variable non rayonné (fractionnel)	41	46
	Z16CR	4 dents géométrie variable rayonné (fractionnel)	41	46
	Z1B	4 dents géométrie variable à bout hémisphérique (fractionnel)	53	54
Z-Carb	Z1M	4 dents géométrie variable non rayonné (métrique)	48	51
	Z1MB	4 dents géométrie variable à bout hémisphérique (métrique)	56	57
	Z1MCR	4 dents géométrie variable alliages haute température rayonné (fractionnel)	59	60
Z-Carb-HTA	ZH1CR	4 dents géométrie variable alliages haute température rayonné (fractionnel)	61	62
	ZH1MCR	4 dents géométrie variable alliages haute température rayonné (métrique)	61	62
	ZH1MCRS	4 dents géométrie variable, alliages haute température, longueur de l'outil court, rayonné (métrique)	61	62
Z-Carb-MD	ZD1CR	4 dents géométrie variable matériaux durs longue portée rayonné (fractionnel)	63	64
	ZD1MCR	4 dents géométrie variable matériaux durs longue portée rayonné (métrique)	63	64
V-Carb	55	5 dents en bout de finition et semi-finition plat (fractionnel)	65	68
	55CR	5 dents en bout de finition et semi-finition rayonné (fractionnel)	65	68
	55M	5 dents en bout de finition et semi-finition plat (métrique)	70	74
	55MCR	5 dents en bout de finition et semi-finition rayonné (métrique)	70	74
	55B	5 dents en bout de finition et semi-finition hémisphérique (fractionnel)	67	68
	55MB	5 dents en bout de finition et semi-finition hémisphérique (métrique)	73	74
	51	6 dents pour usinage grande vitesse non rayonné (fractionnel)	76	79
T-Carb®	51CR	6 dents pour usinage grande vitesse rayonné (fractionnel)	76	79
	51L	6 dents pour usinage grande vitesse non rayonné extra longue (fractionnel)	77	79
	51LC	6 dents pour usinage grande vitesse extra longue rayonné (fractionnel)	77	79
	51B	6 dents hémisphérique UGV dimensions cotes (fractionnel)	78	79
	51LB	6 dents hémisphérique détalonnée UGV dimensions cotes (fractionnel)	78	79
	51M	6 dents pour usinage grande vitesse non rayonné (métrique)	81	84
	51MCR	6 dents pour usinage grande vitesse rayonné (métrique)	81	84
	51ML	6 dents pour usinage grande vitesse non rayonné extra longue (métrique)	82	84
	51MLC	6 dents pour usinage grande vitesse extra longue rayonné (métrique)	82	84
	51MB	6 dents hémisphérique UGV dimensions cotes (métrique)	83	84
	51MLB	6 dents hémisphérique détalonnée UGV dimensions cotes (métrique)	83	84
H-Carb	77	7 dents hautes performances droite côtes (fractionnel)	86	88
	77CR	7 dents hautes performances torique côtes (fractionnel)	86	88
	77M	7 dents hautes performances droite côtes (métrique)	90	92
	77MCR	7 dents hautes performances torique côtes (métrique)	90	92
Multi-Carb	66	Multi-dents non rayonné pour finition (fractionnel)	94	95
	66CR	Multi-dents rayonné pour finition (fractionnel)	94	95
	66M	Multi-dents non rayonné pour finition (métrique)	97	99
	66MCR	Multi-dents rayonné pour finition (métrique)	97	99
	67B	Fraise tonneau à segments de cercle cotes (métrique)	101	102
Série 33	33CR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (fractionnel)	103	104
	33MCR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (métrique)	106	107
Série 7	7	4 dents géométrie variable à queue longue non rayonné (fractionnel)	109	111
	7M	4 dents géométrie variable à queue longue non rayonné (métrique)	112	113
	7B	4 dents géométrie variable à queue longue à bout hémisphérique (fractionnel)	110	111
	7MB	4 dents géométrie variable à queue longue à bout hémisphérique (métrique)	112	113
Turbo-Carb	56B	2 dents contournage longue portée à bout hémisphérique (fractionnel)	114	115
	56MB	2 dents contournage longue portée à bout hémisphérique (métrique)	114	115
Power-Carb®	57	6 dents en bout de finition plat (fractionnel)	116	117
	57M	6 dents en bout de finition plat (métrique)	116	118
CFRP hélice lente	27	4 dents hélice lente non rayonné (fractionnel)	119	120
	27M	4 dents hélice lente non rayonné (métrique)	119	121
Outils de rail Picatinny	PRT	Outil de rainure de recul non ferreux à 3 dents (fractionnel)	122	124
	PRT	Outil de forme en queue d'aronde non ferreux à 5 dents (fractionnel)	125	127
	PRT	Outil de rainure de recul ferreux à 3 dents (fractionnel)	122	123
	PRT	Outil en queue d'aronde ferreux à 5 dents (fractionnel)	125	126

Recommandations de vitesse et avance indiquées après chaque série







HOCHLEISTUNGS-SCHAFTFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Z-Carb-HPR	Z5	Zölliger Schruppfräser mit 5 Schneiden ohne Eckenradien	30	35
	Z5CR	Zölliger Schruppfräser mit 5 Schneiden und Eckenradien	30	35
	Z5MCR	Schruppfräser mit 5 Schneiden und Eckenradien	37	39
Z-Carb-AP	Z1PCR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	41	46
	Z1PLC	Zölliger Langlochfräser mit 4 variablen Schneiden und Eckenradien	44	46
	Z1PLB	Zölliger Radiuschaftfräser mit 4 Schneiden und variablem Spanwinkel	45	46
	Z1MPCR	Fräser mit 4 Schneiden und variablen Spanwinkel	48	51
	Z1MPIC	Fräser mittlerer Länge mit 4 variablen Schneiden und Eckenradien	50	51
	Z1MPLC	Langlochfräser mit 4 variablen Schneiden und Eckenradien	50	51
	Z1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	41	46
	Z16CR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	41	46
Z-Carb	Z1B	Zölliger Radiuschaftfräser mit 4 Schneiden und variabler Form	53	54
	Z1M	Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	48	51
	Z1MB	Radiuschaftfräser mit 4 Schneiden und variabler Form	56	57
Z-Carb-HTA	ZH1CR	Hochwarmfester zölliger Fräser mit 4 variablen Schneiden und Eckenradien	59	60
	ZH1MCR	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	61	62
	ZH1MCRS	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	61	62
Z-Carb-MD	ZD1CR	Zölliger Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	63	64
	ZD1MCR	Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	63	64
V-Carb	55	Zölliger Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien und variabler Form	65	68
	55CR	Zölliger Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien	65	68
	55M	Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien und variabler Form	70	74
	55MCR	Schlicht- und Halbschlichtfräser mit 5 Schneiden und Eckenradien	70	74
	55B	Schlicht- und Halbschlicht-Radiuschaftfräser mit 5 Schneiden ohne Eckenradien	67	68
	55MB	Schlicht- und Halbschlicht-Radiuschaftfräser mit 5 Schneiden und variabler Form	73	74
T-Carb®	51	Zölliger Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	76	79
	51CR	Zölliger Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	76	79
	51L	Zölliger Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	77	79
	51B	6-Schneider Vollradiusfräser für Hochgeschwindigkeitsbearbeitung	77	79
	51LB	6-Schneider Vollradiusfräser mit Freischliff für Hochgeschwindigkeitsbearbeitung	78	79
	51ML	Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	78	79
	51M	Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	81	84
	51MCR	Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien aus Schnellstahl	81	84
	51LC	Zölliger Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	82	84
	51MLC	Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	82	84
	51MB	6-Schneider Vollradiusfräser für Hochgeschwindigkeitsbearbeitung	83	84
	51MLB	6-Schneider Vollradiusfräser mit Freischliff für Hochgeschwindigkeitsbearbeitung	83	84
H-Carb	77	Zölliger Hocheffizienter mit 7 Schneiden ohne Eckenradien	86	88
	77CR	Zölliger Hocheffizienter mit 7 Schneiden und Eckenradien	86	88
	77M	Hocheffizienter mit 7 Schneiden ohne Eckenradien	90	92
	77MCR	Hocheffizienter mit 7 Schneiden und Eckenradien	90	92
Multi-Carb	66	Zölliger mehrschneidiger Schlichtfräser ohne Eckenradien	94	95
	66CR	Zölliger mehrschneidiger Schlichtfräser mit Eckenradien	94	95
	66M	mehrschneidiger Schlichtfräser ohne Eckenradien	97	99
	66MCR	mehrschneidiger Schlichtfräser mit Eckenradien	97	99
	67B	Metrischer mehrschneidiger Schlichtfräser, Tonnenfräser	101	102
Serie 33	33CR	Zölliger Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	103	104
	33MCR	Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	106	107
Serie 7	7	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	109	111
	7M	Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	112	113
	7B	Zölliger Langloch-Radiuschaftfräser mit 4 Schneiden und variabler Form	110	111
	7MB	Langloch-Radiuschaftfräser mit 4 Schneiden und variabler Form	112	113
Turbo-Carb	56B	Zölliger Langloch-Profil-Radiuschaftfräser mit 2 Schneiden	114	115
	56MB	Langloch-Profil-Radiuschaftfräser mit 2 Schneiden	114	115
Power-Carb®	57	Zölliger Schlichtfräser mit 6 Schneiden ohne Eckenradien	116	117
	57M	Schlichtfräser mit 6 Schneiden ohne Eckenradien	116	118
CFRP Slow Helix	27	Zölliger Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	119	120
	27M	Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	119	121
Picatinny	PRT	3 Flöte Nichteisen-Rückstoßnut Nut Grove Bruchteil	122	124
Schienenwerkzeuge	PRT	5 Flöte Nichteisen-Schwalbenschwanzform-Werkzeug Bruchteil	125	127
	PRT	3 Rillen-Eisenrückstoß-Nutwerkzeug fraktioniert	122	123
	PRT	5 Flöte Eisen Schwalbenschwanz Werkzeug gebrochen	125	126

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

End Mill Matrix

Preferred materials for each Series are designated below.			Coolant required in these materials Plunging not recommended in these materials																	
Cut depths (Ae & Ap) are based on a percentage of the cutter diameter (DC)  Material hardness and machinability affect speed, feed, and cut depths. Long flute or long reach tools require reduced rates and cut depths.			Material																	
						 								 						
			Low Carbon ≤ 20 HRC	Medium Carbon, Alloy 20 to 35 HRC	High Carbon, Alloy 35 to 45 HRC	Ferritic & Martensitic ≤ 45 HRC	Austenitic & Duplex ≤ 25 HRC	Precipitation Hardened ≤ 45 HRC	Low Alloy, Grey, Ductile ≤ 25 HRC	Med-High Alloy, Nodular 25 to 35 HRC	High Alloy, Nodular ≥ 35 HRC	Aluminum Alloys	Copper Alloys	Plastics, Composites	Titanium Alloys ≤ 45 HRC	Iron, Nickel, Cobalt Alloys ≤ 45 HRC	Refractory Alloys, Mo, Ta, W ≤ 35 HRC	High Carbon, Med Alloy 45 to 50 HRC	Tool, Mold & Die 45 to 55 HRC	Tool, Mold & Die 55 to 65 HRC
Name	Series	Page	Steel			Stainless Steel			Cast Iron			Non Ferrous			HRSA			Hard Steel		
Series 33	33	103	★	★	★	★	★	☆	★	★	☆				★	☆	☆	○	○	
Z-Carb-AP	Z1P	41	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
Z-Carb-HTA	ZH1	59	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
Series 7	7	109	★	★	★	★	★	★	★	★	★				★	★	☆	☆	○	
Z-Carb HPR	Z5	30	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
V-Carb	55	65	★	★	★	★	★	★	★	★	★				★	★	☆	○	○	
T-Carb®	51	76	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
H-Carb	77	86	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
Multi Carb	66	94	★	★	★	★	☆	★	★	★	★				★	★	★	☆	○	
Multi Carb-B	67B	101	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
Picatinny Groove F	PRT	122	★	★	★	★	★	★							★					
Picatinny Dovetail F	PRT	125	★	★	★	★	★	★							★					
Turbo Carb	56B	114	★	★	★				★	★	★							★	★	★
Z-Carb-MD	ZD1	63			☆					☆	★							★	★	★
Power-Carb®	57	116									☆							★	★	★
Ski-Carb	44	173										★	☆	○						
S-Carb® 2 Flute	47	166										★	★	○						
S-Carb® 3 Flute	43	144										★	★	○						
S-Carb® APR-3	43APR-3	133										★	★	○						
S-Carb® APR-4	43APR-4	136										★	★	○						
S-Carb® APF	43APF	138										★	★	○						
S-Carb® APF-B	43APF-B	142										★	★	☆						
Picatinny Groove NF	PRT	122										★								
Picatinny Dovetail NF	PRT	125										★								
Slow Helix	27	119											☆	★						
CCR	20-CCR	386												★						
CCR Coarse	31-CCR	390												★						
Compression Router	25	393												★						
Up Cut Router	21	396										☆	○	★						
Down Cut Router	22	397										☆	○	★						

End Mill Matrix

	Preferred Cut Type for Series ★ Best ☆ Better ○ Good (blank) Not Recommended						Preferred Entry Method for Series			Preferred Tool Path for Series	
	Heavy	Moderate	Light	Fine	Finish-Wall	Finish - Floor	Plunge	Straight Ramp	Helical Ramp	Standard Path	HEM Path
	Unless blank, a high quality wall or floor finish can be achieved with any Series with adjusted speed & feed.						Speed & Feed are based on ramp angle.			For rough milling, HEM tool paths are usually preferred in most situations, however, Standard paths may be more efficient using suitable tools with moderate to heavy cut types.	
	Ae = 1 to .4 x DC Ap ≤ 1 x DC	Ae = .4 to .25 x DC Ap ≤ 1.5 x DC	Ae = .25 to .1 x DC Ap ≤ 2.5 x DC	Ae = .1 to .02 x DC Ap ≤ 4.5 x DC	Ae ≤ .02 x DC any Ap	Ae ≥ .5 x DC Ap ≤ .02 x DC	Ap ≤ 1 x DC lower feed rates	Ap ≤ 2 x DC medium feed rates	Ap ≤ 4 x DC higher feed rates	Standard Path	HEM Path
											
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
○	○	○	★	★	☆			○	☆	○	☆
☆	★	★	☆	☆	★			★	★	★	★
○	☆	★	★	★	★			○	☆	☆	★
○	○	☆	★	★	★			○	★	○	★
○	○	○	★	★	★			○	★	○	★
○	○	○	☆	★	★			○	★	○	★
			★	★				○	○	★	
★	★	★	★	★	★					★	
★	★	★	★	★	★					★	
○	○	☆	★	★			○	○	★	★	★
★	★	☆	☆	☆	☆			☆	★	☆	★
○	○	☆	★	★	★			○	☆	☆	★
☆	☆	☆	★	★	☆		☆	★	★	★	☆
★	★	☆	☆	○	☆		☆	★	★	★	☆
★	★	☆	☆	☆	★		☆	★	★	★	☆
★	★	☆	☆		★		☆	★	★	★	☆
★	★	☆	☆		★		☆	★	★	★	☆
○	○	☆	★	★	★		○	☆	★	☆	★
			★	★	☆		○	○		★	
★	★	★	★	★	★					★	
★	★	★	★	★	★					★	
○	○	☆	★	★	☆		○	☆	★	★	☆
★	★	☆	☆		☆		○	☆	★	★	☆
★	★	☆	☆		☆		○	☆	★	★	☆
○	○	☆	☆		★		○	☆	★	★	☆
★	★	☆	☆	○	☆		○	☆	★	★	☆
○	○	☆	☆	☆	☆					★	☆

End Mill Matrix

Name	Series	Page	Flute Count	Cut Diameter Range inch mm	Cut Length Availability (x DC) **	Reach Option (x DC) **	End Styles Square Radius Ball	
Series 33	33	103	3	0.125 to 1 3 to 20	2.25 to 3	—	R	
Z-Carb-AP	Z1P	41	4	0.0156 to 1 1 to 25	1 to 3.25	2.5 to 8.5	S, R, B	
Z-Carb-HTA	ZH1	59	4	0.250 to 1 6 to 20	1.25 to 3	—	R	
Series 7	7	109	4	0.125 to 1 3 to 25	2.25 to 8.25	—	S, B	
Z-Carb HPR	Z5	30	5	0.125 – 1 6 – 25	1 to 3	—	S, R	
V-Carb	55	65	5	0.125 to 1 6 to 20	1.25 to 5	—	S, R, B	
T-Carb®	51	76	6	0.250 to 1 6 to 20	1.25 to 3	3.25 to 5.5	S, R	
H-Carb	77	86	7	0.250 to 1 6 to 25	2.5 to 4	—	S, R	
Multi Carb	66	94	7, 9, 11	0.188 to 1 6 to 25	1.5 to 3.25	—	S, R	
Multi Carb-B	67	101	4, 6, 8	— 6 to 16	1.2 to 1.9	—	B	
Picatinny Groove F	PRT	122	3	0.2100 —	0.56	—	S	
Picatinny Dovetail F	PRT	125	5	0.6050 —	0.68	—	S	
Turbo Carb	56B	114	2	0.031 to 0.750 1 to 20	1	2 to 2.25	B	
Z-Carb-MD	ZD1	63	4	0.118 to 0.750 5 to 20	1 to 1.25	2.25 to 5	R	
Power-Carb®	57	116	6	0.250 to 0.500 6 to 20	2 to 2.25	—	S	
Ski-Carb	44	173	2	0.250 to 1 3 to 20	1.25 to 7	—	S, R	
S-Carb® 2 Flute	47	166	2	0.125 to 1 3 to 25	1 to 3	3 to 9	S, B	
S-Carb® 3 Flute	43	144	3	0.125 to 1 3 to 25	1 to 7	2.25 to 8.5	S, R, B	
S-Carb® APR-3	43APR-3	133	3	0.750 to 1 12 to 26	1.25 to 1.75	3 to 4	S, R	
S-Carb® APR-4	43APR-4	136	4	20 to 25	1.25 to 1.75	2.25 to 3.5	S, R	
S-Carb® APF	43APF	138	4	0.500 to 0.750 6 to 25	2.5 to 4	3 to 5	S, R	
S-Carb® APF-B	43APF-B	142	3, 4	— 6 to 16	1.2 to 1.9	—	B	
Picatinny Groove NF	PRT	122	3	0.2100 —	0.56	—	S	
Picatinny Dovetail NF	PRT	125	3	0.6050 —	0.68	—	S	
Slow Helix	27	119	4	0.250 to 0.750 6 to 16	1.75 to 4	—	S	
CCR	20-CCR	386	5, 8, 10, 12	0.250 to 0.500 2 to 12	2.75 to 4	—	S	
CCR Coarse	31-CCR	390	5, 7, 8, 10	0.250 to 0.500 6 to 12	2.75 to 4	—	S	
Compression Router	25	393	4, 6, 8	0.250 to 0.500 6 to 12	2.75 to 4	—	S	
Up Cut Router	21	396	2	0.125 to 0.750 3 to 12	2.5 to 4.25	—	S	
Down Cut Router	22	397	2	0.125 to 0.750 3 to 12	2.5 to 4.25	—	S	

End Mill Matrix

	Chipbreaker Option	Shank Option Solid Round Weldon Flat Jet Stream Coolant Hole	Center Cutting	Helix Angle	Flute Index	Coating	Maximum Recommended Ramp Angle ***
	By Request	SR, WF	Yes	32 / 48	Unequal	Ti-NAMITE®-A	90
	By Request	SR, WF, JS	Yes	35 / 38	Unequal	Ti-NAMITE®-X	90
	By Request	SR, WF	Yes	38 / 41	Unequal	Ti-NAMITE®-A	20
	By Request	SR	Yes	38	Unequal	Ti-NAMITE®-A	1
	By Request	SR, WF, CH	No	37	Unequal	Ti-NAMITE®-M Ti-NAMITE®-A	7
	By Request	SR, WF	Yes	45	Unequal	Ti-NAMITE®-A	5
	By Request	SR	Yes	41	Unequal	Ti-NAMITE®-X	3
	In Stock Available	SR	No	37	Unequal	Ti-NAMITE®-M Ti-NAMITE®-A	1
	By Request	SR	No	35	Equal	Ti-NAMITE®-X	1
	By Request	SR	Yes	varies	Equal	Ti-NAMITE®-H	1
	Not Available	SR	Yes	35	Unequal	Ti-NAMITE®-M	–
	Not Available	SR	No	37	Unequal	Ti-NAMITE®-M	–
	By Request	SR	Yes	30	Equal	Ti-NAMITE®-X	25
	By Request	SR	Yes	42 / 45	Unequal	Ti-NAMITE®-X	2
	By Request	SR	Yes	45	Equal	Ti-NAMITE®-X	1
	By Request	SR, WF	Yes	45	Equal	uncoated or Ti-NAMITE®-B	90
	By Request	SR	Yes	35	Equal	uncoated or Ti-NAMITE®-B	90
	In Stock Available	SR	Yes	38	Equal	uncoated or Ti-NAMITE®-B	90
	Standard	CH	Yes	38	Unequal	Ti-NAMITE®-B	90
	Standard	CH	Yes	38 / 41	Unequal	Ti-NAMITE®-B	90
	By Request	CH	Yes	38 / 41	Unequal	Ti-NAMITE®-B	25
	By Request	SR	Yes	varies	Equal	Ti-NAMITE®-B	1
	Not Available	SR	Yes	38	Equal	Ti-NAMITE®-B	–
	Not Available	SR	No	38	Equal	Ti-NAMITE®-B	–
	By Request	SR	Yes	10, 12	Unequal	uncoated or Di-NAMITE®	5
	Standard	SR	Based upon end style	15	Equal	uncoated or Di-NAMITE®	5 (for end cut styles)
	Standard	SR	Based upon end style	15	Equal	uncoated or Di-NAMITE®	5 (for end cut styles)
	By Request	SR	Yes	30	Equal	uncoated or Di-NAMITE®	5
	By Request	SR	Yes	35	Equal	various optional	90
	By Request	SR	Yes	35	Equal	various optional	–

Application Tips

Tool	• Whenever possible, select an end mill with the largest diameter, shortest flute length, and shortest overall length for the best rigidity • Long flute tools are not intended for pocketing, slotting, or heavy profiling – limit Ae to .02D • High Performance tools minimize cycle time and extend tool life
Tool Holders	• Holders with adequate gripping pressure and TIR are required • Stub holders or zero length collet style holders are recommended for heavy stock removal • When using solid holders, hand ground screw flats are not recommended
Workpiece	• Secure clamping of the workpiece will reduce chatter and deflection
Machine	• Spindle must be in optimum condition for precise TIR and maximum tool life • Sufficient horsepower is required to perform at recommended speeds and feeds • Reduce rates for low power machines to prevent workpiece and / or tool damage
Coolant	• Avoid re-milling chips through use of air blast or liquid coolant as necessary • Maintain clean coolant with appropriate concentration • General recommendations: —Water Soluble Oil or Air Blast: Tool Steels, Mold & Die Steels, Carbon or Alloy Steels —Water Soluble Oil: Stainless Steels, Titanium, High Temperature Alloys, Non-Ferrous Alloys
Methods	• Climb milling is generally preferred • Attention to programming details, tool holders, TIR, balance, fixturing, etc. improve cutting tool performance and extend tool life

END MILLING GUIDELINE

DC = cutting diameter APMX = flute length

Speeds and Feeds for Cut Types are based on Radial Width ($\overline{Ae}$) and Axial Depth ($\overline{Ap}$)

Reductions to Speeds and Feeds may be necessary when:

- Ae and Ap exceed recommendations
- Using long flute or extended reach tools
- Using long tool holders
- Machining materials harder than listed

ENTRY METHODS

Pre-Drilled Hole




Pre-drilling is the preferred entry method for most applications.

Helical Ramp



Straight Ramp



Alternative methods are helical and straight ramping. High ramp angles require reduced feed. Lower ramp angles will allow higher feed rates and extend tool life. Use slotting speeds and feeds for ramp angles of 1° to 2°. Reduce feed to 25% when ramp angles approach 6°. General purpose tools and/or difficult to machine materials will require lower ramp angles and reduced feed.

Plunge



Plunge only in non-ferrous and short-chipping materials using slotting speeds and 25% slotting feeds.

Herramientas	• Siempre que sea posible, seleccione la herramienta de mayor diámetro y menor longitud total y de filo para obtener una mayor rigidez. • Las herramientas con filos largos no son recomendadas para operaciones de apertura de cajas en el maquinado, operación de ranurado o perfilado pesado – limitar la profundidad radial (Ae) a .02D • Las herramientas de alto desempeño minimizan el tiempo de ciclo del maquinado y extienden la vida útil de la herramienta
Portaherramientas	• Los Portaherramientas deberán tener buena presión de amarre para la sujeción de la herramienta y una concentricidad máxima indicada (TIR) • Se recomienda usar portaherramientas de amarre directo cortos, o de boquilla con longitud cero para lograr un máximo arranque de viruta • Cuando se utilicen portaherramientas de amarre directo, no se recomienda hacer manualmente el plano para la sujeción del tornillo en el zanco de la herramienta
Pieza a maquinar	• La buena sujeción de la pieza a maquinar reducirá la vibración y la desviación de la herramienta
Máquina	• El husillo de la maquina debe estar en condiciones optimas, para asegurar la concentricidad de giro (TIR) y asegurar el máximo rendimiento de la herramienta • Para lograr los avances y velocidades recomendados, se necesita suficiente potencia (HP) en la maquina • Reducir los parámetros de corte en maquinas de baja potencia (HP) para prevenir el daño en la herramienta o pieza de trabajo
Refrigeración	• Evite el re-maquinado de virutas usando aire a presión o líquido refrigeración según sea necesario • Mantener limpio la refrigeración con su concentración adecuada • Recomendaciones generales: –Para el maquinado de aceros de herramienta, para Moldes y Dados o Aleaciones de Bajo Carbón, utilice Aceite Soluble en Agua o aire a presión –Para el maquinado de Aleaciones Inoxidables, Aleaciones Termorresistentes, Titanio y Aleaciones No Ferrosas, utilice solamente Aceite Soluble en Agua
Métodos	• Se recomienda el maquinado en sentido ascendente o trepado • El cuidado en los detalles de la programación, la concentricidad de giro (TIR) el balance de los portaherramientas, la sujeción de la pieza a maquinar, etc. son factores que contribuyen a prolongar la vida de la herramienta

GUÍAS DE FRESADO

DC = diámetro de corte APMX = largo de filo

Las velocidades y avances para cortes están basados en la profundidad radial ($-\overline{Ae}-$), y profundidad axial ($\overline{Ap}$)

Reducciones en velocidades y avances serán necesarias cuando:

- Ae y Ap exceda las recomendaciones
- Se utilicen filos largos o herramientas de largo alcance
- Se utilicen portaherramientas largos
- Se maquinen materiales más duros que los recomendados

MÉTODOS DE ENTRADA

Barreno previo




Preferentemente usar un barreno previo como método de entrada para la mayor parte de las aplicaciones.

Rampa helicoidal



Rampa recta



Los métodos alternativos son las rampas helicoidales y rectas. Un ángulo elevado de rampa necesita un avance reducido. Un ángulo de rampa inferior permitirá tasas de avance más elevadas y una mayor duración de la herramienta. Usar velocidades y alcances de ranurado para ángulos de rampa de 1° a 2°. Disminuir el avance un 25% cuando los ángulos de rampa se aproximan a 6°. Las herramientas de uso general y/o materiales difíciles de mecanizar precisarán ángulos de rampa inferiores y un avance reducido.

Agujero o Barrenado



Este método se puede utilizar únicamente en materiales no ferrosos y materiales de formación de virutas cortas, usando la velocidad de ranurado y el 25% de su avance.

Conseils relatifs à l'application

Outil	• Chaque fois que possible, choisissez une fraise de plus grand diamètre possible, la plus courte possible, elle garantira la meilleure rigidité • Les outils longs ne sont pas optimum pour l'ébauche, le pocketing, le rainurage – Ae limité à 0,02 D • Les outils Haute performance optimisent les temps de cycle et de augmentent la durée de vie
Porte-outils	• Des attachements à serrage puissant et à faux rond précis sont recommandés • Attachements à méplats ou pinces à serrage nominale sont recommandées pour les ébauches • Lorsque vous utilisez des attachement rigides, les serrage de l'outil par vis ne sont pas recommandés
Pièce	• Le système de fixation et de bridage de la pièce devra permettre de réduire les vibrations et la déformation
Machine	• Broche doit être en bon état optimal au niveau de son faux rond • Suffisamment puissance est nécessaire pour effectuer à des vitesses recommandées et se nourrit • Réduire les efforts pour les machines de faible puissance pour éviter l'endommagement de la pièce et / ou de l'outil
Liquide de refroidissement	• Évitez les recyclage de copeaux par l'utilisation de soufflage d'air comprimé ou de liquide de refroidissement. • Maintenir le lubrifiant propre à la concentration appropriée • Recommandations générales – –Huile soluble ou Air comprimé: aciers à outils, aciers pour moules, aciers au carbone ou alliés –Huile soluble: aciers inoxydables, titane, alliages à haute température, alliages non ferreux
Méthodes	• L'usinage en avalant est généralement préconisé • Attention à la programmation, porte-outils, faux rond, équilibrage, fixation, etc améliorent les performances de l'outil en coupe et prolonge la durée de vie

GUIDE DU FRAISAGE

DC = diamètre de coupe APMX = longueur de coupe

Vitesses & avances pour ces cas d'usinage sont basées sur l'engagement radial ($\overline{Ae}$), et axial ($\overline{Ap}$)

La réduction de la vitesse et de l'avance doit être nécessaire quand:

- Les engagements Ae et Ap sont importants
- Des dentures longues ou des séries longues sont utilisées
- Des attachement longs sont utilisés
- Lors d'usinage de matériaux durs

TYPES D'ENTREE MATIERE

Preperçage




Le préperçage est la méthode préférable dans la plupart de applications.

Ramping hélicoïdal



Ramping droit



Les autres méthodes sont un ramping hélicoïdal et un ramping droit. Les angles de ramping élevés exigent une avance inférieure. Les angles de ramping inférieurs permettent les taux d'avance supérieurs et prolongeront la vie de l'outil. Utilisez des avances et vitesses de mortaisage pour les angles de ramping de 1° à 2°. Réduisez l'avance à 25 % lorsque les angles de ramping avoisinent 6°. Les outils tout usage et/ou les matériaux difficiles à usiner exigeront des angles de ramping inférieurs et une charge réduite.

Plongée



Plongée uniquement dans les non ferreux. Vitesse rainurage et avances réduites de 25%.

Werkzeug	- Wählen Sie möglichst immer den Schafffräser mit dem größten Durchmesser, der kürzesten Schneide und Gesamtlänge, um eine hohe Steifigkeit zu erhalten - Langlochschaftfräser sind nicht zum Taschen-, Schlitz- oder Profilfräsen bestimmt – die Dehnung auf $A_e 0,2$ der Streckgrenze nicht überschreiten - Hochleistungswerkzeuge minimieren die Bearbeitungszeit und verlängern die Werkzeugstandzeit
Werkzeughalter	- Es werden Spannzangen mit genauem Rundlauf benötigt - Steilkegel oder bündige Spannfutter werden bei hohem Materialabtrag empfohlen - Von der Verwendung fester handverschraubter Halterungen wird abgeraten
Werkstück	Sicheres Werkzeugspannen verringert Vibrationen und das Auswandern aus der Spannvorrichtung
Werkzeugmaschine	- Die Spindel muss in optimalem Zustand sein, um einen genauen Rundlauf und maximale Standzeit zu erzielen - Für die empfohlenen Drehzahlen und Vorschubgeschwindigkeiten ist genügend Leistung bereitzustellen - Bei leistungsschwachen Antrieben sind die Werte zu verringern, um Beschädigungen am Werkstück und/oder Werkzeug zu vermeiden
Kühlmittel	- Das Stauen der Späne durch Luftstrahl oder flüssige Kühlmittel möglichst verhindern - Kühlmittel in geeigneter Konzentration verwenden - Allgemeine Empfehlungen: – Wasser-Öl-Emulsionen oder Luftstrahl: Werkzeugstähle, Form- und Schneidstähle, unlegierte oder legierte Stähle – Wasser-Öl-Emulsion: Nichtrostender Stahl, Titan, Warmfeste Legierungen, Nichteisenlegierungen
Verfahren	- Vorzugsweise Gleichlaufräsen anwenden - Das Beachten der Fräsparemeter, Werkzeughalter, Rundlauf, Auswuchten, Einspannen, usw. verbessert die Schnittleistung und verlängert die Standzeit

RICHTWERTE ZUM FRÄSEN

DC = Fräsdurchmesser APMX = Schnittlänge

Drehzahl und Vorschub für Fräsarbeiten hängen von Radialbreite (A_e) und Frästiefe (A_p) ab

Drehzahl und Vorschub müssen ggfs. verringert werden wenn:

- die empfohlenen Werte für A_e und A_p überschritten werden
- lange Schneiden oder Langschaftfräser verwendet werden
- lange Werkzeughalter verwendet werden
- die Werkstoffe härter als vorgesehen sind

VORBEREITUNGEN

Vorbohrung




Vorbohren ist in den meisten Fällen ratsam.

Zirkulareintauchfräsen



Schrägeintauchfräsen




Alternative Verfahren sind Zirkulareintauchen und Schrägeintauchen. Starke Tauchwinkel erfordern verringerte Vorschubgeschwindigkeiten. Geringe Tauchwinkel ermöglichen höhere Vorschubgeschwindigkeiten und verlängern die Standzeit. Verwenden Sie die Drehzahlen und Vorschübe zum Schlitzfräsen für Tauchwinkel von 1° bis 2° . Den Vorschub auf 25 % verringern, wenn der Tauchwinkel 6° erreicht. Standardwerkzeuge und / oder schwer zu bearbeitende Werkstoffe verlangen kleine Tauchwinkel und verringerte Vorschubgeschwindigkeiten.

Stechen




Stechen Sie in Nichteisenmetalle und kurzspanende Werkstoffe nur mit Schlitzfräsdrehzahl und 25 % der Schlitzvorschubgeschwindigkeit ein.

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

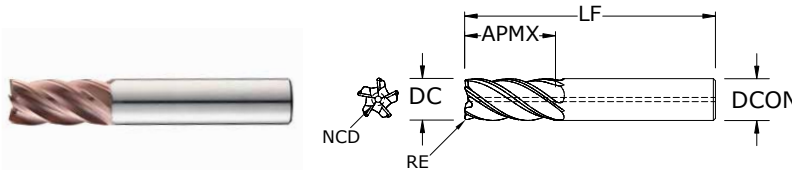

TOLERANCES (inch)

1/8–1/4 DIAMETER
DC = +0.0000/–0.0012
DCON = h_6
RE = +0.0000/–0.0020
>1/4–3/8 DIAMETER
DC = +0.0000/–0.0016
DCON = h_6
RE = +0.0000/–0.0020
>3/8–1 DIAMETER
DC = +0.0000/–0.0020
DCON = h_6
RE = +0.0000/–0.0020

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
1/8	1/4	1-1/2	1/8	—	0.0440	38500	—	—	37000	—	—
1/8	1/4	1-1/2	1/8	0.010	0.0440	38771	—	—	38770	—	—
1/8	1/4	1-1/2	1/8	0.015	0.0440	38525	—	—	37001	—	—
1/8	1/4	1-1/2	1/8	0.030	0.0290	38773	—	—	38772	—	—
1/8	3/8	1-1/2	1/8	—	0.0440	37180	—	—	37002	—	—
1/8	3/8	1-1/2	1/8	0.010	0.0440	38775	—	—	38774	—	—
1/8	3/8	1-1/2	1/8	0.015	0.0440	37181	—	—	37003	—	—
1/8	3/8	1-1/2	1/8	0.030	0.0290	38777	—	—	38776	—	—
3/16	5/16	2	3/16	—	0.0660	38501	—	—	37004	—	—
3/16	5/16	2	3/16	0.010	0.0660	38779	—	—	38778	—	—
3/16	5/16	2	3/16	0.015	0.0660	38526	—	—	37005	—	—
3/16	5/16	2	3/16	0.030	0.0660	38781	—	—	38780	—	—
3/16	1/2	2	3/16	—	0.0660	37182	—	—	37006	—	—
3/16	1/2	2	3/16	0.010	0.0660	38783	—	—	38782	—	—
3/16	1/2	2	3/16	0.015	0.0660	37183	—	—	37007	—	—
3/16	1/2	2	3/16	0.030	0.0660	38785	—	—	38784	—	—
1/4	3/8	2-1/2	1/4	—	0.0880	38502	—	—	37008	—	—
1/4	3/8	2-1/2	1/4	0.010	0.0880	38787	—	—	38786	—	—
1/4	3/8	2-1/2	1/4	0.015	0.0880	38527	—	—	37009	—	—
1/4	3/8	2-1/2	1/4	0.030	0.0880	38528	—	—	37010	—	—
1/4	3/8	2-1/2	1/4	0.060	0.0880	38789	—	—	38788	—	—
1/4	3/8	2-1/2	1/4	0.090	0.0880	38791	—	—	38790	—	—
1/4	1/2	2-1/2	1/4	—	0.0880	37184	—	—	37011	—	—
1/4	1/2	2-1/2	1/4	0.010	0.0880	38793	—	—	38792	—	—
1/4	1/2	2-1/2	1/4	0.015	0.0880	37185	—	—	37012	—	—
1/4	1/2	2-1/2	1/4	0.030	0.0880	37186	—	—	37013	—	—
1/4	1/2	2-1/2	1/4	0.060	0.0880	38795	—	—	38794	—	—
1/4	1/2	2-1/2	1/4	0.090	0.0880	38797	—	—	38796	—	—

continued on next page

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6



RE = +0.0000/-0.0020

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020

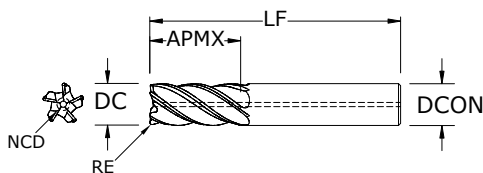


**Z5 •
Z5CR**
FRACTIONAL SERIES


inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
5/16	7/16	2-1/2	5/16	—	0.1090	38503	—	—	37014	—	—
5/16	7/16	2-1/2	5/16	0.010	0.1090	38799	—	—	38798	—	—
5/16	7/16	2-1/2	5/16	0.015	0.1090	38529	—	—	37015	—	—
5/16	7/16	2-1/2	5/16	0.030	0.1090	38801	—	—	38800	—	—
5/16	7/16	2-1/2	5/16	0.060	0.1090	38803	—	—	38802	—	—
5/16	7/16	2-1/2	5/16	0.090	0.0640	38805	—	—	38804	—	—
5/16	5/8	2-1/2	5/16	—	0.1090	38504	—	—	37016	—	—
5/16	5/8	2-1/2	5/16	0.010	0.1090	38807	—	—	38806	—	—
5/16	5/8	2-1/2	5/16	0.015	0.1090	38530	—	—	37017	—	—
5/16	5/8	2-1/2	5/16	0.030	0.1090	38809	—	—	38808	—	—
5/16	5/8	2-1/2	5/16	0.060	0.1090	38811	—	—	38810	—	—
5/16	5/8	2-1/2	5/16	0.090	0.0640	38813	—	—	38812	—	—
3/8	1/2	2-1/2	3/8	—	0.1310	38505	—	—	37018	—	—
3/8	1/2	2-1/2	3/8	0.010	0.1310	38815	—	—	38814	—	—
3/8	1/2	2-1/2	3/8	0.015	0.1310	38531	—	—	37019	—	—
3/8	1/2	2-1/2	3/8	0.030	0.1310	38532	—	—	37020	—	—
3/8	1/2	2-1/2	3/8	0.060	0.1310	38817	—	—	38816	—	—
3/8	1/2	2-1/2	3/8	0.090	0.0830	38819	—	—	38818	—	—
3/8	3/4	2-1/2	3/8	—	0.1310	37187	—	—	37021	—	—
3/8	3/4	2-1/2	3/8	0.010	0.1310	38821	—	—	38820	—	—
3/8	3/4	2-1/2	3/8	0.015	0.1310	37188	—	—	37022	—	—
3/8	3/4	2-1/2	3/8	0.030	0.1310	37189	37174	—	37023	—	—
3/8	3/4	2-1/2	3/8	0.060	0.1310	38823	—	—	38822	—	—
3/8	3/4	2-1/2	3/8	0.090	0.0830	38825	—	—	38824	—	—
7/16	5/8	2-1/2	7/16	0.015	0.1530	37164	—	—	37160	—	—
7/16	5/8	2-1/2	7/16	0.030	0.1530	37165	—	—	37161	—	—
7/16	7/8	2-3/4	7/16	0.015	0.1530	37166	—	—	37162	—	—
7/16	7/8	2-3/4	7/16	0.030	0.1530	37167	—	—	37163	—	—

continued on next page

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

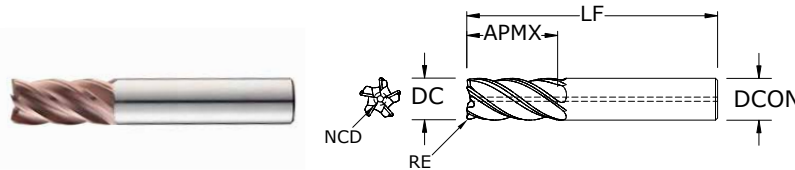

TOLERANCES (inch)

1/8–1/4 DIAMETER	
DC	= +0.0000/–0.0012
DCON = h ₆	
RE	= +0.0000/–0.0020
>1/4–3/8 DIAMETER	
DC	= +0.0000/–0.0016
DCON = h ₆	
RE	= +0.0000/–0.0020
>3/8–1 DIAMETER	
DC	= +0.0000/–0.0020
DCON = h ₆	
RE	= +0.0000/–0.0020

CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.kspatents.com

inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
1/2	5/8	3	1/2	—	0.1750	38506	38512	37320	37024	37030	37321
1/2	5/8	3	1/2	0.010	0.1750	38827	38829	38831	38826	38828	38830
1/2	5/8	3	1/2	0.015	0.1750	38533	38578	37330	37025	37031	37331
1/2	5/8	3	1/2	0.030	0.1750	38534	38579	37332	37026	37032	37333
1/2	5/8	3	1/2	0.060	0.1750	38535	38580	37334	37027	37033	37335
1/2	5/8	3	1/2	0.090	0.1750	38536	38581	37337	37028	37034	37338
1/2	5/8	3	1/2	0.120	0.1750	38537	38582	37339	37029	37035	37340
1/2	1	3	1/2	—	0.1750	38507	38513	37322	37036	37042	37323
1/2	1	3	1/2	0.010	0.1750	38833	38835	38837	38832	38834	38836
1/2	1	3	1/2	0.015	0.1750	38538	38583	37341	37037	37043	37342
1/2	1	3	1/2	0.030	0.1750	38539	38584	37343	37038	37044	37344
1/2	1	3	1/2	0.060	0.1750	38540	38585	37345	37039	37045	37346
1/2	1	3	1/2	0.090	0.1750	38541	38586	37348	37040	37046	37349
1/2	1	3	1/2	0.120	0.1750	38542	38587	37350	37041	37047	37351
1/2	1-1/4	3-1/4	1/2	—	0.1750	37190	37194	37325	37048	37054	37324
1/2	1-1/4	3-1/4	1/2	0.010	0.1750	38839	38841	38843	38838	38840	38842
1/2	1-1/4	3-1/4	1/2	0.015	0.1750	37191	37195	37352	37049	37055	37353
1/2	1-1/4	3-1/4	1/2	0.030	0.1750	37192	37196	37354	37050	37056	37355
1/2	1-1/4	3-1/4	1/2	0.060	0.1750	37193	37197	37356	37051	37057	37357
1/2	1-1/4	3-1/4	1/2	0.090	0.1750	38543	38588	37359	37052	37058	37360
1/2	1-1/4	3-1/4	1/2	0.120	0.1750	38544	38589	37361	37053	37059	37362
5/8	3/4	3-1/2	5/8	—	0.2190	38508	38514	38518	37060	37067	37260
5/8	3/4	3-1/2	5/8	0.010	0.2190	38845	38847	38849	38844	38846	38848
5/8	3/4	3-1/2	5/8	0.015	0.2190	38545	38590	38623	37061	37068	37261
5/8	3/4	3-1/2	5/8	0.030	0.2190	38546	38591	38624	37062	37069	37262
5/8	3/4	3-1/2	5/8	0.060	0.2190	38547	38592	38625	37063	37070	37263
5/8	3/4	3-1/2	5/8	0.090	0.2190	38548	38593	38626	37064	37071	37264
5/8	3/4	3-1/2	5/8	0.120	0.2190	38549	38594	38627	37065	37072	37265
5/8	3/4	3-1/2	5/8	0.190	0.2190	38550	38595	38628	37066	37073	37266
5/8	1-1/4	3-1/2	5/8	—	0.2190	37198	37202	38519	37074	37081	37267

continued on next page

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6



RE = +0.0000/–0.0020

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0020

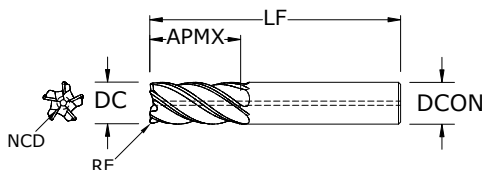


**Z5 •
Z5CR**
FRACTIONAL SERIES


inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
5/8	1-1/4	3-1/2	5/8	0.010	0.2190	38851	38853	38855	38850	38852	38854
5/8	1-1/4	3-1/2	5/8	0.015	0.2190	37199	37203	38629	37075	37082	37268
5/8	1-1/4	3-1/2	5/8	0.030	0.2190	37200	37204	38630	37076	37083	37269
5/8	1-1/4	3-1/2	5/8	0.060	0.2190	37201	37205	38631	37077	37084	37270
5/8	1-1/4	3-1/2	5/8	0.090	0.2190	38551	38596	38632	37078	37085	37271
5/8	1-1/4	3-1/2	5/8	0.120	0.2190	38552	38597	38633	37079	37086	37272
5/8	1-1/4	3-1/2	5/8	0.190	0.2190	38553	38598	38634	37080	37087	37273
3/4	7/8	4	3/4	—	0.2630	38509	38515	38520	37088	37095	37274
3/4	7/8	4	3/4	0.010	0.2630	38857	38859	38861	38856	38858	38860
3/4	7/8	4	3/4	0.030	0.2630	38554	38599	38635	37089	37096	37275
3/4	7/8	4	3/4	0.060	0.2630	38555	38600	38636	37090	37097	37276
3/4	7/8	4	3/4	0.090	0.2630	38556	38601	38637	37091	37098	37277
3/4	7/8	4	3/4	0.120	0.2630	38557	38602	38638	37092	37099	37278
3/4	7/8	4	3/4	0.190	0.2630	38558	38603	38639	37093	37100	37279
3/4	7/8	4	3/4	0.250	0.2630	38559	38604	38640	37094	37101	37280
3/4	1-1/2	4	3/4	—	0.2630	37206	37210	38521	37102	37109	37281
3/4	1-1/2	4	3/4	0.010	0.2630	38863	38865	38867	38862	38864	38866
3/4	1-1/2	4	3/4	0.030	0.2630	37207	37211	38641	37103	37110	37282
3/4	1-1/2	4	3/4	0.060	0.2630	37208	37212	38642	37104	37111	37283
3/4	1-1/2	4	3/4	0.090	0.2630	38560	38605	38643	37105	37112	37284
3/4	1-1/2	4	3/4	0.120	0.2630	37209	37213	38644	37106	37113	37285
3/4	1-1/2	4	3/4	0.190	0.2630	38561	38606	38645	37107	37114	37286
3/4	1-1/2	4	3/4	0.250	0.2630	38562	38607	38646	37108	37115	37287
3/4	1-5/8	4	3/4	0.030	0.2630	37222	—	—	37223	—	—
3/4	1-5/8	4	3/4	0.060	0.2630	37224	—	—	37225	—	—
3/4	1-5/8	4	3/4	0.090	0.2630	37226	—	—	37227	—	—
3/4	1-5/8	4	3/4	0.120	0.2630	37228	—	—	37229	—	—
3/4	2	4-1/2	3/4	0.030	0.2630	37230	—	—	37231	—	—
3/4	2	4-1/2	3/4	0.060	0.2630	37232	—	—	37233	—	—
3/4	2	4-1/2	3/4	0.090	0.2630	37234	—	—	37235	—	—

continued on next page

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

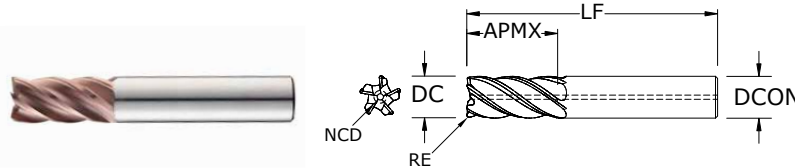

TOLERANCES (inch)

1/8–1/4 DIAMETER	
DC	= +0.0000/–0.0012
DCON = h ₆	
RE	= +0.0000/–0.0020
>1/4–3/8 DIAMETER	
DC	= +0.0000/–0.0016
DCON = h ₆	
RE	= +0.0000/–0.0020
>3/8–1 DIAMETER	
DC	= +0.0000/–0.0020
DCON = h ₆	
RE	= +0.0000/–0.0020


CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com


inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
3/4	2	4-1/2	3/4	0.120	0.2630	37236	—	—	37237	—	—
1	1-1/8	4	1	—	0.3500	38510	38516	38522	37116	37123	37288
1	1-1/8	4	1	0.010	0.3500	38869	38871	38873	38868	38870	38872
1	1-1/8	4	1	0.030	0.3500	38563	38608	38647	37117	37124	37289
1	1-1/8	4	1	0.060	0.3500	38564	38609	38648	37118	37125	37290
1	1-1/8	4	1	0.090	0.3500	38565	38610	38649	37119	37126	37291
1	1-1/8	4	1	0.120	0.3500	38566	38611	38650	37120	37127	37292
1	1-1/8	4	1	0.190	0.3500	38567	38612	38651	37121	37128	37293
1	1-1/8	4	1	0.250	0.3500	38568	38613	38652	37122	37129	37294
1	1-1/2	4	1	—	0.3500	37214	37218	38523	37130	37137	37295
1	1-1/2	4	1	0.010	0.3500	38875	38877	38879	38874	38876	38878
1	1-1/2	4	1	0.030	0.3500	37215	37219	38653	37131	37138	37296
1	1-1/2	4	1	0.060	0.3500	37216	37220	38654	37132	37139	37297
1	1-1/2	4	1	0.090	0.3500	38569	38614	38655	37133	37140	37298
1	1-1/2	4	1	0.120	0.3500	37217	37221	38656	37134	37141	37299
1	1-1/2	4	1	0.190	0.3500	38570	38615	38657	37135	37142	37300
1	1-1/2	4	1	0.250	0.3500	38571	38616	38658	37136	37143	37301
1	2	4-1/2	1	—	0.3500	38511	38517	38524	37144	37151	37302
1	2	4-1/2	1	0.010	0.3500	38881	38883	38885	38880	38882	38884
1	2	4-1/2	1	0.030	0.3500	38572	38617	38659	37145	37152	37303
1	2	4-1/2	1	0.060	0.3500	38573	38618	38660	37146	37153	37304
1	2	4-1/2	1	0.090	0.3500	38574	38619	38661	37147	37154	37305
1	2	4-1/2	1	0.120	0.3500	38575	38620	38662	37148	37155	37306
1	2	4-1/2	1	0.190	0.3500	38576	38621	38663	37149	37156	37307
1	2	4-1/2	1	0.250	0.3500	38577	38622	38664	37150	37157	37308



Series Z5, Z5CR Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.5	≤ 1.5	555 (444-666)	RPM	16961	8480	5654	4240	3392	2827	2120
			Fz	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043				
			Feed (ipm)	39.0	50.9	65.0	65.7	57.7	52.3	45.6				
		≤ 275 Bhn or ≤ 28 HRc	Slot	1	≤ 1	440 (352-528)	RPM	13446	6723	4482	3362	2689	2241	1681
			Fz	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043				
			Feed (ipm)	30.9	40.3	51.5	52.1	45.7	41.5	36.1				
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.5	≤ 1.5	315 (252-378)	RPM	9626	4813	3209	2407	1925	1604	1203
			Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032				
			Feed (ipm)	16.4	21.7	27.3	27.7	25.0	22.5	19.3				
		≤ 375 Bhn or ≤ 40 HRc	Slot	1	≤ 1	250 (200-300)	RPM	7640	3820	2547	1910	1528	1273	955
			Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032				
			Feed (ipm)	13.0	17.2	21.6	22.0	19.9	17.8	15.3				
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.5	≤ 1.5	185 (148-222)	RPM	5654	2827	1885	1413	1131	942	707
			Fz	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026				
			Feed (ipm)	7.9	9.9	13.2	12.7	11.3	10.4	9.2				
		≤ 375 Bhn or ≤ 40 HRc	Slot	1	≤ 1	145 (116-174)	RPM	4431	2216	1477	1108	886	739	554
			Fz	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026				
			Feed (ipm)	6.2	7.8	10.3	10.0	8.9	8.1	7.2				
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.5	≤ 1.5	490 (392-588)	RPM	14974	7487	4991	3744	2995	2496	1872
			Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032				
			Feed (ipm)	25.5	33.7	42.4	43.1	38.9	34.9	29.9				
		≤ 275 Bhn or ≤ 28 HRc	Slot	1	≤ 1	390 (312-468)	RPM	11918	5959	3973	2980	2384	1986	1490
			Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032				
			Feed (ipm)	20.3	26.8	33.8	34.3	31.0	27.8	23.8				
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
			Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025				
			Feed (ipm)	14.0	18.2	24.2	23.4	20.8	19.0	16.2				
		≤ 275 Bhn or ≤ 28 HRc	Slot	1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
			Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025				
			Feed (ipm)	11.1	14.4	19.3	18.6	16.5	15.1	12.9				
	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc	Profile	≤ 0.5	≤ 1.5	310 (248-372)	RPM	9474	4737	3158	2368	1895	1579	1184
			Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025				
			Feed (ipm)	12.8	16.6	22.1	21.3	18.9	17.4	14.8				
		≤ 325 Bhn or ≤ 35 HRc	Slot	1	≤ 1	250 (200-300)	RPM	7640	3820	2547	1910	1528	1273	955
			Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025				
			Feed (ipm)	10.3	13.4	17.8	17.2	15.3	14.0	11.9				
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile	≤ 0.5	≤ 1.5	445 (356-534)	RPM	13599	6800	4533	3400	2720	2267	1700
			Fz	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039				
			Feed (ipm)	28.6	37.4	47.6	47.6	42.2	38.5	33.1				
		≤ 220 Bhn or ≤ 19 HRc	Slot	1	≤ 1	355 (284-426)	RPM	10849	5424	3616	2712	2170	1808	1356
			Fz	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039				
			Feed (ipm)	22.8	29.8	38.0	38.0	33.6	30.7	26.4				
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
			Fz	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029				
			Feed (ipm)	16.1	21.8	27.7	27.3	23.9	21.6	18.8				
		≤ 260 Bhn or ≤ 26 HRc	Slot	1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
			Fz	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029				
			Feed (ipm)	12.8	17.3	22.0	21.7	19.0	17.2	15.0				

continued on next page

FRACTIONAL Z-Carb-HPR



Series Z5, Z5CR Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile	≤ 0.5	≤ 1.5	80 (64-96)	RPM	2445	1222	815	611	489	407	306
			Fz				0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238	
			Feed (ipm)				3.1	4.2	5.2	5.2	4.6	4.2	3.6	
		Slot	1	≤ 1	65 (52-78)	RPM	1986	993	662	497	397	331	248	
						Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238	
						Feed (ipm)	2.5	3.4	4.2	4.2	3.7	3.4	3.0	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile	≤ 0.5	≤ 1.5	62 (50-74)	RPM	1895	947	632	474	379	316	237
			Fz				0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170	
			Feed (ipm)				1.7	2.3	2.8	2.8	2.5	2.2	2.0	
		Slot	1	≤ 1	50 (40-60)	RPM	1528	764	509	382	306	255	191	
						Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170	
						Feed (ipm)	1.4	1.8	2.3	2.3	2.0	1.8	1.6	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile	≤ 0.5	≤ 1.5	215 (172-258)	RPM	6570	3285	2190	1643	1314	1095	821
			Fz				0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
			Feed (ipm)				9.9	13.1	16.4	16.4	14.5	13.1	11.5	
		Slot	1	≤ 1	170 (136-204)	RPM	5195	2598	1732	1299	1039	866	649	
						Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
						Feed (ipm)	7.8	10.4	13.0	13.0	11.4	10.4	9.1	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile	≤ 0.5	≤ 1.5	75 (60-90)	RPM	2292	1146	764	573	458	382	287
			Fz				0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
			Feed (ipm)				3.4	4.6	5.7	5.7	5.0	4.6	4.0	
		Slot	1	≤ 1	60 (48-72)	RPM	1834	917	611	458	367	306	229	
						Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
						Feed (ipm)	2.8	3.7	4.6	4.6	4.0	3.7	3.2	

Bhn (Brinell) HRC (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 5 x rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6


RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

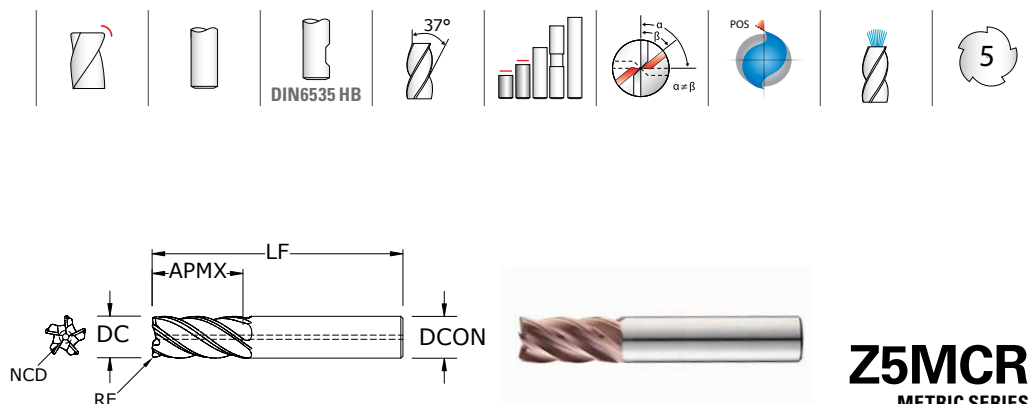

Z5MCR
METRIC SERIES


mm						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
6,0	9,0	54,0	6,0	0,5	2,11	48000	—	—	47000	—	—
6,0	13,0	57,0	6,0	0,3	2,11	48001	—	—	47001	—	—
6,0	13,0	57,0	6,0	0,5	2,11	47120	—	—	47002	—	—
6,0	13,0	57,0	6,0	1,0	2,11	48002	—	—	47003	—	—
6,0	13,0	57,0	6,0	1,5	2,11	48003	—	—	47004	—	—
8,0	11,0	58,0	8,0	0,5	2,79	48004	—	—	47005	—	—
8,0	18,0	63,0	8,0	0,5	2,79	47121	—	—	47006	—	—
8,0	18,0	63,0	8,0	1,0	2,79	47122	—	—	47007	—	—
8,0	18,0	63,0	8,0	1,5	2,79	48005	—	—	47008	—	—
8,0	18,0	63,0	8,0	2,0	2,79	48006	—	—	47009	—	—
10,0	13,0	66,0	10,0	1,0	3,51	48007	—	—	47010	—	—
10,0	22,0	72,0	10,0	0,5	3,51	47123	—	—	47011	—	—
10,0	22,0	72,0	10,0	1,0	3,51	47124	—	—	47012	—	—
10,0	22,0	72,0	10,0	1,5	3,51	48008	—	—	47013	—	—
10,0	22,0	72,0	10,0	2,0	3,51	48009	—	—	47014	—	—
10,0	22,0	72,0	10,0	2,5	3,51	48010	—	—	47015	—	—
12,0	15,0	73,0	12,0	1,0	4,19	48011	48029	—	47016	47024	—
12,0	26,0	83,0	12,0	0,5	4,19	47125	47128	47160	47017	47025	47161
12,0	26,0	83,0	12,0	0,76	4,19	47126	47129	47162	47018	47026	47163
12,0	26,0	83,0	12,0	1,0	4,19	47127	47130	47164	47019	47027	47165
12,0	26,0	83,0	12,0	1,5	4,19	48012	48030	47166	47020	47028	47167
12,0	26,0	83,0	12,0	2,0	4,19	48013	48031	47168	47021	47029	47169
12,0	26,0	83,0	12,0	2,5	4,19	48014	48032	47170	47022	47030	47171
12,0	26,0	83,0	12,0	3,0	4,19	48015	48033	47172	47023	47031	47173
16,0	19,0	82,0	16,0	1,0	5,59	48016	48034	48056	47032	47039	47046
16,0	19,0	82,0	16,0	1,5	5,59	48070	—	—	48071	—	—
16,0	35,0	92,0	16,0	1,0	5,59	47131	48035	47134	47033	47040	47047
16,0	35,0	92,0	16,0	1,5	5,59	48017	48036	48057	47034	47041	47048

continued on next page

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com



Z5MCR

METRIC SERIES

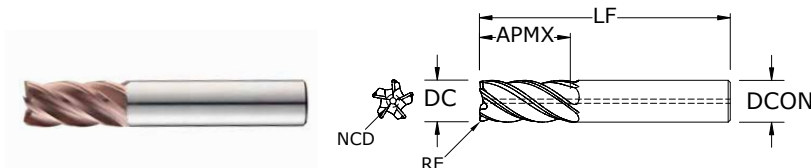

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS


STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.kspatents.com


mm						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
16,0	35,0	92,0	16,0	2,0	5,59	47132	48037	47135	47035	47042	47049
16,0	35,0	92,0	16,0	2,5	5,59	48018	48038	48058	47036	47043	47050
16,0	35,0	92,0	16,0	3,0	5,59	47133	48039	47136	47037	47044	47051
16,0	35,0	92,0	16,0	4,0	5,59	48019	48040	48059	47038	47045	47052
20,0	23,0	92,0	20,0	1,0	7,01	48020	48041	48060	47053	47061	47069
20,0	43,0	104,0	20,0	1,0	7,01	47137	48042	47140	47054	47062	47070
20,0	43,0	104,0	20,0	1,5	7,01	48021	48043	48061	47055	47063	47071
20,0	43,0	104,0	20,0	2,0	7,01	47138	48044	47141	47056	47064	47072
20,0	43,0	104,0	20,0	2,5	7,01	48022	48045	48062	47057	47065	47073
20,0	43,0	104,0	20,0	3,0	7,01	47139	48046	47142	47058	47066	47074
20,0	43,0	104,0	20,0	4,0	7,01	48023	48047	48063	47059	47067	47075
20,0	43,0	104,0	20,0	5,0	7,01	48024	48048	48064	47060	47068	47076
25,0	28,0	100,0	25,0	1,0	8,76	48025	48049	48065	47077	47084	47091
25,0	53,0	121,0	25,0	1,0	8,76	47143	48050	47146	47078	47085	47092
25,0	53,0	121,0	25,0	2,0	8,76	47144	48051	47147	47079	47086	47093
25,0	53,0	121,0	25,0	2,5	8,76	48026	48052	48066	47080	47087	47094
25,0	53,0	121,0	25,0	3,0	8,76	47145	48053	47148	47081	47088	47095
25,0	53,0	121,0	25,0	4,0	8,76	48027	48054	48067	47082	47089	47096
25,0	53,0	121,0	25,0	5,0	8,76	48028	48055	48068	47083	47090	47097



Series Z5MCR Metric	Hardness			Vc (m/min)	DC • mm									
		Ae x DC	Ap x DC		6	8	10	12	16	20	25			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	169 (135-203)	RPM	8967	6725	5380	4484	3363	2690	2152
						Fz	0.029	0.049	0.061	0.074	0.087	0.099	0.108	
						Feed (mm/min)	1291	1650	1650	1668	1463	1327	1157	
			Slot 	1	≤ 1	134 (107-161)	RPM	7109	5332	4265	3555	2666	2133	1706
							Fz	0.029	0.049	0.061	0.074	0.087	0.099	0.108
							Feed (mm/min)	1024	1308	1308	1322	1160	1052	917
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	96 (77-115)	RPM	5089	3817	3054	2545	1909	1527	1221
						Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
						Feed (mm/min)	550	692	692	702	635	570	489	
			Slot 	1	≤ 1	76 (61-91)	RPM	4039	3029	2424	2020	1515	1212	969
							Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080
							Feed (mm/min)	436	549	549	557	504	452	388
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	56 (45-68)	RPM	2989	2242	1793	1495	1121	897	717
						Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.065	
						Feed (mm/min)	251	335	335	323	287	263	233	
			Slot 	1	≤ 1	44 (35-53)	RPM	2343	1757	1406	1171	879	703	562
							Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.065
							Feed (mm/min)	197	262	262	253	225	206	183
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	149 (119-179)	RPM	7917	5938	4750	3958	2969	2375	1900
						Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
						Feed (mm/min)	855	1077	1077	1092	988	887	760	
			Slot 	1	≤ 1	119 (95-143)	RPM	6301	4726	3781	3151	2363	1890	1512
							Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080
							Feed (mm/min)	680	857	857	869	786	706	605
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318
						Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
						Feed (mm/min)	461	615	615	593	527	483	412	
			Slot 	1	≤ 1	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047
							Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063
							Feed (mm/min)	366	489	489	471	419	384	327
	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	94 (76-113)	RPM	5009	3756	3005	2504	1878	1503	1202
						Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
						Feed (mm/min)	421	561	561	541	481	441	376	
			Slot 	1	≤ 1	76 (61-91)	RPM	4039	3029	2424	2020	1515	1212	969
							Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063
							Feed (mm/min)	339	452	452	436	388	355	303
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.5	≤ 1.5	136 (109-163)	RPM	7190	5392	4314	3595	2696	2157	1726
						Fz	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
						Feed (mm/min)	949	1208	1208	1208	1070	978	841	
			Slot 	1	≤ 1	108 (87-130)	RPM	5736	4302	3441	2868	2151	1721	1377
							Fz	0.026	0.045	0.056	0.067	0.079	0.091	0.098
							Feed (mm/min)	757	964	964	964	853	780	671
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318
						Fz	0.020	0.034	0.043	0.050	0.059	0.067	0.073	
						Feed (mm/min)	554	703	703	692	606	549	478	
			Slot 	1	≤ 1	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047
							Fz	0.020	0.034	0.043	0.050	0.059	0.067	0.073
							Feed (mm/min)	440	558	558	550	482	436	380

continued on next page

Z-Carb-HPR



Series Z5MCR Metric	Hardness		Ae x DC	Ap x DC	Vc (m/min)	DC • mm							
						6	8	10	12	16	20	25	
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.5	≤ 1.5	24 (20-29)	RPM	1293	969	776	646	485	388	310
						Fz	0.0160	0.0272	0.0340	0.0409	0.0478	0.0531	0.0599
						Feed (mm/min)	103	132	132	132	116	103	93
		Slot 	1	≤ 1	20 (16-24)	RPM	1050	788	630	525	394	315	252
						Fz	0.0160	0.0272	0.0340	0.0409	0.0478	0.0531	0.0599
						Feed (mm/min)	84	107	107	107	94	84	75
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.5	≤ 1.5	19 (15-23)	RPM	1002	751	601	501	376	301	240
						Fz	0.0112	0.0192	0.0239	0.0284	0.0333	0.0371	0.0420
						Feed (mm/min)	56	72	72	71	63	56	50
		Slot 	1	≤ 1	15 (12-18)	RPM	808	606	485	404	303	242	194
						Fz	0.0112	0.0192	0.0239	0.0284	0.0333	0.0371	0.0420
						Feed (mm/min)	45	58	58	57	50	45	41
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.5	≤ 1.5	66 (52-79)	RPM	3474	2605	2084	1737	1303	1042	834
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.070
						Feed (mm/min)	333	417	417	417	367	333	292
		Slot 	1	≤ 1	52 (41-62)	RPM	2747	2060	1648	1373	1030	824	659
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.070
						Feed (mm/min)	264	330	330	330	290	264	231
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.5	≤ 1.5	23 (18-27)	RPM	1212	909	727	606	454	364	291
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071
						Feed (mm/min)	116	145	145	145	128	116	103
		Slot 	1	≤ 1	18 (15-22)	RPM	969	727	582	485	364	291	233
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071
						Feed (mm/min)	93	116	116	116	102	93	83

Bhn (Brinell) HRC (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 5 x rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



FRACTIONAL Z-Carb-AP • Z-Carb



TOLERANCES (inch)

≤1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h_8

RE = +0.000/-0.0010

>1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h_8

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h_8

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h_8

RE = +0.000/-0.0020


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

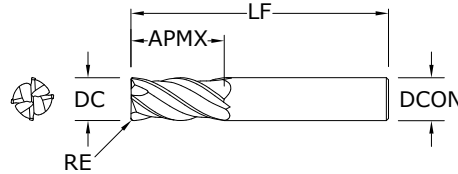


Z1PCR • Z1 • Z16CR FRACTIONAL SERIES

inch					EDP NO.			SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X	Ti-NAMITE®-X W/FLAT	JetStream	
1/64	1/32	1-1/2	1/8	0.002	36874*	—	—	Z1PCR
1/32	5/64	1-1/2	1/8	0.005	36875*	—	—	Z1PCR
3/64	7/64	1-1/2	1/8	0.005	36876*	—	—	Z1PCR
1/16	3/16	1-1/2	1/8	0.005	36872*	—	—	Z1PCR
5/64	3/16	1-1/2	1/8	0.005	36877*	—	—	Z1PCR
3/32	9/32	1-1/2	1/8	0.010	36873*	—	—	Z1PCR
7/64	3/8	1-1/2	1/8	0.010	36878*	—	—	Z1PCR
1/8	1/4	1-1/2	1/8	0.015	36505	—	—	Z16CR
1/8	3/8	1-1/2	1/8	—	36404	—	—	Z1
1/8	3/8	1-1/2	1/8	0.010	36370	—	—	Z1PCR
1/8	3/8	1-1/2	1/8	0.015	36851	—	—	Z1PCR
5/32	5/16	2	3/16	0.015	36506	—	—	Z16CR
5/32	7/16	2	3/16	—	36406	—	—	Z1
3/16	3/8	2	3/16	0.015	36507	—	—	Z16CR
3/16	7/16	2	3/16	—	36408	—	—	Z1
3/16	7/16	2	3/16	0.010	36371	—	—	Z1PCR
3/16	7/16	2	3/16	0.015	36852	—	—	Z1PCR
3/16	7/16	2	3/16	0.030	36722	—	—	Z1PCR
7/32	3/8	2	1/4	0.020	36508	—	—	Z16CR
7/32	7/16	2-1/2	1/4	—	36410	—	—	Z1
1/4	7/16	2	1/4	0.020	36509	—	—	Z16CR
1/4	1/2	2-1/2	1/4	—	36416	—	—	Z1
1/4	1/2	2-1/2	1/4	0.010	36372	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.015	36723	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.020	36853	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.030	36373	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	—	36596	—	—	Z1
1/4	3/4	2-1/2	1/4	0.010	36599	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.015	36600	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.020	36854	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.030	36601	—	—	Z1PCR
9/32	5/8	2-1/2	5/16	—	36418	—	—	Z1

*Variable flute spacing. Helix and rake do not vary.

continued on next page

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

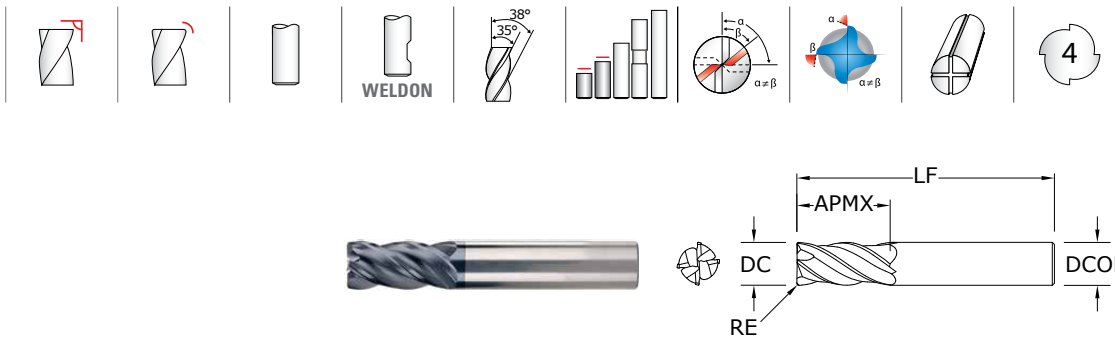

Z1PCR • Z1 • Z16CR

FRACTIONAL SERIES

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.			SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X	Ti-NAMITE®-X W/FLAT	JetStream	
5/16	1/2	2	5/16	0.020	36511	—	—	Z16CR
5/16	13/16	2-1/2	5/16	—	36420	—	—	Z1
5/16	13/16	2-1/2	5/16	0.015	36724	—	—	Z1PCR
5/16	13/16	2-1/2	5/16	0.020	36855	—	—	Z1PCR
5/16	13/16	2-1/2	5/16	0.030	36374	—	—	Z1PCR
11/32	13/16	2-1/2	3/8	—	36422	—	—	Z1
3/8	5/8	2	3/8	0.020	36513	—	—	Z16CR
3/8	7/8	2-1/2	3/8	—	36424	36530	—	Z1
3/8	7/8	2-1/2	3/8	0.010	36375	36701	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.015	36725	36736	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.020	36856	36864	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.030	36376	36702	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.060	36727	36738	—	Z1PCR
13/32	15/16	2-3/4	7/16	—	36426	36531	—	Z1
7/16	5/8	2-1/2	7/16	0.020	36515	—	—	Z16CR
7/16	1	2-3/4	7/16	—	36428	36532	—	Z1
7/16	1	2-3/4	7/16	0.020	36857	36865	—	Z1PCR
15/32	1	3	1/2	—	36430	36533	—	Z1
1/2	5/8	2-1/2	1/2	0.030	36517	—	—	Z16CR
1/2	1	3	1/2	—	36432	36534	36826	Z1
1/2	1	3	1/2	0.010	36378	36704	36804	Z1PCR
1/2	1	3	1/2	0.015	36729	36740	36810	Z1PCR
1/2	1	3	1/2	0.030	36858	36866	36805	Z1PCR
1/2	1	3	1/2	0.060	36380	36706	36811	Z1PCR
1/2	1	3	1/2	0.090	36381	36707	36812	Z1PCR
1/2	1	3	1/2	0.125	36731	36742	36813	Z1PCR
1/2	1-1/4	3-1/4	1/2	—	36597	36598	—	Z1
1/2	1-1/4	3-1/4	1/2	0.010	36602	36603	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.015	36604	36605	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.030	36859	36867	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.060	36610	36611	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.090	36612	36613	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.125	36614	36615	—	Z1PCR
9/16	1-1/8	3-1/2	9/16	—	36436	36535	36827	Z1

TOLERANCES (inch)**≤1/8 DIAMETER**

DC = +0.0005/−0.0005

DCON = h₆

RE = +0.000/−0.0010

>1/8–1/4 DIAMETER

DC = +0.000/−0.0012

DCON = h₆

RE = +0.000/−0.0020

>1/4–3/8 DIAMETER

DC = +0.000/−0.0016

DCON = h₆

RE = +0.000/−0.0020

>3/8–1 DIAMETER

DC = +0.000/−0.0020

DCON = h₆

RE = +0.000/−0.0020

STEELS

STAINLESS STEELS

CAST IRON



HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

continued on next page



FRACTIONAL Z-Carb-AP • Z-Carb

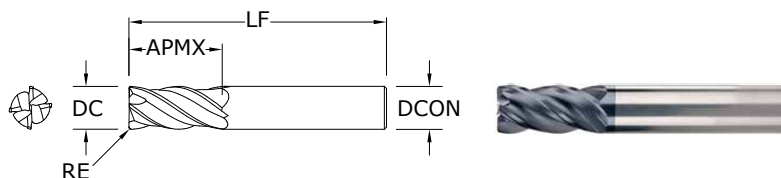

Z1PCR • Z1 • Z16CR FRACTIONAL SERIES

TOLERANCES (inch)

≤1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h_6

RE = +0.000/-0.0010

>1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h_6

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h_6

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h_6

RE = +0.000/-0.0020

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


inch						EDP NO.			SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE		Ti-NAMITE®-X	Ti-NAMITE®-X W/FLAT	JetStream	
9/16	1-1/8	3-1/2	9/16	0.030		36860	36868	36806	Z1PCR
5/8	3/4	3	5/8	0.040		36519	—	—	Z16CR
5/8	1-1/4	3-1/2	5/8	—		36440	36536	36828	Z1
5/8	1-1/4	3-1/2	5/8	0.030		36383	36709	36814	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.040		36861	36869	36807	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.060		36384	36710	36815	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.090		36385	36711	36816	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.125		36733	36744	36817	Z1PCR
3/4	1	3	3/4	0.040		36520	—	—	Z16CR
3/4	1-1/2	4	3/4	—		36442	36537	36829	Z1
3/4	1-1/2	4	3/4	0.030		36386	36712	36818	Z1PCR
3/4	1-1/2	4	3/4	0.040		36862	36870	36808	Z1PCR
3/4	1-1/2	4	3/4	0.060		36387	36713	36819	Z1PCR
3/4	1-1/2	4	3/4	0.090		36388	36714	36820	Z1PCR
3/4	1-1/2	4	3/4	0.125		36389	36715	36821	Z1PCR
1	1-1/2	4	1	—		36444	36538	36830	Z1
1	1-1/2	4	1	0.030		36390	36716	36822	Z1PCR
1	1-1/2	4	1	0.040		36863	36871	36809	Z1PCR
1	1-1/2	4	1	0.060		36391	36717	36823	Z1PCR
1	1-1/2	4	1	0.090		36392	36718	36824	Z1PCR
1	1-1/2	4	1	0.125		36393	36719	36825	Z1PCR

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Z-Carb-AP



Z1PLC FRACTIONAL SERIES

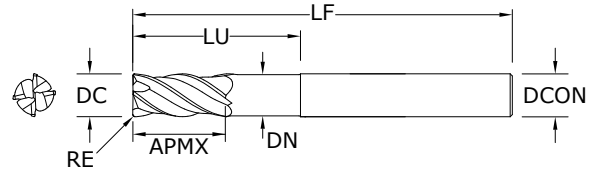

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch		REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	EDP NO.
			SHANK DIAMETER DCON					Ti-NAMITE®-X
1/4	1/2	2-1/2	1/4		1-1/8	.230	.020	36447
1/4	1/2	3-1/2	1/4		1-5/8	.230	.020	36448
1/4	1/2	4	1/4		1-1/4	.230	.020	36450
1/4	1/2	4	1/4		2-1/8	.230	.020	36449
5/16	13/16	3	5/16		1-3/8	.293	.020	36453
5/16	13/16	4	5/16		2	.293	.020	36454
5/16	13/16	4	5/16		1-5/8	.293	.020	36452
3/8	7/8	3	3/8		1-5/8	.355	.020	36457
3/8	7/8	5	3/8		1-7/8	.355	.020	36456
3/8	7/8	4	3/8		2-3/8	.355	.020	36458
7/16	1	6	7/16		2	.418	.020	36460
1/2	1	4	1/2		2	.480	.030	36463
1/2	1	5	1/2		3	.480	.030	36464
1/2	1	6	1/2		2-1/4	.480	.030	36462
9/16	1-1/8	6	9/16		2-1/2	.543	.030	36466
5/8	1-1/4	5	5/8		2-1/2	.605	.040	36468
5/8	1-1/4	6	5/8		3-3/4	.605	.040	36469
5/8	1-1/4	6	5/8		3	.605	.040	36470
3/4	1-1/2	6	3/4		3-1/2	.730	.040	36472
1	1-1/2	6	1		3	.980	.040	36475
1	1-1/2	6	1		4	.980	.040	36474

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.000/-0.005

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.000/-0.005

>3/8-1 DIAMETER



DC = +0.0000/-0.0020

DCON = h_6

RE = +0.000/-0.005

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

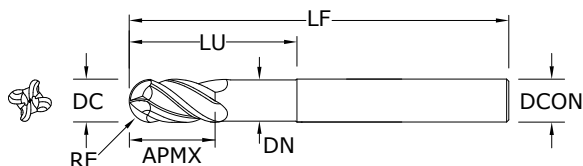

Z1PLB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.0000/-0.0006

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

RE = +0.0000/-0.0008

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0010

inch						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X
1/4	1/2	4	1/4	1-1/4	.230	36480
5/16	13/16	4	5/16	1-5/8	.293	36482
3/8	7/8	5	3/8	1-7/8	.355	36486
7/16	1	6	7/16	2	.418	38490
1/2	1	6	1/2	2-1/4	.480	38492
9/16	1-1/8	6	9/16	2-1/2	.543	38496
5/8	1-1/4	6	5/8	3	.605	36500
3/4	1-1/2	6	3/4	3-1/2	.730	36502
1	1-1/2	6	1	4	.980	36504

RE = 1/2 Cutting Diameter (DC)

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Long reach design allows for deeper and faster cuts
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS


STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

FRACTIONAL Z-Carb-AP



Series Z1, Z16CR, Z1PCR, Z1PLC, Z1PLB Fractional								DC • in							
Hardness		Ae x DC	Ap x DC	Vc (sfm)		1/64	1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 0.5	≤ 1.5	555	RPM	135904	16961	8480	5654	4240	3392	2827	2120	
					(444-666)	Fz	0.00005	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043	
						Feed (ipm)	27.2	31.2	40.7	52.0	52.6	46.1	41.8	36.5	
		 Slot	1	≤ 1	440	RPM	107744	13446	6723	4482	3362	2689	2241	1681	
					(352-528)	Fz	0.00005	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043	
						Feed (ipm)	21.5	24.7	32.3	41.2	41.7	36.6	33.2	28.9	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 0.5	≤ 1.5	315	RPM	77135	9626	4813	3209	2407	1925	1604	1203	
					(252-378)	Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
						Feed (ipm)	12.3	13.1	17.3	21.8	22.1	20.0	18.0	15.4	
		 Slot	1	≤ 1	250	RPM	61218	7640	3820	2547	1910	1528	1273	955	
					(200-300)	Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
						Feed (ipm)	9.8	10.4	13.8	17.3	17.6	15.9	14.3	12.2	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 0.5	≤ 1.5	185	RPM	45301	5654	2827	1885	1413	1131	942	707	
					(148-222)	Fz	0.00003	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026	
						Feed (ipm)	5.4	6.3	7.9	10.6	10.2	9.0	8.3	7.3	
		 Slot	1	≤ 1	145	RPM	35506	4431	2216	1477	1108	886	739	554	
					(116-174)	Fz	0.00003	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026	
						Feed (ipm)	4.3	5.0	6.2	8.3	8.0	7.1	6.5	5.8	
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.5	≤ 1.5	490	RPM	119987	14974	7487	4991	3744	2995	2496	1872
						(392-588)	Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
							Feed (ipm)	19.2	20.4	27.0	33.9	34.4	31.1	28.0	24.0
			 Slot	1	≤ 1	390	RPM	95500	11918	5959	3973	2980	2384	1986	1490
						(312-468)	Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
							Feed (ipm)	15.3	16.2	21.5	27.0	27.4	24.8	22.2	19.1
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		 Profile	≤ 0.5	≤ 1.5	340	RPM	83256	10390	5195	3463	2598	2078	1732	1299	
					(272-408)	Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	10.0	11.2	14.5	19.4	18.7	16.6	15.2	13.0	
		 Slot	1	≤ 1	270	RPM	66115	8251	4126	2750	2063	1650	1375	1031	
					(216-324)	Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	7.9	8.9	11.6	15.4	14.9	13.2	12.1	10.3	
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		 Profile	≤ 0.5	≤ 1.5	310	RPM	75910	9474	4737	3158	2368	1895	1579	1184	
					(248-372)	Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	9.1	10.2	13.3	17.7	17.1	15.2	13.9	11.8	
		 Slot	1	≤ 1	250	RPM	61218	7640	3820	2547	1910	1528	1273	955	
					(200-300)	Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	7.3	8.3	10.7	14.3	13.8	12.2	11.2	9.6	

continued on next page

Series Z1, Z16CR, Z1PCR, Z1PLC, Z1PLB Fractional							DC • in							
Hardness		Ae x DC	Ap x DC	Vc (sfm)		1/64	1/8	1/4	3/8	1/2	5/8	3/4	1	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile ≤ 0.5 ≤ 1.5	445	RPM	108968	13599	6800	4533	3400	2720	2267	1700	
				(356-534)	Fz	0.00005	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039	
					Feed (ipm)	21.8	22.8	29.9	38.1	38.1	33.7	30.8	26.5	
			 Slot 1 ≤ 1	355	RPM	86929	10849	5424	3616	2712	2170	1808	1356	
				(284-426)	Fz	0.00005	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039	
					Feed (ipm)	17.4	18.2	23.9	30.4	30.4	26.9	24.6	21.2	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Profile ≤ 0.5 ≤ 1.5	340	RPM	83256	10390	5195	3463	2598	2078	1732	1299	
				(272-408)	Fz	0.00004	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029	
					Feed (ipm)	13.3	12.9	17.5	22.2	21.8	19.1	17.3	15.1	
			 Slot 1 ≤ 1	270	RPM	66115	8251	4126	2750	2063	1650	1375	1031	
				(216-324)	Fz	0.00004	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029	
					Feed (ipm)	10.6	10.2	13.9	17.6	17.3	15.2	13.8	12.0	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Profile ≤ 0.5 ≤ 1.5	80	RPM	19590	2445	1222	815	611	489	407	306	
				(64-96)	Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024	
					Feed (ipm)	2.4	2.4	3.3	4.2	4.2	3.7	3.3	2.9	
			 Slot 1 ≤ 1	65	RPM	15917	1986	993	662	497	397	331	248	
				(52-78)	Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024	
					Feed (ipm)	1.9	2.0	2.7	3.4	3.4	3.0	2.7	2.4	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile ≤ 0.5 ≤ 1.5	62	RPM	15182	1895	947	632	474	379	316	237	
				(50-74)	Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017	
					Feed (ipm)	1.2	1.4	1.8	2.3	2.3	2.0	1.8	1.6	
			 Slot 1 ≤ 1	50	RPM	12244	1528	764	509	382	306	255	191	
				(40-60)	Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017	
					Feed (ipm)	1.0	1.1	1.5	1.8	1.8	1.6	1.4	1.3	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile ≤ 0.5 ≤ 1.5	215	RPM	52647	6570	3285	2190	1643	1314	1095	821	
				(172-258)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
					Feed (ipm)	6.3	7.9	10.5	13.1	13.1	11.6	10.5	9.2	
			 Slot 1 ≤ 1	170	RPM	41628	5195	2598	1732	1299	1039	866	649	
				(136-204)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
					Feed (ipm)	5.0	6.2	8.3	10.4	10.4	9.1	8.3	7.3	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 Profile ≤ 0.5 ≤ 1.5	75	RPM	18365	2292	1146	764	573	458	382	287	
				(60-90)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
					Feed (ipm)	2.2	2.8	3.7	4.6	4.6	4.0	3.7	3.2	
			 Slot 1 ≤ 1	60	RPM	14692	1834	917	611	458	367	306	229	
				(48-72)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
					Feed (ipm)	1.8	2.2	2.9	3.7	3.7	3.2	2.9	2.6	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 4 x rpm

maximum Slotting Ap for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .25 x DC

maximum Profile Ae for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .20 x DC


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Z-Carb-AP • Z-Carb



Z1MPCR • Z1M

METRIC SERIES

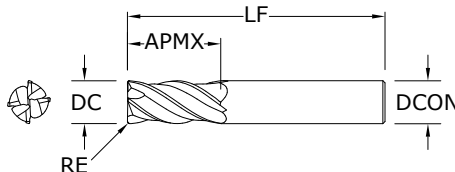

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			CORNER RADIUS RE	EDP NO.			SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON			Ti-NAMITE®-X	Ti-NAMITE®-X W/FLAT	JetStream	
1,0	3,0	57,0	6,0	0,1		46873*	—	—	Z1MPCR
1,5	4,5	57,0	6,0	0,1		46849*	—	—	Z1MPCR
2,0	6,0	57,0	6,0	0,2		46850*	—	—	Z1MPCR
2,5	7,0	57,0	6,0	0,2		46874*	—	—	Z1MPCR
3,0	8,0	57,0	6,0	—		46357	—	—	Z1M
3,0	8,0	57,0	6,0	0,3		46851	—	—	Z1MPCR
3,0	8,0	57,0	6,0	0,5		46880	—	—	Z1MPCR
4,0	11,0	57,0	6,0	—		46358	—	—	Z1M
4,0	11,0	57,0	6,0	0,3		46852	—	—	Z1MPCR
4,0	11,0	57,0	6,0	0,5		46881	—	—	Z1MPCR
5,0	13,0	57,0	6,0	—		46359	—	—	Z1M
5,0	13,0	57,0	6,0	0,3		46853	—	—	Z1MPCR
6,0	13,0	57,0	6,0	—		46360	—	—	Z1M
6,0	13,0	57,0	6,0	0,25		46882	—	—	Z1MPCR
6,0	13,0	57,0	6,0	0,5		46854	—	—	Z1MPCR
6,0	13,0	57,0	6,0	1,0		46855	—	—	Z1MPCR
6,0	13,0	57,0	6,0	1,5		46884	—	—	Z1MPCR
8,0	19,0	63,0	8,0	—		46362	—	—	Z1M
8,0	19,0	63,0	8,0	0,5		46856	—	—	Z1MPCR
8,0	19,0	63,0	8,0	1,0		46857	—	—	Z1MPCR
8,0	19,0	63,0	8,0	1,5		46886	—	—	Z1MPCR
8,0	19,0	63,0	8,0	2,0		46887	—	—	Z1MPCR
10,0	22,0	72,0	10,0	—		46364	—	—	Z1M
10,0	22,0	72,0	10,0	0,5		46858	—	—	Z1MPCR
10,0	22,0	72,0	10,0	1,0		46859	—	—	Z1MPCR
10,0	22,0	72,0	10,0	1,5		46889	—	—	Z1MPCR
10,0	22,0	72,0	10,0	2,0		46890	—	—	Z1MPCR
10,0	22,0	72,0	10,0	2,5		46891	—	—	Z1MPCR
12,0	26,0	83,0	12,0	—		46366	—	—	Z1M
12,0	26,0	83,0	12,0	0,5		46860	46909	—	Z1MPCR
12,0	26,0	83,0	12,0	0,75		46861	46910	46493	Z1MPCR
12,0	26,0	83,0	12,0	1,0		46893	46911	—	Z1MPCR

*Variable flute spacing. Helix and rake do not vary.

continued on next page

TOLERANCES (mm)

<3 DIAMETER

DC = +0,012/-0,012

DCON = h_6

RE = +0,000/-0,025

>3-6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6



RE = +0,000/-0,050

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com



METRIC Z-Carb-AP • Z-Carb

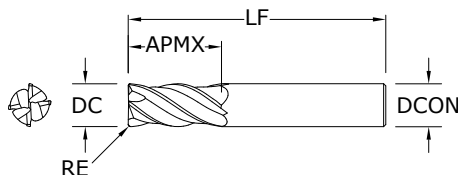

Z1MPCR • Z1M METRIC SERIES

TOLERANCES (mm)

<3 DIAMETER

DC = +0,012/-0,012

DCON = h_6

RE = +0,000/-0,025

>3-6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.		SERIES	
					Ti-NAMITE®-X	Ti-NAMITE®-X W/FLAT	JetStream	
12,0	26,0	83,0	12,0	1,5	46894	46912	—	Z1MPCR
12,0	26,0	83,0	12,0	2,0	46895	46913	—	Z1MPCR
12,0	26,0	83,0	12,0	2,5	46896	46914	—	Z1MPCR
12,0	26,0	83,0	12,0	3,0	42718	46915	42719	Z1MPCR
14,0	26,0	83,0	14,0	—	46368	46506	—	Z1M
14,0	26,0	83,0	14,0	1,0	46862	46916	46494	Z1MPCR
16,0	32,0	92,0	16,0	—	46370	46507	—	Z1M
16,0	32,0	92,0	16,0	1,0	46863	46917	46495	Z1MPCR
16,0	32,0	92,0	16,0	1,5	46898	46918	—	Z1MPCR
16,0	32,0	92,0	16,0	2,0	46899	46919	—	Z1MPCR
16,0	32,0	92,0	16,0	2,5	46900	46920	—	Z1MPCR
16,0	32,0	92,0	16,0	3,0	46864	46921	42721	Z1MPCR
16,0	32,0	92,0	16,0	4,0	46867	46944	—	Z1MPCR
18,0	32,0	92,0	18,0	—	46372	46508	—	Z1M
20,0	38,0	104,0	20,0	—	46374	46509	—	Z1M
20,0	38,0	104,0	20,0	1,0	46865	46922	46497	Z1MPCR
20,0	38,0	104,0	20,0	1,5	46903	46923	—	Z1MPCR
20,0	38,0	104,0	20,0	2,0	46904	46924	—	Z1MPCR
20,0	38,0	104,0	20,0	2,5	46905	46925	—	Z1MPCR
20,0	38,0	104,0	20,0	3,0	42722	46926	42723	Z1MPCR
20,0	38,0	104,0	20,0	4,0	46868	46945	—	Z1MPCR
20,0	38,0	104,0	20,0	5,0	46869	46946	—	Z1MPCR
25,0	38,0	104,0	25,0	—	46376	46510	—	Z1M
25,0	38,0	104,0	25,0	1,0	46866	46927	46498	Z1MPCR

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



Z1MPIC • Z1MPLC

METRIC SERIES

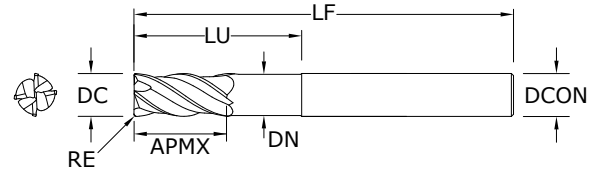

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X	Ti-NAMITE®-X W/FLAT
6,0	8,0	75,0	6,0	24,0	5,49	0,5	46821	—
8,0	10,0	75,0	8,0	32,0	7,49	1,0	46822	—
8,0	10,0	75,0	8,0	32,0	7,49	2,0	46823	—
10,0	12,0	100,0	10,0	40,0	9,50	1,0	46824	—
10,0	12,0	100,0	10,0	40,0	9,50	2,0	46825	—
12,0	15,0	100,0	12,0	48,0	11,48	1,0	46826	46928
12,0	15,0	100,0	12,0	48,0	11,48	1,5	46827	46929
12,0	15,0	100,0	12,0	48,0	11,48	2,0	46828	46930
12,0	15,0	100,0	12,0	48,0	11,48	3,0	46829	46931
12,0	26,0	83,0	12,0	36,0	11,48	2,5	—	42731
12,0	26,0	83,0	12,0	36,0	11,48	3,0	—	42732
12,0	26,0	83,0	12,0	36,0	11,48	4,0	—	42733
16,0	32,0	92,0	16,0	42,0	15,49	2,5	—	42734
16,0	32,0	92,0	16,0	42,0	15,49	4,0	—	42735
16,0	32,0	92,0	16,0	42,0	15,49	6,0	—	42736
16,0	20,0	115,0	16,0	65,0	15,49	1,0	46830	46932
16,0	20,0	115,0	16,0	65,0	15,49	1,5	46831	46933
16,0	20,0	115,0	16,0	65,0	15,49	2,0	46832	46934
16,0	20,0	115,0	16,0	65,0	15,49	3,0	46833	46935
16,0	20,0	115,0	16,0	65,0	15,49	4,0	46834	46936
16,0	20,0	115,0	16,0	65,0	15,49	5,0	46835	46937
20,0	24,0	140,0	20,0	80,0	19,48	1,0	46836	46938
20,0	24,0	140,0	20,0	80,0	19,48	1,5	46837	46939
20,0	24,0	140,0	20,0	80,0	19,48	2,0	46838	46940
20,0	24,0	140,0	20,0	80,0	19,48	3,0	46839	46941
20,0	24,0	140,0	20,0	80,0	19,48	4,0	46840	46942
20,0	24,0	140,0	20,0	80,0	19,48	5,0	46841	46943
20,0	38,0	104,0	20,0	52,0	19,48	2,5	—	42737
20,0	38,0	104,0	20,0	52,0	19,48	4,0	—	42738
20,0	38,0	104,0	20,0	52,0	19,48	6,0	—	42739

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-20 DIAMETER


DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

Series Z1M, Z1MPCR, Z1MPIC, Z1MPLC Metric				Vc (m/min)	DC • mm										
Hardness	Ae x DC	Ap x DC	1		3	6	8	10	12	16	20	25			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536		≤ 0.5	≤ 1.5	169	RPM	53803	17934	8967	6725	5380	4484	3363	2690	2152
					(135-203)	Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108
					Feed (mm/min)	646	782	1040	1318	1313	1327	1170	1065	930	
			1	≤ 1	134	RPM	42654	14218	7109	5332	4265	3555	2666	2133	1706
					(107-161)	Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108
					Feed (mm/min)	512	620	825	1045	1041	1052	928	845	737	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100		≤ 0.5	≤ 1.5	96	RPM	30537	10179	5089	3817	3054	2545	1909	1527	1221
					(77-115)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
					Feed (mm/min)	281	330	448	550	550	560	511	458	391	
			1	≤ 1	76	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
					Feed (mm/min)	223	262	355	436	436	444	406	364	310	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 0.5	≤ 1.5	56	RPM	17934	5978	2989	2242	1793	1495	1121	897	717
					(45-68)	Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065
					Feed (mm/min)	129	158	203	269	265	257	229	212	187	
			1	≤ 1	44	RPM	14057	4686	2343	1757	1406	1171	879	703	562
					(35-53)	Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065
					Feed (mm/min)	101	124	159	211	208	201	179	166	146	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F		≤ 0.5	≤ 1.5	149	RPM	47501	15834	7917	5938	4750	3958	2969	2375	1900
					(119-179)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
					Feed (mm/min)	437	513	697	855	855	871	796	713	608	
			1	≤ 1	119	RPM	37807	12602	6301	4726	3781	3151	2363	1890	1512
					(95-143)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
					Feed (mm/min)	348	408	555	681	681	693	633	567	484	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 0.5	≤ 1.5	104	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
					Feed (mm/min)	237	281	374	494	488	472	420	389	332	
			1	≤ 1	82	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
					Feed (mm/min)	188	223	297	393	387	375	334	309	264	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 0.5	≤ 1.5	94	RPM	30052	10017	5009	3756	3005	2504	1878	1503	1202
					(76-113)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
					Feed (mm/min)	216	256	341	451	445	431	383	355	303	
			1	≤ 1	76	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
					Feed (mm/min)	174	207	275	364	359	347	309	286	244	

continued on next page

Z-Carb-AP

Series Z1M, Z1MPCR, Z1MPIC, Z1MPLC Metric							DC • mm									
	Hardness	Ae x DC	Ap x DC	Vc (m/min)		1	3	6	8	10	12	16	20	25		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.5	≤ 1.5	136	RPM	43139	14380	7190	5392	4314	3595	2696	2157	1726
						(109-163)	Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098
						Feed (mm/min)	483	569	748	971	966	963	852	785	676	
		 Slot	1	≤ 1	108	RPM	34414	11471	5736	4302	3441	2868	2151	1721	1377	
					(87-130)	Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
					Feed (mm/min)	385	454	597	774	771	769	680	626	540		
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Profile	≤ 0.5	≤ 1.5	104	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074
						Feed (mm/min)	264	325	439	560	567	549	486	442	390	
		 Slot	1	≤ 1	82	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047	
					(66-99)	Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074	
					Feed (mm/min)	209	258	349	445	450	436	386	351	310		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Profile	≤ 0.5	≤ 1.5	24	RPM	7755	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060
						Feed (mm/min)	56	63	83	105	105	106	93	82	74	
		 Slot	1	≤ 1	20	RPM	6301	2100	1050	788	630	525	394	315	252	
					(16-24)	Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060	
					Feed (mm/min)	45	51	67	85	86	86	76	67	60		
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile	≤ 0.5	≤ 1.5	19	RPM	6010	2003	1002	751	601	501	376	301	240
						(15-23)	Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042
						Feed (mm/min)	31	34	44	57	58	56	50	44	40	
		 Slot	1	≤ 1	15	RPM	4847	1616	808	606	485	404	303	242	194	
					(12-18)	Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042	
					Feed (mm/min)	25	28	36	46	47	45	40	36	33		
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile	≤ 0.5	≤ 1.5	66	RPM	20842	6947	3474	2605	2084	1737	1303	1042	834
						(52-79)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
						Feed (mm/min)	167	197	264	333	333	333	292	267	233	
		 Slot	1	≤ 1	52	RPM	16480	5493	2747	2060	1648	1373	1030	824	659	
					(41-62)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070	
					Feed (mm/min)	132	156	209	264	264	264	231	211	185		
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 Profile	≤ 0.5	≤ 1.5	23	RPM	7271	2424	1212	909	727	606	454	364	291
						(18-27)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
						Feed (mm/min)	58	69	92	116	116	116	102	93	81	
		 Slot	1	≤ 1	18	RPM	5816	1939	969	727	582	485	364	291	233	
					(15-22)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070	
					Feed (mm/min)	47	55	74	93	93	93	81	74	65		

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 4 x rpm

maximum Slotting Ap for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .25 x DC



maximum Profile Ae for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .20 x DC

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

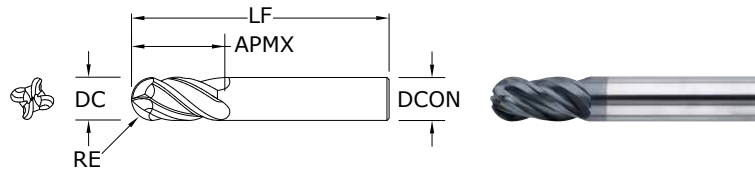

Z1B
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream
1/8	3/8	1-1/2	1/8	36358	—	—
5/32	7/16	2	3/16	36357	—	—
3/16	7/16	2	3/16	36359	—	—
7/32	7/16	2-1/2	1/4	36361	—	—
1/4	1/2	2-1/2	1/4	36344	—	—
1/4	3/4	2-1/2	1/4	36590	—	—
9/32	5/8	2-1/2	5/16	36353	—	—
5/16	13/16	2-1/2	5/16	36345	—	—
11/32	13/16	2-1/2	3/8	36354	—	—
3/8	7/8	2-1/2	3/8	36346	36539	—
13/32	15/16	2-3/4	7/16	36355	36540	—
7/16	1	2-3/4	7/16	36347	36541	—
15/32	1	3	1/2	36356	36542	—
1/2	1	3	1/2	36348	36543	36846
1/2	1-1/4	3-1/4	1/2	36591	36592	—
9/16	1-1/8	3-1/2	9/16	36349	36544	36847
5/8	1-1/4	3-1/2	5/8	36350	36545	36848
3/4	1-1/2	4	3/4	36351	36546	36849
1	1-1/2	4	1	36352	36547	36850


RE = 1/2 Cutting Diameter (DC)

- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



Series Z1B	Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in							
							1/8	1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	555	RPM	16961	8480	5654	4240	3392	2827	2120
						(444-666)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
							Feed (ipm)	25.8	33.9	43.0	42.4	42.1	36.5	29.7
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681
						(352-528)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
							Feed (ipm)	20.4	26.9	34.1	33.6	33.3	29.0	23.5
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203
						(252-378)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027
							Feed (ipm)	10.8	15.4	18.0	18.3	18.5	16.0	13.0
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
						(200-300)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027
							Feed (ipm)	8.6	12.2	14.3	14.5	14.7	12.7	10.3
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707
						(148-222)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	4.5	5.7	7.5	7.3	7.2	6.4	5.1
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554
						(116-174)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	3.5	4.4	5.9	5.8	5.7	5.0	4.0
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
						(392-588)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	18.0	21.0	28.0	27.0	27.6	24.0	18.7
		≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
						(312-468)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	14.3	16.7	22.2	21.5	21.9	19.1	14.9
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (ipm)	8.3	12.5	15.2	14.5	15.0	13.2	10.4
		≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (ipm)	6.6	9.9	12.1	11.6	11.9	10.5	8.3
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	310	RPM	9474	4737	3158	2368	1895	1579	1184
						(248-372)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (ipm)	7.6	11.4	13.9	13.3	13.6	12.0	9.5
		≤ 325 Bhn or ≤ 35 HRc	Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
						(200-300)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (ipm)	6.1	9.2	11.2	10.7	11.0	9.7	7.6

continued on next page

Series	Z1B Fractional	Hardness			Vc (sfm)	DC • in								
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.5	≤ 1.5	445	RPM	13599	6800	4533	3400	2720	2267	1700
						(356-534)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
							Feed (ipm)	19.0	27.2	32.6	32.6	28.1	23.1	
			 Slot	1	≤ 1	355	RPM	10849	5424	3616	2712	2170	1808	1356
						(284-426)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
							Feed (ipm)	15.2	21.7	26.0	26.0	22.4	18.4	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Profile	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	12.5	14.5	19.4	18.7	16.6	13.0	
			 Slot	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	9.9	11.6	15.4	14.9	15.2	13.2	10.3
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Profile	≤ 0.5	≤ 1.5	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (ipm)	2.2	2.0	2.6	2.4	2.5	2.3	1.8
			 Slot	1	≤ 1	65	RPM	1986	993	662	497	397	331	248
						(52-78)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (ipm)	1.6	1.6	2.1	2.0	2.1	1.9	1.5
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile	≤ 0.5	≤ 1.5	62	RPM	1895	947	632	474	379	316	237
						(50-74)	Fz	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010
							Feed (ipm)	0.8	1.1	1.3	1.3	1.2	1.1	0.9
			 Slot	1	≤ 1	50	RPM	1497	749	499	374	299	250	187
						(40-60)	Fz	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010
							Feed (ipm)	0.6	0.9	1.0	1.0	1.0	0.9	0.7
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile	≤ 0.5	≤ 1.5	215	RPM	6570	3285	2190	1643	1314	1095	821
						(172-258)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	5.3	6.6	8.8	8.5	8.4	7.4	5.9
			 Slot	1	≤ 1	170	RPM	5195	2598	1732	1299	1039	866	649
						(136-204)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	4.2	5.2	6.9	6.8	6.6	5.9	4.7
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 Profile	≤ 0.5	≤ 1.5	75	RPM	2292	1146	764	573	458	382	287
						(60-90)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	1.8	2.3	3.1	3.0	2.9	2.6	2.1
			 Slot	1	≤ 1	60	RPM	1834	917	611	458	367	306	229
						(48-72)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	1.5	1.8	2.4	2.4	2.3	2.1	1.7

Bhn (Brinell) HRc (Rockwell C)


rpm = Vc x 3.82 / DC

ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Z1MB

METRIC SERIES

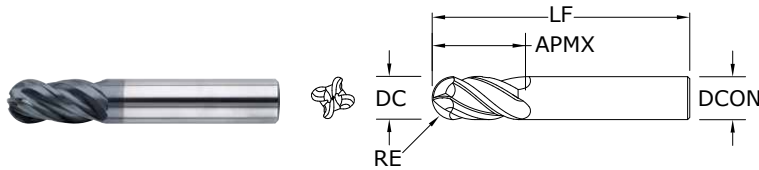

- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)	JetStream
3,0	8,0	57,0	6,0	46354	—
4,0	11,0	57,0	6,0	46355	—
5,0	13,0	57,0	6,0	46356	—
6,0	13,0	57,0	6,0	46343	—
8,0	19,0	63,0	8,0	46344	—
10,0	22,0	72,0	10,0	46345	—
12,0	26,0	83,0	12,0	46346	—
14,0	26,0	83,0	14,0	46347	46518
16,0	32,0	92,0	16,0	46348	46519
18,0	32,0	92,0	18,0	46349	46520
20,0	38,0	104,0	20,0	46350	46521
25,0	38,0	104,0	25,0	46351	46522

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

3–6 DIAMETER

DC = $+0,000/-0,030$
DCON = h_6

RE = $+0,000/-0,015$

>6–10 DIAMETER

DC = $+0,000/-0,040$

DCON = h_6

RE = $+0,000/-0,020$

>10–25 DIAMETER


DC = $+0,000/-0,050$


DCON = h_6

RE = $+0,000/-0,025$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com



Series Z1MB Metric	Hardness		Vc (m/min)	DC • mm											
				3	6	8	10	12	16	20	25				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.5	≤ 1.5	169	RPM	17934	8967	6725	5380	4484	3363	2690	2152
						(135-203)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088
							Feed (mm/min)	654	861	1091	1090	1076	1067	927	753
		 Slot	1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	1706	
					(107-161)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088	
						Feed (mm/min)	519	682	865	864	853	846	735	597	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 375 Bhn or ≤ 40 HRc	≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	1221
						(77-115)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068
							Feed (mm/min)	274	391	456	456	464	469	407	330
		 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969	
					(61-91)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068	
						Feed (mm/min)	217	310	362	362	368	372	323	262	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 375 Bhn or ≤ 40 HRc	≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	717
						(45-68)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	115	143	191	191	186	184	163	129
		 Slot	1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	562	
					(35-53)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
						Feed (mm/min)	90	112	150	150	146	144	127	101	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375	1900
						(119-179)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
							Feed (mm/min)	456	532	709	709	684	699	608	475
		 Slot	1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890	1512	
					(95-143)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063	
						Feed (mm/min)	363	423	565	565	544	557	484	378	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	211	316	387	387	369	380	334	264
		 Slot	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047	
					(66-99)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
						Feed (mm/min)	168	251	307	307	293	302	265	209	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	 Profile	≤ 325 Bhn or ≤ 35 HRc	≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503	1202
						(76-113)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	192	288	353	353	337	346	305	240
		 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969	
					(61-91)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
						Feed (mm/min)	155	233	284	284	271	279	246	194	



continued on next page

METRIC Z-Carb



Series Z1MB Metric	Hardness		Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
						3	6	8	10	12	16	20	25	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157	1726
					(109-163)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
					Feed (mm/min)	483	690	828	828	828	828	713	587	
		Slot 	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
					Feed (mm/min)	385	551	661	661	661	661	569	468	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
					Feed (mm/min)	316	369	492	492	475	485	422	330	
		Slot 	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
					Feed (mm/min)	251	293	391	391	377	385	335	262	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388	310
					(20-29)	Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038
					Feed (mm/min)	55	50	66	53	62	65	58	47	
		Slot 	1	≤ 1	20	RPM	2100	1050	788	630	525	394	315	252
					(16-24)	Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038
					Feed (mm/min)	40	40	54	54	50	52	47	38	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301	240
					(15-23)	Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025
					Feed (mm/min)	19	29	32	32	34	31	29	24	
		Slot 	1	≤ 1	15	RPM	1583	792	594	475	396	297	238	190
					(12-18)	Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025
					Feed (mm/min)	15	23	25	25	27	24	23	19	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042	834	
				(52-79)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
				Feed (mm/min)	133	167	222	222	217	213	189	150		
	Slot 	1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824	659	
				(41-62)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
				Feed (mm/min)	105	132	176	176	171	169	149	119		
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364	291	
				(18-27)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
				Feed (mm/min)	47	58	78	78	76	74	66	52		
	Slot 	1	≤ 1	18	RPM	1939	969	727	582	485	364	291	233	
				(15-22)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
				Feed (mm/min)	37	47	62	62	60	60	53	42		

Bhn (Brinell) HRc (Rockwell C)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 4 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

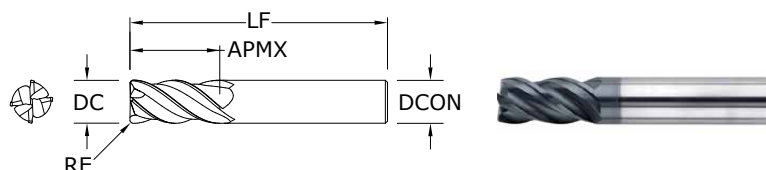

ZH1CR
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.0000/-0.0020

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch					EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
1/4	1/2	2-1/2	1/4	.020	36570	—
1/4	3/4	2-1/2	1/4	.020	36616	—
5/16	13/16	2-1/2	5/16	.020	36571	—
3/8	7/8	2-1/2	3/8	.020	36572	36555
7/16	1	2-3/4	7/16	.020	36573	36556
1/2	1	3	1/2	.030	36574	36557
1/2	1-1/4	3-1/4	1/2	.030	36618	36617
9/16	1-1/8	3-1/2	9/16	.030	36575	36558
5/8	1-1/4	3-1/2	5/8	.040	36576	36559
3/4	1-1/2	4	3/4	.040	36577	36560
1	1-1/2	4	1	.040	36578	36561

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Z-Carb-HTA

Series ZH1CR Fractional	Hardness			Vc (sfm)	Diameter (DC) (inch)							
		Ae x DC	Ap x DC		1/4	3/8	1/2	3/4	1			
HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRC		≤ 0.5	≤ 1.5	85	RPM	1299	866	649	433	325	
					(68-102)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023	
						Feed (ipm)	3.6	4.2	4.4	3.5	3.0	
			1	≤ 1	70	RPM	1070	713	535	357	267	
					(56-84)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023	
						Feed (ipm)	3.0	3.4	3.6	2.9	2.5	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRC		≤ 0.5	≤ 1.5	70	RPM	1070	713	535	357	267
						(56-84)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
							Feed (ipm)	2.1	2.6	2.6	2.0	1.7
				1	≤ 1	55	RPM	840	560	420	280	210
						(44-66)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
							Feed (ipm)	1.7	2.0	2.0	1.6	1.3
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 350 Bhn or ≤ 38 HRC		≤ 0.5	≤ 1.5	215	RPM	3285	2190	1643	1095	821
						(172-258)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (ipm)	10.5	13.1	13.1	10.5	9.2
				1	≤ 1	170	RPM	2598	1732	1299	866	649
						(136-204)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (ipm)	8.3	10.4	10.4	8.3	7.3
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRC		≤ 0.5	≤ 1.5	75	RPM	1146	764	573	382	287
						(60-90)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (ipm)	3.7	4.6	4.6	3.7	3.2
				1	≤ 1	60	RPM	917	611	458	306	229
						(48-72)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (ipm)	2.9	3.7	3.7	2.9	2.6

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

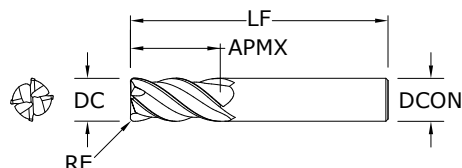

ZH1MCRS •
ZH1MCR
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-20 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm					EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
6,0	10,0	54,0	6,0	0,5	—	42712
6,0	13,0	57,0	6,0	0,5	46450	—
6,0	13,0	57,0	6,0	1,0	46451	—
6,0	13,0	57,0	6,0	1,5	46452	—
8,0	12,0	58,0	8,0	0,5	—	42713
8,0	19,0	63,0	8,0	0,5	46453	—
8,0	19,0	63,0	8,0	1,0	46454	—
8,0	19,0	63,0	8,0	1,5	46455	—
10,0	14,0	66,0	10,0	0,5	—	42714
10,0	22,0	72,0	10,0	0,5	46456	—
10,0	22,0	72,0	10,0	1,0	46457	—
10,0	22,0	72,0	10,0	1,5	46458	—
10,0	22,0	72,0	10,0	2,0	46459	—
12,0	16,0	73,0	12,0	0,7	—	42715
12,0	26,0	83,0	12,0	0,5	46460	46471
12,0	26,0	83,0	12,0	1,0	46461	46472
12,0	26,0	83,0	12,0	1,5	46462	46473
12,0	26,0	83,0	12,0	2,0	46463	46474
12,0	26,0	83,0	12,0	3,0	46464	46475
16,0	22,0	82,0	16,0	1,0	—	42716
16,0	32,0	92,0	16,0	1,5	46465	46476
16,0	32,0	92,0	16,0	2,0	46466	46477
16,0	32,0	92,0	16,0	3,0	46467	46478
16,0	32,0	92,0	16,0	4,0	46482	46483
20,0	26,0	92,0	20,0	1,0	—	42717
20,0	38,0	104,0	20,0	3,0	46468	46479
20,0	38,0	104,0	20,0	4,0	46469	46480
20,0	38,0	104,0	20,0	5,0	46470	46481

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

Z-Carb-HTA

Series ZH1MCRS, ZH1MCR Metric	Hardness			Vc (m/min)	DC • mm				
		Ae x DC	Ap x DC		6	10	12	20	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 Profile ≤ 0.5 ≤ 1.5		26	RPM	1373	824	687	412
				(21-31)	Fz	0.017	0.032	0.041	0.053
					Feed (mm/min)	93	105	113	87
		 Slot 1 ≤ 1		21	RPM	1131	679	565	339
				(17-26)	Fz	0.017	0.032	0.041	0.053
					Feed (mm/min)	77	87	93	72
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 Profile ≤ 0.5 ≤ 1.5		21	RPM	1131	679	565	339
				(17-26)	Fz	0.012	0.024	0.029	0.037
					Feed (mm/min)	54	65	66	50
		 Slot 1 ≤ 1		17	RPM	889	533	444	267
				(13-20)	Fz	0.012	0.024	0.029	0.037
					Feed (mm/min)	43	51	52	39
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile ≤ 0.5 ≤ 1.5		66	RPM	3474	2084	1737	1042
				(52-79)	Fz	0.019	0.041	0.049	0.057
					Feed (mm/min)	264	342	340	238
		 Slot 1 ≤ 1		52	RPM	2747	1648	1373	824
				(41-62)	Fz	0.019	0.041	0.049	0.057
					Feed (mm/min)	209	270	269	188
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile ≤ 0.5 ≤ 1.5		23	RPM	1212	727	606	364	
			(18-27)	Fz	0.019	0.041	0.049	0.057	
				Feed (mm/min)	92	119	119	83	
	 Slot 1 ≤ 1		18	RPM	969	582	485	291	
			(15-22)	Fz	0.019	0.041	0.049	0.057	
				Feed (mm/min)	74	95	95	66	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

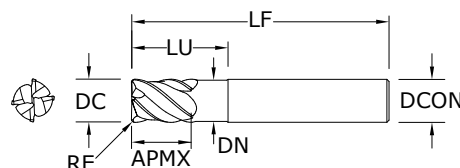

ZD1CR

FRACTIONAL SERIES

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.0000/-0.0020

>3/8-3/4 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


STEELS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X
1/8	5/32	2-1/2	1/4	1/2	.110	.010	36780
3/16	7/32	2-1/2	1/4	3/4	.172	.020	36781
1/4	9/32	2-1/2	1/4	3/4	.235	.020	36782
5/16	13/32	2-1/2	5/16	1	.297	.040	36783
3/8	15/32	2-1/2	3/8	1	.360	.040	36784
7/16	9/16	2-3/4	7/16	1	.422	.040	36785
1/2	5/8	3	1/2	1-1/4	.485	.040	36786
1/2	5/8	4-1/2	1/2	2-1/4	.485	.040	36787
5/8	3/4	3-1/2	5/8	1-1/2	.610	.040	36788
5/8	3/4	4-1/2	5/8	2-1/4	.610	.040	36789
5/8	3/4	5-1/2	5/8	3-1/4	.610	.040	36790
3/4	15/16	4	3/4	1-3/4	.735	.060	36791
3/4	15/16	4-1/2	3/4	2-1/4	.735	.060	36792
3/4	15/16	5-1/2	3/4	3-1/4	.735	.060	36793

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRC (327 to 654 Bhn)

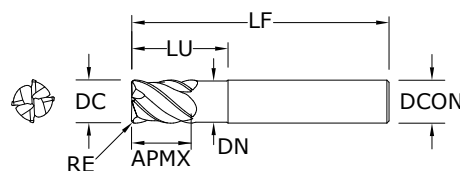

ZD1MCR

METRIC SERIES

TOLERANCES (mm)

3-6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-20 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS


HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X
3,0	4,0	57,0	6,0	15,0	2,62	0,2	46560
4,0	5,0	57,0	6,0	15,0	3,61	0,3	46561
5,0	6,0	57,0	6,0	15,0	4,60	0,5	46562
6,0	7,0	57,0	6,0	15,0	5,61	1,0	46563
8,0	10,0	63,0	8,0	25,0	7,62	1,0	46564
10,0	12,0	72,0	10,0	30,0	9,60	1,0	46565
12,0	15,0	83,0	12,0	35,0	11,61	1,0	46566
16,0	20,0	92,0	16,0	45,0	15,60	1,5	46567
20,0	24,0	104,0	20,0	55,0	19,61	2,0	46568

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRC (327 to 654 Bhn)

Z-Carb-MD

Series ZD1CR Fractional		Hardness			Vc (sfm)	Diameter (DC) (inch)							
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRC	Profile	≤ 0.4	≤ 1	405	RPM	12377	6188	4126	3094	2475	2063
						(324-486)	Fz	0.0005	0.0012	0.0023	0.0030	0.0039	0.0042
						Feed (ipm)	24.8	29.7	38.0	37.1	38.6	34.7	
		≤ 475 Bhn or ≤ 50 HRC	Slot	1	≤ 0.4	320	RPM	9779	4890	3260	2445	1956	1630
						(256-384)	Fz	0.0005	0.0012	0.0023	0.0030	0.0039	0.0042
						Feed (ipm)	19.6	23.5	30.0	29.3	30.5	27.4	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRC	Profile	≤ 0.4	≤ 1	210	RPM	6418	3209	2139	1604	1284	1070
						(168-252)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0035
						Feed (ipm)	10.3	12.8	16.3	16.0	16.4	15.0	
		≤ 655 Bhn or ≤ 60 HRC	Slot	1	≤ 0.4	170	RPM	5195	2598	1732	1299	1039	866
						(136-204)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0035
						Feed (ipm)	8.3	10.4	13.2	13.0	13.3	12.1	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRC	Profile	≤ 0.4	≤ 1	90	RPM	2750	1375	917	688	550	458
						(72-108)	Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
						Feed (ipm)	2.2	2.8	3.7	3.6	3.7	3.3	
		≤ 655 Bhn or ≤ 60 HRC	Slot	1	≤ 0.4	70	RPM	2139	1070	713	535	428	357
						(56-84)	Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
						Feed (ipm)	1.7	2.1	2.9	2.8	2.9	2.6	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC


ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series ZD1MCR Metric		Hardness			Vc (m/min)	Diameter (DC) (mm)								
			Ae x DC	Ap x DC		3	6	8	10	12	16	20		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile		123	RPM	13087	6544	4908	3926	3272	2454	1963	
				≤ 0.4	≤ 1	(99-148)	Fz	0.012	0.029	0.049	0.061	0.072	0.083	0.112
						Feed (mm/min)	628	754	963	963	942	817	879	
			1	≤ 0.4	98	RPM	10340	5170	3878	3102	2585	1939	1551	
					(78-117)	Fz	0.012	0.029	0.049	0.061	0.072	0.083	0.112	
					Feed (mm/min)	496	596	761	761	744	645	695		
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	Profile		64	RPM	6786	3393	2545	2036	1696	1272	1018	
				≤ 0.4	≤ 1	(51-77)	Fz	0.010	0.024	0.041	0.051	0.060	0.068	0.093
						Feed (mm/min)	261	326	413	413	407	347	380	
			1	≤ 0.4	52	RPM	5493	2747	2060	1648	1373	1030	824	
					(41-62)	Fz	0.010	0.024	0.041	0.051	0.060	0.068	0.093	
					Feed (mm/min)	211	264	334	334	330	281	308		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRc	Profile		27	RPM	2908	1454	1091	872	727	545	436	
				≤ 0.4	≤ 1	(22-33)	Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048
						Feed (mm/min)	56	70	93	93	91	79	84	
			1	≤ 0.4	21	RPM	2262	1131	848	679	565	424	339	
					(17-26)	Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048	
					Feed (mm/min)	43	54	72	72	71	62	65		

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

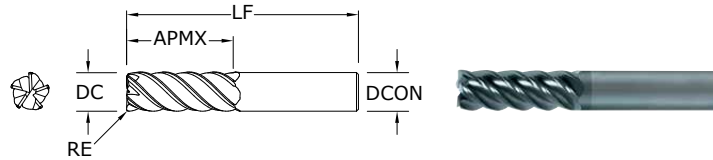

**55 •
55CR**
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


STEELS
STAINLESS STEELS
CAST IRON
HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AITIN)	Ti-NAMITE®-A (AITIN) W/FLAT
1/8	1/4	1-1/2	1/8	—	32672	—
1/8	1/4	1-1/2	1/8	.010	32606	—
1/8	1/2	1-1/2	1/8	—	32655	—
1/8	1/2	1-1/2	1/8	.010	32607	—
5/32	5/16	2	3/16	.010	32608	—
5/32	9/16	2	3/16	—	32656	—
5/32	9/16	2	3/16	.010	32609	—
3/16	5/16	2	3/16	—	32673	—
3/16	5/16	2	3/16	.010	32610	—
3/16	5/8	2	3/16	—	32657	—
3/16	5/8	2	3/16	.010	32611	—
7/32	3/8	2	1/4	.015	32612	—
7/32	3/4	2-1/2	1/4	.015	32613	—
7/32	3/4	2-1/2	1/4	—	32658	—
1/4	3/8	2	1/4	.015	32614	—
1/4	3/8	2	1/4	—	32674	—
1/4	3/4	2-1/2	1/4	—	32659	—
1/4	3/4	2-1/2	1/4	.015	32615	—
1/4	1-1/4	4	1/4	.015	32616	—
5/16	7/16	2	5/16	—	32675	—
5/16	7/16	2	5/16	.015	32619	—
5/16	13/16	2-1/2	5/16	—	32660	—
5/16	13/16	2-1/2	5/16	.015	32620	—
5/16	1-1/4	4	5/16	.015	32621	—
3/8	1/2	2	3/8	—	32676	32677
3/8	1/2	2	3/8	.015	32625	32591
3/8	1/2	2	3/8	.030	32592	32593
3/8	1	2-1/2	3/8	—	32661	32662
3/8	1	2-1/2	3/8	.015	32626	32628
3/8	1	2-1/2	3/8	.030	32573	32574
3/8	1-1/2	4	3/8	.015	32627	—
3/8	1-1/2	4	3/8	.030	32569	—

continued on next page

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



**55 •
55CR**
FRACTIONAL SERIES

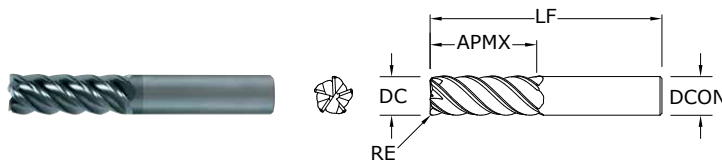

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
7/16	1	2-3/4	7/16	—	32663	—
7/16	1	2-3/4	7/16	.015	32632	—
7/16	2	4	7/16	.015	32633	—
1/2	5/8	2-1/2	1/2	—	32678	32679
1/2	5/8	2-1/2	1/2	.030	32594	32595
1/2	5/8	2-1/2	1/2	.060	32596	32597
1/2	1-1/4	3	1/2	—	32664	32665
1/2	1-1/4	3	1/2	.030	32575	32576
1/2	1-1/4	3	1/2	.060	32577	32578
1/2	2	4	1/2	.030	32685	—
1/2	2	4	1/2	.060	32686	—
5/8	3/4	3	5/8	—	32680	32681
5/8	3/4	3	5/8	.030	32598	32599
5/8	3/4	3	5/8	.060	32600	32601
5/8	1-5/8	3-1/2	5/8	—	32666	32667
5/8	1-5/8	3-1/2	5/8	.030	32579	32580
5/8	1-5/8	3-1/2	5/8	.060	32581	32582
5/8	2-1/2	5	5/8	.030	32570	—
5/8	2-1/2	5	5/8	.060	32687	—
3/4	1	3	3/4	—	32682	32683
3/4	1	3	3/4	.030	32602	32603
3/4	1	3	3/4	.060	32604	32605
3/4	1-5/8	4	3/4	—	32668	32669
3/4	1-5/8	4	3/4	.030	32583	32584
3/4	1-5/8	4	3/4	.060	32585	32586
3/4	3-1/4	6	3/4	.030	32571	—
3/4	3-1/4	6	3/4	.060	32688	—
1	1-1/2	4	1	—	32670	32671
1	1-1/2	4	1	.030	32587	32588
1	1-1/2	4	1	.060	32589	32590
1	2-5/8	6	1	.030	32572	—
1	2-5/8	6	1	.060	32689	—

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

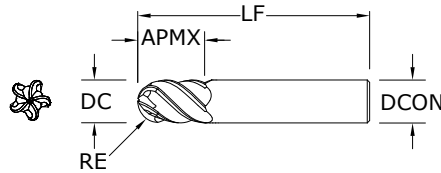

55B
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0005/-0.0010

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-A (AlTiN)
1/4	3/4	2-1/2	1/4	32500
5/16	13/16	2-1/2	5/16	32501
3/8	1	2-1/2	3/8	32502
1/2	1-1/4	3	1/2	32503
5/8	1-5/8	3-1/2	5/8	32504
3/4	1-5/8	4	3/4	32505
1	1-1/2	4	1	32506


RE = 1/2 Cutting Diameter (DC)

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




Series 55, 55CR, 55B Fractional		Hardness			Vc (sfm)		DC • in								
			1/8	1/4			3/8	1/2	5/8	3/4	1				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.25	≤ 1.5	385	RPM	11766	5883	3922	2941	2353	1961	1471	
						(308-462)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0028	0.0032	
						Feed (ipm)	20.6	26.5	33.3	33.8	34.1	27.5	23.5		
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	630	RPM	19253	9626	6418	4813	3851	3209	2407	
						(504-756)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0055	0.0064	
						Feed (ipm)	67.4	86.6	109.1	110.7	109.7	88.2	77.0		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.25	≤ 1.5	325	RPM	9932	4966	3311	2483	1986	1655	1242	
						(260-390)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0021	0.0024	
						Feed (ipm)	12.9	17.4	21.5	21.1	21.9	17.4	14.9		
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	530	RPM	16197	8098	5399	4049	3239	2699	2025	
						(424-636)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0041	0.0048	
						Feed (ipm)	42.1	56.7	70.2	68.8	69.6	55.3	48.6		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.25	≤ 1.5	175	RPM	5348	2674	1783	1337	1070	891	669	
						(140-210)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
						Feed (ipm)	5.3	6.7	8.9	8.7	8.6	7.6	6.0		
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108	
						(232-348)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035	
						Feed (ipm)	17.7	22.2	28.1	27.7	28.4	24.4	19.4		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.25	≤ 1.5	370	RPM	11307	5654	3769	2827	2261	1885	1413
							(296-444)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
							Feed (ipm)	14.7	19.8	24.5	24.0	24.9	21.7	17.0	
			≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	560	RPM	17114	8557	5705	4278	3423	2852	2139
							(448-672)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
							Feed (ipm)	44.5	59.9	74.2	72.7	73.6	62.7	51.3	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.25	≤ 1.5	255	RPM	7793	3896	2598	1948	1559	1299	974	
						(204-306)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023	
						Feed (ipm)	9.4	11.7	15.6	15.6	15.6	13.6	11.2		
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	385	RPM	11766	5883	3922	2941	2353	1961	1471	
						(308-462)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045	
						Feed (ipm)	28.2	38.2	47.1	47.1	47.1	40.2	33.1		
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898	
						(188-282)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019	
						Feed (ipm)	7.5	10.8	12.0	12.6	12.2	10.8	8.5		
		≤ 325 Bhn or ≤ 35 HRc	HSM 	≤ 0.05	≤ 2	355	RPM	10849	5424	3616	2712	2170	1808	1356	
						(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
						Feed (ipm)	22.2	29.8	38.0	38.0	36.9	32.5	26.4		


continued on next page

Series 55, 55CR, 55B Fractional	Hardness			Vc (sfm)	DC • in									
		Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1			
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	470	RPM	14363	7182	4788	3591	2873	2394	1795	
					(376-564)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032	
					Feed (ipm)	25.1	32.3	40.7	41.3	41.7	35.9	28.7		
		≤ 220 Bhn or ≤ 19 HRc		≤ 0.05	≤ 2	705	RPM	21545	10772	7182	5386	4309	3591	2693
						(564-846)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0059	0.0064
						Feed (ipm)	75.4	97.0	122.1	123.9	122.8	105.9	86.2	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	360	RPM	11002	5501	3667	2750	2200	1834	1375	
					(288-432)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024	
					Feed (ipm)	14.3	19.3	23.8	23.4	24.2	21.1	16.5		
		≤ 260 Bhn or ≤ 26 HRc		≤ 0.05	≤ 2	540	RPM	16502	8251	5501	4126	3300	2750	2063
						(432-648)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
						Feed (ipm)	42.9	57.8	71.5	70.1	71.0	60.5	49.5	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400		≤ 0.25	≤ 1.5	70	RPM	2139	1070	713	535	428	357	267	
					(56-84)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019	
					Feed (ipm)	2.2	3.2	3.6	3.7	3.6	3.2	2.5		
		≤ 300 Bhn or ≤ 32 HRc		≤ 0.05	≤ 2	107	RPM	3270	1635	1090	817	654	545	409
						(86-128)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (ipm)	6.7	9.0	11.4	11.4	11.1	9.8	8.0	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene		≤ 0.25	≤ 1.5	55	RPM	1681	840	560	420	336	280	210	
					(44-66)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015	
					Feed (ipm)	1.3	1.7	2.2	2.1	2.2	2.0	1.6		
		≤ 400 Bhn or ≤ 43 HRc		≤ 0.05	≤ 2	85	RPM	2598	1299	866	649	520	433	325
						(68-102)	Fz	0.0003	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
						Feed (ipm)	4.0	5.2	6.5	6.8	6.8	5.8	4.7	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898		
				(188-282)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023		
				Feed (ipm)	7.2	10.8	14.4	14.4	14.4	12.6	10.3			
	≤ 350 Bhn or ≤ 38 HRc		≤ 0.05	≤ 2	390	RPM	11918	5959	3973	2980	2384	1986	1490	
					(312-468)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045	
					Feed (ipm)	29.8	38.7	47.7	47.7	47.7	40.7	33.5		
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.25	≤ 1.5	85	RPM	2598	1299	866	649	520	433	325		
				(68-102)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023		
				Feed (ipm)	2.6	3.9	5.2	5.2	5.2	4.5	3.7			
	≤ 420 Bhn or ≤ 45 HRc		≤ 0.05	≤ 2	140	RPM	4278	2139	1426	1070	856	713	535	
					(112-168)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0042	0.0045	
					Feed (ipm)	10.7	13.9	17.1	17.1	17.1	15.0	12.0		

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 5 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 reduce Ap to 1 x DC (maximum) when profile milling with long or extra long flute length tools
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



55M •
55MCR
METRIC SERIES

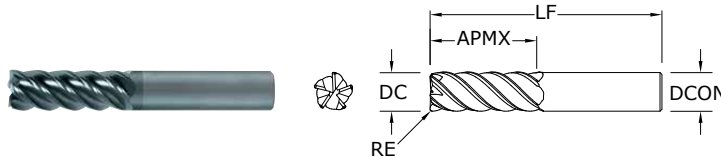

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
6,0	12,0	50,0	6,0	—	42606	—
6,0	12,0	50,0	6,0	0,5	42660	—
6,0	19,0	63,0	6,0	—	42607	—
6,0	19,0	63,0	6,0	0,25	42661	—
6,0	19,0	63,0	6,0	0,5	42662	—
6,0	19,0	63,0	6,0	1,0	42663	—
6,0	19,0	63,0	6,0	1,5	42664	—
6,0	25,0	75,0	6,0	—	42608	—
6,0	25,0	75,0	6,0	0,5	42665	—
8,0	12,0	50,0	8,0	—	42609	—
8,0	12,0	50,0	8,0	0,5	42666	—
8,0	20,0	63,0	8,0	—	42610	—
8,0	20,0	63,0	8,0	0,5	42667	—
8,0	20,0	63,0	8,0	1,0	42668	—
8,0	20,0	63,0	8,0	1,5	42669	—
8,0	20,0	63,0	8,0	2,0	42670	—
8,0	25,0	75,0	8,0	—	42611	—
8,0	25,0	75,0	8,0	0,5	42671	—
10,0	16,0	50,0	10,0	—	42612	—
10,0	16,0	50,0	10,0	0,5	42672	—
10,0	22,0	75,0	10,0	—	42622	42613
10,0	22,0	75,0	10,0	0,5	42673	—
10,0	22,0	75,0	10,0	1,0	42674	—
10,0	22,0	75,0	10,0	1,5	42675	—
10,0	22,0	75,0	10,0	2,0	42676	—
10,0	22,0	75,0	10,0	2,5	42677	—
10,0	38,0	100,0	10,0	—	42614	—
10,0	38,0	100,0	10,0	0,5	42678	—
12,0	19,0	63,0	12,0	—	42615	—
12,0	19,0	63,0	12,0	0,5	42679	—
12,0	25,0	75,0	12,0	—	42616	42623
12,0	25,0	75,0	12,0	0,5	42680	—
12,0	25,0	75,0	12,0	1,0	42681	—
12,0	25,0	75,0	12,0	1,5	42682	—
12,0	25,0	75,0	12,0	2,0	42683	—
12,0	25,0	75,0	12,0	2,5	42684	—

TOLERANCES (inch)

DC = +0.0000/−0.0020



DCON = h_6

RE = +0.0000/−0.0020



For patent information visit
www.ksptpatents.com

continued on next page

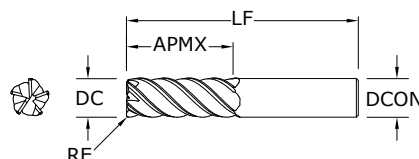

55M •
55MCR
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h₆

RE = +0,000/-0,050


	STEELS
	STAINLESS STEELS
	CAST IRON
	HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
12,0	25,0	75,0	12,0	3,0	42685	—
12,0	50,0	100,0	12,0	—	42617	—
12,0	50,0	100,0	12,0	0,5	42686	—
12,0	50,0	100,0	12,0	3,0	42630	—
12,0	50,0	100,0	12,0	4,0	42631	—
16,0	32,0	89,0	16,0	—	42618	42624
16,0	32,0	89,0	16,0	1,0	42687	—
16,0	32,0	89,0	16,0	1,5	42688	—
16,0	32,0	89,0	16,0	2,0	42689	—
16,0	32,0	89,0	16,0	2,5	42690	—
16,0	32,0	89,0	16,0	3,0	42691	—
16,0	32,0	89,0	16,0	4,0	42692	—
16,0	50,0	100,0	16,0	—	42626	—
16,0	50,0	100,0	16,0	2,0	42656	—
16,0	50,0	100,0	16,0	2,5	42657	—
16,0	50,0	100,0	16,0	3,0	42658	—
16,0	50,0	100,0	16,0	4,0	42659	—
16,0	50,0	100,0	16,0	5,0	42628	—
16,0	75,0	150,0	16,0	—	42619	—
16,0	75,0	150,0	16,0	1,0	42693	—
16,0	75,0	150,0	16,0	3,0	42632	—
16,0	75,0	150,0	16,0	4,0	42633	—
20,0	38,0	100,0	20,0	—	42620	42625
20,0	38,0	100,0	20,0	1,0	42694	—
20,0	38,0	100,0	20,0	1,5	42695	—
20,0	38,0	100,0	20,0	2,0	42696	—
20,0	38,0	100,0	20,0	2,5	42697	—
20,0	38,0	100,0	20,0	3,0	42698	—
20,0	38,0	100,0	20,0	4,0	42699	—
20,0	38,0	100,0	20,0	5,0	42700	—
20,0	38,0	100,0	20,0	6,0	42648	—
20,0	50,0	100,0	20,0	—	42627	—
20,0	50,0	100,0	20,0	2,0	42649	—
20,0	50,0	100,0	20,0	2,5	42650	—
20,0	50,0	100,0	20,0	3,0	42651	—
20,0	50,0	100,0	20,0	4,0	42652	—


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

continued on next page



55M • 55MCR

METRIC SERIES

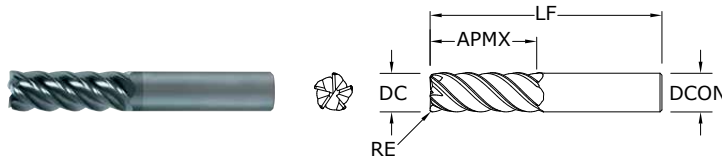


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
20,0	50,0	100,0	20,0	5,0	42653	—
20,0	50,0	100,0	20,0	6,0	42654	—
20,0	75,0	150,0	20,0	—	42621	—
20,0	75,0	150,0	20,0	1,0	42701	—
20,0	75,0	150,0	20,0	2,0	42702	—
20,0	75,0	150,0	20,0	3,0	42703	—
20,0	75,0	150,0	20,0	4,0	42704	—
20,0	75,0	150,0	20,0	5,0	42705	—
20,0	75,0	150,0	20,0	6,0	42655	—

TOLERANCES (mm)

DC = $+0,000/-0,050$
 DCON = h_6
 RE = $+0,000/-0,050$



For patent information visit
www.ksptpatents.com

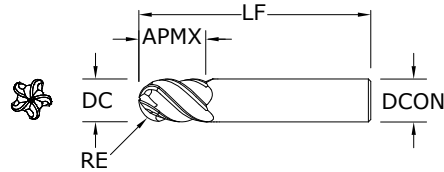

55MB
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-A (AlTiN)
6,0	13,0	57,0	6,0	42750
8,0	19,0	63,0	8,0	42751
10,0	22,0	72,0	10,0	42752
12,0	26,0	83,0	12,0	42753
16,0	32,0	92,0	16,0	42754
20,0	38,0	104,0	20,0	42755


RE = 1/2 Cutting Diameter (DC)

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




Series 55M, 55MCR, 55MB				Vc (m/min)	DC • mm								
Metric	Hardness	Ae x DC	Ap x DC		6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRC	Profile 	≤ 0.25	≤ 1.5	117	RPM	6220	4665	3732	3110	2333	1866
						(94-141)	Fz	0.022	0.036	0.061	0.070	0.072	0.085
						Feed (mm/min)	672	846	1145	1082	836	796	
		≤ 375 Bhn or ≤ 40 HRC	HSM 	≤ 0.05	≤ 2	192	RPM	10179	7634	6107	5089	3817	3054
						(154-230)	Fz	0.043	0.073	0.123	0.137	0.141	0.154
						Feed (mm/min)	2198	2769	3746	3481	2687	2345	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRC	Profile 	≤ 0.25	≤ 1.5	99	RPM	5251	3938	3151	2626	1969	1575
						(79-119)	Fz	0.017	0.028	0.045	0.053	0.054	0.064
						Feed (mm/min)	441	546	571	693	529	504	
		≤ 375 Bhn or ≤ 40 HRC	HSM 	≤ 0.05	≤ 2	162	RPM	8563	6422	5138	4282	3211	2569
						(129-194)	Fz	0.034	0.055	0.091	0.103	0.105	0.128
						Feed (mm/min)	1438	1781	2329	2209	1685	1644	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRC	Profile 	≤ 0.25	≤ 1.5	53	RPM	2827	2121	1696	1414	1060	848
						(43-64)	Fz	0.012	0.021	0.035	0.038	0.044	0.048
						Feed (mm/min)	170	226	294	271	231	204	
		≤ 375 Bhn or ≤ 40 HRC	HSM 	≤ 0.05	≤ 2	88	RPM	4686	3514	2811	2343	1757	1406
						(71-106)	Fz	0.024	0.041	0.067	0.077	0.084	0.093
						Feed (mm/min)	562	712	937	900	742	656	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRC	Profile 	≤ 0.25	≤ 1.5	113	RPM	5978	4484	3587	2989	2242	1793
						(90-135)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
						Feed (mm/min)	502	622	813	789	660	574	
		≤ 275 Bhn or ≤ 28 HRC	HSM 	≤ 0.05	≤ 2	171	RPM	9048	6786	5429	4524	3393	2714
						(137-205)	Fz	0.034	0.055	0.091	0.103	0.113	0.128
						Feed (mm/min)	1520	1882	2461	2334	1911	1737	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRC	Profile 	≤ 0.25	≤ 1.5	78	RPM	4120	3090	2472	2060	1545	1236
						(62-93)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
						Feed (mm/min)	297	396	527	494	415	379	
		≤ 275 Bhn or ≤ 28 HRC	HSM 	≤ 0.05	≤ 2	117	RPM	6220	4665	3732	3110	2333	1866
						(94-141)	Fz	0.031	0.051	0.085	0.096	0.105	0.120
						Feed (mm/min)	970	1194	1592	1493	1224	1120	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRC	Profile 	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139
						(57-86)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
						Feed (mm/min)	273	304	425	387	328	289	
		≤ 325 Bhn or ≤ 35 HRC	HSM 	≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
						(87-130)	Fz	0.026	0.045	0.075	0.082	0.092	0.104
						Feed (mm/min)	757	964	1285	1170	991	895	

continued on next page



Series 55M, 55MCR, 55MB Metric		Ae x DC Ap x DC		Vc (m/min)	DC • mm								
Hardness					6	8	10	12	16	20			
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.25	≤ 1.5	143	RPM	7594	5695	4556	3797	2848	2278
						(115-172)	Fz	0.022	0.036	0.061	0.070	0.077	0.085
							Feed (mm/min)	820	1033	1397	1321	1093	972
		HSM 	≤ 0.05	≤ 2	215	RPM	11391	8543	6834	5695	4271	3417	
					(172-258)	Fz	0.043	0.073	0.123	0.137	0.151	0.171	
						Feed (mm/min)	2460	3099	4192	3895	3226	2916	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.25	≤ 1.5	110	RPM	5816	4362	3490	2908	2181	1745
						(88-132)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
							Feed (mm/min)	489	605	791	768	642	558
		HSM 	≤ 0.05	≤ 2	165	RPM	8725	6544	5235	4362	3272	2617	
					(132-198)	Fz	0.034	0.055	0.091	0.103	0.113	0.128	
						Feed (mm/min)	1466	1815	2373	2251	1843	1675	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.25	≤ 1.5	21	RPM	1131	848	679	565	424	339
						(17-26)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
							Feed (mm/min)	81	90	127	115	98	86
		HSM 	≤ 0.05	≤ 2	33	RPM	1729	1297	1037	864	648	519	
					(26-39)	Fz	0.026	0.045	0.075	0.082	0.092	0.104	
						Feed (mm/min)	228	290	387	353	299	270	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.25	≤ 1.5	17	RPM	889	666	533	444	333	267
						(13-20)	Fz	0.010	0.017	0.027	0.031	0.036	0.040
							Feed (mm/min)	43	57	71	69	60	53
		HSM 	≤ 0.05	≤ 2	26	RPM	1373	1030	824	687	515	412	
					(21-31)	Fz	0.019	0.032	0.056	0.062	0.069	0.077	
						Feed (mm/min)	132	165	231	214	178	159	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139
						(57-86)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
							Feed (mm/min)	273	365	486	456	383	349
		HSM 	≤ 0.05	≤ 2	119	RPM	6301	4726	3781	3151	2363	1890	
					(95-143)	Fz	0.031	0.051	0.085	0.096	0.105	0.120	
						Feed (mm/min)	983	1210	1613	1512	1240	1134	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile 	≤ 0.25	≤ 1.5	26	RPM	1373	1030	824	687	515	412
						(21-31)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
							Feed (mm/min)	99	132	176	165	138	126
		HSM 	≤ 0.05	≤ 2	43	RPM	2262	1696	1357	1131	848	679	
					(34-51)	Fz	0.031	0.051	0.085	0.096	0.108	0.120	
						Feed (mm/min)	353	434	579	543	456	407	


Bhn (Brinell) HRC (Rockwell C) HSM (High Speed Machining)
 rpm = (Vc x 1000) / (DC x 3.14)
 mm/min = Fz x 5 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 reduce Ap to 1 x DC (maximum) when profile milling with long or extra long flute length tools
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



51 • 51CR

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

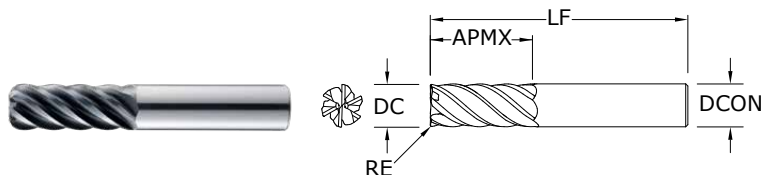


		inch			EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
1/4	3/4	2-1/2	1/4	—	35100
1/4	3/4	2-1/2	1/4	.015	35112
1/4	3/4	2-1/2	1/4	.030	35150
3/8	1	2-1/2	3/8	—	35101
3/8	1	2-1/2	3/8	.015	35113
3/8	1	2-1/2	3/8	.030	35114
1/2	1-1/4	3	1/2	—	35102
1/2	1-1/4	3	1/2	.015	35151
1/2	1-1/4	3	1/2	.030	35115
1/2	1-1/4	3	1/2	.060	35152
1/2	1-1/4	3	1/2	.090	35116
1/2	1-1/4	3	1/2	.120	35117
5/8	1-5/8	3-1/2	5/8	—	35103
5/8	1-5/8	3-1/2	5/8	.015	35153
5/8	1-5/8	3-1/2	5/8	.030	35118
5/8	1-5/8	3-1/2	5/8	.060	35154
5/8	1-5/8	3-1/2	5/8	.090	35119
5/8	1-5/8	3-1/2	5/8	.120	35120
5/8	1-5/8	3-1/2	5/8	.190	35155
3/4	1-5/8	4	3/4	—	35104
3/4	1-5/8	4	3/4	.030	35121
3/4	1-5/8	4	3/4	.060	35156
3/4	1-5/8	4	3/4	.090	35122
3/4	1-5/8	4	3/4	.120	35123
3/4	1-5/8	4	3/4	.190	35157
3/4	1-5/8	4	3/4	.250	35158
1	2-5/8	6	1	—	35105
1	2-5/8	6	1	.030	35124
1	2-5/8	6	1	.060	35159
1	2-5/8	6	1	.090	35125
1	2-5/8	6	1	.120	35126
1	2-5/8	6	1	.190	35160
1	2-5/8	6	1	.250	35161

TOLERANCES (inch)



DC = +0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0020



For patent
information visit
www.ksptpatents.com

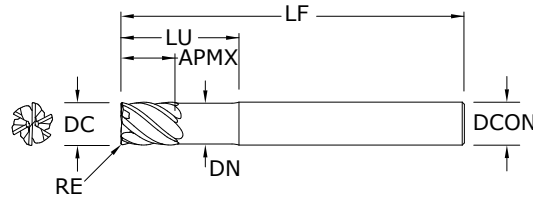
51L •
51LC
FRACTIONAL SERIES
TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h₆


RE = +0.0000/-0.0020

STEELS
STAINLESS STEELS
CAST IRON
HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				CORNER RADIUS RE	EDP NO. Ti-NAMITE®-X (TX)
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			
1/4	3/8	4	1/4	1-1/8	.237	—		35106
1/4	3/8	4	1/4	1-1/8	.237	.015		35127
1/4	3/8	4	1/4	1-1/8	.237	.030		35180
3/8	1/2	4	3/8	2-1/8	.356	—		35107
3/8	1/2	4	3/8	2-1/8	.356	.015		35128
3/8	1/2	4	3/8	2-1/8	.356	.030		35129
1/2	5/8	4	1/2	2-1/4	.475	—		35108
1/2	5/8	4	1/2	2-1/4	.475	.015		35181
1/2	5/8	4	1/2	2-1/4	.475	.030		35130
1/2	5/8	4	1/2	2-1/4	.475	.060		35182
1/2	5/8	4	1/2	2-1/4	.475	.090		35131
1/2	5/8	4	1/2	2-1/4	.475	.120		35132
5/8	3/4	5	5/8	2-1/2	.594	—		35109
5/8	3/4	5	5/8	2-1/2	.594	.015		35183
5/8	3/4	5	5/8	2-1/2	.594	.030		35133
5/8	3/4	5	5/8	2-1/2	.594	.060		35184
5/8	3/4	5	5/8	2-1/2	.594	.090		35134
5/8	3/4	5	5/8	2-1/2	.594	.120		35135
5/8	3/4	5	5/8	2-1/2	.594	.190		35185
3/4	1	6	3/4	3-3/8	.712	—		35110
3/4	1	6	3/4	3-3/8	.712	.030		35136
3/4	1	6	3/4	3-3/8	.712	.060		35186
3/4	1	6	3/4	3-3/8	.712	.090		35137
3/4	1	6	3/4	3-3/8	.712	.120		35138
3/4	1	6	3/4	3-3/8	.712	.190		35187
3/4	1	6	3/4	3-3/8	.712	.250		35188
1	1-1/4	6	1	3-3/8	.950	—		35111
1	1-1/4	6	1	3-3/8	.950	.030		35139
1	1-1/4	6	1	3-3/8	.950	.060		35189
1	1-1/4	6	1	3-3/8	.950	.090		35140
1	1-1/4	6	1	3-3/8	.950	.120		35141
1	1-1/4	6	1	3-3/8	.950	.190		35190
1	1-1/4	6	1	3-3/8	.950	.250		35191


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



51B

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

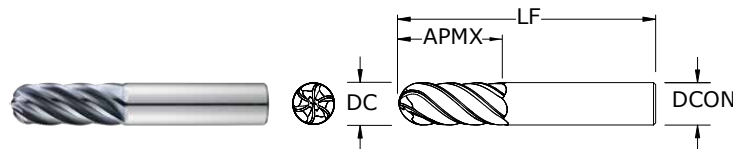

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
1/4	3/4	2-1/2	1/4	35220
3/8	1	2-1/2	3/8	35222
1/2	1-1/4	3	1/2	35224
5/8	1-5/8	3-1/2	5/8	35226
3/4	1-5/8	4	3/4	35228
1	2-5/8	6	1	35230

RE=1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = $+0.0000/-0.0016$

DCON = h_6


RE = $+0.0000/-0.0010$

1/2–1 DIAMETER

DC = $+0.000/-0.0020$

DCON = h_6

RE = $+0.0000/-0.0010$




For patent information visit
www.ksptpatents.com

51LB

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

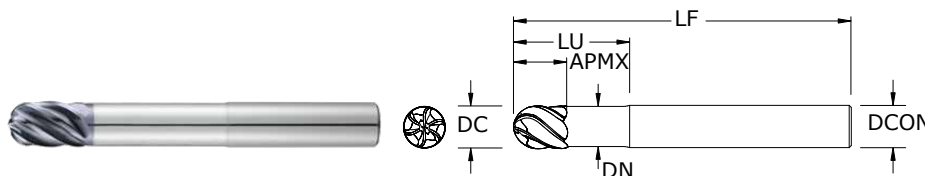

inch						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X (TX)
1/4	3/8	4	1/4	1-1/8	.237	35221
3/8	1/2	4	3/8	2-1/8	.356	35223
1/2	5/8	4	1/2	2-1/4	.475	35225
5/8	3/4	5	5/8	2-1/2	.594	35227
3/4	1	6	3/4	3-3/8	.712	35229
1	1-1/4	6	1	3-3/4	.950	35231

RE=1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = $+0.0000/-0.0016$

DCON = h_6


RE = $+0.0000/-0.0010$

1/2–1 DIAMETER


DC = $+0.000/-0.0020$


DCON = h_6

RE = $+0.0000/-0.0010$




For patent information visit
www.ksptpatents.com



Series 51, 51CR, 51L, 51LC, 51B, 51LB Fractional		Hardness			Vc (sfm)	DC • in							
						1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	720	RPM	11002	7334	5501	4401	3667	2750
						(576-864)	Fz	0.0020	0.0035	0.0050	0.0055	0.0061	0.0071
							Feed (ipm)	132	154	165	145	134	117
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	915	RPM	13981	9321	6991	5592	4660	3495
						(732-1098)	Fz	0.0028	0.0053	0.0070	0.0077	0.0085	0.0100
							Feed (ipm)	235	296	294	258	238	210
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	490	RPM	7487	4991	3744	2995	2496	1872
						(392-588)	Fz	0.0015	0.0029	0.0038	0.0042	0.0046	0.0054
							Feed (ipm)	67	87	85	75	69	61
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	620	RPM	9474	6316	4737	3789	3158	2368
						(496-744)	Fz	0.0021	0.0039	0.0052	0.0057	0.0062	0.0073
							Feed (ipm)	119	148	148	130	117	104
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	240	RPM	3667	2445	1834	1467	1222	917
						(192-288)	Fz	0.0012	0.0023	0.0030	0.0034	0.0037	0.0043
							Feed (ipm)	26	34	33	30	27	24
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	305	RPM	4660	3107	2330	1864	1553	1165
						(244-366)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
							Feed (ipm)	48	60	59	51	47	41
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	510	RPM	7793	5195	3896	3117	2598	1948
						(459-561)	Fz	0.0015	0.0028	0.0038	0.0041	0.0045	0.0053
							Feed (ipm)	70	87	89	77	70	62
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	650	RPM	9932	6621	4966	3973	3311	2483
						(585-715)	Fz	0.0021	0.0038	0.0051	0.0056	0.0061	0.0072
							Feed (ipm)	125	151	152	133	121	107
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	350	RPM	5348	3565	2674	2139	1783	1337
						(315-385)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
							Feed (ipm)	39	49	48	42	39	34
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	450	RPM	6876	4584	3438	2750	2292	1719
						(405-495)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
							Feed (ipm)	70	88	87	76	69	61
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.1	≤ 1	325	RPM	4966	3311	2483	1986	1655	1242
						(293-358)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
							Feed (ipm)	36	46	45	39	36	31
		≤ 325 Bhn or ≤ 35 HRc	HSM 	≤ 0.05	≤ 2	410	RPM	6265	4177	3132	2506	2088	1566
						(369-451)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
							Feed (ipm)	64	80	79	69	63	55



continued on next page



Series
51, 51CR, 51L,
51LC, 51B, 51LB
Fractional

51, 51CR, 51L, 51LC, 51B, 51LB Fractional							DC • in						
Hardness					Ae x DC	Ap x DC	Vc (sfm)	1/4	3/8	1/2	5/8	3/4	1
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	575	RPM	8786	5857	4393	3514	2929	2197	
					(460-690)	Fz	0.0018	0.0035	0.0045	0.0050	0.0055	0.0064	
					Feed (ipm)	94.9	123.0	118.6	105.4	96.6	84.3		
			≤ 0.05	≤ 2	730	RPM	11154	7436	5577	4462	3718	2789	
					(584-876)	Fz	0.0025	0.0047	0.0064	0.0070	0.0076	0.0089	
					Feed (ipm)	167.3	209.7	214.2	187.4	169.5	148.9		
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	430	RPM	6570	4380	3285	2628	2190	1643	
					(344-516)	Fz	0.0018	0.0035	0.0045	0.0050	0.0055	0.0064	
					Feed (ipm)	71.0	92.0	88.7	78.8	72.3	63.1		
			≤ 0.05	≤ 2	545	RPM	8328	5552	4164	3331	2776	2082	
					(436-654)	Fz	0.0025	0.0047	0.0064	0.0070	0.0076	0.0089	
					Feed (ipm)	124.9	156.6	159.9	139.9	126.6	111.2		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400		≤ 0.1	≤ 1	105	RPM	1604	1070	802	642	535	401	
					(84-126)	Fz	0.0014	0.0027	0.0036	0.0039	0.0043	0.0050	
					Feed (ipm)	13	17	17	15	14	12		
			≤ 0.05	≤ 2	130	RPM	1986	1324	993	795	662	497	
					(104-156)	Fz	0.0016	0.0036	0.0048	0.0053	0.0058	0.0067	
					Feed (ipm)	19	29	29	25	23	20		
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene		≤ 0.1	≤ 1	80	RPM	1222	815	611	489	407	306	
					(64-96)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
					Feed (ipm)	7	9	9	8	7	6		
			≤ 0.05	≤ 2	100	RPM	1528	1019	764	611	509	382	
					(80-120)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	
					Feed (ipm)	12	15	16	14	13	11		
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.1	≤ 1	280	RPM	4278	2852	2139	1711	1426	1070		
				(224-336)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034		
				Feed (ipm)	26	31	32	28	25	22			
		≤ 0.05	≤ 2	355	RPM	5424	3616	2712	2170	1808	1356		
				(284-426)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047		
				Feed (ipm)	42	54	55	48	44	38			
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.1	≤ 1	155	RPM	2368	1579	1184	947	789	592		
				(124-186)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034		
				Feed (ipm)	14	17	18	15	14	12			
		≤ 0.05	≤ 2	200	RPM	3056	2037	1528	1222	1019	764		
				(160-240)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047		
				Feed (ipm)	24	31	31	27	25	22			

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 6 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

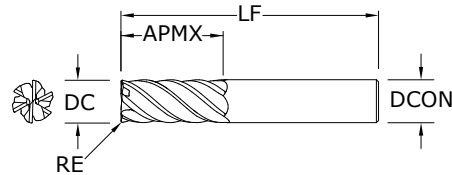

51M • 51MCR

METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h₆

RE = +0,000/-0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


	mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
6,0	19,0	63,0	6,0	—	45100
6,0	19,0	63,0	6,0	0,5	45112
6,0	19,0	63,0	6,0	1,0	45170
6,0	19,0	63,0	6,0	1,5	45171
8,0	20,0	63,0	8,0	—	45101
8,0	20,0	63,0	8,0	0,5	45113
8,0	20,0	63,0	8,0	1,0	45114
8,0	20,0	63,0	8,0	1,2	45150
8,0	20,0	63,0	8,0	1,5	45172
8,0	20,0	63,0	8,0	2,0	45173
10,0	22,0	75,0	10,0	—	45102
10,0	22,0	75,0	10,0	0,5	45174
10,0	22,0	75,0	10,0	1,0	45115
10,0	22,0	75,0	10,0	1,5	45116
10,0	22,0	75,0	10,0	2,0	45117
10,0	22,0	75,0	10,0	2,5	45175
12,0	26,0	83,0	12,0	—	45103
12,0	26,0	83,0	12,0	0,5	45176
12,0	26,0	83,0	12,0	0,76	45177
12,0	26,0	83,0	12,0	1,0	45118
12,0	26,0	83,0	12,0	1,5	45119
12,0	26,0	83,0	12,0	2,0	45120
12,0	26,0	83,0	12,0	2,5	45178
12,0	26,0	83,0	12,0	3,0	45179
16,0	32,0	92,0	16,0	—	45104
16,0	32,0	92,0	16,0	1,0	45121
16,0	32,0	92,0	16,0	1,5	45122
16,0	32,0	92,0	16,0	2,0	45123
16,0	32,0	92,0	16,0	2,5	45180
16,0	32,0	92,0	16,0	3,0	45181
16,0	32,0	92,0	16,0	4,0	45182
20,0	38,0	104,0	20,0	—	45105
20,0	38,0	104,0	20,0	1,0	45124
20,0	38,0	104,0	20,0	1,5	45125
20,0	38,0	104,0	20,0	2,0	45126
20,0	38,0	104,0	20,0	2,5	45183
20,0	38,0	104,0	20,0	3,0	45184
20,0	38,0	104,0	20,0	4,0	45185
20,0	38,0	104,0	20,0	5,0	45186

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



51ML • 51MLC

METRIC SERIES

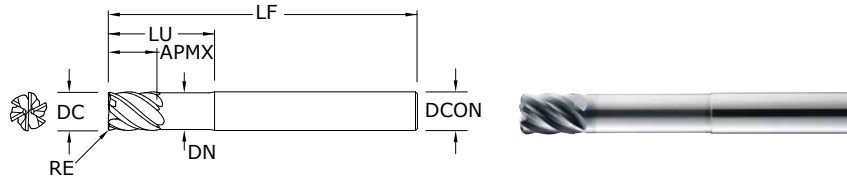


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)



mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
6,0	8,0	75,0	6,0	32,0	5,69	—	45106
6,0	8,0	75,0	6,0	32,0	5,69	0,5	45127
6,0	8,0	75,0	6,0	32,0	5,69	1,0	45187
6,0	8,0	75,0	6,0	32,0	5,69	1,5	45188
8,0	10,0	75,0	8,0	32,0	7,59	—	45107
8,0	10,0	75,0	8,0	32,0	7,59	0,5	45128
8,0	10,0	75,0	8,0	32,0	7,59	1,0	45129
8,0	10,0	75,0	8,0	32,0	7,59	1,5	45189
8,0	10,0	75,0	8,0	32,0	7,59	2,0	45190
10,0	12,0	100,0	10,0	40,0	9,50	—	45108
10,0	12,0	100,0	10,0	40,0	9,50	0,5	45191
10,0	12,0	100,0	10,0	40,0	9,50	1,0	45130
10,0	12,0	100,0	10,0	40,0	9,50	1,5	45131
10,0	12,0	100,0	10,0	40,0	9,50	2,0	45132
10,0	12,0	100,0	10,0	40,0	9,50	2,5	45192
12,0	15,0	100,0	12,0	48,0	11,38	—	45109
12,0	15,0	100,0	12,0	48,0	11,38	0,5	45193
12,0	15,0	100,0	12,0	48,0	11,38	0,76	45194
12,0	15,0	100,0	12,0	48,0	11,38	1,0	45133
12,0	15,0	100,0	12,0	48,0	11,38	1,5	45134
12,0	15,0	100,0	12,0	48,0	11,38	2,0	45135
12,0	15,0	100,0	12,0	48,0	11,38	2,5	45195
12,0	15,0	100,0	12,0	48,0	11,38	3,0	45196
16,0	20,0	115,0	16,0	65,0	15,19	—	45110
16,0	20,0	115,0	16,0	65,0	15,19	1,0	45136
16,0	20,0	115,0	16,0	65,0	15,19	1,5	45137
16,0	20,0	115,0	16,0	65,0	15,19	2,0	45138
16,0	20,0	115,0	16,0	65,0	15,19	2,5	45197
16,0	20,0	115,0	16,0	65,0	15,19	3,0	45198
16,0	20,0	115,0	16,0	65,0	15,19	4,0	45199
20,0	24,0	150,0	20,0	80,0	19,00	—	45111
20,0	24,0	150,0	20,0	80,0	19,00	1,0	45139
20,0	24,0	150,0	20,0	80,0	19,00	1,5	45140
20,0	24,0	150,0	20,0	80,0	19,00	2,0	45141
20,0	24,0	150,0	20,0	80,0	19,00	2,5	45200
20,0	24,0	150,0	20,0	80,0	19,00	3,0	45201
20,0	24,0	150,0	20,0	80,0	19,00	4,0	45202
20,0	24,0	150,0	20,0	80,0	19,00	5,0	45203

TOLERANCES (mm)

DC = $+0,000/-0,050$
DCON = h_6
RE = $+0,000/-0,050$



For patent information visit
www.ksptpatents.com

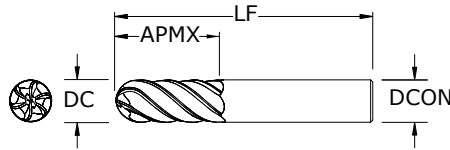

51MB

METRIC SERIES

TOLERANCES (mm)

6,0–10,0 DIAMETER
DC = +0,000/–0,040
DCON = h₆
RE = +0,000/–0,025

12,0–20,0 DIAMETER
DC = +0,000/–0,050
DCON = h₆
RE = +0,000/–0,025


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
6,0	19,0	63,0	6,0	45204
8,0	20,0	63,0	8,0	45206
10,0	22,0	75,0	10,0	45208
12,0	26,0	83,0	12,0	45210
16,0	32,0	92,0	16,0	45212
20,0	38,0	104,0	20,0	45214

RE=1/2 Cutting Diameter (DC)

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

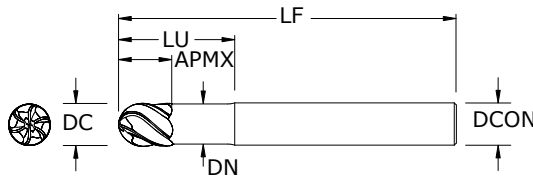

51MLB

METRIC SERIES

TOLERANCES (mm)

6,0–10,0 DIAMETER
DC = +0,000/–0,040
DCON = h₆
RE = +0,000/–0,025

12,0–20,0 DIAMETER
DC = +0,000/–0,050
DCON = h₆
RE = +0,000/–0,025

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

mm						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X (TX)
6,0	8,0	75,0	6,0	32,0	5,68	45205
8,0	10,0	75,0	8,0	32,0	7,58	45207
10,0	12,0	100,0	10,0	40,0	9,49	45209
12,0	15,0	100,0	12,0	48,0	11,37	45211
16,0	20,0	115,0	16,0	65,0	15,18	45213
20,0	24,0	150,0	20,0	80,0	18,99	45215

RE=1/2 Cutting Diameter (DC)


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

Series
51M, 51MCR,
51ML, 51MLC,
51MB, 51MLB
Metric



51ML, 51MLC, 51MB, 51MLB Metric		Hardness			Vc (m/min)	DC • mm								
			Ae x DC	Ap x DC		6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRC	Profile 	≤ 0.1	≤ 1	219	RPM	11633	8725	6980	5816	4362	3490	
						(176-263)	Fz	0.048	0.075	0.093	0.120	0.141	0.163	
						Feed (mm/min)	3350	3909	3909	4188	3685	3406		
		HSM 	≤ 0.05	≤ 2	279	RPM	14784	11088	8870	7392	5544	4435		
					(223-335)	Fz	0.067	0.113	0.141	0.168	0.197	0.227		
					Feed (mm/min)	5960	7523	7522	7450	6557	6032			
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRC	Profile 	≤ 0.1	≤ 1	149	RPM	7917	5938	4750	3958	2969	2375	
						(119-179)	Fz	0.036	0.062	0.077	0.091	0.108	0.123	
						Feed (mm/min)	1710	2204	2204	2166	1915	1748		
		HSM 	≤ 0.05	≤ 2	189	RPM	10017	7513	6010	5009	3756	3005		
					(151-227)	Fz	0.050	0.083	0.104	0.125	0.146	0.165		
					Feed (mm/min)	3029	3751	3750	3750	3289	2981			
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRC	Profile 	≤ 0.1	≤ 1	73	RPM	3878	2908	2327	1939	1454	1163	
						(59-88)	Fz	0.029	0.049	0.061	0.072	0.087	0.099	
						Feed (mm/min)	670	856	856	838	759	689		
		HSM 	≤ 0.05	≤ 2	93	RPM	4928	3696	2957	2464	1848	1478		
					(74-112)	Fz	0.041	0.068	0.085	0.101	0.118	0.133		
					Feed (mm/min)	1206	1514	1514	1490	1306	1183			
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRC	Profile 	≤ 0.1	≤ 1	155	RPM	8240	6180	4944	4120	3090	2472
							(140-171)	Fz	0.036	0.060	0.075	0.091	0.105	0.120
							Feed (mm/min)	1780	2215	2215	2254	1946	1780	
			HSM 	≤ 0.05	≤ 2	198	RPM	10502	7877	6301	5251	3938	3151	
						(178-218)	Fz	0.050	0.081	0.101	0.122	0.143	0.163	
						Feed (mm/min)	3176	3832	3831	3856	3387	3075		
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRC	Profile 	≤ 0.1	≤ 1	107	RPM	5655	4241	3393	2827	2121	1696	
						(96-117)	Fz	0.029	0.049	0.061	0.072	0.084	0.096	
						Feed (mm/min)	977	1249	1249	1221	1075	977		
		HSM 	≤ 0.05	≤ 2	137	RPM	7271	5453	4362	3635	2726	2181		
					(123-151)	Fz	0.041	0.068	0.085	0.101	0.118	0.133		
					Feed (mm/min)	1780	2234	2234	2198	1926	1745			
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRC	Profile 	≤ 0.1	≤ 1	99	RPM	5251	3938	3151	2626	1969	1575	
						(89-109)	Fz	0.029	0.049	0.061	0.072	0.084	0.096	
						Feed (mm/min)	907	1160	1159	1134	998	907		
		HSM 	≤ 0.05	≤ 2	125	RPM	6624	4968	3975	3312	2484	1987		
					(112-137)	Fz	0.041	0.068	0.085	0.101	0.118	0.133		
					Feed (mm/min)	1621	2035	2035	2003	1755	1590			

continued on next page


Series 51M, 51MCR, 51ML, 51MLC, 51MB, 51MLB Metric		Hardness			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		6	8	10	12	16	20		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		≤ 0.25	≤ 1.5	575	RPM	9290	6968	5574	4645	3484	2787
						(460-690)	Fz	0.043	0.075	0.093	0.108	0.128	0.147
						Feed (mm/min)	2408	3122	3122	3010	2675	2453	
		HSM		≤ 0.05	≤ 2	730	RPM	11795	8846	7077	5897	4423	3538
						(584-876)	Fz	0.060	0.100	0.125	0.154	0.179	0.203
						Feed (mm/min)	4246	5322	5322	5434	4755	4303	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		≤ 0.25	≤ 1.5	430	RPM	6947	5211	4168	3474	2605	2084
						(344-516)	Fz	0.043	0.075	0.093	0.108	0.128	0.147
						Feed (mm/min)	1801	2335	2334	2251	2001	1834	
		HSM		≤ 0.05	≤ 2	545	RPM	8806	6604	5283	4403	3302	2642
						(436-654)	Fz	0.060	0.100	0.125	0.154	0.179	0.203
						Feed (mm/min)	3170	3974	3973	4057	3550	3212	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc		≤ 0.1	≤ 1	32	RPM	1696	1272	1018	848	636	509
						(26-38)	Fz	0.034	0.058	0.072	0.086	0.100	0.115
						Feed (mm/min)	342	440	440	440	381	350	
		HSM		≤ 0.05	≤ 2	40	RPM	2100	1575	1260	1050	788	630
						(32-48)	Fz	0.038	0.077	0.096	0.115	0.136	0.155
						Feed (mm/min)	484	726	726	726	641	585	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc		≤ 0.1	≤ 1	24	RPM	1293	969	776	646	485	388
						(20-29)	Fz	0.024	0.038	0.048	0.060	0.069	0.077
						Feed (mm/min)	186	223	223	233	201	180	
		HSM		≤ 0.05	≤ 2	30	RPM	1616	1212	969	808	606	485
						(24-37)	Fz	0.031	0.053	0.067	0.082	0.095	0.109
						Feed (mm/min)	302	388	388	395	344	318	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc		≤ 0.1	≤ 1	85	RPM	4524	3393	2714	2262	1696	1357
						(68-102)	Fz	0.024	0.038	0.048	0.060	0.069	0.077
						Feed (mm/min)	651	782	782	814	704	630	
		HSM		≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
						(87-130)	Fz	0.031	0.053	0.067	0.082	0.095	0.109
						Feed (mm/min)	1074	1377	1377	1404	1222	1129	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc		≤ 0.1	≤ 1	47	RPM	2504	1878	1503	1252	939	751
						(38-57)	Fz	0.024	0.038	0.048	0.060	0.069	0.077
						Feed (mm/min)	361	433	433	451	389	349	
		HSM		≤ 0.05	≤ 2	61	RPM	3231	2424	1939	1616	1212	969
						(49-73)	Fz	0.031	0.053	0.067	0.082	0.095	0.109
						Feed (mm/min)	605	776	776	791	689	636	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 6 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



77 • 77CR FRACTIONAL SERIES

- Specializes in deep axial trochoidal and high-speed milling applications
- Optimized core improves rigidity, chip flow and reduces deflection
- Chip Breaker design breaks up chips from the long flute length allowing for better chip flow and evacuation in deep pocketing operations
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

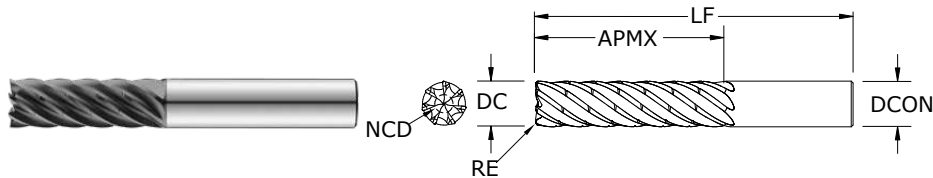

inch						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
1/4	5/8	2-1/2	1/4	—	0.0845	77100	77102	77101	77103
1/4	5/8	2-1/2	1/4	.015	0.0845	77104	77106	77105	77107
1/4	5/8	2-1/2	1/4	.030	0.0845	77108	77110	77109	77111
1/4	3/4	2-1/2	1/4	—	0.0845	77112	77114	77113	77115
1/4	3/4	2-1/2	1/4	.015	0.0845	77116	77118	77117	77119
1/4	3/4	2-1/2	1/4	.030	0.0845	77120	77122	77121	77123
1/4	1	3	1/4	—	0.0845	77124	77126	77125	77127
1/4	1	3	1/4	.015	0.0845	77128	77130	77129	77131
1/4	1	3	1/4	.030	0.0845	77132	77134	77133	77135
3/8	15/16	3	3/8	—	0.1268	77136	77138	77137	77139
3/8	15/16	3	3/8	.015	0.1268	77140	77142	77141	77143
3/8	15/16	3	3/8	.030	0.1268	77144	77146	77145	77147
3/8	1-1/8	3-1/4	3/8	—	0.1268	77148	77150	77149	77151
3/8	1-1/8	3-1/4	3/8	.015	0.1268	77152	77154	77153	77155
3/8	1-1/8	3-1/4	3/8	.030	0.1268	77156	77158	77157	77159
3/8	1-1/2	3-1/2	3/8	—	0.1268	77160	77162	77161	77163
3/8	1-1/2	3-1/2	3/8	.015	0.1268	77164	77166	77165	77167
3/8	1-1/2	3-1/2	3/8	.030	0.1268	77168	77170	77169	77171
1/2	1-1/4	3-1/4	1/2	—	0.1690	77172	77174	77173	77175
1/2	1-1/4	3-1/4	1/2	.030	0.1690	77176	77178	77177	77179
1/2	1-1/4	3-1/4	1/2	.060	0.1690	77180	77182	77181	77183
1/2	1-1/2	3-1/2	1/2	—	0.1690	77184	77186	77185	77187
1/2	1-1/2	3-1/2	1/2	.030	0.1690	77188	77190	77189	77191
1/2	1-1/2	3-1/2	1/2	.060	0.1690	77192	77194	77193	77195
1/2	2	4	1/2	—	0.1690	77196	77198	77197	77199
1/2	2	4	1/2	.030	0.1690	77200	77202	77201	77203
1/2	2	4	1/2	.060	0.1690	77204	77206	77205	77207
5/8	1-9/16	3-3/4	5/8	—	0.2113	77208	77210	77209	77211
5/8	1-9/16	3-3/4	5/8	.030	0.2113	77212	77214	77213	77215
5/8	1-9/16	3-3/4	5/8	.060	0.2113	77216	77218	77217	77219

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012
DCON = h₆
RE = +0.000 / -0.002

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016
DCON = h₆
RE = +0.000 / -0.002


>3/8-1 DIAMETER

DC = +0.0000/-0.0020
DCON = h₆
RE = +0.000 / -0.002

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

continued on next page

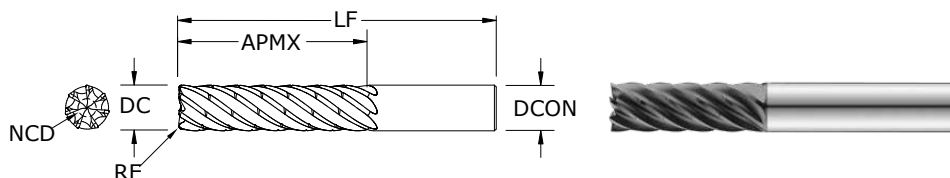

**77 •
77CR**
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.000 / -0.002

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.000 / -0.002

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.000 / -0.002

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


inch						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
5/8	1-7/8	4	5/8	—	0.2113	77220	77222	77221	77223
5/8	1-7/8	4	5/8	.030	0.2113	77224	77226	77225	77227
5/8	1-7/8	4	5/8	.060	0.2113	77228	77230	77229	77231
5/8	2-1/2	4-1/2	5/8	—	0.2113	77232	77234	77233	77235
5/8	2-1/2	4-1/2	5/8	.030	0.2113	77236	77238	77237	77239
5/8	2-1/2	4-1/2	5/8	.060	0.2113	77240	77242	77241	77243
3/4	1-7/8	4	3/4	—	0.2535	77244	77246	77245	77247
3/4	1-7/8	4	3/4	.030	0.2535	77248	77250	77249	77251
3/4	1-7/8	4	3/4	.060	0.2535	77252	77254	77253	77255
3/4	1-7/8	4	3/4	.120	0.2535	77256	77258	77257	77259
3/4	2-1/4	4-1/2	3/4	—	0.2535	77260	77262	77261	77263
3/4	2-1/4	4-1/2	3/4	.030	0.2535	77264	77266	77265	77267
3/4	2-1/4	4-1/2	3/4	.060	0.2535	77268	77270	77269	77271
3/4	2-1/4	4-1/2	3/4	.120	0.2535	77272	77274	77273	77275
3/4	3	5-1/4	3/4	—	0.2535	77276	77278	77277	77279
3/4	3	5-1/4	3/4	.030	0.2535	77280	77282	77281	77283
3/4	3	5-1/4	3/4	.060	0.2535	77284	77286	77285	77287
3/4	3	5-1/4	3/4	.120	0.2535	77288	77290	77289	77291
1	2-1/2	5-1/2	1	—	0.3380	77292	77294	77293	77295
1	2-1/2	5-1/2	1	.030	0.3380	77296	77298	77297	77299
1	2-1/2	5-1/2	1	.060	0.3380	77300	77302	77301	77303
1	2-1/2	5-1/2	1	.120	0.3380	77304	77306	77305	77307
1	3	6	1	—	0.3380	77308	77310	77309	77311
1	3	6	1	.030	0.3380	77312	77314	77313	77315
1	3	6	1	.060	0.3380	77316	77318	77317	77319
1	3	6	1	.120	0.3380	77320	77322	77321	77323
1	4	7	1	—	0.3380	77324	77326	77325	77327
1	4	7	1	.030	0.3380	77328	77330	77329	77331
1	4	7	1	.060	0.3380	77332	77334	77333	77335
1	4	7	1	.120	0.3380	77336	77338	77337	77339

CONTINUED



Series 77, 77CR Fractional		Hardness	Ae x D ₁		Vc (sfm)		D ₁ • inch								
			Ae x D ₁	Ap x D ₁			1/4	3/8	1/2	5/8	3/4	1			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc		2.5xD		816 (653-979)	RPM	11552	7701	5776	4621	3851	2888		
				≤ 0.2 ≤ APMX		Fz	0.0015	0.0024	0.0031	0.0035	0.0038	0.0042			
						Feed (ipm)	121	129	125	113	102	85			
				3xD		845 (676-1014)	Fz	0.0017	0.0027	0.0035	0.0040	0.0043	0.0047		
				≤ 0.15 ≤ APMX		Feed (ipm)	136	146	140	129	116	95			
						Fz	0.0018	0.0028	0.0036	0.0041	0.0044	0.0049			
			4xD		756 (605-907)	Feed (ipm)	146	151	146	133	119	99			
			≤ 0.1 ≤ APMX												
			ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc		2.5xD		595 (476-714)	RPM	8419	5613	4210	3368	2806	2105
						≤ 0.2 ≤ APMX		Fz	0.0009	0.0019	0.0026	0.0028	0.0031	0.0035	
								Feed (ipm)	53	75	77	66	61	52	
						3xD		616 (493-739)	Fz	0.0010	0.0021	0.0030	0.0033	0.0035	0.0039
	≤ 0.15 ≤ APMX					Feed (ipm)	59	83	88	78	69	57			
						Fz	0.0011	0.0022	0.0031	0.0034	0.0036	0.0041			
		4xD		551 (441-661)	Feed (ipm)	65	86	91	80	71	60				
		≤ 0.1 ≤ APMX													
		TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 375 Bhn or ≤ 40 HRc		2.5xD		272 (218-326)	RPM	3851	2567	1925	1540	1284	963
						≤ 0.2 ≤ APMX		Fz	0.0006	0.0011	0.0014	0.0017	0.0020	0.0024	
								Feed (ipm)	16	20	19	18	18	16	
						3xD		282 (226-338)	Fz	0.0007	0.0012	0.0016	0.0019	0.0022	0.0027
	≤ 0.15 ≤ APMX		Feed (ipm)			19	22	22	20	20	18				
			Fz			0.0007	0.0013	0.0017	0.0020	0.0023	0.0028				
			4xD		252 (202-302)	Feed (ipm)	19	23	23	22	21	19			
			≤ 0.1 ≤ APMX												
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F			≤ 275 Bhn or ≤ 28 HRc		2.5xD		646 (517-775)	RPM	9137	6092	4569	3655	3046	2284	
					≤ 0.2 ≤ APMX		Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0032		
							Feed (ipm)	58	72	74	64	60	51		
					3xD		669 (535-803)	Fz	0.0010	0.0019	0.0026	0.0029	0.0031	0.0036	
	≤ 0.15 ≤ APMX				Feed (ipm)	64	81	83	74	66	58				
					Fz	0.0011	0.0020	0.0027	0.0030	0.0033	0.0037				
		4xD		598 (478-718)	Feed (ipm)	70	85	86	77	70	59				
		≤ 0.1 ≤ APMX													
		STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc		2.5xD		425 (340-510)	RPM	6020	4014	3010	2408	2007	1505	
					≤ 0.2 ≤ APMX		Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030		
							Feed (ipm)	29	39	40	39	37	32		
					3xD		440 (352-528)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034	
≤ 0.15 ≤ APMX					Feed (ipm)	34	45	44	42	41	36				
					Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035				
	4xD		394 (315-473)	Feed (ipm)	34	45	46	44	42	37					
	≤ 0.1 ≤ APMX														
	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450		≤ 325 Bhn or ≤ 35 HRc		2.5xD		408 (326-490)	RPM	5776	3851	2888	2310	1925	1444	
					≤ 0.2 ≤ APMX		Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030		
							Feed (ipm)	28	38	38	37	35	30		
					3xD		422 (338-506)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034	
≤ 0.15 ≤ APMX		Feed (ipm)			32	43	42	40	39	34					
		Fz			0.0008	0.0016	0.0022	0.0026	0.0030	0.0035					
		4xD		378 (302-454)	Feed (ipm)	32	43	44	42	40	35				
		≤ 0.1 ≤ APMX													

continued on next page



Series 77, 77CR Fractional	Hardness			Vc (sfm)	D ₁ • inch							
		Ae x D ₁	Ap x D ₁		1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		2.5xD	714 (571-857)	RPM	10100	6733	5050	4040	3367	2525
				≤ 0.2 ≤ APMX		Fz	0.0010	0.0018	0.0024	0.0028	0.0033	0.0037
				3xD	739 (591-887)	Fz	0.0011	0.0020	0.0027	0.0033	0.0037	0.0042
				≤ 0.15 ≤ APMX		Feed (ipm)	71	85	85	79	78	65
				4xD	661 (529-793)	Fz	0.0012	0.0021	0.0028	0.0034	0.0039	0.0043
				≤ 0.1 ≤ APMX		Feed (ipm)	78	94	95	93	87	73
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		2.5xD	425 (340-510)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030
				≤ 0.2 ≤ APMX		Feed (ipm)	29	39	40	39	37	32
				3xD	440 (352-528)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0037
				≤ 0.15 ≤ APMX		Feed (ipm)	34	45	44	42	41	39
				4xD	394 (315-473)	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035
				≤ 0.1 ≤ APMX		Feed (ipm)	34	45	46	44	42	37
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc		2.5xD	136 (109-163)	RPM	1925	1284	963	770	642	481
				≤ 0.2 ≤ APMX		Fz	0.0006	0.0011	0.0016	0.0018	0.0021	0.0025
				3xD	141 (113-169)	Fz	0.0007	0.0012	0.0018	0.0021	0.0024	0.0028
				≤ 0.15 ≤ APMX		Feed (ipm)	8	10	11	10	9	8
				4xD	126 (101-151)	Fz	0.0007	0.0013	0.0018	0.0022	0.0025	0.0029
				≤ 0.1 ≤ APMX		Feed (ipm)	9	11	12	11	11	9
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc		2.5xD	85 (68-102)	Fz	0.0005	0.0009	0.0013	0.0015	0.0018	0.0022
				≤ 0.2 ≤ APMX		Feed (ipm)	4	5	5	5	5	5
				3xD	88 (70-106)	Fz	0.0005	0.0010	0.0015	0.0018	0.0020	0.0025
				≤ 0.15 ≤ APMX		Feed (ipm)	4	6	6	6	6	5
				4xD	79 (63-95)	Fz	0.0006	0.0011	0.0015	0.0018	0.0021	0.0026
				≤ 0.1 ≤ APMX		Feed (ipm)	4	6	6	6	6	5
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc		2.5xD	289 (231-347)	RPM	4095	2730	2048	1638	1365	1024	
			≤ 0.2 ≤ APMX		Fz	0.0008	0.0015	0.0021	0.0024	0.0028	0.0032	
			3xD	299 (239-359)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0036	
			≤ 0.15 ≤ APMX		Feed (ipm)	23	29	30	28	27	23	
			4xD	268 (214-322)	Fz	0.0009	0.0018	0.0024	0.0029	0.0033	0.0037	
			≤ 0.1 ≤ APMX		Feed (ipm)	26	32	33	29	27	26	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc		2.5xD	170 (136-204)	RPM	2399	1599	1199	960	800	600	
			≤ 0.2 ≤ APMX		Fz	0.0008	0.0015	0.0021	0.0024	0.0028	0.0032	
			3xD	176 (141-211)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0036	
			≤ 0.15 ≤ APMX		Feed (ipm)	13	17	18	16	16	13	
			4xD	157 (126-188)	Fz	0.0009	0.0018	0.0024	0.0029	0.0033	0.0037	
			≤ 0.1 ≤ APMX		Feed (ipm)	15	19	19	17	16	15	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = Vc x 3.82 / DC

ipm = Fz x 7 x rpm

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



**77M •
77MCR**
METRIC SERIES

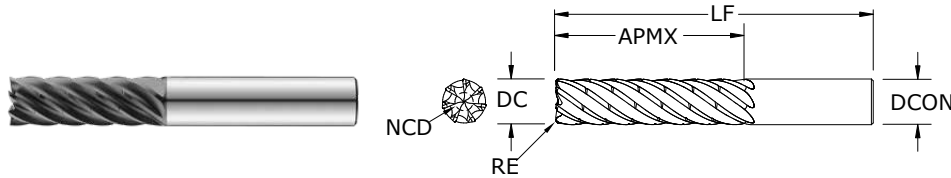

- Specializes in deep axial trochoidal and high-speed milling applications
- Optimized core improves rigidity, chip flow and reduces deflection
- Chip Breaker design breaks up chips from the long flute length allowing for better chip flow and evacuation in deep pocketing operations
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

mm						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
6,0	15,0	63,0	6,0	—	2,03	74300	74302	74301	74303
6,0	15,0	63,0	6,0	0,3	2,03	74304	74306	74305	74307
6,0	15,0	63,0	6,0	0,5	2,03	74308	74310	74309	74311
6,0	18,0	63,0	6,0	—	2,03	74316	74318	74317	74319
6,0	18,0	63,0	6,0	0,3	2,03	74320	74322	74321	74323
6,0	18,0	63,0	6,0	0,5	2,03	74324	74326	74325	74327
6,0	24,0	75,0	6,0	—	2,03	74332	74334	74333	74335
6,0	24,0	75,0	6,0	0,3	2,03	74336	74338	74337	74339
6,0	24,0	75,0	6,0	0,5	2,03	74340	74342	74341	74343
8,0	20,0	75,0	8,0	—	2,71	74348	74350	74349	74351
8,0	20,0	75,0	8,0	0,5	2,71	74352	74354	74353	74355
8,0	20,0	75,0	8,0	1,0	2,71	74356	74358	74357	74359
8,0	20,0	75,0	8,0	2,0	2,71	74360	74362	74361	74363
8,0	24,0	75,0	8,0	—	2,71	74364	74366	74365	74367
8,0	24,0	75,0	8,0	0,5	2,71	74368	74370	74369	74371
8,0	24,0	75,0	8,0	1,0	2,71	74372	74374	74373	74375
8,0	24,0	75,0	8,0	2,0	2,71	74376	74378	74377	74379
8,0	32,0	85,0	8,0	—	2,71	74380	74382	74381	74383
8,0	32,0	85,0	8,0	0,5	2,71	74384	74386	74385	74387
8,0	32,0	85,0	8,0	1,0	2,71	74388	74390	74389	74391
8,0	32,0	85,0	8,0	2,0	2,71	74392	74394	74393	74395
10,0	25,0	75,0	10,0	—	3,38	74396	74398	74397	74399
10,0	25,0	75,0	10,0	0,5	3,38	74400	74402	74401	74403
10,0	25,0	75,0	10,0	1,0	3,38	74404	74406	74405	74407
10,0	30,0	80,0	10,0	—	3,38	74408	74410	74409	74411
10,0	30,0	80,0	10,0	0,5	3,38	74412	74414	74413	74415
10,0	30,0	80,0	10,0	1,0	3,38	74416	74418	74417	74419
10,0	40,0	100,0	10,0	—	3,38	74420	74422	74421	74423
10,0	40,0	100,0	10,0	0,5	3,38	74424	74426	74425	74427
10,0	40,0	100,0	10,0	1,0	3,38	74428	74430	74429	74431
12,0	30,0	83,0	12,0	—	4,06	74432	74434	74433	74435
12,0	30,0	83,0	12,0	0,5	4,06	74436	74438	74437	74439
12,0	30,0	83,0	12,0	1,0	4,06	74440	74442	74441	74443
12,0	36,0	83,0	12,0	—	4,06	74444	74446	74445	74447
12,0	36,0	83,0	12,0	0,5	4,06	74448	74450	74449	74451
12,0	36,0	83,0	12,0	1,0	4,06	74452	74454	74453	74455

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030
DCON = h_6
RE = +0,000 / -0,050

>6-10 DIAMETER

DC = +0,000/-0,040
DCON = h_6
RE = +0,000 / -0,050


>10-25 DIAMETER

DC = +0,000/-0,050
DCON = h_6
RE = +0,000 / -0,050

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

continued on next page

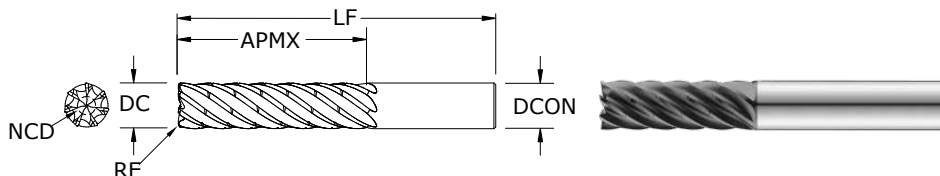

**77M •
77MCR**
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000 / -0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000 / -0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000 / -0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


mm						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
12,0	48,0	100,0	12,0	—	4,06	74456	74458	74457	74459
12,0	48,0	100,0	12,0	0,5	4,06	74460	74462	74461	74463
12,0	48,0	100,0	12,0	1,0	4,06	74464	74466	74465	74467
16,0	40,0	92,0	16,0	—	5,41	74468	74470	74469	74471
16,0	40,0	92,0	16,0	0,5	5,41	74472	74474	74473	74475
16,0	40,0	92,0	16,0	1,0	5,41	74476	74478	74477	74479
16,0	48,0	100,0	16,0	—	5,41	74480	74482	74481	74483
16,0	48,0	100,0	16,0	0,5	5,41	74484	74486	74485	74487
16,0	48,0	100,0	16,0	1,0	5,41	74488	74490	74489	74491
16,0	64,0	115,0	16,0	—	5,41	74492	74494	74493	74495
16,0	64,0	115,0	16,0	0,5	5,41	74496	74498	74497	74499
16,0	64,0	115,0	16,0	1,0	5,41	74500	74502	74501	74503
20,0	50,0	100,0	20,0	—	6,76	74504	74506	74505	74507
20,0	50,0	100,0	20,0	0,5	6,76	74508	74510	74509	74511
20,0	50,0	100,0	20,0	1,0	6,76	74512	74514	74513	74515
20,0	50,0	100,0	20,0	2,0	6,76	74516	74518	74517	74519
20,0	60,0	115,0	20,0	—	6,76	74520	74522	74521	74523
20,0	60,0	115,0	20,0	0,5	6,76	74524	74526	74525	74527
20,0	60,0	115,0	20,0	1,0	6,76	74528	74530	74529	74531
20,0	60,0	115,0	20,0	2,0	6,76	74532	74534	74533	74535
20,0	80,0	140,0	20,0	—	6,76	74536	74538	74537	74539
20,0	80,0	140,0	20,0	0,5	6,76	74540	74542	74541	74543
20,0	80,0	140,0	20,0	1,0	6,76	74544	74546	74545	74547
20,0	80,0	140,0	20,0	2,0	6,76	74548	74550	74549	74551
25,0	63,0	135,0	25,0	—	8,45	74552	74554	74553	74555
25,0	63,0	135,0	25,0	1,0	8,45	74556	74558	74557	74559
25,0	63,0	135,0	25,0	2,0	8,45	74560	74562	74561	74563
25,0	63,0	135,0	25,0	3,0	8,45	74564	74566	74565	74567
25,0	75,0	150,0	25,0	—	8,45	74568	74570	74569	74571
25,0	75,0	150,0	25,0	1,0	8,45	74572	74574	74573	74575
25,0	75,0	150,0	25,0	2,0	8,45	74576	74578	74577	74579
25,0	75,0	150,0	25,0	3,0	8,45	74580	74582	74581	74583
25,0	100,0	170,0	25,0	—	8,45	74584	74586	74585	74587
25,0	100,0	170,0	25,0	1,0	8,45	74588	74590	74589	74591
25,0	100,0	170,0	25,0	2,0	8,45	74592	74594	74593	74595
25,0	100,0	170,0	25,0	3,0	8,45	74596	74598	74597	74599

CONTINUED



Series 77M, 77MCR Metric		Hardness			Vc (m/min)	D ₁ • mm							
			Ae x D ₁	Ap x D ₁		6	8	10	12	16	20	25	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	 HSM	2.5xD	284 (227-341)	RPM	12208	9156	7325	6104	4578	3662	2930
				≤ 0.2 ≤ APMX	Fz	0.0413	0.0411	0.0640	0.0711	0.0889	0.1013	0.1050	
			 HSM	3xD	257 (206-308)	Feed (mm/min)	3529	2634	3282	3038	2849	2597	2154
				≤ 0.15 ≤ APMX	Fz	0.0347	0.0461	0.0717	0.0797	0.0996	0.1135	0.1176	
			 HSM	4xD	230 (184-276)	Feed (mm/min)	2965	2955	3676	3405	3192	2910	2412
				≤ 0.1 ≤ APMX	Fz	0.0362	0.0480	0.0747	0.0830	0.1037	0.1182	0.0919	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 HSM	2.5xD	132 (106-159)	RPM	8068	6051	4841	4034	3025	2420	1936
				≤ 0.2 ≤ APMX	Fz	0.0213	0.0285	0.0512	0.0610	0.0711	0.0827	0.0875	
			 HSM	3xD	138 (111-166)	Feed (mm/min)	1203	1207	1735	1723	1506	1401	1186
				≤ 0.15 ≤ APMX	Fz	0.0239	0.0319	0.0574	0.0683	0.0797	0.0926	0.0980	
			 HSM	4xD	152 (122-182)	Feed (mm/min)	1350	1351	1945	1929	1688	1569	1328
				≤ 0.1 ≤ APMX	Fz	0.0249	0.0332	0.0597	0.0711	0.0830	0.0964	0.1021	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 HSM	2.5xD	83 (66-100)	RPM	4087	3065	2452	2044	1533	1226	981
				≤ 0.2 ≤ APMX	Fz	0.0140	0.0183	0.0294	0.0356	0.0457	0.0560	0.0625	
			 HSM	3xD	86 (69-103)	Feed (mm/min)	401	393	505	509	490	481	429
				≤ 0.15 ≤ APMX	Fz	0.0157	0.0205	0.0330	0.0398	0.0512	0.0627	0.0700	
			 HSM	4xD	77 (62-92)	Feed (mm/min)	449	440	566	569	549	538	481
				≤ 0.1 ≤ APMX	Fz	0.0163	0.0213	0.0344	0.0415	0.0533	0.0653	0.0729	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	 HSM	2.5xD	197 (158-236)	RPM	9660	7245	5796	4830	3623	2898	2318
				≤ 0.2 ≤ APMX	Fz	0.0216	0.0285	0.0448	0.0533	0.0635	0.0747	0.0800	
			 HSM	3xD	204 (163-245)	Feed (mm/min)	1461	1445	1818	1803	1610	1515	1298
				≤ 0.15 ≤ APMX	Fz	0.0242	0.0319	0.0502	0.0598	0.0711	0.0837	0.0896	
			 HSM	4xD	182 (146-218)	Feed (mm/min)	1636	1618	2037	2022	1803	1698	1454
				≤ 0.1 ≤ APMX	Fz	0.0252	0.0332	0.0523	0.0622	0.0741	0.0871	0.0933	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	 HSM	2.5xD	130 (104-156)	RPM	6369	4777	3822	3185	2389	1911	1529
				≤ 0.2 ≤ APMX	Fz	0.0168	0.0221	0.0371	0.0432	0.0584	0.0693	0.0750	
			 HSM	3xD	134 (107-161)	Feed (mm/min)	749	739	993	963	976	927	803
				≤ 0.15 ≤ APMX	Fz	0.0188	0.0248	0.0416	0.0484	0.0655	0.0777	0.0840	
			 HSM	4xD	120 (96-144)	Feed (mm/min)	838	829	1113	1079	1095	1039	899
				≤ 0.1 ≤ APMX	Fz	0.0196	0.0258	0.0433	0.0504	0.0682	0.0809	0.0875	
	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc	 HSM	2.5xD	124 (99-149)	RPM	6104	4578	3662	3052	2289	1831	1465
				≤ 0.2 ≤ APMX	Fz	0.0168	0.0221	0.0371	0.0432	0.0584	0.0693	0.0750	
			 HSM	3xD	129 (103-155)	Feed (mm/min)	718	708	952	923	936	888	769
				≤ 0.15 ≤ APMX	Fz	0.0188	0.0248	0.0416	0.0484	0.0655	0.0777	0.0840	
			 HSM	4xD	115 (92-138)	Feed (mm/min)	803	795	1066	1034	1050	996	861
				≤ 0.1 ≤ APMX	Fz	0.0196	0.0258	0.0433	0.0504	0.0682	0.0809	0.0875	

continued on next page



Series 77M, 77MCR					Vc	D ₁ • mm								
Metric	Hardness	Ae x D ₁		Ap x D ₁	(m/min)	6	8	10	12	16	20	25		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		2.5xD		218 (174-262)	RPM	10722	8041	6433	5361	4021	3217	2573
				≤ 0.2 ≤ APMX			Fz	0.0239	0.0315	0.0474	0.0559	0.0762	0.0880	0.0925
							Feed (mm/min)	1794	1773	2135	2098	2145	1981	1666
				3xD		225 (180-270)	Fz	0.0268	0.0353	0.0531	0.0626	0.0854	0.0986	0.1036
				≤ 0.15 ≤ APMX			Feed (mm/min)	2011	1987	2391	2349	2404	2220	1866
								4xD		202 (162-242)	Fz	0.0279	0.0368	0.0553
	≤ 0.1 ≤ APMX		Feed (mm/min)	2094	2071	2490		2447	2502		2312	1944		
			CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		2.5xD		130 (104-156)	Fz		0.0168	0.0221	0.0371	0.0432
	≤ 0.2 ≤ APMX					Feed (mm/min)	749		739	993	963	976	927	803
							3xD		134 (107-161)	Fz	0.0188	0.0248	0.0416	0.0484
	≤ 0.15 ≤ APMX				Feed (mm/min)		838	829		1113	1079	1095	1039	899
							4xD			120 (96-144)	Fz	0.0196	0.0258	0.0433
≤ 0.1 ≤ APMX		Feed (mm/min)				874	863	1158	1124		1140	1082	936	
		S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc			2.5xD		41 (33-49)		Fz	0.0140	0.0183	0.0294
≤ 0.2 ≤ APMX					Feed (mm/min)		198	194		249	251	242	237	212
							3xD			43 (34-52)	Fz	0.0157	0.0205	0.0330
≤ 0.15 ≤ APMX						Feed (mm/min)	222	217	280		281	271	266	237
							4xD		38 (30-46)		Fz	0.0163	0.0213	0.0344
≤ 0.1 ≤ APMX					Feed (mm/min)		230	226		291	293	282	277	247
			HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc			2.5xD			26 (21-31)	Fz	0.0114	0.0152	0.0243
≤ 0.2 ≤ APMX						Feed (mm/min)	102	102	130		136	127	128	118
							3xD		27 (22-32)		Fz	0.0128	0.0171	0.0273
≤ 0.15 ≤ APMX					Feed (mm/min)		114	114		146	152	143	144	132
							4xD			24 (19-29)	Fz	0.0133	0.0178	0.0284
≤ 0.1 ≤ APMX						Feed (mm/min)	119	119	152		159	149	150	137
		TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc			2.5xD		88 (70-106)	Fz		0.0191	0.0254	0.0397	0.0483
≤ 0.2 ≤ APMX					Feed (mm/min)	582	580		726	736	725	683	585	
						3xD			91 (73-109)	Fz	0.0213	0.0285	0.0445	0.0541
≤ 0.15 ≤ APMX				Feed (mm/min)		649	651	813		824	812	765	655	
						4xD		82 (66-98)		Fz	0.0222	0.0296	0.0463	0.0563
≤ 0.1 ≤ APMX					Feed (mm/min)	676	676		846	858	847	796	682	
		TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc			2.5xD			52 (42-62)	Fz	0.0163	0.0254	0.0397	0.0483
≤ 0.2 ≤ APMX				Feed (mm/min)		291	340	425		431	425	400	342	
						3xD		54 (43-65)		Fz	0.0182	0.0285	0.0445	0.0541
≤ 0.15 ≤ APMX					Feed (mm/min)	325	381		476	482	476	448	384	
						4xD			48 (38-58)	Fz	0.0190	0.0296	0.0463	0.0563
≤ 0.1 ≤ APMX				Feed (mm/min)		339	396	495		502	496	466	399	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fz x 7 x rpm

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



**66 •
66CR**
FRACTIONAL SERIES

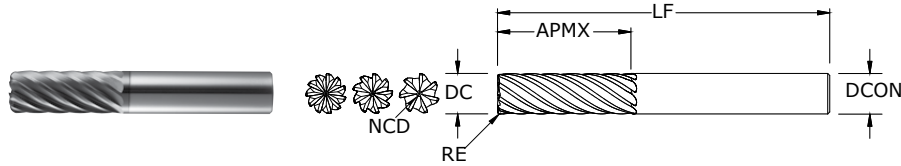


- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X
3/16	5/8	2	3/16	—	0.0550	7	36620
3/16	5/8	2	3/16	.010	0.0550	7	36627
1/4	3/4	2-1/2	1/4	—	0.0650	7	36621
1/4	3/4	2-1/2	1/4	.015	0.0650	7	36628
3/8	1	3	3/8	—	0.0810	7	36622
3/8	1	3	3/8	.015	0.0810	7	36629
1/2	1-1/4	3	1/2	—	0.1340	9	36623
1/2	1-1/4	3	1/2	.030	0.1340	9	36630
1/2	1-1/4	3	1/2	.090	0.1340	9	36631
1/2	1-1/4	3	1/2	.120	0.1340	9	36632
5/8	1-5/8	3-1/2	5/8	—	0.1150	9	36624
5/8	1-5/8	3-1/2	5/8	.030	0.1150	9	36633
5/8	1-5/8	3-1/2	5/8	.090	0.1150	9	36634
5/8	1-5/8	3-1/2	5/8	.120	0.1150	9	36635
3/4	1-5/8	4	3/4	—	0.1750	11	36625
3/4	1-5/8	4	3/4	.030	0.1750	11	36636
3/4	1-5/8	4	3/4	.090	0.1750	11	36637
3/4	1-5/8	4	3/4	.120	0.1750	11	36638
1	2	6	1	—	0.3000	11	36626
1	2	6	1	.030	0.3000	11	36639
1	2	6	1	.090	0.3000	11	36640
1	2	6	1	.120	0.3000	11	36641


Neck Option Available

TOLERANCES (inch)

DC = +0.0000/–0.0020
DCON = h_6
RE = +0.0000/–0.0020




For patent information visit
www.ksptpatents.com



	Series 66, 66CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in						
						3/16	1/4	3/8	1/2	5/8	3/4	1
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	635	RPM	12937	9703	6469	4851	3881	2426
					(508-762)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038
						Feed (ipm)	72.4	81.5	99.6	131.0	129.2	135.2
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	762	RPM	15524	11643	7762	5822	4657	3881
					(610-914)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030
						Feed (ipm)	69.5	78.2	95.6	125.7	124.1	129.8
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile ≤ 0.05	≤ 1	360	RPM	7334	5501	3667	2750	2200	1834
					(288-432)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
						Feed (ipm)	30.8	34.7	43.6	56.9	57.4	60.5
		≤ 40 HRc	Finish ≤ 0.02	≤ 2	432	RPM	8801	6601	4401	3300	2640	2200
					(346-518)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	29.6	33.3	41.9	54.7	55.1	58.1
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile ≤ 0.05	≤ 1	290	RPM	5908	4431	2954	2216	1772	1477
					(232-348)	Fz	0.0004	0.0006	0.0012	0.0016	0.0020	0.0021
						Feed (ipm)	16.5	18.6	24.8	31.9	31.9	34.1
		≤ 40 HRc	Finish ≤ 0.02	≤ 2	348	RPM	7090	5317	3545	2659	2127	1772
					(278-418)	Fz	0.0003	0.0005	0.0010	0.0013	0.0016	0.0017
						Feed (ipm)	15.9	17.9	23.8	30.6	30.6	32.8
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	560	RPM	11409	8557	5705	4278	3423	2852
					(448-672)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
						Feed (ipm)	47.9	53.9	67.9	88.6	89.3	94.1
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	448	RPM	9127	6845	4564	3423	2738	2282
					(358-538)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	30.7	34.5	43.4	56.7	57.2	60.2
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	385	RPM	7844	5883	3922	2941	2353	1961
					(308-462)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	27.5	28.8	38.4	47.7	48.7	51.8
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	462	RPM	9412	7059	4706	3530	2824	2353
					(370-554)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019
						Feed (ipm)	26.4	27.7	36.9	45.7	46.8	49.7
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile ≤ 0.05	≤ 1	355	RPM	7233	5424	3616	2712	2170	1808
					(284-426)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	25.3	26.6	35.4	43.9	44.9	47.7
		≤ 35 HRc	Finish ≤ 0.02	≤ 2	426	RPM	8679	6509	4340	3255	2604	2170
					(341-511)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019
						Feed (ipm)	24.3	25.5	34.0	42.2	43.1	45.8

continued on next page

Multi-Carb



Series 66, 66CR Fractional	Hardness			Vc (sfm)	DC • in								
		Ae x DC	Ap x DC		3/16	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.05	≤ 1	705	RPM	14363	10772	7182	5386	4309	3591	2693
					(564-846)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038	0.0042
					Feed (ipm)	80.4	90.5	110.6	145.4	143.5	150.1	124.4	
		Finish 	≤ 0.02	≤ 2	846	RPM	17236	12927	8618	6463	5171	4309	3232
					(677-1015)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030	0.0034
					Feed (ipm)	77.2	86.9	106.2	139.6	137.7	144.1	119.4	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.05	≤ 1	540	RPM	11002	8251	5501	4126	3300	2750	2063
					(432-648)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
					Feed (ipm)	46.2	52.0	65.5	85.4	86.1	90.8	72.6	
		Finish 	≤ 0.02	≤ 2	648	RPM	13202	9901	6601	4951	3961	3300	2475
					(518-778)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
					Feed (ipm)	44.4	49.9	62.8	82.0	82.7	87.1	69.7	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.05	≤ 1	105	RPM	2139	1604	1070	802	642	535	401
					(84-126)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
					Feed (ipm)	7.5	7.9	10.5	13.0	13.3	14.1	11.5	
		Finish 	≤ 0.02	≤ 2	126	RPM	2567	1925	1284	963	770	642	481
					(101-151)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021
					Feed (ipm)	7.2	7.5	10.1	12.5	12.8	13.6	11.0	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.05	≤ 1	85	RPM	1732	1299	866	649	520	433	325
					(68-102)	Fz	0.0003	0.0005	0.0009	0.0011	0.0014	0.0015	0.0016
					Feed (ipm)	3.6	4.5	5.5	6.4	6.5	7.1	5.7	
		Finish 	≤ 0.02	≤ 2	102	RPM	2078	1559	1039	779	623	520	390
					(82-122)	Fz	0.0002	0.0004	0.0007	0.0009	0.0011	0.0012	0.0013
					Feed (ipm)	3.5	4.4	5.2	6.2	6.3	6.9	5.5	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.05	≤ 1	390	RPM	7946	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
					Feed (ipm)	27.8	33.4	41.7	56.3	55.8	59.0	47.5	
		Finish 	≤ 0.02	≤ 2	468	RPM	9535	7151	4767	3576	2860	2384	1788
					(374-562)	Fz	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023
					Feed (ipm)	26.7	32.0	40.0	54.1	53.5	56.6	45.6	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.05	≤ 1	140	RPM	2852	2139	1426	1070	856	713	535	
				(112-168)	Fz	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029	
				Feed (ipm)	10.0	12.0	15.0	20.2	20.0	21.2	17.1		
	Finish 	≤ 0.02	≤ 2	168	RPM	3423	2567	1711	1284	1027	856	642	
				(134-202)	Fz	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023	
				Feed (ipm)	9.6	11.5	14.4	19.4	19.2	20.3	16.4		

Bhn (Brinell) HRc (Rockwell C)


rpm = Vc x 3.82 / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

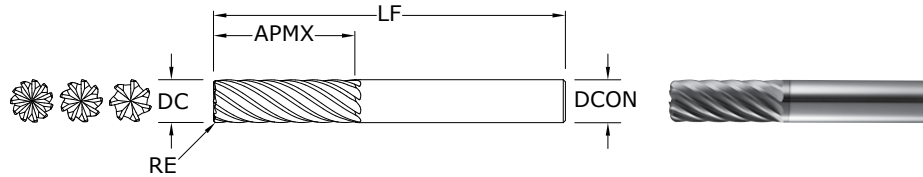

**66M •
66MCR**
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X
6,0	19,0	63,0	6,0	—	1,63	7	46620
6,0	19,0	63,0	8,0	0,5	1,63	7	46627
6,0	19,0	63,0	6,0	1,0	1,63	7	46628
8,0	20,0	63,0	8,0	—	1,78	7	46621
8,0	20,0	63,0	8,0	0,5	1,78	7	46629
8,0	20,0	63,0	8,0	1,0	1,78	7	46630
8,0	20,0	63,0	8,0	1,5	1,78	7	46631
10,0	22,0	75,0	10,0	—	2,03	7	46622
10,0	22,0	75,0	10,0	0,5	2,03	7	46632
10,0	22,0	75,0	10,0	1,0	2,03	7	46633
10,0	22,0	75,0	10,0	1,5	2,03	7	46634
10,0	22,0	75,0	10,0	2,0	2,03	7	46635
12,0	26,0	83,0	12,0	—	3,45	9	46623
12,0	26,0	83,0	12,0	1,0	3,45	9	46636
12,0	26,0	83,0	12,0	1,5	3,45	9	46637
12,0	26,0	83,0	12,0	2,0	3,45	9	46638
12,0	26,0	83,0	12,0	2,5	3,45	9	46639
12,0	26,0	83,0	12,0	3,0	3,45	9	46640
16,0	32,0	92,0	16,0	—	2,92	9	46624
16,0	32,0	92,0	16,0	1,0	2,92	9	46641
16,0	32,0	92,0	16,0	1,5	2,92	9	46642
16,0	32,0	92,0	16,0	2,0	2,92	9	46643
16,0	32,0	92,0	16,0	2,5	2,92	9	46644
16,0	32,0	92,0	16,0	3,0	2,92	9	46645
16,0	32,0	92,0	16,0	4,0	2,92	9	46646
20,0	38,0	104,0	20,0	—	4,57	11	46625
20,0	38,0	104,0	20,0	1,0	4,57	11	46647
20,0	38,0	104,0	20,0	1,5	4,57	11	46648
20,0	38,0	104,0	20,0	2,0	4,57	11	46649
20,0	38,0	104,0	20,0	2,5	4,57	11	46650
20,0	38,0	104,0	20,0	3,0	4,57	11	46651
20,0	38,0	104,0	20,0	4,0	4,57	11	46652


continued on next page

Neck Option Available

- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



**66M •
66MCR**
METRIC SERIES

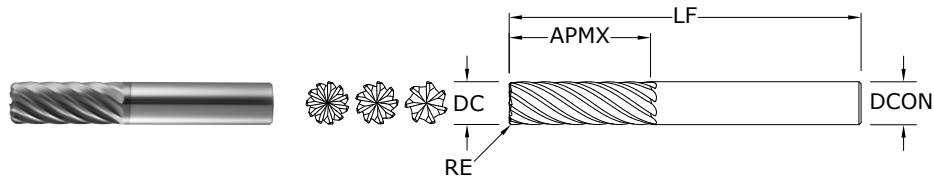

CONTINUED

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X
20,0	38,0	104,0	20,0	5,0	4,57	11	46653
25,0	38,0	104,0	25,0	—	7,49	11	46626
25,0	38,0	104,0	25,0	1,0	7,49	11	46654
25,0	38,0	104,0	25,0	1,5	7,49	11	46655
25,0	38,0	104,0	25,0	2,0	7,49	11	46656
25,0	38,0	104,0	25,0	2,5	7,49	11	46657
25,0	38,0	104,0	25,0	3,0	7,49	11	46658
25,0	38,0	104,0	25,0	4,0	7,49	11	46659
25,0	38,0	104,0	25,0	5,0	7,49	11	46660

Neck Option Available

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h₆

RE = +0,000/-0,050


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com



Series 66M, 66MCR Metric	Hardness		Vc (m/min)	DC • mm								
				6	8	10	12	16	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 ≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05 ≤ 1	194	RPM	10260	7695	6156	5130	3847	3078	2462
				(155-232)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
				Feed (mm/min)	2068	2528	2528	3324	3280	3431	2844	
		 ≤ 28 HRc	Finish ≤ 0.02 ≤ 2	232	RPM	12312	9234	7387	6156	4617	3693	2955
				(186-279)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
				Feed (mm/min)	1985	2427	2427	3191	3149	3294	2730	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 ≤ 375 Bhn or ≤ 40 HRc	Profile ≤ 0.05 ≤ 1	110	RPM	5816	4362	3490	2908	2181	1745	1396
				(88-132)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
				Feed (mm/min)	879	1108	1107	1445	1457	1536	1229	
		 ≤ 40 HRc	Finish ≤ 0.02 ≤ 2	132	RPM	6980	5235	4188	3490	2617	2094	1675
				(105-158)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
				Feed (mm/min)	844	1063	1063	1387	1399	1474	1179	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 ≤ 375 Bhn or ≤ 40 HRc	Profile ≤ 0.05 ≤ 1	88	RPM	4686	3514	2811	2343	1757	1406	1125
				(71-106)	Fz	0.014	0.026	0.032	0.038	0.051	0.056	0.055
				Feed (mm/min)	472	630	630	810	810	866	680	
		 ≤ 40 HRc	Finish ≤ 0.02 ≤ 2	106	RPM	5623	4217	3374	2811	2108	1687	1349
				(85-127)	Fz	0.012	0.020	0.026	0.031	0.041	0.045	0.044
				Feed (mm/min)	453	605	605	777	777	831	653	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 ≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05 ≤ 1	171	RPM	9048	6786	5429	4524	3393	2714	2171
				(137-205)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
				Feed (mm/min)	1368	1723	1723	2247	2267	2389	1911	
		 ≤ 28 HRc	Finish ≤ 0.02 ≤ 2	137	RPM	7238	5429	4343	3619	2714	2171	1737
				(109-164)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
				Feed (mm/min)	875	1103	1103	1438	1451	1529	1223	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 ≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05 ≤ 1	117	RPM	6220	4665	3732	3110	2333	1866	1493
				(94-141)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
				Feed (mm/min)	731	975	975	1209	1236	1314	1067	
		 ≤ 28 HRc	Finish ≤ 0.02 ≤ 2	141	RPM	7465	5598	4479	3732	2799	2239	1791
				(113-169)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
				Feed (mm/min)	702	17	936	1161	1187	1261	1025	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	 ≤ 325 Bhn or ≤ 35 HRc	Profile ≤ 0.05 ≤ 1	108	RPM	5736	4302	3441	2868	2151	1721	1377
				(87-130)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
				Feed (mm/min)	674	899	899	1115	1140	1211	984	
		 ≤ 35 HRc	Finish ≤ 0.02 ≤ 2	130	RPM	6883	5162	4130	3441	2581	2065	1652
				(104-156)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
				Feed (mm/min)	647	863	863	1070	1094	1163	945	

continued on next page

Multi-Carb



Series 66M, 66MCR	Metric	Hardness			Vc (m/min)	DC • mm								
			Ae x DC	Ap x DC		6	8	10	12	16	20	25		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.05	≤ 1	215	RPM	11391	8543	6834	5695	4271	3417	2734
						(172-258)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
						Feed (mm/min)	2296	2807	2807	3690	3641	3809	3158	
			 Finish	≤ 0.02	≤ 2	258	RPM	13669	10252	8201	6834	5126	4101	3281
						(206-309)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
						Feed (mm/min)	2204	2695	2694	3543	3496	3657	3031	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Profile	≤ 0.05	≤ 1	165	RPM	8725	6544	5235	4362	3272	2617	2094
						(132-198)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
						Feed (mm/min)	1319	1661	1661	2167	2186	2303	1843	
			 Finish	≤ 0.02	≤ 2	198	RPM	10470	7852	6282	5235	3926	3141	2513
						(158-237)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
						Feed (mm/min)	1266	1595	1595	2080	2099	2211	1769	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Profile	≤ 0.05	≤ 1	32	RPM	1696	1272	1018	848	636	509	407
						(26-38)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
						Feed (mm/min)	199	266	213	330	337	358	291	
			 Finish	≤ 0.02	≤ 2	38	RPM	2036	1527	1221	1018	763	611	489
						(31-46)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
						Feed (mm/min)	192	255	255	317	324	344	279	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile	≤ 0.05	≤ 1	26	RPM	1373	1030	824	687	515	412	330
						(21-31)	Fz	0.012	0.019	0.024	0.026	0.036	0.040	0.040
						Feed (mm/min)	115	138	138	163	166	181	145	
			 Finish	≤ 0.02	≤ 2	31	RPM	1648	1236	989	824	618	494	396
						(25-37)	Fz	0.010	0.015	0.019	0.021	0.029	0.032	0.032
						Feed (mm/min)	111	133	133	157	159	174	139	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile	≤ 0.05	≤ 1	119	RPM	6301	4726	3781	3151	2363	1890	1512
						(95-143)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073
						Feed (mm/min)	847	1059	1059	1429	1415	1497	1206	
			 Finish	≤ 0.02	≤ 2	143	RPM	7561	5671	4537	3781	2836	2268	1815
						(114-171)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058
						Feed (mm/min)	813	1016	1016	1372	1359	1437	1158	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 Profile	≤ 0.05	≤ 1	43	RPM	2262	1696	1357	1131	848	679	543
						(34-51)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073
						Feed (mm/min)	304	380	380	513	508	537	433	
			 Finish	≤ 0.02	≤ 2	51	RPM	2714	2036	1629	1357	1018	814	651
						(41-61)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058
						Feed (mm/min)	292	365	365	492	488	516	416	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm



reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



METRIC Multi-Carb

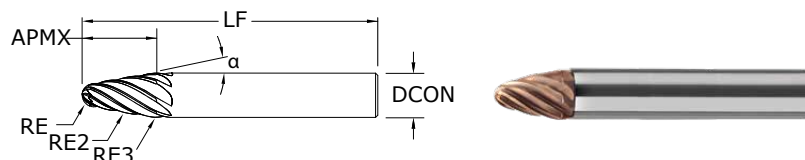

67B METRIC SERIES

TOLERANCES (mm)

DCON = h_6
RE = $+0,010/-0,010$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm								EDP NO.
SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	CENTERLINE ANGLE α	TIP RADIUS RE	TAPERED RADIUS RE2	BLENDED RADIUS RE3	NO. OF FLUTES	Ti-NAMITE®-H
6,0	9,5	58,0	17.5°	1,0	250,0	3,0	4	45700
6,0	8,0	58,0	17.5°	1,5	250,0	3,0	4	45701
8,0	10,5	80,0	20.0°	1,5	250,0	4,0	4	45702
8,0	9,5	80,0	20.0°	2,0	250,0	4,0	4	45703
10,0	12,5	89,0	20.0°	2,0	250,0	5,0	6	45704
10,0	11,5	89,0	20.0°	2,5	250,0	5,0	6	45705
12,0	13,5	100,0	20.0°	3,0	250,0	6,0	8	45706
12,0	14,4	100,0	20.0°	2,5	250,0	6,0	8	45707
12,0	20,0	100,0	14.0°	2,0	60,0	6,0	6	45708
16,0	31,0	109,0	12.5°	2,0	1000,0	5,0	6	45709
16,0	27,5	109,0	12.5°	3,0	1000,0	5,0	8	45710
16,0	24,0	109,0	12.5°	4,0	1000,0	5,0	8	45711
16,0	21,0	109,0	15.0°	4,0	1000,0	5,0	8	45712
16,0	18,5	109,0	20.0°	4,0	1500,0	8,0	8	45713
16,0	28,5	109,0	10.0°	4,0	1000,0	5,0	8	45714
16,0	19,0	109,0	20.0°	3,0	750,0	5,0	8	45715
16,0	15,0	109,0	30.0°	2,0	750,0	3,0	6	45716
16,0	18,5	109,0	20.0°	3,0	60,0	5,0	8	45717

- Designed to significantly improve traditional ball end applications
- Highly efficient at finishing and semi-finishing profiling
- Main application areas include profiling and pocket milling
- Especially suited to machining deep pockets and hard-to-reach areas without using long-reach tools
- Their versatility also allows for machining profiles and blends with one tool
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

Multi-Carb

			DCON	6		8		10		12		16	
			Ae max	0,20	0,45	0,25	0,55	0,30	0,60	0,35	0,65	0,40	0,70
			Diameter	3,0	6,0	4,0	8,0	5,0	10,0	6,0	12,0	8,0	16,0
													
Metric	Hardness (HRC)	Vc (m/min)	Cut Zone	RE	RE2	RE	RE2	RE	RE2	RE	RE2	RE	RE2
P Alloy Steels	≤28 (155-232)	194	RPM	20583	10292	15438	7719	12350	6175	10292	5146	7719	3859
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	1029	1235	1029	1235	1544	1853	1544	1853	1544	1853
	≤40 (88-132)	110	RPM	11671	5836	8753	4377	7003	3501	5836	2918	4377	2188
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,029	0,070
			Feed (mm/min)	389	467	438	525	700	840	729	875	766	919
P Tool Steels	≤35 (69-118)	93	RPM	9867	4934	7400	3700	5920	2960	4934	2467	3700	1850
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	493	592	493	592	740	888	740	888	740	888
	≤45 (51-77)	64	RPM	6790	3395	5093	2546	4074	2037	3395	1698	2546	1273
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	226	272	255	306	407	489	424	509	382	458
M Stainless Steels	≤28 (94-141)	117	RPM	12414	6207	9310	4655	7448	3724	6207	3103	4655	2328
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,029	0,070
			Feed (mm/min)	621	745	621	745	931	1117	931	1117	815	978
	≤35 (87-130)	108	RPM	11459	5729	8594	4297	6875	3438	5729	2865	4297	2149
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	382	458	430	516	688	825	716	859	645	773
S High Temperature Alloys	≤32 (26-38)	32	RPM	3395	1698	2546	1273	2037	1019	1698	849	1273	637
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	113	136	127	153	204	244	212	255	191	229
	≤43 (21-31)	26	RPM	2759	1379	2069	1034	1655	828	1379	690	1034	517
			Fz	0,004	0,010	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050
			Feed (mm/min)	46	55	69	83	124	149	138	166	129	155
S Titanium Alloys	≤35 (85-133)	109	RPM	11565	5782	8674	4337	6939	3469	5782	2891	4337	2168
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,029	0,070
			Feed (mm/min)	578	694	578	694	867	1041	867	1041	759	911
	≤45 (44-61)	53	RPM	5623	2812	4217	2109	3374	1687	2812	1406	2109	1054
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	187	225	211	253	337	405	351	422	316	380

$rpm = (Vc \times 1000) / (DC \times 3.14)$

Feed = Fz x No. of teeth x rpm

Adjust speed and feed according to material hardness


Consider rpm according to cutting area of tool being utilized

Avoid using tip of the tool where possible due to reduced chip space

Be aware of max cut Ae, especially on the lower portion of the tool

Medical applications:

- Titanium can be cut dry while keeping cut size to a minimum and providing good chip evacuation (air blast)
- For cobalt chrome applications, a surface speed of 45M/min is a guide (It can also be cut dry as per cobalt) refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

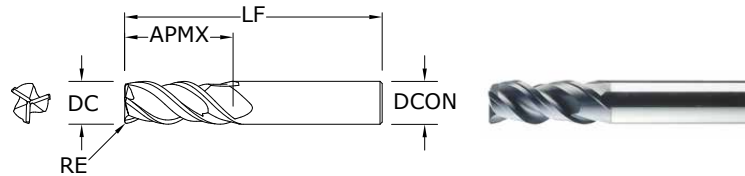

33CR

FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0020

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0020

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

	inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	.015	33345
3/16	9/16	2-1/2	1/4	.015	33346
1/4	3/4	2-1/2	1/4	.020	33347
5/16	13/16	2-1/2	5/16	.020	33348
3/8	1	2-1/2	3/8	.020	33349
7/16	1-1/8	2-3/4	7/16	.020	33350
1/2	1-1/4	3-1/4	1/2	.030	33351
5/8	1-1/2	3-1/2	5/8	.040	33352
3/4	1-3/4	4	3/4	.040	33353
1	2-1/4	5	1	.040	33354


- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

Series 33



Series 33CR Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in							
						1/8	1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	Profile 	≤ 0.5	≤ 1.5	550	RPM	16808	8404	5603	4202	3362	2801	2101
					(440-660)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
						Feed (ipm)	25.2	30.3	38.7	39.1	39.3	33.6	27.1
		Slot 	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681
					(352-528)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
						Feed (ipm)	20.2	24.2	30.9	31.3	31.5	26.9	21.7
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	Profile 	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203
					(252-378)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (ipm)	11.6	13.0	16.4	16.6	16.7	14.4	11.6
		Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
					(200-300)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (ipm)	9.2	10.3	13.0	13.2	13.3	11.5	9.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	Profile 	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707
					(148-222)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (ipm)	5.1	5.9	7.9	7.6	7.8	6.8	5.3
		Slot 	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554
					(116-174)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (ipm)	4.0	4.7	6.2	6.0	6.1	5.3	4.2
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	Profile 	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
					(392-588)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
						Feed (ipm)	17.1	22.5	28.5	28.1	27.9	24.0	19.7
		Slot 	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
						Feed (ipm)	13.6	17.9	22.6	22.3	22.2	19.1	15.6
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	Profile 	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
					(272-408)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
						Feed (ipm)	9.4	12.5	15.6	15.6	15.6	13.5	10.9
		Slot 	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
					(216-324)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
						Feed (ipm)	7.4	9.9	12.4	12.4	12.4	10.7	8.7
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	Profile 	≤ 0.5	≤ 1.5	310	RPM	9474	4737	3158	2368	1895	1579	1184
					(248-372)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
						Feed (ipm)	8.5	11.4	14.2	14.2	14.2	12.3	9.9
		Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
					(200-300)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
						Feed (ipm)	6.9	9.2	11.5	11.5	11.5	9.9	8.0

continued on next page



Series 33CR Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in							
						1/8	1/4	3/8	1/2	5/8	3/4	1	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.5	≤ 1.5	445	RPM	13599	6800	4533	3400	2720	2267	1700
					(356-534)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
						Feed (ipm)	14.3	22.4	28.6	28.6	24.5	19.9	
		Slot 	1	≤ 1	355	RPM	10849	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
						Feed (ipm)	11.4	17.9	22.8	22.8	19.5	15.9	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
					(272-408)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
						Feed (ipm)	9.4	12.5	16.6	16.4	14.0	11.3	
		Slot 	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
					(216-324)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
						Feed (ipm)	7.4	9.9	13.2	13.0	12.9	11.1	9.0
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.5	≤ 1.5	80	RPM	2445	1222	815	611	489	407	306
					(64-96)	Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024
						Feed (ipm)	1.9	2.6	3.2	3.1	3.1	2.7	2.2
		Slot 	1	≤ 1	65	RPM	1986	993	662	497	397	331	248
					(52-78)	Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024
						Feed (ipm)	1.5	2.1	2.6	2.5	2.5	2.2	1.8
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.5	≤ 1.5	62	RPM	1895	947	632	474	379	316	237
					(50-74)	Fz	0.0002	0.0005	0.0009	0.0012	0.0015	0.0016	0.0017
						Feed (ipm)	1.1	1.4	1.7	1.7	1.7	1.5	1.2
		Slot 	1	≤ 1	49	RPM	1497	749	499	374	299	250	187
					(39-59)	Fz	0.0002	0.0005	0.0009	0.0012	0.0015	0.0016	0.0017
						Feed (ipm)	0.9	1.1	1.3	1.3	1.3	1.2	1.0
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.5	≤ 1.5	215	RPM	6570	3285	2190	1643	1314	1095	821
					(172-258)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
						Feed (ipm)	5.9	7.9	9.9	9.9	9.9	8.5	6.9
		Slot 	1	≤ 1	170	RPM	5195	2598	1732	1299	1039	866	649
					(136-204)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
						Feed (ipm)	4.7	6.2	7.8	7.8	7.8	6.8	5.5
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.5	≤ 1.5	75	RPM	2292	1146	764	573	458	382	287
					(60-90)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
						Feed (ipm)	2.1	2.8	3.4	3.4	3.4	3.0	2.4
		Slot 	1	≤ 1	60	RPM	1834	917	611	458	367	306	229
					(48-72)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
						Feed (ipm)	1.7	2.2	2.8	2.8	2.8	2.4	1.9

Bhn (Brinell) HRC (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



33MCR

METRIC SERIES

- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

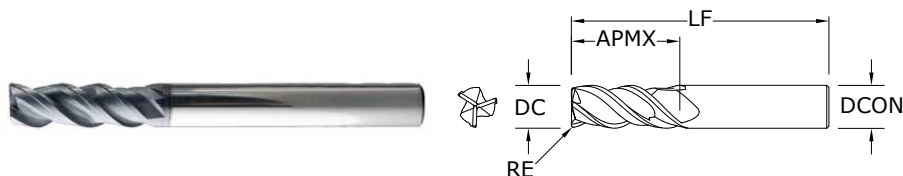

mm					EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)
3,0	9,0	57,0	6,0	0,3	43445
3,0	9,0	57,0	6,0	0,5	43470
4,0	12,0	57,0	6,0	0,3	43446
4,0	12,0	57,0	6,0	0,5	43471
5,0	15,0	57,0	6,0	0,3	43447
5,0	15,0	57,0	6,0	0,5	43472
6,0	18,0	57,0	6,0	0,5	43448
6,0	18,0	57,0	6,0	1,0	43473
6,0	18,0	57,0	6,0	1,5	43474
6,0	18,0	57,0	6,0	2,0	43475
8,0	20,0	63,0	8,0	0,5	43449
8,0	20,0	63,0	8,0	1,0	43476
8,0	20,0	63,0	8,0	1,5	43477
8,0	20,0	63,0	8,0	2,0	43478
10,0	27,0	72,0	10,0	0,5	43450
10,0	27,0	72,0	10,0	1,0	43479
10,0	27,0	72,0	10,0	1,5	43480
10,0	27,0	72,0	10,0	2,0	43481
10,0	27,0	72,0	10,0	2,5	43482
12,0	30,0	83,0	12,0	0,5	43451
12,0	30,0	83,0	12,0	1,0	43483
12,0	30,0	83,0	12,0	1,5	43484
12,0	30,0	83,0	12,0	2,0	43485
12,0	30,0	83,0	12,0	2,5	43486
12,0	30,0	83,0	12,0	3,0	43487
12,0	30,0	83,0	12,0	4,0	43488
16,0	38,0	92,0	16,0	1,0	43452
16,0	38,0	92,0	16,0	1,5	43489
16,0	38,0	92,0	16,0	2,0	43490
16,0	38,0	92,0	16,0	2,5	43491
16,0	38,0	92,0	16,0	3,0	43492
16,0	38,0	92,0	16,0	4,0	43493
20,0	46,0	104,0	20,0	1,0	43453
20,0	46,0	104,0	20,0	2,0	43494
20,0	46,0	104,0	20,0	2,5	43495
20,0	46,0	104,0	20,0	3,0	43496
20,0	46,0	104,0	20,0	4,0	43497

TOLERANCES (mm)

3-6 DIAMETER

DC = $+0,000/-0,030$ DCON = h_6 RE = $+0,000/-0,050$

>6-10 DIAMETER


DC = $+0,000/-0,040$ DCON = h_6 RE = $+0,000/-0,050$

>10-20 DIAMETER

DC = $+0,000/-0,050$ DCON = h_6 RE = $+0,000/-0,050$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com



Series 33MCR Metric		Hardness			Vc (m/min)	DC • mm									
			Ae x DC	Ap x DC		3	6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc		≤ 0.5	≤ 1.5	168	RPM	17773	8886	6665	5332	4443	3332	2666	
						(134-201)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107	
						Feed (mm/min)	640	768	981	981	992	998	853		
				1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	
						(107-161)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107	
						Feed (mm/min)	512	614	785	785	793	798	682		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc		≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	
						(77-115)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080	
						Feed (mm/min)	293	330	415	415	421	425	366		
				1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	
						(61-91)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080	
						Feed (mm/min)	233	262	330	330	334	337	291		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc		≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	
						(45-68)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	
						Feed (mm/min)	129	151	201	201	194	198	172		
				1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	
						(35-53)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	
						Feed (mm/min)	101	118	157	157	152	155	135		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc		≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375
							(119-179)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085
							Feed (mm/min)	433	570	722	722	712	707	608	
					1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890
							(95-143)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085
							Feed (mm/min)	345	454	575	575	567	563	484	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc		≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	
						(83-124)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	237	316	396	396	395	396	343		
				1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	
						(66-99)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	188	251	314	314	314	314	272		
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc		≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503	
						(76-113)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	216	288	361	361	361	361	313		
				1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	
						(61-91)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	174	233	291	291	291	291	252		

continued on next page

Series 33



Series 33MCR						Vc		DC • mm						
Metric	Hardness		Ae x DC	Ap x DC	(m/min)			3	6	8	10	12	16	20
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRC	Profile 	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157
						(109-163)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096
						Feed (mm/min)	362	569	725	725	725	725	621	
		≤ 260 Bhn or ≤ 19 HRC	Slot 	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721
						(87-130)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096
						Feed (mm/min)	289	454	578	578	578	578	496	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRC	Profile 	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648
						(83-124)	Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072
						Feed (mm/min)	237	316	422	422	415	411	356	
		≤ 260 Bhn or ≤ 26 HRC	Slot 	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309
						(66-99)	Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072
						Feed (mm/min)	188	251	335	335	330	327	283	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRC	Profile 	≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388
						(20-29)	Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059
						Feed (mm/min)	48	65	81	65	79	78	68	
		≤ 300 Bhn or ≤ 32 HRC	Slot 	1	≤ 1	20	RPM	2100	1050	788	630	525	394	315
						(16-24)	Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059
						Feed (mm/min)	39	53	66	66	64	64	55	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRC	Profile 	≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301
						(15-23)	Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043
						Feed (mm/min)	29	36	43	43	43	43	38	
		≤ 400 Bhn or ≤ 43 HRC	Slot 	1	≤ 1	15	RPM	1583	792	594	475	396	297	238
						(12-18)	Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043
						Feed (mm/min)	23	28	34	34	34	34	30	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRC	Profile 	≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042
						(52-79)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	150	200	250	250	250	250	217	
		≤ 350 Bhn or ≤ 38 HRC	Slot 	1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824
						(41-62)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	119	158	198	198	198	198	171	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRC	Profile 	≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364
						(18-27)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	52	70	87	87	87	87	76	
		≤ 420 Bhn or ≤ 45 HRC	Slot 	1	≤ 1	18	RPM	1939	969	727	582	485	364	291
						(15-22)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	42	56	70	70	70	70	60	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



7
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h₆

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X
1/8	3/4	2-1/4	1/8	70470
1/8	1	3	1/8	70471
3/16	3/4	2-1/2	3/16	70472
3/16	1-1/8	3	3/16	70473
1/4	1-1/8	3	1/4	70474
1/4	1-1/2	4	1/4	70475
5/16	1-1/8	3	5/16	70476
5/16	1-5/8	4	5/16	70477
3/8	1-1/8	3	3/8	70478
3/8	1-3/4	4	3/8	70479
7/16	2	4-1/2	7/16	70480
7/16	3	6	7/16	70481
1/2	2	4-1/2	1/2	70482
1/2	3	6	1/2	70483
5/8	2-1/4	5	5/8	70484
5/8	3	6	5/8	70485
3/4	2-1/4	5	3/4	70486
3/4	3	6	3/4	70487
1	2-1/4	5	1	70488
1	3	6	1	70489

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)



7B

FRACTIONAL SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)



inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X
1/8	3/4	2-1/4	1/8	70441
1/8	1	3	1/8	70442
3/16	3/4	2-1/2	3/16	70444
3/16	1-1/8	3	3/16	70445
1/4	1-1/8	3	1/4	70447
1/4	1-1/2	4	1/4	70448
5/16	1-1/8	3	5/16	70450
5/16	1-5/8	4	5/16	70451
3/8	1-1/8	3	3/8	70453
3/8	1-3/4	4	3/8	70454
7/16	2	4-1/2	7/16	70456
7/16	3	6	7/16	70457
1/2	2	4-1/2	1/2	70459
1/2	3	6	1/2	70460
5/8	2-1/4	5	5/8	70462
5/8	3	6	5/8	70463
3/4	2-1/4	5	3/4	70465
3/4	3	6	3/4	70466
1	2-1/4	5	1	70468
1	3	6	1	70469

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

DC = $+0.0000/-0.0020$

DCON = h_6

RE = $+0.0000/-0.0010$


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com



Series 7, 7B	Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	480	RPM	14669	7334	4890	3667	2934	2445	1834
						(384-576)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
							Feed (ipm)	23.5	29.3	37.2	36.7	37.6	32.3	25.7
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	275	RPM	8404	4202	2801	2101	1681	1401	1051
						(220-330)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (ipm)	10.1	11.8	15.7	15.1	15.5	13.4	10.9
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	230	RPM	7029	3514	2343	1757	1406	1171	879
						(184-276)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0022
							Feed (ipm)	5.6	8.4	11.2	11.2	11.2	9.8	7.7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	420	RPM	12835	6418	4278	3209	2567	2139	1604
						(336-504)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
							Feed (ipm)	20.5	25.7	32.5	32.1	32.9	28.2	22.5
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108
						(232-348)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (ipm)	10.6	12.4	16.5	16.0	16.3	14.2	11.5
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	265	RPM	8098	4049	2699	2025	1620	1350	1012
						(212-318)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (ipm)	9.7	11.3	15.1	14.6	14.9	13.0	10.5
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish 	≤ 0.02	≤ 2	605	RPM	18489	9244	6163	4622	3698	3081	2311
						(484-726)	Fz	0.0006	0.0015	0.0028	0.0037	0.0046	0.0047	0.0051
							Feed (ipm)	44.4	55.5	69.0	68.4	68.0	57.9	47.1
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish 	≤ 0.02	≤ 2	465	RPM	14210	7105	4737	3553	2842	2368	1776
						(372-558)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
							Feed (ipm)	22.7	31.3	39.8	39.8	38.7	34.1	27.7
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish 	≤ 0.02	≤ 2	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (ipm)	2.9	3.4	4.6	4.4	4.5	3.9	3.2
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	65	RPM	1986	993	662	497	397	331	248
						(52-78)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
							Feed (ipm)	1.6	2.4	2.6	2.8	2.7	2.4	1.9
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish 	≤ 0.02	≤ 2	300	RPM	9168	4584	3056	2292	1834	1528	1146
						(240-360)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
							Feed (ipm)	14.7	20.2	25.7	25.7	24.9	22.0	17.9
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Finish 	≤ 0.02	≤ 2	105	RPM	3209	1604	1070	802	642	535	401	
					(84-126)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
						Feed (ipm)	5.1	7.1	9.0	9.0	8.7	7.7	6.3	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC


ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

METRIC Series 7



7M METRIC SERIES


- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

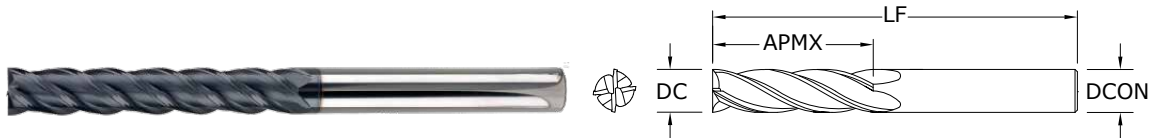


mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X
3,0	25,0	75,0	3,0	70551
4,0	25,0	75,0	4,0	70552
5,0	25,0	75,0	5,0	70553
6,0	25,0	75,0	6,0	70554
8,0	25,0	75,0	8,0	70555
10,0	38,0	100,0	10,0	70556
12,0	50,0	100,0	12,0	70557
12,0	75,0	150,0	12,0	70558
14,0	75,0	150,0	14,0	70559
16,0	75,0	150,0	16,0	70560
18,0	75,0	150,0	18,0	70561
20,0	75,0	150,0	20,0	70562
25,0	75,0	150,0	25,0	70563

TOLERANCES (mm)

DC = $+0,000/+0,050$
DCON = h_6



For patent information visit
www.ksptpatents.com



7MB METRIC SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)




mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X
3,0	25,0	75,0	3,0	70527
4,0	25,0	75,0	4,0	70529
5,0	25,0	75,0	5,0	70531
6,0	25,0	75,0	6,0	70533
8,0	25,0	75,0	8,0	70535
10,0	38,0	100,0	10,0	70537
12,0	50,0	100,0	12,0	70539
12,0	75,0	150,0	12,0	70540
14,0	75,0	150,0	14,0	70542
16,0	75,0	150,0	16,0	70544
18,0	75,0	150,0	18,0	70546
20,0	75,0	150,0	20,0	70548
25,0	75,0	150,0	25,0	70550


RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

DC = $+0,000/+0,050$
DCON = h_6
RE = $+0,000/-0,025$



For patent information visit
www.ksptpatents.com



Series 7M, 7MB Metric	Hardness		Ae x DC	Ap x DC	Vc (m/min)	DC • mm									
						3	6	8	10	12	16	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	146	RPM	15511	7755	5816	4653	3878	2908	2327	1861
						(117-176)	Fz	0.0166	0.043	0.075	0.093	0.110	0.125	0.147	0.160
							Feed (mm/min)	1030	1334	1745	1731	1706	1454	1368	1191
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	84	RPM	8886	4443	3332	2666	2222	1666	1333	1066
						(67-101)	Fz	0.0122	0.034	0.051	0.069	0.082	0.091	0.109	0.120
							Feed (mm/min)	434	604	680	736	729	606	581	512
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	70	RPM	7432	3716	2787	2230	1858	1394	1115	892
						(56-84)	Fz	0.0070	0.019	0.040	0.043	0.048	0.057	0.064	0.070
							Feed (mm/min)	208	282	446	384	357	318	285	250
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	128	RPM	13572	6786	5089	4072	3393	2545	2036	1629
						(102-154)	Fz	0.0086	0.024	0.040	0.048	0.058	0.065	0.077	0.087
							Feed (mm/min)	467	651	814	782	787	662	627	567
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	88	RPM	9371	4686	3514	2811	2343	1757	1406	1125
						(71-106)	Fz	0.0082	0.022	0.037	0.045	0.048	0.060	0.072	0.078
							Feed (mm/min)	307	412	520	506	450	422	405	351
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	81	RPM	8563	4282	3211	2569	2141	1606	1284	1028
						(65-97)	Fz	0.0070	0.019	0.029	0.040	0.048	0.055	0.064	0.070
							Feed (mm/min)	240	325	372	411	411	353	329	288
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish 	≤ 0.02	≤ 2	184	RPM	19550	9775	7331	5865	4887	3666	2932	2346
						(148-221)	Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130
							Feed (mm/min)	1032	1408	1525	1759	1740	1452	1372	1220
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish 	≤ 0.02	≤ 2	142	RPM	15026	7513	5635	4508	3756	2817	2254	1803
						(113-170)	Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130
							Feed (mm/min)	793	1082	1172	1352	1337	1116	1055	938
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish 	≤ 0.02	≤ 2	24	RPM	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.0072	0.019	0.029	0.037	0.046	0.053	0.061	0.085
							Feed (mm/min)	74	98	112	90	119	103	95	105
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	20	RPM	2100	1050	788	630	525	394	315	252
						(16-24)	Fz	0.0075	0.016	0.021	0.030	0.038	0.044	0.051	0.070
							Feed (mm/min)	63	67	66	76	80	69	64	71
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish 	≤ 0.02	≤ 2	91	RPM	9694	4847	3635	2908	2424	1818	1454	1163
						(73-110)	Fz	0.0091	0.024	0.040	0.050	0.060	0.070	0.080	0.088
							Feed (mm/min)	353	465	51	59	582	509	465	409
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Finish 	≤ 0.02	≤ 2	32	RPM	3393	1696	1272	1018	848	636	509	407	
					(26-38)	Fz	0.0082	0.019	0.029	0.037	0.046	0.053	0.061	0.085	
						Feed (mm/min)	111	129	148	151	156	135	124	138	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



56B

FRACTIONAL SERIES

- Short flute length and rigid design to reduce deflection
- S-Gash Ball geometry minimizes load and heat produced during the cutting process, ultimately enhancing tool life
- Ideal for machining complex contoured shapes in hardened steels
- Recommended for materials 35 to 60 HRc (327 to 654 Bhn)

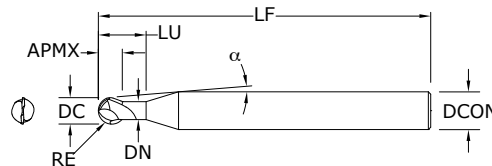

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.
			SHANK DIAMETER DCON	CENTER LINE ANGLE α	REACH LU	NECK DIAMETER DN	
1/32	1/32	3	1/4	8°20'	1/16	.025	93272
1/16	1/16	3	1/4	7°40'	1/8	.055	93273
3/32	3/32	3	1/4	6°50'	3/16	.085	93274
1/8	1/8	3	1/4	6°	1/4	.114	93275
3/16	3/16	3	1/4	3°35'	3/8	.171	93276
1/4	1/4	3-1/2	1/4	—	1/2	.230	93277
5/16	5/16	4	5/16	—	5/8	.292	93278
3/8	3/8	4	3/8	—	3/4	.355	93279
1/2	1/2	4-1/2	1/2	—	1	.480	93280
5/8	5/8	5-1/2	5/8	—	1-1/4	.610	93281
3/4	3/4	6-1/2	3/4	—	1-1/2	.735	93282

Extended Neck Option Available, contact your local KSPT representative for more information.
 RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/32–3/32 DIAMETER

DC = +0.0000/–0.0010

DCON = h_6

RE = +0.0000/–0.0005

>3/32–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–3/4 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS

HARDENED STEELS

For patent


information visit

www.ksptpatents.com

56MB

METRIC SERIES

- Short flute length and rigid design to reduce deflection
- S-Gash Ball geometry minimizes load and heat produced during the cutting process, ultimately enhancing tool life
- Ideal for machining complex contoured shapes in hardened steels
- Recommended for materials 35 to 60 HRc (327 to 654 Bhn)

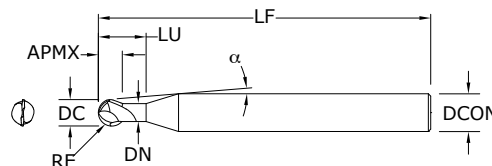

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.
			SHANK DIAMETER DCON	CENTER LINE ANGLE α	REACH LU	NECK DIAMETER DN	
1,0	1,0	76,0	6,0	8°10'	2,0	0,91	91349
1,5	1,5	76,0	6,0	7°45'	3,0	1,37	91350
2,0	2,0	76,0	6,0	7°10'	4,0	1,83	91351
2,5	2,5	76,0	6,0	6°35'	5,0	2,29	91352
3,0	3,0	76,0	6,0	6°	6,0	2,72	91353
4,0	4,0	76,0	6,0	4°30'	8,0	3,63	91354
5,0	5,0	89,0	6,0	2°30'	10,0	4,55	91355
6,0	6,0	89,0	6,0	—	12,0	5,49	91356
8,0	8,0	102,0	8,0	—	16,0	7,49	91357
10,0	10,0	102,0	10,0	—	20,0	9,47	91358
12,0	12,0	114,0	12,0	—	24,0	11,48	91359
16,0	16,0	140,0	16,0	—	32,0	15,62	91360
20,0	20,0	165,0	20,0	—	40,0	19,61	91361

Extended Neck Option Available, contact your local KSPT representative for more information.
 RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

1–2,5 DIAMETER

DC = +0,000/–0,025

DCON = h_6

RE = +0,000/–0,0013

>2,5–6 DIAMETER

DC = +0,000/–0,030

DCON = h_6

RE = +0,000/–0,0013

>6–10 DIAMETER

DC = +0,000/–0,040

DCON = h_6

RE = +0,000/–0,0020

>10–20 DIAMETER

DC = +0,000/–0,050

DCON = h_6

RE = +0,000/–0,0025


STEELS

HARDENED STEELS


For patent

information visit


www.ksptpatents.com

Series 56B						DC • in								
Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)		1/32	1/16	1/8	3/16	1/4	3/8	1/2	3/4	
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 0.4	≤ 0.1	625	RPM	76400	38200	19100	12733	9550	6367	4775	3183
					(500-750)	Fz	0.0006	0.0015	0.0030	0.0040	0.0050	0.0080	0.0100	0.0120
			≤ 0.4	≤ 0.03	950	RPM	116128	58064	29032	19355	14516	9677	7258	4839
					(760-1140)	Fz	0.0007	0.0017	0.0033	0.0044	0.0060	0.0088	0.0110	0.0130
			≤ 0.4	≤ 0.03	950	RPM	116128	58064	29032	19355	14516	9677	7258	4839
					(760-1140)	Fz	0.0007	0.0017	0.0033	0.0044	0.0060	0.0088	0.0110	0.0130
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 0.4	≤ 0.05	750	RPM	91680	45840	22920	15280	11460	7640	5730	3820
					(600-900)	Fz	0.0005	0.0011	0.0023	0.0030	0.0038	0.0060	0.0075	0.0085
			≤ 0.4	≤ 0.02	1150	RPM	140576	70288	35144	23429	17572	11715	8786	5857
					(920-1380)	Fz	0.0006	0.0012	0.0025	0.0033	0.0042	0.0066	0.0082	0.0100
			≤ 0.4	≤ 0.02	1150	RPM	140576	70288	35144	23429	17572	11715	8786	5857
					(920-1380)	Fz	0.0006	0.0012	0.0025	0.0033	0.0042	0.0066	0.0082	0.0100
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 0.4	≤ 0.04	500	RPM	61120	30560	15280	10187	7640	5093	3820	2547
					(400-600)	Fz	0.0004	0.0008	0.0017	0.0023	0.0029	0.0045	0.0057	0.0063
			≤ 0.4	≤ 0.01	1000	RPM	122240	61120	30560	20373	15280	10187	7640	5093
					(800-1200)	Fz	0.0005	0.0009	0.0019	0.0025	0.0032	0.0050	0.0063	0.0071
			≤ 0.4	≤ 0.01	1000	RPM	122240	61120	30560	20373	15280	10187	7640	5093
					(800-1200)	Fz	0.0005	0.0009	0.0019	0.0025	0.0032	0.0050	0.0063	0.0071

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 2 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Series 56MB Metric		Hardness			Vc (m/min)	DC • mm										
			Ae x DC	Ap x DC		1	1.5	3	5	6	10	12	20			
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRC	Rough 	≤ 0.4	≤ 0.1	191	RPM	60748	40498	20249	12150	10125	6075	5062	3037	
			HSM 	≤ 0.4	≤ 0.03	(153-229)	Fz	0.015	0.038	0.076	0.102	0.127	0.203	0.254	0.305	
						Feed (mm/min)	1822	3078	3078	2479	2572	2466	2572	1853		
		H	≤ 475 Bhn or ≤ 50 HRC	HSM 	≤ 0.4	≤ 0.02	290	RPM	92235	61490	46117	18447	15372	9223	7686	4612
							(232-348)	Fz	0.018	0.043	0.084	0.112	0.117	0.224	0.279	0.330
							Feed (mm/min)	3320	5288	7748	4132	3597	4132	4289	3044	
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRC	Rough 	≤ 0.4	≤ 0.04	229	RPM	72833	48556	24278	14567	12139	7283	6069	3642	
						(183-275)	Fz	0.013	0.028	0.058	0.076	0.097	0.152	0.191	0.216	
							Feed (mm/min)	1894	2719	2816	2214	2355	2214	2319	1573	
			HSM 	≤ 0.4	≤ 0.01	351	RPM	111636	74424	37212	22327	18606	11164	9303	5582	
						(281-421)	Fz	0.015	0.030	0.064	0.084	0.107	0.168	0.208	0.254	
						Feed (mm/min)	3349	4465	4763	3751	3982	3751	3870	2836		
		H	≤ 655 Bhn or ≤ 60 HRC	Rough 	≤ 0.4	≤ 0.04	152	RPM	48344	32229	16115	9669	8057	4834	4029	2417
							(122-182)	Fz	0.010	0.020	0.043	0.058	0.074	0.114	0.145	0.160
								Feed (mm/min)	967	1289	1386	1122	1192	1102	1168	773
				HSM 	≤ 0.4	≤ 0.01	305	RPM	97005	64670	32335	19401	16168	9701	8084	4850
							(244-366)	Fz	0.013	0.023	0.048	0.064	0.081	0.127	0.160	0.180
							Feed (mm/min)	2522	2975	3104	2483	2619	2464	2587	1746	


Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $rpm = (Vc \times 1000) / (DC \times 3.14)$
 $mm/min = Fz \times 2 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



57

FRACTIONAL SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

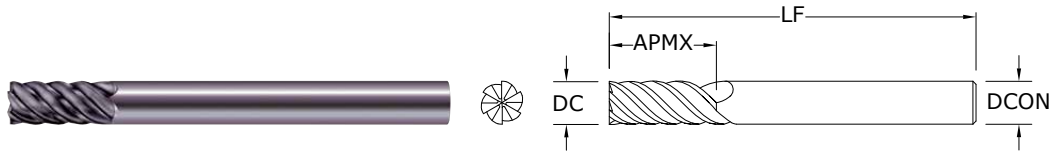

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X
1/4	17/32	3-1/2	1/4	36140
5/16	11/16	4	5/16	36141
3/8	13/16	4	3/8	36142
1/2	1-3/32	4-1/2	1/2	36143

Neck Option Available

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

5/16 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

1/2 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

STEELS


HARDENED STEELS

For patent information visit
www.ksptpatents.com

57M

METRIC SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

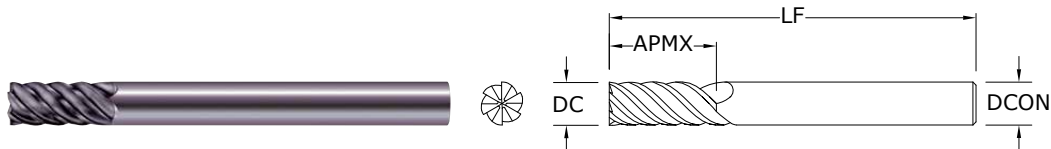

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X
6,0	13,0	89,0	6,0	46140
8,0	18,0	102,0	8,0	46141
10,0	22,0	102,0	10,0	46142
12,0	26,0	114,0	12,0	46143
16,0	32,0	140,0	16,0	46145
20,0	38,0	165,0	20,0	46147

Neck Option Available

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h₆

8 DIAMETER

DC = +0,000/-0,040

DCON = h₆

10 DIAMETER

DC = +0,000/-0,040

DCON = h₆

12-20 DIAMETER


DC = +0,000/-0,050

DCON = h₆

STEELS


HARDENED STEELS

For patent information visit
www.ksptpatents.com



Series 57	Fractional	Hardness			Vc (sfm)	DC • in								
						1/4	5/16	3/8	1/2					
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 420 Bhn or ≤ 45 HRc		1	≤ 0.3	215	RPM	3285	2628	2190	1643			
						(172-258)	Fz	0.0013	0.0019	0.0025	0.0031			
							Feed (ipm)	26	30	33	31			
				≤ 0.1	≤ 1.5	265	RPM	4049	3239	2699	2025			
						(212-318)	Fz	0.0018	0.0026	0.0035	0.0044			
							Feed (ipm)	44	51	57	53			
				≤ 0.04	≤ 1.5	560	RPM	8557	6845	5705	4278			
						(448-672)	Fz	0.0022	0.0033	0.0044	0.0055			
							Feed (ipm)	113	136	151	141			
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 560 Bhn or ≤ 55 HRc		1	≤ 0.3	120	RPM	1834	1467	1222	917			
						(96-144)	Fz	0.0010	0.0015	0.0020	0.0025			
							Feed (ipm)	11	13	15	14			
				≤ 0.1	≤ 1.5	150	RPM	2292	1834	1528	1146			
						(120-180)	Fz	0.0014	0.0021	0.0028	0.0035			
							Feed (ipm)	19	23	26	24			
				≤ 0.04	≤ 1.5	490	RPM	7487	5990	4991	3744			
						(392-588)	Fz	0.0018	0.0026	0.0035	0.0044			
							Feed (ipm)	81	93	105	99			
				1	≤ 0.3	65	RPM	993	795	662	497			
						(52-78)	Fz	0.0008	0.0011	0.0015	0.0019			
							Feed (ipm)	5	5	6	6			
							≤ 0.1	≤ 1.5	80	RPM	1222	978	815	611
									(64-96)	Fz	0.0011	0.0016	0.0021	0.0026
										Feed (ipm)	8	9	10	10
							≤ 0.04	≤ 1.5	250	RPM	3820	3056	2547	1910
									(200-300)	Fz	0.0013	0.0019	0.0025	0.0031
										Feed (ipm)	30	35	38	36

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 6 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Series 57M	Metric	Hardness	Ae Ap		Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		6	8	10	12	16	20		
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 420 Bhn or ≤ 45 HRc	Slot	1	≤ 0.3	66	RPM	3499	2624	2099	1749	1312	1050
						(53-79)	Fz	0.032	0.048	0.064	0.079	0.094	0.109
						Feed (mm/min)	672	756	806	829	740	686	
			Profile	≤ 0.1	≤ 1.5	81	RPM	4294	3220	2576	2147	1610	1288
						(65-97)	Fz	0.046	0.066	0.089	0.112	0.132	0.152
						Feed (mm/min)	1185	1275	1376	1443	1275	1175	
			HSM	≤ 0.04	≤ 1.5	171	RPM	9064	6798	5439	4532	3399	2719
						(137-205)	Fz	0.056	0.084	0.112	0.140	0.170	0.200
						Feed (mm/min)	3046	3426	3655	3807	3467	3263	
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 560 Bhn or ≤ 55 HRc	Slot	1	≤ 0.3	37	RPM	1961	1471	1177	981	735	588
						(30-44)	Fz	0.025	0.038	0.051	0.064	0.077	0.090
						Feed (mm/min)	294	335	360	377	340	318	
			Profile	≤ 0.1	≤ 1.5	46	RPM	2438	1829	1463	1219	914	732
						(37-55)	Fz	0.036	0.053	0.071	0.089	0.107	0.125
						Feed (mm/min)	527	582	623	651	587	549	
			HSM	≤ 0.04	≤ 1.5	149	RPM	7898	5924	4739	3949	2962	2369
						(119-179)	Fz	0.046	0.066	0.089	0.112	0.135	0.158
						Feed (mm/min)	2180	2346	2531	2654	2399	2246	
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 740 Bhn or ≤ 65 HRc	Slot	1	≤ 0.3	20	RPM	1060	795	636	530	398	318
						(16-24)	Fz	0.020	0.028	0.038	0.048	0.058	0.068
						Feed (mm/min)	127	134	145	153	138	130	
			Profile	≤ 0.1	≤ 1.5	24	RPM	1272	954	763	636	477	382
						(19-29)	Fz	0.028	0.041	0.053	0.066	0.078	0.090
						Feed (mm/min)	214	235	243	252	223	206	
			HSM	≤ 0.04	≤ 1.5	76	RPM	4029	3021	2417	2014	1511	1209
						(61-91)	Fz	0.033	0.048	0.064	0.079	0.094	0.109
						Feed (mm/min)	798	870	928	955	852	790	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = (Vc x 1000) / (DC x 3.14)



mm/min = Fz x 6 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

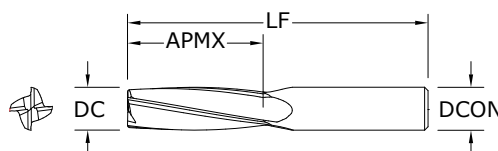

27
 FRACTIONAL SERIES

TOLERANCES (inch)
 $DC = +0.0000/-0.0030$
 $DCON = h_6$
NON-FERROUS

 For patent
 information visit
www.ksptpatents.com

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	72978	72979
3/8	1-1/8	2-1/2	3/8	72980	72981
1/2	1-1/2	3-1/2	1/2	72982	72983
3/4	1-3/8	4	3/4	72984	72985

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites

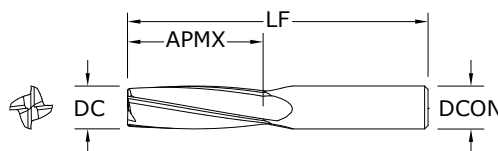
27M
 METRIC SERIES


TOLERANCES (mm)
 $DC = +0,000/-0,080$
 $DCON = h_6$
NON-FERROUS

 For patent
 information visit
www.ksptpatents.com

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	83056	83057
8,0	25,0	63,0	8,0	83058	83059
10,0	28,0	63,0	10,0	83060	83061
12,0	38,0	89,0	12,0	83062	83063
16,0	48,0	115,0	16,0	83064	83065

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites


FRACTIONAL Series 27



Series 27 Fractional			Vc (sfm)		DC • in			
	Ae x DC	Ap x DC			1/4	3/8	1/2	3/4
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1 ≤ 1	400	RPM	6112	4075	3056	2037
			(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	Profile 	≤ 0.5 ≤ 1.5	500	RPM	7640	5093	3820	2547
			(400-600)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	49	61	61	49
	HSM 	≤ 0.5 ≤ 2	825	RPM	12606	8404	6303	4202
			(660-990)	Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	187	232	232	185
GFRP (FIBERGLASS)	Slot 	1 ≤ 1	320	RPM	4890	3260	2445	1630
			(256-384)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	31	39	39	31
	Profile 	≤ 0.5 ≤ 1.5	400	RPM	6112	4075	3056	2037
			(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	HSM 	≤ 0.5 ≤ 2	660	RPM	10085	6723	5042	3362
			(528-792)	Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	149	186	186	148
N CARBON, GRAPHITE	Slot 	1 ≤ 1	480	RPM	7334	4890	3667	2445
			(384-576)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	59	74	73	59
	Profile 	≤ 0.5 ≤ 1.5	600	RPM	9168	6112	4584	3056
			(480-720)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	73	93	92	73
	HSM 	≤ 0.5 ≤ 2	990	RPM	15127	10085	7564	5042
			(792-1188)	Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	278	347	348	278
PLASTICS	Slot 	1 ≤ 1	800	RPM	12224	8149	6112	4075
			(640-690)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	98	124	122	98
	Profile 	≤ 0.5 ≤ 1.5	1000	RPM	15280	10187	7640	5093
			(800-1200)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	122	155	153	122
	HSM 	≤ 0.5 ≤ 2	1650	RPM	25212	16808	12606	8404
			(1320-1980)	Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	464	578	580	464
MACHINABLE CERAMICS MACHINABLE GLASS	Slot 	1 ≤ 1	40	RPM	611	407	306	204
			(32-48)	Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.0	2.4	2.4	2.0
	Profile 	≤ 0.5 ≤ 1.5	50	RPM	764	509	382	255
			(40-60)	Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.4	3.1	3.1	2.4
	HSM 	≤ 0.5 ≤ 2	85	RPM	1299	866	649	433
			(68-102)	Fz	0.0018	0.0034	0.0046	0.0055
				Feed (ipm)	9.4	11.8	11.9	9.5

HSM (High Speed Machining)
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 4 \times rpm$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur
 finish cuts typically required reduced feed and cutting depths



rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information
www.kyocera-sgtool.com



Series 27M Metric				Vc (m/min)	DC • mm					
		Ae x DC	Ap x DC		6	8	10	12	16	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120	RPM	6361	4771	3817	3181	2385
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	1018	1240	1145	1272	1145
		≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976	2982
				(120-180)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	1272	1550	1431	1590	1431
		≤ 0.5	≤ 2	250	RPM	13252	9939	7951	6626	4970
				(200-300)	Fz	0.095	0.145	0.175	0.235	0.280
					Feed (mm/min)	5036	5765	5566	6228	5566
GFRP (FIBERGLASS)		1	≤ 1	100	RPM	5301	3976	3181	2650	1988
				(80-120)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	848	1034	954	1060	954
		≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181	2385
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	1018	1240	1145	1272	1145
		≤ 0.5	≤ 2	200	RPM	10602	7951	6361	5301	3976
				(160-240)	Fz	0.095	0.145	0.175	0.235	0.280
					Feed (mm/min)	4029	4612	4453	4983	4453
CARBON, GRAPHITE		1	≤ 1	145	RPM	7686	5765	4612	3843	2882
				(116-174)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	1537	1845	1752	1922	1729
		≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903	3677
				(148-222)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	1961	2354	2236	2452	2206
		≤ 0.5	≤ 2	300	RPM	15903	11927	9542	7951	5963
				(240-360)	Fz	0.115	0.185	0.220	0.290	0.350
					Feed (mm/min)	7315	8826	8397	9223	8349
PLASTICS		1	≤ 1	245	RPM	12987	9740	7792	6494	4870
				(196-294)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	2597	3117	2961	3247	2922
		≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084	6063
				(244-366)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	3234	3880	3686	4042	3638
		≤ 0.5	≤ 2	505	RPM	26769	20077	16062	13385	10038
				(404-606)	Fz	0.115	0.185	0.220	0.290	0.350
					Feed (mm/min)	12314	14857	14134	15526	14054
MACHINABLE CERAMICS MACHINABLE GLASS		1	≤ 1	10	RPM	530	398	318	265	199
				(8-12)	Fz	0.020	0.035	0.045	0.050	0.060
					Feed (mm/min)	42	56	57	53	48
		≤ 0.5	≤ 1.5	15	RPM	795	596	477	398	298
				(12-18)	Fz	0.020	0.035	0.045	0.050	0.060
					Feed (mm/min)	64	83	86	80	72
		≤ 0.5	≤ 2	25	RPM	1325	994	795	663	497
				(20-30)	Fz	0.045	0.075	0.085	0.115	0.140
					Feed (mm/min)	239	298	270	305	278

HSM (High Speed Machining)
 $\text{rpm} = Vc \times 3.82 / DC$
 $\text{mm/min} = Fz \times 4 \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur
 finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information
www.kyocera-sgtool.com

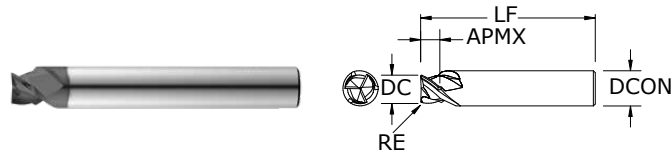

Ferrous Recoil Groove Tool

FRACTIONAL SERIES

- Open Flute design improves chip removal at high feed rates
- Specially engineered flute shape for improved chip control
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- Meets MIL-STD 1913

inch				EDP NO.	
CUTTING DIAMETER DC	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	Ti-NAMITE®-A (TA) Ti-NAMITE®-M (TM)
0.2100	1/4	0.118	1-3/4	.010	33360 33361

TOLERANCES (inch)

DC = +0.0080/-0.0000

APMX = +0.0060/-0.0000

DCON = h₆

RE = +0.0000/-0.0005



STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit

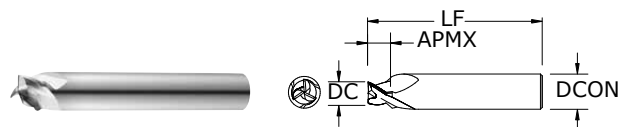www.ksptpatents.com


Non-Ferrous Recoil Groove Tool

FRACTIONAL SERIES

- Open Flute design improves chip removal at high feed rates
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- 45 degree chamfer enables slot and deburr in one operation
- Meets MIL-STD 1913

inch				EDP NO.	
CUTTING DIAMETER DC	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2100	1/4	0.118	1-3/4	34760	34761

TOLERANCES (inch)

DC = +0.0080/-0.0000

APMX = +0.0060/-0.0000


DCON = h₆

NON-FERROUS

For patent
information visit

www.ksptpatents.com

Picatinny Rail Ferrous Recoil Groove Tool



Picatinny Rail Recoil Groove Tool 3 Flute Made to MIL-STD-1913						Vc (sfm)	DC • in	
Hardness				Ae x DC	Ap x DC		0.2100	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	440 (352-528)	RPM	8004
							Fz	0.0009
							Feed (ipm)	22.99
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Slot 	0.210	0.118	250 (200-300)	RPM	4548
							Fz	0.0006
							Feed (ipm)	9.79
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Slot 	0.210	0.118	145 (116-174)	RPM	2638
							Fz	0.0005
							Feed (ipm)	4.47
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	390 (312-468)	RPM	7094
							Fz	0.0007
							Feed (ipm)	17.01
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	270 (216-324)	RPM	4911
							Fz	0.0006
							Feed (ipm)	9.41
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Slot 	0.210	0.118	250 (200-300)	RPM	4548
							Fz	0.0006
							Feed (ipm)	8.74
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Slot 	0.210	0.118	270 (216-324)	RPM	4911
							Fz	0.0006
							Feed (ipm)	9.41
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Slot 	0.210	0.118	65 (52-78)	RPM	1182
							Fz	0.0005
							Feed (ipm)	2.00
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Slot 	0.210	0.118	49 (39-59)	RPM	891
							Fz	0.0004
							Feed (ipm)	1.05
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Slot 	0.210	0.118	170 (136-204)	RPM	3092
							Fz	0.0006
							Feed (ipm)	5.89
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Slot 	0.210	0.118	60 (48-72)	RPM	1091
							Fz	0.0006
							Feed (ipm)	2.09

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

$\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$

$\text{ipm} = \text{Fz} \times 3 \times \text{rpm}$


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Picatinny Rail Non-Ferrous Recoil Groove Tool

Picatinny Rail
Non-Ferrous Recoil
Groove Tool
3 Flute
Made to MIL-STD-1913



	Hardness	Slot	Ae x DC	Ap x DC	Vc (sfm)	DC • in	
						0.2100	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	Slot 	0.210	0.118	1600 (1280-1920)	RPM	29105
						Fz	0.0026
						Feed (ipm)	227.89
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	Slot 	0.210	0.118	600 (480-720)	RPM	10914
						Fz	0.0026
						Feed (ipm)	85.46
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	Slot 	0.210	0.118	345 (276-414)	RPM	6276
						Fz	0.0022
						Feed (ipm)	40.79
	PLASTICS Polycarbonate, PVC, Polypropylene	Slot 	0.210	0.118	1600 (1280-1920)	RPM	29105
						Fz	0.0044
						Feed (ipm)	380.58

Bhn (Brinell) HRC (Rockwell C) HRB (Rockwell B)
when recommended speed exceeds your capability, use maximum available and recalculate ipm
rpm = Vc x 3.82 / DC
ipm = Fz x 3 x rpm
reduce speed and feed for materials harder than listed
reduce feed and Ae when finish milling (.02 x DC maximum)
refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

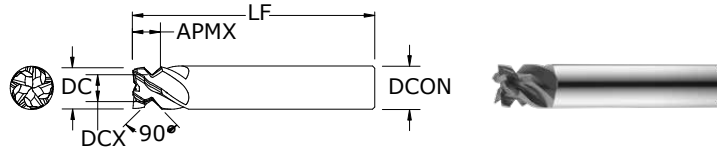

TOLERANCES (inch)

DC = +0.0010/-0.0010

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS



For patent
information visit
www.ksptpatents.com

Ferrous Dovetail Form Tool

FRACTIONAL SERIES

CUTTING DIAMETER DC	INNER CUTTING DIAMETER DCX	inch		LENGTH OF CUT APMX	OVERALL LENGTH LF	EDP NO.	
		SHANK DIAMETER DCON				Ti-NAMITE®-A (TA)	Ti-NAMITE®-M (TM)
0.6050	0.384	5/8		0.410	3-1/2	37391	37390

- Five-flute design allows for higher machining parameters
- Open end work design allows for increased chip space
- Square end configuration with enhanced corner strength to improve corner durability
- Meets MIL-STD 1913

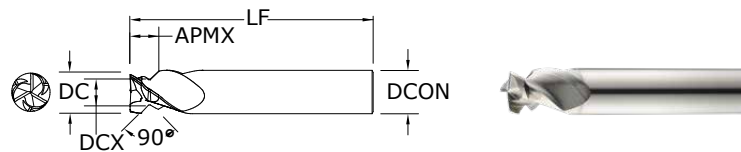

TOLERANCES (inch)

DC = +0.0010/-0.0010

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com


Non-Ferrous Dovetail Form Tool


FRACTIONAL SERIES

CUTTING DIAMETER DC	INNER CUTTING DIAMETER DCX	inch		LENGTH OF CUT APMX	OVERALL LENGTH LF	EDP NO.	
		SHANK DIAMETER DCON				UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.6050	0.384	5/8		0.410	3-1/2	34762	34763

- Open Flute design improves chip removal at high feed rates
- Specially engineered flute shape for improved chip control
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- Meets MIL-STD 1913

Picatinny Rail Ferrous Dovetail Form Tool



Picatinny Rail Dovetail Form Tool 5 Flute Made to MIL-STD-1913						Vc		DC • in	
Hardness				Ae x DC	Ap x DC	(sfm)	0.6050		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	450 (360-540)	RPM	2841	
							Fz	0.0032	
							Feed (ipm)	46.03	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ .50	APMX	260 (208-312)	RPM	1642	
							Fz	0.0024	
							Feed (ipm)	19.68	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ .50	APMX	145 (116-174)	RPM	916	
							Fz	0.0019	
							Feed (ipm)	8.60	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	400 (320-480)	RPM	2526	
							Fz	0.0024	
							Feed (ipm)	30.28	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	280 (224-336)	RPM	1768	
							Fz	0.0019	
							Feed (ipm)	16.61	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ .50	APMX	260 (208-312)	RPM	1642	
							Fz	0.0019	
							Feed (ipm)	15.42	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ .50	APMX	280 (224-336)	RPM	1768	
							Fz	0.0029	
							Feed (ipm)	25.78	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ .50	APMX	75 (60-90)	RPM	474	
							Fz	0.0018	
							Feed (ipm)	4.22	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ .50	APMX	60 (48-72)	RPM	379	
							Fz	0.0013	
							Feed (ipm)	2.39	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ .50	APMX	180 (144-216)	RPM	1137	
							Fz	0.0021	
							Feed (ipm)	11.97	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile 	≤ .50	APMX	70 (56-84)	RPM	442		
						Fz	0.0021		
						Feed (ipm)	4.65		

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC


ipm = Fz x 5 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Picatinny Rail Non-Ferrous Dovetail Form Tool



Picatinny Rail Dovetail Form Tool 3 Flute Made to MIL-STD-1913					Vc (sfm)	DC • in		
Hardness			Ae x DC	Ap x DC		0.6050		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn	Profile	≤ .50	APMX	2000 (1600-2400)	RPM	12628
		or ≤ 88 HRb					Fz	0.0056
							Feed (ipm)	211.39
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn	Profile	≤ .50	APMX	750 (600-900)	RPM	4736
		or ≤ 77 HRb					Fz	0.0056
							Feed (ipm)	79.27
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn	Profile	≤ .50	APMX	430 (344-516)	RPM	2715
		or ≤ 3 HRc					Fz	0.0046
							Feed (ipm)	37.72
	PLASTICS Polycarbonate, PVC, Polypropylene		Profile	≤ .50	APMX	2000 (1600-2400)	RPM	12628
							Fz	0.0093
							Feed (ipm)	353.03

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 when recommended speed exceeds your capability, use maximum available and recalculate ipm
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fz} \times 3 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

High Performance Aluminum End Mills



Milling

HIGH PERFORMANCE ALUMINUM END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
S-Carb APR® & APF®	43APR-3	3 Flute Advanced Productivity Rougher Fractional	133	134
	43APR-3	3 Flute Advanced Productivity Rougher Metric	135	137
	43APR-4	4 Flute Advanced Productivity Rougher Metric	136	137
	43APF	4 Flute Advanced Productivity Finisher Fractional	138	139
	43MAPF	4 Flute Advanced Productivity Finisher Metric	140	141
S-Carb APF-B®	43APF-B	Multi-Flute Advanced Productivity Finisher Metric	142	143
S-Carb® (3 Flute)	43	3 Flute Non-Ferrous Square End Fractional	144	156
	43CR	3 Flute Non-Ferrous Corner Radius Fractional	144	156
	43L	3 Flute Non-Ferrous Square End Long Reach Fractional	148	156
	43LC	3 Flute Non-Ferrous Corner Radius End Long Reach Fractional	148	156
	43EC	3 Flute Non-Ferrous Square End Extra Long Reach Fractional	151	156
	43B	3 Flute Non-Ferrous Ball End Fractional	152	156
	43LB	3 Flute Non-Ferrous Ball End Long Reach Fractional	153	156
	43EB	3 Flute Non-Ferrous Ball End Extra Long Reach Fractional	153	156
	43M	3 Flute Non-Ferrous Square End Metric (Unpolished Flutes)	157	165
	43M	3 Flute Non-Ferrous Square End Metric (Polished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius Metric (Unpolished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius Metric (Polished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius 4xD Metric (Polished Flutes)	157	165
	43ML	3 Flute Non-Ferrous Square End Long Reach Metric	160	165
	43MLC	3 Flute Non-Ferrous Long Reach Corner Radius Metric (Unpolished Flutes)	160	165
	43MLC	3 Flute Non-Ferrous Long Reach Corner Radius Metric (Polished Flutes)	160	165
	43MB	3 Flute Non-Ferrous Ball End Metric (Polished Flutes)	162	165
S-Carb® Rougher (3 Flute)	43CB	3 Flute Rougher Non-Ferrous Chip Breaker Fractional	154	156
	43LCB	3 Flute Rougher Non-Ferrous Chip Breaker Long Reach Fractional	155	156
	43MCB	3 Flute Rougher Non-Ferrous Chip Breaker Metric	164	165
S-Carb® (2 Flute)	47	2 Flute Non-Ferrous Square End Fractional	166	169
	47L	2 Flute Non-Ferrous Square End Long Reach Fractional	167	169
	47B	2 Flute Non-Ferrous Ball End Fractional	168	169
	47LB	2 Flute Non-Ferrous Ball End Long Reach Fractional	168	169
	47M	2 Flute Non-Ferrous Square End Metric	170	172
	47ML	2 Flute Non-Ferrous Square End Long Reach Metric	170	172
	47MB	2 Flute Non-Ferrous Ball End Metric	171	172
	47MLB	2 Flute Non-Ferrous Ball End Long Reach Metric	171	172
Ski-Carb	44	2 Flute Non-Ferrous Materials Square End Fractional	173	174
	44M	2 Flute Non-Ferrous Materials Square End Metric	173	174
	45	2 Flute Non-Ferrous Materials Long Reach Corner Radius Fractional	176	177

Speed & Feed Recommendations listed after each series

FRESAS DE ALTO RENDIMIENTO PARA ALUMINIO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
S-Carb APR® y APF®	43APR-3	3 filos, productividad avanzada, desbastador, fraccional	133	134
	43APR-3	3 filos, productividad avanzada, desbastador, métrico	135	137
	43APR-4	4 filos, productividad avanzada, desbastador, métrico	136	137
	43APF	4 filos, productividad avanzada, acabador, fraccional	138	139
	43MAPF	4 filos, productividad avanzada, acabador, métrico	140	141
S-Carb APF-B®	43APF-B	Fresa Cónica Circular Multi-Filos tipo Barril, métrica	142	143
S-Carb® (3 filos)	43	3 filos, no férrico, punta cuadrada, fraccional	144	156
	43CR	3 filos, no férrico, radio angulado, fraccional	144	156
	43L	3 filos, no férrico, punta cuadrada, largo alcance, fraccional	148	156
	43LC	3 filos, no férricos, largo alcance, radio angulado, fraccional	148	156
	43EC	3 filos, no férrico, punta cuadrada, alcance extralargo, fraccional	151	156
	43B	3 filos, no férrico, punta esférica, fraccional	152	156
	43LB	3 filos, no férrico, punta esférica, largo alcance, fraccional	153	156
	43EB	3 filos, no férrico, punta esférica, alcance extralargo, fraccional	153	156
	43M	3 filos, no férrico, punta cuadrada, métrico (filos no pulidos)	157	165
	43M	3 filos, no férrico, punta cuadrada, métrico (filos pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado, métrico (filos no pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado, métrico (filos pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado 4xD, métrico (filos pulidos)	157	165
	43ML	3 filos, no férrico, punta cuadrada, largo alcance, métrico	160	165
	43MLC	3 filos, no férrico, largo alcance, radio angulado, métrico (filos no pulidos)	160	165
	43MLC	3 filos, no férrico, largo alcance, radio angulado, métrico (filos pulidos)	160	165
	43MB	3 filos, no férrico, punta esférica, métrico (filos pulidos)	162	165
Desbastador S-Carb® (3 filos)	43CB	3 filos, desbastador, no férrico, rompevirutas, fraccional	154	156
	43LCB	3 filos, desbastador, no férrico, rompevirutas, largo alcance, fraccional	155	156
	43MCB	3 filos, desbastador, no férrico, rompevirutas, métrico	164	165
S-Carb® (2 filos)	47	2 filos, no férrico, punta cuadrada, fraccional	166	169
	47L	2 filos, no férrico, punta cuadrada, largo alcance, fraccional	167	169
	47B	2 filos, no férrico, punta esférica, fraccional	168	169
	47LB	2 filos, no férrico, punta esférica, largo alcance, fraccional	168	169
	47M	2 filos, no férrico, punta cuadrada, métrico	170	172
	47ML	2 filos, no férrico, punta cuadrada, largo alcance, métrico	170	172
	47MB	2 filos, no férrico, punta esférica, métrico	171	172
	47MLB	2 filos, no férrico, punta esférica, largo alcance, métrico	171	172
Ski-Carb	44	2 filos, materiales no férricos, punta cuadrada, fraccional	173	174
	44M	2 filos, materiales no férricos, punta cuadrada, métrico	173	174
	45	2 filos, materiales no férricos, largo alcance, radio angulado, fraccional	176	177



Recomendaciones de velocidades y avances mostradas tras cada serie

FRAISE HAUTE PERFORMANCE POUR ALUMINIUM	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
S-Carb APR®/APF®	43APR-3	3 dents productivité avancée d'ébauche (fractionnel)	133	134
	43APR-3	3 dents productivité avancée d'ébauche (métrique)	135	137
	43APR-4	4 dents productivité avancée d'ébauche (métrique)	136	137
	43APF	4 dents productivité avancée de finition (fractionnel)	138	139
	43MAPF	4 dents productivité avancée de finition (métrique)	140	141
S-Carb APF-B®	43APF-B	Fraise multi dents finition pour productivité avancée cotes (métrique)	142	143
S-Carb® (3 dents)	43	3 dents non-ferreux non rayonné (fractionnel)	144	156
	43CR	3 dents non-ferreux rayonné (fractionnel)	144	156
	43L	3 dents non-ferreux non rayonné longue portée (fractionnel)	148	156
	43LC	3 dents non-ferreux longue portée rayonné (fractionnel)	148	156
	43EC	3 dents non-ferreux non rayonné portée extra-longue (fractionnel)	151	156
	43B	3 dents non-ferreux à bout hémisphérique (fractionnel)	152	156
	43LB	3 dents non-ferreux à bout hémisphérique longue portée (fractionnel)	153	156
	43EB	3 dents non-ferreux à bout hémisphérique portée extra-longue (fractionnel)	153	156
	43M	3 dents non-ferreux non rayonné (métrique) (goujures non polies)	157	165
	43M	3 dents non-ferreux non rayonné (métrique) (goujures polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné (métrique) (goujures non polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné (métrique) (goujures polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné 4xD (métrique) (goujures polies)	157	165
	43MLC	3 dents non-ferreux longue portée rayonné (métrique) (goujures non polies)	160	165
	43MLC	3 dents non-ferreux longue portée rayonné (métrique) (goujures polies)	160	165
	43ML	3 dents non-ferreux non rayonné longue portée (métrique)	160	165
	43MB	3 dents non-ferreux à bout hémisphérique (métrique) (goujures polies)	162	165
	43CB	3 dents d'ébauche non-ferreux brise-copeaux (fractionnel)	154	156
	43LCB	3 dents d'ébauche non-ferreux brise-copeaux longue portée (fractionnel)	155	156
	43MCB	3 dents d'ébauche non-ferreux brise-copeaux (métrique)	164	165
S-Carb® (2 dents)	47	2 dents non-ferreux non rayonné (fractionnel)	166	169
	47L	2 dents non-ferreux non rayonné longue portée (fractionnel)	167	169
	47B	2 dents non-ferreux à bout hémisphérique (fractionnel)	168	169
	47LB	2 dents non-ferreux à bout hémisphérique longue portée (fractionnel)	168	169
	47M	2 dents non-ferreux non rayonné (métrique)	170	172
	47ML	2 dents non-ferreux non rayonné longue portée (métrique)	170	172
	47MB	2 dents non-ferreux à bout hémisphérique (métrique)	171	172
	47MLB	2 dents non-ferreux à bout hémisphérique longue portée (métrique)	171	172
Ski-Carb	44	2 dents matériaux non-ferreux non rayonné (fractionnel)	173	174
	44M	2 dents matériaux non-ferreux non rayonné (métrique)	173	174
	45	2 dents matériaux non-ferreux longue portée rayonné (fractionnel)	176	177

Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGSSCHAFTFRÄSER FÜR ALUMINIUM	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
S-Carb APR® & APF®	43APR-3	Hochleistungs-Schruppfräser mit 3 Schneiden	133	134
	43APR-3	Hochleistungs-Schruppfräser mit 3 Schneiden (Erweiterung)	135	137
	43APR-4	Hochleistungs-Schruppfräser mit 4 Schneiden	136	137
	43APF	Zölliger Hochleistungs-Schlichtfräser mit 4 Schneiden	138	139
	43MAPF	Hochleistungs-Schlichtfräser mit 4 Schneiden	140	141
S-Carb APF-B®	43APF-B	Metrischer mehrschneidiger Hochleistungsschlichtfräser	142	143
S-Carb® (3 Schneiden)	43	Zölliger NE-Schaftfräser mit 3 Schneiden ohne Eckenradien	144	156
	43CR	Zölliger NE-Fräser mit 3 Schneiden und Eckenradien	144	156
	43L	Zölliger NE-Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	148	156
	43LC	Zölliger Langlochfräser mit 3 Schneiden und Eckenradien	148	156
	43EC	Zölliger NE-Superlangloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	151	156
	43B	Zölliger NE-Radiusschaftfräser mit 3 Schneiden	152	156
	43LB	Zölliger NE-Langloch-Radiusschaftfräser mit 3 Schneiden	153	156
	43EB	Zölliger NE-Superlangloch-Radiusschaftfräser mit 3 Schneiden	153	156
	43M	NE-Schaftfräser mit 3 unpolierten Schneiden ohne Eckenradien	157	165
	43M	NE-Schaftfräser mit 3 polierten Schneiden ohne Eckenradien	157	165
	43MCR	NE-Fräser mit 3 unpolierten Schneiden und Eckenradien	157	165
	43MCR	NE-Fräser mit 3 polierten Schneiden und Eckenradien	157	165
	43MCR	NE-Fräser 4xD mit 3 polierten Schneiden und Eckenradien	157	165
	43ML	NE-Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	160	165
	43MLC	NE-Langlochfräser mit 3 unpolierten Schneiden und Eckenradien	160	165
	43MLC	NE-Langlochfräser mit 3 polierten Schneiden und Eckenradien	160	165
	43MB	NE-Radiusschaftfräser mit 3 polierten Schneiden	162	165
	43CB	Zölliger NE-Schruppfräser mit 3 Schneiden und Spanbrechern	154	156
	43LCB	Zölliger NE-Langloch-Schruppfräser mit 3 Spanteilernuten	155	156
	43MCB	NE-Schruppfräser mit 3 Schneiden und Spanbrechern	164	165
S-Carb® Schruppfräser (3 Schneiden)	47	Zölliger NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	166	169
	47L	Zölliger NE-Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	167	169
	47B	Zölliger NE-Radiusschaftfräser mit 2 Schneiden	168	169
	47LB	Zölliger NE-Langloch-Radiusschaftfräser mit 2 Schneiden	168	169
	47M	NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	170	172
	47ML	NE-Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	170	172
	47MB	NE-Radiusschaftfräser mit 2 Schneiden	171	172
	47MLB	NE-Langloch-Radiusschaftfräser mit 2 Schneiden	171	172
Ski-Carb	44	Zölliger NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	173	174
	44M	NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	173	174
	45	Zölliger Langlochfräser mit 2 Schneidenn und Eckenradien für Nichteisenmetalle	176	177

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

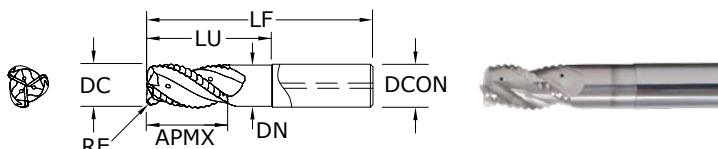

43APR-3

FRACTIONAL SERIES

TOLERANCES (inch)

1/2-1 DIAMETER

DC = -0.0004/-0.004

DCON = h_6

RE = +/-0.002

NON-FERROUS


For patent
information visit
www.ksptpatents.com

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
1/2	1	3-1/4	1/2	1-1/2	.474	.030	34100
1/2	1	3-1/4	1/2	1-1/2	.474	.060	34101
1/2	1	3-1/4	1/2	1-1/2	.474	.090	34102
1/2	1	3-1/4	1/2	1-1/2	.474	.120	34103
5/8	1-3/8	3-5/8	5/8	2	.594	.030	34104*
5/8	1-3/8	3-5/8	5/8	2	.594	.060	34105*
5/8	1-3/8	3-5/8	5/8	2	.594	.090	34106*
5/8	1-3/8	3-5/8	5/8	2	.594	.120	34107*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.030	34108*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.060	34109*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.090	34110*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.120	34111*
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.030	34112
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.060	34113
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.090	34114
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.120	34115
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.030	34116*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.060	34117*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.090	34118*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.120	34119*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.030	34120*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.060	34121*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.090	34122*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.120	34123*
1	1-3/4	4-1/2	1	2-1/2	.949	.030	34124
1	1-3/4	4-1/2	1	2-1/2	.949	.060	34125
1	1-3/4	4-1/2	1	2-1/2	.949	.090	34126
1	1-3/4	4-1/2	1	2-1/2	.949	.120	34127
1	1-3/8	5-1/4	1	3-1/4	.949	.030	34128*
1	1-3/8	5-1/4	1	3-1/4	.949	.060	34129*
1	1-3/8	5-1/4	1	3-1/4	.949	.090	34130*
1	1-3/8	5-1/4	1	3-1/4	.949	.120	34131*
1	1-3/8	6-1/4	1	4-1/4	.949	.030	34132*
1	1-3/8	6-1/4	1	4-1/4	.949	.060	34133*
1	1-3/8	6-1/4	1	4-1/4	.949	.090	34134*
1	1-3/8	6-1/4	1	4-1/4	.949	.120	34135*

*Variable Helix

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- New 3 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

FRACTIONAL S-Carb APR®



Series 43APR-3 Fractional		Ae x DC	Ap x DC	Vc (sfm)		DC • inch	
						APR-3	
						0.75	1
N	ALUMINIUM ALLOYS 6068, 7075	Slot 	1	5250 (980-6900)	RPM	26740	20055
					Fz	0.0055	0.0059
					Feed (ipm)	441	355
		Profile 	≤ 0.5	5900 (980-6900)	RPM	30051	22538
					Fz	0.0063	0.0067
					Feed (ipm)	568	453
		HSM 	≤ 0.1	6900 (980-6900)	RPM	35144	26358
					Fz	0.0075	0.0079
					Feed (ipm)	791	625

Series 43APR-3L Fractional		Ae x DC	Ap x DC	Vc (sfm)		DC • inch			
						APR-3 LONG			
						0.5	0.625	0.75	1
N	ALUMINIUM ALLOYS 6068, 7075	Slot 	1	3280 (980-6900)	RPM	25059	20047	16706	12530
					Fz	0.0039	0.0043	0.0047	0.0051
					Feed (ipm)	293	259	236	192
		Profile 	≤ 0.5	3950 (980-6900)	RPM	30178	24142	20119	15089
					Fz	0.0047	0.0051	0.0055	0.0059
					Feed (ipm)	426	369	332	267
		HSM 	≤ 0.1	4600 (980-6900)	RPM	35144	28115	23429	17572
					Fz	0.0055	0.0059	0.0063	0.0067
					Feed (ipm)	580	498	443	353

RPM stated may be outside of most machine tools in the smaller sizes, adjust the surface speed but maintain the Fz

For best results use the peak power of the specific machine torque chart.

Typically 10hp is required to remove 45 cubic inches of material (MRR).

Eg. >> (Ae x Ap x Feed) >> Therefore Full slotting 1" dia: 1 x 1 x 355 = 355 cubic inches, so it needs a min of 78hp.

Larger cuts and chip load consume more power.


Review the power chart of each machine to determine MAX power for ultimate performance.



Example below shows peak power @ 10,000 rpm.

The new coolant supply is designed for MQL as well as normal emulsion coolant on the same data.

Ensure max MQL flow prior to cutting.

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

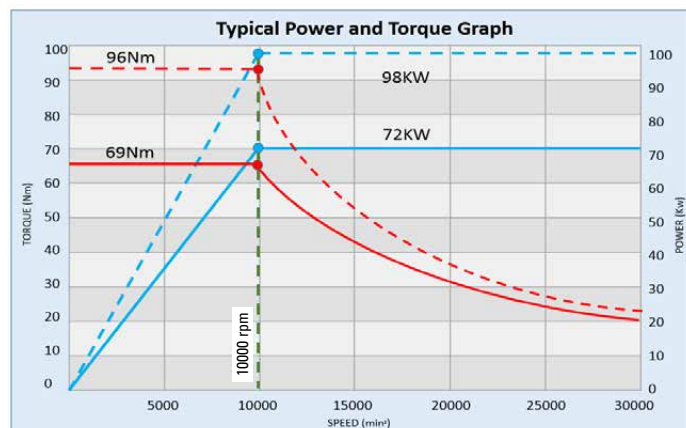

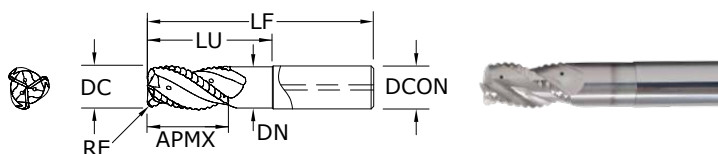

43APR-3

METRIC SERIES

TOLERANCES (mm)

12–25 DIAMETER

DC = $-0,010/-0,100$

DCON = h_6

RE = $+/-0,05$


NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
12,0	26,0	83,0	12,0	39,0	11,40	1,0	44976*
12,0	26,0	83,0	12,0	39,0	11,40	2,0	44977*
12,0	26,0	83,0	12,0	39,0	11,40	3,0	44978*
12,0	26,0	83,0	12,0	39,0	11,40	4,0	44979*
12,0	26,0	95,0	12,0	—	—	—	44975*
16,0	35,0	92,0	16,0	—	—	—	44980*
16,0	35,0	92,0	16,0	51,0	15,20	2,0	44981*
16,0	35,0	92,0	16,0	51,0	15,20	3,0	44982*
16,0	35,0	92,0	16,0	51,0	15,20	4,0	44983*
16,0	35,0	108,0	16,0	67,0	15,20	2,0	44985*
16,0	35,0	108,0	16,0	67,0	15,20	3,0	44986*
16,0	35,0	108,0	16,0	67,0	15,20	4,0	44987*
16,0	35,0	124,0	16,0	—	—	—	44984*
20,0	35,0	86,0	20,0	—	—	—	44990
20,0	35,0	86,0	20,0	45,0	19,00	3,0	44991
20,0	35,0	86,0	20,0	45,0	19,00	4,0	44992
20,0	35,0	106,0	20,0	—	—	—	44993*
20,0	35,0	106,0	20,0	65,0	19,00	2,0	44994*
20,0	35,0	106,0	20,0	65,0	19,00	3,0	44995*
20,0	35,0	106,0	20,0	65,0	19,00	4,0	44996*
20,0	35,0	106,0	20,0	65,0	19,00	5,0	44997*
20,0	35,0	145,0	20,0	—	—	—	45020*
20,0	35,0	125,0	20,0	84,0	19,00	2,0	45021*
20,0	35,0	125,0	20,0	84,0	19,00	3,0	45022*
20,0	35,0	125,0	20,0	84,0	19,00	4,0	45023*
25,0	43,0	108,0	25,0	—	—	—	44998
25,0	43,0	108,0	25,0	60,0	23,75	2,0	44999
25,0	43,0	108,0	25,0	60,0	23,75	3,0	45000
25,0	43,0	108,0	25,0	60,0	23,75	4,0	45001
25,0	35,0	140,0	25,0	—	—	—	45002*
25,0	35,0	140,0	25,0	80,0	23,75	3,0	45003*
25,0	35,0	140,0	25,0	90,0	23,75	3,0	45004*
25,0	35,0	151,0	25,0	105,0	23,75	3,0	45025*
25,0	35,0	176,0	25,0	—	—	—	45024*


*Variable Helix

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- New 3 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43APR-4

METRIC SERIES

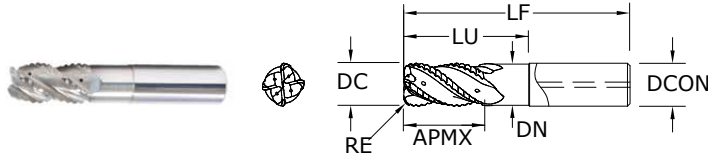

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- 4 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
20,0	35,0	86,0	20,0	—	19,00	—	45005
20,0	35,0	86,0	20,0	45,0	19,00	3,0	45006
20,0	35,0	86,0	20,0	45,0	19,00	4,0	45007
20,0	35,0	106,0	20,0	—	19,00	—	45008
20,0	35,0	106,0	20,0	65,0	19,00	2,0	45009
20,0	35,0	106,0	20,0	65,0	19,00	3,0	45010
20,0	35,0	106,0	20,0	65,0	19,00	4,0	45011
20,0	35,0	106,0	20,0	65,0	19,00	5,0	45012
25,0	43,0	108,0	25,0	—	23,75	—	45013
25,0	43,0	108,0	25,0	60,0	23,75	2,0	45014
25,0	43,0	108,0	25,0	60,0	23,75	3,0	45015
25,0	43,0	108,0	25,0	60,0	23,75	4,0	45016
25,0	35,0	140,0	25,0	—	23,75	—	45017
25,0	35,0	140,0	25,0	80,0	23,75	3,0	45018
25,0	35,0	140,0	25,0	90,0	23,75	3,0	45019

TOLERANCES (mm)

20–25 DIAMETER


DC = -0,010/-0,100

DCON = h₆

RE = ±0,050

NON-FERROUS

For patent information visit
www.ksptpatents.com



Series 43APR-3 43APR-4 Metric					DC • mm							
					Ae x DC		Ap x DC	Vc (m/min)	APR-3		APR-4	
									20	25	20	25
N	ALUMINIUM ALLOYS 6068, 7075		1	≤ 1	1600	RPM	25461	20369	25461	20369		
					(300-2100)	Fz	0.14	0.15	0.12	0.13		
						Feed (mm/min)	10694	9166	12222	10592		
			≤ 0.5	≤ 1.5	1800	RPM	28644	22915	28644	22915		
					(300-2100)	Fz	0.16	0.17	0.14	015		
						Feed (mm/min)	13749	11687	16041	13749		
			≤ 0.25	≤ 2	2100	RPM	33418	26735	33418	26735		
					(300-2100)	Fz	0.19	0.20	0.16	0.17		
						Feed (mm/min)	19048	16041	21388	18180		

Series 43APR-3 43APR-4 Metric						DC • mm				
						APR-3 LONG				
						12	16	20	25	
N	ALUMINIUM ALLOYS 6068, 7075		1	≤ 1	1600	RPM	26522	19892	15913	12731
					(300-2100)	Fz	0.10	0.11	0.12	0.13
						Feed (mm/min)	7957	6564	5729	4965
			≤ 0.5	≤ 1.5	1800	RPM	31827	23870	19096	15277
					(300-2100)	Fz	0.12	0.13	0.14	0.15
						Feed (mm/min)	11458	9309	8020	6875
			≤ 0.25	≤ 2	2100	RPM	37131	27849	22279	17823
					(300-2100)	Fz	0.14	0.15	0.16	0.17
						Feed (mm/min)	15595	12532	10694	9090

RPM stated may be outside of most machine tools in the smaller sizes, adjust the surface speed but maintain the Fz

For best results use the peak power of the specific machine torque chart.

Typically 10kw is required to remove 1 litre of material (MMR).

Eg. >> (Ae x Ap x Feed) / 1000000 >> Therefore Full slotting Ø25: 25 x 25 x 7333 = 4.58 Litres so it needs a min of 46Kw.

Larger cuts and chip load consume more power.

Review the power chart of each machine to determine MAX power for ultimate performance.


Example below shows peak power @ 10,000 rpm.

The APR-4 design is for ultimate metal removal but typically requires more power, and is also better suited to horizontal machines.


The new coolant supply is designed for MQL as well as normal emulsion coolant on the same data.

Ensure max MQL flow prior to cutting.


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

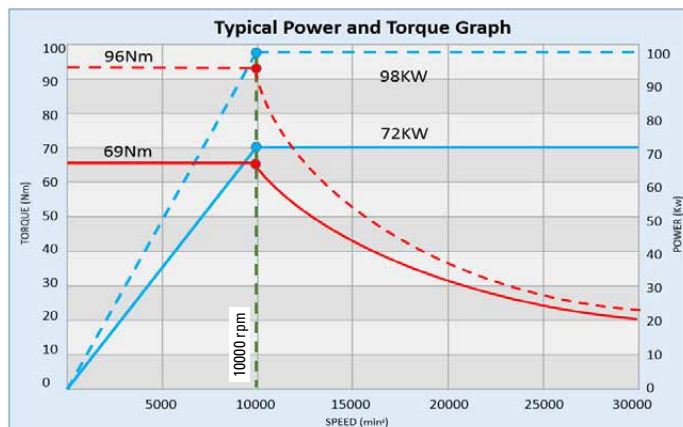

FRACTIONAL S-Carb APF®



43APF FRACTIONAL SERIES

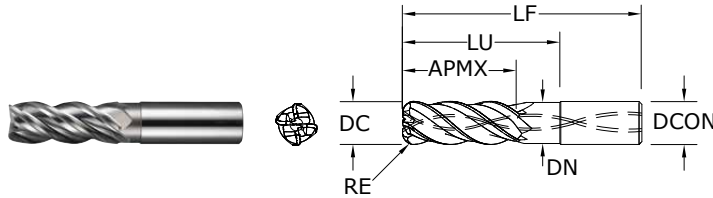

- Ultra high-productivity finisher for Aluminum alloys, specifically for aircraft components
- Two levels of chatter suppression: variable helix and indexing
- Designed for single axial pass semi-finishing and finishing
- Polished flutes maximize chip evacuation and provides enhanced finish
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.030	34016
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.060	34017
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.090	34018
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.120	34019
1/2	2	4	1/2	2-3/8	.478	.030	34020
1/2	2	4	1/2	2-3/8	.478	.060	34021
1/2	2	4	1/2	2-3/8	.478	.090	34022
1/2	2	4	1/2	2-3/8	.478	.120	34023
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.030	34024
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.060	34025
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.090	34026
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.120	34027
3/4	3	5-3/8	3/4	3-1/2	.728	.030	34028
3/4	3	5-3/8	3/4	3-1/2	.728	.060	34029
3/4	3	5-3/8	3/4	3-1/2	.728	.090	34030
3/4	3	5-3/8	3/4	3-1/2	.728	.120	34031

Available on request: • JetStream Technology

TOLERANCES (inch)

1/2-3/4 DIAMETER


DC = $-0.0004/-0.0020$

DCON = h_6


RE = $+0.0012/-0.0012$

NON-FERROUS

For patent
information visit
www.kspatents.com


Series 43APF Fractional		Hardness			Vc (sfm)	DC • in		
			Ae x DC	Ap x DC		1/2	3/4	
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	 Profile	≤ 0.1	≤ 2.5	2625	RPM	20055	13370
					(2100-3150)	Fz	0.0030	0.0050
						Feed (in/min)	241	267
		 Profile	≤ 0.1	≤ 4	2625	RPM	20055	13370
					(2100-3150)	Fz	0.0020	0.0040
						Feed (in/min)	160	214
	ALUMINUM ALLOYS (LITHIUM)* 2090, 2091, 2099, 2195, 2199, 2297, 8090	 Profile	≤ 0.1	≤ 2.5	1970	RPM	15051	10034
					(1576-2364)	Fz	0.0030	0.0050
						Feed (in/min)	181	201
		 Profile	≤ 0.1	≤ 4	1970	RPM	15051	10034
					(1576-2364)	Fz	0.0020	0.0040
						Feed (in/min)	120	161

Bhn (Brinell) HRb (Rockwell B)
 surface speed is dependent on machine spindle and fixturing
 balancing is recommended at ultra high surface speeds
 tool life may be reduced when machining Lithium Alloys
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 4 \times rpm$
 maximum recommended depths shown
 reduce speed and feed for materials harder than listed
 finish cuts typically require reduced feed and cutting depths of 0.02 X DC maximum
 ramp angle = 6° (feed rate = 50%)
 plunging not recommended
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



43MAPF

METRIC SERIES

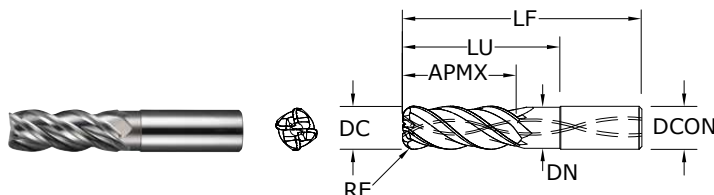

- Ultra high-productivity finisher for Aluminum alloys, specifically for aircraft components
- Two levels of chatter suppression: variable helix and indexing
- Designed for single axial pass semi-finishing and finishing
- Polished flutes maximize chip evacuation and provides enhanced finish
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
6,0	24,0	58,0	6,0	30,0	5,70	—	44627
8,0	32,0	64,0	8,0	40,0	7,60	—	44628
10,0	40,0	80,0	10,0	50,0	9,50	—	44629
12,0	30,0	83,0	12,0	40,0	11,40	—	44630
12,0	30,0	83,0	12,0	40,0	11,40	2,0	44745
12,0	30,0	83,0	12,0	40,0	11,40	3,0	44746
12,0	30,0	83,0	12,0	40,0	11,40	4,0	44747
12,0	30,0	83,0	12,0	50,0	11,40	0,5	44641
12,0	30,0	83,0	12,0	50,0	11,40	5,0	44642
12,0	48,0	100,0	12,0	62,0	11,40	—	44631
12,0	48,0	100,0	12,0	62,0	11,40	2,0	44748
12,0	48,0	100,0	12,0	62,0	11,40	3,0	44749
12,0	48,0	100,0	12,0	62,0	11,40	4,0	44750
16,0	40,0	92,0	16,0	51,0	15,20	—	44634
16,0	40,0	92,0	16,0	51,0	15,20	2,0	44751
16,0	40,0	92,0	16,0	51,0	15,20	3,0	44752
16,0	40,0	92,0	16,0	51,0	15,20	4,0	44753
16,0	42,0	93,0	16,0	51,0	15,20	5,0	44643
16,0	64,0	125,0	16,0	82,0	15,20	—	44635
16,0	64,0	125,0	16,0	82,0	15,20	2,0	44754
16,0	64,0	125,0	16,0	82,0	15,20	3,0	44755
16,0	64,0	125,0	16,0	82,0	15,20	4,0	44756
20,0	50,0	108,0	20,0	63,0	19,00	—	44636
20,0	50,0	108,0	20,0	63,0	19,00	3,0	44757
20,0	50,0	108,0	20,0	63,0	19,00	4,0	44758
20,0	50,0	108,0	20,0	63,0	19,00	5,0	44759
20,0	80,0	150,0	20,0	102,0	19,00	—	44637
20,0	80,0	150,0	20,0	102,0	19,00	3,0	44760
20,0	80,0	150,0	20,0	102,0	19,00	4,0	44761
20,0	80,0	150,0	20,0	102,0	19,00	5,0	44762
25,0	63,0	130,0	25,0	79,0	23,75	—	44638
25,0	63,0	130,0	25,0	79,0	23,75	3,0	44763
25,0	63,0	130,0	25,0	79,0	23,75	4,0	44764
25,0	63,0	130,0	25,0	79,0	23,75	5,0	44765
25,0	100,0	175,0	25,0	120,0	23,75	—	44639
25,0	100,0	175,0	25,0	120,0	23,75	3,0	44766
25,0	100,0	175,0	25,0	120,0	23,75	4,0	44767
25,0	100,0	175,0	25,0	120,0	23,75	5,0	44768

Available on request: • JetStream Technology

TOLERANCES (mm)

6–25 DIAMETER


DC = $-0,010/-0,050$

DCON = h_6

RE = $+0,03/-0,03$

NON-FERROUS

For patent information visit
www.ksptpatents.com



Series 43MAPF Metric	Hardness		Ae x DC	Ap x DC	Vc (m/min)	DC • mm							
						6	8	10	12	16	20	25	
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	Profile 	≤ 0.1	≤ 2.5	800	RPM	42440	31830	25464	21220	15915	12732	10186
					(640-960)	Fz	0.050	0.055	0.060	0.070	0.100	0.140	0.170
						Feed (mm/min)	8488	7003	6111	5942	6366	7130	6926
		Profile 	≤ 0.1	≤ 4	800	RPM	42440	31830	25464	21220	15915	12732	10186
					(640-960)	Fz	0.040	0.045	0.050	0.050	0.070	0.100	0.120
						Feed (mm/min)	6790	5729	5093	4244	4456	5093	4889
	ALUMINUM ALLOYS (LITHIUM)* 2090, 2091, 2099, 2195, 2199, 2297, 8090	Profile 	≤ 0.1	≤ 2.5	600	RPM	31830	23873	19098	15915	11936	9549	7639
					(480-720)	Fz	0.050	0.055	0.060	0.070	0.100	0.140	0.170
						Feed (mm/min)	6366	5252	4584	4456	4774	5347	5195
		Profile 	≤ 0.1	≤ 4	600	RPM	31830	23873	19098	15915	11936	9549	7639
					(480-720)	Fz	0.040	0.045	0.050	0.050	0.070	0.100	0.120
						Feed (mm/min)	5093	4297	3820	3183	3342	3820	3667

Bhn (Brinell) HRb (Rockwell B)

surface speed is dependent on machine spindle and fixturing

balancing is recommended at ultra high surface speeds

*tool life may be reduced when machining Lithium Alloys

$\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$

$\text{mm/min} = \text{Fz} \times 4 \times \text{rpm}$

maximum recommended depths shown


reduce speed and feed for materials harder than listed

finish cuts typically require reduced feed and cutting depths of 0.02 X DC maximum

ramp angle = 6° (feed rate = 50%)


plunging not recommended

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



APF-B

METRIC SERIES

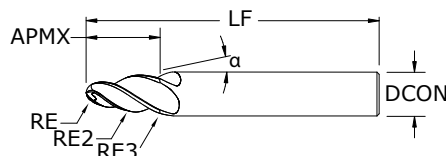

- Designed to significantly improve traditional ball end applications
- Highly efficient at finishing and semi-finishing profiling
- Main application areas include profiling and pocket milling
- Especially suited to machining deep pockets and hard-to-reach areas without using long-reach tools
- Their versatility also allows for machining profiles and blends with one tool
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				NO. OF FLUTES	EDP NO. Ti-NAMITE®-B (TiB ₂)
			CENTERLINE ANGLE α	TIP RADIUS RE	TAPERED RADIUS RE2	BLENDED RADIUS RE3		
6,0	9,5	58,0	17.5°	1,0	250,0	3,0	3	45718
6,0	8,0	58,0	17.5°	1,5	250,0	3,0	3	45719
8,0	10,5	80,0	20°	1,5	250,0	4,0	3	45720
8,0	9,5	80,0	20°	2,0	250,0	4,0	3	45721
10,0	12,5	89,0	20°	2,0	250,0	5,0	3	45722
10,0	11,5	89,0	20°	2,5	250,0	5,0	3	45723
12,0	13,5	100,0	20°	3,0	250,0	6,0	4	45724
12,0	14,4	100,0	20°	2,5	250,0	6,0	4	45725
12,0	20,0	100,0	14°	2,0	60,0	6,0	4	45726
16,0	31,0	109,0	12.5°	2,0	1000,0	5,0	4	45727
16,0	27,5	109,0	12.5°	3,0	1000,0	5,0	4	45728
16,0	24,0	109,0	12.5°	4,0	1000,0	5,0	4	45729
16,0	21,0	109,0	15°	4,0	1000,0	5,0	4	45730
16,0	18,5	109,0	20°	4,0	1500,0	8,0	4	45731
16,0	28,5	109,0	10°	4,0	1000,0	5,0	4	45732
16,0	19,0	109,0	20°	3,0	750,0	5,0	4	45733
16,0	15,0	109,0	30°	2,0	750,0	3,0	4	45734
16,0	18,5	109,0	20°	3,0	60,0	5,0	4	45735

TOLERANCES (mm)

DCON = h_6

RE = $-0,010/-0,010$

NON-FERROUS

For patent
information visit
www.ksptpatents.com

			DCON	6		8		10		12		16	
			Ae max	0,20	0,45	0,25	0,55	0,30	0,60	0,35	0,65	0,40	0,70
			Diameter	3,0	6,0	4,0	8,0	5,0	10,0	6,0	12,0	8,0	16,0
													
Metric	Hardness (HRb)	Vc (m/min)	Cut Zone	RE	RE2	RE	RE2	RE	RE2	RE	RE2	RE	RE2
N Aluminum	≤88	510	RPM	54111	27056	40583	20292	32467	16233	27056	13528	20292	10146
		(388-632)	Fz	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080	0,042	0,100
			Feed (mm/min)	2706	3247	2536	3044	2435	2922	3607	4329	3382	4058
	≥88	330	RPM	35013	17507	26260	13130	21008	10504	17507	8753	13130	6565
		(284-376)	Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	1313	1576	1313	1576	1313	1576	1751	2101	1751	2101

$rpm = (Vc \times 1000) / (DC \times 3.14)$

Feed= Fz x No. of flutes x rpm


Adjust speed and feed cutting

Adjust rates according to cutting area of tool being used


Avoid using tip of the tool where possible due to reduced chip space

Be aware of max cut Ae, especially on the lower portion of the tool

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



**43 •
43CR**
FRACTIONAL SERIES

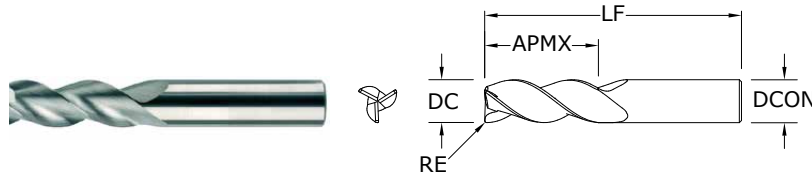

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	—	34701	34728
1/8	3/8	1-1/2	1/8	.010	34771	34793
3/16	5/16	2-1/2	3/16	—	34822	34857
3/16	9/16	2	3/16	—	34702	34729
3/16	9/16	2	3/16	.010	34772	34794
3/16	3/4	2-1/2	3/16	—	34823	34858
1/4	3/8	2	1/4	—	34703	34730
1/4	3/8	2-1/2	1/4	.010	35575	35665
1/4	3/8	2-1/2	1/4	.015	35576	35666
1/4	3/8	2-1/2	1/4	.030	35577	35667
1/4	3/8	2-1/2	1/4	.060	35578	35668
1/4	1/2	2-1/2	1/4	—	34824	34859
1/4	3/4	2-1/2	1/4	—	34704	34731
1/4	3/4	2-1/2	1/4	.010	34773	34795
1/4	3/4	2-1/2	1/4	.015	35579	35669
1/4	3/4	2-1/2	1/4	.030	34774	34796
1/4	3/4	2-1/2	1/4	.060	35580	35670
1/4	1	3	1/4	—	34825	34860
1/4	1	3	1/4	.010	35581	35671
1/4	1	3	1/4	.015	35582	35672
1/4	1	3	1/4	.030	35583	35673
1/4	1	3	1/4	.060	35584	35674
1/4	1-1/4	3-1/2	1/4	—	34705	34732
1/4	1-3/4	4	1/4	—	34826	34861
5/16	7/16	2	5/16	—	34706	34733
5/16	5/8	2-1/2	5/16	—	34707	34734
5/16	5/8	2-1/2	5/16	.030	34775	34797
5/16	1-1/4	4	5/16	—	34708	34735
3/8	1/2	2	3/8	—	34709	34736
3/8	1/2	3	3/8	.010	35585	35675
3/8	1/2	3	3/8	.015	35586	35676
3/8	1/2	3	3/8	.030	35587	35677
3/8	1/2	3	3/8	.060	35588	35678
3/8	1/2	3	3/8	.090	35589	35679
3/8	1	2-1/2	3/8	—	34710	34737
3/8	1	2-1/2	3/8	.010	34776	34798

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

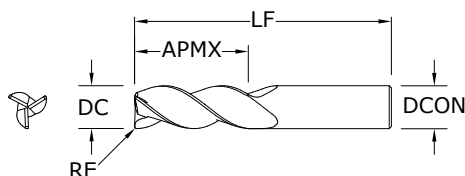

**43 •
43CR**
FRACTIONAL SERIES

CONTINUED

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h_6

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/8	1	2-1/2	3/8	.030	34777	34799
3/8	1	2-1/2	3/8	.060	32761	32825
3/8	1	3	3/8	.015	35590	35680
3/8	1	3	3/8	.090	35591	35681
3/8	1-1/4	3-1/2	3/8	—	34827	34862
3/8	1-1/2	3-1/2	3/8	—	34711	34738
3/8	1-1/2	4	3/8	.010	35592	35682
3/8	1-1/2	4	3/8	.015	35593	35683
3/8	1-1/2	4	3/8	.030	35594	35684
3/8	1-1/2	4	3/8	.060	35595	35685
3/8	1-1/2	4	3/8	.090	35596	35686
3/8	2	4	3/8	—	34828	34863
1/2	5/8	2-1/2	1/2	—	34712	34739
1/2	5/8	3	1/2	.010	35597	35687
1/2	5/8	3	1/2	.015	35598	35688
1/2	5/8	3	1/2	.030	35599	35689
1/2	5/8	3	1/2	.060	35600	35690
1/2	5/8	3	1/2	.090	35601	35691
1/2	5/8	3	1/2	.120	35602	35692
1/2	1	3	1/2	—	34830	34865
1/2	1	3	1/2	.010	35603	35693
1/2	1	3	1/2	.015	35604	35694
1/2	1	3	1/2	.030	35605	35695
1/2	1	3	1/2	.060	35606	35696
1/2	1	3	1/2	.090	35607	35697
1/2	1	3	1/2	.120	35608	35698
1/2	1-1/4	3	1/2	.015	35609	35699
1/2	1-1/4	3-1/4	1/2	—	34713	34740
1/2	1-1/4	3-1/4	1/2	.010	34778	34800
1/2	1-1/4	3-1/4	1/2	.030	34779	34801
1/2	1-1/4	3-1/4	1/2	.060	34780	34802
1/2	1-1/4	3-1/4	1/2	.090	34781	34803
1/2	1-1/4	3-1/4	1/2	.120	32766	32830
1/2	1-5/8	4	1/2	—	34831	34866
1/2	1-5/8	4	1/2	.010	35610	35700
1/2	1-5/8	4	1/2	.015	35611	35701

continued on next page





The technical drawing illustrates the geometry of a double-flute drill bit. The left side shows a 3D perspective view of the bit. The right side shows a cross-sectional view with the following dimensions and labels:

- LF**: Length of the cutting edge.
- APMX**: Axial depth of the cutting edge.
- DC**: Diameter of the cutting edge.
- DCOM**: Diameter of the outer shell.
- RF**: Radius of the cutting edge.

inch					EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	TI-NAMITE®-B (TiB ₂)
1/2	1-5/8	4	1/2	.030	35612	35702
1/2	1-5/8	4	1/2	.060	35613	35703
1/2	1-5/8	4	1/2	.090	35614	35704
1/2	1-5/8	4	1/2	.120	35615	35705
1/2	2	4	1/2	—	34714	34741
1/2	2	4	1/2	.010	35616	35706
1/2	2	4	1/2	.015	35617	35707
1/2	2	4	1/2	.030	35618	35708
1/2	2	4	1/2	.060	35619	35709
1/2	2	4	1/2	.090	35620	35710
1/2	2	4	1/2	.120	35621	35711
1/2	2-1/2	5	1/2	—	34832	34867
1/2	3-1/8	6	1/2	—	34715	34742
5/8	3/4	3	5/8	—	34716	34743
5/8	3/4	3-1/2	5/8	.030	35622	35712
5/8	3/4	3-1/2	5/8	.060	35623	35713
5/8	3/4	3-1/2	5/8	.090	35624	35714
5/8	3/4	3-1/2	5/8	.120	35625	35715
5/8	1-5/8	3-3/4	5/8	—	34717	34744
5/8	1-5/8	3-3/4	5/8	.030	34782	34804
5/8	1-5/8	3-3/4	5/8	.060	34783	34805
5/8	1-5/8	3-3/4	5/8	.090	34784	34806
5/8	1-5/8	3-3/4	5/8	.120	35626	35716
5/8	2-1/8	4	5/8	—	34833	34868
5/8	2-1/2	5	5/8	—	34718	34745
5/8	3-1/4	6	5/8	—	34834	34869
5/8	3-3/4	6	5/8	—	34719	34746
3/4	1	3	3/4	—	34720	34747
3/4	1	4	3/4	.030	35627	35717
3/4	1	4	3/4	.060	35628	35718
3/4	1	4	3/4	.090	35629	35719
3/4	1	4	3/4	.120	35630	35720
3/4	1	4	3/4	.190	35631	35721
3/4	1	4	3/4	.250	35632	35722
3/4	1-5/8	4	3/4	—	34721	34748
3/4	1-5/8	4	3/4	.030	34785	34807

RE = +0.0000/-0.0020

continued on next page

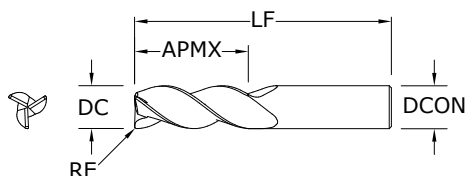

43 •
43CR
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/4	1-5/8	4	3/4	.060	34786	34808
3/4	1-5/8	4	3/4	.090	34787	34809
3/4	1-5/8	4	3/4	.120	34815	34817
3/4	1-5/8	4	3/4	.190	35633	35723
3/4	1-5/8	4	3/4	.250	35634	35724
3/4	2-1/4	5	3/4	—	34722	34749
3/4	2-1/4	5	3/4	.030	35635	35725
3/4	2-1/4	5	3/4	.060	35636	35726
3/4	2-1/4	5	3/4	.090	35637	35727
3/4	2-1/4	5	3/4	.120	35638	35728
3/4	2-1/4	5	3/4	.190	35639	35729
3/4	2-1/4	5	3/4	.250	35640	35730
3/4	2-1/2	5	3/4	—	34758	34765
3/4	3-1/4	6	3/4	—	34723	34750
1	1-1/4	4	1	—	34724	34751
1	1-1/4	5	1	.030	35641	35731
1	1-1/4	5	1	.060	35642	35732
1	1-1/4	5	1	.090	35643	35733
1	1-1/4	5	1	.120	35644	35734
1	1-1/4	5	1	.190	35645	35735
1	1-1/4	5	1	.250	35646	35736
1	2	4-1/2	1	—	34725	34752
1	2	4-1/2	1	.030	34789	34811
1	2	4-1/2	1	.060	34790	34812
1	2	4-1/2	1	.090	34791	34813
1	2	4-1/2	1	.120	34816	34818
1	2	5	1	.190	35647	35737
1	2	5	1	.250	35648	35738
1	2-5/8	6	1	—	34726	34753
1	3-1/4	6	1	—	34727	34754
1	3-1/4	6	1	.030	35649	35739
1	3-1/4	6	1	.060	35650	35740
1	3-1/4	6	1	.090	35651	35741
1	3-1/4	6	1	.120	35652	35742
1	3-1/4	6	1	.190	35653	35743
1	3-1/4	6	1	.250	35654	35744
1	4-1/8	7	1	—	34835	34870


CONTINUED



43L • 43LC

FRACTIONAL SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

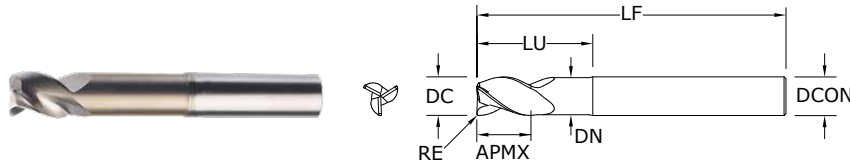

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	5/32	3	1/8	1/2	.105	—	32700	32725
1/8	5/32	3	1/8	1/2	.105	.010	32751	32815
1/8	5/32	3	1/8	3/4	.105	—	32691	34888
3/16	7/32	3	3/16	1/2	.167	—	32701	32726
3/16	7/32	3	3/16	1/2	.167	.010	32752	32816
3/16	7/32	3	3/16	3/4	.167	—	32692	34889
1/4	3/8	2-1/2	1/4	3/4	.230	.015	35787	36235
1/4	3/8	2-1/2	1/4	3/4	.230	.060	35788	36236
1/4	3/8	4	1/4	3/4	.230	—	32702	32727
1/4	3/8	4	1/4	3/4	.230	.010	32753	32817
1/4	3/8	4	1/4	3/4	.230	.030	32754	32818
1/4	3/8	4	1/4	1-1/2	.230	—	32703	32728
1/4	3/8	4	1/4	1-1/2	.230	.010	32755	32819
1/4	3/8	4	1/4	1-1/2	.230	.030	32756	32820
1/4	3/8	4	1/4	2-1/8	.230	—	32704	32729
1/4	3/8	4	1/4	2-1/8	.230	.010	32757	32821
1/4	3/8	4	1/4	2-1/8	.230	.030	32758	32822
5/16	7/16	4	5/16	1-1/8	.292	—	32705	32730
5/16	7/16	4	5/16	1-1/8	.292	.030	32759	32823
5/16	7/16	4	5/16	2-1/8	.292	—	32706	32731
5/16	7/16	4	5/16	2-1/8	.292	.030	32760	32824
3/8	1/2	3	3/8	1-1/8	.355	.015	35791	36239
3/8	1/2	3	3/8	1-1/8	.355	.090	35792	36240
3/8	1/2	4	3/8	1-1/8	.355	—	32707	32732
3/8	1/2	4	3/8	1-1/8	.355	.030	32762	32826
3/8	1/2	4	3/8	1-1/8	.355	.060	32763	32827
3/8	1/2	4	3/8	2-1/8	.355	—	32708	32733
3/8	1/2	4	3/8	2-1/8	.355	.030	32764	32828
3/8	1/2	4	3/8	2-1/8	.355	.060	32765	32829
1/2	5/8	3	1/2	1-3/8	.480	.015	35795	36243
1/2	5/8	4	1/2	1-3/8	.480	—	32709	32734
1/2	5/8	4	1/2	1-3/8	.480	.030	32767	32831
1/2	5/8	4	1/2	1-3/8	.480	.060	32768	32832
1/2	5/8	4	1/2	1-3/8	.480	.090	32769	32833
1/2	5/8	4	1/2	1-3/8	.480	.120	32770	32834
1/2	5/8	4	1/2	2-1/4	.480	.015	35796	36244

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

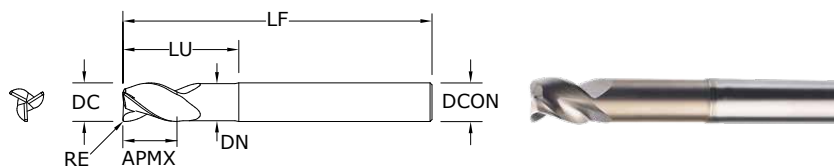

**43L •
43LC**
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h_6

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				CORNER RADIUS RE	EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/2	5/8	6	1/2	2-1/8	.480	—	—	32710	32735
1/2	5/8	6	1/2	2-1/8	.480	.030	—	32771	32835
1/2	5/8	6	1/2	2-1/8	.480	.060	—	32772	32836
1/2	5/8	6	1/2	2-1/8	.480	.090	—	32773	32837
1/2	5/8	6	1/2	2-1/8	.480	.120	—	32774	32838
1/2	5/8	6	1/2	3-3/8	.480	—	—	32711	32736
1/2	5/8	6	1/2	3-3/8	.480	.030	—	32775	32839
1/2	5/8	6	1/2	3-3/8	.480	.060	—	32776	32840
1/2	5/8	6	1/2	3-3/8	.480	.090	—	32777	32841
1/2	5/8	6	1/2	3-3/8	.480	.120	—	32778	32842
1/2	5/8	6	1/2	4-1/4	.480	—	—	32697	34894
5/8	3/4	4	5/8	1-3/4	.605	—	—	32712	32737
5/8	3/4	4	5/8	1-3/4	.605	.030	—	32779	32843
5/8	3/4	4	5/8	1-3/4	.605	.060	—	32780	32844
5/8	3/4	4	5/8	1-3/4	.605	.090	—	32781	32845
5/8	3/4	4	5/8	1-3/4	.605	.120	—	32782	32846
5/8	3/4	4	5/8	2-3/8	.605	—	—	32713	32738
5/8	3/4	4	5/8	2-3/8	.605	.030	—	32783	32847
5/8	3/4	4	5/8	2-3/8	.605	.060	—	32784	32848
5/8	3/4	4	5/8	2-3/8	.605	.090	—	32785	32849
5/8	3/4	4	5/8	2-3/8	.605	.120	—	32786	32850
5/8	3/4	6	5/8	3-3/8	.605	—	—	32714	32739
5/8	3/4	6	5/8	3-3/8	.605	.030	—	32787	32851
5/8	3/4	6	5/8	3-3/8	.605	.060	—	32788	32852
5/8	3/4	6	5/8	3-3/8	.605	.090	—	32789	32853
5/8	3/4	6	5/8	3-3/8	.605	.120	—	32790	32854
5/8	3/4	6	5/8	4-3/8	.605	—	—	32698	34895
3/4	1	4	3/4	1-3/4	.730	—	—	32715	32740
3/4	1	4	3/4	1-3/4	.730	.030	—	32791	32855
3/4	1	4	3/4	1-3/4	.730	.060	—	32792	32856
3/4	1	4	3/4	1-3/4	.730	.090	—	32793	32857
3/4	1	4	3/4	1-3/4	.730	.120	—	32794	32858
3/4	1	4	3/4	2	.730	.190	—	35803	36251
3/4	1	4	3/4	2	.730	.250	—	35804	36252
3/4	1	6	3/4	2-3/8	.730	—	—	32716	32741
3/4	1	6	3/4	2-3/8	.730	.030	—	32795	32859

continued on next page



43L • 43LC

FRACTIONAL SERIES

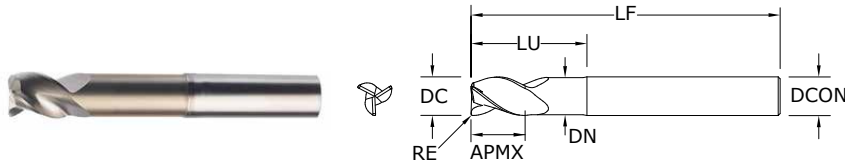

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/4	1	6	3/4	2-3/8	.730	.060	32796	32860
3/4	1	6	3/4	2-3/8	.730	.090	32797	32861
3/4	1	6	3/4	2-3/8	.730	.120	32798	32862
3/4	1	6	3/4	3-3/8	.730	—	32717	32742
3/4	1	6	3/4	3-3/8	.730	.030	32799	32863
3/4	1	6	3/4	3-3/8	.730	.060	32800	32864
3/4	1	6	3/4	3-3/8	.730	.090	32801	32865
3/4	1	6	3/4	3-3/8	.730	.120	32802	32866
3/4	1	6	3/4	4-3/8	.730	—	32699	34896
1	1-1/4	5	1	2-5/8	.980	.190	35809	36257
1	1-1/4	5	1	2-5/8	.980	.250	35810	36258
1	1-1/4	6	1	2-3/8	.980	—	32718	32743
1	1-1/4	6	1	2-3/8	.980	.030	32803	32867
1	1-1/4	6	1	2-3/8	.980	.060	32804	32868
1	1-1/4	6	1	2-3/8	.980	.090	32805	32869
1	1-1/4	6	1	2-3/8	.980	.120	32806	32870
1	1-1/4	6	1	3-3/8	.980	—	32719	32744
1	1-1/4	6	1	3-3/8	.980	.030	32807	32871
1	1-1/4	6	1	3-3/8	.980	.060	32808	32872
1	1-1/4	6	1	3-3/8	.980	.090	32809	32873
1	1-1/4	6	1	3-3/8	.980	.120	32810	32874
1	1-1/4	6	1	3-3/8	.980	.190	35811	36259
1	1-1/4	6	1	3-3/8	.980	.250	35812	36260
1	1-1/4	7	1	4-3/8	.980	—	32720	32745

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

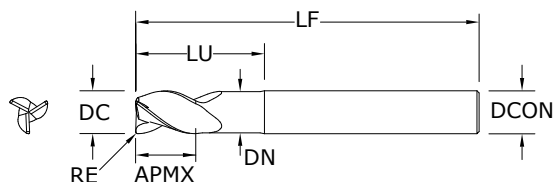

43EC
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				CORNER RADIUS RE	EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	3	1/4	1-1/8	.230	.015		35789	36237
1/4	3/8	3	1/4	1-1/8	.230	.060		35790	36238
3/8	1/2	4	3/8	2-1/8	.355	.015		35793	36241
3/8	1/2	4	3/8	2-1/8	.355	.090		35794	36242
1/2	5/8	5	1/2	3-3/8	.480	.015		35797	36245
1/2	5/8	6	1/2	4-1/4	.480	.015		35798	36246
1/2	5/8	6	1/2	4-1/4	.480	.030		35799	36247
1/2	5/8	6	1/2	4-1/4	.480	.060		35800	36248
1/2	5/8	6	1/2	4-1/4	.480	.090		35801	36249
1/2	5/8	6	1/2	4-1/4	.480	.120		35802	36250
3/4	1	6	3/4	3-3/8	.730	.190		35805	36253
3/4	1	6	3/4	3-3/8	.730	.250		35806	36254
1	1-1/4	7	1	4-3/8	.980	.030		35813	36261
1	1-1/4	7	1	4-3/8	.980	.060		35814	36262
1	1-1/4	7	1	4-3/8	.980	.090		35815	36263
1	1-1/4	7	1	4-3/8	.980	.120		35816	36264
1	1-1/4	7	1	4-3/8	.980	.190		35817	36265
1	1-1/4	7	1	4-3/8	.980	.250		35818	36266


- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43B

FRACTIONAL SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

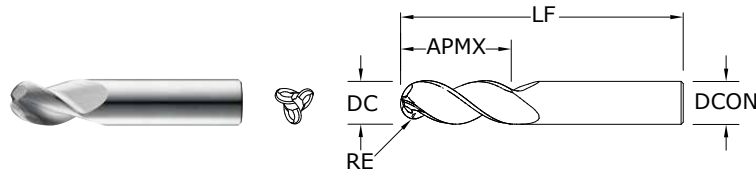

CUTTING DIAMETER DC	inch			EDP NO.	
	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	2	1/4	34916	34972
1/4	3/4	2-1/2	1/4	34917	34973
1/4	1	3	1/4	34918	34974
3/8	1/2	2	3/8	34919	34975
3/8	1	2-1/2	3/8	34920	34976
3/8	1-1/2	3-1/2	3/8	34921	34977
1/2	5/8	2-1/2	1/2	34922	34978
1/2	1	3	1/2	34923	34979
1/2	1-1/4	3	1/2	34924	34980
1/2	1-5/8	4	1/2	34925	34981
1/2	2	4	1/2	34926	34982
5/8	3/4	3	5/8	34927	34983
5/8	1-5/8	4	5/8	34928	34984
3/4	1	3	3/4	34929	34985
3/4	1-5/8	4	3/4	34930	34986
3/4	2-1/4	5	3/4	34931	34987
1	1-1/4	4	1	34932	34988
1	2	5	1	34933	34989
1	3-1/4	6	1	34934	34990

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005

NON-FERROUS

For patent
information visit
www.ksptpatents.com

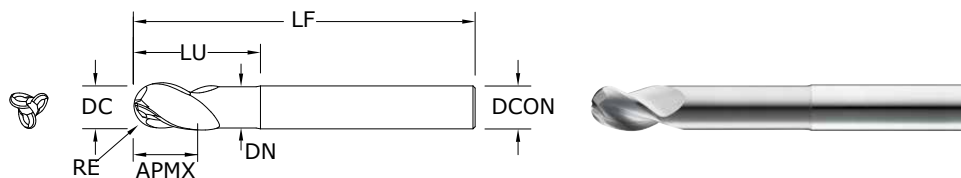

43LB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0005/–0.0005



inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	TI-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	1/4	3/4	.230	34941	35005
3/8	1/2	3	3/8	1-1/8	.355	34943	35007
1/2	5/8	3	1/2	1-3/8	.480	34945	35009
1/2	5/8	4	1/2	2-1/4	.480	34946	35010
5/8	3/4	4	5/8	1-5/8	.605	34949	35013
3/4	1	4	3/4	2	.730	34951	35015
1	1-1/4	5	1	2-5/8	.980	34954	35018
1	1-1/4	6	1	3-3/8	.980	34955	35019

RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

NON-FERROUS

For patent information visit
www.ksptpatents.com

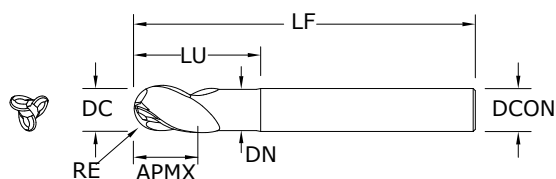

43EB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0005/–0.0005


inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	TI-NAMITE®-B (TiB ₂)
1/4	3/8	3	1/4	1-1/8	.230	34942	35006
3/8	1/2	4	3/8	2-1/8	.355	34944	35008
1/2	5/8	5	1/2	3-3/8	.480	34947	35011
1/2	5/8	6	1/2	4-1/4	.480	34948	35012
5/8	3/4	6	5/8	3-3/8	.605	34950	35014
3/4	1	6	3/4	3-3/8	.730	34952	35016
1	1-1/4	7	1	4-3/8	.980	34956	35020

RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)


NON-FERROUS

For patent information visit
www.ksptpatents.com



43CB

FRACTIONAL SERIES

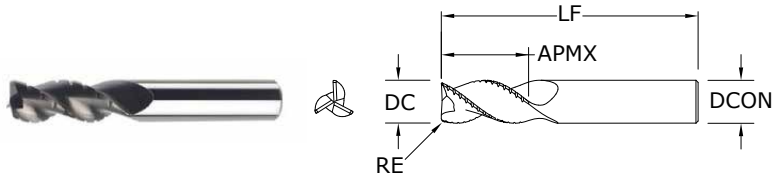

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	1/4	.020	33390	33450
1/4	1/2	2-1/2	1/4	.020	33391	33451
1/4	3/4	2-1/2	1/4	.020	33392	33452
1/4	1	3	1/4	.020	33393	33453
1/4	1-1/4	3-1/2	1/4	.020	33394	33454
1/4	1-3/4	4	1/4	.020	33395	33455
5/16	7/16	2-1/2	5/16	.020	33396	33456
5/16	11/16	2-1/2	5/16	.020	33397	33457
5/16	1	3	5/16	.020	33398	33458
5/16	2-1/8	4	5/16	.020	33400	33460
3/8	1/2	3	3/8	.020	33401	33461
3/8	1	2-1/2	3/8	.020	33400	33405
3/8	1-1/4	3-1/2	3/8	.020	33402	33462
3/8	1-1/2	4	3/8	.020	33403	33463
3/8	2	4	3/8	.020	33404	33464
1/2	5/8	3	1/2	.030	33406	33466
1/2	1	3	1/2	.030	33407	33467
1/2	1-1/4	3-1/4	1/2	.030	33401	33406
1/2	1-5/8	4	1/2	.030	33408	33468
1/2	2	4	1/2	.030	33409	33469
1/2	2-1/2	5	1/2	.030	33410	33470
1/2	3-1/8	6	1/2	.030	33411	33471
5/8	3/4	3-1/2	5/8	.030	33412	33472
5/8	1-5/8	3-3/4	5/8	.030	33402	33407
5/8	2-1/8	4	5/8	.030	33413	33473
5/8	3-1/4	6	5/8	.030	33415	33475
5/8	3-3/4	6	5/8	.030	33416	33476
3/4	1	4	3/4	.030	33417	33477
3/4	1-5/8	4	3/4	.030	33403	33408
3/4	2-1/4	5	3/4	.030	33418	33478
3/4	3-1/4	6	3/4	.030	33419	33479
3/4	4	6	3/4	.030	33420	33480
1	1-1/4	5	1	.030	33421	33481
1	2	4-1/2	1	.030	33404	33409
1	2-5/8	6	1	.030	33422	33482
1	3-1/4	6	1	.030	33423	33483
1	4-1/8	7	1	.030	33424	33484

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent information visit
www.ksptpatents.com

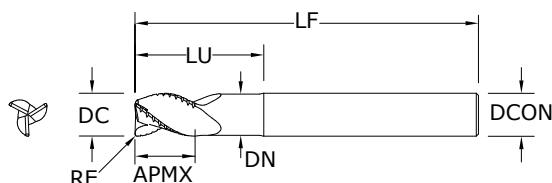

43LCB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0000/–0.0020


NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch							EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	3/4	.230	.020	33500	33540
1/4	3/8	4	1/4	1-1/8	.230	.020	33501	33541
1/4	3/8	4	1/4	2-1/8	.230	.020	33502	33542
5/16	7/16	4	5/16	1-1/8	.292	.020	33503	33543
5/16	7/16	4	5/16	2-1/8	.292	.020	33504	33544
3/8	1/2	4	3/8	1-1/8	.355	.020	33507	33547
3/8	1/2	4	3/8	2-1/8	.355	.020	33508	33548
1/2	5/8	4	1/2	1-3/8	.480	.030	33511	33551
1/2	5/8	4	1/2	2-1/4	.480	.030	—	33552
1/2	5/8	6	1/2	3-3/8	.480	.030	33513	33553
1/2	5/8	6	1/2	4-1/4	.480	.030	33514	33554
5/8	3/4	4	5/8	1-5/8	.605	.030	33515	33555
5/8	3/4	6	5/8	2-3/8	.605	.030	33516	33556
5/8	3/4	6	5/8	3-3/8	.605	.030	33517	33557
5/8	3/4	6	5/8	4-3/8	.605	.030	33518	33558
3/4	1	4	3/4	2	.730	.030	33519	33559
3/4	1	6	3/4	2-1/2	.730	.030	33520	33560
3/4	1	6	3/4	3-3/8	.730	.030	33521	33561
3/4	1	6	3/4	4-3/8	.730	.030	33522	33562
1	1-1/4	6	1	2-5/8	.980	.030	33523	33563
1	1-1/4	6	1	3-3/8	.980	.030	33524	33564
1	1-1/4	7	1	4-3/8	.980	.030	33525	33565



- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

Series
43CR, 43CB, 43LC,
43, 43L, 43LCB, 43B,
43LB, 43ELB, 43EC
Fractional



43, 43L, 43LCB, 43B, 43LB, 43ELB, 43EC Fractional					Ae Ap		Vc (sfm)		DC • in						
Hardness		Ae x DC	Ap x DC			1/8	1/4	3/8	1/2	5/8	3/4	1			
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	Slot	1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112		
					(1280-1920)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085		
					Feed (ipm)	132	183	220	220	191	171	156			
		≤ 150 Bhn or ≤ 88 HRb	Profile	≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640	
						(1600-2400)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
						Feed (ipm)	165	229	275	275	238	214	195		
	≤ 150 Bhn or ≤ 88 HRb	HSM	≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606		
					(2640-3960)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195		
					Feed (ipm)	635	832	1059	1059	908	832	737			
	≤ 125 Bhn or ≤ 77 HRb	Slot	1	≤ 1	600	RPM	18336	9168	6112	4584	3667	3056	2292		
					(480-720)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085		
					Feed (ipm)	50	69	83	83	72	64	58			
		≤ 125 Bhn or ≤ 77 HRb	Profile	≤ 0.5	≤ 1.5	750	RPM	22920	11460	7640	5730	4584	3820	2865	
						(600-900)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
						Feed (ipm)	62	86	103	103	89	80	73		
	≤ 125 Bhn or ≤ 77 HRb	HSM	≤ 0.05	≤ 2	1240	RPM	37894	18947	12631	9474	7579	6316	4737		
					(992-1488)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195		
					Feed (ipm)	239	313	398	398	341	313	277			
	≤ 140 Bhn or ≤ 3 HRc	Slot	1	≤ 1	865	RPM	26434	13217	8811	6609	5287	4406	3304		
					(692-1038)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070		
					Feed (ipm)	63	79	106	99	87	79	69			
		≤ 140 Bhn or ≤ 3 HRc	Profile	≤ 0.5	≤ 1.5	1080	RPM	33005	16502	11002	8251	6601	5501	4126	
						(864-1296)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
						Feed (ipm)	79	99	132	124	109	99	87		
	≤ 140 Bhn or ≤ 3 HRc	HSM	≤ 0.05	≤ 2	1780	RPM	54397	27198	18132	13599	10879	9066	6800		
					(1424-2136)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160		
					Feed (ipm)	277	367	462	469	408	381	326			
	≤ 200 Bhn or ≤ 23 HRc	Slot	1	≤ 1	345	RPM	10543	5272	3514	2636	2109	1757	1318		
(276-414)					Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070			
Feed (ipm)					25	32	42	40	35	32	28				
≤ 200 Bhn or ≤ 23 HRc		Profile	≤ 0.5	≤ 1.5	430	RPM	13141	6570	4380	3285	2628	2190	1643		
					(344-516)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070		
					Feed (ipm)	32	39	53	49	43	39	34			
≤ 200 Bhn or ≤ 23 HRc	HSM	≤ 0.05	≤ 2	710	RPM	21698	10849	7233	5424	4340	3616	2712			
				(568-852)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160			
				Feed (ipm)	111	146	184	187	163	152	130				
ABS, Polycarbonate, PVC, Polypropylene	Slot	1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112			
				(1280-1920)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140			
				Feed (ipm)	220	293	367	367	323	293	257				
	Profile	≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640			
				(1600-2400)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140			
				Feed (ipm)	275	367	458	458	403	367	321				
HSM	≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606				
			(2640-3960)	Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320				
			Feed (ipm)	1029	1361	1714	1740	1513	1387	1210					

Bhn (Brinell) HRC (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fz} \times 3 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgsgstool.com)

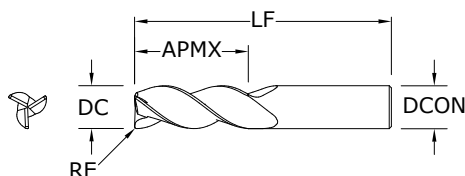

43M •
43MCR
METRIC SERIES

TOLERANCES (mm)

≤6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,000/-0,050

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,000/-0,050

>18-20 DIAMETER

DC = +0,000/-0,013

DCON = h₆

RE = +0,000/-0,050


NON-FERROUS

For patent
information visit
www.ksptpatents.com


mm					EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	52,0	6,0	—	—	44890
4,0	11,0	55,0	6,0	—	—	44891
5,0	13,0	57,0	6,0	—	—	44892
6,0	13,0	57,0	6,0	—	44701	44715
6,0	13,0	57,0	6,0	1,5	—	44732
6,0	13,0	57,0	6,0	0,5	—	44902
6,0	13,0	57,0	6,0	1,0	—	44894
6,0	13,0	72,0	6,0	—	44702	44716
6,0	13,0	72,0	6,0	0,8	—	44842
6,0	13,0	72,0	6,0	1,2	—	44843
6,0	24,0	75,0	6,0	—	—	44893
6,0	24,0	75,0	6,0	0,5	—	44844
6,0	24,0	75,0	6,0	1,0	—	44845
8,0	19,0	63,0	8,0	—	44703	44717
8,0	19,0	63,0	8,0	0,3	—	44846
8,0	19,0	63,0	8,0	0,5	—	44847
8,0	19,0	63,0	8,0	1,0	—	44848
8,0	19,0	63,0	8,0	1,5	—	44849
8,0	32,0	75,0	8,0	—	—	44895
8,0	32,0	75,0	8,0	0,5	—	44850
8,0	32,0	75,0	8,0	1,0	—	44851
8,0	32,0	75,0	8,0	1,5	—	44852
8,0	32,0	75,0	8,0	2,0	—	44853
10,0	22,0	72,0	10,0	—	44705	44719
10,0	22,0	72,0	10,0	0,3	—	44854
10,0	22,0	72,0	10,0	0,5	—	44855
10,0	22,0	72,0	10,0	1,0	—	44856
10,0	22,0	72,0	10,0	1,5	—	44857
10,0	40,0	100,0	10,0	—	—	44896
10,0	40,0	100,0	10,0	0,5	—	44858

continued on next page

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



**43M •
43MCR**
METRIC SERIES

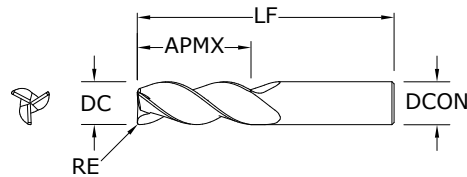

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
10,0	40,0	100,0	10,0	1,0	—	44859
10,0	40,0	100,0	10,0	1,5	—	44860
10,0	40,0	100,0	10,0	2,0	—	44861
12,0	26,0	83,0	12,0	—	44708	44722
12,0	26,0	83,0	12,0	1,5	44814	44733
12,0	26,0	83,0	12,0	2,0	44815	44826
12,0	26,0	83,0	12,0	2,5	44816	44827
12,0	26,0	83,0	12,0	3,0	44817	44734
12,0	48,0	100,0	12,0	—	—	44897
12,0	48,0	100,0	12,0	0,5	—	44862
12,0	48,0	100,0	12,0	1,0	—	44863
12,0	48,0	100,0	12,0	1,5	—	44864
12,0	48,0	100,0	12,0	2,0	—	44865
12,0	48,0	100,0	12,0	2,5	—	44866
12,0	48,0	100,0	12,0	3,0	—	44867
14,0	30,0	89,0	14,0	—	—	44898
14,0	30,0	89,0	14,0	1,0	—	44868
14,0	30,0	89,0	14,0	2,0	—	44869
14,0	30,0	89,0	14,0	3,0	—	44870
16,0	32,0	92,0	16,0	—	44711	44725
16,0	32,0	92,0	16,0	1,5	44818	44735
16,0	32,0	92,0	16,0	2,0	44819	44828
16,0	32,0	92,0	16,0	2,5	44820	44829
16,0	32,0	92,0	16,0	3,0	44821	44736
16,0	32,0	92,0	16,0	4,0	—	44871
16,0	64,0	125,0	16,0	—	—	44900
16,0	64,0	125,0	16,0	0,5	—	44872
16,0	64,0	125,0	16,0	1,0	—	44873
16,0	64,0	125,0	16,0	1,5	—	44874
16,0	64,0	125,0	16,0	2,0	—	44875
16,0	64,0	125,0	16,0	2,5	—	44876
16,0	64,0	125,0	16,0	3,0	—	44877

continued on next page

TOLERANCES (mm)

≤6 DIAMETER

DC = +0,000/–0,008

DCON = h₆

RE = +0,000/–0,050

>6–10 DIAMETER

DC = +0,000/–0,009

DCON = h₆

RE = +0,000/–0,050

>10–18 DIAMETER

DC = +0,000/–0,011

DCON = h₆

RE = +0,000/–0,050

>18–20 DIAMETER



DC = +0,000/–0,013

DCON = h₆

RE = +0,000/–0,050

NON-FERROUS


For patent
information visit
www.ksptpatents.com

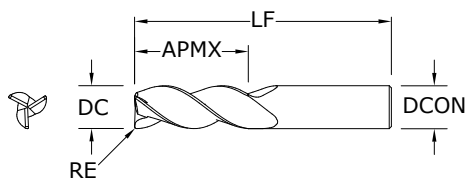

**43M •
43MCR**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
16,0	64,0	125,0	16,0	4,0	—	44878
20,0	38,0	104,0	20,0	—	44714	44728
20,0	38,0	104,0	20,0	2,0	44822	44830
20,0	38,0	104,0	20,0	2,5	44823	44831
20,0	38,0	104,0	20,0	3,0	44824	44737
20,0	38,0	104,0	20,0	4,0	—	44879
20,0	80,0	150,0	20,0	—	—	44901
20,0	80,0	150,0	20,0	0,5	—	44880
20,0	80,0	150,0	20,0	1,0	—	44881
20,0	80,0	150,0	20,0	1,5	—	44882
20,0	80,0	150,0	20,0	2,0	—	44883
20,0	80,0	150,0	20,0	2,5	—	44884
20,0	80,0	150,0	20,0	3,0	—	44885
20,0	80,0	150,0	20,0	4,0	—	44886
25,0	50,0	125,0	25,0	—	—	44731

CONTINUED



43ML • 43MLC

METRIC SERIES

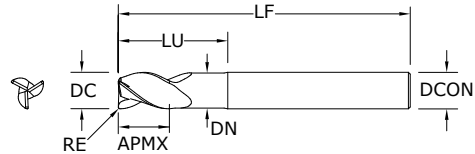

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	63,0	6,0	20,0	5,49	0,5	44769	44789
6,0	10,0	63,0	6,0	20,0	5,49	1,0	44770	44790
6,0	10,0	75,0	6,0	20,0	5,49	—	—	42706
6,0	13,0	72,0	6,0	30,0	5,49	0,5	44771	44791
6,0	13,0	72,0	6,0	30,0	5,49	1,0	44772	44792
8,0	12,0	75,0	8,0	25,0	7,49	—	—	42707
8,0	12,0	75,0	8,0	25,0	7,49	0,3	44773	44793
8,0	12,0	75,0	8,0	25,0	7,49	0,5	44774	44794
8,0	12,0	75,0	8,0	25,0	7,49	0,8	—	44950
8,0	12,0	75,0	8,0	25,0	7,49	1,0	44775	44795
8,0	12,0	75,0	8,0	25,0	7,49	1,2	—	44951
8,0	12,0	75,0	8,0	25,0	7,49	1,5	44776	44796
8,0	12,0	75,0	8,0	25,0	7,49	1,6	—	44952
10,0	14,0	100,0	10,0	35,0	9,48	—	—	42708
10,0	14,0	100,0	10,0	35,0	9,48	0,3	44777	44797
10,0	14,0	100,0	10,0	35,0	9,48	0,5	44778	44798
10,0	14,0	100,0	10,0	35,0	9,48	1,0	44779	44799
10,0	14,0	100,0	10,0	35,0	9,48	1,5	44780	44800
10,0	14,0	100,0	10,0	35,0	9,50	0,8	—	44953
10,0	14,0	100,0	10,0	35,0	9,50	1,2	—	44954
10,0	14,0	100,0	10,0	35,0	9,50	1,6	—	44955
10,0	14,0	100,0	10,0	35,0	9,50	2,4	—	44956
12,0	16,0	100,0	12,0	40,0	11,48	—	—	42709
12,0	16,0	100,0	12,0	40,0	11,48	0,5	44781	44801
12,0	16,0	100,0	12,0	40,0	11,48	0,8	—	44957
12,0	16,0	100,0	12,0	40,0	11,48	1,0	44782	44802
12,0	16,0	100,0	12,0	40,0	11,48	1,2	—	44958
12,0	16,0	100,0	12,0	40,0	11,48	1,5	44783	44803
12,0	16,0	100,0	12,0	40,0	11,48	1,6	—	44959
12,0	16,0	100,0	12,0	40,0	11,48	2,0	44784	44804
12,0	16,0	100,0	12,0	40,0	11,48	2,4	—	44960
12,0	16,0	100,0	12,0	40,0	11,48	2,5	44832	44839
12,0	16,0	100,0	12,0	40,0	11,48	3,0	44833	44738
12,0	16,0	100,0	12,0	40,0	11,48	4,0	44834	44741

continued on next page

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,000/-0,050

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,000/-0,050

>18-20 DIAMETER



DC = +0,000/-0,013

DCON = h₆

RE = +0,000/-0,050

NON-FERROUS


For patent
information visit
www.ksptpatents.com

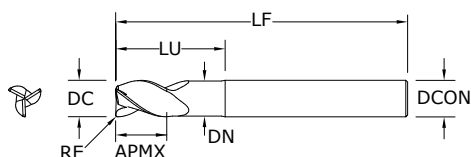

**43ML •
43MLC**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
14,0	18,0	125,0	14,0	45,0	13,49	—	—	44899
14,0	18,0	125,0	14,0	45,0	13,49	1,0	—	44961
14,0	18,0	125,0	14,0	45,0	13,49	2,0	—	44962
14,0	18,0	125,0	14,0	45,0	13,49	3,0	—	44963
14,0	18,0	125,0	14,0	45,0	13,49	4,0	—	44964
16,0	20,0	125,0	16,0	50,0	15,47	—	—	42710
16,0	20,0	125,0	16,0	50,0	15,47	2,0	44785	44805
16,0	20,0	125,0	16,0	50,0	15,47	2,5	44835	44840
16,0	20,0	125,0	16,0	50,0	15,47	3,0	44836	44739
16,0	20,0	125,0	16,0	50,0	15,47	4,0	44786	44806
16,0	20,0	125,0	16,0	50,0	15,49	0,8	—	44965
16,0	20,0	125,0	16,0	50,0	15,49	1,2	—	44966
16,0	20,0	125,0	16,0	50,0	15,49	1,6	—	44967
16,0	20,0	125,0	16,0	50,0	15,49	2,4	—	44968
16,0	20,0	125,0	16,0	50,0	15,49	3,2	—	44969
20,0	25,0	150,0	20,0	65,0	19,46	—	—	42711
20,0	25,0	150,0	20,0	65,0	19,46	2,0	44787	44807
20,0	25,0	150,0	20,0	65,0	19,46	2,4	—	44973
20,0	25,0	150,0	20,0	65,0	19,46	2,5	44837	44841
20,0	25,0	150,0	20,0	65,0	19,46	3,0	44838	44740
20,0	25,0	150,0	20,0	65,0	19,46	4,0	44788	44808
20,0	25,0	150,0	20,0	65,0	19,48	0,8	—	44970
20,0	25,0	150,0	20,0	65,0	19,48	1,2	—	44971
20,0	25,0	150,0	20,0	65,0	19,48	1,6	—	44972
20,0	25,0	150,0	20,0	65,0	19,48	3,2	—	44974

CONTINUED



43MB

METRIC SERIES

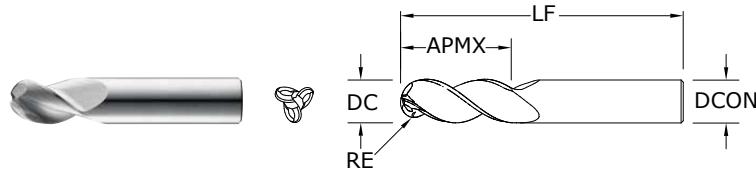

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-B (TiB ₂)
3,0	4,5	57,0	6,0	44916
4,0	6,0	57,0	6,0	44919
5,0	7,5	57,0	6,0	44922
6,0	9,0	57,0	6,0	44925
8,0	12,0	63,0	8,0	44928
10,0	15,0	75,0	10,0	44931
12,0	18,0	83,0	12,0	44934
16,0	24,0	100,0	16,0	44937
20,0	30,0	108,0	20,0	44940
25,0	37,5	127,0	25,0	44943

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006

DCON = h₆

RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,0127/-0,0127

>18-25 DIAMETER



DC = +0,000/-0,013

DCON = h₆

RE = +0,0127/-0,0127

NON-FERROUS

For patent
information visit
www.ksptpatents.com

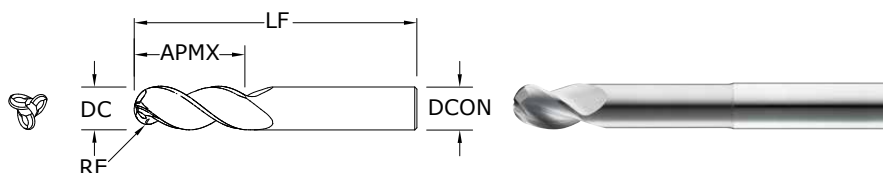

43MB

METRIC SERIES

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006

DCON = h_6

RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008

DCON = h_6

RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h_6

RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h_6

RE = +0,0127/-0,0127

>18-25 DIAMETER

DC = +0,000/-0,013

DCON = h_6

RE = +0,0127/-0,0127


NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-B (TiB ₂)
3,0	6,0	57,0	6,0	10,0	2,74	44917
3,0	9,0	57,0	6,0	16,0	2,74	44918
4,0	8,0	57,0	6,0	13,0	3,73	44920
4,0	12,0	57,0	6,0	21,0	3,73	44921
5,0	10,0	63,0	6,0	16,0	4,50	44923
5,0	15,0	63,0	6,0	26,0	4,50	44924
6,0	12,0	63,0	6,0	19,0	5,49	44926
6,0	18,0	75,0	6,0	31,0	5,49	44927
8,0	16,0	75,0	8,0	25,0	7,49	44929
8,0	24,0	83,0	8,0	41,0	7,49	44930
10,0	20,0	83,0	10,0	31,0	9,50	44932
10,0	30,0	100,0	10,0	51,0	9,50	44933
12,0	24,0	100,0	12,0	37,0	11,48	44935
12,0	36,0	130,0	12,0	61,0	11,48	44936
16,0	32,0	130,0	16,0	49,0	15,49	44938
16,0	48,0	150,0	16,0	81,0	15,49	44939
20,0	40,0	130,0	20,0	61,0	19,48	44941
20,0	60,0	150,0	20,0	101,0	19,48	44942
25,0	50,0	152,0	25,0	76,0	24,49	44944
25,0	75,0	170,0	25,0	126,0	24,49	44945


RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43MCB

METRIC SERIES

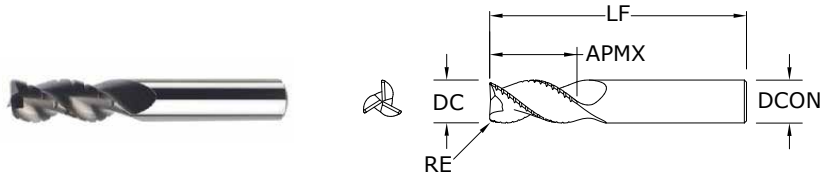

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	19,0	63,0	6,0	0,5	44298	44299
8,0	19,0	63,0	8,0	0,3	44300	44305
10,0	22,0	72,0	10,0	0,3	44301	44306
12,0	26,0	83,0	12,0	1,0	44302	44307
16,0	32,0	92,0	16,0	1,0	44303	44308
20,0	38,0	104,0	20,0	1,0	44304	44309

TOLERANCES (mm)

>6–10 DIAMETER

DC = +0,000/–0,009

DCON = h₆

RE = +0,000/–0,050

>10–18 DIAMETER

DC = +0,000/–0,011

DCON = h₆

RE = +0,000/–0,050

>18–20 DIAMETER

DC = +0,000/–0,013


DCON = h₆

RE = +0,000/–0,050

NON-FERROUS


For patent
information visit
www.ksptpatents.com

Series
43M, 43MB, 43MCR,
43ML, 43MLC,
43MCB
Metric



43ML, 43MLC, 43MCB		 Ae x DC		 Ap x DC		Vc (m/min)	DC • mm										
Metric	Hardness						3	6	10	12	16	20	25				
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243				
					(392-588)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213				
						Feed (mm/min)	3371	4682	5618	5618	4869	4370	3980				
			≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771				
					(488-732)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213				
						Feed (mm/min)	4196	5828	6994	6994	6061	5440	4955				
		≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804					
				(804-1206)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488					
					Feed (mm/min)	16131	21124	26888	26885	23046	21126	18726					
				ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	185	RPM	19641	9820	5892	4910	3683	2946	2357
									(148-222)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
										Feed (mm/min)	1273	1768	2121	2121	1838	1650	1503
	≤ 0.5	≤ 1.5	230			RPM	24418	12209	7326	6105	4578	3663	2930				
			(184-276)			Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213				
						Feed (mm/min)	1582	2197	2637	2637	2285	2051	1868				
	≤ 0.05	≤ 2	380	RPM	40343	20172	12103	10086	7564	6052	4841						
			(304-456)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488						
				Feed (mm/min)	6099	7987	10166	10166	8714	7988	7081						
			COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	265	RPM	28134	14067	8440	7034	5275	4220	3376	
								(212-318)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175	
									Feed (mm/min)	1620	2025	2701	2532	2228	2026	1773	
	≤ 0.5	≤ 1.5			330	RPM	35035	17518	10511	8759	6569	5255	4204				
					(264-396)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175				
						Feed (mm/min)	2018	2522	3363	3153	2775	2523	2207				
	≤ 0.05	≤ 2	545	RPM	57861	28930	17358	14465	10849	8679	6943						
			(436-654)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400						
				Feed (mm/min)	7082	9373	11804	11976	10415	9721	8332						
			COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	105	RPM	11148	5574	3344	2787	2090	1672	1338	
								(84-126)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175	
									Feed (mm/min)	642	803	1070	1003	883	803	702	
	≤ 0.5	≤ 1.5			130	RPM	13802	6901	4141	3450	2588	2070	1656				
					(104-156)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175				
						Feed (mm/min)	795	994	1325	1242	1093	994	870				
	≤ 0.05	≤ 2	215	RPM	22826	11413	6848	5706	4280	3424	2739						
			(172-258)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400						
				Feed (mm/min)	2794	3697	4656	4725	4109	3835	3287						
			PLASTICS ABS, Polycarbonate, PVC, Polypropylene			1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243	
								(392-588)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350	
									Feed (mm/min)	5618	7490	9364	9363	8240	7491	6555	
	≤ 0.5	≤ 1.5			610	RPM	64762	32381	19429	16190	12143	9714	7771				
					(488-732)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350				
						Feed (mm/min)	6994	9325	11657	11656	10258	9326	8160				
	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804						
			(804-1206)	Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800						
				Feed (mm/min)	26117	34567	43532	44169	38410	35210	30730						


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = (Vc x 1000) / (DC x 3.14)
 mm/min = Fz x 3 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



47

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

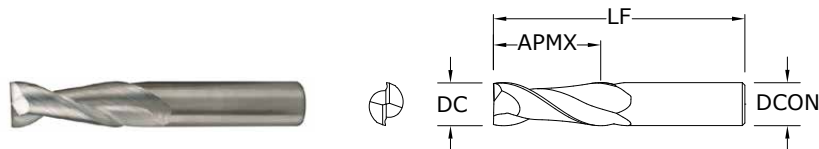

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34620	34660
3/16	9/16	2	3/16	34621	34661
1/4	3/4	2-1/2	1/4	34622	34662
5/16	13/16	2-1/2	5/16	34623	34663
3/8	1	2-1/2	3/8	34624	34664
1/2	1-1/4	3-1/4	1/2	34625	34665
5/8	1-5/8	3-3/4	5/8	34626	34666
3/4	1-5/8	4	3/4	34627	34667
1	2	4-1/2	1	34628	34668

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆



3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

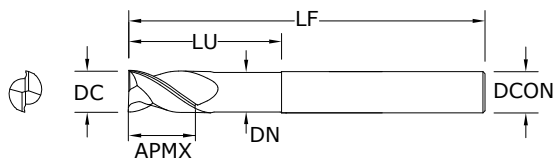

47L
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

3/4–1 DIAMETER

DC = +0.0000/–0.00051


DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch				EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	.235	34640	34678
3/8	1/2	4	3/8	2-1/8	.360	34641	34679
1/2	5/8	6	1/2	2-1/8	.485	34642	34680
1/2	5/8	6	1/2	3-3/8	.485	34643	34681
5/8	3/4	6	5/8	2-3/8	.610	34644	34682
5/8	3/4	6	5/8	3-3/8	.610	34645	34683
3/4	1	6	3/4	2-1/2	.735	34646	34684
3/4	1	6	3/4	3-3/8	.735	34647	34685


- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



47B

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

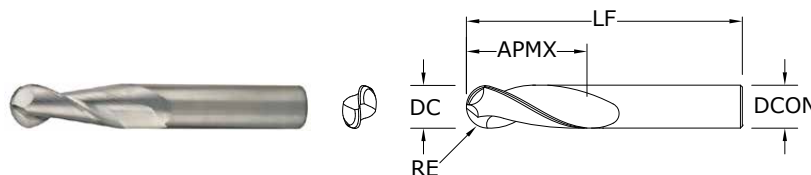

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34630	34669
3/16	9/16	2	3/16	34631	34670
1/4	3/4	2-1/2	1/4	34632	34671
5/16	13/16	2-1/2	5/16	34633	34672
3/8	1	2-1/2	3/8	34634	34673
1/2	1-1/4	3-1/4	1/2	34635	34674
5/8	1-5/8	3-3/4	5/8	34636	34675
3/4	1-5/8	4	3/4	34637	34676
1	2	4-1/2	1	34638	34677

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0005/–0.0005

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005


NON-FERROUS

For patent information visit
www.ksptpatents.com

47LB

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

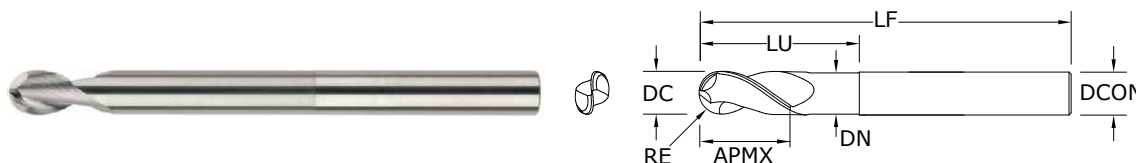

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	.235	34650	34686
3/8	1/2	4	3/8	2-1/8	.360	34651	34687
1/2	5/8	6	1/2	2-1/8	.485	34652	34688
1/2	5/8	6	1/2	3-3/8	.485	34653	34689
5/8	3/4	6	5/8	2-3/8	.610	34655	34691
5/8	3/4	6	5/8	3-3/8	.610	34654	34690
3/4	1	6	3/4	2-1/2	.735	34656	34693
3/4	1	6	3/4	3-3/8	.735	34657	34692

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER


DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005

NON-FERROUS

For patent information visit
www.ksptpatents.com



Series
47, 47B, 47L, 47LB
Fractional

Hardness

Ae x DC Ap x DC

Vc
(sfm)

DC • in

1/8 1/4 3/8 1/2 5/8 3/4 1

N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	Slot 	1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112
						(1280-1920)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	88	122	147	147	127	114	104
			Profile 	≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640
						(1600-2400)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	110	153	183	183	159	143	130
			HSM 	≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606
						(2640-3960)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
							Feed (ipm)	424	555	706	706	605	555	492
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Slot 	1	≤ 1	600	RPM	18336	9168	6112	4584	3667	3056	2292
						(480-720)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	33	46	55	55	48	43	39
			Profile 	≤ 0.5	≤ 1.5	750	RPM	22920	11460	7640	5730	4584	3820	2865
						(600-900)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	41	57	69	69	60	53	49
			HSM 	≤ 0.05	≤ 2	1240	RPM	37894	18947	12631	9474	7579	6316	4737
						(992-1488)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
							Feed (ipm)	159	208	265	265	227	208	185
	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot 	1	≤ 1	865	RPM	26434	13217	8811	6609	5287	4406	3304
						(692-1038)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	42	53	70	66	58	53	46
			Profile 	≤ 0.5	≤ 1.5	1080	RPM	33005	16502	11002	8251	6601	5501	4126
						(864-1296)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	53	66	88	83	73	66	58
			HSM 	≤ 0.05	≤ 2	1780	RPM	54397	27198	18132	13599	10879	9066	6800
						(1424-2136)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
							Feed (ipm)	185	245	308	313	272	254	218
N	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	Slot 	1	≤ 1	345	RPM	10543	5272	3514	2636	2109	1757	1318
						(276-414)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	17	21	28	26	23	21	18
			Profile 	≤ 0.5	≤ 1.5	430	RPM	13141	6570	4380	3285	2628	2190	1643
						(344-516)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	21	26	35	33	29	26	23
			HSM 	≤ 0.05	≤ 2	710	RPM	21698	10849	7233	5424	4340	3616	2712
						(568-852)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
							Feed (ipm)	74	98	123	125	108	101	87
	PLASTICS ABS, Polycarbonate, PVC, Polypropylene		Slot 	1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112
						(1280-1920)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
							Feed (ipm)	147	196	244	244	215	196	171
			Profile 	≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640
						(1600-2400)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
							Feed (ipm)	183	244	306	306	269	244	214
			HSM 	≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606
						(2640-3960)	Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320
							Feed (ipm)	686	908	1143	1160	1008	924	807

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)

rpm = Vc x 3.82 / DC


ipm = Fz x 2 x rpm

reduce speed and feed for materials harder than listed

reduce cut depth and feed by 50% for long flute and long reach tools

reduce feed and Ae when finish milling (.02 x DC maximum)


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



47M

METRIC SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

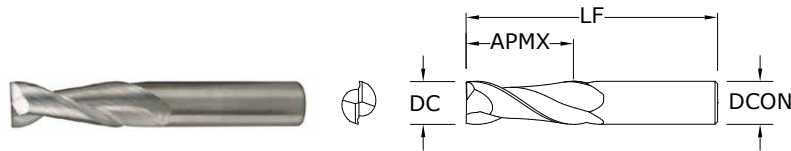

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	38,0	3,0	44550	44587
4,0	11,0	50,0	4,0	44551	44588
5,0	13,0	50,0	5,0	44552	44589
6,0	13,0	57,0	6,0	44553	44590
8,0	19,0	63,0	8,0	44554	44591
10,0	22,0	72,0	10,0	44555	44592
12,0	26,0	83,0	12,0	44556	44593
14,0	26,0	83,0	14,0	44557	44594
16,0	32,0	92,0	16,0	44558	44595
20,0	38,0	104,0	20,0	44559	44596
25,0	38,0	104,0	25,0	44560	44597

TOLERANCES (mm)

3 DIAMETER

DC = $+0,000/-0,006$
DCON = h_6

>3-6 DIAMETER

DC = $+0,000/-0,008$
DCON = h_6

>6-10 DIAMETER

DC = $+0,000/-0,009$
DCON = h_6

>10-18 DIAMETER


DC = $+0,000/-0,012$
DCON = h_6

>18-25 DIAMETER

DC = $+0,000/-0,013$
DCON = h_6

NON-FERROUS


For patent information visit
www.ksptpatents.com



47ML

METRIC SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

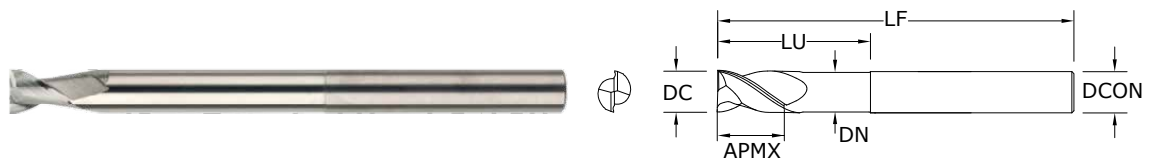

mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	5,62	44561	44609
8,0	12,0	100,0	8,0	54,0	7,62	44562	44610
10,0	12,0	100,0	10,0	54,0	9,62	44563	44611
12,0	16,0	150,0	12,0	80,0	11,62	44564	44612
16,0	20,0	150,0	16,0	80,0	15,62	44565	44613
20,0	25,0	150,0	20,0	80,0	19,62	44566	44614

TOLERANCES (mm)

6 DIAMETER

DC = $+0,000/-0,008$
DCON = h_6

>6-10 DIAMETER

DC = $+0,000/-0,009$
DCON = h_6

>10-18 DIAMETER


DC = $+0,000/-0,011$
DCON = h_6

>18-20 DIAMETER

DC = $+0,000/-0,013$
DCON = h_6

NON-FERROUS

For patent information visit
www.ksptpatents.com

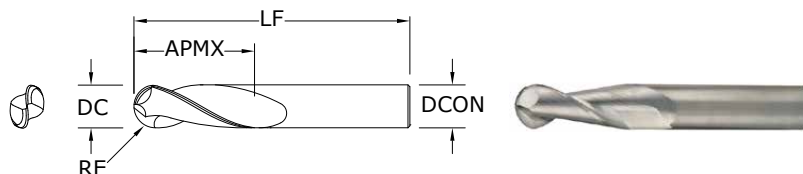

47MB
METRIC SERIES

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006
DCON = h_6
RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008
DCON = h_6
RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h_6
RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,012
DCON = h_6
RE = +0,0127/-0,0127

>18-25 DIAMETER

DC = +0,000/-0,013
DCON = h_6
RE = +0,0127/-0,0127


mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	38,0	3,0	44570	44598
4,0	11,0	50,0	4,0	44571	44599
5,0	13,0	50,0	5,0	44572	44600
6,0	13,0	57,0	6,0	44573	44601
8,0	19,0	63,0	8,0	44574	44602
10,0	22,0	72,0	10,0	44575	44603
12,0	26,0	83,0	12,0	44576	44604
14,0	26,0	83,0	14,0	44577	44605
16,0	32,0	92,0	16,0	44578	44606
20,0	37,3	104,0	20,0	44579	44607
25,0	38,0	104,0	25,0	44580	44608

RE = 1/2 Cutting Diameter (DC)

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

NON-FERROUS

For patent information visit
www.ksptpatents.com

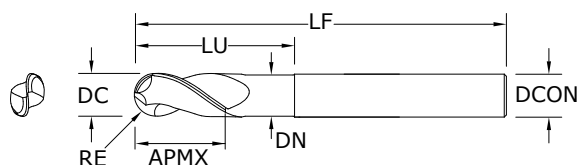

47MLB
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,008
DCON = h_6
RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h_6
RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011
DCON = h_6
RE = +0,0127/-0,0127

>18-20 DIAMETER

DC = +0,000/-0,013
DCON = h_6
RE = +0,0127/-0,0127


mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	5,62	44581	44615
8,0	12,0	100,0	8,0	54,0	7,62	44582	44616
10,0	12,0	100,0	10,0	54,0	9,62	44583	44617
12,0	16,0	150,0	12,0	80,0	11,62	44584	44618
16,0	20,0	150,0	16,0	80,0	15,62	44585	44619
20,0	25,0	150,0	20,0	80,0	19,62	44586	44620

RE = 1/2 Cutting Diameter (DC)

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)


NON-FERROUS

For patent information visit
www.ksptpatents.com



Series 47M, 47MB, 47ML, 47MLB Metric						Vc (m/min)		DC • mm							
Hardness		Ae x DC		Ap x DC				3	6	10	12	16	20	25	
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	 Slot	1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243		
					(392-588)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213		
					Feed (mm/min)	2247	3121	3746	3745	3246	2913	2653			
		 Profile	≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771		
					(488-732)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213		
					Feed (mm/min)	2797	3885	4663	4662	4041	3627	3303			
	≤ 125 Bhn or ≤ 77 HRb	 HSM	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804		
					(804-1206)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488		
					Feed (mm/min)	10754	14083	17925	17924	15364	14084	12484			
		ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb	 Slot	1	≤ 1	185	RPM	19641	9820	5892	4910	3683	2946	2357
							(148-222)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
							Feed (mm/min)	848	1178	1414	1414	1226	1100	1002	
	 Profile			≤ 0.5	≤ 1.5	230	RPM	24418	12209	7326	6105	4578	3663	2930	
						(184-276)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213	
						Feed (mm/min)	1055	1465	1758	1758	1524	1367	1245		
	≤ 140 Bhn or ≤ 3 HRc		 HSM	≤ 0.05	≤ 2	380	RPM	40343	20172	12103	10086	7564	6052	4841	
						(304-456)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488	
						Feed (mm/min)	4066	5325	6778	6777	5809	5325	4720		
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	 Slot	1	≤ 1	265	RPM	28134	14067	8440	7034	5275	4220	3376		
					(212-318)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175		
					Feed (mm/min)	1080	1350	1801	1688	1485	1350	1182			
		 Profile	≤ 0.5	≤ 1.5	330	RPM	35035	17518	10511	8759	6569	5255	4204		
					(264-396)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175		
					Feed (mm/min)	1345	1682	2242	2102	1850	1682	1472			
	≤ 200 Bhn or ≤ 23 HRC	 HSM	≤ 0.05	≤ 2	545	RPM	57861	28930	17358	14465	10849	8679	6943		
					(436-654)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400		
					Feed (mm/min)	4721	6248	7869	7984	6943	6480	5555			
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRC	 Slot	1	≤ 1	105	RPM	11148	5574	3344	2787	2090	1672	1338		
					(84-126)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175		
					Feed (mm/min)	428	535	713	669	589	535	468			
		 Profile	≤ 0.5	≤ 1.5	130	RPM	13802	6901	4141	3450	2588	2070	1656		
					(104-156)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175		
					Feed (mm/min)	530	662	883	828	729	662	580			
	≤ 200 Bhn or ≤ 23 HRC	 HSM	≤ 0.05	≤ 2	215	RPM	22826	11413	6848	5706	4280	3424	2739		
					(172-258)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400		
					Feed (mm/min)	1862	2465	3104	3150	2739	2556	2191			
PLASTICS ABS, Polycarbonate, PVC, Polypropylene	≤ 200 Bhn or ≤ 23 HRC	 Slot	1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243		
					(392-588)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350		
					Feed (mm/min)	3745	4994	6243	6242	5493	4994	4370			
		 Profile	≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771		
					(488-732)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350		
					Feed (mm/min)	4662	6217	7771	7771	6839	6217	5440			
	≤ 200 Bhn or ≤ 23 HRC	 HSM	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804		
					(804-1206)	Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800		
					Feed (mm/min)	17412	23045	29022	29446	25607	23473	20487			

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $rpm = (Vc \times 1000) / (DC \times 3.14)$
 $mm/min = Fz \times 2 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

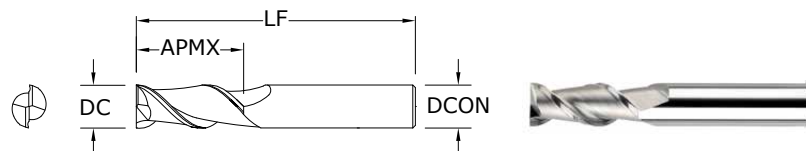

44

FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

 $DC = +0.0000/-0.00035$
 $DCON = h_6$

1/2–5/8 DIAMETER

 $DC = +0.0000/-0.00043$
 $DCON = h_6$

3/4–1 DIAMETER

 $DC = +0.0000/-0.00051$
 $DCON = h_6$
NON-FERROUS

For patent
information visit

www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED W/FLAT	Ti-NAMITE®-B (TiB ₂) W/FLAT	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/4	2-7/16	3/8	34501	34502	32033	32053
1/4	1-1/4	3-1/16	3/8	34503	34504	32034	32054
1/4	1-3/4	3-9/16	3/8	34505	34506	32035	32055
5/16	1-3/8	3-1/8	3/8	34507	34508	32036	32056
3/8	3/4	2-1/2	3/8	34509	34510	32037	32057
3/8	1-1/2	3-1/4	3/8	34511	34512	32038	32058
3/8	2-1/2	4-1/4	3/8	34513	34514	32039	32059
1/2	1-1/4	3-1/4	1/2	34515	34516	32040	32060
1/2	2	4	1/2	34517	34518	32041	32061
1/2	3	5	1/2	34519	34520	32042	32062
5/8	1-5/8	3-3/4	5/8	34521	34522	32043	32063
5/8	2-1/2	4-5/8	5/8	34523	34524	32044	32064
3/4	1-5/8	3-7/8	3/4	34525	34526	32045	32065
3/4	3	5-1/4	3/4	34527	34528	32046	32066
3/4	4	6-1/4	3/4	34529	34530	32047	32067
1	2	4-1/2	1	34531	34532	32048	32068
1	4	6-1/2	1	34533	34534	32049	32069

Contact your KSPT Sales Representative for more information on Corner Radius options.

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

TOLERANCES (mm)

≤3 DIAMETER

 $DC = +0.000/-0.006$
 $DCON = h_6$

>3–6 DIAMETER

 $DC = +0.000/-0.008$
 $DCON = h_6$

>6–10 DIAMETER

 $DC = +0.000/-0.009$
 $DCON = h_6$

>10–18 DIAMETER


 $DC = +0.000/-0.011$
 $DCON = h_6$

>18–20 DIAMETER

 $DC = +0.000/-0.013$
 $DCON = h_6$
NON-FERROUS

For patent
information visit

www.ksptpatents.com

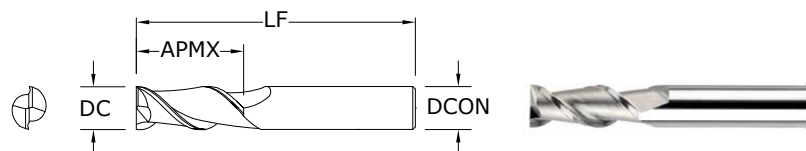

44M


METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED W/FLAT	UNCOATED	Ti-NAMITE®-B (TiB ₂) W/FLAT	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	52,0	6,0	44505	49663	44506	49674
4,0	11,0	55,0	6,0	44509	49664	44510	49675
5,0	13,0	57,0	6,0	44513	49665	44514	49676
6,0	13,0	57,0	6,0	44517	49666	44518	49677
8,0	19,0	69,0	10,0	44521	49667	44522	49678
10,0	22,0	72,0	10,0	44525	49668	44526	49679
12,0	26,0	83,0	12,0	44529	49669	44530	49680
14,0	26,0	83,0	14,0	44533	49670	44534	49681
16,0	32,0	92,0	16,0	44537	49671	44538	49682
18,0	32,0	92,0	18,0	44541	49672	44542	49683
20,0	38,0	104,0	20,0	44545	49673	44546	49684


Contact your KSPT Sales Representative for more information on Corner Radius options.

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

FRACTIONAL Ski-Carb


Series 44 Fractional	Hardness			Vc (sfm)	DC • in								
		Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	1600 (1280-1920)	RPM	48896	24448	16299	12224	9779	8149	6112
						Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	88	122	147	147	127	114	104
			≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	61120	30560	20373	15280	12224	10187	7640
						Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	110	153	183	183	159	143	130
			≤ 0.05	≤ 2	3300 (2640-3960)	RPM	100848	50424	33616	25212	20170	16808	12606
						Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
						Feed (ipm)	424	555	706	706	605	555	492
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	600 (480-720)	RPM	18336	9168	6112	4584	3667	3056	2292
						Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	33	46	55	55	48	43	39
			≤ 0.5	≤ 1.5	750 (600-900)	RPM	22920	11460	7640	5730	4584	3820	2865
						Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	41	57	69	69	60	53	49
			≤ 0.05	≤ 2	1240 (992-1488)	RPM	37894	18947	12631	9474	7579	6316	4737
						Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
						Feed (ipm)	159	208	265	265	227	208	185
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	865 (692-1038)	RPM	26434	13217	8811	6609	5287	4406	3304
						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	42	53	70	66	58	53	46
			≤ 0.5	≤ 1.5	1080 (864-1296)	RPM	33005	16502	11002	8251	6601	5501	4126
						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	53	66	88	83	73	66	58
			≤ 0.05	≤ 2	1780 (1424-2136)	RPM	54397	27198	18132	13599	10879	9066	6800
						Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
						Feed (ipm)	185	245	308	313	272	254	218
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	345 (276-414)	RPM	10543	5272	3514	2636	2109	1757	1318
						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	17	21	28	26	23	21	18
			≤ 0.5	≤ 1.5	430 (344-516)	RPM	13141	6570	4380	3285	2628	2190	1643
						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	21	26	35	33	29	26	23
			≤ 0.05	≤ 2	710 (568-852)	RPM	21698	10849	7233	5424	4340	3616	2712
						Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
						Feed (ipm)	74	98	123	125	108	101	87
PLASTICS ABS, Polycarbonate, PVC, Polypropylene			1	≤ 1	1600 (1280-1920)	RPM	48896	24448	16299	12224	9779	8149	6112
						Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
						Feed (ipm)	147	196	244	244	215	196	171
			≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	61120	30560	20373	15280	12224	10187	7640
						Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
						Feed (ipm)	183	244	306	306	269	244	214
			≤ 0.05	≤ 2	3300 (2640-3960)	RPM	100848	50424	33616	25212	20170	16808	12606
						Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320
						Feed (ipm)	686	908	1143	1160	1008	924	807

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 2 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstoool.com)



Series 44M Metric	Hardness			Vc (m/min)	DC • mm								
		Ae x DC	Ap x DC		3	6	10	12	16	20	25		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	2247	3121	3746	3745	3246	2913	2653
			≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	2797	3885	4663	4662	4041	3627	3303
			≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
						Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488
						Feed (mm/min)	10754	14083	17925	17924	15364	14084	12484
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	185 (148-222)	RPM	19641	9820	5892	4910	3683	2946	2357
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	848	1178	1414	1414	1226	1100	1002
			≤ 0.5	≤ 1.5	230 (184-276)	RPM	24418	12209	7326	6105	4578	3663	2930
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	1055	1465	1758	1758	1524	1367	1245
			≤ 0.05	≤ 2	380 (304-456)	RPM	40343	20172	12103	10086	7564	6052	4841
						Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488
						Feed (mm/min)	4066	5325	6778	6777	5809	5325	4720
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	265 (212-318)	RPM	28134	14067	8440	7034	5275	4220	3376
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	1080	1350	1801	1688	1485	1350	1182
			≤ 0.5	≤ 1.5	330 (264-396)	RPM	35035	17518	10511	8759	6569	5255	4204
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	1345	1682	2242	2102	1850	1682	1472
			≤ 0.05	≤ 2	545 (436-654)	RPM	57861	28930	17358	14465	10849	8679	6943
						Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400
						Feed (mm/min)	4721	6248	7869	7984	6943	6480	5555
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	105 (84-126)	RPM	11148	5574	3344	2787	2090	1672	1338
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	428	535	713	669	589	535	468
			≤ 0.5	≤ 1.5	130 (104-156)	RPM	13802	6901	4141	3450	2588	2070	1656
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	530	662	883	828	729	662	580
			≤ 0.05	≤ 2	215 (172-258)	RPM	22826	11413	6848	5706	4280	3424	2739
						Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400
						Feed (mm/min)	1862	2465	3104	3150	2739	2556	2191
PLASTICS ABS, Polycarbonate, PVC, Polypropylene			1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243
						Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
						Feed (mm/min)	3745	4994	6243	6242	5493	4994	4370
			≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
						Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
						Feed (mm/min)	4662	6217	7771	7771	6839	6217	5440
			≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
						Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800
						Feed (mm/min)	17412	23045	29022	29446	25607	23473	20487


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 2 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



45

FRACTIONAL SERIES

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

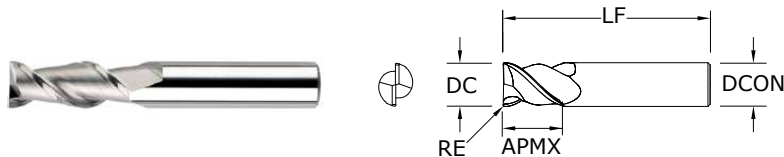

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.			
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED W/FLAT	UNCOATED	TI-NAMITE®-B (TiB ₂) W/FLAT	TI-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	3/8	.010	91257	91250	91242	91235
5/16	7/16	2-1/2	3/8	.012	91258	91251	91243	91236
3/8	9/16	2-1/2	3/8	.015	91259	91252	91244	91237
1/2	3/4	3	1/2	.020	91260	91253	91245	91238
5/8	7/8	3-1/2	5/8	.025	91261	91254	91246	91239
3/4	1	4	3/4	.030	91262	91255	91247	91240
1	1-1/4	4	1	.040	91263	91256	91248	91241

Contact your KSPT representative for reach options.

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER


DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

Series 45 Fractional	Hardness			Vc (sfm)	DC • in							
		Ae x DC	Ap x DC		1/4	3/8	1/2	5/8	3/4	1		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	1600	RPM	24448	16299	12224	9779	8149	6112
					(1280-1920)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	122	147	147	127	114	104
			≤ 0.5	≤ 1.5	2000	RPM	30560	20373	15280	12224	10187	7640
					(1600-2400)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	153	183	183	159	143	130
			≤ 0.05	≤ 2	3300	RPM	50424	33616	25212	20170	16808	12606
					(2640-3960)	Fz	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
						Feed (ipm)	555	706	706	605	555	492
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	600	RPM	9168	6112	4584	3667	3056	2292
					(480-720)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	46	55	55	48	43	39
			≤ 0.5	≤ 1.5	750	RPM	11460	7640	5730	4584	3820	2865
					(600-900)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	57	69	69	60	53	49
			≤ 0.05	≤ 2	1240	RPM	18947	12631	9474	7579	6316	4737
					(992-1488)	Fz	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
						Feed (ipm)	208	265	265	227	208	185
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	865	RPM	13217	8811	6609	5287	4406	3304
					(692-1038)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	53	70	66	58	53	46
			≤ 0.5	≤ 1.5	1080	RPM	16502	11002	8251	6601	5501	4126
					(864-1296)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	66	88	83	73	66	58
			≤ 0.05	≤ 2	1780	RPM	27198	18132	13599	10879	9066	6800
					(1424-2136)	Fz	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
						Feed (ipm)	245	308	313	272	254	218
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	345	RPM	5272	3514	2636	2109	1757	1318
					(276-414)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	21	28	26	23	21	18
			≤ 0.5	≤ 1.5	430	RPM	6570	4380	3285	2628	2190	1643
					(344-516)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	26	35	33	29	26	23
			≤ 0.05	≤ 2	710	RPM	10849	7233	5424	4340	3616	2712
					(568-852)	Fz	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
						Feed (ipm)	98	123	125	108	101	87
PLASTICS ABS, Polycarbonate, PVC, Polypropylene			1	≤ 1	1600	RPM	24448	16299	12224	9779	8149	6112
					(1280-1920)	Fz	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
						Feed (ipm)	196	244	244	215	196	171
			≤ 0.5	≤ 1.5	2000	RPM	30560	20373	15280	12224	10187	7640
					(1600-2400)	Fz	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
						Feed (ipm)	244	306	306	269	244	214
			≤ 0.05	≤ 2	3300	RPM	50424	33616	25212	20170	16808	12606
					(2640-3960)	Fz	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320
						Feed (ipm)	908	1143	1160	1008	924	807

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 2 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

High Performance Drills



Hole Making

HIGH PERFORMANCE DRILLS	SERIES	DESCRIPTION	APPLICATION		PAGE	S&F PAGE
			● PREFERRED	○ ALTERNATE		
Hi-PerCarb®	142P (3XD)	2 Flute Internal Coolant 4 Margin 3XD	●		188	202
	142P (5XD)	2 Flute Internal Coolant 4 Margin 5XD	●		191	202
	142P (8XD)	2 Flute Internal Coolant 4 Margin 8XD	●		194	202
	142P (12XD)	2 Flute Internal Coolant 4 Margin 12XD	●		198	202
	143M-S (3XD)	2 Flute Internal Coolant 2 Margin 3XD	●	○	206	214
	143M-S (5XD)	2 Flute Internal Coolant 2 Margin 5XD	●	○	210	214
	141K (5xD)	3 Flute Internal Coolant 3 Margin 5xD	●		218	222
	131N (3xD)	3 Flute External Coolant 3 Margin 3xD		●	223	231
	131N (5xD)	3 Flute External Coolant 3 Margin 5xD		●	227	231
	135 (3xD)	2 Flute External Coolant 4 Margin 3xD	●	○	234	240
	135 (5xD)	2 Flute External Coolant 4 Margin 5xD	●	○	244	250
	146U (3xD)	2 Flute External Coolant 4 Margin 3xD	●	○	254	268
	146U (5xD)	2 Flute External Coolant 4 Margin 5xD	●	○	259	268
	136U (2xD)	2 Flute External Coolant 4 Margin 2xD	●	○	264	268
CFRP 8 Facet	120	2 Flute External Coolant 4 Margin CFRP		●	232	233

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	APLICACIÓN		PÁGINA	S&F PÁGINA
			● PREFERIDO	○ ALTERNATIVO		
Hi-PerCarb®	142P (3XD)	2 filos, refrigeración interna, 4 margen, 3XD	●		188	202
	142P (5XD)	2 filos, refrigeración interna, 4 margen, 5XD	●		191	202
	142P (8XD)	2 filos, refrigeración interna, 4 margen, 8XD	●		194	202
	142P (12XD)	2 filos, refrigeración interna, 4 margen, 12XD	●		198	202
	143M-S (3XD)	2 filos, refrigeración interna, 2 margen, 3XD	●	○	206	214
	143M-S (5XD)	2 filos, refrigeración interna, 2 margen, 5XD	●	○	210	214
	141K (5xD)	3 filos, refrigeración interna, 3 margen, 5xD	●		218	222
	131N (3xD)	3 filos, refrigeración externa, 3 margen, 3xD		●	223	231
	131N (5xD)	3 filos, refrigeración externa, 3 margen, 5xD		●	227	231
	135 (3xD)	2 filos, refrigeración externa, 4 margen, 3xD	●	○	234	240
	135 (5xD)	2 filos, refrigeración externa, 4 margen, 5xD	●	○	244	250
	146U (3xD)	2 filos, refrigeración externa, 4 margen, 3xD	●	○	254	268
	146U (5xD)	2 filos, refrigeración externa, 4 margen, 5xD	●	○	259	268
	136U (2xD)	2 filos, refrigeración externa, 4 margen, 2xD	●	○	264	268
	De 8 caras CFRP	2 filos, refrigeración externa, 4 margen, CFRP		●	232	233

Recomendaciones de velocidades y avances mostradas tras cada serie

Outils de perçage

FORETS HAUTE PERFORMANCE	SÉRIES	DESCRIPTION	APPLICATION		PAGE	S&F PAGE
			● PRÉFÉRÉ	○ ALTERNER		
Hi-PerCarb®	142P (3XD)	2 dents trou d'huile 4 listel 3XD	●		188	202
	142P (5XD)	2 dents trou d'huile 4 listel 5XD	●		191	202
	142P (8XD)	2 dents trou d'huile 4 listel 8XD	●		194	202
	142P (12XD)	2 dents trou d'huile 4 listel 12XD	●		198	202
	143M-S (3XD)	2 dents trou d'huile 2 listel 3XD	●	○	206	214
	143M-S (5XD)	2 dents trou d'huile 2 listel 5XD	●	○	210	214
	141K (5xD)	3 dents refroidissement interne à 3 listel 5xD	●		218	222
	131N (3xD)	3 dents refroidissement externe à 3 listel 3xD		●	223	231
	131N (5xD)	3 dents refroidissement externe à 3 listel 5xD		●	227	231
	135 (3xD)	2 dents refroidissement externe à 4 listel 3xD	●	○	234	240
	135 (5xD)	2 dents refroidissement externe à 4 listel 5xD	●	○	244	250
	146U (3xD)	2 dents refroidissement externe à 4 listel 3xD	●	○	254	268
	146U (5xD)	2 dents refroidissement externe à 4 listel 5xD	●	○	259	268
	136U (2xD)	2 dents refroidissement externe à 4 listel 2xD	●	○	264	268
	CFRP à 8 facettes	2 dents refroidissement externe à 4 listel CFRP		●	232	233


Recommandations de vitesse et avance indiquées après chaque série

Bohren

HOCHLEISTUNGS- BOHRER	SERIE	BESCHREIBUNG	ANWENDUNG		SEITE	S&F SEITE
			● BEVORZUGT	○ WECHSELN		
Hi-PerCarb®	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 3xD	●		188	202
	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 5xD	●		191	202
	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 8xD	●		194	202
	142P (12XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 12xD	●		198	202
	143M-S (3XD)	2 Einfasenbohrer mit 2 Schneiden und Innenkühlung, 3xD	●	●	206	214
	143M-S (5XD)	2 Einfasenbohrer mit 2 Schneiden und Innenkühlung, 5xD	●	●	210	214
	141K (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Innenkühlung	●		218	222
	131N (3xD)	Dreifasenbohrer 3xD mit 3 Schneiden und Außenkühlung		●	223	231
	131N (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Außenkühlung		●	227	231
	135 (3xD)	Doppelfasenbohrer 3xD mit 4 Schneiden und Außenkühlung	● ● ● ● ● ●		234	240
	135 (5xD)	Doppelfasenbohrer 5xD mit 4 Schneiden und Außenkühlung	● ● ● ● ● ●		244	250
	146U (3xD)	Doppelfasenbohrer 3xD mit 4 Schneiden und Außenkühlung	● ● ● ● ● ●		254	268
	146U (5xD)	Doppelfasenbohrer 5xD mit 4 Schneiden und Außenkühlung	● ● ● ● ● ●		259	268
	136U (2xD)	Doppelfasenbohrer 2xD mit 4 Schneiden und Außenkühlung	● ● ● ● ● ●		264	268
CFRP 8 Facet	120	Doppelfasenbohrer CFRP mit 4 Schneiden und Außenkühlung		●	232	233

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

Drill Matrix

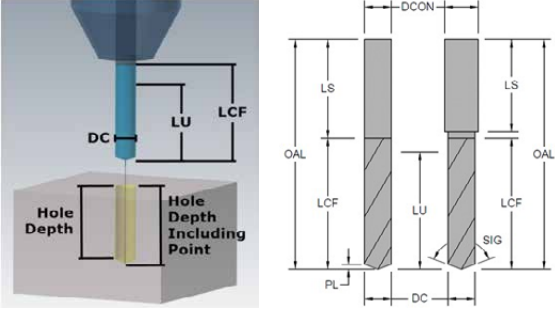Item				Preferred Cut Type for Series ★ Best ☆ Better ○ Good (blank) Not Recommended																		
				Material																		
				Low Carbon ≤ 20 HRC	Medium Carbon, Alloy 20 to 35 HRC	High Carbon, Alloy 35 to 45 HRC	Ferritic & Martensitic ≤ 45 HRC	Austenitic & Duplex ≤ 25 HRC	Precipitation Hardened ≤ 45 HRC	Low Alloy, Grey, Ductile ≤ 25 HRC	Med-High Alloy, Nodular 25 to 35 HRC	High Alloy, Nodular ≥ 35 HRC	Aluminum Alloys	Copper Alloys	Plastics, Composites	Titanium Alloys ≤ 45 HRC	Iron, Nickel, Cobalt Alloys ≤ 45 HRC	Refractory Alloys, Mo, Ta, W ≤ 35 HRC	High Carbon, Med Alloy 45 to 50 HRC	Tool, Mold & Die 45 to 55 HRC	Tool, Mold & Die 55 to 65 HRC	
Name / Series	Tool Type	Coolant Delivery	Page	Steel			Stainless Steel			Cast Iron			Non Ferrous			HRSA			Hard Steel			
Hi-PerCarb® 142P	High Performance Drill	Internal	188	★	★	★	☆	☆	☆	☆	☆	☆	☆	★		☆	☆	☆	★	☆	☆	
Hi-PerCarb® 143M-S	High Performance Drill	Internal	206	☆			★	★	★	☆	☆	☆	○	★		★	★	★				
Hi-PerCarb® 141K	High Performance Drill	Internal	218	☆	☆	☆	○		○	★	★	★	☆	☆		○		○				
Hi-PerCarb® 131N	High Performance Drill	External	223							○			★	★	☆	○						
Series 120	High Performance Drill	External	232												★							
Hi-PerCarb® 135	High Performance Drill	External	234	★	★	★	★	☆	★	☆	☆	☆	○	○		☆	☆	☆	★	☆	☆	
Hi-PerCarb® 146U	High Performance Drill	Internal	254	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Hi-PerCarb® 136U	High Performance Drill	External	264	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Series 120	High Performance Drill	External	232												★							
Series 106	General Application Drill	External	348	○	○	○						☆							★	★	☆	
Series 101	General Application Drill	External	336	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○				
Series 103	General Application Drill	External	352	○	○	○	○	○	○	○	☆	☆	○			○	○	○				
Series 108	General Application Drill	External	341	★	☆	☆	☆	☆	☆	☆	☆	☆		○	○	☆	☆	☆				
Series 301, 301M	Drill & Countersink	External	358	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	○	○	☆	○	○	
Series 601	Countersink	External	364	○	○	○	○	★	○	☆	☆	☆	★	☆	○	○	○	○				
Series 603	Countersink	External	367	☆	☆	☆	☆	★	☆	★	☆	☆	★	★	☆	☆	☆	☆	○			
Series 606	Countersink	External	370	★	★	★	★	★	★	★	★	★	○	★	★	★	★	★	☆	☆	○	
Series 200	Reamer	External	374	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	○	
Series 201M	Reamer	External	378	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	○	




Drill Matrix

	Attributes										
	Material hardness and machinability affect speed, feed, and cut depths. For dimensional and finish quality, a low TIR of the tool-holder assembly in the machine is critical: less than 0.1% drill diameter is preferred. Spot drilling is not necessary in most situations if the drilling surface is machined flat ; spot drill point angle should be greater than drill point angle. Liquid coolant (internal or external) such as oil based or synthetic is highly recommended for all drilling applications. For proper cooling, lubrication and chip evacuation, ensure the coolant is supplied throughout the entire depth of the hole. When liquid coolant cannot be applied for applications such as plastics or composites, clear the swarf with air or vacuum. Depending on material machinability, a peck cycle may be necessary for external coolant drills beyond 2x or 3x depths.										
	Diameter Range inch	Diameter Range mm	Tolerance	Length	Point Angle °	Self Centering	Flute Count	Margins	Helix Angle °	Shank	Coating
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x, 8x, 12x	137	yes	2	4	30	Common	Ti-NAMITE®-X
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x	136	yes	2	2	30	Common	Ti-NAMITE®-A
	0.1250 0.7500	3,00 16,00	DC + / +	5x	124	yes	3	3	30	Common	Ti-NAMITE®-X
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x	124	yes	3	3	30	Common	Ti-NAMITE®-B
	0.0980 0.5000	2,70 12,00	DC 0 / -	3x	145, 90	yes	2	4	20	Common	Di-NAMITE®
	0.0156 0.9219	1,25 22,00	DC + / +	3x, 5x	145	yes	2	4	32	Common	Ti-NAMITE®-A
	0.1250 0.8125	3,00 20,50	DC + / +	3x, 5x	180	yes	2	4	15	Common	Ti-NAMITE®-X
	0.0625 0.8125	1,50 20,50	DC + / +	2x	180	yes	2	4	15	Common	Ti-NAMITE®-X
	0.0980 0.5000	2,70 12,00	DC + / -	3x	145, 90	yes	2	4	20	Common	Di-Namite®
	0.0400 0.5000	1,00 12,00	DC 0 / -	3x	140	yes	2	2	0	Straight	Ti-NAMITE®-A or uncoated
	0.0135 0.5000	0,70 12,00	DC 0 / -	5x	118	no	2	2	20	Straight	Ti-NAMITE®-A or uncoated
	0.1065 0.7500	3,00 20,00	DC 0 / -	3x	150	yes	3	3	30	Straight	Ti-NAMITE®-A or uncoated
	-	0,50 16,00	DC 0 / -	3x	118	yes	2	2	20	Straight	Ti-NAMITE®-A or uncoated
	0.0250 0.2188	0,50 5,00	DC + / 0	spot	118, 60	yes	2	2	0	Straight	Ti-NAMITE®-A or uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	1	-	0	Common	uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	3	-	0	Common	uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	6	6	0	Common	uncoated
	0.0469 0.5000	-	DC + / 0	varies	-	-	4 or 6	4 or 6	0	Straight	uncoated
	-	1,00 10,00	DC + / 0	varies	-	-	4 or 6	4 or 6	0	Straight	uncoated


Drilling Operations

Coolant Recommendations

- Coolant works to mobilize chips away from the cut zone, reduce the heat created during the cutting process and minimize friction.
- It is important to optimize the coolant pressure and position in order to gain the full benefits coolant offers the cutting process.
- Proper coolant application promotes greater operating parameters, greater material removal rates, improved surface finishes, predictable tool life, reduced power consumption and reduced cycle times.
- Pressure is important, but more importantly is consistency of the pressure and application onto the tool; intermittent cooling of carbide leads to thermal stressing of the material and the formation of "microcracks."
- Proper cleanliness and filtration of coolants is important in order for the coolant to maintain its beneficial properties, and also to avoid a reduction in coolant pressure or the possibility of clogging the coolant channels in coolant through drills.

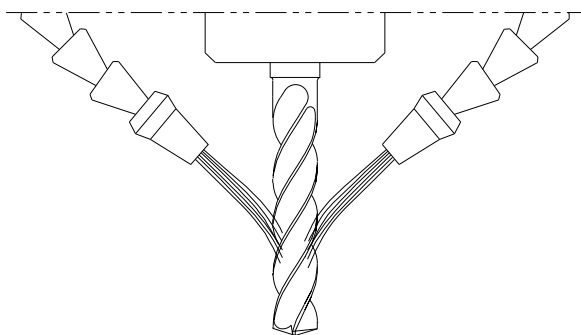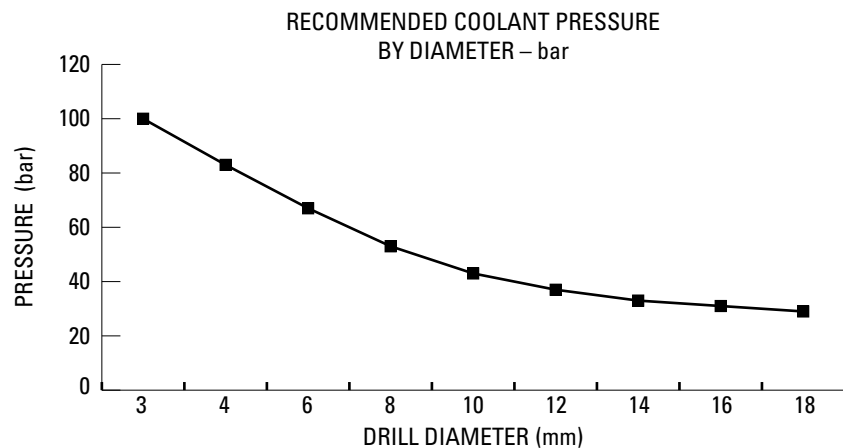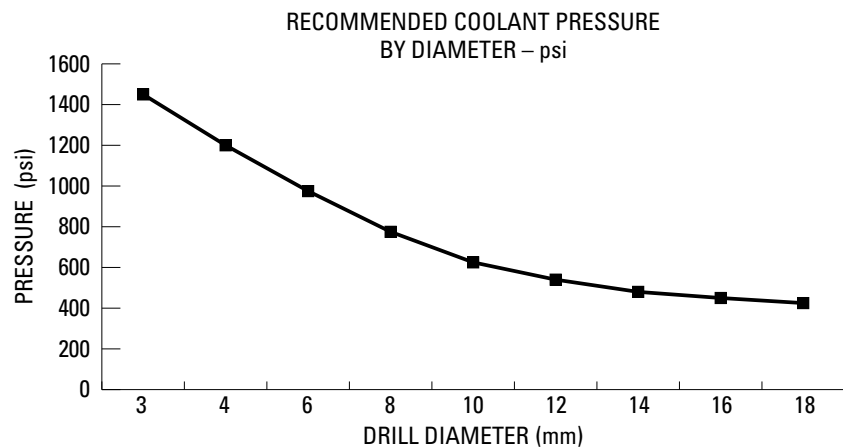

LARGE TIP – LOW VELOCITY
NO COVERAGE AT MAXIMUM DEPTH



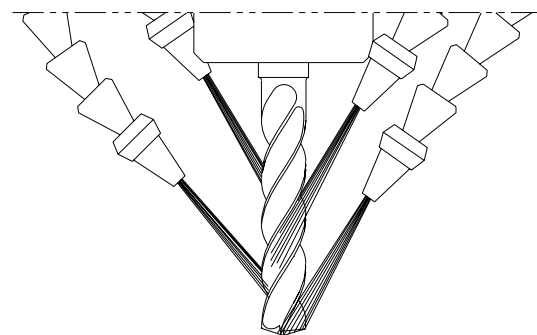


SMALL TIP – HIGH VELOCITY
COMPLETE COVERAGE


- Reducing the nozzle size helps maximize the cooling benefits of the unique double margin design on the Hi-PerCarb drill by increasing velocity. Aim the nozzles in line with the secondary flute located between the two margins as well as the flute for best results.

Recomendaciones en operacion de taladrado

- El líquido de refrigeración actúa movilizandando las virutas fuera de la zona de corte, disminuyendo el calor generado durante el proceso de corte y minimizando la fricción.
- Es importante optimizar la presión de la refrigeración y la posición para poder obtener todos los beneficios del refrigerante durante el proceso de corte.
- Una aplicación apropiada de la refrigeración fomenta mayores parámetros de operación, mayores índices de eliminación de material, acabados de superficie mejorados, una duración de la herramienta más predecible, bajo consumo de energía y un tiempo de ciclo reducido.
- La presión del refrigerante es importante, pero lo es más el flujo continuo aplicado a la herramienta; una refrigeración intermitente en el carburo puede ocasionar un estrés térmico en el material y la formación de "micro-fisuras".
- Una limpieza y filtración adecuadas son importantes para que el refrigerante mantenga sus propiedades y beneficios; por otra parte, se evita la reducción de la presión o la posibilidad de obstruir los canales de refrigeración de la broca.

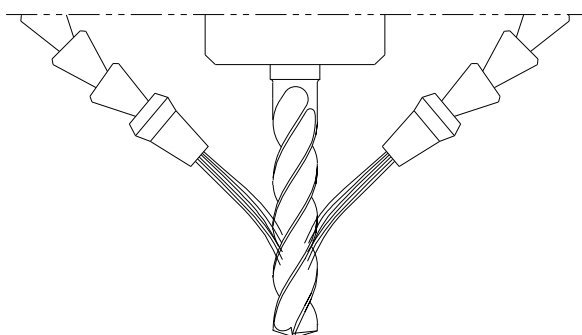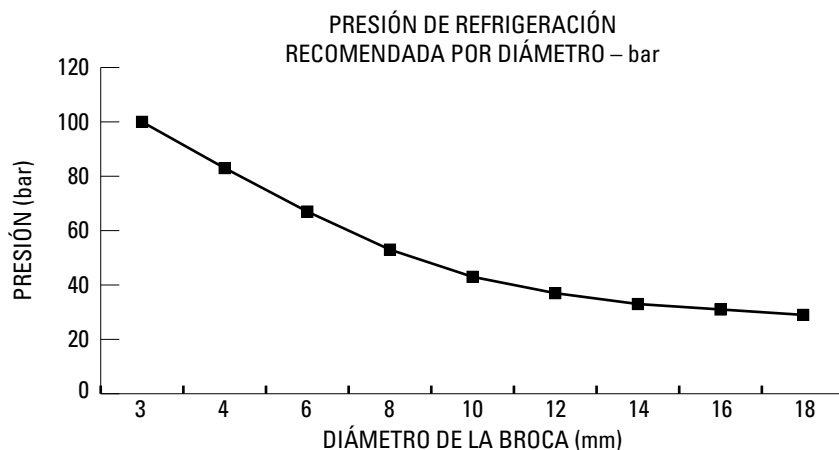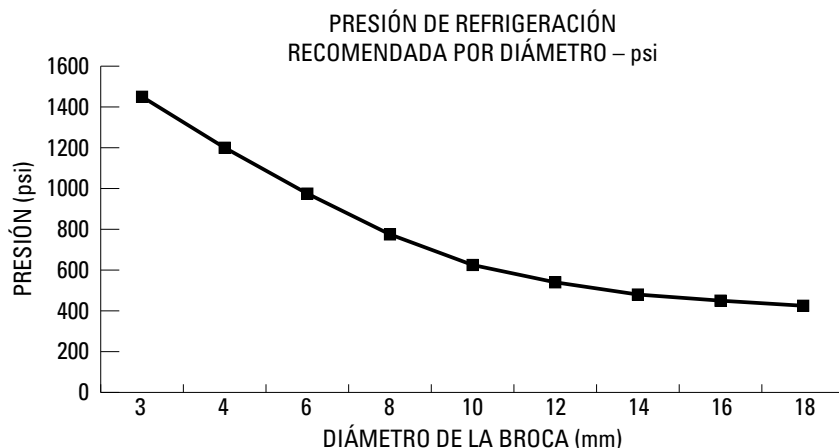

PUNTA GRANDE – BAJA VELOCIDAD
SIN ALCANCE A PROFUNDIDAD MÁXIMA

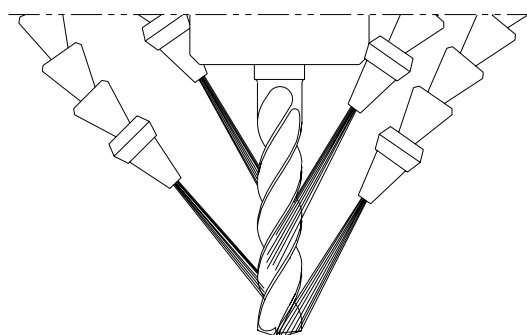




PUNTA PEQUEÑA – ALTA VELOCIDAD
COMPLETO ALCANCE

- Reducir el tamaño de la boquilla ayuda a maximizar los beneficios de refrigeración del exclusivo diseño de doble margen de la broca. Hi-PerCarb aumentando la velocidad. Coloque las boquillas en línea con el segundo filo que se encuentra entre los dos márgenes y también el filo para obtener mejores resultados.


Opérations de perçage

Recommandations en matière de refroidissement

- Le liquide de refroidissement sert à éloigner les copeaux de la zone de coupe, à réduire la chaleur dégagée durant la coupe et à minimiser la friction.
- Il est important d'optimiser la pression et la position du réfrigérant pour en retirer les bénéfices maximums durant la coupe.
- L'application adéquate de réfrigérant se traduit par des paramètres opératoires supérieurs, des taux d'élimination supérieurs des matériaux, de plus belles finitions des surfaces, une durée de vie des outils prévisible, moins de consommation d'énergie et des temps de cycle réduits.
- La pression est importante, mais une pression régulière et l'application sur l'outil sont des facteurs encore plus importants ; le refroidissement intermittent du carbure se traduit par des contraintes thermiques pour le matériau et la formation de microfissures.
- La propreté et le filtrage adéquats des réfrigérants sont importants pour qu'ils conservent leur propriétés, mais aussi pour éviter la réduction de pression du réfrigérant ou le risque d'obturation des conduits à réfrigérant dans les perceuses à réfrigérant intégré.

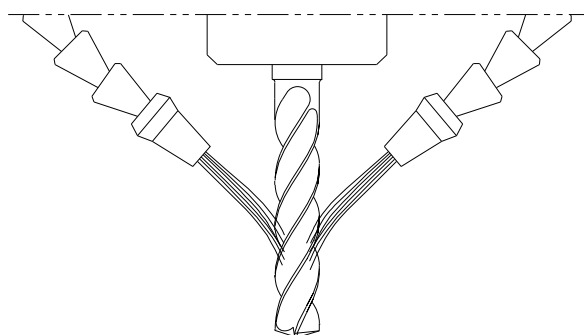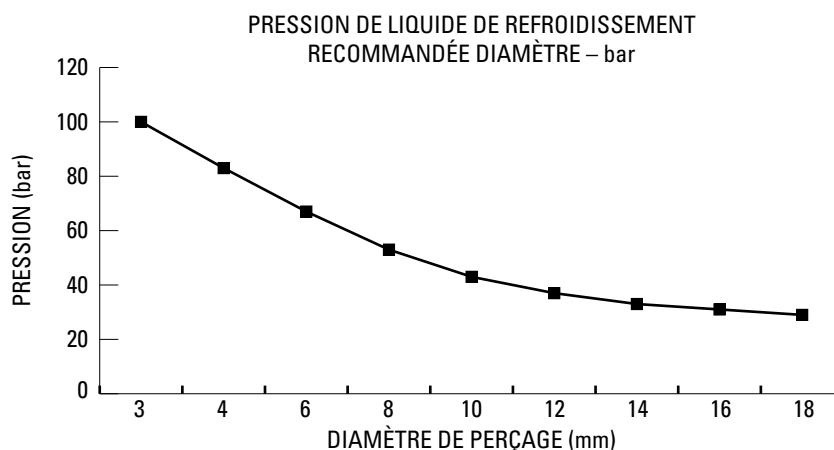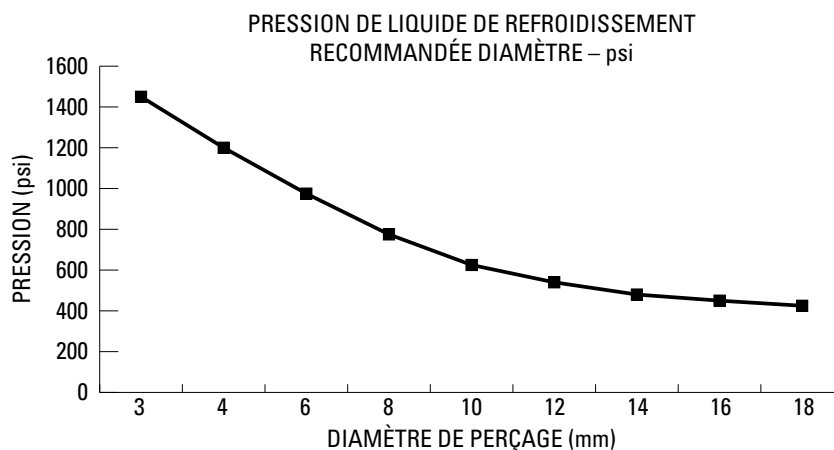

POINTE LARGE – BASSE VITESSE
PAS DE COUVERTURE À LA PROFONDEUR MAXIMUM



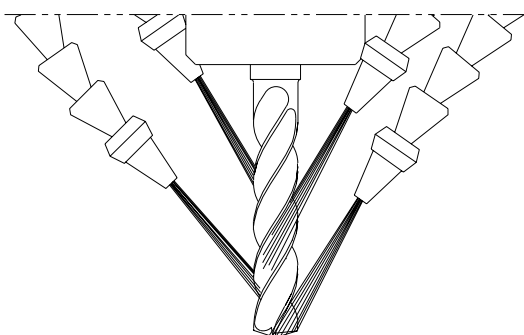


POINTE FINE – GRANDE VITESSE
COUVERTURE COMPLÈTE


- La réduction de la taille de l'embout permet de maximiser les bienfaits du refroidissement du concept à double listel original de la perceuse Hi-PerCarb en augmentant la vitesse. Pour les meilleurs résultats, orientez les embouts dans l'axe de la goujure secondaire située entre les deux listels, de même que la goujure primaire.

Bohrarbeiten Kühlmittelempfehlungen

- Kühlmittel dienen dazu, die Späne aus dem Schneidenbereich zu entfernen, die beim Schneiden erzeugte Wärme abzutransportieren und die Reibung zu verringern.
- Es kommt darauf an, den Kühlschmiermitteldruck und die Zufuhr zu optimieren, um alle Vorteile beim Bohren nutzen zu können.
- Der richtige Kühlschmiermitteleinsatz ermöglicht höhere Schnittparameter, höheren Materialabtrag, bessere Oberflächengüte, vorhersehbare Standzeiten und geringere Leistungsaufnahme und Laufzeiten.
- Der Druck ist wichtig, aber wichtiger ist dessen Konstanz und die Zufuhr zum Werkzeug. Unterbrochene Kühlung des Hartmetalls führt zur thermischen Belastung und Bildung von "Mikrorissen".
- Kühlmittel sind sauber zu halten und zu filtern, damit die Qualität des Kühlmittels erhalten bleibt und der Kühlmitteldruck durch Verstopfung der Kühlmittelkanäle im Bohrer nicht absinkt.

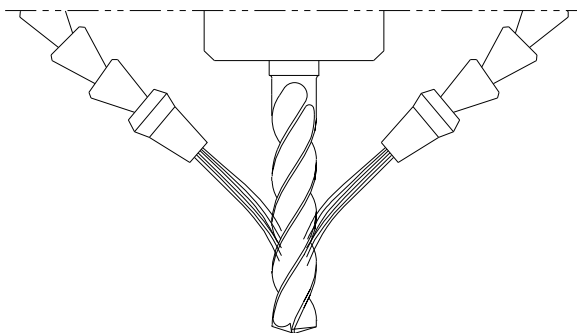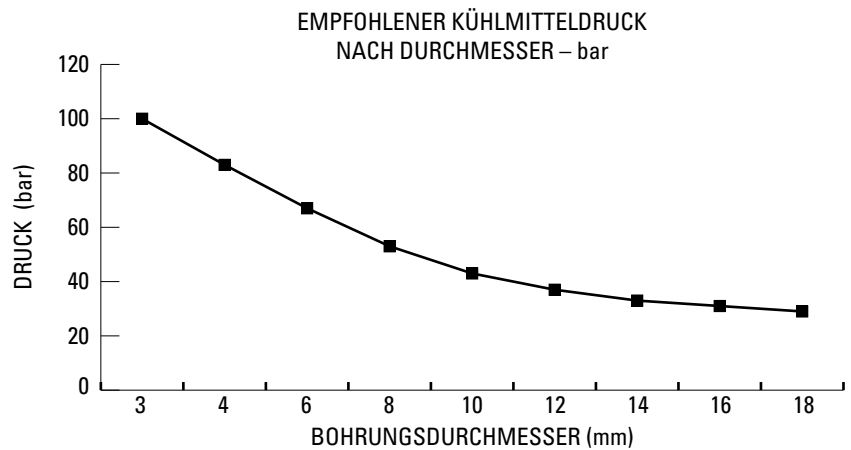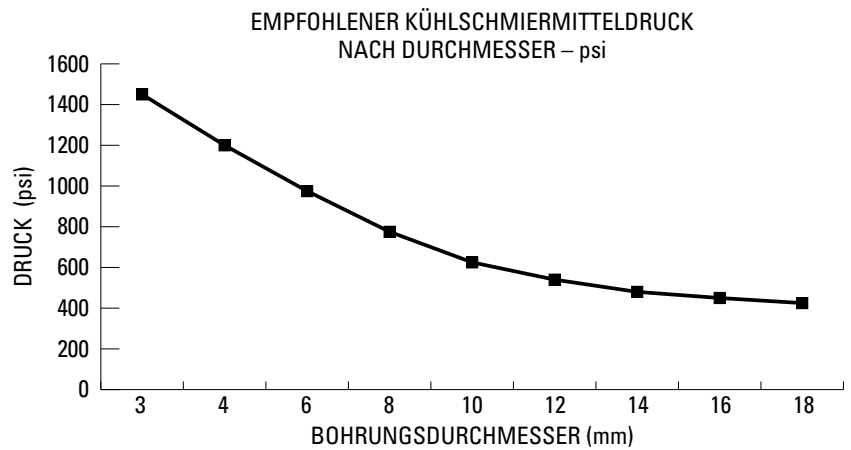

BREITE QUERSCHNEIDE – GERINGE DREHZAHL
KEINE VOLLSTÄNDIGE BENETZUNG BEI MAX. BOHRUNGSTIEFE

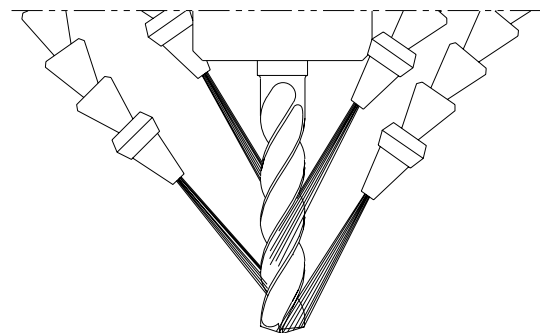

SCHMALE QUERSCHNEIDE – HOHE DREHZAHL
VOLLSTÄNDIGE BENETZUNG

- Durch Verringern der Düsengröße können die vorteilhaften Eigenschaften der Doppelfase genutzt werden, um die Drehzahl des Hi-PerCarb-Bohrers zu steigern. Richten Sie die Düsen auf die Nebennut zwischen beiden Fasen sowie auf die Schneiden aus, um beste Ergebnisse zu erzielen.




3xD



142P 3xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm						EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	66400
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	66401
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	56400
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	66402
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	66403
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	66404
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	56401
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	66405
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	56402
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	66406
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	66407
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	66408
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	66409
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	56403
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	66410
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	56404
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	66411
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	66412
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	66413
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	56405
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	66414
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	66415
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	66416
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	66417
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	56406
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	66418
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	66419
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	66420
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	66421
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	56407
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	66422
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	66423
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	66424
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	66425
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	56408
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	66426
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	66427
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	66428
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	66429
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	56409
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	66430
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	66431
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	66432
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	66433

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

continued on next page

142P 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					TI-NAMITE®-X (TX)
0.2500	6,350 mm	1/4 E #0	8,0	79,0	34,0	24,0	36,0	56410
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	66434
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	66435
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	56411
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	66436
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	66437
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	56412
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	66438
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	66439
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	66440
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	66441
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	56413
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	66442
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	66443
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	66444
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	66445
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	56414
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	66446
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	66447
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	66448
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	66449
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	56415
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	66450
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	66451
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	66452
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	66453
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	56416
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	66454
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	56417
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	66455
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	66456
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	66457
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	56418
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	66458
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	66459
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	66460
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	66461
0.3594	9,129 mm	23/64	10,0	89,0	47,0	33,0	40,0	56419
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	66462
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	66463
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	56420
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	66464
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	66465
0.3750	9,525 mm	3/8	10,0	89,0	47,0	33,0	40,0	56421
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	66466
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	66467
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	66468
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	66469
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	56422
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	66470
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	66471
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	66472
0.4055	10,300 mm		12,0	102,0	55,0	40,0	45,0	66473
0.4062	10,317 mm	13/32	12,0	102,0	55,0	40,0	45,0	56423

continued on next page

CONTINUED




3xD



142P 3xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)		
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	66474		
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	66475		
0.4173	10,600 mm		12,0	102,0	55,0	39,0	45,0	66476		
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	66477		
0.4219	10,716 mm	27/64	12,0	102,0	55,0	39,0	45,0	56424		
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	66478		
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	66479		
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	66480		
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	66481		
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	56425		
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	66482		
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	66483		
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	66484		
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	66485		
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	66486		
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	66487		
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	66488		
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	66489		
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0	56426		
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	66490		
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0	56427		
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	66491		
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0	56428		
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	66492		
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	66493		
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0	56429		
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	66494		
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0	66495		
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	66496		
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0	56430		
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	66497		
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0	56431		
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0	66498		
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	66499		
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	66500		
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0	66501		
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0	56432		
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	66502		
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0	56433		
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0	56434		
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0	56435		

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS


CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com



142P 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

		inch & mm							EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	66503	
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	66504	
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	56436	
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	66505	
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	66506	
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	66507	
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	56437	
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	66508	
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	56438	
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	66509	
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	66510	
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	66511	
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	66512	
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	56439	
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	66513	
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	56440	
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	66514	
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	66515	
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	66516	
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	56441	
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	66517	
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	66518	
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	66519	
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	66520	
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	56442	
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	66521	
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	66522	
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	66523	
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	66524	
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	56443	
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	66525	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	66526	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	66527	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	66528	
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	56444	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	66529	
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	66530	
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	66531	
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	66532	
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	56445	
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	66533	
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	66534	
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	66535	

continued on next page




5xD



142P 5xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)		
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	66536		
0.2500	6,350 mm	1/4 E #0	8,0	91,0	53,0	43,0	36,0	56446		
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	66537		
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	66538		
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	56447		
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	66539		
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	66540		
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	56448		
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	66541		
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	66542		
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	66543		
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	66544		
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	56449		
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	66545		
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	66546		
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	66547		
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	66548		
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	56450		
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	66549		
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	66550		
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	66551		
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	66552		
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	56451		
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	66553		
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	66554		
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	66555		
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	66556		
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	56452		
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	66557		
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	56453		
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	66558		
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	66559		
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	66560		
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	56454		
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	66561		
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	66562		
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	66563		
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	66564		
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	56455		
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	66565		
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	66566		
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	56456		
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	66567		

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	66568
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	56457
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	66569
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	66570
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	66571
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	66572
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	56458
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	66573
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	66574
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	66575
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	66576
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	56459
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	66577
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	66578
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	66579
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	66580
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	56460
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	66581
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	66582
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	66583
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	66584
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	56461
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	66585
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	66586
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	66587
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	66588
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	66589
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	66590
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	66591
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	66592
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	56462
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	66593
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	56463
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	66594
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	56464
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	66595
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	66596
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	56465
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	66597
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	66598
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	66599
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	56466
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	66600
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	56467
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	66601
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	66602
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	66603
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	66604
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	56468
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	66605
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	56469
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	56470
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	56471

CONTINUED




8xD



142P 8xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life

- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation

- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle

- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications

- Recommended for materials ≤ 50HRC (475 Bhn)

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					
0.1181	3,000 mm		6,0	72,0	34,0	29,0	36,0	66606
0.1220	3,100 mm		6,0	72,0	34,0	29,0	36,0	66607
0.1250	3,175 mm	1/8	6,0	72,0	34,0	29,0	36,0	56472
0.1260	3,200 mm		6,0	72,0	34,0	29,0	36,0	66608
0.1299	3,300 mm		6,0	72,0	34,0	29,0	36,0	66609
0.1339	3,400 mm		6,0	72,0	34,0	29,0	36,0	66610
0.1360	3,454 mm	#29	6,0	72,0	34,0	29,0	36,0	56473
0.1378	3,500 mm		6,0	72,0	34,0	29,0	36,0	66611
0.1406	3,571 mm	9/64	6,0	72,0	34,0	29,0	36,0	56474
0.1417	3,600 mm		6,0	72,0	34,0	29,0	36,0	66612
0.1457	3,700 mm		6,0	72,0	34,0	29,0	36,0	66613
0.1496	3,800 mm		6,0	81,0	43,0	37,0	36,0	66614
0.1535	3,900 mm		6,0	81,0	43,0	37,0	36,0	66615
0.1562	3,967 mm	5/32	6,0	81,0	43,0	37,0	36,0	56475
0.1575	4,000 mm		6,0	81,0	43,0	37,0	36,0	66616
0.1590	4,039 mm	#21	6,0	81,0	43,0	37,0	36,0	56476
0.1614	4,100 mm		6,0	81,0	43,0	37,0	36,0	66617
0.1654	4,200 mm		6,0	81,0	43,0	37,0	36,0	66618
0.1693	4,300 mm		6,0	81,0	43,0	37,0	36,0	66619
0.1719	4,366 mm	11/64	6,0	81,0	43,0	36,0	36,0	56477
0.1732	4,400 mm		6,0	81,0	43,0	36,0	36,0	66620
0.1772	4,500 mm		6,0	81,0	43,0	36,0	36,0	66621
0.1811	4,600 mm		6,0	81,0	43,0	36,0	36,0	66622
0.1850	4,699 mm	#13	6,0	81,0	43,0	36,0	36,0	66623
0.1875	4,763 mm	3/16	6,0	95,0	57,0	50,0	36,0	56478
0.1890	4,801 mm	#12	6,0	95,0	57,0	50,0	36,0	66624
0.1929	4,900 mm		6,0	95,0	57,0	50,0	36,0	66625
0.1969	5,000 mm		6,0	95,0	57,0	49,0	36,0	66626
0.2008	5,100 mm		6,0	95,0	57,0	49,0	36,0	66627
0.2031	5,159 mm	13/64	6,0	95,0	57,0	49,0	36,0	56479
0.2047	5,200 mm		6,0	95,0	57,0	49,0	36,0	66628
0.2087	5,300 mm		6,0	95,0	57,0	49,0	36,0	66629
0.2126	5,400 mm		6,0	95,0	57,0	49,0	36,0	66630
0.2165	5,500 mm		6,0	95,0	57,0	49,0	36,0	66631
0.2188	5,558 mm	7/32	6,0	95,0	57,0	49,0	36,0	56480
0.2205	5,600 mm		6,0	95,0	57,0	49,0	36,0	66632

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 8xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	95,0	57,0	48,0	36,0	66633
0.2283	5,800 mm		6,0	95,0	57,0	48,0	36,0	66634
0.2323	5,900 mm		6,0	95,0	57,0	48,0	36,0	66635
0.2344	5,954 mm	15/64	6,0	95,0	57,0	48,0	36,0	56481
0.2362	6,000 mm		6,0	95,0	57,0	48,0	36,0	66636
0.2402	6,100 mm		8,0	114,0	76,0	67,0	36,0	66637
0.2441	6,200 mm		8,0	114,0	76,0	67,0	36,0	66638
0.2480	6,300 mm		8,0	114,0	76,0	67,0	36,0	66639
0.2500	6,350 mm	1/4 E #0	8,0	114,0	76,0	66,0	36,0	56482
0.2520	6,400 mm		8,0	114,0	76,0	66,0	36,0	66640
0.2559	6,500 mm		8,0	114,0	76,0	66,0	36,0	66641
0.2570	6,528 mm	F	8,0	114,0	76,0	66,0	36,0	56483
0.2598	6,600 mm		8,0	114,0	76,0	66,0	36,0	66642
0.2638	6,700 mm		8,0	114,0	76,0	66,0	36,0	66643
0.2656	6,746 mm	17/64	8,0	114,0	76,0	66,0	36,0	56484
0.2677	6,800 mm		8,0	114,0	76,0	66,0	36,0	66644
0.2717	6,900 mm		8,0	114,0	76,0	66,0	36,0	66645
0.2756	7,000 mm		8,0	114,0	76,0	65,0	36,0	66646
0.2795	7,100 mm		8,0	114,0	76,0	65,0	36,0	66647
0.2812	7,142 mm	9/32	8,0	114,0	76,0	65,0	36,0	56485
0.2835	7,200 mm		8,0	114,0	76,0	65,0	36,0	66648
0.2874	7,300 mm		8,0	114,0	76,0	65,0	36,0	66649
0.2913	7,400 mm		8,0	114,0	76,0	65,0	36,0	66650
0.2953	7,500 mm		8,0	114,0	76,0	65,0	36,0	66651
0.2969	7,541 mm	19/64	8,0	114,0	76,0	65,0	36,0	56486
0.2992	7,600 mm		8,0	114,0	76,0	65,0	36,0	66652
0.3031	7,700 mm		8,0	114,0	76,0	64,0	36,0	66653
0.3071	7,800 mm		8,0	114,0	76,0	64,0	36,0	66654
0.3110	7,900 mm		8,0	114,0	76,0	64,0	36,0	66655
0.3125	7,938 mm	5/16	8,0	114,0	76,0	64,0	36,0	56487
0.3150	8,000 mm		8,0	114,0	76,0	64,0	36,0	66656
0.3189	8,100 mm		10,0	142,0	95,0	83,0	40,0	66657
0.3228	8,200 mm		10,0	142,0	95,0	83,0	40,0	66658
0.3268	8,300 mm		10,0	142,0	95,0	83,0	40,0	66659
0.3281	8,334 mm	21/64	10,0	142,0	95,0	83,0	40,0	56488
0.3307	8,400 mm		10,0	142,0	95,0	82,0	40,0	66660
0.3320	8,433 mm	Q	10,0	142,0	95,0	82,0	40,0	56489
0.3346	8,500 mm		10,0	142,0	95,0	82,0	40,0	66661
0.3386	8,600 mm		10,0	142,0	95,0	82,0	40,0	66662
0.3425	8,700 mm		10,0	142,0	95,0	82,0	40,0	66663
0.3438	8,733 mm	11/32	10,0	142,0	95,0	82,0	40,0	56490
0.3465	8,800 mm		10,0	142,0	95,0	82,0	40,0	66664
0.3504	8,900 mm		10,0	142,0	95,0	82,0	40,0	66665
0.3543	9,000 mm		10,0	142,0	95,0	82,0	40,0	66666

continued on next page

CONTINUED




8xD



142P 8xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)		
0.3583	9,100 mm		10,0	142,0	95,0	81,0	40,0	66667		
0.3594	9,129 mm	23/64	10,0	142,0	95,0	81,0	40,0	56491		
0.3622	9,200 mm		10,0	142,0	95,0	81,0	40,0	66668		
0.3661	9,300 mm		10,0	142,0	95,0	81,0	40,0	66669		
0.3680	9,347 mm	U	10,0	142,0	95,0	81,0	40,0	56492		
0.3701	9,400 mm		10,0	142,0	95,0	81,0	40,0	66670		
0.3740	9,500 mm		10,0	142,0	95,0	81,0	40,0	66671		
0.3750	9,525 mm	3/8	10,0	142,0	95,0	81,0	40,0	56493		
0.3780	9,600 mm		10,0	142,0	95,0	81,0	40,0	66672		
0.3819	9,700 mm		10,0	142,0	95,0	80,0	40,0	66673		
0.3858	9,800 mm		10,0	142,0	95,0	80,0	40,0	66674		
0.3898	9,900 mm		10,0	142,0	95,0	80,0	40,0	66675		
0.3906	9,921 mm	25/64	10,0	142,0	95,0	80,0	40,0	56494		
0.3937	10,000 mm		10,0	142,0	95,0	80,0	40,0	66676		
0.3976	10,100 mm		12,0	162,0	114,0	99,0	45,0	66677		
0.4016	10,200 mm		12,0	162,0	114,0	99,0	45,0	66678		
0.4055	10,300 mm		12,0	162,0	114,0	99,0	45,0	66679		
0.4062	10,317 mm	13/32	12,0	162,0	114,0	99,0	45,0	56495		
0.4095	10,400 mm		12,0	162,0	114,0	98,0	45,0	66680		
0.4134	10,500 mm		12,0	162,0	114,0	98,0	45,0	66681		
0.4173	10,600 mm		12,0	162,0	114,0	98,0	45,0	66682		
0.4213	10,700 mm		12,0	162,0	114,0	98,0	45,0	66683		
0.4219	10,716 mm	27/64	12,0	162,0	114,0	98,0	45,0	56496		
0.4252	10,800 mm		12,0	162,0	114,0	98,0	45,0	66684		
0.4291	10,900 mm		12,0	162,0	114,0	98,0	45,0	66685		
0.4331	11,000 mm		12,0	162,0	114,0	97,0	45,0	66686		
0.4370	11,100 mm		12,0	162,0	114,0	97,0	45,0	66687		
0.4375	11,113 mm	7/16	12,0	162,0	114,0	97,0	45,0	56497		
0.4409	11,200 mm		12,0	162,0	114,0	97,0	45,0	66688		
0.4449	11,300 mm		12,0	162,0	114,0	97,0	45,0	66689		
0.4488	11,400 mm		12,0	162,0	114,0	97,0	45,0	66690		
0.4528	11,500 mm		12,0	162,0	114,0	97,0	45,0	66691		
0.4567	11,600 mm		12,0	162,0	114,0	97,0	45,0	66692		
0.4606	11,700 mm		12,0	162,0	114,0	96,0	45,0	66693		

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS


For patent
information visit
www.ksptpatents.com

142P 8xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4646	11,800 mm		12,0	162,0	114,0	96,0	45,0	66694
0.4685	11,900 mm		12,0	162,0	114,0	96,0	45,0	66695
0.4688	11,908 mm	15/32	12,0	162,0	114,0	96,0	45,0	56498
0.4724	12,000 mm		12,0	162,0	114,0	96,0	45,0	66696
0.4844	12,304 mm	31/64	14,0	178,0	133,0	114,0	45,0	56499
0.4921	12,500 mm		14,0	178,0	133,0	114,0	45,0	66697
0.5000	12,700 mm	1/2	14,0	178,0	133,0	114,0	45,0	56500
0.5039	12,800 mm		14,0	178,0	133,0	114,0	45,0	66698
0.5118	13,000 mm		14,0	178,0	133,0	114,0	45,0	66699
0.5156	13,096 mm	33/64	14,0	178,0	133,0	113,0	45,0	56501
0.5315	13,500 mm		14,0	178,0	133,0	113,0	45,0	66700
0.5433	13,800 mm		14,0	178,0	133,0	113,0	45,0	66701
0.5512	14,000 mm		14,0	178,0	133,0	113,0	45,0	66702
0.5625	14,288 mm	9/16	16,0	203,0	152,0	130,0	48,0	56502
0.5709	14,500 mm		16,0	203,0	152,0	130,0	48,0	66703
0.5781	14,684 mm	37/64	16,0	203,0	152,0	130,0	48,0	56503
0.5827	14,800 mm		16,0	203,0	152,0	130,0	48,0	66704
0.5906	15,000 mm		16,0	203,0	152,0	129,0	48,0	66705
0.6102	15,500 mm		16,0	203,0	152,0	129,0	48,0	66706
0.6221	15,800 mm		16,0	203,0	152,0	128,0	48,0	66707
0.6250	15,875 mm	5/8	16,0	203,0	152,0	128,0	48,0	56504
0.6299	16,000 mm		16,0	203,0	152,0	128,0	48,0	66708
0.6562	16,667 mm	21/32	18,0	222,0	171,0	145,0	48,0	56505
0.6875	17,463 mm	11/16	18,0	222,0	171,0	145,0	48,0	56506
0.7500	19,050 mm	3/4	20,0	243,0	190,0	161,0	50,0	56507

CONTINUED



142P 12xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRC (475 Bhn)

		inch & mm						EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	87,0	49,0	44,0	36,0	66709
0.1220	3,100 mm		6,0	87,0	49,0	44,0	36,0	66710
0.1250	3,175 mm	1/8	6,0	87,0	49,0	44,0	36,0	56508
0.1260	3,200 mm		6,0	87,0	49,0	44,0	36,0	66711
0.1299	3,300 mm		6,0	87,0	49,0	44,0	36,0	66712
0.1339	3,400 mm		6,0	87,0	49,0	44,0	36,0	66713
0.1360	3,454 mm	#29	6,0	87,0	49,0	44,0	36,0	56509
0.1378	3,500 mm		6,0	87,0	49,0	44,0	36,0	66714
0.1406	3,571 mm	9/64	6,0	87,0	49,0	43,0	36,0	56510
0.1417	3,600 mm		6,0	87,0	49,0	43,0	36,0	66715
0.1457	3,700 mm		6,0	87,0	49,0	43,0	36,0	66716
0.1496	3,800 mm		6,0	100,0	62,0	56,0	36,0	66717
0.1535	3,900 mm		6,0	100,0	62,0	56,0	36,0	66718
0.1562	3,967 mm	5/32	6,0	100,0	62,0	56,0	36,0	56511
0.1575	4,000 mm		6,0	100,0	62,0	56,0	36,0	66719
0.1590	4,039 mm	#21	6,0	100,0	62,0	56,0	36,0	56512
0.1614	4,100 mm		6,0	100,0	62,0	56,0	36,0	66720
0.1654	4,200 mm		6,0	100,0	62,0	55,0	36,0	66721
0.1693	4,300 mm		6,0	100,0	62,0	55,0	36,0	66722
0.1719	4,366 mm	11/64	6,0	100,0	62,0	55,0	36,0	56513
0.1732	4,400 mm		6,0	100,0	62,0	55,0	36,0	66723
0.1772	4,500 mm		6,0	100,0	62,0	55,0	36,0	66724
0.1811	4,600 mm		6,0	100,0	62,0	55,0	36,0	66725
0.1850	4,699 mm	#13	6,0	100,0	62,0	55,0	36,0	66726
0.1875	4,763 mm	3/16	6,0	119,0	81,0	74,0	36,0	56514
0.1890	4,801 mm	#12	6,0	119,0	81,0	74,0	36,0	66727
0.1929	4,900 mm		6,0	119,0	81,0	74,0	36,0	66728
0.1969	5,000 mm		6,0	119,0	81,0	73,0	36,0	66729
0.2008	5,100 mm		6,0	119,0	81,0	73,0	36,0	66730
0.2031	5,159 mm	13/64	6,0	119,0	81,0	73,0	36,0	56515
0.2047	5,200 mm		6,0	119,0	81,0	73,0	36,0	66731
0.2087	5,300 mm		6,0	119,0	81,0	73,0	36,0	66732
0.2126	5,400 mm		6,0	119,0	81,0	73,0	36,0	66733
0.2165	5,500 mm		6,0	119,0	81,0	73,0	36,0	66734

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com


142P 12xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2188	5,558 mm	7/32	6,0	119,0	81,0	73,0	36,0	56516
0.2205	5,600 mm		6,0	119,0	81,0	73,0	36,0	66735
0.2244	5,700 mm		6,0	119,0	81,0	72,0	36,0	66736
0.2283	5,800 mm		6,0	119,0	81,0	72,0	36,0	66737
0.2323	5,900 mm		6,0	119,0	81,0	72,0	36,0	66738
0.2344	5,954 mm	15/64	6,0	119,0	81,0	72,0	36,0	56517
0.2362	6,000 mm		6,0	119,0	81,0	72,0	36,0	66739
0.2402	6,100 mm		8,0	146,0	108,0	99,0	36,0	66740
0.2441	6,200 mm		8,0	146,0	108,0	99,0	36,0	66741
0.2480	6,300 mm		8,0	146,0	108,0	99,0	36,0	66742
0.2500	6,350 mm	1/4 E #0	8,0	146,0	108,0	98,0	36,0	56518
0.2520	6,400 mm		8,0	146,0	108,0	98,0	36,0	66743
0.2559	6,500 mm		8,0	146,0	108,0	98,0	36,0	66744
0.2570	6,528 mm	F	8,0	146,0	108,0	98,0	36,0	56519
0.2598	6,600 mm		8,0	146,0	108,0	98,0	36,0	66745
0.2638	6,700 mm		8,0	146,0	108,0	98,0	36,0	66746
0.2656	6,746 mm	17/64	8,0	146,0	108,0	98,0	36,0	56520
0.2677	6,800 mm		8,0	146,0	108,0	98,0	36,0	66747
0.2717	6,900 mm		8,0	146,0	108,0	98,0	36,0	66748
0.2756	7,000 mm		8,0	146,0	108,0	97,0	36,0	66749
0.2795	7,100 mm		8,0	146,0	108,0	97,0	36,0	66750
0.2812	7,142 mm	9/32	8,0	146,0	108,0	97,0	36,0	56521
0.2835	7,200 mm		8,0	146,0	108,0	97,0	36,0	66751
0.2874	7,300 mm		8,0	146,0	108,0	97,0	36,0	66752
0.2913	7,400 mm		8,0	146,0	108,0	97,0	36,0	66753
0.2953	7,500 mm		8,0	146,0	108,0	97,0	36,0	66754
0.2969	7,541 mm	19/64	8,0	146,0	108,0	97,0	36,0	56522
0.2992	7,600 mm		8,0	146,0	108,0	97,0	36,0	66755
0.3031	7,700 mm		8,0	146,0	108,0	96,0	36,0	66756
0.3071	7,800 mm		8,0	146,0	108,0	96,0	36,0	66757
0.3110	7,900 mm		8,0	146,0	108,0	96,0	36,0	66758
0.3125	7,938 mm	5/16	8,0	146,0	108,0	96,0	36,0	56523
0.3150	8,000 mm		8,0	146,0	108,0	96,0	36,0	66759
0.3189	8,100 mm		10,0	182,0	135,0	123,0	40,0	66760
0.3228	8,200 mm		10,0	182,0	135,0	123,0	40,0	66761
0.3268	8,300 mm		10,0	182,0	135,0	123,0	40,0	66762
0.3281	8,334 mm	21/64	10,0	182,0	135,0	123,0	40,0	56524
0.3307	8,400 mm		10,0	182,0	135,0	122,0	40,0	66763
0.3320	8,433 mm	Q	10,0	182,0	135,0	122,0	40,0	56525
0.3346	8,500 mm		10,0	182,0	135,0	122,0	40,0	66764
0.3386	8,600 mm		10,0	182,0	135,0	122,0	40,0	66765
0.3425	8,700 mm		10,0	182,0	135,0	122,0	40,0	66766


continued on next page

CONTINUED



142P 12xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3438	8,733 mm	11/32	10,0	182,0	135,0	122,0	40,0	56526
0.3465	8,800 mm		10,0	182,0	135,0	122,0	40,0	66767
0.3504	8,900 mm		10,0	182,0	135,0	122,0	40,0	66768
0.3543	9,000 mm		10,0	182,0	135,0	122,0	40,0	66769
0.3583	9,100 mm		10,0	182,0	135,0	121,0	40,0	66770
0.3594	9,129 mm	23/64	10,0	182,0	135,0	121,0	40,0	56527
0.3622	9,200 mm		10,0	182,0	135,0	121,0	40,0	66771
0.3661	9,300 mm		10,0	182,0	135,0	121,0	40,0	66772
0.3680	9,347 mm	U	10,0	182,0	135,0	121,0	40,0	56528
0.3701	9,400 mm		10,0	182,0	135,0	121,0	40,0	66773
0.3740	9,500 mm		10,0	182,0	135,0	121,0	40,0	66774
0.3750	9,525 mm	3/8	10,0	182,0	135,0	121,0	40,0	56529
0.3780	9,600 mm		10,0	182,0	135,0	121,0	40,0	66775
0.3819	9,700 mm		10,0	182,0	135,0	120,0	40,0	66776
0.3858	9,800 mm		10,0	182,0	135,0	120,0	40,0	66777
0.3898	9,900 mm		10,0	182,0	135,0	120,0	40,0	66778
0.3906	9,921 mm	25/64	10,0	182,0	135,0	120,0	40,0	56530
0.3937	10,000 mm		10,0	182,0	135,0	120,0	40,0	66779
0.3976	10,100 mm		12,0	210,0	162,0	147,0	45,0	66780
0.4016	10,200 mm		12,0	210,0	162,0	147,0	45,0	66781
0.4055	10,300 mm		12,0	210,0	162,0	147,0	45,0	66782
0.4062	10,317 mm	13/32	12,0	210,0	162,0	147,0	45,0	56531
0.4095	10,400 mm		12,0	210,0	162,0	146,0	45,0	66783
0.4134	10,500 mm		12,0	210,0	162,0	146,0	45,0	66784
0.4173	10,600 mm		12,0	210,0	162,0	146,0	45,0	66785
0.4213	10,700 mm		12,0	210,0	162,0	146,0	45,0	66786
0.4219	10,716 mm	27/64	12,0	210,0	162,0	146,0	45,0	56532
0.4252	10,800 mm		12,0	210,0	162,0	146,0	45,0	66787
0.4291	10,900 mm		12,0	210,0	162,0	146,0	45,0	66788
0.4331	11,000 mm		12,0	210,0	162,0	145,0	45,0	66789
0.4370	11,100 mm		12,0	210,0	162,0	145,0	45,0	66790
0.4375	11,113 mm	7/16	12,0	210,0	162,0	145,0	45,0	56533
0.4409	11,200 mm		12,0	210,0	162,0	145,0	45,0	66791
0.4449	11,300 mm		12,0	210,0	162,0	145,0	45,0	66792

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 12xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4488	11,400 mm		12,0	210,0	162,0	145,0	45,0	66793
0.4528	11,500 mm		12,0	210,0	162,0	145,0	45,0	66794
0.4567	11,600 mm		12,0	210,0	162,0	145,0	45,0	66795
0.4606	11,700 mm		12,0	210,0	162,0	144,0	45,0	66796
0.4646	11,800 mm		12,0	210,0	162,0	144,0	45,0	66797
0.4685	11,900 mm		12,0	210,0	162,0	144,0	45,0	66798
0.4688	11,908 mm	15/32	12,0	210,0	162,0	144,0	45,0	56534
0.4724	12,000 mm		12,0	210,0	162,0	144,0	45,0	66799
0.4844	12,304 mm	31/64	14,0	234,0	189,0	171,0	45,0	56535
0.4921	12,500 mm		14,0	234,0	189,0	170,0	45,0	66800
0.5000	12,700 mm	1/2	14,0	234,0	189,0	170,0	45,0	56536
0.5039	12,800 mm		14,0	234,0	189,0	170,0	45,0	66801
0.5118	13,000 mm		14,0	234,0	189,0	170,0	45,0	66802
0.5156	13,096 mm	33/64	14,0	234,0	189,0	169,0	45,0	56537
0.5315	13,500 mm		14,0	234,0	189,0	169,0	45,0	66803
0.5433	13,800 mm		14,0	234,0	189,0	168,0	45,0	66804
0.5512	14,000 mm		14,0	234,0	189,0	168,0	45,0	66805
0.5625	14,288 mm	9/16	16,0	267,0	216,0	195,0	48,0	56538
0.5709	14,500 mm		16,0	267,0	216,0	194,0	48,0	66806
0.5781	14,684 mm	37/64	16,0	267,0	216,0	194,0	48,0	56539
0.5827	14,800 mm		16,0	267,0	216,0	194,0	48,0	66807
0.5906	15,000 mm		16,0	267,0	216,0	193,0	48,0	66808
0.6102	15,500 mm		16,0	267,0	216,0	193,0	48,0	66809
0.6221	15,800 mm		16,0	267,0	216,0	192,0	48,0	66810
0.6250	15,875 mm	5/8	16,0	267,0	216,0	192,0	48,0	56540
0.6299	16,000 mm		16,0	267,0	216,0	192,0	48,0	66811
0.6562	16,667 mm	21/32	18,0	292,0	241,0	216,0	48,0	56541
0.6875	17,463 mm	11/16	18,0	292,0	241,0	215,0	48,0	56542
0.7500	19,050 mm	3/4	20,0	319,0	266,0	238,0	50,0	56543

CONTINUED

Series 142P Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	5/8	3/4		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	425	RPM	12988	8659	6494	4329	3247	2598	2165
			(340-510)	Fr	0.0043	0.0065	0.0086	0.0129	0.0172	0.0216	0.0259
				Feed (ipm)	56.0	56.0	56.0	56.0	56.0	56.0	56.0
		≤ 275 Bhn or ≤ 28 HRc	380	RPM	11613	7742	5806	3871	2903	2323	1935
			(304-456)	Fr	0.0039	0.0058	0.0078	0.0116	0.0155	0.0194	0.0233
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0
		≤ 425 Bhn or ≤ 45 HRc	220	RPM	6723	4482	3362	2241	1681	1345	1121
			(176-264)	Fr	0.0033	0.0049	0.0065	0.0098	0.0131	0.0164	0.0196
				Feed (ipm)	22.0	22.0	22.0	22.0	22.0	22.0	22.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	330	RPM	10085	6723	5042	3362	2521	2017	1681
			(264-396)	Fr	0.0033	0.0049	0.0065	0.0098	0.0131	0.0164	0.0196
				Feed (ipm)	33.0	33.0	33.0	33.0	33.0	33.0	33.0
		≤ 375 Bhn or ≤ 40 HRc	200	RPM	6112	4075	3056	2037	1528	1222	1019
			(160-240)	Fr	0.0028	0.0042	0.0056	0.0083	0.0111	0.0139	0.0167
				Feed (ipm)	17.0	17.0	17.0	17.0	17.0	17.0	17.0
		≤ 425 Bhn or ≤ 45 HRc	140	RPM	4278	2852	2139	1426	1070	856	713
			(112-168)	Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119
				Feed (ipm)	8.5	8.5	8.5	8.5	8.5	8.5	8.5
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	145	RPM	4431	2954	2216	1477	1108	886	739
			(116-174)	Fr	0.0028	0.0042	0.0056	0.0085	0.0113	0.0141	0.0169
				Feed (ipm)	12.5	12.5	12.5	12.5	12.5	12.5	12.5
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	2903	1935	1452	968	726	581	484
			(76-114)	Fr	0.0013	0.0020	0.0027	0.0040	0.0054	0.0067	0.0081
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	305	RPM	9321	6214	4660	3107	2330	1864	1553
			(244-366)	Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154
				Feed (ipm)	24.0	24.0	24.0	24.0	24.0	24.0	24.0
		≤ 275 Bhn or ≤ 28 HRc	195	RPM	5959	3973	2980	1986	1490	1192	993
			(156-234)	Fr	0.0020	0.0030	0.0040	0.0060	0.0081	0.0101	0.0121
				Feed (ipm)	12.0	12.0	12.0	12.0	12.0	12.0	12.0
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	150	RPM	4584	3056	2292	1528	1146	917	764
			(120-180)	Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119
				Feed (ipm)	9.1	9.1	9.1	9.1	9.1	9.1	9.1
		≤ 375 Bhn or ≤ 40 HRc	110	RPM	3362	2241	1681	1121	840	672	560
			(88-132)	Fr	0.0018	0.0027	0.0036	0.0054	0.0071	0.0089	0.0107
				Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	360	RPM	11002	7334	5501	3667	2750	2200	1834
			(288-432)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		≤ 260 Bhn or ≤ 26 HRc	335	RPM	10238	6825	5119	3413	2559	2048	1706
			(268-402)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	46.5	46.5	46.5	46.5	46.5	46.5	46.5

continued on next page

Series 142P Fractional				DC • in							
Hardness		Vc (sfm)		1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	770	RPM	23531	15687	11766	7844	5883	4706	3922
			(616-924)	Fr	0.0049	0.0073	0.0098	0.0147	0.0195	0.0244	0.0293
				Feed (ipm)	115.0	115.0	115.0	115.0	115.0	115.0	115.0
		≤ 150 Bhn or ≤ 8 HRb	660	RPM	20170	13446	10085	6723	5042	4034	3362
			(528-792)	Fr	0.0050	0.0074	0.0099	0.0149	0.0198	0.0248	0.0297
				Feed (ipm)	100.0	100.0	100.0	100.0	100.0	100.0	100.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	550	RPM	16808	11205	8404	5603	4202	3362	2801
			(440-660)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
				Feed (ipm)	33.5	33.5	33.5	33.5	33.5	33.5	33.5
		≤ 200 Bhn or ≤ 23 HRc	440	RPM	13446	8964	6723	4482	3362	2689	2241
			(352-528)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
				Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	95	RPM	2903	1935	1452	968	726	581	484
			(76-114)	Fr	0.0008	0.0012	0.0016	0.0024	0.0032	0.0040	0.0048
				Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		≤ 400 Bhn or ≤ 43 HRc	50	RPM	1528	1019	764	509	382	306	255
			(40-60)	Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0033	0.0039
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	215	RPM	6570	4380	3285	2190	1643	1314	1095
			(172-258)	Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0105
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 350 Bhn or ≤ 38 HRc	160	RPM	4890	3260	2445	1630	1222	978	815
			(128-192)	Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
				Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8
		≤ 440 Bhn or ≤ 47 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.1	3.1	3.1	3.1	3.1	3.1	3.1
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0008	0.0013	0.0017	0.0025	0.0034	0.0042	0.0051
				Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 rpm = Vc x 3.82 / DC
 ipm = Fr x RPM
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 142P Metric	Hardness	Vc (m/min)	DC • mm							
			3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	130	RPM	13733	6867	5150	4120	3433	2943	2575
		≤ 175 Bhn or ≤ 7 HRc (104-155)	Fr	0.104	0.207	0.276	0.345	0.414	0.483	0.552
			Feed (mm/min)	1422	1422	1422	1422	1422	1422	1422
		116	RPM	12279	6140	4605	3684	3070	2631	2302
		≤ 275 Bhn or ≤ 28 HRc (93-139)	Fr	0.093	0.186	0.248	0.310	0.372	0.434	0.496
			Feed (mm/min)	1143	1143	1143	1143	1143	1143	1143
		67	RPM	7109	3555	2666	2133	1777	1523	1333
		≤ 425 Bhn or ≤ 45 HRc (54-80)	Fr	0.079	0.157	0.210	0.262	0.314	0.367	0.419
			Feed (mm/min)	559	559	559	559	559	559	559
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	101	RPM	10664	5332	3999	3199	2666	2285	1999
		≤ 275 Bhn or ≤ 28 HRc (80-121)	Fr	0.079	0.157	0.210	0.262	0.314	0.367	0.419
			Feed (mm/min)	838	838	838	838	838	838	838
		61	RPM	6463	3231	2424	1939	1616	1385	1212
		≤ 375 Bhn or ≤ 40 HRc (49-73)	Fr	0.067	0.134	0.178	0.223	0.267	0.312	0.356
			Feed (mm/min)	432	432	432	432	432	432	432
		43	RPM	4524	2262	1696	1357	1131	969	848
		≤ 425 Bhn or ≤ 45 HRc (34-51)	Fr	0.048	0.095	0.127	0.159	0.191	0.223	0.255
			Feed (mm/min)	216	216	216	216	216	216	216
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	44	RPM	4686	2343	1757	1406	1171	1004	879
		≤ 200 Bhn or ≤ 13 HRc (35-53)	Fr	0.068	0.136	0.181	0.226	0.271	0.316	0.361
			Feed (mm/min)	318	318	318	318	318	318	318
		29	RPM	3070	1535	1151	921	767	658	576
		≤ 375 Bhn or ≤ 40 HRc (23-35)	Fr	0.032	0.065	0.086	0.108	0.129	0.151	0.172
			Feed (mm/min)	99	99	99	99	99	99	99
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	93	9856	9856	4928	3696	2957	2464	2112	1848
		≤ 185 Bhn or ≤ 9 HRc (74-112)	0.062	0.062	0.124	0.165	0.206	0.247	0.289	0.330
			610	610	610	610	610	610	610	610
		59	6301	6301	3151	2363	1890	1575	1350	1181
		≤ 275 Bhn or ≤ 28 HRc (48-71)	0.048	0.048	0.097	0.129	0.161	0.193	0.226	0.258
			305	305	305	305	305	305	305	305
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	46	4847	4847	2424	1818	1454	1212	1039	909
		≤ 275 Bhn or ≤ 28 HRc (37-55)	0.048	0.048	0.095	0.127	0.159	0.191	0.223	0.254
			231	231	231	231	231	231	231	231
		34	3555	3555	1777	1333	1066	889	762	666
		≤ 375 Bhn or ≤ 40 HRc (27-40)	0.043	0.043	0.086	0.114	0.143	0.171	0.200	0.229
			152	152	152	152	152	152	152	152
K	CAST IRONS Gray, Malleable, Ductile	110	RPM	11633	5816	4362	3490	2908	2493	2181
		≤ 220 Bhn or ≤ 19 HRc (88-132)	Fr	0.109	0.218	0.291	0.364	0.437	0.509	0.582
			Feed (mm/min)	1270	1270	1270	1270	1270	1270	1270
		102	RPM	10825	5413	4059	3248	2706	2320	2030
		≤ 260 Bhn or ≤ 26 HRc (82-123)	Fr	0.109	0.218	0.291	0.364	0.436	0.509	0.582
			Feed (mm/min)	1181	1181	1181	1181	1181	1181	1181

continued on next page

Series 142P Metric	Hardness	Vc (m/min)	DC • mm									
			3	6	8	10	12	14	16			
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRB	235 (188-282)	RPM	24882	12441	9331	7465	6220	5332	4665	
				Fr	0.117	0.235	0.313	0.391	0.470	0.548	0.626	
				Feed (mm/min)	2921	2921	2921	2921	2921	2921	2921	
		≤ 150 Bhn or ≤ 88 HRB	201 (161-241)	RPM	21327	10664	7998	6398	5332	4570	3999	
				Fr	0.119	0.238	0.318	0.397	0.476	0.556	0.635	
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540	
	Copper Alloys Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	168 (134-201)	RPM	17773	8886	6665	5332	4443	3808	3332	
				Fr	0.048	0.096	0.128	0.160	0.192	0.223	0.255	
				Feed (mm/min)	851	851	851	851	851	851	851	
		≤ 200 Bhn or ≤ 23 HRc	134 (107-161)	RPM	14218	7109	5332	4265	3555	3047	2666	
				Fr	0.048	0.096	0.129	0.161	0.193	0.225	0.257	
				Feed (mm/min)	686	686	686	686	686	686	686	
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	29 (23-35)	RPM	3070	1535	1151	921	767	658	576	
				Fr	0.019	0.038	0.051	0.063	0.076	0.089	0.101	
				Feed (mm/min)	58	58	58	58	58	58	58	
		≤ 400 Bhn or ≤ 43 HRc	15 (12-18)	RPM	1616	808	606	485	404	346	303	
				Fr	0.016	0.031	0.042	0.052	0.063	0.073	0.084	
				Feed (mm/min)	25	25	25	25	25	25	25	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	66 (52-79)	RPM	6947	3474	2605	2084	1737	1489	1303	
				Fr	0.042	0.084	0.112	0.140	0.168	0.196	0.224	
				Feed (mm/min)	292	292	292	292	292	292	292	
		≤ 350 Bhn or ≤ 38 HRc	49 (39-59)	RPM	5170	2585	1939	1551	1293	1108	969	
				Fr	0.038	0.077	0.102	0.128	0.153	0.179	0.204	
				Feed (mm/min)	198	198	198	198	198	198	198	
		≤ 440 Bhn or ≤ 47 HRc	26 (21-31)	RPM	2747	1373	1030	824	687	589	515	
				Fr	0.029	0.057	0.076	0.096	0.115	0.134	0.153	
				Feed (mm/min)	79	79	79	79	79	79	79	
	H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	26 (21-31)	RPM	2747	1373	1030	824	687	589	515
					Fr	0.020	0.041	0.054	0.068	0.081	0.095	0.109
					Feed (mm/min)	56	56	56	56	56	56	56

(Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x RPM

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




3xD



143M-S 3xD

FRACTIONAL & METRIC SERIES

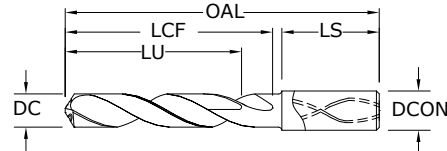

- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	69120
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	69121
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	56800
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	69122
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	69123
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	69124
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	56801
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	69125
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	56802
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	69126
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	69127
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	69128
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	69129
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	56803
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	69130
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	56804
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	69131
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	69132
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	69133
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	56805
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	69134
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	69135
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	69136
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	69137
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	56806
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	69138
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	69139
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	69140
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	69141
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	56807
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	69142
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	69143
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	69144
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	69145
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	56808
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	69146

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


143M-S 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	69147
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	69148
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	69149
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	56809
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	69150
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	69151
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	69152
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	69153
0.2500	6,350 mm	1/4 E #0	8,0	79,0	34,0	24,0	36,0	56810
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	69154
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	69155
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	56811
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	69156
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	69157
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	56812
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	69158
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	69159
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	69160
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	69161
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	56813
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	69162
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	69163
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	69164
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	69165
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	56814
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	69166
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	69167
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	69168
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	69169
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	56815
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	69170
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	69171
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	69172
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	69173
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	56816
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	69174
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	56817
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	69175
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	69176
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	69177
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	56818
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	69178
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	69179
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	69180


continued on next page

CONTINUED



143M-S 3xD

FRACTIONAL & METRIC SERIES

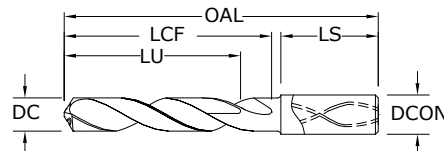

- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	69181
0.3594	9,129 mm	23/64	10,0	89,0	47,0	33,0	40,0	56819
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	69182
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	69183
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	56820
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	69184
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	69185
0.3750	9,525 mm	3/8	10,0	89,0	47,0	33,0	40,0	56821
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	69186
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	69187
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	69188
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	69189
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	56822
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	69190
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	69191
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	69192
0.4055	10,300 mm		12,0	102,0	55,0	40,0	45,0	69193
0.4062	10,317 mm	13/32	12,0	102,0	55,0	40,0	45,0	56823
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	69194
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	69195
0.4173	10,600 mm		12,0	102,0	55,0	39,0	45,0	69196
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	69197
0.4219	10,716 mm	27/64	12,0	102,0	55,0	39,0	45,0	56824
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	69198
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	69199
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	69200
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	69201
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	56825
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	69202
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	69203
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	69204
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	69205
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	69206
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	69207
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	69208
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	69209

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

143M-S 3xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0	56826
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	69210
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0	56827
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	69211
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0	56828
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	69212
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	69213
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0	56829
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	69214
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0	69215
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	69216
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0	56830
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	69217
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0	56831
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0	69218
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	69219
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	69220
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0	69221
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0	56832
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	69222
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0	56833
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0	56834
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0	56835

CONTINUED




5xD



143M-S 5xD

FRACTIONAL & METRIC SERIES



- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)	
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	69223	
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	69224	
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	56836	
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	69225	
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	69226	
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	69227	
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	56837	
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	69228	
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	56838	
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	69229	
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	69230	
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	69231	
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	69232	
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	56839	
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	69233	
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	56840	
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	69234	
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	69235	
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	69236	
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	56841	
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	69237	
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	69238	
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	69239	
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	69240	
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	56842	
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	69241	
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	69242	
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	69243	
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	69244	
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	56843	
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	69245	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	69246	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	69247	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	69248	
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	56844	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	69249	

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

continued on next page


143M-S 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-A (AITIN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	69250
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	69251
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	69252
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	56845
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	69253
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	69254
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	69255
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	69256
0.2500	6,350 mm	1/4 E #0	8,0	91,0	53,0	43,0	36,0	56846
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	69257
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	69258
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	56847
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	69259
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	69260
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	56848
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	69261
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	69262
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	69263
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	69264
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	56849
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	69265
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	69266
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	69267
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	69268
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	56850
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	69269
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	69270
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	69271
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	69272
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	56851
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	69273
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	69274
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	69275
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	69276
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	56852
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	69277
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	56853
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	69278
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	69279
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	69280
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	56854
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	69281
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	69282
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	69283


continued on next page

CONTINUED



143M-S 5xD

FRACTIONAL & METRIC SERIES



- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.3583	9,100 mm	23/64	10,0	103,0	61,0	47,0	40,0	69284
0.3594	9,129 mm		10,0	103,0	61,0	47,0	40,0	56855
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	69285
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	69286
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	56856
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	69287
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	69288
0.3750	9,525 mm		10,0	103,0	61,0	47,0	40,0	56857
0.3780	9,600 mm	3/8	10,0	103,0	61,0	47,0	40,0	69289
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	69290
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	69291
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	69292
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	56858
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	69293
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	69294
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	69295
0.4055	10,300 mm	13/32	12,0	118,0	71,0	56,0	45,0	69296
0.4062	10,317 mm		12,0	118,0	71,0	56,0	45,0	56859
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	69297
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	69298
0.4173	10,600 mm	27/64	12,0	118,0	71,0	55,0	45,0	69299
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	69300
0.4219	10,716 mm		12,0	118,0	71,0	55,0	45,0	56860
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	69301
0.4291	10,900 mm	7/16	12,0	118,0	71,0	55,0	45,0	69302
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	69303
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	69304
0.4375	11,113 mm		12,0	118,0	71,0	54,0	45,0	56861
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	69305
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	69306
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	69307
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	69308
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	69309
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	69310
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	69311
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	69312

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER


DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆



For patent information visit
www.ksptpatents.com

continued on next page

143M-S 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.	CONTINUED
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)	
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	56862	
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	69313	
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	56863	
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	69314	
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	56864	
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	69315	
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	69316	
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	56865	
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	69317	
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	69318	
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	69319	
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	56866	
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	69320	
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	56867	
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	69321	
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	69322	
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	69323	
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	69324	
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	56868	
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	69325	
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	56869	
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	56870	
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	56871	

	Series 143M-S Fractional	Hardness	Vc (sfm)	DC • in								
				1/8	3/16	1/4	3/8	1/2	5/8	3/4		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	425	RPM	12988	8659	6494	4329	3247	2598	2165	
			(340-510)	Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236	
				Feed (ipm)	51.0	51.0	51.0	51.0	51.0	51.0	51.0	
		≤ 275 Bhn or ≤ 28 HRc	380	RPM	11613	7742	5806	3871	2903	2323	1935	
			(304-456)	Fr	0.0035	0.0053	0.0071	0.0106	0.0141	0.0177	0.0212	
				Feed (ipm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0	
		≤ 425 Bhn or ≤ 45 HRc	220	RPM	6723	4482	3362	2241	1681	1345	1121	
			(176-264)	Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178	
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0	
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	330	RPM	10085	6723	5042	3362	2521	2017	1681
				(264-396)	Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
					Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
	≤ 375 Bhn or ≤ 40 HRc		200	RPM	6112	4075	3056	2037	1528	1222	1019	
			(160-240)	Fr	0.0025	0.0038	0.0051	0.0076	0.0101	0.0127	0.0152	
				Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5	
	≤ 425 Bhn or ≤ 45 HRc		140	RPM	4278	2852	2139	1426	1070	856	713	
			(112-168)	Fr	0.0018	0.0027	0.0036	0.0054	0.0072	0.0090	0.0108	
				Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 200 Bhn or ≤ 13 HRc	145	RPM	4431	2954	2216	1477	1108	886	739
				(116-174)	Fr	0.0026	0.0039	0.0052	0.0078	0.0104	0.0130	0.0156
					Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	2903	1935	1452	968	726	581	484	
			(76-114)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072	
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	325	RPM	9932	6621	4966	3311	2483	1986	1655	
			(260-390)	Fr	0.0030	0.0045	0.0060	0.0091	0.0121	0.0151	0.0181	
				Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0	
		≤ 275 Bhn or ≤ 28 HRc	210	RPM	6418	4278	3209	2139	1604	1284	1070	
			(168-252)	Fr	0.0023	0.0035	0.0047	0.0070	0.0093	0.0117	0.0140	
				Feed (ipm)	15.0	15.0	15.0	15.0	15.0	15.0	15.0	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	160	RPM	4890	3260	2445	1630	1222	978	815	
			(128-192)	Fr	0.0023	0.0035	0.0047	0.0070	0.0093	0.0117	0.0140	
				Feed (ipm)	11.4	11.4	11.4	11.4	11.4	11.4	11.4	
		≤ 375 Bhn or ≤ 40 HRc	115	RPM	3514	2343	1757	1171	879	703	586	
			(92-138)	Fr	0.0021	0.0031	0.0042	0.0062	0.0083	0.0104	0.0125	
				Feed (ipm)	7.3	7.3	7.3	7.3	7.3	7.3	7.3	

continued on next page

Series 143M-S Fractional				DC • in							
		Hardness	Vc (sfm)	1/8	3/16	1/4	3/8	1/2	5/8	3/4	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	360	RPM	11002	7334	5501	3667	2750	2200	1834
			(288-432)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		≤ 260 Bhn or ≤ 26 HRc	335	RPM	10238	6825	5119	3413	2559	2048	1706
			(268-402)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	46.5	46.5	46.5	46.5	46.5	46.5	46.5
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	130	RPM	3973	2649	1986	1324	993	795	662
			(104-156)	Fr	0.0014	0.0022	0.0029	0.0043	0.0057	0.0072	0.0086
				Feed (ipm)	5.7	5.7	5.7	5.7	5.7	5.7	5.7
		≤ 400 Bhn or ≤ 43 HRc	70	RPM	2139	1426	1070	713	535	428	357
			(56-84)	Fr	0.0012	0.0018	0.0024	0.0036	0.0049	0.0061	0.0073
				Feed (ipm)	2.6	2.6	2.6	2.6	2.6	2.6	2.6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	215	RPM	6570	4380	3285	2190	1643	1314	1095
			(172-258)	Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0105
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 350 Bhn or ≤ 38 HRc	160	RPM	4890	3260	2445	1630	1222	978	815
			(128-192)	Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
				Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8
		≤ 440 Bhn or ≤ 47 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.1	3.1	3.1	3.1	3.1	3.1	3.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x RPM

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 143M-S Metric	Hardness	Vc (m/min)	DC • mm							
			3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	130 (104-155) ≤ 175 Bhn or ≤ 7 HRc	RPM	13733	6867	5150	4120	3433	2943	2575
			Fr	0.094	0.189	0.252	0.314	0.377	0.440	0.503
			Feed (mm/min)	1295	1295	1295	1295	1295	1295	1295
		116 (93-139) ≤ 275 Bhn or ≤ 28 HRc	RPM	12279	6140	4605	3684	3070	2631	2302
			Fr	0.085	0.170	0.226	0.283	0.339	0.396	0.452
			Feed (mm/min)	1041	1041	1041	1041	1041	1041	1041
		67 (54-80) ≤ 425 Bhn or ≤ 45 HRc	RPM	7109	3555	2666	2133	1777	1523	1333
			Fr	0.071	0.143	0.191	0.238	0.286	0.333	0.381
			Feed (mm/min)	508	508	508	508	508	508	508
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	101 (80-121) ≤ 275 Bhn or ≤ 28 HRc	RPM	10664	5332	3999	3199	2666	2285	1999
			Fr	0.071	0.143	0.191	0.238	0.286	0.333	0.381
			Feed (mm/min)	762	762	762	762	762	762	762
		61 (49-73) ≤ 375 Bhn or ≤ 40 HRc	RPM	6463	3231	2424	1939	1616	1385	1212
			Fr	0.061	0.122	0.162	0.203	0.244	0.284	0.325
			Feed (mm/min)	394	394	394	394	394	394	394
		43 (34-51) ≤ 425 Bhn or ≤ 45 HRc	RPM	4524	2262	1696	1357	1131	969	848
			Fr	0.043	0.086	0.115	0.144	0.173	0.202	0.231
			Feed (mm/min)	196	196	196	196	196	196	196
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	44 (35-53) ≤ 200 Bhn or ≤ 13 HRc	RPM	4686	2343	1757	1406	1171	1004	879
			Fr	0.062	0.125	0.166	0.208	0.249	0.291	0.332
			Feed (mm/min)	292	292	292	292	292	292	292
		29 (23-35) ≤ 375 Bhn or ≤ 40 HRc	RPM	3070	1535	1151	921	767	658	576
			Fr	0.029	0.058	0.077	0.097	0.116	0.135	0.154
			Feed (mm/min)	89	89	89	89	89	89	89
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	99 (79-119) ≤ 185 Bhn or ≤ 9 HRc	RPM	10502	5251	3938	3151	2626	2250	1969
			Fr	0.073	0.145	0.193	0.242	0.290	0.339	0.387
			Feed (mm/min)	762	762	762	762	762	762	762
		64 (51-77) ≤ 275 Bhn or ≤ 28 HRc	RPM	6786	3393	2545	2036	1696	1454	1272
			Fr	0.056	0.112	0.150	0.187	0.225	0.262	0.299
			Feed (mm/min)	381	381	381	381	381	381	381
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	49 (39-59) ≤ 275 Bhn or ≤ 28 HRc	RPM	5170	2585	1939	1551	1293	1108	969
			Fr	0.056	0.112	0.149	0.187	0.224	0.261	0.299
			Feed (mm/min)	290	290	290	290	290	290	290
		35 (28-42) ≤ 375 Bhn or ≤ 40 HRc	RPM	3716	1858	1394	1115	929	796	697
			Fr	0.050	0.100	0.133	0.166	0.200	0.233	0.266
			Feed (mm/min)	185	185	185	185	185	185	185

continued on next page

Series 143M-S Metric	Hardness	Vc (m/min)	DC • mm							
			3	6	8	10	12	14	16	
K	CAST IRONS Gray, Malleable, Ductile	110	RPM	11633	5816	4362	3490	2908	2493	2181
		(88-132)	Fr	0.109	0.218	0.291	0.364	0.437	0.509	0.582
			Feed (mm/min)	1270	1270	1270	1270	1270	1270	1270
		102	RPM	10825	5413	4059	3248	2706	2320	2030
		(82-123)	Fr	0.109	0.218	0.291	0.364	0.436	0.509	0.582
			Feed (mm/min)	1181	1181	1181	1181	1181	1181	1181
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	40	RPM	4201	2100	1575	1260	1050	900	788
		(32-48)	Fr	0.034	0.069	0.092	0.115	0.138	0.161	0.184
			Feed (mm/min)	145	145	145	145	145	145	145
		21	RPM	2262	1131	848	679	565	485	424
		(17-26)	Fr	0.029	0.058	0.078	0.097	0.117	0.136	0.156
			Feed (mm/min)	66	66	66	66	66	66	66
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	66	RPM	6947	3474	2605	2084	1737	1489	1303
		(52-79)	Fr	0.042	0.084	0.112	0.140	0.168	0.196	0.224
			Feed (mm/min)	292	292	292	292	292	292	292
		49	RPM	5170	2585	1939	1551	1293	1108	969
		(39-59)	Fr	0.038	0.077	0.102	0.128	0.153	0.179	0.204
			Feed (mm/min)	198	198	198	198	198	198	198
		26	RPM	2747	1373	1030	824	687	589	515
		(21-31)	Fr	0.029	0.057	0.076	0.096	0.115	0.134	0.153
			Feed (mm/min)	79	79	79	79	79	79	79

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{RPM}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




5xD



141K 5xD

FRACTIONAL & METRIC SERIES

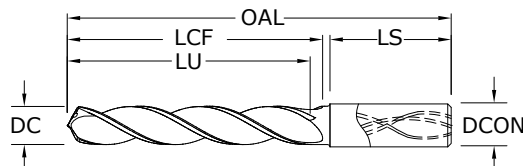

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 43 HRc (≤ 400 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)	
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	65160	
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	65161	
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	55160	
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	65162	
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	65163	
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	65164	
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	55161	
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	65165	
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	55162	
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	65166	
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	65167	
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	65168	
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	65169	
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	55163	
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	65170	
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	55164	
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	65171	
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	65172	
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	65173	
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	55165	
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	65174	
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	65175	
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	65176	
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	65177	
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	55166	
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	65178	
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	65179	
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	65180	
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	65181	
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	55167	
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	65182	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	65183	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	65184	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	65185	
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	55168	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	65186	

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

CAST IRON

For patent
information visit
www.ksptpatents.com

continued on next page

141K 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-M (TM)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	65187
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	65188
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	65189
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	55169
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	65190
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	65191
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	65192
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	65193
0.2500	6,350 mm	1/4 E #0	8,0	91,0	53,0	43,0	36,0	55170
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	65194
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	65195
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	55171
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	65196
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	65197
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	55172
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	65198
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	65199
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	65200
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	65201
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	55173
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	65202
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	65203
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	65204
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	65205
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	55174
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	65206
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	65207
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	65208
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	65209
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	55175
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	65210
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	65211
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	65212
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	65213
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	55176
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	65214
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	55177
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	65215
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	65216
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	65217
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	55178
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	65218
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	65219
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	65220
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	65221
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	55179

continued on next page

CONTINUED




5xD



141K 5xD

FRACTIONAL & METRIC SERIES

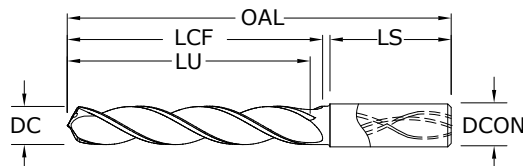

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 43 HRc (≤ 400 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)	
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	65222	
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	65223	
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	55180	
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	65224	
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	65225	
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	55181	
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	65226	
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	65227	
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	65228	
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	65229	
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	55182	
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	65230	
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	65231	
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	65232	
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	65233	
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	55183	
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	65234	
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	65235	
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	65236	
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	65237	
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	55184	
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	65238	
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	65239	
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	65240	
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	65241	
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	55185	
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	65242	
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	65243	
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	65244	
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	65245	
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	65246	
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	65247	
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	65248	
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	65249	
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	55186	
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	65250	

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$ DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$ DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$ DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$ DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$ DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0.002/\pm 0.012$ DCON = h_6

>3-6 DIAMETER

DC = $\pm 0.004/\pm 0.016$ DCON = h_6

>6-10 DIAMETER

DC = $\pm 0.006/\pm 0.021$ DCON = h_6

>10-18 DIAMETER

DC = $\pm 0.007/\pm 0.025$ DCON = h_6

CAST IRON

For patent
information visit
www.ksptpatents.com

continued on next page

141K 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	55187
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	65251
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	55188
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	65252
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	65253
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	55189
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	65254
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	65255
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	65256
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	55190
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	65257
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	55191
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	65258
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	65259
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	65260
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	65261
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	55192
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	65262
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	55193
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	55194
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	55195

CONTINUED

FRACTIONAL Hi-PerCarb®

Series 141K 5D Fractional	Hardness	Vc (sfm)		DC • in							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 1 HRc (360-540)	450	RPM	13752	9168	6876	4584	3438	2750	2292
			Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297	
			Feed (ipm)	68	68	68	68	68	68	68	
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc (300-450)	375	RPM	11460	7640	5730	3820	2865	2292	1910
			Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236	
			Feed (ipm)	45	45	45	45	45	45	45	
	COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc (260-390)	325	RPM	9932	6621	4966	3311	2483	1986	1655
			Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236	
			Feed (ipm)	39	39	39	39	39	39	39	
	MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc (360-540)	450	RPM	13752	9168	6876	4584	3438	2750	2292
			Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297	
			Feed (ipm)	68	68	68	68	68	68	68	
	MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc (200-300)	250	RPM	7640	5093	3820	2547	1910	1528	1273
			Fr	0.0031	0.0047	0.0063	0.0094	0.0126	0.0157	0.0188	
			Feed (ipm)	24	24	24	24	24	24	24	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

METRIC Hi-PerCarb®

Series 141K 5D Metric	Hardness	Vc (m/min)	DC • mm								
			3	6	8	10	12	14	16		
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 1 HRc (110-165)	137	RPM	14541	7271	5453	4362	3635	3116	2726
				Fr	0.119	0.237	0.316	0.395	0.475	0.554	0.633
				Feed (mm/min)	1725	1725	1725	1725	1725	1725	1725
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc (91-137)	114	RPM	12118	6059	4544	3635	3029	2597	2272
				Fr	0.094	0.189	0.252	0.315	0.378	0.441	0.504
				Feed (mm/min)	1145	1145	1145	1145	1145	1145	1145
	COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc (79-119)	99	RPM	10502	5251	3938	3151	2626	2250	1969
				Fr	0.094	0.189	0.251	0.314	0.377	0.440	0.503
				Feed (mm/min)	990	990	990	990	990	990	990
	MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc (110-165)	137	RPM	14541	7271	5453	4362	3635	3116	2726
				Fr	0.119	0.237	0.316	0.395	0.475	0.554	0.633
				Feed (mm/min)	1725	1725	1725	1725	1725	1725	1725
	MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc (61-91)	76	RPM	8078	4039	3029	2424	2020	1731	1515
				Fr	0.076	0.151	0.201	0.252	0.302	0.352	0.403
				Feed (mm/min)	610	610	610	610	610	610	610



(Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

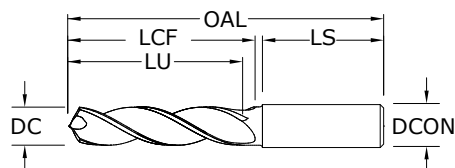

131N 3xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

		inch & mm						EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	64600	67600
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	64601	67601
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	54600	54700
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	64602	67602
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	64603	67603
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	64604	67604
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	54601	54701
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	64605	67605
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	54602	54702
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	64606	67606
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	64607	67607
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	64608	67608
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	64609	67609
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	54603	54703
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	64610	67610
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	54604	54704
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	64611	67611
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	64612	67612
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	64613	67613
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	54605	54705
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	64614	67614
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	64615	67615
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	64616	67616
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	64617	67617
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	54606	54706
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	64618	67618
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	64619	67619
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	64620	67620
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	64621	67621
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	54607	54707
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	64622	67622
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	64623	67623
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	64624	67624
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	64625	67625
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	54608	54708
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	64626	67626

continued on next page

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRC)




3xD



131N 3xD

FRACTIONAL & METRIC SERIES

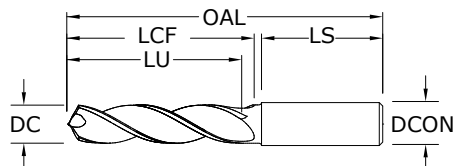

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

DECIMAL DC	METRIC DC	inch & mm						EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	64627	67627
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	64628	67628
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	64629	67629
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	54609	54709
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	64630	67630
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	64631	67631
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	64632	67632
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	64633	67633
0.2500	6,350 mm	1/4 E #0	8,0	79,0	34,0	24,0	36,0	54610	54710
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	64634	67634
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	64635	67635
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	54611	54711
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	64636	67636
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	64637	67637
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	54612	54712
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	64638	67638
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	64639	67639
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	64640	67640
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	64641	67641
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	54613	54713
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	64642	67642
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	64643	67643
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	64644	67644
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	64645	67645
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	54614	54714
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	64646	67646
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	64647	67647
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	64648	67648
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	64649	67649
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	54615	54715
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	64650	67650
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	64651	67651
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	64652	67652
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	64653	67653
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	54616	54716
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	64654	67654

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

continued on next page


131N 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	54617	54717
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	64655	67655
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	64656	67656
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	64657	67657
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	54618	54718
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	64658	67658
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	64659	67659
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	64660	67660
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	64661	67661
0.3594	9,129 mm	23/64	10,0	89,0	47,0	33,0	40,0	54619	54719
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	64662	67662
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	64663	67663
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	54620	54720
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	64664	67664
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	64665	67665
0.3750	9,525 mm	3/8	10,0	89,0	47,0	33,0	40,0	54621	54721
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	64666	67666
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	64667	67667
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	64668	67668
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	64669	67669
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	54622	54722
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	64670	67670
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	64671	67671
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	64672	67672
0.4055	10,300 mm		12,0	102,0	55,0	40,0	45,0	64673	67673
0.4062	10,317 mm	13/32	12,0	102,0	55,0	40,0	45,0	54623	54723
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	64674	67674
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	64675	67675
0.4173	10,600 mm		12,0	102,0	55,0	39,0	45,0	64676	67676
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	64677	67677
0.4219	10,716 mm	27/64	12,0	102,0	55,0	39,0	45,0	54624	54724
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	64678	67678
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	64679	67679
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	64680	67680
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	64681	67681
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	54625	54725
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	64682	67682
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	64683	67683
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	64684	67684
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	64685	67685
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	64686	67686
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	64687	67687
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	64688	67688
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	64689	67689


continued on next page

CONTINUED



131N 3xD

FRACTIONAL & METRIC SERIES

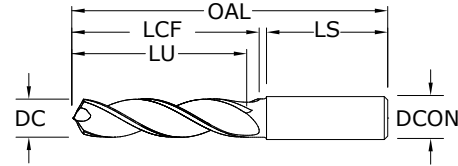

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRC)

inch & mm									EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS		UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0		54626	54726
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0		64690	67690
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0		54627	54727
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0		64691	67691
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0		54628	54728
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0		64692	67692
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0		64693	67693
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0		54629	54729
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0		64694	67694
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0		64695	67695
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0		64696	67696
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0		54630	54730
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0		64697	67697
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0		54631	54731
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0		64698	67698
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0		64699	67699
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0		64700	67700
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0		64701	67701
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0		54632	54732
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0		64702	67702
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0		54633	54733
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0		54634	54734
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0		54635	54735

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$

DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$

DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$

DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$

DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0,002/\pm 0,012$

DCON = h_6

>3-6 DIAMETER

DC = $\pm 0,004/\pm 0,016$

DCON = h_6

>6-10 DIAMETER

DC = $\pm 0,006/\pm 0,021$

DCON = h_6



>10-18 DIAMETER

DC = $\pm 0,007/\pm 0,025$

DCON = h_6

NON-FERROUS

For patent information visit
www.ksptpatents.com

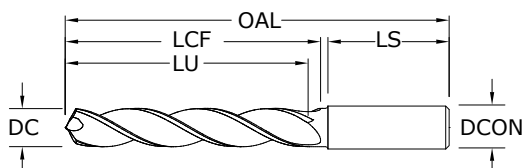

131N 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00028/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

		inch & mm						EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	TI-NAMITE®-B (TiB ₂)
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	65000	64800
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	65001	64801
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	55000	54800
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	65002	64802
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	65003	64803
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	65004	64804
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	55001	54801
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	65005	64805
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	55002	54802
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	65006	64806
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	65007	64807
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	65008	64808
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	65009	64809
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	55003	54803
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	65010	64810
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	55004	54804
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	65011	64811
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	65012	64812
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	65013	64813
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	55005	54805
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	65014	64814
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	65015	64815
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	65016	64816
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	65017	64817
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	55006	54806
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	65018	64818
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	65019	64819
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	65020	64820
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	65021	64821
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	55007	54807
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	65022	64822
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	65023	64823
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	65024	64824
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	65025	64825
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	55008	54808
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	65026	64826

continued on next page

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRC)




5xD



131N 5xD

FRACTIONAL & METRIC SERIES

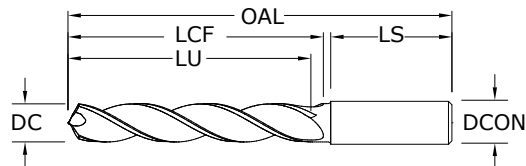

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

		inch & mm							EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS		UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0		65027	64827
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0		65028	64828
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0		65029	64829
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0		55009	54809
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0		65030	64830
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0		65031	64831
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0		65032	64832
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0		65033	64833
0.2500	6,350 mm	1/4 E #0	8,0	91,0	53,0	43,0	36,0		55010	54810
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0		65034	64834
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0		65035	64835
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0		55011	54811
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0		65036	64836
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0		65037	64837
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0		55012	54812
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0		65038	64838
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0		65039	64839
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0		65040	64840
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0		65041	64841
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0		55013	54813
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0		65042	64842
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0		65043	64843
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0		65044	64844
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0		65045	64845
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0		55014	54814
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0		65046	64846
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0		65047	64847
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0		65048	64848
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0		65049	64849
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0		55015	54815
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0		65050	64850
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0		65051	64851
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0		65052	64852
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0		65053	64853
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0		55016	54816
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0		65054	64854

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$ DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$ DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$ DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$ DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$ DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0,002/\pm 0,012$ DCON = h_6

>3-6 DIAMETER

DC = $\pm 0,004/\pm 0,016$ DCON = h_6

>6-10 DIAMETER

DC = $\pm 0,006/\pm 0,021$ DCON = h_6

>10-18 DIAMETER

DC = $\pm 0,007/\pm 0,025$ DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com


continued on next page

131N 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.		CONTINUED
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)	
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	55017	54817	
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	65055	64855	
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	65056	64856	
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	65057	64857	
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	55018	54818	
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	65058	64858	
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	65059	64859	
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	65060	64860	
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	65061	64861	
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	55019	54819	
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	65062	64862	
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	65063	64863	
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	55020	54820	
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	65064	64864	
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	65065	64865	
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	55021	54821	
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	65066	64866	
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	65067	64867	
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	65068	64868	
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	65069	64869	
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	55022	54822	
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	65070	64870	
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	65071	64871	
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	65072	64872	
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	65073	64873	
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	55023	54823	
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	65074	64874	
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	65075	64875	
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	65076	64876	
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	65077	64877	
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	55024	54824	
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	65078	64878	
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	65079	64879	
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	65080	64880	
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	65081	64881	
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	55025	54825	
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	65082	64882	
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	65083	64883	
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	65084	64884	
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	65085	64885	
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	65086	64886	
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	65087	64887	
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	65088	64888	
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	65089	64889	
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	55026	54826	
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	65090	64890	

continued on next page




131N 5xD

FRACTIONAL & METRIC SERIES

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

inch & mm										EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE®-B (TiB ₂)			
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	55027	54827		
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	65091	64891		
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	55028	54828		
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	65092	64892		
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	65093	64893		
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	55029	54829		
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	65094	64894		
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	65095	64895		
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	65096	64896		
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	55030	54830		
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	65097	64897		
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	55031	54831		
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	65098	64898		
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	65099	64899		
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	65100	64900		
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	65101	64901		
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	55032	54832		
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	65102	64902		
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	55033	54833		
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	55034	54834		
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	55035	54835		

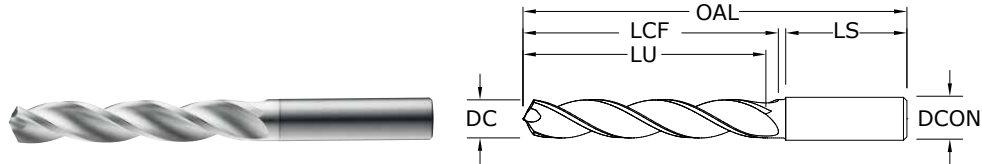

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

Series 131N 3D & 5D Fractional				DC • in							
Hardness	Vc (sfm)			1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS < 12% SI 6061, 2024, 7075	≤ 150 Bhn or ≤ 88 HRb	800	RPM	24448	16299	12224	8149	6112	4890	4075
			(640-960)	Fr	0.0055	0.0083	0.0110	0.0166	0.0221	0.0276	0.0331
			Feed (ipm)	135	135	135	135	135	135	135	135
	ALUMINUM ALLOYS > 12% SI A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	600	RPM	18336	12224	9168	6112	4584	3667	3056
			(480-720)	Fr	0.0055	0.0082	0.0109	0.0164	0.0218	0.0273	0.0327
			Feed (ipm)	100	100	100	100	100	100	100	100
	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	550	RPM	16808	11205	8404	5603	4202	3362	2801
			(440-660)	Fr	0.0020	0.0030	0.0040	0.0061	0.0081	0.0101	0.0121
			Feed (ipm)	34	34	34	34	34	34	34	34
	PLASTICS Acrylic, PVC, Polypropylene		450	RPM	13752	9168	6876	4584	3438	2750	2292
			(360-540)	Fr	0.0025	0.0037	0.0049	0.0074	0.0099	0.0124	0.0148
			Feed (ipm)	34	34	34	34	34	34	34	34

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 131N 3D & 5D Metric				DC • mm							
Hardness	Vc (m/min)			3	6	8	10	12	14	16	
N	ALUMINUM ALLOYS < 12% SI 6061, 2024, 7075	≤ 150 Bhn or ≤ 88 HRb	244	RPM	25851	12926	9694	7755	6463	5540	4847
			(195-293)	Fr	0.133	0.265	0.354	0.442	0.531	0.619	0.708
				Feed (mm/min)	3430	3430	3430	3430	3430	3430	3430
	ALUMINUM ALLOYS > 12% SI A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	183	RPM	19388	9694	7271	5816	4847	4155	3635
			(146-219)	Fr	0.131	0.262	0.349	0.437	0.524	0.611	0.699
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540
	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	168	RPM	17773	8886	6665	5332	4443	3808	3332
			(134-201)	Fr	0.049	0.097	0.130	0.162	0.194	0.227	0.259
				Feed (mm/min)	864	864	864	864	864	864	864
PLASTICS Acrylic, PVC, Polypropylene		137	RPM	14541	7271	5453	4362	3635	3116	2726	
		(110-165)	Fr	0.059	0.119	0.158	0.198	0.238	0.277	0.317	
			Feed (mm/min)	864	864	864	864	864	864	864	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 120




3xD



120

FRACTIONAL & METRIC SERIES

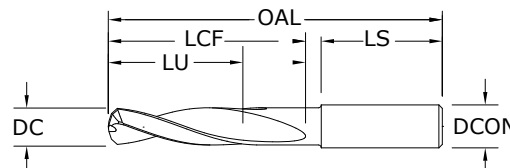

- Double margin design stabilizes the drill for greater hole accuracy and improved surface finish
- Notched point reduces thrust force over conventional designs
- 8 facet point reduces fiber breakout and delamination on exit
- 90 degree secondary chamfer angle improves hole entrance and exit quality

DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.0980	2,489 mm	#40	1/8	2	9/16	7/16	1-1/4	50000
0.1063	2,700 mm		6,0	63,0	20,0	16,0	32,0	50001
0.1181	3,000 mm		6,0	63,0	20,0	16,0	36,0	50002
0.1250	3,175 mm	1/8	1/4	2-1/2	3/4	9/16	1-7/16	50003
0.1260	3,200 mm		6,0	63,0	20,0	15,0	36,0	50004
0.1285	3,264 mm	#30	1/4	2-1/2	3/4	9/16	1-7/16	50005
0.1405	3,569 mm	#28	1/4	2-1/2	3/4	9/16	1-7/16	50006
0.1570	3,988 mm	#22	1/4	2-5/8	7/8	5/8	1-7/16	50007
0.1590	4,039 mm	#21	1/4	2-5/8	7/8	5/8	1-7/16	50008
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	50009
0.1660	4,216 mm	#19	1/4	2-5/8	7/8	5/8	1-7/16	50010
0.1719	4,366 mm	11/64	1/4	2-5/8	7/8	5/8	1-7/16	50011
0.1875	4,763 mm	3/16	1/4	2-5/8	1	23/32	1-7/16	50012
0.1910	4,851 mm	#11	1/4	2-5/8	1	23/32	1-7/16	50013
0.1990	5,055 mm	#8	1/4	2-5/8	1	23/32	1-7/16	50014
0.2010	5,105 mm	#7	1/4	2-5/8	1	23/32	1-7/16	50015
0.2210	5,613 mm	#2	1/4	2-5/8	1	21/32	1-7/16	50016
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	50017
0.2500	6,350 mm	1/4 E #0	1/4	3-1/8	1-5/16	15/16	1-7/16	50018
0.2510	6,380 mm		5/16	3-1/8	1-5/16	15/16	1-7/16	50019
0.2570	6,528 mm	F	5/16	3-1/8	1-5/16	15/16	1-7/16	50020
0.2720	6,909 mm	I	5/16	3-1/8	1-5/16	29/32	1-7/16	50021
0.2770	7,036 mm	J	5/16	3-1/8	1-5/16	29/32	1-7/16	50022
0.2810	7,137 mm	K	5/16	3-1/8	1-9/16	1-9/64	1-7/16	50023
0.3125	7,938 mm	5/16	5/16	3-1/8	1-9/16	1-3/32	1-7/16	50024
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	50025
0.3750	9,525 mm	3/8	3/8	3-1/2	1-27/32	1-9/32	1-9/16	50026
0.3770	9,576 mm	V	1/2	3-1/2	1-27/32	1-9/32	1-9/16	50027
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	50028
0.4375	11,113 mm	7/16	1/2	4-1/16	2-3/16	1-17/32	1-9/16	50029
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	50030
0.5000	12,700 mm	1/2	1/2	4-1/4	2-5/16	1-9/16	1-3/4	50031

TOLERANCES (inch)

DC = +.0000/+0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0,000/+0,013

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

Series 120

Series 120 Fractional			DC • in							
Vc (sfm)			1/8	3/16	1/4	5/16	3/8	7/16	1/2	
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	320	RPM	9779	6519	4890	3912	3260	2794	2445
		(256-384)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	5.9	5.9	5.9	5.9	5.9	5.9	5.9
	GFRP (Fiberglass)	240	RPM	7334	4890	3667	2934	2445	2096	1834
		(192-288)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	CARBON, GRAPHITE	400	RPM	12224	8149	6112	4890	4075	3493	3056
		(320-480)	Fr	0.0008	0.0012	0.0016	0.0020	0.0024	0.0028	0.0032
			Feed (ipm)	9.8	9.8	9.8	9.8	9.8	9.8	9.8

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)


Series 120 Metric			DC • mm							
Vc (m/min)			2.5	3	4	6	8	10	12	
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	100	RPM	12722	10602	7951	5301	3976	3181	2650
		(80-120)	Fr	0.012	0.014	0.019	0.028	0.038	0.047	0.057
			Feed (mm/min)	150	150	150	150	150	150	150
	GFRP (Fiberglass)	75	RPM	9542	7951	5963	3976	2982	2385	1988
		(65-90)	Fr	0.012	0.014	0.019	0.029	0.039	0.048	0.058
			Feed (mm/min)	115	115	115	115	115	115	115
	CARBON, GRAPHITE	120	RPM	15266	12722	9542	6361	4771	3817	3181
		(96-144)	Fr	0.015	0.018	0.025	0.037	0.049	0.062	0.074
			Feed (mm/min)	235	235	235	235	235	235	235

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm


adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



135 3xD

FRACTIONAL & METRIC SERIES

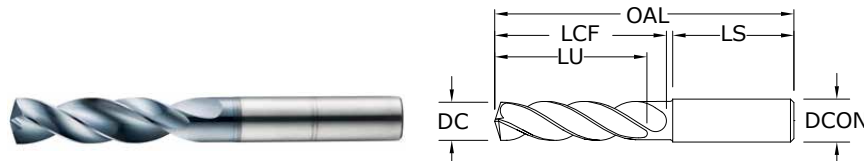

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)
0.0156	0,396 mm	1/64	1/8	1-1/2	1/8	7/64	1	51752*
0.0312	0,792 mm	1/32	1/8	1-1/2	1/4	13/64	1	51269*
0.0469	1,191 mm	3/64	1/8	1-1/2	3/8	5/16	1	51270*
0.0492	1,250 mm		3,0	38,0	9,5	8,0	25,0	64500*
0.0571	1,450 mm		3,0	38,0	9,5	7,0	25,0	64501*
0.0595	1,511 mm	#53	1/8	1-1/2	3/8	9/32	1	64502*
0.0625	1,588 mm	1/16	1/8	2	7/16	11/32	1-1/4	51271*
0.0630	1,600 mm		3,0	50,0	11,0	9,0	32,0	64503*
0.0689	1,750 mm		3,0	50,0	11,0	8,0	32,0	64504*
0.0700	1,778 mm	#50	1/8	2	7/16	21/64	1-1/4	64505*
0.0781	1,984 mm	5/64	1/8	2	1/2	25/64	1-1/4	51272*
0.0785	1,994 mm	#47	1/8	2	1/2	25/64	1-1/4	64506*
0.0807	2,050 mm		3,0	50,0	12,0	9,0	32,0	64507*
0.0810	2,057 mm	#46	1/8	2	1/2	3/8	1-1/4	64508*
0.0890	2,261 mm	#43	1/8	2	1/2	3/8	1-1/4	64509*
0.0935	2,375 mm	#42	1/8	2	1/2	23/64	1-1/4	64510*
0.0938	2,383 mm	3/32	1/8	2	1/2	23/64	1-1/4	51273
0.0980	2,489 mm	#40	1/8	2	9/16	27/64	1-1/4	51274
0.0984	2,500 mm		3,0	50,0	14,0	10,0	32,0	64511
0.0995	2,527 mm	#39	1/8	2	9/16	27/64	1-1/4	51753
0.1015	2,578 mm	#38	1/8	2	9/16	27/64	1-1/4	51754
0.1040	2,642 mm	#37	1/8	2	9/16	13/32	1-1/4	51755
0.1065	2,705 mm	#36	1/8	2	9/16	13/32	1-1/4	51756
0.1094	2,779 mm	7/64	1/8	2	5/8	15/32	1-1/4	51275
0.1100	2,794 mm	#35	1/8	2	5/8	15/32	1-1/4	51276
0.1110	2,819 mm	#34	1/8	2	5/8	15/32	1-1/4	51277
0.1130	2,870 mm	#33	1/8	2	5/8	29/64	1-1/4	51757
0.1142	2,900 mm		3,0	50,0	16,0	12,0	32,0	64512
0.1160	2,946 mm	#32	1/8	2	5/8	29/64	1-1/4	51758
0.1181	3,000 mm		6,0	62,0	20,0	16,0	36,0	63155
0.1200	3,048 mm	#31	1/8	2	5/8	29/64	1-1/4	51759
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	63741
0.1250	3,175 mm	1/8	1/4	2-1/2	3/4	9/16	1-7/16	51330
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	63156
0.1285	3,264 mm	#30	1/4	2-1/2	3/4	9/16	1-7/16	51278
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	63157

*Single Margin

continued on next page

TOLERANCES (inch)

$\leq .1181$ DIAMETER

DC = $\pm 0.0008/\pm 0.0047$

DCON = h_6

$>.1181-.2362$ DIAMETER

DC = $\pm 0.0016/\pm 0.0063$

DCON = h_6

$>.2362-.3937$ DIAMETER

DC = $\pm 0.0024/\pm 0.0083$

DCON = h_6

$>.3937-.7087$ DIAMETER

DC = $\pm 0.0028/\pm 0.0098$

DCON = h_6

$>.7087-1.1811$ DIAMETER

DC = $\pm 0.0031/\pm 0.0114$

DCON = h_6

TOLERANCES (mm)

≤ 3 DIAMETER

DC = $\pm 0,002/\pm 0,012$

DCON = h_6

$>3-6$ DIAMETER

DC = $\pm 0,004/\pm 0,016$

DCON = h_6

$>6-10$ DIAMETER

DC = $\pm 0,006/\pm 0,021$

DCON = h_6

$>10-18$ DIAMETER

DC = $\pm 0,007/\pm 0,025$

DCON = h_6

$>18-30$ DIAMETER

DC = $\pm 0,008/\pm 0,029$

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent information visit
www.ksptpatents.com

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	63158
0.1360	3,454 mm	#29	1/4	2-1/2	3/4	9/16	1-7/16	51331
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	63159
0.1405	3,569 mm	#28	1/4	2-1/2	3/4	35/64	1-7/16	51760
0.1406	3,571 mm	9/64	1/4	2-1/2	3/4	9/16	1-7/16	51332
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	63160
0.1440	3,658 mm	#27	1/4	2-1/2	3/4	35/64	1-7/16	51761
0.1457	3,700 mm		6,0	62,0	20,0	14,0	36,0	63161
0.1470	3,734 mm	#26	1/4	2-1/2	3/4	17/32	1-7/16	51762
0.1495	3,797 mm	#25	1/4	2-5/8	7/8	21/32	1-7/16	51333
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	63742
0.1520	3,861 mm	#24	1/4	2-5/8	7/8	21/32	1-7/16	51763
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	63743
0.1540	3,912 mm	#23	1/4	2-5/8	7/8	21/32	1-7/16	51764
0.1562	3,967 mm	5/32	1/4	2-5/8	7/8	41/64	1-7/16	51334
0.1570	3,988 mm	#22	1/4	2-5/8	7/8	41/64	1-7/16	51765
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	63162
0.1590	4,039 mm	#21	1/4	2-5/8	7/8	41/64	1-7/16	51335
0.1610	4,089 mm	#20	1/4	2-5/8	7/8	5/8	1-7/16	51279
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	63744
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	63163
0.1660	4,216 mm	#19	1/4	2-5/8	7/8	5/8	1-7/16	51766
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	63164
0.1695	4,305 mm	#18	1/4	2-5/8	7/8	5/8	1-7/16	51767
0.1719	4,366 mm	11/64	1/4	2-5/8	7/8	39/64	1-7/16	51336
0.1730	4,394 mm	#17	1/4	2-5/8	7/8	5/8	1-7/16	51768
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	63745
0.1770	4,496 mm	#16	1/4	2-5/8	7/8	39/64	1-7/16	51769
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	63165
0.1800	4,572 mm	#15	1/4	2-5/8	7/8	39/64	1-7/16	51770
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	63166
0.1820	4,623 mm	#14	1/4	2-5/8	7/8	39/64	1-7/16	51771
0.1850	4,699 mm	#13	1/4	2-5/8	7/8	39/64	1-7/16	51772
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	63746
0.1875	4,763 mm	3/16	1/4	2-5/8	1	23/32	1-7/16	51337
0.1890	4,801 mm	#12	1/4	2-5/8	1	23/32	1-7/16	51773
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	63167
0.1910	4,851 mm	#11	1/4	2-5/8	1	23/32	1-7/16	51774
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	63747
0.1935	4,915 mm	#10	1/4	2-5/8	1	23/32	1-7/16	51775
0.1960	4,978 mm	#9	1/4	2-5/8	1	23/32	1-7/16	51776
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	63168
0.1990	5,055 mm	#8	1/4	2-5/8	1	45/64	1-7/16	51777
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	63748
0.2010	5,105 mm	#7	1/4	2-5/8	1	45/64	1-7/16	51338
0.2031	5,159 mm	13/64	1/4	2-5/8	1	45/64	1-7/16	51339

continued on next page

CONTINUED




3xD



135 3xD

FRACTIONAL & METRIC SERIES

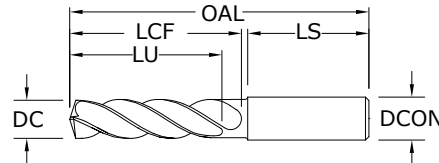

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)
0.2040	5,182 mm	#6	1/4	2-5/8	1	45/64	1-7/16	51778
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	63749
0.2055	5,220 mm	#5	1/4	2-5/8	1	45/64	1-7/16	51779
0.2067	5,250 mm		6,0	66,0	28,0	20,0	36,0	63169
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	63170
0.2090	5,309 mm	#4	1/4	2-5/8	1	11/16	1-7/16	51780
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	63750
0.2130	5,410 mm	#3	1/4	2-5/8	1	11/16	1-7/16	51340
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	63171
0.2188	5,558 mm	7/32	1/4	2-5/8	1	43/64	1-7/16	51341
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	63751
0.2210	5,613 mm	#2	1/4	2-5/8	1	11/16	1-7/16	51781
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	63752
0.2280	5,791 mm	#1	1/4	2-5/8	1	21/32	1-7/16	51782
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	63172
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	63753
0.2340	5,944 mm	A	1/4	2-5/8	1	21/32	1-7/16	51601
0.2344	5,954 mm	15/64	1/4	2-5/8	1	21/32	1-7/16	51342
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	63173
0.2380	6,045 mm	B	1/4	3-1/8	1-5/16	31/32	1-7/16	51602
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	63754
0.2420	6,147 mm	C	1/4	3-1/8	1-5/16	61/64	1-7/16	51603
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	63755
0.2460	6,248 mm	D	1/4	3-1/8	1-5/16	61/64	1-7/16	51604
0.2461	6,250 mm		8,0	79,0	34,0	25,0	36,0	63174
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	63756
0.2500	6,350 mm	1/4 E #0	1/4	3-1/8	1-5/16	15/16	1-7/16	51343
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	63175
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	63213
0.2570	6,528 mm	F	5/16	3-1/8	1-5/16	59/64	1-7/16	51344
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	63757
0.2610	6,629 mm	G	5/16	3-1/8	1-5/16	59/64	1-7/16	51606
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	63758
0.2656	6,746 mm	17/64	5/16	3-1/8	1-5/16	59/64	1-7/16	51345
0.2660	6,756 mm	H	5/16	3-1/8	1-5/16	59/64	1-7/16	51607
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	63176
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	63759
0.2720	6,909 mm	I	5/16	3-1/8	1-5/16	29/32	1-7/16	51346

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.00047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.00063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.00083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.00098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0,002/+0,012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0,004/+0,016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0,006/+0,021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0,007/+0,025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0,008/+0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

continued on next page

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	63177
0.2770	7,036 mm	J	5/16	3-1/8	1-5/16	29/32	1-7/16	51608
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	63760
0.2810	7,137 mm	K	5/16	3-1/8	1-9/16	1-9/64	1-7/16	51609
0.2812	7,142 mm	9/32	5/16	3-1/8	1-9/16	1-9/64	1-7/16	51347
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	63761
0.2854	7,250 mm		8,0	79,0	41,0	30,0	36,0	63178
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	63762
0.2900	7,366 mm	L	5/16	3-1/8	1-9/16	1-1/8	1-7/16	51610
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	63763
0.2950	7,493 mm	M	5/16	3-1/8	1-9/16	1-1/8	1-7/16	51611
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	63179
0.2969	7,541 mm	19/64	5/16	3-1/8	1-9/16	1-7/64	1-7/16	51348
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	63764
0.3020	7,671 mm	N	5/16	3-1/8	1-9/16	1-7/64	1-7/16	51612
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	63765
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	63180
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	63766
0.3125	7,938 mm	5/16	5/16	3-1/8	1-9/16	1-3/32	1-7/16	51349
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	63181
0.3160	8,026 mm	O	3/8	3-1/2	1-27/32	1-3/8	1-9/16	51613
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	63767
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	63768
0.3230	8,204 mm	P	3/8	3-1/2	1-27/32	1-23/64	1-9/16	51614
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	63769
0.3281	8,334 mm	21/64	3/8	3-1/2	1-27/32	1-23/64	1-9/16	51350
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	63182
0.3320	8,433 mm	Q	3/8	3-1/2	1-27/32	1-11/32	1-9/16	51351
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	63183
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	63770
0.3390	8,611 mm	R	3/8	3-1/2	1-27/32	1-11/32	1-9/16	51615
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	63771
0.3438	8,733 mm	11/32	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51352
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	63184
0.3480	8,839 mm	S	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51616
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	63772
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	63185
0.3580	9,093 mm	T	3/8	3-1/2	1-27/32	1-5/16	1-9/16	51617
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	63773
0.3594	9,129 mm	23/64	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51353
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	63774
0.3642	9,250 mm		10,0	89,0	47,0	33,0	40,0	63186
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	63775
0.3680	9,347 mm	U	3/8	3-1/2	1-27/32	1-19/64	1-9/16	51354
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	63776
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	63187

continued on next page

CONTINUED




3xD



135 3xD

FRACTIONAL & METRIC SERIES

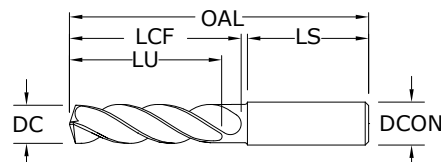

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)	
0.3750	9,525 mm	3/8	3/8	3-1/2	1-27/32	1-9/32	1-9/16	51355	
0.3770	9,576 mm	V	1/2	3-1/2	1-27/32	1-9/32	1-9/16	51618	
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	63777	
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	63778	
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	63779	
0.3860	9,804 mm	W	1/2	3-1/2	1-27/32	1-17/64	1-9/16	51619	
0.4095	10,400 mm		10,0	89,0	47,0	32,0	40,0	63780	
0.4130	10,490 mm	Z	1/2	3-1/2	1-27/32	1-17/64	1-9/16	51356	
0.4134	10,500 mm		10,0	89,0	47,0	32,0	40,0	63188	
0.4173	10,600 mm		1/2	4-1/16	2-3/16	1-19/32	1-49/64	51620	
0.4213	10,700 mm		12,0	102,0	55,0	40,0	45,0	63781	
0.4219	10,716 mm	27/64	12,0	102,0	55,0	40,0	45,0	63189	
0.4252	10,800 mm		1/2	4-1/16	2-3/16	1-19/32	1-49/64	51621	
0.4291	10,900 mm		12,0	102,0	55,0	40,0	45,0	63782	
0.4331	11,000 mm		1/2	4-1/16	2-3/16	1-37/64	1-49/64	51357	
0.4370	11,100 mm		12,0	102,0	55,0	39,0	45,0	63783	
0.4375	11,113 mm	7/16	1/2	4-1/16	2-3/16	1-37/64	1-49/64	51622	
0.4409	11,200 mm		12,0	102,0	55,0	39,0	45,0	63190	
0.4429	11,250 mm		12,0	102,0	55,0	39,0	45,0	63784	
0.4449	11,300 mm		12,0	102,0	55,0	39,0	45,0	63785	
0.4488	11,400 mm		1/2	4-1/16	2-3/16	1-9/16	1-49/64	51358	
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	63191	
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	63786	
0.4331	11,0 mm		12,0	102,0	55,0	39,0	45,0	63192	
0.4331	11,000 mm		12,0	102,0	55,0	38,0	45,0	63787	
0.4370	11,100 mm		1/2	4-1/16	2-3/16	1-17/32	1-49/64	51359	
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	63788	
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	63193	
0.4429	11,250 mm		12,0	102,0	55,0	38,0	45,0	63789	
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	63790	
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	63194	
0.4531	11,509 mm	29/64	1/2	4-1/16	2-3/16	1-33/64	1-49/64	51360	
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	63791	
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	63792	
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	63793	
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	63794	
0.4688	11,908 mm	15/32	1/2	4-1/16	2-3/16	1-31/64	1-49/64	51361	
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	63195	

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.00047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.00063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.00083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.00098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0,002/+0,012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0,004/+0,016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0,006/+0,021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0,007/+0,025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0,008/+0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.kspatents.com

continued on next page

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITIN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4844	12,304 mm	31/64	1/2	4-1/4	2-5/16	1-19/32	1-49/64	51362
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	63196
0.5000	12,700 mm	1/2	1/2	4-1/4	2-5/16	1-9/16	1-49/64	51363
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	63197
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	63198
0.5156	13,096 mm	33/64	5/8	4-1/4	2-5/16	1-35/64	1-49/64	51364
0.5312	13,492 mm	17/32	5/8	4-1/4	2-5/16	1-33/64	1-49/64	51365
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	63199
0.5469	13,8 mm	35/64	5/8	4-1/4	2-5/16	1-1/2	1-49/64	51783
0.5469	13,891 mm	35/64	14,0	107,0	60,0	39,0	45,0	63200
0.5512	14,000 mm		5/8	4-9/16	2-1/2	1-21/32	1-57/64	51366
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0	63201
0.5781	14,684 mm	37/64	5/8	4-9/16	2-1/2	1-41/64	1-57/64	51367
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	63202
0.5938	15,083 mm	19/32	5/8	4-9/16	2-1/2	1-39/64	1-57/64	51784
0.6094	15,479 mm	39/64	5/8	4-9/16	2-1/2	1-19/32	1-57/64	51785
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	63203
0.6250	15,875 mm	5/8	5/8	4-9/16	2-1/2	1-9/16	1-57/64	51368
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	63204
0.6406	16,271 mm	41/64	3/4	4-7/8	2-3/4	1-51/64	1-57/64	51786
0.6496	16,500 mm		18,0	123,0	73,0	48,0	48,0	63205
0.6562	16,667 mm	21/32	3/4	4-7/8	2-3/4	1-25/32	1-57/64	51369
0.6693	17,000 mm		18,0	123,0	73,0	47,0	48,0	63206
0.6719	17,066 mm	43/64	3/4	4-7/8	2-3/4	1-3/4	1-57/64	51787
0.6875	17,463 mm	11/16	3/4	4-7/8	2-3/4	1-47/64	1-57/64	51370
0.6890	17,500 mm		18,0	123,0	73,0	47,0	48,0	63207
0.7031	17,859 mm	45/64	3/4	4-7/8	2-3/4	1-45/64	1-57/64	51788
0.7087	18,000 mm		18,0	123,0	73,0	46,0	48,0	63208
0.7188	18,258 mm	23/32	3/4	4-7/8	2-3/4	1-43/64	1-57/64	51789
0.7283	18,500 mm		20,0	131,0	79,0	51,0	50,0	63209
0.7344	18,654 mm	47/64	3/4	4-7/8	2-3/4	1-21/32	1-57/64	51790
0.7480	19,000 mm		20,0	131,0	79,0	51,0	50,0	63210
0.7500	19,050 mm	3/4	3/4	5-1/4	3-1/16	1-15/16	1-31/32	51371
0.7656	19,446 mm	49/64	7/8	5-1/4	3-1/16	1-59/64	1-31/32	51372
0.7677	19,500 mm		20,0	131,0	79,0	50,0	50,0	63211
0.7812	19,842 mm	25/32	7/8	6	3-11/16	2-33/64	2-1/8	51791
0.7874	2,0000 mm		20,0	131,0	79,0	49,0	50,0	63212
0.7969	20,241 mm	51/64	7/8	6	3-11/16	2-1/2	2-1/8	51792
0.8071	20,500 mm		22,0	150,0	93,0	62,0	53,0	64513
0.8125	20,638 mm	13/16	7/8	6	3-11/16	2-15/32	2-1/8	51373
0.8268	21,000 mm		22,0	150,0	93,0	61,0	53,0	64514
0.8661	22,000 mm		22,0	150,0	93,0	60,0	53,0	64515
0.8750	22,225 mm	7/8	7/8	6	3-11/16	2-3/8	2-1/8	51374
0.9219	23,416 mm	59/64	1	6	3-11/16	2-5/16	2-1/8	51375

CONTINUED

	Series 135 3D Fractional	Hardness	Vc (sfm)	DC • in								
				1/32	1/8	1/4	3/8	1/2	5/8	7/8		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	385	RPM	47062	11766	5883	3922	2941	2353	1681	
			(308-462)	Fr	0.0010	0.0038	0.0076	0.0115	0.0153	0.0191	0.0268	
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
		≤ 275 Bhn or ≤ 28 HRc	350	RPM	42784	10696	5348	3565	2674	2139	1528	
			(280-420)	Fr	0.0009	0.0036	0.0071	0.0107	0.0142	0.0178	0.0249	
				Feed (ipm)	38.0	38.0	38.0	38.0	38.0	38.0	38.0	
		≤ 425 Bhn or ≤ 45 HRc	200	RPM	24448	6112	3056	2037	1528	1222	873	
			(160-240)	Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206	
				Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0	18.0	
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	300	RPM	36672	9168	4584	3056	2292	1834	1310
				(240-360)	Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206
					Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0
	≤ 375 Bhn or ≤ 40 HRc		185	RPM	22614	5654	2827	1885	1413	1131	808	
			(148-222)	Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0180	
				Feed (ipm)	14.5	14.5	14.5	14.5	14.5	14.5	14.5	
	≤ 425 Bhn or ≤ 45 HRc		130	RPM	15891	3973	1986	1324	993	795	568	
			(104-156)	Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123	
				Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 200 Bhn or ≤ 13 HRc	130	RPM	15891	3973	1986	1324	993	795	568
				(104-156)	Fr	0.0007	0.0026	0.0053	0.0079	0.0106	0.0132	0.0185
					Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		≤ 375 Bhn or ≤ 40 HRc	90	RPM	11002	2750	1375	917	688	550	393	
			(72-108)	Fr	0.0003	0.0012	0.0023	0.0035	0.0047	0.0058	0.0081	
				Feed (ipm)	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	275	RPM	33616	8404	4202	2801	2101	1681	1201	
			(220-330)	Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179	
				Feed (ipm)	21.5	21.5	21.5	21.5	21.5	21.5	21.5	
		≤ 275 Bhn or ≤ 28 HRc	170	RPM	20781	5195	2598	1732	1299	1039	742	
			(136-204)	Fr	0.0005	0.0020	0.0040	0.0061	0.0081	0.0101	0.0141	
				Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	90	RPM	11002	2750	1375	917	688	550	393	
			(72-108)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140	
				Feed (ipm)	5.5	5.5	5.5	5.5	5.5	5.5	5.5	
		≤ 375 Bhn or ≤ 40 HRc	65	RPM	7946	1986	993	662	497	397	284	
			(52-78)	Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123	
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	320	RPM	39117	9779	4890	3260	2445	1956	1397	
			(256-384)	Fr	0.0012	0.0046	0.0092	0.0138	0.0184	0.0230	0.0322	
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
		≤ 260 Bhn or ≤ 26 HRc	285	RPM	34838	8710	4355	2903	2177	1742	1244	
			(228-342)	Fr	0.0011	0.0046	0.0092	0.0138	0.0184	0.0230	0.0321	
				Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0	

continued on next page

	Series 135 3D Fractional	Hardness	Vc (sfm)	DC • in							
				1/32	1/8	1/4	3/8	1/2	5/8	7/8	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	700	RPM	85568	21392	10696	7131	5348	4278	3056
			(560-840)	Fr	0.0012	0.0049	0.0098	0.0147	0.0196	0.0245	0.0344
				Feed (ipm)	105.0	105.0	105.0	105.0	105.0	105.0	105.0
		≤ 150 Bhn or ≤ 88 HRb	600	RPM	73344	18336	9168	6112	4584	3667	2619
			(480-720)	Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0347
				Feed (ipm)	91.0	91.0	91.0	91.0	91.0	91.0	91.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	500	RPM	61120	15280	7640	5093	3820	3056	2183
			(400-600)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
		≤ 200 Bhn or ≤ 23 HRc	400	RPM	48896	12224	6112	4075	3056	2445	1746
			(320-480)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	24.5	24.5	24.5	24.5	24.5	24.5	24.5
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	55	RPM	6723	1681	840	560	420	336	240
			(44-66)	Fr	0.0002	0.0008	0.0015	0.0023	0.0031	0.0039	0.0054
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 400 Bhn or ≤ 43 HRc	30	RPM	3667	917	458	306	229	183	131
			(24-36)	Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	135	RPM	16502	4126	2063	1375	1031	825	589
			(108-162)	Fr	0.0004	0.0018	0.0035	0.0053	0.0071	0.0088	0.0124
				Feed (ipm)	7.3	7.3	7.3	7.3	7.3	7.3	7.3
		≤ 350 Bhn or ≤ 38 HRc	100	RPM	12224	3056	1528	1019	764	611	437
			(80-120)	Fr	0.0004	0.0016	0.0033	0.0049	0.0065	0.0082	0.0115
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0
		≤ 440 Bhn or ≤ 47 HRc	55	RPM	6723	1681	840	560	420	336	240
			(44-66)	Fr	0.0003	0.0012	0.0024	0.0036	0.0048	0.0059	0.0083
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	75	RPM	9168	2292	1146	764	573	458	327
			(60-90)	Fr	0.0002	0.0008	0.0016	0.0024	0.0031	0.0039	0.0055
				Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8	1.8

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 135 3D Metric	Hardness	Vc (m/min)	DC • mm									
			1.5	3	6	8	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	117	RPM	24882	12441	6220	4665	3732	3110	2333	1866
			(94-141)	Fr	0.047	0.094	0.189	0.252	0.315	0.378	0.504	0.630
				Feed (mm/min)	1175	1175	1175	1175	1175	1175	1175	1175
		≤ 275 Bhn or ≤ 28 HRc	107	RPM	22620	11310	5655	4241	3393	2827	2121	1696
			(85-128)	Fr	0.043	0.086	0.172	0.229	0.286	0.343	0.457	0.572
				Feed (mm/min)	970	970	970	970	970	970	970	970
		≤ 475 Bhn or ≤ 45 HRc	61	RPM	12926	6463	3231	2424	1939	1616	1212	969
			(49-73)	Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	460	460	460	460	460	460	460	460
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	91	RPM	19388	9694	4847	3635	2908	2424	1818	1454
			(73-110)	Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	690	690	690	690	690	690	690	690
		≤ 375 Bhn or ≤ 40 HRc	56	RPM	11956	5978	2989	2242	1793	1495	1121	897
			(45-68)	Fr	0.031	0.061	0.122	0.163	0.204	0.244	0.326	0.407
				Feed (mm/min)	365	365	365	365	365	365	365	365
		≤ 425 Bhn or ≤ 45 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.021	0.042	0.083	0.111	0.139	0.167	0.222	0.278
				Feed (mm/min)	175	175	175	175	175	175	175	175
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.032	0.063	0.126	0.168	0.210	0.252	0.336	0.421
				Feed (mm/min)	265	265	265	265	265	265	265	265
		≤ 375 Bhn or ≤ 40 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.014	0.028	0.055	0.073	0.092	0.110	0.147	0.183
				Feed (mm/min)	80	80	80	80	80	80	80	80
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	84	RPM	17773	8886	4443	3332	2666	2222	1666	1333
			(67-101)	Fr	0.031	0.061	0.123	0.164	0.204	0.245	0.327	0.409
				Feed (mm/min)	545	545	545	545	545	545	545	545
		≤ 275 Bhn or ≤ 28 HRc	52	RPM	10987	5493	2747	2060	1648	1373	1030	824
			(41-62)	Fr	0.024	0.047	0.095	0.126	0.158	0.189	0.252	0.316
				Feed (mm/min)	260	260	260	260	260	260	260	260
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.023	0.046	0.093	0.124	0.155	0.186	0.248	0.309
				Feed (mm/min)	135	135	135	135	135	135	135	135
		≤ 375 Bhn or ≤ 40 HRc	20	RPM	4201	2100	1050	788	630	525	394	315
			(16-24)	Fr	0.020	0.040	0.081	0.108	0.135	0.162	0.216	0.270
				Feed (mm/min)	85	85	85	85	85	85	85	85
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	98	RPM	20681	10340	5170	3878	3102	2585	1939	1551
			(78-117)	Fr	0.055	0.110	0.220	0.293	0.366	0.439	0.585	0.732
				Feed (mm/min)	1135	1135	1135	1135	1135	1135	1135	1135
		≤ 260 Bhn or ≤ 26 HRc	87	RPM	18419	9209	4605	3454	2763	2302	1727	1381
			(69-104)	Fr	0.055	0.110	0.219	0.292	0.366	0.439	0.585	0.731
				Feed (mm/min)	1010	1010	1010	1010	1010	1010	1010	1010

continued on next page

	Series 135 3D Metric	Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	213	RPM	45239	22620	11310	8482	6786	5655	4241	3393
			(171-256)	Fr	0.059	0.119	0.238	0.317	0.396	0.476	0.634	0.793
				Feed (mm/min)	2690	2690	2690	2690	2690	2690	2690	2690
		≤ 150 Bhn or ≤ 8 HRb	183	RPM	38777	19388	9694	7271	5816	4847	3635	2908
			(146-219)	Fr	0.060	0.120	0.240	0.320	0.400	0.480	0.640	0.799
				Feed (mm/min)	2325	2325	2325	2325	2325	2325	2325	2325
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	152	RPM	32314	16157	8078	6059	4847	4039	3029	2424
			(122-183)	Fr	0.024	0.048	0.096	0.128	0.160	0.192	0.256	0.320
				Feed (mm/min)	776	776	776	776	776	776	776	776
		≤ 200 Bhn or ≤ 23 HRc	122	RPM	25851	12926	6463	4847	3878	3231	2424	1939
			(98-146)	Fr	0.024	0.049	0.097	0.130	0.162	0.195	0.260	0.325
				Feed (mm/min)	630	630	630	630	630	630	630	630
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	17	RPM	3555	1777	889	666	533	444	333	267
			(13-20)	Fr	0.010	0.020	0.039	0.053	0.066	0.079	0.105	0.131
				Feed (mm/min)	35	35	35	35	35	35	35	35
		≤ 400 Bhn or ≤ 43 HRc	9	RPM	1939	969	485	364	291	242	182	145
			(7-11)	Fr	0.008	0.015	0.031	0.041	0.052	0.062	0.083	0.103
				Feed (mm/min)	15	15	15	15	15	15	15	15
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	41	RPM	8725	4362	2181	1636	1309	1091	818	654
			(33-49)	Fr	0.021	0.042	0.085	0.113	0.141	0.170	0.226	0.283
				Feed (mm/min)	185	185	185	185	185	185	185	185
		≤ 350 Bhn or ≤ 38 HRc	30	RPM	6463	3231	1616	1212	969	808	606	485
			(24-37)	Fr	0.019	0.039	0.077	0.103	0.129	0.155	0.206	0.258
				Feed (mm/min)	125	125	125	125	125	125	125	125
		≤ 440 Bhn or ≤ 47 HRc	17	RPM	3555	1777	889	666	533	444	333	267
			(13-20)	Fr	0.014	0.028	0.056	0.075	0.094	0.113	0.150	0.188
				Feed (mm/min)	50	50	50	50	50	50	50	50
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	23	RPM	4847	2424	1212	909	727	606	454	364
			(18-27)	Fr	0.009	0.019	0.037	0.050	0.062	0.074	0.099	0.124
				Feed (mm/min)	45	45	45	45	45	45	45	45


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

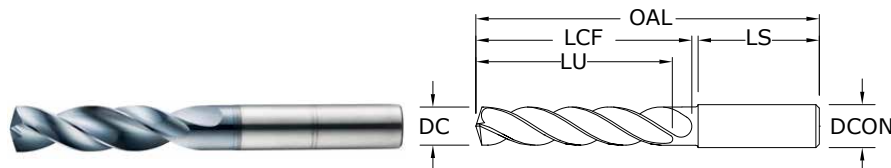

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)
0.0156	0,396 mm	1/64	1/8	1 1/2	5/32	1/8	1	52300*
0.0312	0,792 mm	1/32	1/8	1 1/2	5/16	17/64	1	52301*
0.0469	1,191 mm	3/64	1/8	1 1/2	25/64	21/64	1	52302*
0.0492	1,250 mm		3,0	38,0	10,0	8,0	25,0	64520*
0.0571	1,450 mm		3,0	38,0	10,0	8,0	25,0	64521*
0.0595	1,511 mm	#53	1/8	1-1/2	25/64	5/16	1	64522*
0.0625	1,588 mm	1/16	1/8	2	15/32	3/8	1-1/4	52303*
0.0630	1,600 mm		3,0	50,0	12,0	10,0	32,0	64523*
0.0689	1,750 mm		3,0	50,0	12,0	9,0	32,0	64524*
0.0700	1,778 mm	#50	1/8	2	15/32	23/64	1-1/4	64525*
0.0781	1,984 mm	5/64	1/8	2	35/64	7/16	1-1/4	52304*
0.0785	1,994 mm	#47	1/8	2	35/64	7/16	1-1/4	64526*
0.0807	2,050 mm		3,0	50,0	14,0	11,0	32,0	64527*
0.0810	2,057 mm	#46	1/8	2	35/64	27/64	1-1/4	64528*
0.0890	2,261 mm	#43	1/8	2	19/32	15/32	1-1/4	64529*
0.0935	2,375 mm	#42	1/8	2	5/8	31/64	1-1/4	64530*
0.0938	2,383 mm	3/32	1/8	2	5/8	31/64	1-1/4	52305
0.0980	2,489 mm	#40	1/8	2	43/64	17/32	1-1/4	52306
0.0984	2,500 mm		3,0	50,0	17,0	13,0	32,0	64531
0.0995	2,527 mm	#39	1/8	2	43/64	17/32	1-1/4	52307
0.1015	2,578 mm	#38	1/8	2	43/64	17/32	1-1/4	52308
0.1040	2,642 mm	#37	1/8	2	45/64	35/64	1-1/4	52309
0.1065	2,705 mm	#36	1/8	2	45/64	35/64	1-1/4	52310
0.1094	2,779 mm	7/64	1/8	2	3/4	19/32	1-1/4	52311
0.1100	2,794 mm	#35	1/8	2	3/4	19/32	1-1/4	52312
0.1110	2,819 mm	#34	1/8	2	3/4	19/32	1-1/4	52313
0.1130	2,870 mm	#33	1/8	2	3/4	19/32	1-1/4	52314
0.1142	2,900 mm		3,0	50,0	19,0	15,0	32,0	64532
0.1160	2,946 mm	#32	1/8	2	3/4	37/64	1-1/4	52315
0.1181	3,000 mm		6,0	66,0	28,0	24,0	36,0	64100
0.1200	3,048 mm	#31	1/8	2	3/4	37/64	1-1/4	52316
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	64101
0.1250	3,175 mm	1/8	1/4	3	1	13/16	1-7/16	51580
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	64102
0.1285	3,264 mm	#30	1/4	3	1	13/16	1-7/16	51581
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	64103

*Single Margin

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$

DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$

DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$

DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$

DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0,002/\pm 0,012$

DCON = h_6

>3-6 DIAMETER

DC = $\pm 0,004/\pm 0,016$

DCON = h_6

>6-10 DIAMETER

DC = $\pm 0,006/\pm 0,021$

DCON = h_6

>10-18 DIAMETER

DC = $\pm 0,007/\pm 0,025$

DCON = h_6

>18-30 DIAMETER

DC = $\pm 0,008/\pm 0,029$

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent information visit
www.ksptpatents.com

135 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					Ti-NAMITE-A (AITiN)
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	64104
0.1360	3,454 mm	#29	1/4	3	1	51/64	1-7/16	51582
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	64105
0.1405	3,569 mm	#28	1/4	3	1	51/64	1-7/16	52317
0.1406	3,571 mm	9/64	1/4	3	1	51/64	1-7/16	51583
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	64106
0.1440	3,658 mm	#27	1/4	3	1	51/64	1-7/16	52318
0.1457	3,700 mm		6,0	66,0	28,0	22,0	36,0	64107
0.1470	3,734 mm	#26	1/4	3	1	25/32	1-7/16	52319
0.1495	3,797 mm	#25	1/4	3-1/4	1-1/4	1-1/32	1-7/16	51584
0.1496	3,800 mm		6,0	74,0	36,0	30,0	36,0	64108
0.1520	3,861 mm	#24	1/4	3-1/4	1-1/4	1-1/32	1-7/16	52321
0.1535	3,900 mm		6,0	74,0	36,0	30,0	36,0	64109
0.1540	3,912 mm	#23	1/4	3-1/4	1-1/4	1-1/32	1-7/16	52322
0.1562	3,967 mm	5/32	1/4	3-1/4	1-1/4	1-1/64	1-7/16	51585
0.1570	3,988 mm	#22	1/4	3-1/4	1-1/4	1-1/64	1-7/16	52323
0.1575	4,000 mm		6,0	74,0	36,0	30,0	36,0	64110
0.1590	4,039 mm	#21	1/4	3-1/4	1-1/4	1-1/64	1-7/16	51586
0.1610	4,089 mm	#20	1/4	3-1/4	1-1/4	1	1-7/16	51587
0.1614	4,100 mm		6,0	74,0	36,0	30,0	36,0	64111
0.1654	4,200 mm		6,0	74,0	36,0	30,0	36,0	64112
0.1660	4,216 mm	#19	1/4	3-1/4	1-1/4	1	1-7/16	52324
0.1693	4,300 mm		6,0	74,0	36,0	30,0	36,0	64113
0.1695	4,305 mm	#18	1/4	3-1/4	1-1/4	1	1-7/16	52325
0.1719	4,366 mm	11/64	1/4	3-1/4	1-1/4	1	1-7/16	51588
0.1730	4,394 mm	#17	1/4	3-1/4	1-1/4	1	1-7/16	52326
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	64114
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	64115
0.1800	4,572 mm	#15	1/4	3-1/4	1-1/4	63/64	1-7/16	52327
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	64116
0.1820	4,623 mm	#14	1/4	3-1/4	1-1/4	63/64	1-7/16	52328
0.1850	4,699 mm	#13	1/4	3-1/4	1-1/4	63/64	1-7/16	52329
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	64117
0.1875	4,763 mm	3/16	1/4	3-1/4	1-3/4	1-15/32	1-7/16	51589
0.1890	4,801 mm	#12	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52330
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	64118
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	64119
0.1935	4,915 mm	#10	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52331
0.1960	4,978 mm	#9	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52332
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	64120
0.1990	5,055 mm	#8	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52333
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	64121
0.2010	5,105 mm	#7	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51506
0.2031	5,159 mm	13/64	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51507
0.2040	5,182 mm	#6	1/4	3 1/4	1 3/4	1-29/64	1 7/16	52334
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	64122

continued on next page

CONTINUED




5xD



135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

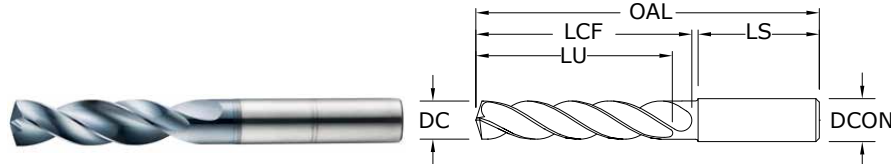

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)	
0.2055	5,220 mm	#5	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51590	
0.2067	5,250 mm		6,0	82,0	44,0	36,0	36,0	64123	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	64124	
0.2090	5,309 mm	#4	1/4	3-1/4	1-3/4	1-7/16	1-7/16	51508	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	64125	
0.2130	5,410 mm	#3	1/4	3-1/4	1-3/4	1-7/16	1-7/16	51509	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	64126	
0.2188	5,558 mm	7/32	1/4	3-1/4	1-3/4	1-27/64	1-7/16	51510	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	64127	
0.2210	5,613 mm	#2	1/4	3-1/4	1-3/4	1-27/64	1-7/16	52335	
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	64128	
0.2280	5,791 mm	#1	1/4	3-1/4	1-3/4	1-13/32	1-7/16	52336	
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	64129	
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	64130	
0.2340	5,944 mm	A	1/4	3-1/4	1-3/4	1-13/32	1-7/16	52337	
0.2344	5,954 mm	15/64	1/4	3-1/4	1-3/4	1-13/32	1-7/16	51591	
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	64131	
0.2380	6,045 mm	B	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52338	
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	64132	
0.2420	6,147 mm	C	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52339	
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	64133	
0.2460	6,248 mm	D	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52340	
0.2461	6,250 mm		8,0	91,0	53,0	44,0	36,0	64134	
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	64135	
0.2500	6,350 mm	1/4 E #0	1/4	3-5/8	2-5/64	1-45/64	1-7/16	51511	
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	64136	
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	64137	
0.2570	6,528 mm	F	5/16	3-5/8	2-5/64	1-45/64	1-7/16	51512	
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	64138	
0.2610	6,629 mm	G	5/16	3 5/8	2 5/64	1-11/16	1 7/16	52341	
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	64139	
0.2656	6,746 mm	17/64	5/16	3-5/8	2-5/64	1-11/16	1-7/16	51513	
0.2660	6,756 mm	H	5/16	3-5/8	2-5/64	1-11/16	1-7/16	52342	
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	64140	
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	64141	
0.2720	6,909 mm	I	5/16	3-5/8	2-5/64	1-43/64	1-7/16	51514	

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent information visit
www.kspatents.com

135 5xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	64142
0.2770	7,036 mm	J	5/16	3 5/8	2-5/64	1-43/64	1-7/16	52343
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	64143
0.2810	7,137 mm	K	5/16	3 5/8	2-5/64	1-21/32	1-7/16	52344
0.2812	7,142 mm	9/32	5/16	3-5/8	2-5/64	1-21/32	1-7/16	51515
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	64144
0.2854	7,250 mm		8,0	91,0	53,0	42,0	36,0	64145
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	64146
0.2900	7,366 mm	L	5/16	3-5/8	2-5/64	1-41/64	1-7/16	52345
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	64147
0.2950	7,493 mm	M	5/16	3-5/8	2-5/64	1-41/64	1-7/16	52346
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	64148
0.2969	7,541 mm	19/64	5/16	3-5/8	2-5/64	1-41/64	1-7/16	51516
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	64149
0.3020	7,671 mm	N	5/16	3-5/8	2-5/64	1-5/8	1-7/16	52347
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	64150
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	64151
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	64152
0.3125	7,938 mm	5/16	5/16	3-5/8	2-5/64	1-39/64	1-7/16	51517
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	64153
0.3160	8,026 mm	O	3/8	4	2-13/32	1-15/16	1-9/16	52348
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	64154
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	64155
0.3230	8,204 mm	P	3/8	4	2-13/32	1-59/64	1-9/16	51518
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	64156
0.3281	8,334 mm	21/64	3/8	4	2-13/32	1-59/64	1-9/16	51519
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	64157
0.3320	8,433 mm	Q	3/8	4	2-13/32	1-59/64	1-9/16	51520
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	64158
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	64159
0.3390	8,611 mm	R	3/8	4	2-13/32	1-29/32	1-9/16	52349
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	64160
0.3438	8,733 mm	11/32	3/8	4	2-13/32	1-57/64	1-9/16	51521
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	64161
0.3480	8,839 mm	S	3/8	4	2-13/32	1-57/64	1-9/16	51522
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	64162
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	64163
0.3580	9,093 mm	T	3/8	4	2 13/32	1-7/8	1 9/16	52350
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	64164
0.3594	9,129 mm	23/64	3/8	4	2-13/32	1-7/8	1-9/16	51523
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	64165
0.3642	9,250 mm		10,0	103,0	61,0	47,0	40,0	64166
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	64167
0.3680	9,347 mm	U	3/8	4	2-13/32	1-55/64	1-9/16	51524
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	64168
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	64169

continued on next page

CONTINUED



5xD

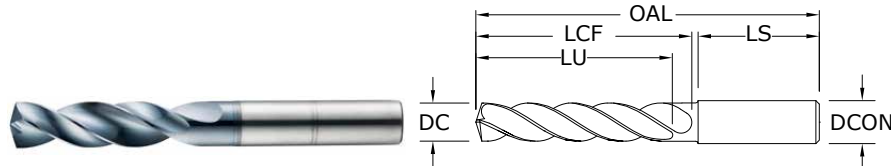

135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)
0.3750	9,525 mm	3/8	3/8	4	2-13/32	1-27/32	1-9/16	51525
0.3770	9,576 mm	V	1/2	4	2-13/32	1-27/32	1-9/16	52351
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	64170
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	64171
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	64172
0.3860	9,804 mm	W	1/2	4	2-13/32	1-53/64	1-9/16	51526
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	64173
0.3906	9,921 mm	25/64	1/2	4	2-13/32	1-53/64	1-9/16	51527
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	64174
0.3970	10,084 mm	X	1/2	4-11/16	2-3/4	2-5/32	1-49/64	52352
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	64175
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	64176
0.4040	10,262 mm	Y	1/2	4-11/16	2-3/4	2-5/32	1-49/64	52353
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	64177
0.4062	10,317 mm	13/32	1/2	4-11/16	2-3/4	2-9/64	1-49/64	51528
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	64178
0.4130	10,490 mm	Z	1/2	4-11/16	2-3/4	2-9/64	1-49/64	52354
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	64179
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	64180
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	64181
0.4219	10,716 mm	27/64	1/2	4-11/16	2-3/4	2-1/8	1-49/64	51529
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	64182
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	64183
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	64184
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	64185
0.4375	11,113 mm	7/16	1/2	4-11/16	2-3/4	2-3/32	1-49/64	51530
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	64186
0.4429	11,250 mm		12,0	118,0	71,0	54,0	45,0	64187
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	64188
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	64189
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	64190
0.4531	11,509 mm	29/64	1/2	4-11/16	2-3/4	2-5/64	1-49/64	51531
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	64191
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	64192
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	64193
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	64194

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.0047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.0063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.0083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.0098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0,002/+0,012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0,004/+0,016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0,006/+0,021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0,007/+0,025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0,008/+0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent information visit
www.ksptpatents.com

135 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4688	11,908 mm	15/32	1/2	4-11/16	2-3/4	2-3/64	1-49/64	51532
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	64195
0.4844	12,304 mm	31/64	1/2	4-7/8	3-1/32	1-5/16	1-49/64	51533
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	64196
0.5000	12,700 mm	1/2	1/2	4-7/8	3-1/32	2-9/32	1-49/64	51534
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	64197
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	64198
0.5156	13,096 mm	33/64	5/8	4-7/8	3-1/32	2-17/64	1-49/64	51535
0.5312	13,492 mm	17/32	5/8	4-7/8	3-1/32	2-15/64	1-49/64	51536
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	64199
0.5469	13,8 mm	35/64	5/8	4-7/8	3-1/32	2-7/32	1-49/64	51537
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	64200
0.5625	14,288 mm	9/16	5/8	5-1/4	3-1/4	2-13/32	1-57/64	51538
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	64201
0.5781	14,684 mm	37/64	5/8	5-1/4	3-1/4	2-25/64	1-57/64	51539
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	64202
0.5938	15,083 mm	19/32	5/8	5-1/4	3-1/4	2-23/64	1-57/64	51592
0.6094	15,479 mm	39/64	5/8	5-1/4	3-1/4	2-11/32	1-57/64	51593
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	64203
0.6250	15,875 mm	5/8	5/8	5-1/4	3-1/4	2-5/16	1-57/64	51540
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	64204
0.6406	16,271 mm	41/64	3/4	5-5/8	3-5/8	2-43/64	1-57/64	51594
0.6496	16,500 mm		18,0	143,0	93,0	68,0	48,0	64205
0.6562	16,667 mm	21/32	3/4	5-5/8	3-5/8	2-41/64	1-57/64	51541
0.6693	17,000 mm		18,0	143,0	93,0	67,0	48,0	64206
0.6719	17,066 mm	43/64	3/4	5-5/8	3-5/8	2-5/8	1-57/64	51595
0.6875	17,463 mm	11/16	3/4	5-5/8	3-5/8	2-19/32	1-57/64	51542
0.6890	17,500 mm		18,0	143,0	93,0	67,0	48,0	64207
0.7031	17,859 mm	45/64	3/4	5-5/8	3-5/8	2-37/64	1-57/64	51543
0.7087	18,000 mm		18,0	143,0	93,0	66,0	48,0	64208
0.7188	18,258 mm	23/32	3/4	6	4	2-59/64	1-31/32	51596
0.7283	18,500 mm		20,0	153,0	101,0	73,0	50,0	64209
0.7344	18,654 mm	47/64	3/4	6	4	2-29/32	1-31/32	51544
0.7480	19,000 mm		20,0	153,0	101,0	73,0	50,0	64210
0.7500	19,050 mm	3/4	3/4	6	4	2-7/8	1-31/32	51545
0.7656	19,446 mm	49/64	7/8	6	4	2-55/64	1-31/32	52355
0.7677	19,500 mm		20,0	153,0	101,0	72,0	50,0	64211
0.7812	19,842 mm	25/32	7/8	6	4	2-55/64	1-31/32	52356
0.7874	20,000 mm		20,0	153,0	101,0	71,0	50,0	64212
0.7969	20,241 mm	51/64	7/8	6	4	2-13/16	1-31/32	52357
0.8071	20,500 mm		22,0	153,0	101,0	70,0	50,0	64533
0.8125	20,638 mm	13/16	7/8	6-1/2	4-1/2	3-3/32	1-31/32	52358
0.8268	21,000 mm		22,0	153,0	101,0	69,0	50,0	64534
0.8661	22,000 mm		22,0	178,0	127,0	94,0	50,0	64535
0.8750	22,225 mm	7/8	7/8	6-1/2	4-1/2	3-3/16	1-31/32	52359
0.9219	23,416 mm	59/64	1	7	5	3-5/8	2-1/8	52360

CONTINUED

	Series 135 5D Fractional	Hardness	Vc (sfm)	DC • in							
				1/32	1/8	1/4	3/8	1/2	5/8	7/8	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	345	RPM	42173	10543	5272	3514	2636	2109	1506
			(276-414)	Fr	0.0010	0.0040	0.0080	0.0120	0.0159	0.0199	0.0279
				Feed (ipm)	42.0	42.0	42.0	42.0	42.0	42.0	42.0
		≤ 275 Bhn or ≤ 28 HRc	310	RPM	37894	9474	4737	3158	2368	1895	1353
			(248-372)	Fr	0.0009	0.0036	0.0072	0.0108	0.0144	0.0179	0.0251
				Feed (ipm)	34.0	34.0	34.0	34.0	34.0	34.0	34.0
		≤ 425 Bhn or ≤ 45 HRc	180	RPM	22003	5501	2750	1834	1375	1100	786
			(144-216)	Fr	0.0007	0.0030	0.0060	0.0090	0.0120	0.0150	0.0210
				Feed (ipm)	16.5	16.5	16.5	16.5	16.5	16.5	16.5
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	270	RPM	33005	8251	4126	2750	2063	1650	1179
			(216-324)	Fr	0.0008	0.0030	0.0061	0.0091	0.0121	0.0151	0.0212
				Feed (ipm)	25.0	25.0	25.0	25.0	25.0	25.0	25.0
		≤ 375 Bhn or ≤ 40 HRc	165	RPM	20170	5042	2521	1681	1261	1008	720
			(132-198)	Fr	0.0006	0.0026	0.0052	0.0077	0.0103	0.0129	0.0180
				Feed (ipm)	13.0	13.0	13.0	13.0	13.0	13.0	13.0
		≤ 425 Bhn or ≤ 45 HRc	115	RPM	14058	3514	1757	1171	879	703	502
			(92-138)	Fr	0.0004	0.0018	0.0035	0.0053	0.0071	0.0088	0.0123
				Feed (ipm)	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	120	RPM	14669	3667	1834	1222	917	733	524
			(96-144)	Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0179
				Feed (ipm)	9.4	9.4	9.4	9.4	9.4	9.4	9.4
		≤ 375 Bhn or ≤ 40 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0003	0.0012	0.0024	0.0036	0.0047	0.0059	0.0083
				Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	250	RPM	30560	7640	3820	2547	1910	1528	1091
			(200-300)	Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179
				Feed (ipm)	19.5	19.5	19.5	19.5	19.5	19.5	19.5
		≤ 275 Bhn or ≤ 28 HRc	150	RPM	18336	4584	2292	1528	1146	917	655
			(120-180)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	9.0	9.0	9.0	9.0	9.0	9.0	9.0
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	4.8	4.8	4.8	4.8	4.8	4.8	4.8
		≤ 375 Bhn or ≤ 40 HRc	55	RPM	6723	1681	840	560	420	336	240
			(44-66)	Fr	0.0004	0.0018	0.0036	0.0054	0.0071	0.0089	0.0125
				Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	300	RPM	36672	9168	4584	3056	2292	1834	1310
			(240-360)	Fr	0.0011	0.0045	0.0089	0.0134	0.0179	0.0224	0.0313
				Feed (ipm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
		≤ 260 Bhn or ≤ 26 HRc	265	RPM	32394	8098	4049	2699	2025	1620	1157
			(212-318)	Fr	0.0011	0.0046	0.0091	0.0137	0.0183	0.0228	0.0320
				Feed (ipm)	37.0	37.0	37.0	37.0	37.0	37.0	37.0

continued on next page

	Series 135 5D Fractional	Hardness	Vc (sfm)	DC • in							
				1/32	1/8	1/4	3/8	1/2	5/8	7/8	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	635	RPM	77622	19406	9703	6469	4851	3881	2772
			(508-762)	Fr	0.0012	0.0049	0.0099	0.0148	0.0198	0.0247	0.0346
				Feed (ipm)	96.0	96.0	96.0	96.0	96.0	96.0	96.0
		≤ 150 Bhn or ≤ 88 HRc	540	RPM	66010	16502	8251	5501	4126	3300	2357
			(432-648)	Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0348
				Feed (ipm)	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	450	RPM	55008	13752	6876	4584	3438	2750	1965
			(360-540)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	27.5	27.5	27.5	27.5	27.5	27.5	27.5
		≤ 200 Bhn or ≤ 23 HRc	360	RPM	44006	11002	5501	3667	2750	2200	1572
			(288-432)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	22.0	22.0	22.0	22.0	22.0	22.0	22.0
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	40	RPM	4890	1222	611	407	306	244	175
			(32-48)	Fr	0.0002	0.0008	0.0016	0.0025	0.0033	0.0041	0.0057
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 400 Bhn or ≤ 43 HRc	20	RPM	2445	611	306	204	153	122	87
			(16-24)	Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	105	RPM	12835	3209	1604	1070	802	642	458
			(84-126)	Fr	0.0005	0.0018	0.0036	0.0054	0.0072	0.0090	0.0127
				Feed (ipm)	5.8	5.8	5.8	5.8	5.8	5.8	5.8
		≤ 350 Bhn or ≤ 38 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0004	0.0016	0.0032	0.0048	0.0064	0.0080	0.0112
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
		≤ 440 Bhn or ≤ 47 HRc	42	RPM	5134	1284	642	428	321	257	183
			(34-50)	Fr	0.0003	0.0012	0.0025	0.0037	0.0050	0.0062	0.0087
				Feed (ipm)	1.6	1.6	1.6	1.6	1.6	1.6	1.6
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	70	RPM	8557	2139	1070	713	535	428	306
			(56-84)	Fr	0.0002	0.0008	0.0016	0.0024	0.0032	0.0040	0.0056
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 135M 5D Metric	Hardness	Vc (m/min)	DC • mm									
			1.5	3	6	8	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	105	RPM	22297	11148	5574	4181	3344	2787	2090	1672
			(84-126)	Fr	0.048	0.095	0.190	0.254	0.317	0.380	0.507	0.634
				Feed (mm/min)	1060	1060	1060	1060	1060	1060	1060	1060
		≤ 275 Bhn or ≤ 28 HRc	94	RPM	20035	10017	5009	3756	3005	2504	1878	1503
			(76-113)	Fr	0.043	0.085	0.171	0.228	0.285	0.341	0.455	0.569
				Feed (mm/min)	855	855	855	855	855	855	855	855
		≤ 425 Bhn or ≤ 45 HRc	55	RPM	11633	5816	2908	2181	1745	1454	1091	872
			(44-66)	Fr	0.036	0.071	0.143	0.190	0.238	0.285	0.381	0.476
				Feed (mm/min)	415	415	415	415	415	415	415	415
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	82	RPM	17449	8725	4362	3272	2617	2181	1636	1309
			(66-99)	Fr	0.036	0.072	0.143	0.191	0.239	0.287	0.382	0.478
				Feed (mm/min)	625	625	625	625	625	625	625	625
		≤ 375 Bhn or ≤ 40 HRc	50	RPM	10664	5332	2666	1999	1600	1333	1000	800
			(40-60)	Fr	0.031	0.062	0.124	0.165	0.206	0.248	0.330	0.413
				Feed (mm/min)	330	330	330	330	330	330	330	330
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	7432	3716	1858	1394	1115	929	697	557
			(28-42)	Fr	0.022	0.043	0.086	0.115	0.144	0.172	0.230	0.287
				Feed (mm/min)	160	160	160	160	160	160	160	160
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	37	RPM	7755	3878	1939	1454	1163	969	727	582
			(29-44)	Fr	0.031	0.062	0.124	0.165	0.206	0.248	0.330	0.413
				Feed (mm/min)	240	240	240	240	240	240	240	240
		≤ 375 Bhn or ≤ 40 HRc	24	RPM	5170	2585	1293	969	776	646	485	388
			(20-29)	Fr	0.015	0.029	0.058	0.077	0.097	0.116	0.155	0.193
				Feed (mm/min)	75	75	75	75	75	75	75	75
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	76	RPM	16157	8078	4039	3029	2424	2020	1515	1212
			(61-91)	Fr	0.031	0.061	0.123	0.163	0.204	0.245	0.327	0.408
				Feed (mm/min)	495	495	495	495	495	495	495	495
		≤ 275 Bhn or ≤ 28 HRc	46	RPM	9694	4847	2424	1818	1454	1212	909	727
			(37-55)	Fr	0.024	0.047	0.095	0.127	0.158	0.190	0.253	0.316
				Feed (mm/min)	230	230	230	230	230	230	230	230
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	24	RPM	5170	2585	1293	969	776	646	485	388
			(20-29)	Fr	0.023	0.046	0.093	0.124	0.155	0.186	0.248	0.309
				Feed (mm/min)	120	120	120	120	120	120	120	120
		≤ 375 Bhn or ≤ 40 HRc	17	RPM	3555	1777	889	666	533	444	333	267
			(13-20)	Fr	0.021	0.042	0.084	0.113	0.141	0.169	0.225	0.281
				Feed (mm/min)	75	75	75	75	75	75	75	75
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	91	RPM	19388	9694	4847	3635	2908	2424	1818	1454
			(73-110)	Fr	0.054	0.108	0.217	0.289	0.361	0.433	0.578	0.722
				Feed (mm/min)	1050	1050	1050	1050	1050	1050	1050	1050
		≤ 260 Bhn or ≤ 26 HRc	81	RPM	17126	8563	4282	3211	2569	2141	1606	1284
			(65-97)	Fr	0.055	0.109	0.218	0.291	0.364	0.437	0.582	0.728
				Feed (mm/min)	935	935	935	935	935	935	935	935

continued on next page

	Series 135M 5D Metric	Hardness	Vc (m/min)	DC • mm							
				1.5	3	6	8	10	12	16	20
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	194	RPM	41039	20519	10260	7695	6156	5130	3078
			(155-232)	Fr	0.059	0.118	0.237	0.316	0.395	0.474	0.632
				Feed (mm/min)	2430	2430	2430	2430	2430	2430	2430
		≤ 150 Bhn or ≤ 88 HRc	165	RPM	34899	17449	8725	6544	5235	4362	2617
			(132-198)	Fr	0.059	0.118	0.237	0.316	0.394	0.473	0.631
				Feed (mm/min)	2065	2065	2065	2065	2065	2065	2065
	Copper Alloys Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	137	RPM	29082	14541	7271	5453	4362	3635	2181
			(110-165)	Fr	0.027	0.053	0.107	0.142	0.178	0.213	0.284
				Feed (mm/min)	775	775	775	775	775	775	775
		≤ 200 Bhn or ≤ 23 HRc	110	RPM	23266	11633	5816	4362	3490	2908	1745
			(88-132)	Fr	0.027	0.054	0.108	0.144	0.181	0.217	0.289
				Feed (mm/min)	630	630	630	630	630	630	630
S	HIGH TEMP ALLOYS (Nickel, Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	12	RPM	2585	1293	646	485	388	323	194
			(10-15)	Fr	0.010	0.019	0.039	0.052	0.064	0.077	0.103
				Feed (mm/min)	25	25	25	25	25	25	25
		≤ 400 Bhn or ≤ 43 HRc	6	RPM	1293	646	323	242	194	162	121
			(5-7)	Fr	0.007	0.014	0.028	0.037	0.046	0.056	0.074
				Feed (mm/min)	9	9	9	9	9	9	9
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	32	RPM	6786	3393	1696	1272	1018	848	636
			(26-38)	Fr	0.021	0.043	0.085	0.114	0.142	0.171	0.228
				Feed (mm/min)	145	145	145	145	145	145	145
		≤ 350 Bhn or ≤ 38 HRc	24	RPM	5170	2585	1293	969	776	646	485
			(20-29)	Fr	0.019	0.039	0.077	0.103	0.129	0.155	0.206
				Feed (mm/min)	100	100	100	100	100	100	100
		≤ 440 Bhn or ≤ 47 HRc	13	RPM	2714	1357	679	509	407	339	254
			(10-15)	Fr	0.015	0.029	0.059	0.079	0.098	0.118	0.157
				Feed (mm/min)	40	40	40	40	40	40	40
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	21	RPM	4524	2262	1131	848	679	565	424
			(17-26)	Fr	0.010	0.019	0.038	0.051	0.064	0.076	0.102
				Feed (mm/min)	43	43	43	43	43	43	43

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




3xD



146U 3xD

FRACTIONAL & METRIC SERIES

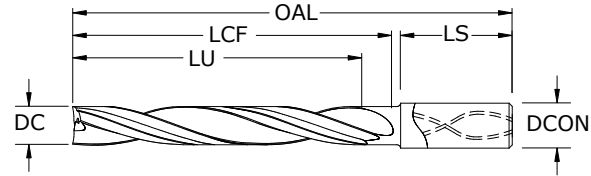

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	55,0	13,0	9,0	34,0	67705
0.1220	3,100 mm		6,0	55,0	14,0	9,0	34,0	67706
0.1250	3,175 mm	1/8	6,0	55,0	14,0	10,0	34,0	58800
0.1260	3,200 mm		6,0	55,0	14,0	10,0	34,0	67707
0.1299	3,300 mm		6,0	55,0	15,0	10,0	34,0	67708
0.1339	3,400 mm		6,0	55,0	15,0	10,0	34,0	67709
0.1360	3,454 mm	#29	6,0	55,0	16,0	10,0	34,0	58801
0.1378	3,500 mm		6,0	55,0	16,0	11,0	34,0	67710
0.1405	3,569 mm	#28	6,0	55,0	16,0	11,0	34,0	58802
0.1406	3,571 mm	9/64	6,0	55,0	16,0	11,0	34,0	58803
0.1417	3,600 mm		6,0	55,0	16,0	11,0	34,0	67711
0.1457	3,700 mm		6,0	60,0	17,0	11,0	34,0	67712
0.1470	3,734 mm	#26	6,0	60,0	17,0	11,0	34,0	58804
0.1495	3,797 mm	#25	6,0	60,0	17,0	11,0	34,0	58805
0.1496	3,800 mm		6,0	60,0	17,0	11,0	34,0	67713
0.1520	3,861 mm	#24	6,0	60,0	17,0	12,0	34,0	58806
0.1535	3,900 mm		6,0	60,0	18,0	12,0	34,0	67714
0.1562	3,967 mm	5/32	6,0	60,0	18,0	12,0	34,0	58807
0.1570	3,988 mm	#22	6,0	60,0	18,0	12,0	34,0	58808
0.1575	4,000 mm		6,0	60,0	18,0	12,0	34,0	67715
0.1590	4,039 mm	#21	6,0	60,0	18,0	12,0	34,0	58809
0.1610	4,089 mm	#20	6,0	60,0	18,0	12,0	34,0	58810
0.1614	4,100 mm		6,0	60,0	18,0	12,0	34,0	67716
0.1654	4,200 mm		6,0	60,0	19,0	13,0	34,0	67717
0.1693	4,300 mm		6,0	60,0	19,0	13,0	34,0	67718
0.1719	4,366 mm	11/64	6,0	60,0	20,0	13,0	34,0	58811
0.1732	4,400 mm		6,0	60,0	20,0	13,0	34,0	67719
0.1770	4,496 mm	#16	6,0	60,0	20,0	13,0	34,0	58812
0.1772	4,500 mm		6,0	60,0	20,0	14,0	34,0	67720
0.1811	4,600 mm		6,0	60,0	21,0	14,0	34,0	67721
0.1850	4,699 mm	#13	6,0	60,0	21,0	14,0	34,0	58813
0.1875	4,763 mm	3/16	6,0	60,0	21,0	14,0	34,0	58814
0.1890	4,801 mm	#12	6,0	65,0	22,0	14,0	33,0	58815
0.1929	4,900 mm		6,0	65,0	22,0	15,0	33,0	67724
0.1935	4,915 mm	#10	6,0	65,0	22,0	15,0	33,0	58816
0.1969	5,000 mm		6,0	65,0	23,0	15,0	33,0	67725

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.0047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.0063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.0083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.0098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0,002/+0,012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0,004/+0,016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0,006/+0,021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0,007/+0,025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0,008/+0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

146U 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2008	5,100 mm		6,0	65,0	23,0	15,0	33,0	67726
0.2010	5,105 mm	#7	6,0	65,0	23,0	15,0	33,0	58817
0.2031	5,159 mm	13/64	6,0	65,0	23,0	15,0	33,0	58818
0.2047	5,200 mm		6,0	65,0	23,0	16,0	33,0	67727
0.2087	5,300 mm		6,0	65,0	24,0	16,0	33,0	67728
0.2090	5,309 mm	#4	6,0	65,0	24,0	16,0	33,0	58819
0.2126	5,400 mm		6,0	65,0	24,0	16,0	33,0	67729
0.2130	5,410 mm	#3	6,0	65,0	24,0	16,0	33,0	58820
0.2165	5,500 mm		6,0	65,0	25,0	16,0	33,0	67730
0.2188	5,558 mm	7/32	6,0	65,0	25,0	17,0	33,0	58821
0.2205	5,600 mm		6,0	65,0	25,0	17,0	33,0	67731
0.2244	5,700 mm		6,0	65,0	26,0	17,0	33,0	67732
0.2283	5,800 mm		6,0	65,0	26,0	17,0	33,0	67733
0.2323	5,900 mm		6,0	65,0	27,0	18,0	33,0	67734
0.2344	5,954 mm	15/64	6,0	65,0	27,0	18,0	33,0	58822
0.2362	6,000 mm		6,0	65,0	27,0	18,0	33,0	67735
0.2402	6,100 mm		8,0	70,0	28,0	19,0	34,0	67736
0.2441	6,200 mm		8,0	70,0	28,0	19,0	34,0	67737
0.2461	6,250 mm		8,0	70,0	28,0	19,0	34,0	67738
0.2480	6,300 mm		8,0	70,0	28,0	19,0	34,0	67739
0.2500	6,350 mm	1/4 E #0	8,0	70,0	29,0	19,0	34,0	58823
0.2520	6,400 mm		8,0	70,0	29,0	19,0	34,0	67740
0.2559	6,500 mm		8,0	70,0	29,0	19,0	34,0	67741
0.2570	6,528 mm	F	8,0	70,0	29,0	20,0	34,0	58824
0.2598	6,600 mm		8,0	70,0	30,0	20,0	34,0	67742
0.2638	6,700 mm		8,0	70,0	30,0	20,0	34,0	67743
0.2656	6,746 mm	17/64	8,0	70,0	30,0	20,0	34,0	58825
0.2677	6,800 mm		8,0	70,0	31,0	20,0	34,0	67744
0.2717	6,900 mm		8,0	70,0	31,0	21,0	34,0	67745
0.2720	6,909 mm	I	8,0	70,0	31,0	21,0	34,0	58826
0.2756	7,000 mm		8,0	75,0	32,0	21,0	34,0	67746
0.2795	7,100 mm		8,0	75,0	32,0	21,0	34,0	67747
0.2812	7,142 mm	9/32	8,0	75,0	32,0	21,0	34,0	58827
0.2835	7,200 mm		8,0	75,0	32,0	22,0	34,0	67748
0.2854	7,250 mm		8,0	75,0	33,0	22,0	34,0	67749
0.2874	7,300 mm		8,0	75,0	33,0	22,0	34,0	67750
0.2913	7,400 mm		8,0	75,0	33,0	22,0	34,0	67751
0.2953	7,500 mm		8,0	75,0	34,0	23,0	34,0	67752
0.2969	7,541 mm	19/64	8,0	75,0	34,0	23,0	34,0	58828
0.2992	7,600 mm		8,0	75,0	34,0	23,0	34,0	67753
0.3031	7,700 mm		8,0	75,0	35,0	23,0	34,0	67754
0.3071	7,800 mm		8,0	75,0	35,0	23,0	34,0	67755
0.3110	7,900 mm		8,0	75,0	36,0	24,0	34,0	67756
0.3125	7,938 mm	5/16	8,0	75,0	36,0	24,0	34,0	58829
0.3150	8,000 mm		8,0	75,0	36,0	24,0	34,0	67757
0.3189	8,100 mm		10,0	80,0	36,0	24,0	34,0	67758

continued on next page

CONTINUED




3xD



146U 3xD

FRACTIONAL & METRIC SERIES

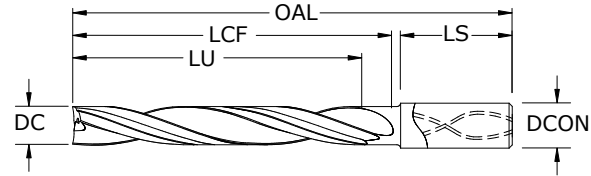

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3228	8,200 mm		10,0	80,0	37,0	25,0	34,0	67759
0.3268	8,300 mm		10,0	80,0	37,0	25,0	34,0	67760
0.3281	8,334 mm	21/64	10,0	80,0	38,0	25,0	34,0	58830
0.3307	8,400 mm		10,0	80,0	38,0	25,0	34,0	67761
0.3320	8,433 mm	Q	10,0	80,0	38,0	25,0	34,0	58831
0.3346	8,500 mm		10,0	80,0	38,0	25,0	34,0	67762
0.3386	8,600 mm		10,0	80,0	39,0	26,0	34,0	67763
0.3425	8,700 mm		10,0	80,0	39,0	26,0	34,0	67764
0.3438	8,733 mm	11/32	10,0	80,0	39,0	26,0	34,0	58832
0.3465	8,800 mm		10,0	80,0	40,0	26,0	34,0	67765
0.3504	8,900 mm		10,0	80,0	40,0	27,0	34,0	67766
0.3543	9,000 mm		10,0	80,0	40,0	27,0	34,0	67767
0.3583	9,100 mm		10,0	80,0	41,0	27,0	34,0	67768
0.3594	9,129 mm	23/64	10,0	80,0	41,0	27,0	34,0	58833
0.3622	9,200 mm		10,0	80,0	41,0	28,0	35,0	67769
0.3661	9,300 mm		10,0	85,0	42,0	28,0	35,0	67770
0.3680	9,347 mm	U	10,0	85,0	42,0	28,0	35,0	58834
0.3701	9,400 mm		10,0	85,0	42,0	28,0	35,0	67771
0.3740	9,500 mm		10,0	85,0	43,0	28,0	35,0	67772
0.3750	9,525 mm	3/8	10,0	85,0	43,0	29,0	35,0	58835
0.3780	9,600 mm		10,0	85,0	43,0	29,0	35,0	67773
0.3819	9,700 mm		10,0	85,0	44,0	29,0	35,0	67774
0.3858	9,800 mm		10,0	85,0	44,0	29,0	35,0	67775
0.3898	9,900 mm		10,0	85,0	45,0	30,0	35,0	67776
0.3906	9,921 mm	25/64	10,0	85,0	45,0	30,0	35,0	58836
0.3937	10,000 mm		10,0	85,0	45,0	30,0	35,0	67777
0.3970	10,084 mm	X	12,0	90,0	46,0	31,0	36,0	58837
0.3976	10,100 mm		12,0	90,0	46,0	31,0	36,0	67778
0.4016	10,200 mm		12,0	90,0	46,0	31,0	36,0	67779
0.4040	10,262 mm	Y	12,0	90,0	46,0	31,0	36,0	58838
0.4055	10,300 mm		12,0	90,0	46,0	31,0	36,0	67780
0.4062	10,317 mm	13/32	12,0	90,0	46,0	31,0	36,0	58839
0.4094	10,400 mm		12,0	90,0	47,0	31,0	36,0	67781
0.4134	10,500 mm		12,0	90,0	47,0	32,0	36,0	67782
0.4173	10,600 mm		12,0	90,0	48,0	32,0	36,0	67783
0.4213	10,700 mm		12,0	90,0	48,0	32,0	36,0	67784

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.0047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.0063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.0083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.0098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0,002/+0,012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0,004/+0,016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0,006/+0,021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0,007/+0,025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0,008/+0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com


146U 3xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4219	10,716 mm	27/64	12,0	90,0	48,0	32,0	36,0	58840
0.4252	10,800 mm		12,0	90,0	49,0	32,0	36,0	67785
0.4291	10,900 mm		12,0	90,0	49,0	33,0	36,0	67786
0.4331	11,000 mm		12,0	95,0	50,0	33,0	36,0	67787
0.4370	11,100 mm		12,0	95,0	50,0	33,0	36,0	67788
0.4375	11,113 mm	7/16	12,0	95,0	50,0	33,0	36,0	58841
0.4409	11,200 mm		12,0	95,0	50,0	34,0	36,0	67789
0.4449	11,300 mm		12,0	95,0	51,0	34,0	36,0	67790
0.4488	11,400 mm		12,0	95,0	51,0	34,0	36,0	67791
0.4528	11,500 mm		12,0	95,0	52,0	35,0	36,0	67792
0.4531	11,509 mm	29/64	12,0	95,0	52,0	35,0	36,0	58842
0.4567	11,600 mm		12,0	95,0	52,0	35,0	36,0	67793
0.4606	11,700 mm		12,0	95,0	53,0	35,0	36,0	67794
0.4646	11,800 mm		12,0	95,0	53,0	35,0	36,0	67795
0.4685	11,900 mm		12,0	95,0	54,0	36,0	36,0	67796
0.4688	11,908 mm	15/32	12,0	95,0	54,0	36,0	36,0	58843
0.4724	12,000 mm		12,0	95,0	54,0	36,0	36,0	67797
0.4844	12,304 mm	31/64	14,0	105,0	55,0	37,0	37,0	58844
0.4921	12,500 mm		14,0	105,0	56,0	37,0	37,0	67798
0.5000	12,700 mm	1/2	14,0	105,0	57,0	38,0	37,0	58845
0.5039	12,800 mm		14,0	105,0	58,0	38,0	37,0	67799
0.5118	13,000 mm		14,0	105,0	58,0	39,0	37,0	67800
0.5156	13,096 mm	33/64	14,0	105,0	59,0	39,0	37,0	58846
0.5312	13,492 mm	17/32	14,0	105,0	61,0	40,0	37,0	58847
0.5315	13,500 mm		14,0	105,0	61,0	41,0	37,0	67801
0.5469	13,891 mm	35/64	14,0	105,0	63,0	42,0	37,0	58848
0.5512	14,000 mm		14,0	105,0	63,0	42,0	37,0	67802
0.5625	14,288 mm	9/16	16,0	115,0	64,0	43,0	38,0	58849
0.5709	14,500 mm		16,0	115,0	65,0	44,0	38,0	67803
0.5781	14,684 mm	37/64	16,0	115,0	66,0	44,0	38,0	58850
0.5906	15,000 mm		16,0	115,0	68,0	45,0	38,0	67804
0.5938	15,083 mm	19/32	16,0	115,0	68,0	45,0	38,0	58851
0.6094	15,479 mm	39/64	16,0	115,0	70,0	46,0	38,0	58852
0.6102	15,500 mm		16,0	115,0	70,0	46,0	38,0	67805
0.6250	15,875 mm	5/8	16,0	115,0	71,0	48,0	38,0	58853
0.6299	16,000 mm		16,0	115,0	72,0	48,0	38,0	67806
0.6406	16,271 mm	41/64	18,0	130,0	73,0	49,0	44,0	58854
0.6496	16,500 mm		18,0	130,0	74,0	49,0	44,0	67807
0.6562	16,667 mm	21/32	18,0	130,0	75,0	50,0	44,0	58855
0.6693	17,000 mm		18,0	130,0	77,0	51,0	44,0	67808
0.6719	17,066 mm	43/64	18,0	130,0	77,0	51,0	44,0	58856
0.6875	17,463 mm	11/16	18,0	130,0	79,0	52,0	44,0	58857
0.6890	17,500 mm		18,0	130,0	79,0	53,0	44,0	67809
0.7031	17,859 mm	45/64	18,0	130,0	80,0	54,0	44,0	58858

continued on next page

CONTINUED



146U 3xD

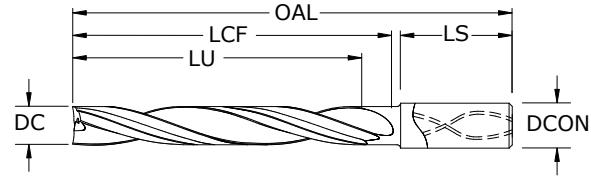

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.7087	18,000 mm		18,0	130,0	81,0	54,0	44,0	67810
0.7188	18,258 mm	23/32	20,0	140,0	82,0	55,0	45,0	58859
0.7283	18,500 mm		20,0	140,0	83,0	55,0	45,0	67811
0.7344	18,654 mm	47/64	20,0	140,0	84,0	56,0	45,0	58860
0.7480	19,000 mm		20,0	140,0	85,0	57,0	45,0	67812
0.7500	19,050 mm	3/4	20,0	140,0	86,0	57,0	45,0	58861
0.7656	19,446 mm	49/64	20,0	140,0	88,0	58,0	45,0	58862
0.7677	19,500 mm		20,0	140,0	88,0	58,0	45,0	67813
0.7812	19,842 mm	25/32	20,0	140,0	89,0	60,0	45,0	58863
0.7874	20,000 mm		20,0	140,0	90,0	60,0	45,0	67814
0.7969	20,241 mm	51/64	22,0	150,0	91,0	61,0	52,0	58864
0.8071	20,500 mm		22,0	150,0	92,0	62,0	52,0	67815
0.8125	20,638 mm	13/16	22,0	150,0	93,0	62,0	52,0	58865

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS

STAINLESS STEELS


CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent information visit
www.ksptpatents.com

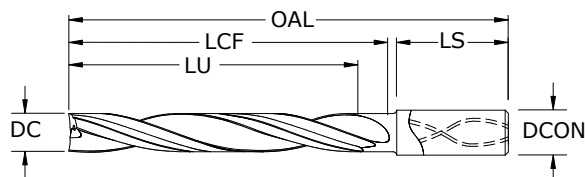

146U 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

NON-FERROUS


For patent
information visit
www.ksptpatents.com

		inch & mm							EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.1181	3,000 mm		6,0	75,0	19,0	15,0	51,0	67816	
0.1220	3,100 mm		6,0	80,0	20,0	15,0	49,0	67817	
0.1250	3,175 mm	1/8	6,0	80,0	21,0	16,0	49,0	58866	
0.1260	3,200 mm		6,0	80,0	21,0	16,0	49,0	67818	
0.1299	3,300 mm		6,0	80,0	21,0	16,0	49,0	67819	
0.1339	3,400 mm		6,0	80,0	22,0	17,0	49,0	67820	
0.1360	3,454 mm	#29	6,0	80,0	22,0	17,0	49,0	58867	
0.1378	3,500 mm		6,0	80,0	23,0	18,0	49,0	67821	
0.1405	3,569 mm	#28	6,0	80,0	23,0	18,0	49,0	58868	
0.1406	3,571 mm	9/64	6,0	80,0	23,0	18,0	49,0	58869	
0.1417	3,600 mm		6,0	80,0	23,0	18,0	49,0	67822	
0.1457	3,700 mm		6,0	80,0	24,0	19,0	49,0	67823	
0.1470	3,734 mm	#26	6,0	80,0	24,0	19,0	49,0	58870	
0.1495	3,797 mm	#25	6,0	80,0	25,0	19,0	49,0	58871	
0.1496	3,800 mm		6,0	80,0	25,0	19,0	49,0	67824	
0.1520	3,861 mm	#24	6,0	80,0	25,0	19,0	49,0	58872	
0.1535	3,900 mm		6,0	80,0	25,0	19,0	49,0	67825	
0.1562	3,967 mm	5/32	6,0	80,0	26,0	20,0	49,0	58873	
0.1570	3,988 mm	#22	6,0	80,0	26,0	20,0	49,0	58874	
0.1575	4,000 mm		6,0	80,0	26,0	20,0	49,0	67826	
0.1590	4,039 mm	#21	6,0	80,0	26,0	20,0	49,0	58875	
0.1610	4,089 mm	#20	6,0	90,0	27,0	20,0	53,0	58876	
0.1614	4,100 mm		6,0	90,0	27,0	20,0	53,0	67827	
0.1654	4,200 mm		6,0	90,0	27,0	21,0	53,0	67828	
0.1693	4,300 mm		6,0	90,0	28,0	22,0	53,0	67829	
0.1719	4,366 mm	11/64	6,0	90,0	28,0	22,0	53,0	58877	
0.1732	4,400 mm		6,0	90,0	29,0	22,0	53,0	67830	
0.1770	4,496 mm	#16	6,0	90,0	29,0	22,0	53,0	58878	
0.1772	4,500 mm		6,0	90,0	29,0	23,0	53,0	67831	
0.1811	4,600 mm		6,0	90,0	30,0	23,0	53,0	67832	
0.1850	4,699 mm	#13	6,0	90,0	31,0	23,0	53,0	58879	
0.1875	4,763 mm	3/16	6,0	90,0	31,0	24,0	53,0	58880	
0.1890	4,801 mm	#12	6,0	90,0	31,0	24,0	53,0	58881	
0.1929	4,900 mm		6,0	90,0	32,0	24,0	53,0	67835	
0.1935	4,915 mm	#10	6,0	90,0	32,0	25,0	53,0	58882	
0.1969	5,000 mm		6,0	95,0	33,0	25,0	51,0	67836	
0.2008	5,100 mm		6,0	95,0	33,0	26,0	51,0	67837	
0.2010	5,105 mm	#7	6,0	95,0	33,0	26,0	51,0	58883	
0.2031	5,159 mm	13/64	6,0	95,0	34,0	26,0	51,0	58884	
0.2047	5,200 mm		6,0	95,0	34,0	26,0	51,0	67838	
0.2087	5,300 mm		6,0	95,0	34,0	27,0	51,0	67839	
0.2090	5,309 mm	#4	6,0	95,0	35,0	27,0	51,0	58885	

continued on next page



5xD

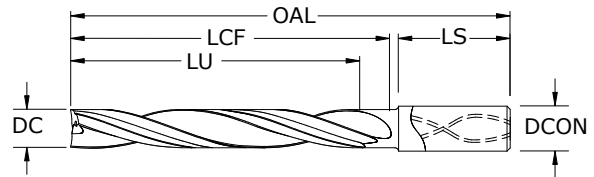

146U 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	TI-NAMITE®-X (TX)
0.2126	5,400 mm		6,0	95,0	35,0	27,0	51,0	67840
0.2130	5,410 mm	#3	6,0	95,0	35,0	27,0	51,0	58886
0.2165	5,500 mm		6,0	95,0	36,0	27,0	51,0	67841
0.2188	5,558 mm	7/32	6,0	95,0	36,0	28,0	51,0	58887
0.2205	5,600 mm		6,0	95,0	36,0	28,0	51,0	67842
0.2244	5,700 mm		6,0	95,0	37,0	28,0	51,0	67843
0.2283	5,800 mm		6,0	95,0	38,0	29,0	51,0	67844
0.2323	5,900 mm		6,0	95,0	38,0	30,0	51,0	67845
0.2344	5,954 mm	15/64	6,0	95,0	39,0	30,0	51,0	58888
0.2362	6,000 mm		6,0	95,0	39,0	30,0	51,0	67846
0.2402	6,100 mm		8,0	100,0	40,0	31,0	49,0	67847
0.2441	6,200 mm		8,0	100,0	40,0	31,0	49,0	67848
0.2461	6,250 mm		8,0	100,0	41,0	31,0	49,0	67849
0.2480	6,300 mm		8,0	100,0	41,0	31,0	49,0	67850
0.2500	6,350 mm	1/4 E #0	8,0	100,0	41,0	32,0	49,0	58889
0.2520	6,400 mm		8,0	100,0	42,0	32,0	49,0	67851
0.2559	6,500 mm		8,0	100,0	42,0	32,0	49,0	67852
0.2570	6,528 mm	F	8,0	100,0	42,0	33,0	49,0	58890
0.2598	6,600 mm		8,0	100,0	43,0	33,0	49,0	67853
0.2638	6,700 mm		8,0	100,0	44,0	34,0	49,0	67854
0.2656	6,746 mm	17/64	8,0	100,0	44,0	34,0	49,0	58891
0.2677	6,800 mm		8,0	100,0	44,0	34,0	49,0	67855
0.2717	6,900 mm		8,0	100,0	45,0	35,0	49,0	67856
0.2720	6,909 mm	I	8,0	100,0	45,0	35,0	49,0	58892
0.2756	7,000 mm		8,0	100,0	46,0	35,0	49,0	67857
0.2795	7,100 mm		8,0	100,0	46,0	35,0	49,0	67858
0.2812	7,142 mm	9/32	8,0	100,0	46,0	36,0	49,0	58893
0.2835	7,200 mm		8,0	110,0	47,0	36,0	53,0	67859
0.2854	7,250 mm		8,0	110,0	47,0	36,0	53,0	67860
0.2874	7,300 mm		8,0	110,0	47,0	36,0	53,0	67861
0.2913	7,400 mm		8,0	110,0	48,0	37,0	53,0	67862
0.2953	7,500 mm		8,0	110,0	49,0	38,0	53,0	67863
0.2969	7,541 mm	19/64	8,0	110,0	49,0	38,0	53,0	58894
0.2992	7,600 mm		8,0	110,0	49,0	38,0	53,0	67864
0.3031	7,700 mm		8,0	110,0	50,0	38,0	53,0	67865
0.3071	7,800 mm		8,0	110,0	51,0	39,0	53,0	67866
0.3110	7,900 mm		8,0	110,0	51,0	39,0	53,0	67867
0.3125	7,938 mm	5/16	8,0	110,0	52,0	40,0	53,0	58895
0.3150	8,000 mm		8,0	110,0	52,0	40,0	53,0	67868
0.3189	8,100 mm		10,0	115,0	53,0	41,0	51,0	67869
0.3228	8,200 mm		10,0	115,0	53,0	41,0	51,0	67870
0.3268	8,300 mm		10,0	115,0	54,0	42,0	51,0	67871

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

146U 5xD

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					Ti-NAMITE®-X (TX)
0.3281	8,334 mm	21/64	10,0	115,0	54,0	42,0	51,0	58896
0.3307	8,400 mm		10,0	115,0	55,0	42,0	51,0	67872
0.3320	8,433 mm	Q	10,0	115,0	55,0	42,0	51,0	58897
0.3346	8,500 mm		10,0	115,0	55,0	42,0	51,0	67873
0.3386	8,600 mm		10,0	115,0	56,0	43,0	51,0	67874
0.3425	8,700 mm		10,0	115,0	57,0	43,0	51,0	67875
0.3438	8,733 mm	11/32	10,0	115,0	57,0	44,0	51,0	58898
0.3465	8,800 mm		10,0	115,0	57,0	44,0	51,0	67876
0.3504	8,900 mm		10,0	115,0	58,0	45,0	51,0	67877
0.3543	9,000 mm		10,0	115,0	58,0	45,0	51,0	67878
0.3583	9,100 mm		10,0	115,0	59,0	46,0	51,0	67879
0.3594	9,129 mm	23/64	10,0	115,0	59,0	46,0	51,0	58899
0.3622	9,200 mm		10,0	125,0	60,0	46,0	55,0	67880
0.3661	9,300 mm		10,0	125,0	60,0	46,0	55,0	67881
0.3680	9,347 mm	U	10,0	125,0	61,0	47,0	55,0	58900
0.3701	9,400 mm		10,0	125,0	61,0	47,0	55,0	67882
0.3740	9,500 mm		10,0	125,0	62,0	47,0	55,0	67883
0.3750	9,525 mm	3/8	10,0	125,0	62,0	48,0	55,0	58901
0.3780	9,600 mm		10,0	125,0	62,0	48,0	55,0	67884
0.3819	9,700 mm		10,0	125,0	63,0	49,0	55,0	67885
0.3858	9,800 mm		10,0	125,0	64,0	49,0	55,0	67886
0.3898	9,900 mm		10,0	125,0	64,0	50,0	55,0	67887
0.3906	9,921 mm	25/64	10,0	125,0	64,0	50,0	55,0	58902
0.3937	10,000 mm		10,0	125,0	65,0	50,0	55,0	67888
0.3970	10,084 mm	X	12,0	135,0	66,0	50,0	57,0	58903
0.3976	10,100 mm		12,0	135,0	66,0	50,0	57,0	67889
0.4016	10,200 mm		12,0	135,0	66,0	51,0	57,0	67890
0.4040	10,262 mm	Y	12,0	135,0	67,0	51,0	57,0	58904
0.4055	10,300 mm		12,0	135,0	67,0	51,0	57,0	67891
0.4062	10,317 mm	13/32	12,0	135,0	67,0	52,0	57,0	58905
0.4094	10,400 mm		12,0	135,0	68,0	52,0	57,0	67892
0.4134	10,500 mm		12,0	135,0	68,0	53,0	57,0	67893
0.4173	10,600 mm		12,0	135,0	69,0	53,0	57,0	67894
0.4213	10,700 mm		12,0	135,0	70,0	54,0	57,0	67895
0.4219	10,716 mm	27/64	12,0	135,0	70,0	54,0	57,0	58906
0.4252	10,800 mm		12,0	135,0	70,0	54,0	57,0	67896
0.4291	10,900 mm		12,0	135,0	71,0	54,0	57,0	67897
0.4331	11,000 mm		12,0	135,0	72,0	55,0	57,0	67898
0.4370	11,100 mm		12,0	135,0	72,0	55,0	57,0	67899
0.4375	11,113 mm	7/16	12,0	135,0	72,0	56,0	57,0	58907
0.4409	11,200 mm		12,0	135,0	73,0	56,0	57,0	67900
0.4449	11,300 mm		12,0	135,0	73,0	57,0	57,0	67901
0.4488	11,400 mm		12,0	145,0	74,0	57,0	62,0	67902
0.4528	11,500 mm		12,0	145,0	75,0	58,0	62,0	67903
0.4531	11,509 mm	29/64	12,0	145,0	75,0	58,0	62,0	58908
0.4567	11,600 mm		12,0	145,0	75,0	58,0	62,0	67904
0.4606	11,700 mm		12,0	145,0	76,0	58,0	62,0	67905
0.4646	11,800 mm		12,0	145,0	77,0	59,0	62,0	67906
0.4685	11,900 mm		12,0	145,0	77,0	59,0	62,0	67907
0.4688	11,908 mm	15/32	12,0	145,0	77,0	60,0	62,0	58909

continued on next page




5xD



146U 5xD

FRACTIONAL & METRIC SERIES

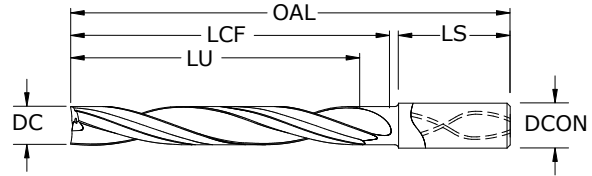

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.4724	12,000 mm		12,0	145,0	78,0	60,0	62,0	67908
0.4844	12,304 mm	31/64	14,0	155,0	80,0	62,0	59,0	58910
0.4921	12,500 mm		14,0	155,0	81,0	62,0	59,0	67909
0.5000	12,700 mm	1/2	14,0	155,0	83,0	64,0	59,0	58911
0.5039	12,800 mm		14,0	155,0	83,0	64,0	59,0	67910
0.5118	13,000 mm		14,0	155,0	84,0	65,0	59,0	67911
0.5156	13,096 mm	33/64	14,0	155,0	85,0	65,0	59,0	58912
0.5312	13,492 mm	17/32	14,0	155,0	88,0	67,0	59,0	58913
0.5315	13,500 mm		14,0	155,0	88,0	68,0	59,0	67912
0.5469	13,891 mm	35/64	14,0	155,0	90,0	69,0	59,0	58914
0.5512	14,000 mm		14,0	155,0	91,0	70,0	59,0	67913
0.5625	14,288 mm	9/16	16,0	175,0	93,0	71,0	66,0	58915
0.5709	14,500 mm		16,0	175,0	94,0	73,0	66,0	67914
0.5781	14,684 mm	37/64	16,0	175,0	95,0	73,0	66,0	58916
0.5906	15,000 mm		16,0	175,0	98,0	75,0	66,0	67915
0.5938	15,083 mm	19/32	16,0	175,0	98,0	75,0	66,0	58917
0.6094	15,479 mm	39/64	16,0	175,0	101,0	77,0	66,0	58918
0.6102	15,500 mm		16,0	175,0	101,0	77,0	66,0	67916
0.6250	15,875 mm	5/8	16,0	175,0	103,0	79,0	66,0	58919
0.6299	16,000 mm		16,0	175,0	104,0	80,0	66,0	67917
0.6406	16,271 mm	41/64	18,0	195,0	106,0	81,0	73,0	58920
0.6496	16,500 mm		18,0	195,0	107,0	82,0	73,0	67918
0.6562	16,667 mm	21/32	18,0	195,0	108,0	83,0	73,0	58921
0.6693	17,000 mm		18,0	195,0	111,0	85,0	73,0	67919
0.6719	17,066 mm	43/64	18,0	195,0	111,0	85,0	73,0	58922
0.6875	17,463 mm	11/16	18,0	195,0	114,0	87,0	73,0	58923
0.6890	17,500 mm		18,0	195,0	114,0	88,0	73,0	67920
0.7031	17,859 mm	45/64	18,0	195,0	116,0	89,0	73,0	58924
0.7087	18,000 mm		18,0	195,0	117,0	90,0	73,0	67921
0.7188	18,258 mm	23/32	20,0	215,0	119,0	91,0	80,0	58925
0.7283	18,500 mm		20,0	215,0	120,0	92,0	80,0	67922
0.7344	18,654 mm	47/64	20,0	215,0	121,0	93,0	80,0	58926
0.7480	19,000 mm		20,0	215,0	123,0	95,0	80,0	67923
0.7500	19,050 mm	3/4	20,0	215,0	124,0	95,0	80,0	58927
0.7656	19,446 mm	49/64	20,0	215,0	126,0	97,0	80,0	58928
0.7677	19,500 mm		20,0	215,0	127,0	97,0	80,0	67924
0.7812	19,842 mm	25/32	20,0	215,0	129,0	99,0	80,0	58929
0.7874	20,000 mm		20,0	215,0	130,0	100,0	80,0	67925
0.7969	20,241 mm	51/64	22,0	220,0	132,0	101,0	81,0	58930
0.8071	20,500 mm		22,0	220,0	133,0	103,0	81,0	67926
0.8125	20,638 mm	13/16	22,0	220,0	134,0	103,0	81,0	58931

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS

STAINLESS STEELS



CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

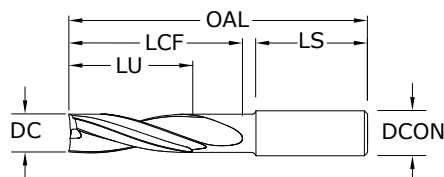

136U 2xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.0591	1,500 mm		6,0	45,0	5,0	3,0	33,0	67060	
0.0625	1,588 mm	1/16	6,0	45,0	6,0	3,0	33,0	58480	
0.0630	1,600 mm		6,0	45,0	6,0	3,0	33,0	67061	
0.0669	1,700 mm		6,0	45,0	6,0	3,0	33,0	67062	
0.0709	1,800 mm		6,0	45,0	6,0	4,0	33,0	67063	
0.0748	1,900 mm		6,0	45,0	7,0	4,0	33,0	67064	
0.0781	1,984 mm	5/64	6,0	45,0	7,0	4,0	33,0	58481	
0.0787	2,000 mm		6,0	45,0	7,0	4,0	33,0	67065	
0.0827	2,100 mm		6,0	45,0	7,0	4,0	33,0	67066	
0.0866	2,200 mm		6,0	50,0	8,0	4,0	31,0	67067	
0.0906	2,300 mm		6,0	50,0	8,0	5,0	31,0	67068	
0.0938	2,383 mm	3/32	6,0	50,0	8,0	5,0	31,0	58482	
0.0945	2,400 mm		6,0	50,0	8,0	5,0	31,0	67069	
0.0984	2,500 mm		6,0	50,0	9,0	5,0	31,0	67070	
0.1015	2,578 mm	#38	6,0	50,0	9,0	5,0	31,0	58483	
0.1024	2,600 mm		6,0	50,0	9,0	5,0	31,0	67071	
0.1040	2,642 mm	#37	6,0	50,0	9,0	5,0	31,0	58484	
0.1063	2,700 mm		6,0	50,0	9,0	5,0	31,0	67072	
0.1065	2,705 mm	#36	6,0	50,0	9,0	5,0	31,0	58485	
0.1094	2,779 mm	7/64	6,0	50,0	10,0	6,0	31,0	58486	
0.1102	2,800 mm		6,0	50,0	10,0	6,0	31,0	67073	
0.1130	2,870 mm	#33	6,0	50,0	10,0	6,0	31,0	58487	
0.1142	2,900 mm		6,0	50,0	10,0	6,0	31,0	67074	
0.1181	3,000 mm		6,0	50,0	10,0	6,0	31,0	67075	
0.1220	3,100 mm		6,0	50,0	11,0	6,0	31,0	67076	
0.1250	3,175 mm	1/8	6,0	50,0	11,0	6,0	31,0	58488	
0.1260	3,200 mm		6,0	50,0	11,0	6,0	31,0	67077	
0.1299	3,300 mm		6,0	50,0	12,0	7,0	31,0	67078	
0.1339	3,400 mm		6,0	50,0	12,0	7,0	31,0	67079	
0.1360	3,454 mm	#29	6,0	50,0	12,0	7,0	31,0	58489	
0.1378	3,500 mm		6,0	50,0	12,0	7,0	31,0	67080	
0.1405	3,569 mm	#28	6,0	50,0	12,0	7,0	31,0	58490	
0.1406	3,571 mm	9/64	6,0	50,0	12,0	7,0	31,0	58491	
0.1417	3,600 mm		6,0	50,0	13,0	7,0	31,0	67081	
0.1457	3,700 mm		6,0	50,0	13,0	7,0	31,0	67082	
0.1470	3,734 mm	#26	6,0	50,0	13,0	7,0	31,0	58492	
0.1495	3,797 mm	#25	6,0	50,0	13,0	8,0	31,0	58493	
0.1496	3,800 mm		6,0	50,0	13,0	8,0	31,0	67083	


continued on next page

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)



136U 2xD

FRACTIONAL & METRIC SERIES

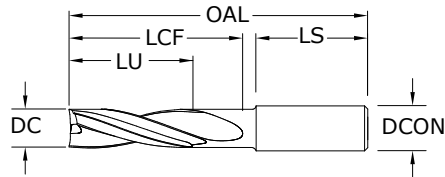

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1520	3,861 mm	#24	6,0	50,0	14,0	8,0	31,0	58494
0.1535	3,900 mm		6,0	50,0	14,0	8,0	31,0	67084
0.1562	3,967 mm	5/32	6,0	50,0	14,0	8,0	31,0	58495
0.1570	3,988 mm	#22	6,0	50,0	14,0	8,0	31,0	58496
0.1575	4,000 mm		6,0	50,0	14,0	8,0	31,0	67085
0.1590	4,039 mm	#21	6,0	50,0	14,0	8,0	31,0	58497
0.1610	4,089 mm	#20	6,0	50,0	14,0	8,0	31,0	58498
0.1614	4,100 mm		6,0	50,0	14,0	8,0	31,0	67086
0.1654	4,200 mm		6,0	60,0	15,0	8,0	34,0	67087
0.1693	4,300 mm		6,0	60,0	15,0	9,0	34,0	67088
0.1719	4,366 mm	11/64	6,0	60,0	15,0	9,0	34,0	58499
0.1732	4,400 mm		6,0	60,0	15,0	9,0	34,0	67089
0.1770	4,496 mm	#16	6,0	60,0	16,0	9,0	34,0	58500
0.1772	4,500 mm		6,0	60,0	16,0	9,0	34,0	67090
0.1811	4,600 mm		6,0	60,0	16,0	9,0	34,0	67091
0.1850	4,699 mm	#13	6,0	60,0	16,0	9,0	34,0	58501
0.1875	4,763 mm	3/16	6,0	60,0	17,0	10,0	34,0	58502
0.1890	4,801 mm	#12	6,0	60,0	17,0	10,0	34,0	58503
0.1929	4,900 mm		6,0	60,0	17,0	10,0	34,0	67094
0.1935	4,915 mm	#10	6,0	60,0	17,0	10,0	34,0	58504
0.1969	5,000 mm		6,0	60,0	18,0	10,0	34,0	67095
0.2008	5,100 mm		6,0	60,0	18,0	10,0	34,0	67096
0.2010	5,105 mm	#7	6,0	60,0	18,0	10,0	34,0	58505
0.2031	5,159 mm	13/64	6,0	60,0	18,0	10,0	34,0	58506
0.2047	5,200 mm		6,0	60,0	18,0	10,0	34,0	67097
0.2087	5,300 mm		6,0	60,0	19,0	11,0	34,0	67098
0.2090	5,309 mm	#4	6,0	60,0	19,0	11,0	34,0	58507
0.2126	5,400 mm		6,0	60,0	19,0	11,0	34,0	67099
0.2130	5,410 mm	#3	6,0	60,0	19,0	11,0	34,0	58508
0.2165	5,500 mm		6,0	60,0	19,0	11,0	34,0	67100
0.2188	5,558 mm	7/32	6,0	60,0	19,0	11,0	34,0	58509
0.2205	5,600 mm		6,0	60,0	20,0	11,0	34,0	67101
0.2244	5,700 mm		6,0	60,0	20,0	11,0	34,0	67102
0.2283	5,800 mm		6,0	60,0	20,0	12,0	34,0	67103
0.2323	5,900 mm		6,0	60,0	21,0	12,0	34,0	67104
0.2344	5,954 mm	15/64	6,0	60,0	21,0	12,0	34,0	58510
0.2362	6,000 mm		6,0	60,0	21,0	12,0	34,0	67105
0.2402	6,100 mm		8,0	70,0	22,0	13,0	37,0	67106

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

136U 2xD
FRACTIONAL & METRIC SERIES

CONTINUED


DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.2441	6,200 mm		8,0	70,0	22,0	12,0	37,0	67107
0.2461	6,250 mm		8,0	70,0	22,0	13,0	37,0	67108
0.2480	6,300 mm		8,0	70,0	22,0	13,0	37,0	67109
0.2500	6,350 mm	1/4 E #0	8,0	70,0	22,0	13,0	37,0	58511
0.2520	6,400 mm		8,0	70,0	22,0	13,0	37,0	67110
0.2559	6,500 mm		8,0	70,0	23,0	13,0	37,0	67111
0.2570	6,528 mm	F	8,0	70,0	23,0	13,0	37,0	58512
0.2598	6,600 mm		8,0	70,0	23,0	13,0	37,0	67112
0.2638	6,700 mm		8,0	70,0	23,0	13,0	37,0	67113
0.2656	6,746 mm	17/64	8,0	70,0	24,0	13,0	37,0	58513
0.2677	6,800 mm		8,0	70,0	24,0	14,0	37,0	67114
0.2717	6,900 mm		8,0	70,0	24,0	14,0	37,0	67115
0.2720	6,909 mm	I	8,0	70,0	24,0	14,0	37,0	58514
0.2756	7,000 mm		8,0	70,0	25,0	14,0	37,0	67116
0.2795	7,100 mm		8,0	70,0	25,0	14,0	37,0	67117
0.2812	7,142 mm	9/32	8,0	70,0	25,0	14,0	37,0	58515
0.2835	7,200 mm		8,0	70,0	25,0	14,0	37,0	67118
0.2854	7,250 mm		8,0	70,0	25,0	14,0	37,0	67119
0.2874	7,300 mm		8,0	70,0	26,0	15,0	37,0	67120
0.2913	7,400 mm		8,0	70,0	26,0	15,0	37,0	67121
0.2953	7,500 mm		8,0	70,0	26,0	15,0	37,0	67122
0.2969	7,541 mm	19/64	8,0	70,0	26,0	15,0	37,0	58516
0.2992	7,600 mm		8,0	70,0	27,0	15,0	37,0	67123
0.3031	7,700 mm		8,0	70,0	27,0	15,0	37,0	67124
0.3071	7,800 mm		8,0	70,0	27,0	16,0	37,0	67125
0.3110	7,900 mm		8,0	70,0	28,0	16,0	37,0	67126
0.3125	7,938 mm	5/16	8,0	70,0	28,0	16,0	37,0	58517
0.3150	8,000 mm		8,0	70,0	28,0	16,0	37,0	67127
0.3189	8,100 mm		10,0	80,0	29,0	17,0	40,0	67128
0.3228	8,200 mm		10,0	80,0	29,0	16,0	40,0	67129
0.3268	8,300 mm		10,0	80,0	29,0	17,0	40,0	67130
0.3281	8,334 mm	21/64	10,0	80,0	29,0	17,0	40,0	58518
0.3307	8,400 mm		10,0	80,0	29,0	17,0	40,0	67131
0.3320	8,433 mm	Q	10,0	80,0	30,0	17,0	40,0	58519
0.3346	8,500 mm		10,0	80,0	30,0	17,0	40,0	67132
0.3386	8,600 mm		10,0	80,0	30,0	17,0	40,0	67133
0.3425	8,700 mm		10,0	80,0	30,0	17,0	40,0	67134
0.3438	8,733 mm	11/32	10,0	80,0	31,0	17,0	40,0	58520
0.3465	8,800 mm		10,0	80,0	31,0	18,0	40,0	67135
0.3504	8,900 mm		10,0	80,0	31,0	18,0	40,0	67136
0.3543	9,000 mm		10,0	80,0	31,0	18,0	40,0	67137
0.3583	9,100 mm		10,0	80,0	32,0	18,0	40,0	67138
0.3594	9,129 mm	23/64	10,0	80,0	32,0	18,0	40,0	58521
0.3622	9,200 mm		10,0	80,0	32,0	18,0	40,0	67139
0.3661	9,300 mm		10,0	80,0	33,0	19,0	40,0	67140
0.3680	9,347 mm	U	10,0	80,0	33,0	19,0	40,0	58522

continued on next page



136U 2xD

FRACTIONAL & METRIC SERIES

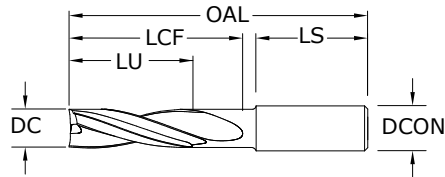

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3701	9,400 mm		10,0	80,0	33,0	19,0	40,0	67141
0.3740	9,500 mm		10,0	80,0	33,0	19,0	40,0	67142
0.3750	9,525 mm	3/8	10,0	80,0	33,0	19,0	40,0	58523
0.3780	9,600 mm		10,0	80,0	34,0	19,0	40,0	67143
0.3819	9,700 mm		10,0	80,0	34,0	19,0	40,0	67144
0.3858	9,800 mm		10,0	80,0	34,0	20,0	40,0	67145
0.3898	9,900 mm		10,0	80,0	35,0	20,0	40,0	67146
0.3906	9,921 mm	25/64	10,0	80,0	35,0	20,0	40,0	58524
0.3937	10,000 mm		10,0	80,0	35,0	20,0	40,0	67147
0.3970	10,084 mm	X	12,0	90,0	36,0	21,0	43,0	58525
0.3976	10,100 mm		12,0	90,0	36,0	21,0	43,0	67148
0.4016	10,200 mm		12,0	90,0	36,0	20,0	43,0	67149
0.4040	10,262 mm	Y	12,0	90,0	36,0	21,0	43,0	58526
0.4055	10,300 mm		12,0	90,0	36,0	21,0	43,0	67150
0.4062	10,317 mm	13/32	12,0	90,0	36,0	21,0	43,0	58527
0.4094	10,400 mm		12,0	90,0	36,0	21,0	43,0	67151
0.4134	10,500 mm		12,0	90,0	37,0	21,0	43,0	67152
0.4173	10,600 mm		12,0	90,0	37,0	21,0	43,0	67153
0.4213	10,700 mm		12,0	90,0	37,0	21,0	43,0	67154
0.4219	10,716 mm	27/64	12,0	90,0	38,0	21,0	43,0	58528
0.4252	10,800 mm		12,0	90,0	38,0	22,0	43,0	67155
0.4291	10,900 mm		12,0	90,0	38,0	22,0	43,0	67156
0.4331	11,000 mm		12,0	90,0	39,0	22,0	43,0	67157
0.4370	11,100 mm		12,0	90,0	39,0	22,0	43,0	67158
0.4375	11,113 mm	7/16	12,0	90,0	39,0	22,0	43,0	58529
0.4409	11,200 mm		12,0	90,0	39,0	22,0	43,0	67159
0.4449	11,300 mm		12,0	90,0	40,0	23,0	43,0	67160
0.4488	11,400 mm		12,0	90,0	40,0	23,0	43,0	67161
0.4528	11,500 mm		12,0	90,0	40,0	23,0	43,0	67162
0.4531	11,509 mm	29/64	12,0	90,0	40,0	23,0	43,0	58530
0.4567	11,600 mm		12,0	90,0	41,0	23,0	43,0	67163
0.4606	11,700 mm		12,0	90,0	41,0	23,0	43,0	67164
0.4646	11,800 mm		12,0	90,0	41,0	24,0	43,0	67165
0.4685	11,900 mm		12,0	90,0	42,0	24,0	43,0	67166
0.4688	11,908 mm	15/32	12,0	90,0	42,0	24,0	43,0	58531
0.4724	12,000 mm		12,0	90,0	42,0	24,0	43,0	67167
0.4844	12,304 mm	31/64	14,0	100,0	43,0	25,0	46,0	58532
0.4921	12,500 mm		14,0	100,0	44,0	25,0	46,0	67168

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$
DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$
DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$
DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$
DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$
DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0.002/\pm 0.012$
DCON = h_6

>3-6 DIAMETER

DC = $\pm 0.004/\pm 0.016$
DCON = h_6

>6-10 DIAMETER

DC = $\pm 0.006/\pm 0.021$
DCON = h_6

>10-18 DIAMETER

DC = $\pm 0.007/\pm 0.025$
DCON = h_6

>18-30 DIAMETER

DC = $\pm 0.008/\pm 0.029$
DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

136U 2xD
FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.5000	12,700 mm	1/2	14,0	100,0	44,0	25,0	46,0	58533
0.5039	12,800 mm		14,0	100,0	45,0	26,0	46,0	67169
0.5118	13,000 mm		14,0	100,0	45,0	26,0	46,0	67170
0.5156	13,096 mm	33/64	14,0	100,0	46,0	26,0	46,0	58534
0.5312	13,492 mm	17/32	14,0	100,0	47,0	27,0	46,0	58535
0.5315	13,500 mm		14,0	100,0	47,0	27,0	46,0	67171
0.5469	13,891 mm	35/64	14,0	100,0	49,0	28,0	46,0	58536
0.5512	14,000 mm		14,0	100,0	49,0	28,0	46,0	67172
0.5625	14,288 mm	9/16	16,0	110,0	50,0	29,0	49,0	58537
0.5709	14,500 mm		16,0	110,0	51,0	29,0	49,0	67173
0.5781	14,684 mm	37/64	16,0	110,0	51,0	29,0	49,0	58538
0.5906	15,000 mm		16,0	110,0	53,0	30,0	49,0	67174
0.5938	15,083 mm	19/32	16,0	110,0	53,0	30,0	49,0	58539
0.6094	15,479 mm	39/64	16,0	110,0	54,0	31,0	49,0	58540
0.6102	15,500 mm		16,0	110,0	54,0	31,0	49,0	67175
0.6250	15,875 mm	5/8	16,0	110,0	56,0	32,0	49,0	58541
0.6299	16,000 mm		16,0	110,0	56,0	32,0	49,0	67176
0.6406	16,271 mm	41/64	18,0	125,0	57,0	33,0	57,0	58542
0.6496	16,500 mm		18,0	125,0	58,0	33,0	57,0	67177
0.6562	16,667 mm	21/32	18,0	125,0	58,0	33,0	57,0	58543
0.6693	17,000 mm		18,0	125,0	60,0	34,0	57,0	67178
0.6719	17,066 mm	43/64	18,0	125,0	60,0	34,0	57,0	58544
0.6875	17,463 mm	11/16	18,0	125,0	61,0	35,0	57,0	58545
0.6890	17,500 mm		18,0	125,0	61,0	35,0	57,0	67179
0.7031	17,859 mm	45/64	18,0	125,0	63,0	36,0	57,0	58546
0.7087	18,000 mm		18,0	125,0	63,0	36,0	57,0	67180
0.7188	18,258 mm	23/32	20,0	135,0	64,0	37,0	60,0	58547
0.7283	18,500 mm		20,0	135,0	65,0	37,0	60,0	67181
0.7344	18,654 mm	47/64	20,0	135,0	65,0	37,0	60,0	58548
0.7480	19,000 mm		20,0	135,0	66,0	38,0	60,0	67182
0.7500	19,050 mm	3/4	20,0	135,0	67,0	38,0	60,0	58549
0.7656	19,446 mm	49/64	20,0	135,0	68,0	39,0	60,0	58550
0.7677	19,500 mm		20,0	135,0	68,0	39,0	60,0	67183
0.7812	19,842 mm	25/32	20,0	135,0	69,0	40,0	60,0	58551
0.7874	20,000 mm		20,0	135,0	70,0	40,0	60,0	67184
0.7969	20,241 mm	51/64	22,0	145,0	71,0	40,0	68,0	58552
0.8071	20,500 mm		22,0	145,0	72,0	41,0	68,0	67185
0.8125	20,638 mm	13/16	22,0	145,0	72,0	41,0	68,0	58553

CONTINUED

Series 146U, 136U Fractional				DC • in								
Hardness		Vc (sfm)		1/16	1/8	1/4	3/8	1/2	5/8	3/4	13/16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	285	RPM	17419	8710	4355	2903	2177	1742	1452	1340
			(228-342)	Fr	0.0016	0.0031	0.0062	0.0093	0.0124	0.0155	0.0186	0.0202
				Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0
		≤ 275 Bhn or ≤ 28 HRc	255	RPM	15586	7793	3896	2598	1948	1559	1299	1199
			(204-306)	Fr	0.0013	0.0027	0.0054	0.0081	0.0108	0.0135	0.0162	0.0175
				Feed (ipm)	21.0	21.0	21.0	21.0	21.0	21.0	21.0	21.0
		≤ 425 Bhn or ≤ 45 HRc	145	RPM	8862	4431	2216	1477	1108	886	739	682
			(116-174)	Fr	0.0011	0.0023	0.0045	0.0068	0.0090	0.0113	0.0135	0.0147
				Feed (ipm)	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	220	RPM	13446	6723	3362	2241	1681	1345	1121	1034
			(176-264)	Fr	0.0015	0.0030	0.0059	0.0089	0.0119	0.0149	0.0178	0.0193
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
		≤ 375 Bhn or ≤ 40 HRc	135	RPM	8251	4126	2063	1375	1031	825	688	635
			(108-162)	Fr	0.0013	0.0027	0.0053	0.0080	0.0107	0.0133	0.0160	0.0173
				Feed (ipm)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	125	RPM	7640	3820	1910	1273	955	764	637	588	
		(100-150)	Fr	0.0012	0.0025	0.0050	0.0075	0.0099	0.0124	0.0149	0.0162	
			Feed (ipm)	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	
	≤ 375 Bhn or ≤ 40 HRc	90	RPM	5501	2750	1375	917	688	550	458	423	
		(72-108)	Fr	0.0005	0.0011	0.0022	0.0033	0.0044	0.0055	0.0065	0.0071	
			Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	265	RPM	16197	8098	4049	2699	2025	1620	1350	1246
			(212-318)	Fr	0.0008	0.0016	0.0032	0.0048	0.0064	0.0080	0.0096	0.0104
				Feed (ipm)	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0
		≤ 275 Bhn or ≤ 28 HRc	170	RPM	10390	5195	2598	1732	1299	1039	866	799
			(136-204)	Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0075	0.0081
				Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	130	RPM	7946	3973	1986	1324	993	795	662	611
			(104-156)	Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0076	0.0082
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	5806	2903	1452	968	726	581	484	447
			(76-114)	Fr	0.0006	0.0011	0.0023	0.0034	0.0045	0.0057	0.0068	0.0074
				Feed (ipm)	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
K	GRAY CAST IRONS	≤ 220 Bhn or ≤ 19 HRc	250	RPM	15280	7640	3820	2547	1910	1528	1273	1175
			(200-300)	Fr	0.0016	0.0031	0.0063	0.0094	0.0126	0.0157	0.0188	0.0204
				Feed (ipm)	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
	DUCTILE CAST IRONS	≤ 260 Bhn or ≤ 26 HRc	220	RPM	13446	6723	3362	2241	1681	1345	1121	1034
			(176-264)	Fr	0.0015	0.0030	0.0059	0.0089	0.0119	0.0149	0.0178	0.0193
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0

continued on next page

Series 146U, 136U Fractional				DC • in								
		Hardness	Vc (sfm)	1/16	1/8	1/4	3/8	1/2	5/8	3/4	13/16	
N	ALUMINUM ALLOYS (WROUGHT) 2024, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	475	RPM	29032	14516	7258	4839	3629	2903	2419	2233
			Fr	0.0016	0.0031	0.0062	0.0093	0.0124	0.0155	0.0186	0.0202	
			Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
	ALUMINUM ALLOYS (CAST) A356, A380, 390	≤ 140 Bhn or ≤ 3 HRc	380	RPM	23226	11613	5806	3871	2903	2323	1935	1787
			Fr	0.0014	0.0028	0.0055	0.0083	0.0110	0.0138	0.0165	0.0179	
			Feed (ipm)	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	175	RPM	10696	5348	2674	1783	1337	1070	891	823
			Fr	0.0007	0.0014	0.0028	0.0042	0.0055	0.0069	0.0083	0.0090	
			Feed (ipm)	7.4	7.4	7.4	7.4	7.4	7.4	7.4	7.4	
		≤ 350 Bhn or ≤ 38 HRc	130	RPM	7946	3973	1986	1324	993	795	662	611
			Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0076	0.0082	
			Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	
		≤ 440 Bhn or ≤ 47 HRc	70	RPM	4278	2139	1070	713	535	428	357	329
			Fr	0.0005	0.0009	0.0019	0.0028	0.0037	0.0047	0.0056	0.0061	
			Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
H	Alloy Steels 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 450 Bhn or ≤ 48 HRc	95	RPM	5806	2903	1452	968	726	581	484	447
			Fr	0.0008	0.0016	0.0031	0.0047	0.0062	0.0078	0.0093	0.0101	
			Feed (ipm)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	80	RPM	4890	2445	1222	815	611	489	407	376
			Fr	0.0007	0.0014	0.0029	0.0043	0.0057	0.0072	0.0086	0.0093	
			Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	

reduce rates when material is harder than listed, when drilling conditions are not optimum, or coolant is not available
 rates shown are for drilling into a flat surface and should be lowered using the reduction multiplier when the workpiece is angled or curved
 reduce rates 10 to 20 percent when using drills without internal coolant
 always use the shortest overhang possible
 longer drills may require a spot drill operation to avoid walking on entry
 internal coolant required in ISO S and M material groups or when drilling depth exceeds 3xD
 Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fr} \times \text{rpm}$
 speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

angle °	reduction multiplier	
	speed x	feed x
up to 30	1.0	0.6
over 30	0.7	0.4

Series 146U, 136U Metric		Hardness	Vc (m/mm)	DC • mm								
				1.5	3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	87	RPM	18419	9209	4605	3454	2763	2302	1727	1381
			(69-104)	Fr	0.037	0.074	0.149	0.199	0.248	0.298	0.397	0.496
				Feed (mm/min)	686	686	686	686	686	686	686	686
		≤ 275 Bhn or ≤ 28 HRc	78	RPM	16480	8240	4120	3090	2472	2060	1545	1236
			(62-93)	Fr	0.032	0.065	0.129	0.173	0.216	0.259	0.345	0.432
				Feed (mm/min)	533	533	533	533	533	533	533	533
		≤ 425 Bhn or ≤ 45 HRc	44	RPM	9371	4686	2343	1757	1406	1171	879	703
			(35-53)	Fr	0.027	0.054	0.108	0.145	0.181	0.217	0.289	0.361
				Feed (mm/min)	254	254	254	254	254	254	254	254
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	67	RPM	14218	7109	3555	2666	2133	1777	1333	1066
			(54-80)	Fr	0.036	0.071	0.143	0.191	0.238	0.286	0.381	0.476
				Feed (mm/min)	508	508	508	508	508	508	508	508
		≤ 375 Bhn or ≤ 40 HRc	41	RPM	8725	4362	2181	1636	1309	1091	818	654
			(33-49)	Fr	0.032	0.064	0.128	0.171	0.213	0.256	0.342	0.427
				Feed (mm/min)	279	279	279	279	279	279	279	279
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	38	RPM	8078	4039	2020	1515	1212	1010	757	606
			(30-46)	Fr	0.030	0.060	0.119	0.159	0.199	0.239	0.319	0.398
				Feed (mm/min)	241	241	241	241	241	241	241	241
		≤ 375 Bhn or ≤ 40 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.013	0.026	0.052	0.070	0.087	0.105	0.140	0.175
				Feed (mm/min)	76	76	76	76	76	76	76	76
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	81	RPM	17126	8563	4282	3211	2569	2141	1606	1284
			(65-97)	Fr	0.019	0.039	0.077	0.103	0.129	0.154	0.206	0.257
				Feed (mm/min)	330	330	330	330	330	330	330	330
		≤ 275 Bhn or ≤ 28 HRc	52	RPM	10987	5493	2747	2060	1648	1373	1030	824
			(41-62)	Fr	0.015	0.030	0.060	0.080	0.100	0.120	0.160	0.200
				Feed (mm/min)	165	165	165	165	165	165	165	165
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.015	0.030	0.060	0.081	0.101	0.121	0.161	0.202
				Feed (mm/min)	127	127	127	127	127	127	127	127
		≤ 375 Bhn or ≤ 40 HRc	29	RPM	6140	3070	1535	1151	921	767	576	460
			(23-35)	Fr	0.014	0.027	0.055	0.073	0.091	0.109	0.146	0.182
				Feed (mm/min)	84	84	84	84	84	84	84	84
K	GRAY CAST IRONS	≤ 220 Bhn or ≤ 19 HRc	76	RPM	16157	8078	4039	3029	2424	2020	1515	1212
			(61-91)	Fr	0.038	0.075	0.151	0.201	0.252	0.302	0.402	0.503
				Feed (mm/min)	610	610	610	610	610	610	610	610
	DUCTILE CAST IRONS	≤ 260 Bhn or ≤ 26 HRc	67	RPM	14218	7109	3555	2666	2133	1777	1333	1066
			(54-80)	Fr	0.036	0.071	0.143	0.191	0.238	0.286	0.381	0.476
				Feed (mm/min)	508	508	508	508	508	508	508	508

continued on next page

Series 146U, 136U Metric			Vc (m/mm)	DC • mm								
				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS (WROUGHT) 2024, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	145 (116-174)	RPM	30698	15349	7675	5756	4605	3837	2878	2302
			Fr	0.037	0.074	0.149	0.199	0.248	0.298	0.397	0.496	
			Feed (mm/min)	1143	1143	1143	1143	1143	1143	1143	1143	
	ALUMINUM ALLOYS (CAST) A356, A380, 390	≤ 140 Bhn or ≤ 3 HRc	116 (93-139)	RPM	24559	12279	6140	4605	3684	3070	2302	1842
			Fr	0.033	0.066	0.132	0.177	0.221	0.265	0.353	0.441	
			Feed (mm/min)	813	813	813	813	813	813	813	813	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	53 (43-64)	RPM	11310	5655	2827	2121	1696	1414	1060	848
			Fr	0.017	0.033	0.066	0.089	0.111	0.133	0.177	0.222	
			Feed (mm/min)	188	188	188	188	188	188	188	188	
		≤ 350 Bhn or ≤ 38 HRc	40 (32-48)	RPM	8402	4201	2100	1575	1260	1050	788	630
			Fr	0.015	0.030	0.060	0.081	0.101	0.121	0.161	0.202	
			Feed (mm/min)	127	127	127	127	127	127	127	127	
		≤ 440 Bhn or ≤ 47 HRc	21 (17-26)	RPM	4524	2262	1131	848	679	565	424	339
			Fr	0.011	0.022	0.045	0.060	0.075	0.090	0.120	0.150	
			Feed (mm/min)	51	51	51	51	51	51	51	51	
H	Alloy Steels 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 450 Bhn or ≤ 48 HRc	29 (23-35)	RPM	6140	3070	1535	1151	921	767	576	460
			Fr	0.019	0.037	0.074	0.099	0.124	0.149	0.199	0.248	
			Feed (mm/min)	114	114	114	114	114	114	114	114	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	24 (20-29)	RPM	5170	2585	1293	969	776	646	485	388
			Fr	0.017	0.034	0.069	0.092	0.115	0.138	0.183	0.229	
			Feed (mm/min)	89	89	89	89	89	89	89	89	

reduce rates when material is harder than listed, when drilling conditions are not optimum, or coolant is not available
 rates shown are for drilling into a flat surface and should be lowered using the reduction multiplier when the workpiece is angled or curved
 reduce rates 10 to 20 percent when using drills without internal coolant
 always use the shortest overhang possible
 longer drills may require a spot drill operation to avoid walking on entry
 internal coolant required in ISO S and M material groups or when drilling depth exceeds 3xD
 Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

angle °	reduction multiplier	
	speed x	feed x
up to 30	1.0	0.6
over 30	0.7	0.4

General Application End Mills





Milling

SERIES	GENERAL APPLICATION END MILLS DESCRIPTION	PAGE	S&F PAGE
3	2 Flute Square End Standard Length Fractional	280	320, 321
3L	2 Flute Square End Long Reach Fractional	280	320, 321
3EL	2 Flute Square End Extended Length Fractional	280	320, 321
3CR	2 Flute Corner Radius Standard Length Fractional	280	320, 321
3M	2 Flute Square End Standard Length Metric	285	326
3XLM	2 Flute Square End Extra Long Reach Metric	285	326
3B	2 Flute Ball End Standard Length Fractional	283	320
3LB	2 Flute Ball End Long Reach Fractional	283	320
3ELB	2 Flute Ball End Extended Length Fractional	283	320
3MB	2 Flute Ball End Standard Length Metric	286	326
3XLMB	2 Flute Ball End Extra Long Reach Metric	286	326
15	2 Flute Double End Square Stub Fractional	287	321
15M	2 Flute Double End Square Stub Metric	289	326
15B	2 Flute Double End Ball Stub Fractional	288	322
15MB	2 Flute Double End Ball Stub Metric	290	326
17	2 Flute Square End Stub Fractional	291	321
17M	2 Flute Square End Stub Metric	291	326
52	2 Flute High Shear Square End Standard Length Fractional	292	323
52M	2 Flute High Shear Square End Standard Length Metric	292	328
59	2 Flute Square End Long Reach Fractional	293	321
59M	2 Flute Square End Long Reach Metric	295	326
59B	2 Flute Ball End Long Reach Fractional	294	321
59MB	2 Flute Ball End Long Reach Metric	296	327
5	3 Flute Square End Standard Length Fractional	297	321
5M	3 Flute Square End Standard Length Metric	299	326
5XLM	3 Flute Square End Extra Long Reach Metric	299	326
5B	3 Flute Ball End Standard Length Fractional	298	321
5MB	3 Flute Ball End Standard Length Metric	300	326
5XLMB	3 Flute Ball End Extra Long Reach Metric	300	326
23	3 Flute Tapered Square End Standard Length Fractional	301	321
24	3 Flute Tapered Corner Radius Standard Length Fractional	302	321
1	4 Flute Square End Standard Length Fractional	303	320, 321
1L	4 Flute Square End Long Reach Fractional	303	320, 321
1EL	4 Flute Square End Extended Length Fractional	303	320, 321
1CR	4 Flute Corner Radius Standard Length Fractional	303	320, 321
1M	4 Flute Square End Standard Length Metric	309	326
1XLM	4 Flute Square End Extra Long Reach Metric	309	326
1MCR	4 Flute Corner Radius Standard Length Metric	309	326

Speed & Feed Recommendations listed at the end of this section

SERIES	GENERAL APPLICATION END MILLS DESCRIPTION	PAGE	S&F PAGE
1B	4 Flute Ball End Standard Length Fractional	307	320
1LB	4 Flute Ball End Long Reach Fractional	307	320
1ELB	4 Flute Ball End Extended Length Fractional	307	320
1MB	4 Flute Ball End Standard Length Metric	312	326
1XLMB	4 Flute Ball End Extra Long Reach Metric	312	326
14	4 Flute Double End Square Stub Fractional	313	321
14M	4 Flute Double End Square Stub Metric	313	326
14B	4 Flute Double End Ball Stub Fractional	314	321
14MB	4 Flute Double End Ball Stub Metric	314	326
16	4 Flute Square End Stub Fractional	303	321
16M	4 Flute Square End Stub Metric	309	326
54	4 Flute High Shear Square End Standard Length Fractional	315	323
54M	4 Flute High Shear Square End Standard Length Metric	315	328
61	Multi-Flute Coarse Pitch Rougher Fractional	316	324
61M	Multi-Flute Coarse Pitch Rougher Metric	316	330
62	Multi-Flute Fine Pitch Rougher Fractional	317	325
62M	Multi-Flute Fine Pitch Rougher Metric	317	331
End Mill Sets	2, 3, & 4 Flute Square End Series 1, 3, 5, 14, 15	318	320, 321
	2, 3, & 4 Flute Ball End Series 1B, 3B, 5B, 14B, 15B	319	320, 321

Speed & Feed Recommendations listed at the end of this section

Fresado

SERIE	DESCRIPCIÓN DE FRESAS DE USO GENERAL	PÁGINA	S&F PÁGINA
3	2 filos, punta cuadrada, longitud estándar, fraccional	280	320, 321
3L	2 filos, punta cuadrada, largo alcance, fraccional	280	320, 321
3EL	2 filos, punta cuadrada, longitud extendida, fraccional	280	320, 321
3CR	2 filos, radio angulado, longitud estándar, fraccional	280	320, 321
3M	2 filos, punta cuadrada, longitud estándar, métrico	285	326
3XLM	2 filos, punta cuadrada, alcance extralargo, métrico	285	326
3B	2 filos, punta esférica, longitud estándar, fraccional	283	320
3LB	2 filos, punta esférica, largo alcance, fraccional	283	320
3ELB	2 filos, punta esférica, longitud extendida, fraccional	283	320
3MB	2 filos, punta esférica, longitud estándar, métrico	286	326
3XLMB	2 filos, punta esférica, alcance extralargo, métrico	286	326
15	2 filos, pieza doble de punta cuadrada, fraccional	287	321
15M	2 filos, pieza doble de punta cuadrada, métrico	289	326
15B	2 filos, pieza doble de punta esférica, fraccional	288	322
15MB	2 filos, pieza doble de punta esférica, métrico	290	326
17	2 filos, pieza de punta cuadrada, fraccional	291	321

SERIE	DESCRIPCIÓN DE FRESAS DE USO GENERAL	PÁGINA	S&F PÁGINA
17M	2 filos, pieza de punta cuadrada, métrico	291	326
52	2 filos, alto rendimiento, punta cuadrada, longitud estándar, fraccional	292	323
52M	2 filos, alto rendimiento, punta cuadrada, longitud estándar, métrico	292	328
59	2 filos, punta cuadrada, largo alcance, fraccional	293	321
59M	2 filos, punta cuadrada, largo alcance, métrico	295	326
59B	2 filos, punta esférica, largo alcance, fraccional	294	321
59MB	2 filos, punta esférica, largo alcance, métrico	296	327
5	3 filos, punta cuadrada, longitud estándar, fraccional	297	321
5M	3 filos, punta cuadrada, longitud estándar, métrico	299	326
5XLM	3 filos, punta cuadrada, alcance extralargo, métrico	299	326
5B	3 filos, punta esférica, longitud estándar, fraccional	298	321
5MB	3 filos, punta esférica, longitud estándar, métrico	300	326
5XLMB	3 filos, punta esférica, alcance extralargo, métrico	300	326
23	3 filos, cónico, punta cuadrada, longitud estándar, fraccional	301	321
24	3 filos, cónico, radio angulado, longitud estándar, fraccional	302	321
1	4 filos, punta cuadrada, longitud estándar, fraccional	303	320, 321
1L	4 filos, punta cuadrada, largo alcance, fraccional	303	320, 321
1EL	4 filos, punta cuadrada, longitud extendida, fraccional	303	320, 321
1CR	4 filos, radio angulado, longitud estándar, fraccional	303	320, 321
1M	4 filos, punta cuadrada, longitud estándar, métrico	309	326
1XLM	4 filos, punta cuadrada, alcance extralargo, métrico	309	326
1MCR	4 filos, radio angulado, longitud estándar, métrico	309	326
1B	4 filos, punta esférica, longitud estándar, fraccional	307	320
1LB	4 filos, punta esférica, largo alcance, fraccional	307	320
1ELB	4 filos, punta esférica, longitud extendida, fraccional	307	320
1MB	4 filos, punta esférica, longitud estándar, métrico	312	326
1XLMB	4 filos, punta esférica, alcance extralargo, métrico	312	326
14	4 filos, pieza doble de punta cuadrada, fraccional	313	321
14M	4 filos, pieza doble de punta cuadrada, métrico	313	326
14B	4 filos, pieza doble de punta esférica, fraccional	314	321
14MB	4 filos, pieza doble de punta esférica, métrico	314	326
16	4 filos, pieza de punta cuadrada, fraccional	303	321
16M	4 filos, pieza de punta cuadrada, métrico	309	326
54	4 filos, alto rendimiento, punta cuadrada, longitud estándar, fraccional	315	323
54M	4 filos, alto rendimiento, punta cuadrada, longitud estándar, métrico	315	328
61	Filo múltiple, paso grueso, desbastador, fraccional	316	324
61M	Filo múltiple, paso grueso, desbastador, métrico	316	330
62	Filo múltiple, paso fino, desbastador, fraccional	317	325
62M	Filo múltiple, paso fino, desbastador, métrico	317	331
Juegos de fresas	2, 3 y 4 filos, punta cuadrada, series 1, 3, 5, 14, 15	318	320, 321
	2, 3 y 4 filos, punta esférica, series 1B, 3B, 5B, 14B, 15B	319	320, 321

Recomendaciones de Velocidad y Avance mostrados al final de esta sección.

SÉRIES	DESCRIPTION DE FRAISES À USAGE GÉNÉRAL	PAGE	S&F PAGE
3	2 dents non rayonné longueur standard (fractionnel)	280	320, 321
3L	2 dents non rayonné longue portée (fractionnel)	280	320, 321
3EL	2 dents non rayonné extra-long (fractionnel)	280	320, 321
3CR	2 dents rayonné longueur standard (fractionnel)	280	320, 321
3M	2 dents non rayonné longueur standard (métrique)	285	326
3XLM	2 dents non rayonné portée extra-longue (métrique)	285	326
3B	2 dents à bout hémisphérique longueur standard (fractionnel)	283	320
3LB	2 dents à bout hémisphérique longue portée (fractionnel)	283	320
3ELB	2 dents à bout hémisphérique extra-long (fractionnel)	283	320
3MB	2 dents à bout hémisphérique longueur standard (métrique)	286	326
3XLMB	2 dents à bout hémisphérique portée extra-longue (métrique)	286	326
15	2 dents à double bouts plats court (fractionnel)	287	321
15M	2 dents à double bouts plats court (métrique)	289	326
15B	2 dents à double bouts hémisphériques court (fractionnel)	288	322
15MB	2 dents à double bouts hémisphériques court (métrique)	290	326
17	2 dents non rayonné court (fractionnel)	291	321
17M	2 dents non rayonné court (métrique)	291	326
52	2 dents cisaillement élevé non rayonné longueur standard (fractionnel)	292	323
52M	2 dents cisaillement élevé non rayonné longueur standard (métrique)	292	328
59	2 dents non rayonné longue portée (fractionnel)	293	321
59M	2 dents non rayonné longue portée (métrique)	295	326
59B	2 dents à bout hémisphérique longue portée (fractionnel)	294	321
59MB	2 dents à bout hémisphérique longue portée (métrique)	296	327
5	3 dents non rayonné longueur standard (fractionnel)	297	321
5M	3 dents non rayonné longueur standard (métrique)	299	326
5XLM	3 dents non rayonné portée extra-longue (métrique)	299	326
5B	3 dents à bout hémisphérique longueur standard (fractionnel)	298	321
5MB	3 dents à bout hémisphérique longueur standard (métrique)	300	326
5XLMB	3 dents à bout hémisphérique portée extra-longue (métrique)	300	326
23	3 dents conique non rayonné longueur standard (fractionnel)	301	321
24	3 dents conique rayonné longueur standard (fractionnel)	302	321
1	4 dents non rayonné longueur standard (fractionnel)	303	320, 321
1L	4 dents non rayonné longue portée (fractionnel)	303	320, 321
1EL	4 dents non rayonné extra-long (fractionnel)	303	320, 321
1CR	4 dents rayonné longueur standard (fractionnel)	303	320, 321
1M	4 dents non rayonné longueur standard (métrique)	309	326
1XLM	4 dents non rayonné portée extra-longue (métrique)	309	326
1MCR	4 dents rayonné longueur standard (métrique)	309	326
1B	4 dents à bout hémisphérique longueur standard (fractionnel)	307	320
1LB	4 dents à bout hémisphérique longue portée (fractionnel)	307	320

SÉRIES	DESCRIPTION DE FRAISES À USAGE GÉNÉRAL	PAGE	S&F PAGE
1ELB	4 dents à bout hémisphérique extra-long (fractionnel)	307	320
1MB	4 dents à bout hémisphérique longueur standard (métrique)	312	326
1XLMB	4 dents à bout hémisphérique portée extra-longue (métrique)	312	326
14	4 dents à double bouts plats court (fractionnel)	313	321
14M	4 dents à double bouts plats court (métrique)	313	326
14B	4 dents à double bouts hémisphériques court (fractionnel)	314	321
14MB	4 dents à double bouts hémisphériques court (métrique)	314	326
16	4 dents non rayonné court (fractionnel)	303	321
16M	4 dents non rayonné court (métrique)	309	326
54	4 dents cisaillement élevé non rayonné longueur standard (fractionnel)	315	323
54M	4 dents cisaillement élevé non rayonné longueur standard (métrique)	315	328
61	Multi-dents à pas gros d'ébauche (fractionnel)	316	324
61M	Multi-dents à pas gros d'ébauche (métrique)	316	330
62	Multi-dents à pas fin d'ébauche (fractionnel)	317	325
62M	Multi-dents à pas fin d'ébauche (métrique)	317	331
Jeux de fraises	2, 3, & 4 Série goujure non rayonné 1,3,5,14,15	318	320, 321
	2, 3, & 4 Série goujure à bout hémisphérique 15B, 15MB, 15B, 15MB, 15B, 15MB	319	320, 321


Les avances et les vitesses recommandées se trouvent à la fin du chapitre.

SERIE	BESCHREIBUNG DER STANDARD-SCHAFTFRÄSER	SEITE	S&F SEITE
3	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, Standardlänge	280	320, 321
3L	Zölliger Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	280	320, 321
3EL	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, extra lang	280	320, 321
3CR	Zölliger Schaftfräser mit 2 Schneiden mit Eckenradien, Standardlänge	280	320, 321
3M	Schaftfräser mit 2 Schneiden ohne Eckenradien, Standardlänge	285	326
3XLM	Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	285	326
3B	Zölliger Radiuschaftfräser mit 2 Schneiden, Standardlänge	283	320
3LB	Zölliger Langloch-Radiuschaftfräser mit 2 Schneiden	283	320
3ELB	Zölliger Schaftfräser mit 2 Schneiden, Extra lang	283	320
3MB	Schaftfräser mit 2 Schneiden, Standardlänge	286	326
3XLMB	Superlangloch-Schaftfräser mit 2 Schneiden	286	326
15	Zölliger Schaftfräser mit 2 Schneiden, kurze Ausführung	287	321
15M	Schaftfräser mit 2 Schneiden, kurze Ausführung	289	326
15B	Zölliger Doppelend-Radiuschaftfräser mit 2 Schneiden, kurze Ausführung	288	322
15MB	Doppelend-Radiuschaftfräser mit 2 Schneiden, kurze Ausführung	290	326
17	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, kurze Ausführung	291	321
17M	Schaftfräser mit 2 Schneiden ohne Eckenradien, kurze Ausführung	291	326
52	Zölliger Schaftfräser hoher Scherfestigkeit mit 2 Schneiden ohne Eckenradien, Standardlänge	292	323
52M	Schaftfräser hoher Scherfestigkeit mit 2 Schneiden ohne Eckenradien, Standardlänge	292	328
59	Zölliger Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	293	321
59M	Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	295	326
59B	Zölliger Langloch-Radiuschaftfräser mit 2 Schneiden	294	321
59MB	Langloch-Radiuschaftfräser mit 2 Schneiden	296	327
5	Zölliger Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	297	321
5M	Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	299	326
5XLM	Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	299	326
5B	Zölliger Schaftfräser mit 3 Schneiden, Standardlänge	298	321
5MB	Schaftfräser mit 3 Schneiden, Standardlänge	300	326
5XLMB	Langloch-Schaftfräser mit 3 Schneiden	300	326
23	Zölliger Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	301	321
24	Zölliger Schaftfräser mit 3 Schneiden mit Eckenradien, Standardlänge	302	321
1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, Standardlänge	303	320, 321
1L	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien	303	320, 321
1EL	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, extra lang	303	320, 321
1CR	Zölliger Schaftfräser mit 4 Schneiden mit Eckenradien, Standardlänge	303	320, 321
1M	Schaftfräser mit 4 Schneiden ohne Eckenradien, Standardlänge	309	326
1XLM	Superlangloch-Schaftfräser mit 4 Schneiden ohne Eckenradien	309	326
1MCR	Schaftfräser mit 4 Schneiden mit Eckenradien, Standardlänge	309	326
1B	Zölliger Schaftfräser mit 4 Schneiden, Standardlänge	307	320


SERIE	BESCHREIBUNG DER STANDARD-SCHAFTFRÄSER	SEITE	S&F SEITE
1LB	Zölliger Langloch-Radiusschaftfräser mit 4 Schneiden	307	320
1ELB	Zölliger Schaftfräser mit 4 Schneiden, Extra lang	307	320
1MB	Schaftfräser mit 4 Schneiden, Standardlänge	312	326
1XLMB	Langloch-Radiusschaftfräser mit 4 Schneiden	312	326
14	Zölliger Schaftfräser mit 4 Schneiden, kurze Ausführung	313	321
14M	Schaftfräser mit 4 Schneiden, kurze Ausführung	313	326
14B	Zölliger Doppelend-Radiusschaftfräser mit 4 Schneiden, kurze Ausführung	314	321
14MB	Doppelend-Radiusschaftfräser mit 4 Schneiden, kurze Ausführung	314	326
16	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, kurze Ausführung	303	321
16M	Schaftfräser mit 4 Schneiden ohne Eckenradien, kurze Ausführung	309	326
54	Zölliger Schaftfräser hoher Scherfestigkeit mit 4 Schneiden ohne Eckenradien, Standardlänge	315	323
54M	Schaftfräser hoher Scherfestigkeit mit 4 Schneiden ohne Eckenradien, Standardlänge	315	328
61	Zölliger mehrschneidiger fein verzahnter Schruppfräser	316	324
61M	Mehrschneidiger fein verzahnter Schruppfräser	316	330
62	Zölliger mehrschneidiger fein verzahnter Schruppfräser	317	325
62M	Mehrschneidiger fein verzahnter Schruppfräser	317	331
Richtwerte zum Fräsen	Schaftfräser mit 2, 3 und 4 Schneiden ohne Eckenradien, Serien 1, 3, 5, 14, 15	318	320, 321
	Radiusschaftfräser mit 2, 3 und 4 Schneiden, Serien 1B, 3B, 5B, 14B, 15B	319	320, 321

Schnittwertempfehlungen finden Sie am Ende dieses Abschnitts

2 Flute Square End • 2 Flute Corner Radius



**3•3L•
3EL•3CR**
FRACTIONAL SERIES

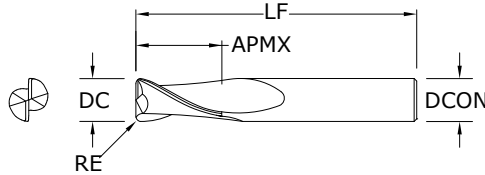

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

3CR DC = -0.001/-0.002

DCON = h_6

RE = +0.000/-0.002


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.kspatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			CORNER RADIUS RE	WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON				UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	—	—		30301	39301	39501	30397	3
1/32	5/64	1-1/2	1/8	—	—		30303	39303	39503	30398	3
3/64	7/64	1-1/2	1/8	—	—		30305	39305	39505	30399	3
*1/16	3/16	1-1/2	1/8	—	—		30307	39307	39507	30400	3
5/64	3/16	1-1/2	1/8	—	—		30309	39309	39509	30435	3
3/32	9/32	1-1/2	1/8	—	—		30311	39311	39511	30436	3
7/64	3/8	1-1/2	1/8	—	—		30313	39313	39513	30437	3
1/8	3/8	1-1/2	1/8	—	—		30377	39377	39577	30469	3
*1/8	1/2	1-1/2	1/8	—	—		30315	39315	39515	30438	3
1/8	1/2	1-1/2	1/8	.015	—		38201	38202	38315	38357	3CR
1/8	1/2	1-1/2	1/8	.020	—		38203	38204	38316	38358	3CR
1/8	3/4	2-1/4	1/8	—	—		33341	31800	31810	31850	3L
1/8	1	3	1/8	—	—		33343	31938	31948	31958	3EL
9/64	1/2	2	3/16	—	—		30317	39317	39517	30439	3
5/32	1/2	2	3/16	—	—		30319	39319	39519	30440	3
11/64	5/8	2	3/16	—	—		30321	39321	39521	30441	3
*3/16	5/8	2	3/16	—	—		30323	39323	39523	30442	3
3/16	5/8	2	3/16	.015	—		38209	38210	38317	38359	3CR
3/16	5/8	2	3/16	.020	—		38211	38212	38318	38360	3CR
3/16	5/8	2	3/16	.030	—		38213	38214	38319	38361	3CR
3/16	3/4	2-1/2	3/16	—	—		33301	31820	31825	31851	3L
3/16	1-1/8	3	3/16	—	—		33321	31939	31949	31959	3EL
13/64	5/8	2-1/2	1/4	—	—		30325	39325	39525	30443	3
7/32	5/8	2-1/2	1/4	—	—		30327	39327	39527	30444	3
15/64	3/4	2-1/2	1/4	—	—		30329	39329	39529	30445	3
*1/4	3/4	2-1/2	1/4	—	—		30331	39331	39531	30446	3
1/4	3/4	2-1/2	1/4	.015	—		38219	38220	38320	38362	3CR
1/4	3/4	2-1/2	1/4	.020	—		38221	38222	38321	38363	3CR
1/4	3/4	2-1/2	1/4	.030	—		38223	38224	38322	38364	3CR
1/4	3/4	2-1/2	1/4	.045	—		38225	38226	38323	38365	3CR
1/4	1-1/8	3	1/4	—	—		33303	31802	31812	31852	3L
1/4	1-1/2	4	1/4	—	—		33323	31940	31950	31960	3EL
17/64	3/4	2-1/2	5/16	—	—		30333	39333	39533	30447	3
9/32	3/4	2-1/2	5/16	—	—		30335	39335	39535	30448	3

continued on next page

2 Flute Square End • 2 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000 / -0.002

3CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

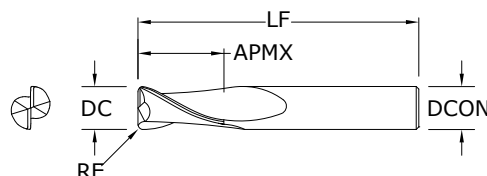

**3•3L•
3EL•3CR**
FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
19/64	13/16	2-1/2	5/16	—		30337	39337	39537	30449	3
*15/16	13/16	2-1/2	5/16	—		30339	39339	39539	30450	3
5/16	13/16	2-1/2	5/16	.015		38231	38232	38324	38366	3CR
5/16	13/16	2-1/2	5/16	.020		38233	38234	38325	38367	3CR
5/16	13/16	2-1/2	5/16	.030		38235	38236	38326	38368	3CR
5/16	13/16	2-1/2	5/16	.045		38237	38238	38327	38369	3CR
5/16	1-1/8	3	5/16	—		33305	31821	31826	31853	3L
5/16	1-5/8	4	5/16	—		33325	31941	31951	31961	3EL
21/64	1	2-1/2	3/8	—		30341	39341	39541	30451	3
11/32	1	2-1/2	3/8	—		30343	39343	39543	30452	3
23/64	1	2-1/2	3/8	—		30345	39345	39545	30453	3
*13/8	1	2-1/2	3/8	—		30347	39347	39547	30454	3
3/8	1	2-1/2	3/8	.015	•	38245	38246	38328	38370	3CR
3/8	1	2-1/2	3/8	.020	•	38247	38248	38329	38371	3CR
3/8	1	2-1/2	3/8	.030	•	38249	38250	38330	38372	3CR
3/8	1	2-1/2	3/8	.045	•	38251	38252	38331	38373	3CR
3/8	1-1/8	3	3/8	—		33307	31804	31814	31854	3L
3/8	1-3/4	4	3/8	—		33327	31942	31952	31962	3EL
25/64	1	2-3/4	7/16	—		30349	39349	39549	30455	3
13/32	1	2-3/4	7/16	—		30351	39351	39551	30456	3
27/64	1	2-3/4	7/16	—		30353	39353	39553	30457	3
7/16	1	2-3/4	7/16	—		30355	39355	39555	30458	3
7/16	2	4-1/2	7/16	—		33309	31822	31827	31855	3L
7/16	3	6	7/16	—		33329	31943	31953	31963	3EL
29/64	1	3	1/2	—		30357	39357	39557	30459	3
15/32	1	3	1/2	—		30359	39359	39559	30460	3
31/64	1	3	1/2	—		30361	39361	39561	30461	3
*11/2	1	3	1/2	—		30363	39363	39563	30462	3
1/2	1	3	1/2	.015	•	38259	38260	38332	38374	3CR
1/2	1	3	1/2	.020	•	38261	38262	38333	38375	3CR
1/2	1	3	1/2	.030	•	38263	38264	38334	38376	3CR
1/2	1	3	1/2	.045	•	38265	38266	38335	38377	3CR
1/2	1	3	1/2	.060	•	38267	38268	38336	38378	3CR
1/2	2	4-1/2	1/2	—		33311	31806	31816	31856	3L


continued on next page

CONTINUED


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

2 Flute Square End • 2 Flute Corner Radius



**3•3L•
3EL•3CR**
FRACTIONAL SERIES

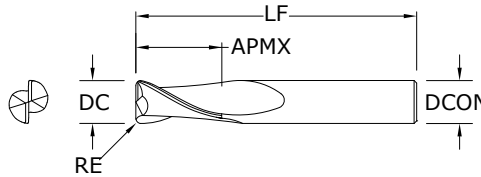

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000 / -0.002

3CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

CONTINUED


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		CORNER RADIUS RE	WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON			UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/2	3	6	1/2	—		33331	31944	31954	31964	3EL
9/16	1-1/8	3-1/2	9/16	—		30365	39365	39565	30463	3
5/8	1-1/4	3-1/2	5/8	—		30367	39367	39567	30464	3
5/8	1-1/4	3-1/2	5/8	.015	•	38273	38274	38337	38379	3CR
5/8	1-1/4	3-1/2	5/8	.020	•	38275	38276	38338	38380	3CR
5/8	1-1/4	3-1/2	5/8	.030	•	38277	38278	38339	38381	3CR
5/8	1-1/4	3-1/2	5/8	.045	•	38279	38280	38340	38382	3CR
5/8	1-1/4	3-1/2	5/8	.060	•	38281	38282	38341	38383	3CR
5/8	1-1/4	3-1/2	5/8	.090	•	38283	38284	38342	38384	3CR
5/8	2-1/4	5	5/8	—		33313	31823	31817	31857	3L
5/8	3	6	5/8	—		33333	31945	31955	31965	3EL
11/16	1-3/8	4	3/4	—		30369	39369	39569	30465	3
3/4	1-1/2	4	3/4	—		30371	39371	39571	30466	3
3/4	1-1/2	4	3/4	.015	•	38287	38288	38343	38385	3CR
3/4	1-1/2	4	3/4	.020	•	38289	38290	38344	38386	3CR
3/4	1-1/2	4	3/4	.030	•	38291	38292	38345	38387	3CR
3/4	1-1/2	4	3/4	.045	•	38293	38294	38346	38388	3CR
3/4	1-1/2	4	3/4	.060	•	38295	38296	38347	38389	3CR
3/4	1-1/2	4	3/4	.090	•	38297	38298	38348	38390	3CR
3/4	1-1/2	4	3/4	.125	•	38299	38300	38349	38391	3CR
3/4	2-1/4	5	3/4	—		33315	31808	31818	31858	3L
3/4	3	6	3/4	—		33335	31946	31956	31966	3EL
7/8	1-1/2	4	7/8	—		30373	39373	39573	30467	3
1	1-1/2	4	1	—		30375	39375	39575	30468	3
1	1-1/2	4	1	.015	•	38301	38302	38350	38392	3CR
1	1-1/2	4	1	.020	•	38303	38304	38351	38393	3CR
1	1-1/2	4	1	.030	•	38305	38306	38352	38394	3CR
1	1-1/2	4	1	.045	•	38307	38308	38353	38395	3CR
1	1-1/2	4	1	.060	•	38309	38310	38354	38396	3CR
1	1-1/2	4	1	.090	•	38311	38312	38355	38397	3CR
1	1-1/2	4	1	.125	•	38313	38314	38356	38398	3CR
1	2-1/4	5	1	—		33317	31824	31819	31859	3L
1	3	6	1	—		33337	31947	31957	31967	3EL
*Series 3 Set					—	30389	39389	39589	30470	3

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

FRACTIONAL 2 Flute Ball End



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


RE = +0.000 / -0.0005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6


RE = +0.000 / -0.001

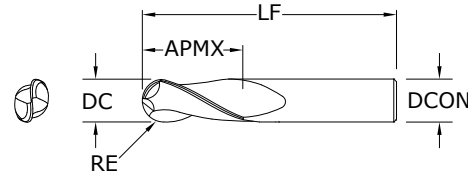

**3B•3LB•
3ELB**
FRACTIONAL SERIES



inch				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	30302	39302	39502	30471	3B
1/32	5/64	1-1/2	1/8	30304	39304	39504	30472	3B
3/64	7/64	1-1/2	1/8	30306	39306	39506	30473	3B
1/16	3/16	1-1/2	1/8	30308	39308	39508	30474	3B
5/64	3/16	1-1/2	1/8	30310	39310	39510	30475	3B
3/32	9/32	1-1/2	1/8	30312	39312	39512	30476	3B
7/64	3/8	1-1/2	1/8	30314	39314	39514	30477	3B
1/8	3/8	1-1/2	1/8	30378	39378	39578	30599	3B
*1/8	1/2	1-1/2	1/8	30316	39316	39516	30478	3B
1/8	3/4	2-1/4	1/8	33342	31830	31840	31890	3LB
1/8	1	3	1/8	33344	31968	31978	31988	3ELB
9/64	1/2	2	3/16	30318	39318	39518	30479	3B
5/32	1/2	2	3/16	30320	39320	39520	30480	3B
11/64	5/8	2	3/16	30322	39322	39522	30481	3B
*3/16	5/8	2	3/16	30324	39324	39524	30482	3B
3/16	3/4	2-1/2	3/16	33302	31831	31841	31891	3LB
3/16	1-1/8	3	3/16	33322	31969	31979	31989	3ELB
13/64	5/8	2-1/2	1/4	30326	39326	39526	30483	3B
7/32	5/8	2-1/2	1/4	30328	39328	39528	30484	3B
15/64	3/4	2-1/2	1/4	30330	39330	39530	30485	3B
*1/4	3/4	2-1/2	1/4	30332	39332	39532	30486	3B
1/4	1-1/8	3	1/4	33304	31832	31842	31892	3LB
1/4	1-1/2	4	1/4	33324	31970	31980	31990	3ELB
17/64	3/4	2-1/2	5/16	30334	39334	39534	30487	3B
9/32	3/4	2-1/2	5/16	30336	39336	39536	30488	3B
19/64	13/16	2-1/2	5/16	30338	39338	39538	30489	3B
*5/16	13/16	2-1/2	5/16	30340	39340	39540	30490	3B
5/16	1-1/8	3	5/16	33306	31833	31843	31893	3LB
5/16	1-5/8	4	5/16	33326	31971	31981	31991	3ELB
21/64	1	2-1/2	3/8	30342	39342	39542	30491	3B
11/32	1	2-1/2	3/8	30344	39344	39544	30492	3B
23/64	1	2-1/2	3/8	30346	39346	39546	30493	3B

continued on next page



For patent
information visit
www.ksptpatents.com

2 Flute Ball End

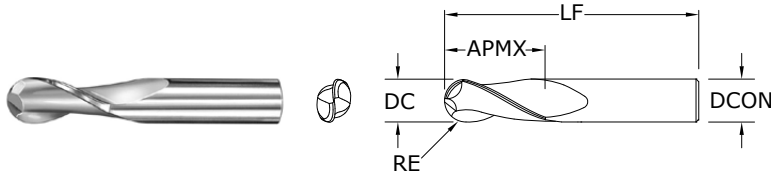
**3B•3LB•
3ELB**
FRACTIONAL SERIES
**TOLERANCES (inch)****<1/8 DIAMETER**

DC = +0.000 / -0.001

DCON = h_6


RE = +0.000 / -0.0005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

RE = +0.000 / -0.001




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
*3/8	1	2-1/2	3/8	30348	39348	39548	30494	3B
3/8	1-1/8	3	3/8	33308	31834	31844	31894	3LB
3/8	1-3/4	4	3/8	33328	31972	31982	31992	3ELB
25/64	1	2-3/4	7/16	30350	39350	39550	30495	3B
13/32	1	2-3/4	7/16	30352	39352	39552	30496	3B
27/64	1	2-3/4	7/16	30354	39354	39554	30497	3B
7/16	1	2-3/4	7/16	30356	39356	39556	30498	3B
7/16	2	4-1/2	7/16	33310	31835	31845	31895	3LB
7/16	3	6	7/16	33330	31973	31983	31993	3ELB
29/64	1	3	1/2	30358	39358	39558	30499	3B
15/32	1	3	1/2	30360	39360	39560	30500	3B
31/64	1	3	1/2	30362	39362	39562	30591	3B
*1/2	1	3	1/2	30364	39364	39564	30592	3B
1/2	2	4-1/2	1/2	33312	31836	31846	31896	3LB
1/2	3	6	1/2	33332	31974	31984	31994	3ELB
9/16	1-1/8	3-1/2	9/16	30366	39366	39566	30593	3B
5/8	1-1/4	3-1/2	5/8	30368	39368	39568	30594	3B
5/8	2-1/4	5	5/8	33314	31837	31847	31897	3LB
5/8	3	6	5/8	33334	31975	31985	31995	3ELB
11/16	1-3/8	4	3/4	30370	39370	39570	30595	3B
3/4	1-1/2	4	3/4	30372	39372	39572	30596	3B
3/4	2-1/4	5	3/4	33316	31838	31848	31898	3LB
3/4	3	6	3/4	33336	31976	31986	31996	3ELB
7/8	1-1/2	4	7/8	30374	39374	39574	30597	3B
1	1-1/2	4	1	30376	39376	39576	30598	3B
1	2-1/4	5	1	33318	31839	31849	31899	3LB
1	3	6	1	33338	31977	31987	31997	3ELB
*Series 3B Set				30390	39390	39590	30600	3B

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000/-0.0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000/-0.0508

DCON = h_6

RE = +0,0000/-0.0508

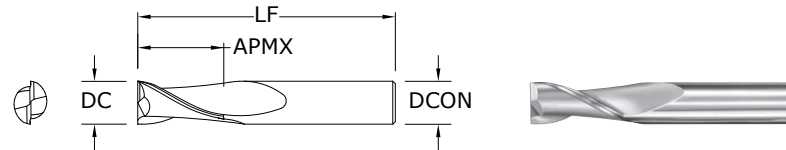

**3M·
3XLM**
METRIC SERIES

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40305	48628	48650	48671	3M
1,5	4,5	38,0	3,0	40309	48629	48651	48672	3M
2,0	6,3	38,0	3,0	40313	48630	48652	48673	3M
2,5	9,5	38,0	3,0	40317	48631	48653	48674	3M
3,0	12,0	38,0	3,0	40321	48632	48654	48675	3M
3,0	25,0	75,0	3,0	43301	49427	49440	49453	3XLM
3,5	12,0	50,0	4,0	40325	48633	48655	48676	3M
4,0	14,0	50,0	4,0	40329	48634	48656	48677	3M
4,0	25,0	75,0	4,0	43303	49428	49441	49454	3XLM
4,5	16,0	50,0	6,0	40333	48635	48657	48678	3M
5,0	16,0	50,0	6,0	40337	48636	48658	48679	3M
5,0	25,0	75,0	5,0	43307	49430	49443	49456	3XLM
6,0	19,0	50,0	6,0	40341	48637	48659	48680	3M
6,0	25,0	75,0	6,0	43305	49429	49442	49455	3XLM
7,0	19,0	63,0	8,0	40345	48638	48660	48681	3M
8,0	20,0	63,0	8,0	40349	48639	48661	48682	3M
8,0	25,0	75,0	8,0	43315	49431	49444	49457	3XLM
9,0	22,0	75,0	10,0	40353	48640	48662	48683	3M
10,0	22,0	75,0	10,0	40357	48641	48663	48684	3M
10,0	38,0	100,0	10,0	43325	49432	49445	49458	3XLM
11,0	25,0	75,0	12,0	40361	48642	48664	48685	3M
12,0	25,0	75,0	12,0	40365	48643	48665	48686	3M
12,0	50,0	100,0	12,0	43335	49433	49446	49459	3XLM
12,0	75,0	150,0	12,0	43345	49434	49447	49460	3XLM
14,0	32,0	89,0	14,0	40369	48644	48666	48687	3M
14,0	75,0	150,0	14,0	43355	49435	49448	49461	3XLM
16,0	32,0	89,0	16,0	40373	48645	48667	48688	3M
16,0	75,0	150,0	16,0	43365	49436	49449	49462	3XLM
18,0	38,0	100,0	18,0	40377	48646	48668	48689	3M
18,0	75,0	150,0	18,0	43375	49437	49450	49463	3XLM
20,0	38,0	100,0	20,0	40381	48647	48669	48690	3M
20,0	75,0	150,0	20,0	43385	49438	49451	49464	3XLM
25,0	38,0	100,0	25,0	40385	48648	48670	48691	3M
25,0	75,0	150,0	25,0	43395	49439	49452	49465	3XLM

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

2 Flute Ball End



3MB• 3XLMB

METRIC SERIES

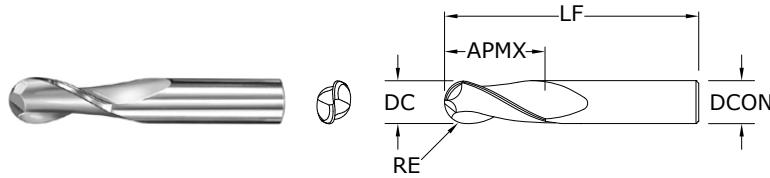

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40306	48692	48714	48735	3MB
1,5	4,5	38,0	3,0	40310	48693	48715	48736	3MB
2,0	6,3	38,0	3,0	40314	48694	48716	48737	3MB
2,5	9,5	38,0	3,0	40318	48695	48717	48738	3MB
3,0	12,0	38,0	3,0	40322	48696	48718	48739	3MB
3,0	25,0	75,0	3,0	43302	49544	49557	49570	3XLMB
3,5	12,0	50,0	4,0	40326	48697	48719	48740	3MB
4,0	14,0	50,0	4,0	40330	48698	48720	48741	3MB
4,0	25,0	75,0	4,0	43304	49545	49558	49571	3XLMB
4,5	16,0	50,0	6,0	40334	48699	48721	48742	3MB
5,0	16,0	50,0	6,0	40338	48700	48722	48743	3MB
5,0	25,0	75,0	5,0	43308	49547	49560	49573	3XLMB
6,0	19,0	50,0	6,0	40342	48701	48723	48744	3MB
6,0	25,0	75,0	6,0	43306	49546	49559	49572	3XLMB
7,0	19,0	63,0	8,0	40346	48702	48724	48745	3MB
8,0	20,0	63,0	8,0	40350	48703	48725	48746	3MB
8,0	25,0	75,0	8,0	43316	49548	49561	49574	3XLMB
9,0	22,0	75,0	10,0	40354	48704	48726	48747	3MB
10,0	22,0	75,0	10,0	40358	48705	48727	48748	3MB
10,0	38,0	100,0	10,0	43326	49549	49562	49575	3XLMB
11,0	25,0	75,0	12,0	40362	48706	48728	48749	3MB
12,0	25,0	75,0	12,0	40366	48707	48729	48750	3MB
12,0	50,0	100,0	12,0	43336	49550	49563	49576	3XLMB
12,0	75,0	150,0	12,0	43346	49551	49564	49577	3XLMB
14,0	32,0	89,0	14,0	40370	48708	48730	48751	3MB
14,0	75,0	150,0	14,0	43356	49552	49565	49578	3XLMB
16,0	32,0	89,0	16,0	40374	48709	48731	48752	3MB
16,0	75,0	150,0	16,0	43366	49553	49566	49579	3XLMB
18,0	38,0	100,0	18,0	40378	48710	48732	48753	3MB
18,0	75,0	150,0	18,0	43376	49554	49567	49580	3XLMB
20,0	38,0	100,0	20,0	40382	48711	48733	48754	3MB
20,0	75,0	150,0	20,0	43386	49555	49568	49581	3XLMB
25,0	38,0	100,0	25,0	40386	48712	48734	48755	3MB
25,0	75,0	150,0	25,0	43396	49556	49569	49582	3XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL 2 Flute Double End

TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

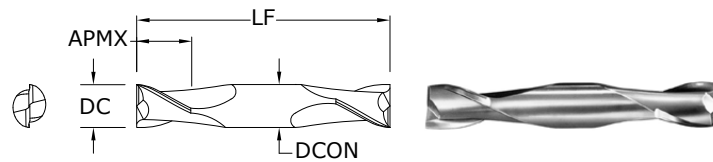


15
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31501	31541	39651	31316
3/64	3/32	1-1/2	1/8	31503	31543	39653	31317
1/16	1/8	1-1/2	1/8	31505	31545	39655	31318
5/64	1/8	1-1/2	1/8	31507	31547	39657	31319
3/32	3/16	1-1/2	1/8	31509	31549	39659	31320
7/64	3/16	1-1/2	1/8	31511	31551	39661	31321
*1/8	1/4	1-1/2	1/8	31513	31553	39663	31322
9/64	5/16	2	3/16	31515	31555	39665	31323
5/32	5/16	2	3/16	31517	31557	39667	31324
11/64	5/16	2	3/16	31519	31559	39669	31325
*3/16	3/8	2	3/16	31521	31561	39671	31326
13/64	1/2	2-1/2	1/4	31523	31563	39673	31327
7/32	1/2	2-1/2	1/4	31525	31565	39675	31328
15/64	1/2	2-1/2	1/4	31527	31567	39677	31329
*1/4	1/2	2-1/2	1/4	31529	31569	39679	31330
9/32	1/2	2-1/2	5/16	31531	31571	39681	31331
*5/16	1/2	2-1/2	5/16	31533	31573	39683	31332
*3/8	9/16	2-1/2	3/8	31535	31575	39685	31333
7/16	9/16	2-3/4	7/16	31537	31577	39687	31334
*1/2	5/8	3	1/2	31539	31579	39689	31335
*Series 15 Set				31589	31581	39691	31336

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

2 Flute Double End Ball End



15B

FRACTIONAL SERIES

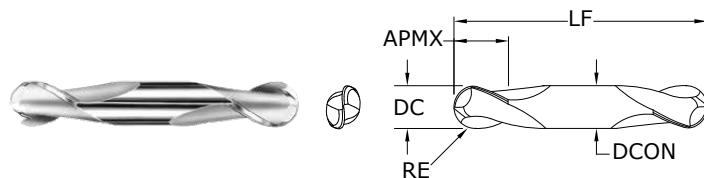

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

RE = +0.000 / -0.0005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

RE = +0.000 / -0.001

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31502	31542	39652	31337
3/64	3/32	1-1/2	1/8	31504	31544	39654	31338
1/16	1/8	1-1/2	1/8	31506	31546	39656	31339
5/64	1/8	1-1/2	1/8	31508	31548	39658	31340
3/32	3/16	1-1/2	1/8	31510	31550	39660	31341
7/64	3/16	1-1/2	1/8	31512	31552	39662	31342
*1/8	1/4	1-1/2	1/8	31514	31554	39664	31343
9/64	5/16	2	3/16	31516	31556	39666	31344
5/32	5/16	2	3/16	31518	31558	39668	31345
11/64	5/16	2	3/16	31520	31560	39670	31346
*3/16	3/8	2	3/16	31522	31562	39672	31347
13/64	1/2	2-1/2	1/4	31524	31564	39674	31348
7/32	1/2	2-1/2	1/4	31526	31566	39676	31349
15/64	1/2	2-1/2	1/4	31528	31568	39678	31350
*1/4	1/2	2-1/2	1/4	31530	31570	39680	31351
9/32	1/2	2-1/2	5/16	31532	31572	39682	31352
*5/16	1/2	2-1/2	5/16	31534	31574	39684	31353
*3/8	9/16	2-1/2	3/8	31536	31576	39686	31354
7/16	9/16	2-3/4	7/16	31538	31578	39688	31355
*1/2	5/8	3	1/2	31540	31580	39690	31356
*Series 15B Set				31590	31582	39692	31357

RE = 1/2 Cutting Diameter (DC)

METRIC

2 Flute Double End



TOLERANCES (mm)

<3 DIAMETER


DC = +0,0000 / -0,0254

DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

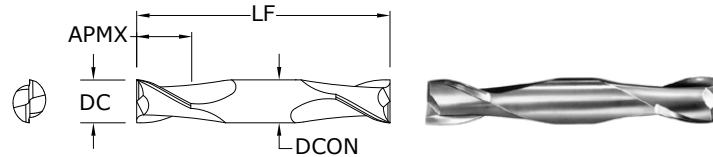


15M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41505	49010	49031	49052
1,5	3,0	38,0	3,0	41509	49011	49032	49053
2,0	4,0	38,0	3,0	41513	49012	49033	49054
2,5	5,0	38,0	3,0	41517	49013	49034	49055
3,0	6,0	38,0	3,0	41521	49014	49035	49056
3,5	7,0	50,0	4,0	41525	49015	49036	49057
4,0	8,0	50,0	4,0	41529	49016	49037	49058
4,5	9,5	63,0	4,5	41533	49017	49038	49059
5,0	10,0	63,0	5,0	41537	49018	49039	49060
6,0	12,0	63,0	6,0	41541	49019	49040	49061
7,0	12,0	63,0	8,0	41545	49020	49041	49062
8,0	12,0	63,0	8,0	41549	49021	49042	49063
9,0	14,0	75,0	9,0	41553	49022	49043	49064
10,0	14,0	75,0	10,0	41557	49023	49044	49065
11,0	14,0	75,0	12,0	41561	49024	49045	49066
12,0	16,0	75,0	12,0	41565	49025	49046	49067


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

2 Flute Double End Ball End



15MB
METRIC SERIES

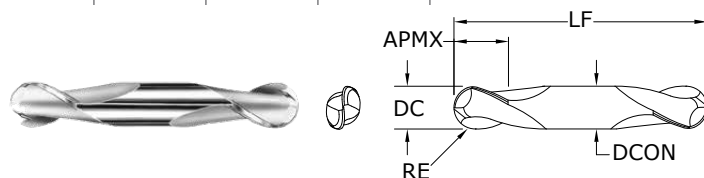

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_6


RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_6

RE = +0,0000 / -0.0254



For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41506	49073	49094	49115
1,5	3,0	38,0	3,0	41510	49074	49095	49116
2,0	4,0	38,0	3,0	41514	49075	49096	49117
2,5	5,0	38,0	3,0	41518	49076	49097	49118
3,0	6,0	38,0	3,0	41522	49077	49098	49119
3,5	7,0	50,0	4,0	41526	49078	49099	49120
4,0	8,0	50,0	4,0	41530	49079	49100	49121
4,5	9,5	63,0	4,5	41534	49080	49101	49122
5,0	10,0	63,0	5,0	41538	49081	49102	49123
6,0	12,0	63,0	6,0	41542	49082	49103	49124
7,0	12,0	63,0	8,0	41546	49083	49104	49125
8,0	12,0	63,0	8,0	41550	49084	49105	49126
9,0	14,0	75,0	9,0	41554	49085	49106	49127
10,0	14,0	75,0	10,0	41558	49086	49107	49128
11,0	14,0	75,0	12,0	41562	49087	49108	49129
12,0	16,0	75,0	12,0	41566	49088	49109	49130

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End Stub

TOLERANCES (inch)


<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

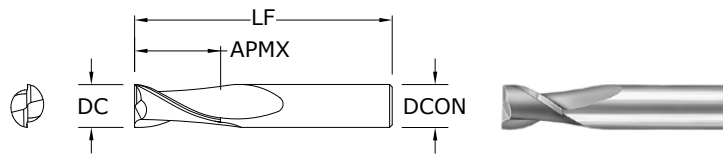DCON = h_6 
17
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/16	1/8	1-1/2	1/8	31701	31750	31303	31358
3/32	3/16	1-1/2	1/8	31703	31751	31304	31359
1/8	1/4	1-1/2	1/8	31705	31752	31305	31360
5/32	5/16	2	3/16	31707	31753	31306	31361
3/16	3/8	2	3/16	31709	31754	31307	31362
7/32	7/16	2	1/4	31711	31755	31308	31363
1/4	1/2	2	1/4	31713	31756	31309	31364
5/16	1/2	2	5/16	31715	31757	31310	31365
3/8	5/8	2	3/8	31717	31758	31311	31366
7/16	5/8	2-1/2	7/16	31719	31759	31312	31367
1/2	5/8	2-1/2	1/2	31721	31760	31313	31368
5/8	3/4	3	5/8	31723	31761	31314	31369
3/4	1	3	3/4	31725	31762	31315	31370

- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)


<3 DIAMETER

DC = +0.0000/-0.0254

DCON = h_6

≥3 DIAMETER

DC = +0.0000/-0.0508

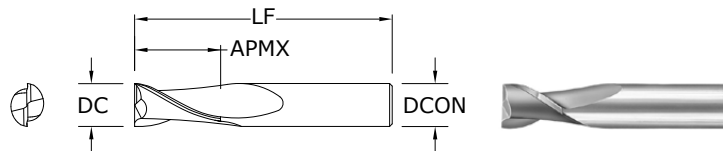
DCON = h_6 
17M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41705	49262	49283	49304
1,5	3,0	38,0	3,0	41709	49263	49284	49305
2,0	4,0	38,0	3,0	41713	49264	49285	49306
2,5	5,0	38,0	3,0	41717	49265	49286	49307
3,0	6,0	38,0	3,0	41721	49266	49287	49308
3,5	7,0	50,0	4,0	41725	49267	49288	49309
4,0	8,0	50,0	4,0	41729	49268	49289	49310
4,5	9,5	50,0	4,5	41733	49269	49290	49311
5,0	10,0	50,0	5,0	41737	49270	49291	49312
6,0	12,0	50,0	6,0	41741	49271	49292	49313
7,0	12,0	50,0	8,0	41745	49272	49293	49314
8,0	12,0	50,0	8,0	41749	49273	49294	49315
9,0	14,0	50,0	9,0	41753	49274	49295	49316
10,0	16,0	50,0	10,0	41757	49275	49296	49317
11,0	19,0	63,0	12,0	41761	49276	49297	49318
12,0	19,0	63,0	12,0	41765	49277	49298	49319

- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

2 Flute High Shear



52

FRACTIONAL SERIES

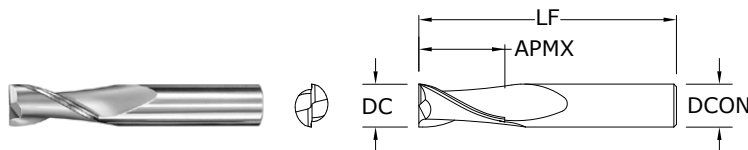

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

inch

EDP NO.


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
1/16	3/16	1-1/2	1/8	35273	35300
3/32	3/8	1-1/2	1/8	35275	35301
1/8	7/16	1-1/2	1/8	35277	35302
5/32	9/16	2	3/16	35278	35303
3/16	9/16	2	3/16	35279	35304
7/32	5/8	2-1/2	1/4	35280	35305
1/4	3/4	2-1/2	1/4	35281	35306
9/32	3/4	2-1/2	5/16	35282	35307
5/16	13/16	2-1/2	5/16	35283	35308
3/8	7/8	2-1/2	3/8	35285	35309
7/16	1	2-3/4	7/16	35287	35310
1/2	1	3	1/2	35289	35311
9/16	1-1/8	3-1/2	9/16	35291	35312
5/8	1-1/4	3-1/2	5/8	35293	35313
3/4	1-1/2	4	3/4	35295	35314
1	1-1/2	4	1	35297	35315

NON-FERROUS

For patent
information visit
www.ksptpatents.com

52M

METRIC SERIES

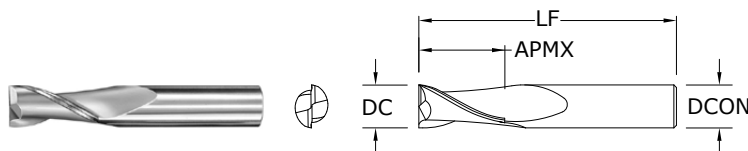

TOLERANCES (mm)

<3 DIAMETER

DC = +0.0000 / -0.0254

DCON = h_6

≥3 DIAMETER

DC = +0.0000 / -0.0508

DCON = h_6

mm

EDP NO.

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
3,0	7,0	38,0	3,0	45277	49829
3,5	7,0	57,0	6,0	45279	49830
4,0	8,0	57,0	6,0	45281	49831
4,5	8,0	57,0	6,0	45283	49832
5,0	10,0	57,0	6,0	45285	49833
6,0	10,0	57,0	6,0	45287	49834
8,0	16,0	63,0	8,0	45289	49835
10,0	19,0	72,0	10,0	45291	49836
12,0	22,0	83,0	12,0	45293	49837
14,0	22,0	83,0	14,0	45295	49838
16,0	26,0	92,0	16,0	45297	49839
20,0	32,0	104,0	20,0	45299	49840

NON-FERROUS

For patent
information visit
www.ksptpatents.com

2 Flute Square End Long Reach

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000 / -0.0012

DCON = h_6

>1/4–3/8 DIAMETER


DC = +0.0000 / -0.0016

DCON = h_6

>3/8–3/4 DIAMETER

DC = +0.0000 / -0.0020

DCON = h_6

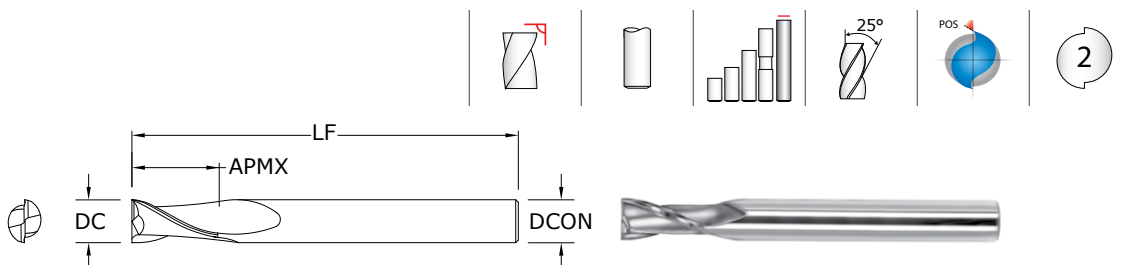

59

FRACTIONAL SERIES

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	32280	32260	32270
3/16	9/16	3	1/4	32281	32261	32271
1/4	5/8	3-1/2	1/4	32282	32262	32272
5/16	11/16	4	5/16	32283	32263	32273
3/8	7/8	4	3/8	32284	32264	32274
1/2	1	4-1/2	1/2	32285	32265	32275
5/8	1-1/8	5	5/8	32286	32266	32276
3/4	1-3/8	5-1/4	3/4	32287	32267	32277

Neck Option Available

STEELS

STAINLESS STEELS



CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

2 Flute Ball End Long Reach

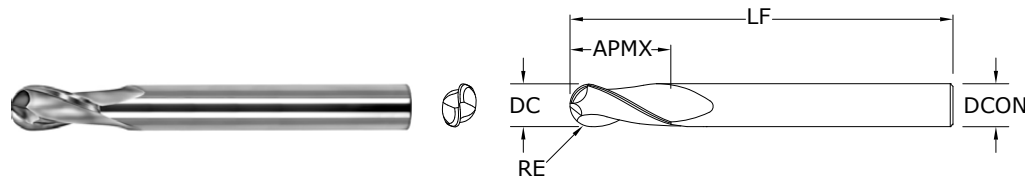

59B

FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–3/4 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	32210	32290	32200
3/16	9/16	3	1/4	32211	32291	32201
1/4	5/8	3-1/2	1/4	32212	32292	32202
5/16	11/16	4	5/16	32213	32293	32203
3/8	7/8	4	3/8	32214	32294	32204
1/2	1	4-1/2	1/2	32215	32295	32205
5/8	1-1/8	5	5/8	32216	32296	32206
3/4	1-3/8	5-1/4	3/4	32217	32297	32207

Neck Option Available

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End Long Reach



TOLERANCES (mm)

3-6 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

>6-10 DIAMETER


DC = +0,0000 / -0,0406

DCON = h_6

>10-20 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

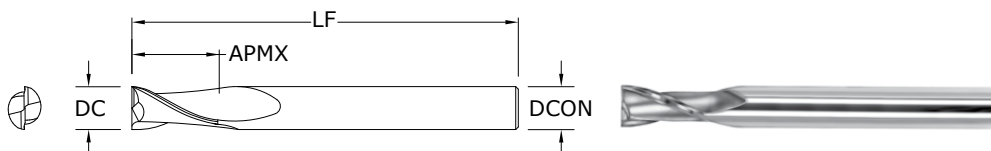

59M

METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
3,0	9,0	60,0	6,0	43910	43920	43930	43950
4,0	12,0	70,0	6,0	43911	43921	43931	43951
6,0	15,0	80,0	6,0	43912	43922	43932	43952
8,0	20,0	89,0	8,0	43913	43923	43933	43953
10,0	25,0	100,0	10,0	43914	43924	43934	43954
12,0	30,0	110,0	12,0	43915	43925	43935	43955
14,0	35,0	120,0	16,0	43916	43926	43936	43956
16,0	40,0	120,0	16,0	43917	43927	43937	43957
18,0	40,0	130,0	20,0	43918	43928	43938	43958
20,0	45,0	130,0	20,0	43919	43929	43939	43959

Neck Option Available

STEELS

STAINLESS STEELS



CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

2 Flute Ball End Long Reach

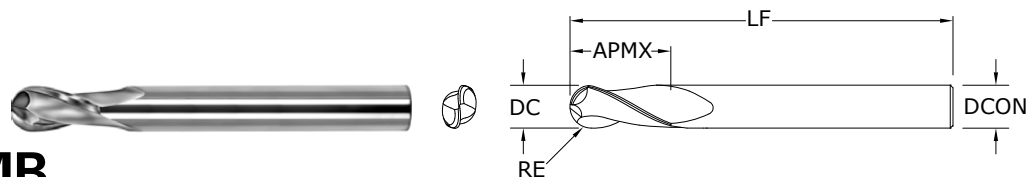

59MB
METRIC SERIES

TOLERANCES (mm)

3–6 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

>6–10 DIAMETER

DC = +0,0000 / -0,0406

DCON = h_6


RE = +0,0000 / -0,0203

>10–20 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254




For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
3,0	9,0	60,0	6,0	43900	49622	49632	49642
4,0	12,0	70,0	6,0	43901	49623	49633	49643
6,0	15,0	80,0	6,0	43902	49624	49634	49644
8,0	20,0	89,0	8,0	43903	49625	49635	49645
10,0	25,0	100,0	10,0	43904	49626	49636	49646
12,0	30,0	110,0	12,0	43905	49627	49637	49647
14,0	35,0	120,0	16,0	43906	49628	49638	49648
16,0	40,0	120,0	16,0	43907	49629	49639	49649
18,0	40,0	130,0	20,0	43908	49630	49640	49650
20,0	45,0	130,0	20,0	43909	49631	49641	49651

Neck Option Available

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL 3 Flute Square End



TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

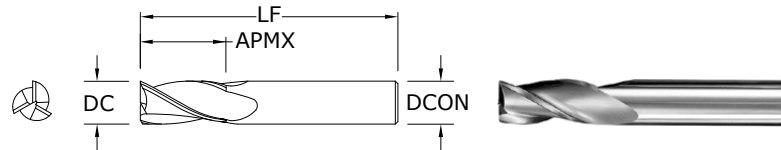

5

FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/64	1/32	1-1/2	1/8	30501	39701	30771	30811
1/32	5/64	1-1/2	1/8	30503	39703	30772	30812
3/64	7/64	1-1/2	1/8	30505	39705	30773	30813
1/16	3/16	1-1/2	1/8	30507	39707	30774	30814
5/64	3/16	1-1/2	1/8	30509	39709	30775	30815
3/32	9/32	1-1/2	1/8	30511	39711	30776	30816
7/64	3/8	1-1/2	1/8	30513	39713	30777	30817
1/8	3/8	1-1/2	1/8	30577	39777	30809	30849
*1/8	1/2	1-1/2	1/8	30515	39715	30778	30818
9/64	1/2	2	3/16	30517	39717	30779	30819
5/32	1/2	2	3/16	30519	39719	30780	30820
11/64	5/8	2	3/16	30521	39721	30781	30821
*3/16	5/8	2	3/16	30523	39723	30782	30822
13/64	5/8	2-1/2	1/4	30525	39725	30783	30823
7/32	5/8	2-1/2	1/4	30527	39727	30784	30824
15/64	3/4	2-1/2	1/4	30529	39729	30785	30825
*1/4	3/4	2-1/2	1/4	30531	39731	30786	30826
17/64	3/4	2-1/2	5/16	30533	39733	30787	30827
9/32	3/4	2-1/2	5/16	30535	39735	30788	30828
19/64	13/16	2-1/2	5/16	30537	39737	30789	30829
*5/16	13/16	2-1/2	5/16	30539	39739	30790	30830
21/64	1	2-1/2	3/8	30541	39741	30791	30831
11/32	1	2-1/2	3/8	30543	39743	30792	30832
23/64	1	2-1/2	3/8	30545	39745	30793	30833
*3/8	1	2-1/2	3/8	30547	39747	30794	30834
25/64	1	2-3/4	7/16	30549	39749	30795	30835
13/32	1	2-3/4	7/16	30551	39751	30796	30836
27/64	1	2-3/4	7/16	30553	39753	30797	30837
7/16	1	2-3/4	7/16	30555	39755	30798	30838
29/64	1	3	1/2	30557	39757	30799	30839
15/32	1	3	1/2	30559	39759	30800	30840
31/64	1	3	1/2	30561	39761	30801	30841
*1/2	1	3	1/2	30563	39763	30802	30842
9/16	1-1/8	3-1/2	9/16	30565	39765	30803	30843
5/8	1-1/4	3-1/2	5/8	30567	39767	30804	30844
11/16	1-3/8	4	3/4	30569	39769	30805	30845
3/4	1-1/2	4	3/4	30571	39771	30806	30846
7/8	1-1/2	4	7/8	30573	39773	30807	30847
1	1-1/2	4	1	30575	39775	30808	30848
*Series 5 Set				30589	39789	30810	30850

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

3 Flute Ball End



5B

FRACTIONAL SERIES

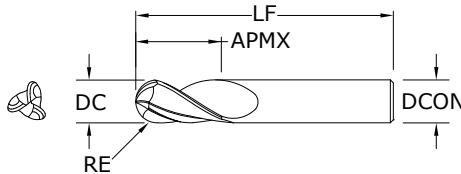

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

RE = +0.000/-0.0005

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/64	1/32	1-1/2	1/8	30502	30851	30602	31130
1/32	5/64	1-1/2	1/8	30504	30852	30604	31131
3/64	7/64	1-1/2	1/8	30506	30853	30606	31132
1/16	3/16	1-1/2	1/8	30508	30854	30608	31133
5/64	3/16	1-1/2	1/8	30510	30855	30610	31134
3/32	9/32	1-1/2	1/8	30512	30856	30612	31135
7/64	3/8	1-1/2	1/8	30514	30857	30902	31136
1/8	3/8	1-1/2	1/8	30578	30889	30943	31168
*1/8	1/2	1-1/2	1/8	30516	30858	30904	31137
9/64	1/2	2	3/16	30518	30859	30906	31138
5/32	1/2	2	3/16	30520	30860	30908	31139
11/64	5/8	2	3/16	30522	30861	30910	31140
*3/16	5/8	2	3/16	30524	30862	30912	31141
13/64	5/8	2-1/2	1/4	30526	30863	30914	31142
7/32	5/8	2-1/2	1/4	30528	30864	30916	31143
15/64	3/4	2-1/2	1/4	30530	30865	30918	31144
*1/4	3/4	2-1/2	1/4	30532	30866	30920	31145
17/64	3/4	2-1/2	5/16	30534	30867	30921	31146
9/32	3/4	2-1/2	5/16	30536	30868	30922	31147
19/64	13/16	2-1/2	5/16	30538	30869	30923	31148
*5/16	13/16	2-1/2	5/16	30540	30870	30924	31149
21/64	1	2-1/2	3/8	30542	30871	30925	31150
11/32	1	2-1/2	3/8	30544	30872	30926	31151
23/64	1	2-1/2	3/8	30546	30873	30927	31152
*3/8	1	2-1/2	3/8	30548	30874	30928	31153
25/64	1	2-3/4	7/16	30550	30875	30929	31154
13/32	1	2-3/4	7/16	30552	30876	30930	31155
27/64	1	2-3/4	7/16	30554	30877	30931	31156
7/16	1	2-3/4	7/16	30556	30878	30932	31157
29/64	1	3	1/2	30558	30879	30933	31158
15/32	1	3	1/2	30560	30880	30934	31159
31/64	1	3	1/2	30562	30881	30935	31160
*1/2	1	3	1/2	30564	30882	30936	31161
9/16	1-1/8	3-1/2	9/16	30566	30883	30937	31162
5/8	1-1/4	3-1/2	5/8	30568	30884	30938	31163
11/16	1-3/8	4	3/4	30570	30885	30939	31164
3/4	1-1/2	4	3/4	30572	30886	30940	31165
7/8	1-1/2	4	7/8	30574	30887	30941	31166
1	1-1/2	4	1	30576	30888	30942	31167
*Series 5B Set				30590	30900	30944	31169

RE = 1/2 Cutting Diameter (DC)

3 Flute Square End



TOLERANCES (mm)

<3 DIAMETER


DC = +0,0000/-0,0254

DCON = h_6

≥3 DIAMETER

DC = +0,0000/-0,0508

DCON = h_6

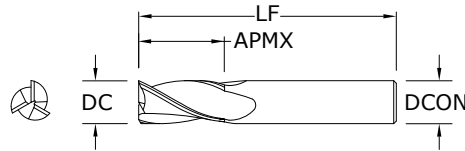


**5M•
5XLM**
METRIC SERIES

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40505	48756	48778	48799	5M
1,5	4,5	38,0	3,0	40509	48757	48779	48800	5M
2,0	6,3	38,0	3,0	40513	48758	48780	48801	5M
2,5	9,5	38,0	3,0	40517	48759	48781	48802	5M
3,0	12,0	38,0	3,0	40521	48760	48782	48803	5M
3,0	25,0	75,0	3,0	43501	49466	49479	49492	5XLM
3,5	12,0	50,0	4,0	40525	48761	48783	48804	5M
4,0	14,0	50,0	4,0	40529	48762	48784	48805	5M
4,0	25,0	75,0	4,0	43503	49467	49480	49493	5XLM
4,5	16,0	50,0	6,0	40533	48763	48785	48806	5M
5,0	16,0	50,0	6,0	40537	48764	48786	48807	5M
5,0	25,0	75,0	5,0	43507	49469	49482	49495	5XLM
6,0	19,0	50,0	6,0	40541	48765	48787	48808	5M
6,0	25,0	75,0	6,0	43505	49468	49481	49494	5XLM
7,0	19,0	63,0	8,0	40545	48766	48788	48809	5M
8,0	20,0	63,0	8,0	40549	48767	48789	48810	5M
8,0	25,0	75,0	8,0	43515	49470	49483	49496	5XLM
9,0	22,0	75,0	10,0	40553	48768	48790	48811	5M
10,0	22,0	75,0	10,0	40557	48769	48791	48812	5M
10,0	38,0	100,0	10,0	43525	49471	49484	49497	5XLM
11,0	25,0	75,0	12,0	40561	48770	48792	48813	5M
12,0	25,0	75,0	12,0	40565	48771	48793	48814	5M
12,0	50,0	100,0	12,0	43535	49472	49485	49498	5XLM
12,0	75,0	150,0	12,0	43545	49473	49486	49499	5XLM
14,0	32,0	89,0	14,0	40569	48772	48794	48815	5M
14,0	75,0	150,0	14,0	43555	49474	49487	49500	5XLM
16,0	32,0	89,0	16,0	40573	48773	48795	48816	5M
16,0	75,0	150,0	16,0	43565	49475	49488	49501	5XLM
18,0	38,0	100,0	18,0	40577	48774	48796	48817	5M
18,0	75,0	150,0	18,0	43575	49476	49489	49502	5XLM
20,0	38,0	100,0	20,0	40581	48775	48797	48818	5M
20,0	75,0	150,0	20,0	43585	49477	49490	49503	5XLM
25,0	38,0	100,0	25,0	40585	48776	48798	48819	5M
25,0	75,0	150,0	25,0	43595	49478	49491	49504	5XLM

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

3 Flute Ball End



5MB• 5XLMB

METRIC SERIES

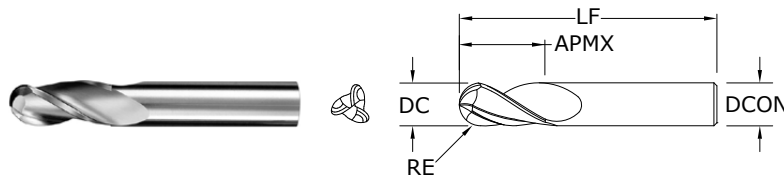

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_8

RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_8

RE = +0,0000 / -0.0254


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40506	48820	48842	48863	5MB
1,5	4,5	38,0	3,0	40510	48821	48843	48864	5MB
2,0	6,3	38,0	3,0	40514	48822	48844	48865	5MB
2,5	9,5	38,0	3,0	40518	48823	48845	48866	5MB
3,0	12,0	38,0	3,0	40522	48824	48846	48867	5MB
3,0	25,0	75,0	3,0	43502	49583	49596	49609	5XLMB
3,5	12,0	50,0	4,0	40526	48825	48847	48868	5MB
4,0	14,0	50,0	4,0	40530	48826	48848	48869	5MB
4,0	25,0	75,0	4,0	43504	49584	49597	49610	5XLMB
4,5	16,0	50,0	6,0	40534	48827	48849	48870	5MB
5,0	16,0	50,0	6,0	40538	48828	48850	48871	5MB
5,0	25,0	75,0	5,0	43508	49586	49599	49612	5XLMB
6,0	19,0	50,0	6,0	40542	48829	48851	48872	5MB
6,0	25,0	75,0	6,0	43506	49585	49598	49611	5XLMB
7,0	19,0	63,0	8,0	40546	48830	48852	48873	5MB
8,0	20,0	63,0	8,0	40550	48831	48853	48874	5MB
8,0	25,0	75,0	8,0	43516	49587	49600	49613	5XLMB
9,0	22,0	75,0	10,0	40554	48832	48854	48875	5MB
10,0	22,0	75,0	10,0	40558	48833	48855	48876	5MB
10,0	38,0	100,0	10,0	43526	49588	49601	49614	5XLMB
11,0	25,0	75,0	12,0	40562	48834	48856	48877	5MB
12,0	25,0	75,0	12,0	40566	48835	48857	48878	5MB
12,0	50,0	100,0	12,0	43536	49589	49602	49615	5XLMB
12,0	75,0	150,0	12,0	43546	49590	49603	49616	5XLMB
14,0	32,0	89,0	14,0	40570	48836	48858	48879	5MB
14,0	75,0	150,0	14,0	43556	49591	49604	49617	5XLMB
16,0	32,0	89,0	16,0	40574	48837	48859	48880	5MB
16,0	75,0	150,0	16,0	43566	49592	49605	49618	5XLMB
18,0	38,0	100,0	18,0	40578	48838	48860	48881	5MB
18,0	75,0	150,0	18,0	43576	49593	49606	49619	5XLMB
20,0	38,0	100,0	20,0	40582	48839	48861	48882	5MB
20,0	75,0	150,0	20,0	43586	49594	49607	49620	5XLMB
25,0	38,0	100,0	25,0	40586	48840	48862	48883	5MB
25,0	75,0	150,0	25,0	43596	49595	49608	49621	5XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL Tapered Square End




TOLERANCES (inch)

DC = +0.001 / -0.002

DCON = h_6

α = +10' / -10'

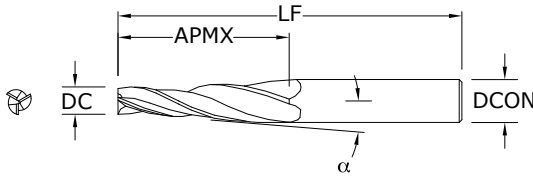

23


FRACTIONAL SERIES

inch					EDP NO.			
SHANK DIAMETER DCON	CENTER LINE ANGLE α	SMALL DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/4	1°	1/8	1-1/2	3	32301	32370	32302	32345
1/4	1°30'	1/8	1-1/2	3	32303	32371	32304	32346
1/4	2°	1/8	1-1/4	3	32305	32372	32306	32347
1/4	3°	1/8	1	3	32307	32373	32308	32348
1/4	5°	1/8	3/4	3	32309	32374	32310	32349
1/4	7°	1/8	1/2	3	32311	32375	32312	32350
1/4	10°	3/32	1/2	3	32313	32376	32314	32351
3/8	1°	3/16	1-3/4	3-1/2	32315	32377	32316	32352
3/8	1°30'	3/16	1-3/4	3-1/2	32317	32378	32318	32353
3/8	2°	3/16	1-3/4	3-1/2	32319	32379	32320	32354
3/8	3°	5/32	1-3/4	3-1/2	32321	32380	32322	32355
3/8	5°	1/8	1-1/2	3-1/2	32323	32381	32324	32356
3/8	7°	1/8	1	3-1/2	32325	32382	32326	32357
3/8	10°	1/8	3/4	3-1/2	32327	32383	32328	32358
1/2	1°	1/4	2	4	32329	32384	32330	32359
1/2	2°	1/4	2	4	32333	32385	32334	32360
1/2	3°	1/4	2	4	32335	32386	32336	32361
1/2	5°	1/4	1-1/4	4	32337	32387	32338	32362
1/2	7°	3/16	1-1/4	4	32339	32388	32340	32363
1/2	10°	1/8	1	4	32341	32389	32342	32364

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

Tapered Ball End



24

FRACTIONAL SERIES

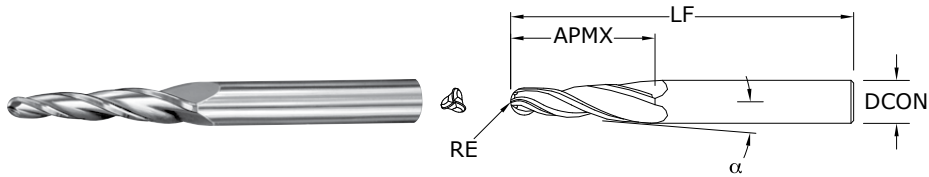

TOLERANCES (inch)


DCON = h_6
 RE = $+0.0000/-0.0010$
 α = $+10' / -10'$

- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

SHANK DIAMETER DCON	CENTER LINE ANGLE α	inch			EDP NO.			
		RADIUS RE	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/4	1°	.062	1-1/2	3	32402	32403	32445	32470
1/4	1°30'	.062	1-1/2	3	32404	32405	32446	32471
1/4	2°	.062	1-1/4	3	32406	32407	32447	32472
1/4	3°	.062	1	3	32408	32409	32448	32473
1/4	5°	.062	3/4	3	32410	32411	32449	32474
1/4	7°	.062	1/2	3	32412	32413	32450	32475
1/4	10°	.047	1/2	3	32414	32415	32451	32476
3/8	1°	.093	1-3/4	3-1/2	32416	32417	32452	32477
3/8	1°30'	.093	1-3/4	3-1/2	32418	32419	32453	32478
3/8	2°	.093	1-3/4	3-1/2	32420	32421	32454	32479
3/8	3°	.078	1-3/4	3-1/2	32422	32423	32455	32480
3/8	5°	.062	1-1/2	3-1/2	32424	32425	32456	32481
3/8	7°	.062	1	3-1/2	32426	32427	32457	32482
3/8	10°	.062	3/4	3-1/2	32428	32429	32458	32483
1/2	1°	.125	2	4	32430	32431	32459	32484
1/2	2°	.125	2	4	32434	32435	32460	32485
1/2	3°	.125	2	4	32436	32437	32461	32486
1/2	5°	.125	1-1/4	4	32438	32439	32462	32487
1/2	7°	.093	1-1/4	4	32440	32441	32463	32488
1/2	10°	.062	1	4	32442	32443	32464	32489

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

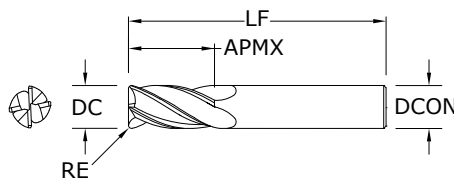

1 • 1L • 1EL •
1CR • 16
 FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	—		30101	39101	39001	30191	1
1/32	5/64	1-1/2	1/8	—		30103	39103	39003	30192	1
3/64	7/64	1-1/2	1/8	—		30105	39105	39005	30193	1
1/16	1/8	1-1/2	1/8	—		31601	31650	31238	31251	16
† 1/16	3/16	1-1/2	1/8	—		30107	39107	39007	30194	1
5/64	3/16	1-1/2	1/8	—		30109	39109	39009	30195	1
3/32	3/16	1-1/2	1/8	—		31603	31651	31239	31252	16
3/32	9/32	1-1/2	1/8	—		30111	39111	39011	30196	1
7/64	3/8	1-1/2	1/8	—		30113	39113	39013	30197	1
1/8	1/4	1-1/2	1/8	—		31605	31652	31240	31253	16
1/8	3/8	1-1/2	1/8	—		30177	39177	39077	30029	1
*† 1/8	1/2	1-1/2	1/8	—		30115	39115	39015	30198	1
1/8	1/2	1-1/2	1/8	.015		38001	38002	38115	38157	1CR
1/8	1/2	1-1/2	1/8	.020		38003	38004	38116	38158	1CR
1/8	3/4	2-1/4	1/8	—		33141	31727	31737	31747	1L
1/8	1	3	1/8	—		33143	31860	31870	31880	1EL
9/64	1/2	2	3/16	—		30117	39117	39017	30199	1
5/32	5/16	2	3/16	—		31607	31653	31241	31254	16
5/32	1/2	2	3/16	—		30119	39119	39019	30000	1
11/64	5/8	2	3/16	—		30121	39121	39021	30001	1
3/16	3/8	2	3/16	—		31609	31654	31242	31255	16
*† 3/16	5/8	2	3/16	—		30123	39123	39023	30002	1
3/16	5/8	2	3/16	.015		38009	38010	38117	38159	1CR
3/16	5/8	2	3/16	.020		38011	38012	38118	38160	1CR
3/16	5/8	2	3/16	.030		38013	38014	38119	38161	1CR
3/16	3/4	2-1/2	3/16	—		33101	31728	31738	31748	1L
3/16	1-1/8	3	3/16	—		33121	31861	31871	31881	1EL
13/64	5/8	2-1/2	1/4	—		30125	39125	39025	30003	1
7/32	7/16	2	1/4	—		31611	31655	31243	31256	16
7/32	5/8	2-1/2	1/4	—		30127	39127	39027	30004	1
15/64	3/4	2-1/2	1/4	—		30129	39129	39029	30005	1
1/4	1/2	2	1/4	—		31613	31656	31244	31257	16
*† 1/4	3/4	2-1/2	1/4	—		30131	39131	39031	30006	1
1/4	3/4	2-1/2	1/4	—	•	30300	—	—	—	1

STEELS

STAINLESS STEELS

CAST IRON


NON-FERROUS

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


continued on next page

4 Flute Square End • 4 Flute Corner Radius



**1•1L•1EL •
1CR • 16**

FRACTIONAL SERIES

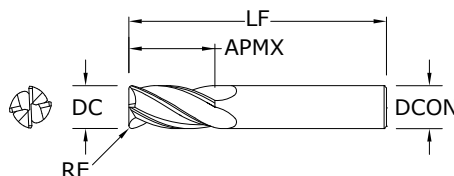

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

CONTINUED

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	EDP NO.				SERIES
						UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/4	3/4	2-1/2	1/4	.015		38019	38020	38120	38162	1CR
1/4	3/4	2-1/2	1/4	.020		38021	38022	38121	38163	1CR
1/4	3/4	2-1/2	1/4	.030		38023	38024	38122	38164	1CR
1/4	3/4	2-1/2	1/4	.045		38025	38026	38123	38165	1CR
1/4	1-1/8	3	1/4	—		33103	31729	31739	31749	1L
1/4	1-1/2	4	1/4	—		33123	31862	31872	31882	1EL
17/64	3/4	2-1/2	5/16	—		30133	39133	39033	30007	1
9/32	3/4	2-1/2	5/16	—		30135	39135	39035	30008	1
19/64	13/16	2-1/2	5/16	—		30137	39137	39037	30009	1
5/16	1/2	2	5/16	—		31615	31657	31245	31258	16
*1/5	13/16	2-1/2	5/16	—		30139	39139	39039	30010	1
5/16	13/16	2-1/2	5/16	.015		38031	38032	38124	38166	1CR
5/16	13/16	2-1/2	5/16	.020		38033	38034	38125	38167	1CR
5/16	13/16	2-1/2	5/16	.030		38035	38036	38126	38168	1CR
5/16	13/16	2-1/2	5/16	.045		38037	38038	38127	38169	1CR
5/16	1-1/8	3	5/16	—		33105	31730	31740	31763	1L
5/16	1-5/8	4	5/16	—		33125	31863	31873	31883	1EL
21/64	1	2-1/2	3/8	—		30141	39141	39041	30011	1
11/32	1	2-1/2	3/8	—		30143	39143	39043	30012	1
23/64	1	2-1/2	3/8	—		30145	39145	39045	30013	1
3/8	5/8	2	3/8	—		31617	31658	31246	31259	16
*1/3	1	2-1/2	3/8	—		30147	39147	39047	30014	1
3/8	1	2-1/2	3/8	—	•	30179	—	—	30379	1
3/8	1	2-1/2	3/8	.015	•	38045	38046	38128	38170	1CR
3/8	1	2-1/2	3/8	.020	•	38047	38048	38129	38171	1CR
3/8	1	2-1/2	3/8	.030	•	38049	38050	38130	38172	1CR
3/8	1	2-1/2	3/8	.045	•	38051	38052	38131	38173	1CR
3/8	1-1/8	3	3/8	—		33107	31731	31741	31764	1L
3/8	1-3/4	4	3/8	—		33127	31864	31874	31884	1EL
25/64	1	2-3/4	7/16	—		30149	39149	39049	30015	1
13/32	1	2-3/4	7/16	—		30151	39151	39051	30016	1
27/64	1	2-3/4	7/16	—		30153	39153	39053	30017	1

continued on next page

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

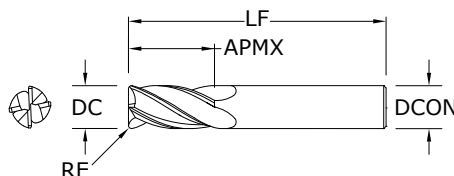


1•1L• 1EL•
1CR• 16

FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
7/16	5/8	2-1/2	7/16	—		31619	31659	31247	31260	16
7/16	1	2-3/4	7/16	—		30155	39155	39055	30018	1
7/16	2	4-1/2	7/16	—		33109	31732	31742	31765	1L
7/16	3	6	7/16	—		33129	31865	31875	31885	1EL
29/64	1	3	1/2	—		30157	39157	39057	30019	1
15/32	1	3	1/2	—		30159	39159	39059	30020	1
31/64	1	3	1/2	—		30161	39161	39061	30021	1
1/2	5/8	2-1/2	1/2	—		31621	31660	31248	31261	16
*1/2	1	3	1/2	—		30163	39163	39063	30022	1
1/2	1	3	1/2	—	•	30180	—	—	30380	1
1/2	1	3	1/2	.015	•	38059	38060	38132	38174	1CR
1/2	1	3	1/2	.020	•	38061	38062	38133	38175	1CR
1/2	1	3	1/2	.030	•	38063	38064	38134	38176	1CR
1/2	1	3	1/2	.045	•	38065	38066	38135	38177	1CR
1/2	1	3	1/2	.060	•	38067	38068	38136	38178	1CR
1/2	2	4-1/2	1/2	—		33111	31733	31743	31766	1L
1/2	3	6	1/2	—		33131	31866	31876	31886	1EL
9/16	1-1/8	3-1/2	9/16	—		30165	39165	39065	30023	1
5/8	3/4	3	5/8	—		31623	31661	31249	31262	16
5/8	1-1/4	3-1/2	5/8	—		30167	39167	39067	30024	1
5/8	1-1/4	3-1/2	5/8	—	•	30181	—	—	30381	1
5/8	1-1/4	3-1/2	5/8	.015	•	38073	38074	38137	38179	1CR
5/8	1-1/4	3-1/2	5/8	.020	•	38075	38076	38138	38180	1CR
5/8	1-1/4	3-1/2	5/8	.030	•	38077	38078	38139	38181	1CR
5/8	1-1/4	3-1/2	5/8	.045	•	38079	38080	38140	38182	1CR
5/8	1-1/4	3-1/2	5/8	.060	•	38081	38082	38141	38183	1CR
5/8	1-1/4	3-1/2	5/8	.090	•	38083	38084	38142	38184	1CR
5/8	2-1/4	5	5/8	—		33113	31734	31744	31767	1L
5/8	3	6	5/8	—		33133	31867	31877	31887	1EL
11/16	1-3/8	4	3/4	—		30169	39169	39069	30025	1
3/4	1	3	3/4	—		31625	31662	31250	31263	16
3/4	1-1/2	4	3/4	—		30171	39171	39071	30026	1


continued on next page

CONTINUED




For patent information visit
www.ksptpatents.com

4 Flute Square End • 4 Flute Corner Radius



**1•1L•1EL •
1CR • 16**

FRACTIONAL SERIES

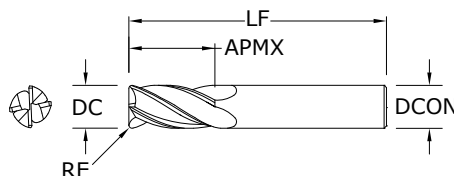

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER


DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

CONTINUED




For patent
information visit
www.ksptpatents.com

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
3/4	1-1/2	4	3/4	—	•	30182	—	—	30382	1
3/4	1-1/2	4	3/4	.015	•	38087	38088	38143	38185	1CR
3/4	1-1/2	4	3/4	.020	•	38089	38090	38144	38186	1CR
3/4	1-1/2	4	3/4	.030	•	38091	38092	38145	38187	1CR
3/4	1-1/2	4	3/4	.045	•	38093	38094	38146	38188	1CR
3/4	1-1/2	4	3/4	.060	•	38095	38096	38147	38189	1CR
3/4	1-1/2	4	3/4	.090	•	38097	38098	38148	38190	1CR
3/4	1-1/2	4	3/4	.125	•	38099	38100	38149	38191	1CR
3/4	2-1/4	5	3/4	—		33115	31735	31745	31768	1L
3/4	3	6	3/4	—		33135	31868	31878	31888	1EL
7/8	1-1/2	4	7/8	—		30173	39173	39073	30027	1
1	1-1/2	4	1	—		30175	39175	39075	30028	1
1	1-1/2	4	1	—		30183	—	—	30383	1
1	1-1/2	4	1	.015	•	38101	38102	38150	38192	1CR
1	1-1/2	4	1	.020	•	38103	38104	38151	38193	1CR
1	1-1/2	4	1	.030	•	38105	38106	38152	38194	1CR
1	1-1/2	4	1	.045	•	38107	38108	38153	38195	1CR
1	1-1/2	4	1	.060	•	38109	38110	38154	38196	1CR
1	1-1/2	4	1	.090	•	38111	38112	38155	38197	1CR
1	1-1/2	4	1	.125	•	38113	38114	38156	38198	1CR
1	2-1/4	5	1	—		33117	31736	31746	31769	1L
1	3	6	1	—		33137	31869	31879	31889	1EL
*Series 1 Set						30189	39189	39089	30030	1

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

FRACTIONAL 4 Flute Ball End



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6


RE = +0.000/-0.0005

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

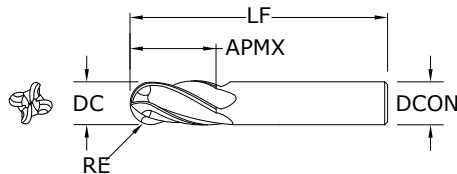


**1B • 1LB •
1ELB**
FRACTIONAL SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON		UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8		30102	39102	39002	30031	1B
1/32	5/64	1-1/2	1/8		30104	39104	39004	30032	1B
3/64	7/64	1-1/2	1/8		30106	39106	39006	30033	1B
*1/16	3/16	1-1/2	1/8		30108	39108	39008	30034	1B
5/64	3/16	1-1/2	1/8		30110	39110	39010	30035	1B
3/32	9/32	1-1/2	1/8		30112	39112	39012	30036	1B
7/64	3/8	1-1/2	1/8		30114	39114	39014	30037	1B
*1/8	3/8	1-1/2	1/8		30178	39178	39078	30069	1B
*1/8	1/2	1-1/2	1/8		30116	39116	39016	30038	1B
1/8	3/4	2-1/4	1/8		33142	31770	31780	31790	1LB
1/8	1	3	1/8		33144	31900	31918	31928	1ELB
9/64	1/2	2	3/16		30118	39118	39018	30039	1B
5/32	1/2	2	3/16		30120	39120	39020	30040	1B
11/64	5/8	2	3/16		30122	39122	39022	30041	1B
*1/32	5/8	2	3/16		30124	39124	39024	30042	1B
3/16	3/4	2-1/2	3/16		33102	31771	31781	31791	1LB
3/16	1-1/8	3	3/16		33122	31902	31919	31929	1ELB
13/64	5/8	2-1/2	1/4		30126	39126	39026	30043	1B
7/32	5/8	2-1/2	1/4		30128	39128	39028	30044	1B
15/64	3/4	2-1/2	1/4		30130	39130	39030	30045	1B
*1/4	3/4	2-1/2	1/4		30132	39132	39032	30046	1B
1/4	1-1/8	3	1/4		33104	31772	31782	31792	1LB
1/4	1-1/2	4	1/4		33124	31904	31920	31930	1ELB
17/64	3/4	2-1/2	5/16		30134	39134	39034	30047	1B
9/32	3/4	2-1/2	5/16		30136	39136	39036	30048	1B
19/64	13/16	2-1/2	5/16		30138	39138	39038	30049	1B
*1/5	13/16	2-1/2	5/16		30140	39140	39040	30050	1B
5/16	1-1/8	3	5/16		33106	31773	31783	31793	1LB
5/16	1-5/8	4	5/16		33126	31906	31921	31931	1ELB
21/64	1	2-1/2	3/8		30142	39142	39042	30051	1B
11/32	1	2-1/2	3/8		30144	39144	39044	30052	1B
23/64	1	2-1/2	3/8		30146	39146	39046	30053	1B



RE = 1/2 Cutting Diameter (DC)

continued on next page



For patent
information visit
www.ksptpatents.com

4 Flute Ball End

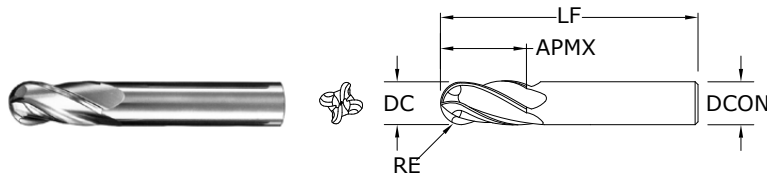
**1B•1LB•
1ELB**
FRACTIONAL SERIES


TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

RE = +0.000/-0.0005


≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

CONTINUED




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON		UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
*1/8	1	2-1/2	3/8		30148	39148	39048	30054	1B
3/8	1	2-1/2	3/8	•	30184	—	—	30384	1B
3/8	1-1/8	3	3/8		33108	31774	31784	31794	1LB
3/8	1-3/4	4	3/8		33128	31908	31922	31932	1ELB
25/64	1	2-3/4	7/16		30150	39150	39050	30055	1B
13/32	1	2-3/4	7/16		30152	39152	39052	30056	1B
27/64	1	2-3/4	7/16		30154	39154	39054	30057	1B
7/16	1	2-3/4	7/16		30156	39156	39056	30058	1B
7/16	2	4-1/2	7/16		33110	31775	31785	31795	1LB
7/16	3	6	7/16		33130	31910	31923	31933	1ELB
29/64	1	3	1/2		30158	39158	39058	30059	1B
15/32	1	3	1/2		30160	39160	39060	30060	1B
31/64	1	3	1/2		30162	39162	39062	30061	1B
*1/2	1	3	1/2		30164	39164	39064	30062	1B
1/2	1	3	1/2	•	30185	—	—	30385	1B
1/2	2	4-1/2	1/2		33112	31776	31786	31796	1LB
1/2	3	6	1/2		33132	31912	31924	31934	1ELB
9/16	1-1/8	3-1/2	9/16		30166	39166	39066	30063	1B
5/8	1-1/4	3-1/2	5/8		30168	39168	39068	30064	1B
5/8	1-1/4	3-1/2	5/8	•	30186	—	—	30386	1B
5/8	2-1/4	5	5/8		33114	31777	31787	31797	1LB
5/8	3	6	5/8		33134	31914	31925	31935	1ELB
11/16	1-3/8	4	3/4		30170	39170	39070	30065	1B
3/4	1-1/2	4	3/4		30172	39172	39072	30066	1B
3/4	1-1/2	4	3/4	•	30187	—	—	30387	1B
3/4	2-1/4	5	3/4		33116	31778	31788	31798	1LB
3/4	3	6	3/4		33136	31916	31926	31936	1ELB
7/8	1-1/2	4	7/8		30174	39174	39074	30067	1B
1	1-1/2	4	1		30176	39176	39076	30068	1B
1	1-1/2	4	1	•	30188	—	—	30388	1B
1	2-1/4	5	1		33118	31779	31789	31799	1LB
1	3	6	1		33138	31917	31927	31937	1ELB
*Series 1B Set					30190	39190	39090	30070	1B

RE = 1/2 Cutting Diameter (DC)

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0508

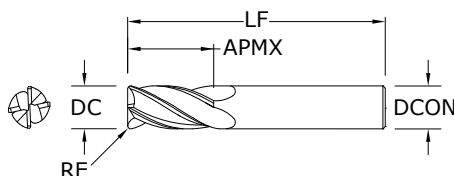


1M • 1XLM • 1MCR • 16M

METRIC SERIES


mm					EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	2,0	38,0	—	3,0	41605	49136	49157	49178	16M
1,0	4,0	38,0	—	3,0	40105	48500	48522	48543	1M
1,5	3,0	38,0	—	3,0	41609	49137	49158	49179	16M
1,5	4,5	38,0	—	3,0	40109	48501	48523	48544	1M
2,0	4,0	38,0	—	3,0	41613	49138	49159	49180	16M
2,0	6,3	38,0	—	3,0	40113	48502	48524	48545	1M
2,5	5,0	38,0	—	3,0	41617	49139	49160	49181	16M
2,5	9,5	38,0	—	3,0	40117	48503	48525	48546	1M
3,0	6,0	38,0	—	3,0	41621	49140	49161	49182	16M
3,0	12,0	38,0	—	3,0	40121	48504	48526	48547	1M
3,0	25,0	75,0	—	3,0	43101	49388	49401	49414	1XLM
3,5	7,0	50,0	—	4,0	41625	49141	49162	49183	16M
3,5	12,0	50,0	—	4,0	40125	48505	48527	48548	1M
4,0	8,0	50,0	—	4,0	41629	49142	49163	49184	16M
4,0	14,0	50,0	—	4,0	40129	48506	48528	48549	1M
4,0	14,0	50,0	0,25	4,0	—	—	—	40000	1MCR
4,0	14,0	50,0	0,50	4,0	—	—	—	40001	1MCR
4,0	14,0	50,0	1,00	4,0	—	—	—	40003	1MCR
4,0	25,0	75,0	—	4,0	43103	49389	49402	49415	1XLM
4,5	9,5	50,0	—	4,5	41633	49143	49164	49185	16M
4,5	16,0	50,0	—	6,0	40133	48507	48529	48550	1M
5,0	10,0	50,0	—	5,0	41637	49144	49165	49186	16M
5,0	16,0	50,0	—	6,0	40137	48508	48530	48551	1M
5,0	16,0	50,0	0,25	6,0	—	—	—	40004	1MCR
5,0	16,0	50,0	0,50	6,0	—	—	—	40005	1MCR
5,0	16,0	50,0	1,00	6,0	—	—	—	40007	1MCR
5,0	25,0	75,0	—	5,0	43107	49391	49404	49417	1XLM
6,0	12,0	50,0	—	6,0	41641	49145	49166	49187	16M
6,0	19,0	50,0	—	6,0	40141	48509	48531	48552	1M
6,0	19,0	50,0	0,25	6,0	—	—	—	40009	1MCR
6,0	19,0	50,0	0,50	6,0	—	—	—	40010	1MCR
6,0	19,0	50,0	0,75	6,0	—	—	—	40011	1MCR

continued on next page




For patent information visit
www.ksptpatents.com

4 Flute Square End • 4 Flute Corner Radius



**1M • 1XLM •
1MCR • 16M**

METRIC SERIES

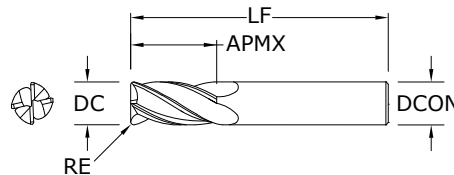

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000/-0,0254

DCON = h_6

≥3 DIAMETER

DC = +0,0000/-0,0508

DCON = h_6

RE = +0,0000/-0,0508

CONTINUED


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.				SERIES
		OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
6,0	19,0	50,0	1,00	6,0	—	—	—	40012	1MCR
6,0	25,0	75,0	—	6,0	43105	49390	49403	49416	1XLM
7,0	12,0	50,0	—	8,0	41645	49146	49167	49188	16M
7,0	19,0	63,0	—	8,0	40145	48510	48532	48553	1M
8,0	12,0	50,0	—	8,0	41649	49147	49168	49189	16M
8,0	20,0	63,0	—	8,0	40149	48511	48533	48554	1M
8,0	20,0	63,0	0,50	8,0	—	—	—	40015	1MCR
8,0	20,0	63,0	0,75	8,0	—	—	—	40016	1MCR
8,0	20,0	63,0	1,00	8,0	—	—	—	40017	1MCR
8,0	20,0	63,0	1,50	8,0	—	—	—	40019	1MCR
8,0	20,0	63,0	2,00	8,0	—	—	—	40020	1MCR
8,0	25,0	75,0	—	8,0	43115	49392	49405	49418	1XLM
9,0	14,0	50,0	—	9,0	41653	49148	49169	49190	16M
9,0	22,0	75,0	—	10,0	40153	48512	48534	48555	1M
10,0	16,0	50,0	—	10,0	41657	49149	49170	49191	16M
10,0	22,0	75,0	—	10,0	40157	48513	48535	48556	1M
10,0	22,0	75,0	0,50	10,0	—	—	—	40021	1MCR
10,0	22,0	75,0	1,00	10,0	—	—	—	40023	1MCR
10,0	22,0	75,0	1,50	10,0	—	—	—	40024	1MCR
10,0	22,0	75,0	2,00	10,0	—	—	—	40025	1MCR
10,0	38,0	100,0	—	10,0	43125	49393	49406	49419	1XLM
11,0	19,0	63,0	—	12,0	41661	49150	49171	49192	16M
11,0	25,0	75,0	—	12,0	40161	48514	48536	48557	1M
12,0	19,0	63,0	—	12,0	40165	49151	49172	49193	16M
12,0	25,0	75,0	—	12,0	41665	48515	48537	48558	1M
12,0	25,0	75,0	0,50	12,0	—	—	—	40028	1MCR
12,0	25,0	75,0	1,00	12,0	—	—	—	40030	1MCR
12,0	25,0	75,0	1,50	12,0	—	—	—	40031	1MCR
12,0	25,0	75,0	2,00	12,0	—	—	—	40032	1MCR
12,0	50,0	100,0	—	12,0	43135	49394	49407	49420	1XLM
12,0	75,0	150,0	—	12,0	43145	49395	49408	49421	1XLM
14,0	32,0	89,0	—	14,0	40169	48516	48538	48559	1M
14,0	75,0	150,0	—	14,0	43155	49396	49409	49422	1XLM
16,0	32,0	89,0	—	16,0	40173	48517	48539	48560	1M
16,0	32,0	89,0	0,50	16,0	—	—	—	40035	1MCR
16,0	32,0	89,0	1,00	16,0	—	—	—	40037	1MCR

continued on next page

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0508

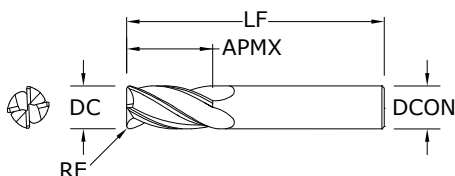

**1M • 1XLM •
1MCR • 16M**

METRIC SERIES

mm					EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
16,0	32,0	89,0	1,50	16,0	—	—	—	40038	1MCR
16,0	32,0	89,0	2,00	16,0	—	—	—	40039	1MCR
16,0	75,0	150,0	—	16,0	43165	49397	49410	49423	1XLM
18,0	38,0	100,0	—	18,0	40177	48518	48540	48561	1M
18,0	75,0	150,0	—	18,0	43175	49398	49411	49424	1XLM
20,0	38,0	100,0	—	20,0	40181	48519	48541	48562	1M
20,0	75,0	150,0	—	20,0	43185	49399	49412	49425	1XLM
25,0	38,0	100,0	—	25,0	40185	48520	48542	48563	1M
25,0	75,0	150,0	—	25,0	43195	49400	49413	49426	1XLM

CONTINUED

STEELS

STAINLESS STEELS


CAST IRON

NON-FERROUS


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

4 Flute Ball End



**1MB•
1XLMB**
METRIC SERIES

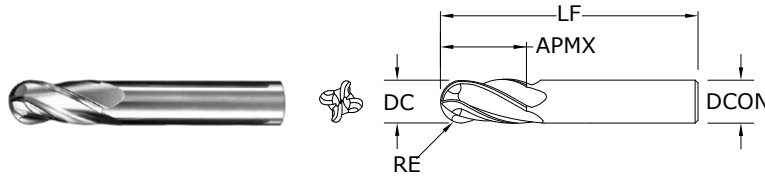

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_6


RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_6

RE = +0,0000 / -0.0254



For patent
information visit
www.ksptpatents.com

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40106	48564	48586	48607	1MB
1,5	4,5	38,0	3,0	40110	48565	48587	48608	1MB
2,0	6,3	38,0	3,0	40114	48566	48588	48609	1MB
2,5	9,5	38,0	3,0	40118	48567	48589	48610	1MB
3,0	12,0	38,0	3,0	40122	48568	48590	48611	1MB
3,0	25,0	75,0	3,0	43102	49505	49518	49531	1XLMB
3,5	12,0	50,0	4,0	40126	48569	48591	48612	1MB
4,0	14,0	50,0	4,0	40130	48570	48592	48613	1MB
4,0	25,0	75,0	4,0	43104	49506	49519	49532	1XLMB
4,5	16,0	50,0	6,0	40134	48571	48593	48614	1MB
5,0	16,0	50,0	6,0	40138	48572	48594	48615	1MB
5,0	25,0	75,0	5,0	43108	49508	49521	49534	1XLMB
6,0	19,0	50,0	6,0	40142	48573	48595	48616	1MB
6,0	25,0	75,0	6,0	43106	49507	49520	49533	1XLMB
7,0	19,0	63,0	8,0	40146	48574	48596	48617	1MB
8,0	20,0	63,0	8,0	40150	48575	48597	48618	1MB
8,0	25,0	75,0	8,0	43116	49509	49522	49535	1XLMB
9,0	22,0	75,0	10,0	40154	48576	48598	48619	1MB
10,0	22,0	75,0	10,0	40158	48577	48599	48620	1MB
10,0	38,0	100,0	10,0	43126	49510	49523	49536	1XLMB
11,0	25,0	75,0	12,0	40162	48578	48600	48621	1MB
12,0	25,0	75,0	12,0	40166	48579	48601	48622	1MB
12,0	50,0	100,0	12,0	43136	49511	49524	49537	1XLMB
12,0	75,0	150,0	12,0	43146	49512	49525	49538	1XLMB
14,0	32,0	89,0	14,0	40170	48580	48602	48623	1MB
14,0	75,0	150,0	14,0	43156	49513	49526	49539	1XLMB
16,0	32,0	89,0	16,0	40174	48581	48603	48624	1MB
16,0	75,0	150,0	16,0	43166	49514	49527	49540	1XLMB
18,0	38,0	100,0	18,0	40178	48582	48604	48625	1MB
18,0	75,0	150,0	18,0	43176	49515	49528	49541	1XLMB
20,0	38,0	100,0	20,0	40182	48583	48605	48626	1MB
20,0	75,0	150,0	20,0	43186	49516	49529	49542	1XLMB
25,0	38,0	100,0	25,0	40186	48584	48606	48627	1MB
25,0	75,0	150,0	25,0	43196	49517	49530	49543	1XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL & METRIC 4 Flute Double End

TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h₆

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h₆

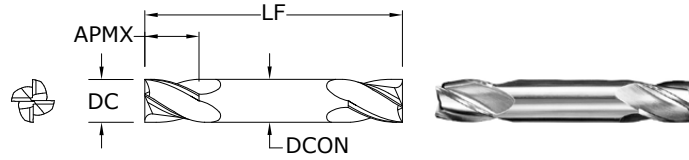

14
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31401	31441	39601	31170
3/64	3/32	1-1/2	1/8	31403	31443	39603	31171
1/16	1/8	1-1/2	1/8	31405	31445	39605	31172
5/64	1/8	1-1/2	1/8	31407	31447	39607	31173
3/32	3/16	1-1/2	1/8	31409	31449	39609	31174
7/64	3/16	1-1/2	1/8	31411	31451	39611	31175
*1/8	1/4	1-1/2	1/8	31413	31453	39613	31176
9/64	5/16	2	3/16	31415	31455	39615	31177
5/32	5/16	2	3/16	31417	31457	39617	31178
11/64	5/16	2	3/16	31419	31459	39619	31179
*3/16	3/8	2	3/16	31421	31461	39621	31180
13/64	1/2	2-1/2	1/4	31423	31463	39623	31181
7/32	1/2	2-1/2	1/4	31425	31465	39625	31182
15/64	1/2	2-1/2	1/4	31427	31467	39627	31183
*1/4	1/2	2-1/2	1/4	31429	31469	39629	31184
9/32	1/2	2-1/2	5/16	31431	31471	39631	31185
*5/16	1/2	2-1/2	5/16	31433	31473	39633	31186
*3/8	9/16	2-1/2	3/8	31435	31475	39635	31187
7/16	9/16	2-3/4	7/16	31437	31477	39637	31188
*1/2	5/8	3	1/2	31439	31479	39639	31189
*Series 14 Set				31489	31481	39641	31190

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)

<3 DIAMETER


DC = +0.0000/-0.0254

DCON = h₆

≥3 DIAMETER

DC = +0.0000/-0.0508

DCON = h₆

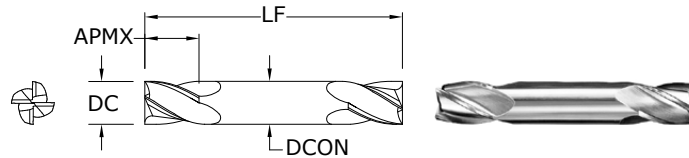

14M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41405	48884	48905	48926
1,5	3,0	38,0	3,0	41409	48885	48906	48927
2,0	4,0	38,0	3,0	41413	48886	48907	48928
2,5	5,0	38,0	3,0	41417	48887	48908	48929
3,0	6,0	38,0	3,0	41421	48888	48909	48930
3,5	7,0	50,0	4,0	41425	48889	48910	48931
4,0	8,0	50,0	4,0	41429	48890	48911	48932
4,5	9,5	63,0	4,5	41433	48891	48912	48933
5,0	10,0	63,0	5,0	41437	48892	48913	48934
6,0	12,0	63,0	6,0	41441	48893	48914	48935
7,0	12,0	63,0	8,0	41445	48894	48915	48936
8,0	12,0	63,0	8,0	41449	48895	48916	48937
9,0	14,0	75,0	9,0	41453	48896	48917	48938
10,0	14,0	75,0	10,0	41457	48897	48918	48939
11,0	14,0	75,0	12,0	41461	48898	48919	48940
12,0	16,0	75,0	12,0	41465	48899	48920	48941

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

4 Flute Double End Ball End



14B

FRACTIONAL SERIES

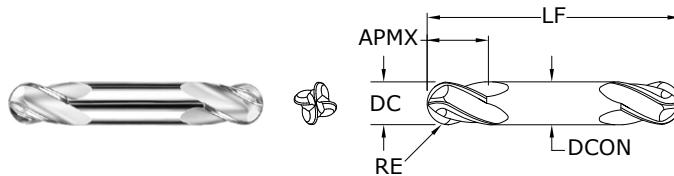

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

RE = +0.000 / -0.005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6


RE = +0.000 / -0.001

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.kspatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31402	31442	39602	31218
3/64	3/32	1-1/2	1/8	31404	31444	39604	31219
1/16	1/8	1-1/2	1/8	31406	31446	39606	31220
5/64	1/8	1-1/2	1/8	31408	31448	39608	31221
3/32	3/16	1-1/2	1/8	31410	31450	39610	31222
7/64	3/16	1-1/2	1/8	31412	31452	39612	31223
*1/8	1/4	1-1/2	1/8	31414	31454	39614	31224
9/64	5/16	2	3/16	31416	31456	39616	31225
5/32	5/16	2	3/16	31418	31458	39618	31226
11/64	5/16	2	3/16	31420	31460	39620	31227
*3/16	3/8	2	3/16	31422	31462	39622	31228
13/64	1/2	2-1/2	1/4	31424	31464	39624	31229
7/32	1/2	2-1/2	1/4	31426	31466	39626	31230
15/64	1/2	2-1/2	1/4	31428	31468	39628	31231
*1/4	1/2	2-1/2	1/4	31430	31470	39630	31232
9/32	1/2	2-1/2	5/16	31432	31472	39632	31233
*5/16	1/2	2-1/2	5/16	31434	31474	39634	31234
*3/8	9/16	2-1/2	3/8	31436	31476	39636	31235
7/16	9/16	2-3/4	7/16	31438	31478	39638	31236
*1/2	5/8	3	1/2	31440	31480	39640	31237
*Series 14B Set				31490	31482	39642	31217

RE = 1/2 Cutting Diameter (DC)

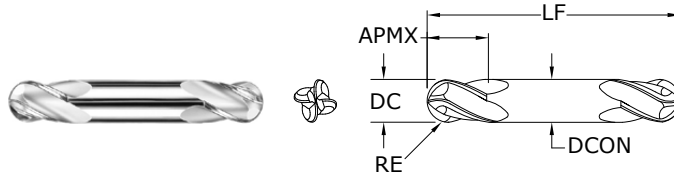

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254

14MB

METRIC SERIES

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.kspatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41406	48947	48968	48989
1,5	3,0	38,0	3,0	41410	48948	48969	48990
2,0	4,0	38,0	3,0	41414	48949	48970	48991
2,5	5,0	38,0	3,0	41418	48950	48971	48992
3,0	6,0	38,0	3,0	41422	48951	48972	48993
3,5	7,0	50,0	4,0	41426	48952	48973	48994
4,0	8,0	50,0	4,0	41430	48953	48974	48995
4,5	9,5	63,0	4,5	41434	48954	48975	48996
5,0	10,0	63,0	5,0	41438	48955	48976	48997
6,0	12,0	63,0	6,0	41442	48956	48977	48998
7,0	12,0	63,0	8,0	41446	48957	48978	48999
8,0	12,0	63,0	8,0	41450	48958	48979	49000
9,0	14,0	75,0	9,0	41454	48959	48980	49001
10,0	14,0	75,0	10,0	41458	48960	48981	49002
11,0	14,0	75,0	12,0	41462	48961	48982	49003
12,0	16,0	75,0	12,0	41466	48962	48983	49004

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL & METRIC 4 Flute High Shear



TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h₆

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h₆

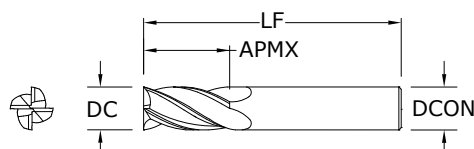

54
FRACTIONAL SERIES

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
1/16	3/16	1-1/2	1/8	35473	35500
3/32	3/8	1-1/2	1/8	35475	35501
1/8	7/16	1-1/2	1/8	35477	35502
5/32	9/16	2	3/16	35478	35503
3/16	9/16	2	3/16	35479	35504
7/32	5/8	2-1/2	1/4	35480	35505
1/4	3/4	2-1/2	1/4	35481	35506
9/32	3/4	2-1/2	5/16	35482	35507
5/16	13/16	2-1/2	5/16	35483	35508
3/8	7/8	2-1/2	3/8	35485	35509
7/16	1	2-3/4	7/16	35487	35510
1/2	1	3	1/2	35489	35511
9/16	1-1/8	3-1/2	9/16	35491	35512
5/8	1-1/4	3-1/2	5/8	35493	35513
3/4	1-1/2	4	3/4	35495	35514
1	1-1/2	4	1	35497	35515

NON-FERROUS

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)

<3 DIAMETER


DC = +0,0000/-0,0254

DCON = h₆

≥3 DIAMETER

DC = +0,0000/-0,0508

DCON = h₆

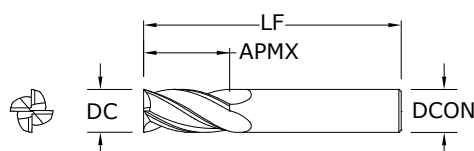


54M
METRIC SERIES

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
3,0	8,0	38,0	3,0	45477	45478
3,5	10,0	57,0	6,0	45479	45480
4,0	11,0	57,0	6,0	45481	45482
4,5	11,0	57,0	6,0	45483	45484
5,0	13,0	57,0	6,0	45485	45486
6,0	13,0	57,0	6,0	45487	45488
8,0	19,0	63,0	8,0	45489	45490
10,0	22,0	72,0	10,0	45491	45492
12,0	26,0	83,0	12,0	45493	45494
14,0	26,0	83,0	14,0	45495	45496
16,0	32,0	92,0	16,0	45497	45498
20,0	38,0	104,0	20,0	45499	45500

NON-FERROUS


For patent information visit
www.ksptpatents.com

Single End Roughers (Coarse Pitch)



61

FRACTIONAL SERIES

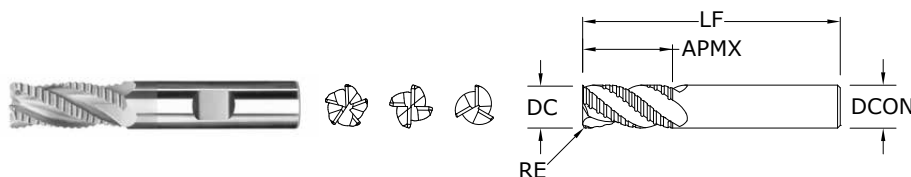

TOLERANCES (inch)

DC = +0.0000/-0.0040

DCON = h_6

RE = +0.0050/-0.0050


STEELS

CAST IRON

For patent
information visit
www.ksptpatents.com

inch						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
*1/4	3/4	2-1/2	1/4	.045	3	36107	36106	36110
*5/16	3/4	2-1/2	5/16	.045	3	36109	36108	36111
3/8	7/8	2-1/2	3/8	.060	3	36113	36112	36114
1/2	1	3	1/2	.060	4	36117	36116	36118
5/8	1-1/4	3-1/2	5/8	.060	4	36121	36120	36122
3/4	1-5/8	4	3/4	.060	4	36125	36124	36126
1	1-3/4	4	1	.060	5	36129	36128	36130

*Without Flat



TOLERANCES (mm)

DC = +0,000 / -0,100

DCON = h_6

RE = +0,127/-0,127

61M

METRIC SERIES

STEELS

CAST IRON

For patent
information visit
www.ksptpatents.com

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46107	46106	46110
8,0	19,0	63,0	8,0	1,14	3	46109	46108	46111
10,0	22,0	72,0	10,0	1,52	3	46113	46112	46114
12,0	26,0	83,0	12,0	1,52	4	46117	46116	46118
16,0	32,0	92,0	16,0	1,52	4	46121	46120	46122
20,0	38,0	104,0	20,0	1,52	4	46129	46128	46132
25,0	44,0	104,0	25,0	1,52	5	46131	46130	46133

Single End Roughers (Fine Pitch)




TOLERANCES (inch)

DC = +0.0000/-0.0040

DCON = h_6

RE = +0.0050/-0.0050

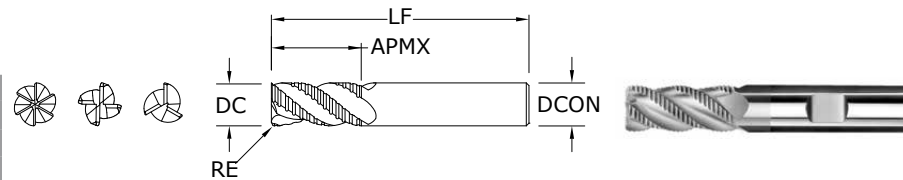

62

FRACTIONAL SERIES


inch						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
*1/4	3/4	2-1/2	1/4	.045	3	36207	36206	36210
*5/16	3/4	2-1/2	5/16	.045	3	36209	36208	36211
3/8	7/8	2-1/2	3/8	.060	3	36213	36212	36214
1/2	1	3	1/2	.060	4	36217	36216	36218
5/8	1-1/4	3-1/2	5/8	.060	4	36221	36220	36222
3/4	1-5/8	4	3/4	.060	4	36225	36224	36226
1	1-3/4	4	1	.060	6	36229	36228	36230

*Without Flat

STAINLESS STEELS

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com




TOLERANCES (mm)

DC = +0,000 / -0,100

DCON = h_6

RE = +0,127/-0,127

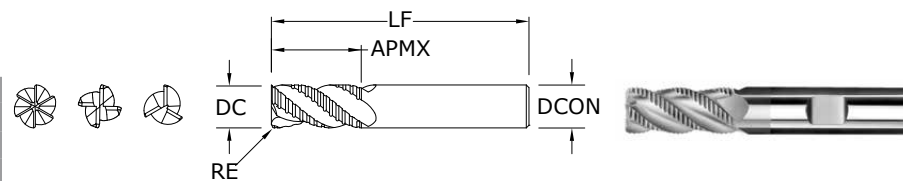

62M

METRIC SERIES

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46207	46206	46210
8,0	19,0	63,0	8,0	1,14	3	46209	46208	46211
10,0	22,0	72,0	10,0	1,52	3	46213	46212	46214
12,0	26,0	83,0	12,0	1,52	4	46217	46216	46218
16,0	32,0	92,0	16,0	1,52	4	46221	46220	46222
20,0	38,0	104,0	20,0	1,52	4	46229	46228	46232
25,0	44,0	104,0	25,0	1,52	5	46231	46230	46233


STAINLESS STEELS

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

FRACTIONAL

End Mill Sets

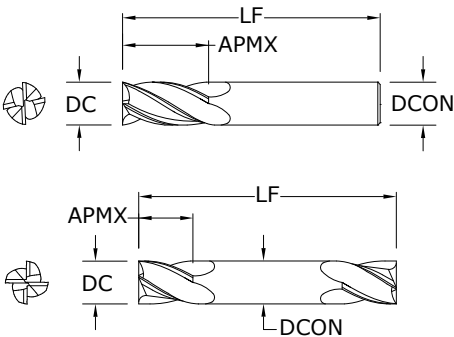

Pictured:
Series 1 4 Flute
Single End Square
Endmill Set

CUTTING DIAMETER DC	SINGLE END LENGTH OF CUT APMX	DOUBLE END LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

Square End


FRACTIONAL SERIES



For patent
information visit
www.ksptpatents.com

DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
Series 1 – 4 Flute, Single End	30189	39189	39089	30030
Series 3 – 2 Flute, Single End	30389	39389	39589	30470
Series 5 – 3 Flute, Single End	30589	39789	30810	30850
Series 14 – 4 Flute, Double End	31489	31481	39641	31190
Series 15 – 2 Flute, Double End	31589	31581	39691	31336

FRACTIONAL End Mill Sets

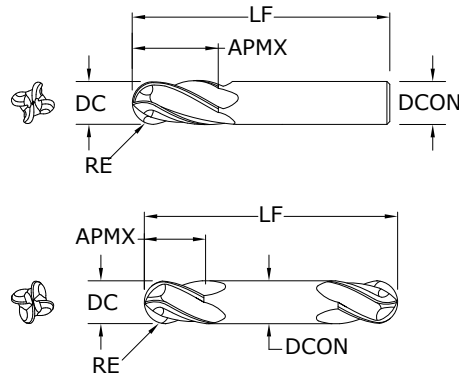

Pictured:
Series 1 4 Flute Single
End Ball Endmill Set

CUTTING DIAMETER DC	SINGLE END LENGTH OF CUT APMX	DOUBLE END LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

RE = 1/2 Cutting Diameter (DC)

Ball End FRACTIONAL SERIES


DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
Series 1B – 4 Flute, Single End	30190	39190	39090	30070
Series 3B – 2 Flute, Single End	30390	39390	39590	30600
Series 5B – 3 Flute, Single End	30590	30900	30944	31169
Series 14B – 4 Flute, Double End	31490	31482	39642	31217
Series 15B – 2 Flute, Double End	31590	31582	39692	31357



For patent
information visit
www.ksptpatents.com

2 Flute: Square & Ball End

4 Flute: Square & Ball End



Diamond 1, 1B, 3, 3B Fractional			Vc (sfm)	DC • in						
	Ae x DC	Ap x DC			1/8	1/4	5/16	3/8	1/2	
GRAPHITE Ultrafine, Superfine		≤ 0.25	≤ 1.5	720	RPM	22003	11002	8801	7334	5501
				(576-864)	Fz	0.0009	0.0023	0.0036	0.0043	0.0058
					Feed 2 flutes (ipm)	38.3	50.6	63.4	63.1	63.8
					Feed 4 flutes (ipm)	76.6	101.2	126.7	126.2	127.6
		≤ 1	≤ 1	580	RPM	17725	8862	7090	5908	4431
				(464-696)	Fz	0.0075	0.0020	0.0031	0.0038	0.0050
					Feed 2 flutes (ipm)	265.9	35.4	44.0	44.9	44.3
					Feed 4 flutes (ipm)	531.7	70.9	87.9	89.8	88.6
COMPOSITES FRP, CFRP, GRP		≤ 0.25	≤ 1.5	385	RPM	11766	5883	4706	3922	2941
				(308-462)	Fz	0.0005	0.0014	0.0022	0.0026	0.0035
					Feed 2 flutes (ipm)	12.2	16.5	20.7	20.4	20.6
					Feed 4 flutes (ipm)	24.5	32.9	41.4	40.8	41.2
		≤ 1	≤ 1	350	RPM	10696	5348	4278	3565	2674
				(280-420)	Fz	0.0005	0.0012	0.0019	0.0023	0.0030
					Feed 2 flutes (ipm)	9.6	12.8	16.3	16.4	16.0
					Feed 3 flutes (ipm)	19.3	25.7	32.5	32.8	32.1
PLASTICS Polycarbonate, PVC, Polypropylene		≤ 0.25	≤ 1.5	1200	RPM	36672	18336	14669	12224	9168
				(960-1440)	Fz	0.0009	0.0023	0.0036	0.0043	0.0058
					Feed 2 flutes (ipm)	63.8	84.3	105.6	105.1	106.3
					Feed 4 flutes (ipm)	127.6	168.7	211.2	210.3	212.7
		≤ 1	≤ 1	960	RPM	29338	14669	11735	9779	7334
				(768-1152)	Fz	0.0008	0.0020	0.0031	0.0038	0.0050
					Feed 2 flutes (ipm)	44.0	58.7	72.8	74.3	73.3
					Feed 3 flutes (ipm)	88.0	117.4	145.5	148.6	146.7

rpm = (Vc x 3.82) / DC


ipm = Fz x number of flutes x rpm

finish cuts typically require reduced feed and cut depths (.02 x D maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

2 Flute: Square, Double, Stub, Long, Ball, Corner Radius
3 Flute: Square, Ball, Tapered
4 Flute: Square, Double, Stub, Ball, Corner Radius
Tapered: Square, Radius



Series 1, 3, 5, 14, 15, 16, 17, 23, 24, 59 Fractional		Hardness	Flutes			Vc (sfm)	DC • in										
				Ae x DC	Ap x DC		1/64	1/32	1/16	1/8	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc		Profile		460	RPM	112461	56230	28115	14058	7029	4686	3514	2343	1757	
							Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
							Feed (ipm)	6.7	6.7	7.3	8.4	11.2	14.1	14.1	11.2	9.8	
								10.1	10.1	11.0	12.7	16.9	21.1	21.1	16.9	14.8	
								13.5	13.5	14.6	16.9	22.5	28.1	28.1	22.5	19.7	
						335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280	
		≤ 275 Bhn or ≤ 28 HRc		Slot				Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028
								Feed (ipm)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2
									7.4	7.4	8.0	9.2	12.3	15.4	15.4	12.3	10.7
								9.8	9.8	10.6	12.3	16.4	20.5	20.5	16.4	14.3	
						335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280	
						(268-402)	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 250 Bhn or ≤ 24 HRc		Profile		315	RPM	77011	38506	19253	9626	4813	3209	2407	1604	1203	
							Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
							Feed (ipm)	3.1	3.9	3.5	3.9	5.8	7.1	7.2	5.8	5.1	
								4.6	5.8	5.2	5.8	8.7	10.6	10.8	8.7	7.6	
								6.2	7.7	6.9	7.7	11.6	14.1	14.4	11.6	10.1	
						230	RPM	56230	28115	14058	7029	3514	2343	1757	1171	879	
		≤ 220 Bhn or ≤ 19 HRc		Slot				Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021
								Feed (ipm)	2.2	2.8	2.5	2.8	4.2	5.2	5.3	4.2	3.7
									3.4	4.2	3.8	4.2	6.3	7.7	7.9	6.3	5.5
								4.5	5.6	5.1	5.6	8.4	10.3	10.5	8.4	7.4	
						315	RPM	77011	38506	19253	9626	4813	3209	2407	1604	1203	
						(252-378)	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275 Bhn or ≤ 28 HRc		Profile		370	RPM	90458	45229	22614	11307	5654	3769	2827	1885	1413	
							Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
							Feed (ipm)	3.6	4.5	4.1	4.5	6.8	8.3	8.5	6.8	5.9	
								5.4	6.8	6.1	6.8	10.2	12.4	12.7	10.2	8.9	
								7.2	9.0	8.1	9.0	13.6	16.6	17.0	13.6	11.9	
						270	RPM	66010	33005	16502	8251	4126	2750	2063	1375	1031	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4 PH, 15-5, 13-4, Custom 450	≤ 275 Bhn or ≤ 28 HRc		Slot				Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021
								Feed (ipm)	2.6	3.3	3.0	3.3	5.0	6.1	6.2	5.0	4.3
									4.0	5.0	4.5	5.0	7.4	9.1	9.3	7.4	6.5
								5.3	6.6	5.9	6.6	9.9	12.1	12.4	9.9	8.7	
						255	RPM	62342	31171	15586	7793	3896	2598	1948	1299	974	
						(204-306)	Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		Profile		335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280	
							Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
							Feed (ipm)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2	
								7.4	7.4	8.0	9.2	12.3	15.4	15.4	12.3	10.7	
								9.8	9.8	10.6	12.3	16.4	20.5	20.5	16.4	14.3	
						245	RPM	59898	29949	14974	7487	3744	2496	1872	1248	936	
	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb		Slot				Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028
								Feed (ipm)	3.6	3.6	3.9	4.5	6.0	7.5	7.5	6.0	5.2
									5.4	5.4	5.8	6.7	9.0	11.2	11.2	9.0	7.9
								7.2	7.2	7.8	9.0	12.0	15.0	15.0	12.0	10.5	
						880	RPM	215142	107571	53786	26893	13446	8964	6723	4482	3362	
						(704-1056)	Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb		Profile		880	RPM	215142	107571	53786	26893	13446	8964	6723	4482	3362	
							Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
							Feed (ipm)	25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6	
								38.7	42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5	
						640	RPM	156467	78234	39117	19558	9779	6519	4890	3260	2445	
						(512-768)	Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
					Feed (ipm)	18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4			
						28.2	30.5	29.3	35.2	46.9	58.7	58.7	46.9	41.1			

continued on next page


FRACTIONAL

2 Flute: Square, Double, Stub, Long, Ball, Corner Radius

3 Flute: Square, Ball, Tapered

4 Flute: Square, Double, Stub, Ball, Corner Radius

Tapered: Square, Radius



Series
1, 3, 5, 14, 15, 16,
17, 23, 24, 59
Fractional

Hardness

Flutes

Ae x DC

Ap x DC

Vc
(sfm)

DC • in

N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRC		Profile			(388-582)	RPM	485	118573	59286	29643	14822	7411	4941	3705	2470	1853			
				2	≤ 0.50	≤ 1.5			Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028			
				3	≤ 0.25	≤ 1.5			Feed (ipm)	7.1	7.1	7.7	8.9	11.9	14.8	14.8	11.9	10.4			
				4	≤ 0.25	≤ 1.5			10.7	10.7	11.6	13.3	17.8	22.2	22.2	17.8	15.6				
				Slot			(280-420)	RPM	350	85568	42784	21392	10696	5348	3565	2674	1783	1337			
				2	1	≤ 1			Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028			
				3	1	≤ 0.5			Feed (ipm)	5.1	5.1	5.6	6.4	8.6	10.7	10.7	8.6	7.5			
				4	1	≤ 0.4			7.7	7.7	8.3	9.6	12.8	16.0	16.0	12.8	11.2				
			P	PLASTICS Polycarbonate, PVC, Polypropylene	≤ 300 Bhn or ≤ 32 HRC		Profile			(704-1056)	RPM	880	215142	107571	53786	26893	13446	8964	6723	4482	3362
							2	≤ 0.50	≤ 1.5			Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056
							3	≤ 0.25	≤ 1.5			Feed (ipm)	25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6
							4	≤ 0.25	≤ 1.5			38.7	42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5	
	Slot					(512-768)	RPM	640	156467	78234	39117	19558	9779	6519	4890	3260	2445				
	2	1						≤ 1	Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056			
	3	1						≤ 0.5	Feed (ipm)	18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4			
	4	1						≤ 0.4	28.2	30.5	29.3	35.2	46.9	58.7	58.7	46.9	41.1				
G	GRAPHITE	≤ 300 Bhn or ≤ 32 HRC					Profile			(528-792)	RPM	660	161357	80678	40339	20170	10085	6723	5042	3362	2521
							2	≤ 0.50	≤ 1.5			Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056
							3	≤ 0.25	≤ 1.5			Feed (ipm)	19.4	21.0	20.2	24.2	32.3	40.3	40.3	32.3	28.2
							4	≤ 0.25	≤ 1.5			29.0	31.5	30.3	36.3	48.4	60.5	60.5	48.4	42.4	
				Slot			(384-576)	RPM	480	117350	58675	29338	14669	7334	4890	3667	2445	1834			
				2	1	≤ 1			Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056			
				3	1	≤ 0.5			Feed (ipm)	14.1	15.3	14.7	17.6	23.5	29.3	29.3	23.5	20.5			
				4	1	≤ 0.4			21.1	22.9	22.0	26.4	35.2	44.0	44.0	35.2	30.8				
			S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400,Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRC		Profile			(52-78)	RPM	65	15891	7946	3973	1986	993	662	497	331	248
							2	≤ 0.50	≤ 1.5			Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014
							3	≤ 0.25	≤ 1.5			Feed (ipm)	0.6	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7
							4	≤ 0.25	≤ 1.5			1.0	0.7	0.7	1.1	1.0	1.6	1.5	1.2	1.0	
	Slot					(36-54)	RPM	45	11002	5501	2750	1375	688	458	344	229	172				
	2	1						≤ 1	Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014			
	3	1						≤ 0.5	Feed (ipm)	0.4	0.3	0.3	0.5	0.5	0.7	0.7	0.6	0.5			
	4	1						≤ 0.4	0.7	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7				
T	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRC					Profile			(144-216)	RPM	180	44006	22003	11002	5501	2750	1834	1375	917	688
							2	≤ 0.50	≤ 1.5			Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017
							3	≤ 0.25	≤ 1.5			Feed (ipm)	1.8	1.8	1.8	2.2	2.8	3.3	3.3	2.6	2.3
							4	≤ 0.25	≤ 1.5			2.6	2.6	2.6	3.3	4.1	5.0	5.0	3.9	3.5	
				Slot			(104-156)	RPM	130	31782	15891	7946	3973	1986	1324	993	662	497			
				2	1	≤ 1			Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017			
				3	1	≤ 0.5			Feed (ipm)	1.3	1.3	1.3	1.6	2.0	2.4	2.4	1.9	1.7			
				4	1	≤ 0.4			1.9	1.9	1.9	2.4	3.0	3.6	3.6	2.8	2.5				

Bhn (Brinell) HRC (Rockwell C) HRB (Rockwell B)

rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

for tapered end mills, base the speed on the largest diameter contacting

the workpiece and the feed on the smallest diameter

limit cut depths of long and extra long flute mills to .05 x DC when slotting

or profiling


reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

2 Flute: High Shear

4 Flute: High Shear



Series 52, 54 Fractional	Hardness	Flutes	Ae x DC		Ap x DC	Vc (sfm)	DC • in							
			1/8	1/4			3/8	1/2	3/4	1				
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb	Profile 				1360	RPM	41562	20781	13854	10390	6927	5195	
						(1088-1632)	Fz	0.00069	0.0018	0.0034	0.0046	0.0055	0.0064	
			2	≤ 0.3	≤ 1.5		Feed (ipm)	57.4	74.8	94.2	95.6	76.2	66.5	
			4	≤ 0.3	≤ 1.5			114.7	149.6	188.4	191.2	152.4	133.0	
		Slot 				1090	RPM	33310	16655	11103	8328	5552	4164	
						(872-1308)	Fz	0.00063	0.0017	0.0032	0.0042	0.0050	0.0059	
			2	1	≤ 1		Feed (ipm)	42.0	56.6	71.1	70.0	55.5	49.1	
			4	1	≤ 0.25			83.9	113.3	142.1	139.9	111.0	98.3	
	ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Profile 				510	RPM	15586	7793	5195	3896	2598	1948
							(408-612)	Fz	0.00069	0.0018	0.0034	0.0046	0.0055	0.0064
				2	≤ 0.3	≤ 1.5		Feed (ipm)	21.5	28.1	35.3	35.8	28.6	24.9
				4	≤ 0.3	≤ 1.5			43.0	56.1	70.7	71.7	57.1	49.9
			Slot 				410	RPM	12530	6265	4177	3132	2088	1566
							(328-492)	Fz	0.00063	0.0017	0.0032	0.0042	0.0050	0.0059
				2	1	≤ 1		Feed (ipm)	15.8	21.3	26.7	26.3	20.9	18.5
				4	1	≤ 0.25			31.6	42.6	53.5	52.6	41.8	37.0
COPPER ALLOYS Aluminum Bronze, Muntz Brass, Naval, Brass, Red Brass		≤ 140 Bhn or ≤ 3 HRc	Profile 				590	RPM	18030	9015	6010	4508	3005	2254
							(472-708)	Fz	0.00039	0.0010	0.0020	0.0026	0.0031	0.0037
				2	≤ 0.3	≤ 1.5		Feed (ipm)	14.1	18.0	24.0	23.4	18.6	16.7
				4	≤ 0.3	≤ 1.5			28.1	36.1	48.1	46.9	37.3	33.4
			Slot 				475	RPM	14516	7258	4839	3629	2419	1815
							(380-570)	Fz	0.00036	0.0010	0.0018	0.0024	0.0029	0.0034
				2	1	≤ 1		Feed (ipm)	10.5	14.5	17.4	17.4	14.0	12.3
				4	1	≤ 0.25			20.9	29.0	34.8	34.8	28.1	24.7
	COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	Profile 				235	RPM	7182	3591	2394	1795	1197	898
							(188-282)	Fz	0.00039	0.0010	0.0020	0.0026	0.0031	0.0037
				2	≤ 0.3	≤ 1.5		Feed (ipm)	5.6	7.2	9.6	9.3	7.4	6.6
				4	≤ 0.3	≤ 1.5			11.2	14.4	19.2	18.7	14.8	13.3
			Slot 				190	RPM	5806	2903	1935	1452	968	726
							(152-228)	Fz	0.00036	0.0010	0.0018	0.0024	0.0029	0.0034
				2	1	≤ 1		Feed (ipm)	4.2	5.8	7.0	7.0	5.6	4.9
				4	1	≤ 0.25			8.4	11.6	13.9	13.9	11.2	9.9
PLASTICS ABS, Polycarbonate, PVC, Polypropylene			Profile 				1600	RPM	48896	24448	16299	12224	8149	6112
							(1280-1920)	Fz	0.00110	0.0030	0.0056	0.0074	0.0089	0.0100
				2	≤ 0.3	≤ 1.5		Feed (ipm)	107.6	146.7	182.5	180.9	145.1	122.2
				4	≤ 0.3	≤ 1.5			215.1	293.4	365.1	361.8	290.1	244.5
			Slot 				1280	RPM	39117	19558	13039	9779	6519	4890
							(1024-1536)	Fz	0.00100	0.0027	0.0051	0.0068	0.0082	0.0095
				2	1	≤ 1		Feed (ipm)	78.2	105.6	133.0	133.0	106.9	92.9
				4	1	≤ 0.25			156.5	211.2	266.0	266.0	213.8	185.8
	PLASTICS Fiberglass, Glass Filled		Profile 				720	RPM	22003	11002	7334	5501	3667	2750
							(576-864)	Fz	0.00082	0.0022	0.0041	0.0055	0.0065	0.0076
				2	≤ 0.3	≤ 1.5		Feed (ipm)	36.1	48.4	60.1	60.5	47.7	41.8
				4	≤ 0.3	≤ 1.5			72.2	96.8	120.3	121.0	95.3	83.6
			Slot 				575	RPM	17572	8786	5857	4393	2929	2197
							(460-690)	Fz	0.00075	0.0020	0.0037	0.0050	0.0060	0.0070
				2	1	≤ 1		Feed (ipm)	26.4	35.1	43.3	43.9	35.1	30.8
				4	1	≤ 0.25			52.7	70.3	86.7	87.9	70.3	61.5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 3.82) / DC


ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Single End Roughers (Coarse Pitch)



Series 61 Fractional	Hardness			Vc (sfm)	DC • in					
		Ae x DC	Ap x DC		1/4	3/8	1/2	3/4	1	
P 										

Bhn (Brinell) HRc (Rockwell C)


rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Fine Pitch)



Series	62	Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)		DC • in				
								1/4	3/8	1/2	3/4	1
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.5	≤ 1.5	405	RPM	6188	4126	3094	2063	1547
						(324-486)	Fz	0.0006	0.0011	0.0015	0.0019	0.0021
							Feed (ipm)	11.1	13.6	18.6	15.7	19.5
			Slot	1	≤ 1	325	RPM	4966	3311	2483	1655	1242
						(260-390)	Fz	0.0006	0.0011	0.0015	0.0019	0.0021
							Feed (ipm)	8.9	10.9	14.9	12.6	15.6
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.5	≤ 1.5	280	RPM	4278	2852	2139	1426	1070
						(224-336)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
							Feed (ipm)	6.4	7.7	10.3	8.6	10.9
			Slot	1	≤ 1	225	RPM	3438	2292	1719	1146	860
						(180-270)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
							Feed (ipm)	5.2	6.2	8.3	6.9	8.8
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRc	Profile	≤ 0.5	≤ 1.5	70	RPM	1070	713	535	357	267
						(56-84)	Fz	0.0004	0.0008	0.0010	0.0013	0.0014
							Feed (ipm)	1.3	1.7	2.1	1.9	2.2
			Slot	1	≤ 1	56	RPM	856	570	428	285	214
						(45-67)	Fz	0.0004	0.0008	0.0010	0.0013	0.0014
							Feed (ipm)	1.0	1.4	1.7	1.5	1.8
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al3Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRc	Profile	≤ 0.5	≤ 1.5	155	RPM	2368	1579	1184	789	592
						(124-186)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
							Feed (ipm)	3.6	4.3	5.7	4.7	6.0
			Slot	1	≤ 1	195	RPM	2980	1986	1490	993	745
						(156-234)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
							Feed (ipm)	4.5	5.4	7.2	6.0	7.6

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)


METRIC

2 Flute: Square, Double, Stub, Long Reach, Ball

3 Flute: Square, Long Reach, Ball

4 Flute: Square, Double, Stub, Long Reach, Ball, Corner Radius




Series 1M, 3M, 5M, 14M, 15M, 16M, 17M, 59M				DC • mm																		
Metric	Hardness	Flutes	Ae x DC	Ap x DC	Vc (m/min)									0.4	0.75	1.5	3	6	10	12	20	25
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536		≤ 175 Bhn or ≤ 7 HRc	Profile		(112-168)	140	RPM	111483	59458	29729	14864	7432	4459	3716	2230	1784					
				Fz			0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070							
				Feed (mm/min)	178		178	184	208	282	357	357	285	250								
					268		268	276	312	424	535	535	428	375								
		Fz		357	357	369	416	565	713	713	571	499										
		102		RPM	81189	43301	21650	10825	5413	3248	2706	1624	1299									
			Slot	(82-123)	Fz		0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070							
					Feed (mm/min)	130	130	134	152	206	260	260	208	182								
						195	195	201	227	309	390	390	312	273								
					Fz		260	260	268	303	411	520	520	416	364							
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc		Profile	(82-123)	102	RPM	81189	43301	21650	10825	5413	3248	2706	1624	1299					
							Fz		0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052					
	Feed (mm/min)						81	104	95	130	152	188	195	156	135							
							122	156	143	195	227	283	292	234	203							
	Fz			162	208	191	260	303	377	390	312	270										
	75			RPM	59377	31668	15834	7917	3958	2375	1979	1188	950									
				Slot	(60-90)	Fz		0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052						
						Feed (mm/min)	59	76	70	95	111	138	143	114	99							
							119	152	139	190	222	276	285	228	198							
						Fz		119	152	139	190	222	276	285	228	198						
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			≤ 250 Bhn or ≤ 24 HRc		Profile	(77-115)	96	RPM	76342	40715	20358	10179	5089	3054	2545	1527	1221				
								Fz		0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052				
		Feed (mm/min)	76					98	90	122	143	177	183	147	127							
			115					147	134	183	214	266	275	220	191							
Fz		153	195		179	244	285	354	366	293	254											
70		RPM	55741		29729	14864	7432	3716	2230	1858	1115	892										
		Slot	(56-84)		Fz		0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052							
					Feed (mm/min)	56	71	65	89	104	129	134	107	93								
						84	107	98	134	156	194	201	161	139								
					Fz		111	143	131	178	208	259	268	214	186							
M		STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F			≤ 275 Bhn or ≤ 28 HRc	(90-135)	113	RPM	89671	47825	23912	11956	5978	3587	2989	1793	1435					
							Fz		0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052					
	Feed (mm/min)			90			115	105	143	167	208	215	172	149								
				135			172	158	215	251	312	323	258	224								
	Fz		179	230	210	287	335	416	430	344	298											
	82		RPM	65436	34899	17449	8725	4362	2617	2181	1309	1047										
			Slot	(66-99)	Fz		0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052							
					Feed (mm/min)	65	84	77	105	122	152	157	126	109								
						98	126	115	157	183	228	236	188	163								
					Fz		131	168	154	209	244	304	314	251	218							
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4 PH, 15-5, 13-4, Custom 450		≤ 275 Bhn or ≤ 28 HRc		Profile	(62-93)	78	RPM	61800	32960	16480	8240	4120	2472	2060	1236	989					
							Fz		0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042					
		Feed (mm/min)					62	66	63	66	99	119	119	91	83							
							93	99	94	99	148	178	179	137	125							
		Fz		124	132	125	132	198	237	239	183	166										
		56		RPM	44836	23912	11956	5978	2989	1793	1495	897	717									
				Slot	(45-68)	Fz		0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042						
						Feed (mm/min)	45	48	45	48	72	86	87	66	60							
							67	72	68	72	108	129	130	100	90							
						Fz		90	96	91	96	143	172	173	133	121						
		K		CAST IRONS Gray, Malleable, Ductile		≤ 220 Bhn or ≤ 19 HRc	(82-123)	102	RPM	81189	43301	21650	10825	5413	3248	2706	1624	1299				
								Fz		0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070				
	Feed (mm/min)		130					130	134	152	206	260	260	208	182							
			195					195	201	227	309	390	390	312	273							
Fz			260		260	268	303	411	520	520	416	364										
75			RPM		59377	31668	15834	7917	3958	2375	1979	1188	950									
	Slot		(60-90)		Fz		0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070							
					Feed (mm/min)	95	95	98	111	150	190	190	152	133								
						143	143	147	166	226	285	285	228	200								
					Fz		190	190	196	222	301	380	380	304	266							


continued on next page

2 Flute: Square, Double, Stub, Long Reach, Ball

3 Flute: Square, Long Reach, Ball


4 Flute: Square, Double, Stub, Long Reach, Ball, Corner Radius



Series 1M, 3M, 5M, 14M, 15M, 16M, 17M, 59M Metric								DC • mm									
	Hardness	Flutes	Ae x DC	Ap x DC	Vc (m/min)												
						0.4	0.75	1.5	3	6	10	12	20	25			
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	Profile		2	≤ 0.50	≤ 1.5	268	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412
								Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
								Feed (mm/min)	640	728	682	796	1081	1365	1365	1092	955
		Slot		3	≤ 0.25	≤ 1.5	195	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482
								Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
								Feed (mm/min)	465	529	496	579	786	993	993	794	695
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	Profile		2	≤ 0.50	≤ 1.5	148	RPM	117542	62689	31344	15672	7836	4702	3918	2351	1881
								Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070
								Feed (mm/min)	188	188	194	219	298	376	376	301	263
		Slot		3	≤ 0.25	≤ 1.5	195	RPM	84824	45239	22620	11310	5655	3393	2827	1696	1357
								Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070
								Feed (mm/min)	204	204	210	238	322	407	407	326	285
	PLASTICS Polycarbonate, PVC, Polypropylene	Profile		2	≤ 0.50	≤ 1.5	268	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412
								Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
								Feed (mm/min)	960	1092	1024	1194	1621	2047	2047	1638	1433
		Slot		3	≤ 0.25	≤ 1.5	195	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482
								Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
								Feed (mm/min)	698	794	745	869	1179	1489	1489	1191	1042
	GRAPHITE	Profile		2	≤ 0.50	≤ 1.5	201	RPM	159954	85309	42654	21327	10664	6398	5332	3199	2559
								Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
								Feed (mm/min)	480	546	512	597	810	1024	1024	819	717
		Slot		3	≤ 0.25	≤ 1.5	146	RPM	116330	62043	31021	15511	7755	4653	3878	2327	1861
								Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
								Feed (mm/min)	349	397	372	434	589	745	745	596	521
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400, Rene, Waspalloy	Profile		2	≤ 0.50	≤ 1.5	20	RPM	15753	8402	4201	2100	1050	630	525	315	252
								Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035
								Feed (mm/min)	16	12	12	17	21	26	25	20	18
		Slot		3	≤ 0.25	≤ 1.5	14	RPM	10906	5816	2908	1454	727	436	364	218	174
								Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035
								Feed (mm/min)	24	18	18	25	32	40	38	30	26
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	Profile		2	≤ 0.50	≤ 1.5	55	RPM	43624	23266	11633	5816	2908	1745	1454	872	698
								Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042
								Feed (mm/min)	44	47	44	47	70	84	84	65	59
		Slot		3	≤ 0.25	≤ 1.5	40	RPM	31506	16803	8402	4201	2100	1260	1050	630	504
								Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042
								Feed (mm/min)	65	70	66	70	105	126	127	97	88

2 Flute: High Shear

4 Flute: High Shear




Series 52M, 54M Metric	Hardness	Flutes			Vc (m/min)	DC • mm										
			Ae x DC	Ap x DC		3	6	10	12	20	25					
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb		Profile		415	RPM	43947	21973	13184	10987	6592	5274				
					(332-497)	Fz	0.0166	0.043	0.091	0.110	0.147	0.160				
						Feed (mm/min)	1459	1890	2399	2417	1938	1688				
			2	≤ 0.3	≤ 1.5		2918	3779	4799	4834	3876	3375				
			4	≤ 0.3	≤ 1.5											
					332	RPM	35222	17611	10567	8806	5283	4227				
				Fz		0.0151	0.041	0.085	0.101	0.133	0.148					
			Slot		(266-399)	Feed (mm/min)	1064	1444	1796	1779	1405	1251				
			2	1		≤ 1	2127	2888	3593	3557	2811	2502				
			4	1	≤ 0.25											
			ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb		Profile		155	RPM	16480	8240	4944	4120	2472	1978	
								(124-187)	Fz	0.0166	0.043	0.091	0.110	0.147	0.160	
						Feed (mm/min)	547		709	900	906	727	633			
	2	≤ 0.3					≤ 1.5	1094	1417	1800	1813	1454	1266			
	4	≤ 0.3				≤ 1.5										
						125	RPM	13249	6624	3975	3312	1987	1590			
					Fz		0.0151	0.041	0.085	0.101	0.133	0.148				
		Slot			(100-150)	Feed (mm/min)	400	543	676	669	529	471				
		2				1	≤ 1	800	1086	1351	1338	1057	941			
		4			1	≤ 0.25										
		COPPER ALLOYS Aluminum Bronze, Muntz Brass, Naval, Brass, Red Brass			≤ 140 Bhn or ≤ 3 HRc		Profile		180	RPM	19065	9533	5720	4766	2860	2288
									(144-216)	Fz	0.0094	0.024	0.053	0.062	0.083	0.093
							Feed (mm/min)	358		458	606	591	475	426		
	2		≤ 0.3	≤ 1.5				717	915	1213	1182	949	851			
4	≤ 0.3		≤ 1.5													
			145	RPM			15349	7675	4605	3837	2302	1842				
				Fz		0.0086	0.024	0.048	0.058	0.077	0.085					
	Slot		(116-174)	Feed (mm/min)		264	368	442	445	355	313					
	2			1		≤ 1	528	737	884	890	709	626				
	4		1	≤ 0.25												
	COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze		≤ 200 Bhn or ≤ 23 HRc			Profile		72	RPM	7594	3797	2278	1898	1139	911	
								(57-86)	Fz	0.0094	0.024	0.053	0.062	0.083	0.093	
					Feed (mm/min)	143	182		241	235	189	169				
2		≤ 0.3				≤ 1.5	286	365	483	471	378	339				
4		≤ 0.3			≤ 1.5											
		58			RPM	6140	3070	1842	1535	921	737					
				Fz	0.0086	0.024	0.048	0.058	0.077	0.085						
		Slot		(46-69)	Feed (mm/min)	106	147	177	178	142	125					
		2			1	≤ 1	211	295	354	356	284	250				
		4		1	≤ 0.25											

continued on next page

2 Flute: High Shear

4 Flute: High Shear



Series 52M, 54M Metric	Hardness	Flutes			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		3	6	10	12	20	25		
N	PLASTICS ABS, Polycarbonate, PVC, Polypropylene				488	RPM	51702	25851	15511	12926	7755	6204	
						Fz	0.0264	0.072	0.149	0.178	0.237	0.250	
			2	≤ 0.3	≤ 1.5	(390-585)	Feed (mm/min)	2730	3723	4622	4601	3676	3102
			4	≤ 0.3	≤ 1.5			5460	7445	9244	9203	7352	6204
					390	RPM	41362	20681	12409	10340	6204	4963	
						Fz	0.0240	0.065	0.136	0.163	0.210	0.238	
			2	1	≤ 1	(312-468)	Feed (mm/min)	1985	2689	3375	3371	2606	2363
			4	1	≤ 0.25			3971	5377	6750	6742	5212	4725
	PLASTICS Fiberglass, Glass Filled				219	RPM	23266	11633	6980	5816	3490	2792	
						Fz	0.0197	0.053	0.109	0.132	0.173	0.190	
			2	≤ 0.3	≤ 1.5	(176-263)	Feed (mm/min)	917	1233	1522	1536	1208	1061
			4	≤ 0.3	≤ 1.5			1833	2466	3043	3071	2415	2122
					175	RPM	18580	9290	5574	4645	2787	2230	
						Fz	0.0180	0.048	0.101	0.120	0.160	0.175	
			2	1	≤ 1	(140-210)	Feed (mm/min)	669	892	1126	1115	892	780
			4	1	≤ 0.25			1338	1784	2252	2230	1784	1561

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Coarse Pitch)



Series 61M	Metric	Hardness			Vc (m/min)	DC • mm						
			Ae x DC	Ap x DC		6	10	12	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc		≤ 0.5	≤ 1.5	152	RPM	8078	4847	4039	2424	1939
						(122-183)	Fz	0.014	0.029	0.034	0.045	0.050
						Feed (mm/min)	339	422	549	436	485	
				1	≤ 1	122	RPM	6463	3878	3231	1939	1551
						(98-146)	Fz	0.014	0.029	0.034	0.045	0.050
						Feed (mm/min)	271	337	439	349	388	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc		≤ 0.5	≤ 1.5	111	RPM	5897	3538	2949	1769	1415
						(89-134)	Fz	0.010	0.021	0.026	0.035	0.038
						Feed (mm/min)	177	223	307	248	269	
				1	≤ 1	90	RPM	4766	2860	2383	1430	1144
						(72-108)	Fz	0.010	0.021	0.026	0.035	0.038
						Feed (mm/min)	143	180	248	200	217	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc		≤ 0.5	≤ 1.5	105	RPM	5574	3344	2787	1672	1338
						(84-126)	Fz	0.014	0.024	0.036	0.048	0.053
						Feed (mm/min)	234	241	401	321	355	
				1	≤ 1	84	RPM	4443	2666	2222	1333	1066
						(67-101)	Fz	0.014	0.024	0.036	0.048	0.053
						Feed (mm/min)	187	192	320	256	283	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		≤ 0.5	≤ 1.5	111	RPM	5897	3538	2949	1769	1415
						(89-134)	Fz	0.019	0.040	0.048	0.064	0.070
						Feed (mm/min)	336	425	566	453	495	
				1	≤ 1	90	RPM	4766	2860	2383	1430	1144
						(72-108)	Fz	0.019	0.040	0.048	0.064	0.070
						Feed (mm/min)	272	343	458	366	400	

Bhn (Brinell) HRc (Rockwell C)


rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Fine Pitch)



Series 62M	Metric	Hardness			Vc (m/min)	DC • mm						
			Ae x DC	Ap x DC		6	10	12	20	25		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc		≤ 0.5	≤ 1.5	123	RPM	6544	3926	3272	1963	1570
						(99-148)	Fz	0.014	0.029	0.036	0.051	0.053
							Feed (mm/min)	283	345	471	398	495
				1	≤ 1	99	RPM	5251	3151	2626	1575	1260
						(79-119)	Fz	0.014	0.029	0.036	0.051	0.053
							Feed (mm/min)	227	277	378	319	397
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc		≤ 0.5	≤ 1.5	85	RPM	4524	2714	2262	1357	1086
						(68-102)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	163	195	261	217	277
				1	≤ 1	69	RPM	3635	2181	1818	1091	872
						(55-82)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	131	157	209	174	222
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRc		≤ 0.5	≤ 1.5	21	RPM	1131	679	565	339	271
						(17-26)	Fz	0.010	0.021	0.024	0.035	0.035
							Feed (mm/min)	33	43	54	47	57
				1	≤ 1	17	RPM	905	543	452	271	217
						(14-20)	Fz	0.010	0.021	0.024	0.035	0.035
							Feed (mm/min)	26	35	43	38	46
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRc		≤ 0.5	≤ 1.5	47	RPM	2504	1503	1252	751	601
						(38-57)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	90	108	144	120	153
				1	≤ 1	59	RPM	3151	1890	1575	945	756
						(48-71)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	113	136	181	151	193

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

General Application Drills



Hole Making

GENERAL APPLICATION DRILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
2 Flute	101	2 Flute Slow Spiral	336	344
Short Length Self Centering (DIN6539)	108M Plus	2 Flute Short Length DIN 6539	341	346
Straight Flute	106	Straight Flute 140 Point Geometry	348	351
3 Flute with 150 Point Geometry	103	3 Flute 150 Point Geometry	352	356
GENERAL APPLICATION COUNTERSINKS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Combined Drill & Countersink	301	2 Flute Straight Flute Combined Drill and Countersink Fractional	358	361
	301M	2 Flute Straight Flute Combined Drill and Countersink Metric	358	362
Single Flute Countersink	601	Single Flute Fractional	364	365
3 Flute Countersink	603	3 Flute Fractional	367	368
6 Flute Countersink	606	6 Flute Fractional	370	371
GENERAL APPLICATION REAMERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Straight Flute Accu-Reamer	200	Accu-Reamer	374	376
Straight Flute Reamer	201M	Metric Reamer	378	379

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE USO GENERAL	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
2 filos	101	2 filos, espiral de avance lento	336	344
Autocentrante de longitud corta (DIN6539)	108M Plus	2 filos, longitud corta, DIN 6539	341	346
Filo recto	106	Filo recto, geometría de 140 puntos	348	351
3 filos con geometría de 150 puntos	103	3 filos, geometría de 150 puntos	352	356

BROCAS DE USO AVELLANADORES	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Broca y avellanador combinados	301	2 filos, filo recto, broca y avellanador combinados, fraccional	358	361
	301M	2 filos, filo recto, broca y avellanador combinados, métrico	358	362
Avellanador de filo único	601	Filo único, fraccional	364	365
Avellanador de 3 filos	603	3 filos, fraccional	367	368
Avellanador de 6 filos	606	6 filos, fraccional	370	371

BROCAS DE USO ESCARIADORES	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Escariador Accu de filo recto	200	Escariador Accu	374	376
Escariador de filo recto	201M	Escariador métrico	378	379

Recomendaciones de velocidades y avances mostradas tras cada serie

Outils de perçage

FORETS UNIVERSELS	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
2 dents	101	2 dents à spirale lente	336	344
Court autocentrant (DIN 6539)	108M Plus	2 dents court DIN 6539	341	346
Denture droite	106	Denture droite à angle de pointe 140°	348	351
3 dents à angle de pointe 150°	103	3 dents à angle de pointe 150°	352	356

FORETS À FRAISER	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Foret et foret à fraiser combinés	301	2 dents denture droite foret et foret à fraiser combinés (fractionnel)	358	361
	301M	2 dents denture droite foret et foret à fraiser combinés (métrique)	358	362
Foret à fraiser à dent simple	601	Foret à dent simple (fractionnel)	364	365
Foret à fraiser 3 dents	603	3 dents (fractionnel)	367	368
Foret à fraiser 6 dents	606	6 dents (fractionnel)	370	371

FORETS À ALÉSOIRS	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Alésoir denture droite Accu-Reamer	200	Alésoir Accu-Reamer	374	376
Alésoir denture droite	201M	Alésoir (métrique)	378	379

Recommandations de vitesse et avance indiquées après chaque série



STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
2 Schneiden	101	2 Schneiden mit kleinem Spanwinkel	336	344
Kurze Bauform Selbstzentrierung (DIN 6539)	108M Plus	2 Schneiden Kurze Bauform DIN 6539	341	346
Gerade Schneiden	106	Gerade Schneiden Spitzengeometrie 140	348	351
3 Schneiden mit Spitzengeometrie 150	103	3 Schneiden Spitzengeometrie 150	352	356

STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Senkbohrer	301	Zölliger Senkbohrer mit 2 geraden Schneiden	358	361
	301M	Metrischer Senkbohrer mit 2 geraden Schneiden	358	362
Senker mit 1 Schneide	601	Zölliger Bohrer mit 1 Schneide	364	365
Senkbohrer mit 1 Schneide	603	Zölliger Bohrer mit 3 Schneiden	367	368
Senkbohrer mit 6 Schneiden	606	Zölliger Bohrer mit 6 Schneiden	370	371

STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Reibahlen mit gerader Schneide	200	Accu-Reamer	374	376
Reibahle mit gerader Schneide	201M	Metrische Reibahle	378	379

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

2 Flute Drills • Metric: DIN 338

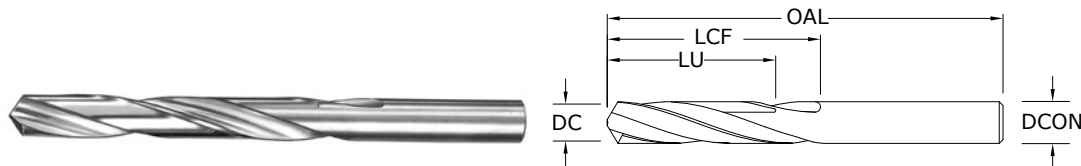

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set



DECIMAL DC/DCON	METRIC DC/DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AITiN)
0.0135	0,340 mm	#80	3/4	3/16	—	51080	57076
0.0145	0,370 mm	#79	3/4	3/16	—	51079	57077
0.0156	0,400 mm	1/64	3/4	3/16	—	51101	57078
0.0160	0,410 mm	#78	3/4	3/16	—	51078	57079
0.0180	0,460 mm	#77	3/4	3/16	—	51077	57080
0.0200	0,510 mm	#76	7/8	1/4	—	51076	57081
0.0210	0,530 mm	#75	7/8	1/4	—	51075	57082
0.0225	0,570 mm	#74	7/8	1/4	—	51074	57083
0.0240	0,610 mm	#73	7/8	1/4	—	51073	57084
0.0250	0,640 mm	#72	1	5/16	—	51072	57085
0.0260	0,660 mm	#71	1	5/16	—	51071	57086
0.0276	0,700 mm		28,0	9,0	—	61001	68268
0.0280	0,710 mm	#70	1-1/4	1/2	—	51070	57087
0.0292	0,740 mm	#69	1-1/4	1/2	—	51069	57088
0.0310	0,790 mm	#68	1-1/4	1/2	—	51068	57089
0.0312	0,790 mm	1/32	1-1/4	1/2	—	51102	57090
0.0315	0,800 mm		30,0	10,0	—	61003	68269
0.0320	0,810 mm	#67	1-1/4	1/2	—	51067	57091
0.0330	0,840 mm	#66	1-1/4	1/2	—	51066	57092
0.0350	0,890 mm	#65	1-3/8	5/8	1/2	51065	57093
0.0354	0,900 mm		32,0	11,0	8,0	61005	68270
0.0360	0,910 mm	#64	1-3/8	5/8	1/2	51064	57094
0.0370	0,940 mm	#63	1-3/8	5/8	1/2	51063	57095
0.0380	0,970 mm	#62	1-3/8	5/8	1/2	51062	57096
0.0390	0,990 mm	#61	1-3/8	5/8	1/2	51061	57097
0.0394	1,000 mm		34,0	12,0	9,0	61007	68271
0.0400	1,020 mm	#60	1-1/2	3/4	39/64	51060	57098
0.0410	1,040 mm	#59	1-1/2	3/4	39/64	51059	57099
0.0420	1,070 mm	#58	1-1/2	3/4	39/64	51058	57100
0.0430	1,090 mm	#57	1-1/2	3/4	39/64	51057	57101
0.0433	1,000 mm		36,0	14,0	11,0	61052	68294
0.0465	1,180 mm	#56	1-1/2	3/4	39/64	51056	57102
0.0469	1,190 mm	3/64	1-1/2	3/4	39/64	51103	57103
0.0472	1,200 mm		38,0	16,0	12,0	61053	68295
0.0512	1,300 mm		38,0	16,0	12,0	61054	68296
0.0520	1,320 mm	#55	1-1/2	3/4	39/64	51055	57104
0.0550	1,400 mm	#54	1-1/2	3/4	39/64	51054	57105
0.0551	1,400 mm		40,0	18,0	14,0	61055	68297
0.0591	1,500 mm		40,0	18,0	14,0	61009	68272
0.0595	1,510 mm	#53	1-1/2	3/4	39/64	51053	57106
0.0625	1,590 mm	*1/16	1-1/2	3/4	39/64	51104	57107
0.0630	1,600 mm		43,0	20,0	16,0	61056	68298
0.0635	1,610 mm	#52	1-1/2	3/4	39/64	51052	57108
0.0669	1,700 mm		43,0	20,0	17,0	61057	68299


continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

TOLERANCES (mm)

DC = +0.0000/-0.0127



For patent
information visit
www.ksptpatents.com

2 Flute Drills • Metric: DIN 338

101



FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AITiN)
0.0670	1,700 mm	#51	1-1/2	3/4	39/64	51051	57109
0.0700	1,780 mm	#50	1-3/4	7/8	45/64	51050	57110
0.0709	1,800 mm		46,0	22,0	17,0	61058	68300
0.0730	1,850 mm	#49	1-3/4	7/8	45/64	51049	57111
0.0748	1,900 mm		46,0	22,0	17,0	61059	68301
0.0760	1,930 mm	#48	1-3/4	7/8	45/64	51048	57112
0.0781	1,980 mm	5/64	1-3/4	7/8	45/64	51105	57113
0.0785	1,990 mm	#47	1-3/4	7/8	45/64	51047	57114
0.0787	2,000 mm		49,0	24,0	19,0	61011	68273
0.0810	2,060 mm	#46	1-3/4	7/8	45/64	51046	57115
0.0820	2,080 mm	#45	1-3/4	7/8	45/64	51045	57116
0.0827	2,100 mm		49,0	24,0	19,0	61060	68302
0.0860	2,180 mm	#44	2	1	51/64	51044	57117
0.0866	2,200 mm		53,0	27,0	21,0	61061	68303
0.0890	2,260 mm	#43	2	1	51/64	51043	57118
0.0906	2,300 mm		53,0	27,0	21,0	61062	68304
0.0935	2,370 mm	#42	2	1	51/64	51042	57119
0.0938	2,380 mm	3/32	2	1	51/64	51106	57120
0.0945	2,400 mm		57,0	30,0	24,0	61063	68305
0.0960	2,440 mm	#41	2	1	51/64	51041	57121
0.0980	2,490 mm	#40	2	1	51/64	51040	57122
0.0984	2,500 mm		57,0	30,0	24,0	61013	68274
0.0995	2,530 mm	#39	2-1/4	1-1/4	1	51039	57123
0.1015	2,580 mm	#38	2-1/4	1-1/4	1	51038	57124
0.1024	2,600 mm		57,0	30,0	24,0	61064	68306
0.1040	2,640 mm	#37	2-1/4	1-1/4	1	51037	57125
0.1063	2,700 mm		61,0	33,0	26,0	61065	68307
0.1065	2,710 mm	#36	2-1/4	1-1/4	1	51036	57126
0.1094	2,780 mm	7/64	2-1/4	1-1/4	1	51107	57127
0.1100	2,790 mm	#35	2-1/4	1-1/4	1	51035	57128
0.1102	2,800 mm		61,0	33,0	26,0	61066	68308
0.1110	2,820 mm	#34	2-1/4	1-1/4	1	51034	57129
0.1130	2,870 mm	#33	2-1/4	1-1/4	1	51033	57130
0.1142	2,900 mm		61,0	33,0	26,0	61067	68309
0.1160	2,950 mm	#32	2-1/4	1-1/4	1	51032	57131
0.1181	3,000 mm		61,0	33,0	26,0	61015	68275
0.1200	3,050 mm	#31	2-1/4	1-1/4	1	51031	57132
0.1220	3,100 mm		65,0	36,0	28,0	61068	68310
0.1250	3,180 mm	*1/8	2-1/4	1-1/4	1	51108	57133
0.1260	3,200 mm		65,0	36,0	28,0	61069	68311
0.1285	3,260 mm	#30	2-1/4	1-1/4	1	51030	57134
0.1299	3,300 mm		65,0	36,0	28,0	61070	68312
0.1339	3,400 mm		70,0	39,0	31,0	61071	68313
0.1360	3,450 mm	#29	2-1/2	1-3/8	1-7/64	51029	57135
0.1378	3,500 mm		70,0	39,0	31,0	61017	68276
0.1405	3,570 mm	#28	2-1/2	1-3/8	1-7/64	51028	57136
0.1406	3,570 mm	9/64	2-1/2	1-3/8	1-7/64	51109	57137
0.1417	3,600 mm		70,0	39,0	31,0	61072	68314
0.1440	3,660 mm	#27	2-1/2	1-3/8	1-7/64	51027	57138
0.1457	3,700 mm		70,0	39,0	31,0	61073	68315
0.1470	3,730 mm	#26	2-1/2	1-3/8	1-7/64	51026	57139
0.1495	3,800 mm	#25	2-1/2	1-3/8	1-7/64	51025	57140
0.1496	3,800 mm		75,0	43,0	34,0	61074	68316
0.1520	3,860 mm	#24	2-1/2	1-3/8	1-7/64	51024	57141

continued on next page

2 Flute Drills • Metric: DIN 338

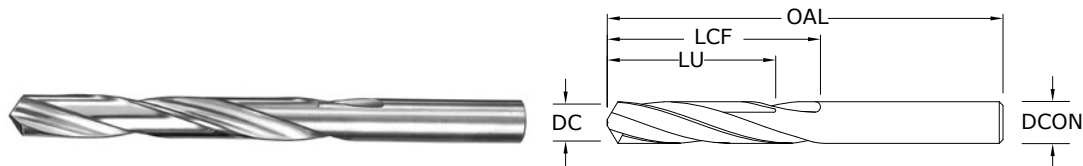

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set



CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AITiN)
0.1535	3,900 mm		75,0	43,0	34,0	61075	68317
0.1540	3,910 mm	#23	2-1/2	1-3/8	1-7/64	51023	57142
0.1562	3,970 mm	5/32	2-1/2	1-3/8	1-7/64	51110	57143
0.1570	3,990 mm	#22	2-1/2	1-3/8	1-7/64	51022	57144
0.1575	4,000 mm		75,0	43,0	34,0	61019	68277
0.1590	4,040 mm	#21	2-1/2	1-3/8	1-7/64	51021	57145
0.1610	4,090 mm	#20	2-1/2	1-3/8	1-7/64	51020	57146
0.1614	4,100 mm		75,0	43,0	34,0	61076	68318
0.1654	4,200 mm		75,0	43,0	34,0	61077	68319
0.1660	4,220 mm	#19	2-3/4	1-5/8	1-19/64	51019	57147
0.1693	4,300 mm		80,0	47,0	37,0	61078	68320
0.1695	4,310 mm	#18	2-3/4	1-5/8	1-19/64	51018	57148
0.1719	4,370 mm	11/64	2-3/4	1-5/8	1-19/64	51111	57149
0.1730	4,390 mm	#17	2-3/4	1-5/8	1-19/64	51017	57150
0.1732	4,400 mm		80,0	47,0	37,0	61079	68321
0.1770	4,500 mm	#16	2-3/4	1-5/8	1-19/64	51016	57151
0.1772	4,500 mm		80,0	47,0	37,0	61021	68278
0.1800	4,570 mm	#15	2-3/4	1-5/8	1-19/64	51015	57152
0.1811	4,600 mm		80,0	47,0	37,0	61080	68322
0.1820	4,620 mm	#14	2-3/4	1-5/8	1-19/64	51014	57153
0.1850	4,700 mm		80,0	47,0	37,0	61081	68323
0.1850	4,700 mm	#13	2-3/4	1-5/8	1-19/64	51013	57154
0.1875	4,760 mm	*3/16	2-3/4	1-5/8	1-19/64	51112	57155
0.1890	4,800 mm		86,0	52,0	41,0	61082	68324
0.1890	4,800 mm	#12	2-3/4	1-5/8	1-19/64	51012	57156
0.1910	4,850 mm	#11	2-3/4	1-5/8	1-19/64	51011	57157
0.1929	4,900 mm		86,0	52,0	41,0	61083	68325
0.1935	4,910 mm	#10	2-3/4	1-5/8	1-19/64	51010	57158
0.1960	4,980 mm	#9	3	1-3/4	1-13/32	51009	57159
0.1969	5,000 mm		86,0	52,0	41,0	61023	68279
0.1990	5,050 mm	#8	3	1-3/4	1-13/32	51008	57160
0.2008	5,010 mm		86,0	52,0	41,0	61084	68326
0.2010	5,110 mm	#7	3	1-3/4	1-13/32	51007	57161
0.2031	5,160 mm	13/64	3	1-3/4	1-13/32	51113	57162
0.2040	5,180 mm	#6	3	1-3/4	1-13/32	51006	57163
0.2047	5,200 mm		86,0	52,0	41,0	61085	68327
0.2055	5,220 mm	#5	3	1-3/4	1-13/32	51005	57164
0.2087	5,300 mm		86,0	52,0	41,0	61086	68328
0.2090	5,310 mm	#4	3	1-3/4	1-13/32	51004	57165
0.2126	5,400 mm		93,0	57,0	45,0	61087	68329
0.2130	5,410 mm	#3	3	1-3/4	1-13/32	51003	57166
0.2165	5,500 mm		93,0	57,0	1-13/32	61025	68280
0.2188	5,560 mm	7/32	3	1-3/4	1-13/32	51114	57167
0.2205	5,600 mm		93,0	57,0	45,0	61088	68330

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

TOLERANCES (mm)

DC = +0.0000/-0.0127

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

2 Flute Drills • Metric: DIN 338

101



FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AITiN)
0.2210	5,610 mm	#2	3	1-3/4	1-13/32	51002	57168
0.2244	5,700 mm		93,0	57,0	45,0	61089	68331
0.2280	5,790 mm	#1	3	1-3/4	1-13/32	51001	57169
0.2283	5,800 mm		93,0	57,0	45,0	61090	68332
0.2323	5,900 mm		93,0	57,0	45,0	61091	68333
0.2340	5,940 mm	A	3-1/4	2	1-39/64	51201	57170
0.2344	5,950 mm	15/64	3-1/4	2	1-39/64	51115	57171
0.2362	6,000 mm		93,0	57,0	45,0	61027	68281
0.2380	6,050 mm	B	3-1/4	2	1-39/64	51202	57172
0.2402	6,100 mm		101,0	63,0	50,0	61092	68334
0.2420	6,150 mm	C	3-1/4	2	1-39/64	51203	57173
0.2441	6,200 mm		101,0	63,0	50,0	61093	68335
0.2460	6,250 mm	D	3-1/4	2	1-39/64	51204	57174
0.2480	6,300 mm		101,0	63,0	50,0	61094	68336
0.2500	6,350 mm	*1/4	3-1/4	2	1-39/64	51116	57176
0.2520	6,400 mm		101,0	63,0	50,0	61095	68337
0.2559	6,500 mm		101,0	63,0	50,0	61029	68282
0.2570	6,530 mm	F	3-1/4	2	1-39/64	51206	57177
0.2598	6,600 mm		101,0	63,0	50,0	61096	68338
0.2610	6,630 mm	G	3-1/2	2-1/8	1-45/64	51207	57178
0.2638	6,700 mm		101,0	63,0	50,0	61097	68339
0.2656	6,750 mm	17/64	3-1/2	2-1/8	1-45/64	51117	57179
0.2660	6,760 mm	H	3-1/2	2-1/8	1-45/64	51208	57180
0.2677	6,800 mm		109,0	69,0	55,0	61098	68340
0.2717	6,900 mm		109,0	69,0	55,0	61099	68341
0.2720	6,910 mm	I	3-1/2	2-1/8	1-45/64	51209	57181
0.2756	7,000 mm		109,0	69,0	55,0	61031	68283
0.2770	7,040 mm	J	3-1/2	2-1/8	1-45/64	51210	57182
0.2795	7,100 mm		109,0	69,0	55,0	61100	68342
0.2810	7,140 mm	K	3-1/2	2-1/8	1-45/64	51211	57183
0.2812	7,140 mm	9/32	3-1/2	2-1/8	1-45/64	51118	57184
0.2835	7,200 mm		109,0	69,0	55,0	61101	68343
0.2874	7,300 mm		109,0	69,0	55,0	61102	68344
0.2900	7,370 mm	L	3-1/2	2-1/8	1-45/64	51212	57185
0.2913	7,400 mm		109,0	69,0	55,0	61103	68345
0.2950	7,490 mm	M	3-3/4	2-3/8	1-29/32	51213	57186
0.2953	7,500 mm		109,0	69,0	55,0	61033	68284
0.2969	7,540 mm	19/64	3-3/4	2-3/8	1-29/32	51119	57187
0.2992	7,600 mm		117,0	75,0	60,0	61104	68346
0.3020	7,670 mm	N	3-3/4	2-3/8	1-29/32	51214	57188
0.3031	7,700 mm		117,0	75,0	60,0	61105	68347
0.3071	7,800 mm		117,0	75,0	60,0	61106	68348
0.3110	7,900 mm		117,0	75,0	60,0	61107	68349
0.3125	7,940 mm	*5/16	3-3/4	2-3/8	1-29/32	51120	57189
0.3150	8,000 mm		117,0	75,0	60,0	61035	68285
0.3160	8,030 mm	O	3-3/4	2-3/8	1-29/32	51215	57190
0.3189	8,100 mm		117,0	75,0	60,0	61108	68350
0.3228	8,200 mm		117,0	75,0	60,0	61109	68351
0.3230	8,200 mm	P	3-3/4	2-3/8	1-29/32	51216	57191
0.3268	8,300 mm		117,0	75,0	60,0	61110	68352
0.3281	8,330 mm	21/64	4	2-1/2	2	51121	57192
0.3307	8,400 mm		117,0	75,0	60,0	61111	68353
0.3320	8,430 mm	Q	4	2-1/2	2	51217	57193
0.3346	8,500 mm		117,0	75,0	60,0	61037	68286

continued on next page

2 Flute Drills • Metric: DIN 338

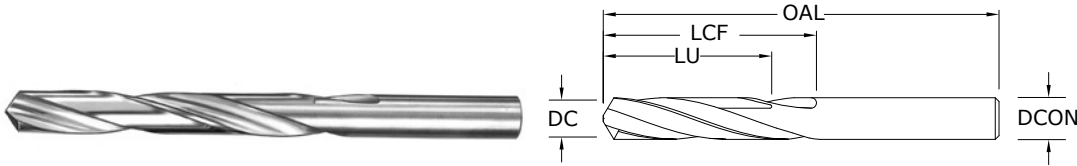

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set



CONTINUED

inch & mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AITiN)
0.3386	8,600 mm		125,0	81,0	64,0	61112	68354
0.3390	8,610 mm	R	4	2-1/2	2	51218	57194
0.3425	8,700 mm		125,0	81,0	64,0	61113	68355
0.3438	8,730 mm	11/32	4	2-1/2	2	51122	57195
0.3465	8,800 mm		125,0	81,0	64,0	61114	68356
0.3480	8,840 mm	S	4	2-1/2	2	51219	57196
0.3504	8,900 mm		125,0	81,0	64,0	61115	68357
0.3543	9,000 mm		125,0	81,0	64,0	61039	68287
0.3580	9,090 mm	T	4-1/4	2-3/4	2-13/64	51220	57197
0.3583	9,100 mm		125,0	81,0	64,0	61116	68358
0.3594	9,130 mm	23/64	4-1/4	2-3/4	2-13/64	51123	57198
0.3622	9,200 mm		125,0	81,0	64,0	61117	68359
0.3661	9,300 mm		125,0	81,0	64,0	61118	68360
0.3680	9,350 mm	U	4-1/4	2-3/4	2-13/64	51221	57199
0.3701	9,400 mm		125,0	81,0	64,0	61119	68361
0.3740	9,500 mm		125,0	81,0	64,0	61041	68288
0.3750	9,530 mm	*3/8	4-1/4	2-3/4	2-13/64	51124	57200
0.3770	9,580 mm	V	4-1/4	2-3/4	2-13/64	51222	57201
0.3780	9,600 mm		133,0	87,0	69,0	61120	68362
0.3819	9,700 mm		133,0	87,0	69,0	61121	68363
0.3858	9,800 mm		133,0	87,0	69,0	61122	68364
0.3860	9,800 mm	W	4-1/2	2-7/8	2-19/64	51223	57202
0.3898	9,900 mm		133,0	87,0	69,0	61123	68365
0.3906	9,920 mm	25/64	4-1/2	2-7/8	2-19/64	51125	57203
0.3937	10,000 mm		133,0	87,0	69,0	61043	68289
0.3970	10,080 mm	X	4-1/2	2-7/8	2-19/64	51224	57204
0.4016	10,010 mm		133,0	87,0	69,0	61124	68366
0.4040	10,260 mm	Y	4-1/2	2-7/8	2-19/64	51225	57205
0.4062	10,320 mm	13/32	4-1/2	2-7/8	2-19/64	51126	57206
0.4130	10,490 mm	Z	4-1/2	2-7/8	2-19/64	51226	57207
0.4134	10,500 mm		133,0	87,0	69,0	61045	68290
0.4219	10,720 mm	27/64	4-1/2	2-7/8	2-19/64	51127	57208
0.4331	11,000 mm		142,0	94,0	75,0	61047	68291
0.4375	11,110 mm	7/16	4-1/2	2-7/8	2-19/64	51128	57209
0.4528	11,500 mm		142,0	94,0	75,0	61049	68292
0.4531	11,510 mm	29/64	4-3/4	3	2-13/32	51129	57210
0.4688	11,910 mm	15/32	4-3/4	3	2-13/32	51130	57211
0.4724	12,000 mm		151,0	101,0	80,0	61051	68293
0.4844	12,300 mm	31/64	4-3/4	3	2-13/32	51131	57212
0.5000	12,700 mm	1/2	4-3/4	3	2-13/32	51132	57213
*Series 101 Set						61175	57351

TOLERANCES (inch)

DC = +0.0000/-0.0005


TOLERANCES (mm)

DC = +0.0000/-0.0127

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Short Length Self Centering Drills • DIN 6539

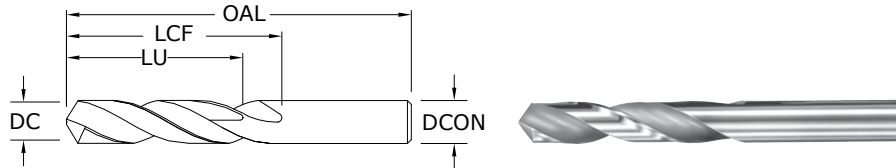

108M Plus

METRIC SERIES

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/-0,010

DCON = h_6

>3-6 DIAMETER

DC = +0,000/-0,012

DCON = h_6

>6-10 DIAMETER

DC = +0,000/-0,015

DCON = h_6

>10-16 DIAMETER

DC = +0,000/-0,018

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AlTiN)
0.0197	0,500 mm		20,0	3,0	—	62001	68643
0.0217	0,550 mm		21,0	3,5	—	62003	68644
0.0236	0,600 mm		21,0	3,5	—	62005	68645
0.0256	0,650 mm		22,0	4,0	—	62007	68646
0.0276	0,700 mm		23,0	4,5	—	62009	68647
0.0295	0,750 mm		23,0	4,5	—	62011	68648
0.0315	0,800 mm		24,0	5,0	—	62013	68649
0.0335	0,850 mm		24,0	5,0	—	62015	68650
0.0354	0,900 mm		25,0	5,5	4,0	62017	68651
0.0374	0,950 mm		25,0	5,5	4,0	62019	68652
0.0394	1,000 mm		26,0	6,0	4,7	62021	68653
0.0413	1,050 mm		26,0	6,0	4,7	62023	68654
0.0433	1,100 mm		28,0	7,0	5,4	62025	68655
0.0453	1,150 mm		28,0	7,0	5,4	62027	68656
0.0472	1,200 mm		30,0	8,0	6,0	62029	68657
0.0492	1,250 mm		30,0	8,0	6,0	62031	68658
0.0512	1,300 mm		30,0	8,0	6,0	62033	68659
0.0531	1,350 mm		32,0	9,0	7,0	62035	68660
0.0551	1,400 mm		32,0	9,0	7,0	62037	68661
0.0571	1,450 mm		32,0	9,0	7,0	62039	68662
0.0591	1,500 mm		32,0	9,0	7,0	62041	68663
0.0630	1,600 mm		34,0	10,0	7,0	62043	68664
0.0669	1,700 mm		34,0	10,0	7,0	62045	68665
0.0709	1,800 mm		36,0	11,0	8,0	62047	68666
0.0748	1,900 mm		36,0	11,0	8,0	62049	68667
0.0748	2,000 mm		38,0	12,0	9,0	62051	68668
0.0827	2,100 mm		38,0	12,0	9,0	62053	68669
0.0866	2,200 mm		40,0	13,0	10,0	62055	68670
0.0906	2,300 mm		40,0	13,0	10,0	62057	68671
0.0945	2,400 mm		43,0	14,0	11,0	62059	68672
0.0984	2,500 mm		43,0	14,0	11,0	62061	68673
0.1024	2,600 mm		43,0	14,0	11,0	62063	68674
0.1063	2,700 mm		46,0	16,0	12,0	62065	68675
0.1102	2,800 mm		46,0	16,0	12,0	62067	68676

continued on next page

Short Length Self Centering Drills • DIN 6539




3xD



108M Plus

METRIC SERIES

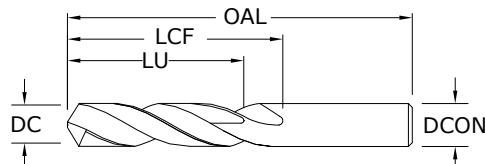

CONTINUED

mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.1142	2,900 mm		46,0	16,0	12,0	62069	68677
0.1181	3,000 mm		46,0	16,0	12,0	62071	68678
0.1220	3,100 mm		49,0	18,0	14,0	62073	68679
0.1260	3,200 mm		49,0	18,0	14,0	62075	68680
0.1299	3,300 mm		49,0	18,0	14,0	62077	68681
0.1339	3,400 mm		52,0	20,0	15,0	62079	68682
0.1378	3,500 mm		52,0	20,0	15,0	62081	68683
0.1417	3,600 mm		52,0	20,0	15,0	62083	68684
0.1457	3,700 mm		52,0	20,0	15,0	62085	68685
0.1496	3,800 mm		55,0	22,0	17,0	62087	68686
0.1535	3,900 mm		55,0	22,0	17,0	62089	68687
0.1575	4,000 mm		55,0	22,0	17,0	62091	68688
0.1614	4,100 mm		55,0	22,0	17,0	62093	68689
0.1654	4,200 mm		55,0	22,0	17,0	62095	68690
0.1693	4,300 mm		58,0	24,0	18,0	62097	68691
0.1732	4,400 mm		58,0	24,0	18,0	62099	68692
0.1772	4,500 mm		58,0	24,0	18,0	62101	68693
0.1811	4,600 mm		58,0	24,0	18,0	62103	68694
0.1850	4,700 mm	#13	58,0	24,0	18,0	62105	68695
0.1890	4,800 mm	#12	62,0	26,0	20,0	62107	68696
0.1929	4,900 mm		62,0	26,0	20,0	62109	68697
0.1969	5,000 mm		62,0	26,0	20,0	62111	68698
0.2008	5,100 mm		62,0	26,0	20,0	62113	68699
0.2047	5,200 mm		62,0	26,0	20,0	62115	68700
0.2087	5,300 mm		62,0	26,0	20,0	62117	68701
0.2126	5,400 mm		66,0	28,0	21,0	62119	68702
0.2165	5,500 mm		66,0	28,0	21,0	62121	68703
0.2205	5,600 mm		66,0	28,0	21,0	62123	68704
0.2244	5,700 mm		66,0	28,0	21,0	62125	68705
0.2283	5,800 mm		66,0	28,0	21,0	62127	68706
0.2323	5,900 mm		66,0	28,0	21,0	62129	68707
0.2362	6,000 mm		66,0	28,0	21,0	62131	68708

continued on next page

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/-0,010

DCON = h₆

>3-6 DIAMETER

DC = +0,000/-0,012

DCON = h₆

>6-10 DIAMETER

DC = +0,000/-0,015

DCON = h₆

>10-16 DIAMETER



DC = +0,000/-0,018

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Short Length Self Centering Drills • DIN 6539

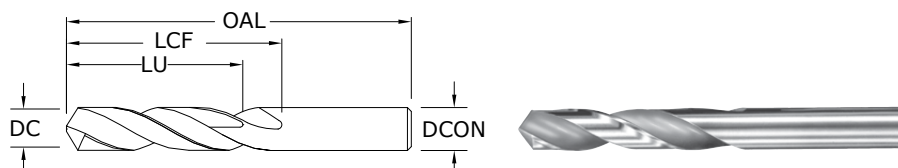

108M Plus

METRIC SERIES

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/-0,010

DCON = h_6

>3-6 DIAMETER

DC = +0,000/-0,012

DCON = h_6

>6-10 DIAMETER

DC = +0,000/-0,015

DCON = h_6

>10-16 DIAMETER

DC = +0,000/-0,018

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2402	6,100 mm		70,0	31,0	23,0	62133	68709
0.2441	6,200 mm		70,0	31,0	23,0	62135	68710
0.2480	6,300 mm		70,0	31,0	23,0	62137	68711
0.2520	6,400 mm		70,0	31,0	23,0	62139	68712
0.2559	6,500 mm		70,0	31,0	23,0	62141	68713
0.2598	6,800 mm		70,0	31,0	23,0	62142	68603
0.2756	7,000 mm		74,0	34,0	25,0	62143	68718
0.2953	7,500 mm		74,0	34,0	25,0	62145	68723
0.3071	7,800 mm		79,0	37,0	27,0	62146	68604
0.3150	8,000 mm		79,0	37,0	27,0	62147	68728
0.3346	8,500 mm		79,0	37,0	27,0	62149	68733
0.3543	9,000 mm		84,0	40,0	29,0	62151	68738
0.3740	9,500 mm		84,0	40,0	29,0	62153	68743
0.3858	9,800 mm		89,0	43,0	31,0	62154	68606
0.3937	10,000 mm		89,0	43,0	31,0	62155	68748
0.4016	10,200 mm		89,0	43,0	31,0	62156	68607
0.4134	10,500 mm		89,0	43,0	31,0	62066	68753
0.4331	11,000 mm		95,0	47,0	33,0	62157	68758
0.4528	11,500 mm		95,0	47,0	33,0	62084	68763
0.4646	11,800 mm		102,0	51,0	35,0	62158	68608
0.4724	12,000 mm		102,0	51,0	35,0	62159	68768
0.4921	12,500 mm		102,0	51,0	35,0	62102	68773
0.5118	13,000 mm		102,0	51,0	35,0	62112	68778
0.5433	13,800 mm		107,0	54,0	37,0	62164	68609
0.5512	14,000 mm		107,0	54,0	37,0	62116	68780
0.5709	14,500 mm		111,0	56,0	38,0	62166	68611
0.5827	14,800 mm		111,0	56,0	38,0	62167	68612
0.5906	15,000 mm		111,0	56,0	38,0	62168	68613
0.6221	15,800 mm		115,0	58,0	38,0	62170	68614
0.6299	16,000 mm		115,0	58,0	38,0	62171	68616

CONTINUED

2 Flute Drills

Series 101 Fractional	Hardness	Vc (sfm)		DC • in						
				1/64	1/32	1/16	1/8	1/4	3/8	1/2
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	265	RPM	64787	32394	16197	8098	4049	2699	2025
		≤ 175 Bhn or ≤ 7 HRc	Fr	0.00021	0.0004	0.0008	0.0017	0.0033	0.0050	0.0067
		(212-318)	Feed (ipm)	13.5	13.5	13.5	13.5	13.5	13.5	13.5
		125	RPM	30560	15280	7640	3820	1910	1273	955
		≤ 300 Bhn or ≤ 32 HRc	Fr	0.00020	0.0004	0.0008	0.0016	0.0031	0.0047	0.0063
		(100-150)	Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0
		85	RPM	20781	10390	5195	2598	1299	866	649
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.00011	0.0002	0.0004	0.0008	0.0017	0.0025	0.0034
		(68-102)	Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230	RPM	56230	28115	14058	7029	3514	2343	1757
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.00019	0.0004	0.0007	0.0015	0.0030	0.0045	0.0060
		(184-276)	Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		145	RPM	35450	17725	8862	4431	2216	1477	1108
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.00019	0.0004	0.0007	0.0015	0.0030	0.0045	0.0060
		(116-174)	Feed (ipm)	6.6	6.6	6.6	6.6	6.6	6.6	6.6
		60	RPM	14669	7334	3667	1834	917	611	458
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.00008	0.0002	0.0003	0.0007	0.0013	0.0020	0.0026
		(48-72)	Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85	RPM	20781	10390	5195	2598	1299	866	649
		≤ 250 Bhn or ≤ 24 HRc	Fr	0.00011	0.0002	0.0004	0.0009	0.0018	0.0027	0.0035
		(68-102)	Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		55	RPM	13446	6723	3362	1681	840	560	420
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0012	0.0017
		(44-66)	Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	210	RPM	51341	25670	12835	6418	3209	2139	1604
		≤ 250 Bhn or ≤ 24 HRc	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
		(168-252)	Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7
		110	RPM	26893	13446	6723	3362	1681	1121	840
		≤ 330 Bhn or ≤ 36 HRc	Fr	0.00009	0.0002	0.0004	0.0007	0.0015	0.0022	0.0030
		(88-132)	Feed (ipm)	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	65	RPM	15891	7946	3973	1986	993	662	497
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.00010	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
		(52-78)	Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		55	RPM	13446	6723	3362	1681	840	560	420
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.00010	0.0002	0.0004	0.0008	0.0015	0.0023	0.0031
		(44-66)	Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
K	CAST IRONS Gray, Malleable, Ductile	280	RPM	68454	34227	17114	8557	4278	2852	2139
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.00026	0.0005	0.0010	0.0020	0.0041	0.0061	0.0082
		(224-336)	Feed (ipm)	17.5	17.5	17.5	17.5	17.5	17.5	17.5
		250	RPM	61120	30560	15280	7640	3820	2547	1910
		≤ 330 Bhn or ≤ 36 HRc	Fr	0.00025	0.0005	0.0010	0.0020	0.0041	0.0061	0.0081
		(200-300)	Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5

continued on next page

FRACTIONAL 2 Flute Drills

Series 101 Fractional	Hardness	Vc (sfm)		DC • in						
				1/64	1/32	1/16	1/8	1/4	3/8	1/2
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540 (432-648)	RPM	132019	66010	33005	16502	8251	5501	4126
			Fr	0.00030	0.0006	0.0012	0.0024	0.0048	0.0073	0.0097
			Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0
		455 (364-546)	RPM	111238	55619	27810	13905	6952	4635	3476
			Fr	0.00031	0.0006	0.0013	0.0025	0.0050	0.0076	0.0101
			Feed (ipm)	35.0	35.0	35.0	35.0	35.0	35.0	35.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	190 (152-228)	RPM	46451	23226	11613	5806	2903	1935	1452
			Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
			Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0
		175 (140-210)	RPM	42784	21392	10696	5348	2674	1783	1337
			Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
			Feed (ipm)	6.4	6.4	6.4	6.4	6.4	6.4	6.4
S	PLASTICS Polycarbonate, PVC	500 (400-600)	RPM	122240	61120	30560	15280	7640	5093	3820
			Fr	0.00031	0.0006	0.0012	0.0025	0.0050	0.0075	0.0099
			Feed (ipm)	38.0	38.0	38.0	38.0	38.0	38.0	38.0
		40 (32-48)	RPM	9779	4890	2445	1222	611	407	306
			Fr	0.00010	0.0002	0.0004	0.0008	0.0016	0.0025	0.0033
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	25 (20-30)	RPM	6112	3056	1528	764	382	255	191
			Fr	0.00010	0.0002	0.0004	0.0008	0.0016	0.0024	0.0031
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		20 (16-24)	RPM	4890	2445	1222	611	306	204	153
			Fr	0.00004	0.0001	0.0002	0.0003	0.0007	0.0010	0.0013
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
H	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	85 (68-102)	RPM	20781	10390	5195	2598	1299	866	649
			Fr	0.00020	0.0004	0.0008	0.0016	0.0032	0.0049	0.0065
			Feed (ipm)	4.2	4.2	4.2	4.2	4.2	4.2	4.2
		65 (52-78)	RPM	15891	7946	3973	1986	993	662	497
			Fr	0.00011	0.0002	0.0004	0.0009	0.0017	0.0026	0.0034
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40 (32-48)	RPM	9779	4890	2445	1222	611	407	306
			Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0012	0.0016
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

2 Flute Drills

Short Length Self Centering Drills • DIN 6539

Series 101M, 108M Metric	Hardness	Vc (m/min)	DC • mm							
			1	3	6	8	10	12	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	81	RPM	25690	8563	4282	3211	2569	2141	1606
		(65-97)	Fr	0.014	0.041	0.082	0.109	0.136	0.163	0.218
			Feed (mm/min)	350	350	350	350	350	350	350
		38	RPM	12118	4039	2020	1515	1212	1010	757
		(30-46)	Fr	0.012	0.036	0.072	0.096	0.120	0.144	0.191
			Feed (mm/min)	145	145	145	145	145	145	145
		26	RPM	8240	2747	1373	1030	824	687	515
		(21-31)	Fr	0.007	0.020	0.040	0.053	0.067	0.080	0.107
			Feed (mm/min)	55	55	55	55	55	55	55
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70	RPM	22297	7432	3716	2787	2230	1858	1394
		(56-84)	Fr	0.012	0.036	0.073	0.097	0.121	0.145	0.194
			Feed (mm/min)	270	270	270	270	270	270	270
		44	RPM	14057	4686	2343	1757	1406	1171	879
		(35-53)	Fr	0.012	0.036	0.073	0.097	0.121	0.145	0.194
			Feed (mm/min)	170	170	170	170	170	170	170
		18	RPM	5816	1939	969	727	582	485	364
		(15-22)	Fr	0.005	0.015	0.030	0.040	0.050	0.060	0.080
			Feed (mm/min)	29	29	29	29	29	29	29
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	8240	2747	1373	1030	824	687	515
		(21-31)	Fr	0.007	0.020	0.040	0.053	0.067	0.080	0.107
			Feed (mm/min)	55	55	55	55	55	55	55
		17	RPM	5332	1777	889	666	533	444	333
		(13-20)	Fr	0.003	0.010	0.020	0.027	0.034	0.041	0.054
			Feed (mm/min)	18	18	18	18	18	18	18
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	64	RPM	20358	6786	3393	2545	2036	1696	1272
		(51-77)	Fr	0.010	0.029	0.059	0.079	0.098	0.118	0.157
			Feed (mm/min)	200	200	200	200	200	200	200
		34	RPM	10664	3555	1777	1333	1066	889	666
		(27-40)	Fr	0.006	0.017	0.034	0.045	0.056	0.068	0.090
			Feed (mm/min)	60	60	60	60	60	60	60
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	20	RPM	6301	2100	1050	788	630	525	394
		(16-24)	Fr	0.007	0.021	0.043	0.057	0.071	0.086	0.114
			Feed (mm/min)	45	45	45	45	45	45	45
		17	RPM	5332	1777	889	666	533	444	333
		(13-20)	Fr	0.007	0.020	0.039	0.053	0.066	0.079	0.105
			Feed (mm/min)	35	35	35	35	35	35	35
K	CAST IRONS Gray, Malleable, Ductile	85	RPM	27144	9048	4524	3393	2714	2262	1696
		(68-102)	Fr	0.016	0.049	0.097	0.130	0.162	0.195	0.259
			Feed (mm/min)	440	440	440	440	440	440	440
		76	RPM	24235	8078	4039	3029	2424	2020	1515
		(61-91)	Fr	0.017	0.050	0.099	0.132	0.165	0.198	0.264
			Feed (mm/min)	400	400	400	400	400	400	400

continued on next page

2 Flute Drills

Short Length Self Centering Drills • DIN 6539

Series 101M, 108M Metric	Hardness	Vc (m/min)	DC • mm								
			1	3	6	8	10	12	16		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	165	RPM	52348	17449	8725	6544	5235	4362	3272
			(132-198)	Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.319
			Feed (mm/min)	1045	1045	1045	1045	1045	1045	1045	
		≤ 150 Bhn or ≤ 88 HRb	139	RPM	44108	14703	7351	5514	4411	3676	2757
			(111-166)	Fr	0.020	0.060	0.120	0.160	0.200	0.239	0.319
			Feed (mm/min)	880	880	880	880	880	880	880	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	58	RPM	18419	6140	3070	2302	1842	1535	1151
			(46-69)	Fr	0.010	0.030	0.060	0.080	0.100	0.121	0.161
			Feed (mm/min)	185	185	185	185	185	185	185	
		≤ 200 Bhn or ≤ 23 HRc	53	RPM	16965	5655	2827	2121	1696	1414	1060
			(43-64)	Fr	0.010	0.030	0.060	0.080	0.100	0.120	0.160
			Feed (mm/min)	170	170	170	170	170	170	170	
PLASTICS Polycarbonate, PVC	152 (122-183)	RPM	48471	16157	8078	6059	4847	4039	3029		
		Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.320		
		Feed (mm/min)	970	970	970	970	970	970	970		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	12	RPM	3878	1293	646	485	388	323	242
			(10-15)	Fr	0.006	0.019	0.039	0.052	0.064	0.077	0.103
			Feed (mm/min)	25	25	25	25	25	25	25	
		≤ 320 Bhn or ≤ 34 HRc	8	RPM	2424	808	404	303	242	202	151
			(6-9)	Fr	0.006	0.019	0.037	0.050	0.062	0.074	0.099
			Feed (mm/min)	15	15	15	15	15	15	15	
		≤ 425 Bhn or ≤ 45 HRc	6	RPM	1939	646	323	242	194	162	121
			(5-7)	Fr	0.005	0.015	0.031	0.041	0.052	0.062	0.083
			Feed (mm/min)	10	10	10	10	10	10	10	
	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	26	RPM	8240	2747	1373	1030	824	687	515
			(21-31)	Fr	0.013	0.040	0.080	0.107	0.133	0.160	0.214
			Feed (mm/min)	110	110	110	110	110	110	110	
		≤ 350 Bhn or ≤ 38 HRc	20	RPM	6301	2100	1050	788	630	525	394
			(16-24)	Fr	0.007	0.021	0.043	0.057	0.071	0.086	0.114
			Feed (mm/min)	45	45	45	45	45	45	45	
		≤ 440 Bhn or ≤ 47 HRc	17	RPM	5332	1777	889	666	533	444	333
			(13-20)	Fr	0.007	0.020	0.039	0.053	0.066	0.079	0.105
			Feed (mm/min)	35	35	35	35	35	35	35	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	12	RPM	3878	1293	646	485	388	323	242
			(10-15)	Fr	0.003	0.009	0.019	0.025	0.031	0.037	0.050
			Feed (mm/min)	12	12	12	12	12	12	12	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Straight Flute Drills • Metric: DIN 6539




3xD



106

FRACTIONAL & METRIC SERIES

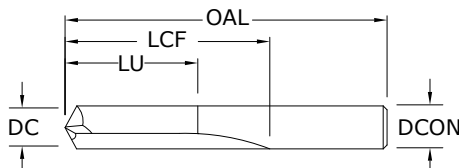

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AlTiN)
0.0394	1,000 mm		26,0	6,0	4,5	66001	66002
0.0400	1,020 mm	#60	1-1/2	1/2	13/32	56060	56269
0.0410	1,040 mm	#59	1-1/2	1/2	13/32	56059	56268
0.0420	1,070 mm	#58	1-1/2	1/2	13/32	56058	56267
0.0430	1,090 mm	#57	1-1/2	1/2	13/32	56057	56266
0.0465	1,180 mm	#56	1-1/2	1/2	13/32	56056	56265
0.0469	1,190 mm	3/64	1-1/2	1/2	13/32	56103	56135
0.0520	1,320 mm	#55	1-1/2	1/2	13/32	56055	56264
0.0550	1,400 mm	#54	1-1/2	1/2	13/32	56054	56263
0.0591	1,500 mm		32,0	9,0	7,0	66003	66004
0.0595	1,510 mm	#53	1-1/2	1/2	13/32	56053	56262
0.0625	1,590 mm	1/16	1-1/2	5/8	1/2	56104	56136
0.0635	1,610 mm	#52	1-11/16	11/16	35/64	56052	56261
0.0670	1,700 mm	#51	1-11/16	11/16	35/64	56051	56260
0.0700	1,780 mm	#50	1-11/16	11/16	35/64	56050	56259
0.0730	1,850 mm	#49	1-11/16	11/16	35/64	56049	56258
0.0760	1,930 mm	#48	1-11/16	11/16	35/64	56048	56257
0.0781	1,980 mm	5/64	1-11/16	11/16	35/64	56105	56137
0.0785	1,990 mm	#47	1-3/4	3/4	39/64	56047	56256
0.0787	2,000 mm		38,0	12,0	9,0	66005	66006
0.0810	2,060 mm	#46	1-3/4	3/4	39/64	56046	56255
0.0820	2,080 mm	#45	1-3/4	3/4	39/64	56045	56254
0.0860	2,180 mm	#44	1-3/4	3/4	39/64	56044	56253
0.0890	2,260 mm	#43	1-3/4	3/4	39/64	56043	56252
0.0935	2,370 mm	#42	1-3/4	3/4	39/64	56042	56251
0.0938	2,380 mm	3/32	1-3/4	3/4	39/64	56106	56138
0.0960	2,440 mm	#41	1-13/16	13/16	21/32	56041	56250
0.0980	2,490 mm	#40	1-13/16	13/16	21/32	56040	56249
0.0984	2,500 mm		43,0	14,0	11,0	66007	66008
0.0995	2,530 mm	#39	1-13/16	13/16	21/32	56039	56248
0.1015	2,580 mm	#38	1-13/16	13/16	21/32	56038	56247
0.1040	2,640 mm	#37	1-13/16	13/16	21/32	56037	56246
0.1065	2,710 mm	#36	1-13/16	13/16	21/32	56036	56245
0.1094	2,780 mm	7/64	1-13/16	13/16	21/32	56107	56139
0.1100	2,790 mm	#35	1-7/8	7/8	45/64	56035	56244
0.1110	2,820 mm	#34	1-7/8	7/8	45/64	56034	56243

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Straight Flute Drills • Metric: DIN 6539

106

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AITiN)
0.1130	2,870 mm	#33	1-7/8	7/8	45/64	56033	56242
0.1160	2,950 mm	#32	1-7/8	7/8	45/64	56032	56241
0.1181	3,000 mm		46,0	16,0	12,0	66009	66010
0.1200	3,050 mm	#31	1-7/8	7/8	45/64	56031	56240
0.1250	3,180 mm	1/8	1-7/8	7/8	45/64	56108	56140
0.1285	3,260 mm	#30	1-15/16	15/16	3/4	56030	56239
0.1360	3,450 mm	#29	1-15/16	15/16	3/4	56029	56238
0.1378	3,500 mm		52,0	20,0	15,0	66011	66012
0.1405	3,570 mm	#28	1-15/16	15/16	3/4	56028	56237
0.1406	3,570 mm	9/64	1-15/16	15/16	3/4	56109	56141
0.1440	3,660 mm	#27	2-1/16	1	51/64	56027	56236
0.1470	3,730 mm	#26	2-1/16	1	51/64	56026	56235
0.1495	3,800 mm	#25	2-1/16	1	51/64	56025	56234
0.1520	3,860 mm	#24	2-1/16	1	51/64	56024	56233
0.1540	3,910 mm	#23	2-1/16	1	51/64	56023	56232
0.1562	3,970 mm	5/32	2-1/16	1	51/64	56110	56142
0.1570	3,990 mm	#22	2-1/8	1-1/16	55/64	56022	56231
0.1575	4,000 mm		55,0	22,0	17,0	66013	66014
0.1590	4,040 mm	#21	2-1/8	1-1/16	55/64	56021	56230
0.1610	4,090 mm	#20	2-1/8	1-1/16	55/64	56020	56229
0.1660	4,220 mm	#19	2-1/8	1-1/16	55/64	56019	56228
0.1695	4,310 mm	#18	2-1/8	1-1/16	55/64	56018	56227
0.1719	4,370 mm	11/64	2-1/8	1-1/16	55/64	56111	56143
0.1730	4,390 mm	#17	2-3/16	1-1/8	29/32	56017	56226
0.1770	4,500 mm	#16	2-3/16	1-1/8	29/32	56016	56225
0.1772	4,500 mm		58,0	24,0	18,0	66015	66016
0.1800	4,570 mm	#15	2-3/16	1-1/8	29/32	56015	56224
0.1820	4,620 mm	#14	2-3/16	1-1/8	29/32	56014	56223
0.1850	4,700 mm	#13	2-3/16	1-1/8	29/32	56013	56222
0.1875	4,760 mm	3/16	2-3/16	1-1/8	29/32	56112	56144
0.1890	4,800 mm	#12	2-3/16	1-1/8	29/32	56012	56221
0.1910	4,850 mm	#11	2-3/16	1-1/8	29/32	56011	56220
0.1935	4,910 mm	#10	2-3/16	1-1/8	29/32	56010	56219
0.1960	4,980 mm	#9	2-1/4	1-3/16	61/64	56009	56218
0.1969	5,000 mm		62,0	26,0	20,0	66017	66018
0.1990	5,050 mm	#8	2-1/4	1-3/16	61/64	56008	56217
0.2010	5,110 mm	#7	2-1/4	1-3/16	61/64	56007	56216
0.2031	5,160 mm	13/64	2-1/4	1-3/16	61/64	56113	56145
0.2040	5,180 mm	#6	2-3/8	1-1/4	1	56006	56215
0.2055	5,220 mm	#5	2-3/8	1-1/4	1	56005	56214
0.2090	5,310 mm	#4	2-3/8	1-1/4	1	56004	56213
0.2130	5,410 mm	#3	2-3/8	1-1/4	1	56003	56212
0.2165	5,500 mm		66,0	28,0	21,0	66019	66020
0.2188	5,560 mm	7/32	2-3/8	1-1/4	1	56114	56146
0.2210	5,610 mm	#2	2-7/16	1-5/16	1-3/64	56002	56211
0.2280	5,790 mm	#1	2-7/16	1-5/16	1-3/64	56001	56210

continued on next page

Straight Flute Drills • Metric: DIN 6539




3xD



106

FRACTIONAL & METRIC SERIES

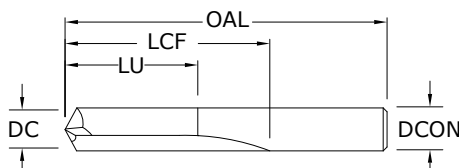

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2344	5,950 mm	15/64	2-7/16	1-5/16	1-3/64	56115	56147
0.2362	6,000 mm		66,0	28,0	21,0	66021	66045
0.2500	6,350 mm	1/4	2-1/2	1-3/8	1-7/64	56116	56148
0.2559	6,500 mm		70,0	31,0	23,0	66022	66046
0.2656	6,750 mm	17/64	2-5/8	1-7/16	1-7/64	56117	56149
0.2756	7,000 mm		74,0	34,0	25,0	66023	66024
0.2812	7,140 mm	9/32	2-11/16	1-1/2	1-13/64	56118	56150
0.2953	7,500 mm		74,0	34,0	25,0	66025	66026
0.2969	7,540 mm	19/64	2-3/4	1-9/16	1-1/4	56119	56151
0.3125	7,940 mm	5/16	2-13/16	1-5/8	1-19/64	56120	56152
0.3150	8,000 mm		79,0	37,0	27,0	66027	66028
0.3281	8,330 mm	21/64	2-15/16	1-11/16	1-23/64	56121	56153
0.3346	8,500 mm		79,0	37,0	27,0	66029	66030
0.3438	8,730 mm	11/32	3	1-11/16	1-23/64	56122	56154
0.3543	9,000 mm		84,0	40,0	29,0	66031	66032
0.3594	9,130 mm	23/64	3-1/16	1-3/4	1-13/32	56123	56155
0.3740	9,500 mm		84,0	40,0	29,0	66033	66034
0.3750	9,530 mm	3/8	3-1/8	1-13/16	1-29/64	56124	56156
0.3906	9,920 mm	25/64	3-1/4	1-7/8	1-1/2	56125	56157
0.3937	10,000 mm		89,0	43,0	31,0	66035	66036
0.4062	10,320 mm	13/32	3-5/16	1-15/16	1-35/64	56126	56158
0.4134	10,500 mm		89,0	43,0	31,0	66037	66038
0.4219	10,720 mm	27/64	3-3/8	2	1-39/64	56127	56159
0.4331	11,000 mm		95,0	47,0	33,0	66039	66040
0.4375	11,110 mm	7/16	3-7/16	2-1/16	1-21/32	56128	56160
0.4528	11,500 mm		95,0	47,0	33,0	66041	66042
0.4531	11,510 mm	29/64	3-9/16	2-1/8	1-45/64	56129	56161
0.4688	11,910 mm	15/32	3-5/8	2-1/8	1-45/64	56130	56162
0.4724	12,000 mm		102,0	51,0	35,0	66043	66044
0.4844	12,300 mm	31/64	3-11/16	2-3/16	1-3/4	56131	56163
0.5000	12,700 mm	1/2	3-3/4	2-1/4	1-51/64	56132	56164

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

FRACTIONAL & METRIC Straight Flute Drills

Series 106 Fractional		Hardness	Vc (sfm)	DC • in						
				1/16	1/8	3/16	1/4	3/8	1/2	
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 500 Bhn or ≤ 52 HRc	60	RPM	3667	1834	1222	917	611	458
			(48-72)	Fr	0.0004	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 615 Bhn or ≤ 58 HRc	50	RPM	3056	1528	1019	764	509	382
			(40-60)	Fr	0.0004	0.0008	0.0012	0.0016	0.0024	0.0031
				Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	250	RPM	15280	7640	5093	3820	2547	1910
			(200-300)	Fr	0.0010	0.0020	0.0030	0.0041	0.0061	0.0081
				Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5
		≤ 330 Bhn or ≤ 36 HRc	195	RPM	11918	5959	3973	2980	1986	1490
			(156-234)	Fr	0.0010	0.0020	0.0030	0.0040	0.0060	0.0081
				Feed (ipm)	12.0	12.0	12.0	12.0	12.0	12.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 500 Bhn or ≤ 52 HRc	60	RPM	3667	1834	1222	917	611	458
			(48-72)	Fr	0.0004	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 615 Bhn or ≤ 58 HRc	50	RPM	3056	1528	1019	764	509	382
			(40-60)	Fr	0.0004	0.0008	0.0012	0.0016	0.0024	0.0031
				Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2

Bhn (Brinell) HRc (Rockwell C)

$\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$

$\text{ipm} = \text{Fr} \times \text{rpm}$

reduce speed and feed 30 percent when using uncoated drills

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Series 106M Metric	Hardness	Vc (m/min)	DC • mm							
			1	3	6	8	10	12		
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 500 Bhn or ≤ 52 HRc	18	RPM	5816	1939	969	727	582	485
		(15-22)	Fr	0.006	0.018	0.035	0.047	0.058	0.070	
			Feed (mm/min)	34	34	34	34	34	34	
		≤ 615 Bhn or ≤ 58 HRc	15	RPM	4847	1616	808	606	485	404
		(12-18)	Fr	0.006	0.017	0.033	0.045	0.056	0.067	
			Feed (mm/min)	27	27	27	27	27	27	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	76	RPM	24235	8078	4039	3029	2424	2020
		(61-91)	Fr	0.016	0.048	0.096	0.128	0.160	0.192	
			Feed (mm/min)	395	395	395	395	395	395	
		≤ 330 Bhn or ≤ 36 HRc	59	RPM	18904	6301	3151	2363	1890	1575
		(48-71)	Fr	0.016	0.048	0.096	0.128	0.160	0.192	
			Feed (mm/min)	305	305	305	305	305	305	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 500 Bhn or ≤ 52 HRc	18	RPM	5816	1939	969	727	582	485
		(15-22)	Fr	0.006	0.018	0.035	0.047	0.058	0.070	
			Feed (mm/min)	34	34	34	34	34	34	
		≤ 615 Bhn or ≤ 58 HRc	15	RPM	4847	1616	808	606	485	404
		(12-18)	Fr	0.006	0.017	0.033	0.045	0.056	0.067	
			Feed (mm/min)	27	27	27	27	27	27	

Bhn (Brinell) HRc (Rockwell C)

$\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$

$\text{mm/min} = \text{Fr} \times \text{rpm}$

reduce speed and feed 30 percent when using uncoated drills

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)


3 Flute Drills • Metric: DIN 6539


3xD
(mm)

5xD
(inch)

103

FRACTIONAL & METRIC SERIES

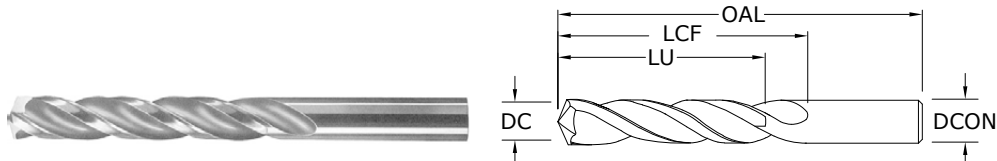

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm			USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF		UNCOATED	Ti-NAMITE®-A (AITiN)
0.1065	2,710 mm	#36	2-1/4	1-1/4	1	53036	58011
0.1094	2,780 mm	7/64	2-1/4	1-1/4	1	53107	58012
0.1100	2,790 mm	#35	2-1/4	1-1/4	1	53035	58013
0.1110	2,820 mm	#34	2-1/4	1-1/4	1	53034	58014
0.1130	2,870 mm	#33	2-1/4	1-1/4	1	53033	58015
0.1160	2,950 mm	#32	2-1/4	1-1/4	1	53032	58016
0.1181	3,000 mm		46,0	16,0	12,0	63000	68965
0.1200	3,050 mm	#31	2-1/4	1-1/4	1	53031	58017
0.1220	3,100 mm		49,0	18,0	14,0	63044	68966
0.1250	3,180 mm	1/8	2-1/4	1-1/4	1	53108	58018
0.1260	3,200 mm		49,0	18,0	14,0	63045	68967
0.1285	3,260 mm	#30	2-1/4	1-1/4	1	53030	58019
0.1299	3,300 mm		49,0	18,0	14,0	63001	68968
0.1339	3,400 mm		52,0	20,0	15,0	63046	68969
0.1360	3,450 mm	#29	2-1/2	1-3/8	1-7/64	53029	58020
0.1378	3,500 mm		52,0	20,0	15,0	63002	68970
0.1405	3,570 mm	#28	2-1/2	1-3/8	1-7/64	53028	58021
0.1406	3,570 mm	9/64	2-1/2	1-3/8	1-7/64	53109	58022
0.1417	3,600 mm		52,0	20,0	15,0	63047	68971
0.1440	3,660 mm	#27	2-1/2	1-3/8	1-7/64	53027	58023
0.1457	3,700 mm		52,0	20,0	15,0	63003	68972
0.1470	3,730 mm	#26	2-1/2	1-3/8	1-7/64	53026	58024
0.1495	3,800 mm	#25	2-1/2	1-3/8	1-7/64	53025	58025
0.1496	3,800 mm		55,0	22,0	17,0	63048	68973
0.1520	3,860 mm	#24	2-1/2	1-3/8	1-7/64	53024	58026
0.1535	3,900 mm		55,0	22,0	17,0	63049	68974
0.1540	3,910 mm	#23	2-1/2	1-3/8	1-7/64	53023	58027
0.1562	3,970 mm	5/32	2-1/2	1-3/8	1-7/64	53110	58028
0.1570	3,990 mm	#22	2-1/2	1-3/8	1-7/64	53022	58029
0.1575	4,000 mm		55,0	22,0	17,0	63004	68975
0.1590	4,040 mm	#21	2-1/2	1-3/8	1-7/64	53021	58030
0.1610	4,090 mm	#20	2-1/2	1-3/8	1-7/64	53020	58031
0.1614	4,100 mm		55,0	22,0	17,0	63050	68976
0.1654	4,200 mm		55,0	22,0	17,0	63005	68977
0.1660	4,220 mm	#19	2-3/4	1-5/8	1-19/64	53019	58032
0.1693	4,300 mm		58,0	24,0	18,0	63051	68978
0.1695	4,310 mm	#18	2-3/4	1-5/8	1-19/64	53018	58033
0.1719	4,370 mm	11/64	2-3/4	1-5/8	1-19/64	53111	58034
0.1730	4,390 mm	#17	2-3/4	1-5/8	1-19/64	53017	58035
0.1732	4,400 mm		58,0	24,0	18,0	63052	68979

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

NON-FERROUS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

3 Flute Drills • Metric: DIN 6539

103

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AITiN)
0.1770	4,500 mm	#16	2-3/4	1-5/8	1-19/64	53016	58036
0.1772	4,500 mm		58,0	24,0	18,0	63006	68980
0.1800	4,570 mm	#15	2-3/4	1-5/18	1-19/64	53015	58037
0.1811	4,600 mm		58,0	24,0	18,0	63053	68981
0.1820	4,620 mm	#14	2-3/4	1-5/8	1-19/64	53014	58038
0.1850	4,700 mm	#13	2-3/4	1-5/8	1-19/64	53013	58039
0.1850	4,700 mm		58,0	24,0	18,0	63054	68982
0.1875	4,760 mm	3/16	2-3/4	1-5/8	1-19/64	53112	58040
0.1890	4,800 mm	#12	2-3/4	1-5/8	1-19/64	53012	58041
0.1890	4,800 mm		62,0	26,0	20,0	63055	68983
0.1910	4,850 mm	#11	2-3/4	1-5/8	1-19/64	53011	58042
0.1929	4,900 mm		62,0	26,0	20,0	63056	68984
0.1935	4,910 mm	#10	2-3/4	1-5/8	1-19/64	53010	58043
0.1960	4,980 mm	#9	3	1-3/4	1-13/32	53009	58044
0.1969	5,000 mm		62,0	26,0	20,0	63007	68985
0.1990	5,050 mm	#8	3	1-3/4	1-13/32	53008	58045
0.2008	5,100 mm		62,0	26,0	20,0	63057	68986
0.2010	5,110 mm	#7	3	1-3/4	1-13/32	53007	58046
0.2031	5,160 mm	13/64	3	1-3/4	1-13/32	53113	58047
0.2040	5,180 mm	#6	3	1-3/4	1-13/32	53006	58048
0.2047	5,200 mm		62,0	26,0	20,0	63008	68987
0.2055	5,220 mm	#5	3	1-3/4	1-13/32	53005	58049
0.2087	5,300 mm		62,0	26,0	20,0	63058	68988
0.2090	5,310 mm	#4	3	1-3/4	1-13/32	53004	58050
0.2126	5,400 mm		66,0	28,0	21,0	63059	68989
0.2130	5,410 mm	#3	3	1-3/4	1-13/32	53003	58051
0.2165	5,500 mm		66,0	28,0	21,0	63009	68990
0.2188	5,560 mm	7/32	3	1-3/4	1-13/32	53114	58052
0.2205	5,600 mm		66,0	28,0	21,0	63060	68991
0.2210	5,610 mm	#2	3	1-3/4	1-13/32	53002	58053
0.2244	5,700 mm		66,0	28,0	21,0	63061	68992
0.2280	5,790 mm	#1	3	1-3/4	1-13/32	53001	58054
0.2283	5,800 mm		66,0	28,0	21,0	63062	68993
0.2323	5,900 mm		66,0	28,0	21,0	63063	68994
0.2340	5,940 mm	A	3-1/4	2	1-39/64	53201	58055
0.2344	5,950 mm	15/64	3-1/4	2	1-39/64	53115	58056
0.2362	6,000 mm		66,0	28,0	21,0	63010	68995
0.2380	6,050 mm	B	3-1/4	2	1-39/64	53202	58057
0.2402	6,100 mm		70,0	31,0	23,0	63064	68996
0.2420	6,150 mm	C	3-1/4	2	1-39/64	53203	58058
0.2441	6,200 mm		70,0	31,0	23,0	63011	68997
0.2460	6,250 mm	D	3-1/4	2	1-39/64	53204	58059
0.2480	6,300 mm		70,0	31,0	23,0	63065	68998
0.2500	6,350 mm	1/4	3-1/4	2	1-39/64	53116	58061
0.2520	6,400 mm		70,0	31,0	23,0	63066	68999
0.2559	6,500 mm		70,0	31,0	23,0	63012	69000
0.2570	6,530 mm	F	3-1/4	2	1-39/64	53206	58062
0.2598	6,600 mm		70,0	31,0	23,0	63067	69001
0.2610	6,630 mm	G	3-1/2	2-1/8	1-45/64	53207	58063
0.2638	6,700 mm		70,0	31,0	23,0	63068	69002


continued on next page

3 Flute Drills • Metric: DIN 6539

3xD
(mm)5xD
(inch)

103

FRACTIONAL & METRIC SERIES

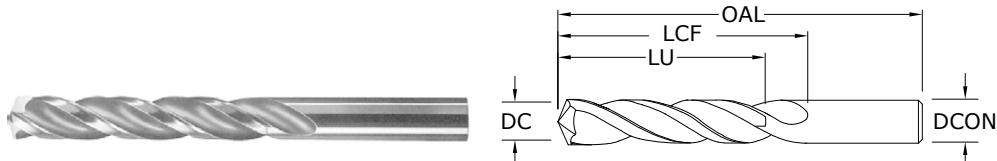

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AITiN)
0.2656	6,750 mm	17/64	3-1/2	2-1/8	1-45/64	53117	58064
0.2660	6,760 mm	H	3-1/2	2-1/8	1-45/64	53208	58065
0.2677	6,800 mm		74,0	34,0	25,0	63013	69003
0.2717	6,900 mm		74,0	34,0	25,0	63069	69004
0.2720	6,910 mm	I	3-1/2	2-1/8	1-45/64	53209	58066
0.2756	7,000 mm		74,0	34,0	25,0	63014	69005
0.2770	7,040 mm	J	3-1/2	2-1/8	1-45/64	53210	58067
0.2795	7,100 mm		74,0	34,0	25,0	63070	69006
0.2810	7,140 mm	K	3-1/2	2-1/8	1-45/64	53211	58068
0.2812	7,140 mm	9/32	3-1/2	2-1/8	1-45/64	53118	58069
0.2835	7,200 mm		74,0	34,0	25,0	63015	69007
0.2874	7,300 mm		74,0	34,0	25,0	63071	69008
0.2900	7,370 mm	L	3-1/2	2-1/8	1-45/64	53212	58070
0.2913	7,400 mm		74,0	34,0	25,0	63072	69009
0.2950	7,490 mm	M	3-3/4	2-3/8	1-29/32	53213	58071
0.2953	7,500 mm		74,0	34,0	25,0	63016	69010
0.2969	7,540 mm	19/64	3-3/4	2-3/8	1-29/32	53119	58072
0.2992	7,600 mm		79,0	37,0	27,0	63073	69011
0.3020	7,670 mm	N	2-3/8	2-3/8	1-29/32	53214	58073
0.3031	7,700 mm		79,0	37,0	27,0	63074	69012
0.3071	7,800 mm		79,0	37,0	27,0	63075	69013
0.3110	7,900 mm		79,0	37,0	27,0	63076	69014
0.3125	7,940 mm	5/16	3-3/4	2-3/8	1-29/32	53120	58074
0.3150	8,000 mm		79,0	37,0	27,0	63017	69015
0.3160	8,030 mm	O	3-3/4	2-3/8	1-29/32	53215	58075
0.3189	8,100 mm		79,0	37,0	27,0	63077	69016
0.3228	8,200 mm		79,0	37,0	27,0	63018	69017
0.3230	8,200 mm	P	3-3/4	2-3/8	1-29/32	53216	58076
0.3268	8,300 mm		79,0	37,0	27,0	63078	69018
0.3281	8,330 mm	21/64	4	2-1/2	2	53121	58077
0.3307	8,400 mm		79,0	37,0	27,0	63019	69019
0.3320	8,430 mm	Q	4	2-1/2	2	53217	58078
0.3346	8,500 mm		79,0	37,0	27,0	63020	69020
0.3386	8,600 mm		84,0	40,0	29,0	63021	69021
0.3390	8,610 mm	R	4	2-1/2	2	53218	58079
0.3425	8,700 mm		84,0	40,0	29,0	63079	69022
0.3438	8,730 mm	11/32	4	2-1/2	2	53122	58080
0.3465	8,800 mm		84,0	40,0	29,0	63022	69023
0.3480	8,840 mm	S	4	2-1/2	2	53219	58081
0.3504	8,900 mm		84,0	40,0	29,0	63080	69024
0.3543	9,000 mm		84,0	40,0	29,0	63023	69025
0.3580	9,090 mm	T	4-1/4	2-3/4	2-13/64	53220	58082

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

NON-FERROUS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

3 Flute Drills • Metric: DIN 6539

103

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.3583	9,100 mm		84,0	40,0	29,0	63081	69026
0.3594	9,130 mm	23/64	4-1/4	2-3/4	2-13/64	53123	58083
0.3622	9,200 mm		84,0	40,0	29,0	63024	69027
0.3661	9,300 mm		84,0	40,0	29,0	63082	69028
0.3680	9,350 mm	U	4-1/4	2-3/4	2-13/64	53221	58084
0.3701	9,400 mm		84,0	40,0	29,0	63083	69029
0.3740	9,500 mm		84,0	40,0	29,0	63025	69030
0.3750	9,530 mm	3/8	4-1/4	2-3/4	2-13/64	53124	58085
0.3770	9,580 mm	V	4-1/4	2-3/4	2-13/64	53222	58086
0.3780	9,600 mm		89,0	43,0	31,0	63084	69031
0.3819	9,700 mm		89,0	43,0	31,0	63085	69032
0.3858	9,800 mm		89,0	43,0	31,0	63086	69033
0.3860	9,800 mm	W	4-1/2	2-7/8	2-19/64	53223	58087
0.3898	9,900 mm		89,0	43,0	31,0	63087	69034
0.3906	9,920 mm	25/64	4-1/2	2-7/8	2-19/64	53125	58088
0.3937	10,000 mm		89,0	43,0	31,0	63026	69035
0.3970	10,080 mm	X	4-1/2	2-7/8	2-19/64	53224	58089
0.3976	10,100 mm		89,0	43,0	31,0	63088	69036
0.4016	10,200 mm		89,0	43,0	31,0	63027	69037
0.4040	10,260 mm	Y	4-1/2	2-7/8	2-19/64	53225	58090
0.4062	10,320 mm	13/32	4-1/2	2-7/8	2-19/64	53126	58091
0.4094	10,400 mm		89,0	43,0	31,0	63028	69038
0.4130	10,490 mm	Z	4-1/2	2-7/8	2-19/64	53226	58092
0.4134	10,500 mm		89,0	43,0	31,0	63029	69039
0.4213	10,700 mm		95,0	47,0	33,0	63030	69040
0.4219	10,720 mm	27/64	4-1/2	2-7/8	2-19/64	53127	58093
0.4252	10,800 mm		95,0	47,0	33,0	63031	69041
0.4331	11,000 mm		95,0	47,0	33,0	63032	69042
0.4375	11,110 mm	7/16	4-1/2	2-7/8	2-19/64	53128	58094
0.4528	11,500 mm		95,0	47,0	33,0	63033	69043
0.4531	11,510 mm	29/64	4-3/4	3	2-13/32	53129	58095
0.4688	11,910 mm	15/32	4-3/4	3	2-13/32	53130	58096
0.4724	12,000 mm		102,0	51,0	35,0	63034	69044
0.4844	12,300 mm	31/64	4-3/4	3	2-13/32	53131	58097
0.4921	12,500 mm		102,0	51,0	35,0	63035	69045
0.5000	12,700 mm	1/2	4-3/4	3	2-13/32	53132	58098
0.5039	12,800 mm		102,0	51,0	35,0	63036	69046
0.5118	13,000 mm		102,0	51,0	35,0	63089	69047
0.5156	13,100 mm	33/64	4-3/4	3	2-13/32	53135	58099
0.5157	13,100 mm		102,0	51,0	35,0	63037	69048
0.5315	13,500 mm		107,0	54,0	37,0	63090	69049
0.5512	14,000 mm		107,0	54,0	37,0	63038	69050
0.5625	14,290 mm	9/16	4-3/4	3	2-13/32	53136	58100
0.5630	14,300 mm		111,0	56,0	38,0	63039	69051
0.5709	14,500 mm		111,0	56,0	38,0	63040	69052
0.5906	15,000 mm		111,0	56,0	38,0	63091	69053
0.6250	15,880 mm	5/8	5-3/4	3-1/2	2-51/64	53133	58101
0.6875	17,460 mm	11/16	5-3/4	3-1/2	2-51/64	53137	58102
0.6890	17,500 mm		123,0	62,0	40,0	63041	69054
0.7500	19,050 mm	3/4	5-3/4	4-1/4	3 13/32	53134	58103
0.7677	19,500 mm		131,0	66,0	42,0	63042	69055
0.7874	20,000 mm		131,0	66,0	42,0	63043	69056

3 Flute Drills

Series 103 Fractional	Hardness	Vc (sfm)	DC • in						
				1/8	1/4	3/8	1/2	5/8	3/4
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	295	RPM	9015	4508	3005	2254	1803	1503
		≤ 175 Bhn or ≤ 7 HRc	Fr	0.0026	0.0051	0.0077	0.0102	0.0128	0.0153
		(236-354)	Feed (ipm)	23.0	23.0	23.0	23.0	23.0	23.0
		260	RPM	7946	3973	2649	1986	1589	1324
		≤ 300 Bhn or ≤ 32 HRc	Fr	0.0023	0.0045	0.0068	0.0091	0.0113	0.0136
		(208-312)	Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0
		150	RPM	4584	2292	1528	1146	917	764
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.0013	0.0026	0.0039	0.0052	0.0065	0.0079
		(120-180)	Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230	RPM	7029	3514	2343	1757	1406	1171
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.0019	0.0038	0.0058	0.0077	0.0096	0.0115
		(184-276)	Feed (ipm)	13.5	13.5	13.5	13.5	13.5	13.5
		145	RPM	4431	2216	1477	1108	886	739
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.0019	0.0038	0.0058	0.0077	0.0096	0.0115
		(116-174)	Feed (ipm)	8.5	8.5	8.5	8.5	8.5	8.5
		115	RPM	3514	1757	1171	879	703	586
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.0005	0.0010	0.0015	0.0020	0.0026	0.0031
		(92-138)	Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85	RPM	2598	1299	866	649	520	433
		≤ 250 Bhn or ≤ 24 HRc	Fr	0.0013	0.0026	0.0039	0.0052	0.0065	0.0079
		(68-102)	Feed (ipm)	3.4	3.4	3.4	3.4	3.4	3.4
		65	RPM	1986	993	662	497	397	331
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.0007	0.0013	0.0020	0.0026	0.0033	0.0039
		(52-78)	Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
K	CAST IRONS Gray, Malleable, Ductile	250	RPM	7640	3820	2547	1910	1528	1273
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.0026	0.0052	0.0079	0.0105	0.0131	0.0157
		(200-300)	Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0
		195	RPM	5959	2980	1986	1490	1192	993
		≤ 330 Bhn or ≤ 36 HRc	Fr	0.0026	0.0052	0.0078	0.0104	0.0130	0.0156
		(156-234)	Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540	RPM	16502	8251	5501	4126	3300	2750
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.0032	0.0064	0.0096	0.0128	0.0161	0.0193
		(432-648)	Feed (ipm)	53.0	53.0	53.0	53.0	53.0	53.0
		455	RPM	13905	6952	4635	3476	2781	2317
		≤ 150 Bhn or ≤ 88 HRb	Fr	0.0032	0.0065	0.0097	0.0129	0.0162	0.0194
		(364-546)	Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	305	RPM	9321	4660	3107	2330	1864	1553
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.0019	0.0039	0.0058	0.0077	0.0097	0.0116
		(244-366)	Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0
		160	RPM	4890	2445	1630	1222	978	815
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.0016	0.0033	0.0049	0.0065	0.0082	0.0098
		(128-192)	Feed (ipm)	8.0	8.0	8.0	8.0	8.0	8.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
		50	RPM	1528	764	509	382	306	255
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.0007	0.0013	0.0020	0.0026	0.0033	0.0039
		(40-60)	Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 103M Metric	Hardness	Vc (m/min)	DC • mm						
			3	6	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	90	RPM	9533	4766	2860	2383	1787	1430
		≤ 175 Bhn or ≤ 7 HRc	Fr	0.062	0.124	0.206	0.248	0.330	0.413
		(72-108)	Feed (mm/min)	590	590	590	590	590	590
		79	RPM	8402	4201	2520	2100	1575	1260
		≤ 300 Bhn or ≤ 32 HRc	Fr	0.055	0.110	0.183	0.219	0.292	0.365
		(63-95)	Feed (mm/min)	460	460	460	460	460	460
		46	RPM	4847	2424	1454	1212	909	727
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.032	0.064	0.107	0.128	0.171	0.213
		(37-55)	Feed (mm/min)	155	155	155	155	155	155
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70	RPM	7432	3716	2230	1858	1394	1115
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.046	0.093	0.155	0.186	0.248	0.309
		(56-84)	Feed (mm/min)	345	345	345	345	345	345
		44	RPM	4686	2343	1406	1171	879	703
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.046	0.092	0.153	0.184	0.245	0.306
		(35-53)	Feed (mm/min)	215	215	215	215	215	215
		35	RPM	3716	1858	1115	929	697	557
		≤ 450 Bhn or ≤ 48 HRc	Fr	0.012	0.024	0.040	0.048	0.065	0.081
		(28-42)	Feed (mm/min)	45	45	45	45	45	45
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	2747	1373	824	687	515	412
		≤ 250 Bhn or ≤ 24 HRc	Fr	0.031	0.062	0.103	0.124	0.165	0.206
		(21-31)	Feed (mm/min)	85	85	85	85	85	85
		20	RPM	2100	1050	630	525	394	315
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.017	0.033	0.056	0.067	0.089	0.111
		(16-24)	Feed (mm/min)	35	35	35	35	35	35
K	CAST IRONS Gray, Malleable, Ductile	76	RPM	8078	4039	2424	2020	1515	1212
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.063	0.126	0.210	0.253	0.337	0.421
		(61-91)	Feed (mm/min)	510	510	510	510	510	510
		59	RPM	6301	3151	1890	1575	1181	945
		≤ 330 Bhn or ≤ 36 HRc	Fr	0.052	0.105	0.175	0.209	0.279	0.349
		(48-71)	Feed (mm/min)	330	330	330	330	330	330
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	165	RPM	17449	8725	5235	4362	3272	2617
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.078	0.156	0.260	0.312	0.416	0.520
		(132-198)	Feed (mm/min)	1360	1360	1360	1360	1360	1360
		139	RPM	14703	7351	4411	3676	2757	2205
		≤ 150 Bhn or ≤ 7 HRc	Fr	0.078	0.156	0.261	0.313	0.417	0.521
		(111-166)	Feed (mm/min)	1150	1150	1150	1150	1150	1150
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	93	RPM	9856	4928	2957	2464	1848	1478
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.047	0.094	0.157	0.189	0.252	0.315
		(74-112)	Feed (mm/min)	465	465	465	465	465	465
		49	RPM	5170	2585	1551	1293	969	776
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.039	0.077	0.129	0.155	0.206	0.258
		(39-59)	Feed (mm/min)	200	200	200	200	200	200
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	15	RPM	1616	808	485	404	303	242
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.015	0.031	0.052	0.062	0.083	0.103
		(12-18)	Feed (mm/min)	25	25	25	25	25	25


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $rpm = (Vc \times 1000) / (DC \times 3.14)$
 $mm/min = Fr \times rpm$
 reduce speed and feed 30 percent when using uncoated drills
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

Combined Drill & Countersink



301
FRACTIONAL SERIES

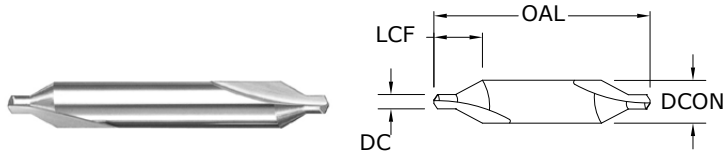

Pictured:
Series 301 Set





SIZE	inch				EDP NO.	
	DRILL DIAMETER DC	BODY DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED	Ti-NAMITE®-A (AlTiN)
*00	.025	1/8	1-1/2	.125	57005	57015
*0	1/32	1/8	1-1/2	.130	57006	57016
*1	3/64	1/8	1-1/2	.135	57007	57017
*2	5/64	3/16	1-7/8	.200	57008	57018
*3	7/64	1/4	2	.280	57009	57019
*4	1/8	5/16	2-1/8	.340	57010	57020
*5	3/16	7/16	2-3/4	.475	57011	57021
*6	7/32	1/2	3	.540	57012	57022
*Series 301 Set	—	—	—	—	57075	—

TOLERANCES (inch)
DC = +0.003/–0.000
DCON = –0.0001/–0.0005

- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS
- HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Combined Drill & Countersink

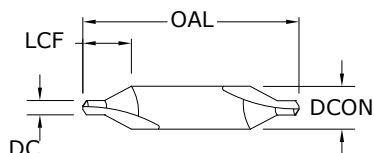

301M
METRIC SERIES

TOLERANCES (mm)

DC = +0,076/-0,000
DCON = -0,0025/-0,0127

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.	
DRILL DIAMETER DC	BODY DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED	Ti-NAMITE®-A (AlTiN)
0,5	3,15	20,0	3,0	67005	67035
0,8	3,15	20,0	3,5	67007	67037
1	3,15	31,5	3,5	67009	67039
1,25	3,15	31,5	4,0	67011	67041
1,6	4,0	35,5	5,0	67013	67043
2	5,0	40,0	6,0	67015	67045
2,5	6,3	45,0	7,0	67017	67047
3,15	8,0	50,0	9,0	67019	67049
4	10,0	56,0	11,0	67021	67051
5	12,5	63,0	14,0	67023	67053

Combined Drill & Countersink

Series 301 Fractional	Hardness	Vc (sfm)	DC • in						
			1/32	5/64	1/8	3/16	7/32		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	265	RPM	8098	5399	3239	2314	2025	
		≤ 175 Bhn or ≤ 7 HRc	(212-318)	Fr	0.00068	0.0010	0.0017	0.0024	0.0027
			Feed (ipm)	5.5	5.5	5.5	5.5	5.5	
		125	RPM	3820	2547	1528	1091	955	
		≤ 300 Bhn or ≤ 32 HRc	(100-150)	Fr	0.00065	0.0010	0.0016	0.0023	0.0026
			Feed (ipm)	2.5	2.5	2.5	2.5	2.5	
		85	RPM	2598	1732	1039	742	649	
		≤ 425 Bhn or ≤ 45 HRc	(68-102)	Fr	0.00038	0.0006	0.0010	0.0013	0.0015
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230	RPM	7029	4686	2812	2008	1757	
		≤ 275 Bhn or ≤ 28 HRc	(184-276)	Fr	0.00064	0.0010	0.0016	0.0022	0.0026
			Feed (ipm)	4.5	4.5	4.5	4.5	4.5	
		145	RPM	4431	2954	1772	1266	1108	
		≤ 375 Bhn or ≤ 40 HRc	(116-174)	Fr	0.00059	0.0009	0.0015	0.0021	0.0023
			Feed (ipm)	2.6	2.6	2.6	2.6	2.6	
		60	RPM	1834	1222	733	524	458	
		≤ 425 Bhn or ≤ 45 HRc	(48-72)	Fr	0.00027	0.0004	0.0007	0.0010	0.0011
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85	RPM	2598	1732	1039	742	649	
		≤ 250 Bhn or ≤ 24 HRc	(68-102)	Fr	0.00035	0.0005	0.0009	0.0012	0.0014
			Feed (ipm)	0.9	0.9	0.9	0.9	0.9	
		55	RPM	1681	1121	672	480	420	
		≤ 375 Bhn or ≤ 40 HRc	(44-66)	Fr	0.00016	0.0002	0.0004	0.0006	0.0006
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	210	RPM	6418	4278	2567	1834	1604	
		≤ 250 Bhn or ≤ 24 HRc	(168-252)	Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	3.1	3.1	3.1	3.1	3.1	
		110	RPM	3362	2241	1345	960	840	
		≤ 330 Bhn or ≤ 36 HRc	(88-132)	Fr	0.00028	0.0004	0.0007	0.0010	0.0011
			Feed (ipm)	0.9	0.9	0.9	0.9	0.9	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	65	RPM	1986	1324	795	568	497	
		≤ 275 Bhn or ≤ 28 HRc	(52-78)	Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7	
		55	RPM	1681	1121	672	480	420	
		≤ 375 Bhn or ≤ 40 HRc	(44-66)	Fr	0.00032	0.0005	0.0008	0.0011	0.0013
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	
K	CAST IRONS Gray, Malleable, Ductile	280	RPM	8557	5705	3423	2445	2139	
		≤ 220 Bhn or ≤ 19 HRc	(224-336)	Fr	0.00084	0.0013	0.0021	0.0029	0.0034
			Feed (ipm)	7.2	7.2	7.2	7.2	7.2	
		250	RPM	7640	5093	3056	2183	1910	
		≤ 330 Bhn or ≤ 36 HRc	(200-300)	Fr	0.00084	0.0013	0.0021	0.0029	0.0034
			Feed (ipm)	6.4	6.4	6.4	6.4	6.4	

continued on next page

Combined Drill & Countersink

Series 301 Fractional	Hardness	Vc (sfm)		DC • in				
				1/32	5/64	1/8	3/16	7/32
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540 (432-648)	RPM	16502	11002	6601	4715	4126
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	16.5	16.5	16.5	16.5	16.5
		455 (364-546)	RPM	13905	9270	5562	3973	3476
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	13.9	13.9	13.9	13.9	13.9
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	190 (152-228)	RPM	5806	3871	2323	1659	1452
			Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	2.8	2.8	2.8	2.8	2.8
		175 (140-210)	RPM	5348	3565	2139	1528	1337
			Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	2.6	2.6	2.6	2.6	2.6
S	PLASTICS Polycarbonate, PVC	500 (400-600)	RPM	15280	10187	6112	4366	3820
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	15.3	15.3	15.3	15.3	15.3
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	40 (32-48)	RPM	1222	815	489	349	306
			Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4
		25 (20-30)	RPM	764	509	306	218	191
			Fr	0.00033	0.0005	0.0008	0.0011	0.0013
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3
		20 (16-24)	RPM	611	407	244	175	153
			Fr	0.00016	0.0002	0.0004	0.0006	0.0007
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	85 (68-102)	RPM	2598	1732	1039	742	649
			Fr	0.00064	0.0010	0.0016	0.0022	0.0026
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7
		65 (52-78)	RPM	1986	1324	795	568	497
			Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40 (32-48)	RPM	1222	815	489	349	306
			Fr	0.00016	0.0002	0.0004	0.0006	0.0007
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DCON

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Combined Drill & Countersink

Series 301M Metric	Hardness	Vc (m/min)	DC • mm					
			1	1.6	2.5	4	5	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	81	RPM	8155	6422	4078	2569	2055
		(65-97)	Fr	0.017	0.022	0.034	0.054	0.068
			Feed (mm/min)	139	139	139	139	139
		38	RPM	3847	3029	1923	1212	969
		(30-46)	Fr	0.016	0.020	0.032	0.051	0.064
			Feed (mm/min)	62	62	62	62	62
		26	RPM	2616	2060	1308	824	659
		(21-31)	Fr	0.010	0.013	0.020	0.032	0.039
			Feed (mm/min)	26	26	26	26	26
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70	RPM	7078	5574	3539	2230	1784
		(56-84)	Fr	0.016	0.020	0.032	0.051	0.063
			Feed (mm/min)	113	113	113	113	113
		44	RPM	4462	3514	2231	1406	1125
		(35-53)	Fr	0.015	0.019	0.030	0.048	0.060
			Feed (mm/min)	67	67	67	67	67
		18	RPM	1847	1454	923	582	465
		(15-22)	Fr	0.007	0.009	0.014	0.022	0.028
			Feed (mm/min)	13	13	13	13	13
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	2616	2060	1308	824	659
		(21-31)	Fr	0.009	0.012	0.018	0.029	0.036
			Feed (mm/min)	24	24	24	24	24
17		RPM	1693	1333	846	533	427	
(13-20)		Fr	0.004	0.005	0.008	0.013	0.016	
		Feed (mm/min)	7	7	7	7	7	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	64	RPM	6463	5089	3231	2036	1629
		(51-77)	Fr	0.012	0.015	0.024	0.038	0.048
			Feed (mm/min)	78	78	78	78	78
		34	RPM	3385	2666	1693	1066	853
		(27-40)	Fr	0.007	0.009	0.014	0.023	0.028
			Feed (mm/min)	24	24	24	24	24
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	20	RPM	2000	1575	1000	630	504
		(16-24)	Fr	0.009	0.011	0.018	0.029	0.036
			Feed (mm/min)	18	18	18	18	18
		17	RPM	1693	1333	846	533	427
		(13-20)	Fr	0.008	0.011	0.017	0.026	0.033
			Feed (mm/min)	14	14	14	14	14
K	CAST IRONS Gray, Malleable, Ductile	85	RPM	8617	6786	4309	2714	2171
		(68-102)	Fr	0.021	0.027	0.042	0.067	0.083
			Feed (mm/min)	181	181	181	181	181
		76	RPM	7694	6059	3847	2424	1939
		(61-91)	Fr	0.021	0.027	0.042	0.067	0.084
			Feed (mm/min)	162	162	162	162	162

continued on next page

Combined Drill & Countersink

Series 301M Metric	Hardness	Vc (m/min)		DC • mm				
				1	1.6	2.5	4	5
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	165	RPM	16619	13087	8309	5235	4188
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.025	0.032	0.050	0.079	0.099
		(132-198)	Feed (mm/min)	415	415	415	415	415
		139	RPM	14003	11027	7001	4411	3529
		≤ 150 Bhn or ≤ 88 HRc	Fr	0.025	0.032	0.050	0.079	0.099
		(111-166)	Feed (mm/min)	350	350	350	350	350
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	58	RPM	5847	4605	2924	1842	1474
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.012	0.015	0.024	0.038	0.048
		(46-69)	Feed (mm/min)	70	70	70	70	70
		53	RPM	5386	4241	2693	1696	1357
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.012	0.015	0.024	0.038	0.048
		(43-64)	Feed (mm/min)	65	65	65	65	65
	PLASTICS Polycarbonate, PVC	152	RPM	15388	12118	7694	4847	3878
		(122-183)	Fr	0.025	0.032	0.050	0.079	0.099
			Feed (mm/min)	385	385	385	385	385
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	12	RPM	1231	969	616	388	310
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.009	0.011	0.018	0.028	0.035
		(10-15)	Feed (mm/min)	11	11	11	11	11
		8	RPM	769	606	385	242	194
		≤ 320 Bhn or ≤ 34 HRc	Fr	0.008	0.010	0.016	0.025	0.031
		(6-9)	Feed (mm/min)	6	6	6	6	6
		6	RPM	616	485	308	194	155
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.003	0.004	0.006	0.010	0.013
		(5-7)	Feed (mm/min)	2	2	2	2	2
		26	RPM	2616	2060	1308	824	659
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.016	0.020	0.032	0.051	0.064
		(21-31)	Feed (mm/min)	42	42	42	42	42
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	20	RPM	2000	1575	1000	630	504
		≤ 350 Bhn or ≤ 38 HRc	Fr	0.009	0.011	0.018	0.029	0.036
		(16-24)	Feed (mm/min)	18	18	18	18	18
		17	RPM	1693	1333	846	533	427
		≤ 440 Bhn or ≤ 47 HRc	Fr	0.008	0.011	0.017	0.026	0.033
		(13-20)	Feed (mm/min)	14	14	14	14	14
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	12	RPM	1231	969	616	388	310
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.004	0.005	0.008	0.013	0.016
		(10-15)	Feed (mm/min)	5	5	5	5	5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DCON x 3.14)


mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills


reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single Flute Countersink

**601**

FRACTIONAL SERIES

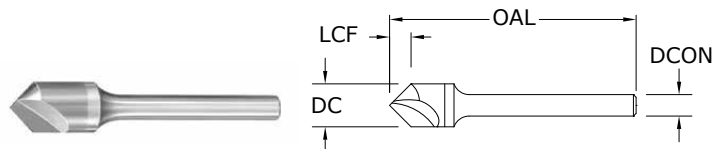

inch				EDP NO.		
CUTTING DIAMETER DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.062	—	—	74201
1/8	1/8	1-1/2	.072	—	74101	—
1/8	1/8	1-1/2	.108	74001	—	—
3/16	3/16	2	.094	—	—	74204
3/16	3/16	2	.108	—	74104	—
3/16	3/16	2	.163	74004	—	—
1/4	1/4	2	.125	—	—	74207
1/4	1/4	2	.144	—	74107	—
1/4	1/4	2	.217	74007	—	—
*3/8	1/4	2-13/16	.188	—	—	74210
*3/8	1/4	2-13/16	.216	—	74110	—
*3/8	1/4	2-13/16	.325	74010	—	—
*1/2	1/4	2-7/8	.250	—	—	74213
*1/2	1/4	2-7/8	.288	—	74113	—
*1/2	1/4	2-7/8	.433	74013	—	—
*5/8	3/8	3	.313	—	—	74216
*5/8	3/8	3	.360	—	74116	—
*5/8	3/8	3	.541	74016	—	—
*3/4	1/2	3	.375	—	—	74219
*3/4	1/2	3	.431	—	74119	—
*3/4	1/2	3	.650	74019	—	—
*1	1/2	3-1/4	.500	—	—	74222
*1	1/2	3-1/4	.575	—	74122	—
*1	1/2	3-1/4	.866	74022	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visitwww.ksptpatents.com

Single Flute Countersink

Series 601 Fractional	Hardness	Vc (sfm)		DC • in						
				1/8	3/16	1/4	3/8	1/2	3/4	1
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	125 (100-150)	RPM	3820	2547	1910	1273	955	637	478
			Fr	0.0005	0.0008	0.0010	0.0016	0.0021	0.0031	0.0042
			Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0
		60 (48-72)	RPM	1834	1222	917	611	458	306	229
			Fr	0.0005	0.0007	0.0010	0.0015	0.0020	0.0029	0.0039
			Feed (ipm)	0.9	0.9	0.9	0.9	0.9	0.9	0.9
		45 (36-54)	RPM	1375	917	688	458	344	229	172
			Fr	0.0003	0.0004	0.0006	0.0009	0.0012	0.0017	0.0023
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	95 (76-114)	RPM	2903	1935	1452	968	726	484	363
			Fr	0.0004	0.0007	0.0009	0.0013	0.0018	0.0027	0.0036
			Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
		60 (48-72)	RPM	1834	1222	917	611	458	306	229
			Fr	0.0004	0.0007	0.0009	0.0013	0.0017	0.0026	0.0035
			Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
		35 (28-42)	RPM	1070	713	535	357	267	178	134
			Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	35 (28-42)	RPM	1070	713	535	357	267	178	134
			Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		25 (20-30)	RPM	764	509	382	255	191	127	96
			Fr	0.0001	0.0002	0.0003	0.0004	0.0005	0.0008	0.0010
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	53 (42-64)	RPM	1620	1080	810	540	405	270	202
			Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
		46 (37-55)	RPM	1406	937	703	469	351	234	176
			Fr	0.0002	0.0003	0.0004	0.0006	0.0009	0.0013	0.0017
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	28 (22-34)	RPM	856	570	428	285	214	143	107
			Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		21 (17-25)	RPM	642	428	321	214	160	107	80
			Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
K	CAST IRONS Gray, Malleable, Ductile	105 (84-126)	RPM	3209	2139	1604	1070	802	535	401
			Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0036	0.0047
			Feed (ipm)	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		75 (60-90)	RPM	2292	1528	1146	764	573	382	287
			Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0037	0.0049
			Feed (ipm)	1.4	1.4	1.4	1.4	1.4	1.4	1.4

continued on next page

Single Flute Countersink

	Series 601 Fractional	Hardness	Vc (sfm)	DC • in							
	1/8			3/16	1/4	3/8	1/2	3/4	1		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	225	RPM	6876	4584	3438	2292	1719	1146	860
		(180-270)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061	
			Feed (ipm)	5.2	5.2	5.2	5.2	5.2	5.2	5.2	
		≤ 150 Bhn or ≤ 88 HRb	190	RPM	5806	3871	2903	1935	1452	968	726
		(152-228)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061	
			Feed (ipm)	4.4	4.4	4.4	4.4	4.4	4.4	4.4	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	95	RPM	2903	1935	1452	968	726	484	363
		(76-114)	Fr	0.0004	0.0006	0.0008	0.0011	0.0015	0.0023	0.0030	
			Feed (ipm)	1.1	1.1	1.1	1.1	1.1	1.1	1.1	
		≤ 200 Bhn or ≤ 23 HRc	80	RPM	2445	1630	1222	815	611	407	306
		(64-96)	Fr	0.0004	0.0006	0.0008	0.0012	0.0016	0.0025	0.0033	
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	18	RPM	550	367	275	183	138	92	69
		(14-22)	Fr	0.0002	0.0003	0.0004	0.0005	0.0007	0.0011	0.0015	
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
		≤ 320 Bhn or ≤ 34 HRc	14	RPM	428	285	214	143	107	71	53
		(11-17)	Fr	0.0002	0.0004	0.0005	0.0007	0.0009	0.0014	0.0019	
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
	≤ 425 Bhn or ≤ 45 HRc	12	RPM	367	244	183	122	92	61	46	
	(10-14)	Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022		
		Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	36	RPM	1100	733	550	367	275	183	138
		(29-43)	Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036	
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
≤ 350 Bhn or ≤ 38 HRc		28	RPM	856	570	428	285	214	143	107	
(22-34)		Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028		
		Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
≤ 440 Bhn or ≤ 47 HRc	21	RPM	642	428	321	214	160	107	80		
(17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012			
	Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1			
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	20	RPM	611	407	306	204	153	102	76
		(16-24)	Fr	0.0002	0.0002	0.0003	0.0005	0.0007	0.0010	0.0013	
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)


rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

3 Flute Countersink

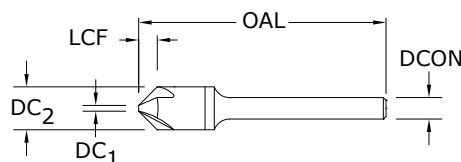

603
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC ₂	SHANK DIAMETER DCON	inch			EDP NO.		
		OVERALL LENGTH OAL	FLUTE LENGTH LCF	TIP DIAMETER DC ₁	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.045	.040	—	—	74225
1/8	1/8	1-1/2	.049	.040	—	74125	—
1/8	1/8	1-1/2	.078	.035	74025	—	—
3/16	3/16	2	.071	.060	—	—	74228
3/16	3/16	2	.073	.060	—	74128	—
3/16	3/16	2	.123	.045	74028	—	—
1/4	1/4	2	.090	.100	—	—	74231
1/4	1/4	2	.086	.100	—	74131	—
1/4	1/4	2	.156	.070	74031	—	—
*3/8	1/4	2-13/16	.138	.108	—	—	74234
*3/8	1/4	2-13/16	.154	.108	—	74134	—
*3/8	1/4	2-13/16	.238	.100	74034	—	—
*1/2	1/4	2-7/8	.194	.122	—	—	74237
*1/2	1/4	2-7/8	.217	.122	—	74137	—
*1/2	1/4	2-7/8	.335	.113	74037	—	—
*5/8	3/8	3	.249	.138	—	—	74240
*5/8	3/8	3	.280	.138	—	74140	—
*5/8	3/8	3	.430	.128	74040	—	—
*3/4	1/2	3	.304	.153	—	—	74243
*3/4	1/2	3	.343	.153	—	74143	—
*3/4	1/2	3	.526	.143	74043	—	—
*1	1/2	3-1/4	.421	.168	—	—	74246
*1	1/2	3-1/4	.479	.168	—	74146	—
*1	1/2	3-1/4	.729	.158	74046	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

NOTE: DC₁ dimension varies based on angle. Contact your KSPT representative or consult SGS Tool Wizard® for dimension information.

3 Flute Countersink

Series 603 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125	RPM	3820	2547	1910	1273	955	637	478
		(100-150)	Fr	0.0008	0.0012	0.0016	0.0024	0.0031	0.0047	0.0063	
			Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	
		≤ 300 Bhn or ≤ 32 HRc	60	RPM	1834	1222	917	611	458	306	229
		(48-72)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0043	0.0057	
			Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
		≤ 425 Bhn or ≤ 45 HRc	45	RPM	1375	917	688	458	344	229	172
		(36-54)	Fr	0.0004	0.0007	0.0009	0.0013	0.0017	0.0026	0.0035	
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	95	RPM	2903	1935	1452	968	726	484	363
		(76-114)	Fr	0.0007	0.0010	0.0014	0.0021	0.0028	0.0041	0.0055	
			Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
		≤ 375 Bhn or ≤ 40 HRc	60	RPM	1834	1222	917	611	458	306	229
		(48-72)	Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0039	0.0052	
			Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	1.2	
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	1070	713	535	357	267	178	134
		(28-42)	Fr	0.0004	0.0006	0.0007	0.0011	0.0015	0.0022	0.0030	
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	35	RPM	1070	713	535	357	267	178	134
		(28-42)	Fr	0.0004	0.0006	0.0007	0.0011	0.0015	0.0022	0.0030	
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	
		≤ 375 Bhn or ≤ 40 HRc	25	RPM	764	509	382	255	191	127	96
		(20-30)	Fr	0.0003	0.0004	0.0005	0.0008	0.0010	0.0016	0.0021	
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53	RPM	1620	1080	810	540	405	270	202
		(42-64)	Fr	0.0004	0.0006	0.0009	0.0013	0.0017	0.0026	0.0035	
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
		≤ 330 Bhn or ≤ 36 HRc	46	RPM	1406	937	703	469	351	234	176
		(37-55)	Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028	
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28	RPM	856	570	428	285	214	143	107
		(22-34)	Fr	0.0005	0.0007	0.0009	0.0014	0.0019	0.0028	0.0037	
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	642	428	321	214	160	107	80
		(17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012	
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105	RPM	3209	2139	1604	1070	802	535	401
		(84-126)	Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072	
			Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9	
		≤ 330 Bhn or ≤ 36 HRc	75	RPM	2292	1528	1146	764	573	382	287
		(60-90)	Fr	0.0009	0.0014	0.0018	0.0027	0.0037	0.0055	0.0073	
			Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1	

continued on next page

FRACTIONAL

3 Flute Countersink

	Series 603 Fractional	Hardness	Vc (sfm)	DC • in								
				1/8	3/16	1/4	3/8	1/2	3/4	1		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	225	RPM	6876	4584	3438	2292	1719	1146	860	
			(180-270)	Fr	0.0011	0.0017	0.0023	0.0034	0.0045	0.0068	0.0091	
				Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8	
		≤ 150 Bhn or ≤ 88 HRb	190	RPM	5806	3871	2903	1935	1452	968	726	
			(152-228)	Fr	0.0011	0.0017	0.0022	0.0034	0.0045	0.0067	0.0090	
				Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	95	RPM	2903	1935	1452	968	726	484	363	
			(76-114)	Fr	0.0006	0.0009	0.0012	0.0018	0.0023	0.0035	0.0047	
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7	
		≤ 200 Bhn or ≤ 23 HRc	80	RPM	2445	1630	1222	815	611	407	306	
			(64-96)	Fr	0.0006	0.0009	0.0011	0.0017	0.0023	0.0034	0.0046	
				Feed (ipm)	1.4	1.4	1.4	1.4	1.4	1.4	1.4	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	18	RPM	550	367	275	183	138	92	69	
			(14-22)	Fr	0.0004	0.0005	0.0007	0.0011	0.0015	0.0022	0.0029	
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
		≤ 320 Bhn or ≤ 34 HRc	14	RPM	428	285	214	143	107	71	53	
			(11-17)	Fr	0.0002	0.0004	0.0005	0.0007	0.0009	0.0014	0.0019	
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
		≤ 425 Bhn or ≤ 45 HRc	12	RPM	367	244	183	122	92	61	46	
			(10-14)	Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022	
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
		TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	36	RPM	1100	733	550	367	275	183	138
				(29-43)	Fr	0.0007	0.0011	0.0015	0.0022	0.0029	0.0044	0.0058
					Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
	≤ 350 Bhn or ≤ 38 HRc		28	RPM	856	570	428	285	214	143	107	
			(22-34)	Fr	0.0006	0.0009	0.0012	0.0018	0.0023	0.0035	0.0047	
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
	H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	20	RPM	611	407	306	204	153	102	76
				(16-24)	Fr	0.0002	0.0002	0.0003	0.0005	0.0007	0.0010	0.0013
					Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

6 Flute Countersink



606

FRACTIONAL SERIES

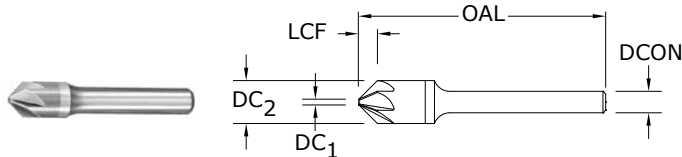

CUTTING DIAMETER DC ₂	SHANK DIAMETER DCON	inch			EDP NO.		
		OVERALL LENGTH OAL	FLUTE LENGTH LCF	TIP DIAMETER DC ₁	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.045	.035	—	—	74249
1/8	1/8	1-1/2	.052	.035	—	74149	—
1/8	1/8	1-1/2	.078	.035	74049	—	—
3/16	3/16	2	.071	.045	—	—	74252
3/16	3/16	2	.082	.045	—	74152	—
3/16	3/16	2	.123	.045	74052	—	—
1/4	1/4	2	.090	.070	—	—	74255
1/4	1/4	2	.104	.070	—	74155	—
1/4	1/4	2	.156	.070	74055	—	—
*3/8	1/4	2-13/16	.138	.100	—	—	74258
*3/8	1/4	2-13/16	.158	.100	—	74158	—
*3/8	1/4	2-13/16	.238	.100	74058	—	—
*1/2	1/4	2-7/8	.170	.160	—	—	74261
*1/2	1/4	2-7/8	.196	.160	—	74161	—
*1/2	1/4	2-7/8	.294	.160	74061	—	—
*5/8	3/8	3	.218	.190	—	—	74264
*5/8	3/8	3	.250	.190	—	74164	—
*5/8	3/8	3	.377	.190	74064	—	—
*3/4	1/2	3	.265	.220	—	—	74267
*3/4	1/2	3	.305	.220	—	74167	—
*3/4	1/2	3	.459	.220	74067	—	—
*1	1/2	3-1/4	.370	.260	—	—	74270
*1	1/2	3-1/4	.426	.260	—	74170	—
*1	1/2	3-1/4	.641	.260	74070	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

NOTE: DC₁ dimension varies based on angle. Contact your KSPT representative or consult SGS Tool Wizard® for dimension information.

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

FRACTIONAL 6 Flute Countersink

Series 606 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125	RPM	3820	2547	1910	1273	955	637	478
			(100-150)	Fr	0.0010	0.0016	0.0021	0.0031	0.0042	0.0063	0.0084
			Feed (ipm)	4.0	4.0	4.0	4.0	4.0	4.0	4.0	
		≤ 300 Bhn or ≤ 32 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0010	0.0015	0.0020	0.0029	0.0039	0.0059	0.0079
			Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
		≤ 425 Bhn or ≤ 45 HRc	45	RPM	1375	917	688	458	344	229	172
			(36-54)	Fr	0.0006	0.0009	0.0012	0.0017	0.0023	0.0035	0.0047
			Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0009	0.0013	0.0018	0.0027	0.0036	0.0054	0.0072
			Feed (ipm)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	
		≤ 375 Bhn or ≤ 40 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0009	0.0014	0.0019	0.0028	0.0037	0.0056	0.0074
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7	
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0034	0.0045
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0034	0.0045
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
		≤ 375 Bhn or ≤ 40 HRc	25	RPM	764	509	382	255	191	127	96
			(20-30)	Fr	0.0003	0.0004	0.0005	0.0008	0.0010	0.0016	0.0021
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53	RPM	1620	1080	810	540	405	270	202
			(42-64)	Fr	0.0006	0.0009	0.0012	0.0019	0.0025	0.0037	0.0049
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
		≤ 330 Bhn or ≤ 36 HRc	46	RPM	1406	937	703	469	351	234	176
			(37-55)	Fr	0.0005	0.0007	0.0010	0.0015	0.0020	0.0030	0.0040
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
			Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
			Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	

continued on next page

6 Flute Countersink

Series 606 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
K	CAST IRONS Gray, Malleable, Ductile	105	RPM	3209	2139	1604	1070	802	535	401	
		(84-126)	Fr	0.0012	0.0018	0.0024	0.0036	0.0049	0.0073	0.0097	
			Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9	
		75	RPM	2292	1528	1146	764	573	382	287	
		≤ 330 Bhn or ≤ 36 HRc	(60-90)	Fr	0.0012	0.0018	0.0024	0.0037	0.0049	0.0073	0.0098
				Feed (ipm)	2.8	2.8	2.8	2.8	2.8	2.8	2.8
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	225	RPM	6876	4584	3438	2292	1719	1146	860	
		(180-270)	Fr	0.0015	0.0022	0.0030	0.0045	0.0060	0.0090	0.0120	
			Feed (ipm)	10.3	10.3	10.3	10.3	10.3	10.3	10.3	
		190	RPM	5806	3871	2903	1935	1452	968	726	
		≤ 150 Bhn or ≤ 88 HRb	(152-228)	Fr	0.0015	0.0022	0.0030	0.0045	0.0060	0.0090	0.0120
				Feed (ipm)	8.7	8.7	8.7	8.7	8.7	8.7	8.7
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	95	RPM	2903	1935	1452	968	726	484	363	
		≤ 140 Bhn or ≤ 3 HRc	(76-114)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061
				Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2
		80	RPM	2445	1630	1222	815	611	407	306	
		≤ 200 Bhn or ≤ 23 HRc	(64-96)	Fr	0.0008	0.0012	0.0016	0.0023	0.0031	0.0047	0.0062
				Feed (ipm)	1.9	1.9	1.9	1.9	1.9	1.9	1.9

continued on next page

FRACTIONAL 6 Flute Countersink

Series 606 Fractional				DC • in							
Hardness		Vc (sfm)		1/8	3/16	1/4	3/8	1/2	3/4	1	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	18	RPM	550	367	275	183	138	92	69
			(14-22)	Fr	0.0005	0.0008	0.0011	0.0016	0.0022	0.0033	0.0044
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		≤ 320 Bhn or ≤ 34 HRc	14	RPM	428	285	214	143	107	71	53
			(11-17)	Fr	0.0005	0.0007	0.0009	0.0014	0.0019	0.0028	0.0037
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		≤ 425 Bhn or ≤ 45 HRc	12	RPM	367	244	183	122	92	61	46
			(10-14)	Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	36	RPM	1100	733	550	367	275	183	138
			(29-43)	Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0055	0.0073
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 350 Bhn or ≤ 38 HRc	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		≤ 440 Bhn or ≤ 47 HRc	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	20	RPM	611	407	306	204	153	102	76
			(16-24)	Fr	0.0003	0.0005	0.0007	0.0010	0.0013	0.0020	0.0026
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

$\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$

$\text{ipm} = \text{Fr} \times \text{rpm}$


reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Straight Flute Accu-Reamer

**200**

FRACTIONAL SERIES

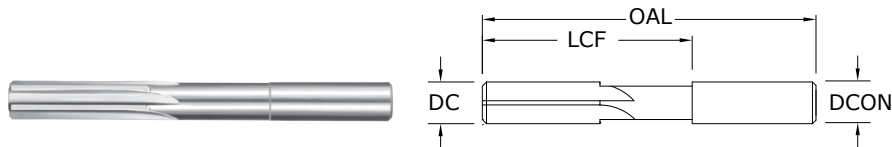

inch					EDP NO.
CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	NO. OF FLUTES	UNCOATED
3/64	3/64	3/4	1-1/2	4	70003
1/16	1/16	3/4	1-1/2	4	70004
5/64	5/64	1	2	4	70005
3/32	3/32	1-1/4	2-1/4	4	70006
7/64	7/64	1-1/4	2-1/4	4	70007
1/8	1/8	1-1/4	2-1/4	4	70008
9/64	9/64	1-1/2	2-1/2	4	70009
5/32	5/32	1-1/2	2-1/2	4	70010
11/64	11/64	1-3/4	2-3/4	4	70011
3/16	3/16	1-3/4	2-3/4	4	70012
13/64	13/64	2	3	4	70013
7/32	7/32	2	3	4	70014
15/64	15/64	2	3	4	70015
1/4	1/4	2	3	4	70016
17/64	17/64	2-1/4	3-1/4	6	70017
9/32	9/32	2-1/4	3-1/4	6	70018
19/64	19/64	2-1/4	3-1/4	6	70019
5/16	5/16	2-1/4	3-1/4	6	70020
21/64	21/64	2-3/8	3-1/2	6	70021
11/32	11/32	2-3/8	3-1/2	6	70022
23/64	23/64	2-3/8	3-1/2	6	70023
3/8	3/8	2-3/8	3-1/2	6	70024
25/64	25/64	2-7/8	4	6	70025
13/32	13/32	2-7/8	4	6	70026
27/64	27/64	2-7/8	4	6	70027
7/16	7/16	2-7/8	4	6	70028
29/64	29/64	2-7/8	4	6	70029
15/32	15/32	2-7/8	4	6	70030
31/64	31/64	2-7/8	4	6	70031
1/2	1/2	2-7/8	4	6	70032

continued on next page

TOLERANCES (inch)

DC = +0.0002/-0.0000

DCON = +0.0002/-0.0000

STEELS

STAINLESS STEELS

CAST IRON


NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Straight Flute Accu-Reamer


200

FRACTIONAL SERIES

CONTINUED

inch				NO. OF FLUTES
CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	
.0470 – .0625	1/16	3/4	1-1/2	4
.0626 – .0781	5/64	1	2	4
.0782 – .0938	3/32	1-1/4	2-1/4	4
.0939 – .1094	7/64	1-1/4	2-1/4	4
.1095 – .1250	1/8	1-1/4	2-1/4	4
.1251 – .1406	9/64	1-1/2	2-1/2	4
.1407 – .1562	5/32	1-1/2	2-1/2	4
.1563 – .1719	11/64	1-3/4	2-3/4	4
.1720 – .1875	3/16	1-3/4	2-3/4	4
.1876 – .2031	13/64	2	3	4
.2032 – .2188	7/32	2	3	4
.2189 – .2344	15/64	2	3	4
.2345 – .2500	1/4	2	3	4
.2501 – .2656	17/64	2-1/4	3-1/4	6
.2657 – .2812	9/32	2-1/4	3-1/4	6
.2813 – .2969	19/64	2-1/4	3-1/4	6
.2970 – .3125	5/16	2-1/4	3-1/4	6
.3126 – .3281	21/64	2-3/8	3-1/2	6
.3282 – .3438	11/32	2-3/8	3-1/2	6
.3439 – .3594	23/64	2-3/8	3-1/2	6
.3595 – .3750	3/8	2-3/8	3-1/2	6
.3751 – .3906	25/64	2-7/8	4	6
.3907 – .4062	13/32	2-7/8	4	6
.4063 – .4219	27/64	2-7/8	4	6
.4220 – .4375	7/16	2-7/8	4	6
.4376 – .4531	29/64	2-7/8	4	6
.4532 – .4688	15/32	2-7/8	4	6
.4689 – .4844	31/64	2-7/8	4	6
.4845 – .5000	1/2	2-7/8	4	6

SER 200 Fractional reamers can be ordered to specific diameters according to the size range of Cutting Diameter DC. Please order as:

- 200. Then the size of the cut diameter in fractional format.
 - i.e. 200.0492
 - Description: Series 200 size 0.0492
 - For Metric sizes convert to fractional inches (i.e. $\div 25.4$)
 - The above sample would be a 1.25mm size ($1.25 \div 25.4 = 0.0492$)
- All other dimensions are fractional as per table including the Shank

Straight Flute Accu-Reamer

Series 200 Fractional	Hardness	Vc (sfm)		DC • in						
				1/16	1/8	3/16	1/4	5/16	3/8	1/2
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	150 (120-180)	RPM	9168	4584	3056	2292	1834	1528	1146
			Fr	0.0018	0.0035	0.0053	0.0071	0.0088	0.0106	0.0141
			Feed (ipm)	16.5	16.0	16.2	16.3	16.1	16.2	16.2
		75 (60-90)	RPM	4584	2292	1528	1146	917	764	573
			Fr	0.0016	0.0031	0.0047	0.0062	0.0078	0.0093	0.0124
			Feed (ipm)	7.3	7.1	7.2	7.1	7.2	7.1	7.1
		55 (44-66)	RPM	3362	1681	1121	840	672	560	420
			Fr	0.0009	0.0019	0.0028	0.0037	0.0046	0.0056	0.0074
			Feed (ipm)	3.0	3.2	3.1	3.1	3.1	3.1	3.1
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	115 (92-138)	RPM	7029	3514	2343	1757	1406	1171	879
			Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
			Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		70 (56-84)	RPM	4278	2139	1426	1070	856	713	535
			Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
			Feed (ipm)	6.4	6.4	6.4	6.4	6.4	6.4	6.4
		45 (36-54)	RPM	2750	1375	917	688	550	458	344
			Fr	0.0009	0.0019	0.0028	0.0037	0.0046	0.0056	0.0074
			Feed (ipm)	2.5	2.6	2.6	2.5	2.5	2.6	2.5
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40 (32-48)	RPM	2445	1222	815	611	489	407	306
			Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	2.4	2.4	2.4	2.4	2.4	2.4	2.4
		25 (20-30)	RPM	1528	764	509	382	306	255	191
			Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
			Feed (ipm)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	75 (60-90)	RPM	4584	2292	1528	1146	917	764	573
			Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	4.6	4.6	4.4	4.5	4.5	4.5	4.5
		55 (44-66)	RPM	3362	1681	1121	840	672	560	420
			Fr	0.0008	0.0015	0.0023	0.0030	0.0038	0.0045	0.0060
			Feed (ipm)	2.7	2.5	2.6	2.5	2.6	2.5	2.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	35 (28-42)	RPM	2139	1070	713	535	428	357	267
			Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		25 (20-30)	RPM	1528	764	509	382	306	255	191
			Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
			Feed (ipm)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
K	CAST IRONS Gray, Malleable, Ductile	125 (100-150)	RPM	7640	3820	2547	1910	1528	1273	955
			Fr	0.0020	0.0040	0.0060	0.0081	0.0101	0.0121	0.0161
			Feed (ipm)	15.3	15.3	15.3	15.5	15.4	15.4	15.4
		95 (76-114)	RPM	5806	2903	1935	1452	1161	968	726
			Fr	0.0020	0.0040	0.0060	0.0081	0.0101	0.0121	0.0161
			Feed (ipm)	11.6	11.6	11.6	11.8	11.7	11.7	11.7

continued on next page

Straight Flute Accu-Reamer

	Series 200 Fractional	Hardness	Vc (sfm)	DC • in							
	1/16			1/8	3/16	1/4	5/16	3/8	1/2		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	270	RPM	16502	8251	5501	4126	3300	2750	2063
			(216-324)	Fr	0.0025	0.0050	0.0075	0.0100	0.0125	0.0150	0.0200
				Feed (ipm)	41.3	41.3	41.3	41.3	41.3	41.3	41.3
		≤ 150 Bhn or ≤ 88 HRb	230	RPM	14058	7029	4686	3514	2812	2343	1757
			(184-276)	Fr	0.0025	0.0050	0.0075	0.0100	0.0125	0.0150	0.0200
				Feed (ipm)	35.1	35.1	35.1	35.1	35.1	35.1	35.1
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	115	RPM	7029	3514	2343	1757	1406	1171	879
			(92-138)	Fr	0.0013	0.0026	0.0038	0.0051	0.0064	0.0077	0.0102
				Feed (ipm)	9.1	9.1	8.9	9.0	9.0	9.0	9.0
		≤ 200 Bhn or ≤ 23 HRc	95	RPM	5806	2903	1935	1452	1161	968	726
			(76-114)	Fr	0.0013	0.0026	0.0038	0.0051	0.0064	0.0077	0.0102
				Feed (ipm)	7.5	7.5	7.4	7.4	7.4	7.5	7.4
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	20	RPM	1222	611	407	306	244	204	153
			(16-24)	Fr	0.0008	0.0015	0.0023	0.0030	0.0038	0.0045	0.0060
				Feed (ipm)	1.0	0.9	0.9	0.9	0.9	0.9	0.9
		≤ 320 Bhn or ≤ 34 HRc	15	RPM	917	458	306	229	183	153	115
			(12-18)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 425 Bhn or ≤ 45 HRc	10	RPM	611	306	204	153	122	102	76
			(8-12)	Fr	0.0004	0.0007	0.0011	0.0015	0.0018	0.0022	0.0029
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		≤ 275 Bhn or ≤ 28 HRc	45	RPM	2750	1375	917	688	550	458	344
			(36-54)	Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
				Feed (ipm)	4.1	4.1	4.1	4.1	4.1	4.1	4.1
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	20	RPM	1222	611	407	306	244	204	153
			(16-24)	Fr	0.0004	0.0008	0.0012	0.0016	0.0019	0.0023	0.0031
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
		≤ 655 Bhn or ≤ 60 HRc	14	RPM	856	428	285	214	171	143	107
			(11-17)	Fr	0.0003	0.0007	0.0011	0.0014	0.0018	0.0021	0.0028
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC


ipm = Fr x rpm

increase speed and feed 30 percent when using coated reamers


reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Straight Flute Reamer



201M
METRIC SERIES

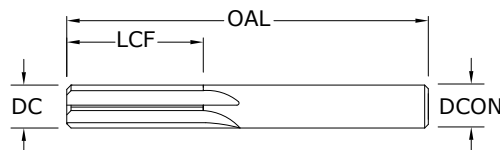

CUTTING DIAMETER DC	SHANK DIAMETER DCON	mm		NO. OF FLUTES	EDP NO. UNCOATED
		MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL		
1,0	1,0	6,0	32,0	4	81001
1,5	1,5	9,5	38,0	4	81003
2,0	2,0	12,7	44,0	4	81005
2,5	2,5	12,7	50,0	4	81007
3,0	3,0	16,0	57,0	4	81009
3,5	3,5	19,0	63,0	4	81011
4,0	4,0	19,0	63,0	4	81013
4,5	4,5	22,0	70,0	4	81015
5,0	5,0	25,0	75,0	4	81017
5,5	5,5	25,0	75,0	4	81019
6,0	6,0	25,0	75,0	4	81021
7,0	7,0	28,0	82,0	6	81023
8,0	8,0	28,0	82,0	6	81025
9,0	9,0	31,0	89,0	6	81027
10,0	10,0	31,0	89,0	6	81029

TOLERANCES (mm)

1-6 DIAMETER

DC = +0,008/-0,000

>6-10 DIAMETER

DC = +0,010/-0,000

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)		DC • mm							
				1	2	3	4	6	8	10	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	46	RPM	14541	7271	4847	3635	2424	1818	1454
			(37-55)	Fr	0.028	0.056	0.085	0.113	0.169	0.226	0.282
				Feed (mm/min)	410	410	410	410	410	410	410
		≤ 300 Bhn or ≤ 32 HRc	23	RPM	7271	3635	2424	1818	1212	909	727
			(18-27)	Fr	0.025	0.050	0.074	0.099	0.149	0.198	0.248
				Feed (mm/min)	180	180	180	180	180	180	180
		≤ 425 Bhn or ≤ 45 HRc	17	RPM	5332	2666	1777	1333	889	666	533
			(13-20)	Fr	0.015	0.030	0.044	0.059	0.089	0.119	0.148
				Feed (mm/min)	79	79	79	79	79	79	79
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	35	RPM	11148	5574	3716	2787	1858	1394	1115
			(28-42)	Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
				Feed (mm/min)	268	268	268	268	268	268	268
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	6786	3393	2262	1696	1131	848	679
			(17-26)	Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
				Feed (mm/min)	163	163	163	163	163	163	163
		≤ 425 Bhn or ≤ 45 HRc	14	RPM	4362	2181	1454	1091	727	545	436
			(11-16)	Fr	0.015	0.030	0.045	0.060	0.089	0.119	0.149
				Feed (mm/min)	65	65	65	65	65	65	65
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	12	RPM	3878	1939	1293	969	646	485	388
			(10-15)	Fr	0.015	0.031	0.046	0.062	0.093	0.124	0.155
				Feed (mm/min)	60	60	60	60	60	60	60
		≤ 375 Bhn or ≤ 40 HRc	8	RPM	2424	1212	808	606	404	303	242
			(6-9)	Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
				Feed (mm/min)	24	24	24	24	24	24	24
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	23	RPM	7271	3635	2424	1818	1212	909	727
			(18-27)	Fr	0.015	0.030	0.045	0.059	0.089	0.119	0.149
				Feed (mm/min)	108	108	108	108	108	108	108
		≤ 330 Bhn or ≤ 36 HRc	17	RPM	5332	2666	1777	1333	889	666	533
			(13-20)	Fr	0.012	0.024	0.036	0.048	0.072	0.096	0.120
				Feed (mm/min)	64	64	64	64	64	64	64
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	11	RPM	3393	1696	1131	848	565	424	339
			(9-13)	Fr	0.015	0.029	0.044	0.059	0.088	0.118	0.147
				Feed (mm/min)	50	50	50	50	50	50	50
		≤ 375 Bhn or ≤ 40 HRc	8	RPM	2424	1212	808	606	404	303	242
			(6-9)	Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
				Feed (mm/min)	24	24	24	24	24	24	24

continued on next page

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm								
			1	2	3	4	6	8	10		
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	38	RPM	12118	6059	4039	3029	2020	1515	1212
		(30-46)	Fr	0.032	0.064	0.097	0.129	0.193	0.257	0.322	
			Feed (mm/min)	390	390	390	390	390	390	390	
		≤ 330 Bhn or ≤ 36 HRc	29	RPM	9209	4605	3070	2302	1535	1151	921
		(23-35)	Fr	0.032	0.064	0.096	0.128	0.192	0.256	0.320	
			Feed (mm/min)	295	295	295	295	295	295	295	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	82	RPM	26174	13087	8725	6544	4362	3272	2617
		(66-99)	Fr	0.040	0.080	0.120	0.160	0.240	0.320	0.400	
			Feed (mm/min)	1047	1047	1047	1047	1047	1047	1047	
		≤ 150 Bhn or ≤ 88 HRb	70	RPM	22297	11148	7432	5574	3716	2787	2230
		(56-84)	Fr	0.040	0.080	0.120	0.160	0.240	0.320	0.400	
			Feed (mm/min)	892	892	892	892	892	892	892	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	35	RPM	11148	5574	3716	2787	1858	1394	1115
		(28-42)	Fr	0.020	0.041	0.061	0.081	0.122	0.163	0.204	
			Feed (mm/min)	227	227	227	227	227	227	227	
		≤ 200 Bhn or ≤ 23 HRc	29	RPM	9209	4605	3070	2302	1535	1151	921
		(23-35)	Fr	0.020	0.041	0.061	0.082	0.122	0.163	0.204	
			Feed (mm/min)	188	188	188	188	188	188	188	

continued on next page

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm							
				1	2	3	4	6	8	10
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	6 (5-7)	RPM	1939	969	646	485	323	242	194
			Fr	0.012	0.024	0.036	0.047	0.071	0.095	0.119
			Feed (mm/min)	23	23	23	23	23	23	23
		5 (4-5)	RPM	1454	727	485	364	242	182	145
			Fr	0.010	0.021	0.031	0.041	0.062	0.083	0.103
			Feed (mm/min)	15	15	15	15	15	15	15
		3 (2-4)	RPM	969	485	323	242	162	121	97
			Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062
			Feed (mm/min)	6	6	6	6	6	6	6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	14 (11-16)	RPM	4362	2181	1454	1091	727	545	436
			Fr	0.024	0.048	0.072	0.096	0.144	0.193	0.241
			Feed (mm/min)	105	105	105	105	105	105	105
		11 (9-13)	RPM	3393	1696	1131	848	565	424	339
			Fr	0.015	0.029	0.044	0.059	0.088	0.118	0.147
			Feed (mm/min)	50	50	50	50	50	50	50
		8 (6-9)	RPM	2424	1212	808	606	404	303	242
			Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
			Feed (mm/min)	24	24	24	24	24	24	24
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	6 (5-7)	RPM	1939	969	646	485	323	242	194
			Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062
			Feed (mm/min)	12	12	12	12	12	12	12
		4 (3-5)	RPM	1272	636	424	318	212	159	127
			Fr	0.006	0.013	0.019	0.025	0.038	0.050	0.063
			Feed (mm/min)	8	8	8	8	8	8	8

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

increase speed and feed 30 percent when using coated reamers

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Routers



Routing

HIGH PERFORMANCE ROUTERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Carbon Composite	20-CCR	Multi-Flute Carbon Composite Fractional	386	388
	20M-CCR	Multi-Flute Carbon Composite Metric	386	389
	20-CCR-LHC	Multi-Flute Carbon Composite Left Hand Cut Fractional	387	388
	20M-CCR-LHC	Multi-Flute Carbon Composite Left Hand Cut Metric	387	389
Coarse Cut Carbon Composite	31-CCR	Multi-Flute Coarse Composite Fractional	390	391
	31M-CCR	Multi-Flute Coarse Composite Metric	390	392
Compression	25	Multi-Flute Compression Fractional	393	394
	25M	Multi-Flute Compression Metric	393	395
GENERAL APPLICATION ROUTERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Up Cut	21	2 Flute Up Cut Fractional	396	398
	21M	2 Flute Up Cut Metric	396	399
Down Cut	22	2 Flute Down Cut Fractional	397	398
	22M	2 Flute Down Cut Metric	397	399

Speed & Feed Recommendations listed after each series

Ranurado

RANURADORES DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Compuesto de carbono	20-CCR	Filo múltiple, compuesto de carbono, fraccional	386	388
	20M-CCR	Filo múltiple, compuesto de carbono, métrico	386	389
	20-CCR-LHC	Filo múltiple, carbon composite corte hélice izquierda fraccional	387	388
	20M-CCR-LHC	Filo múltiple, carbo composite corte hélice izquierda métrico	387	389
Compuesto de carbono de corte grueso	31-CCR	Filo múltiple, compuesto grueso, fraccional	390	391
	31M-CCR	Filo múltiple, compuesto grueso, métrico	390	392
Compresión	25	Filo múltiple, compresión, fraccional	393	394
	25M	Filo múltiple, compresión, métrico	393	395

RANURADORES DE USO GENERAL	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Corte ascendente	21	2 filos, corte ascendente, fraccional	396	398
	21M	2 filos, corte ascendente, métrico	396	399
Corte descendente	22	2 filos, corte descendente, fraccional	397	398
	22M	2 filos, corte descendente, métrico	397	399

Recomendaciones de velocidades y avances mostradas tras cada serie

Détourage

FRAISES A DETOURER HAUTE PERFORMANCE	SÈRIES	DESCRIPTION	PAGE	S&F PAGE
Composites carbone	20-CCR	Multi-dents pour composites carbone (fractionnel)	386	388
	20M-CCR	Multi-dents pour composites carbone (métrique)	386	389
	20-CCR-LHC	Multi-dents carbon composite coupe à gauche (fractionnel)	387	388
	20M-CCR-LHC	Multi-dents carbon composite coupe à gauche (métrique)	387	389
Pour composites carbone coupe grossière	31-CCR	Multi-dents pour composites grossiers (fractionnel)	390	391
	31M-CCR	Multi-dents pour composites grossiers (métrique)	390	392
Compression	25	Multi-dents de compression (fractionnel)	393	394
	25M	Multi-dents de compression (métrique)	393	395

FRAISES À DÉTOURER UNIVERSELLES	SÈRIES	DESCRIPTION	PAGE	S&F PAGE
Coupe ascendante	21	2 dents coupe ascendante (fractionnel)	396	398
	21M	2 dents coupe ascendante (métrique)	396	399
Coupe descendante	22	2 dents coupe descendante (fractionnel)	397	398
	22M	2 dents coupe descendante (métrique)	397	399


Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGS-KONTURENFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Kohlefaserverbundwerkstoff	20-CCR	Zölliger Konturenfräser für Kohlefaserverbundwerkstoff	386	388
	20M-CCR	Konturenfräser für Kohlefaserverbundwerkstoff	386	389
	20-CCR-LHC	Mehrschneider Carbon Composite Links geschnittene zöllig	387	388
	20M-CCR-LHC	Mehrschneider Carbon Composite Links geschnittene metrisch	387	389
Grobschnitt Kohlefaserverbundwerkstoff	31-CCR	Zölliger Konturenfräser für Verbundkunststoff	390	391
	31M-CCR	Konturenfräser für Verbundkunststoff	390	392
Gegenläufiger Drall	25	Zölliger Gegenläufiger Konturenfräser	393	394
	25M	Gegenläufiger Konturenfräser	393	395

STANDARD-KONTURENFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Rechtsspirale	21	Zölliger VHM-Fräser mit 2 Schneiden (ziehend)	396	398
	21M	VHM-Fräser mit 2 Schneiden (ziehend)	396	399
Linksspirale	22	Zölliger VHM-Fräser mit 2 Schneiden (drückend)	397	398
	22M	VHM-Fräser mit 2 Schneiden (drückend)	397	399

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie


Carbon Composite



20-CCR

FRACTIONAL SERIES

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

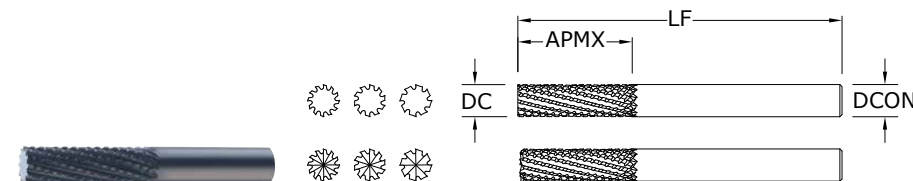

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	72930	73013
1/4	1	2-1/2	1/4	8	End Cutting	72947	73012
5/16	1	2-1/2	5/16	10	No End Cutting	72948	73026
5/16	1	2-1/2	5/16	10	End Cutting	72949	73014
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	72950	73028
3/8	1-1/8	2-1/2	3/8	12	End Cutting	72951	73027
1/2	1-1/2	3-1/2	1/2	12	No End Cutting	72952	73041
1/2	1-1/2	3-1/2	1/2	12	End Cutting	72953	73029

TOLERANCES (inch)

DC = +.000/- .005

DCON = h₆


NON-FERROUS

For patent
information visit
www.ksptpatents.com

20M-CCR

METRIC SERIES

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

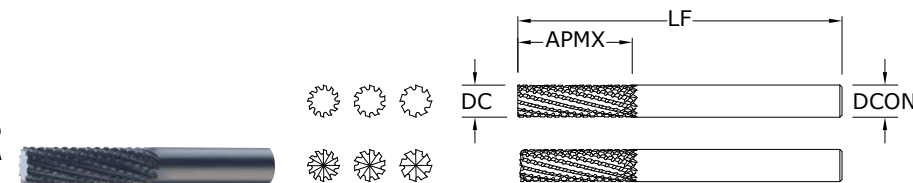

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Ti-NAMITE-B (TiB ₂)	Di-NAMITE® (Diamond)
2,0	6,0	38,0	3,0	5	End Cutting	82930	83100	83070
3,0	10,0	38,0	3,0	6	End Cutting	82931	83101	83071
4,0	12,0	50,0	4,0	7	End Cutting	82932	83102	83072
5,0	15,0	50,0	6,0	8	End Cutting	82933	83103	83073
6,0	25,0	63,0	6,0	8	No End Cutting	82966	83104	83027
6,0	25,0	63,0	6,0	8	End Cutting	82967	83105	83026
8,0	25,0	63,0	8,0	10	No End Cutting	82968	83106	83029
8,0	25,0	63,0	8,0	10	End Cutting	82969	83107	83028
10,0	28,0	63,0	10,0	12	No End Cutting	82970	83108	83042
10,0	28,0	63,0	10,0	12	End Cutting	82971	83109	83041
12,0	38,0	89,0	12,0	12	No End Cutting	82972	83110	83044
12,0	38,0	89,0	12,0	12	End Cutting	82973	83111	83043

TOLERANCES (mm)

DC = +0,000/-0,130


DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com



FRACTIONAL & METRIC Carbon Composite

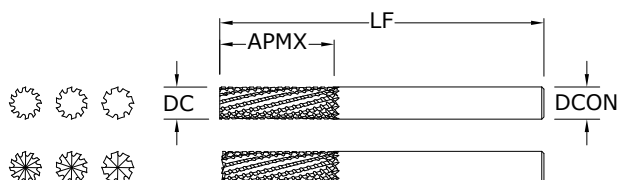

20-CCR-LHC FRACTIONAL SERIES

TOLERANCES (inch)

DC = +.000/- .005


DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	EDP NO.	
						UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	73070	73078
1/4	1	2-1/2	1/4	8	End Cutting	73071	73079
5/16	1	2-1/2	5/16	10	No End Cutting	73072	73080
5/16	1	2-1/2	5/16	10	End Cutting	73073	73081
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	73074	73082
3/8	1-1/8	2-1/2	3/8	12	End Cutting	73075	73083

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

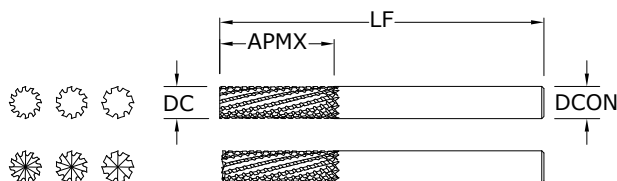

20M-CCR-LHC METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,130

DCON = h_6


NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	EDP NO.	
						UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	8	No End Cutting	83220	83230
6,0	25,0	63,0	6,0	8	End Cutting	83221	83231
8,0	25,0	63,0	8,0	10	No End Cutting	83222	83232
8,0	25,0	63,0	8,0	10	End Cutting	83223	83233
10,0	28,0	63,0	10,0	12	No End Cutting	83224	83234
10,0	28,0	63,0	10,0	12	End Cutting	83225	83235

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

Carbon Composite



Series 20 Fractional			Vc (sfm)	DC • in						
	Ae x DC	Ap x DC			1/4	5/16	3/8	1/2		
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	 Slot	1	≤ 1	400 (320-480)	RPM	6112	4890	4075	3056
						Fr	0.0049	0.0094	0.0135	0.0180
						Feed (ipm)	30	46	55	55
		 Profile	≤ 0.5	≤ 1.5	500 (400-600)	RPM	7640	6112	5093	3820
						Fr	0.0049	0.0094	0.0135	0.0180
						Feed (ipm)	38	58	69	69
		 HSM	≤ 0.05	≤ 2	825 (660-990)	RPM	12606	10085	8404	6303
						Fr	0.0111	0.0215	0.0309	0.0413
						Feed (ipm)	140	217	260	260
	GFRP (FIBERGLASS)	 Slot	1	≤ 1	320 (256-384)	RPM	4890	3912	3260	2445
						Fr	0.0049	0.0095	0.0135	0.0180
						Feed (ipm)	24	37	44	44
		 Profile	≤ 0.5	≤ 1.5	400 (320-480)	RPM	6112	4890	4075	3056
						Fr	0.0049	0.0095	0.0135	0.0180
						Feed (ipm)	30	46	55	55
		 HSM	≤ 0.05	≤ 2	660 (528-792)	RPM	10085	8068	6723	5042
						Fr	0.0110	0.0214	0.0311	0.0414
						Feed (ipm)	111	173	209	209
	CARBON, GRAPHITE	 Slot	1	≤ 1	480 (384-576)	RPM	7334	5868	4890	3667
						Fr	0.0064	0.0124	0.0180	0.0240
						Feed (ipm)	47	73	88	88
		 Profile	≤ 0.5	≤ 1.5	600 (480-720)	RPM	9168	7334	6112	4584
						Fr	0.0064	0.0124	0.0180	0.0240
						Feed (ipm)	59	91	110	110
		 HSM	≤ 0.05	≤ 2	990 (792-1188)	RPM	15127	12102	10085	7564
						Fr	0.0147	0.0287	0.0412	0.0549
						Feed (ipm)	223	347	415	415
	PLASTICS	 Slot	1	≤ 1	665 (640-690)	RPM	10161	8129	6774	5081
						Fr	0.0077	0.0150	0.0217	0.0241
						Feed (ipm)	78	122	147	147
		 Profile	≤ 0.5	≤ 1.5	1000 (800-1200)	RPM	15280	12224	10187	7640
						Fr	0.0077	0.0150	0.0217	0.0241
						Feed (ipm)	118	183	221	184
		 HSM	≤ 0.05	≤ 2	1650 (1320-1980)	RPM	25212	20170	16808	12606
						Fr	0.0147	0.0287	0.0413	0.0551
						Feed (ipm)	370	579	694	694

HSM (high speed machining)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

www.kyocera-sgstool.com

Carbon Composite

Series 20M Metric				Vc (m/min)	DC • mm						
	Ae x DC	Ap x DC	3		6	8	10	12			
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120 (96-164)	RPM	12722	6361	4771	3817	3181
						Fr	0.055	0.113	0.243	0.366	0.439
						Feed (mm/min)	700	720	1160	1395	1395
			≤ 0.5	≤ 1.5	150 (120-180)	RPM	15903	7951	5963	4771	3976
						Fr	0.055	0.113	0.243	0.366	0.439
						Feed (mm/min)	875	900	1450	1744	1744
			≤ 0.05	≤ 2	250 (200-300)	RPM	26504	13252	9939	7951	6626
						Fr	0.126	0.260	0.556	0.833	1.000
						Feed (mm/min)	3350	3450	5527	6625	6625
	GFRP (FIBERGLASS)		1	≤ 1	100 (80-120)	RPM	10602	5301	3976	3181	2650
						Fr	0.054	0.111	0.236	0.357	0.428
						Feed (mm/min)	570	587	940	1135	1135
			≤ 0.5	≤ 1.5	120 (96-164)	RPM	12722	6361	4771	3817	3181
						Fr	0.054	0.111	0.236	0.357	0.428
						Feed (mm/min)	684	704	1128	1362	1362
			≤ 0.05	≤ 2	200 (160-240)	RPM	21203	10602	7951	6361	5301
						Fr	0.124	0.261	0.557	1.011	1.213
						Feed (mm/min)	2629	2765	4430	6430	6430
	CARBON, GRAPHITE		1	≤ 1	145 (116-174)	RPM	15372	7686	5765	4612	3843
						Fr	0.069	0.152	0.323	0.482	0.579
						Feed (mm/min)	1061	1165	1860	2224	2224
			≤ 0.5	≤ 1.5	185 (148-222)	RPM	19613	9807	7355	5884	4903
						Fr	0.069	0.152	0.323	0.482	0.579
						Feed (mm/min)	1353	1486	2373	2838	2838
			≤ 0.05	≤ 2	300 (240-360)	RPM	31805	15903	11927	9542	7951
						Fr	0.159	0.348	0.740	1.109	1.331
						Feed (mm/min)	5057	5535	8820	10580	10580
	PLASTICS		1	≤ 1	245 (196-294)	RPM	25974	12987	9740	7792	6494
						Fr	0.069	0.150	0.319	0.477	0.572
						Feed (mm/min)	1792	1945	3107	3717	3717
			≤ 0.5	≤ 1.5	305 (244-366)	RPM	32335	16168	12126	9701	8084
						Fr	0.069	0.150	0.319	0.477	0.572
						Feed (mm/min)	2231	2421	3868	4627	4627
			≤ 0.05	≤ 2	505 (404-606)	RPM	53538	26769	20077	16062	13385
						Fr	0.159	0.344	0.732	1.097	1.316
						Feed (mm/min)	8513	9220	14690	17617	17617

HSM (high speed machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard® for complete technical information
www.kyocera-sgstool.com


Coarse Cut Carbon Composite



31-CCR

FRACTIONAL SERIES

- Fewer, deeper flutes to prevent clogging in heavy routing
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

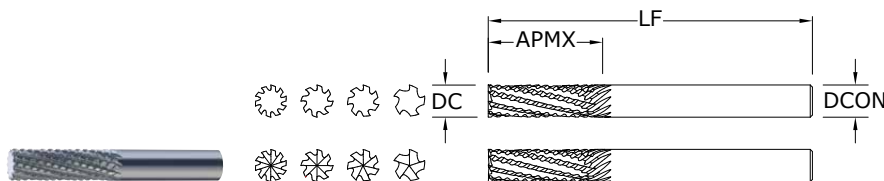

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	5	End Cutting	72954	72955
1/4	1	2-1/2	1/4	5	No End Cutting	72956	72957
5/16	1	2-1/2	5/16	7	End Cutting	72958	72959
5/16	1	2-1/2	5/16	7	No End Cutting	72960	72961
3/8	1-1/8	2-1/2	3/8	8	End Cutting	72962	72963
3/8	1-1/8	2-1/2	3/8	8	No End Cutting	72964	72965
1/2	1-1/2	3-1/2	1/2	10	End Cutting	72966	72967
1/2	1-1/2	3-1/2	1/2	10	No End Cutting	72968	72969

TOLERANCES (inch)

DC = +.000/- .005

DCON = h₆


NON-FERROUS

For patent information visit
www.ksptpatents.com

31M-CCR

METRIC SERIES

- Fewer, deeper flutes to prevent clogging in heavy routing
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

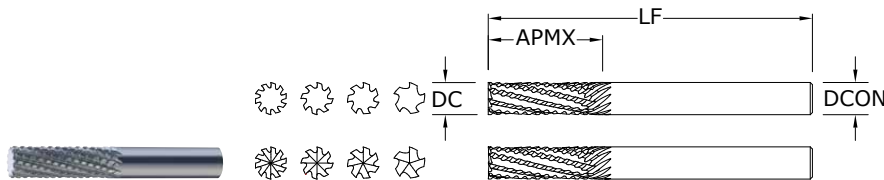

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Ti-NAMITE-B (TiB ₂)	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	5	End Cutting	82974	83200	82982
6,0	25,0	63,0	6,0	5	No End Cutting	82975	83201	82983
8,0	25,0	63,0	8,0	7	End Cutting	82976	83202	82984
8,0	25,0	63,0	8,0	7	No End Cutting	82977	83203	82985
10,0	28,0	63,0	10,0	8	End Cutting	82978	83204	82986
10,0	28,0	63,0	10,0	8	No End Cutting	82979	83205	82987
12,0	38,0	89,0	12,0	10	End Cutting	82980	83206	82988
12,0	38,0	89,0	12,0	10	No End Cutting	82981	83207	82989

TOLERANCES (mm)


DC = +0,000/-0,130

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com



Coarse Cut Carbon Composite



Series 31M Metric			Vc (m/min)	DC • mm						
	Ae x DC	Ap x DC		6	8	10	12			
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120	RPM	6361	4771	3817	3181
					(96-164)	Fr	0.071	0.170	0.244	0.366
						Feed (mm/min)	450	810	930	1165
			≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976
					(120-180)	Fr	0.071	0.170	0.244	0.366
						Feed (mm/min)	563	1013	1163	1456
			≤ 0.05	≤ 2	250	RPM	13252	9939	7951	6626
					(200-300)	Fr	0.162	0.388	0.555	0.832
						Feed (mm/min)	2150	3860	4415	5515
	GFRP (FIBERGLASS)		1	≤ 1	100	RPM	5301	3976	3181	2650
					(80-120)	Fr	0.069	0.165	0.237	0.357
						Feed (mm/min)	365	655	755	945
			≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181
					(96-164)	Fr	0.069	0.165	0.237	0.357
						Feed (mm/min)	438	786	906	1134
			≤ 0.05	≤ 2	200	RPM	10602	7951	6361	5301
					(160-240)	Fr	0.163	0.390	0.557	0.834
						Feed (mm/min)	1725	3100	3540	4420
CARBON, GRAPHITE		1	≤ 1	145	RPM	7686	5765	4612	3843	
				(116-174)	Fr	0.095	0.226	0.321	0.483	
					Feed (mm/min)	728	1300	1480	1855	
		≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903	
				(148-222)	Fr	0.095	0.226	0.321	0.483	
					Feed (mm/min)	929	1659	1888	2367	
		≤ 0.05	≤ 2	300	RPM	15903	11927	9542	7951	
				(240-360)	Fr	0.217	0.517	0.739	1.111	
					Feed (mm/min)	3450	6170	7050	8830	
PLASTICS		1	≤ 1	245	RPM	12987	9740	7792	6494	
				(196-294)	Fr	0.094	0.223	0.318	0.477	
					Feed (mm/min)	1215	2175	2475	3100	
		≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084	
				(244-366)	Fr	0.094	0.223	0.318	0.477	
					Feed (mm/min)	1513	2708	3081	3859	
		≤ 0.05	≤ 2	505	RPM	26769	20077	16062	13385	
				(404-606)	Fr	0.215	0.512	0.731	1.098	
					Feed (mm/min)	5760	10280	11745	14700	

HSM (high speed machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard® for complete technical information
www.kyocera-sgstool.com

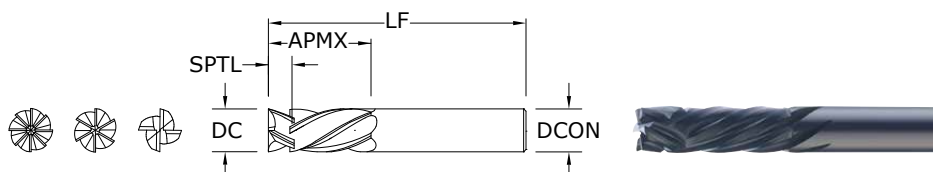

TOLERANCES (inch)

DC = +.000/- .003

DCON = h_6


NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	SPLIT LENGTH SPTL	NO. OF FLUTES	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	11/64	4	72970	72971
5/16	1	2-1/2	5/16	7/32	4	72972	72973
3/8	1-1/8	2-1/2	3/8	17/64	6	72974	72975
1/2	1-1/2	3-1/2	1/2	23/64	8	72976	72977

25
FRACTIONAL SERIES

- Compression-style helixes direct cutting forces inward, eliminating fiber breakout and delamination
- Primary/secondary relief grind for reduced friction and pressure
- Rigid, heavy core

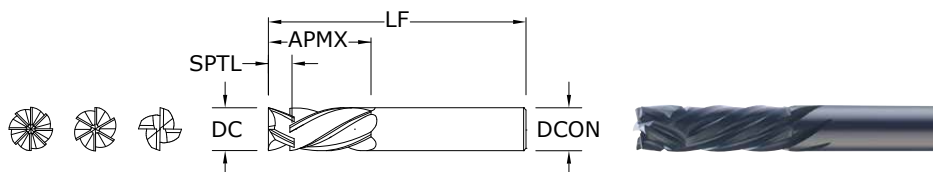

TOLERANCES (mm)

DC = +0,000/-0,080

DCON = h_6

NON-FERROUS


For patent
information visit
www.ksptpatents.com

mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	SPLIT LENGTH SPTL	NO. OF FLUTES	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	4,10	4	82990	82991
8,0	25,0	63,0	8,0	5,58	4	82992	82993
10,0	28,0	63,0	10,0	7,05	6	82994	82995
12,0	38,0	89,0	12,0	8,60	8	82996	82997

25M
METRIC SERIES

- Compression-style helixes direct cutting forces inward, eliminating fiber breakout and delamination
- Primary/secondary relief grind for reduced friction and pressure
- Rigid, heavy core

Compression



Series 25 Fractional				Vc (sfm)		DC • in				
		1/4 5/16 3/8 1/2								
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	 Profile	≤ 0.5	≤ 1.5	500	RPM	7640	6112	5093	3820
					(400-600)	Fz	0.0016	0.0030	0.0040	0.0048
						Feed (ipm)	49	73	122	147
		 HSM	≤ 0.05	≤ 2	825	RPM	12606	10085	8404	6303
					(660-990)	Fz	0.0037	0.0069	0.0092	0.0110
						Feed (ipm)	187	278	464	555
	GFRP (FIBERGLASS)	 Profile	≤ 0.5	≤ 1.5	400	RPM	6112	4890	4075	3056
					(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
						Feed (ipm)	39	59	98	117
		 HSM	≤ 0.05	≤ 2	660	RPM	10085	8068	6723	5042
					(528-792)	Fz	0.0037	0.0069	0.0092	0.0110
						Feed (ipm)	149	223	371	444
	CARBON, GRAPHITE	 Profile	≤ 0.5	≤ 1.5	600	RPM	9168	7334	6112	4584
					(480-720)	Fz	0.0020	0.0038	0.0050	0.0060
						Feed (ipm)	73	111	183	220
		 HSM	≤ 0.05	≤ 2	990	RPM	15127	12102	10085	7564
					(792-1188)	Fz	0.0046	0.0086	0.0115	0.0138
						Feed (ipm)	278	416	696	835
PLASTICS	 Profile	≤ 0.5	≤ 1.5	1000	RPM	15280	12224	10187	7640	
				(800-1200)	Fz	0.0020	0.0038	0.0050	0.0060	
					Feed (ipm)	122	186	306	367	
	 HSM	≤ 0.05	≤ 2	1650	RPM	25212	20170	16808	12606	
				(1320-1980)	Fz	0.0046	0.0086	0.0115	0.0138	
					Feed (ipm)	464	694	1160	1392	
MACHINABLE CERAMICS MACHINABLE GLASS	 Profile	≤ 0.5	≤ 1.5	50	RPM	764	611	509	382	
				(40-60)	Fz	0.0008	0.0015	0.0020	0.0024	
					Feed (ipm)	2.4	3.7	6.1	7.3	
	 HSM	≤ 0.05	≤ 2	85	RPM	1299	1039	866	649	
				(68-102)	Fz	0.0018	0.0034	0.0046	0.0055	
					Feed (ipm)	9.4	14.1	23.9	28.6	

HSM (high speed machining)

rpm = Vc x 3.82 / DC

ipm = Fz x number of flutes x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

www.kyocera-sgstool.com

Compression



Series 25M Metric		 Ae x DC  Ap x DC		Vc (m/min)	DC • mm			
					6	8	10	12
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	 Profile ≤ 0.5 ≤ 1.5	150	RPM	7951	5963	4771	3976
			(96-164)	Fz	0.040	0.065	0.075	0.100
				Feed (mm/min)	1272	1550	2147	3181
		 HSM ≤ 0.05 ≤ 2	250	RPM	13252	9939	7951	6626
			(200-300)	Fz	0.095	0.145	0.175	0.235
				Feed (mm/min)	5036	5765	8349	12457
	GFRP (FIBERGLASS)	 Profile ≤ 0.5 ≤ 1.5	120	RPM	6361	4771	3817	3181
			(96-164)	Fz	0.040	0.065	0.075	0.100
				Feed (mm/min)	1018	1240	1717	2544
		 HSM ≤ 0.05 ≤ 2	200	RPM	10602	7951	6361	5301
			(160-240)	Fz	0.095	0.145	0.175	0.235
				Feed (mm/min)	4029	4612	6679	9966
CARBON, GRAPHITE	 Profile ≤ 0.5 ≤ 1.5	185	RPM	9807	7355	5884	4903	
		(148-222)	Fz	0.050	0.080	0.095	0.125	
			Feed (mm/min)	1961	2354	3354	4903	
	 HSM ≤ 0.05 ≤ 2	300	RPM	15903	11927	9542	7951	
		(240-360)	Fz	0.115	0.185	0.220	0.290	
			Feed (mm/min)	7315	8826	12595	18447	
PLASTICS	 Profile ≤ 0.5 ≤ 1.5	305	RPM	16168	12126	9701	8084	
		(244-366)	Fz	0.050	0.080	0.095	0.125	
			Feed (mm/min)	3234	3880	5529	8084	
	 HSM ≤ 0.05 ≤ 2	505	RPM	26769	20077	16062	13385	
		(404-606)	Fz	0.115	0.185	0.220	0.290	
			Feed (mm/min)	12314	14857	21201	31052	
MACHINABLE CERAMICS MACHINABLE GLASS	 Profile ≤ 0.5 ≤ 1.5	15	RPM	795	596	477	398	
		(12-18)	Fz	0.020	0.035	0.045	0.050	
			Feed (mm/min)	64	83	129	159	
	 HSM ≤ 0.05 ≤ 2	25	RPM	1325	994	795	663	
		(20-30)	Fz	0.045	0.075	0.085	0.115	
			Feed (mm/min)	239	298	406	610	

HSM (high speed machining)

$\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$

$\text{mm/min} = \text{Fz} \times \text{number of flutes} \times \text{rpm}$

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials


refer to the SGS Tool Wizard® for complete technical information

www.kyocera-sgstool.com

Up Cut

**21**

FRACTIONAL SERIES

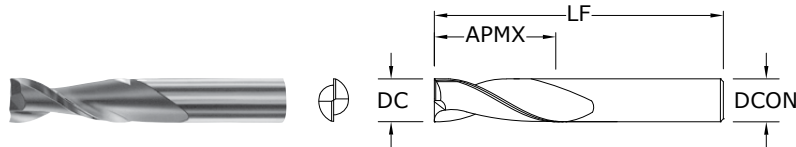

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
1/8	1/2	2	1/4	90001
5/32	5/8	2-1/2	1/4	90005
3/16	3/4	2-1/2	1/4	90009
1/4	3/4	2-1/2	1/4	90013
1/4	1	2-1/2	1/4	90017
5/16	1	2-1/2	5/16	90021
5/16	1	3	1/2	90025
3/8	1	2-1/2	3/8	90029
3/8	1-1/4	3	1/2	90033
1/2	1-1/4	3	1/2	90037
1/2	1-1/2	3-1/2	1/2	90041
1/2	2	4	1/2	90045
5/8	2	4-1/2	5/8	90049
3/4	2	4-1/2	3/4	90053

TOLERANCES (inch)

DC = +.000/- .003


DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

21M

METRIC SERIES

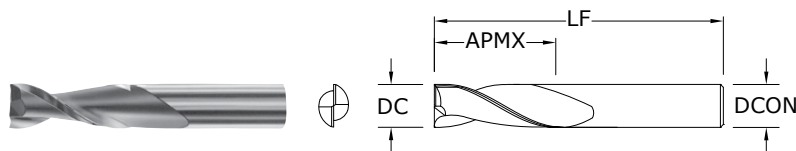

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
3,0	13,0	50,0	6,0	90101
4,0	16,0	63,0	6,0	90107
5,0	19,0	63,0	6,0	90109
6,0	25,0	63,0	6,0	90113
8,0	25,0	63,0	8,0	90121
10,0	31,0	75,0	10,0	90129
12,0	31,0	75,0	12,0	90137

TOLERANCES (mm)


DC = +0,000/-0,080

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

Down Cut

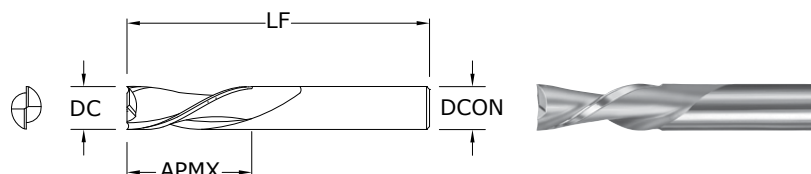**22**

FRACTIONAL SERIES


TOLERANCES (inch)

DC = +.000/-0.003

DCON = h_6 **NON-FERROUS**

For patent
information visit
www.ksptpatents.com

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
1/8	1/2	2	1/4	91001
5/32	5/8	2-1/2	1/4	91005
3/16	3/4	2-1/2	1/4	91009
1/4	3/4	2-1/2	1/4	91013
1/4	1	2-1/2	1/4	91017
5/16	1	2-1/2	5/16	91021
5/16	1	3	1/2	91025
3/8	1	2-1/2	3/8	91029
3/8	1-1/4	3	1/2	91033
1/2	1-1/4	3	1/2	91037
1/2	1-1/2	3-1/2	1/2	91041
1/2	2	4	1/2	91045
5/8	2	4-1/2	5/8	91049
3/4	2	4-1/2	3/4	91053

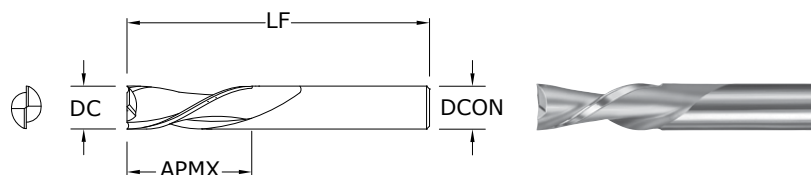**22M**

METRIC SERIES

TOLERANCES (mm)


DC = +0,000/-0,080

DCON = h_6 **NON-FERROUS**

For patent
information visit
www.ksptpatents.com


mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
3,0	13,0	50,0	6,0	91101
4,0	16,0	63,0	6,0	91107
5,0	19,0	63,0	6,0	91109
6,0	25,0	63,0	6,0	91113
8,0	25,0	63,0	8,0	91121
10,0	31,0	75,0	10,0	91129
12,0	31,0	75,0	12,0	91137

Up Cut Down Cut



Series 21, 22 Fractional		Ae x DC Ap x DC		Vc (sfm)		DC • in				
						1/8	1/4	3/8	1/2	3/4
HARDWOODS	Slot 	1	≤ 1	1550	RPM	47368	23684	15789	11842	7895
				(1240-1860)	Fz	0.0008	0.0015	0.0025	0.0030	0.0045
					Feed (ipm)	76	71	79	71	71
	Profile 	≤ 0.5	≤ 1.5	1550	RPM	47368	23684	15789	11842	7895
				(1240-1860)	Fz	0.0008	0.0015	0.0025	0.0030	0.0045
					Feed (ipm)	76	71	79	71	71
	Slot 	1	≤ 1	1950	RPM	59592	29796	19864	14898	9932
				(1560-2340)	Fz	0.0010	0.0020	0.0030	0.0035	0.0055
					Feed (ipm)	119	119	119	104	109
	Profile 	≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932
				(1560-2340)	Fz	0.0010	0.0020	0.0030	0.0035	0.0055
					Feed (ipm)	119	119	119	104	109
PLYWOODS	Slot 	1	≤ 1	1950	RPM	59592	29796	19864	14898	9932
				(1560-2340)	Fz	0.0013	0.0025	0.0040	0.0050	0.0075
					Feed (ipm)	155	149	159	149	149
	Profile 	≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932
				(1560-2340)	Fz	0.0013	0.0025	0.0040	0.0050	0.0075
					Feed (ipm)	155	149	159	149	149
N PLASTICS	Slot 	1	≤ 1	1950	RPM	59592	29796	19864	14898	9932
				(1560-2340)	Fz	0.0008	0.0017	0.0025	0.0035	0.0050
					Feed (ipm)	95	101	99	104	99
	Profile 	≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932
				(1560-2340)	Fz	0.0008	0.0017	0.0025	0.0035	0.0050
					Feed (ipm)	95	101	99	104	99

rpm = Vc x 3.82 / DC
ipm = Fz x 2 x rpm



Series 21M, 22M Metric						Vc (m/min)	DC • mm				
		Ae x DC	Ap x DC	3	6		10	12	20		
HARDWOODS		1	≤ 1	470	RPM	49828	24914	14948	12457	7474	
				(376-564)	Fz	0.020	0.040	0.065	0.075	0.115	
					Feed (mm/min)	1993	1993	1943	1869	1719	
				470	RPM	49828	24914	8155	4241	1509	
				(376-564)	Fz	0.020	0.040	0.065	0.075	0.115	
					Feed (mm/min)	1993	1993	1060	636	347	
		≤ 0.5	≤ 1.5	470	RPM	49828	24914	8155	4241	1509	
				(376-564)	Fz	0.020	0.040	0.065	0.075	0.115	
					Feed (mm/min)	1993	1993	1060	636	347	
				600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.025	0.050	0.075	0.090	0.140	
					Feed (mm/min)	3181	3181	2862	2862	2672	
SOFTWOODS		1	≤ 1	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.025	0.050	0.075	0.090	0.140	
					Feed (mm/min)	3181	3181	2862	2862	2672	
				600	RPM	63610	31805	19083	15903	303467	
				(480-720)	Fz	0.025	0.050	0.075	0.090	0.140	
					Feed (mm/min)	3181	3181	2862	2862	84971	
		≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	3626	
				600	RPM	63610	31805	19083	15903	303467	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	115318	
PLYWOODS		1	≤ 1	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	115318	
				600	RPM	63610	31805	19083	15903	303467	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	115318	
		≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	115318	
				600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	115318	
N	PLASTICS		1	≤ 1	600	RPM	63610	31805	19083	15903	9542
					(480-720)	Fz	0.020	0.040	0.065	0.090	0.125
						Feed (mm/min)	2544	2544	2481	2862	2385
					600	RPM	63610	31805	19083	15903	9542
					(480-720)	Fz	0.020	0.040	0.065	0.090	0.125
						Feed (mm/min)	2544	2544	2481	2862	2385

rpm = (Vc x 1000) / (DC x 3.14)
mm/min = Fz x 2 x rpm

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
30000	303	30108	307	30188	308	30366	284	30483	283	30563	297	30813	297
30001	303	30109	303	30189	306	30367	282	30484	283	30564	298	30814	297
30002	303	30110	307	30189	318	30368	284	30485	283	30565	297	30815	297
30003	303	30111	303	30190	308	30369	282	30486	283	30566	298	30816	297
30004	303	30112	307	30190	319	30370	284	30487	283	30567	297	30817	297
30005	303	30113	303	30191	303	30371	282	30488	283	30568	298	30818	297
30006	303	30114	307	30192	303	30372	284	30489	283	30569	297	30819	297
30007	304	30115	303	30193	303	30373	282	30490	283	30570	298	30820	297
30008	304	30116	307	30194	303	30374	284	30491	283	30571	297	30821	297
30009	304	30117	303	30195	303	30375	282	30492	283	30572	298	30822	297
30010	304	30118	307	30196	303	30376	284	30493	283	30573	297	30823	297
30011	304	30119	303	30197	303	30377	280	30494	284	30574	298	30824	297
30012	304	30120	307	30198	303	30378	283	30495	284	30575	297	30825	297
30013	304	30121	303	30199	303	30379	304	30496	284	30576	298	30826	297
30014	304	30122	307	30300	303	30380	305	30497	284	30577	297	30827	297
30015	304	30123	303	30301	280	30381	305	30498	284	30578	298	30828	297
30016	304	30124	307	30302	283	30382	306	30499	284	30589	297	30829	297
30017	304	30125	303	30303	280	30383	306	30500	284	30589	318	30830	297
30018	305	30126	307	30304	283	30384	308	30501	297	30590	298	30831	297
30019	305	30127	303	30305	280	30385	308	30502	298	30590	319	30832	297
30020	305	30128	307	30306	283	30386	308	30503	297	30591	284	30833	297
30021	305	30129	303	30307	280	30387	308	30504	298	30592	284	30834	297
30022	305	30130	307	30308	283	30388	308	30505	297	30593	284	30835	297
30023	305	30131	303	30309	280	30389	282	30506	298	30594	284	30836	297
30024	305	30132	307	30310	283	30389	318	30507	297	30595	284	30837	297
30025	305	30133	304	30311	280	30390	284	30508	298	30596	284	30838	297
30026	305	30134	307	30312	283	30390	319	30509	297	30597	284	30839	297
30027	306	30135	304	30313	280	30397	280	30510	298	30598	284	30840	297
30028	306	30136	307	30314	283	30398	280	30511	297	30599	283	30841	297
30029	303	30137	304	30315	280	30399	280	30512	298	30600	284	30842	297
30030	306	30138	307	30316	283	30400	280	30513	297	30600	319	30843	297
30030	318	30139	304	30317	280	30435	280	30514	298	30602	298	30844	297
30031	307	30140	307	30318	283	30436	280	30515	297	30604	298	30845	297
30032	307	30141	304	30319	280	30437	280	30516	298	30606	298	30846	297
30033	307	30142	307	30320	283	30438	280	30517	297	30608	298	30847	297
30034	307	30143	304	30321	280	30439	280	30518	298	30610	298	30848	297
30035	307	30144	307	30322	283	30440	280	30519	297	30612	298	30849	297
30036	307	30145	304	30323	280	30441	280	30520	298	30771	297	30850	297
30037	307	30146	307	30324	283	30442	280	30521	297	30772	297	30850	318
30038	307	30147	304	30325	280	30443	280	30522	298	30773	297	30851	298
30039	307	30148	308	30326	283	30444	280	30523	297	30774	297	30852	298
30040	307	30149	304	30327	280	30445	280	30524	298	30775	297	30853	298
30041	307	30150	308	30328	283	30446	280	30525	297	30776	297	30854	298
30042	307	30151	304	30329	280	30447	280	30526	298	30777	297	30855	298
30043	307	30152	308	30330	283	30448	280	30527	297	30778	297	30856	298
30044	307	30153	304	30331	280	30449	281	30528	298	30779	297	30857	298
30045	307	30154	308	30332	283	30450	281	30529	297	30780	297	30858	298
30046	307	30155	305	30333	280	30451	281	30530	298	30781	297	30859	298
30047	307	30156	308	30334	283	30452	281	30531	297	30782	297	30860	298
30048	307	30157	305	30335	280	30453	281	30532	298	30783	297	30861	298
30049	307	30158	308	30336	283	30454	281	30533	297	30784	297	30862	298
30050	307	30159	305	30337	281	30455	281	30534	298	30785	297	30863	298
30051	307	30160	308	30338	283	30456	281	30535	297	30786	297	30864	298
30052	307	30161	305	30339	281	30457	281	30536	298	30787	297	30865	298
30053	307	30162	308	30340	283	30458	281	30537	297	30788	297	30866	298
30054	308	30163	305	30341	281	30459	281	30538	298	30789	297	30867	298
30055	308	30164	308	30342	283	30460	281	30539	297	30790	297	30868	298
30056	308	30165	305	30343	281	30461	281	30540	298	30791	297	30869	298
30057	308	30166	308	30344	283	30462	281	30541	297	30792	297	30870	298
30058	308	30167	305	30345	281	30463	282	30542	298	30793	297	30871	298
30059	308	30168	308	30346	283	30464	282	30543	297	30794	297	30872	298
30060	308	30169	305	30347	281	30465	282	30544	298	30795	297	30873	298
30061	308	30170	308	30348	284	30466	282	30545	297	30796	297	30874	298
30062	308	30171	305	30349	281	30467	282	30546	298	30797	297	30875	298
30063	308	30172	308	30350	284	30468	282	30547	297	30798	297	30876	298
30064	308	30173	306	30351	281	30469	280	30548	298	30799	297	30877	298
30065	308	30174	308	30352	284	30470	282	30549	297	30800	297	30878	298
30066	308	30175	306	30353	281	30470	318	30550	298	30801	297	30879	298
30067	308	30176	308	30354	284	30471	283	30551	297	30802	297	30880	298
30068	308	30177	303	30355	281	30472	283	30552	298	30803	297	30881	298
30069	307	30178	307	30356	284	30473	283	30553	297	30804	297	30882	298
30070	308	30179	304	30357	281	30474	283	30554	298	30805	297	30883	298
30070	319	30180	305	30358	284	30475	283	30555	297	30806	297	30884	298
30101	303	30181	305	30359	281	30476	283	30556	298	30807	297	30885	298
30102	307	30182	306	30360	284	30477	283	30557	297	30808	297	30886	298
30103	303	30183	306	30361	281	30478	283	30558	298	30809	297	30887	298
30104	307	30184	308	30362	284	30479	283	30559	297	30810	297	30888	298
30105	303	30185	308	30363	281	30480	283	30560	298	30810	318	30889	298
30106	307	30186	308	30364	284	30481	283	30561	297	30811	297	30900	298
30107	303	30187	308	30365	282	30482	283	30562	298	30812	297	30900	319

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
30902.....	298	31174.....	313	31317.....	287	31425.....	313	31517.....	287	31617.....	304	31776.....	308
30904.....	298	31175.....	313	31318.....	287	31426.....	314	31518.....	288	31619.....	305	31777.....	308
30906.....	298	31176.....	313	31319.....	287	31427.....	313	31519.....	287	31621.....	305	31778.....	308
30908.....	298	31177.....	313	31320.....	287	31428.....	314	31520.....	288	31623.....	305	31779.....	308
30910.....	298	31178.....	313	31321.....	287	31429.....	313	31521.....	287	31625.....	305	31780.....	307
30912.....	298	31179.....	313	31322.....	287	31430.....	314	31522.....	288	31650.....	303	31781.....	307
30914.....	298	31180.....	313	31323.....	287	31431.....	313	31523.....	287	31651.....	303	31782.....	307
30916.....	298	31181.....	313	31324.....	287	31432.....	314	31524.....	288	31652.....	303	31783.....	307
30918.....	298	31182.....	313	31325.....	287	31433.....	313	31525.....	287	31653.....	303	31784.....	308
30920.....	298	31183.....	313	31326.....	287	31434.....	314	31526.....	288	31654.....	303	31785.....	308
30921.....	298	31184.....	313	31327.....	287	31435.....	313	31527.....	287	31655.....	303	31786.....	308
30922.....	298	31185.....	313	31328.....	287	31436.....	314	31528.....	288	31656.....	303	31787.....	308
30923.....	298	31186.....	313	31329.....	287	31437.....	313	31529.....	287	31657.....	304	31788.....	308
30924.....	298	31187.....	313	31330.....	287	31438.....	314	31530.....	288	31658.....	304	31789.....	308
30925.....	298	31188.....	313	31331.....	287	31439.....	313	31531.....	287	31659.....	305	31790.....	307
30926.....	298	31189.....	313	31332.....	287	31440.....	314	31532.....	288	31660.....	305	31791.....	307
30927.....	298	31190.....	313	31333.....	287	31441.....	313	31533.....	287	31661.....	305	31792.....	307
30928.....	298	31190.....	318	31334.....	287	31442.....	314	31534.....	288	31662.....	305	31793.....	307
30929.....	298	31217.....	314	31335.....	287	31443.....	313	31535.....	287	31701.....	291	31794.....	308
30930.....	298	31217.....	319	31336.....	287	31444.....	314	31536.....	288	31703.....	291	31795.....	308
30931.....	298	31218.....	314	31336.....	318	31445.....	313	31537.....	287	31705.....	291	31796.....	308
30932.....	298	31219.....	314	31337.....	288	31446.....	314	31538.....	288	31707.....	291	31797.....	308
30933.....	298	31220.....	314	31338.....	288	31447.....	313	31539.....	287	31709.....	291	31798.....	308
30934.....	298	31221.....	314	31339.....	288	31448.....	314	31540.....	288	31711.....	291	31799.....	308
30935.....	298	31222.....	314	31340.....	288	31449.....	313	31541.....	287	31713.....	291	31800.....	280
30936.....	298	31223.....	314	31341.....	288	31450.....	314	31542.....	288	31715.....	291	31802.....	280
30937.....	298	31224.....	314	31342.....	288	31451.....	313	31543.....	287	31717.....	291	31804.....	281
30938.....	298	31225.....	314	31343.....	288	31452.....	314	31544.....	288	31719.....	291	31806.....	281
30939.....	298	31226.....	314	31344.....	288	31453.....	313	31545.....	287	31721.....	291	31808.....	282
30940.....	298	31227.....	314	31345.....	288	31454.....	314	31546.....	288	31723.....	291	31810.....	280
30941.....	298	31228.....	314	31346.....	288	31455.....	313	31547.....	287	31725.....	291	31812.....	280
30942.....	298	31229.....	314	31347.....	288	31456.....	314	31548.....	288	31727.....	303	31814.....	281
30943.....	298	31230.....	314	31348.....	288	31457.....	313	31549.....	287	31728.....	303	31816.....	281
30944.....	298	31231.....	314	31349.....	288	31458.....	314	31550.....	288	31729.....	304	31817.....	282
30944.....	319	31232.....	314	31350.....	288	31459.....	313	31551.....	287	31730.....	304	31818.....	282
31130.....	298	31233.....	314	31351.....	288	31460.....	314	31552.....	288	31731.....	304	31819.....	282
31131.....	298	31234.....	314	31352.....	288	31461.....	313	31553.....	287	31732.....	305	31820.....	280
31132.....	298	31235.....	314	31353.....	288	31462.....	314	31554.....	288	31733.....	305	31821.....	281
31133.....	298	31236.....	314	31354.....	288	31463.....	313	31555.....	287	31734.....	305	31822.....	281
31134.....	298	31237.....	314	31355.....	288	31464.....	314	31556.....	288	31735.....	306	31823.....	282
31135.....	298	31238.....	303	31356.....	288	31465.....	313	31557.....	287	31736.....	306	31824.....	282
31136.....	298	31239.....	303	31357.....	288	31466.....	314	31558.....	288	31737.....	303	31825.....	280
31137.....	298	31240.....	303	31357.....	319	31467.....	313	31559.....	287	31738.....	303	31826.....	281
31138.....	298	31241.....	303	31358.....	291	31468.....	314	31560.....	288	31739.....	304	31827.....	281
31139.....	298	31242.....	303	31359.....	291	31469.....	313	31561.....	287	31740.....	304	31830.....	283
31140.....	298	31243.....	303	31360.....	291	31470.....	314	31562.....	288	31741.....	304	31831.....	283
31141.....	298	31244.....	303	31361.....	291	31471.....	313	31563.....	287	31742.....	305	31832.....	283
31142.....	298	31245.....	304	31362.....	291	31472.....	314	31564.....	288	31743.....	305	31833.....	283
31143.....	298	31246.....	304	31363.....	291	31473.....	313	31565.....	287	31744.....	305	31834.....	284
31144.....	298	31247.....	305	31364.....	291	31474.....	314	31566.....	288	31745.....	306	31835.....	284
31145.....	298	31248.....	305	31365.....	291	31475.....	313	31567.....	287	31746.....	306	31836.....	284
31146.....	298	31249.....	305	31366.....	291	31476.....	314	31568.....	288	31747.....	303	31837.....	284
31147.....	298	31250.....	305	31367.....	291	31477.....	313	31569.....	287	31748.....	303	31838.....	284
31148.....	298	31251.....	303	31368.....	291	31478.....	314	31570.....	288	31749.....	304	31839.....	284
31149.....	298	31252.....	303	31369.....	291	31479.....	313	31571.....	287	31750.....	291	31840.....	283
31150.....	298	31253.....	303	31370.....	291	31480.....	314	31572.....	288	31751.....	291	31841.....	283
31151.....	298	31254.....	303	31401.....	313	31481.....	313	31573.....	287	31752.....	291	31842.....	283
31152.....	298	31255.....	303	31402.....	314	31481.....	318	31574.....	288	31753.....	291	31843.....	283
31153.....	298	31256.....	303	31403.....	313	31482.....	314	31575.....	287	31754.....	291	31844.....	284
31154.....	298	31257.....	303	31404.....	314	31482.....	319	31576.....	288	31755.....	291	31845.....	284
31155.....	298	31258.....	304	31405.....	313	31489.....	313	31577.....	287	31756.....	291	31846.....	284
31156.....	298	31259.....	304	31406.....	314	31489.....	318	31578.....	288	31757.....	291	31847.....	284
31157.....	298	31260.....	305	31407.....	313	31490.....	314	31579.....	287	31758.....	291	31848.....	284
31158.....	298	31261.....	305	31408.....	314	31490.....	319	31580.....	288	31759.....	291	31849.....	284
31159.....	298	31262.....	305	31409.....	313	31501.....	287	31581.....	287	31760.....	291	31850.....	280
31160.....	298	31263.....	305	31410.....	314	31502.....	288	31581.....	318	31761.....	291	31851.....	280
31161.....	298	31303.....	291	31411.....	313	31503.....	287	31582.....	288	31762.....	291	31852.....	280
31162.....	298	31304.....	291	31412.....	314	31504.....	288	31582.....	319	31763.....	304	31853.....	281
31163.....	298	31305.....	291	31413.....	313	31505.....	287	31589.....	287	31764.....	304	31854.....	281
31164.....	298	31306.....	291	31414.....	314	31506.....	288	31589.....	318	31765.....	305	31855.....	281
31165.....	298	31307.....	291	31415.....	313	31507.....	287	31590.....	288	31766.....	305	31856.....	281
31166.....	298	31308.....	291	31416.....	314	31508.....	288	31590.....	319	31767.....	305	31857.....	282
31167.....	298	31309.....	291	31417.....	313	31509.....	287	31601.....	303	31768.....	306	31858.....	282
31168.....	298	31310.....	291	31418.....	314	31510.....	288	31603.....	303	31769.....	306	31859.....	282
31169.....	298	31311.....	291	31419.....	313	31511.....	287	31605.....	303	31770.....	307	31860.....	303
31169.....	319	31312.....	291	31420.....	314	31512.....	288	31607.....	303	31771.....	307	31861.....	303
31170.....	313	31313.....	291	31421.....	313	31513.....	287	31609.....	303	31772.....	307	31862.....	304
31171.....	313	31314.....	291	31422.....	314	31514.....	288	31611.....	303	31773.....	307	31863.....	304
31172.....	313	31315.....	291	31423.....	313	31515.....	287	31613.....	303	31774.....	308	31864.....	304
31173.....	313	31316.....	287	31424.....	314	31516.....	288	31615.....	304	31775.....	308	31865.....	305

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
31866	305	31954	282	32202	294	32337	301	32438	302	32596	66	32711	149
31867	305	31955	282	32203	294	32338	301	32439	302	32597	66	32712	149
31868	306	31956	282	32204	294	32339	301	32440	302	32598	66	32713	149
31869	306	31957	282	32205	294	32340	301	32441	302	32599	66	32714	149
31870	303	31958	280	32206	294	32341	301	32442	302	32600	66	32715	149
31871	303	31959	280	32207	294	32342	301	32443	302	32601	66	32716	149
31872	304	31960	280	32210	294	32345	301	32445	302	32602	66	32717	150
31873	304	31961	281	32211	294	32346	301	32446	302	32603	66	32718	150
31874	304	31962	281	32212	294	32347	301	32447	302	32604	66	32719	150
31875	305	31963	281	32213	294	32348	301	32448	302	32605	66	32720	150
31876	305	31964	282	32214	294	32349	301	32449	302	32606	65	32725	148
31877	305	31965	282	32215	294	32350	301	32450	302	32607	65	32726	148
31878	306	31966	282	32216	294	32351	301	32451	302	32608	65	32727	148
31879	306	31967	282	32217	294	32352	301	32452	302	32609	65	32728	148
31880	303	31968	283	32260	293	32353	301	32453	302	32610	65	32729	148
31881	303	31969	283	32261	293	32354	301	32454	302	32611	65	32730	148
31882	304	31970	283	32262	293	32355	301	32455	302	32612	65	32731	148
31883	304	31971	283	32263	293	32356	301	32456	302	32613	65	32732	148
31884	304	31972	284	32264	293	32357	301	32457	302	32614	65	32733	148
31885	305	31973	284	32265	293	32358	301	32458	302	32615	65	32734	148
31886	305	31974	284	32266	293	32359	301	32459	302	32616	65	32735	149
31887	305	31975	284	32267	293	32360	301	32460	302	32619	65	32736	149
31888	306	31976	284	32270	293	32361	301	32461	302	32620	65	32737	149
31889	306	31977	284	32271	293	32362	301	32462	302	32621	65	32738	149
31890	283	31978	283	32272	293	32363	301	32463	302	32625	65	32739	149
31891	283	31979	283	32273	293	32364	301	32464	302	32626	65	32740	149
31892	283	31980	283	32274	293	32370	301	32470	302	32627	65	32741	149
31893	283	31981	283	32275	293	32371	301	32471	302	32628	65	32742	150
31894	284	31982	284	32276	293	32372	301	32472	302	32632	66	32743	150
31895	284	31983	284	32277	293	32373	301	32473	302	32633	66	32744	150
31896	284	31984	284	32280	293	32374	301	32474	302	32655	65	32745	1

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
32800.....	150	33110.....	308	33354.....	103	33518.....	155	34134.....	133	34660.....	166
32801.....	150	33111.....	305	33360.....	122	33519.....	155	34135.....	133	34661.....	166
32802.....	150	33112.....	308	33361.....	122	33520.....	155	34300.....	154	34662.....	166
32803.....	150	33113.....	305	33390.....	154	33521.....	155	34301.....	154	34663.....	166
32804.....	150	33114.....	308	33391.....	154	33522.....	155	34302.....	154	34664.....	166
32805.....	150	33115.....	306	33392.....	154	33523.....	155	34303.....	154	34665.....	166
32806.....	150	33116.....	308	33393.....	154	33524.....	155	34304.....	154	34666.....	166
32807.....	150	33117.....	306	33394.....	154	33525.....	155	34305.....	154	34667.....	166
32808.....	150	33118.....	308	33395.....	154	33540.....	155	34306.....	154	34668.....	166
32809.....	150	33121.....	303	33396.....	154	33541.....	155	34307.....	154	34669.....	168
32810.....	150	33122.....	307	33397.....	154	33542.....	155	34308.....	154	34670.....	168
32815.....	148	33123.....	304	33398.....	154	33543.....	155	34309.....	154	34671.....	168
32816.....	148	33124.....	307	33400.....	154	33544.....	155	34501.....	173	34672.....	168
32817.....	148	33125.....	304	33401.....	154	33547.....	155	34502.....	173	34673.....	168
32818.....	148	33126.....	307	33402.....	154	33548.....	155	34503.....	173	34674.....	168
32819.....	148	33127.....	304	33403.....	154	33551.....	155	34504.....	173	34675.....	168
32820.....	148	33128.....	308	33404.....	154	33552.....	155	34505.....	173	34676.....	168
32821.....	148	33129.....	305	33406.....	154	33553.....	155	34506.....	173	34677.....	168
32822.....	148	33130.....	308	33407.....	154	33554.....	155	34507.....	173	34678.....	167
32823.....	148	33131.....	305	33408.....	154	33555.....	155	34508.....	173	34679.....	167
32824.....	148	33132.....	308	33409.....	154	33556.....	155	34509.....	173	34680.....	167
32825.....	145	33133.....	305	33410.....	154	33557.....	155	34510.....	173	34681.....	167
32826.....	148	33134.....	308	33411.....	154	33558.....	155	34511.....	173	34682.....	167
32827.....	148	33135.....	306	33412.....	154	33559.....	155	34512.....	173	34683.....	167
32828.....	148	33136.....	308	33413.....	154	33560.....	155	34513.....	173	34684.....	167
32829.....	148	33137.....	306	33415.....	154	33561.....	155	34514.....	173	34685.....	167
32830.....	145	33138.....	308	33416.....	154	33562.....	155	34515.....	173	34686.....	168
32831.....	148	33141.....	303	33417.....	154	33563.....	155	34516.....	173	34687.....	168
32832.....	148	33142.....	307	33418.....	154	33564.....	155	34517.....	173	34688.....	168
32833.....	148	33143.....	303	33419.....	154	33565.....	155	34518.....	173	34689.....	168
32834.....	148	33144.....	307	33420.....	154	34016.....	138	34519.....	173	34690.....	168
32835.....	149	33301.....	280	33421.....	154	34017.....	138	34520.....	173	34691.....	168
32836.....	149	33302.....	283	33422.....	154	34018.....	138	34521.....	173	34692.....	168
32837.....	149	33303.....	280	33423.....	154	34019.....	138	34522.....	173	34693.....	16

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
34867	146	35103	76	35280	292	35596	145	35686	145	35810	150
34868	146	35104	76	35281	292	35597	145	35687	145	35811	150
34869	146	35105	76	35282	292	35598	145	35688	145	35812	150
34870	147	35106	77	35283	292	35599	145	35689	145	35813	151
34888	148	35107	77	35285	292	35600	145	35690	145	35814	151
34889	148	35108	77	35287	292	35601	145	35691	145	35815	151
34894	149	35109	77	35289	292	35602	145	35692	145	35816	151
34895	149	35110	77	35291	292	35603	145	35693	145	35817	151
34896	150	35111	77	35293	292	35604	145	35694	145	35818	151
34916	152	35112	76	35295	292	35605	145	35695	145	36106	316
34917	152	35113	76	35297	292	35606	145	35696	145	36107	316
34918	152	35114	76	35300	292	35607	145	35697	145	36108	316
34919	152	35115	76	35301	292	35608	145	35698	145	36109	316
34920	152	35116	76	35302	292	35609	145	35699	145	36110	316
34921	152	35117	76	35303	292	35610	145	35700	145	36111	316
34922	152	35118	76	35304	292	35611	145	35701	145	36112	316
34923	152	35119	76	35305	292	35612	146	35702	146	36113	316
34924	152	35120	76	35306	292	35613	146	35703	146	36114	316
34925	152	35121	76	35307	292	35614	146	35704	146	36116	316
34926	152	35122	76	35308	292	35615	146	35705	146	36117	316
34927	152	35123	76	35309	292	35616	146	35706	146	36118	316
34928	152	35124	76	35310	292	35617	146	35707	146	36120	316
34929	152	35125	76	35311	292	35618	146	35708	146	36121	316
34930	152	35126	76	35312	292	35619	146	35709	146	36122	316
34931	152	35127	77	35313	292	35620	146	35710	146	36124	316
34932	152	35128	77	35314	292	35621	146	35711	146	36125	316
34933	152	35129	77	35315	292	35622	146	35712	146	36126	316
34934	152	35130	77	35473	315	35623	146	35713	146	36128	316
34941	153	35131	77	35475	315	35624	146	35714	146	36129	316
34942	153	35132	77	35477	315	35625	146	35715	146	36130	316
34943	153	35133	77	35478	315	35626	146	35716	146	36140	116
34944	153	35134	77	35479	315	35627	146	35717	146	36141	116
34945	153	35135	77	35480	315	35628	146	35718	146	36142	116
34946	153	35136	77	35481	315	35629	146	35719	146	36143	116
34947	153	35137	77	35482	315	35630	146	35720	146	36206	317
34948	153	35138	77	35483	315	35631	146	35721	146	36207	317
34949	153	35139	77	35485	315	35632	146	35722	146	36208	317
34950	153	35140	77	35487	315	35633	147	35723	147	36209	317
34951	153	35141	77	35489	315	35634	147	35724	147	36210	317
34952	153	35150	76	35491	315	35635	147	35725	147	36211	317
34954	153	35151	76	35493	315	35636	147	35726	147	36212	317
34955	153	35152	76	35495	315	35637	147	35727	147	36213	317
34956	153	35153	76	35497	315	35638	147	35728	147	36214	317
34972	152	35154	76	35500	315	35639	147	35729	147	36216	317
34973	152	35155	76	35501	315	35640	147	35730	147	36217	317
34974	152	35156	76	35502	315	35641	147	35731	147	36218	317
34975	152	35157	76	35503	315	35642	147	35732	147	36220	317
34976	152	35158	76	35504	315	35643	147	35733	147	36221	317
34977	152	35159	76	35505	315	35644	147	35734	147	36222	317
34978	152	35160	76	35506	315	35645	147	35735	147	36224	317
34979	152	35161	76	35507	315	35646	147	35736	147	36225	317
34980	152	35180	77	35508	315	35647	147	35737	147	36226	317
34981	152	35181	77	35509	315	35648	147	35738	147	36228	317
34982	152	35182	77	35510	315	35649	147	35739	147	36229	317
34983	152	35183	77	35511	315	35650	147	35740	147	36230	317
34984	152	35184	77	35512	315	35651	147	35741	147	36235	148
34985	152	35185	77	35513	315	35652	147	35742	147	36236	148
34986	152	35186	77	35514	315	35653	147	35743	147	36237	151
34987	152	35187	77	35515	315	35654	147	35744	147	36238	151
34988	152	35188	77	35575	144	35655	144	35787	148	36239	148
34989	152	35189	77	35576	144	35666	144	35788	148	36240	148
34990	152	35190	77	35577	144	35667	144	35789	151	36241	151
35005	153	35191	77	35578	144	35668	144	35790	151	36242	151
35006	153	35220	78	35579	144	35669	144	35791	148	36243	148
35007	153	35221	78	35580	144	35670	144	35792	148	36244	148
35008	153	35222	78	35581	144	35671	144	35793	151	36245	151
35009	153	35223	78	35582	144	35672	144	35794	151	36246	151
35010	153	35224	78	35583	144	35673	144	35795	148	36247	151
35011	153	35225	78	35584	144	35674	144	35796	148	36248	151
35012	153	35226	78	35585	144	35675	144	35797	151	36249	151
35013	153	35227	78	35586	144	35676	144	35798	151	36250	151
35014	153	35228	78	35587	144	35677	144	35799	151	36251	149
35015	153	35229	78	35588	144	35678	144	35800	151	36252	149
35016	153	35230	78	35589	144	35679	144	35801	151	36253	151
35018	153	35231	78	35590	145	35680	145	35802	151	36254	151
35019	153	35273	292	35591	145	35681	145	35803	149	36257	150
35020	153	35275	292	35592	145	35682	145	35804	149	36258	150
35100	76	35277	292	35593	145	35683	145	35805	151	36259	150
35101	76	35278	292	35594	145	35684	145	35806	151	36260	150
35102	76	35279	292	35595	145	35685	145	35809	150	36261	151

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
36475.....	44	36626.....	94	36825.....	43	37041.....	32	37121.....	34	37214.....	34	37331.....	32
36480.....	45	36627.....	94	36826.....	42	37042.....	32	37122.....	34	37215.....	34	37332.....	32
36482.....	45	36628.....	94	36827.....	42	37043.....	32	37123.....	34	37216.....	34	37333.....	32
36486.....	45	36629.....	94	36828.....	43	37044.....	32	37124.....	34	37217.....	34	37334.....	32
36500.....	45	36630.....	94	36829.....	43	37045.....	32	37125.....	34	37218.....	34	37335.....	32
36502.....	45	36631.....	94	36830.....	43	37046.....	32	37126.....	34	37219.....	34	37337.....	32
36504.....	45	36632.....	94	36846.....	53	37047.....	32	37127.....	34	37220.....	34	37338.....	32
36505.....	41	36633.....	94	36847.....	53	37048.....	32	37128.....	34	37221.....	34	37339.....	32
36506.....	41	36634.....	94	36848.....	53	37049.....	32	37129.....	34	37222.....	33	37340.....	32
36507.....	41	36635.....	94	36849.....	53	37050.....	32	37130.....	34	37223.....	33	37341.....	32
36508.....	41	36636.....	94	36850.....	53	37051.....	32	37131.....	34	37224.....	33	37342.....	32
36509.....	41	36637.....	94	36851.....	41	37052.....	32	37132.....	34	37225.....	33	37343.....	32
36511.....	42	36638.....	94	36852.....	41	37053.....	32	37133.....	34	37226.....	33	37344.....	32
36513.....	42	36639.....	94	36853.....	41	37054.....	32	37134.....	34	37227.....	33	37345.....	32
36515.....	42	36640.....	94	36854.....	41	37055.....	32	37135.....	34	37228.....	33	37346.....	32
36517.....	42	36641.....	94	36855.....	42	37056.....	32	37136.....	34	37229.....	33	37348.....	32
36519.....	43	36701.....	42	36856.....	42	37057.....	32	37137.....	34	37230.....	33	37349.....	32
36520.....	43	36702.....	42	36857.....	42	37058.....	32	37138.....	34	37231.....	33	37350.....	32
36530.....	42	36704.....	42	36858.....	42	37059.....	32	37139.....	34	37232.....	33	37351.....	32
36531.....	42	36706.....	42	36859.....	42	37060.....	32	37140.....	34	37233.....	33	37352.....	32
36532.....	42	36707.....	42	36860.....	43	37061.....	32	37141.....	34	37234.....	33	37353.....	32
36533.....	42	36709.....	43	36861.....	43	37062.....	32	37142.....	34	37235.....	33	37354.....	32
36534.....	42	36710.....	43	36862.....	43	37063.....	32	37143.....	34	37236.....	34	37355.....	32
36535.....	42	36711.....	43	36863.....	43	37064.....	32	37144.....	34	37237.....	34	37356.....	32
36536.....	43	36712.....	43	36864.....	42	37065.....	32	37145.....	34	37260.....	32	37357.....	32
36537.....	43	36713.....	43	36865.....	42	37066.....	32	37146.....	34	37261.....	32	37359.....	32
36538.....	43	36714.....	43	36866.....	42	37067.....	32	37147.....	34	37262.....	32	37360.....	32
36539.....	53	36715.....	43	36867.....	42	37068.....	32	37148.....	34	37263.....	32	37361.....	32
36540.....	53	36716.....	43	36868.....	43	37069.....	32	37149.....	34	37264.....	32	37362.....	32
36541.....	53	36717.....	43	36869.....	43	37070.....	32	37150.....	34	37265.....	32	37390.....	125
36542.....	53	36718.....	43	36870.....	43	37071.....	32	37151.....	34	37266.....	32	37391.....	125
36543.....	53	36719.....	43	36871.....	43	37072.....	32	37152.....	34	37267.....	32	38001.....	303
36544.....	53	36722.....	41	36872.....	41	37073.....	32	37153.....	34	37268.....	33	38002.....	303
36545.....	53	36723.....	41	36873.....	41	37074.....	32	37154.....	34	37269.....	33	38003.....	303
36546.....	53	36724.....	42	36874.....	41	37075.....	33	37155.....	34	37270.....	33	38004.....	303
36547.....	53	36725.....	42	36875.....	41	37076.....	33	37156.....	34	37271.....	33	38009.....	303
36555.....	59	36727.....	42	36876.....	41	37077.....	33	37157.....	34	37272.....	33	38010.....	303
36556.....	59	36729.....	42	36877.....	41	37078.....	33	37160.....	31	37273.....	33	38011.....	303
36557.....	59	36731.....	42	36878.....	41	37079.....	33	37161.....	31	37274.....	33	38012.....	303
36558.....	59	36733.....	43	37000.....	30	37080.....	33	37162.....	31	37275.....	33	38013.....	303
36559.....	59	36736.....	42	37001.....	30	37081.....	32	37163.....	31	37276.....	33	38014.....	303
36560.....	59	36738.....	42	37002.....	30	37082.....	33	37164.....	31	37277.....	33	38019.....	304
36561.....	59	36740.....	42	37003.....	30	37083.....	33	37165.....	31	37278.....	33	38020.....	304
36570.....	59	36742.....	42	37004.....	30	37084.....	33	37166.....	31	37279.....	33	38021.....	304
36571.....	59	36744.....	43	37005.....	30	37085.....	33	37167.....	31	37280.....	33	38022.....	304
36572.....	59	36780.....	63	37006.....	30	37086.....	33	37174.....	31	37281.....	33	38023.....	304
36573.....	59	36781.....	63	37007.....	30	37087.....	33	37180.....	30	37282.....	33	38024.....	304
36574.....	59	36782.....	63	37008.....	30	37088.....	33	37181.....	30	37283.....	33	38025.....	304
36575.....	59	36783.....	63	37009.....	30	37089.....	33	37182.....	30	37284.....	33	38026.....	304
36576.....	59	36784.....	63	37010.....	30	37090.....	33	37183.....	30	37285.....	33	38031.....	304
36577.....	59	36785.....	63	37011.....	30	37091.....	33	37184.....	30	37286.....	33	38032.....	304
36578.....	59	36786.....	63	37012.....	30	37092.....	33	37185.....	30	37287.....	33	38033.....	304
36590.....	53	36787.....	63	37013.....	30	37093.....	33	37186.....	30	37288.....	34	38034.....	304
36591.....	53	36788.....	63	37014.....	31	37094.....	33	37187.....	31	37289.....	34	38035.....	304
36592.....	53	36789.....	63	37015.....	31	37095.....	33	37188.....	31	37290.....	34	38036.....	304
36596.....	41	36790.....	63	37016.....	31	37096.....	33	37189.....	31	37291.....	34	38037.....	304
36597.....	42	36791.....	63	37017.....	31	37097.....	33	37190.....	32	37292.....	34	38038.....	304
36598.....	42	36792.....	63	37018.....	31	37098.....	33	37191.....	32	37293.....	34	38045.....	304
36599.....	41	36793.....	63	37019.....	31	37099.....	33	37192.....	32	37294.....	34	38046.....	304
36600.....	41	36804.....	42	37020.....	31	37100.....	33	37193.....	32	37295.....	34	38047.....	304
36601.....	41	36805.....	42	37021.....	31	37101.....	33	37194.....	32	37296.....	34	38048.....	304
36602.....	42	36806.....	43	37022.....	31	37102.....	33	37195.....	32	37297.....	34	38049.....	304
36603.....	42	36807.....	43	37023.....	31	37103.....	33	37196.....	32	37298.....	34	38050.....	304
36604.....	42	36808.....	43	37024.....	32	37104.....	33	37197.....	32	37299.....	34	38051.....	304
36605.....	42	36809.....	43	37025.....	32	37105.....	33	37198.....	32	37300.....	34	38052.....	304
36610.....	42	36810.....	42	37026.....	32	37106.....	33	37199.....	33	37301.....	34	38059.....	305
36611.....	42	36811.....	42	37027.....	32	37107.....	33	37200.....	33	37302.....	34	38060.....	305
36612.....	42	36812.....	42	37028.....	32	37108.....	33	37201.....	33	37303.....	34	38061.....	305
36613.....	42	36813.....	42	37029.....	32	37109.....	33	37202.....	32	37304.....	34	38062.....	305
36614.....	42	36814.....	43	37030.....	32	37110.....	33	37203.....	33	37305.....	34	38063.....	305
36615.....	42	36815.....	43	37031.....	32	37111.....	33	37204.....	33	37306.....	34	38064.....	305
36616.....	59	36816.....	43	37032.....	32	37112.....	33	37205.....	33	37307.....	34	38065.....	305
36617.....	59	36817.....	43	37033.....	32	37113.....	33	37206.....	33	37308.....	34	38066.....	305
36618.....	59	36818.....	43	37034.....	32	37114.....	33	37207.....	33	37320.....	32	38067.....	305
36620.....	94	36819.....	43	37035.....	32	37115.....	33	37208.....	33	37321.....	32	38068.....	305
36621.....	94	36820.....	43	37036.....	32	37116.....	34	37209.....	33	37322.....	32	38073.....	305
36622.....	94	36821.....	43	37037.....	32	37117.....	34	37210.....	33	37323.....	32	38074.....	305
36623.....	94	36822.....	43	37038.....	32	37118.....	34	37211.....	33	37324.....	32	38075.....	305
36624.....	94	36823.....	43	37039.....	32	37119.....	34	37212.....	33	37325.....	32	38076.....	305
36625.....	94	36824.....	43	37040.....	32	37120.....	34	37213.....	33	37330.....	32	38077.....	305

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
38078.....	305	38160.....	303	38266.....	281	38352.....	282	38530.....	31	38610.....	34	38795.....	30
38079.....	305	38161.....	303	38267.....	281	38353.....	282	38531.....	31	38611.....	34	38796.....	30
38080.....	305	38162.....	304	38268.....	281	38354.....	282	38532.....	31	38612.....	34	38797.....	30
38081.....	305	38163.....	304	38273.....	282	38355.....	282	38533.....	32	38613.....	34	38798.....	31
38082.....	305	38164.....	304	38274.....	282	38356.....	282	38534.....	32	38614.....	34	38799.....	31
38083.....	305	38165.....	304	38275.....	282	38357.....	280	38535.....	32	38615.....	34	38800.....	31
38084.....	305	38166.....	304	38276.....	282	38358.....	280	38536.....	32	38616.....	34	38801.....	31
38087.....	306	38167.....	304	38277.....	282	38359.....	280	38537.....	32	38617.....	34	38802.....	31
38088.....	306	38168.....	304	38278.....	282	38360.....	280	38538.....	32	38618.....	34	38803.....	31
38089.....	306	38169.....	304	38279.....	282	38361.....	280	38539.....	32	38619.....	34	38804.....	31
38090.....	306	38170.....	304	38280.....	282	38362.....	280	38540.....	32	38620.....	34	38805.....	31
38091.....	306	38171.....	304	38281.....	282	38363.....	280	38541.....	32	38621.....	34	38806.....	31
38092.....	306	38172.....	304	38282.....	282	38364.....	280	38542.....	32	38622.....	34	38807.....	31
38093.....	306	38173.....	304	38283.....	282	38365.....	280	38543.....	32	38623.....	32	38808.....	31
38094.....	306	38174.....	305	38284.....	282	38366.....	281	38544.....	32	38624.....	32	38809.....	31
38095.....	306	38175.....	305	38287.....	282	38367.....	281	38545.....	32	38625.....	32	38810.....	31
38096.....	306	38176.....	305	38288.....	282	38368.....	281	38546.....	32	38626.....	32	38811.....	31
38097.....	306	38177.....	305	38289.....	282	38369.....	281	38547.....	32	38627.....	32	38812.....	31
38098.....	306	38178.....	305	38290.....	282	38370.....	281	38548.....	32	38628.....	32	38813.....	31
38099.....	306	38179.....	305	38291.....	282	38371.....	281	38549.....	32	38629.....	33	38814.....	31
38100.....	306	38180.....	305	38292.....	282	38372.....	281	38550.....	32	38630.....	33	38815.....	31
38101.....	306	38181.....	305	38293.....	282	38373.....	281	38551.....	33	38631.....	33	38816.....	31
38102.....	306	38182.....	305	38294.....	282	38374.....	281	38552.....	33	38632.....	33	38817.....	31
38103.....	306	38183.....	305	38295.....	282	38375.....	281	38553.....	33	38633.....	33	38818.....	31
38104.....	306	38184.....	305	38296.....	282	38376.....	281	38554.....	33	38634.....	33	38819.....	31
38105.....	306	38185.....	306	38297.....	282	38377.....	281	38555.....	33	38635.....	33	38820.....	31
38106.....	306	38186.....	306	38298.....	282	38378.....	281	38556.....	33	38636.....	33	38821.....	31
38107.....	306	38187.....	306	38299.....	282	38379.....	282	38557.....	33	38637.....	33	38822.....	31
38108.....	306	38188.....	306	38300.....	282	38380.....	282	38558.....	33	38638.....	33	38823.....	31
38109.....	306	38189.....	306	38301.....	282	38381.....	282	38559.....	33	38639.....	33	38824.....	31
38110.....	306	38190.....	306	38302.....	282	38382.....	282	38560.....	33	38640.....	33	38825.....	31
38111.....	306	38191.....	306	38303.....	282	38383.....	282	38561.....	33	38641.....	33	38826.....	32
38112.....	306	38192.....	306	38304.....	282	38384.....	282	38562.....	33	38642.....	33	38827.....	32
38113.....	306	38193.....	306	38305.....	282	38385.....	282	38563.....	34	38643.....	33	38828.....	32
38114.....	306	38194.....	306	38306.....	282	38386.....	282	38564.....	34	38644.....	33	38829.....	32
38115.....	303	38195.....	306	38307.....	282	38387.....	282	38565.....	34	38645.....	33	38830.....	32
38116.....	303	38196.....	306	38308.....	282	38388.....	282	38566.....	34	38646.....	33	38831.....	32
38117.....	303	38197.....	306	38309.....	282	38389.....	282	38567.....	34	38647.....	34	38832.....	32
38118.....	303	38198.....	306	38310.....	282	38390.....	282	38568.....	34	38648.....	34	38833.....	32
38119.....	303	38201.....	280	38311.....	282	38391.....	282	38569.....	34	38649.....	34	38834.....	32
38120.....	304	38202.....	280	38312.....	282	38392.....	282	38570.....	34	38650.....	34	38835.....	32
38121.....	304	38203.....	280	38313.....	282	38393.....	282	38571.....	34	38651.....	34	38836.....	32
38122.....	304	38204.....	280	38314.....	282	38394.....	282	38572.....	34	38652.....	34	38837.....	32
38123.....	304	38209.....	280	38315.....	280	38395.....	282	38573.....	34	38653.....	34	38838.....	32
38124.....	304	38210.....	280	38316.....	280	38396.....	282	38574.....	34	38654.....	34	38839.....	32
38125.....	304	38211.....	280	38317.....	280	38397.....	282	38575.....	34	38655.....	34	38840.....	32
38126.....	304	38212.....	280	38318.....	280	38398.....	282	38576.....	34	38656.....	34	38841.....	32
38127.....	304	38213.....	280	38319.....	280	38490.....	45	38577.....	34	38657.....	34	38842.....	32
38128.....	304	38214.....	280	38320.....	280	38492.....	45	38578.....	32	38658.....	34	38843.....	32
38129.....	304	38219.....	280	38321.....	280	38496.....	45	38579.....	32	38659.....	34	38844.....	32
38130.....	304	38220.....	280	38322.....	280	38500.....	30	38580.....	32	38660.....	34	38845.....	32
38131.....	304	38221.....	280	38323.....	280	38501.....	30	38581.....	32	38661.....	34	38846.....	32
38132.....	305	38222.....	280	38324.....	281	38502.....	30	38582.....	32	38662.....	34	38847.....	32
38133.....	305	38223.....	280	38325.....	281	38503.....	31	38583.....	32	38663.....	34	38848.....	32
38134.....	305	38224.....	280	38326.....	281	38504.....	31	38584.....	32	38664.....	34	38849.....	32
38135.....	305	38225.....	280	38327.....	281	38505.....	31	38585.....	32	38770.....	30	38850.....	33
38136.....	305	38226.....	280	38328.....	281	38506.....	32	38586.....	32	38771.....	30	38851.....	33
38137.....	305	38231.....	281	38329.....	281	38507.....	32	38587.....	32	38772.....	30	38852.....	33
38138.....	305	38232.....	281	38330.....	281	38508.....	32	38588.....	32	38773.....	30	38853.....	33
38139.....	305	38233.....	281	38331.....	281	38509.....	33	38589.....	32	38774.....	30	38854.....	33
38140.....	305	38234.....	281	38332.....	281	38510.....	34	38590.....	32	38775.....	30	38855.....	33
38141.....	305	38235.....	281	38333.....	281	38511.....	34	38591.....	32	38776.....	30	38856.....	33
38142.....	305	38236.....	281	38334.....	281	38512.....	32	38592.....	32	38777.....	30	38857.....	33
38143.....	306	38237.....	281	38335.....	281	38513.....	32	38593.....	32	38778.....	30	38858.....	33
38144.....	306	38238.....	281	38336.....	281	38514.....	32	38594.....	32	38779.....	30	38859.....	33
38145.....	306	38245.....	281	38337.....	282	38515.....	33	38595.....	32	38780.....	30	38860.....	33
38146.....	306	38246.....	281	38338.....	282	38516.....	34	38596.....	33	38781.....	30	38861.....	33
38147.....	306	38247.....	281	38339.....	282	38517.....	34	38597.....	33	38782.....	30	38862.....	33
38148.....	306	38248.....	281	38340.....	282	38518.....	32	38598.....	33	38783.....	30	38863.....	33
38149.....	306	38249.....	281	38341.....	282	38519.....	32	38599.....	33	38784.....	30	38864.....	33
38150.....	306	38250.....	281	38342.....	282	38520.....	33	38600.....	33	38785.....	30	38865.....	33
38151.....	306	38251.....	281	38343.....	282	38521.....	33	38601.....	33	38786.....	30	38866.....	33
38152.....	306	38252.....	281	38344.....	282	38522.....	34	38602.....	33	38787.....	30	38867.....	33
38153.....	306	38259.....	281	38345.....	282	38523.....	34	38603.....	33	38788.....	30	38868.....	34
38154.....	306	38260.....	281	38346.....	282	38524.....	34	38604.....	33	38789.....	30	38869.....	34
38155.....	306	38261.....	281	38347.....	282	38525.....	30	38605.....	33	38790.....	30	38870.....	34
38156.....	306	38262.....	281	38348.....	282	38526.....	30	38606.....	33	38791.....	30	38871.....	34
38157.....	303	38263.....	281	38349.....	282	38527.....	30	38607.....	33	38792.....	30	38872.....	34
38158.....	303	38264.....	281	38350.....	282	38528.....	30	38608.....	34	38793.....	30	38873.....	34
38159.....	303	38265.....	281	38351.....	282	38529.....	31	38609.....	34	38794.....	30	38874.....	34

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
38875.....	34	39070.....	308	39168.....	308	39366.....	284	39564.....	284	39668.....	288	40017.....	310
38876.....	34	39071.....	305	39169.....	305	39367.....	282	39565.....	282	39669.....	287	40019.....	310
38877.....	34	39072.....	308	39170.....	308	39368.....	284	39566.....	284	39670.....	288	40020.....	310
38878.....	34	39073.....	306	39171.....	305	39369.....	282	39567.....	282	39671.....	287	40021.....	310
38879.....	34	39074.....	308	39172.....	308	39370.....	284	39568.....	284	39672.....	288	40023.....	310
38880.....	34	39075.....	306	39173.....	306	39371.....	282	39569.....	282	39673.....	287	40024.....	310
38881.....	34	39076.....	308	39174.....	308	39372.....	284	39570.....	284	39674.....	288	40025.....	310
38882.....	34	39077.....	303	39175.....	306	39373.....	282	39571.....	282	39675.....	287	40028.....	310
38883.....	34	39078.....	307	39176.....	308	39374.....	284	39572.....	284	39676.....	288	40030.....	310
38884.....	34	39089.....	306	39177.....	303	39375.....	282	39573.....	282	39677.....	287	40031.....	310
38885.....	34	39089.....	318	39178.....	307	39376.....	284	39574.....	284	39678.....	288	40032.....	310
39001.....	303	39090.....	308	39189.....	306	39377.....	280	39575.....	282	39679.....	287	40035.....	310
39002.....	307	39090.....	319	39189.....	318	39378.....	283	39576.....	284	39680.....	288	40037.....	310
39003.....	303	39101.....	303	39190.....	308	39389.....	318	39577.....	280	39681.....	287	40038.....	311
39004.....	307	39102.....	307	39190.....	319	39390.....	284	39578.....	283	39682.....	288	40039.....	311
39005.....	303	39103.....	303	39301.....	280	39390.....	319	39589.....	282	39683.....	287	40105.....	309
39006.....	307	39104.....	307	39302.....	283	39501.....	280	39589.....	318	39684.....	288	40106.....	312
39007.....	303	39105.....	303	39303.....	280	39502.....	283	39590.....	284	39685.....	287	40109.....	309
39008.....	307	39106.....	307	39304.....	283	39503.....	280	39590.....	319	39686.....	288	40110.....	312
39009.....	303	39107.....	303	39305.....	280	39504.....	283	39601.....	313	39687.....	287	40113.....	309
39010.....	307	39108.....	307	39306.....	283	39505.....	280	39602.....	314	39688.....	288	40114.....	312
39011.....	303	39109.....	303	39307.....	280	39506.....	283	39603.....	313	39689.....	287	40117.....	309
39012.....	307	39110.....	307	39308.....	283	39507.....	280	39604.....	314	39690.....	288	40118.....	312
39013.....	303	39111.....	303	39309.....	280	39508.....	283	39605.....	313	39691.....	287	40121.....	309
39014.....	307	39112.....	307	39310.....	283	39509.....	280	39606.....	314	39691.....	318	40122.....	312
39015.....	303	39113.....	303	39311.....	280	39510.....	283	39607.....	313	39692.....	288	40125.....	309
39016.....	307	39114.....	307	39312.....	283	39511.....	280	39608.....	314	39692.....	319	40126.....	312
39017.....	303	39115.....	303	39313.....	280	39512.....	283	39609.....	313	39701.....	297	40129.....	309
39018.....	307	39116.....	307	39314.....	283	39513.....	280	39610.....	314	39703.....	297	40130.....	312
39019.....	303	39117.....	303	39315.....	280	39514.....	283	39611.....	313	39705.....	297	40133.....	309
39020.....	307	39118.....	307	39316.....	283	39515.....	280	39612.....	314	39707.....	297	40134.....	312
39021.....	303	39119.....	303	39317.....	280	39516.....	283	39613.....	313	39709.....	297	40137.....	309
39022.....	307	39120.....	307	39318.....	283	39517.....	280	39614.....	314	39711.....	297	40138.....	312
39023.....	303	39121.....	303	39319.....	280	39518.....	283	39615.....	313	39713.....	297	40141.....	309
39024.....	307	39122.....	307	39320.....	283	39519.....	280	39616.....	314	39715.....	297	40142.....	312
39025.....	303	39123.....	303	39321.....	280	39520.....	283	39617.....	313	39717.....	297	40145.....	310
39026.....	307	39124.....	307	39322.....	283	39521.....	280	39618.....	314	39719.....	297	40146.....	312
39027.....	303	39125.....	303	39323.....	280	39522.....	283	39619.....	313	39721.....	297	40149.....	310
39028.....	307	39126.....	307	39324.....	283	39523.....	280	39620.....	314	39723.....	297	40150.....	312
39029.....	303	39127.....	303	39325.....	280	39524.....	283	39621.....	313	39725.....	297	40153.....	310
39030.....	307	39128.....	307	39326.....	283	39525.....	280	39622.....	314	39727.....	297	40154.....	312
39031.....	303	39129.....	303	39327.....	280	39526.....	283	39623.....	313	39729.....	297	40157.....	310
39032.....	307	39130.....	307	39328.....	283	39527.....	280	39624.....	314	39731.....	297	40158.....	312
39033.....	304	39131.....	303	39329.....	280	39528.....	283	39625.....	313	39733.....	297	40161.....	310
39034.....	307	39132.....	307	39330.....	283	39529.....	280	39626.....	314	39735.....	297	40162.....	312
39035.....	304	39133.....	304	39331.....	280	39530.....	283	39627.....	313	39737.....	297	40165.....	310
39036.....	307	39134.....	307	39332.....	283	39531.....	280	39628.....	314	39739.....	297	40166.....	312
39037.....	304	39135.....	304	39333.....	280	39532.....	283	39629.....	313	39741.....	297	40169.....	310
39038.....	307	39136.....	307	39334.....	283	39533.....	280	39630.....	314	39743.....	297	40170.....	312
39039.....	304	39137.....	304	39335.....	280	39534.....	283	39631.....	313	39745.....	297	40173.....	310
39040.....	307	39138.....	307	39336.....	283	39535.....	280	39632.....	314	39747.....	297	40174.....	312
39041.....	304	39139.....	304	39337.....	281	39536.....	283	39633.....	313	39749.....	297	40177.....	311
39042.....	307	39140.....	307	39338.....	283	39537.....	281	39634.....	314	39751.....	297	40178.....	312
39043.....	304	39141.....	304	39339.....	281	39538.....	283	39635.....	313	39753.....	297	40181.....	311
39044.....	307	39142.....	307	39340.....	283	39539.....	281	39636.....	314	39755.....	297	40182.....	312
39045.....	304	39143.....	304	39341.....	281	39540.....	283	39637.....	313	39757.....	297	40185.....	311
39046.....	307	39144.....	307	39342.....	283	39541.....	281	39638.....	314	39759.....	297	40186.....	312
39047.....	304	39145.....	304	39343.....	281	39542.....	283	39639.....	313	39761.....	297	40305.....	285
39048.....	308	39146.....	307	39344.....	283	39543.....	281	39640.....	314	39763.....	297	40306.....	286
39049.....	304	39147.....	304	39345.....	281	39544.....	283	39641.....	313	39765.....	297	40309.....	285
39050.....	308	39148.....	308	39346.....	283	39545.....	281	39642.....	318	39767.....	297	40310.....	286
39051.....	304	39149.....	304	39347.....	281	39546.....	283	39642.....	314	39769.....	297	40313.....	285
39052.....	308	39150.....	308	39348.....	284	39547.....	281	39642.....	319	39771.....	297	40314.....	286
39053.....	304	39151.....	304	39349.....	281	39548.....	284	39651.....	287	39773.....	297	40317.....	285
39054.....	308	39152.....	308	39350.....	284	39549.....	281	39652.....	288	39775.....	297	40318.....	286
39055.....	305	39153.....	304	39351.....	281	39550.....	284	39653.....	287	39777.....	297	40321.....	285
39056.....	308	39154.....	308	39352.....	284	39551.....	281	39654.....	288	39789.....	297	40322.....	286
39057.....	305	39155.....	305	39353.....	281	39552.....	284	39655.....	287	39789.....	318	40325.....	285
39058.....	308	39156.....	308	39354.....	284	39553.....	281	39656.....	288	40000.....	309	40326.....	286
39059.....	305	39157.....	305	39355.....	281	39554.....	284	39657.....	287	40001.....	309	40329.....	285
39060.....	308	39158.....	308	39356.....	284	39555.....	281	39658.....	288	40003.....	309	40330.....	286
39061.....	305	39159.....	305	39357.....	281	39556.....	284	39659.....	287	40004.....	309	40333.....	285
39062.....	308	39160.....	308	39358.....	284	39557.....	281	39660.....	288	40005.....	309	40334.....	286
39063.....	305	39161.....	305	39359.....	281	39558.....	284	39661.....	287	40007.....	309	40337.....	285
39064.....	308	39162.....	308	39360.....	284	39559.....	281	39662.....	288	40009.....	309	40338.....	286
39065.....	305	39163.....	305	39361.....	281	39560.....	284	39663.....	287	40010.....	309	40341.....	285
39066.....	308	39164.....	308	39362.....	284	39561.....	281	39664.....	288	40011.....	309	40342.....	286
39067.....	305	39165.....	305	39363.....	281	39562.....	284	39665.....	287	40012.....	310	40345.....	285
39068.....	308	39166.....	308	39364.....	284	39563.....	281	39666.....	288	40015.....	310	40346.....	286
39069.....	305	39167.....	305	39365.....	282			39667.....	287	40016.....	310	40349.....	285

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
40350.....	286	41445.....	313	42611.....	70	42707.....	160	43395.....	285	43916.....	295	44563.....	170
40353.....	285	41446.....	314	42612.....	70	42708.....	160	43396.....	286	43917.....	295	44564.....	170
40354.....	286	41449.....	313	42613.....	70	42709.....	160	43445.....	106	43918.....	295	44565.....	170
40357.....	285	41450.....	314	42614.....	70	42710.....	161	43446.....	106	43919.....	295	44566.....	170
40358.....	286	41453.....	313	42615.....	70	42711.....	161	43447.....	106	43920.....	295	44570.....	171
40361.....	285	41454.....	314	42616.....	70	42712.....	61	43448.....	106	43921.....	295	44571.....	171
40362.....	286	41457.....	313	42617.....	71	42713.....	61	43449.....	106	43922.....	295	44572.....	171
40365.....	285	41458.....	314	42618.....	71	42714.....	61	43450.....	106	43923.....	295	44573.....	171
40366.....	286	41461.....	313	42619.....	71	42715.....	61	43451.....	106	43924.....	295	44574.....	171
40369.....	285	41462.....	314	42620.....	71	42716.....	61	43452.....	106	43925.....	295	44575.....	171
40370.....	286	41465.....	313	42621.....	72	42717.....	61	43453.....	106	43926.....	295	44576.....	171
40373.....	285	41466.....	314	42622.....	70	42718.....	49	43470.....	106	43927.....	295	44577.....	171
40374.....	286	41505.....	289	42623.....	70	42719.....	49	43471.....	106	43928.....	295	44578.....	171
40377.....	285	41506.....	290	42624.....	71	42721.....	49	43472.....	106	43929.....	295	44579.....	171
40378.....	286	41509.....	289	42625.....	71	42722.....	49	43473.....	106	43930.....	295	44580.....	171
40381.....	285	41510.....	290	42626.....	71	42723.....	49	43474.....	106	43931.....	295	44581.....	171
40382.....	286	41513.....	289	42627.....	71	42731.....	50	43475.....	106	43932.....	295	44582.....	171
40385.....	285	41514.....	290	42628.....	71	42732.....	50	43476.....	106	43933.....	295	44583.....	171
40386.....	286	41517.....	289	42630.....	71	42733.....	50	43477.....	106	43934.....	295	44584.....	171
40505.....	299	41518.....	290	42631.....	71	42734.....	50	43478.....	106	43935.....	295	44585.....	171
40506.....	300	41521.....	289	42632.....	71	42735.....	50	43479.....	106	43936.....	295	44586.....	171
40509.....	299	41522.....	290	42633.....	71	42736.....	50	43480.....	106	43937.....	295	44587.....	170
40510.....	300	41525.....	289	42648.....	71	42737.....	50	43481.....	106	43938.....	295	44588.....	170
40513.....	299	41526.....	290	42649.....	71	42738.....	50	43482.....	106	43939.....	295	44589.....	170
40514.....	300	41529.....	289	42650.....	71	42739.....	50	43483.....	106	43950.....	295	44590.....	170
40517.....	299	41530.....	290	42651.....	71	42750.....	73	43484.....	106	43951.....	295	44591.....	170
40518.....	300	41533.....	289	42652.....	71	42751.....	73	43485.....	106	43952.....	295	44592.....	170
40521.....	299	41534.....	290	42653.....	72	42752.....	73	43486.....	106	43953.....	295	44593.....	170
40522.....	300	41537.....	289	42654.....	72	42753.....	73	43487.....	106	43954.....	295	44594.....	170
40525.....	299	41538.....	290	42655.....	72	42754.....	73	43488.....	106	43955.....	295	44595.....	170
40526.....	300	41541.....	289	42656.....	71	42755.....	73	43489.....	106	43956.....	295	44596.....	170
40529.....	299	41542.....	290	42657.....	71	43101.....	309	43490.....	106	43957.....	295	44597.....	170
40530.....	300	41545.....	289	42658.....	71	43102.....	312	43491.....	106	43958.....	295	44598.....	171
40533.....	299	41546.....	290	42659.....	71	43103.....	309	43492.....	106	43959.....	295	44599.....	171
40534.....	300	41549.....	289	42660.....	70	43104.....	312	43493.....	106	44298.....	164	44600.....	171
40537.....	299	41550.....	290	42661.....	70	43105.....	310	43494.....	106	44299.....	164	44601.....	171
40538.....	300	41553.....	289	42662.....	70	43106.....	312	43495.....	106	44300.....	164	44602.....	171
40541.....	299	41554.....	290	42663.....	70	43107.....	309	43496.....	106	44301.....	164	44603.....	171
40542.....	300	41557.....	289	42664.....	70	43108.....	312	43497.....	106	44302.....	164	44604.....	171
40545.....	299	41558.....	290	42665.....	70	43115.....	310	43501.....	299	44303.....	164	44605.....	171
40546.....	300	41561.....	289	42666.....	70	43116.....	312	43502.....	300	44304.....	164	44606.....	171
40549.....	299	41562.....	290	42667.....	70	43125.....	310	43503.....	299	44305.....	164	44607.....	171
40550.....	300	41565.....	289	42668.....	70	43126.....	312	43504.....	300	44306.....	164	44608.....	171
40553.....	299	41566.....	290	42669.....	70	43135.....	310	43505.....	299	44307.....	164	44609.....	170
40554.....	300	41605.....	309	42670.....	70	43136.....	312	43506.....	300	44308.....	164	44610.....	170
40557.....	299	41609.....	309	42671.....	70	43145.....	310	43507.....	299	44309.....	164	44611.....	170
40558.....	300	41613.....	309	42672.....	70	43146.....	312	43508.....	300	44505.....	173	44612.....	170
40561.....	299	41617.....	309	42673.....	70	43155.....	310	43515.....	299	44506.....	173	44613.....	170
40562.....	300	41621.....	309	42674.....	70	43156.....	312	43516.....	300	44509.....	173	44614.....	170
40565.....	299	41625.....	309	42675.....	70	43165.....	311	43525.....	299	44510.....	173	44615.....	171
40566.....	300	41629.....	309	42676.....	70	43166.....	312	43526.....	300	44513.....	173	44616.....	171
40569.....	299	41633.....	309	42677.....	70	43175.....	311	43535.....	299	44514.....	173	44617.....	171
40570.....	300	41637.....	309	42678.....	70	43176.....	312	43536.....	300	44517.....	173	44618.....	171
40573.....	299	41641.....	309	42679.....	70	43185.....	311	43545.....	299	44518.....	173	44619.....	171
40574.....	300	41645.....	310	42680.....	70	43186.....	312	43546.....	300	44521.....	173	44620.....	171
40577.....	299	41649.....	310	42681.....	70	43195.....	311	43555.....	299	44522.....	173	44627.....	140
40578.....	300	41653.....	310	42682.....	70	43196.....	312	43556.....	300	44525.....	173	44628.....	140
40581.....	299	41657.....	310	42683.....	70	43301.....	285	43565.....	299	44526.....	173	44629.....	140
40582.....	300	41661.....	310	42684.....	70	43302.....	286	43566.....	300	44529.....	173	44630.....	140
40585.....	299	41665.....	310	42685.....	71	43303.....	285	43575.....	299	44530.....	173	44631.....	140
40586.....	300	41705.....	291	42686.....	71	43304.....	286	43576.....	300	44533.....	173	44634.....	140
41405.....	313	41709.....	291	42687.....	71	43305.....	285	43585.....	299	44534.....	173	44635.....	140
41406.....	314	41713.....	291	42688.....	71	43306.....	286	43586.....	300	44537.....	173	44636.....	140
41409.....	313	41717.....	291	42689.....	71	43307.....	285	43595.....	299	44538.....	173	44637.....	140
41410.....	314	41721.....	291	42690.....	71	43308.....	286	43596.....	300	44541.....	173	44638.....	140
41413.....	313	41725.....	291	42691.....	71	43315.....	285	43900.....	296	44542.....	173	44639.....	140
41414.....	314	41729.....	291	42692.....	71	43316.....	286	43901.....	296	44545.....	173	44641.....	140
41417.....	313	41733.....	291	42693.....	71	43325.....	285	43902.....	296	44546.....	173	44642.....	140
41418.....	314	41737.....	291	42694.....	71	43326.....	286	43903.....	296	44550.....	170	44643.....	140
41421.....	313	41741.....	291	42695.....	71	43335.....	285	43904.....	296	44551.....	170	44701.....	157
41422.....	314	41745.....	291	42696.....	71	43336.....	286	43905.....	296	44552.....	170	44702.....	157
41425.....	313	41749.....	291	42697.....	71	43345.....	285	43906.....	296	44553.....	170	44703.....	157
41426.....	314	41753.....	291	42698.....	71	43346.....	286	43907.....	296	44554.....	170	44705.....	157
41429.....	313	41757.....	291	42699.....	71	43355.....	285	43908.....	296	44555.....	170	44708.....	158
41430.....	314	41761.....	291	42700.....	71	43356.....	286	43909.....	296	44556.....	170	44711.....	158
41433.....	313	41765.....	291	42701.....	72	43365.....	285	43910.....	295	44557.....	170	44714.....	159
41434.....	314	42606.....	70	42702.....	72	43366.....	286	43911.....	295	44558.....	170	44715.....	157
41437.....	313	42607.....	70	42703.....	72	43375.....	285	43912.....	295	44559.....	170	44716.....	157
41438.....	314	42608.....	70	42704.....	72	43376.....	286	43913.....	295	44560.....	170	44717.....	157
41441.....	313	42609.....	70	42705.....	72	43385.....	285	43914.....	295	44561.....	170	44719.....	157
41442.....	314	42610.....	70	42706.....	160	43386.....	286	43915.....	295	44562.....	170	44722.....	158

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
44725.....	158	44818.....	158	44916.....	162	45003.....	135	45185.....	81	45714.....	101	46356.....	56
44728.....	159	44819.....	158	44917.....	163	45004.....	135	45186.....	81	45715.....	101	46357.....	48
44731.....	159	44820.....	158	44918.....	163	45005.....	136	45187.....	82	45716.....	101	46358.....	48
44732.....	157	44821.....	158	44919.....	162	45006.....	136	45188.....	82	45717.....	101	46359.....	48
44733.....	158	44822.....	159	44920.....	163	45007.....	136	45189.....	82	45718.....	142	46360.....	48
44734.....	158	44823.....	159	44921.....	163	45008.....	136	45190.....	82	45719.....	142	46362.....	48
44735.....	158	44824.....	159	44922.....	162	45009.....	136	45191.....	82	45720.....	142	46364.....	48
44736.....	158	44826.....	158	44923.....	163	45010.....	136	45192.....	82	45721.....	142	46366.....	48
44737.....	159	44827.....	158	44924.....	163	45011.....	136	45193.....	82	45722.....	142	46368.....	49
44738.....	160	44828.....	158	44925.....	162	45012.....	136	45194.....	82	45723.....	142	46370.....	49
44739.....	161	44829.....	158	44926.....	163	45013.....	136	45195.....	82	45724.....	142	46372.....	49
44740.....	161	44830.....	159	44927.....	163	45014.....	136	45196.....	82	45725.....	142	46374.....	49
44741.....	160	44831.....	159	44928.....	162	45015.....	136	45197.....	82	45726.....	142	46376.....	49
44745.....	140	44832.....	160	44929.....	163	45016.....	136	45198.....	82	45727.....	142	46450.....	61
44746.....	140	44833.....	160	44930.....	163	45017.....	136	45199.....	82	45728.....	142	46451.....	61
44747.....	140	44834.....	160	44931.....	162	45018.....	136	45200.....	82	45729.....	142	46452.....	61
44748.....	140	44835.....	161	44932.....	163	45019.....	136	45201.....	82	45730.....	142	46453.....	61
44749.....	140	44836.....	161	44933.....	163	45020.....	135	45202.....	82	45731.....	142	46454.....	61
44750.....	140	44837.....	161	44934.....	162	45021.....	135	45203.....	82	45732.....	142	46455.....	61
44751.....	140	44838.....	161	44935.....	163	45022.....	135	45204.....	83	45733.....	142	46456.....	61
44752.....	140	44839.....	160	44936.....	163	45023.....	135	45205.....	83	45734.....	142	46457.....	61
44753.....	140	44840.....	161	44937.....	162	45024.....	135	45206.....	83	45735.....	142	46458.....	61
44754.....	140	44841.....	161	44938.....	163	45025.....	135	45207.....	83	46106.....	316	46459.....	61
44755.....	140	44842.....	157	44939.....	163	45100.....	81	45208.....	83	46107.....	316	46460.....	61
44756.....	140	44843.....	157	44940.....	162	45101.....	81	45209.....	83	46108.....	316	46461.....	61
44757.....	140	44844.....	157	44941.....	163	45102.....	81	45210.....	83	46109.....	316	46462.....	61
44758.....	140	44845.....	157	44942.....	163	45103.....	81	45211.....	83	46110.....	316	46463.....	61
44759.....	140	44846.....	157	44943.....	162	45104.....	81	45212.....	83	46111.....	316	46464.....	61
44760.....	140	44847.....	157	44944.....	163	45105.....	81	45213.....	83	46112.....	316	46465.....	61
44761.....	140	44848.....	157	44945.....	163	45106.....	82	45214.....	83	46113.....	316	46466.....	61
44762.....	140	44849.....	157	44950.....	160	45107.....	82	45215.....	83	46114.....	316	46467.....	61
44763.....	140	44850.....	157	44951.....	160	45108.....	82	45277.....	292	46116.....	316	46468.....	61
44764.....	140	44851.....	157	44952.....	160	45109.....	82	45279.....	292	46117.....	316	46469.....	61
44765.....	140	44852.....	157	44953.....	160	45110.....	82	45281.....	292	46118.....	316	46470.....	61
44766.....	140	44853.....	157	44954.....	160	45111.....	82	45283.....	292	46120.....	316	46471.....	61
44767.....	140	44854.....	157	44955.....	160	45112.....	81	45285.....	292	46121.....	316	46472.....	61
44768.....	140	44855.....	157	44956.....	160	45113.....	81	45287.....	292	46122.....	316	46473.....	61
44769.....	160	44856.....	157	44957.....	160	45114.....	81	45289.....	292	46128.....	316	46474.....	61
44770.....	160	44857.....	157	44958.....	160	45115.....	81	45291.....	292	46129.....	316	46475.....	61
44771.....	160	44858.....	157	44959.....	160	45116.....	81	45293.....	292	46130.....	316	46476.....	61
44772.....	160	44859.....	158	44960.....	160	45117.....	81	45295.....	292	46131.....	316	46477.....	61
44773.....	160	44860.....	158	44961.....	161	45118.....	81	45297.....	292	46132.....	316	46478.....	61
44774.....	160	44861.....	158	44962.....	161	45119.....	81	45299.....	292	46133.....	316	46479.....	61
44775.....	160	44862.....	158	44963.....	161	45120.....	81	45477.....	315	46140.....	116	46480.....	61
44776.....	160	44863.....	158	44964.....	161	45121.....	81	45478.....	315	46141.....	116	46481.....	61
44777.....	160	44864.....	158	44965.....	161	45122.....	81	45479.....	315	46142.....	116	46482.....	61
44778.....	160	44865.....	158	44966.....	161	45123.....	81	45480.....	315	46143.....	116	46483.....	61
44779.....	160	44866.....	158	44967.....	161	45124.....	81	45481.....	315	46145.....	116	46493.....	48
44780.....	160	44867.....	158	44968.....	161	45125.....	81	45482.....	315	46147.....	116	46494.....	49
44781.....	160	44868.....	158	44969.....	161	45126.....	81	45483.....	315	46206.....	317	46495.....	49
44782.....	160	44869.....	158	44970.....	161	45127.....	82	45484.....	315	46207.....	317	46497.....	49
44783.....	160	44870.....	158	44971.....	161	45128.....	82	45485.....	315	46208.....	317	46498.....	49
44784.....	160	44871.....	158	44972.....	161	45129.....	82	45486.....	315	46209.....	317	46506.....	49
44785.....	161	44872.....	158	44973.....	161	45130.....	82	45487.....	315	46210.....	317	46507.....	49
44786.....	161	44873.....	158	44974.....	161	45131.....	82	45488.....	315	46211.....	317	46508.....	49
44787.....	161	44874.....	158	44975.....	135	45132.....	82	45489.....	315	46212.....	317	46509.....	49
44788.....	161	44875.....	158	44976.....	135	45133.....	82	45490.....	315	46213.....	317	46510.....	49
44789.....	160	44876.....	158	44977.....	135	45134.....	82	45491.....	315	46214.....	317	46518.....	56
44790.....	160	44877.....	158	44978.....	135	45135.....	82	45492.....	315	46216.....	317	46519.....	56
44791.....	160	44878.....	159	44979.....	135	45136.....	82	45493.....	315	46217.....	317	46520.....	56
44792.....	160	44879.....	159	44980.....	135	45137.....	82	45494.....	315	46218.....	317	46521.....	56
44793.....	160	44880.....	159	44981.....	135	45138.....	82	45495.....	315	46220.....	317	46522.....	56
44794.....	160	44881.....	159	44982.....	135	45139.....	82	45496.....	315	46221.....	317	46560.....	63
44795.....	160	44882.....	159	44983.....	135	45140.....	82	45497.....	315	46222.....	317	46561.....	63
44796.....	160	44883.....	159	44984.....	135	45141.....	82	45498.....	315	46228.....	317	46562.....	63
44797.....	160	44884.....	159	44985.....	135	45150.....	81	45499.....	315	46229.....	317	46563.....	63
44798.....	160	44885.....	159	44986.....	135	45170.....	81	45500.....	315	46230.....	317	46564.....	63
44799.....	160	44886.....	159	44987.....	135	45171.....	81	45700.....	101	46231.....	317	46565.....	63
44800.....	160	44890.....	157	44990.....	135	45172.....	81	45701.....	101	46232.....	317	46566.....	63
44801.....	160	44891.....	157	44991.....	135	45173.....	81	45702.....	101	46233.....	317	46567.....	63
44802.....	160	44892.....	157	44992.....	135	45174.....	81	45703.....	101	46343.....	56	46568.....	63
44803.....	160	44893.....	157	44993.....	135	45175.....	81	45704.....	101	46344.....	56	46620.....	97
44804.....	160	44894.....	157	44994.....	135	45176.....	81	45705.....	101	46345.....	56	46621.....	97
44805.....	161	44895.....	157	44995.....	135	45177.....	81	45706.....	101	46346.....	56	46622.....	97
44806.....	161	44896.....	157	44996.....	135	45178.....	81	45707.....	101	46347.....	56	46623.....	97
44807.....	161	44897.....	158	44997.....	135	45179.....	81	45708.....	101	46348.....	56	46624.....	97
44808.....	161	44898.....	158	44998.....	135	45180.....	81	45709.....	101	46349.....	56	46625.....	97
44814.....	158	44899.....	161	44999.....	135	45181.....	81	45710.....	101	46350.....	56	46626.....	98
44815.....	158	44900.....	158	45000.....	135	45182.....	81	45711.....	101	46351.....	56	46627.....	97
44816.....	158	44901.....	159	45001.....	135	45183.....	81	45712.....	101	46354.....	56	46628.....	97
44817.....	158	44902.....	157	45002.....	135	45184.....	81	45713.....	101	46355.....	56	46629.....	97

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
46630.....	97	46889.....	48	47030.....	37	47133.....	38	48051.....	38	48562.....	311
46631.....	97	46890.....	48	47031.....	37	47134.....	37	48052.....	38	48563.....	311
46632.....	97	46891.....	48	47032.....	37	47135.....	38	48053.....	38	48564.....	312
46633.....	97	46893.....	48	47033.....	37	47136.....	38	48054.....	38	48565.....	312
46634.....	97	46894.....	49	47034.....	37	47137.....	38	48055.....	38	48566.....	312
46635.....	97	46895.....	49	47035.....	38	47138.....	38	48056.....	37	48567.....	312
46636.....	97	46896.....	49	47036.....	38	47139.....	38	48057.....	37	48568.....	312
46637.....	97	46898.....	49	47037.....	38	47140.....	38	48058.....	38	48569.....	312
46638.....	97	46899.....	49	47038.....	38	47141.....	38	48059.....	38	48570.....	312
46639.....	97	46900.....	49	47039.....	37	47142.....	38	48060.....	38	48571.....	312
46640.....	97	46903.....	49	47040.....	37	47143.....	38	48061.....	38	48572.....	312
46641.....	97	46904.....	49	47041.....	37	47144.....	38	48062.....	38	48573.....	312
46642.....	97	46905.....	49	47042.....	38	47145.....	38	48063.....	38	48574.....	312
46643.....	97	46909.....	48	47043.....	38	47146.....	38	48064.....	38	48575.....	312
46644.....	97	46910.....	48	47044.....	38	47147.....	38	48065.....	38	48576.....	312
46645.....	97	46911.....	48	47045.....	38	47148.....	38	48066.....	38	48577.....	312
46646.....	97	46912.....	49	47046.....	37	47160.....	37	48067.....	38	48578.....	312
46647.....	97	46913.....	49	47047.....	37	47161.....	37	48068.....	38	48579.....	312
46648.....	97	46914.....	49	47048.....	37	47162.....	37	48070.....	37	48580.....	312
46649.....	97	46915.....	49	47049.....	38	47163.....	37	48071.....	37	48581.....	312
46650.....	97	46916.....	49	47050.....	38	47164.....	37	48500.....	309	48582.....	312
46651.....	97	46917.....	49	47051.....	38	47165.....	37	48501.....	309	48583.....	312
46652.....	97	46918.....	49	47052.....	38	47166.....	37	48502.....	309	48584.....	312
46653.....	98	46919.....	49	47053.....	38	47167.....	37	48503.....	309	48586.....	312
46654.....	98	46920.....	49	47054.....	38	47168.....	37	48504.....	309	48587.....	312
46655.....	98	46921.....	49	47055.....	38	47169.....	37	48505.....	309	48588.....	312
46656.....	98	46922.....	49	47056.....	38	47170.....	37	48506.....	309	48589.....	312
46657.....	98	46923.....	49	47057.....	38	47171.....	37	48507.....	309	48590.....	312
46658.....	98	46924.....	49	47058.....	38	47172.....	37	48508.....	309	48591.....	312
46659.....	98	46925.....	49	47059.....	38	47173.....	37	48509.....	309	48592.....	312
46660.....	98	46926.....	49	47060.....	38	48000.....	37	48510.....	310	48593.....	312
46821.....	50	46927.....	49	47061.....	38	48001.....	37	48511.....	310	48594.....	312
46822.....	50	46928.....	50	47062.....	38	48002.....	37	48512.....	310	48595.....	312
46823.....	50	46929.....	50	47063.....	38	48003.....	37	48513.....	310	48596.....	312
46824.....	50	46930.....	50	47064.....	38	48004.....	37	48514.....	310	48597.....	312
46825.....	50	46931.....	50	47065.....	38	48005.....	37	48515.....	310	48598.....	312
46826.....	50	46932.....	50	47066.....	38	48006.....	37	48516.....	310	48599.....	312
46827.....	50	46933.....	50	47067.....	38	48007.....	37	48517.....	310	48600.....	312
46828.....	50	46934.....	50	47068.....	38	48008.....	37	48518.....	311	48601.....	312
46829.....	50	46935.....	50	47069.....	38	48009.....	37	48519.....	311	48602.....	312
46830.....	50	46936.....	50	47070.....	38	48010.....	37	48520.....	311	48603.....	312
46831.....	50	46937.....	50	47071.....	38	48011.....	37	48522.....	309	48604.....	312
46832.....	50	46938.....	50	47072.....	38	48012.....	37	48523.....	309	48605.....	312
46833.....	50	46939.....	50	47073.....	38	48013.....	37	48524.....	309	48606.....	312
46834.....	50	46940.....	50	47074.....	38	48014.....	37	48525.....	309	48607.....	312
46835.....	50	46941.....	50	47075.....	38	48015.....	37	48526.....	309	48608.....	312
46836.....	50	46942.....	50	47076.....	38	48016.....	37	48527.....	309	48609.....	312
46837.....	50	46943.....	50	47077.....	38	48017.....	37	48528.....	309	48610.....	312
46838.....	50	46944.....	49	47078.....	38	48018.....	38	48529.....	309	48611.....	312
46839.....	50	46945.....	49	47079.....	38	48019.....	38	48530.....	309	48612.....	312
46840.....	50	46946.....	49	47080.....	38	48020.....	38	48531.....	309	48613.....	312
46841.....	50	47000.....	37	47081.....	38	48021.....	38	48532.....	310	48614.....	312
46849.....	48	47001.....	37	47082.....	38	48022.....	38	48533.....	310	48615.....	312
46850.....	48	47002.....	37	47083.....	38	48023.....	38	48534.....	310	48616.....	312
46851.....	48	47003.....	37	47084.....	38	48024.....	38	48535.....	310	48617.....	312
46852.....	48	47004.....	37	47085.....	38	48025.....	38	48536.....	310	48618.....	312
46853.....	48	47005.....	37	47086.....	38	48026.....	38	48537.....	310	48619.....	312
46854.....	48	47006.....	37	47087.....	38	48027.....	38	48538.....	310	48620.....	312
46855.....	48	47007.....	37	47088.....	38	48028.....	38	48539.....	310	48621.....	312
46856.....	48	47008.....	37	47089.....	38	48029.....	37	48540.....	311	48622.....	312
46857.....	48	47009.....	37	47090.....	38	48030.....	37	48541.....	311	48623.....	312
46858.....	48	47010.....	37	47091.....	38	48031.....	37	48542.....	311	48624.....	312
46859.....	48	47011.....	37	47092.....	38	48032.....	37	48543.....	309	48625.....	312
46860.....	48	47012.....	37	47093.....	38	48033.....	37	48544.....	309	48626.....	312
46861.....	48	47013.....	37	47094.....	38	48034.....	37	48545.....	309	48627.....	312
46862.....	49	47014.....	37	47095.....	38	48035.....	37	48546.....	309	48628.....	285
46863.....	49	47015.....	37	47096.....	38	48036.....	37	48547.....	309	48629.....	285
46864.....	49	47016.....	37	47097.....	38	48037.....	38	48548.....	309	48630.....	285
46865.....	49	47017.....	37	47120.....	37	48038.....	38	48549.....	309	48631.....	285
46866.....	49	47018.....	37	47121.....	37	48039.....	38	48550.....	309	48632.....	285
46867.....	49	47019.....	37	47122.....	37	48040.....	38	48551.....	309	48633.....	285
46868.....	49	47020.....	37	47123.....	37	48041.....	38	48552.....	309	48634.....	285
46869.....	49	47021.....	37	47124.....	37	48042.....	38	48553.....	310	48635.....	285
46873.....	48	47022.....	37	47125.....	37	48043.....	38	48554.....	310	48636.....	285
46874.....	48	47023.....	37	47126.....	37	48044.....	38	48555.....	310	48637.....	285
46880.....	48	47024.....	37	47127.....	37	48045.....	38	48556.....	310	48638.....	285
46881.....	48	47025.....	37	47128.....	37	48046.....	38	48557.....	310	48639.....	285
46882.....	48	47026.....	37	47129.....	37	48047.....	38	48558.....	310	48640.....	285
46884.....	48	47027.....	37	47130.....	37	48048.....	38	48559.....	310	48641.....	285
46886.....	48	47028.....	37	47131.....	37	48049.....	38	48560.....	310	48642.....	285
46887.....	48	47029.....	37	47132.....	38	48050.....	38	48561.....	311	48643.....	285

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
48727.....	286	48809.....	299	48891.....	313	48997.....	314	49103.....	290	49272.....	291	49431.....	285
48728.....	286	48810.....	299	48892.....	313	48998.....	314	49104.....	290	49273.....	291	49432.....	285
48729.....	286	48811.....	299	48893.....	313	48999.....	314	49105.....	290	49274.....	291	49433.....	285
48730.....	286	48812.....	299	48894.....	313	49000.....	314	49106.....	290	49275.....	291	49434.....	285
48731.....	286	48813.....	299	48895.....	313	49001.....	314	49107.....	290	49276.....	291	49435.....	285
48732.....	286	48814.....	299	48896.....	313	49002.....	314	49108.....	290	49277.....	291	49436.....	285
48733.....	286	48815.....	299	48897.....	313	49003.....	314	49109.....	290	49283.....	291	49437.....	285
48734.....	286	48816.....	299	48898.....	313	49004.....	314	49115.....	290	49284.....	291	49438.....	285
48735.....	286	48817.....	299	48899.....	313	49010.....	289	49116.....	290	49285.....	291	49439.....	285
48736.....	286	48818.....	299	48905.....	313	49011.....	289	49117.....	290	49286.....	291	49440.....	285
48737.....	286	48819.....	299	48906.....	313	49012.....	289	49118.....	290	49287.....	291	49441.....	285
48738.....	286	48820.....	300	48907.....	313	49013.....	289	49119.....	290	49288.....	291	49442.....	285
48739.....	286	48821.....	300	48908.....	313	49014.....	289	49120.....	290	49289.....	291	49443.....	285
48740.....	286	48822.....	300	48909.....	313	49015.....	289	49121.....	290	49290.....	291	49444.....	285
48741.....	286	48823.....	300	48910.....	313	49016.....	289	49122.....	290	49291.....	291	49445.....	285
48742.....	286	48824.....	300	48911.....	313	49017.....	289	49123.....	290	49292.....	291	49446.....	285
48743.....	286	48825.....	300	48912.....	313	49018.....	289	49124.....	290	49293.....	291	49447.....	285
48744.....	286	48826.....	300	48913.....	313	49019.....	289	49125.....	290	49294.....	291	49448.....	285
48745.....	286	48827.....	300	48914.....	313	49020.....	289	49126.....	290	49295.....	291	49449.....	285
48746.....	286	48828.....	300	48915.....	313	49021.....	289	49127.....	290	49296.....	291	49450.....	285
48747.....	286	48829.....	300	48916.....	313	49022.....	289	49128.....	290	49297.....	291	49451.....	285
48748.....	286	48830.....	300	48917.....	313	49023.....	289	49129.....	290	49298.....	291	49452.....	285
48749.....	286	48831.....	300	48918.....	313	49024.....	289	49130.....	290	49304.....	291	49453.....	285
48750.....	286	48832.....	300	48919.....	313	49025.....	289	49136.....	309	49305.....	291	49454.....	285
48751.....	286	48833.....	300	48920.....	313	49031.....	289	49137.....	309	49306.....	291	49455.....	285
48752.....	286	48834.....	300	48926.....	313	49032.....	289	49138.....	309	49307.....	291	49456.....	285
48753.....	286	48835.....	300	48927.....	313	49033.....	289	49139.....	309	49308.....	291	49457.....	285
48754.....	286	48836.....	300	48928.....	313	49034.....	289	49140.....	309	49309.....	291	49458.....	285
48755.....	286	48837.....	300	48929.....	313	49035.....	289	49141.....	309	49310.....	291	49459.....	285
48756.....	299	48838.....	300	48930.....	313	49036.....	289	49142.....	309	49311.....	291	49460.....	285
48757.....	299	48839.....	300	48931.....	313	49037.....	289	49143.....	309	49312.....	291	49461.....	285
48758.....	299	48840.....	300	48932.....	313	49038.....	289	49144.....	309	49313.....	291	49462.....	285
48759.....	299	48842.....	300	48933.....	313	49039.....	289	49145.....	309	49314.....	291	49463.....	285
48760.....	299	48843.....	300	48934.....	313	49040.....	289	49146.....	310	49315.....	291	49464.....	285
48761.....	299	48844.....	300	48935.....	313	49041.....	289	49147.....	310	49316.....	291	49465.....	285
48762.....	299	48845.....	300	48936.....	313	49042.....	289	49148.....	310	49317.....	291	49466.....	299
48763.....	299	48846.....	300	48937.....	313	49043.....	289	49149.....	310	49318.....	291	49467.....	299
48764.....	299	48847.....	300	48938.....	313	49044.....	289	49150.....	310	49319.....	291	49468.....	299
48765.....	299	48848.....	300	48939.....	313	49045.....	289	49151.....	310	49388.....	309	49469.....	299
48766.....	299	48849.....	300	48940.....	313	49046.....	289	49157.....	309	49389.....	309	49470.....	299
48767.....	299	48850.....	300	48941.....	313	49052.....	289	49158.....	309	49390.....	310	49471.....	299
48768.....	299	48851.....	300	48947.....	314	49053.....	289	49159.....	309	49391.....	309	49472.....	299
48769.....	299	48852.....	300	48948.....	314	49054.....	289	49160.....	309	49392.....	310	49473.....	299
48770.....	299	48853.....	300	48949.....	314	49055.....	289	49161.....	309	49393.....	310	49474.....	299
48771.....	299	48854.....	300	48950.....	314	49056.....	289	49162.....	309	49394.....	310	49475.....	299
48772.....	299	48855.....	300	48951.....	314	49057.....	289	49163.....	309	49395.....	310	49476.....	299
48773.....	299	48856.....	300	48952.....	314	49058.....	289	49164.....	309	49396.....	310	49477.....	299
48774.....	299	48857.....	300	48953.....	314	49059.....	289	49165.....	309	49397.....	311	49478.....	299
48775.....	299	48858.....	300	48954.....	314	49060.....	289	49166.....	309	49398.....	311	49479.....	299
48776.....	299	48859.....	300	48955.....	314	49061.....	289	49167.....	310	49399.....	311	49480.....	299
48778.....	299	48860.....	300	48956.....	314	49062.....	289	49168.....	310	49400.....	311	49481.....	299
48779.....	299	48861.....	300	48957.....	314	49063.....	289	49169.....	310	49401.....	309	49482.....	299
48780.....	299	48862.....	300	48958.....	314	49064.....	289	49170.....	310	49402.....	309	49483.....	299
48781.....	299	48863.....	300	48959.....	314	49065.....	289	49171.....	310	49403.....	310	49484.....	299
48782.....	299	48864.....	300	48960.....	314	49066.....	289	49172.....	310	49404.....	309	49485.....	299
48783.....	299	48865.....	300	48961.....	314	49067.....	289	49178.....	309	49405.....	310	49486.....	299
48784.....	299	48866.....	300	48962.....	314	49073.....	290	49179.....	309	49406.....	310	49487.....	299
48785.....	299	48867.....	300	48968.....	314	49074.....	290	49180.....	309	49407.....	310	49488.....	299
48786.....	299	48868.....	300	48969.....	314	49075.....	290	49181.....	309	49408.....	310	49489.....	299
48787.....	299	48869.....	300	48970.....	314	49076.....	290	49182.....	309	49409.....	310	49490.....	299
48788.....	299	48870.....	300	48971.....	314	49077.....	290	49183.....	309	49410.....	311	49491.....	299
48789.....	299	48871.....	300	48972.....	314	49078.....	290	49184.....	309	49411.....	311	49492.....	299
48790.....	299	48872.....	300	48973.....	314	49079.....	290	49185.....	309	49412.....	311	49493.....	299
48791.....	299	48873.....	300	48974.....	314	49080.....	290	49186.....	309	49413.....	311	49494.....	299
48792.....	299	48874.....	300	48975.....	314	49081.....	290	49187.....	309	49414.....	309	49495.....	299
48793.....	299	48875.....	300	48976.....	314	49082.....	290	49188.....	310	49415.....	309	49496.....	299
48794.....	299	48876.....	300	48977.....	314	49083.....	290	49189.....	310	49416.....	310	49497.....	299
48795.....	299	48877.....	300	48978.....	314	49084.....	290	49190.....	310	49417.....	309	49498.....	299
48796.....	299	48878.....	300	48979.....	314	49085.....	290	49191.....	310	49418.....	310	49499.....	299
48797.....	299	48879.....	300	48980.....	314	49086.....	290	49192.....	310	49419.....	310	49500.....	299
48798.....	299	48880.....	300	48981.....	314	49087.....	290	49193.....	310	49420.....	310	49501.....	299
48799.....	299	48881.....	300	48982.....	314	49088.....	290	49262.....	291	49421.....	310	49502.....	299
48800.....	299	48882.....	300	48983.....	314	49094.....	290	49263.....	291	49422.....	310	49503.....	299
48801.....	299	48883.....	300	48989.....	314	49095.....	290	49264.....	291	49423.....	311	49504.....	299
48802.....	299	48884.....	313	48990.....	314	49096.....	290	49265.....	291	49424.....	311	49505.....	312
48803.....	299	48885.....	313	48991.....	314	49097.....	290	49266.....	291	49425.....	311	49506.....	312
48804.....	299	48886.....	313	48992.....	314	49098.....	290	49267.....	291	49426.....	311	49507.....	312
48805.....	299	48887.....	313	48993.....	314	49099.....	290	49268.....	291	49427.....	285	49508.....	312
48806.....	299	48888.....	313	48994.....	314	49100.....	290	49269.....	291	49428.....	285	49509.....	312
48807.....	299	48889.....	313	48995.....	314	49101.....	290	49270.....	291	49429.....	285	49510.....	312
48808.....	299	48890.....	313	48996.....	314	49102.....	290	49271.....	291	49430.....	285	49511.....	312

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
49512.....	312	49593.....	300	49829.....	292	51038.....	337	51208.....	339	51511.....	246
49513.....	312	49594.....	300	49830.....	292	51039.....	337	51209.....	339	51512.....	246
49514.....	312	49595.....	300	49831.....	292	51040.....	337	51210.....	339	51513.....	246
49515.....	312	49596.....	300	49832.....	292	51041.....	337	51211.....	339	51514.....	246
49516.....	312	49597.....	300	49833.....	292	51042.....	337	51212.....	339	51515.....	247
49517.....	312	49598.....	300	49834.....	292	51043.....	337	51213.....	339	51516.....	247
49518.....	312	49599.....	300	49835.....	292	51044.....	337	51214.....	339	51517.....	247
49519.....	312	49600.....	300	49836.....	292	51045.....	337	51215.....	339	51518.....	247
49520.....	312	49601.....	300	49837.....	292	51046.....	337	51216.....	339	51519.....	247
49521.....	312	49602.....	300	49838.....	292	51047.....	337	51217.....	339	51520.....	247
49522.....	312	49603.....	300	49839.....	292	51048.....	337	51218.....	340	51521.....	247
49523.....	312	49604.....	300	49840.....	292	51049.....	337	51219.....	340	51522.....	247
49524.....	312	49605.....	300	50000.....	232	51050.....	337	51220.....	340	51523.....	247
49525.....	312	49606.....	300	50001.....	232	51051.....	337	51221.....	340	51524.....	247
49526.....	312	49607.....	300	50002.....	232	51052.....	336	51222.....	340	51525.....	248
49527.....	312	49608.....	300	50003.....	232	51053.....	336	51223.....	340	51526.....	248
49528.....	312	49609.....	300	50004.....	232	51054.....	336	51224.....	340	51527.....	248
49529.....	312	49610.....	300	50005.....	232	51055.....	336	51225.....	340	51528.....	248
49530.....	312	49611.....	300	50006.....	232	51056.....	336	51226.....	340	51529.....	248
49531.....	312	49612.....	300	50007.....	232	51057.....	336	51269.....	234	51530.....	248
49532.....	312	49613.....	300	50008.....	232	51058.....	336	51270.....	234	51531.....	248
49533.....	312	49614.....	300	50009.....	232	51059.....	336	51271.....	234	51532.....	249
49534.....	312	49615.....	300	50010.....	232	51060.....	336	51272.....	234	51533.....	249
49535.....	312	49616.....	300	50011.....	232	51061.....	336	51273.....	234	51534.....	249
49536.....	312	49617.....	300	50012.....	232	51062.....	336	51274.....	234	51535.....	249
49537.....	312	49618.....	300	50013.....	232	51063.....	336	51275.....	234	51536.....	249
49538.....	312	49619.....	300	50014.....	232	51064.....	336	51276.....	234	51537.....	249
49539.....	312	49620.....	300	50015.....	232	51065.....	336	51277.....	234	51538.....	249
49540.....	312	49621.....	300	50016.....	232	51066.....	336	51278.....	234	51539.....	249
49541.....	312	49622.....	296	50017.....	232	51067.....	336	51279.....	235	51540.....	249
49542.....	312	49623.....	296	50018.....	232	51068.....	336	51330.....	234	51541.....	249
49543.....	312	49624.....	296	50019.....	232	51069.....	336	51331.....	235	51542.....	249
49544.....	286	49625.....	296	50020.....	232	51070.....	336	51332.....	235	51543.....	249
49545.....	286	49626.....	296	50021.....	232	51071.....	336	51333.....	235	51544.....	24

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
52349.....	247	53203.....	353	54722.....	225	55031.....	230	56041.....	348	56211.....	349	56422.....	189
52350.....	247	53204.....	353	54723.....	225	55032.....	230	56042.....	348	56212.....	349	56423.....	189
52351.....	248	53206.....	353	54724.....	225	55033.....	230	56043.....	348	56213.....	349	56424.....	190
52352.....	248	53207.....	353	54725.....	225	55034.....	230	56044.....	348	56214.....	349	56425.....	190
52353.....	248	53208.....	354	54726.....	226	55035.....	230	56045.....	348	56215.....	349	56426.....	190
52354.....	248	53209.....	354	54727.....	226	55160.....	218	56046.....	348	56216.....	349	56427.....	190
52355.....	249	53210.....	354	54728.....	226	55161.....	218	56047.....	348	56217.....	349	56428.....	190
52356.....	249	53211.....	354	54729.....	226	55162.....	218	56048.....	348	56218.....	349	56429.....	190
52357.....	249	53212.....	354	54730.....	226	55163.....	218	56049.....	348	56219.....	349	56430.....	190
52358.....	249	53213.....	354	54731.....	226	55164.....	218	56050.....	348	56220.....	349	56431.....	190
52359.....	249	53214.....	354	54732.....	226	55165.....	218	56051.....	348	56221.....	349	56432.....	190
52360.....	249	53215.....	354	54733.....	226	55166.....	218	56052.....	348	56222.....	349	56433.....	190
53001.....	353	53216.....	354	54734.....	226	55167.....	218	56053.....	348	56223.....	349	56434.....	190
53002.....	353	53217.....	354	54735.....	226	55168.....	218	56054.....	348	56224.....	349	56435.....	190
53003.....	353	53218.....	354	54800.....	227	55169.....	219	56055.....	348	56225.....	349	56436.....	191
53004.....	353	53219.....	354	54801.....	227	55170.....	219	56056.....	348	56226.....	349	56437.....	191
53005.....	353	53220.....	354	54802.....	227	55171.....	219	56057.....	348	56227.....	349	56438.....	191
53006.....	353	53221.....	355	54803.....	227	55172.....	219	56058.....	348	56228.....	349	56439.....	191
53007.....	353	53222.....	355	54804.....	227	55173.....	219	56059.....	348	56229.....	349	56440.....	191
53008.....	353	53223.....	355	54805.....	227	55174.....	219	56060.....	348	56230.....	349	56441.....	191
53009.....	353	53224.....	355	54806.....	227	55175.....	219	56103.....	348	56231.....	349	56442.....	191
53010.....	353	53225.....	355	54807.....	227	55176.....	219	56104.....	348	56232.....	349	56443.....	191
53011.....	353	53226.....	355	54808.....	227	55177.....	219	56105.....	348	56233.....	349	56444.....	191
53012.....	353	54600.....	223	54809.....	228	55178.....	219	56106.....	348	56234.....	349	56445.....	191
53013.....	353	54601.....	223	54810.....	228	55179.....	219	56107.....	348	56235.....	349	56446.....	192
53014.....	353	54602.....	223	54811.....	228	55180.....	220	56108.....	349	56236.....	349	56447.....	192
53015.....	353	54603.....	223	54812.....	228	55181.....	220	56109.....	349	56237.....	349	56448.....	192
53016.....	353	54604.....	223	54813.....	228	55182.....	220	56110.....	349	56238.....	349	56449.....	192
53017.....	352	54605.....	223	54814.....	228	55183.....	220	56111.....	349	56239.....	349	56450.....	192
53018.....	352	54606.....	223	54815.....	228	55184.....	220	56112.....	349	56240.....	349	56451.....	192
53019.....	352	54607.....	223	54816.....	228	55185.....	220	56113.....	349	56241.....	349	56452.....	192
53020.....	352	54608.....	223	54817.....	229	55186.....	220	56114.....	349	56242.....	349	56453.....	192
53021.....	352	54609.....	224	54818.....	229	55187.....	221	56115.....	350	56243.....	348	56454.....	192
53022.....	352	54610.....	224	54819.....	229	55188.....	221	56116.....	350	56244.....	348	56455.....	192
53023.....	352	54611.....	224	54820.....	229	55189.....	221	56117.....	350	56245.....	348	56456.....	192
53024.....	352	54612.....	224	54821.....	229	55190.....	221	56118.....	350	56246.....	348	56457.....	193
53025.....	352	54613.....	224	54822.....	229	55191.....	221	56119.....	350	56247.....	348	56458.....	193
53026.....	352	54614.....	224	54823.....	229	55192.....	221	56120.....	350	56248.....	348	56459.....	193
53027.....	352	54615.....	224	54824.....	229	55193.....	221	56121.....	350	56249.....	348	56460.....	193
53028.....	352	54616.....	224	54825.....	229	55194.....	221	56122.....	350	56250.....	348	56461.....	193
53029.....	352	54617.....	225	54826.....	229	55195.....	221	56123.....	350	56251.....	348	56462.....	193
53030.....	352	54618.....	225	54827.....	230	56001.....	349	56124.....	350	56252.....	348	56463.....	193
53031.....	352	54619.....	225	54828.....	230	56002.....	349	56125.....	350	56253.....	348	56464.....	193
53032.....	352	54620.....	225	54829.....	230	56003.....	349	56126.....	350	56254.....	348	56465.....	193
53033.....	352	54621.....	225	54830.....	230	56004.....	349	56127.....	350	56255.....	348	56466.....	193
53034.....	352	54622.....	225	54831.....	230	56005.....	349	56128.....	350	56256.....	348	56467.....	193
53035.....	352	54623.....	225	54832.....	230	56006.....	349	56129.....	350	56257.....	348	56468.....	193
53036.....	352	54624.....	225	54833.....	230	56007.....	349	56130.....	350	56258.....	348	56469.....	193
53107.....	352	54625.....	225	54834.....	230	56008.....	349	56131.....	350	56259.....	348	56470.....	193
53108.....	352	54626.....	226	54835.....	230	56009.....	349	56132.....	350	56260.....	348	56471.....	193
53109.....	352	54627.....	226	55000.....	227	56010.....	349	56135.....	348	56261.....	348	56472.....	194
53110.....	352	54628.....	226	55001.....	227	56011.....	349	56136.....	348	56262.....	348	56473.....	194
53111.....	352	54629.....	226	55002.....	227	56012.....	349	56137.....	348	56263.....	348	56474.....	194
53112.....	353	54630.....	226	55003.....	227	56013.....	349	56138.....	348	56264.....	348	56475.....	194
53113.....	353	54631.....	226	55004.....	227	56014.....	349	56139.....	348	56265.....	348	56476.....	194
53114.....	353	54632.....	226	55005.....	227	56015.....	349	56140.....	349	56266.....	348	56477.....	194
53115.....	353	54633.....	226	55006.....	227	56016.....	349	56141.....	349	56267.....	348	56478.....	194
53116.....	353	54634.....	226	55007.....	227	56017.....	349	56142.....	349	56268.....	348	56479.....	194
53117.....	354	54635.....	226	55008.....	227	56018.....	349	56143.....	349	56269.....	348	56480.....	194
53118.....	354	54700.....	223	55009.....	228	56019.....	349	56144.....	349	56400.....	188	56481.....	195
53119.....	354	54701.....	223	55010.....	228	56020.....	349	56145.....	349	56401.....	188	56482.....	195
53120.....	354	54702.....	223	55011.....	228	56021.....	349	56146.....	349	56402.....	188	56483.....	195
53121.....	354	54703.....	223	55012.....	228	56022.....	349	56147.....	350	56403.....	188	56484.....	195
53122.....	354	54704.....	223	55013.....	228	56023.....	349	56148.....	350	56404.....	188	56485.....	195
53123.....	355	54705.....	223	55014.....	228	56024.....	349	56149.....	350	56405.....	188	56486.....	195
53124.....	355	54706.....	223	55015.....	228	56025.....	349	56150.....	350	56406.....	188	56487.....	195
53125.....	355	54707.....	223	55016.....	228	56026.....	349	56151.....	350	56407.....	188	56488.....	195
53126.....	355	54708.....	223	55017.....	229	56027.....	349	56152.....	350	56408.....	188	56489.....	195
53127.....	355	54709.....	224	55018.....	229	56028.....	349	56153.....	350	56409.....	188	56490.....	195
53128.....	355	54710.....	224	55019.....	229	56029.....	349	56154.....	350	56410.....	189	56491.....	196
53129.....	355	54711.....	224	55020.....	229	56030.....	349	56155.....	350	56411.....	189	56492.....	196
53130.....	355	54712.....	224	55021.....	229	56031.....	349	56156.....	350	56412.....	189	56493.....	196
53131.....	355	54713.....	224	55022.....	229	56032.....	349	56157.....	350	56413.....	189	56494.....	196
53132.....	355	54714.....	224	55023.....	229	56033.....	349	56158.....	350	56414.....	189	56495.....	196
53133.....	355	54715.....	224	55024.....	229	56034.....	348	56159.....	350	56415.....	189	56496.....	196
53134.....	355	54716.....	224	55025.....	229	56035.....	348	56160.....	350	56416.....	189	56497.....	196
53135.....	355	54717.....	225	55026.....	229	56036.....	348	56161.....	350	56417.....	189	56498.....	197
53136.....	355	54718.....	225	55027.....	230	56037.....	348	56162.....	350	56418.....	189	56499.....	197
53137.....	355	54719.....	225	55028.....	230	56038.....	348	56163.....	350	56419.....	189	56500.....	197
53201.....	353	54720.....	225	55029.....	230	56039.....	348	56164.....	350	56420.....	189	56501.....	197
53202.....	353	54721.....	225	55030.....	230	56040.....	348	56210.....	349	56421.....	189	56502.....	197

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
56503.....	197	56840.....	210	57108.....	336	57190.....	339	58068.....	354	58525.....	266
56504.....	197	56841.....	210	57109.....	337	57191.....	339	58069.....	354	58526.....	266
56505.....	197	56842.....	210	57110.....	337	57192.....	339	58070.....	354	58527.....	266
56506.....	197	56843.....	210	57111.....	337	57193.....	339	58071.....	354	58528.....	266
56507.....	197	56844.....	210	57112.....	337	57194.....	340	58072.....	354	58529.....	266
56508.....	198	56845.....	211	57113.....	337	57195.....	340	58073.....	354	58530.....	266
56509.....	198	56846.....	211	57114.....	337	57196.....	340	58074.....	354	58531.....	266
56510.....	198	56847.....	211	57115.....	337	57197.....	340	58075.....	354	58532.....	266
56511.....	198	56848.....	211	57116.....	337	57198.....	340	58076.....	354	58533.....	266
56512.....	198	56849.....	211	57117.....	337	57199.....	340	58077.....	354	58534.....	267
56513.....	198	56850.....	211	57118.....	337	57200.....	340	58078.....	354	58535.....	267
56514.....	198	56851.....	211	57119.....	337	57201.....	340	58079.....	354	58536.....	267
56515.....	198	56852.....	211	57120.....	337	57202.....	340	58080.....	354	58537.....	267
56516.....	199	56853.....	211	57121.....	337	57203.....	340	58081.....	354	58538.....	267
56517.....	199	56854.....	211	57122.....	337	57204.....	340	58082.....	354	58539.....	267
56518.....	199	56855.....	212	57123.....	337	57205.....	340	58083.....	355	58540.....	267
56519.....	199	56856.....	212	57124.....	337	57206.....	340	58084.....	355	58541.....	267
56520.....	199	56857.....	212	57125.....	337	57207.....	340	58085.....	355	58542.....	267
56521.....	199	56858.....	212	57126.....	337	57208.....	340	58086.....	355	58543.....	267
56522.....	199	56859.....	212	57127.....	337	57209.....	340	58087.....	355	58544.....	267
56523.....	199	56860.....	212	57128.....	337	57210.....	340	58088.....	355	58545.....	267
56524.....	199	56861.....	212	57129.....	337	57211.....	340	58089.....	355	58546.....	267
56525.....	199	56862.....	213	57130.....	337	57212.....	340	58090.....	355	58547.....	267
56526.....	200	56863.....	213	57131.....	337	57213.....	340	58091.....	355	58548.....	267
56527.....	200	56864.....	213	57132.....	337	57351.....	340	58092.....	355	58549.....	267
56528.....	200	56865.....	213	57133.....	337	58011.....	352	58093.....	355	58550.....	267
56529.....	200	56866.....	213	57134.....	337	58012.....	352	58094.....	355	58551.....	267
56530.....	200	56867.....	213	57135.....	337	58013.....	352	58095.....	355	58552.....	267
56531.....	200	56868.....	213	57136.....	337	58014.....	352	58096.....	355	58553.....	267
56532.....	200	56869.....	213	57137.....	337	58015.....	352	58097.....	355	58554.....	267
56533.....	200	56870.....	213	57138.....	337	58016.....	352	58098.....	355	58555.....	267
56534.....	201	56871.....	213	57139.....	337	58017.....	352	58099.....	355	58556.....	267
56535.....	201	57005.....	358	57140.....	337	58018.....	352	58100.....	355	58557.....	267
56536.....	201	57006.....	358	57141.....	337	58019.....	352	58101.....	355	58558.....	26

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
61003.....	336	61108.....	339	62117.....	342	63048.....	352	63192.....	238	64105.....	245
61005.....	336	61109.....	339	62119.....	342	63049.....	352	63193.....	238	64106.....	245
61007.....	336	61110.....	339	62121.....	342	63050.....	352	63194.....	238	64107.....	245
61009.....	336	61111.....	339	62123.....	342	63051.....	352	63195.....	238	64108.....	245
61011.....	337	61112.....	340	62125.....	342	63052.....	352	63196.....	239	64109.....	245
61013.....	337	61113.....	340	62127.....	342	63053.....	353	63197.....	239	64110.....	245
61015.....	337	61114.....	340	62129.....	342	63054.....	353	63198.....	239	64111.....	245
61017.....	337	61115.....	340	62131.....	342	63055.....	353	63199.....	239	64112.....	245
61019.....	338	61116.....	340	62133.....	343	63056.....	353	63200.....	239	64113.....	245
61021.....	338	61117.....	340	62135.....	343	63057.....	353	63201.....	239	64114.....	245
61023.....	338	61118.....	340	62137.....	343	63058.....	353	63202.....	239	64115.....	245
61025.....	338	61119.....	340	62139.....	343	63059.....	353	63203.....	239	64116.....	245
61027.....	339	61120.....	340	62141.....	343	63060.....	353	63204.....	239	64117.....	245
61029.....	339	61121.....	340	62142.....	343	63061.....	353	63205.....	239	64118.....	245
61031.....	339	61122.....	340	62143.....	343	63062.....	353	63206.....	239	64119.....	245
61033.....	339	61123.....	340	62145.....	343	63063.....	353	63207.....	239	64120.....	245
61035.....	339	61124.....	340	62146.....	343	63064.....	353	63208.....	239	64121.....	245
61037.....	339	61175.....	340	62147.....	343	63065.....	353	63209.....	239	64122.....	245
61039.....	340	62001.....	341	62149.....	343	63066.....	353	63210.....	239	64123.....	246
61041.....	340	62003.....	341	62151.....	343	63067.....	353	63211.....	239	64124.....	246
61043.....	340	62005.....	341	62153.....	343	63068.....	353	63212.....	239	64125.....	246
61045.....	340	62007.....	341	62154.....	343	63069.....	354	63213.....	236	64126.....	246
61047.....	340	62009.....	341	62155.....	343	63070.....	354	63741.....	234	64127.....	246
61049.....	340	62011.....	341	62156.....	343	63071.....	354	63742.....	235	64128.....	246
61051.....	340	62013.....	341	62157.....	343	63072.....	354	63743.....	235	64129.....	246
61052.....	336	62015.....	341	62158.....	343	63073.....	354	63744.....	235	64130.....	246
61053.....	336	62017.....	341	62159.....	343	63074.....	354	63745.....	235	64131.....	246
61054.....	336	62019.....	341	62164.....	343	63075.....	354	63746.....	235	64132.....	246
61055.....	336	62021.....	341	62166.....	343	63076.....	354	63747.....	235	64133.....	246
61056.....	336	62023.....	341	62167.....	343	63077.....	354	63748.....	235	64134.....	246
61057.....	336	62025.....	341	62168.....	343	63078.....	354	63749.....	236	64135.....	246
61058.....	337	62027.....	341	62170.....	343	63079.....	354	63750.....	236	64136.....	246
61059.....	337	62029.....	341	62171.....	343	63080.....	354	63751.....	236	64137.....	246
61060.....	337	62031.....	341	63000.....	352	63081.....	355	63752.....	236	64138.....	24

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
64622	223	64800	227	64881	229	65059	229	65197	219	66016	349	66450	189
64623	223	64801	227	64882	229	65060	229	65198	219	66017	349	66451	189
64624	223	64802	227	64883	229	65061	229	65199	219	66018	349	66452	189
64625	223	64803	227	64884	229	65062	229	65200	219	66019	349	66453	189
64626	223	64804	227	64885	229	65063	229	65201	219	66020	349	66454	189
64627	224	64805	227	64886	229	65064	229	65202	219	66021	350	66455	189
64628	224	64806	227	64887	229	65065	229	65203	219	66022	350	66456	189
64629	224	64807	227	64888	229	65066	229	65204	219	66023	350	66457	189
64630	224	64808	227	64889	229	65067	229	65205	219	66024	350	66458	189
64631	224	64809	227	64890	229	65068	229	65206	219	66025	350	66459	189
64632	224	64810	227	64891	230	65069	229	65207	219	66026	350	66460	189
64633	224	64811	227	64892	230	65070	229	65208	219	66027	350	66461	189
64634	224	64812	227	64893	230	65071	229	65209	219	66028	350	66462	189
64635	224	64813	227	64894	230	65072	229	65210	219	66029	350	66463	189
64636	224	64814	227	64895	230	65073	229	65211	219	66030	350	66464	189
64637	224	64815	227	64896	230	65074	229	65212	219	66031	350	66465	189
64638	224	64816	227	64897	230	65075	229	65213	219	66032	350	66466	189
64639	224	64817	227	64898	230	65076	229	65214	219	66033	350	66467	189
64640	224	64818	227	64899	230	65077	229	65215	219	66034	350	66468	189
64641	224	64819	227	64900	230	65078	229	65216	219	66035	350	66469	189
64642	224	64820	227	64901	230	65079	229	65217	219	66036	350	66470	189
64643	224	64821	227	64902	230	65080	229	65218	219	66037	350	66471	189
64644	224	64822	227	65000	227	65081	229	65219	219	66038	350	66472	189
64645	224	64823	227	65001	227	65082	229	65220	219	66039	350	66473	189
64646	224	64824	227	65002	227	65083	229	65221	219	66040	350	66474	190
64647	224	64825	227	65003	227	65084	229	65222	220	66041	350	66475	190
64648	224	64826	227	65004	227	65085	229	65223	220	66042	350	66476	190
64649	224	64827	228	65005	227	65086	229	65224	220	66043	350	66477	190
64650	224	64828	228	65006	227	65087	229	65225	220	66044	350	66478	190
64651	224	64829	228	65007	227	65088	229	65226	220	66045	350	66479	190
64652	224	64830	228	65008	227	65089	229	65227	220	66046	350	66480	190
64653	224	64831	228	65009	227	65090	229	65228	220	66400	188	66481	190
64654	224	64832	228	65010	227	65091	230	65229	220	66401	188	66482	190
64655	225	64833	228	65011	227	65092	230	65230	220	66402	188	66483	190
64656	225	64834	228	65012	227	65093	230	65231	220	66403	188	66484	190
64657	225	64835	228	65013	227	65094	230	65232	220	66404	188	66485	190
64658	225	64836	228	65014	227	65095	230	65233	220	66405	188	66486	190
64659	225	64837	228	65015	227	65096	230	65234	220	66406	188	66487	190
64660	225	64838	228	65016	227	65097	230	65235	220	66407	188	66488	190
64661	225	64839	228	65017	227	65098	230	65236	220	66408	188	66489	190
64662	225	64840	228	65018	227	65099	230	65237	220	66409	188	66490	190
64663	225	64841	228	65019	227	65100	230	65238	220	66410	188	66491	190
64664	225	64842	228	65020	227	65101	230	65239	220	66411	188	66492	190
64665	225	64843	228	65021	227	65102	230	65240	220	66412	188	66493	190
64666	225	64844	228	65022	227	65160	218	65241	220	66413	188	66494	190
64667	225	64845	228	65023	227	65161	218	65242	220	66414	188	66495	190
64668	225	64846	228	65024	227	65162	218	65243	220	66415	188	66496	190
64669	225	64847	228	65025	227	65163	218	65244	220	66416	188	66497	190
64670	225	64848	228	65026	227	65164	218	65245	220	66417	188	66498	190
64671	225	64849	228	65027	228	65165	218	65246	220	66418	188	66499	190
64672	225	64850	228	65028	228	65166	218	65247	220	66419	188	66500	190
64673	225	64851	228	65029	228	65167	218	65248	220	66420	188	66501	190
64674	225	64852	228	65030	228	65168	218	65249	220	66421	188	66502	190
64675	225	64853	228	65031	228	65169	218	65250	220	66422	188	66503	191
64676	225	64854	228	65032	228	65170	218	65251	221	66423	188	66504	191
64677	225	64855	229	65033	228	65171	218	65252	221	66424	188	66505	191
64678	225	64856	229	65034	228	65172	218	65253	221	66425	188	66506	191
64679	225	64857	229	65035	228	65173	218	65254	221	66426	188	66507	191
64680	225	64858	229	65036	228	65174	218	65255	221	66427	188	66508	191
64681	225	64859	229	65037	228	65175	218	65256	221	66428	188	66509	191
64682	225	64860	229	65038	228	65176	218	65257	221	66429	188	66510	191
64683	225	64861	229	65039	228	65177	218	65258	221	66430	188	66511	191
64684	225	64862	229	65040	228	65178	218	65259	221	66431	188	66512	191
64685	225	64863	229	65041	228	65179	218	65260	221	66432	188	66513	191
64686	225	64864	229	65042	228	65180	218	65261	221	66433	188	66514	191
64687	225	64865	229	65043	228	65181	218	65262	221	66434	189	66515	191
64688	225	64866	229	65044	228	65182	218	66001	348	66435	189	66516	191
64689	225	64867	229	65045	228	65183	218	66002	348	66436	189	66517	191
64690	226	64868	229	65046	228	65184	218	66003	348	66437	189	66518	191
64691	226	64869	229	65047	228	65185	218	66004	348	66438	189	66519	191
64692	226	64870	229	65048	228	65186	218	66005	348	66439	189	66520	191
64693	226	64871	229	65049	228	65187	219	66006	348	66440	189	66521	191
64694	226	64872	229	65050	228	65188	219	66007	348	66441	189	66522	191
64695	226	64873	229	65051	228	65189	219	66008	348	66442	189	66523	191
64696	226	64874	229	65052	228	65190	219	66009	349	66443	189	66524	191
64697	226	64875	229	65053	228	65191	219	66010	349	66444	189	66525	191
64698	226	64876	229	65054	228	65192	219	66011	349	66445	189	66526	191
64699	226	64877	229	65055	229	65193	219	66012	349	66446	189	66527	191
64700	226	64878	229	65056	229	65194	219	66013	349	66447	189	66528	191
64701	226	64879	229	65057	229	65195	219	66014	349	66448	189	66529	191
64702	226	64880	229	65058	229	65196	219	66015	349	66449	189	66530	191

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
66531.....	191	66612.....	194	66693.....	196	66774.....	200	67083.....	263	67166.....	266	67661.....	225
66532.....	191	66613.....	194	66694.....	197	66775.....	200	67084.....	264	67167.....	266	67662.....	225
66533.....	191	66614.....	194	66695.....	197	66776.....	200	67085.....	264	67168.....	266	67663.....	225
66534.....	191	66615.....	194	66696.....	197	66777.....	200	67086.....	264	67169.....	266	67664.....	225
66535.....	191	66616.....	194	66697.....	197	66778.....	200	67087.....	264	67170.....	267	67665.....	225
66536.....	192	66617.....	194	66698.....	197	66779.....	200	67088.....	264	67171.....	267	67666.....	225
66537.....	192	66618.....	194	66699.....	197	66780.....	200	67089.....	264	67172.....	267	67667.....	225
66538.....	192	66619.....	194	66700.....	197	66781.....	200	67090.....	264	67173.....	267	67668.....	225
66539.....	192	66620.....	194	66701.....	197	66782.....	200	67091.....	264	67174.....	267	67669.....	225
66540.....	192	66621.....	194	66702.....	197	66783.....	200	67094.....	264	67175.....	267	67670.....	225
66541.....	192	66622.....	194	66703.....	197	66784.....	200	67095.....	264	67176.....	267	67671.....	225
66542.....	192	66623.....	194	66704.....	197	66785.....	200	67096.....	264	67177.....	267	67672.....	225
66543.....	192	66624.....	194	66705.....	197	66786.....	200	67097.....	264	67178.....	267	67673.....	225
66544.....	192	66625.....	194	66706.....	197	66787.....	200	67098.....	264	67179.....	267	67674.....	225
66545.....	192	66626.....	194	66707.....	197	66788.....	200	67099.....	264	67180.....	267	67675.....	225
66546.....	192	66627.....	194	66708.....	197	66789.....	200	67100.....	264	67181.....	267	67676.....	225
66547.....	192	66628.....	194	66709.....	198	66790.....	200	67101.....	264	67182.....	267	67677.....	225
66548.....	192	66629.....	194	66710.....	198	66791.....	200	67102.....	264	67183.....	267	67678.....	225
66549.....	192	66630.....	194	66711.....	198	66792.....	200	67103.....	264	67184.....	267	67679.....	225
66550.....	192	66631.....	194	66712.....	198	66793.....	201	67104.....	264	67185.....	267	67680.....	225
66551.....	192	66632.....	194	66713.....	198	66794.....	201	67105.....	264	67600.....	223	67681.....	225
66552.....	192	66633.....	195	66714.....	198	66795.....	201	67106.....	264	67601.....	223	67682.....	225
66553.....	192	66634.....	195	66715.....	198	66796.....	201	67107.....	264	67602.....	223	67683.....	225
66554.....	192	66635.....	195	66716.....	198	66797.....	201	67108.....	264	67603.....	223	67684.....	225
66555.....	192	66636.....	195	66717.....	198	66798.....	201	67109.....	265	67604.....	223	67685.....	225
66556.....	192	66637.....	195	66718.....	198	66799.....	201	67110.....	265	67605.....	223	67686.....	225
66557.....	192	66638.....	195	66719.....	198	66800.....	201	67111.....	265	67606.....	223	67687.....	225
66558.....	192	66639.....	195	66720.....	198	66801.....	201	67112.....	265	67607.....	223	67688.....	225
66559.....	192	66640.....	195	66721.....	198	66802.....	201	67113.....	265	67608.....	223	67689.....	225
66560.....	192	66641.....	195	66722.....	198	66803.....	201	67114.....	265	67609.....	223	67690.....	226
66561.....	192	66642.....	195	66723.....	198	66804.....	201	67115.....	265	67610.....	223	67691.....	226
66562.....	192	66643.....	195	66724.....	198	66805.....	201	67116.....	265	67611.....	223	67692.....	226
66563.....	192	66644.....	195	66725.....	198	66806.....	201	67117.....	265	67612.....	223	67693.....	226
66564.....	192	66645.....	195	66726.....	198	66807.....	201	67118.....	265	67613.....	223	67694.....	226
66565.....	192	66646.....	195	66727.....	198	66808.....	201	67119.....	265	67614.....	223	67695.....	226
66566.....	192	66647.....	195	66728.....	198	66809.....	201	67120.....	265	67615.....	223	67696.....	226
66567.....	192	66648.....	195	66729.....	198	66810.....	201	67121.....	265	67616.....	223	67697.....	226
66568.....	193	66649.....	195	66730.....	198	66811.....	201	67122.....	265	67617.....	223	67698.....	226
66569.....	193	66650.....	195	66731.....	198	67005.....	359	67123.....	265	67618.....	223	67699.....	226
66570.....	193	66651.....	195	66732.....	198	67007.....	359	67124.....	265	67619.....	223	67700.....	226
66571.....	193	66652.....	195	66733.....	198	67009.....	359	67125.....	265	67620.....	223	67701.....	226
66572.....	193	66653.....	195	66734.....	198	67011.....	359	67126.....	265	67621.....	223	67702.....	226
66573.....	193	66654.....	195	66735.....	199	67013.....	359	67127.....	265	67622.....	223	67705.....	254
66574.....	193	66655.....	195	66736.....	199	67015.....	359	67128.....	265	67623.....	223	67706.....	254
66575.....	193	66656.....	195	66737.....	199	67017.....	359	67129.....	265	67624.....	223	67707.....	254
66576.....	193	66657.....	195	66738.....	199	67019.....	359	67130.....	265	67625.....	223	67708.....	254
66577.....	193	66658.....	195	66739.....	199	67021.....	359	67131.....	265	67626.....	223	67709.....	254
66578.....	193	66659.....	195	66740.....	199	67023.....	359	67132.....	265	67627.....	224	67710.....	254
66579.....	193	66660.....	195	66741.....	199	67035.....	359	67133.....	265	67628.....	224	67711.....	254
66580.....	193	66661.....	195	66742.....	199	67037.....	359	67134.....	265	67629.....	224	67712.....	254
66581.....	193	66662.....	195	66743.....	199	67039.....	359	67135.....	265	67630.....	224	67713.....	254
66582.....	193	66663.....	195	66744.....	199	67041.....	359	67136.....	265	67631.....	224	67714.....	254
66583.....	193	66664.....	195	66745.....	199	67043.....	359	67137.....	265	67632.....	224	67715.....	254
66584.....	193	66665.....	195	66746.....	199	67045.....	359	67138.....	265	67633.....	224	67716.....	254
66585.....	193	66666.....	195	66747.....	199	67047.....	359	67139.....	265	67634.....	224	67717.....	254
66586.....	193	66667.....	196	66748.....	199	67049.....	359	67140.....	265	67635.....	224	67718.....	254
66587.....	193	66668.....	196	66749.....	199	67051.....	359	67141.....	265	67636.....	224	67719.....	254
66588.....	193	66669.....	196	66750.....	199	67053.....	359	67142.....	265	67637.....	224	67720.....	254
66589.....	193	66670.....	196	66751.....	199	67060.....	263	67143.....	266	67638.....	224	67721.....	254
66590.....	193	66671.....	196	66752.....	199	67061.....	263	67144.....	266	67639.....	224	67724.....	254
66591.....	193	66672.....	196	66753.....	199	67062.....	263	67145.....	266	67640.....	224	67725.....	254
66592.....	193	66673.....	196	66754.....	199	67063.....	263	67146.....	266	67641.....	224	67726.....	255
66593.....	193	66674.....	196	66755.....	199	67064.....	263	67147.....	266	67642.....	224	67727.....	255
66594.....	193	66675.....	196	66756.....	199	67065.....	263	67148.....	266	67643.....	224	67728.....	255
66595.....	193	66676.....	196	66757.....	199	67066.....	263	67149.....	266	67644.....	224	67729.....	255
66596.....	193	66677.....	196	66758.....	199	67067.....	263	67150.....	266	67645.....	224	67730.....	255
66597.....	193	66678.....	196	66759.....	199	67068.....	263	67151.....	266	67646.....	224	67731.....	255
66598.....	193	66679.....	196	66760.....	199	67069.....	263	67152.....	266	67647.....	224	67732.....	255
66599.....	193	66680.....	196	66761.....	199	67070.....	263	67153.....	266	67648.....	224	67733.....	255
66600.....	193	66681.....	196	66762.....	199	67071.....	263	67154.....	266	67649.....	224	67734.....	255
66601.....	193	66682.....	196	66763.....	199	67072.....	263	67155.....	266	67650.....	224	67735.....	255
66602.....	193	66683.....	196	66764.....	199	67073.....	263	67156.....	266	67651.....	224	67736.....	255
66603.....	193	66684.....	196	66765.....	199	67074.....	263	67157.....	266	67652.....	224	67737.....	255
66604.....	193	66685.....	196	66766.....	199	67075.....	263	67158.....	266	67653.....	224	67738.....	255
66605.....	193	66686.....	196	66767.....	200	67076.....	263	67159.....	266	67654.....	224	67739.....	255
66606.....	194	66687.....	196	66768.....	200	67077.....	263	67160.....	266	67655.....	225	67740.....	255
66607.....	194	66688.....	196	66769.....	200	67078.....	263	67161.....	266	67656.....	225	67741.....	255
66608.....	194	66689.....	196	66770.....	200	67079.....	263	67162.....	266	67657.....	225	67742.....	255
66609.....	194	66690.....	196	66771.....	200	67080.....	263	67163.....	266	67658.....	225	67743.....	255
66610.....	194	66691.....	196	66772.....	200	67081.....	263	67164.....	266	67659.....	225	67744.....	255
66611.....	194	66692.....	196	66773.....	200	67082.....	263	67165.....	266	67660.....	225	67745.....	255

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
67746.....	255	67827.....	259	67910.....	262	68332.....	339	68678.....	342	68996.....	353
67747.....	255	67828.....	259	67911.....	262	68333.....	339	68679.....	342	68997.....	353
67748.....	255	67829.....	259	67912.....	262	68334.....	339	68680.....	342	68998.....	353
67749.....	255	67830.....	259	67913.....	262	68335.....	339	68681.....	342	68999.....	353
67750.....	255	67831.....	259	67914.....	262	68336.....	339	68682.....	342	69000.....	353
67751.....	255	67832.....	259	67915.....	262	68337.....	339	68683.....	342	69001.....	353
67752.....	255	67835.....	259	67916.....	262	68338.....	339	68684.....	342	69002.....	353
67753.....	255	67836.....	259	67917.....	262	68339.....	339	68685.....	342	69003.....	354
67754.....	255	67837.....	259	67918.....	262	68340.....	339	68686.....	342	69004.....	354
67755.....	255	67838.....	259	67919.....	262	68341.....	339	68687.....	342	69005.....	354
67756.....	255	67839.....	259	67920.....	262	68342.....	339	68688.....	342	69006.....	354
67757.....	255	67840.....	260	67921.....	262	68343.....	339	68689.....	342	69007.....	354
67758.....	255	67841.....	260	67922.....	262	68344.....	339	68690.....	342	69008.....	354
67759.....	256	67842.....	260	67923.....	262	68345.....	339	68691.....	342	69009.....	354
67760.....	256	67843.....	260	67924.....	262	68346.....	339	68692.....	342	69010.....	354
67761.....	256	67844.....	260	67925.....	262	68347.....	339	68693.....	342	69011.....	354
67762.....	256	67845.....	260	67926.....	262	68348.....	339	68694.....	342	69012.....	354
67763.....	256	67846.....	260	68268.....	336	68349.....	339	68695.....	342	69013.....	354
67764.....	256	67847.....	260	68269.....	336	68350.....	339	68696.....	342	69014.....	354
67765.....	256	67848.....	260	68270.....	336	68351.....	339	68697.....	342	69015.....	354
67766.....	256	67849.....	260	68271.....	336	68352.....	339	68698.....	342	69016.....	354
67767.....	256	67850.....	260	68272.....	336	68353.....	339	68699.....	342	69017.....	354
67768.....	256	67851.....	260	68273.....	337	68354.....	340	68700.....	342	69018.....	354
67769.....	256	67852.....	260	68274.....	337	68355.....	340	68701.....	342	69019.....	354
67770.....	256	67853.....	260	68275.....	337	68356.....	340	68702.....	342	69020.....	354
67771.....	256	67854.....	260	68276.....	337	68357.....	340	68703.....	342	69021.....	354
67772.....	256	67855.....	260	68277.....	338	68358.....	340	68704.....	342	69022.....	354
67773.....	256	67856.....	260	68278.....	338	68359.....	340	68705.....	342	69023.....	354
67774.....	256	67857.....	260	68279.....	338	68360.....	340	68706.....	342	69024.....	354
67775.....	256	67858.....	260	68280.....	338	68361.....	340	68707.....	342	69025.....	354
67776.....	256	67859.....	260	68281.....	339	68362.....	340	68708.....	342	69026.....	355
67777.....	256	67860.....	260	68282.....	339	68363.....	340	68709.....	343	69027.....	355
67778.....	256	67861.....	260	68283.....	339	68364.....	340	68710.....	343	69028.....	355
67779.....	256	67862.....	260	68284.....	339	68365.....	340	68711.....	343	69029.....	35

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
69221.....	209	69302.....	212	70477.....	109	73014.....	386	74246.....	367	74384.....	90
69222.....	209	69303.....	212	70478.....	109	73026.....	386	74249.....	370	74385.....	90
69223.....	210	69304.....	212	70479.....	109	73027.....	386	74252.....	370	74386.....	90
69224.....	210	69305.....	212	70480.....	109	73028.....	386	74255.....	370	74387.....	90
69225.....	210	69306.....	212	70481.....	109	73029.....	386	74258.....	370	74388.....	90
69226.....	210	69307.....	212	70482.....	109	73041.....	386	74261.....	370	74389.....	90
69227.....	210	69308.....	212	70483.....	109	73070.....	387	74264.....	370	74390.....	90
69228.....	210	69309.....	212	70484.....	109	73071.....	387	74267.....	370	74391.....	90
69229.....	210	69310.....	212	70485.....	109	73072.....	387	74270.....	370	74392.....	90
69230.....	210	69311.....	212	70486.....	109	73073.....	387	74300.....	90	74393.....	90
69231.....	210	69312.....	212	70487.....	109	73074.....	387	74301.....	90	74394.....	90
69232.....	210	69313.....	213	70488.....	109	73075.....	387	74302.....	90	74395.....	90
69233.....	210	69314.....	213	70489.....	109	73078.....	387	74303.....	90	74396.....	90
69234.....	210	69315.....	213	70527.....	112	73079.....	387	74304.....	90	74397.....	90
69235.....	210	69316.....	213	70529.....	112	73080.....	387	74305.....	90	74398.....	90
69236.....	210	69317.....	213	70531.....	112	73081.....	387	74306.....	90	74399.....	90
69237.....	210	69318.....	213	70533.....	112	73082.....	387	74307.....	90	74400.....	90
69238.....	210	69319.....	213	70535.....	112	73083.....	387	74308.....	90	74401.....	90
69239.....	210	69320.....	213	70537.....	112	74001.....	364	74309.....	90	74402.....	90
69240.....	210	69321.....	213	70539.....	112	74004.....	364	74310.....	90	74403.....	90
69241.....	210	69322.....	213	70540.....	112	74007.....	364	74311.....	90	74404.....	90
69242.....	210	69323.....	213	70542.....	112	74010.....	364	74316.....	90	74405.....	90
69243.....	210	69324.....	213	70544.....	112	74013.....	364	74317.....	90	74406.....	90
69244.....	210	69325.....	213	70546.....	112	74016.....	364	74318.....	90	74407.....	90
69245.....	210	70003.....	374	70548.....	112	74019.....	364	74319.....	90	74408.....	90
69246.....	210	70004.....	374	70550.....	112	74022.....	364	74320.....	90	74409.....	90
69247.....	210	70005.....	374	70551.....	112	74025.....	367	74321.....	90	74410.....	90
69248.....	210	70006.....	374	70552.....	112	74028.....	367	74322.....	90	74411.....	90
69249.....	210	70007.....	374	70553.....	112	74031.....	367	74323.....	90	74412.....	90
69250.....	211	70008.....	374	70554.....	112	74034.....	367	74324.....	90	74413.....	90
69251.....	211	70009.....	374	70555.....	112	74037.....	367	74325.....	90	74414.....	90
69252.....	211	70010.....	374	70556.....	112	74040.....	367	74326.....	90	74415.....	90
69253.....	211	70011.....	374	70557.....	112	74043.....	367	74327.....	90	74416.....	90
69254.....	211	70012.....	374	70558.....	112	74046.....	367	74332.....	90	74417.....	90
69255.....	211	70013.....	374	70559.....	112	74049.....	370	74333.....	90	74418.....	90
69256.....	211	70014.....	374	70560.....	112	74052.....	370	74334.....	90	74419.....	90
69257.....	211	70015.....	374	70561.....	112	74055.....	370	74335.....	90	74420.....	90
69258.....	211	70016.....	374	70562.....	112	74058.....	370	74336.....	90	74421.....	90
69259.....	211	70017.....	374	70563.....	112	74061.....	370	74337.....	90	74422.....	90
69260.....	211	70018.....	374	72930.....	386	74064.....	370	74338.....	90	74423.....	90
69261.....	211	70019.....	374	72947.....	386	74067.....	370	74339.....	90	74424.....	90
69262.....	211	70020.....	374	72948.....	386	74070.....	370	74340.....	90	74425.....	90
69263.....	211	70021.....	374	72949.....	386	74101.....	364	74341.....	90	74426.....	90
69264.....	211	70022.....	374	72950.....	386	74104.....	364	74342.....	90	74427.....	90
69265.....	211	70023.....	374	72951.....	386	74107.....	364	74343.....	90	74428.....	90
69266.....	211	70024.....	374	72952.....	386	74110.....	364	74348.....	90	74429.....	90
69267.....	211	70025.....	374	72953.....	386	74113.....	364	74349.....	90	74430.....	90
69268.....	211	70026.....	374	72954.....	390	74116.....	364	74350.....	90	74431.....	90
69269.....	211	70027.....	374	72955.....	390	74119.....	364	74351.....	90	74432.....	90
69270.....	211	70028.....	374	72956.....	390	74122.....	364	74352.....	90	74433.....	90
69271.....	211	70029.....	374	72957.....	390	74125.....	367	74353.....	90	74434.....	90
69272.....	211	70030.....	374	72958.....	390	74128.....	367	74354.....	90	74435.....	90
69273.....	211	70031.....	374	72959.....	390	74131.....	367	74355.....	90	74436.....	90
69274.....	211	70032.....	374	72960.....	390	74134.....	367	74356.....	90	74437.....	90
69275.....	211	70441.....	110	72961.....	390	74137.....	367	74357.....	90	74438.....	90
69276.....	211	70442.....	110	72962.....	390	74140.....	367	74358.....	90	74439.....	90
69277.....	211	70444.....	110	72963.....	390	74143.....	367	74359.....	90	74440.....	90
69278.....	211	70445.....	110	72964.....	390	74146.....	367	74360.....	90	74441.....	90
69279.....	211	70447.....	110	72965.....	390	74149.....	370	74361.....	90	74442.....	90
69280.....	211	70448.....	110	72966.....	390	74152.....	370	74362.....	90	74443.....	90
69281.....	211	70450.....	110	72967.....	390	74155.....	370	74363.....	90	74444.....	90
69282.....	211	70451.....	110	72968.....	390	74158.....	370	74364.....	90	74445.....	90
69283.....	211	70453.....	110	72969.....	390	74161.....	370	74365.....	90	74446.....	90
69284.....	212	70454.....	110	72970.....	393	74164.....	370	74366.....	90	74447.....	90
69285.....	212	70456.....	110	72971.....	393	74167.....	370	74367.....	90	74448.....	90
69286.....	212	70457.....	110	72972.....	393	74170.....	370	74368.....	90	74449.....	90
69287.....	212	70459.....	110	72973.....	393	74201.....	364	74369.....	90	74450.....	90
69288.....	212	70460.....	110	72974.....	393	74204.....	364	74370.....	90	74451.....	90
69289.....	212	70462.....	110	72975.....	393	74207.....	364	74371.....	90	74452.....	90
69290.....	212	70463.....	110	72976.....	393	74210.....	364	74372.....	90	74453.....	90
69291.....	212	70465.....	110	72977.....	393	74213.....	364	74373.....	90	74454.....	90
69292.....	212	70466.....	110	72978.....	119	74216.....	364	74374.....	90	74455.....	90
69293.....	212	70468.....	110	72979.....	119	74219.....	364	74375.....	90	74456.....	91
69294.....	212	70469.....	110	72980.....	119	74222.....	364	74376.....	90	74457.....	91
69295.....	212	70470.....	109	72981.....	119	74225.....	367	74377.....	90	74458.....	91
69296.....	212	70471.....	109	72982.....	119	74228.....	367	74378.....	90	74459.....	91
69297.....	212	70472.....	109	72983.....	119	74231.....	367	74379.....	90	74460.....	91
69298.....	212	70473.....	109	72984.....	119	74234.....	367	74380.....	90	74461.....	91
69299.....	212	70474.....	109	72985.....	119	74237.....	367	74381.....	90	74462.....	91
69300.....	212	70475.....	109	73012.....	386	74240.....	367	74382.....	90	74463.....	91
69301.....	212	70476.....	109	73013.....	386	74243.....	367	74383.....	90	74464.....	91

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
74546.....	91	77117.....	86	77188.....	86	77259.....	87	77330.....	87	83058.....	119
74547.....	91	77118.....	86	77189.....	86	77260.....	87	77331.....	87	83059.....	119
74548.....	91	77119.....	86	77190.....	86	77261.....	87	77332.....	87	83060.....	119
74549.....	91	77120.....	86	77191.....	86	77262.....	87	77333.....	87	83061.....	119
74550.....	91	77121.....	86	77192.....	86	77263.....	87	77334.....	87	83062.....	119
74551.....	91	77122.....	86	77193.....	86	77264.....	87	77335.....	87	83063.....	119
74552.....	91	77123.....	86	77194.....	86	77265.....	87	77336.....	87	83064.....	119
74553.....	91	77124.....	86	77195.....	86	77266.....	87	77337.....	87	83065.....	119
74554.....	91	77125.....	86	77196.....	86	77267.....	87	77338.....	87	83070.....	386
74555.....	91	77126.....	86	77197.....	86	77268.....	87	77339.....	87	83071.....	386
74556.....	91	77127.....	86	77198.....	86	77269.....	87	81001.....	378	83072.....	386
74557.....	91	77128.....	86	77199.....	86	77270.....	87	81003.....	378	83073.....	386
74558.....	91	77129.....	86	77200.....	86	77271.....	87	81005.....	378	83100.....	386
74559.....	91	77130.....	86	77201.....	86	77272.....	87	81007.....	378	83101.....	386
74560.....	91	77131.....	86	77202.....	86	77273.....	87	81009.....	378	83102.....	386
74561.....	91	77132.....	86	77203.....	86	77274.....	87	81011.....	378	83103.....	386
74562.....	91	77133.....	86	77204.....	86	77275.....	87	81013.....	378	83104.....	386
74563.....	91	77134.....	86	77205.....	86	77276.....	87	81015.....	378	83105.....	386
74564.....	91	77135.....	86	77206.....	86	77277.....	87	81017.....	378	83106.....	386
74565.....	91	77136.....	86	77207.....	86	77278.....	87	81019.....	378	83107.....	386
74566.....	91	77137.....	86	77208.....	86	77279.....	87	81021.....	378	83108.....	386
74567.....	91	77138.....	86	77209.....	86	77280.....	87	81023.....	378	83109.....	386
74568.....	91	77139.....	86	77210.....	86	77281.....	87	81025.....	378	83110.....	386
74569.....	91	77140.....	86	77211.....	86	77282.....	87	81027.....	378	83111.....	386
74570.....	91	77141.....	86	77212.....	86	77283.....	87	81029.....	378	83200.....	390
74571.....	91	77142.....	86	77213.....	86	77284.....	87	82930.....	386	83201.....	390
74572.....	91	77143.....	86	77214.....	86	77285.....	87	82931.....	386	83202.....	390
74573.....	91	77144.....	86	77215.....	86	77286.....	87	82932.....	386	83203.....	390
74574.....	91	77145.....	86	77216.....	86	77287.....	87	82933.....	386	83204.....	390
74575.....	91	77146.....	86	77217.....	86	77288.....	87	82966.....	386	83205.....	390
74576.....	91	77147.....	86	77218.....	86	77289.....	87	82967.....	386	83206.....	390
74577.....	91	77148.....	86	77219.....	86	77290.....	87	82968.....	386	83207.....	390
74578.....	91	77149.....	86	77220.....	87	77291.....	87	82969.....	386	83220.....	387
74579.....	91	77150.....	86	77221.....	87	77292.....	87	82970.....	386	83221.....	387
74580.....	91	77151.....	86	77222.....	87	77293.....	87	82971.....	386	83222.....	387
74581.....	91	77152.....	86	77223.....	87	77294.....	87	82972.....	386	83223.....	387
74582.....	91	77153.....	86	77224.....	87	77295.....	87	82973.....	386	83224.....	387
74583.....	91	77154.....	86	77225.....	87	77296.....	87	82974.....	390	83225.....	387
74584.....	91	77155.....	86	77226.....	87	77297.....	87	82975.....	390	83230.....	387
74585.....	91	77156.....	86	77227.....	87	77298.....	87	82976.....	390	83231.....	387
74586.....	91	77157.....	86	77228.....	87	77299.....	87	82977.....	390	83232.....	387
74587.....	91	77158.....	86	77229.....	87	77300.....	87	82978.....	390	83233.....	387
74588.....	91	77159.....	86	77230.....	87	77301.....	87	82979.....	390	83234.....	387
74589.....	91	77160.....	86	77231.....	87	77302.....	87	82980.....	390	83235.....	387
74590.....	91	77161.....	86	77232.....	87	77303.....	87	82981.....	390	90001.....	396
74591.....	91	77162.....	86	77233.....	87	77304.....	87	82982.....	390	90005.....	396
74592.....	91	77163.....	86	77234.....	87	77305.....	87	82983.....	390	90009.....	396
74593.....	91	77164.....	86	77235.....	87	77306.....	87	82984.....	390	90013.....	396
74594.....	91	77165.....	86	77236.....	87	77307.....	87	82985.....	390	90017.....	396
74595.....	91	77166.....	86	77237.....	87	77308.....	87	82986.....	390	90021.....	396
74596.....	91	77167.....	86	77238.....	87	77309.....	87	82987.....	390	90025.....	396
74597.....	91	77168.....	86	77239.....	87	77310.....	87	82988.....	390	90029.....	396
74598.....	91	77169.....	86	77240.....	87	77311.....	87	82989.....	390	90033.....	396
74599.....	91	77170.....	86	77241.....	87	77312.....	87	82990.....	393	90037.....	396
77100.....	86	77171.....	86	77242.....	87	77313.....	87	82991.....	393	90041.....	396
77101.....	86	77172.....	86	77243.....	87	77314.....	87	82992.....	393	90045.....	396
77102.....	86	77173.....	86	77244.....	87	77315.....	87	82993.....	393	90049.....	396
77103.....	86	77174.....	86	77245.....	87	77316.....	87	82994.....	393	90053.....	396
77104.....	86	77175.....	86	77246.....	87	77317.....	87	82995.....	393	90101.....	396
77105.....	86	77176.....	86	77247.....	87	77318.....	87	82996.....	393	90107.....	396
77106.....	86	77177.....	86	77248.....	87	77319.....	87	82997.....	393	90109.....	396
77107.....	86	77178.....	86	77249.....	87	77320.....	87	83026.....	386	90113.....	396
77108.....	86	77179.....	86	77250.....	87	77321.....	87	83027.....	386	90121.....	396
77109.....	86	77180.....	86	77251.....	87	77322.....	87	83028.....	386	90129.....	396
77110.....	86	77181.....	86	77252.....	87	77323.....	87	83029.....	386	90137.....	396
77111.....	86	77182.....	86	77253.....	87	77324.....	87	83041.....	386	91001.....	397
77112.....	86	77183.....	86	77254.....	87	77325.....	87	83042.....	386	91005.....	397
77113.....	86	77184.....	86	77255.....	87	77326.....	87	83043.....	386	91009.....	397
77114.....	86	77185.....	86	77256.....	87	77327.....	87	83044.....	386	91013.....	397
77115.....	86	77186.....	86	77257.....	87	77328.....	87	83056.....	119	91017.....	397
77116.....	86	77187.....	86	77258.....	87	77329.....	87	83057.....	119	91021.....	397

KSPT Reference Information

ISO h6 SPECIFICATIONS					
DIAMETER	+	–	DIAMETER	+	–
≥ 1/8 - 3/16	0.00000	–0.00032	≤ 3	0,000	0,006
> 3/16 - 7/16	0.00000	–0.00035	> 3 - 6	0,000	0,008
> 7/16 - 5/8	0.00000	–0.00043	> 6 - 10	0,000	0,009
> 5/8 - 1	0.00000	–0.00051	> 10 - 18	0,000	0,011
> 1 - 1-1/4	0.00000	–0.00063	> 18 - 25	0,000	0,013

MACHINING FORMULAS	
INCH FORMULAS	METRIC FORMULAS
sfm = rpm x .262 x cutting diameter	m/min = (3.14 x cutting diameter x rpm) / 1000
rpm = sfm x 3.82 / cutting diameter	rpm = (1000 x m / min) / (3.14 x cutting diameter)
feed (inches per tooth) = ipm / (number of teeth x rpm)	feed (mm per tooth) = millimeters per minute / (number of teeth x rpm)
feed (inches / minute) = inches per tooth x number of teeth x rpm	feed (mm/minute) = feed per tooth x number of teeth x rpm
feed (inches / minute) = ipr x rpm	feed (mm/minute) = mmr x rpm
feed (inches / revolution) = ipm / rpm	feed (mm per revolution) = mmr / rpm
cuspl height = (tool diameter / 2) – $\sqrt{(\text{tool diameter}^2 - \text{pitch}^2) / 4}$	cuspl height = (tool diameter / 2) – $\sqrt{(\text{tool diameter}^2 - \text{pitch}^2) / 4}$
pitch = $\sqrt{4 \times (\text{cuspl height} \times \text{tool diameter}) - 4 \times (\text{cuspl height}^2)}$	pitch = $\sqrt{4 \times (\text{cuspl height} \times \text{tool diameter}) - 4 \times (\text{cuspl height}^2)}$
mrr – milling – (in ³ /min) = width of cut x depth of cut x ipm	mrr – milling – (cm ³ /min) = (width of cut x depth of cut x mm/min) / 1000
cutting time – drilling – (minutes) = length / ipm	cutting time – drilling – (minutes) = length / mm/min

sfm	surface feet per minute
rpm	revolutions per minute
ipm	feed rate in inches per minutes
ipr	inches per revolution
mmr	millimeters per revolution
mm/min	feed rate in millimeters per minute
mrr	material removal rate
	on flat surface

GENERAL FORMULAS	
coolant pressure: 1 Bar = 14.5 Pounds per Square Inch (PSI)	
calculation of coolant pressure: Pounds Per Square Inch (PSI) = (Horsepower of Pump x 1.460) / Gallons per Minute (GPM)	
1 Liter = 0.254 Gallons	
inch = millimeters / 25.4	millimeters = inch x 25.4
inch tap drill sizes = major diameter – ((1.299 x % of thread) / threads per inch)	
metric tap drill sizes = major diameter – (1.082 x pitch x % of thread)	
inch thread forming drill size: maximum diameter = basic major diameter – (3/8 x number of threads per inch)	
inch thread forming drill size: minimum diameter = basic major diameter – (1/2 x number of threads per inch)	
metric thread forming drill size: maximum diameter = basic major diameter – (.375 x pitch)	
metric thread forming drill size: minimum diameter = basic major diameter – (.500 x pitch)	

Decimal Equivalents

Fraction • Number • Letter • Metric Sizes

INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT
—	0,10	0.0039	—	1,60	0.0630	9/64	3,57	0.1406	#1	5,79	0.2280	R	8,61	0.3390	—	13,00	0.5118
—	0,20	0.0079	#52	1,61	0.0635	—	3,60	0.1417	—	5,80	0.2283	—	8,70	0.3425	33/64	13,10	0.5156
—	0,25	0.0098	—	1,65	0.0650	#27	3,66	0.1440	—	5,90	0.2323	11/32	8,73	0.3438	17/32	13,49	0.5312
—	0,30	0.0118	#51	1,70	0.0669	—	3,70	0.1457	A	5,94	0.2340	—	8,75	0.3445	—	13,50	0.5315
#80	0,34	0.0135	—	1,75	0.0689	#26	3,73	0.1470	15/64	5,95	0.2344	—	8,80	0.3465	35/64	13,89	0.5469
—	0,35	0.0138	#50	1,78	0.0700	—	3,75	0.1476	—	6,00	0.2362	S	8,84	0.3480	—	14,00	0.5512
#79	0,37	0.0145	—	1,80	0.0709	#25	3,80	0.1495	B	6,05	0.2380	—	8,90	0.3504	9/16	14,29	0.5625
1/64	0,40	0.0156	#49	1,85	0.0728	—	3,80	0.1496	—	6,10	0.2402	—	9,00	0.3543	—	14,50	0.5709
#78	0,41	0.0160	—	1,90	0.0748	#24	3,86	0.1520	C	6,15	0.2420	T	9,09	0.3580	37/64	14,68	0.5781
—	0,45	0.0177	#48	1,93	0.0760	—	3,90	0.1535	—	6,20	0.2441	—	9,10	0.3583	—	15,00	0.5906
#77	0,46	0.0180	—	1,95	0.0768	#23	3,91	0.1540	D	6,25	0.2461	23/64	9,13	0.3594	19/32	15,08	0.5938
—	0,50	0.0197	5/64	1,98	0.0781	5/32	3,97	0.1562	—	6,30	0.2480	—	9,20	0.3622	39/64	15,48	0.6094
#76	0,51	0.0200	#47	1,99	0.0785	#22	3,99	0.1570	E	6,35	0.2500	—	9,25	0.3642	—	15,50	0.6102
#75	0,53	0.0210	—	2,00	0.0787	—	4,00	0.1575	1/4	6,35	0.2500	—	9,30	0.3661	5/8	15,88	0.6250
—	0,55	0.0217	—	2,05	0.0807	#21	4,04	0.1590	—	6,40	0.2520	U	9,35	0.3680	—	16,00	0.6299
#74	0,57	0.0225	#46	2,06	0.0810	#20	4,09	0.1610	—	6,50	0.2559	—	9,40	0.3701	41/64	16,27	0.6406
—	0,60	0.0236	#45	2,08	0.0820	—	4,10	0.1614	F	6,53	0.2570	—	9,50	0.3740	—	16,50	0.6496
#73	0,61	0.0240	—	2,10	0.0827	—	4,20	0.1654	—	6,60	0.2598	3/8	9,53	0.3750	21/32	16,67	0.6562
#72	0,64	0.0250	—	2,15	0.0846	#19	4,22	0.1660	G	6,63	0.2610	V	9,56	0.3770	—	17,00	0.6693
—	0,65	0.0256	#44	2,18	0.0860	—	4,25	0.1673	—	6,70	0.2638	—	9,60	0.3780	43/64	17,07	0.6719
#71	0,66	0.0260	—	2,20	0.0866	—	4,30	0.1693	17/64	6,75	0.2656	—	9,70	0.3819	11/16	17,46	0.6875
—	0,70	0.0276	—	2,25	0.0886	#18	4,31	0.1695	H	6,76	0.2660	—	9,75	0.3839	—	17,50	0.6890
#70	0,71	0.0280	#43	2,26	0.0890	11/64	4,37	0.1719	—	6,80	0.2677	W	9,80	0.3858	45/64	17,86	0.7031
#69	0,74	0.0292	—	2,30	0.0906	#17	4,39	0.1730	—	6,90	0.2717	—	9,90	0.3898	—	18,00	0.7087
—	0,75	0.0295	—	2,35	0.0925	—	4,40	0.1732	I	6,91	0.2720	25/64	9,92	0.3906	23/32	18,26	0.7188
#68	0,79	0.0310	#42	2,37	0.0935	#16	4,50	0.1770	—	7,00	0.2756	—	10,00	0.3937	—	18,50	0.7283
1/32	0,79	0.0313	3/32	2,38	0.0938	—	4,50	0.1772	J	7,04	0.2770	X	10,08	0.3970	47/64	18,65	0.7344
—	0,80	0.0315	—	2,40	0.0945	#15	4,57	0.1800	—	7,10	0.2795	—	10,10	0.3976	—	19,00	0.7480
#67	0,81	0.0320	#41	2,44	0.0960	—	4,60	0.1811	K	7,14	0.2810	—	10,20	0.4016	3/4	19,05	0.7500
#66	0,84	0.0330	—	2,45	0.0965	#14	4,62	0.1820	9/32	7,14	0.2812	Y	10,26	0.4040	49/64	19,45	0.7656
—	0,85	0.0335	#40	2,50	0.0984	#13	4,70	0.1850	—	7,20	0.2835	—	10,30	0.4055	—	19,50	0.7677
#65	0,89	0.0350	#39	2,53	0.0995	—	4,75	0.1870	—	7,25	0.2854	13/32	10,32	0.4062	25/32	19,84	0.7812
—	0,90	0.0354	#38	2,58	0.1015	3/16	4,76	0.1875	—	7,30	0.2874	—	10,40	0.4094	—	20,00	0.7874
#64	0,91	0.0360	—	2,60	0.1024	#12	4,80	0.1890	L	7,37	0.2900	Z	10,49	0.4130	51/64	20,24	0.7969
#63	0,94	0.0370	#37	2,64	0.1040	#11	4,85	0.1910	—	7,40	0.2913	—	10,50	0.4134	—	20,50	0.8071
—	0,95	0.0374	—	2,70	0.1063	—	4,90	0.1929	M	7,49	0.2950	—	10,60	0.4173	13/16	20,64	0.8125
#62	0,97	0.0380	#36	2,71	0.1065	#10	4,91	0.1935	—	7,50	0.2953	—	10,70	0.4213	—	21,00	0.8268
#61	0,99	0.0390	—	2,75	0.1083	#9	4,98	0.1960	19/64	7,54	0.2969	27/64	10,72	0.4219	53/64	21,03	0.8281
—	1,00	0.0394	7/64	2,78	0.1094	—	5,00	0.1969	—	7,60	0.2992	—	10,80	0.4252	27/32	21,43	0.8438
#60	1,02	0.0400	#35	2,79	0.1100	#8	5,05	0.1990	N	7,67	0.3020	—	10,90	0.4291	—	21,50	0.8465
#59	1,04	0.0410	—	2,80	0.1102	—	5,10	0.2008	—	7,70	0.3031	—	11,00	0.4331	55/64	21,84	0.8594
—	1,05	0.0413	#34	2,82	0.1110	#7	5,11	0.2010	—	7,75	0.3051	—	11,10	0.4370	—	22,00	0.8661
#58	1,07	0.0420	#33	2,87	0.1130	13/64	5,16	0.2031	—	7,80	0.3071	7/16	11,11	0.4375	7/8	22,23	0.8750
#57	1,09	0.0430	—	2,90	0.1142	#6	5,18	0.2040	—	7,90	0.3110	—	11,20	0.4409	—	22,50	0.8858
—	1,10	0.0433	#32	2,95	0.1160	—	5,20	0.2047	5/16	7,94	0.3125	—	11,30	0.4449	57/64	22,62	0.8906
—	1,15	0.0453	—	3,00	0.1181	#5	5,22	0.2055	—	8,00	0.3150	—	11,40	0.4488	—	23,00	0.9055
#56	1,18	0.0465	#31	3,05	0.1200	—	5,25	0.2067	O	8,03	0.3160	—	11,50	0.4528	29/32	23,02	0.9062
3/64	1,19	0.0469	—	3,10	0.1220	—	5,3	0.2087	—	8,10	0.3189	29/64	11,51	0.4531	59/64	23,42	0.9219
—	1,20	0.0472	1/8	3,18	0.1250	#4	5,31	0.2090	—	8,20	0.3228	—	11,60	0.4567	—	23,50	0.9252
—	1,25	0.0492	—	3,20	0.1260	—	5,40	0.2126	P	8,20	0.3230	—	11,70	0.4606	15/16	23,81	0.9375
—	1,30	0.0512	—	3,25	0.1280	#3	5,41	0.2130	—	8,25	0.3248	—	11,80	0.4646	—	24,00	0.9449
#55	1,32	0.0520	#30	3,26	0.1285	—	5,50	0.2165	—	8,30	0.3268	—	11,90	0.4685	61/64	24,21	0.9531
—	1,35	0.0531	—	3,30	0.1299	7/32	5,56	0.2188	21/64	8,33	0.3281	15/32	11,91	0.4688	—	24,50	0.9646
#54	1,40	0.0550	—	3,40	0.1339	—	5,60	0.2205	—	8,40	0.3307	—	12,00	0.4724	31/32	24,61	0.9688
#53	1,51	0.0595	#29	3,45	0.1360	#2	5,61	0.2210	Q	8,43	0.3320	31/64	12,30	0.4844	—	25,00	0.9843
—	1,55	0.0610	—	3,50	0.1378	—	5,70	0.2244	—	8,50	0.3346	—	12,50	0.4921	63/64	25,00	0.9844
1/16	1,59	0.0625	#28	3,57	0.1405	—	5,75	0.2264	—	8,60	0.3386	1/2	12,70	0.5000	1	25,40	1.0000

Hardness Conversion Chart

ROCKWELL HARDNESS (HRb)	ROCKWELL HARDNESS (HRC)	BRINELL HARDNESS (HB)	VICKERS HARDNESS (HV)	TENSILE STRENGTH (N/mm2)	PSI (1000lb/in2)
67	—	121	122	401	58
70	—	126	127	432	63
73	—	132	132	448	65
75	—	136	137	455	66
77	—	140	143	463	67
80	—	147	150	479	69
82	—	153	156	494	72
84	—	159	163	525	76
86	—	165	171	540	78
89	—	177	178	556	81
91	—	186	188	602	88
93	—	197	196	632	92
96	—	216	212	664	97
97	—	223	218	695	101
98	21	230	234	756	110
—	22	236	241	772	112
—	23	242	247	787	114
—	24	248	255	818	118
—	25	254	261	849	123
—	27	266	269	865	125
—	28	272	275	895	130
—	29	278	284	911	132
—	30	284	292	942	136
—	31	293	300	973	141
—	32	302	308	988	143
—	33	310	318	1019	147
—	34	319	327	1050	152
—	35	328	337	1096	159
—	37	345	349	1127	163
—	38	353	359	1158	168
—	39	362	370	1189	172
—	40	370	381	1235	179
—	41	381	395	1266	183
—	42	391	408	1312	190
—	44	411	422	1359	197
—	45	422	437	1420	206
—	46	433	452	1467	212
—	48	455	470	1513	219
—	50	479	497	1559	226
—	51	485	517	1621	235
—	52	497	532	1668	241
—	54	—	573	1729	250
—	56	—	609	1807	262
—	57	—	630	1884	273
—	59	—	670	1961	284
—	60	—	698	2039	295
—	61	—	725	—	—
—	62	—	740	—	—
—	63	—	780	—	—
—	64	—	812	—	—
—	65	—	847	—	—
—	66	—	885	—	—
—	67	—	926	—	—
—	68	—	971	—	—

Conversions from each scale are approximate

SOLUTIONS AROUND THE GLOBE

KYOCERA SGS Precision Tools is an ISO 9001:2015 Certified leader of round solid carbide cutting tool technology for the aerospace, metalworking, and automotive industries with manufacturing sites in the United States and United Kingdom. Our global network of Sales Representatives, Industrial Distributors, and Agents blanket the world selling into more than 60 countries.

LEADERS IN SOLID CARBIDE TOOL TECHNOLOGY

Brand names such as Z-Carb, S-Carb®, V-Carb, Hi-PerCarb®, Multi-Carb have become synonymous with high performance tooling in the machining and metalworking industry.

We're proud to have pioneered some of the world's most advanced cutting technology right here on our Northeast Ohio manufacturing campus. KSPT high performance end mills, drills and routers are increasing productivity and reducing cost around the world.

EXCEEDING CUSTOMER EXPECTATIONS

As the world's manufacturing needs change, so does KSPT. It's all about the science, starting with our lab inspected substrate materials to our tool designs and coatings. Our exceptional team of researchers, engineers, and machinists are dedicated to developing the absolute best and delivering the ultimate Value at the Spindle®.

- Incredible batch-to-batch consistency
- Metallurgical lab dedicated to testing and rigorous quality control
- ISO 9001:2015 Certified quality procedures
- Patented geometries that extend tool life, reduce chatter, cut cycle times, and improve part quality—even at extreme parameters
- Specialists in extreme and demanding product applications
- Comprehensive tooling services
- Experienced Field Sales Engineers who work to optimize a tool for your particular application
- Dedicated multi-lingual customer service representatives

SGS PRODUCTS ARE DISTRIBUTED BY:



www.kyocera-sgstool.com



UNITED STATES OF AMERICA

KYOCERA SGS Precision Tools
150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
fax - US & Canada: (800) 447-4017
international fax: (330) 686-2146
orders: sales@kyocera-sgstool.com
web: www.kyocera-sgstool.com

VALUE AT THE SPINDLE®

UNITED KINGDOM

KYOCERA SGS Precision Tools Europe Ltd.
10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com
web: www.kyocera-sgstool.co.uk

JAPAN

KYOCERA Corporation
International Sales Dept.
6 Takeda Tobadono-cho,
Fushimi-ku, Kyoto 612-8501, Japan
phone: +81-75-604-3473
fax: +81-75-604-3472
web: global.kyocera.com/prdct/tool/index.html

COMMERCIAL OFFICES

EASTERN EUROPE

SINTCOM
Sintcom Tools
95 Arsenalski Blvd.
1421 Sofia, Bulgaria
phone: (359) 283-64421
fax: (359) 286-52493
e-mail: sintcom@sintcomtools.com

FRANCE

DOGA Usinage
8, Avenue Gutenberg CS 50510
78317 Maurepas Cedex - France
phone: +33 1 30 66 41 41
e-mail: usinage-outils@doga.fr

GERMANY

KADIGO Tool Systems GmbH
Walramster. 27
65510 Idstein, Germany
phone: +49 8376 9287238
fax: +49 8376 9287237
e-mail: info@kadigo-ts.com

INDIA

KYOCERA Asia Pacific India Pvt. Ltd
Plot No.51, Phase-I,
Udyog Vihar Gurgaon 122016,
Haryana, India
phone: +91-124-4025022
fax: +91-124-4025001

KOREA

KYOCERA Precision Tools Korea Co., Ltd.
2LT 69BL, Namdong Industrial Estate,
638-1, Kozan-Dong, Namdong Incheon,
Korea
phone: +82-32-821-8365
fax: +82-32-821-8369
web: www.kptk.co.kr/

POLAND

KYOCERA SGS Precision Tools
phone: +48 530 432 002
e-mail: SalesEU@kyocera-sgstool.com

SPAIN

KYOCERA SGS Precision Tools IBERICA
e-mail: SalesEU@kyocera-sgstool.com

THAILAND

KYOCERA Asia Pacific (Thailand) Co., Ltd.
1 Capital Work Place Building
7th Floor, Soi Chamchan, Sukhumvit
55 Road, Klongton Nua, Wattana,
Bangkok 10110, Thailand
phone: +66-2-030-6688
fax: +66-2-030-6600

SINGAPORE

KYOCERA Asia Pacific Pte. Ltd.
298 Tiong Bahru Road, #13-03/05 Central Plaza,
Singapore 168730
phone: +65-6373-6700
fax: +65-6271-0600
web: asia.kyocera.com/products/cuttingtools/index.html

CHINA

KYOCERA (China) Sales & Trading Corporation
Room 140, Building A3, Daning Central Square,
No. 700 Wannong Road,
Zhabei District, Shanghai, 200072,
P.R. China
phone: +86-21-3660-7711
fax: +86-21-568-6200
web: www.kyocera.com.cn/prdct/cuttingtool

