

Reshaping
your
world.

NORTON

SAINT-GOBAIN

CATALOG #7362

FULL-LINE STOCK CATALOG
ABRASIVE PRODUCTS FOR
THE INDUSTRIAL MARKET

AHB

TOOLING & MACHINERY, INC.

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225

www.ahbinc.com

ISO Certified

customerservice@ahbinc.com

BECAUSE **RIGHT CHOICES** MATTER™


SAINT-GOBAIN

Reshaping
your
world.

Our Mission

We offer powerful, precise, user-friendly solutions, which enable our customers to cut, shape and finish all materials even in the most complex and challenging applications. By working closely with end-users and our grinding expert partners, we design and provide customized solutions to secure the best option for performance, cost and safety.

Our Expertise

Norton is the leading brand of Saint-Gobain Abrasives, with more than 135 years of experience in manufacturing abrasives.

We are committed to providing access to our expert's knowledge whenever you need it. Whether it is through our [Process Solutions Program \(PSP\)](#), ongoing training programs, or through on-line expert articles and white papers you can stay up-to-date with Norton where and when you need it.

Bring us your grinding challenges, we have solutions!

Our Commitment

You be the final judge in performance! We are so confident of the superior performance of our abrasive products, as recommended for specific applications, that we invite in-plant tests against any other brand of abrasive product on the market. Contact your Norton Representative to find out more about our No Risk test policy or visit www.nortonabrasives.com



Why Tiers Matter

At Norton we believe in delivering right choices that matter. Our abrasives are classified in BEST, BETTER, and GOOD performance/price tiers to help you choose the right product for your specific application every time.

BEST

Our BEST tier products are designed for the customer who is seeking the highest productivity at the lowest total cost.

BETTER

Our BETTER tier products provide an excellent blend of performance and price.

GOOD

And, our GOOD tier products promise the highest quality you expect from the Norton name with a low initial price.

If you need help determining the right tier for your specific needs, don't hesitate to contact us directly or reach out to your Norton sales representative.

Go Further

Visit our website at www.nortonabrasives.com for a more comprehensive outline of products, safety and application information. We continually update it with our most current information.

Connect with us:



METAL FAB CUTTING AND GRINDING

Rough Grinding	
Depressed Center Wheels	7
Cut-off Wheels	
Small Diameter Reinforced Cut-off	17
Circular Saw Reinforced Cut-off	24
Chop Saw Reinforced Cut-off	25
High-Speed Reinforced Cut-Off	28
Walk-Behind Reinforced Cut-off	30
Stationary Saw Reinforced Cut-off	31
Toolroom Cut-off	32
Metallurgical Non-Reinforced Cut-off	34
Rail Reinforced Cut-off	35
Foundry Wheels	
Foundry Cut-off	36
Portable Snagging	38
Floorstand and Swingframe Snagging	42

COATED AND NON-WOVEN ABRASIVES

Coated Abrasive Basics	45
Non-Woven Abrasive Basics	48
Discs	
Fiber Discs	50
Flap Discs	55
Non-Woven Discs	61
Non-Woven Depressed Center Discs	63
Non-Woven Standard Back-up Pad Discs	65
Non-Woven Speed-Change Discs	67
Non-Woven Hook and Loop Discs	68
Cloth PSA Discs and Accessories	69
Paper Discs	72
Mesh Discs	81
Film and Foam Finishing Discs	82
Flexible Diamond-Coated Discs	84
Sanding Accessories	85
Wheels	
Non-Woven Convolute Wheels	88
Belts	
File Belts	93
Portable Belts	96
Narrow Belts	98
Wide Belts	104
FastTrack Service Made-to-Order Belts	106
Non-Woven Belts	107
Rolls / Sheets	
Cloth Rolls and Sheets	109
Paper Rolls and Sheets	112
Non-Woven Rolls	121
Sponges / Hand Pads	
Abrasive Sponges	122
Non-Woven Hand Pads and Sponges	124
Foam Hand Pads	126
Flexible Diamond-Coated Hand Pads	127

PORTABLE TOOLS AND SPECIALTIES

Mini Angle Sander	129
Mini Flap Discs	130
Quick-Change Discs	131
Non-Woven Quick-Change Discs	139
Quick-Change Disc Accessories	147
Die Grinder	148
Cartridge Rolls	149
Spiral Rolls	152
Square/Cross Pads, Overlap Slotted Discs	155
Spiral Bands	159
Tapered Cone Points	162
Mandrels	163
Test Kits	164
Non-Woven Specialties	165
Flap Wheels	167
Non-Woven Flap Wheels	179
Arbor Hole (Gangable) Discs	181
Bore Polishers	182
FlexDrums	184
Non-Woven Unified Wheels	188
Mounted Points	192
Carbide Burrs	193

PRECISION OFFHAND/PORTABLE

Mounted Points	198
Sharpening Stones	204
Retail Dressing Sticks and Stones	217
Rubbing Bricks	218

PRECISION GRINDING WHEELS

Bonded Abrasives Basics	220
Bench and Pedestal Wheels	222
Sawgumming Wheels	226
Toolroom Vitrified Wheels	227
Large Surface Grinding Wheels	243
Surface Grinding Segments	244
Cylindrical Wheels	246
Centerless and Feed Wheels	250
Creepfeed Blank Stock FastTrack Service	254
Quantum Blank Stock FastTrack Service	256
55A Blank Stock FastTrack Service	257
Gear Wheel Blank Stock FastTrack Service	258
ID, Race and Superfinishing Wheels/Sticks	260

DRESSING SOLUTIONS

Diamond Stationary Dressing Tools	263
Diamond Stationary Fliesen Tools	281
Diamond Rotary Dressing Tools	284
Truing Devices	285
Dressing Sticks	286
Truing and Dressing Guide	288

DIAMOND AND cBN ABRASIVES

Diamond / cBN Basics	290
Diamond / cBN Wheels	295
B99 Express Resin Bond Wheels	305
Diamond / cBN CNC Wheels	307
Electroplated Products	313
Diamond Lapping Compound	322

CONSTRUCTION PRODUCTS

Diamond Blades	324
Diamond Cup Grinders	329
Diamond Core Bits	330
Equipment	331

WIRE BRUSHES

Wire Brush Basics	334
Wire Brushes	336
Nylon Brushes	347

MASKING PRODUCTS

Tape	349
Masking Film, Paper, and Sheeting	352
Micro-Fiber Cloths	353









SAFETY








Safety Icons	6
Safety Leadership / References	354
Safety Icon Meanings	355
Coated Abrasive Do's and Don'ts	357
Portable Grinding Safety	358
Starting a Grinding Wheel / Ring Test	359
Wheel Speed Conversion Table	360
Silica Precautions	361

GENERAL INFORMATION

Catalog Navigation	4
Machine Index	4
Product Warranties	362
Trademarks	362
Contact Information	363
Abrasive Connection	363
Norton Tech	363
Merchandising	363

Machine Index and Catalog Navigation

	1. Backstand Belt Grinders
	Coated Abrasive Backstand Belts 98–99, 103, 106
	Non-Woven Backstand Belts 107–108
	2. Bench and Pedestal Grinders
	Coated Abrasive Large Diameter Flap Wheels 175–177
	Non-Woven Convolute Wheels (6"–14" wheels) 88–92
	Non-Woven Discs (6"–12" discs) 181
	Non-Woven Flap Wheels (6"–8" wheels) 179–180
	Non-Woven Nylon Wheel Brushes 347
	Non-Woven Unified Wheels (6" wheels) 188–191
	Sand-O-Flex Wheels 178
	Vitrified Bench and Pedestal Wheels 222–225
	Wire Brushes 338–340
	3. Benchstand Grinders
	Coated Abrasive Benchstand Belts 98–102, 106
	Non-Woven Benchstand Belts 107–108
	4. Chop Saw Machines
	Chop Saw Reinforced Cut-off Wheels 25–27
	5. Circular Saws
	Circular Saw Diamond Blades 327
	Circular Saw Reinforced Cut-off Wheels 24
	6. Core Drills
	Diamond Core Bits 330
	7. Die and Pencil Grinders
	Carbide Burrs 193–196
	Coated Abrasive Small Diameter Flap Wheels 167–173, 177
	Coated Abrasive Specialties 130–138, 147, 148–164
	Mounted Points 192, 198–203
	Non-Woven Specialties 165–166
	Non-Woven Flap Wheels (2"–4" wheels) 179–180
	Non-Woven Nylon Twisted Brushes 347
	Non-Woven Surface Strip and Unified Wheels (1"–4" wheels) 188–191
	Wire Brushes 334–342
	8. Drills
	Sand-O-Flex Wheels 178
	Small Diameter Reinforced Cut-off Wheels (2" and 3" wheels with mandrel) 17–21

	9. Fixed Rail Saws
	Rail Reinforced Cut-off Wheels 35
	10. Flexible Shaft Motors
	Non-Woven Rapid Strip Wheels 188–189
	Non-Woven Unified Wheels 188–191
	11. Hand Finishing Applications
	Coated Abrasive Paper Discs 86
	Coated Abrasive Sheets, Rolls and Sponges 109–123
	Flexible Diamond Coated Hand Pads 127
	Micro-Fiber Cloths, Masking Tape 349–353
	Non-Woven Hand Pads, Rolls and Sponges 121, 124–126
	Sharpening Stones and Rubbing Bricks 204–218
	Dressing Sticks 286–287
	Diamond Lapping Compound 322
	Wire Brushes 346
	12. High-Speed Gas or Electric Saws
	High-Speed Reinforced Cut-off Wheels 28–29
	High-Speed Saw Diamond Blades 325–326
	High-Speed Saws 331
	13. Horizontal/Straight Shaft Portable Grinders
	Coated Abrasive Flap Wheels with Arbor Holes (3-1/2"–5" wheels) 174–175, 177
	Cones and Plugs 38–39, 41
	Mounted Points 192, 198–203
	Non-Woven Disc Wheels 181
	Non-Woven Flap Wheels 179–180
	Non-Woven Unified Wheels 188–191
	Snagging Straight Wheels 38–40
	14. In-Line Drum Sanders
	Coated Abrasive Portable Belts 96–97
	Non-Woven Portable Belts 107–108
	15. Jitterbug Sanders
	Coated Abrasive Sheets and Rolls 109–120
	Non-Woven Rolls 121
	Non-Woven Hand Pads 124–125

Easy-to-Follow Page Guide

Key Questions to Simplify Product Selection

Am I in the right section?

- A** Product
- B** Category overview
- C** General attributes
- D** Correct machine use

How do I narrow choices?

- E** Product design variations

How do I match my end-user needs?

- F** Application recommendations
- G** Best/Better/Good performance color coding
- H** Full application / grit guide


How do I match or upgrade from a competitive product?

- I** Cross reference guide



Machine Index and Catalog Navigation

     	<p>16. Masonry Saws Large, Compact, and Portable Masonry Saws 325</p> <p>17. Orbital Sanders Coated Abrasive Paper Discs 72-80 Coated Abrasive Small Diameter Cloth PSA Discs 69-70 Film and Foam Finishing Discs 82-83 Flexible Diamond Coated PSA Discs 84 Mesh Discs 81</p> <p>18. Portable Belt Sanders Coated Abrasive Portable Belts 96-97 Non-Woven Portable Belts 107-108</p> <p>19. Portable Cut-off Tool Small Diameter Reinforced Cut-off Wheels (1-1/2"-4" wheels) 17-21</p> <p>20. Portable File Belt Sanders Coated Abrasive File Belts 93-95 Non-Woven File Belts 107-108</p> <p>21. Right Angle/Vertical Shaft Portable Grinders Coated Abrasive Fiber Discs 50-54 Coated Abrasive Film and Foam Finishing Discs 82-83 Coated Abrasive Flap Discs 55-60 Coated Abrasive Paper Discs 72-80 Coated Abrasive Quick-Change Discs 131-138 Depressed Center Grinding Wheels, Notchers, Saucers and Type 29 Wheels 8-16 Diamond Blades 327 Flexible Diamond PSA & Quick-Change Discs 84 Non-Woven Depressed Center Discs 61-64 Non-Woven Discs 65-68, 139-147 Non-Woven Nylon Disc Brushes 347 Non-Woven Nylon Stem Mounted and End Brushes 341-345 Pneumatic Air Tool 129 Right Angle Grinder Reinforced Cut-off Wheels, Type 01/41 and Type 27/42 17-20, 22-23 Wire Brushes 338-340</p>	     	<p>22. Right Angle/Vertical Shaft Portable Cup Grinders Diamond Cup Grinders 329 Non-Woven Nylon Cup Brushes 347 Snagging Cup Wheels 38-40 Wire Cup Brushes 334-337</p> <p>23. Sanding Boards Sanding Boards and Coated Abrasive File Strips 115</p> <p>24. Saw Gumming Saw Gumming Wheels 226</p> <p>25. Stationary Chop Saws Large Diameter Reinforced Cut-off Wheels 31</p> <p>26. Stationary Disc Sanders Coated Abrasive Large Diameter Cloth PSA Discs (10"-24" discs) 69, 71</p> <p>27. Walk-Behind Saws Diamond Blades 328 Reinforced Cut-off Wheels 30 Walk-Behind Push Saws 331 Wire Brushes 339</p>
---	--	--	--

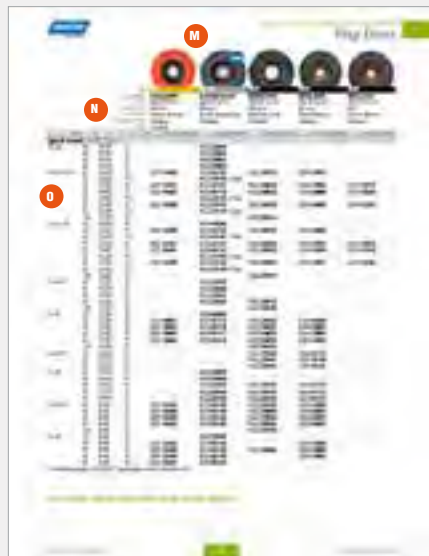

What are the Leading Products by Tier?

- J** Tiers by color-coding: Best, Better, Good
- K** Features and benefits
- L** New, improved, and/or expanded offering

How Do I Find What I Want Now That I Know What I Want?

- M** Visual identification
- N** Key product attributes
- O** Full specification and product number


⚠ WARNING

Improper use of abrasive products might cause grinding wheel breakage and serious injury. Comply with ANSI B7.1, OSHA and Safety Guide furnished with package. Don't overspeed, abuse, or drop wheel. Always use a guard, personal protective equipment and proper mounting procedures.



Speeds

Check machine spindle speed and speed listed on machine against safe maximum operating speed marked on the grinding wheel. Do not overspeed the wheel.



Flanges

When mounting most grinding wheels, use flanges of equal diameter and bearing surface. For exceptions, see ANSI B7.1.



Safety Gloves

Grinding applications are conducted in harsh environments. The use of proper fitting gloves is recommended.



Wheel Guard

Always use the wheel guard as supplied by the machine manufacturer, in the proper position.



Do Not Use Damaged Wheel

Always check each wheel for cracks or damage before use. Never use a damaged wheel.



Eye/Face Protection

Always wear government-approved face and eye protection when using abrasive products.



Hearing Protection

Use of abrasive products can create elevated sound levels. Hearing protection must be worn where required.



Safety Guides, SDS and Wheel Warning Messages

Before using any abrasive materials, READ:

- The Safety Guides
- Wheel Warning Messages
- Safety Data Sheets (SDS)

All Norton products provide information pertaining to safe use. Please take the time to read it carefully. Contact suppliers of the workpiece and abrasive materials for copies of the SDS if one is not readily available. Norton abrasives SDS can be obtained on www.nortonabrasives.com



Dust Protection

Exposure to dust generated from workpiece and/or abrasive materials can result in lung damage and/or other physical injury.

Use dust capture or local exhaust as stated in the SDS. Wear government-approved respiratory protection and eye and skin protection. Failure to follow this warning can result in serious lung damage and/or physical injury.

This is a general dust warning and does not cover specific situations. For more information, refer to the SDS dust warning provided with your products, and workpiece.

Please see pages 354 - 360 for additional safety information



when the going
gets rough

**RELY ON
NORTON INNOVATION**

For stock removal, rough blending,
cleaning castings and welds...Norton
depressed center wheels are
constructed to tackle the demanding
work of all material types.



Depressed center wheels may also be referred to as raised hub wheels or by their shape designation of "Type", with Type 27 being the most popular. The depressed center design allows the flange/lock nut to recess within the wheel so that it can be used for various grinding and cutting applications. Depressed center wheels are designed to handle the most severe right angle grinding applications from heavy stock removal to rough blending. More recently, depressed center wheels have been designed to increase the utility of the tool for cut-off applications. While large right angle grinders (7" & 9") have been around for many years, small or mini grinders that handle 4", 4-1/2", 5", and 6" wheels have made this machine, and wheel category, the most popular in power tools.

- Applications:** Grinding, stock removal, edge chamfering, beveling, weld blending, and cutting-off
- Size Range:** 2" – 9"
- Thickness Range:** .040" – 1/4"
- Grit Range:** 24 – 46 grits for stock removal; 60, 80 grits for blending and finishing
- Abrasive Grain:** Ceramic Alumina, Diamond, Zirconia Alumina, Aluminum Oxide, Silicon Carbide
- Mounting Options:** Plain hole (3/8", 5/8" and 7/8") and discard mount (5/8"-11)
- Shape:** Type 27, Type 28, Type 29
- Machine Used:**



RIGHT ANGLE GRINDER

How to Pick the Right Wheel

DEPRESSED CENTER WHEEL DESCRIPTION CODES						
BLANK = All Purpose	ALU = Aluminum	FC = Fast Cut	HD = Heavy Duty	INOX/SS = Contaminant Free	LL = Long Life	XXL = Extra Long Life
■ = Aluminum	■ = Foundry	■ = Masonry	■ = Stainless	■ = Steel / Metal		

DESCRIPTION CODE DEFINITIONS	
BLANK = All Purpose	Where an excellent blend of cut rate and life is needed.
ALU = Aluminum	Specially formulated bond for reduced loading and surface contamination while cutting aluminum and soft materials.
FC = Fast Cut	Where fast stock removal is needed, or the application only allows for low-pressure or under-horsepowered grinders.
HD = Heavy Duty	Triple reinforced for the most aggressive foundry applications
INOX/SS = Contaminate Free	Contain <0.1% iron, sulfur or chlorine for rust-free and corrosion-free results. Will not contaminate stainless steel.
LL = Long Life	Where durability is needed due to severe application, and when horsepower of the grinder allows for heavy pressure.
XXL = Extra Long Life	Offers 50% more life and metal removal than standard aluminum oxide wheels.

How to Pick the Right Mount

Most wheel sizes come with a plain hole or a discard mount option. While the plain hole has a small, initial cost advantage, the discard mount can provide a labor cost advantage with the quicker wheel change.




Mini-Mount Hub

Our unique, patented mini-mount hub used on 4-1/2" and 5" depressed center wheels provides up to 30% more wheel life because the hub covers just a small surface area, providing maximum grinding area exposure and usage.

Standard throw-away hub size

Why Choose Depressed Center Wheels?

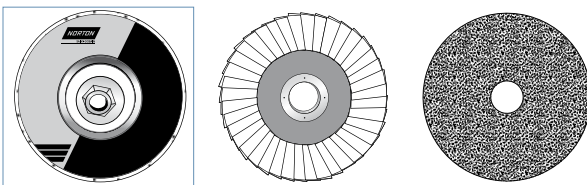

Depressed Center Wheels vs. Flap Discs or Fiber Discs




- Up to 5X life over flap discs, less downtime and inventory
- Up to 100X life over fiber discs, less downtime and inventory
- Rigidity for severe operations and high power grinders
- 1/8" wheels can be used for cutting and grinding
- Can be used to grind inside corners at outer edge of wheel

Mounting Depressed Center Wheels



See how to correctly mount a depressed center wheel on our youtube page at <https://nortonsga.us/7hc5m>

Type-To-Application Recommendation Guide

Wheel Type/Thickness	Applications	90° ANGLE	30° ANGLE	15° ANGLE
 TYPE 27 Type 27 wheels are essentially straight wheels that have a “depressed center/ raised hub”. Different types of fiberglass reinforcement mesh give the product stability for use on the periphery, on the face, or a combination of the two.				
.040", .045", and 1/16" Type 27/42 RightCut	Cutting only, where fast cutting and low kerf loss are desired	◆		
3/32" and .125" Type 27/42	For tough cutting and notching applications where stability is important; cutting and cleaning burr-free narrow root pass welds	◆		
1/8" Type 27	For multiple applications ranging from cutting-off, notching and light-duty side grinding	◆	◆	
1/8" Pipe Notcher Type 27	2-1/2 pieces of reinforcement; durable face grinding; root pass grinding without removing pipe material	◆	◆	
1/8" Type 27 Flexible	For light stock/blending/finishing/polishing		◆	
.140" and 1/8" Type 27 Foundry Notchers	Triple-reinforced for grinding steel and dirty/scale-covered castings; removing and cleaning gates and risers	◆	◆	
1/4" Type 27	For light- to heavy-duty grinding on the bottom/face of the wheel		◆	
1/4" Type 27 Foundry Snaggers	Designed for cleaning parting lines, pads and slag		◆	
1/4" Type 27 Heavy-Duty Foundry	Triple-reinforced for the most aggressive foundry applications		◆	
 TYPE 28 Type 28 wheels are constructed with a downward angle built into the grinding section to facilitate a flatter grinding angle. These wheels can only be used on the face and never on the periphery for cutting-off.				
1/4" Type 28 Saucers	Smooth, gouge-free grinding at shallow angles			◆
 TYPE 29 Type 29 wheels are constructed with an upward angle built into the grinding section to provide full face contact for light stock removal and blending operations. These wheels can only be used on the face and never on the periphery for cutting-off.				
1/8" Type 29 Flexible, AVOS	Polishing and blending applications			◆

Material/Application-To-Product Recommendation Guide

	BEST		BETTER	GOOD		
	Quantum3	NorZon Plus	BlueFire	Gemini	Metal	Masonry
CUTTING						
Mild Carbon / High Tensile Steel	◆	◆	◆	◆	◆	
Stainless Steel / Alloys	◆	◆	◆	◆	◆	
Contaminate Free*			◆ FC/INOX/SS	◆ INOX/SS		
Cast Iron	◆	◆		◆		
Gray Iron						
Aluminum / Bronze / Brass				◆ ALU		
Asphalt / Brick / Concrete						◆
Fiberglass / Plastic						◆
NOTCHING						
Mild Carbon / High Tensile Steel	◆	◆	◆	◆	◆	
Stainless Steel / Alloys	◆	◆	◆	◆ INOX/SS		
Contaminate Free*			◆ FC/INOX/SS	◆ INOX/SS		
Cast Iron	◆	◆	◆ Foundry	◆		
GRINDING						
Mild Carbon / High Tensile Steel	◆	◆	◆	◆		
Stainless Steel / Alloys	◆		◆	◆		
Contaminate Free*	◆		◆ FC/INOX/SS	◆ INOX/SS		
Cast Iron		◆	◆ Foundry	◆		
Gray Iron	◆		◆ Foundry	◆		
Aluminum / Bronze / Brass				◆ ALU		
Asphalt / Brick / Concrete						◆
BLENDING						
Mild Carbon / High Tensile Steel				◆ Flexible		
Stainless Steel / Alloys				◆ Flexible		
Aluminum / Bronze / Brass				◆ Flexible		
Fiberglass / Plastic				◆		

Typical Steel, Stainless Steel, Cast Iron Products: Angle Iron, Bar Stock, Ductile Pipe, Channel Iron, Decking, Rebar, I-Beams, Rail Steel, Studs, Tubing, and Welds
 * For use in nuclear and food industry applications that require contaminant free (<0.1% iron, sulfur or chlorine)

Cross Reference Guides

Type 27 and 28 – 1/8" and 1/4"

NORTON	TOTAL PERFORMANCE						INITIAL PRICE				SPECIALTY		
	BEST		BETTER		GOOD		BETTER		GOOD				
	Quantum3	NorZon Plus LL	NorZon Plus	BlueFire	BlueFire FC/INOX/SS	Gemini XXL	Gemini	Gemini Fast Cut	Gemini SS	Metal	BlueFire Foundry	Gemini ALU	Masonry
3M	Cubitron II	-	-	-	-	High Perform., Green Corps	-	-	-	-	-	-	-
Arc	-	-	-	-	-	-	Predator A24R	-	-	-	-	-	-
Brilliant	-	-	-	-	Brill-Max Z24R	-	Brill-Tex A24UHPXL, A30T	Brill-Tex A24R Super-G	Brill-Tex A30P	Hornet Metal	-	Brill-Tex 30ALU	Brill-Tex C30P, Hornet Concrete
Bullard	-	-	TA24S	ZA24R Competitor	ZA24R	-	A24R	A24N	A46Q	A24R Competitor	-	AL36N	C24R
Camel	-	-	-	-	ZA24T	-	A24R	Ultra A24-N-BF, A24T Super Quickie Cut	WA24S	A24N, R&T Fast Cut	-	A30N, Fast Cut	C24R
DeWalt	-	XP Ceramic	-	XP	-	HP	-	-	HP SS	Metal	-	-	-
Flexovit	-	Flexon ZA24P ZA30T	Flexon ZA20Q	Metalhog, AXT24S	-	-	High Perform. A24/30T	High Performance A30S, Specialist A30Q & R	Free Grind A30Q	-	Flexon ZA16U	Specialist A24ALU	High Perform. C24/30P
Metabo	M-Calibur	-	-	ZA24T	-	-	A24R & T	A24N	A360	-	-	A36M	C24N
Pearl	-	-	-	-	Z24T	-	Premium Metal A24S, Redline Max A/WA24S	Premium Metal A24R, Redline Max A/WA24R	WA24R, SRT24	Silver Line A24R & S	-	D.A. Series AL24M	Silver Line C24S
Pferd	SG-Elastic Ceramic C024Q	-	-	ZA SGP, ZA T SGP	ZA R SGP, Z-SG	SG-Elastic	A-PS, A-SG	-	A-SG INOX, A-PS INOX	-	-	A-SG ALU	S-SG, Masonry
Sait	The Ultimate Grind	Saitech Ultimate Perform.	Saitech Attacker, Pipeline	Z24R Z-Tech	Stainless	-	A24R, A24Turbo	A24N	XA24Q	A24T	CA24R - Foundry	A46N-ALU	C24N
Tyrolit	-	-	-	ZA24P-BFX	ZA24N-BFX	-	A30S & Q-BFX	A30R-BFX	A30-BF INOX	A30-BF	ZZA24R-BFX	A36N-BFX WA46-BF	C30-BF
Walter	-	-	-	Allsteel XX	Double-X	Allsteel	HP	-	Stainless	-	-	-	-
Weiler	Tiger Ceramic	-	-	Tiger Zirc	Tiger Inox	Tiger LL	Wolverine A24R	-	-	Wolverine A24N	-	-	-

Type 27 – Flexible 1/8"

GOOD	
NORTON Gemini Flexible	
Brilliant	Brill-Flex
Bullard	Flexlite AC
Camel	FGF, Special Wheel
Flexovit	Flexcel
Metabo	Z-Plus
Pearl	Flexible AC
Pferd	SG-Flex
Sait	Challenger II
Walter	Flexcut





Best choice for stainless and carbon steel applications; efficiently grinds and cuts a variety of materials from alloys to gray iron

QUANTUM3 CERAMIC ALUMINA

- 100% next-generation, uniquely-shaped, ceramic alumina abrasive grain and tough new bond system result in 5-6 times the life of aluminum oxide wheels and up to 100% increase in performance and life over competitive ceramic wheels
- Significantly increase production, for the lowest total grinding cost of any wheel in the market place today
- Better operator control, improved comfort, and exceptional finished part quality with a more robust, sharper, yet smoother cutting action; wheels don't grab or dig



Best for metal plate, pipe, tubing, cast iron, carbon and mild steel, foundry and welding applications, and ceramics

DIALAST DIAMOND WHEELS

- A combination of high-quality diamond and advanced brazed single-layer bonding technology for extra-long life versus conventional abrasives or other vacuum-brazed diamond tools
- Retains diamond grains and wheel shape for full life with low sparks, while keeping a continuous grinding depth for exceptional wheel life; less blade changes reduce downtime and labor costs
- Environmentally friendly design generates minimal dust for less clean-up and safer working conditions



Better choice for stainless steel, carbon steel, alloys and gray iron

BLUEFIRE ZIRCONIA ALUMINA / A/O BLEND

- A blend of the most advanced zirconia alumina and premium aluminum oxide abrasives delivers 2 to 3 times the life of aluminum oxide wheels
- Broad utility; from light-to heavy-pressure applications
- Engineered specifically to deliver fast cut rate; excellent blend of performance and price



Good choice for steel and ferrous metals as well as specialty applications in aluminum and foundries

GEMINI ALUMINUM OXIDE

- Quality aluminum oxide for consistent performance at an economical price
- High-performance bond and wheel hardness are designed for fast cut while retaining excellent wheel life
- Versatile, general purpose specification for use on variety of materials including 400 series stainless, hard carbon steels, soft carbon steels
- Gemini XXL - fastest 100% aluminum oxide wheels on the market today with 50% more life and metal removal than standard aluminum oxide wheels



Good choice for steel/ferrous metal applications with low initial price

METAL ALUMINUM OXIDE

- Durable bond and wheel hardness are designed to provide a good mix of cut rate and life
- Good choice when low initial price is needed for small jobs or newer operators
- Metal (Aluminum Oxide) engineered for all steel/ferrous materials



Good choice for masonry applications with low initial price

MASONRY SILICON CARBIDE

- Durable bond and wheel hardness are designed to provide a good mix of cut rate and life
- Good choice when low initial price is needed for small jobs or newer operators
- Masonry (Silicon Carbide) for masonry materials such as concrete, brick and asphalt



TIER:	BEST	GOOD
TRADENAME:	NORZON PLUS	GEMINI XXL
SHAPE:	Type 27	Type 27
ABRASIVE:	Ceramic Alumina/ Zirconia Alumina	Aluminum Oxide
MATERIAL:	STAINLESS	STAINLESS
	STEEL/METAL	STEEL/METAL

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #
1/8" (5/32") – Pipe Notching – Type 27				
4-1/2 x 1/8 (5/32) x 5/8-11	13,580	10		662533 70272 XXL
4-1/2 x 1/8 (5/32) x 7/8	13,580	25		662533 70271 XXL
5 x 1/8 (5/32) x 5/8-11	12,225	10		662533 70273 XXL
5 x 1/8 (5/32) x 7/8	12,225	25		662528 42038 XXL
6 x 1/8 (5/32) x 5/8-11	10,185	10		662528 41193 XXL
6 x 1/8 (5/32) x 7/8	10,185	20		662528 35580 XXL
7 x 1/8 (5/32) x 5/8-11	8,600	10	662529 39184	662533 70274 XXL
7 x 1/8 (5/32) x 7/8	8,600	20		662528 35581 XXL
9 x 1/8 (5/32) x 5/8-11	6,600	10	662530 49066	662533 70275 XXL
9 x 1/8 (5/32) x 7/8	6,600	20		662533 70276 XXL

Pipe Notchers are to be used for cutting/notching only.

See Type 27 .040" – 1/4" Foundry, Type 28 Saucer, Type 27 Flexible, and Type 29 Blending Wheels at the end of this section.



TIER:	BEST	BEST	BETTER	GOOD	GOOD	GOOD
TRADENAME:	QUANTUM3	NORZON PLUS	BLUEFIRE	GEMINI	METAL	MASONRY
SHAPE:	Type 27	Type 27	Type 27	Type 27	Type 27	Type 27
ABRASIVE:	Ceramic Alumina	Ceramic Alumina/ Zirconia Alumina	Zirconia Alumina/ Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Silicon Carbide
MATERIAL:	STAINLESS	STAINLESS	STAINLESS	STAINLESS	STAINLESS	MASONRY
	STEEL/METAL	STEEL/METAL	STEEL/METAL	STEEL/METAL	STEEL/METAL	
				ALUMINUM		

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #
1/8" – Cutting / Notching / Light Grinding – Type 27						
3 x 1/8 x 3/8	18,000	25	662528 42177			
4 x 1/8 x 3/8	15,280	25	662528 42004	662528 43178	662528 42016	
4 x 1/8 x 5/8	15,280	25	662528 42005	662528 43176	662528 42017	662528 42014 662528 42013
4-1/2 x 1/8 x 5/8-11	13,580 10 13,580 10	662528 39423	662528 43323	662528 43211	662528 43590	662528 43609
4-1/2 x 1/8 x 7/8	13,580 25 13,580 25	662528 39424	662528 43324	662528 43191 FC/INOX/SS 662528 43212	662528 42029 ALU 46 662528 43591	662528 43611 662528 43601
5 x 1/8 x 5/8-11	12,225 10 12,225 10	662528 39425	662528 43330	662528 43215 662528 43195 FC/INOX/SS		662528 43615
5 x 1/8 x 7/8	12,225 25 12,225 25	662528 39426	662528 43331	662528 43216 662528 43194 FC/INOX/SS	662528 43596	662528 43616
6 x 1/8 x 5/8-11	10,185 10	662528 39427	662528 41891	662528 43199 FC/INOX/SS	662528 33965	
6 x 1/8 x 7/8	10,185 20 10,185 20	662528 39428		662528 43202 662528 43198 FC/INOX/SS	662528 01864	
7 x 1/8 x 5/8-11	8,600 10 8,600 10	662528 39429	662529 38855	662528 43233 662528 43183 FC/INOX/SS	662529 39259	07660 702678
7 x 1/8 x 7/8	8,600 20 8,600 25*	662528 39430	662529 38854	662528 43234	662529 39207	07660 775956 5-Pk
9 x 1/8 x 5/8-11	6,600 10 8,600 10	662528 39431	662530 48897	662528 43244 662528 43187 FC/INOX/SS	662530 48983	
9 x 1/8 x 7/8	6,600 20 6,600 20	662528 39432	662530 48896	662528 43245 662528 43186 FC/INOX/SS	662530 48994	

* 5-wheel Job Packs; wheels are packed 5 wheels/Pack, with 5 Job Packs/carton. Order per each wheel in standard package quantities of 25. Order in multiples of 25.

DEPRESSED CENTER WHEEL DESCRIPTION CODES

BLANK = All Purpose	ALU = Aluminum	FC = Fast Cut	HD = Heavy Duty	INOX/SS = Contaminant Free	LL = Long Life	XXL = Extra Long Life
■ = Aluminum	■ = Foundry	■ = Masonry	■ = Stainless	■ = Steel / Metal		



TIER:	BEST	BEST	BETTER	GOOD	GOOD
TRADENAME:	QUANTUM3	NORZON PLUS	BLUEFIRE	GEMINI / GEMINI XXL	METAL OR MASONRY
SHAPE:	Type 27	Type 27	Type 27	Type 27	Type 27
ABRASIVE:	Ceramic Alumina	Ceramic Alumina/ Zirconia Alumina	Zirconia Alumina/ Aluminum Oxide	Aluminum Oxide	Aluminum Oxide – Metal Silicon Carbide – Masonry
MATERIAL:	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL MASONRY

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #
1/4" – Grinding – Type 27							
3 x 1/4 x 3/8	18,000	25		662528 42178		662528 42179	
4 x 1/4 x 3/8	15,280	25	662533 71180	662528 42002	662528 43179	662528 42018	
4 x 1/4 x 5/8	15,280	25	662533 71181	662528 42003	662528 43177	662528 42020 FC	662528 42011
	15,280	25				662528 42019	662528 42010 Masonry
	15,280	25				662528 42183 ALU 46	
4-1/2 x 3/16 x 7/8	13,580	25		662528 43592		662528 43592	
4-1/2 x 1/4 x 5/8-11	13,580	10	662533 70793	662528 43326	662528 43213	662528 43593	662528 43605
	13,580	10		662528 43327 LL	662528 43193 FC/INOX/SS	662528 43585 FC	662528 43599 Masonry
	13,580	10				662528 42032 INOX/SS	
	13,580	10				662528 43785 XXL	
	13,580	10				662528 42031 ALU 46	
	13,580	40					662528 19559
4-1/2 x 1/4 x 7/8	13,580	10 V		662528 29541 2-Pk	662528 42162 2-Pk	662528 42163 2-Pk	
	13,580	25	662533 70794	662528 43328	662528 43214	662528 43594	662528 43607
	13,580	25			662528 43192 FC/INOX/SS	662528 43584 FC	662528 43600 Masonry
	13,580	25				662528 42033 INOX/SS	
	13,580	25				662528 43784 XXL	
	13,580	25				662528 42034 ALU 46	
5 x 1/4 x 5/8-11	13,580	50					662528 36796
	13,580	10 V		662528 29540 2-Pk	662528 42164 2-Pk	662528 42165 2-Pk	
	12,225	10	662533 70795	662528 43332	662528 43217	662528 43597	662528 43613
5 x 1/4 x 7/8	12,225	10		662528 43333 LL	662528 43197 FC/INOX/SS	662528 43787 XXL	
	12,225	25	662533 70796	662528 43334	662528 43218	662528 43598	662528 43614
	12,225	25				662528 42040 INOX/SS	
	12,225	25				662528 43786 XXL	
6 x 1/4 x 5/8-11	12,225	25				662528 42039 ALU 46	
	10,185	10	662533 70797	662528 41920	662528 43224	662528 32390	
	10,185	10				662528 43789 XXL	
6 x 1/4 x 7/8	10,185	20	662533 70798	662528 09376	662528 43203	662528 01865	
	10,185	20				662528 43788 XXL	
	10,185	20				662528 43788 XXL	
7 x 1/4 x 5/8-11	8,600	10	662533 70799	662529 17881	662528 43235	662529 40147 FC	662529 12633
	8,600	10		662528 35578 LL	662528 43185 FC/INOX/SS	662529 40148 LL	076607 75942 Masonry
	8,600	10				662528 43791 XXL	
	8,600	10				662529 40514 ALU 24	
	8,600	10				662529 40515 ALU 46	
	8,600	25*					076607 75940 5-Pk
7 x 1/4 x 7/8	8,600	20	662533 70800	662529 17880	662528 43236	662529 40098 LL	
	8,600	20				662528 43790 XXL	
	8,600	20				662529 40516 ALU 24	
	8,600	25*					076607 75936 5-Pk
9 x 1/4 x 5/8-11	6,600	10	662533 70801	662530 21634	662528 43246	662530 49105 FC	076607 75937 Masonry
	6,600	10		662528 30728 LL		662530 49104 LL	
	6,600	10				662528 43793 XXL	
	6,600	10				662530 49045 ALU 24	
	6,600	25*					076607 75938 5-Pk
	6,600	20	662533 70802	662530 21633	662528 43247	662530 49077 FC	
9 x 1/4 x 7/8	6,600	20		662530 49069	662528 43188 FC/INOX/SS	662530 48991 LL	
	6,600	20		NorZon III – Rail Grind			

* 5-wheel Job Packs; wheels are packed 5 wheels/Pack. with 5 Job Packs/carton. Order per each wheel in standard package quantities of 25. Order in multiples of 25.
 V Vendible 2-wheel Package. Ideal for vending machinings and small jobs. 5 packs/carton. Order in multiples of 10.







See 1/4 inch thick Type 27 Foundry and Type 28 Saucer Wheels on the next page.

DEPRESSED CENTER WHEEL DESCRIPTION CODES

BLANK = All Purpose	ALU = Aluminum	FC = Fast Cut	HD = Heavy Duty	INOX/SS = Contaminant Free	LL = Long Life	XXL = Extra Long Life
■ = Aluminum	■ = Foundry	■ = Masonry	■ = Stainless	■ = Steel / Metal		








TIER:	BEST	BEST	BEST	BEST	BETTER	GOOD
TRADENAME:	QUANTUM3	NORZON PLUS	DIALAST	DIALAST	BLUEFIRE	GEMINI
SHAPE:	Type 28	Type 28	Type 29	Reversible	Type 28	Type 28
ABRASIVE:	Ceramic Alumina	Ceramic Alumina/ Zirconia Alumina	Diamond	Diamond	Zirconia Alumina/ Aluminum Oxide	Aluminum Oxide
MATERIAL:	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
1/4" – Grinding – Type 28 Saucer 								
7 x 1/4 x 5/8-11	8,600	10	662533 70803	662529 05369		662528 43229	662529 40149	
7 x 1/4 x 7/8	8,600	20		662529 05368			662529 40095	
9 x 1/4 x 5/8-11	6,600	10	662533 70804	662530 06335		662528 43237	662530 49106	
9 x 1/4 x 7/8	6,600	20	662533 70805				662530 49081	
Light Grinding – Type 29 								
4-1/2 x 5/8-11	13,600	1			662533 70009			
5 x 5/8-11	12,225	1			662533 70010			
6 x 5/8-11	10,200	1			662533 70011			
7 x 5/8-11	8,600	1			662533 70012			
1/4" – Grinding – Reversible Grinding Disc 								
4-1/2 x 1/4 x 5/8-11	13,600	1				662533 70019		
7 x 1/4 x 5/8-11	8,600	1				662533 70020		






TIER:	BEST	BEST	BEST	BETTER
TRADENAME:	QUANTUM3	NORZON PLUS	DIALAST	BLUEFIRE
SHAPE:	Type 27	Type 27	Type 27	Type 27
ABRASIVE:	Ceramic Alumina	Ceramic Alumina/ Zirconia Alumina	Diamond	Zirconia Alumina/ Silicon Carbide
MATERIAL:	FOUNDRY	FOUNDRY	FOUNDRY	FOUNDRY

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	
.140", 1/8" – Cutting / Notching / Lt. Grinding – Type 27 								
4-1/2 x 1/8 x 5/8-11	13,580	10				662528 43206		
4-1/2 x 1/8 x 7/8	13,580	25				662528 43204		
7 x .140 x 5/8-11	8,600	1			662533 70014			
7 x 1/8 x 5/8-11	8,600	10				662528 43232		
7 x 1/8 x 7/8	8,600	20				662529 15526		
9 x .140 x 5/8-11	6,600	1			662533 70015			
9 x 1/8 x 5/8-11	6,600	10				662528 43240		
9 x 1/8 x 7/8	6,600	20				662528 43238		
1/4" – Grinding – Type 27 								
4 x 1/4 x 3/8	15,280	25				662528 43181		
4 x 1/4 x 5/8	15,280	25				662528 43180		
4-1/2 x 1/4 x 5/8-11	13,580	10				662528 43207		
4-1/2 x 1/4 x 7/8	13,580	25				662528 43205		
7 x 1/4 x 5/8-11	8,600	10				662528 43231		
7 x 1/4 x 7/8	8,600	20				662528 43230		
9 x 1/4 x 5/8-11	6,600	10	662533 70849 HD	662530 07014		662528 43241		
		10				662528 43261 HD		
9 x 1/4 x 7/8	6,600	20	662533 70848 HD	662530 07013		662528 43239		
		20				662528 43260 HD		

All Norton foundry wheels are designed and reinforced to withstand the most aggressive foundry applications.

DEPRESSED CENTER WHEEL DESCRIPTION CODES

BLANK = All Purpose	ALU = Aluminum	FC = Fast Cut	HD = Heavy Duty	INOX/SS = Contaminant Free	LL = Long Life	XXL = Extra Long Life
 = Aluminum	 = Foundry	 = Masonry	 = Stainless	 = Steel / Metal		



				TIER: GOOD	BETTER	GOOD
				GEMINI FLEXIBLE	GEMINI AVOS	GEMINI
				SHAPE: Type 27	Type 29	Type 29
				ABRASIVE: Aluminum Oxide	Aluminum Oxide	Aluminum Oxide
				MATERIAL: ALUMINUM	ALUMINUM	ALUMINUM
				STEEL/METAL	STEEL/METAL	STEEL/METAL
SIZE (D x T x H)	MAX. RPM	STD. PKG.	GRIT	PART #	PART #	PART #
1/8", 1/4" – Blending – Type 27 and 29						
2 x 1/8 x 3/8	30,560	25	60	662528 35632*		
	30,560	25	80	662528 35633*		
4 x 1/8 x 5/8	15,280	20	36	662435 29721#		
	15,280	20	60	662435 29722#		
4-1/2 x 1/8 x 5/8-11	12,000	10	36		662528 42208	662528 42203
4-1/2 x 1/8 x 7/8	12,000	25	36	662528 30424#	662528 42209	662528 42204
	12,000	25	60	662528 30425#	662528 42211	
5 x 1/8 x 7/8	12,225	25	36		662528 42212	662528 42205
7 x 1/8 x 5/8-11	8,600	10	36	662529 39024		662529 17052
7 x 1/8 x 7/8	8,600	20	36	662529 39028#		662529 17051

*5 wheels per display pack; 5 display packs per standard package.

These wheels are packed 20 per box, and must be used with this specific back plate. Two back plates are included in each box.



Depressed Center Adapter Kit

This reusable adapter kit contains everything you need to mount depressed center wheels and saucers with 7/8" center holes on to portable right angle or vertical shaft grinders. Adapter hubs are threaded for mounting on to standard 5/8"-11 NCRH spindles.

KIT NO.	WHEEL DIAMETER	WHEEL THICKNESS	PART #	STD. PKG.
114	6" thru 9"	1/16" thru 1/4"	076607 89275	1

DEPRESSED CENTER WHEEL DESCRIPTION CODES

BLANK = All Purpose ALU = Aluminum FC = Fast Cut HD = Heavy Duty INOX/SS = Contaminant Free LL = Long Life XXL = Extra Long Life
 ■ = Aluminum ■ = Foundry ■ = Masonry ■ = Stainless ■ = Steel / Metal

no short cuts taken here
**SATISFY ALL YOUR
CUT-OFF REQUIREMENTS**

From small diameter portable cut-off wheels to large diameter foundry cut-off wheels; from portable high-speed gas saw wheels to precision toolroom and Metlab wheels, our Norton offering encompasses the broadest range of applications.




Small Diameter Reinforced Cut-off



The Norton small diameter cut-off wheel line consists of Type 01/41 straight and Type 27/42 depressed center cut-off wheels from 1-1/2" to 9" diameters. These wheels come in ultra thin .035" for quick burn-free and burr-free cutting to .125" for more durable applications. All are reinforced for the demanding nature of portable cut-off.

- Applications:** Cutting sheet metal, cutting pipe, and metal fabrication
- Size Range:** 1-1/2" - 9" diameter
- Thickness Range:** .035", .040", .045", .050", .060", 1/16", .090", 3/32" and .125"
- Abrasive Grain:** Ceramic Alumina / Zirconia Alumina, Zirconia Alumina / Aluminum Oxide, Aluminum Oxide, Silicon Carbide, Diamond
- Shape:** Type 01/41 Straight and Type 27/42 Depressed Center
- Machine Used:**

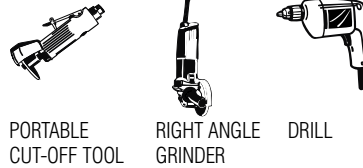







PORTABLE CUT-OFF TOOL RIGHT ANGLE GRINDER DRILL

How to Pick the Right Wheel Type

CUT-OFF WHEEL DESCRIPTION CODES					
BLANK = All Purpose	ALU = Aluminum	FC = Fast Cut	INOX/SS = Contaminant Free	LL = Long Life	1-2-3 = Cutting/Notching/Grinding
■ = Masonry	■ = Stainless	■ = Steel / Metal			

DESCRIPTION CODE DEFINITIONS	
BLANK = All Purpose	Where an excellent blend of cut rate and life is needed
ALU = Aluminum	Specially formulated bond for reduced loading and surface contamination while cutting aluminum and soft materials
FC = Fast Cut	Where fast stock removal is needed, or the application only allows for low-pressure or under-horsepowered grinders
INOX/SS = Contaminate Free	Contain <0.1% iron, sulfur or chlorine for rust-free and corrosion-free results. Will not contaminate stainless steel
LL = Long Life	Where durability is needed due to severe application, and when horsepower of the grinder allows for heavy pressure
RightCut = Cutting-off Only	RightCut wheels for cutting only, provide noticeably longer life and faster cut rate versus competitive wheels, and less pressure is required for first cut
1-2-3 = Cutting/Notching/Grinding	Can be used in cutting, notching and grinding applications

Type-to-Application Recommendation Guide

Wheel Type/Thickness	Applications	
TYPE 01/41 	Type 01/41 straight cut-off wheels are designed for portable cut-off tool applications. All are supplied with full fiberglass reinforcing.	
.035, .040, .060, and 1/16 .125	Where fast cutting and low kerf loss are desired For tough cutting and notching applications where stability is important	◆ ◆
TYPE 01/41 RIGHTCUT 	Type 01/41 RightCut straight cut-off wheels are designed for use on right angle grinder cut-off applications. All are supplied with full fiberglass reinforcing.	 90° angle
.035, .040, .045, .050, 1/16 3/32	Where fast cutting and low kerf loss are desired For tough cutting and notching applications where stability is important	◆ ◆
TYPE 27/42 RIGHTCUT 	Type 27/42 RightCut depressed center cut-off wheels are designed for use on right angle grinder cut-off applications. Their depressed center shape provides a recess for the hub, which allows flush cutting. All are supplied with full fiberglass reinforcing.	 90° angle
.040, .045, 1/16 3/32, .125	Where fast cutting and low kerf loss are desired For tough cutting and notching applications where stability is important	◆ ◆

Small Diameter Reinforced Cut-off

Material-To-Product Recommendation Guide

	BEST		BETTER	GOOD		
	Quantum3	NorZon Plus	BlueFire	Gemini	Metal	Masonry
Mild Carbon / High Tensile Steel	◆	◆	◆		◆	
Stainless Steel / Alloys	◆	◆	◆	◆		
Contaminate Free*				◆ INOX/SS		
Cast Iron	◆	◆	◆	◆		
Aluminum / Bronze / Brass				◆ ALU		
Asphalt / Brick / Concrete						◆

* For use in nuclear and food industry applications that require contaminant free (<0.1% iron, sulfur or chlorine)

Cross Reference Guides

Type 01/41 .035" - .125" Reinforced Cut-off Wheels for Portable Cut-off Tools



NORTON	TOTAL PERFORMANCE ←			INITIAL PRICE →		
	BEST	BETTER	GOOD	GOOD	BETTER	BEST
	NorZon Plus	BlueFire	Gemini Free Cut	Gemini Long Life	Metal	
Brilliant	—	Brill-Max ZA	—	—	Safe-Tex FC, LL	
Bullard	—	ZA46T, ZA60T	TA36T	TA46T, TA60T	A36T, A60T Comp.	
Camel	—	ZA60-TBF	A36 RBF	A60 RBF	Fast Cut RBF	
Flexovit	Flexon Fast Cut A46, 60	—	High Perf Fast Grind A36	High Perf Fast Cut A36, 46, 60	—	
Pearl	—	SRT, Zirconia	—	Premium	Silver Line	
Pferd	—	—	—	—	PSF-A	
Sait	Saittech	—	A60S	A24R, A36T, A60T	—	
Spedecut	—	—	—	—	A46, 60 TBXX	
Walter	—	—	A24 ZIP	A60 ZIP	—	

Type 01/41 and Type 27/42 .035" - .125" Reinforced Cut-off Wheels for Right Angle Grinders



90° angle

NORTON	TOTAL PERFORMANCE ←			INITIAL PRICE →			SPECIALTY →	
	BEST	BETTER	GOOD	GOOD	BETTER	BEST	GOOD	GOOD
	Quantum3 .045"	Quantum3 1/16"	BlueFire	Gemini Free Cut	Gemini	Metal	Gemini ALU	Gemini INOX/SS
3M	—	Cubitron II .045	—	—	—	—	—	—
Brilliant	—	—	—	Brill-Blade Extra FC	Brill-Blade Heavy Duty	Hornet Stinger	—	—
Bullard	—	—	ZA60T	SGA60U	TA46T, TA60T, TA60U	A46T, A60T Comp.	AL46N	—
Camel	—	—	ZA Quickie Cut	A36-S-BF	Super Quickie Cut	Quickie Cut	A46 Quickie Cut	A60-T-BF, WA60R, Quickie Cut
DeWalt	XP Ceramic 0.040	XP Ceramic 1/16", XP Ceramic 0.045	XP	—	HP	Metal	—	—
Flexovit	—	—	—	Razorblade A60SST	Razorblade A24T, 30V, 36T	—	Razorblade A30Q	—
Metabo	Slicer Limited Edition .040	M-Calibur 1/16	Super Slicer	—	Slicer-Plus, Original Slicer LL	Original Slicer	—	—
Pearl	—	—	Redline Max Slimcut	—	Slimcut	Slimcut Pro-V, Silverline	—	—
Pferd	SG Elastic, SG Plus 1mm	SG Plus 1.6, SG Elastic 1.6	—	—	—	PS-Forte	SG-ALU	—
Sait	—	The Ultimate Ceramic Cutoff .045, Saitech	Z-tech	SAIT.M.X	Sait .045, The Ultimate Cutoff	—	A46N	XA46R
SpedeCut	—	—	—	—	—	A46, 60 TBXX	—	—
Walter	Zip One	—	Zip+ Xtra	A-30-ZIP	A-60-ZIP	—	A-60-ZIP-ALU	A60-SS-ZIP
Weiler	Tiger Zirc Ultra Cut 1mm, Tiger INOX UltraCut 1mm	Tiger Ceramic .045, Tiger Zirc .045, Tiger INOX .045	—	—	Tiger	Wolverine	—	—

Small Diameter Reinforced Cut-off

SAFETY

Dangerous Pairing: Die Grinders and Cut-off Wheels

While die grinders and cut-off tools may look similar, they are not interchangeable. Small diameter cut-off wheels can be used only on portable cut-off tools. Several crucial differences exist between the two handheld machines.

- Small diameter cut-off wheels must be used on portable cut-off tools with guards for the safety of the operator and bystanders. Also, portable cut-off tool guards prevent use of an oversize wheel.
- These cut-off wheels must be mounted between proper flanges on portable cut-off tools as described in the national safety standard for abrasive wheels, ANSI B7.1. Die grinders make use of a collet for mounting.
- All cut-off wheels must be used at or below their maximum operating speed, marked clearly on the side of the wheel. Die grinders operate above cut-off wheel speeds. Excessive speed can result in breakage and serious personal injury.



It is the user's responsibility to refer to and comply with ANSI B7.1

TECH TIP

Measure Your Wheel's Thickness

Why should you measure your wheel thickness? Many competitors market their wheels as .045", but they are truly thicker. New Norton Quantum3 RightCut wheels are true to size so you can pick the right wheel for the job whether you need precision cutting or rugged durability. Compare our 1/16" Quantum3 with competitive 0.045" ceramic cut-off wheels and you will see the longest life and fastest cut on the market.



It is the user's responsibility to refer to and comply with ANSI B7.1

Norton Quantum3 RightCut Wheels

The Norton Quantum3 RightCut is our top tier cut-off wheel, available in 0.045" and 1/16" thickness. If you want speed of cut and work on thin or hollow materials, the 0.045" will get you there with comfort. If you are cutting thicker materials and life of the wheel is important, then the 1/16" is ideal. Whatever your pick is, experience the extra-smooth cutting action, thanks to our premium ceramic grain.



Norton Quantum3 RightCut: 0.045" versus 1/16"

How to match the wheel to the application

5" x .045" x 7/8"
125 x 1.2 x 22mm

5" x 1/16" x 7/8"
125 x 1.6 x 22mm

PRODUCT	0.045" (FAST CUTTING)	1/16" (LONGEST LIFE)
Abrasive:	Ceramic	Ceramic
Target application:	Thin metals and/or light-style cutting	Thick metals and/or aggressive-style cutting
Strengths:	Fast cutting, smooth easy feel, precise and maneuverable, reduced burrs	Long lasting, durable, aggressive easy feel, versatile across applications and metals

Small Diameter Reinforced Cut-off



NEW

Best choice for stainless steel and carbon steel applications

QUANTUM3 CERAMIC ALUMINA

- 100% advanced ceramic alumina grain with a special shape for comfort and performance guaranteeing 7X the life of aluminum oxide wheels and 3X the life of zirconia alumina wheels
- Unique bond system prevents premature grain release maximizing wheel life
- Available in type 01 straight and type 27 depressed center cut-off wheels from 4-1/2 inch to 6 inch diameters



Best for metal plate, pipe, tubing, cast iron, carbon and mild steel, foundry and welding applications, and ceramics

DIALAST DIAMOND WHEELS

- A combination of high-quality diamond and advanced brazed single-layer bonding technology for extra-long life versus conventional abrasives or other vacuum-brazed diamond tools
- Retains diamond grains and wheel shape for full life with low sparks, while keeping a continuous grinding depth for exceptional wheel life; less blade changes reduces downtime and labor costs
- Environmentally-friendly grinding for minimal dust, less clean-up and safer working conditions



Best choice for highest productivity for steel, stainless steel and all ferrous metals

NORZON PLUS CERAMIC / ZIRCONIA BLEND

- Patented Norton SG ceramic alumina and zirconia alumina grain blend delivers the fastest cutting wheel available on the market, up to 10X faster cutting versus aluminum oxide wheels on 400 series stainless and soft and hard carbon steels
- Ultra-thin side reinforcing creates maximum cut rate and minimum kerf loss; ideal when precise thin cut is desired
- High-performance resin bond adds a freer cut and longest life



Better choice for stainless steel, carbon steel, alloys and gray iron

BLUEFIRE ZIRCONIA ALUMINA / A/O BLEND

- A blend of the most advanced zirconia alumina and premium aluminum oxide abrasives delivers 2 to 3 times the life of aluminum oxide wheels
- Ultra-thin side reinforcing for maximum cut rate with minimum kerf loss; ideal when precise, thin cut is desired
- Broad utility from light-to heavy-pressure applications



Good, versatile choice for steel and ferrous metals

GEMINI ALUMINUM OXIDE

- Quality aluminum oxide for consistent performance at an economical price
- Designed for portable cut-off tool applications where a fast cut and minimum material loss are desired
- Durable bond designed for fast cut while retaining excellent wheel life



Good choice for grinding alloys, metals, steels, and ferrous metals

METAL ALUMINUM OXIDE

- Quality aluminum oxide abrasive for quick cutting action
- Resin bond provides free cutting action with long life
- Good choice when low initial price is needed for small jobs or newer operators

Small Diameter Reinforced Cut-off



TIER:	BEST	BETTER	BETTER	GOOD	GOOD	GOOD
TRADENAME:	NORZON PLUS	BLUEFIRE	A60-OBNA2	GEMINI	GEMINI LONG LIFE	METAL
SHAPE:	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41
ABRASIVE:	Ceramic Alumina/ Zirconia Alumina	Zirconia Alumina/ Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide
MATERIAL:	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	
.035", .040", .060", 1/16" and .125" Type 01/41 – Cut-off									
1-1/2 x .035 x 1/16	40,745	25			662434 27764				
1-1/2 x .035 x 1/8	40,745	25			662434 27831				
1-1/2 x .035 x 1/4	40,745	25			662434 27875				
2 x .035 x 1/8	30,560	25				662434 11392 FC			
2 x .035 x 1/4	30,560	25			662434 28014	662434 11393 FC			
2 x .035 x 3/8	30,560	25				662434 11394 FC			
2 x .060 x 1/8	30,560	25			662434 28041				
2 x 1/16 x 1/4	30,560	25				662434 11395 FC			
2 x 1/16 x 3/8	30,560	25				662434 11396 FC			
2 x .125 x 1/4	30,560	25				662434 11402 FC			
2 x .125 x 3/8	30,560	25				662434 11403 FC			
2-1/2 x .035 x 1/8	30,560	25			662435 28476				
2-1/2 x .035 x 1/4	30,560	25			662435 28425				
2-1/2 x 1/16 x 1/4	30,560	25				662435 10640 FC			
2-1/2 x 1/16 x 3/8	30,560	25				662435 10641 FC			
3 x .035 x 1/4	25,465	25	662435 10668		662435 28573	662435 10627 FC			
	25,465	25*	662435 31753 5-Pk						
3 x .035 x 3/8	25,465	25	662435 10669	662528 43174	662435 28574	662435 10628 FC	662435 37271 LL	076607 89451	
	25,465	25*		662435 34821 5-Pk					
3 x 1/16 x 1/4	25,465	25	662435 10670		662435 28471	662435 10645 FC	662435 10649 LL		
3 x 1/16 x 3/8	25,465	25	662435 10671	662528 43175	662435 28552	662435 10647 FC	662435 10648 LL	662528 35553	
	25,465	25	662435 10835 LL						
	25,465	25*						076607 47767 5-Pk	
	25,465	100						076607 89012	
	25,465	10-Pk†						662528 43624	
								5 Whls & 1 Mandrel/ Pack	
3 x .125 x 1/4	25,465	25				662435 10650 FC			
3 x .125 x 3/8	25,465	25	662435 10673			662435 10651 FC	662435 10653 LL		
4 x .035 x 1/4	15,300	25			662435 29606				
	19,100	25				662435 10629 FC			
4 x .035 x 3/8	19,100	25	662435 10675	662528 43173	662435 29621	662435 10630 FC	662435 37273 LL	076607 89453	
4 x .035 x 1/2	19,100	25			662435 29622				
4 x .035 x 3/4	19,100	25			662435 29609				
4 x .040 x 3/8	19,100	25			662435 29516				
4 x 1/16 x 1/4	19,100	25	662435 10676			662435 10654 FC			
4 x 1/16 x 3/8	19,100	25	662435 10677	662528 43171		662435 10655 FC		662528 43848	
4 x 1/16 x 5/8	19,100	100			662435 27827				
					FabCut				
4 x .125 x 1/4	19,100	25				662435 10658 FC			
4 x .125 x 3/8	19,100	25	662435 10841	662528 43172		662435 10659 FC	662435 10661 LL		
	19,100	25	662435 10680 LL						

* 5-wheel Job Packs; wheels are packed 5 wheels/Pack, with 5 Job Packs/carton. Order per each wheel in standard package quantities of 25. Order in multiples of 25.
 † Order per number of pack, in multiples of 10 packs. Priced per pack.



Drill-Mount Mandrel

Used for mounting 2" and 3" x 3/8" hole cut-off wheels on to a drill

DESCRIPTION	STD. PKG.	PART #
Drill-Mount Mandrel	1	076607 47769



CUT-OFF WHEEL DESCRIPTION CODES

BLANK = All Purpose ALU = Aluminum FC = Fast Cut INOX/SS = Contaminant Free LL = Long Life 1-2-3 = Cutting/Notching/Grinding
 ■ = Masonry ■ = Stainless ■ = Steel / Metal

Small Diameter Reinforced Cut-off



TIER:	BEST	BEST	BEST	BETTER	GOOD	GOOD
TRADENAME:	QUANTUM3 RIGHTCUT	NORZON PLUS RIGHTCUT	DIALAST RIGHTCUT	BLUEFIRE RIGHTCUT	GEMINI RIGHTCUT	METAL RIGHTCUT
SHAPE:	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41
ABRASIVE:	Ceramic Alumina	Ceramic Alumina/ Zirconia Alumina	Diamond	Zirconia Alumina/ Aluminum Oxide	Aluminum Oxide	Aluminum Oxide
MATERIAL:	STAINLESS	STAINLESS	STAINLESS	STAINLESS	STAINLESS	STAINLESS
	STEEL/METAL	STEEL/METAL	STEEL/METAL	STEEL/METAL	STEEL/METAL	STEEL/METAL

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
.035", .040", .045", .050", 1/16, and 3/32" Type 01/41 – RightCut Cut-off								
4 x .040 x 5/8	15,280	25						076607 01616
4 x .045 x 5/8	15,280	25					662435 27956	
4 x 3/32 x 5/8	15,280	25					662435 27955	
4-1/2 x .035 x 7/8	13,580	25						662528 43846
4-1/2 x .040 x 7/8	13,580	25					662528 43225	076607 01617
	13,580	50						662533 70222
	13,580	250+						662528 40001
	13,580	25*						662528 42158 5-Pk
4-1/2 x .045 x 7/8	13,580	25	662528 38454				662528 23602	
	13,580	25					662528 41994 ALU	
	13,580	25					662528 41997 INOX/SS	
	13,580	250+					662528 41213	
	13,580	25*					662528 42160 5-Pk	
4-1/2 x .050 x 7/8	13,580	1			662533 70016			
4-1/2 x 1/16 x 7/8	13,580	25	662528 38455			662528 43208		662528 43845
	13,580	25*				662528 42159 5-Pk		
	13,580	250+				662533 71660		
4-1/2 x 3/32 x 7/8	13,580	25					662528 23599	
5 x .040 x 5/8	12,225	25						662528 43847
5 x .040 x 7/8	12,225	25					662528 43226	076607 01618
5 x .045 x 7/8	12,225	25	662528 38460				662528 23603	
	12,225	25					662528 41995 ALU	
	12,225	250+					662528 41214	
	12,225	25*					662528 42170 5-Pk	
5 x .050 x 7/8	12,225	25		662528 09829 NZ ThinCut				
	12,225	1			662533 70017			
5 x 1/16 x 7/8	12,225	25	662528 38462			662528 43209		
	12,225	25*				662528 42169 5-Pk		
5 x 3/32 x 7/8	12,225	25					662528 23600	
6 x .040 x 7/8	10,185	25						076607 02757
	10,185	50						662533 70223
	10,185	250+						662528 41212
6 x .045 x 7/8	10,185	25					662528 23604	
	10,185	25					662528 41996 ALU	
	10,185	25					662528 41999 INOX/SS	
	10,185	250+					662528 41215	
	10,185	25*				662528 42174 5-Pk	662528 42175 5-Pk	
6 x .050 x 7/8	10,185	1			662533 70018			
6 x 1/16 x 7/8	10,185	25	662528 38465			662528 43210		
	10,185	250+				662533 71662		
6 x 3/32 x 7/8	10,185	25					662528 23601	
7 x .045 x 7/8	8,600	25					662528 32323	
	8,600	20					662528 42000 INOX/SS	
7 x 1/16 x 7/8	8,600	25		662529 00652				
	8,600	1				701846 94055		
9 x .060 x 7/8	6,600	1				701846 94056		

RightCut wheels are to be used for cutting only

* 5-wheel Job Packs; wheels are packed 5 wheels/Pack, with 5 Job Packs/carton. Order per each wheel in standard package quantities of 25. Order in multiples of 25.

+ Bulk packed 250 Wheels/carton; 5 inner boxes of 50 wheels each. Order in multiples of 250 wheels.

CUT-OFF WHEEL DESCRIPTION CODES

BLANK = All Purpose ALU = Aluminum FC = Fast Cut INOX/SS = Contaminant Free LL = Long Life 1-2-3 = Cutting/Notching/Grinding
 ■ = Masonry ■ = Stainless ■ = Steel / Metal

Small Diameter Reinforced Cut-off



TIER:	BEST	BEST	BETTER	GOOD	GOOD
TRADENAME:	QUANTUM3	NORZON PLUS	BLUEFIRE	GEMINI	METAL
SHAPE:	Type 27/42	Type 27/42	Type 27/42	Type 27/42	Type 27/42
ABRASIVE:	Ceramic Alumina	Ceramic Alumina/ Zirconia Alumina	Zirconia Alumina/ Aluminum Oxide	Aluminum Oxide	Aluminum Oxide
MATERIAL:		STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL	STAINLESS STEEL/METAL
				ALUMINUM	

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #
.040, .045, 1/16" – RightCut Cut-off – Type 27/42							
4 x .045 x 5/8	15,280	25				662528 42180	076607 05249
4-1/2 x .040 x 5/8-11	13,580	10				662528 43227	
4-1/2 x .045 x 5/8-11	13,580	10				662528 42025	
	13,580	10				662528 41913 INOX/SS	
4-1/2 x .045 x 7/8	13,580	25				662528 42026	662528 43604
	13,580	25				662528 41912 INOX/SS	
	13,580	25				662528 41909 ALU 36	
	13,580	25*				662528 42161 5-Pk	
	13,580	250				662533 70065 250-Pk	
4-1/2 x 1/16 x 5/8-11	13,580	10	662528 38457		662528 43223		
4-1/2 x 1/16 x 7/8	13,580	10			662528 43219		
	13,580	25	662528 38456				
5 x .040 x 5/8-11	12,225	10				662528 43228	
5 x .045 x 5/8-11	12,225	10				662528 41939	
5 x .045 x 7/8	12,225	25				662528 42036	662528 43849
	12,225	25				662528 41914 INOX/SS	
	12,225	25				662528 41910 ALU 36	
	12,225	25*				662528 42171 5-Pk	
	12,225	250				662533 70066 250-Pk	
5 x 1/16 x 7/8	12,225	25	662528 38464		662528 43220		
6 x .045 x 5/8-11	10,185	10		662528 42007		662528 30587	
6 x .045 x 7/8	10,185	25				662528 42202	662528 42015
	10,185	25				662528 41916 INOX/SS	
	10,185	25				662528 41911 ALU 36	
	10,185	25*				662528 42176 5-Pk	
	10,185	250				662533 70067 250-Pk	
6 x 1/16 x 7/8	10,185	25	662528 38466		662528 43221		
7 x .045 x 5/8-11	8,600	10				662528 41919 INOX/SS	
7 x .045 x 7/8	8,600	20				662529 12626	
	8,600	20				662528 41918 INOX/SS	
7 x 1/16 x 7/8	8,600	10					076607 05251
9 x 1/16 x 5/8-11	6,600	10				662530 19115	
9 x 1/16 x 7/8	6,600	10				662530 17734	
<i>RightCut wheels are to be used for cutting only.</i>							
3/32", .125" – Cut-off – Type 27/42							
4 x .125 x 3/8	15,280	25		662528 42001			
4-1/2 x 3/32 x 5/8-11	13,580	10				662528 41903	
	13,580	10				662528 42027 INOX/SS	
4-1/2 x 3/32 x 7/8	13,580	25				662528 41940	
	13,580	25				662528 42028 INOX/SS	
	13,580	25				662528 43582 1-2-3	
4-1/2 x .125 x 5/8-11	13,580	10	662528 43321			662528 43588	
4-1/2 x .125 x 7/8	13,580	25	662528 43322			662528 43589	
5 x 3/32 x 5/8-11	12,225	10				662528 41904	
5 x 3/32 x 7/8	12,225	25				662528 42037 INOX/SS	
	12,225	25				662528 43587 LL	
5 x .125 x 7/8	12,225	25				662528 43595	
6 x 3/32 x 5/8-11	10,185	10				662528 41905	
6 x 3/32 x 7/8	10,185	25				662528 41906	
	10,185	25				662528 32487 INOX/SS	
6 x .125 x 5/8-11	10,185	10				662528 41192	
6 x .125 x 7/8	10,185	25				662528 42021	
7 x 3/32 x 5/8-11	8,600	10				662528 41907	
7 x 3/32 x 7/8	8,600	20				662528 41908	
	8,600	20				662529 14638 INOX/SS	
7 x .125 x 5/8-11	8,600	10		662529 12625			
7 x .125 x 7/8	8,600	20		662529 12624		662529 00619	
9 x 3/32 x 5/8-11	6,600	10			662528 42378		
9 x 3/32 x 7/8	6,600	20			662528 42343		

*These wheels are to be used for cutting only. * 5-wheel Job Packs; wheels are packed 5 wheels/Pack, with 5 Job Packs/carton. Order per each wheel in standard package quantities of 25. Order in multiples of 25.*

Circular Saw Reinforced Cut-off

A circular saw uses an abrasive wheel to cut different materials using a rotary motion spinning around an arbor. Norton Circular Saw abrasive cut-off wheels are ideal for use in deburring, cleaning, slotting and cutting all types of metal and masonry.

Applications:

Deburring, cleaning, slotting and cutting

Size Range:

6" - 9" diameter

Thickness Range:

.035", .060", 1/16", 1/8", and .125"

Abrasive Grain:

Zirconia Alumina / Aluminum Oxide, Aluminum Oxide, Silicon Carbide, Diamond

Shape:

Type 01/41 Straight

Machine Used:



CIRCULAR SAW



TIER:	BEST	BETTER	GOOD	GOOD	GOOD
TRADENAME:	DIALAST	CHARGER	GEMINI	METAL	MASONRY
SHAPE:	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41
ABRASIVE:	Diamond	Zirconia Alumina/ Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Silicon Carbide
MATERIAL:	STAINLESS	STEEL/METAL	STEEL/METAL	STEEL/METAL	MASONRY

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #
Type 01/41 – Circular Saw							
6 x .035 x 5/8	10,185	25		662528	09714		
6 x 1/16 x 5/8	10,185	25		662528	09718		
6-1/2 x .125 x DM-5/8	9,405	10				076607	89098
7 x 1/16 x 5/8	8,730	25		662529	05957		
7 x .060 x 7/8	8,600	1	701846	94055			
7 x 1/8 x DM-5/8	8,730	25				076607	89097
8 x 1/16 x 5/8	7,640	25		662530	17771 LL	662530	07025
	7,640	10				662530	17795
8 x 1/8 x DM-5/8	7,640	10				076607	89096
9 x .060 x 7/8	6,600	1	701846	94056			



DM Denotes Diamond Mount; 5/8" hole bushings included

CUT-OFF WHEEL DESCRIPTION CODES				
BLANK = All Purpose	FC = Free Cut	LL = Long Life	■ = Masonry	■ = Stainless
				■ = Steel / Metal

Chop Saw Reinforced Cut-off



A chop saw is a light, low-horsepower portable machine. Although very similar to a compound miter saw, it is designed for cutting denser materials, like metal bar, tubing or pipe. Chop saw cut-off wheels are designed specifically for this machine with finer grit, softer grades, and reinforcement layers that match the application.

- Applications:** Cutting small-diameter metal pieces, bar stock, metal pipe, tubing, decking, cable, drywall studs, and metal plate dimensioning
- Size Range:** 10" - 16" diameter
- Thickness Range:** 3/32" and 7/64"
- Abrasive Grain:** Zirconia Alumina / Aluminum Oxide Blend, Aluminum Oxide, and Diamond
- Shape:** Type 01/41 Straight
- Reinforcement Type:** Side reinforced, centrally reinforced
- Machine Used:**



Cross Reference Guide

	TOTAL PERFORMANCE			INITIAL PRICE			SPECIALTY	
	BETTER			GOOD			GOOD	
NORTON	BlueFire Free Cut	BlueFire Rapid Cut	BlueFire Long Life	Gemini Free Cut	Gemini Rapid Cut	Gemini Long Life	Stud Cutter	Gemini Aluminum
Brilliant	—	—	—	Super-G	Tube/Pipe	—	Drywall Stud	Aluminum
Bullard	ZA36T	—	—	TA36T A46T The Competitor	A36R The Competitor	A36R Ironmaster	A46T Studmaster	AL36R
Camel	—	—	ZA24-S	A36-P, WA36-P	—	A36-S	A30-R Mr. Stud	A30-N
Dewalt	—	—	XP	GP, Stainless Fabrication	—	—	Stud Cutting	—
Flexovit	—	—	—	A30R Fast Cut A30-Q Free Cut	—	A30S Long Life	A30T Drywall Stud	—
Makita	—	—	—	—	General Purpose	—	—	—
Pearl	SRT36	—	—	A36P Premium	A30P Silver Line	—	A46S Stud Cutting	—
Pferd	—	—	—	A 36 K SG CHOP	PSF CHOP	—	A 36 K SG-STUD	—
Sait	Saitech Steel Worker	Z-tech	—	EZ-Chop	EZ-Chop Attacker	Iron Worker	Stud King	Aluminum
Walter	—	—	—	—	A-30	A-30-HC+	—	A30-ALU

Application-to-Product Recommendation Guide

Wheel Type/Reinforcement

TYPE 01/41 STRAIGHT SIDE-REINFORCED CUT-OFF WHEEL

Side-reinforced wheels have two full layers of reinforcing and are designed for a fast cut and the most aggressive applications. All Purpose, Free Cut, and Long Life are side reinforced.



TYPE 01/41 STRAIGHT CENTRALLY-REINFORCED CUT-OFF WHEEL

Centrally-reinforced wheels have a single layer of reinforcing with exposed rough sides for free-cutting, non-binding applications where minimal burr and burn are the key requirements. Rapid Cut wheels are centrally reinforced.



How to Pick the Right Bond Type

DESCRIPTION CODE DEFINITIONS

BLANK = All Purpose	Where an excellent blend of cut rate and life is needed
FC = Free Cut	Used when fast, burn-free cutting is desired or when cutting pieces with larger cross sections
LL = Long Life	Where durability is needed due to severe application, and when cutting parts with small cross sections
RC = Rapid Cut	Where a free cutting, non-binding wheel is needed for burn-free and burr-free cuts
STUD = High-Performance	High-performance aluminum oxide/resin bond combination designed for cleaner cuts and longer life when cutting steel studs
ALU = Aluminum	Specially formulated bond for reduced loading/surface contamination when cutting aluminum/soft materials

Chop Saw Reinforced Cut-off

Designed for cutting steel, metal studs, stainless steel, non-ferrous materials, tile, brick, plastic and much more



DIALAST DIAMOND

- A combination of high-quality diamond and advanced brazed single-layer bonding technology for extra-long life versus conventional abrasives or other vacuum-brazed diamond tools
- Retains diamond grains and wheel shape for full life with low sparks, while keeping a continuous grinding depth for exceptional wheel life; less blade changes reduce downtime and labor costs
- Environmentally-friendly grinding for minimal dust, less clean-up and safer working conditions

Better choice for steel, stainless steel and all other ferrous metals



BLUEFIRE ZIRCONIA ALUMINA / A/O BLEND

- Durable, latest generation zirconia alumina and premium aluminum oxide abrasive blend outperforms competitive chop saw zirconia wheels by 20 percent
- Delivers twice the life and cut rate of aluminum oxide wheels on difficult to cut metals
- High performance resin bond is designed for free cut and long life

Good choice for all steel and ferrous metals as well as specialty applications in aluminum



GEMINI ALUMINUM OXIDE

- Durable, versatile aluminum oxide abrasive engineered for consistent performance and economical price on chop saw cut-off machine applications
- Abrasive and bond combination designed for smooth clean cut on low HP machines
- Good choice for consistent performance at an economical price


Good choice for drywall studs



METAL ALUMINUM OXIDE

- Quality aluminum oxide abrasive designed for cutting alloys, steels and ferrous metals including 400 series stainless, soft and hard carbon steels
- Designed with finer grit and softer grades, specifically for chop saw machines that typically have lower horsepower
- Constructed with full fiberglass reinforcing; Stud Cutter version designed specifically for cutting steel studs

Chop Saw Reinforced Cut-off

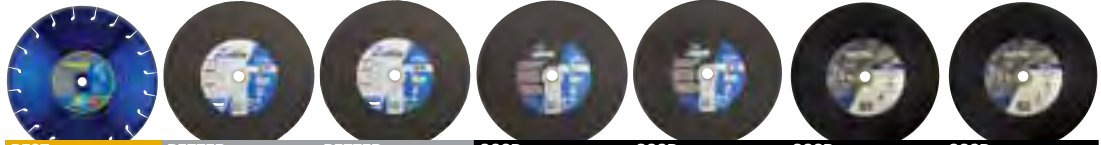

TIER:	BEST	BETTER	BETTER	GOOD	GOOD	GOOD	GOOD
TRADENAME:	DIALAST	BLUEFIRE	BLUEFIRE	GEMINI	GEMINI	METAL	METAL
SHAPE:	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41
ABRASIVE:	Diamond	Zirconia Alumina/ Aluminum Oxide	Zirconia Alumina/ Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide
REINFORCING:		Side	Central	Side	Central	Side	Central
MATERIAL:	STAINLESS	STAINLESS	STAINLESS	STAINLESS	STAINLESS	STAINLESS	STAINLESS
		STEEL/METAL	STEEL/METAL	STEEL/METAL	STEEL/METAL	STEEL/METAL	STEEL/METAL

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
Type 01/41 Straight Cut-off								
10 x 7/64 x 1	6,110	10				662531	06109 LL	
12 x 7/64 x 1	5,095	10	662528	43250		662532	07554 LL	662532 14561 RC
	5,095	5						076607 89400
14 x 3/32 x 1	4,365	10				662533	06627 FC	662533 13588 RC
	4,365	10						662528 35554
								076607 89405
								STUD
	4,365	5 V						076607 89399
14 x 7/64 x 1	4,365	10	662528	43252 FC	662528	43254 RC	662533	14816 ALU
	4,365	10	662528	43253 LL				
	4,365	25						076607 03970 5-Pk
14 x .155 x 1	5,400	1	701846	94053				
16 x 3/32 x 1	3,820	10				662534	10198 LL	
16 x 7/64 x 1	3,820	10	662528	43256 FC				
	3,820	10	662528	43257 LL				



V Vendible 2-wheel Package. Ideal for vending machinings and small jobs. 5 packs/carton. Order in multiples of 10.

CUT-OFF WHEEL DESCRIPTION CODES					
BLANK = All Purpose	ALU = Aluminum	FC = Free Cut	LL = Long Life	RC = Rapid Cut	STUD = Stud Cutter
■ = Masonry	■ = Stainless	■ = Steel / Metal			



High-Speed Reinforced Cut-off



Norton high-speed cut-off abrasive wheels provide the industry's leading performance in all high-speed gas and electric-powered applications.

Applications:

Metalworking: steel, stainless, ductile, cast iron, rail steel and metal decking
 Non-Metal Building Materials: concrete, brick, masonry, asphalt aggregate, stone and schedule 40 and 80 PVC pipe

Rescue and Demolition: steel, acrylic, fiberglass, rubber, glass, wood, concrete, brick and asphalt

Size Range:

12" – 16" diameter

Thickness Range:

1/8" and 5/32"

Abrasive Grain:

Aluminum Oxide, Silicon Carbide, Silicon Carbide / Aluminum Oxide Blend

Shape:

Type 01/41 Straight

Reinforcement:

Wheels are offered in standard two-layer reinforcement as well as three-layer reinforcement for higher-speed saws and heavy-duty applications.

Arbor:

Wheels are offered with patented universal arbor that accommodates both 20mm and all other machines with 1" arbors.

Machine Used:


HIGH-SPEED GAS
OR ELECTRIC SAW

Material / Application-to-Product Recommendation Guide


Icon		Application
	Metal	High-performance aluminum oxide grain wheels designed for general purpose cutting of all steel and stainless parts including rebar, steel pipe, structural steel, sheet metal, cable and small to medium diameter solid pieces.
	Metal Decking	High-performance aluminum oxide abrasive combined with a thicker wheel (5/32") that stands up to the sharp edges of sheet metal and roof decking.
	Ductile/Cast Iron	A special blend of silicon carbide abrasive for cutting and aluminum oxide abrasive for life, designed to cut ductile and cast iron pipe, concrete-lined water pipes, sewer construction and heavy duty PVC.
	Rescue	For ventilation, forcible entry, rescue and demolition. A versatile abrasive formula that can be used on a wide range of materials including all types of metals and masonry.
	Concrete	Coarse grit silicon carbide abrasive provides a low initial cost solution for cutting brick, block, concrete or other masonry materials. For higher-production applications that require optimum speed of cut and product life, please see our complete selection of high-speed diamond wheels in our Norton Construction diamond product line.
	Asphalt	A special blend of extra coarse silicon carbide abrasive grains provides a low initial cost solution for cutting asphalt, green concrete, asphalt over concrete, a wide range of aggregates and abrasive materials. For higher-production applications that require optimum speed of cut and product life, please see our Norton Construction diamond blade product offering in the Construction Product section of this catalog -and the complete offering in our "Diamond, Abrasives and Equipment for the Construction Market Catalog" #7719 found on www.nortonabrasives.com

Cross Reference Guide


NORTON	SPECIALTY				
	GOOD				
	Gemini Metal	Gemini Metal Decking	Gemini Ductile	Gemini Concrete	Gemini Asphalt
Abmast	A 24 R, Kompetitor Metal	A 24 T	AC 24 R, Kompetitor Ductile Iron	C 24 R, Kompetitor Concrete	C 16 T, Kompetitor Asphalt
Brilliant	Metal/Stainless	—	—	Concrete/Masonry	—
Bullard Blaze & Road Warrior	A24R, ZA24Q, The Competitor	TA24R	AC24R	C24R, The Competitor	CC20R
Camel	A24-R	A24-T	AC24-R	C24-R	C16-U
Flexovit	A24/30SB	A24TB	AC24SB	C30UB	C16UB
Husqvarna	Blue XHS, Blue QMS-CM, Blue EHS	Grey QMS-CM	Green QMS-CM, Green EHS	Red XHS, Red QHS-CM, Red EHS	Black QMS-AS
Pearl	SRT, Premium A36S, Silver Line A30R	—	AC30S	Premium C36S, Silver Line C24R	—
Pferd	A 24 R SG	A 24 Q SG-RAIL	AC 24 Q SG	C 24 R SG	—
Sait	A24R, A30S, XFC	Brute	Ductile	C24R	Big M.A.C, XFC
Tyrolit	A30P, A30BF	—	AC24, AC30BF	1C24, C30BF	—
Virginia Abrasives	Metal	—	Ductile	Concrete	Asphalt
Walter	A-24	—	—	—	—

High-Speed Reinforced Cut-off

How to Pick the Right Reinforcement



Two full layers of reinforcing are offered for lower power machines, and light-to-medium applications where speed of cut is the primary selection criterion.




Three full layers of reinforcing are recommended for high-speed, high-power machines where the application is heavy-duty, and durability is the primary selection criterion.



TIER:	GOOD	GOOD	GOOD	GOOD
TRADENAME:	GEMINI METAL HD	GEMINI METAL	GEMINI METAL DECKING	GEMINI RESCUE
SHAPE:	Type 01/41	Type 01/41	Type 01/41	Type 01/41
ABRASIVE:	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Silicon Carbide/ Aluminum Oxide Blend
REINFORCING:	3 Layers	2 Layers	2 Layers	2 Layers
MATERIAL:				

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #
Type 01/41 Cut-off – for Gas & Electric-Powered Saws						
12 x 1/8 x 1" / 20mm	6,300	10	662528 36708	662528 37838		
14 x 1/8 x 1" / 20mm	5,400	10	662528 35386	662528 37841		662435 78262
14 x 5/32 x 1" / 20mm	5,400	10			662528 32521	
16 x 1/8 x 1" / 20mm	4,800	10		662528 30886		

See additional Rail Cut wheels on the next page for larger-volume jobs.

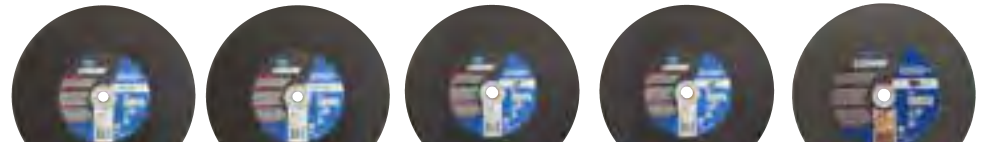

TIER:	GOOD	GOOD	GOOD	GOOD	GOOD
TRADENAME:	GEMINI DUCTILE HD	GEMINI DUCTILE	GEMINI CONCRETE HD	GEMINI CONCRETE	GEMINI ASPHALT
SHAPE:	Type 01/41	Type 01/41	Type 01/41	Type 01/41	Type 01/41
ABRASIVE:	Silicon Carbide / Aluminum Oxide Blend	Silicon Carbide / Aluminum Oxide Blend	Silicon Carbide	Silicon Carbide	Silicon Carbide
REINFORCING:	3 Layers	2 Layers	3 Layers	2 Layers	2 Layers
MATERIAL:					

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #
Type 01/41 Cut-off – for Gas & Electric-Powered Saws							
12 x 1/8 x 1" / 20mm	6,300	10		662528 37840		662528 37839	701846 70243
14 x 1/8 x 1" / 20mm	5,400	10	662528 35388	662528 37843	662528 35387	662528 37842	701846 72877
16 x 1/8 x 1" / 20mm	4,800	10				701846 23029	



Universal Arbor

Two Blade Sizes in One

Our Norton patented 1"/20mm knock-out arbor fits all gas and electric high-speed saws. A 20mm bushing is pre-mounted into the 1" molded arbor hole. The wheel, with the 20mm bushing, can be mounted directly on any 20mm arbor high-speed saw. With the bushing removed, exposing the 1" arbor hole, the wheel can be mounted on any 1" arbor high-speed saw. Combining this arbor, with heavy-duty triple reinforcing results in a higher performing, extra strong, longer lasting cutting wheel. Once the 20mm bushing is removed, it cannot be replaced.

Walk-Behind Reinforced Cut-off



These powerful, self-propelled machines are designed to cut concrete slabs and asphalt and are normally fitted with diamond blades. For inexperienced operators or small jobs, the machines can accommodate these low initial cost, conventional abrasives wheels.



- Applications:** Cutting straight sections of concrete surfaces
- Size Range:** 14" and 18" diameter
- Thickness Range:** 3/16" – 3/8"
- Abrasive Grain:** Silicon Carbide
- Bond:** Hot Pressed (HP) – for higher-horsepower machine applications where additional durability is needed, may be used wet or dry
Cold Pressed (CP) – for lower-horsepower machines, which need a free-cutting wheel
- Shape:** Type 01/41 Straight
- Arbor:** All are 1" with a drive pin
- Machine Used:**



FLAT SAW /
WALK-BEHIND SAW

Cross Reference Guide

NORTON	SPECIALTY		
	BETTER	GOOD	GOOD
	Gemini Asphalt / Green Concrete – HP	Gemini Asphalt - CP	Gemini Concrete - CP
Abmast	—	C 16 T. Kompetitor Asphalt/Concrete	C 24 R
Bullard Blaze & Road Warrior	—	C16R & T, C16R3	—
Camel	—	C16-U	C24-R
Flexovit	HPC16AG	C16 G.P. C16UB	C20SB/C16TB
Husqvarna	Red GC-7A	Black EWC	Gold RTC, Blue RTC, Blue EWC
Pearl	—	—	Premium C36S, Silver Line C24R
Pferd	—	C 24 R SG ASP	C 24 R SG GP
Sait	Street Runner	C16	C24R, Street Walker
Tyrolit	Concrete/Asphalt CHP	Asphalt CP	Concrete CP
Virginia Abrasives	—	GC/Asphalt	Concrete
Walter	—	—	C-24



TIER:	BETTER	GOOD	GOOD
TRADENAME:	GEMINI ASPHALT - HP	GEMINI ASPHALT - CP	GEMINI CONCRETE - CP
SHAPE:	Type 01/41	Type 01/41	Type 01/41
ABRASIVE:	Silicon Carbide	Silicon Carbide	Silicon Carbide
BOND:	Hot Pressed - Long Life	Cold Pressed - Free Cut	Cold Pressed - Free Cut

MATERIAL:



SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #
Type 01/41 Cut-off – For Walk-Behind Saws					
14 x 3/16 x 1 Pin Hole	4,365	10		701846 80324	701846 80323
14 x 1/4 x 1 Pin Hole	4,365	5			701846 70533
18 x 1/4 x 1 Pin Hole	4,250	5	701846 70103		

For higher-production applications, optimum speed of cut and product life, please see our diamond blade product offering for walk-behind saws in the Construction Product section of this catalog and the complete offering in our Diamond, Abrasives and Equipment for the Construction Market Catalog #7719 found on www.nortonabrasives.com.

Stationary Saw Reinforced Cut-off



The Norton stationary saw reinforced cut-off wheel line consists of Type 01/41 straight 10" - 24" wheels, designed to fit on fixed-base stationary saws that are free-standing or mounted on a workbench.

Applications:

Primary applications are cutting of all metal parts (flat stock, bars, studs, pipes, tubes, angle iron, cable), wire rope and hydraulic hose used in fabrication, construction and plant maintenance.

Size Range:

10" - 20" diameter

Thickness Range:

3/32", 1/8", 5/32", 3/16"

Abrasive Grain:

Zirconia Alumina / Aluminium Oxide Blend, Aluminum Oxide, Silicon Carbide

Shape:

Type 01/41 Straight

Machine Used:



STATIONARY SAW

Cross Reference Guide

NORTON	TOTAL PERFORMANCE				INITIAL PRICE	SPECIALITY
	BETTER	GOOD	GOOD	GOOD		
	BlueFire	Gemini Free Cut	Gemini Long Life	Gemini Rapid Cut*	Norton Masonry	Foundry Cut**
Abmast	Z 24 R3	A 30 R	—	—	—	AC 24 R3
Brilliant	—	GP Fast Cut	GPX Long Life	XL , XLX	—	—
Bullard	—	A30-R	A30-T	A300	C20R	—
Camel	ZA24-R	A24-R, A46-T	—	—	C24-R	WA24-S
Flexovit	—	A30RB Multi Purpose	A30SB Long Life, A24TB Long Life	—	C24RB	AC24PB Heavy Duty
Metabo	—	A30N, A30R	A30S, A30V	—	C30S	—
Pearl	SRT36	A30P Premium, A30Q Silver Line	A30S Premium, A36R Premium	—	C24 Silver Line	—
Pferd	ZA 24 Q/R SG-HD	A 24 N/P SG-HD	A 24 Q/S SG-HD	—	C 24 0 SG	—
Sait	—	A24N, A36R	A24R	—	C24R	—
Tyrolit	—	A30BF	—	—	C30BF	—
Walter	—	A-24-FC	A-24-RIP	—	—	—

* For Burr-Free applications, please see centrally-reinforced BlueFire Rapid Cut and Gemini Rapid Cut wheels in Chop Saw cut-off wheel section or at www.nortonabrasives.com


** For Foundry and other cut-off wheels, please refer to that section of this Norton Full Line Catalog #7362 or at www.nortonabrasives.com



SIZE (D x T x H)	MAX. RPM	STD. PKG.	TIER: BETTER	GOOD	GOOD	GOOD
			TRADENAME: BLUEFIRE	GEMINI FREE CUT	GEMINI LONG LIFE	MASONRY
			SHAPE: Type 01/41	Type 01/41	Type 01/41	Type 01/41
			ABRASIVE: Zirconia Alumina/Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Silicon Carbide
			MATERIAL: STAINLESS	STAINLESS	STAINLESS	MASONRY
			STEEL/METAL	STEEL/METAL	STEEL/METAL	
SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #
Type 01/41 Straight Cut-Off						
10 x 3/32 x 5/8	6,110	10	662528 43248	662531 06101 FC	662531 06102 LL	
	6,110	5				076607 89391
12 x 1/8 x 1	5,095	10	662528 43249		662532 07548 LL	
	5,095	5				
14 x 1/8 x 1	4,365	10	662528 43251	662533 06609 FC	662533 06611 LL	
	4,365	5				
16 x 5/32 x 1	3,820	10	662528 43255	662534 10183 FC	662534 10184 LL	
18 x 5/32 x 1	3,015	10		662534 10185 FC		
20 x 5/32 x 1	2,710	5	662528 43258 FC	690786 09031 FC	690786 09032 LL	
	2,710	5	662528 43259 LL			
20 x 3/16 x 1	2,710	5		690786 09033 FC	690786 09034 LL	

CUT-OFF WHEEL DESCRIPTION CODES

BLANK = All Purpose FC = Free Cut LL = Long Life ■ = Masonry ■ = Stainless ■ = Steel / Metal

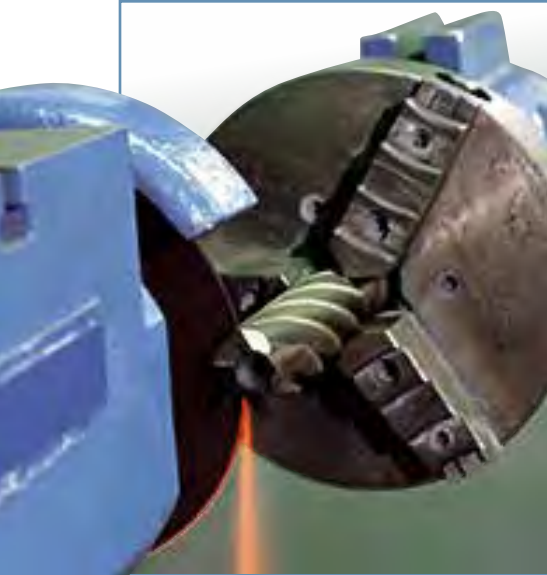

Reinforced and non-reinforced engineered cut-off wheels for cutting all types of tool steel with fixed-based cut-off machines.

Applications:

Reinforced cut-off wheels are designed to resist breakage caused by severe cross-bending and are required on any operation where the work is not securely clamped.

Non-Reinforced cut-off wheels are designed for use on fixed-based machines where the work is securely clamped, guarded, and where the wheel operates on a controlled cutting plane.

Size range:

6" – 12" diameter

Grit range:

36 – 90 grit

Abrasive grain:

Aluminum Oxide

Bond:

Resinoid, Rubber, and Shellac

Shape:

Type 01/41 Straight

Cross Reference Guide

NORTON	BETTER		
	Reinforced A60-QBNA2	Reinforced 57A364-TB25N	Non-Reinforced 57A60-M8B
Bates	A602-T-BF	A36-R-BF	-
Buffalo	A60-R-BF2	-	-
Dia. Tool	A80-SP	A46-SP	-
Radiac	A54-N6-B20	-	A54-N6-B20
Tyrolit	A60-QBF38A2	-	-

TECH TIP

- Smooth side pattern – Used when a precise thickness tolerance is needed
- Rough (R) side pattern – Abrasive particles protrude from sides of wheel

Troubleshooting Guide

PROBLEM	POSSIBLE CAUSES	SUGGESTED CORRECTION
Poor cut rate	Insufficient power used	Increase feed or pressure to full power
	Wheel too hard	Use softer grade, or thinner wheel
	Contact area too large	Reduce contact area
	Wheel too coarse	Use finer grit
	Wheel side out of truth	Check spindle runout
Non-square cuts	Work not clamped properly	Check clamp and clean to remove swarf
	Misaligned spindle bearings	Check for bearing truth and alignment
	Poor coolant distribution	Ensure equal volume of coolant to each wheel side
	Wheel is too hard	Use softer acting wheel: softer grade, or finer grit
Workpiece burn	Insufficient feed rate	Work machine to maximum power available
	Poor coolant flow	Increase volume and direct at cutting point
	Wheel is too coarse	Use finer grit or more machine power
	Wheel is too hard	Use softer grade wheel
	Wheel is running out	Check spindle and flanges
Poor finish	Wheel speed is too slow	Ensure tight flanges and maximum safe operating speed being used
	Too much burr	Use finer grit, or softer grade
	Wheel too coarse	Use finer grit

TECH TIP

- Wheels with a "W" reinforcement (reinforcement around the hole) are not considered to be truly reinforced.
- Clamp or fixture the workpiece for straightest cuts.
- Run wheels at the highest possible speed marked on the wheel and make cuts as quickly as possible. Do not overspeed wheels.
- It is recommended that a cut-off machine should have 1 horsepower for every inch of wheel diameter. For less than this, we recommend using a softer specification.
- Using a harder grade wheel increases wheel life, but it also increases burn, power required and decreases cut rate.
- Using a coarser grit wheel increases wheel life and cut rate, but it also increases burr and power required.

Better choice for cutting tool steel on fixed-based machines when work is not securely clamped



TOOLROOM REINFORCED ALUMINUM OXIDE

- Tough, versatile aluminum oxide grain for toolroom cut-off applications
- Constructed with full diameter fiberglass reinforcement on each side of wheel, to provide greatest possible resistance to side pressure and bending
- OBNA2 full side reinforced, resin bond; yields maximum cut rate and minimum kerf loss; ideal when thin cut is desired
- B25N full side reinforced, resin bond; versatile; durable, free cutting; offer greatest stiffness

SIZE (D x T x H)	MAX. RPM	STD. PKG.	TIER: BETTER		PART #
			SPEC.		
Type O1/41 Straight Cut-off – Reinforced					
6 x .035 x 1/2	10,190	25	A60-OBNA2		662528 35053
6 x .035 x 1-1/4	10,190	25	A60-OBNA2		662528 35055
6 x .060 x 1/2	10,190	25	A60-OBNA2		662528 35164
6 x .060 x 1/2	10,190	25	57A364-TB25N		662528 22969
6 x .060 x 1-1/4	10,190	25	A60-OBNA2		662528 35165
7 x .035 x 1/2	8,730	25	A60-OBNA2		662529 38786
7 x .035 x 1-1/4	8,730	25	A60-OBNA2		662529 38788
7 x .060 x 1/2	8,730	25	A60-OBNA2		662529 38816
7 x .060 x 1-1/4	8,730	25	A60-OBNA2		662529 38796
7 x .060 x 1-1/4	8,730	25	57A364-TB25N		662529 22676

SIZE (D x T x H)	MAX. RPM	STD. PKG.	TIER: BETTER		PART #
			SPEC.		
Type O1/41 Straight Cut-off – Reinforced					
8 x .035 x 1/2	7,640	25	A60-OBNA2		662530 43014
8 x .035 x 1-1/4	7,640	25	A60-OBNA2		662530 42980
8 x .060 x 1/2	7,640	25	A60-OBNA2		662530 43009
8 x .060 x 1-1/4	7,640	25	A60-OBNA2		662530 42983
8 x .060 x 1-1/4	7,640	25	57A364-TB25N		662530 22705
10 x .060 x 5/8	6,110	25	A60-OBNA2		662531 49317
10 x .060 x 1-1/4	6,110	25	A60-OBNA2		662531 49186
12 x .060 x 1	5,095	10	A60-OBNA2		662532 61811
12 x .075 x 1	5,095	10	A60-OBNA2		662532 61910
12 x .075 x 1-1/4	5,095	10	A60-OBNA2		662532 61858

Better choice for cutting tool steel on fixed-based machines when the work is securely clamped



TOOLROOM NON-REINFORCED ALUMINUM OXIDE

- Tough, durable and versatile aluminum oxide grain for toolroom cut-off applications
- Non-reinforced, use on fixed-based machines where the work is securely clamped
- B bond (smooth sides); a mild acting resin bond for light cut-off applications
- B25 bond (smooth sides); a versatile, free-cutting, more durable resin bond; ideal for dry cutting metal in high production runs
- E7 bond (smooth sides); a shellac bond with very mild cutting action, recommended for highly critical applications where no burr, heat checks, or discoloration is permitted
- R30 bond (smooth sides); mild acting rubber bond primarily for wet, ultra-thin cutting

SIZE (D x T x H)	MAX. RPM	STD. PKG.	TIER: BETTER		PART #
			SPEC.		
Type O1/41 Straight Cut-off – Non-Reinforced					
6 x .015 x 1-1/4	6,370	25	57A90-ROR30		662528 22953
6 x .020 x 1-1/4	6,370	25	57A90-ROR30		662528 22954
6 x .035 x 1-1/4	6,370	25	57A60-M8B		662528 22958
6 x .060 x 1/2	7,640	25	57A541-RB25		662528 22970
6 x .060 x 1-1/4	7,640	25	57A60-M8B		662528 22975
7 x .035 x 1-1/4	5,460	25	57A60-M8B		662529 22983
			57A60-O8B		662529 22986
			57A60-Q8B		662529 22987
7 x .035 x 1-1/4	5,460	25	57A601-PB25		662529 22988
			57A601-RB25		662529 22989
7 x .035 x 1-1/4	5,185	25	57A60-OE7		662529 22985
			23A601-PB25		662529 38701
7 x .050 x 1-1/4	5,460	25	23A601-PB25		662529 38724*
7 x .060 x 1/2	6,550	25	57A60-O8B		662529 22672

*Exception: rough sides

SIZE (D x T x H)	MAX. RPM	STD. PKG.	TIER: BETTER		PART #
			SPEC.		
Type O1/41 Straight Cut-off – Non-Reinforced					
7 x .060 x 1-1/4	6,550	25	57A46-M8B		662529 22677
			57A60-M8B		662529 22681
			57A60-O8B		662529 22684
			57A60-OE7		662529 22683
7 x .090 x 1-1/4	6,550	25	57A60-M8B		662529 22690
7 x .125 x 1-1/4	6,550	25	57A60-M8B		662529 22692
8 x .035 x 1-1/4	4,775	25	57A60-N8B		662530 22694
8 x .060 x 1/2	5,730	25	57A60-M8B		662530 22702
8 x .060 x 1-1/4	5,730	25	57A60-M8B		662530 22708
8 x .060 x 1-1/4	4,540	25	57A60-OE7		662530 22709
10 x .060 x 5/8	4,585	25	57A46-Q8BW		662531 22816
			57A60-M8BW		662531 22818
10 x .090 x 5/8	4,585	25	57A60-M8BW		662531 22824

Metallurgical Non-Reinforced Cut-off



The Norton metallurgical line of Type 01/41 straight cut-off wheels was developed specifically for sectioning off metal samples; burr-free cutting, minimal burn and distortion.

Applications:

Designed specifically for cutting off metal samples ranging from mild steel to super alloys on fixed-based machinery by scientists, engineers, and lab technicians.

Size range:

9" – 13.75" diameter

Cross Reference Guide

SIZE	MATERIAL CUT	NORTON		BUEHLER		LECO		STRUERS	
		SPEC.	PART #	METABRASE PART #	BUEHLERMET II PART #	PART #	PART #	PART #	AXITOM/-5 PART #
9 x .063 x 1-1/4 (229mm x 1.6mm x 32mm)	Very Hard Steels (Rc 55 - 68)	ML-109	662531 17874	10-4110-010					60A24*
	Medium Steels (Rc 30 - 40)	ML-309	662531 17877	10-4116-010	10-5112-010	811-043-010			40A24*
	Soft Steels (Rc 20 - 30)	ML-409	662531 17828	10-4120-010	10-5116-010	811-049-010			30A24*
10 x .063 x 1-1/4 (254mm x 1.6mm x 32mm)	Very Hard Steels (Rc 55 - 68)	ML-110	662531 17879	10-4210-010		808-673	812-231		60A25•
	Hard Steels (Rc 40 - 55)	ML-210	662531 17880	10-4212-010	10-5210-010	811-059-010	810-310-010		54A25•
	Medium Steels (Rc 30 - 40)	ML-310	662531 17881	10-4216-010	10-5212-010	811-067-010	810-310-010		40A25•
	Soft Steels (Rc 20 - 30)	ML-410	662531 17830	10-4220-010	10-5216-010	811-073-010			30A25•
12 x .078 x 1-1/4 (305mm x 2.0mm x 32mm)	Very Hard Steels (Rc 55 - 68)	ML-112	662533 22151	10-4410-010		808-674	811-065-010		60A30†
	Hard Steels (Rc 40 - 55)	ML-212	662533 22152	10-4412-010	10-5410-010	811-081-010	810-311-010		50A30†
13.75 x .098 x 1-1/4 (350mm x 2.5mm x 32mm)	Very Hard Steels (Rc 55 - 68)	ML-114	662533 22863	10-4310-010		808-675	812-232		60A35▲ 50A35
	Hard Steels (Rc 40 - 55)	ML-214	662533 22156	10-4312-010	10-5310-010	809-346	811-977-010		50A35▲ 40A35

*Discotom/Labotom • Discotom-5/-6/Labotom-3 † Unitom/Discotom-50/-60/-65 ▲ Exotom/Unitom-2/-5/-50

Best choice for wet use when you want burn-free cuts and ultra-clean samples



METLAB 38A ALUMINUM OXIDE

- Quality aluminum oxide abrasive wheel designed specifically for burr-free cutting of soft carbon steels, tool steels, super alloys for microscopic metal analysis
- Superior bond system generates pure cuts for sectioning off samples while minimizing wheel wear and odor
- Designed to work on Buehler®, LECO® and Struers® machinery

SIZE (D x T x H)	MAX. RPM	STD. PKG.	PRODUCT #	APPLICATION	TIER: BEST PART #
Type 01/41 Straight Cut-off – Non-Reinforced					
9 x .063 x 1-1/4 (229mm x 1.6mm x 32mm)	4,025	10	ML-109	Very Hard Steels (Rc 55 - 68)	662531 17874
	4,025	10	ML-309	Medium Steels (Rc 30 - 40)	662531 17877
	5,085	10	ML-409	Soft Steels (Rc 20 - 30)	662531 17828
10 x .063 x 1-1/4 (254mm x 1.6mm x 32mm)	3,500	10	ML-110	Very Hard Steels (Rc 55 - 68)	662531 17879
	3,500	10	ML-210	Hard Steels (Rc 40 - 55)	662531 17880
	3,500	10	ML-310	Medium Steels (Rc 30 - 40)	662531 17881
	4,585	10	ML-410	Soft Steels (Rc 20 - 30)	662531 17830
12 x .078 x 1-1/4 (305mm x 2.0mm x 32mm)	3,820	10	ML-112	Very Hard Steels (Rc 55 - 68)	662533 22151
	3,820	10	ML-212	Hard Steels (Rc 40 - 55)	662533 22152
13.75 x .098 x 1-1/4 (350mm x 2.5mm x 32mm)	2,770	10	ML-114	Very Hard Steels (Rc 55 - 68)	662533 22863
	2,770	10	ML-214	Hard Steels (Rc 40 - 55)	662533 22156

SIZE (D x T x H)	MAX. RPM	STD. PKG.	SPEC.	PART #
Type 01/41 Straight Cut-off – Non-Reinforced				
10 x 1/16 x 1-1/4	4,585	5	88A901-HB82 Metlab	662531 49449
12 x 1/16 x 1-1/4	3,820	5	88A901-HB82 Metlab	662532 62172



The Norton RailCut line is designed for high-speed fixtured hydraulic or gas-powered rail saws.

- Applications:** Fixed rail track cutting
- Size range:** 14" and 16" diameter
- Thickness range:** 1/8"
- Grit range:** 14 – 16
- Abrasive grain:** Zirconia Alumina / Aluminum Oxide Blend, Zirconia Alumina, and Aluminum Oxide
- Shape:** Type 01/41 Straight
- Reinforcement:** Side reinforced with R (rough) sides
- Speed rating:** All wheels are rated for 20,000 SFPM applications
- Machines Used:**



FIXTURED HYDRAULIC OR
GAS-POWERED RAIL SAW

Cross Reference Guide and Machine-to-Product Recommendation Guide

	BEST	BETTER	GOOD	GOOD
NORTON	RailCut X	RailCut NorZon III	RailCut A30X	RailCut Metal
Bullard Abrasive	Trackmaster Pro ZA24 Q-BF (Blue)	Trackmaster Pro ZA24 Q-BF (Blue)	Trackmaster A30 R-BF (Red)	—
DiaTool	—	—	—	RailMaster Rail Cut 27
Flexovit USA	—	—	A30-PB	—
Giesmar	AM303-R	AM303-R	NR242-Q	NR242-Q
Klingspor	A 24 SX Special	A 24 SX Special	—	—
Portaco	A30 R-BF	A30 R-BF	—	—
Racine Kwik Kut	A24R	A24R	—	—

	BEST	BETTER	GOOD	GOOD	GOOD
	RailCut X	RailCut NorZon III	RailCut NorZon III FastCut	RailCut A30X	RailCut Metal
HYDRAULIC SAW	◆	—	—	◆	◆
GAS SAW	—	—	—	—	—
High-Horsepower / Newer Machine	◆	◆	—	◆	◆
Low-Horsepower / Older Machine	◆	◆	◆	◆	◆



Best choice for high-performance cutting of rails on applications where the hydraulic or gas saw is fixtured and has adequate power

RAILCUT X ZIRCONIA ALUMINA / A/O BLEND

- Highest-performance zirconia alumina and engineered aluminum oxide abrasive blend expertly cuts a broad range of rail material
- Rough sides enable fastest cutting and longest lasting wheels
- Achieve highest productivity with lowest total abrasive costs



Good choice for price-sensitive jobs with lowest initial price

RAILCUT METAL ALUMINUM OXIDE

- Quality aluminum oxide abrasive wheels designed for jobs where low initial price is a key purchasing criterion
- Side reinforced with rough sides; rated for 20,000 SFPM applications
- Designed for multi-purpose use; great versatility on a variety of rail materials



TIER:	BEST	BETTER	BETTER	GOOD	GOOD
TRADENAME:	RAILCUT X	RAILCUT NORZON III	RAILCUT NORZON III FASTCUT	RAILCUT A30X	RAILCUT METAL
ABRASIVE:	Zirconia Alumina/ Aluminum Oxide Blend	Zirconia Alumina	Zirconia Alumina	Aluminum Oxide	Aluminum Oxide
SIZE (D x T x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #
Type 01/41 Cut-Off					
14 x 1/8 x 1	5,400	10	662533 37716	662533 60493	662533 63694
16 x 1/8 x 1	4,800	10	662533 35024	662534 64607	662532 59935
				662532 60462	662434 82068
				662532 59935	662434 82066



Foundry cut-off wheels are designed with abrasives, bonds and reinforcement types specific to foundry machine parameters and materials. Most of the specifications are non-stock. This stock listing is designed to provide popular size and starting specifications.

- Size Range:** Reinforced: 14" – 30" diameter; Non-reinforced: 12" – 20" diameter
- Grit Range:** 24 – 46 grit
- Abrasive Grain:** Ceramic Alumina (Norton Quantum; non-stock only), Zirconia Alumina, Aluminum Oxide
- Reinforcement:** Reinforced: Engineered with strengthening fabric or filaments, which make wheels resistant to cross-bending breakage. All portable cut-off, swingframe, locked-head push-through and foundry chop stroke operations require reinforced cut-off wheels.
- B:** One or more full diameter pieces of filament molded inside each wheel. This construction leaves the abrasive exposed on the side of the wheel, improving freeness of cut. Used for fixed work operations with low probability of side pressure.
- N:** Full diameter pieces of reinforcement on the side of the wheel. Offers greatest possible resistance to side pressure and bending.
- Non-Reinforced:** Designed for use on fixed-base types of machines where the work is securely clamped and guarded, and where the wheel operates on a controlled cutting plane.
- W:** Reinforcement around the center hole only. These wheels are not considered to be truly reinforced.
- Side Patterns:** Smooth sides: Used for precision cutting applications
 Rough (R) sides: Abrasive particles protrude from sides of wheel
 Used wet or dry on most metals


Material-to-Product Recommendation Guide

	BEST	BETTER	GOOD	GOOD
	Foundry X Quantum*	Foundry X BlueFire	Foundry X	Foundry Metal
INVESTMENT CAST ALLOYS				
Stainless Steel	◆	◆	◆	◆
Titanium	◆	◆	◆	◆
CAST IRON				
	◆	◆	◆	◆
CAST STEEL				
Carbon and Low Alloy	◆	◆	◆	◆
Stainless Steel and High Alloy	◆	◆	◆	◆
Aluminum Alloy	◆	◆	◆	◆
Copper Alloys, Brass, Bronze	◆	◆	◆	◆

*Foundry X Quantum wheels are non-stock, custom-made to your requirements

Cross Reference Guide

	TOTAL PERFORMANCE		INITIAL PRICE	
	BEST	BETTER	GOOD	GOOD
NORTON	Foundry X Quantum and B97 (Non-stock; custom-made to your exact requirements)	Foundry X BlueFire	Foundry X	Foundry Metal
Allison	TA362 R6 8045HA, YW462 MR B2HA	TA302-T6-B6HA, A46-T6-BX5T6A, HF 1247 K – CHALLENGER	—	Economiser
Avery	—	TA30-V680	A 3226 C7A, C11922 W071	92871H
Buckeye	—	Steel Shark	—	—
DiaTool	BV1734R 710	BV 1397-5284-C	—	—
Flexovit	—	ZAX30TB	A24PB, A30RB	—
Klingspor	20A24-QBF	—	—	—
NATAB	—	—	T 1584 HA	—
Rappold	—	6Z30U-B3F2	—	—



Better choice on stainless steel, aerospace alloys, cast iron, and steel

FOUNDRY X BLUEFIRE REINFORCED

- Next generation self-sharpening zirconia alumina abrasive provides fast cuts on foundry cut-off applications
- Improved durability and heat resistance result in longer abrasive life
- More aggressive; can withstand very demanding applications



Good choice on general purpose applications

FOUNDRY X ALUMINUM OXIDE

- Durable, versatile aluminum oxide abrasive engineered for consistent performance and economical price on foundry cut-off applications
- Advanced bond technology with improved thermal stability and mechanical strength
- Excellent value on stainless steel and exotic aerospace alloys




Good choice for price-sensitive jobs with lowest initial price

FOUNDRY METAL ALUMINUM OXIDE

- Great versatility from multi-purpose aluminum oxide abrasive formulated specifically for typical foundry applications
- Bond and reinforcement engineered to foundry market machine parameters and materials
- Good choice for small jobs and quick applications where performance is not measured

Reinforced

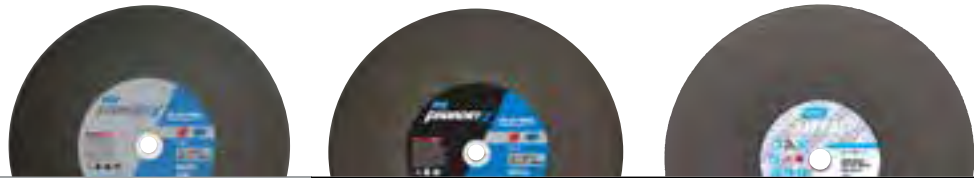

TIER:	BETTER	GOOD	GOOD
TRADENAME:	FOUNDRY X BLUEFIRE	FOUNDRY X	FOUNDRY METAL
ABRASIVE:	Zirconia Alumina / Aluminum Oxide	Aluminum Oxide	Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	STD. PKG.	SPEC.	PART #	SPEC.	PART #	SPEC.	PART #
Type 01/41 Straight Cut-off – Foundry Reinforced								
14 x 1/8 x 1	4,365	10	NV24-TB75N	662533 47674	U57A30-TB75N	662533 45779	Side Reinforced	662434 85918
	4,365	10	NV24-VB75N	662531 79193	U57A30-VB75N	662531 79191		
	4,365	10	NV24-YB97N	662533 47698				
16 x 5/32 x 1	3,820	10	NV24-TB75N	662533 47676	U57A30-TB75N	662533 45781	Side Reinforced	662434 85919
	3,820	10	NV24-VB75N	662531 79147	U57A30-VB75N	662531 79148		
	3,820	10	NV24-YB97N	662533 47693				
20 x 5/32 x 1	2,710	10	NV24-TB75N	662533 47683	U57A30-TB75N	662533 47546	Side Reinforced	662434 85920
	2,710	10	NV24-VB75N	662531 79363	U57A30-VB75N	662531 79364		
	2,710	10	NV24-YB97N	662533 47694	U57A30-YB97N	662533 47701		
20 x 3/16 x 1	2,710	10	NV24-TB75B	662533 47684	U57A30-TB75B	662533 47547	Centrally Reinforced	662434 85921
	2,710	10	NV24-VB75B	662531 79366	U57A30-VB75B	662531 79367		
	2,710	10	NV24-YB97B	662533 47699	U57A30-YB97B	662533 47702		
24 x 7/32 x 1-3/4	2,260	10	NV24-TB75B	662533 47685				
	2,260	10	NV24-VB75B	662531 79374	U57A30-VB75B	662531 79375		
	2,260	10	NV24-YB97B	662533 47697				
30 x 1/4 x 1-3/4	1,810	10	NV24-TB75B	662533 47722	U57A30-TB75B	662533 47720		
	1,810	10	NV24-YB97B	662533 47723	U57A30-YB97B	662533 47721		

Specifications ending in "B" are centrally reinforced; specifications ending in "N" are side reinforced.

Non-Reinforced



TIER:	BETTER	GOOD
TRADENAME:	U57A	GEMINI
ABRASIVE:	Aluminum Oxide	Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	STD. PKG.	SPEC	PART #	SPEC	PART #
Type 01/41 Straight Cut-off – Foundry Non-Reinforced R-Sides						
12 x 3/32 x 1	5,095	10	U57A461-PB25	662532 61887		
16 x 1/8 x 1	3,820	10			AP	662534 22942
20 x 1/8 x 1	2,710	10	U57A304-VB25W	690786 65497		

Ask your Norton representative about our custom, made-to-order Norton Foundry X Quantum ceramic alumina wheels for high alloys, stainless steel, and aerospace applications.

CUT-OFF WHEEL DESCRIPTION CODES

AP = All Purpose

Where a good blend of cut rate and life is needed



For consistent, quality performance in foundries, welding shops, fabrication facilities, steel mills and shipyards, Norton portable snagging wheels maximize your productivity. Used on horizontal/straight shaft grinders or right angle portable cup grinders.

- Applications:** Removing flaws, cracks, gates, risers and parting lines, smoothing weld seams, cleaning castings, and rough beveling
- Size Range:** Type 01 Straight Wheels: 2-1/2" – 8" diameter
Type 06 and 11 Cup Wheels: 4" – 6" diameter
Cones and Plugs: Type 16, 17, 17R, 18 and 18R
- Grit Range:** 14 – 24
- Abrasive Types:** Zirconia Alumina NZ and NV; Zirconia Alumina / Silicon Carbide Blend NVC; Aluminum Oxide 57A and Metal; Aluminum Oxide / Silicon Carbide Blend 57AC, Silicon Carbide 37C and Masonry

Machine Used:



Material-To-Product Recommendation Guide

	BEST	BETTER	GOOD	
	NorZon Plus	BlueFire	Gemini	Metal
IRON				
Gray	◆ NZ14-R	◆ NV16-Q	◆ 57A16-Q	◆
Ductile/Malleable	◆ NZ14-R	◆ NV16-Q	◆ 57A16-Q	◆
Dirty/Scale-covered		◆ NVC16-Q	◆ 57AC16-Q	
STEEL				
Carbon and Low Alloy	◆ NZ14-Q	◆	◆ 57A16-Q	◆
Stainless and High Alloy	◆ NZ14-P	◆	◆ 57A16-Q	◆
ALUMINUM, COPPER, BRASS, & BRONZE ALLOYS				
		◆ NVC16-Q	◆ 57AC16-Q	

NOTE: Grade, Grit and Abrasive tuning may be necessary to obtain optimum performance

Cross Reference Guide for Type 01, 06 and 11 Wheels

	TOTAL PERFORMANCE ←			→ INITIAL PRICE	
	BEST	BETTER	GOOD		
NORTON	NorZon Plus	BlueFire NV	Gemini 57A/Metal	Gemini 57AC	Gemini 37C/Masonry
Brilliant	—	ZA16QB	A16QB	—	C16QB
Bullard	—	ZA16PB	A16R	AC16	C16P
Camel	—	—	A	CA	C
Flexovit	ZA16PB	—	A16QB	AC16QB	C16PB
Gulf States	Zirconium	—	A16	—	C16
Pacific	Z, Z-GPC	—	A	CA	—
Pearl	—	—	A16Q	—	C16-Q
Pferd	ZA 16 Q SG	—	A 16 Q SG	—	C 16 Q SG
Sait	—	Z16	A16, 20	CA16	C16
Tyrolit	—	—	A16PB	—	C16PB
Walter	—	—	A	—	C

Best choice for heavy-duty stock removal on medium- and high-horsepower grinders



NORZON PLUS ZIRCONIA ALUMINA

- Tough, durable, premium zirconia alumina grain provides 10X life and 50% faster grinding versus aluminum oxide products
- Engineered to excel on the toughest foundry snagging applications
- Best performance on a wide variety of materials; 300 and 400 series stainless, soft and hard carbon steels, tool steels, titanium, super alloys, soft metals, and cast, ductile and gray iron

Better choice for stock removal on high- and medium-horsepower grinders



BLUEFIRE ZIRCONIA ALUMINA

- Friable zirconia alumina grain and durable resin bond technologies deliver sharper grain longer, for extended wheel life, higher metal removal rates, and faster, freer cutting action than standard zirconia alumina blends
- Ideal for foundry snagging, tool sharpening, portable grinding and stock removal applications on high- and medium-horsepower grinders
- Strong operator preference for these smooth-acting wheels that require less pressure and exertion, while improving productivity
- NVC – zirconia alumina / silicon carbide blend is highly effective on dirty, scale-covered castings
- Available with low odor bond to help reduce odors associated with portable grinding when used in confined spaces

Good choice for steel and ferrous metals as well as specialty applications in aluminum and foundries



GEMINI ALUMINUM OXIDE

- Tough, durable aluminum oxide abrasive for heavy-duty work including foundry snagging, tool sharpening, and stock removal
- Work well with a variety of machines, horsepower, and operations
- Good general-purpose choice for numerous small jobs
- Available with low odor bond to help reduce odors associated with portable grinding when used in confined spaces

Good choice for steel/ferrous metal applications with low initial price



METAL ALUMINUM OXIDE

- Tough, durable aluminum oxide abrasive for heavy-duty work including foundry snagging, tool sharpening, and stock removal
- Work well with a variety of machines, horsepower, and operations
- Good general-purpose choice for numerous small jobs on 300 and 400 series stainless, soft and hard carbon steels, tool steels, titanium, super alloys, soft metals, and cast, ductile and gray iron

Good choice for masonry applications with low initial price



MASONRY ALUMINUM OXIDE

- Sharp silicon carbide abrasive for small-volume snagging jobs
- Delivers rapid stock removal in small areas on a portable cup grinder
- Versatile; good starting specification where initial price is a primary purchasing consideration, especially nonferrous and masonry



TIER:	BEST	BETTER	GOOD	GOOD
TRADENAME:	NORZON PLUS	BLUEFIRE	GEMINI	METAL/MASONRY
SHAPE:	Type 01 and 11	Type 01, 06, and 11	Type 01 and 11	Type 11
ABRASIVE:	Premium Zirconia Alumina	Zirconia Alumina NV Zirconia Alumina/ Silicon Carbide NVC	Aluminum Oxide 57A, Silicon Carbide 37C, Aluminum Oxide/ Silicon Carbide 57AC	Metal – Aluminum Oxide Masonry – Silicon Carbide

SIZE (D x T x H)	MAX. RPM	STD. PKG.	SPEC	PART #	SPEC	PART #	SPEC	PART #	SPEC	PART #
Type 01 Straight										
2-1/2 x 1/2 x 3/8	21,700	20					57A24-R	662435 22381		
3 x 1/4 x 3/8	20,370	25			NV20-T	662533 43872*	57A24-T	662435 28831		
3 x 3/8 x 3/8	18,080	10					57A24-R	662435 22415		
3 x 1/2 x 3/8	18,080	10					57A24-P	662435 22417		
4 x 1/4 x 3/8	15,280	10			NV20-T	662533 44098	57A24-R	662435 22221		
6 x 1 x 5/8	8,000	5			NV14-R	662531 98589	57A16-QS	662528 09563		
S Webs	8,000	5			NZ III 14-Q	662528 38075				
	8,000	5			NZ III 14-R	662528 37961				
8 x 3/4 x 5/8	6,000	10			NV14-S	662533 44347				
S Webs										
8 x 1 x 5/8	6,000	5	NZ IV 16-Q	662530 30778	NV16-Q	662531 98590				
S Webs	6,000	5	NZ IV 16-Q	662530 44532						
	6,000	10			NV14-R	662533 44355				
	6,000	10			NV14-T	662533 44365				
	6,000	10			NVC16-Q	662531 98592				
Type 06 Straight Cup										
6 x 2 x 5/8-11	6,000	5			NZ III 16-R	662528 38577				
Rim 2" Back 3/4"										
Type 11 Flaring Cup										
4/3 x 2 x 5/8-11	9,070	10	NZ IV 16-Q	662435 30761	NV16-Q	662531 98583	57A16-Q	662435 10512	Masonry C16-Q	076607 89431
Rim 3/4" Back 3/4"										
5/3-3/4 x 2 x 5/8-11	7,260	5			NV16-Q	662531 46918	57A16-Q	662528 09598	Metal 16-Q	076607 89430
Rim 1" Back 3/4"	7,260	5			4NZ16-Q RB	690786 40233	57AC16-Q RB	690786 40234		
6/4-3/4 x 2 x 5/8-11	6,000	5			NV16-Q	662531 46925	57A16-Q	662528 25201		
Rim 1" Back 3/4"	6,000	5			NZ III 16-Q	662528 38568				
6/4-3/4 x 2 x 5/8-11	6,000	5	NZ IV 16-P	662528 30765	NV14-R	662533 44371	37C16-P	662528 09609		
Rim 1-1/2" Back 3/4"	6,000	5			NV16-Q	662531 98584	57A16-Q	662528 09618		
	6,000	5			NVC16-Q	662531 46922	57AC16-Q	662528 09608		
	6,000	5			4NZ16-Q RB	690786 40484	9CA16-Q RB Ti	690786 40488		
							57AC16-Q RB	690786 40485		
Type 11 Flaring Cup with Steel Back										
4/3 x 2 x 5/8-11	9,070	10			NV16-Q	662531 46917				
Rim 3/4" Back 3/4"										
5/3-13/16 x 2 x 5/8-11	7,260	10			NV16-Q	662531 46920				
Rim 1" Back 3/4"										
6/4-13/16 x 2 x 5/8-11	6,000	5			NV14-R	662533 44373	57A16-Q	662528 09599		
Rim 1-1/2" Back 3/4"	6,000	5			NV16-Q	662531 98586	57AC16-Q	662528 09600		
	6,000	5			NVC16-Q	662531 46929	57AC16-Q RB	690786 40486		
	6,000	5			4NZ16-Q RB	690786 40487	9CA16-Q RB Ti	690786 40489		

* Std. Pkg. = 50

RB = Low odor bond. Note: Ti formulation optimized for grinding Titanium

TECH TIP

Norton BlueFire and Gemini Type 11 cup wheels now available in new RB low odor bond to help reduce odors associated with portable grinding when used in confined spaces.



TIER:	BEST	BETTER	GOOD	GOOD
TRADENAME:	NORZON PLUS	BLUEFIRE	GEMINI	METAL
ABRASIVE:	Zirconia Alumina	Zirconia Alumina/Aluminum Oxide	Aluminum Oxide	Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	STD. PKG.	SPEC	PART #	SPEC	PART #	SPEC	PART #	SPEC	PART #
Type 16 Cones										
1 x 3 x 3/8-24 (ME 107019)	36,290	10			NV20-S	662533 44376	57A24-R	614636 22342	Metal 24	662533 49752
1-1/2 x 2-1/2 x 3/8-24 (ME 44436)	24,190	10					57A24-R	614636 22349	Metal 24	662533 49754
1-1/2 x 2-1/2 x 5/8-11 ME 171651	24,190	10					57A24-R	690786 40166	Metal 20	690786 40046
1-1/2 x 3 x 3/8-24 (ME 139029)	24,190	10			NV20-S	662533 44377				
1-1/2 x 3 x 3/8-24 (ME 171652)	24,190	10							Metal 20	690786 40215
1-1/2 x 3 x 5/8-11 (ME 70535)	24,190	10	NZ IV 20-R	614636 44231	NV20-S	662533 44379	57A24-R	614636 22190	Metal 24	662533 49757
1-3/4 x 3 x 3/8-24 (ME49226)	20,735	10					57A24-R	614636 14503	Metal 24	662533 49840
1-3/4 x 3 x 5/8-11 (ME 33432)	20,740	10					57A24-R	614636 22195	Metal 24	662533 49841
2 x 3 x 3/8-24 ME 157287	18,145	10							Metal 24	662534 76413
2 x 3 x 5/8-11 (ME 28229)	18,145	10	NZ IV 20-R	614636 44232	NV20-S	662533 44381	57A24-R	614636 22218	Metal 24	662533 49846
2-3/4 x 3-1/2 x 5/8-11 (ME 18265)	13,195	10			NV20-S	662533 44383	57A24-R	614636 22387	Metal 24	662533 49855
3 x 3 x 5/8-11 (ME70537)	12,100	10							Metal 24	662434 96885
Type 17 Cones, Square Tip										
1-1/2 / 1/2 x 3 x 3/8-24	24,190	10					57A24-R	614636 22194	Metal 24	662533 49753
1-1/2 / 1/2 x 3 x 5/8-11	24,190	10					57A24-R	690786 40225	Metal 20	690786 40224
2 / 1/2 x 3 x 5/8-11	18,145	10					57A24-R	614636 15722	Metal 24	662533 49845
Type 17R Cones, Round Tip										
2 / 3/4 x 3 x 5/8-11 (ME 151373)	18,145	10			NV20-S	662533 44384				
Type 18 Plugs, Square Tip										
1-1/2 x 2-1/2 x 3/8-24	24,190	10					57A24-R	614636 22217	Metal 24	662533 49755
	24,190	1 V					57A24-R	662533 25902		
1-1/2 x 2-1/2 x 5/8-11	24,190	10	NZ IV 20-R	614636 44224	NV20-S	662533 44385	57A24-R	614636 22351	Metal 20	690786 40226
	24,190	1 V					57A24-R	662533 25905		
1-1/2 x 3 x 5/8-11	24,190	10			NV20-S	662533 44386	57A24-R	614636 22191	Metal 24	662533 49838
	24,190	1 V					57A24-R	662533 25909		
2 x 3 x 5/8-11	18,145	10	NZ IV 20-R	614636 44234	NV20-S	662533 44387	57A24-R	614636 22219	Metal 24	662533 49847
	18,145	10			NV24-S	662533 44391				
2 x 4 x 5/8-11	18,145	10					57A24-R	614636 22366	Metal 24	662533 49850
Type 18R Plugs, Round Tip										
1-1/2 x 2-1/2 x 3/8-24	24,190	10					57A24-R	690786 40230	Metal 20	690786 40229
1-1/2 x 2-1/2 x 5/8-11	24,190	10					57A24-R	690786 40228	Metal 20	690786 40227
1-1/2 x 3 x 3/8-24	24,190	10					57A24-R	614636 22192	Metal 24	662533 49756
1-1/2 x 3 x 5/8-11	24,190	10							Metal 24	662434 95628
2 x 3 x 5/8-11	18,145	10			NV20-S	662533 44389	57A24-R	614636 22220	Metal 24	662533 49849
3 x 3 x 3/8-24	12,095	10					57A24-R	690786 40232		
3 x 3 x 5/8-11	12,095	10							Metal 20	690786 40231

V = Vendible Package. Ideal for vending machines and small jobs.

Core Files

These files consist of coarse grit silicon carbide abrasive in a hard grade, resin-bonded to a reinforcing rod. Half-round in shape, they are a frequent choice for easy cleaning of rough castings.



TIER:	GOOD
ABRASIVE:	Silicon Carbide

SIZE (T x W x L)	STD. PKG.	SPEC.	PART #
Stock Resinoid Core Files – Silicon Carbide			
1/2 x 1 x 10	5	37C24-SB	614636 10314

Floorstand and Swingframe Snagging



Norton snagging wheels maximize your productivity in foundries, welding shops, fabrication facilities, steel mills, and ship yards.

- Applications:** Removing unwanted metal on castings, removing flaws and cracks, removing gates, risers and parting lines
- Size Range:** 24" and 30" diameters in stock; other diameters available as made-to-order
- Abrasive Grain:** Zirconia Alumina, Zirconia Alumina/Silicon Carbide blend, Aluminum Oxide
- Shape:** Type 01 Straight
- Reinforcement:** Strong fiberglass webbing and steel rings for maximum strength

Floorstand Snagging Wheel Material-to-Product Recommendation Guide

	BEST					BETTER		GOOD
	4ZF1434-R5B38S	4ZF1434-Q5B38S	4NZ1434-R5B38S	4NZ1434-Q5B38S	ZI/25-R	ZI/26-Q	Charger	Gemini All Purpose
IRON								
Gray	◆				◆	◆	◆ Long Life	◆
Ductile/Malleable		◆			◆	◆	◆ Long Life	◆
STEEL								
Carbon and Low Alloy			◆				◆ Free Cut	◆
Stainless and High Alloy				◆			◆ Free Cut	◆

Note: Grade, Grit and Abrasive tuning may be necessary to obtain optimum performance

Swingframe Snagging Wheel Material-to-Product Recommendation Guide

	BEST				GOOD	
	4ZF1234-R5B38S	4ZF1434-R5B38S	NZC142-R5B38S	ZI/25-R	ZI/26-Q	Gemini All Purpose
IRON						
Gray		◆			◆	◆
Ductile/Malleable		◆			◆	◆
STEEL						
Carbon and Low Alloy			◆			◆
Stainless and High Alloy						◆
ALUMINUM ALLOY						
COPPER ALLOYS / BRASS / BRONZE						

Note: Grade, Grit and Abrasive tuning may be necessary to obtain optimum performance

Troubleshooting Guide

PROBLEM	POSSIBLE CAUSES	SUGGESTED CORRECTION
Poor stock removal	Insufficient pressure applied	Increase pressure to use all available power
	Wheel too coarse or hard	Use finer grit and/or softer grade wheel
	Inadequate abrasive	Try NorZon, 4ZF, or ZI/25 specification
Grinding costs too high	Wheel acting too soft	Use harder and/or coarser wheel
	Low performance specification	Try NorZon or ZI products
Wheel loading or glazing	Grade too hard	Try softer grade
	Grit too coarse	Try finer grit
	Dirty, scale-covered parts	Try NZC wheels
Wheels "dusty"	Wheel too soft	Try harder grade
Wheel doesn't hold corner or wheel spalling	Wheel too coarse	Use finer grit and/or 2 grit combination
	Wheel too soft	Use harder grade
Burning the workpiece	Wheel too hard	Use softer grade
	Wheel glazed or loaded	Dress the wheel face
	Grinding pressure too low	Increase grinding force
	Grinding pressure too high	Reduce grinding force
Surface finish too rough	Wheel too coarse	Try finer grit or try ZI/26 specification
	Wheel speed too slow	Try higher speed machine (Do not exceed maximum operating speed of wheel)
	Worn machine bearings	Rebuild machine
Vibration	Wheel worn out of round	Try truing the wheel
	Faulty flanges	Check flanges for flatness and burrs (see ANSI B7.1)
	Bent machine spindle	Check spindle run-out
	Worn machine bearings	Rebuild machine
Wheel stalls or slows	Grinding force too high	Reduce pressure or contact area
	Wheel too hard	Use softer grade wheel
	Machine power too low	Replace machine with higher power grinder

Best choice for demanding applications

4ZF, 4NZ, ZI, AND NZC ZIRCONIA ALUMINA

- Zirconia alumina abrasive engineered for high-pressure, heavy duty, snagging operations including foundry snagging and stock removal
- These wheels have high-speed steel rings with fine centers and reinforcing webs for added safety
- 4ZF – zirconia alumina grain for exceptional wheel life; engineered for high-pressure, heavy-duty, snagging operations, particularly on iron
- 4NZ – zirconia alumina grain for sharpness and an exceptionally high cut rate; developed for low- to medium-pressure operations, especially on steel and steel castings; the most operator-friendly wheels
- ZI – zirconia alumina grain stays sharper, longer, making it the choice for iron castings: ZI/25 for tough metal removal, ZI/26 for finer surface finish
- NZC – zirconia alumina and silicon carbide blend is ideal for dirty, scale-covered castings

Better choice for strong performance to price ratio

CHARGER ZIRCONIA ALUMINA

- Strong, free-cutting aluminum oxide abrasive for foundry snagging and stock removal
- These wheels have high-speed steel rings with fine centers and reinforcing webs for added safety
- Good, general-purpose choice for heavy-duty stock removal on low- to medium-horsepower machines

Good choice for numerous small jobs

5ZF ZIRCONIA ALUMINA AND GEMINI ALUMINUM OXIDE

- These wheels have high-speed steel rings with fine centers and reinforcing webs for added safety
- Ideal for lower horsepower machines or low-pressure applications
- 5ZF - Versatile, good quality zirconia alumina abrasive for foundry snagging and stock removal
- Gemini – versatile aluminum oxide formulation works well with a variety of machines, horsepower, and operations

SIZE (D x T x H)	MAX. RPM	TIER: BEST			BETTER		GOOD	
		STD. PKG.	SPEC.	PART #	SPEC.	PART #	SPEC.	PART #
Type O1 Straight								
24 x 3 x 12	1,990	1	4ZF1234-R5B38S	690831 66310			5ZF14-QS	690831 66858
HS Steel Rings with Fine Centers, S Webs	1,990	1					Gemini All Purp.	690831 67173
30 x 2 x 12	1,595	1	4NZ1634-Q5B38S	692104 21412	Charger Free Cut	692104 21417	5ZF14-R	692104 67105
HS Steel Rings with Fine Centers, S Webs	1,595	1	4ZF1434-R5B38S	692104 66458	Charger Long Life	692104 21418	Gemini All Purp.	692104 17463
	1,595	1	4ZF1634-Q5B38S	692104 66460				
	1,595	1	ZI/25-R	662531 19636				
	1,595	1	ZI/26-Q	662531 19638				
	1,595	1	NZC142-R5B38S	692104 21414				

For your safety: all floorstand and swingframe wheels have strong fine centers, steel rings and high-strength fiberglass reinforcement construction.

TECH TIP

- Always ensure proper mounting of floorstand and swingframe wheels by mounting with arrow down as marked on wheel
- Always use safety guard
- Always run wheel for 1 minute before grinding
- For optimum performance, ensure adequate air pressure and air volume when using pneumatic machines
- Use constant surface foot per minute machines for highest efficiency
- Do not overdress the wheel face
- Avoid loading or glazing by changing the contact angle
- Use pressure assist whenever possible to obtain maximum cut rate



It is the user's responsibility to refer to and comply with ANSI B7.1

the brightest product
solutions from
**A TOTAL SPECTRUM
OF INNOVATION**

For everything from heavy-to-medium stock removal, to fine finishing, to light blending and polishing, abrasive products are available in many shapes, abrasive grains, specialty coatings and backing configurations to meet many application needs.

Coated Abrasives

A coated abrasive product is made up of three basic raw materials: an abrasive grain, the backing onto which the abrasive is applied, and an adhesive bond.

Abrasive Types

Emery (6)

Emery is a dark gray, round-shaped grain which tends to polish rather than abrade a work surface.


- For polishing and cleaning metal only



Garnet (5)

Garnet is reddish brown in color. This natural abrasive is medium hard and relatively sharp, but not as durable as synthetic abrasives.

- For use on wood only
- Particularly good for soft woods such as pine
- Produces an excellent finish



Silicon Carbide (4)

Silicon carbide is the hardest and sharpest of the manufactured abrasives. Because of its extreme sharpness, this bluish-black abrasive grain permits fast stock removal and cool cut.

- Cast iron
- Non-ferrous metals, i.e. brass, aluminum and bronze
- Non-metallics, i.e. glass, rubber, plastic and stone
- Final finish on wood and stainless steel
- Abrasive planing particleboard



Light Brown Aluminum Oxide (2)

Light brown aluminum oxide is a tough, yet sharp synthetic abrasive characterized by cool cut, long life and the ability to break down under pressure, producing new cutting edges.

- Production wood sanding
- Non-ferrous metal finishing



Brown Aluminum Oxide (2, 7)

Brown aluminum oxide is a tough, durable, synthetic abrasive characterized by the long life and wear resistance of its cutting edges. It offers enormous penetrating strength, even at high speeds.

- Ferrous metals
- Aluminum
- Hardwood



Heat-treated Aluminum Oxide (2)

Heat-treated aluminum oxide is a tough but cool cutting abrasive which gives both long life and freeness of cut on a wide range of materials.

- Ferrous metals
- Wood sanding



Zirconia Alumina (8)

Zirconia alumina is an ultra-tough, synthetic abrasive which provides a free, cool cut for high stock removal applications. It is tougher and sharper than aluminum oxide. It has a micro-crystalline structure which allows for controlled breakdown and self-sharpening.


- Heavy-duty snagging and grinding of all ferrous and non-ferrous metals
- Abrasive planing of wood, plywood and particleboard
- Grinding fiberglass, rubber and plastics



Ceramic Alumina (9)

The sub-micron structure of ceramic alumina allows each grain to continually expose sharp cutting points, resulting in a cooler cutting action and an extended life.

- All ferrous/non-ferrous metals, carbon steel and exotic alloys



Backing Types

Backings are the base for the abrasive minerals and, combined with the adhesive bond, support and anchor the abrasive mineral. The backings used in the manufacture of coated abrasives are:

Paper

Due to the fine surface of paper, a consistent finish is produced. Paper weights include *A, B, C, D, E* and *F* weights with *A* being the lightest and most flexible and *F* being the heaviest and least flexible. *A, B, C* and *D* weight papers are used for hand sanding and light mechanical operations in the form of sheets, PSA (pressure sensitive adhesive) and hook and loop discs and sheet rolls. *E* and *F* weight papers are primarily used for more aggressive mechanical operations in the form of belts and discs.

Cloth

Cloth backings used for coated abrasives are identified by weight. Cloth backings are filled or "finished" with a variety of materials (glues or resins) to create various backing characteristics, most notably flexibility. Several cloth types are used: cotton, polyester, polyester/nylon and polyester/cotton blends, and rayon.

There are three basic weights of cloth: J-weight or "jeans" is the lightest and most flexible. X-weight or "drills" is a heavier cloth that ranges in flexibility, strength and durability and is used on the broadest range of applications. Y-weight is a heavyweight drills cloth used on heavy-duty, high stock removal operations.

Fiber

Vulcanized fiber (cotton fibers which are chemically treated and then pressed under temperature and pressure to form a very durable backing) is used exclusively as the backing for resin fiber discs.

Film

Polyester film backing comes in 3 mil. and 5 mil. thicknesses, which have high strength and surface smoothness. They are used primarily in disc and roll applications requiring consistent surface finish, including powertrain applications.

Foam

Primarily used as backing for sponges, finer grit finishing discs, and buffing and polishing pads for cleaning and moist finishing applications.

Mesh

Mesh matrix backing comprised of thousands of tiny holes allowing for maximum dust extraction.

Bond Types

An adhesive bond system is required to secure the abrasive mineral to the backing. All coated abrasive products are made with a two stage bonding process, the *make coat* and the *size coat*.

The *make coat* is the first layer of bond applied to the backing. The make coat provides the adhesive base between the abrasive mineral and the backing.

The *size coat* is the second coat, which is applied over the abrasive mineral and make coat to anchor the abrasive mineral and provide the desired physical strength of the finished product.

Glue, urea resin, and phenolic resin are the three basic bonding agents most commonly used. There are many size coat and make coat combinations, such as *glue over glue, urea over glue, and resin over resin*. *Glue over glue* is the most flexible bond while *resin over resin* bond is moisture-resistant, harder, less flexible, heat-resistant and has superior grain retention.

Coating Types

There are two types of abrasive coatings used in the manufacturing of coated abrasives: *open coat* and *closed coat*.

Open Coat

With an open coat, 50% to 75% of the surface is covered by abrasive grain. There are evenly spaced voids between the particles of grain, helping reduce the effect of loading caused by wood dust or metal particles.



OPEN COAT
(1/3 LESS GRAIN THAN CLOSED)

Closed Coat

With a closed coat, the entire surface is covered with abrasive grain, with no voids between the particles. This is the most typical coating, permitting the greatest degree of stock removal and longest product life.




CLOSED COAT

Super Size Coating

The Super Size coat is an optional final coat and grinding aid applied over the size coat to help maintain low grinding temperatures and prevent loading.

How to Read a Coated Abrasive Specification

The Norton coated abrasive marking system includes both a generic and a technical marking, which identifies the actual components which make up the product. The markings identify the tradename, abrasive type, bond, backing, and any special features. An example would be: Norton Blaze R980P.

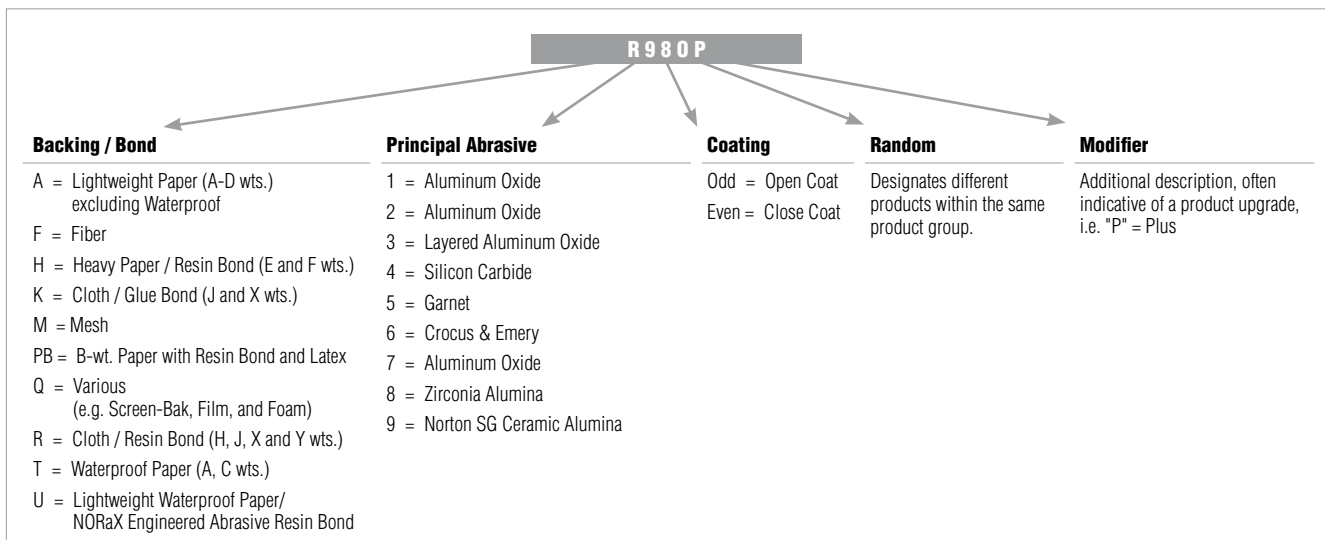

Coated Abrasive Grit Comparison Chart

AVERAGE PARTICLE SIZE IN MICRONS	GRADING SYSTEMS (OTHER THAN EMERY)			EMERY PRODUCTS
	ANSI	FEPA	JIS	
5.0	-	-	-	-
6.0	-	-	3000	-
6.5	1200	-	2500	4/0
8.4	-	P2500	-	-
8.5	-	-	2000	-
9.2	1000	-	-	3/0
10.3	-	P2000	-	-
10.5	-	-	1500	-
12.2	800	-	1200	-
12.6	-	P1500	-	-
15.0	-	-	-	-
15.3	-	P1200	1000	-
16.0	600	-	-	2/0
18.3	-	P1000	800	-
19.7	500	-	-	0
20.0	-	-	-	-
21.8	-	P800	-	-
23.6	400	-	600	-
25.0	-	-	-	-
25.75	-	P600	-	-
28.8	360	-	500	-
30.0	-	P500	-	-
35.0	-	P400	400	-
36.0	320	-	-	-
40.0	-	-	360	-
40.5	-	P360	-	-
44.0	280	-	-	1
45.0	-	-	-	-
46.2	-	P320	320	-
50.0	-	-	-	-
52.5	-	P280	280	-
53.5	240	-	-	-
55.0	-	-	-	-
58.5	-	P240	-	-
60.0	-	-	240	-
64.0	-	-	-	2
65.0	-	P220	220	-
66.0	220	-	-	-
78.0	180	P180	180	-
79.0	-	-	-	3
93.0	150	-	150	-
95.0	-	-	-	FINE
97.0	-	P150	-	-
116.0	120	-	120	-
127.0	-	P120	100	-
136.0	-	-	-	MEDIUM
141.0	100	-	-	-
156.0	-	P100	-	-
189.0	-	-	-	COARSE
192.0	80	-	80	-
197.0	-	P80	-	-
260.0	-	P60	-	-
268.0	60	-	60	-
326.0	-	P50	50	-
341.0	-	-	-	EX. COARSE
351.0	50	-	-	-
412.0	-	P40	40	-
428.0	40	-	-	-
524.0	-	P36	-	-
535.0	36	-	36	-
622.0	-	P30	-	-
638.0	30	-	30	-
715.0	24	-	-	-
740.0	-	P24	24	-
905.0	20	-	-	-
984.0	-	P20	20	-
1320.0	16	-	16	-
1324.0	-	P16	-	-
1764.0	-	P12	-	-
1842.0	12	-	-	-

Coated Abrasive Storage


Stored under proper conditions, coated abrasives will retain their efficiency and usefulness over long periods. Improper or inadequate storage can introduce problems of weakened bond, curl, brittleness, and breakage.

Temperature and humidity are the two most important climatic factors influencing coated abrasive performance. Backings and adhesives are sensitive to climatic changes and will gain or lose moisture according to the relative humidity of their surroundings.

Excessive humidity may cause a softening of some types of adhesive bonds so that the product quickly fills and clogs, or loses its grain during use. Excessive dryness may cause brittleness, reduced flexibility, and distortion of product shapes.

As moisture in the coated abrasive product increases or decreases, dimensional changes can occur. When the backing changes more than the adhesive bond, it causes cupping. High and low humidity can cause concave and convex cupping respectively.

The newer synthetic-backed belts are not affected by moisture. Broad temperature swings will not permanently harm these products either, but cold temperatures will cause a "cold set" condition. Consequently, these products should be allowed to come to room temperature before use.

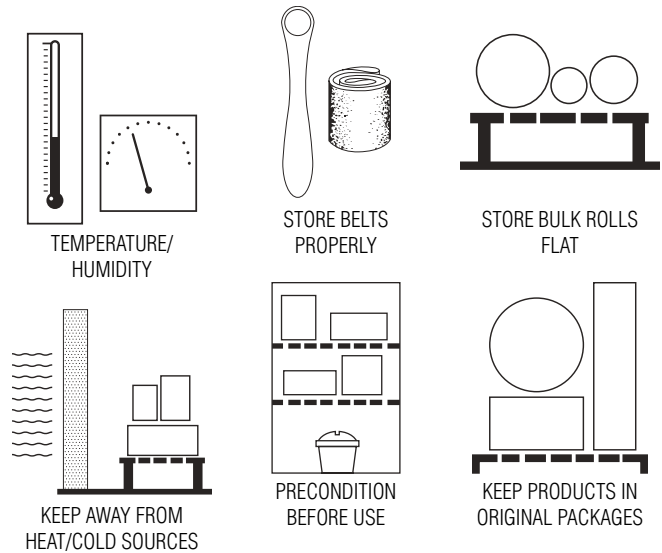

Storage Facilities

The ideal storage (stock) room for coated abrasives would be one in which all the walls are inside partitions, rather than the outside walls of the building.

- Constant levels of humidity and temperature should be maintained. Stockroom temperature should be 60-degrees to 80-degrees F and relative humidity between 35 and 50%.
- Cartons should be kept away from damp or cold walls and floors, where they might absorb moisture.
- Store coated abrasives away from heat sources – steam heated radiators, steam pipes, hot air inlets, heat ducts, or rooms near furnaces or ovens.
- Keep products in original packages. These packages facilitate handling and can be stacked in the most practical and convenient manner.
- Bulk rolls should not be allowed to stand on edge after they have been unpacked. Store flat on shelves or pallets.
- Narrow belts which have been removed from the carton should be rolled up and stored on edge on a clean shelf. Belts may be draped over a large cylinder, such as a gallon can, brake drum, or flanged hanger of the type used for a garden hose. Never hang a belt from a nail – the backing will crease and the abrasive belt might crack. Wide belts should be hung over a tube of at least 4" diameter. Center the belt joint over the tube and add a light weight (such as old packaging tubes) to the bottom loop of the belt to aid in removing set. Condition for 24 hours prior to use.
- For maximum product efficiency, precondition coated abrasive products in a chamber of controlled temperature and humidity before use.

Introduction


Most Norton Bear-Text products consist of a non-woven web of nylon fibers impregnated throughout with abrasive grain and bonded with synthetic resins. This design produces a cushioned, three-dimensional material that is extremely pliable and long lasting. The uniform dispersion of abrasive throughout the web provides a continuous supply of new grain as the old grain and fibers wear away during use.

Norton Bear-Text products, with their open mesh construction, are waterproof, washable, resilient, conformable, non-loading, non-conductive, non-metallic and non-rusting. Non-woven wheels are easily pre-formed to conform to special-shaped work pieces.

Since non-woven products are designed for use where stock removal is not required, they begin where other abrasives leave off. The relatively non-aggressive nature of nylon and grit inherent in the material makes it ideal as a finishing tool. While 60 to 80 grits are considered intermediate sizes in other products, they are considered coarse for non-woven items.

Used wet or dry, Norton Bear-Text non-woven products offer the following advantages: controlled cut (with little or no stock removal) allows for increased productivity, consistent, uniform finish, ability to automate operations, minimized smearing and reduced operator training. These advantages make our non-woven products an excellent alternative to bristle brushes, set-up wheels, greaseless compounds and steel wool.

Product Identification System

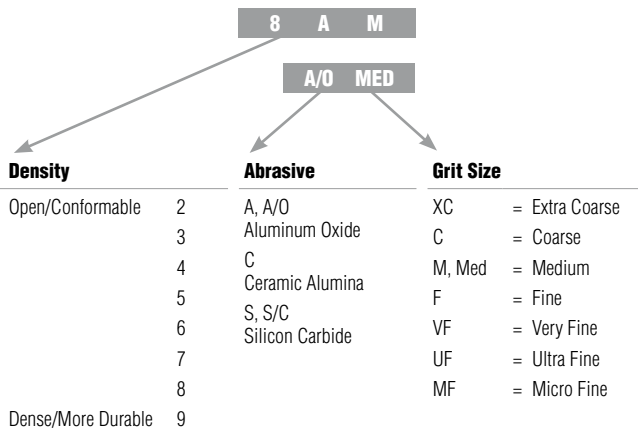

Abrasives

Ceramic alumina, silicon carbide and aluminum oxide abrasives are offered. Ceramic alumina cuts the fastest and is the most cost effective on large-volume applications. Silicon carbide is sharper, cuts faster than aluminum oxide, and produces finer scratch patterns on most surfaces. Aluminum oxide is more durable and tends to last longer. It causes less discoloration on aluminum, and is more aggressive on certain applications such as hardened steel parts. Norton Bear-Text hand pads are also available in a non-abrasive material.

Grits

Grit refers to the size of the abrasive grain impregnated into the nylon web. The coarser the grit, the more aggressive the cut, the rougher the finish. The finer the grit, the less aggressive the cut and the resulting surface finish will be finer, if all other conditions are equal.

GRIT DESIGNATIONS	GRIT SIZE
Extra Coarse (XC)	50
Coarse (C)	60 – 80
Medium (M)	100 – 150
Fine (F)	180 – 220
Very Fine (VF)	240 – 360
Super Fine (SF)	400
Ultra Fine (UF)	600
Micro Fine (MF)	800 – 1200

Densities

The product "density" refers to the number of fibers which have been compressed into the nylon web material. Under identical conditions, harder density wheels cut faster, last longer and produce finer finishes than softer density wheels. Softer density wheels offer greater conformability and have less tendency to load or burn the work piece.

Fiber Sizing

Several nylon fiber sizes are used in the manufacture of Norton Bear-Text and Merit web material because the fiber size is a significant factor in the coating process, as each produces distinct cutting characteristics.

Bonding Agents

Waterproof resins are used in the manufacture of Norton Bear-Text and Merit web material to bond the nylon fibers together and to firmly anchor the abrasive grains throughout the web.

Conventional Finishing Methods Versus Norton Bear-Text Non-Woven Products

The following chart outlines the advantages achievable when using our products as alternatives to other cleaning, blending, deburring and finishing methods. These products are listed in the sequence of normal preference for the application stated. However, because of the numerous variables, only testing can ensure selection of the most cost-effective product.

CONVENTIONAL FINISHING METHOD	KEY APPLICATION	NORTON/MERIT PRODUCT ALTERNATIVES	ADVANTAGES OF NORTON/MERIT PRODUCT VERSUS ALTERNATE FINISHING METHODS
Bristle Brushes	Cleaning	Rapid Strip, Convolute Wheels, and Rapid Prep Discs	Superior cleaning performance Higher productivity No slurry or compound required More consistent finish Eliminate compound dust
Greaseless Compounds	Finishing	Flap Wheels Convolute Wheels Unified Wheels Rapid Prep Discs	Reduced maintenance No compound, instant set-up Elimination of compound dust More uniform finish More consistent work rate
Set-up Wheels	Blending/ Deburring	Convolute Wheels Unified Wheels XHD Discs Rapid Prep Discs	No break-in time required More consistent cut More uniform finish Maintain geometry Safer, no flying wheel pieces
Steel Wool	Cleaning	Rolls Discs Hand Pads	Faster, longer life Less pressure required Non-rusting, cleaner Safer, no splinters

Getting the Most Out of Norton Bear-Tex Wheels

Maximum wheel life and best surface conditioning results can be achieved by closely adhering to the following recommendations.

1) Wheel Direction

Convolute, interleaf flap wheels, and conventional flap wheels must always run in the direction indicated by the arrow printed on the side of each wheel. Unified wheels can be run in either direction.

2) Wheel Speed

Wheel speed is an important factor in that it affects product finish, rate of cut, and wheel life. In general, fast wheel speeds give harder action and a finer finish; whereas, slower speeds give a softer action and a coarser finish for the same wheel density.

The following are recommended operating speeds for the most common applications.

APPLICATION	RECOMMENDED SPEED
Cleaning and upgrading of surface conditions	2200 to 6000 SFPM
Cut-buffing on metal surfaces	6500 to 8000 SFPM
Deburring	5500 to 8000 SFPM
Decorative finishing	500 to 3000 SFPM
Imparting decorative finishes	900 to 3000 SFPM
Oxide removal	3500 to 6500 SFPM

Testing might show that a slower or faster speed is desirable for specific operations. Never exceed the maximum RPM rating of the wheel.

3) Pressure

Light to medium pressure is recommended for most operations. Flap wheels require much lighter pressure to perform properly than other non-woven wheels; unified wheels can withstand much higher pressures in order to perform deburring jobs. In all cases, avoid excessive pressure which might result in wheel deformation and damage to the work surface.

4) Feed Speed

Low feed speed reduces the number of workpieces completed, while producing a shorter scratch pattern. Slow feed speed allows for longer dwell time and permits more work to be done on each piece. Conversely, a fast feed speed increases the number of workpieces completed, while producing a longer scratch pattern.

5) Oscillation

Oscillation may be used to break up scratch lines and produce a more uniform finish. Additionally, an increase in cut might be experienced.

A general starting point for oscillation is 3/8" amplitude at 200 cycles per minute.

6) Lubricants

Lubricants, such as water, water soluble oil, and straight oil, will decrease the heat generated while running, improve the luster, and reduce the surface finish. The higher the viscosity of the lubricant, the lower the surface finish (RMS value) produced.

Factors in Wheel Choice

This chart provides a relative comparison of other Norton Bear-Tex wheel variables. It can serve as a useful guide in choosing the most suitable product for a given application. However, as many other factors affect wheel performance, this chart can only be general in nature. The most cost-effective results can always be obtained by wheel testing on the application.

Factor	Direction	Product
1 Wheel Conformability	MOST CONFORMABLE (SOFT) ←	Flap Wheels, Clean & Finish, Metal Finishing
	→ LEAST CONFORMABLE (HARD)	Rapid Finish GP 7 Density, Rapid Finish GP 8 & 9 Density, Series 4000
2 Wheel Openness	← OPEN MESH	Clean & Finish, Metal Finishing
	→ CLOSED MESH	Rapid Finish GP 7 Density, Rapid Finish GP 8 & 9 Density, Series 4000
3 Wheel Aggressiveness	← MOST AGGRESSIVE	Metal Finishing
	→ LEAST AGGRESSIVE	Clean & Finish, Rapid Finish GP, Flap Wheels
4 Finishing Action	← COARSER	Metal Finishing, Clean & Finish
	→ FINER	Series 4000, Rapid Finish GP Series 4000, Flap Wheels
5 Pressure for Best Results	← LIGHTER	Flap Wheels, Clean & Finish
	→ HIGHER	Metal Finishing Rapid Finish GP 7 Density, Rapid Finish GP 8 & 9 Density, Series 4000

* On steel surfaces, silicon carbide wheels will produce a brighter finish than aluminum oxide wheels.

Surface Finish Variables


Changes in any one of many factors can affect the surface finish on the work piece. This chart shows the effect on surface finish by changes in single factors of product specifications. Arrows have been used to signify the trend direction. The arrow length does not signify that the effect of each factor is equal.

Variable Factor	Rough Finish High RMS Reading	Smooth Surface Lower RMS Reading
1 Grit Size	Coarse ←	→ Very Fine
2 Wheel Grade	Soft ←	→ Hard
3 Wheel Speed	Slow ←	→ Fast
4 Feed Speed	Faster (Long Scratch) ←	→ Slower (Short Scratch)
5 Oscillation	No Oscillation ←	→ Oscillation
6 Lubricants and Compounds	Dry ←	→ Straight Oil
	← Water	→ Soluble Oil
	← Compounds	→



The strongest of coated abrasive discs with resin-over-resin construction on heavy-duty fiber backing. Designed for applications ranging from heavy stock removal to surface blending. Used with back-up pads on portable angle grinders.

- Applications:** Stock removal, edge chamfering, weld blending, deburring/deflashing, rust removal, cleaning and finishing
- Size Range:** 4" x 5/8" hole, 4-1/2" – 9-1/8" x 7/8" and 5/8"-11 hole
- Grit Range:** 16 – 120
- Abrasive Grain:** Ceramic Alumina, Zirconia Alumina Blend, and Aluminum Oxide
- Product Options:** Conventional, Speed-Change hubs (5/8"-11), and AVOS technology
- Accessories:** Air-cooled, smooth-faced, and AVOS back-up pads
- Machines Used:**



Material-to-Product Recommendation Guide

	BEST		BETTER	GOOD	
	BlazeX F970	Blaze F980	BlueFire F826P	Gemini F726	Metal F240
Stainless Steel / Titanium / Super Alloys*		◆	◆	◆	◆
Mild Carbon Steel / Welds	◆		◆	◆	◆
Ferrous Metals / Cast Iron	◆		◆	◆	◆
Brass / Bronze / Aluminum				◆	◆

*Nickel/Cobalt Based – Hastelloy, Inconel, Waspalloy



Application/Grit Recommendation Guide

COARSER (GRINDING) ←										FINER (FINISHING) →									
16	24	30	36	40	50	60	80	100	120	16	24	30	36	40	50	60	80	100	120
Stock Removal				Edge Chamfering						Weld Blending									
Deburring/Deflashing						Rust Removal				Cleaning and Finishing									

Cross Reference Guide

	TOTAL PERFORMANCE ←				INITIAL PRICE →	
	BEST		BETTER	GOOD		
NORTON	BlazeX F970	Blaze F980	BlueFire F826P	Gemini F726	Metal F240	
3M	782C, 982C, 988C	785C, 787C, 985C, 987C	501C	381C	—	
Camel	—	Ceramic	Zirconia	A/O	—	
Flexovit	CG	CG+	ZA	A	—	
GemTex	PMD, Gem Supreme	PMD Supreme, PMD Supreme Plus	Zee-Type, Zee Supreme, Gem Supreme	C-Type	A-Type	
Hermes	—	CR456	RB414X, RB414X Procut	RB514J	RB314	
Klingspor	FS964 ACT	FS966	CS565, CS570	FS764 ACT	CS561	
Metabo	CER	CER	ZA	—	A/O	
Mirka	—	—	Blue, Gold	—	Red	
Pearl	Red Line	—	FZ	Premium A/O	Silver Line	
Pferd	CO-PMD	CO Cool	Z, Z Cool	A Cool	A	
United Abrasives/Sait	7S, 7A-S, 7-11	9S, 9-11	3Z, Z, AZX	3A	A/O, 2A	
SIA	4515, 4580	4515, 4560,	4815, 4819	4924	4919, 4961	
Standard	Ceramic	Ceramic Pro	Zirconia	—	A/O	
VSM	XF760	AF890, AF799, XF885, XF870, XF850	ZF713, ZF714, ZF844	KF808	KF708	
Walter	Walter Coolcut XX	Walter Coolcut XX	Walter Topcut	Walter Coolcut	—	
Weiler	—	Tiger Ceramic	Tiger Zirc, Wolverine Zirc	Tiger A/O	Wolverine A/O	



Best choice for carbon steel and other soft-to-grind materials

BLAZEX F970 CERAMIC ALUMINA


- Improved ceramic alumina micro-fracturing grain constantly exposes sharper grain edges to significantly increase cut rate and life over competitive blended/low-ratio ceramic alumina discs
- Heavier fiber backing for additional strength and tear resistance
- Non-supersized design for cool cutting and long life on carbon steel and other soft-to-grind materials



Best choice for stainless steel, titanium, and super alloys

BLAZE F980 CERAMIC ALUMINA

- 100% ceramic alumina micro-fracturing grain constantly exposes sharper grain edges to significantly increase cut rate and life over competitive blended/low-ratio ceramic alumina discs
- Self-lubricating grinding aid treatment delivers the coolest cut on stainless steel, high alloy steels, super alloys, titanium, and other difficult to grind materials
- Heavier fiber backing for additional strength and tear resistance

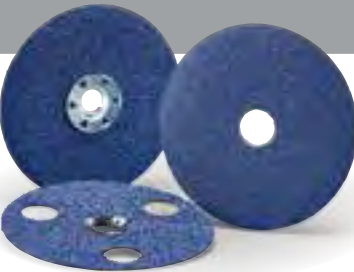

Better choice for stainless, super alloys, steel, cast iron and high-pressure applications

BLUEFIRE F826P ZIRCONIA ALUMINA

- High-performance zirconia alumina abrasive blend provides 15% faster cut and longer life with less power draw than conventional zirconia discs
- Advanced resin bond technology with enhanced grain adhesion for extended life
- Heavier fiber backing for additional strength and tear resistance



Good choice for carbon steel and aluminum applications

GEMINI F726 ALUMINUM OXIDE

- Premium aluminum oxide blend for aggressive cut and longer life than competitive aluminum oxide discs
- Full resin bond for strength and durability
- Heavier fiber backing for additional strength and tear resistance



Good choice for small jobs, applications where performance is not measured, and price-sensitive operations

METAL F240 ALUMINUM OXIDE

- Versatile, multi-purpose aluminum oxide abrasive provides consistent performance on numerous materials and small jobs
- Full resin bond for strength and durability
- Heavier fiber backing for additional strength and tear resistance; low initial price



TIER:	BEST	BEST	BETTER	GOOD	GOOD
TRADENAME:	BLAZEX F970	BLAZE F980	BLUEFIRE F826P	METAL F240	GEMINI F726
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Zirconia Alumina Blend	Aluminum Oxide	Aluminum Oxide
OTHER:		Supersize			

SIZE (D x H)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #	STD. PKG.	PART #
4 x 5/8	24	25				055395 10595	10	666233 95000
	36	25				055395 10594	10	666233 95001
	50	25					10	666233 95002
	60	25				055395 10592		
	80						10	666233 95004
4-1/2 x 7/8	24	25		699573 98000	662611 38457	666233 53309	10	666233 95007
	36	25	699573 70193	699573 98001	662611 38456	666233 53306	10	666233 95008
	36	50 V			666233 77276			
	50	25	699573 70194	699573 98002	662611 38454	666233 53310	10	666233 95009
	60	25	699573 70195	699573 98003	662611 38453	666233 53311	10	666233 95010
	60	50 V			666233 77278			
	80	25	699573 70196	699573 98004	662611 38452	666233 53312	10	666233 95011
	80	50 V			666233 77279			
	100	25				666233 53313	10	666233 95012
	120	25		662544 25332		666233 53314	10	666233 95013
5 x 7/8	16	25				055395 10684		
	24	25		699573 98005	662611 38563	666233 57276	10	666233 95016
	36	25	699573 70197	699573 98006	662611 38562	666233 57277	10	666233 95017
	36	50 V			666233 77283			
	50	25	699573 70198	699573 98007	662611 38561	666233 57278	10	666233 95018
	60	25	699573 70199	699573 98008	662611 38601	666233 57279	10	666233 95019
	80	25	699573 70200	699573 98009	662611 38600	666233 57280	10	666233 95020
	100	25				666233 57281	10	666233 95021
6 x 7/8	120	25		662544 09084		666233 57282	10	666233 95022
	24	25		662611 60033				
	36	25		662611 60034				
	50	25		662611 60035				
	80	25		662611 60037				
7 x 7/8	16	25				055395 10693		
	24	25		699573 98010	662611 38594	666233 57283	10	666233 95029
	36	25	699573 70201	699573 98011	662611 38593	666233 57284	10	666233 95030
	36	50 V			666233 77287			
	50	25	699573 70202	699573 98012	662611 38592	666233 57285	10	666233 95031
	60	25	699573 70203	699573 98013	662611 38591	666233 57286	10	666233 95032
	80	25	699573 70204	699573 98014	662611 38590	666233 57287	10	666233 95033
	100	25				666233 57288	10	666233 95034
	120	25		662544 11528		666233 57289	10	666233 95035
	9-1/8 x 7/8	24	25		699573 98015	662611 38584	055395 10702	10
36		25		699573 98016	662611 38583	055395 10701	10	666233 95037
50		25		699573 98017	662611 38582		10	666233 95038
60		25				055395 10699	10	666233 95039
80							10	666233 95040
100							10	666233 95041
120							10	666233 95042

Note: Fiber discs must be used with back-up pads shown on the last page of this section.
V = Vendible Package. Ideal for vending machines and small jobs. 10 discs/package.



Learn the best way to mount a fiber disc on a right angle grinder at <https://nortonsga.us/5sdjv>

Speed-Change Fiber Discs

These fiber discs feature Norton quick, tool-free, twist-on and -off Speed-Change fasteners. Discs lock to standard back-up pads with a unique nut design and are easily removed, increasing your productivity with more time to grind.



TIER:	BEST	BEST	BETTER	GOOD
TRADENAME:	BLAZEX F970	BLAZE F980	BLUEFIRE F826P	GEMINI F726
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Zirconia Alumina Blend	Aluminum Oxide
OTHER:		Supersize		

SIZE (D x H)	GRIT	STD. PKG.	PART #	PART #	PART #	STD. PKG.	PART #
4-1/2 x 5/8-11	24	25		662610 23269		10	776960 09702
	36	25	699573 70205	662611 85294		10	776960 09703
	50	25	699573 70206			10	776960 09704
	60	25	699573 70207	662610 42247			
	80	25	699573 70208	666233 28529		10	776960 09715
	120					10	776960 09723
5 x 5/8-11	24	25		662544 25336	662611 38797		
	36	25	699573 70209	662611 85801	662611 38796	10	666233 95014
	50	25	699573 70210				
	60	25	699573 70211	662611 85803		10	666233 95015
	80	25	699573 70212	666233 16697		10	776960 09728
7 x 5/8-11	24	25		699573 49782	662611 38819	10	666233 95023
	36	25	699573 70213	662610 29863	662611 38818	10	666233 95024
	50	25	699573 70214		662611 38817	10	666233 95025
	60	25	699573 70215	662610 42249	662611 38816		
	80	25	699573 70216	662544 74373		10	666233 95026
	100					10	666233 95027
120					10	666233 95028	

Note: Speed Change fiber discs must always be used with smooth face back-up pads, see next page for details.

Blaze Fiber Disc Test Kits NEW

- Each kit contains one box of 25 BlazeX F970 (36 grit) fiber discs and one box of 25 Blaze F980 (36 grit) fiber discs. Test them for yourself!



TIER:	BEST
TRADENAME:	BLAZEX F970 & BLAZE F980 TEST KITS
ABRASIVE:	Ceramic Alumina

SIZE	GRIT	STD. PKG.	PART #
4-1/2	36	1	776960 95018
5	36	1	776960 95019
7	36	1	776960 95020

AVOS Fiber Discs

- Patented, see-through design allows interrupted cut which reduces heat up to 30% over standard discs
- The scooped holes create air flow to pull swarf away from grinding zone; cool cutting and extended product life
- 15° back-up pad for full utilization of discs – no gouging
- Quick, tool-free, twist-on and -off Speed-Lok fasteners



TIER:	BEST	BETTER
BRAND:	Norton	Norton
TRADENAME:	BLAZE F980	BLUEFIRE F826P
ABRASIVE:	Ceramic Alumina	Zirconia Alumina Blend

SIZE	GRIT	STD. PKG.	PART #	PART #
4-1/2 Speed-Lok (3 hole)	24	10	662544 68389	662611 29718
	36	10	662544 68390	662611 29719
	50	10	662544 68391	662611 29720
	60	10	662544 68392	662611 29721
	80	10	662544 68393	662611 29722
5 Speed-Lok (3 hole)	24	10	662544 68385	662611 26556
	36	10	662544 68386	662611 26557
	50	10	662544 68387	662611 26558
	60	10	662544 68388	662611 26559
7 Speed-Lok (6 hole)	24	10	662544 68381	662611 37454
	36	10	662544 68382	662611 37455
	50	10	662544 68383	662611 37456
	60	10	662544 68384	
	80	10		662611 37458

Note: AVOS fiber discs must be used with AVOS Speed-Lok back-up pads, see next page for details.



Fiber Disc Accessories



- Fiber Disc Baling Unit**
- Places 100 discs on a spindle between two plates
 - Locks down with a pinch screw
 - Maintains the shape of the discs by maintaining pressure to minimize curl
 - User-friendly and reusable



- Air-Cooled Standard Back-up Pad**
- Slotted hub design and curved ribs draw heat away from the grinding zone, reducing disc loading and increasing life. All pads have a 5/8"-11 threaded female hub for mounting. We also offer a no-nose pad for shorter-shafted right angle grinders.



- Smooth Face Speed-Change Back-up Pad**
- Molded rubber back-up pads with a smooth face.
- Hard density pads are for aggressive cutting action
 - Medium density pads are for all-purpose applications



- AVOS Fiber Disc Back-up Pad**
- Patented, see-through design allows interrupted cut which reduces heat up to 30% over standard discs
 - The scooped holes create air flow to pull swarf away from grinding zone
 - 15° back-up pad for full utilization of discs – no gouging
 - Quick, tool-free, twist-on and -off Speed-Lok fasteners

DESCRIPTION	MAX. RPM	STD. PKG.	PART #
Fiber Disc Baling Unit			
5"	—	1	776960 01065
7"	—	1	776960 01066
Rubber Back-up Pads			
Air-Cooled Standard for 7/8 Hole Fiber and Non-Woven Discs			
4" Medium	12,000	5	636425 04918
4-1/2" Medium	11,000	5	636425 02122
5" Medium	10,000	5	636425 43421
7" Hard	8,600	5	636425 43425
7" Medium	8,600	5	636425 43422
9" Hard	6,600	5	636425 43426
9" Medium	6,600	5	636425 43423
<i>Note: Retainer nuts are not included with back-up pads. These must be ordered separately.</i>			
Air-Cooled No-Nose			
4-1/2" Medium	11,000	5	636425 04872
5" Medium	10,000	5	636425 03000
Smooth Face for Fiber and Non-Woven Speed-Change Discs			
4-1/2" Medium	20,000	5	662544 92277
5" Medium	12,000	5	636425 43235
7" Hard	8,600	5	636425 43240
7" Medium	8,600	5	636425 43245
7" Soft	8,600	5	636425 43250
9" Medium	7,000	5	636425 43270
AVOS Speed-Lok Back-up Pads			
AVOS Triangular Speed-Lok Back-up Pads			
4-1/2" x 5/8-11	13,000	5	636425 02985
5" x 3/8-24 Pistol Grip*	20,000	5	636425 03029
5" x 5/8-11	13,000	5	636425 02517
5" x 5/8-11 Thicker	13,000	5	636425 02517
5" x 7/16-20 Pistol Grip*	20,000	5	636425 03030
<i>*Use on air pneumatic and high-speed pistol grip sanders</i>			
AVOS Round Speed-Lok Back-up Pads			
7" x 5/8-11 Hard	8,600	5	636425 04873
Tools			
#103 Retainer Nut	—	10	636425 43463
Spanner Wrench	—	5	636425 43005
66NS Short Retainer Nut	—	10	636425 43461

All fiber disc back-up pads are packed in individual boxes within the shipping carton. Each box can be used in a vending machine.



Corner Store Convenience – Right on the Floor

Industry's best selection of vendible abrasive solutions

See the many popular products conveniently pre-packed in small quantity packages

- Perfect for vending machines, pegboards, new test orders, small orders and jobs, and carrying cleanly to job site
- Available in fiber, flap, paper, and quick-change discs, belts, hand pads, depressed center, cut-off and bench wheels, mounted points, cones and plugs, and sharpening stones



Flap discs are versatile grinding and finishing tools having four main components: abrasive flaps, flap density (how the flaps are stacked), backing plate shape (flat or conical), backing plate material (fiberglass or plastic). All flap discs have flaps that are overlapped and glued to the backing plate. The flaps wear during use, exposing new abrasive grain. The different variations of the components above provide a variety of application choices ranging from heavy stock removal to blending to finishing. Flap discs are designed for portable grinder applications and can be the preferred choice over depressed center wheels or fiber discs.

- Applications:** Grinding, stock removal, edge chamfering/beveling, weld blending, deburring/deflashing, rust removal, blending, cleaning and finishing
- Size Range:** 4" : 5/8" hole
4-1/2" - 7" : 5/8"-11 discard mount, 7/8" hole, and 2" - 3" quick-change
- Grit Range:** 24 - 120
- Abrasive Grain:** Ceramic Alumina, Zirconia Alumina, and Aluminum Oxide
- Abrasive Flaps:** Polyester, Cotton/Poly Blend
- Flap Disc Shape:** Type 27 Flat and Type 29 Conical
- Abrasive Flap Density:** Standard or high
- Backing Plate Material:** Fiberglass and plastic
- Machine Used:** RIGHT ANGLE GRINDER

Flap Disc Shapes

Type 27 Flat – The Best Choice for Finishing

- Used primarily on flat surfaces
- The best choice for blending and smooth finishing

GRIND AT FLATTER ANGLES:
0° – 15°

Type 29 Conical – The Best Choice for Aggressive Stock Removal

- Conical flap discs have angled flaps and may be used on both contoured and edge work
- The angle provides greater surface contact for stock removal on flat surfaces
- The best choice when speed and stock removal are primary considerations

GRIND AT STEEPER ANGLES:
15° – 25°

Abrasive Flap Densities

Standard Density


- Excellent for heavy-duty applications and rapid stock removal

High Density

- Ideal when working on uneven or curved surfaces, as well as finer grit blending

Backing Plate Materials

All flap discs are a combination of abrasive flaps adhered to a rigid backing plate. It is the backing plate that provides stability during operation. There are two main materials used: fiberglass and plastic. The fiberglass backing plate, along with the flap shape, helps to absorb vibration and is consumed during use with no smearing. Fiberglass is the most popular material because of its high strength and light weight. The plastic backing plate offers some additional conformability and is trimmable.



Why Choose Flap Discs?

Flap discs replace both grinding wheels and fiber discs. The same flap disc can be used for applications ranging from stock removal to blending.

Flap Discs vs. Grinding Wheels

- Faster stock removal
- Smoother finish, no gouging
- Cooler cutting, less glazing
- Lightweight, easier to control
- Less vibration, less operator fatigue
- Reduced noise


Flap Discs vs. Fiber Discs

- 20X longer life, reduced abrasive cost
- Fewer disc changes, reduced labor cost
- More consistent finish
- No back-up pad required
- Easier storage, no curling
- Reduced loading
- Use flap discs one grit size coarser than fiber discs, except in 36 grit

Material-to-Product Recommendation Guide

	BEST	BETTER	GOOD	
	Blaze R980P	BlueFire R884P	Gemini R766	Metal R828
TYPE 29 FOR STOCK REMOVAL				
Stainless Steel / Titanium / Super Alloys	◆	◆	◆	◆
Mild Carbon Steel / Welds		◆	◆	◆
Ferrous Metals / Cast Iron		◆	◆	◆
Brass / Bronze / Aluminum		◆		
TYPE 27 FOR BLENDING AND FINISHING				
Stainless Steel / Titanium / Super Alloys	◆	◆	◆	◆
Mild Carbon Steel / Welds		◆	◆	◆
Ferrous Metals / Cast Iron		◆	◆	◆
Brass / Bronze / Aluminum		◆	◆	◆

Application/Grit Recommendation Guide

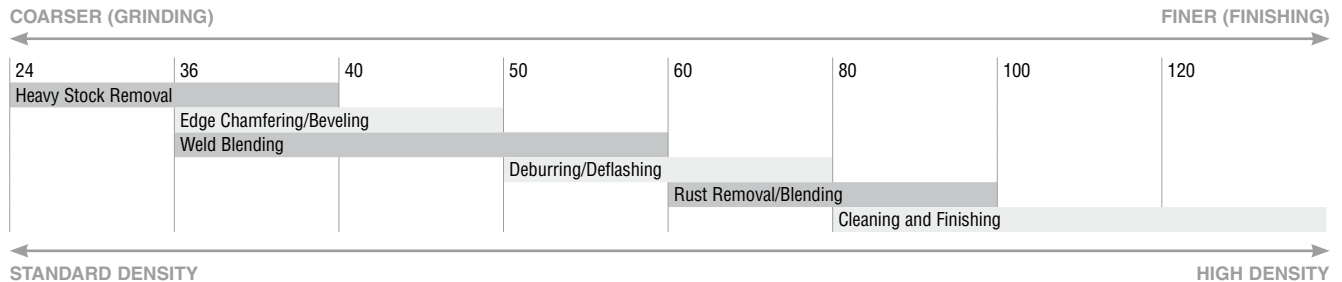

Cross Reference Guide

	TOTAL PERFORMANCE		INITIAL PRICE	
	BEST	BETTER	GOOD	
NORTON	Blaze R980P	BlueFire R884P	Gemini R766	Metal R828
3M	747D, 947D, 967A, 969F	546D, 566A, 577F	—	—
Camel	Ceramic Pro	ZA Pro	A Pro	ZA
CGW/Pasco	Ceramic	Zirconia	A/O	—
DeWalt	XP Ceramic	HP Zirconia	Zirconia	FlexVolt
Flexovit	Zircotex Ceramic	Zircotex, Zirocomax, Tornado	—	—
Garryson	CeramiQ	Zirc+	Zirconium	A/O
GemTex	Ceramic Flaptec	Zirconia Flaptec	A/O Flaptec	—
Hermes	—	FL390	RB48024YX, RB48624YX	Webrax-AN 701
Klingspor	SMT656	SMT624, SMT626, SMT627, SMT630	SMT627	—
Metabo	Flexiamant Super Ceramic	Flexiamant Zirconia, Novoflex	—	—
Mirka	—	—	Blue	—
Pearl	Redline Maxidics, Stainlessmax Maxidics	Zirconia Maxidisc, Silver Line Zirconia	A/O Maxidisc	Silver Line A/O
Pferd	Polifan Z-SG, Polifan SG-CO	Polifan SG Zirkon, Polifan SG ZA, SGP, PSF Zirc	Polifan SG A, A-Cool	Polifan PSF A/O
United Abrasives/Sait	Encore Ceramic, Ovation Ceramic	Ovation, Saitlam U	Ovation Attacker	Encore
SIA	—	—	2824 SIAFlap	—
Standard	Ceramic Pro, Ceramic	Zirconia HP, Zirconia AP	Zirconia GP	—
Tyrolit	Cerabond Ceramic, Premium Ceramic	Fastcut, Premium Longlife	Premium A/O	Basic, Standard
VSM (Lehigh Valley)	Ceramic	Zirconia	A/O	—
Walter	Enduro-Flex Turbo	Enduro-Flex, Enduro-Flex Stainless	Enduro-Flex Alu.	Flexsteel
Weiler	Tiger Ceramic, Tiger X, Tiger Saber Tooth	Tiger Paw, Wolverine	Tiger Premium	Tiger

Best/highest productivity for stainless steel, titanium, and super alloys



BLAZE R980P CERAMIC ALUMINA

- Premium ceramic alumina abrasive grain lasts 50% – 200% longer than many flap discs on stainless steel, cobalt, chrome, inconel, titanium and other hard-to-grind materials
- Y-weight polyester flaps with a supersize grinding aid significantly improve life, grain retention, and fray resistance while providing a cool, noticeably fast cut rate
- High-strength fiberglass back on Type 29 and Type 27 High Density is durable, lightweight, and absorbs vibration; Black, flexible plastic backing plate on Type 27 Quick Trim allows for trimmability of the plate

Better choice for mild carbon steel, and welds



BLUEFIRE R884P ZIRCONIA ALUMINA

- High performance zirconia alumina plus abrasive for aggressive cut and long life, with up to 30% longer life than competitive zirconia alumina products
- Polyester/cotton flaps with semi-open coat provide improved durability and reduces loading on aluminum
- High-strength fiberglass back on Type 29 and Type 27 High Density is durable, lightweight, and absorbs vibration; blue, flexible plastic backing plate on Type 27 Quick Trim allows for trimmability of the plate
- Vendible 2-disc package is ideal for vending machines, small jobs, or carrying to a job site

Good choice for carbon steel and aluminum applications



GEMINI R766 ALUMINUM OXIDE

- Alternating zirconia alumina and aluminum oxide flaps provide higher performance than aluminum oxide while retaining an economical price
- Polyester/cotton flaps are the best choice when speed of job completion and stock removal are primary considerations
- Type 27 Flat with quick trim, flexible plastic backing plate or high-density fiberglass back; Type 29 conical with durable, fiberglass back

Good consistent performance with low initial price



METAL R828 ZIRCONIA ALUMINA

- Durable zirconia grain provide good cut rate and life with consistent finish
- Fiberglass/resin backing plates with high strength, light weight, ability to absorb vibration, and operator comfort
- Good choice for coarse grit blending, deburring, and stock removal



TIER:	BEST	BETTER	GOOD	GOOD	GOOD
TRADENAME:	BLAZE R980P	BLUEFIRE R884P	GEMINI R766	METAL R828	METAL R828
SHAPE:	Type 29 Conical	Type 29 Conical	Type 29 Conical	Type 29 Conical	Type 29 Conical
FLAP DENSITY:	Standard	Standard	Standard	Standard	High
ABRASIVE:	Ceramic Alumina	Zirconia Alumina Plus	Aluminum Oxide	Zirconia Alumina	Zirconia Alumina
BACKING PLATE:	Fiberglass	Fiberglass	Fiberglass	Fiberglass	Fiberglass
OTHER:	Supersize				

SIZE (D x H)	GRIT	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #
Type 29 Conical								
4 x 5/8	36	15,300	10		666233 99049			
	40	15,300	10		666233 99050			
	60	15,300	10		666233 99051			
	80	15,300	10		666233 99052			
4-1/2 x 5/8-11	36	13,300	10	662611 83490	662544 61165	666233 99028	662544 19991	
	36	13,300	10 V		666233 41104 2-Pack			
	40	13,300	10	662611 83491	662544 61167	666233 99029	662544 19994	662611 32535
	60	13,300	10	662611 83492	662544 61170	666233 99030	662544 19996	662611 32536
	60	13,300	10 V		666233 41105 2-Pack			
	80	13,300	10	662611 83493	662544 61173	666233 99173	662544 19997	662611 32537
	80	13,300	10 V		666233 41106 2-Pack			
	120	13,300	10			666233 99174		
4-1/2 x 7/8	24	13,300	10		666233 99204			
	36	13,300	10	662611 83486	662544 61155	666233 99032	662544 19963	
	36	13,300	10 V		666233 41107 2-Pack			
	40	13,300	10	662611 83487	662544 61161	666233 99033	662544 19978	662611 32538
	60	13,300	10	662611 83488	662544 61163	666233 99034	662544 19984	662611 32539
	60	13,300	10 V		666233 41108 2-Pack			
	80	13,300	10	662611 83489	662544 61164	666233 99035	662544 19987	662611 32540
	80	13,300	10 V		666233 41109 2-Pack			
5 x 5/8-11	36	12,000	10		666233 99189			
	40	12,000	10		666233 99190			
	60	12,000	10		666233 99191			
	80	12,000	10		666233 99192	666233 99179		
5 x 7/8	120	12,000	10			666233 99180		
	24	12,000	10		666233 99206			
	36	12,000	10	662611 90001	662544 61174	666233 99036	662544 19998	
	40	12,000	10	662611 90002	662544 61176	666233 99037	662544 20001	
	60	12,000	10	662611 90003	662544 61177	666233 99038	662544 20002	
	80	12,000	10	662611 90004	662544 61178	666233 99039	662544 20003	
	120	12,000	10			666233 99181		
	6 x 5/8-11	40	10,200	10		666233 99040	662544 91779	
	60	10,200	10		666233 99041	662544 91780		
	80	10,200	10		666233 99042	662544 91781		
6 x 7/8	24	10,200	10		666233 99066			
	36	10,200	10		666233 99298			
	40	10,200	10		666233 99193	666233 99182	662544 91776	
	60	10,200	10		666233 99194	666233 99183	662544 91777	
	80	10,200	10		666233 99195	666233 99184	662544 91778	
7 x 5/8-11	36	8,600	10	662611 83498	662544 61188	666233 99185	662544 20009	
	40	8,600	10	662611 83499	662544 61190	666233 99043	662544 20010	
	60	8,600	10	662611 83500	662544 61192	666233 99044	662544 20012	
	80	8,600	10	662611 83501	662544 61193	666233 99045	662544 20013	
	120	8,600	10			666233 99186		
7 x 7/8	24	8,600	10		666233 99196			
	36	8,600	10	662611 83494	662544 61180		662544 20004	
	40	8,600	10	662611 83495	662544 61183	666233 99046	662544 20006	
	60	8,600	10	662611 83496	662544 61185		662544 20007	
80	8,600	10	662611 83497	662544 61186				

V = Vendible package. 2 discs/pack; 5 packs/carton. Order in multiples of 10.

See Portable Tools and Specialties section for mini flap discs.



TIER:	BEST	BEST	BETTER	BETTER	GOOD	GOOD	GOOD
TRADENAME:	BLAZE R980P	BLAZE R980P	BLUEFIRE R884P	BLUEFIRE R884P	GEMINI R766	GEMINI R766	METAL R828
SHAPE:	Type 27 Flat	Type 27 Flat	Type 27 Flat	Type 27 Flat	Type 27 Flat	Type 27 Flat	Type 27 Flat
FLAP DENSITY:	Standard	High	Standard	High	Standard	Standard	Standard
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Zirconia Alumina Plus	Zirconia Alumina Plus	Aluminum Oxide	Aluminum Oxide	Zirconia Alumina
BACKING PLATE:	Quick Trim Plastic	Fiberglass	Quick Trim Plastic	Fiberglass	Quick Trim Plastic	Fiberglass	Fiberglass
OTHER:	Supersize	Supersize					

SIZE (D x H)	GRIT	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #		
Type 27 Flat											
4-1/2 x 5/8-11	36	13,300	10		662544 99894	666233 99136		666233 99125	666233 99205	662544 72655	
	36	13,300	10 V			666233 41086	2-Pk				
	40	13,300	10	662544 00257	662610 98290	666233 99137	776960 90086	666233 99000	666233 99059	662544 37013	
	60	13,300	10	662544 00258	662610 96435	666233 99138	776960 90087	666233 99001	666233 99060	662544 72656	
	60	13,300	10 V			666233 41087	2-Pk				
	80	13,300	10	662544 00259	662610 96436	666233 99139	776960 90088	666233 99002	666233 99061	662544 72657	
4-1/2 x 7/8	36	13,300	10	636425 01865	662610 97678	666233 99140	776960 90081	666233 99126	666233 99062	662544 72653	
	40	13,300	10	662544 00253	662610 20628	666233 99141	776960 90082	666233 99004	666233 99063	662544 37004	
	60	13,300	10	662544 00254	662610 20633	666233 99142	776960 90083	666233 99005	666233 99064	662544 48989	
	80	13,300	10	662544 00255	662610 20634	666233 99143	776960 90084	666233 99006	666233 99065	662544 48990	
	120	13,300	10	662544 00256			776960 90085	666233 99007			
	5 x 5/8-11	36	12,000	10			666233 99144		666233 99127		
40		12,000	10	776960 90141		666233 99145		666233 99128	666233 99208		
60		12,000	10	776960 90142		666233 99146		666233 99130	666233 99209		
80		12,000	10	776960 90143		666233 99147		666233 99131	666233 99210		
120		12,000	10					666233 99132			
5 x 7/8		36	12,000	10			666233 99148		666233 99133	666233 99211	
	40	12,000	10	662544 00262		666233 99149		666233 99008	666233 99212	662544 72660	
	60	12,000	10	662544 00264		666233 99150		666233 99009	666233 99213	662544 72661	
	80	12,000	10	662544 00265		666233 99151		666233 99010	666233 99214	662544 72662	
	120	12,000	10	662544 00519				666233 99011			
	6 x 5/8-11	40	10,200	10	662611 32128	662611 32145				666233 99219	662544 91773
60		10,200	10	662611 32129	662611 32146				666233 99220	662544 91774	
80		10,200	10	662611 32130	662611 32147				666233 99221	662544 91775	
6 x 7/8		36	10,200	10						666233 99215	
		40	10,200	10	662611 32123		666233 99152		666233 99012	666233 99216	662544 91770
		60	10,200	10	662611 32124	662611 32136	666233 99153		666233 99013	666233 99217	662544 91771
	80	10,200	10	662611 32125		666233 99154		666233 99014	666233 99218		
120	10,200	10					666233 99015				
7 x 5/8-11	36	8,600	10			666233 99155		666233 99134	666233 99222	662544 72669	
	40	8,600	10	662544 61066	662611 32148	666233 99156	776960 90092	666233 99016	666233 99067	662544 72670	
	60	8,600	10	662544 61067	662611 32168	666233 99157	776960 90093	666233 99017	666233 99068	662544 72671	
	80	8,600	10	662544 61068		666233 99158	776960 90094	666233 99018	666233 99069	662544 72672	
	120	8,600	10	662544 61069				666233 99019			
	7 x 7/8	36	8,600	10	636425 01866		666233 99159		666233 99135	666233 99070	
40		8,600	10	662544 61059	662611 32138	666233 99160	776960 90089	666233 99020	666233 99071	662544 72665	
60		8,600	10	662544 61060	662611 32139	666233 99161	776960 90090	666233 99021		662544 72666	
80		8,600	10	662544 61061		666233 99162	776960 90091	666233 99022		662544 72667	
120		8,600	10	662544 61063				666233 99023			

V = Vendible package. Ideal for vending machines & small jobs. 2 Flap Discs/pack, 5 packs/carton. Order in multiples of 10.

See Portable Tools and Specialties section for mini flap discs.

Packaged for retail / walk-in selling / small jobs



BLUEFIRE R884P ZIRCONIA ALUMINA

- Zirconia alumina plus abrasive for aggressive cut and long life
- Individual hang cards provides product selling points; ships in merchandise display case of small quantities
- Available wire rack (with header card) allows merchandising of 4" and 4-1/2" product three ways: hung on pegboard, mounted on an upright, or placed on a shelf/counter



WIRE RACK (WITH HEADER CARD)
ALLOWS MERCHANDISING OF 4"
AND 4-1/2" PRODUCT THREE WAYS:
HUNG ON PEGBOARD, MOUNTED ON
AN UPRIGHT, OR PLACED ON A
SHELF/COUNTER

TIER: **BETTER**
TRADENAME: **BLUEFIRE R884P**
SHAPE: Type 29
FLAP DENSITY: Standard
ABRASIVE: Zirconia Alumina Plus
BACKING PLATE: Fiberglass

SIZE (D x H)	GRIT	MAX. RPM	STD. PKG.	PART #
4 x M-10	40	15,300	5	076607 03214
	60	15,300	5	076607 03215
	80	15,300	5	076607 03216
4-1/2 x 5/8-11	40	13,300	5	076607 03211
	60	13,300	5	076607 03212
	80	13,300	5	076607 03213
7 x 5/8-11	40	8,600	5	076607 03205
	60	8,600	5	076607 03206
	80	8,600	5	076607 03207
Wire Rack			2	076607 04157




See Portable Tools and Specialties section for mini flap discs.



Non-woven depressed center discs have three components: strong synthetic fiber mesh and quality abrasives, bonded together by a smear-resistant adhesive. Rapid Strip discs have an open web construction that enables aggressive cutting action while maintaining a cool, non-loading surface. Rapid Blend discs have a unitized construction with varying weave – from open to tighter – for deburring and finishing. Rapid Prep discs have a more open weave that excels in surface preparation and cleaning. Each product provides excellent cutting action while improving surface finish.

- Applications:** Medium-to-light material removal, deburring, blending, cleaning, finishing, and polishing
- Size Range:** 4-1/2" - 7"
- Grit Range:** X-Coarse, Coarse, Medium, Fine, Very Fine
- Abrasive Grain:** Ceramic Alumina, Silicon Carbide, Engineered Aluminum Oxide, Aluminum Oxide
- Machine Used:**



Material/Application-To-Product Recommendation Guide – For All Discs Used on Right Angle Grinders

Stripping Discs	BEST	BETTER	Deburring, Blending, Finishing Discs	BEST	BETTER	
	Blaze Rapid Strip Ceramic	Rapid Strip Silicon Carbide		Vortex Rapid Blend	Vortex Rapid Prep	Rapid Blend
Removing scale and coarse welding marks	◆ XC	◆ XC	Removing weld marks and weld spatter	◆ C	◆ C	
Removing coatings, epoxy/glue, paint and other clogging material	◆ XC	◆ XC	Stainless steel deburring and cleaning	◆ C	◆ C	
Removing rust, oxidation, corrosion and residue	◆ XC	◆ XC	Removing small flashings and parting lines	◆ C	◆ C	
Removing parting lines and seams on fiberglass parts	◆ XC	◆ XC	Surface preparation before coatings/plating		◆ C	◆ C
Removing paint/graffiti from concrete/stone	◆ XC	◆ XC	Light cleaning		◆ F	◆ F
			Cleaning and prepping welds	◆ M		◆ M
			Removing blemishes after welding stainless		◆ M	◆ M
			Blending and finishing all metal parts	◆ VF		◆ VF
			Creating decorative finishes on stainless steel	◆ VF		◆ VF
			Final finishing and polishing	◆ VF		◆ VF
			Final finishing/polishing where high conformability is needed			◆ VF

XC - Extra Course, C - Coarse, M - Medium, F - Fine, VF - Very Fine


Application/Product Recommendation Guide – For All Discs Used on Right Angle Grinders

	MOST AGGRESSIVE / LEAST CONFORMABLE		LEAST AGGRESSIVE / MOST CONFORMABLE		
Depressed Center Discs	Blaze Rapid Strip	Vortex Rapid Blend A/O Med. Rapid Blend A/O Coarse	Rapid Blend A/O Medium	Rapid Blend S/C Fine	
Discs With Back-Up Pad		Vortex Rapid Prep Rapid Prep A/O Coarse	Rapid Prep A/O Medium	Rapid Prep A/O Fine	Rapid Prep Very Fine
Scale Removal	Best Choice	Second Choice			
Stock Removal	Best Choice	Best Choice			
Heavy Deburring	Second Choice	Best Choice			
Light Deburring		Best Choice	Second Choice		
Light Finishing		Second Choice	Best Choice		
Blending			Best Choice	Second Choice	
Finishing			Second Choice	Best Choice	
Polishing				Best Choice	Second Choice

Cross Reference Guide – For All Discs Used on Right Angle Grinders

	STRIPPING (EXTRA COARSE)		SURFACE FINISHING (COARSE – MEDIUM – FINE)		SURFACE PREP (VERY FINE)	
	BEST	BETTER	BEST	BETTER	BEST	BETTER
NORTON	Blaze Rapid Strip	Rapid Strip	Vortex Rapid Blend	Rapid Blend	Vortex Rapid Prep	Rapid Prep
3M	Clean & Strip XT PRO, Clean & Strip XT PRO Extra Cut	Clean & Strip X	Debur and Finish PRO, Cut and Polish	EXL	SE, Duraflex	SC, PD, AI, LS
Bibielle	—	SDR Strip-It/Red	—	BUR Unitized	SCHD	SCLS, SCD, SCSB
Camel	—	EZ Strip Black/Red	—	—	—	—
Flexovit	—	Clean & Strip	—	—	—	—
Hermes	Strip Discs	Webrax	—	—	—	—
Pearl	—	S/C Stripping	—	—	—	Surface Preparation
Pferd	—	Policlean	—	Poliflex PUR	—	—
Sait	—	Sait-Strip	—	Unitized	7S, 8S	3Z
SIA	SiaStrip	—	—	—	6260	6250
Standard	—	Cleaning	700/800/900 Series	700/800/900 Series	FE, GP	FE, GP, RC
Superior	—	Stripping	—	XL Unitized	—	FD, GD, CC
Walter	—	FX Cleaning	—	—	—	Blendex Surface Conditioning

Why Choose Non-Woven Depressed Center Discs?



Non-Woven Right Angle Discs vs. Fiber Discs, Wire Wheels, and Depressed Center Wheels

- Deburring, blending and finishing done with one product to reduce the number of steps
- To provide a controlled, sustained finish
- To prevent undercutting and gouging
- To provide a cooler grinding action to lessen the chance of warping or discoloration
- When loading is an issue with fiberglass, adhesives and soft metals
- For stripping coatings and paint off of hard materials like concrete, cement and stone
- Less vibration and quieter for high operator acceptance
- To provide an alternative to wire brushes



Blaze Your Way to Greatest Productivity

Norton Blaze Rapid Strip Type 27 Depressed Center Discs

Strip/clean Cast Iron, Steels, Aluminum, Fiberglass and composites

- Open structure; will not load on sticky coatings, adhesives, and soft metals (e.g. aluminum), or snag and shed like a cloth or fiber disc might
- Norton Blaze ceramic alumina grain provides 2X cut rate and life over silicon carbide
- Will not shed on heavily rust-encrusted pieces
- Extremely versatile; use one disc; stiff enough to stand abuse, but soft enough to prevent gouging and rework
- Use on edge for blending weld root forms
- Apply some pressure to strip or remove coatings; lighter pressure finishes like a surface finishing disc
- Fewer safety, ergonomic, and environmental issues due to fewer change-outs, less downtime, and less production waste/landfill scrap



Rapid Strip

Best choice for quick and easy rough cleaning and stripping of all materials



BLAZE RAPID STRIP CERAMIC ALUMINA

- Blaze ceramic grain provides 2X plus faster, consistent rate and life than silicon carbide discs, leaves a thoroughly cleaned surface, ensuring excellent adhesion in subsequent processes such as painting and soldering
- Open web construction for minimal loading; does not shed or snag on rusty pieces; prevents gouging and rework
- Rapid Strip material provides a unique combination of aggressive performance, long life, and improved finish

Better choice for use on a variety of materials, including metal, fiberglass and stone



RAPID STRIP SILICON CARBIDE

- Sharp silicon carbide abrasive provides fast aggressive cutting action
- Advanced resin bond prevents shedding, snagging, gouging, and rework
- Open web construction for minimal loading; great alternative to wire brushes



		TIER: BEST		TIER: BETTER	
		BLAZE RAPID STRIP		RAPID STRIP	
TRADENAME:		Ceramic Alumina		Silicon Carbide	
ABRASIVE:		36-50		36-50	
GRIT SIZE:		X-Coarse		X-Coarse	
GRADE:		Type 27/Fiberglass		Type 27/Fiberglass	
TYPE/BACKING:		SIZE (D x H)	MAX. RPM	STD. PKG.	PART #
		4-1/2 x 5/8-11	12,000	10	662544 98101
		4-1/2 x 7/8	12,000	10	666233 03783
		5 x 5/8-11	11,000	10	666233 03915
		5 x 7/8	11,000	10	666233 03916
		7 x 5/8-11	8,000	10	666233 03919
		7 x 7/8	8,000	10	666233 03920
					662610 09585
					662610 09649
					662610 09650
					662610 09586

Rapid Blend

Best choice with revolutionary technology for heavy deburring and finishing



VORTEX RAPID BLEND ALUMINUM OXIDE

- Proprietary engineered Vortex aluminum oxide agglomerated grain performs the medium to fine grit steps of traditional aluminum oxide discs
- Thick nylon web for 2X longer life and faster finishing vs. traditional aluminum oxide discs, with minimal shedding
- Special resin chemistry resists shedding when used on sharp edges, making it ideal for deburring; no smearing

Better choice for surface prep, deburring, blending and removing parting lines, rust, and coatings



RAPID BLEND NEX A/O / S/C

- Premium aluminum oxide or silicon carbide grain for consistent performance
- Uniform construction extends life and maintains part tolerance; prevents cutting and gouging
- Resin formula produces consistent, smear-free finishes

Consistent smear free performance with low entry price



RAPID BLEND ALUMINUM OXIDE

- Premium aluminum oxide grain; engineered for more demanding applications
- Uniform construction maintains part tolerance; prevents cutting and gouging
- Smear-free bond excels at producing light satin finishes

MOST AGGRESSIVE / LEAST CONFORMABLE ← → LEAST AGGRESSIVE / MOST CONFORMABLE



	BEST		BETTER		BETTER		BETTER		BETTER	
TIER:	VORTEX RAPID BLEND		RAPID BLEND NEX		RAPID BLEND NEX		RAPID BLEND NEX		RAPID BLEND	
TRADENAME:	Engineered A/O		Aluminum Oxide		Aluminum Oxide		Silicon Carbide		Aluminum Oxide	
ABRASIVE:	100-120		150-180		220-280		320-400		150-180	
GRIT SIZE:	Vortex 5AM		NEX-2AM		NEX-2AF		NEX-2SF		High Strength Medium	
SPECIFICATION:	Type 27/Fiberglass		Type 27/Fiberglass		Type 27/Fiberglass		Type 27/Fiberglass		Type 27/Fiberglass	
TYPE/BACKING:	SIZE (D x H)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	PART #
	4-1/2 x 5/8-11	12,000	10	662544 29243	662610 23947	662610 23946	662610 23943	662610 23949		
	4-1/2 x 7/8	12,000	10	662544 29268	662610 20548	662610 20547	662610 20546	662610 20549		

Rapid Prep
7/8" Center Hole

Best choice for aggressive stock removal and blending in one step



RAPID PREP XHD

- Coarse and Medium discs solve your most aggressive stock removal and blending challenges; remove weld lines, weld spatter, weld discoloration and blend surfaces in a single step
- Improve cut control and surface blending over traditional coated flap discs and fiber discs from our unique combination of a conformable fiber matrix and premium ceramic grain
- XHD Coarse discs for aggressive weld removal and surface blending on steels and Medium discs on softer metals/alloys



TIER: **BEST**
 TRADENAME: **RAPID PREP XHD**
 ABRASIVE: Ceramic Alumina

SIZE (D x H)	STD. PKG.	PART #
Coarse		
4-1/2" x 7/8"	40	662611 70275
5" x 7/8"	40	662611 70279
7" x 7/8"	25	662611 70280
Medium		
4-1/2" x 7/8"	40	662611 70282
5" x 7/8"	40	662611 70283
7" x 7/8"	25	662611 70284

All Vortex and Rapid Prep 7/8 hole discs are non-stock. Contact your Norton representative for current order quantities, and lead-times.

Note: Max RPM is determined by corresponding back up pad.

Norton Rapid Prep Surface Conditioning Products

The Perfect Abrasive, Coating, and Bond Built into Every Disc and Belt

- Available in premium Vortex aluminum oxide aggregate grain and Norton aluminum oxide grain; ideal for many aerospace, metal and stainless steel fabrication, and MRO applications
- Our proprietary coating method extends life and delivers consistent finishes by creating a thick layer of grain throughout the product; grain does not sit on top of fibers as other competitive products can
- Our new Clean Bond resin system guarantees smear-free finishes, even on high nickel content alloys; will not load on aluminum and soft metals, as competitive products can



Rapid Prep
7/8" Center Hole

Best choice for finishing and blending applications



VORTEX RAPID PREP ALUMINUM OXIDE DISCS

- High-performing, patented Vortex agglomerated aluminum oxide grain provides the cutting power of a coarser grit with the finish of finer grits
- Premium high-loft nylon fiber bonded to a strong nylon scrim backing allows a thick layer of resin bond and grain for extended life and provides added durability and stiffness
- Proprietary Clean Bond resin technology guarantees smear-free finishes even on high nickel content alloys and reduces loading on aluminum and other soft metals

Better choice for high nickel content alloys, aluminum and other soft metals



RAPID PREP ALUMINUM OXIDE

- Quality aluminum oxide abrasive grain coating provides up to 20% higher cut rate and 50% better performance than competitive products
- Premium high-loft nylon fiber bonded to a strong nylon scrim backing allows a thick layer of resin bond and grain for extended life, added durability and stiffness
- Proprietary Clean Bond resin technology guarantees smear-free finishes even on high nickel content alloys and reduces loading on aluminum and other soft metals



	TIER: BEST		BETTER	
	TRADENAME: VORTEX RAPID PREP		RAPID PREP	
	ABRASIVE: Engineered Aluminum Oxide		Aluminum Oxide	
SIZE (D x H)	STD. PKG.	PART #		PART #
Extra Coarse				
4-1/2" x 7/8"	25			666233 26070
5" x 7/8"	25	666233 34975		
7" x 7/8"	25	666233 41360		
Coarse				
4-1/2" x 7/8"	25	666233 34944		662544 73868
5" x 7/8"	25	666233 34946		662610 08293
7" x 7/8"	25	666233 41362		666233 25138
Medium				
4-1/2" x 7/8"	25	666233 33612		666233 25915
5" x 7/8"	25	666233 34963		662610 17124
7" x 7/8"	25	666233 41364		666233 25919
Fine				
4-1/2" x 7/8"	25	666233 33608		666233 25153
5" x 7/8"	25	666233 34954		662544 69132
7" x 7/8"	25	666233 41366		666233 25897
Very Fine				
4-1/2" x 7/8"	25	666233 33616		
5" x 7/8"	25			666233 25943
7" x 7/8"	25	666233 41368		666233 25959

All these discs are non-stock. Contact your Norton representative for current order quantities, and lead-times.
Note: Max RPM is determined by corresponding back-up pad.

See page 54 for 7/8" Hole Air Cooled Back-up Pads

Rapid Prep

Speed Change 5/8"-11

- These discs feature Norton quick, tool-free, twist-on and -off Speed-Change fasteners. Discs lock to standard back-up pads with a unique nut design and are easily removed, increasing your productivity with more time to grind.



TIER: **BEST**
 TRADENAME: **RAPID PREP XHD**
 ABRASIVE: Ceramic Alumina

SIZE (D x H)	STD. PKG.	PART #
Coarse		
4-1/2" x 5/8-11"	25	662611 70060
5" x 5/8-11"	25	662611 70061
7" x 5/8-11"	25	662611 70288
Medium		
4-1/2" x 5/8-11"	25	662611 70062
5" x 5/8-11"	25	662611 70063
7" x 5/8-11"	25	662611 70289

Max RPM is determined by corresponding back up pad.



TIER: **BEST** | **BETTER**
 TRADENAME: **VORTEX RAPID PREP** | **RAPID PREP**
 ABRASIVE: Engineered Aluminum Oxide | Aluminum Oxide

SIZE (D x H)	STD. PKG.	PART #	PART #
Extra Coarse			
4-1/2" x 5/8-11"	25	666233 73667	666233 73690
5" x 5/8-11"	25	666233 73669	
7" x 5/8-11"	25	666233 73670	666233 73692
Coarse			
4-1/2" x 5/8-11"	25	666233 73671	666233 73693
5" x 5/8-11"	25	666233 73674	662544 98516
7" x 5/8-11"	25	666233 73675	662611 92908
Medium			
4-1/2" x 5/8-11"	25	666233 73678	666233 08157
5" x 5/8-11"	25	666233 73679	666233 73694
7" x 5/8-11"	25	666233 73680	662611 92913
Fine			
4-1/2" x 5/8-11"	25	666233 73681	
5" x 5/8-11"	25	666233 73682	666233 73695
7" x 5/8-11"	25	666233 73684	
Very Fine			
5" x 5/8-11"	25	666233 73686	666233 73699
7" x 5/8-11"	25	666233 73687	666233 73700

Note: Speed Change discs must always be used with smooth face back-up pads.
 Max RPM is determined by corresponding back-up pad.

AVOS Non-Woven Speed-Lok

- Patented hole design allows for interrupted cut, reducing heat up to 30% over standard surface preparation discs for cooler cutting and longer life
- With complete vision into the grinding zone, operators can grind more accurately with less re-work; scooped holes create air flow to pull loose abrasive and swarf away from work surface grinding zone – resulting in extended disc life
- The 15° angle back-up pad lets you grind at 5° - 15° angle allowing for greater utilization of disc surface and eliminates gouging of workpiece

See page 54 for Speed Change and AVOS Back-up Pads



TIER: **BETTER**
 TRADENAME: **RAPID PREP AVOS**
 ABRASIVE: Aluminum Oxide

SIZE (DIAMETER)	STD. PKG.	PART #
Coarse		
4-1/2	10	662610 10447
5	10	666233 74818
Medium		
4-1/2	10	662610 10448
5	10	666233 74819
Very Fine		
4-1/2	10	666233 74823
5	10	666233 74824

Note: AVOS discs must be used with AVOS Speed-Lok back-up pads.
 Max RPM is determined by corresponding back up pad.

Non-Woven Hook and Loop Discs

Rapid Prep

Non-Woven Hook and Loop Discs



TIER: **BEST**
 TRADENAME: **RAPID PREP XHD**
 ABRASIVE: Ceramic Alumina

SIZE (DIAMETER)	STD. PKG.	PART #
Coarse		
4-1/2	40	662611 70179
5	40	662611 70181
7	25	662611 70182
Medium		
4-1/2	40	662611 70183
5	40	662611 70185
7	25	662611 70186


Max RPM is determined by corresponding back-up pad.

* Standard Package = 80

Back-up Pads

Hook & Loop Back-up Pads

PAD DIAMETER	SPINDLE OR HOLE SIZE	MAX. RPM	3M EQUIVALENT	STD. PKG.	PART #
Back-up Pads for Hook and Loop Discs					
2	1/4 Steel Shank	23,000	922	5	662610 59352
3	1/4 Steel Shank	20,000	923	5	662610 59354
4	1/4 Steel Shank	18,000	924	5	662610 59356
	5/8-11	13,000	914	5	662610 59304
	M10 x 1.250	13,000		5	662610 59305
4-1/2	5/8-11	10,000	9145	5	662610 06948
5	5/16-24 Male	10,000	905	5	662610 59360
	5/8-11	10,000	915	5	662610 59310
6	5/8-11	8,000	916	5	662610 59312
7	5/8-11	6,000	917	5	662610 59368
8	5/8-11	4,500	918	5	662610 59372



TIER: **BEST** **BETTER**
 TRADENAME: **VORTEX RAPID PREP** **RAPID PREP**
 ABRASIVE: Engineered Aluminum Oxide Aluminum Oxide

SIZE (DIAMETER)	STD. PKG.	PART #	PART #
Extra Coarse			
2	50		662610 17900
3	25	666233 33620	
4-1/2	25	666233 34972	662610 17906
5	25	666233 34974	662610 17215
7	25	666233 34976	662611 92846
Coarse			
2	50	666233 34882	662610 04431 *
3	25	666233 34883	662610 55015
4-1/2	25	666233 34943	662610 17806
5	25	666233 34945	662610 04435
7	25	666233 34951	662610 55027
Medium			
2	50	666233 34958	662610 04441
3	25	666233 34956	662610 04442
4-1/2	25	666233 34961	662610 04444
5	25	666233 34962	662610 55022
7	25	666233 34965	662610 17813
Fine			
2	50	666233 33604	666233 25141
3	25	666233 33605	666233 25143
4-1/2	25	666233 33607	666233 25147
5	25	666233 33609	666233 25154
7	25	666233 34955	662611 99465
Very Fine			
2	50	666233 33613	666233 25926
3	25	666233 33614	666233 25934
4-1/2	25	666233 33615	666233 25936
5	25	666233 33617	666233 25941
7	25	666233 34969	662610 19990

Max RPM is determined by corresponding back-up pad.

* Standard Package = 80





Norton PSA (pressure sensitive adhesive) individual cloth discs are used on four different types of machines and the application changes depending on which machine they are used on.

Applications:

Pneumatic and Electric Dual-Action (DA) and Electric Random Orbital Sanders – for use on contours or flat surfaces for light- to medium-pressure grinding, blending, leveling, and finishing applications.

Stationary Disc Sanders – used in woodworking and metalworking for stock removal, sanding/grinding flat surfaces, dimensioning and finishing.

Size Range:

5" – 24" diameter

Grit Range:

24 – 180

Abrasive Grain:

Ceramic Alumina, Zirconia Alumina, Aluminum Oxide


Back-up Pads:

Rubber, with hardness variations for different applications, for portable machines. Steel for stationary disc sanders.

Machine Used:



ORBITAL SANDER



STATIONARY DISC SANDERS

Best choice for all hard-to-grind high alloy steels



BLAZE R980P CERAMIC ALUMINA

- 100% ceramic alumina micro-fracturing grain constantly exposes sharper grain edges to provide fastest cut rate and longest life over competitive blended/low-ratio ceramic alumina discs
- Strong resin bond and heavy-duty Y-weight polyester backing for consistent cut, better grain adhesion, edge-tear resistance, and durability
- Self-lubricating grinding aid treatment delivers the coolest cut on stainless steel, high alloy steels, super alloys, titanium, and other difficult to grind materials

Better choice for grinding and deburring stainless steel



BLUEFIRE R821P ZIRCONIA ALUMINA

- Latest generation of self-sharpening, zirconia alumina abrasive for cooler cut and extended life over aluminum oxide discs
- Heavy-duty Y-weight cotton backing for edge-tear resistance and durability
- Pressure sensitive adhesive makes for easy application and removal

Good choice for general-purpose metalworking



GEMINI R228 ALUMINUM OXIDE

- Premium aluminum oxide abrasive gives an excellent initial cut rate
- Durable X-weight cotton backing makes these discs a good blend of flexibility and life
- The cotton backing provides good resistance to heat

Good option for light- to medium-pressure grinding, blending, leveling and finishing applications



METAL R243 ALUMINUM OXIDE

- Aluminum Oxide grain provides consistent cut for general purpose use
- Improved resin bond system provides longer life
- Flexible J-weight cotton backing for added conformability, tabs allow for easy liner removal

Cloth PSA Discs for Dual-Action and Random Orbital Sanders



TIER:	BEST	GOOD	GOOD
TRADENAME:	BLAZE R980P	GEMINI R228	METAL R243
ABRASIVE:	Ceramic Alumina	Aluminum Oxide	Aluminum Oxide
ATTACHMENT:	PSA Discs	PSA Discs	PSA Discs
OTHER:	Supersize		

SIZE (D)	GRIT	PKG./CASE	PART #	PART #	PART #
5	36	50/250	662544 61506*	662611 36589	
	40	50/250	662544 61507	662611 36588	
	50	50/250	662544 61508	662611 36587	
	60	50/250	662544 61509	662611 36586	
	80	50/250	662544 61510	662611 36585	699573 39967
	100	50/250		662611 36584	699573 39968
	120	50/250	662544 61512	662611 36583	699573 39969
	150	50/250		662611 36582	699573 39970
	180	50/250		662611 36581	699573 39971
	6	60	50/250		662611 36596
80		50/250		662611 36595	699573 39973
100		50/250		662611 36594	699573 39977
120		50/250		662611 36593	699573 39978
150		50/250			699573 39979
180		50/250		662611 36592	699573 39986
8	36	50/250		662611 36350	
	40	50/250		662611 36351	
	50	50/250		662611 36352	
	60	50/250		662611 36356	
	80	50/250		662611 36354	
	120	50/250		662611 36355	

*PKG./Case: Blaze R980P 5" 36 grit discs = 50/200




Back-up Pads for Cloth PSA Discs

DESCRIPTION	MAX. RPM	STD. PKG.	PART #
Back-up Pads for Cloth PSA Discs			
5" Diameter – Low Profile – Soft	12,000	5	636425 06126
5" Diameter – Low Profile – Medium	12,000	5	636425 06131
5" Diameter – Tapered – Medium	12,000	5	636425 06139
6" Diameter – Low Profile – Soft	10,000	5	636425 06127
6" Diameter – Low Profile – Med	10,000	5	636425 06133
6" Diameter – Tapered – Medium	10,000	5	636425 06141
8" Diameter – Tapered – Medium	6,000	5	636425 43112

Large Diameter Cloth PSA Discs

Used on stationary disc machines for dimensioning and finishing metal workpieces and woodworking. Pressure sensitive adhesive offers fast, convenient mounting. Made without center holes for full-face usage.

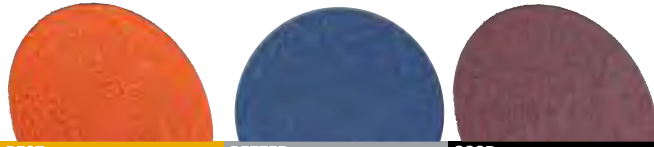

TIER:	BEST	BETTER	GOOD
TRADENAME:	BLAZE R980P	BLUEFIRE R821P	GEMINI R228
ABRASIVE:	Ceramic Alumina	Zirconia Alumina	Aluminum Oxide
ATTACHMENT:	PSA	PSA	PSA
OTHER:	Supersize		

SIZE (D)	GRIT	PKG./CASE	PART #	PART #	PART #
10	36	25/50			662611 36606
	40	25/50		662611 38314	662611 36604
	50	25/50			662611 36607
	60	25/50		662611 38316	662611 36602
	80	25/50		662611 38317	662611 36601
	100	25/50			662611 36600
12	24	25/50		662611 38318	
	36	25/50	662544 16171	662611 38319	662611 36635
	40	25/50	662544 16172	662611 38320	662611 36630
	50	25/50	662544 16173	662611 38321	662611 36625
	60	25/50	662544 16174	662611 38322	662611 36620
	80	25/50	662544 16175	662611 38323	662611 36615
	100	25/50			662611 36614
	120	25/50	662544 16176		662611 36613
15	36	25/50			662611 36666
	60	25/50			662611 36663
	80	25/50			662611 36662
16	36	25/50			662611 36700
	40	25/50			662611 36685
	50	25/50			662611 36684
	60	25/50		662611 38334	662611 36683
	80	25/50			662611 36701
18	36	25/50			662611 36720
	60	25/50			662611 36696
	80	25/50			662611 36723
20	36	25/50	662544 16165	662611 38343	662611 36710
	40	25/50		662611 38344	662611 36709
	50	25/50	662544 16167		662611 36711
	60	25/50	662544 16168	662611 38346	662611 36712
	80	25/50	662544 16169		662611 36706
	120	25/50	662544 16170		
24	36	10/10			662611 36718
	40	10/10			662611 36717
	50	10/10			662611 36725
	60	10/10			662611 36726
	80	10/10			662611 36727



For use on dual action and random orbital sanders. The industry's highest performing and broadest selection of paper discs in PSA (pressure sensitive adhesive) disc rolls and individual discs, and hook and loop discs.

- Applications:** Stripping and preparing primed and painted surfaces for finishing, sanding of plastics, fiberglass and composites, bare wood sanding, light weld blending, preparing and finishing metal, and sanding of all gel coat and body filler compounds.
- Size Range:** 3" – 8"
- Grit Range:** 36 – 1500
- Abrasive Grain:** Ceramic Alumina, Zirconia Alumina, Aluminum Oxide, Silicon Carbide
- Attachment Systems:** PSA (pressure-sensitive adhesive), hook and loop
- Paper Weights:** Heavyweight – E and F; Lightweight – B, C, and D
- Vacuum Holes:** See product availability charts
- Machine Used:**



ORBITAL SANDER



VERTICAL SHAFT PORTABLE GRINDER

Material/Application-to-Product Recommendation Guide

	BEST			BETTER		GOOD	
	Heavy-Medium Stock Removal	Light Stock Removal Finishing		Heavy-Medium Stock Removal		Light Stock Removal Finishing	Light Stock Removal Finishing
	SG H920	Blaze A995	Dry Ice A975	BlueFire H875P	BlueFire H822	A2750P	Gold Reserve A296
Primed, Painted Surfaces		◆	◆	◆		◆	◆
Fiberglass / Composites / Gel Coats		◆	◆	◆		◆	◆
Wood		◆	◆	◆		◆	◆
Metal	◆	◆	◆		◆	◆	◆
Body Fillers / Compounds / Plastics		◆	◆	◆		◆	◆

Application/Grit Recommendation Guide

COARSER (GRINDING)										FINER (FINISHING)									
36	40	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500
Roughing to Intermediate					Intermediate to Finishing										Ultra Fine Finishing				
										Fine Finishing									

Cross Reference Guide

	TOTAL PERFORMANCE							INITIAL PRICE	
	BEST			BETTER				GOOD	
NORTON	F-Weight SG H920	X-Weight Blaze A995	B- & C-Weight Dry Ice A975	F-Weight BlueFire H822	E-Weight BlueFire H875P	B-Weight A275 OP	B-Weight Durite A475	C-Weight A290	B-Weight Gold Reserve A296
3M	763U	732U, 737U, 755L 775L	334U, 734U, 735U	—	740I, 745I, 750U, 751U, 751I	216U, 255L, 236U, 260L, 334U	405N, 414N, 415U, 426U, 435U	236U, 316U, NX	216U, 236U
Hermes	BW114, CR116	CR116	—	BW115, BW184	BW110, VC153	VC154-LL	SF168	VC151-LL, VC152, WA flex 28	—
Indasa	—	HT Line	HT Line, RedLine	—	HeavyLine	PlusLine	—	WhiteLine, YellowLine	—
Klingspor	PS61	—	PS36	PS21	PS36	PS33, PS73W	PL35, PS14	PS33	PL36
Mirka	—	—	—	—	Royal CRS. Cut	Q-Silver, Royal Micro	CaratFlex, PolarStar	Bulldog Gold, Basecut	Bulldog Gold
SIA	—	—	Siaprime 5550, 1958	1820	1820, 1919, 1948	1940, 1944, 1950	1748	1947, 1960	—
VSM	—	—	—	—	KP510E, KP709	—	CP131A	KP911	—

Heavyweight Paper Discs


Best choice for most demanding stock removal applications



SG H920 CERAMIC ALUMINA

- Durable and friable Norton seeded gel ceramic alumina abrasive ensures fast, aggressive, yet cool cutting action and maximum life
- Strong F-weight paper, synthetically-coated, provides maximum durability and resistance to edge chipping and shedding
- Closed coat and sharp grain make this a premiere product for metal fabricating and blending; ideal for soldered and welded areas


Better choice for aggressive metalworking applications



BLUEFIRE H822 ZIRCONIA ALUMINA

- Patented zirconia alumina abrasive provides 2X-3X life over aluminum oxide products
- Strong F-weight paper, synthetically-coated for excellent durability and chip resistance; pressure sensitive adhesive and linked disc roll format allow easy application, removal, and dispensing
- Non-stearated (no anti-loading agents) for non-contaminating; often required for prime auto and aerospace paint applications


Better choice for soft material and wood applications

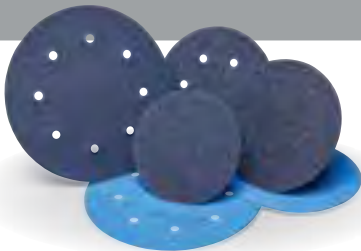

BLUEFIRE H875P ZIRCONIA ALUMINA

- Next-generation, self-sharpening zirconia alumina abrasive provides 2-3 times the life of aluminum oxide discs, longer life versus original zirconia alumina discs, improved cut rate, and minimal heat
- Strong E-weight latex/paper backing resists tearing while staying conformable and flexible
- Open coat contributes to minimized loading

Stick & Sand (PSA)
Heavyweight Disc Rolls
Non-Vacuum

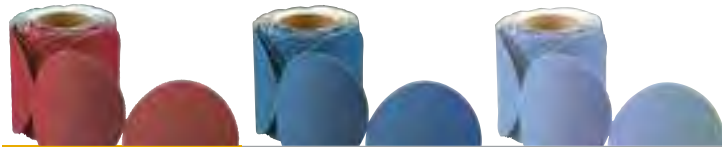

				TIER: BEST	BETTER	BETTER
				TRADENAME: SG H920	BLUEFIRE H822	BLUEFIRE H875P
				ABRASIVE: Ceramic Alumina	Zirconia Alumina	Zirconia Alumina
				PAPER BACKING WEIGHT: F-Weight	F-Weight	E-Weight
				FASTENING: PSA	PSA	PSA
SIZE	GRIT	ROLLS/STD. PKG.	DISCS/ ROLL	PART #	PART #	PART #
5	60	4	100	662611 49873	662611 37310	
	80	4	100	662611 49872	662611 37309	662611 24977
	100	4	100	662611 49871	662611 37308	
	120	4	100	662611 49870	662611 37307	
6	60	4	100		662611 37323	
	80	4	100	662611 49876	662611 37322	662611 25573
	120	4	100	662611 49874		
8	100	4	50	662611 49879		
	120	4	50		662611 37333	

Refer to the Sanding Accessories section for back-up pads and accessories.


Heavyweight Paper Discs

Stick & Sand (PSA)
Individual Discs
Non-Vacuum and Vacuum




TIER:	BETTER	BETTER
TRADENAME:	BLUEFIRE H875P	BLUEFIRE H875P
ABRASIVE:	Zirconia Alumina	Zirconia Alumina
PAPER BACKING WEIGHT:	E-Weight	E-Weight
FASTENING:	PSA	PSA Vacuum

SIZE	GRIT	PKG./CASE	PART #	PART #
5	36	50/200	662611 25436	
	40	50/200	662611 25307	
	80	50/200	662611 25244	



6" x 6 Hole
Die #3371

6	36	50/200	662611 23575	
	40	50/200	662611 23574	662611 23580
	80	50/200	662611 23573	



8" x 8 Hole
Die #3370


8	36	25/100	662611 23578	662611 23584
	40	25/100	662611 23577	
	80	25/100	662611 23576	662611 23582

Hook & Loop
Individual Discs
Non-Vacuum and Vacuum



TIER:	BEST	BETTER	BETTER
TRADENAME:	SG H920	BLUEFIRE H875P	BLUEFIRE H875P
ABRASIVE:	Ceramic Alumina	Zirconia Alumina	Zirconia Alumina
PAPER BACKING WEIGHT:	F-Weight	E-Weight	E-Weight
FASTENING:	Hook & Loop	Hook & Loop	Hook & Loop
OTHER:			Vacuum

SIZE	GRIT	PKG./CASE	PART #	PART #	PART #
5	40	25/100		662611 25684	
	60	50/250	662611 49864		
	80	50/250	662611 49865	662611 25444*	
	100	50/250	662611 49866		
	120	50/250	662611 49867		
6	36	25/100		662611 23590	
	40	25/100		662611 23589	
	80	25/100		662611 23588	



8" x 8 Hole
Die #3370

8	36	25/100		662611 23593	662611 23598
	40	25/100		662611 23592	
	80	25/100		662611 23591	662611 23596

Packaging Standards: Min. / Std. Pkg. * H875P = 25/100

Lightweight Paper Discs

Less dust; more productivity



MULTI-AIR CYCLONIC HOOK & LOOP VACUUM


- Multi-Air Cyclonic precision laser-cut, spiral vacuum hole design maximizes dust extraction for cleanest work environment and less potential for contamination, while delivering coolest, fastest, most consistent cut rate, and longest life of any paper disc
- Water-based, non-pigmented stearate No-Fil coating and open coat provide maximum load resistance and no color transfer to work
- Exceptional choice for the most demanding paper disc sanding applications; hook and loop back for easy disc mounting and changing



TIER:	BEST	BEST
TRADENAME:	BLAZE A995 NO-FIL	DRY ICE A975 NO-FIL
ABRASIVE:	Ceramic Alumina	Ceramic Alumina
PAPER BACKING WEIGHT:	C- & D-Weight	B- & C-Weight
FASTENING:	Hook & Loop	Hook & Loop
OTHER:	P-Graded	P-Graded



SIZE	GRIT	PKG/CASE	PART #	PART #
3 x 0	80	50/200		776960 95005
	120	50/200		776960 95006
	150	50/200		776960 95007
	180	50/200		776960 95008
	220	50/200		776960 95009
	240	50/200		776960 95010
	320	50/200		776960 95011
	400	50/200		776960 95012
	500	50/200		776960 95013
	600	50/200		776960 95014
	800	50/200		776960 95015
1000	50/200		776960 95016	
5 x 11/16 (125mm x 18mm)	80	50/200	636425 97500	776960 07745
	120	50/200	636425 97501	776960 07753
	150	50/200	636425 97502	776960 07755
	180	50/200	636425 97503	776960 07756
	220	50/200	636425 97504	776960 07757
	240	50/200		776960 07760
	280	50/200		776960 07762
	320	50/200		776960 07763
	400	50/200		776960 07765
	500	50/200		776960 07768
	600	50/200		776960 07791
800	50/200		776960 07793	
1000	50/200		776960 07795	
6 x 11/16 (150mm x 18mm)	80	50/200	636425 97505	776960 07770
	120	50/200	636425 97506	776960 07773
	150	50/200	636425 97507	776960 07774
	180	50/200	636425 97508	776960 07775
	220	50/200	636425 97509	776960 07776
	240	50/200		776960 07777
	280	50/200		776960 07778
	320	50/200		776960 07781
	400	50/200		776960 07784
	500	50/200		776960 07785
	600	50/200		776960 07786
800	50/200		776960 07787	
1000	50/200		776960 07788	

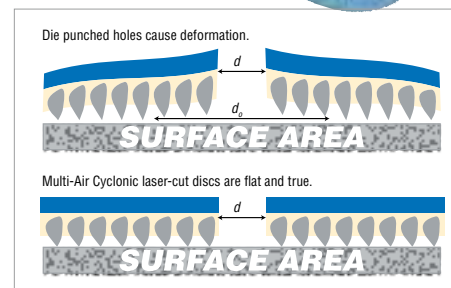

Improved Dust Extraction / Increased Productivity

The upgrade to precise, flat, laser-cut holes instead of die-punched holes, dramatically increases surface area contact allowing Norton Multi-Air Cyclonic discs to improve productivity by 32% versus conventional multi-hole sanding and by 60% versus non-vacuum sanding.

The end result is more holes for dust extraction, more abrasive coverage for a better cut and no deformation – for full surface contact utilizing all the cutting power of the premium ceramic grain.

Refer to the Sanding Accessories section for back-up pads and accessories.

Lightweight Paper Discs



Best choice for the most demanding coarse grit stripping, blending, and sanding applications

BLAZE A995 NO-FIL CERAMIC ALUMINA

- P-graded, next-generation sharper-edged ceramic aluminum oxide abrasive ensures fastest cut rate and longest life of any paper disc
- Unique polyester-reinforced, D-weight latex saturated backing provides maximum tear strength while retaining flexibility
- Water-based, non-pigmented stearate No-Fil coating and open coat provide maximum load resistance and no color transfer to work



Best choice for the most demanding sanding applications

DRYICE A975 NO-FIL CERAMIC ALUMINA

- P-graded seeded-gel ceramic alumina abrasive for fastest cut rate and longest life of any paper disc
- Unique fiber reinforced, flexible B or C-weight latex saturated backing delivers 50% - 60% improvement in tear strength while retaining flexibility
- Water-based, non-pigmented stearate No-Fil coating and open coat provide maximum load resistance and no color transfer to work



Better choice for high-performance dry finishing on all materials

A2750P NO-FIL ALUMINUM OXIDE

- Premium P-graded, heat treated, toughened aluminum oxide abrasive delivers superior life, fast cut rate, consistent finish
- Unique fiber reinforced, flexible B-weight latex saturated backing provides 50% - 60% improvement in tear strength while retaining flexibility
- Water-based, non-pigmented stearate No-Fil coating and open coat provide maximum load resistance and no color transfer to work
- 5" and 6" individual PSA discs in fine grits have a tabbed, white translucent liner to protect the PSA adhesive from airborne contaminants; the tab allows easier removal of the paper liner



Better choice for hard-to-sand surfaces and wood applications

DURITE A475 NO-FIL SILICON CARBIDE

- Sharp and hard, P-graded, silicon carbide abrasive easily penetrates the hardest material and veneers to create finer finishes where finish is critical
- Flexible, B-weight fiber reinforced, latex paper backing provides flexibility and resistance to tearing
- Water-based, non-pigmented stearate No-Fil coating and open coat provide maximum load resistance and no color transfer to work



Good choice for sanding a broad range of substrates including primed or painted surfaces, wood, composites, aluminum, and ferrous metals

GOLD RESERVE A296 NO-FIL ALUMINUM OXIDE

- P-graded premium aluminum oxide abrasive produces a quick, cool cut and a more consistent surface finish
- Strong B-weight latex/paper backing resists tearing while staying conformable and flexible
- Water-based, non-loading (No-Fil) stearate coating minimizes clogging and increases disc life

Lightweight Paper Discs

Stick & Sand (PSA)
Lightweight Disc Rolls
Non-Vacuum



TIER:	BEST	BETTER	BETTER	GOOD	GOOD
TRADENAME:	DRYICE A975 NO-FIL	A2750P NO-FIL	DURITE A475 NO-FIL	GOLD RESERVE A296 NO-FIL	A290 NO-FIL
ABRASIVE:	Ceramic Alumina	Aluminum Oxide	Silicon Carbide	Aluminum Oxide	Aluminum Oxide
PAPER BACKING WEIGHT:	B- & C-Weight	B-Weight	B-Weight	B-Weight	C-Weight
FASTENING:	PSA	PSA	PSA	PSA	PSA
OTHER:	P-Graded	P-Graded	P-Graded	P-Graded	P-Graded

SIZE	GRIT	ROLLS/ STD. PKG.	DISCS/ ROLL	PART #	PART #	PART #	PART #	PART #
3-1/2	80	4	100		662611 36376			
	120	4	100		662611 36375			
	180	4	100		662611 36373			
	220	4	100		662611 36372			
	280	4	100		662611 36370			
	320	4	100		662611 36369			
	400	4	100		662611 36368			
5	60	4	100					662611 49831
	80	4	100	662611 40502	662611 131464 *	662544 87415	662611 183806	662611 49830
	100	4	100	662611 40501	662611 131463 *	662544 87417	662611 183807	662611 49829
	120	4	100	662611 40500	662611 131462 *	662544 87418	662611 183808	662611 49828
	150	4	100	662611 40499	662611 131461 *	662544 87440	662611 183809	662611 49827
	180	4	100	662611 40498	662611 131460 *	662544 87441	662611 183810	662611 49826
	220	4	100	662611 42474	662611 131459 *	662544 87442	662611 183811	662611 49825
	240	4	100	662611 55380	662611 131458 *	662544 87443		662611 49824
	280	4	100	662611 55379	662611 131457 *			662611 49823
	320	4	100	662611 55378	662611 131456 *	662544 87444	662611 183813	662611 49822
	400	4	100	662611 55377	662611 131454 *	662610 65293	662611 183814	662611 49821
	500	4	100		662611 131453 *			
	600	4	100	666233 05608	662611 131452 *	662544 21217		
800	4	100	662544 80230	662611 131451 *				
6	60	4	100					662611 49847
	80	4	100	662611 40512	662611 131481 *	662544 87446	662611 183815	662611 49842
	100	4	100	662611 40511	662611 131480 *		662611 183816	662611 49841
	120	4	100	662611 40510	662611 131479 *	662544 87447	662611 183817	662611 49840
	150	4	100	662611 40509	662611 131478 *		662611 183818	662611 49839
	180	4	100	662611 40508	662611 131477 *	662544 87448	662611 183819	662611 49838
	220	4	100	662611 48340	662611 131476 *	662544 87449	662611 183820	662611 49837
	240	4	100	662611 55376	662611 131475 *		662611 183821	662611 49836
	280	4	100		662611 131474 *			662611 49835
	320	4	100	662611 55374	662611 131473 *	662544 87450	662611 183822	662611 49834
	400	4	100	662611 55373	662611 131471 *		662611 183823	662611 49833
	500	4	100	636425 06198	662611 131470 *			
	600	4	100	636425 06199	662611 131469 *		662610 40261	
800	4	100	636425 06200	662611 131468 *		636425 06164		
8	80	4	100		662611 131617			
	120	4	100		662611 131615			
	150	4	100		662611 131614			
	180	4	100		662611 131613			
	220	4	100		662611 131612			
320	4	100		662611 131609				

* Packaging Standards A275 = 6/100

Refer to the Sanding Accessories section for back-up pads and accessories.

Lightweight Paper Discs

Stick & Sand (PSA)
Lightweight Disc Rolls
Vacuum




TIER: **BETTER**
 TRADENAME: **A2750P NO-FIL**
 ABRASIVE: Aluminum Oxide
 PAPER BACKING WEIGHT: B-Weight
 FASTENING: PSA
 OTHER: P-Graded




TIER: **GOOD**
 TRADENAME: **A290 NO-FIL**
 ABRASIVE: Aluminum Oxide
 C-Weight
 PSA
 P-Graded


Stick & Sand (PSA)
Individual Discs
Non-Vacuum




TIER: **BETTER**
 TRADENAME: **A2750P NO-FIL**
 ABRASIVE: Aluminum Oxide
 PAPER BACKING WEIGHT: B-Weight
 FASTENING: PSA Tabbed
 OTHER: P-Graded

SIZE	GRIT	ROLLS/ STD. PKG.	DISCS/ ROLL	PART #	ROLLS/ STD. PKG.	DISCS/ ROLL	PART #
							
				5" x 5 Hole Die #3329			
5	60				4	100	662611 30266
	80	6	100	662611 31498	4	100	662611 30265
	100	6	100	662611 31497			
	120	6	100	662611 31496	4	100	662611 30263
	150	6	100	662611 31495	4	100	662611 30262
	180	6	100	662611 31494	4	100	662611 30261
	220	6	100	662611 31493	4	100	662611 30260
	240	6	100	662611 31492			
	320	6	100	662611 31490	4	100	662611 30258
	400	6	100	662611 31488			

SIZE	GRIT	MIN./ STD PKG.	PART #
5	1000	100/400	662611 31450
	1200	100/400	662611 31449
6	1000	100/400	662611 31467
	1200	100/400	662611 31466
	1500	100/400	662611 31465

SIZE	GRIT	ROLLS/ STD. PKG.	DISCS/ ROLL	PART #	ROLLS/ STD. PKG.	DISCS/ ROLL	PART #
							
				6" x 6 Hole Die #3333			
6	80	6	100	662611 31515	4	100	662611 30276
	100	6	100	662611 31514	4	100	662611 30275
	120	6	100	662611 31513	4	100	662611 30274
	150	6	100	662611 31512	4	100	662611 30273
	180	6	100	662611 31511	4	100	662611 30272
	220	6	100	662611 31510	4	100	662611 30271
	240	6	100	662611 31509			
	280	6	100	662611 31508			
	320	6	100	662611 31507	4	100	662611 30268
	400	6	100	662611 31505			
	600	6	100	662611 31503			

Refer to the Sanding Accessories section for back-up pads and accessories.



PSA Disc Roll Dispenser

- Norton disc roll dispensers feature heavy-duty construction and a rubberized finish to protect your product, as well as the finish on your workpiece
- These versatile dispensers are designed to accommodate any 5" or 6" disc roll or sheet roll
- They can be attached to a wall or stacked for multi-grit or multi-diameter operations
- Discs are individually dispensed and removed from the roll by a cutter bar

DESCRIPTION	STD. PKG.	PART #
PSA Disc Roll Dispenser		
Single Disc Roll Dispenser	1	636425 42772
Double Disc Roll Dispenser (shown)	1	636425 02981

Lightweight Paper Discs

Hook & Loop
Individual Discs
Non-Vacuum



TIER:	BEST	BEST
CAP CODE:	BLAZE A995 NO-FIL	DRY ICE A975 NO-FIL
ABRASIVE:	Ceramic Alumina	Ceramic Alumina
PAPER BACKING WEIGHT:	D-Weight	B- & C-Weight
FASTENING:	Hook & Loop	Hook & Loop
OTHER:	P-Graded	P-Graded

BETTER	BETTER	GOOD	GOOD
A2750P NO-FIL	DURITE A475 NO-FIL	GOLD RESERVE A296 NO-FIL	A290 NO-FIL
Aluminum Oxide	Silicon Carbide	Aluminum Oxide	Aluminum Oxide
B-Weight	B-Weight	B-Weight	C-Weight
Hook & Loop	Hook & Loop	Hook & Loop	Hook & Loop
P-Graded	P-Graded	P-Graded	P-Graded

SIZE	GRIT	PKG/CASE	PART #	PART #	PKG/CASE	PART #	PART #	PART #	PART #
3	80				50/200	662611 31532			
	100				50/200	662611 44926			
	120				50/200	662611 28688			
	150				50/200	662611 40385			
	180				50/200	662611 31528			
	220				50/200	662611 31527			
	240				50/200	662611 31526			
	320				50/200	662611 31524			
	400				50/200	662611 36995			
	500				50/200	662611 31521			
	600				50/200	662611 36996			
	800				50/200	662611 31519			
	1000				50/200	662611 35900			
	1500				50/200	662611 47434			
	5	60				100/400			
80		50/200		662611 40522	100/400	662611 31549		666233 77539	662611 49907
100		50/200		662611 40521	100/400	662611 31548			662611 49906
120		50/200		662611 40520	100/400	662611 31547		666233 77541	662611 49905
150		50/200		662611 40519	100/400	662611 31546		666233 77542	662611 49904
180		50/200		662611 40518	100/400	662611 31545		666233 77543	662611 49903
220		50/200		662611 49541	100/400	662611 31544		666233 05637	662611 49902
240		50/200		662611 49540	100/400	662611 31543			
280					100/400	662611 31542			
320		50/200		662611 49538	100/400	662611 31541		666233 05638	662611 49900
400		50/200		662611 49537	100/400	662611 31539	662610 52270	666233 05639	662611 49899
500		50/200		662544 80233	100/400	662611 31538			
600					100/400	662611 31537		662611 05390	
800		50/200		662544 80232	100/400	662611 31536	662610 52267	666233 77544	
1000					100/400	662611 31535	662610 52254		
1200				100/400	662611 31534				
1500				100/400	662611 31533				
6	80	50/200	636425 97510	662611 40532	100/400	662611 31566		636425 06236*	662611 49916
	100	50/200		662611 40531	100/400	662611 31565		636425 06235*	662611 49915
	120	50/200	636425 97511	662611 40530	100/400	662611 31564		636425 06234*	662611 49914
	150	50/200	636425 97512	662611 40529	100/400	662611 31563		636425 06233*	662611 49913
	180	50/200	636425 97513	662611 40528	100/400	662611 31562		636425 06232*	662611 49912
	220	50/200	636425 97514	662611 49546	100/400	662611 31561		636425 06231*	662611 49911
	240				100/400	662611 31560		636425 06225*	
	280				100/400	662611 31559			
	320	50/200		662611 49543	100/400	662611 31558		636425 06230*	662611 49909
	400	50/200		662611 49542	100/400	662611 31556		636425 06229*	662611 49908
	500	50/200		636425 06202	100/400	662611 31555		636425 06228*	
	600	50/200		636425 06203	100/400	662611 31554		636425 06227*	
	800	50/200		636425 06204	100/400	662611 31553		636425 06226*	
	1000	50/200		636425 06375	100/400	662611 31552	662610 52255		
	1200	50/200		636425 06376	100/400	662611 31551			
1500	50/200		636425 06377	100/400	662611 31550				
8	120				100/400	662611 31662			
	180				100/400	662611 31661			

Packaging Standards: PKG/CASE A296 = 50/250

Refer to the Sanding Accessories section for back-up pads and accessories.

Lightweight Paper Discs

Hook & Loop
Individual Discs
Vacuum



		BEST		BETTER		GOOD		GOOD		GOOD	
		DRY ICE A975 NO-FIL		A2750P NO-FIL		GOLD RESERVE A296 NO-FIL		A290 NO-FIL		A290 NO-FIL	
		Ceramic Alumina		Aluminum Oxide		Aluminum Oxide		Aluminum Oxide		Aluminum Oxide	
		B- & C-Weight		B-Weight		B-weight		C-Weight		C-Weight	
		Hook & Loop		Hook & Loop		Hook & Loop		Hook & Loop		Hook & Loop	
		P-Graded		P-Graded		P-Graded		P-Graded		P-Graded	
SIZE	GRIT	PKG./CASE	PART #	PART #	PART #	PART #	PART #	PART #	PART #	PART #	PART #
			5" x 5 Hole Die #3328	5" x 5 Hole Die #3328			5" x 5 Hole Die #3328	5" x 8 Hole Die #3392			
5	60	100/400					662611 30236*	662611 30245*			
	80	100/400	662611 40517*	662611 31583			662611 30235*	662611 30244*			
	100	100/400		662611 31582			662611 30234*	662611 30243*			
	120	100/400	662611 40515*	662611 31581			662611 30233*	662611 30242*			
	150	100/400		662611 31580			662611 30232*	662611 30241*			
	180	100/400		662611 31579			662611 30231*	662611 30240*			
	220	100/400		662611 31578			662611 30230*	662611 30239*			
	320	100/400		662611 31575			662611 30227*	662611 30238*			
	400	100/400		662611 31573			662611 30226*				
	600	100/400		662611 31571							
			6" x 6 Hole Die #3371	6" x 6 Hole Die #3371			6" x 6 Hole Die #3371	6" x 6 Hole Die #3371			
6	80	100/400	662611 40527*	662611 31600			666233 34786*	662611 30255*			
	100	100/400		662611 31599			666233 34787*				
	120	100/400		662611 31598			666233 34788*	662611 30253*			
	150	100/400		662611 31597							
	180	100/400		662611 31596			666233 34790*	662611 30251*			
	220	100/400		662611 31595			666233 34791*	662611 30250*			
	280	100/400		662611 31593							
	320	100/400		662611 31592			666233 34793*				
	400	100/400		662611 31590			666233 34794*				
	600	100/400		662611 31588			666233 34796*				
	800	100/400		662611 31587			666233 34797*				
	1000	100/400		662611 31586							
	1500	100/400		662611 31584							

Packaging Standards: * A975 Vacuum, A296 Vacuum, A290 Vacuum = 50/200

Refer to the Sanding Accessories section for back-up pads and accessories.



NEW

An alternative to traditional perforated paper discs, mesh discs are a multi-functional abrasive, designed with thousands of holes, created by the unique mesh matrix structure. For use with random orbital and rotary sanders, superior performing mesh discs are engineered for maximum dust extraction on composite, automotive, and other fine finishing applications. Norton mesh discs produce superior finishes with virtually dust free sanding.

Applications: Surface preparation, Sanding, Finishing

Size Range: 5", 6"

Grit Range: 80-400


Machine Used:



ORBITAL SANDER

Powerful Dust Extraction Means A Cleaner, Safer Work Environment

We've answered the demands for a cleaner and safer working environment with Norton MeshPower discs. The open construction of the mesh backing allows dust particles to flow freely through the thousands of tiny holes, creating a virtually dust free sanding environment. Better for your health, better for your application and better for your business!

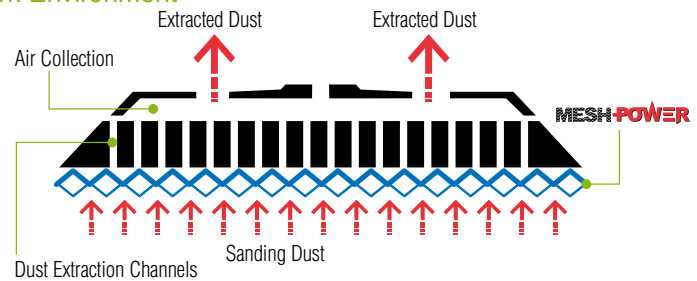

NEW

Good choice for sharp cutting along with powerful dust extraction

MESHPower ALUMINUM OXIDE

- Mesh matrix backing with thousands of tiny holes offers powerful dust extraction for a cleaner, healthier working environment
- Norton No-Fil technology prevents clogging and creates a consistent cut throughout the product life
- Self-grip backing with no designated hole pattern is quick and easy to align to any backing pad – just apply and go!

TIER: **GOOD**
TRADENAME: **MESHPower**
ABRASIVE: Aluminum Oxide

SIZE	GRIT	PKG./CASE	PART #
5	80	50/200	636425 06451
	120	50/200	636425 06452
	180	50/200	636425 06453
	220	50/200	636425 06454 NS
	240	50/200	636425 06455
	320	50/200	636425 06456
	400	50/200	636425 06457
6	80	50/200	636425 06458
	120	50/200	636425 06459
	180	50/200	636425 06460
	220	50/200	636425 06461 NS
	240	50/200	636425 06462
	320	50/200	636425 06463
	400	50/200	636425 06464

NS Non-Stock, contact your Norton representative for current order quantities and lead-times.

TECH TIP

Increase performance even further by using the Norton MeshPower discs with the Norton Multi-Air back-up pads - it's the ultimate dust extraction experience!



For use on random orbital and rotary sanders. The industry's highest performing film and foam finishing discs are engineered for composite, automotive, and other fine finishing applications. Norton microfinishing film discs produce superior finishes dry without sacrificing cut rate while Norton foam finishing discs are used moist to produce a semi-polished surface to reduce buffing time.

Applications:

Film discs: final dry finishing of primed and painted surfaces, varnishes, composites, and gel coats before buffing

Foam finishing discs: final moist finishing of clear coat, varnishes, composites, and gel coats before buffing

Compounds and buffing pads: removes swirl marks and sand scratches

Size Range:

3", 5" and 6"

Grit Range:

Film Discs: P80-P1500

Foam Discs: P1500, P2000, P3000

Machine Used:



ORBITAL SANDER



VERTICAL SHAFT PORTABLE GRINDER



MINI ANGLE SANDER

Finishing Film

Best choice for final dry finishing of primed and painted surfaces, varnishes, composites, and gel coats



PURE ICE Q175 A/O FINISHING FILM

- White aluminum oxide grain and patented resin system for better life, cut rate, and finish
- 3 mil polyester film backing for better flexibility and flatness of discs; hook and loop attachment for easy mounting and removal
- Color-coded backprint by grit size

Good choice for dry sanding applications, especially uneven, hard-to-sand surfaces



Q275 NO-FIL A/O FINISHING FILM

- Sharp, P-graded, heat-treated premium aluminum oxide grain ensures faster, yet cooler, cut for a longer life
- 3-mil polyester film backing delivers unmatched durability and tear strength with exceptional flatness for a flawless surface finish and reduced leveling and rework; hook and loop attachment for easy mounting and removal
- Water-based stearated No-Fil coating provides maximum load resistance when sanding dry for extended life

Finishing Foam

Best choice for moist finishing of clear coats, varnishes, composites, and gel coats



ICE Q255 A/O FINISHING FOAM

- Premium, P-graded fine grit aluminum oxide grain
- Conformable, integrated foam backing eliminates pigtailed and costly rework; produces a semi-polished finished that can be quickly buffed out; hook and loop attachment
- Open mesh design distributes pressure evenly for quicker sanding and uniform scratch patterns
- Color coded abrasive face by grit size for easy grit identification



TIER:	BEST	GOOD
TRADENAME:	PURE ICE Q175	Q275 NO-FIL
ABRASIVE:	Aluminum Oxide	Aluminum Oxide
BACKING WEIGHT:	3 mil Polyester Film	3 mil Polyester Film
OTHER:	P-Graded	P-Graded

TIER:	BEST
TRADENAME:	ICE Q255
ABRASIVE:	Aluminum Oxide
BACKING WEIGHT:	Foam
OTHER:	P-Graded

SIZE	GRIT	PKG./CASE	COLOR	PART #	PART #	PKG./CASE	COLOR	PART #
3	P800	50/200	Black	776960 88701				
	P1000	50/200	Red	776960 88702				
	P1200	50/200	Green	776960 88703				
	P1500	50/200	Blue	776960 88704		6/24	Blue	636425 06022
	P2000					6/24	Magenta	636435 06021
	P3000					6/24	Green	636425 06020
5	P80	50/200			662611 01614			
	P120	50/200			662611 01613			
	P180	50/200			662611 01610			
	P220	50/200			662611 01609			
	P240	50/200			662611 01608			
	P320	50/200			662611 01607			
	P400	50/200			662611 01606			
	P600	50/200			662611 01604			
	P1200	50/200			662611 01601			
6	P80	50/200			662611 01628			
	P120	50/200			662611 01627			
	P180	50/200			662611 01625			
	P220	50/200			662611 01624			
	P320	50/200			662611 01622			
	P800	50/200	Black	776960 88713	662611 01618			
	P1000	50/200	Red	776960 88714	662611 01617			
	P1200	50/200	Green	776960 88715	662611 01616			
	P1500	50/200	Blue	776960 88716	662611 01615	15/60	Blue	636425 06015
	P2000					15/60	Magenta	636425 06014
	P3000					15/60	Green	636425 06013

Refer to the Sanding Accessories section for back-up pads and accessories.



Norton flexible diamond coated discs combine the durability and aggressiveness of diamond, on a flexible backing.

Applications:

Grinding ceramic, glass, composites, carbide and ceramic coatings, fiberglass, and reinforced plastics; removing rust and scale on other materials; producing metallurgical stamps and coupons

Size Range:

PSA (Pressure Sensitive Adhesive) Discs: 2" – 6"
Quick-Change TR (Type III) Discs: 2" and 3"

Grit Range:

60 – 1500

Abrasive Types:

Diamond

Backing Color:

Color-coded backings for easily distinguished grit size selection

Machine Used:



ORBITAL SANDER




VERTICAL SHAFT PORTABLE GRINDER

Better choice for grinding glass, ceramics and composites, removing rust and scale, and producing metallurgical stamps and coupons

D71S PSA DISCS

- Combines the durability and aggressiveness of a unique diamond abrasive face pattern with a flexible backing, to significantly increase life and lower costs versus standard coated and diamond discs
- Cloth backing provides strength, tear resistance, and flexibility
- Color-coded, PSA backing for quick, easy mounting and removal and identification of coarse grit sizes/applications

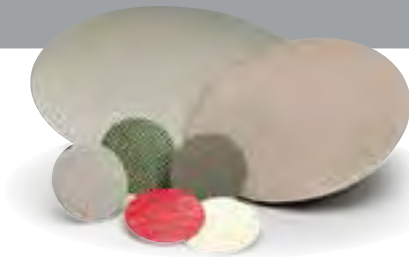

SIZE (D)	COLOR	GRIT	STD. PKG.	TIER: BETTER PART #
Flexible Diamond Coated PSA Discs				
2	Green	60	1	662603 08159
	Black	120	1	662603 07722
	Red	200	1	662603 07723
	Yellow	400	1	662603 08160
	White	800	1	662603 07012
5	Green	60	1	662603 07839
	Black	120	1	662603 07838
	Red	200	1	662603 07019
	Yellow	400	1	662603 07960


SIZE (D)	COLOR	GRIT	STD. PKG.	TIER: BETTER PART #
Flexible Diamond Coated PSA Discs				
6	Green	60	1	662603 06381
	Black	120	1	662603 06382

See Page 70 – Coated Abrasive Cloth PSA Disc section for back-up pads.

Better choice for improved cut rate and finish on ceramics, glass, fiberglass, composites, carbide, and other tough metals and coatings

D7210 QUICK-CHANGE TR (TYPE III) DISCS

- Unique, durable diamond abrasive pattern increases life and lowers costs versus standard coated and diamond discs; color-coded backing for easy grit/application identification
- Better choice for improved cut rate and finish on ceramics, glass, fiberglass, composites, carbide, and other tough metals and coatings
- Removes rust and scale on other material; producing metallurgical stamps and coupons

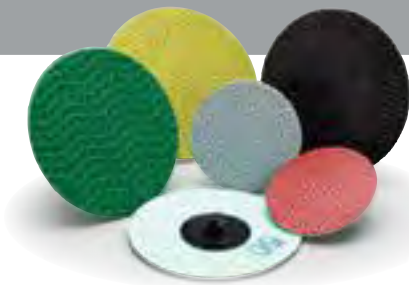

SIZE (D)	COLOR	GRIT	STD. PKG.	TIER: BETTER PART #
Flexible Diamond Coated Quick-Change TR (Type III) Discs				
2	Green	60	12	662603 11778
	Black	120	12	662603 11779
	Red	200	12	662603 11780
	Yellow	400	12	662603 11781
	White	800	12	662603 11782

SIZE (D)	COLOR	GRIT	STD. PKG.	TIER: BETTER PART #
Flexible Diamond Coated Quick-Change TR (Type III) Discs				
3	Green	60	12	662603 11783
	Black	120	12	662603 11784
	Yellow	400	12	662603 11786

See Page 147 – Quick-Change Disc Accessories section for back-up pads.

Multi-Air Foam Interface Pads

- Designed for use with fine grit Multi-Air Cyclonic hook and loop sanding discs to improve both surface finish and cut rate
- Use with Multi-Air hook and loop disc back-up pads
- Align the interface pad with the Multi-Air back up pad then simply attach the disc to the interface pad because the holes do not have to be lined up
- Ideal for use with new Mesh discs



SIZE (D x T)	DESCRIPTION	STD. PKG.	PART #
Multi-Air Foam Interface Pads with Vacuum Holes			
5 x 1/2	Multi-Air Hook & Loop Interface Pad	8	636425 85864
6 x 1/2	Multi-Air Hook & Loop Interface Pad	12	076607 19359

Low-Profile Pads for Dual Action / Random Orbital Sanders

- Soft density low-profile pads utilize 1/2" thick foam for fine finish sanding and offer moderate conformability
- Medium low-profile pads have 1/2" thick urethane foam for intermediate and finish sanding
- Available with PSA (pressure sensitive adhesive) or hook and loop faces; both designs are shock resistant and have a fiberglass backing plate with a riveted 5/16"-24 threaded shank for added strength and increased heat resistance
- Available with standard hole patterns for vacuum-assist sanding



SIZE (D)	DESCRIPTION	MAX. RPM	STD. PKG.	PART #
Low Profile Pads for DA/Random Orbital Sanders				
3	Hook & Loop Soft Low-Profile	12,000	10	636425 06128
3-1/4	Hook & Loop Buffing Pad		5	662610 85302
5	PSA Soft Low-Profile	12,000	5	636425 06126
5	PSA Medium Low-Profile	15,000	5	636425 06131
5 x 5 holes	PSA Medium Low-Profile	15,000	5	636425 06132
5	Hook & Loop Soft Low-Profile	12,000	5	636425 06129
5	Hook & Loop Medium Low-Profile	15,000	5	636425 06135
5 x 5 holes	Hook & Loop Medium Low-Profile	15,000	5	636425 06136
6	PSA Soft Low-Profile	12,000	5	636425 06127
6	PSA Medium Low-Profile	15,000	5	636425 06133
6	Hook & Loop Soft Low-Profile	12,000	5	636425 06130
6	Hook & Loop Medium Low-Profile	15,000	5	636425 06137
6 x 6 holes	Hook & Loop Medium Low-Profile	15,000	5	636425 06138
8 x 8 holes, 5 screws	Hook & Loop Medium Low-Profile	1,500	5	636425 43712
8 x 8 holes, 6 screws	Hook & Loop Medium Low-Profile	1,500	5	636425 43714

Packed in individual clamshell

Multi-Air Hook & Loop Back-up Pads with Vacuum Holes

- Innovative design optimized for maximum air flow and powerful dust extraction
- Pads are engineered with a durable urethane foam, heat-resistant plastic, a molded-in 5/16"-24 spindle, and hooked face
- Holes in the disc do not have to be matched up with the holes in the pad, so changeover is fast and easy
- Ideal for use with new Mesh discs



SIZE (D)	DESCRIPTION	MAX. RPM	STD. PKG.	PART #
Multi-Air Hook & Loop Back-up Pads with Vacuum Holes				
5" (125mm) with 5/16"-24 Shank	Medium-Density Urethane Pad	15,000	5	666233 76000
6" (150mm) with 5/16"-24 Shank	Medium-Density Urethane Pad	15,000	5	636425 06160

Tapered Pads for Dual Action / Random Orbital Sanders

- Designed with medium density polyurethane foam and a tapered edge for conformability, these pads are firm enough for flat surfaces, yet soft enough for severe curves and contours
- Available with either PSA (vinyl, pressure sensitive adhesive) or hook and loop faces in vacuum or non-vacuum
- The 5" and 6" pads are shock resistant and have a fiberglass backing plate with a riveted 5/16"-24 threaded shank for use on random orbital or dual action sanders
- The 8" pads have a 5/8"-11 threaded female hub



SIZE (D)	DESCRIPTION	MAX. RPM	STD. PKG.	PART #
Tapered Pads for DA/Random Orbital Sanders				
5	PSA Medium Tapered	15,000	5	636425 06139
5 x 5 holes	PSA Medium Tapered	15,000	5	636425 06140
5	Hook & Loop Medium Tapered	15,000	5	636425 06143
5 x 5 holes	Hook & Loop Medium Tapered	15,000	5	636425 06144
6	PSA Medium Tapered	15,000	5	636425 06141
6 x 6 holes	PSA Medium Tapered	15,000	5	636425 06142
6	Hook & Loop Medium Tapered	15,000	5	636425 06145
6 x 6 holes	Hook & Loop Medium Tapered	15,000	5	636425 06146
8	PSA Medium Tapered	6,000	5	636425 43112
8	Hook & Loop Medium Tapered	3,200	5	636425 43704

Packed in individual clamshell

Hook & Loop Foam Interface Pads

- Designed for use with our fine grit hook and loop sanding discs
- Improve both surface finish and cut rate
- Use with hook and loop back-up pads



SIZE (D x T)	DESCRIPTION	STD. PKG.	PART #
Foam Hook & Loop Interface Pads			
3 x 1/2	Interface Pad	10	636425 05457
6 x 1/2	Interface Pad	5	636425 42089
5 x 3.4	Interface Pad	2	636425 02161
6 x 3/4	Interface Pad	2	636425 02162

Half Moon Hand Pad

- The unique half moon pad takes a standard 5" hook and loop disc folded in half, which adheres to the hooks on the pad face
- The straight edge of the pad allows the operator to sand corners, contours, narrow crevices and minute imperfections without over-sanding



SIZE (D)	DESCRIPTION	STD. PKG.	PART #
Half Moon Hand Pad			
5	Hook & Loop	10	636425 02768

Polishing Adapter Pad

- Converts your standard hook and loop pad into a soft polishing pad
- The foam adapter is 3/8" thick and is excellent for fine grits where minimal removal is required
- It is ideal for either flat or contour surfaces



SIZE	DESCRIPTION	MAX. RPM	STD. PKG.	PART #
Polishing Adapter Pad				
5	Hook & Loop Adapter Pad	3,786	10	636425 03121

Ergonomic Hand Sanders

- The ergonomic palm sander is uniquely designed to be user-friendly, with finger indentations for the operator
- It quickly converts standard 5" and 6" hook and loop discs into hand sanders for finishing flat surfaces



SIZE (D)	DESCRIPTION	STD. PKG.	PART #
Ergonomic Hand Sander			
5	Hook & Loop	5	636425 03147
6	Hook & Loop	5	636425 03726

Disc Hand Pads

- Hand pads eliminate finger sanding
- The ultra-thin 3/16" thick pad is composed of a single layer of neoprene foam and is designed for maximum flexibility – producing excellent finishes
- The 1" thick pad is composed of two layers, neoprene and polyester foam, for excellent conformability and softness, resulting in fine finishes
- Each pad has an elastic hand strap to hold it firmly in place
- Available with either PSA (vinyl, pressure sensitive adhesive) faces or hook and loop face



SIZE (D x T)	DESCRIPTION	STD. PKG.	PART #
Disc Hand Pads			
5 x 3/16	Soft Foam PSA	10	636425 03111
5 x 1	Soft Foam PSA	10	636425 02842
5 x 1	Soft Foam Hook & Loop	10	636425 03117

Panel and Adhesive Cleaner

- Removes adhesives, tar, grease, wax, body sealers, undercoating sprays, and silicone from most surfaces
- Aggressive cleaner is safe to use on most paint applications
- Packaged with squirt dispenser
- Use as directed



SIZE/DESCRIPTION	STD. PKG.	PART #
Panel and Adhesive Cleaner		
Quart Can	12	076607 82780

Liquid Ice Extra-Cut Compound

- Water soluble; easy to use and easy to clean up
- Engineered to be used with a selection of 3 pads, depending on the finish required



SIZE	DESCRIPTION	STD. PKG.	STD. CASE	PART #
Quart	Liquid Ice Extra-Cut Compound	1	4	636425 97116

Liquid Ice Clean-up / Detailer Spray

- The spray detailer easily cleans up excess buffing residue and produces paint protection
- Spray it on and wipe off with a Norton Microfiber cloth ("Masking Products" section)



SIZE	DESCRIPTION	STD. PKG.	STD. CASE	PART #
32 oz.	Spray Bottle Clean-up Detailer	1	4	636425 42082

Liquid Ice Ultra-Fine Machine Glaze


- Use on its own for fine scratch removal or as Step 3 in place of Norton Liquid Ice Extra-Cut Compound to eliminate swirl marks and produce a high gloss finish
- Ideal for dark-colored vehicles



SIZE	DESCRIPTION	STD. PKG.	STD. CASE	PART #
Quart	Liquid Ice Ultra-Fine Machine Glaze	1	4	636425 06092

8" Hook & Loop Buffing/Polishing Waffle Pads

- These pads can be used with Norton Liquid Ice Extra-Cut Compound



SIZE (D)	DESCRIPTION	STD. PKG.	STD. CASE	PART #
8	Orange Waffle Foam pad - Step 1	1	6	636425 06379
8	Blue Waffle Foam Pad - Step 2	1	6	636425 06380
8	White Waffle Foam Pad - Step 3	1	6	636425 06381

8" and 9" Hook & Loop Buffing/Polishing Pads

- These pads can be used with Norton Liquid Ice Extra-Cut Compound following the step numbers



SIZE (D)	DESCRIPTION	STD. PKG.	STD. CASE	PART #
8	Super Cut Wool Pad - Step 1	1	6	636425 42077
9	Blue Cutting Foam Pad - Step 2	1	6	636425 42078
9	White Finishing Foam Pad - Step 3	1	6	636425 42079

3" Hook & Loop Buffing/Polishing Pads

- For small spot repair



SIZE (D)	DESCRIPTION	STD. PKG.	STD. CASE	PART #
3	Super Cut Wool Pad - Step 1	10	40	636425 43832
3	Blue Cutting Foam Pad - Step 2	10	40	636425 05459
3	White Finishing Foam Pad - Step 3	10	40	636425 05460

Hook & Loop Back-up Pads for 8" and 9" Buffing Pads

- Black plastic back-up plate with hook and loop face. Molded-in 5/8"-11 threaded female hub



SIZE (D)	DESCRIPTION	STD. PKG.	STD. CASE	PART #
8 and 9	Hook & Loop Back-up Pad	1	3	636425 42080

Black Lambswool Hook & Loop Polishing Pads

- Distributing and applying material evenly and consistently, these dense, durable, lambswool pads are designed to repair clearcoat finishes



SIZE	DESCRIPTION	STD. CASE	PART #
3	Pad with Loop - 3/4" nap	40	636425 03670
4	Pad with Loop - 3/4" nap	250	636425 03671



Made from non-woven synthetic fiber mesh, which is impregnated with abrasives and bound with resins, non-woven wheels are designed to create desired surface finish where little or no stock removal is required. Non-woven wheels have an open mesh construction that is waterproof, washable, conformable and non-loading.

Non-Woven Convolute wheels are formed by wrapping and bonding web material impregnated with abrasive grain and resin around a center core.

Applications:

- Burr and flashing removal
- Surface roughness reduction
- Blending weld areas on stainless steel
- Blending scratch patterns
- Weld polishing
- Removing rust and oxides
- Applying decorative finishes including antique patterns

Abrasive Grain:

Aluminum Oxide, Silicon Carbide

Grit Range:

Medium (M), Fine (F), Very Fine (VF)

Machine Used:



BENCH GRINDER



PEDESTAL GRINDER

Application/Grit Recommendation Guide

NORTON	Rapid Finish GP Convolute Wheels	Metal Finishing Convolute Wheels	Clean & Finish Convolute Wheels	Light Finishing Convolute Wheels
Scale Removal				
Stock Removal	Second Choice			
Heavy Deburring	Second Choice			
Decorative Finishing		Best Choice	Second Choice	
Blending	Best Choice	Second Choice		
Cleaning		Second Choice	Best Choice	
Light Deburring	Second Choice			Best Choice
Light Finishing	Second Choice			Best Choice
Polishing				Best Choice
Buffing				

Surface Finish Variables

Changes in any one of many factors can affect the surface finish on the workpiece. This chart shows the effect on surface finish by changes in single factors of product specifications. Arrows have been used to signify the trend direction. The arrow length does not signify that the effect of each factor is equal.

Variable Factor	Rough Finish High RMS Reading	Smooth Surface Lower RMS Reading
1. Wheel Speed	Slow ←	Fast →
2. Feed Speed	Faster (Long Scratch) ←	Slower (Short Scratch) →
3. Oscillation	No Oscillation ←	Oscillation →
4. Lubricants	Dry ←	Water ← Soluble Oil ← Straight Oil → Compounds →

Non-Woven Marking System

ABRASIVE	SILICON CARBIDE	ALUMINUM OXIDE		
	← SHARPER, FINER/BRIGHTER SCRATCH PATTERN	MORE DURABLE, LONGER LASTING, POLISHED FINISH →		
GRIT SIZE	XC (50)	C (60-80)	M (100-150)	F (180-220)
	← FASTER, AGGRESSIVE CUT, ROUGHER FINISH	REDUCED CUT RATE, FINER FINISH →		
DENSITY	2	9		
	← SOFT, OPEN, CONFORMABLE, LESS BURNING/LOADING	HARDER, MORE DURABLE, FASTER CUTTING, BETTER FINISH →		

Cross Reference Guide

NORTON	BEST	BETTER	BETTER	GOOD	GOOD	GOOD
3M	Rapid Finish P 3M EXL, General Purpose	Series 1000 EXL Deburring	Metal Finishing Metal Finishing	Series 4000 EX2 & EX3	Light Finishing Light Deburring	Clean & Finish Multi Finishing
Standard	General Purpose Plus, Light Deburring	Deburring Convolute	Metal Finishing	GP Plus	LDW	Multi Finishing

Aggressive Deburring

Good choice for heavy deburring applications



SERIES 4000 ALUMINUM OXIDE & SILICON CARBIDE

- High-quality synthetic web provides long life for heavy deburring, edge-breaking, and parting line removal on exotic metals
- Advanced resin bond system ensures free cutting action
- Use both wet and dry

TIER: **GOOD**
TRADENAME: **SERIES 4000**

SIZE (D x T x H)	ABRASIVE	GRIT	MAX. RPM	STD. PKG.	8 DENSITY PART #	9 DENSITY PART #
6 x 1/2 x 1	S/C	F	6,000	4		6626100 4021
6 x 1 x 1	A/O	M	6,000	3	6626100 4208	
	S/C	F	6,000	3	6626100 4142	6626100 4141
8 x 1 x 3	A/O	M	4,500	3	6626100 4165	
	S/C	F	4,500	3	6626100 4123	6626100 4135
12 x 1 x 5	S/C	F	3,000	2	6626100 4284	6626100 4148
12 x 2 x 5	S/C	F	3,000	1		6626100 4011

General Duty



Best choice for broad range of applications: general deburring, blending, and finishing on all materials including metals, wood, glass


RAPID FINISH GENERAL PURPOSE A/O & S/C

- Eliminate smearing and loading on a wide range of workpieces (from high-nickel-content alloys to aluminum and other soft metals with patent-pending Norton Clean Bond resin technology)
- Increase throughput with a 30% faster finish through new Norton grain/bond configuration, decrease wheel changes with a 10-30% longer life, provided by a new fiber and the high-temperature resin bond
- Ease wheel selection with color-coding wheel to match the primary use (maroon for General Purpose), and fiberglass core to match the abrasive (black for silicon carbide and white for aluminum oxide)

TIER: **BEST**
TRADENAME: **RAPID FINISH GENERAL PURPOSE**

SIZE (D x T x H)	ABRASIVE	GRIT	MAX. RPM	STD. PKG.	PRODUCT CODE	6 DENSITY PART #	7 DENSITY PART #	8 DENSITY PART #	9 DENSITY PART #
6 x 1/2 x 1	A/O	M	6,000	4	C2315		662611 34177	662611 34178	662611 34179
	S/C	M	6,000	4	C4315				662611 08076
	S/C	F	6,000	4	C4415		662611 33213	662611 06732	662611 12985
6 x 1 x 1	A/O	M	6,000	3	C2315	662611 34180	662611 34181	662611 34182	662611 34183
	A/O	F	6,000	3	C2408	662611 32100	662611 32322	662611 32324	
	S/C	M	6,000	3	C4315		662611 08074	662611 33215	662611 08075
	S/C	F	6,000	3	C4415	662611 14475	662611 19988	636425 77269	636425 81587
	S/C	VF	6,000	3	C4515	662611 31970			
	S/C	M	6,000	2	C2315		662611 34184		
6 x 2 x 1	S/C	M	6,000	2	C4315		662611 14471		
	S/C	F	6,000	2	C4415		662611 32325		
	S/C	M	4,500	3	C4315		662611 08066	662611 08069	
8 x 1 x 3	S/C	F	4,500	3	C4415	662611 08064	662611 08065	636425 53754	636425 76004
	S/C	VF	4,500	3	C4515				662611 33209
	S/C	M	4,500	2	C4315		662611 14473		
8 x 2 x 3	S/C	F	4,500	2	C4415		662611 14480	662611 14483	662611 14486
	S/C	VF	4,500	2	C4515				662611 33210
	S/C	M	3,600	3	C2315		662611 34185		
10 x 1 x 5	S/C	F	3,600	3	C4415			662611 06554	662611 14488
	S/C	F	3,600	1	C4415			636425 81044	662611 14489
12 x 1 x 5	A/O	M	3,000	2	C2315				662611 34186
	S/C	F	3,000	2	C4415	662611 08053	662611 14481	662611 14484	662611 14074
	S/C	VF	3,000	2	C4515				662611 34187
12 x 2 x 5	S/C	F	3,000	1	C4415		662611 14482	662611 12766	662611 14490

General Duty *continued*

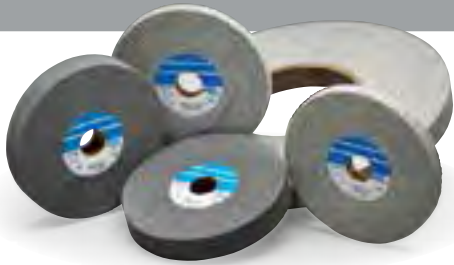

Better choice for general deburring, blending, and final finishing

SERIES 1000 LONG LIFE A/O & S/C

- Offered in variety of web densities: more open, cool-cutting 7 density for light deburring, 8 to 9 density a good starting point for deburring, blending, polishing, and finishing
- Smear- and heat-free resin bond guarantees consistent, high-quality results; uniform grain dispersion and coating clean and condition without gouging or changing dimensions of workpiece
- Conformable and flexible for less operator fatigue

TIER: **BETTER**
TRADENAME: **SERIES 1000 LONG LIFE**

SIZE (D x T x H)	ABRASIVE	GRIT	MAX. RPM	STD. PKG.	7 DENSITY PART #	8 DENSITY PART #	9 DENSITY PART #
6 x 1/2 x 1	A/O	M	6,000	4	662610 18857		662610 18650
	S/C	M	6,000	4			662610 19540
	S/C	F	6,000	4	662610 18628		662610 18629
6 x 1 x 1	A/O	M	6,000	3	699573 97884	662610 18636	662610 19337
	S/C	M	6,000	3	699573 97882	699573 97883	662610 18630
	S/C	F	6,000	3	662610 18631	662610 18774	662610 18632
8 x 1 x 3	A/O	M	4,500	3	699573 97885	662610 18855	662610 18633
	S/C	M	4,500	3	699573 94610	662610 18673	662610 18997
	S/C	F	4,500	3	662610 18639	662610 18640	662610 18641
12 x 1 x 5	A/O	M	3,000	2	699573 97887		662610 18896
	S/C	M	3,000	2		662610 18786	662610 18908
	S/C	F	3,000	2			662610 18626

Aesthetic Finishing



Better choice for decorative finishing, blending, and final finishing

METAL FINISHING ALUMINUM OXIDE

- Premium, medium grit aluminum oxide grain generates uniform distinct satin and antique finishes
- Dense, very durable web allows these wheels to be used for blending applications; strong resin binder provides resiliency and long life
- Uniform grain dispersion and coating clean and condition without gouging or changing dimensions of workpiece

TIER: **BETTER**
TRADENAME: **METAL FINISHING**

SIZE (D x T x H)	ABRASIVE	GRIT	DENSITY	MAX. RPM	STD. PKG.	PART #
6 x 1 x 1	A/O	M	5	6,000	3	662610 07936
	A/O	M	6	6,000	3	662610 10148
6 x 2 x 1	A/O	M	5	6,000	2	662610 07957
	A/O	M	6	6,000	2	662610 09635
8 x 1 x 3	A/O	M	5	4,500	3	662610 07831
8 x 2 x 3	A/O	M	5	4,500	2	662610 07904
	A/O	M	6	4,500	2	662610 12971
12 x 1 x 5	A/O	M	5	3,000	2	662610 07434
	A/O	M	6	3,000	2	662610 09481
12 x 2 x 5	A/O	M	5	3,000	1	662610 07212
14 x 2 x 8	A/O	M	5	2,550	1	662610 07817

Aesthetic Finishing *continued*

Good choice for light deburring, polishing, and fine finishing applications



LIGHT FINISHING SILICON CARBIDE

- Advanced manufacturing process produces a consistent web and grain distribution for a consistent finish on intricate polishing applications
- Superior form holding for consistent, reliable edge breaking and finishing with minimal wheel dressing and reshaping; less dust and shedding with more uniform wear
- Controlled cut rate prevents “over benching”, deburrs and polishes without altering geometry

TIER: **GOOD**

TRADENAME: **LIGHT FINISHING**

SIZE (D x T x H)	ABRASIVE	GRIT	MAX. RPM	6 DENSITY PART #	7 DENSITY PART #	8 DENSITY PART #
6 x 1/2 x 1	S/C	F	6,000	662610 92322	662610 92324	662544 21572
6 x 1 x 1	S/C	F	6,000	662544 03708	662544 03709	662544 21573
8 x 1/2 x 3	S/C	F	4,500	662544 03707	662544 09698	662544 21575
8 x 1 x 3	S/C	F	4,500	662610 95702	662544 09924	662544 21577

All Light Finishing convolute wheels are non-stock. Ask your Norton representative for current lead-times and order quantities.

Good choice for fine finishing with light pressure



CLEAN & FINISH SILICON CARBIDE

- Sharp, more aggressive silicon carbide abrasive leaves a fine/brighter scratch pattern
- Conformable to intricate shapes and contours without changing the workpiece dimension
- Open web construction makes these ideal for low-to moderate-pressure, low speed applications

TIER: **GOOD**

TRADENAME: **CLEAN & FINISH**

SIZE (D x T x H)	ABRASIVE	GRIT	DENSITY	MAX. RPM	STD. PKG.	PART #
4 x 1 x 1	S/C	M	4	4,000	10	662610 58502
		F	4	4,000	10	662610 58501
6 x 1 x 1	S/C	M	4	3,000	4	662610 58507
		F	4	3,000	4	662610 58506
6 x 2 x 1	S/C	M	4	3,000	2	662610 58510
		F	4	3,000	2	662610 58509
6 x 3 x 1	S/C	M	4	3,000	1	662610 58512
6 x 4 x 1	S/C	M	4	3,000	1	662610 58514
8 x 1 x 3	S/C	M	4	2,500	3	662610 58518
8 x 2 x 3	S/C	M	4	2,500	2	662610 58521
8 x 3 x 3	S/C	M	4	2,500	1	662610 58524
8 x 4 x 3	S/C	M	4	2,500	1	662610 58526

Aluminum Reducing Bushings for Flap and Convolute Wheels



- Durable, aluminum one-piece-design flanges with integrated contact washer
- Snug fit; extended usable life
- Available in stock and non-stock sizes in many combinations of ID hole reduction


WHEEL CENTER HOLE	BUSHING REDUCES HOLE SIZE TO	FOR WHEEL DIAMETER	STD. PKG.	PART #
1	3/8	4 - 6	1 Pair	662610 80522
	1/2	4 - 6	1 Pair	662610 80523
	5/8	4 - 6	1 Pair	662610 80524
	3/4	4 - 6	1 Pair	662610 80525
2	7/8	4 - 6	1 Pair	662610 80526
	1/2	6	1 Pair	662610 80527
	5/8	6	1 Pair	662610 80528
3	1	6	1 Pair	662610 80529
	1-1/4	8	1 Pair	662610 80531
5	1	8	1 Pair	662610 80532
	1-1/4	10 and 12	1 Pair	662610 80533
	3	10 and 12	1 Pair	662610 80534
8	1-1/4	14	1 Pair	662610 80535
			1 Pair	662610 80536

TECH TIP

- Convolute wheels must always run in the direction indicated by the arrow printed on the side of each wheel.
- Light to medium pressure is recommended. Excessive pressure may result in part damage.
- Lubricants such as water-soluble oil and straight oil will decrease the heat and improve the surface finish and lustre.



It is the user's responsibility to refer to and comply with ANSI B7.1

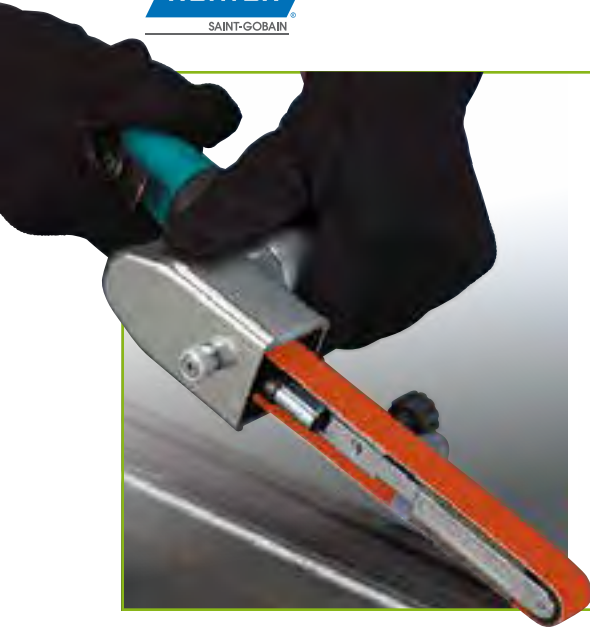

Portable file belt sanders have replaced tedious hand filing and sanding. First introduced in pneumatic, they are now also available in electric. Increasingly, tool manufacturers are introducing additional fixtures for additional applications. The belts listed are popular stock sizes, but additional sizes, specifications, backing materials, and edge scallops are available made-to-order.

Applications:

Light weld removal and blending, shape and contour sanding, surface preparation prior to coating and plating, removing cutting tool marks from molds and dies, general clean-up and finishing

Size Range:

1/8" to 1" wide, 12" to 30" long

Grit Range:

40 – 120

Abrasive Grain:

Ceramic Alumina, Zirconia Alumina, Aluminum Oxide

Machine Used:



PORTABLE FILE BELT SANDER

Cross Reference Guide

	BEST	BEST	BETTER	GOOD	GOOD
NORTON	Blaze R980P	RedHeat R983	BlueFire R887D/R823P	Gemini R766	Gemini R283
3M	963G/H, 966F, 967F, 997F, 984F, 784F, 947A	747D, 777F, 778F, 784F, 987F, 977F	577F, 551E	361F, 363F	241E, 244E, 251E, 261E
Hermes	CR456	—	RB48624YX, RB48644Z	RB377XY, SB378	RB530J, RB304J, RB306J
Klingspor	CS610	CS912	CS411X, CS416, CS409	CS412, CS413	CS412
SIA	2515, 2503	—	2800, 2803, 2815, 2829, 2824	—	—
VSM	XK875X, XK885Y, XK880Y	XK870X, XK870X	ZK713X, ZK713T, KK715X	LK719X, KK711X	KK711E
Sait	—	—	AZ-X	1AX, 2AX	LA-X
Sunmigh	—	—	—	P656W	—

Material-to-Product Recommendation Guide

	BEST	BEST	BETTER	GOOD	GOOD	
	Blaze R980P	RedHeat R983	BlueFire R887D	BlueFire R823P	Gemini R766	Gemini R283
Carbon Steel	◆	◆	◆	◆	◆	◆
Stainless Steel / Alloys	◆	◆	◆	◆	◆	◆
Cast Iron	◆	◆	◆	◆	◆	◆
Brass / Bronze	◆	◆	◆	◆	◆	◆
Aluminum	◆	◆	◆	◆	◆	◆



Best for stainless, cobalt, chrome, inconel, titanium, mild and carbon steel

BLAZE R980P CERAMIC ALUMINA


- Next-generation cooler cutting Norton SG ceramic alumina grain lasts 50% to 200% longer on mild and carbon steel, stainless, cobalt, chrome, inconel and titanium with better metal integrity
- Durable Y-weight polyester, waterproof cloth backing for improved grain adhesion, reduced edge-fray, and better body retention, resulting in longer life and product consistency
- Lubricating grinding aid coating means cooler cut, burn-free grinding of heat-sensitive materials, minimized loading, and improved part finish and integrity



Exceptional performance, especially on hard-to-grind alloys

REDHEAT R983 CERAMIC ALUMINA

- Premium ceramic abrasive provides sharp cutting, exceptional life and value, especially on hard-to-grind alloys
- "Supersize" grinding-aid for longer life, cooler cut and minimized loading
- Strong Y-weight polyester, waterproof cloth backing for improved grain adhesion, reduced edge-fray and better body retention, resulting in longer life and product consistency

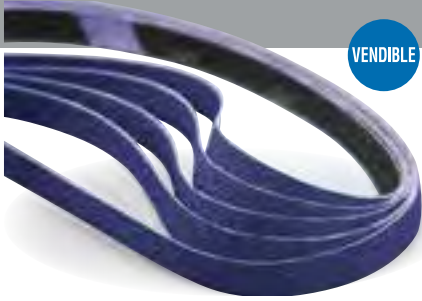

VENDIBLE

Better choice for stainless and carbon steel

BLUEFIRE R887D/R823P ZIRCONIA ALUMINA

- Strong, self-sharpening zirconia alumina abrasive for fast, aggressive cut and 30% longer life than competitive zirconia belts
- Durable resin bond for excellent grain retention and product life
- Strong Y-weight polyester backing - R887D for heavy-duty stock removal applications; flexible X-weight polyester backing - R823P for moderate- to light-pressure applications



Good choice for difficult-to-grind materials (aluminum, brass, bronze, stainless, carbon steel, titanium, etc.)

GEMINI R766 ALUMINUM OXIDE

- Premium aluminum oxide abrasive blend is ideal when primary purchasing criteria is a good-performing, economically-priced, general-purpose belt
- Y-weight waterproof polyester backing withstands light- to moderately-demanding applications and provides extended life on dry grinding applications
- Resin bond system provides improved edge retention and 30% plus improvement in life versus key competitors



Good choice for stainless and carbon steel applications when initial price is the primary purchasing factor

GEMINI R283 ALUMINUM OXIDE

- P-graded premium aluminum oxide abrasive for consistent, cool cut
- Strong, semi-flexible, smooth X-weight rayon waterproof backing is designed for light- to moderate- pressure applications
- Durable resin coating provides excellent grain retention and product life



TIER:	BEST	BEST	BETTER	GOOD	GOOD
TRADENAME:	BLAZE R980P	REDHEAT R983	BLUEFIRE R887D/R823P	GEMINI R766	GEMINI R283
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Zirconia Alumina	Aluminum Oxide Blend	Aluminum Oxide
BACKING:	Y-Weight Polyester	Y-Weight Polyester	Y- or X-Weight Polyester	Y-Weight Polyester	X-Weight Rayon
OTHER:	Supersize	Supersize			

SIZE (W x L)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #	
12" Belts								
1/8 x 12	40	50				666233	90000	
	60	50	662544	05345	662544	91522	662610	93029
	80	50			662544	91523		
	120	50	662544	91519	662544	91524		
1/4 x 12	40	50	662544	91520			666233	90003
	60	50	662611	96480		780727	58896	
	80	50			662544	91526	780727	82621
1/2 x 12	120	50	662610	63632	662544	91527	780727	82622
	40	50	699573	98018	662544	91528	662544	92522
	50	50	662610	43759	780727	18700	666233	90006
	60	50	699573	98019	780727	18701	780727	28745
	60	25 V					666233	73753
	80	50	699573	98020	780727	18702	780727	28744
1 x 12	80	25 V					666233	73754
	100	50	662610	1081180	662544	91529	662544	91534
	120	50	662610	42909	780727	00518	780727	28742
	120	25 V					666233	73755
							780727	53073
								780727

Additional sizes, grits and scalloped edge belts are available MTO (made-to-order). Contact your Norton representative for availability, order quantities and lead-times.

40 and 50 grit BlueFire belts are furnished in BlueFire R887D (Y-weight Polyester); 60-120 grits are supplied in BlueFire R823P (X-weight Polyester).

Joints - All belts are PG jointed; a butt joint joined with flexible tape for contour grinding.

V = Vendible package. Ideal for vending machines and small jobs. 5 belts per pack / 5 packs per carton. Order in multiples of 25.

continued



TIER:	BEST	BEST	BETTER	GOOD	GOOD
TRADENAME:	BLAZE R980P	REDHEAT R983	BLUEFIRE R887D/R823P	GEMINI R766	GEMINI R283
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Zirconia Alumina	Aluminum Oxide Blend	Aluminum Oxide
BACKING:	Y-Weight Polyester	Y-Weight Polyester	Y- or X-Weight Polyester	Y-Weight Polyester	X-Weight Rayon
OTHER:	Supersize	Supersize			

SIZE (W x L)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #
13" Belts							
3/8 x 13	60	50	699573 45359	780727 45459	780727 40295	666233 90011	780727 32112
	80	50	699573 92150	780727 74916	780727 36062	666233 90012	780727 71323
18" Belts							
1/8 x 18	40	50	662544 75211		662544 91535	666233 90014	
	60	50	662610 80010		780727 60595	666233 90015	
	80	50	662610 89120	780727 89083	780727 60595		
	120	50	662544 75215	780727 89084	636425 95221		
1/4 x 18	40	50	662610 27923	662611 98953	662544 92525	666233 90016	662544 91543
	60	50	699573 47249	780727 74684	780727 43583	666233 90017	780727 71000
	60	25 V			666233 73747		
	80	50	699573 46155	780727 03284	780727 53075		780727 73921
	80	25 V			666233 73748		
	120	50	662610 85071	780727 85655	780727 73764		
1/2 x 18	40	50	699573 98021	780727 66018	662544 44193	666233 90019	780727 27561
	60	50	699573 98022	780727 18704	780727 28569	666233 90020	780727 27560
	60	25 V			666233 73756		
	80	50	699573 98023	780727 18705	780727 28568	666233 90021	780727 27559
	80	25 V			666233 73757		
	120	50	662610 41384	780727 18706	780727 28567		780727 27558
3/4 x 18	40	50	699573 98027	780727 62476	662544 92526	666233 90022	780727 81797
	60	50	699573 98028	780727 45691	780727 09590	666233 90023	780727 39966
	60	25 V			666233 73762		
	80	50	699573 98029	780727 56309	780727 58953	666233 90024	780727 32289
	80	25 V			666233 73763		
	120	25 V			666233 73764		
20-1/2" Belts							
3/4 x 20-1/2	40	50	699573 98030	780727 14398	662544 57869	666233 90025	780727 27573
	50	50	699573 44982	780727 18714	662544 92527	666233 90026	662544 91544
	60	50	699573 98031	780727 18715	780727 28560	666233 90027	780727 27571
	60	25 V			666233 73765		
	80	50	699573 98032	780727 18716	780727 28559	666233 90028	780727 27570
	80	25 V			666233 73766		
	100	50	662610 55516	780727 71151	662610 38911		780727 27569
	120	50	662610 44755	780727 27380	780727 28557		780727 27575
24" Belts							
1/4 x 24	40	50	662611 98631	780727 47823	662544 73499		662544 01929
	60	50	699573 45451	780727 56534	780727 28552	666233 90030	780727 27548
	60	25 V			666233 73750		
	80	50	636425 96940	780727 18340	780727 67713		
1/2 x 24	120	50	662610 80367	780727 70718	780727 28550		
	40	50	699573 98024	780727 60092	662544 92528	666233 90032	780727 27568
	50	50	662610 43757	780727 18707	662544 52237	666233 46910	780727 27567
	60	50	699573 98025	780727 18708	780727 28564	666233 90033	780727 27566
	60	25 V			666233 73759		
	80	50	699573 98026	780727 18709	780727 28566	666233 90034	780727 27565
	80	25 V			666233 73760		
	100	50	662610 42203	780727 45021	780727 53076		662544 91545
120	50	662610 42565	780727 18710	780727 28565		780727 27564	
1 x 24	40	50	699573 50019	662544 91531			
	50	50	699573 44889	780727 10374			662544 91547
	60	50	699573 53375				
	80	50	699573 45419	780727 72209	780727 76498	666233 34206	662610 85068
120	50	662610 85067	662544 91532	780727 30029		662610 85069	
30" Belts							
1 x 30	40	50	662610 53470		662544 78257	666233 90038	662611 89958
	60	50	699573 45985		780727 28583	666233 90039	662544 91549
	80	50	699573 46105	780727 64439	780727 28582	666233 90040	780727 27579
	120	50	662611 93676	780727 81197	780727 66992		780727 27577

Additional sizes, grits and scalloped edge belts are available MTO (made-to-order). Contact your Norton representative for availability, order quantities and lead-times. 40 and 50 grit BlueFire belts are furnished in BlueFire R887D (Y-weight Polyester); 60-120 grits are supplied in BlueFire R823P (X-weight Polyester).

Joints - All belts are PG jointed; a butt joint joined with flexible tape for contour grinding.

V = Vendible package. Ideal for vending machines and small jobs. 5 belts per pack / 5 packs per carton. Order in multiples of 25.



Portable belts are ideal for all your metal and woodworking applications. Choose 36 – 50 grits for rough/heavy-duty applications, 60 – 100 for intermediate, and 100 – 220 for finishing/polishing applications.

The belts listed are popular stock sizes, but additional sizes, specifications, and backing materials, are available made-to-order.

Applications:

Grinding and finishing all metals, blending welds, sanding and finishing wood, glass seaming, and polishing

Size Range:

3" to 4" wide, 15-1/2" to 24" long

Grit Range:

36 – 220

Abrasive Grain:

Ceramic Alumina, Zirconia Alumina, Aluminum Oxide

Machine used:



BELT SANDER



IN-LINE DRUM SANDER

Cross Reference Guide

NORTON	BEST RedHeat R983	BETTER BlueFire R831	GOOD Gemini R215/ Metalite R255
3M	747D, 777F, 778F, 784F, 987F, 977F	577F	240DZ, 340A, 340D
Hermes	—	RB480	RB320
Klingspor	CS912	CS411	LS309XH
Sait	—	Z-H	1A-X, 2A-X, AO-X, LA-X
SIA	—	2800, 2829, 2925	2920, 2928, 2921, 2951, 2925
VSM	XK870X, XK870X	ZK713X	KK504X, KP510E

Material-to-Product Recommendation Guide

	BEST RedHeat R983	BETTER Bluefire R831	GOOD Gemini R215	Metalite R255
Wood		◆	◆	◆
Carbon Steel / Stainless Steel	◆	◆		
Brass / Bronze / Aluminum		◆	◆	◆

Exceptional performance, especially on hard-to-grind alloys



REDHEAT R983 CERAMIC ALUMINA


- Premium ceramic abrasive provides sharp cutting, exceptional life and value, especially on hard-to-grind alloys
- "Supersize" grinding-aid for longer life, cooler cut and minimized loading
- Strong Y-weight polyester, waterproof cloth backing for improved grain adhesion, reduced edge-fray and better body retention, resulting in longer life and product consistency

Better choice for stainless steel and wood



BLUEFIRE R831 ZIRCONIA ALUMINA

- Premium, self-sharpening zirconia alumina abrasive provides superior cut on all surfaces, lasts substantially longer, and cuts faster than the next leading competitor in side-by-side comparisons
- Proprietary patented grain technology produces one of the finest scratch patterns in the industry for finer looking finish; open-coat design and strong Y-weight cotton backing for reduced loading and extended life
- Reversible butt splice allows belt to be used in either direction for longer life



Good choice to minimize loading on wood and soft metals - where initial price is the main concern

GEMINI R215 / METALITE R255 ALUMINUM OXIDE

- Premium aluminum oxide abrasive for fast initial cut rate
- Heavy, durable X-weight cotton backing is ideal for heat sensitive applications
- Strong butt joint that allows the belt to be run in either direction

Portable Belts for Belt Sanders

	JOBPACK	JOBPACK	
TIER:	BETTER	GOOD	GOOD
TRADENAME:	BLUEFIRE R831	GEMINI R215	METALITE R255
ABRASIVE:	Zirconia Alumina	Aluminum Oxide	Aluminum Oxide
BACKING:	Y-Weight Cotton	X-Weight Cotton	X-Weight Cotton
JOINT:	Plyweld	Plyweld	Plyweld
GRAIN COATING:	Open Coat	Open Coat	Open Coat
OTHER:			UPC Bar Coded

SIZE (W x L)	GRIT	PKG./CASE	PART #	PART #	STD. PKG.	PART #
3 x 18	36				5	780727 80447
	50	5/25*	076607 49259	076607 00964	10	780727 27994
	80	5/25*	076607 49258	076607 00968	10	780727 27993
	120	5/25*	076607 49256	076607 00969	10	780727 27992
3 x 21	36	5/25*	076607 49266	076607 01741		
	40				10	780727 27927
	50	5/25*	076607 49265	076607 01740	10	780727 27926
	60				10	780727 27925
	80	5/25*	076607 49264	076607 02064	10	780727 27924
	100	5/25*	076607 49263		10	780727 27923
	120	5/25*	076607 49262	076607 02062	10	780727 27922
	220	5/25*		076607 05287		
3 x 24	36	5/25*	076607 49272	076607 01743	5	780727 81847
	40				10	780727 27937
	50	5/25*	076607 49271	076607 01742	10	780727 27936
	60				10	780727 27935
	80	5/25*		076607 02067	10	780727 27934
	100	5/25*	076607 49269	076607 02066	10	780727 27933
	120	5/25*	076607 49268	076607 02065	10	780727 27932
	180	5/25*	076607 49278	076607 01745	5	780727 80438
4 x 24	36	5/25*			10	780727 27947
	40				10	780727 27946
	50	5/25*	076607 49277	076607 01744	10	780727 27945
	60				10	780727 27944
	80	5/25*	076607 49276	076607 02069	10	780727 27943
	100	5/25*			10	780727 27942
	120	5/25*	076607 49274	076607 02068	10	780727 27941
	180	5/25*		076607 05285		

*Job Pack packing standards: 5 belts/Job Pack; 5 Job Packs per case. Order by number of packs, in multiples of 5 packs.

Portable Belts for Pneumatic In-Line Drum Sanders

	BEST	BETTER	GOOD
TIER:	BEST	BETTER	GOOD
TRADENAME:	REDHEAT R983	BLUEFIRE R823P	GEMINI R215
ABRASIVE:	Ceramic Alumina	Zirconia Alumina	Aluminum Oxide
BACKING:	Y-Weight Polyester	X-Weight Polyester	X-Weight Cotton
JOINT:	Plyweld	Plyweld	Plyweld
GRAIN COATING:	Closed Coat/Supersize	Closed Coat	Open Coat

SIZE (W x L)	GRIT	STD. PKG.	PART #	PART #	PART #
3-1/2 x 15-1/2	36	10	780727 00783		780727 21997
	60	10	780727 18750		780727 22000
	80	10	780727 18751	780727 53074	780727 21995
	120	10	780727 18753		



A broad selection of sizes and grits for most dimensioning, intermediate grinding and polishing applications.

The belts listed are popular stock sizes, but additional sizes, specifications, and backing materials, are available made-to-order.

Applications:

Benchstand and Backstand Belts: grinding and deburring of all metals, heavy stock removal, blending, dimensioning and shaping, polishing.

Centerless, Conveyor and Platen Belts: intermediate grinding stainless and carbon, moderate-pressure applications, dimensioning and finishing.

Size Range:

1" to 10" wide, 36" to 132" long

Grit Range:

24 – 320

Abrasive Grain:

Ceramic Alumina, Zirconia Alumina, Aluminum Oxide

Machine Used:



BACKSTAND
BELT GRINDER



BENCHSTAND
GRINDER

Cross Reference Guide

	BEST	BEST	BETTER	BETTER	BETTER	GOOD	GOOD
NORTON	Blaze R980P	RedHeat R983	BlueFire R821P	BlueFire R823P	BlueFire R884P	Gemini R766	Gemini R228
3M	963G/H, 966F, 967F, 997F, 984F, 784F, 947A	747D, 777F, 778F, 784F, 987F, 977F	—	551E	561D	361F, 363F	241D, 251D, 341D
Hermes	CR454, CR456	CN464	—	RB486 X, RB346, RB486	RB48024YX, RB48444Z, RB485Z	RB377XY, SB378, RB34MJ	RB320X, HSB
Klingspor	CS610	CS912	CS411X	CS411X, CS416	CS411	CS412, CS413	CS310
SIA	2515, 2503	—	—	—	2820	—	2918, 2928
VSM	XK875X, XK885Y, XK880Y	XK870X, XK870X	—	ZK713X, KK715X	KK716, ZK713T	LK719X, KK711X	KK511X, KK711

Material-to-Product Recommendation Guide

	BEST	BETTER	BETTER	BETTER	GOOD	GOOD
	Blaze R980P	BlueFire R884P	BlueFire R823P	BlueFire 821P	Gemini R766	Gemini R228
Aluminum		◆	◆		◆	
Cast Iron	◆		◆		◆	
Brass / Bronze		◆	◆		◆	
Die Castings	◆		◆		◆	
Carbon Steel	◆		◆		◆	◆
Glass / Ceramics	◆			◆	◆	
Stainless Steel and Alloys	◆	◆	◆		◆	
Wood		◆			◆	

Grit Selection Recommendation Guide

STOCK REMOVAL	INTERMEDIATE	FINISHING
24 – 50 grit	60 – 100 grit	120 – 320 grit

TECH TIP

Troubleshooting Guide

Problem	Correction	Problem	Correction
Loading	Decrease infeed pressure or belt speed	Belt breakage	Reduce belt tension
Shedding	Reduce applied pressure		Use less aggressive contact wheel
	Use a less aggressive contact wheel		Check tracking mechanism for belts tracking erratically
	Dress contact wheel if worn or damaged		
	Use entire surface of belt		



Best for mild and carbon steel, stainless, cobalt, chrome, inconel, titanium

BLAZE R980P CERAMIC ALUMINA

- Next-generation cooler cutting Norton SG ceramic alumina grain lasts 50% to 200% longer on mild and carbon steel, stainless, cobalt, chrome, inconel and titanium with better metal integrity
- Durable Y-weight polyester, waterproof cloth backing for improved grain adhesion, reduced edge-fray, and better body retention, resulting in longer life and product consistency
- Lubricating grinding aid coating means cooler cut, burn-free grinding of heat-sensitive materials, minimized loading, and improved part finish and integrity



Exceptional performance, especially on hard-to-grind alloys

REDHEAT R983 CERAMIC ALUMINA

- Premium ceramic abrasive provides sharp cutting, exceptional life and value, especially on hard-to-grind alloys
- "Supersize" grinding-aid for longer life, cooler cut and minimized loading
- Strong Y-weight polyester, waterproof cloth backing for improved grain adhesion, reduced edge-fray and better body retention, resulting in longer life and product consistency



Better choice for heaviest-pressure applications

BLUEFIRE R821P/R823P/R884P ZIRCONIA ALUMINA

- Strong, self-sharpening zirconia alumina abrasive for fast, aggressive cut and 30% longer life than competitive zirconia belts
- Durable resin bond for excellent grain retention and product life
- R821P Y-weight cotton backing provides durability and even wear on coarser grit stock removal applications;
- R823 has flexible X-weight polyester waterproof backing to excel on light- to moderate-pressure, applications
- R884P has a durable Y-weight polyester waterproof cloth backing that excels on medium- to high pressure applications



Good choice for difficult-to-grind materials (aluminum, brass, bronze, stainless, carbon steel, titanium, etc.)

GEMINI R766 ALUMINUM OXIDE

- Premium aluminum oxide abrasive blend is ideal when primary purchasing criteria is a good-performing, economically-priced, general-purpose belt
- Y-weight waterproof polyester backing withstands light- to moderately-demanding applications and provides extended life on dry grinding applications
- Resin bond system provides improved edge retention and 30% plus improvement in life versus key competitors



Good choice for fine grit metalworking blending and polishing where initial price is the main concern

GEMINI R228 ALUMINUM OXIDE

- Premium aluminum oxide abrasive delivers fast initial cut rate
- Heavy, durable X-weight cotton backing is ideal for heat sensitive applications
- Strong butt joint that allows the belt to be run in either direction

1" to 6" wide, 36" to 72" long



TIER:	BEST	BETTER	BETTER	GOOD	GOOD
TRADENAME:	BLAZE R980P	BLUEFIRE R821P	BLUEFIRE R823P	GEMINI R766	GEMINI R228
ABRASIVE:	Ceramic Alumina	Zirconia Alumina	Zirconia Alumina	Aluminum Oxide Blend	Aluminum Oxide
BACKING:	Y-Weight Polyester	Y-Weight Cotton	X-Weight Polyester	Y-Weight Polyester	X-Weight Cotton
OTHER:	Supersize				

SIZE (W x L)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #
1 x 42	36	50	662544 76825				780727 91710
	40	50	699573 45887	780727 26905			780727 20910
	50	50	662544 76826	780727 26904		666233 90042	780727 20905
	60	50	699573 45486	780727 26903	780727 28596	666233 34502	780727 20900
	80	50	662610 41539	780727 26902	780727 28594	666233 90043	780727 20895
	100	50	662610 43462		780727 28592		780727 20890
	120	50	662610 38660		780727 28590		780727 20885
	150	50			780727 28588		780727 20880
	180	50			780727 28586		780727 20875
	220	50			780727 00001		780727 20871
	240	50					780727 20870
	320	50					780727 20865
	1-1/2 x 60	36	10	699573 45578			
40		10	636425 95003				
50		10					780727 87807
60		10	699573 45631			666233 90045	
80		10	699573 45579			666233 90046	
100		10			780727 65077		699573 51736
120		10	662610 56493		780727 26984		
2 x 48	24	10					780727 26130
	36	10	636425 92057	780727 27103		666233 90047	780727 21255
	40	10	699573 45193	780727 27102		666233 90048	780727 21250
	50	10	699573 46716	780727 27101			780727 21245
	60	10	699573 44423	780727 27100	780727 28621	666233 90050	780727 21240
	80	10	699573 45100	780727 27099	780727 28619	666233 90051	780727 21235
	100	10	662610 52522		780727 28617		780727 21230
	120	10	662610 52520		780727 28615		780727 21225
	150	10			780727 28613		780727 23246
	180	10			780727 28611		780727 21223
	220	10			780727 28609		780727 63677
	320	10					780727 46387
	2 x 60	24	10				
36		10	699573 45196			666233 90052	780727 01170
40		10	699573 94425	780727 27124			780727 21300
50		10	699573 46149				780727 62537
60		10	699573 44901	780727 27122		666233 90055	780727 21290
80		10	636425 92574	780727 27121		666233 90056	780727 21285
100		10	662610 52222		662610 82976		780727 21280
120		10	662610 42738		780727 61958		
150		10					780727 44018
180		10			780727 02695		780727 20441
220		10			780727 06282		780727 44020
240		10					780727 61862
320		10					780727 02825
2 x 72	24	10	662544 33969				
	36	10	699573 45460	780727 27147		666233 90057	780727 21335
	40	10	699573 46729	780727 27146		666233 90058	780727 21332
	50	10	699573 44966	780727 27145			780727 84894
	60	10	699573 45157	780727 27144	780727 28645	666233 90060	780727 21325
	80	10	699573 44961	780727 27142	780727 28643	666233 34237	780727 21320
	100	10	662610 41897		662610 25537		780727 23235
	120	10	662610 44095		780727 28639		780727 21318
	150	10			780727 61770		780727 61973
	180	10			780727 63853		780727 18488
	220	10			780727 28633		780727 65601
	320	10					780727 21308

* Std. Pkg. = 20 Belts
Continued

1" to 6" wide, 36" to 72" long *continued*



TIER:	BEST	BETTER	BETTER	BETTER	GOOD	GOOD
TRADENAME:	BLAZE R980P	BLUEFIRE R821P	BLUEFIRE R823P	BLUEFIRE R884P	GEMINI R766	GEMINI R228
ABRASIVE:	Ceramic Alumina	Zirconia Alumina	Zirconia Alumina	Zirconia Alumina	Aluminum Oxide Blend	Aluminum Oxide
BACKING:	Y-Weight Polyester	Y-Weight Cotton	X-Weight Polyester	Y-Weight Polyester	Y-Weight Polyester	X-Weight Cotton
OTHER:	Supersize					

SIZE (W x L)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	
2-1/2 x 48	36	10					666233 90061	780727 21540	
	50	10		780727 27213				780727 21530	
	60	10					666233 90064	780727 21525	
	80	10					666233 90065	780727 21520	
2-1/2 x 60	24	10				780727 37759		780727 08296	
	36	10	699573 44963	780727 27235			666233 90066	780727 21610	
	40	10	699573 46523	780727 27234			666233 90067	780727 21605	
	50	10	699573 45300	780727 27233			666233 90068	780727 21600	
	60	10	699573 45002	780727 27232	780727 28692	780727 21383	666233 90069	780727 21595	
	80	10	699573 46095	780727 27231	780727 28690		666233 90070	780727 21590	
	100	10	662610 41380		780727 28691			780727 21585	
	120	10			780727 28686			780727 21580	
	180	10			780727 28682			780727 21570	
	220	10			780727 78217			780727 21565	
4 x 36	36	10					666233 90071	780727 22110	
	40	10						780727 22105	
	50	10		780727 27475			666233 90073	780727 22100	
	60	10			780727 28827		666233 90074	780727 22095	
	80	10		780727 27473	780727 28825		666233 90075	780727 22090	
	100	10			780727 28823			780727 22085	
	120	10			780727 28821			780727 22080	
	150	10						780727 22079	
	180	10						780727 22075	
	240	10						780727 22926	
4 x 54	320	10						780727 22071	
	36	10						780727 22185	
	40	10						780727 22180	
	50	10					666233 90078	780727 22175	
	60	10	662610 63419	780727 27518	780727 25116			780727 22170	
	80	10	699573 45139		780727 82996			780727 22165	
	100	10						780727 22160	
4 x 60	120	10			780727 28847			780727 22155	
	150	10						780727 28381	
	24	10	662544 61488					780727 72342	
	36	10	699573 45298			780727 37955		780727 05189	
	40	10	699573 91732					780727 44693	
	50	10	699573 46715					780727 61630	
	60	10	636425 94485		780727 74790			780727 62861	
4 x 72	80	10	699573 45099		780727 65086			780727 84685	
	100	10						780727 63161	
	120	10	662544 16188		780727 66229			780727 87840	
	36	10				780727 25984			
	6 x 48	36	10	699573 45143	780727 27698			666233 90081	780727 22590
		40	10		780727 27697			666233 90082	
50		10		780727 27696			666233 90083	780727 22580	
60		10	699573 44422	780727 27695*	780727 28937*		666233 90084		
80		10		780727 27694*	780727 28935*		666233 90085	780727 22570	
100		10			780727 28933*			780727 22565	
120		10			780727 28931*			780727 22560	
150		10			780727 70042			780727 22555	
180		10						780727 22550	
220		10						780727 22545	
240		10						780727 22540	
320		10						780727 22543	

* Std. Pkg. = 20 Belts
Continued

1" to 6" wide, 36" to 72" long *continued*



TIER:	BEST	BETTER	BETTER	BETTER	GOOD
TRADENAME:	BLAZE R980P	BLUEFIRE R821P	BLUEFIRE R823P	BLUEFIRE R884P	GEMINI R228
ABRASIVE:	Ceramic Alumina	Zirconia Alumina	Zirconia Alumina	Zirconia Alumina	Aluminum Oxide
BACKING:	Y-Weight Polyester	Y-Weight Cotton	X-Weight Polyester	Y-Weight Polyester	X-Weight Cotton
OTHER:	Supersize				

SIZE (W x L)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #
6 x 54	60	10				780727 46982	
6 x 60	36	10					780727 22680
	40	10		780727 27762			780727 22679
	60	10	699573 45149	780727 28957*			780727 22665*
	80	10			780727 28955		780727 22660*
	100	10	662544 77452				
	120	10					780727 63882

* Std. Pkg. = 20 Belts

Belt Cleaning Stick



- This solid, rubber cleaning stick is designed to remove wood and other non-metallic materials that build up on belt surface during use
- Apply it to the face of the belt, while running, to remove unwanted materials and prolong the overall life of the belt up to 10 times

DESCRIPTION	STD. PKG.	PART #
1-3/8 x 1-3/8 x 6	10	076607 01717

TECH TIP

A light-bodied grease applied to a benchstand belt surface will reduce loading and greatly enhance the belt life and performance when grinding soft, malleable nonferrous materials such as aluminum, brass, bronze and copper.



For non-stock belts, FastTrack Service offers all the benefits of an ISO 9001 quality manufacturer and the advantages of a coated abrasives express belt service. As the industry's leading producer of abrasive material and backings, our FastTrack service offers an extensive range of Norton made-to-order belts including Blaze ceramic alumina, BlueFire zirconia alumina, and versatile aluminum oxide and silicon carbide belts.

Manufacturing Lead-times:


- Narrow belts: (1/2" – 12" wide) two days
- Wide belts (14" – 52" wide) three days

Size Availability:

- Maximum width: 52"
- 1/2" and greater widths; 25" and greater lengths

Please see the FastTrack Service Made-to-Order Belts section of this catalog for complete details.

2" to 10" wide, over 70" long

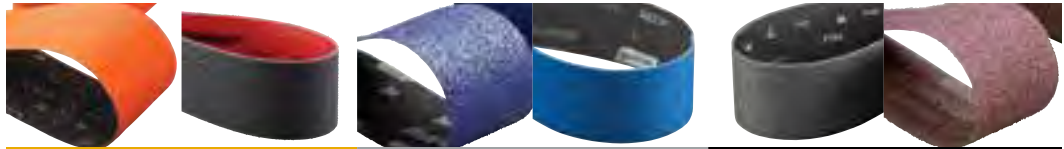

TIER:	BEST	BEST	BETTER	BETTER	GOOD	GOOD
TRADENAME:	BLAZE R980P	REDHEAT R983	BLUEFIRE R884P	BLUEFIRE R823P	GEMINI R766	GEMINI R228
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Zirconia Alumina	Zirconia Alumina	Aluminum Oxide Blend	Aluminum Oxide
BACKING:	Y-Weight Polyester	Y-Weight Polyester	Y-Weight Polyester	X-Weight Polyester	Y-Weight Polyester	X-Weight Cotton
OTHER:	Supersize	Supersize				

SIZE (W x L)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
2 x 132	36	10		780727 53086	780727 50016		666233 47337	
	40	10			780727 50015		666233 90089	
	50	10		780727 40771	780727 50013		666233 90090	
	60	10			780727 50011		666233 90091	780727 21445
	80	10		780727 01958	780727 50008		666233 90092	780727 21440
	120	10				780727 28662		
3 x 79	50	10	662610 90276					
	60	10			780727 48280			
3 x 90	36	10	699573 46319					780727 85831
3 x 132	24	10			780727 50140			
	36	10	699573 44710	780727 53087	780727 50138 RR		666233 90093	780727 21900
	36	10			780727 50139 L			
	40	10	699573 44964	780727 01614				
	50	10	699573 44763	780727 03709	780727 50135			780727 21890
	60	10	699573 44958			780727 28794	666233 90096	780727 21885
	80	10	699573 44764			780727 28792	666233 90097	780727 21880
	100	10				780727 28790		
	120	10				780727 28789		780727 21870
	180	10				780727 28785		780727 21860
4 x 79	36	10		662610 22622				
	40	10			780727 74955			
4 x 100	36	10			780727 68679			
4 x 132	24	10			780727 50289			
	36	10	699573 43852	780727 39662	780727 50287		666233 26093	
	40	10					666233 90098	
	60	10			780727 50281			
	80	10			780727 50279			780727 22385
	120	10						780727 22375
6 x 78-3/4	40	10			780727 25150			
6 x 79	36	10			780727 38105			
	80	10			780727 79322			
8 x 107	36	10						780727 22795
	50	10						780727 49887
	60	10						780727 22780*
	80	10						780727 22775*
10 x 70-1/2	36	10						780727 22840
	40	10						780727 22835
	50	10						780727 22830
	60	10					666233 47345	780727 22825
	80	10					666233 47346	780727 22820

* Std. Pkg. = 20 Belts



A small selection of stock products in popular sizes are available for wide belt woodworking and metalworking applications.

Applications: **Metalworking**

Metalworking wide belts are used for plate dimensioning, slag grinding, machining, deburring, and other general metalworking applications. They are usually cloth and are closed coat.

Woodworking

Cloth woodworking wide belts are used for rough stock removal and dimensioning
Paper woodworking belts are used to upgrade the finish on furniture and other wood components.

Size Range:

Stock: 25" – 52" wide, 48" to 103" long

Grit Range:

Stock: 36 – 220

Abrasive Grain:

Zirconia Alumina, Aluminum Oxide


Metalworking Cloth Belt Recommendation Guide/Cross Reference

	TOTAL PERFORMANCE						INITIAL PRICE		
	BEST		BETTER		GOOD				
	H-wt. Polyester	Y-wt. Polyester	H-wt. Polyester	Y-wt. Polyester	X-wt. Polyester	Y-wt. Polyester	X-wt. Polyester	X-wt. Cotton	
NORTON	Blaze R940P	Blaze R980P	BlueFire R840P	BlueFire R887D/R884P	BlueFire R823P	Gemini R766	Gemini R766X	Gemini R228	
3M	966F, 984F, 994F, 997F	963G/H, 966F, 967F, 997F, 984F, 784F, 947A	561F	577F, 561D	551E	361F, 363F	353F, 384F	241D, 251D, 341D	
Ekamant/ Uneeda	—	PS991, PS992	PZ628	PZ528, PZ633	XZ677	PA631, PG730, PG830	XA911	XA167	
Hermes	CB441Z	CR456	SB488YR	RB48624YX, RB48644Z, RB48024YX, RB48444Z, RB485Z	RB486	RB377XY, SB378	RB377XY	RB320X, HSB	
Klingspor	—	CS610	CS811	CS409, CS411	CS411X, CS416	CS412, CS413	CS341, CS710	CS310	
SIA	—	2515, 2503	C888DP	2803, 2815, 2829, 2824, 2820	—	—	2820	2918, 2928	
VSM	XK888Z, XK877Z	XK875X, XK885Y, XK880Y	KK717	KK716	ZK713X, ZK713T, KK715X	LK719X, KK711X	LK719X, KK711X	KK511X	

Woodworking Cloth and Paper Belt Recommendation Guide/Cross Reference

	TOTAL PERFORMANCE						INITIAL PRICE	
	BEST		BETTER		GOOD			
	Y-wt. Cotton	F-wt. Paper	Y-wt. Cotton	X-wt. Cotton	F-wt. Paper	F-wt. Paper		
NORTON	Dust-Less SG R963	Dust-Less SG 975	BlueFire R831	Gemini R215	Dust-Less H295	Dust-Less H275		
3M	960G, 970DZ, 990FZ, 991FZ	966UZ	—	240DZ, 340A, 340D	260UZ	364UZ		
Ekamant/ Uneeda	—	—	XZ677	RKX, RKXO	—	ARKFO, EKA1000, EKABlack		
Hermes	—	CB115	RB480	RB320	BW114	BW110, BW114, CB115		
Klingspor	—	—	C409, CS411	LS309XH	PS22	PS29		
SIA	—	—	2803, 2820, 2829	2920, 2928, 2921, 2951	1919	1909, 1918, 1919 CRS, 1993		
VSM	XK760X, XK760Y	XP760	KK713X, KK715X	KK504X, KP510E	KK508E	KP709, KP520, KP508E, KP510E		

Better choice for all metal and wood applications due to the cut rate and life of the proprietary Norton BlueFire grain

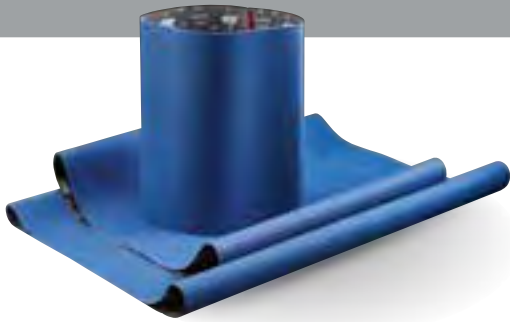

BLUEFIRE R884P/R823P ZIRCONIA ALUMINA CLOTH


- Strong, self-sharpening zirconia alumina abrasive for fast, aggressive cut and 30% longer life than competitive zirconia belts
- Durable resin bond for excellent grain retention and product life
- R884P has a durable Y-weight polyester waterproof cloth backing that excels on medium- to high pressure metal applications
- R823 has flexible X-weight polyester waterproof backing to excel on light- to moderate-pressure metal applications

Good choice for abrasive planing and dimensioning of glued-up stock and banded particleboard



GEMINI R215 ALUMINUM OXIDE CLOTH

- Premium aluminum oxide abrasive for fast initial cut rate
- Heavy, durable X-weight cotton backing is ideal for heat sensitive applications
- Strong butt joint that allows the belt to be run in either direction

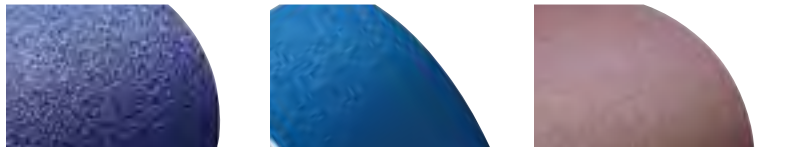


		TIER: BETTER		TIER: BETTER		TIER: GOOD	
		BLUEFIRE R884P		BLUEFIRE R823P		GEMINI R215	
		ABRASIVE: Zirconia Alumina		ABRASIVE: Zirconia Alumina		ABRASIVE: Aluminum Oxide	
		BACKING: Y-Weight Polyester Cloth		BACKING: X-Weight Polyester Cloth		BACKING: X-Weight Cotton Cloth	
		JOINT/FLEX: Plyweld, RR		JOINT/FLEX: Plyweld, RR		JOINT/FLEX: Plyweld, RR	
SIZE (W x L)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #
25 x 48	80	3		699573 44781			
25 x 60	80	3		699573 28117			
	120	5		699573 28115			
25 x 75	120	5		699573 44791			
36 x 75	36	2	699573 50934				
	60	3	699573 50931				
	120	5		699573 29014			
37 x 60	180	5		699573 44869			
	50	3	699573 06219				
	80	3		699573 29019		699573 25709	
	100	5		699573 28103		699573 25708	
37 x 75	120	5		699573 29018		699573 25707	
	150	5		699573 28102		699573 02955	
	180	5		699573 28101			
	220	5		699573 28100			
	36	2	699573 50959				
	50	3	699573 05107				
52 x 75	80	3	699573 50955			699573 25957	
	100	5				699573 23880	
	120	5		699573 07358		699573 25760	
	150	5				699573 05737	
	180	5		699573 06734			
120	5		699573 13510				

Due to the wide varieties of machines and applications, the majority of wide belts are non-stock. Our FastTrack belt service is available on the majority of products with 3-day lead-time on orders up to two cases quantity.

TECH TIP

6" wide belts can be used on machines that normally use 37" wide belts.

FastTrack Service Made-to-Order Belts

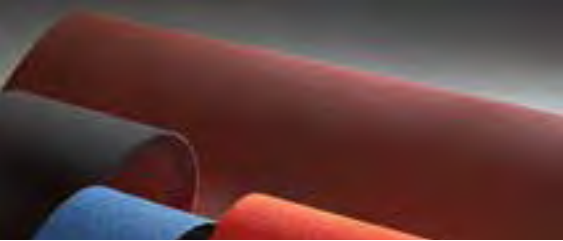

For many non-stock belts, our FastTrack belt service offers all the benefits of an ISO 9001 quality manufacturer and the advantages of a coated abrasives express belt service. As the industry leader of abrasive belts, our FastTrack belt service has an extensive range of Norton made-to-order belts including Blaze ceramic alumina, BlueFire zirconia alumina, versatile aluminum oxide, and silicon carbide belts.

Manufacturing lead-time is two days for narrow belts (1/2" – 12" wide) and three days for wide belts (14" – 52" wide). Please see the FastTrack belt service chart below for complete details on availability and lead-time.

FastTrack Availability and Lead-time information

WIDTH	GRIT SIZE	MINIMUM ORDER QUANTITY	CASE QUANTITY	MAXIMUM ORDER QUANTITY (EQUALS 2 CASES)	CONVERSION LEAD-TIMES
Narrow Belts					
1/2" through 1"	All	50	200	400	2
Over 1" through 5"	All	10	50	100	2
Over 5" through 9"	All	10	20	40	2
Over 9" through 14"	All	10	10	20	2
Wide Belts					
Over 14" through 20"	All	5	10	20	3
Over 20" through 52"	36 & coarser	2	2	4	3
Over 20" through 52"	40-80	3	3	6	3
Over 20" through 52"	100 & finer	5	5	10	3

How to Place a FastTrack Belt Order

- Check the FastTrack belt availability
- Include a full description of belt: quantity, size, Norton CAP code, and grit size
- Send order electronically, fax, or phone to customer service
- When ordering a belt that does not have an existing part number, please call Customer Service to expedite part number creation

TIER	PRODUCT CAP CODE	SHAPE AVAILABILITY	GRIT SIZE	ABRASIVE GRAIN	BACKING	APPLICATIONS
Metalworking						
Best	R980P	Narrow, Wide	24-120	Blaze Ceramic Alumina	Y-wt. Polyester	Latest-generation Norton SG grain, supersized and designed for high-performance grinding on stainless and other alloys
Best	R984	Narrow, Wide	36-120	SG Ceramic Alumina	Y-wt. Polyester	Norton SG grain for medium-pressure grinding and finishing heat-sensitive alloys
Best	R983	Narrow	P36-P120	Red Heat Ceramic Alumina	Y-wt. Plus	P-graded ceramic alumina abrasive with lubricating supersize coat; engineered for maximum productivity on mild carbon steel, ferrous metal, and cast iron applications
Better	R884P	Narrow, Wide	24, 36-80	BlueFire Zirconia Alumina	Y-wt. Polyester	High-performance zirconia alumina grain designed for medium- to high-pressure grinding
Better	R887D	Narrow, Wide	24, 36-120	BlueFire Zirconia Alumina	Y-wt. Polyester	High-performance zirconia alumina grain, supersized and designed for medium- to high-pressure grinding of heat-sensitive alloys
Better	R823P	Narrow, Wide	60-220	BlueFire Zirconia Alumina	X-wt. Polyester	High-performance zirconia alumina grain on lighter backing designed for light to medium grinding
Good	R766	Narrow	P24-80	Gemini Aluminum Oxide Blend	Y-wt. Polyester	Premium aluminum oxide blend product designed for a variety of applications including soft metals to hard-to-grind stainless and carbon steel
Good	R766X	Narrow, Wide	P60-P400	Gemini Aluminum Oxide Blend	X-wt. Polyester	Quality, P-graded aluminum oxide and broad grit range for stock removal to finer finishing
Good	MX240	Narrow, Wide	P80-P150	Aluminum Oxide	X-wt. Poly/Cotton	P-graded, heat-treated aluminum oxide X-weight cloth with strong, but flexible, cotton/polyester backing making it an ideal multi-purpose product
Good	R245	Narrow	P80-P240, P320, P400	Aluminum Oxide	J-wt. Polyester	Aluminum oxide on flexible, lightweight polyester backing for moderate- to light- pressure applications on mild steel
Good	KF376	Narrow	P80-P320, P400, P600	Aluminum Oxide	J-wt. Cotton	P-graded, heat-treated aluminum oxide with ceramic coating on a very flexible backing for use wherever flexibility and conformability are needed
Good	R445	Narrow	60-220	Silicon Carbide	X-wt. Polyester	Sharp, silicon carbide grain on medium polyester backing for grinding very hard materials – glass, stone, solid surface
Good	U243	Narrow, Wide to 24"	X80, X65, X45, X30, X22, X16	NORaX Aluminum Oxide	J-wt. Cotton	High-performance, multi-layered NORaX grain on very flexible backing for dry polishing applications
Woodworking						
Best	R963	Narrow, Wide	24-60, P80 100-150	SG Ceramic Alumina	Y-wt. Polyester	Norton SG ceramic alumina grain with anti-static coating for forest product applications (MDF, particleboard, plywood)
Best	R955	Narrow	P36-P120	Red Heat Ceramic Alumina	Y-wt. Cotton	100% ceramic alumina abrasive with Y-weight cloth backing for dimensioning, intermediate sanding of wood
Better	R831	Narrow, Wide	24, 36-120	BlueFire Zirconia Alumina	Y-wt. Cotton	Norton BlueFire open-coat product recommended for dry low-pressure applications or where loading is a problem
Good	R215	Narrow, Wide	50-180	Gemini Aluminum Oxide	X-wt. Cotton	Initial starting specification for woodworking applications where loading is a problem, and initial cost a primary concern
Good	R490	Narrow, Wide	P36-P150	Silicon Carbide	Y-wt. Polyester	Anti-static product for forest product applications (MDF, particle board, plywood) where loading is an issue
Good	R422	Narrow	50-120	Silicon Carbide	X-wt. Cotton	Initial starting specification for woodworking applications where loading is not an issue
Best	H975	Narrow, Wide	60-220	Red Heat Ceramic Alumina	F-wt. Paper	Ceramic alumina grain, antistatic coating, and open coat; the best choice for applications where loading is a problem (soft woods, etc.)
Better	H831	Wide	24,36-120	BlueFire Zirconia Alumina	F-wt. Paper	Durable zirconia alumina grain, antistatic coating, and open coat: the better choice for applications where loading is a problem (soft woods, etc.)
Good	H275B	Narrow, Wide	P60-P220	Aluminum Oxide	F-wt. Paper	Quality aluminum oxide grain, antistatic coating, and open coat make these an economical choice for all heavy-weight paper belt jobs
Better	H475	Narrow, Wide	P120-P400	Onyx Silicon Carbide	F-wt. Paper	Sharp silicon carbide and antistatic coating create finer finishes on hard materials and veneers where finish is critical



Norton non-woven belts are a combination of strong synthetic mesh and quality abrasive, bonded together by a smear-resistant adhesive. The open construction of non-woven material enables aggressive cutting action and improved surface finish while maintaining its non-loading feature.

Watch for new and improved narrow belt and file belt joints.

Applications:

Removing surface defects, light edge burrs, parting lines, flashing, rust, oxides, corrosion, paints, and scale; blending mill marks, tool marks, uneven edges, and applying decorative finishes.

Abrasive Grain:

Engineered Aluminum Oxide, Aluminum Oxide

Grit Range:

Extra Coarse (Black), Coarse (Brown), Medium (Maroon), Fine (Green), Very Fine (Blue)

Machine Used:



Application/Grit Recommendation Guide

	EXTRA COARSE	COARSE	MEDIUM	FINE	VERY FINE
	BEST Choice - Vortex Rapid Prep				
	BETTER Choice - Rapid Prep				
Scale Removal	◆				
Stock Removal		◆			
Heavy Deburring		◆			
Light Deburring			◆		
Light Finishing			◆		
Blending				◆	
Finishing					◆

Vortex Rapid Prep Pump Sleeve Belts

Best choice for finishing and blending applications



VORTEX RAPID PREP ALUMINUM OXIDE

- Patented Vortex agglomerated aluminum oxide grain produces the most consistent cutting and finishing action combining the cutting power of a coarser grit with the finish of finer grits
- Premium high-loft nylon fiber bonded to a strong nylon scrim backing allows a uniformly thick layer of resin bond and grain for extended life, durability, and stiffness
- Proprietary Clean Bond resin technology and open coat guarantee smear-free finishes even on high nickel content alloys and minimize loading on aluminum and other soft metals

	EXTRA COARSE	COARSE	MEDIUM	FINE	VERY FINE
GRIT/COLOR:	EXTRA COARSE	COARSE	MEDIUM	FINE	VERY FINE
TIER:	BEST	BEST	BEST	BEST	BEST
TRADENAME:	VORTEX RAPID PREP	VORTEX RAPID PREP	VORTEX RAPID PREP	VORTEX RAPID PREP	VORTEX RAPID PREP
ABRASIVE:	Engineered A/O	Engineered A/O	Engineered A/O	Engineered A/O	Engineered A/O
WIDTH	3-1/2	3-1/2	3-1/2	3-1/2	3-1/2
LENGTH	15-1/2	15-1/2	15-1/2	15-1/2	15-1/2
STD. PKG.	8	8	8	8	8
PART #	66623333725	66623335042	66623335118	66623333665	66623335139

Rapid Prep File and Narrow Belts

Better choice for finishing and blending applications



RAPID PREP ALUMINUM OXIDE

- Premium aluminum oxide abrasive grain coating provides up to 20% higher cut rate versus other surface conditioning belts
- Durable nylon fiber bonded to a strong Y-weight polyester backing with extremely low stretch is ideal for applications where low-stretch and durability are necessary
- Proprietary Clean Bond resin technology and open coat guarantee smear-free finishes even on high nickel content alloys and minimize loading on aluminum and other soft metals

GRIT/COLOR:	EXTRA COARSE	COARSE	MEDIUM	FINE	VERY FINE
TIER:	BETTER	BETTER	BETTER	BETTER	BETTER
TRADENAME:	RAPID PREP	RAPID PREP	RAPID PREP	RAPID PREP	RAPID PREP
ABRASIVE:	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide

WIDTH	LENGTH	STD. PKG.	PART #	PART #	PART #	PART #	PART #
File Belts							
1/4	18	24		66261011420	66261012524	66623333424	66623333511
	24	24		69957392606	66261097565	66623333425	66623333512
1/2	12	24		66261003177	66261006465	66623318175	66254499884
	18	24		66261055309	66261055310	66623333426	66261055311
	24	24		66261055312	66261008972	66254490859	66261019876
3/4	18	12		66261002111	66261015808	66254490858	66261003622
	20-1/2	12		66261083899	66261003260		66623333515
1	18	12		66261007023	66261017898	66623333429	66623333518
	21	12		66623333412	66623336005	66623333430	66623333519
Narrow Belts							
3/4	80	12		66623333411	66623333505	66623333428	66623333516
1	30	12		66261019801	66623336006	66623333431	66261001972
	42	12		66261008317	66254441289	66623333432	66623333521
	60	12					66261055412
	64	12		66623333414	66623301513	66623333434	66261055413
	72	12		66261194240	66261006378	66254493830	66261005583
	132	8		66623314981			
1-1/2	132	10			66261011414	66254436886	66623333525
	60	8		66623333415	66261007644		66623303624
2	18-15/16	12	66261018226		66623333507	66623333436	66623333528
	34	12		66261063309		66623333437	66623333529
	48	10		66261006504	66261006648	66623333438	66623333531
	60	8		66623333416	66261189669	66623333439	66623333532
	72	8		66261002571	66261007757	66623333440	66261002307
	132	6				66261069525	66623333533
2-1/2	60	6		66254429365	66254441491	66623333441	66623333534
2-3/4	15-1/2	10	66623333578	66623333417	66623333508		66623333535
3	10-11/16	12	66623333580	66261018076	66261067469	66623333443	66623333536
	18	10	66254428772	66254496043	66254428776	66623333444	66261019836
	21	10	66623333584	66623333418	66261010870	66623333445	66623333537
	24	10	66254433359	66623314158		66623333446	66261055593
	72	6		66623333419	69957396833	66623333447	66261003176
	80	4		66623333420	66261007149	66623333448	66623333542
	90	4		66623333421		66623333449	66623333541
	118	4		66623333422	66623333510	66623333450	66261047121
	132	4		66254490470	66261055322	66623333451	66623333543
	3-1/2	15-1/2	8	66623333595	66261055324	66254444576	66623333452
4	24	8	66623333596	66254495931	66261031667		
	36	6			66261002321	66623333454	66623333546
	132	2		66261009056	66261006898	66623333455	66623333547
	168	2		63642576650	66261009174	66623333456	66623333548
6	48	4		66261055330	66261055331	66623333457	66261055332

Most Narrow belts are also available in our Vortex grain. If you do not see the Rapid Prep belts you need in our stock offering contact your Norton Representative for made-to-order availability.



Engineered for flexibility and fast cutting, cloth sheets and rolls have a longer life than paper. They tear cleanly and straight without shedding and are packed in a protective dispenser to eliminate waste and damage.

Categories:

All purpose, fine finishing, and screen-back

Applications:

Scouring and light deburring, scale and rust removal, blending and fine sanding, polishing lathe turnings, rolls and cylinders, and blending machine tool marks

Size Range:

Sheets: 9" x 11"
Rolls: 1" x 10 yds., 1-1/2" – 2" x 25 yds., 1" – 4" x 50 yds.


Grit Range:

40 – 600, extra coarse, coarse, medium, fine

Abrasive Grain:

Aluminum Oxide, Silicon Carbide, Emery

Machine Used:



HAND
SANDING

JITTERBUG
SANDER

Cross Reference Guide

	GOOD			
NORTON	Gemini K225	Metal R243	K622 Emery	Screen-Bak Q421
3M	011K	211K, 314D	011K, Emery Cloth	481W, 483W
Hermes	RB317	RB232J	—	GS91350, GS92400
Klingspor	LS309	KL361, LS309	KL371X	—
Sait/United Abrasives	DA-F	EA-F	—	Sait-Screen
SIA	2915	2601, 2915, 2936	1600, 2601	SIA-Screen
VSM	KK114F	KK505J, KK504X	—	—

Application/Starting Recommendation Guide

Durability/Stock Removal	Conformability	Slower Cut	Waterproof
Fast Cut	Excellent Finish	Fine Finish	Load Resistant
Gemini K225	Metal R243	K622 Emery	Screen-Bak Durite Q421

Good choice for general-purpose metal and woodworking applications

GEMINI K225 ALUMINUM OXIDE

- Premium P-graded aluminum oxide abrasive for greater cut rate on general purpose metalworking application
- Flexible J-weight backing for superior conformability to complex surfaces and better finishes
- Advanced full resin bond system for exceptional grain adhesion for longer life


Good choice for small-volume metal and woodworking applications at a low initial price

METAL R243 ALUMINUM OXIDE

- Quality P-graded aluminum oxide abrasive grain delivers fast cut rate and consistent finish on metals
- Smooth, flexible J-weight cotton backing provides superior conformability to complex surfaces and better finishes
- Advanced full resin bond system provides exceptional grain adhesion for longer life on aluminum, fiberglass, composites, hard woods and soft woods




Good choice for removing rust, paint and scale from metal surfaces

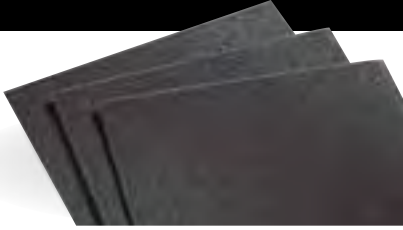

K622 EMERY

- Natural emery abrasive for scouring and polishing non-rated metals and utensils
- Abrasive is durabonded onto a flexible cloth backing for durability
- Close coat for the greatest degree of stock removal and longest life

Good choice for sanding softer materials where loading is a major problem such as plastic, copper, brass, plaster, wood, and drywall

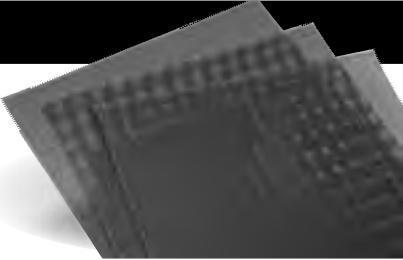

SCREEN-BAK Q421 SILICON CARBIDE

- P-graded silicon carbide for excellent cutting and non-loading properties
- Open weave screen for extreme resistance to loading when removing scale, rust and corrosion
- Open mesh design is waterproof and washable, allowing you to rinse and reuse

Cloth and Screen Rolls



TIER: GOOD		TIER: GOOD		TIER: GOOD		TIER: GOOD		TIER: GOOD	
TRADENAME: GEMINI K225		TRADENAME: GEMINI K225		TRADENAME: GEMINI K225		TRADENAME: GEMINI K225		TRADENAME: GEMINI K225	
ABRASIVE: Aluminum Oxide		ABRASIVE: Aluminum Oxide		ABRASIVE: Aluminum Oxide		ABRASIVE: Aluminum Oxide		ABRASIVE: Aluminum Oxide	
BACKING: J-Weight Cotton		BACKING: J-Weight Cotton		BACKING: J-Weight Cotton		BACKING: J-Weight Cotton		BACKING: J-Weight Cotton	
SIZE: 1" x 10 yds		SIZE: 1" x 50 yds		SIZE: 1-1/2" x 50 yds		SIZE: 2" x 50 yds		SIZE: 4" x 50 yds	
GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	PART #	PART #
40	1		66261058716+	66261058715+	66261058714+				
50	1		66261127728+	66261127730+	66261127732+				
60	1		66261127729+	66261127731+	66261127733+				
80	1	66261134298	66261126276	66261126288	66261126299				
100	1	66261134299	66261126275	66261126287	66261126298				
120	1	66261134300	66261126274	66261126286	66261126297			66261127285*	
150	1	66261134301	66261126273	66261126285	66261126296				
180	1	66261134302	66261126272	66261126284	66261126295				
220	1		66261126271	66261126283	66261126294				
240	1	66261134303	66261126270	66261126282	66261126293				
280	1		66261126269	66261126281	66261126292				
320	1	66261134304	66261126268	66261126280	66261126291				
400	1		66261126267	66261126279	66261126290				
600	1		66261126266	66261126278	66261126289				

+ 40 - 60 grit, are supplied in durable, but flexible X-weight cotton backing

* Packaging Standards: 4" Roll Std. Pkg.: 6 rolls



TIER: GOOD		TIER: GOOD		TIER: GOOD		TIER: GOOD		TIER: GOOD	
TRADENAME: METAL R243		TRADENAME: METAL R243		TRADENAME: METAL R243		TRADENAME: SCREEN-BAK Q421		TRADENAME: SCREEN-BAK Q421	
ABRASIVE: Aluminum Oxide		ABRASIVE: Aluminum Oxide		ABRASIVE: Aluminum Oxide		ABRASIVE: Silicon Carbide		ABRASIVE: Silicon Carbide	
BACKING: J-Weight Cotton		BACKING: J-Weight Cotton		BACKING: J-Weight Cotton		BACKING: Mesh		BACKING: Mesh	
SIZE: 1" x 50 yds		SIZE: 1-1/2" x 50 yds		SIZE: 2" x 50 yds		SIZE: 1-1/2" x 25 yds		SIZE: 2" x 25 yds	
OTHER:						Waterproof		Waterproof	
GRIT	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	PART #	PART #
60	1	66261136178	66261136190	66261136203					
80	1	66261136179	66261136192	66261136204		66261107275*			
100	1	66261136180	66261136194	66261136205					
120	1	66261136181	66261136195	66261136206		66261107270*		66261149811*	
150	1	66261136182	66261136196	66261136207					
180	1	66261136186	66261136199	66261136208		66261107265*			
240	1	66261136187	66261136200	66261136209					
320	1	66261136188	66261136201	66261136210					
400	1	66261136189	66261136202	66261136211					

* Packaging Standards: Screen-Bak Q421 Std. Pkg.: 10 rolls

Cloth Sheets



TIER:	GOOD	GOOD	GOOD	GOOD
TRADENAME:	GEMINI K225	METAL R243	K622 EMERY	SCREEN-BAK Q421
ABRASIVE:	Aluminum Oxide	Aluminum Oxide	Emery	Silicon Carbide
BACKING:	J-Weight Cotton	J-Weight Cotton	J-Weight Cotton	Mesh
OTHER:				Waterproof

SIZE (W x L)	GRIT	PKG./CASE	PART #	PART #	PART #	PKG./CASE	PART #
9 x 11	40	25/125	66261 058713+				
	50	25/125	66261 101862+				
	60	25/125	66261 101861+				
	80	25/125	66261 126340	66261 179998		25/125	66261 100960
	100	50/250	66261 126339	66261 181503		25/125	66261 100955
	120	50/250	66261 126338	66261 181504		25/125	66261 100950
	150	50/250	66261 126337	66261 181505		25/125	66261 100945
	180	50/250	66261 126336	66261 180005		25/125	66261 100940
	220	50/250	66261 126335			25/125	66261 100935
	240	50/250	66261 126334	66261 181507			
	280	50/250	66261 126333				
	320	50/250	66261 126332	66261 180006		25/125	66261 100920
	400	50/250	66261 126331	66261 181509		25/125	66261 100915
	600	50/250	66261 126330				
	Extra Coarse	25/125					66261 101255
	Coarse	25/125					076607 01307
	Medium	50/250					076607 01309
	Fine	50/250					076607 01308

+ 40 - 60 grit are supplied in durable, but flexible X-weight cotton backing





Paper sheets and rolls are engineered for optimum performance when sanding metal, wood, composites and painted surfaces. The sheets are packed in protective packaging to eliminate waste and permit easy, neat storage.

Categories:
Applications:

All purpose, wood sanding, stearated (non-loading), waterproof, and heavyweight
Light-duty metal sanding, primer sanding, defect removal from painted surfaces, filler sanding, sanding and finishing of composites and fiberglass, bare wood sanding, sanding between sealer coats

Size Range:
Grit Range:

Full Sheets, Cut Sheets, File Strips and Rolls
36 – 2500

Abrasive Grain:

Ceramic Alumina, Zirconia Alumina, Aluminum Oxide, Silicon Carbide, and Garnet

Paper Weights:

Heavyweight – E; Lightweight – A through D

Machine Used:




Material-to-Product Recommendation Guide

	BEST			BETTER			GOOD						
	Blaze A995	Dry Ice A975	A2750P	Black Ice T214	Black Ice T401	A259PS	Durite A475	Blue-Bak T414	Gold Reserve A296	PB273	Garnet	TufBak T461	Other
Unfinished Metal	◆	◆	◆						◆	◆			
Primed / Painted Surfaces / Between Coats	◆	◆	◆				◆		◆	◆			
Fiberglass / Composites	◆	◆	◆				◆		◆	◆			
Bare Wood	◆	◆	◆								◆		
											A511, A513, A514		
Clear Coat Sanding				◆	◆							◆	
Sealer Sanding	◆	◆	◆				◆		◆	◆			
Lacquer Sanding				◆	◆			◆				◆	
Wet Sanding				◆	◆			◆				◆	
Paint Stripping	◆	◆	◆			◆	◆						A290
All Purpose	◆	◆	◆			◆							A212, A213, A211


Cross Reference Guide

NORTON	3M	Hermes	Klingspor	Mirka	SIA	VSM
STEARATED (NON-LOADING)						
Blaze A995	732U, 737U, 755L, 775L	CR116	—	—	—	—
Dry Ice A975	334U	—	PS36	—	Siaprime 5550	—
A2750P	216U, 255L, 236U, 260L, 334U	VC154-LL	PS33, PS73W	Q-Silver, Royal Micro	1940, 1944, 1950	—
A259PS	216U, 255L, 236U, 260L, 334U	—	—	—	—	—
Durite A475	405N, 414N, 415U, 426U, 435U	SF168	PL35, PS14	CaratFlex, PolarStar	1748	CP131A
Gold Reserve A296 / PB273	216U, 236U, 316U, 315U, NX	VC154-LL	PS33, PS73W	Q-Silver, Royal Micro, Bulldog Gold	19,401,950	MP10
WATERPROOF						
Blue Ice T214	213Q	WAFlex28	—	—	1913, 1951, 1600	—
Blue Ice T401	401Q, 414Q, 486Q	WSFlex16	PL35	Waterproof (A)	—	CP918A
Blue-Bak T414	413Q	WSFlex 16	PS14	Waterproof (A)	—	CP918A/C
TufBak T461	431Q	WSFlex 18	PS14	—	1727	CP918A/C
ALL PURPOSE/WOOD						
A211	230U, 240N, 346U	—	—	—	—	—
A212	210N	—	PL31	—	—	—
A213	230N	—	PL31	—	—	—
Garnet A511	110N	—	PS10	—	1400	—
Garnet A513	130N	GCAB	—	—	—	—
Garnet A514	140N	GCAB	—	—	—	—
HEAVYWEIGHT PAPER						
BlueFire H875P	740I, 745I, 750U, 751U, 751I	BW110	PS36	Royal CRS. Cut	1820, 1919, 1948	KP510E, KP709

Application/Grit Recommendation Guide

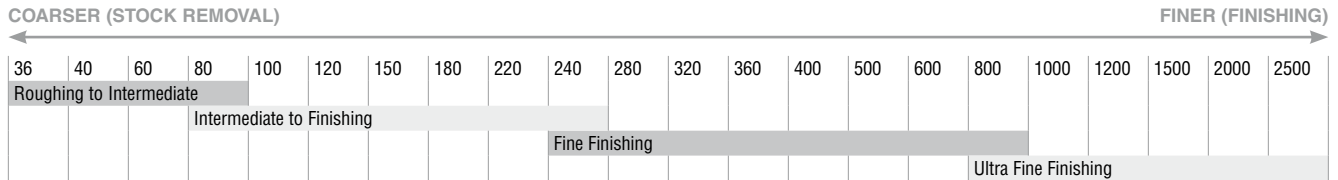

Recommended Backing Weight



Paper Rolls



Best choice for fast cut rate and maximum dust extraction

BLAZE A995 MULTI-AIR CYCLONIC CERAMIC ALUMINA

- P-graded next-generation ceramic aluminum oxide abrasive for fastest cut rate and longest life with innovative spiral hole design to optimize dust extraction
- Proprietary D-weight Polyester-reinforced, flexible latex-saturated backing for 100% improvement in tear strength and edge durability providing longer life in all applications
- Waterbased, non-loading (No-Fil) stearate resists clogging and increases roll life; hook and loop (NorGrip) back for easy mounting and changing



Best choice for the most demanding dry sanding applications

DRYICE A975 CERAMIC ALUMINA

- P-graded, 100% SG ceramic alumina abrasive delivers fastest cut rate and longest life of any paper roll; available in Multi-Air Cyclonic version with laser-cut, spiral, vacuum-hole design to maximizes dust extraction
- Unique fiber reinforced, flexible B-wt. latex saturated paper backing for 50% - 60% improvement in tear strength while retaining flexibility; perforated for easy sizing
- Water-based non-pigmented stearate No-Fil coating provides improved load resistance and no color transfer to work



Better choice for high performance dry sanding applications

A2750P ALUMINUM OXIDE

- Premium P-graded, heat treated, toughened aluminum oxide abrasive delivers superior life, fast cut rate, consistent finish
- Unique fiber reinforced, flexible B-weight latex saturated backing provides 50% - 60% improvement in tear strength while retaining flexibility
- Water-based, non-pigmented stearate No-Fil coating provides maximum load resistance; available in Multi-Air Cyclonic version for maximum dust collection




Good choice and value for dry sanding and finishing aluminum, fiberglass, composites, hard woods and soft woods

A296 GOLD ALUMINUM OXIDE

- P-graded premium aluminum oxide abrasive produces a quick, cool cut and a more consistent surface finish
- Strong paper backing resists tearing while staying conformable and flexible
- Water-based, non-loading No-Fil stearate coating minimizes clogging and increases disc life

Paper Rolls *continued*


Hook and Loop
Paper Rolls

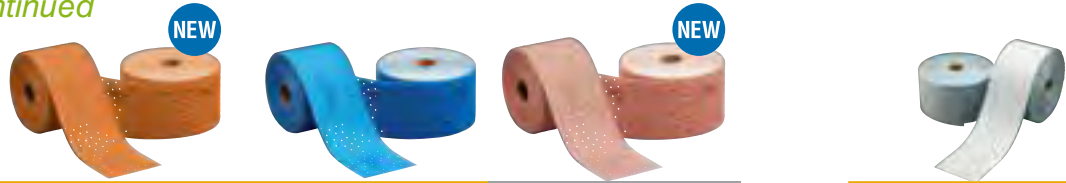

TIER:	BEST	BEST	BETTER	BEST	
TRADENAME:	BLAZE A995 NO-FIL MULTI-AIR CYCLONIC	DRY ICE A975 NO-FIL MULTI-AIR CYCLONIC	A2750P NO-FIL MULTI-AIR CYCLONIC	DRY ICE A975 NO-FIL	
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Aluminum Oxide	Ceramic Alumina	
BACKING WEIGHT:	D-Weight.	C- & B-Weight	D-Weight	B-Weight.	
BACKING ATTACHMENT:	Hook & Loop	Hook & Loop	Hook & Loop	Hook & Loop	
OTHER:	P-Graded	P-Graded	P-Graded	P-Graded	
SIZE:	2-3/4" x 13 yd	2-3/4" x 13 yd	2-3/4" x 13 yd	2-3/4" x 13 yd	
GRIT	PKG./CASE	PART #	PART #	PKG./CASE	PART #
80	1/4	699573 08899	636425 06113	1/4	636425 06261
120	1/4	699573 08900	636425 06114	1/4	636425 06259
150	1/4	699573 08901	636425 06117	1/4	636425 06258
180	1/4	699573 08902	636425 06118	1/4	636425 06257
220	1/4	699573 08903	636425 06119	1/4	636425 06256
240	1/4		636425 06120		
320	1/4		636425 06121	1/4	636425 06255
400	1/4		636425 06122	1/4	666233 29518
500	1/4		636425 06123	1/4	666233 29547
600	1/4		636425 06124	1/4	666233 29548

2-3/4" wide hook and loop paper rolls are perforated at 2-3/4" which allows use on all standard lengths of hand blocks and file boards. Additional grit sizes available, contact your Norton rep for more details.

PSA (Pressure Sensitive Adhesive) Paper Rolls

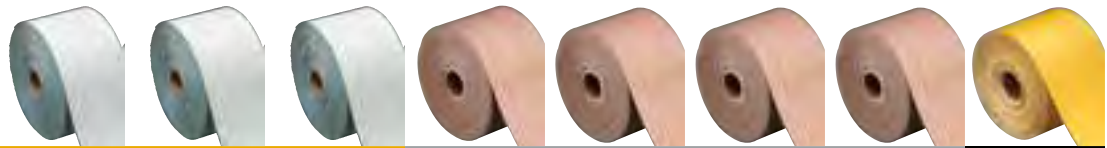

TIER:	BEST	BEST	BEST	BETTER	BETTER	BETTER	BETTER	GOOD
TRADENAME:	DRY ICE A975 NO-FIL	DRY ICE A975 NO-FIL	DRY ICE A975 NO-FIL	A275 OP NO-FIL	A275 OP NO-FIL	A275 OP NO-FIL	A275 OP NO-FIL	GOLD RESERVE A296 NO-FIL
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Ceramic Alumina	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide
BACKING WEIGHT:	C-Weight.	C-Weight.	B-Weight.	B-Weight.	B-Weight.	B-Weight.	B-Weight.	B-Weight
BACKING ATTACHMENT:	PSA	PSA	PSA	PSA	PSA	PSA	PSA	PSA
OTHER:	P-Graded	P-Graded	P-Graded	P-Graded	P-Graded	P-Graded	P-Graded	P-Graded
SIZE:	2-3/4" x 25 yd	2-3/4" x 30 yd	2-3/4" x 45 yd	2-3/4" x 25 yd	2-3/4" x 30 yd	2-3/4" x 45 yd	4-1/2 x 10 yd	2-3/4" x 25 yd
GRIT	PKG./CASE	PART #	PART #	PART #	PART #	PART #	PART #	PART #
80	1/5	662611 49566			662611 131691		662611 131697	636425 06153
100	1/5					662611 131690	662611 131696	
120	1/5		662611 49564			662611 131689	662611 131695	636425 06152
150	1/5			662611 49563			662611 131688	662611 131694
180	1/5			662611 49562			662611 131687	662611 131693
220	1/5			662611 49561			662611 131686	662611 131692
240	1/5						662611 131685	
320	1/5			662611 49558			662611 131683	636425 06148
400	1/5			662611 49557			662611 131681	636425 06147
600	1/5						662611 131679	

Additional attachment options available as non-stock, contact your Norton rep for more details.

Roll Accessories



PSA Roll Dispenser

- Heavy-duty wire dispenser has a vinyl coating to protect the work surface
- Accommodates two 2-3/4" PSA rolls; stackable for multi-grit operations. Attach to wall or mount on cabinet

DESCRIPTION	STD. PKG.	PART #
PSA Roll Dispenser	1	636425 42773


PSA/Hook & Loop Sanding Blocks

- Ergonomically-shaped flexible foam blocks used with 2-3/4" rolls, fit comfortably in your hand
- Firm block produces a truly flat surface
- The soft block is designed for flat surfaces and contours

SIZE	DESCRIPTION	STD. PKG.	BACKING ATTACHMENT: PSA		Hook & Loop	
			PART #	PART #	PART #	PART #
2-3/4 x 5	Soft	5	636425 42090		636425 42092	
2-3/4 x 5	Firm	5	636425 42091		636425 42093	
2-3/4 x 7-3/4	Soft	5			636425 42095	
2-3/4 x 7-3/4	Firm	5	636425 42094			

Paper File Strips

Better choice for soft material applications

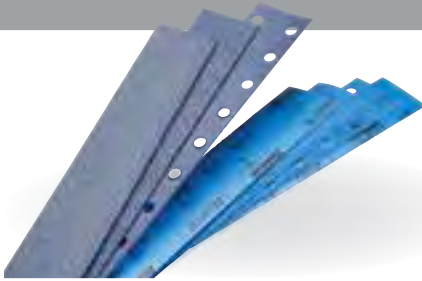


BLUEFIRE H875P ZIRCONIA ALUMINA

- Strong zirconia alumina plus abrasive provides 2 - 3 times life over aluminum oxide products
- Strong E-weight paper, synthetically-coated for excellent durability and chip resistance plus superior bond system optimizes grain adhesion and extends product life
- Non-stearated (no anti-loading agents); non-contamination often required for prime auto and aerospace paint applications

Paper File Strips
PSA (Pressure Sensitive Adhesive)
and Non-PSA


TIER:	BEST				BETTER		BETTER		BETTER	
TRADENAME:	A2750P NO-FIL	A2750P NO-FIL	A2750P NO-FIL	A2750P NO-FIL	BLUEFIRE H875P	BLUEFIRE H875P	BLUEFIRE H875P	BLUEFIRE H875P	BLUEFIRE H875P	BLUEFIRE H875P
ABRASIVE:	A/O	A/O	A/O	A/O	Z/A	Z/A	Z/A	Z/A	Z/A	Z/A
BACKING WEIGHT:	B-Weight	B-Weight	B-Weight	B-Weight	E-Weight	E-Weight	E-Weight	E-Weight	E-Weight	E-Weight
BACKING ATTACHMENT:	Non-PSA	PSA	Hook/Loop	Hook/Loop Vac	Non-PSA	PSA	PSA	PSA	PSA	Hook/Loop
OTHER:	P-Graded	P-Graded	P-Graded	P-Graded						

SIZE (W x L)	GRIT	PKG./CASE	PART #	PART #	PART #	PART #	PKG./CASE	PART #	PART #	PKG./CASE	PART #		
2-3/4 x 16	100	50/500				662611	131657						
	120	50/500				662611	131656						
	180	50/500				662611	131654						
2-3/4 x 16-1/2	36						50/250		662611	123610	25/125 662611	123616	
	40						50/250		662611	123609	25/125 662611	123615	
	80	50/500		662611	131640	662611	131646	50/250		662611	123608	25/125 662611	123614
	100	50/500		662611	131639	662611	131645						
	120	50/500							662611	131644			
	150	50/500		662611	131637	662611	131643						
	180	50/500		662611	131636	662611	131642						
2-3/4 x 17-1/2	220	50/500				662611	131641						
	36						50/250	662611	123622				
	40						50/250	662611	123621				
	80	50/500	662611	131652			50/250	662611	123620				
	100	50/500	662611	131651			50/250	662611	126512				
	120	50/500	662611	131650									
150	50/500	662611	131649										
180	50/500	662611	131648			50/250	662611	126511					
220	50/500	662611	131647										



VACUUM HOLE PATTERN FOR
2-3/4 X 16 FILE STRIPS

Sanding Boards

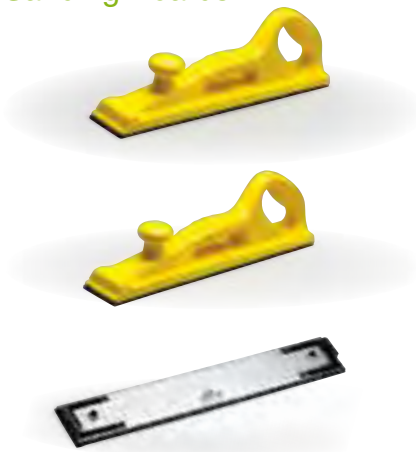

PSA/Non-PSA Sanding Board

- This sanding board has a cushioned surface
- Spring clips mounted at each end securely hold 2-3/4" x 16-1/2" PSA file strips and 2-3/4" x 17-1/2" non-PSA file strips

Hook and Loop and Non-PSA Sanding Board

- Lightweight, rugged design for easy sanding of plastic fillers
- Spring clips mounted at each end securely hold 2-3/4" x 16-1/2" hook and loop file strips and 2-3/4" x 17-1/2" non-PSA file strips
- Air file shoe eliminates the need for clips. The quick-change backing positively locks and unlocks for fast use.

DESCRIPTION	STD. PKG.	PART #
PSA/Non-PSA File Strip Sanding Board	6	636425 42724
Hook and Loop/Non-PSA File Strip Sanding Board	5	636425 52836
Hook and Loop Air File Shoe	5	636425 52835

Stearated (Non-Loading) 9" x 11" Sheets


The best choice for sanding painted surfaces, composites, plastics or any material that tends to load



A2750P NO-FIL ALUMINUM OXIDE

- Premium, P-graded, heat-treated aluminum oxide abrasive for consistent surface finish, exceptional performance on all surfaces and coatings
- Unique fiber-reinforced, B-weight latex-saturated backing for 50 - 60 percent improvement in tear strength, exceptional flexibility, can be folded without cracking
- Non-pigmented, water based stearate (anti-clog) coating, open coat for best resistance to clogging and loading during sanding


Best choice for moderate material removal

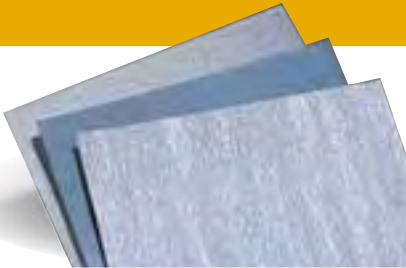

A259PS NO-FIL ALUMINUM OXIDE

- Premium heat-treated abrasive offers faster cut and long sanding life
- Open coat, non-pigmented, water-based stearate coating prevents color transfer and minimizes loading
- Increased backing weight, fiber-reinforcement and latex saturation offers better grain retention and tear-resistance yet is highly flexible for easy folding and unfolding

The better choice for gel coats, hard composite substrates, abrasion-resistant coatings, and woodworking applications

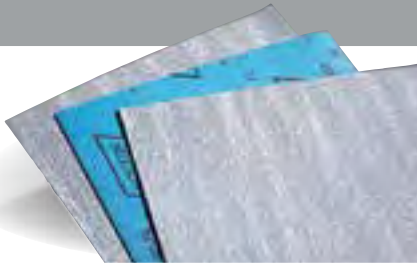

DURITE A475 NO-FIL SILICON CARBIDE

- P-graded, silicon carbide abrasive for easy penetration of the hardest surfaces
- Water based stearate, non-pigmented, No-Fil coating resists loading for the longest usable product life; no color transfer to work
- Fiber-reinforced, latex paper backing provides flexibility and resistance to tearing

Good choice for fast cuts and an even finish



PB273 NO-FIL ALUMINUM OXIDE

- P-graded, sharp light-brown, aluminum oxide abrasive for fast cut rate, extended life and consistent finish
- Water based non-pigmented stearate provides maximum load resistance and extended life; no dye in coating means no risk of color transfer or finish contamination
- Flexible latex-saturated B-weight backing, with a full resin bond and open coat for improved life

Stearated (Non-Loading) 9" x 11" Sheets *continued*

9 x 11
Paper Sheets



		JOBPACK				
		BEST	BEST	BETTER	GOOD	
TRADENAME:		A2750P NO-FIL	A259PS NO-FIL	DURITE A475 NO-FIL	PB273 NO-FIL	
ABRASIVE:		Aluminum Oxide	Aluminum Oxide	Silicon Carbide	Aluminum Oxide	
BACKING WEIGHT:		B-Weight	C- & B-Weight	B-Weight	B-Weight	
OTHER:		P-Graded	P-Graded	P-Graded	P-Graded	
SIZE (W x L)	GRIT	PKG./ CASE	PART #	PART #	PART #	PART #
9 x 11	80	50/250	662611 31634	076607 68174*	662544 87393	666233 11878
	100	100/500	662611 31633	076607 68173*	662544 87394	666233 11877
	120	100/500	662611 31632	076607 68172*	662544 87395	666233 11876
	150	100/500	662611 31631	076607 68171*	662544 87396	666233 11875
	180	100/500	662611 31630	076607 68168*	662544 87397	666233 11874
	220	100/500	662611 31629	076607 68167*	662544 87398	666233 11873
	240	100/500	662611 31628		662544 87399	666233 11879
	280	100/500	662611 31627			
	320	100/500	662611 31626	076607 68166*	662544 87400	666233 11871
	400	100/500	662611 31624	076607 68165*		666233 11870
	500	100/500	662611 31623			
	600	100/500	662611 31622			
	800	100/500	662611 31621			
	1000	100/500	662611 31620			
	1200	100/500	662611 31619			
	1500	100/500	662611 31618			

* Packaging Standards: A259PS Job Packs: 20 sheets per pack / 10 packs per standard package for a total of 200 sheets

Rubber Hand Sanding Blocks


- Resilient rubber blocks that conform well to mild contours and flat surfaces

DESCRIPTION	STD. PKG.	PART #
2-3/4 x 5	5	076607 01889



Waterproof 9" x 11" Sheets


Best choice for superior cut and life in wet applications

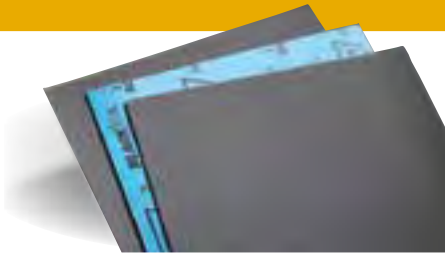

BLACK ICE T214 ALUMINUM OXIDE WATERPROOF

- Premium, P-graded, heat-treated aluminum oxide abrasive for ultimate cut and life in wet applications
- Strong resin bond for longer life in wet applications
- High-strength B-weight waterproof latex paper backing is extremely flexible, environmentally stable, and resists humidity-caused curling


Best choice for superior finish in wet applications

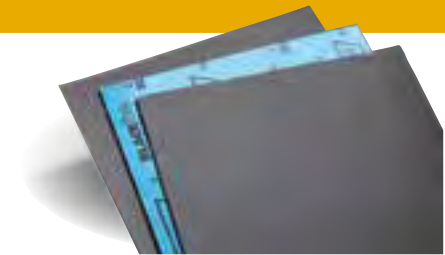

BLACK ICE T401 SILICON CARBIDE WATERPROOF

- Premium, JIS graded ultra-fine silicon carbide abrasive provides the ultimate finish in wet applications
- Strong resin bond for longer life in wet applications
- High-strength B-weight waterproof latex paper backing is extremely flexible, environmentally stable, and resists humidity-caused curling


Better choice for wet finishing applications

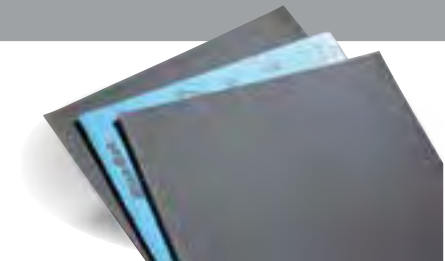

BLUE-BAK T414 SILICON CARBIDE

- Sharp, ANSI graded silicon carbide abrasive for exceptional finishes in wet applications
- Strong resin bond for longer life in wet applications
- High-strength B-weight waterproof latex paper backing is extremely flexible, environmentally stable, and resists humidity-caused curling

Good choice for medium material removal in wet applications

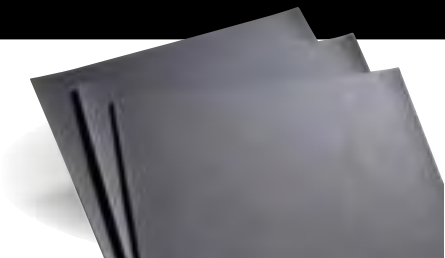

TUFBAK T461 SILICON CARBIDE

- ANSI graded silicon carbide abrasive for fast cutting with excellent finish in wet applications
- Advanced resin bond system for excellent flexibility and abrasive adhesion
- Strong, waterproof C-weight backing is ideal for more aggressive applications while being environmentally stable, resists product curl in humidity

Waterproof 9" x 11" Sheets *continued*

9 x 11
Paper Sheets



		BEST		BETTER		GOOD	
		BLACK ICE T214		BLACK ICE T401		BLUE-BAK T414	
		Aluminum Oxide		Silicon Carbide		Silicon Carbide	
		B-Weight		B-Weight		C-Weight	
		P-Graded		JIS Graded		ANSI Graded	
SIZE (W x L)	GRIT	PKG./CASE	PART #	PART #	PART #	PART #	PART #
9 x 11	60	50/250					662611 01175
	80	50/250					662611 01170
	100	50/250					662611 01165
	120	50/250					662611 01160
	150	50/250					662611 01155
	180	50/250					662611 01150
	220	50/250		662611 39389		662611 39367	
	240	50/250		662611 39388		662611 39366	662611 30331
	280	50/250				662611 39365	
	320	50/250		662611 39386		662611 39364	662611 30332
	360	50/250				662611 39363	
	400	50/250		662611 39385		662611 39362	662611 30333
	500	50/250		662611 39384		662611 39361	
	600	50/250		662611 39383		662611 39360	662611 30334
	800	50/250		662611 39382			
	1000	50/250			662611 39381		
	1200	50/250			662611 39380		
	1500	50/250			662611 39379		
	2000	50/250			662611 39378		
	2500	50/250			662611 39377		

Waterproof Sanding Blocks – with “Grabbing” Power



Dual Density Wet Sanding Block

- No adhesive required: simply wrap a 5-1/2" x 9" (9" x 11" cut in half) sheet around the block
- The dense side is for more aggressive blocking, while the soft side is for color sanding
- Equalizes sanding pressure for fine grit applications

Holey Block

- No adhesive required: simply wrap a 5-1/2" x 9" (9" x 11" cut in half) sheet around the block
- A rugged, semi-rigid, multi-purpose sanding block engineered for flat to medium curved surfaces
- A tactical hole pattern side provides numerous cutting edges to create a 30% faster cut rate
- The plain side provides firmness and a comfortable, easy-to-hold surface

DESCRIPTION	STD. PKG.	PART #
Wet Sanding Block	12	636425 03728
Holey Block	8	636425 03729

All-Purpose 9" x 11" Paper Sheets

Good choice for your wood, metal or composite sanding projects



A211/A212/A213 ALUMINUM OXIDE

- P-graded, aluminum oxide grain, open-coat provides aggressive, long-lasting cutting action
- Use for dry, general purpose hand sanding on hardwood, metal, and composites
- Available in multiple backing weights: A212 A-weight; A213 C-weight, A211 D-weight

Good choice for use on soft woods such as pine



A513/A511 GARNET

- Natural garnet abrasive is ideal for soft woods, such as pine, and produces an excellent, consistent finish
- Use dry on bare wood prior to coating
- Available in two backing weights: A511 A-wt. and A513 C-wt. for heavy-duty to light-duty hand sanding

9 x 11
Paper Sheets



TIER:	GOOD	GOOD	GOOD	GOOD	GOOD	GOOD	GOOD
TRADENAME:	A211	A213	A212	JOBPACK MULTISAND A213/A212	A513	A511	JOBPACK WOODSAND A513/A511
ABRASIVE:	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Garnet	Garnet	Garnet
BACKING WEIGHT:	D-Weight	C-Weight	A-Weight	D-, C- & A-Weight	D- & C-Weight	A-Weight	D-, C- & A-Weight
OTHER:	P-Graded	P-Graded	P-Graded	P-Graded			

SIZE (W x L)	GRIT	PKG./CASE	PART #	PART #	PART #	PART #	PART #	PART #	PART #
9 x 11	36	25/125	662611 00335						
	40	25/125	662611 00330						
	50	50/250	662611 00325						
	60	50/250		662611 00320			662611 01560		
	80	50/250		662611 00315			662611 01555	662611 01505	076607 01584*
	100	100/500		662611 00295		076607 00358*	662611 01535	662611 01500	076607 01583*
	120	100/500		662611 00290		076607 00357*	662611 01530	662611 01495	076607 01582*
	150	100/500		662611 00285		076607 00356*	662611 01525	662611 01490	076607 01581*
	180	100/500			662611 00245	076607 00355*		662611 01489	076607 01580*
	220	100/500			076607 00156	076607 00354*		662611 01488	076607 01579*
	Asst+	100/500				076607 00365*			

* Packaging Standards: Job Packs: 25 sheets per pack / 10 packs per standard package for a total of 250 sheets
+ Assorted contains 6 each of 60, 100, 150 grit and 7 each of 220 grit

3-2/3 x 9
Paper Cut Sheets



TIER:	GOOD	GOOD
TRADENAME:	A290 NO-FIL	A213
ABRASIVE:	Aluminum Oxide	Aluminum Oxide
BACKING WEIGHT:	C-Weight	C-Weight
OTHER:	P-Graded	P-Graded

SIZE (W x L)	GRIT	PKG./CASE	PART #	PART #
3-2/3 x 9	60	100/1000		662611 02925
	80	100/1000	662611 01119	662611 02920
	100	100/1000		662611 02900
	180	100/1000	662611 01124	
	220	100/1000	662611 01123	



Surface finishing rolls are made of a non-woven nylon web impregnated with abrasive grain and resin bond.

Applications:

Light- to heavy-duty cleaning, deburring, blending, polishing, and finishing of metal, wood, composite, plastics, stone, solid surface and painted surfaces.

Abrasive Grain:

Aluminum Oxide, Silicon Carbide


Grit Range:

Medium (M), Fine (F), Very Fine (VF), Ultra Fine (UF), Micro Fine (MF)

Roll Features:

- Economical alternative to cut pads
- Can be cut to specific sizes

Machine Used:



HAND
SANDING

JITTERBUG
SANDER

Application/Grit Recommendation Guide


MORE AGGRESSIVE, ROUGHER FINISH

LESS AGGRESSIVE, FINER FINISH



	#740	#644	#747	#635	#851	#777	HIGH STRENGTH
PRODUCT #:	#740	#644	#747	#635	#851	#777	HIGH STRENGTH
COLOR:	Dark Tan	Maroon	Maroon	Gray	Gray	Maroon	Maroon
DESCRIPTION:	Heavy Duty	GP – Fine	GP Plus – Very Fine	Clean & Finish	General Cleaning	General Purpose	High Strength
ABRASIVE:	AO	AO	AO	SC	SC	AO	AO
GRIT SIZE:	Medium 100 - 150	Fine 180 - 220	Very Fine 240 - 360	Ultra Fine 400 - 600	Very Fine 240 - 360	Very Fine 240 - 360	Medium 100 - 150
STEEL WOOL EQUIVALENT:	4 Extra Coarse	2 Medium Coarse	1 Medium	00 Very Fine	00 Very Fine	1 Medium	4 Extra Coarse
APPLICATIONS:	<ul style="list-style-type: none"> • Smear-free Clean Bond technology • 2X life • Most durable and aggressive cutting pad • Heavy-duty removal <ul style="list-style-type: none"> » rust » oxidation • Deburring 	<ul style="list-style-type: none"> • Cleaning and deburring <ul style="list-style-type: none"> » machinery » metal parts » plastic » solid surface » stone 	<ul style="list-style-type: none"> • Light cleaning, deburring and finishing <ul style="list-style-type: none"> » machinery » metal parts » plastic » solid surface » stone 	<ul style="list-style-type: none"> • Light cleaning and finishing of most surfaces <ul style="list-style-type: none"> » steel, aluminum » denibbing plastic » scuffing acrylics 	<ul style="list-style-type: none"> • Light cleaning and finishing of most surfaces <ul style="list-style-type: none"> » steel, aluminum » denibbing plastic » scuffing acrylics 	<ul style="list-style-type: none"> • Light cleaning, deburring and finishing <ul style="list-style-type: none"> » machinery » metal parts » plastic » solid surface » stone 	<ul style="list-style-type: none"> • Moderate deburring and surface blending

SIZE (W x L)	COLOR	DESCRIPTION	ABRASIVE	GRIT SIZE	STD. PKG.	TIER: BEST BETTER	
						PART #	PART #
Non-Woven Rolls							
4" x 30 Ft.	Maroon	High Strength Roll	A/O	M	3	662610 06358	
	Dark Tan	740 Heavy-Duty Roll	A/O	M	3		662610 10081
	Maroon	644 General Purpose Fine Roll	A/O	F	4		662610 58364
	Maroon	777 General Purpose Very Fine Roll	A/O	VF	4	662610 06373	662610 58361
	Maroon	747 General Purpose Plus Roll	A/O	VF	4		662610 51701
	Gray	851 General Cleaning Roll	S/C	VF	4		662610 58360
	Gray	635 Clean & Finish Roll	S/C	UF	5		662610 58357
6" x 30 Ft.	Maroon	High Strength Roll	A/O	M	2	662610 05182	
	Maroon	747 General Purpose Plus Roll	A/O	VF	3		662610 16430
	Maroon	777 General Purpose Very Fine Roll	A/O	VF	3	662610 04281	662610 58376
	Gray	851 General Cleaning Roll	S/C	VF	3		662610 58377
2" x 15 Ft. Handy Roll Pack	Assorted	1 each A/O Fine, A/O VF, SC MF	–	–	1		662610 08108

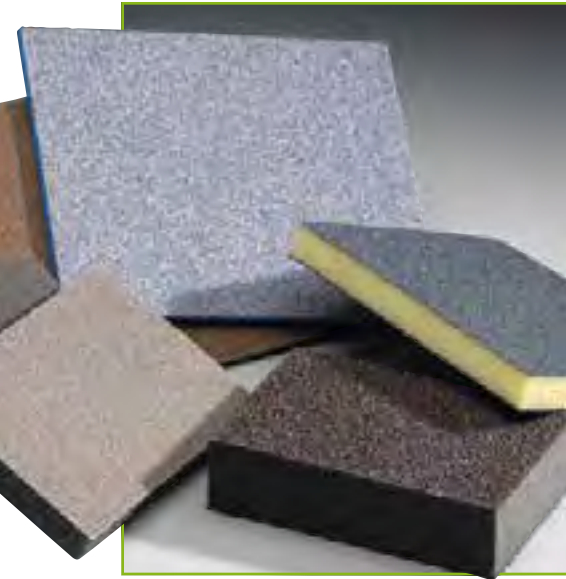

Flexible, abrasive sanding sponges for a wide variety of curved, contoured or flat surface applications on wood, metal, paint, plastic, ceramics and drywall.

Applications:

Light stock removal, sanding sealer and wash-coats, touch-up or repair of primer, sanding contours and intricate shapes, and finishing

Benefits:



- Can be used wet or dry
- Clog resistant, washable, reusable
- Easy to use, can be folded without cracking
- Conformable
- Generate a consistent surface finish

Machine Used:



HAND
SANDING

Why Choose Abrasive Sponges Versus Conventional Sheets?



Eliminate Clogging

- The combination of flexible foam backing material and abrasive grit adhesion continually releases sanded material
- Any clogging can be washed out

Pressure Control

- Foam backing allows optimum pressure distribution to prevent sanding through surfaces
- Pressure spots are eliminated providing even surface pattern

Adapt to Contours

- Flexible foam allows adaptability to contours, shapes or areas of limited access
- No folding or buckling results in an even pattern without scratching

Surface Finishing Chart – Contour Sponges versus Sheets

	← COARSER → FINER →												
SHEETS	P150	P180	P220	P280	P320	P400	P500	P600	P800	P1000	P1200	P1500	P2000
SPONGES	Medium 60		Fine 100		Extra Fine 150		Super Fine 180		Ultra Fine 220		Micro Fine 280/320		


Surface Finishing Chart – Sponges versus Sheets

	← COARSER → FINER →													
SHEETS	P80	P100	P120	P150	P180	P220	P280	P320	P400	P500	P600	P800	P1000	P1200
SPONGES	Extra Coarse 36		Coarse 60		Medium 80 - 120		Fine 120 - 150		Very Fine 180 - 220				Micro Fine 280 - 320	

Cross Reference Guide

	BETTER	GOOD	GOOD	GOOD	GOOD	GOOD
NORTON	SoftTouch	Contour	Small Area	Profile	Sealer Sanding	Flexible
3M	Softback	Contour	Full Size	High Flexibility	Woodworking	Pro Pads
Hermes	Single Side	–	Four Sided	–	Two Sided	–
Klingspor	–	–	–	–	Foam Sanding Pad	–
SIA	Flat Pad	–	Standard Block	–	Standard Pad	–

For hand-sanding or finishing flat, curved, contoured and hard-to-reach areas on wood, metal, composites, paint and solid surfaces

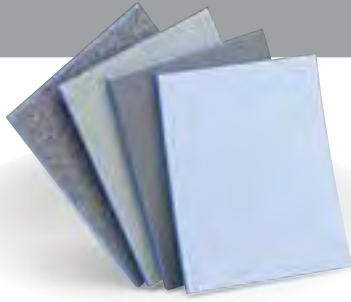


SOFTTOUCH CONTOUR SPONGES – COATED 1 SIDE

- Superior flexibility
- Premium foam substrate provides for an extremely smooth and uniform sanded surface

SIZE (W x L x T)	GRIT	STD. PKG.	PART #
4-1/2 x 5-1/2 x 3/16	60 Medium	80	076607 03074
	100 Fine	80	076607 03075
	180 Super Fine	80	076607 03076
	220 Ultra Fine	80	076607 03077
	280 Micro Fine	80	076607 03078

Good for sanding small diameters and contours

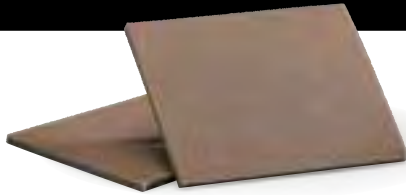

CONTOUR SPONGES – COATED 1 SIDE

- Thin, flexible; good for sanding small diameters and contours such as ceramics, spindles, turnings and railings

SIZE (W x L x T)	GRIT	STD. PKG.	PART #
4-1/2 x 5-1/2 x 3/16	100 Fine	100	076607 02257
	150 Extra Fine	100	076607 02256
	220 Ultra Fine	100	076607 02255

Good for a wide variety of materials and sanding applications where moderate flexibility is needed




SMALL AREA GENERAL PURPOSE SPONGES – COATED 4 SIDES

- Medium to firm density open cell polyurethane foam provides uniform support and moderately aggressive cutting action while generating a smooth surface

SIZE (W x L x T)	GRIT	STD. PKG.	PART #	BULK PKG.	PART #
4 x 2-3/4 x 1	36/80	24	076607 49505	250	076607 04735
	Ex. Coarse/Med	24	076607 49507	250	076607 01875
	80/80	24	076607 49504	250	076607 02600
	Med/Med	24	076607 49504	250	076607 02600
	80/120	24	076607 49504	250	076607 02600
4 x 2-3/4 x 1/2	Med/Fine	24	076607 49506		
	120/120	24	076607 49506		
	Fine/Fine				

Good for corners and flat surfaces on wood, metal, plastic and paint

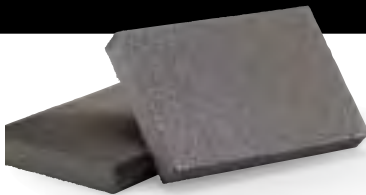


PROFILE SPONGES – COATED 3 SIDES

- Ideal for cabinet sanding of raised profile doors

SIZE (W x L x T)	GRIT	STD. PKG.	PART #
4 x 2-3/4 x 1/2	100 Medium	500	636425 36313

Good for sanding primers, sealers and between coats on furniture and cabinets

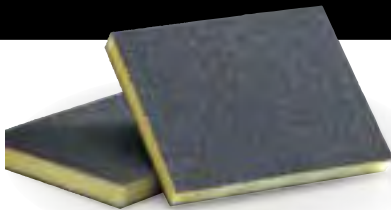

SEALER SANDING SPONGES – COATED 2 SIDES

- Very flexible; silicon carbide abrasive for sanding primers, sealers and between coats on furniture and cabinets

SIZE (W x L x T)	GRIT	BULK PKG.	PART #
4-3/4 x 3-3/4 x 1/2	36 Extra Coarse	250	636425 02538
	60 Coarse	250	636425 52870
	100 Medium	250	636425 52869
	150 Fine	250	636425 52868

Ideal for final sanding of surfaces, primer sanding, and between coats sanding



FLEXIBLE ABRASIVE SPONGES – COATED 1 SIDE

- Best initial price point for abrasive sponges

SIZE (W x L x T)	GRIT	STD. PKG.	PART #	BULK PKG.	PART #
3 x 4 x 1/2	60 Coarse	48	076607 04068	108	076607 01110
	80 Medium	48	076607 04067	108	076607 04070
	100 Medium	48	076607 04066	108	076607 00950
	150 Fine	48	076607 04065	108	076607 00949
	220 Very Fine			108	076607 04069

Non-Woven Hand Pads and Sponges



Surface finishing hand pads are made of a non-woven nylon web impregnated with abrasive grain and resin bond.

Applications: Light- to heavy-duty cleaning, deburring, blending, polishing, and finishing of metal, wood, composite, plastics, stone, solid surface and painted surfaces.

Abrasive Grain: Aluminum Oxide, Silicon Carbide
Grit Range: Medium (M), Fine (F), Very Fine (VF), Ultra Fine (UF), Micro Fine (MF), Non-Abrasive (-)

Hand Pad Features:

- Flexible; conform to work surface
- Gentle action easily removes flashing or burrs without affecting dimension of workpiece
- Non-loading; constant supply of new cutting edges
- Non-rusting; no workpiece contamination
- Resilient construction; long life, increased productivity; solvent resistant; waterproof

Sponge Pad Features:

- Non-woven material is laminated to a long-lasting sponge for the convenience of 2 pads in one
- Superior replacement for steel wool

Machine Used:



HAND SANDING



JITTERBUG SANDER

Application/Grit Recommendation Guide

MORE AGGRESSIVE, ROUGHER FINISH ←

→ LESS AGGRESSIVE, FINER FINISH



PRODUCT #:	#740	#746	#644	#747	#796	#635	#748	THIN-FLEX VF	THIN-FLEX UF	THIN-FLEX BP	#456
COLOR:	Dark Tan	Gray	Maroon	Maroon	Green	Gray	Gray	Maroon	Gray	Gold	White
DESCRIPTION:	Heavy Duty	Blending	GP - Fine	GP Plus - Very Fine	Scouring	Clean & Finish	Final Shine	Cleaning	Cleaning	Blend Prep	Cleaning
ABRASIVE:	AO	SC	AO	AO	AO	SC	SC	AO	SC	AO	Non-Abrasive
GRIT SIZE:	Medium 100 - 150	Medium 100 - 150	Fine 180 - 220	Very Fine 240 - 360	Very Fine 240 - 360	Ultra Fine 400 - 600	Micro Fine 800 - 1200	Very Fine 240 - 360	Ultra Fine 400 - 600	Micro-Fine 800 - 1200	Non-Abrasive ----
STEEL WOOL EQUIVALENT:	4 Extra Coarse	3 Coarse	2 Medium Coarse	1 Medium	0 Fine	00 Very Fine	00 Very Fine	00 Very Fine	000 Extra Fine	000 Extra Fine	0000 Super Fine
APPLICATIONS:	<ul style="list-style-type: none"> • Smear-free Clean Bond technology • 2X life • Most durable and aggressive cutting pad • Heavy-duty removal <ul style="list-style-type: none"> » rust » oxidation • Deburring 	<ul style="list-style-type: none"> • Blending and deburring <ul style="list-style-type: none"> » welds » aluminum » stainless 	<ul style="list-style-type: none"> • Cleaning and deburring <ul style="list-style-type: none"> » machinery » metal parts » plastic » solid surface » stone 	<ul style="list-style-type: none"> • Light cleaning, deburring and finishing <ul style="list-style-type: none"> » machinery » metal parts » plastic » solid surface » stone 	<ul style="list-style-type: none"> • Removing stains, marks, rust, corrosion or oxidation from stainless equipment • Light cleaning of metal surfaces 	<ul style="list-style-type: none"> • Light cleaning and finishing of most surfaces <ul style="list-style-type: none"> » steel, aluminum » denibbing plastic » scuffing acrylics 	<ul style="list-style-type: none"> • Final finishing <ul style="list-style-type: none"> » final rub on wood » final blend on metal » final finish on plastics and acrylics 	<ul style="list-style-type: none"> • Maximum flexibility for consistent finishes • Cleaning, blending, finishing, and deburring in woodwork, metalwork, MRO, and synthetic applications 	<ul style="list-style-type: none"> • Maximum flexibility for consistent finishes • Cleaning, blending, finishing, and deburring in woodwork, metalwork, MRO, and synthetic applications 	<ul style="list-style-type: none"> • Fine cleaning • Fine polishing (most surfaces) • Top coat finishing (water-based and solvent) 	<ul style="list-style-type: none"> • Scratch-free cleaning <ul style="list-style-type: none"> » metal » fiberglass » stone » solid surface » ceramic • Wood <ul style="list-style-type: none"> » high-lighting » rubbing

Cross Reference Guide

← COARSER

→ FINER

NORTON	#740	#746	#644	#747/847	#796	#635	#748	Thin-Flex VF	Thin Flex UF	#456
3M	7440	7446	64659	7447/8447 Production Hand Pad	96	64660	7448	Multi-Flex Maroon	Multi-Flex Gray	7445
Camel	Tan	—	—	Maroon	Green	—	Gray	—	—	White
Mirka	—	—	—	Maroon/Red VF	—	—	—	Mirlon Total Maroon	Mirlon Total Gray	—
Sait	Brown	—	—	Maroon	Green	—	Gray	—	—	—
SIA	6912 Brown	6712 Grey	—	6912 Maroon	6312 Green	—	—	—	—	—
Standard	HD-Tan AO	—	—	GP-Maroon VF	Green-AO	HP-VF	UF Gray	—	—	Cleaning White

SIZE (W x L)	COLOR	DESCRIPTION	ABRASIVE	GRIT SIZE	STD. PKG.	TIER: BEST	BETTER
						PART #	PART #
Hand Pads							
4-1/2 x 9	Maroon	Thin Flex Cleaning Pad	A/O	VF	25	666233 98062	
	Grey	Thin Flex Cleaning Pad	S/C	UF	25	666233 98063	
	Gold	Thin Flex Blend Prep	A/O	MF	25	662611 13519	
6 x 9	Dark Tan	740 Heavy-Duty Pad	A/O	Med	40	662610 74000	
	Gray	746 Blending Pad	S/C	Med	40		662610 74600
	Maroon	777 General Purpose Very Fine Pad	A/O	VF	60		662610 77700
	Maroon	747 General Purpose Plus Pad	A/O	VF	60	662610 74700	
	Maroon	847 General Purpose Plus Perforated Pad	A/O	VF	60	662610 84700	
	Green	796 Scouring Pad	A/O	VF	60		662610 79600
	Lt. Green	696 Food Pro Pad	A/O	VF	60		662610 69600
	Gray	851 General Cleaning Pad	S/C	VF	40		662610 85100
	Gray	635 Clean & Finish Pad	S/C	UF	60		662610 63500
	Gray	748 Final Shine Pad	S/C	MF	60		662610 74800
	White	456 Cleaning Pad	None	–	60		662610 45600
	Hand Pad Holder						
3-1/4 x 5-1/2	N/A	Hand Pad Holder			10		662610 47583
Scouring Pads/Sponges							
3-1/4 x 6-1/4 x 3/4	Green/Yellow	893 Scour-N-Sponge Pad	A/O	VF	40		662610 59403
3-1/4 x 6-1/4 x 3/4	White/Yellow	875 Clean-N-Sponge Pad	None	–	40		662610 59402



THIN and FLEXIBLE: Perfect for Tight Spots

Norton Bear-Tex Thin-Flex High-Performance Hand Pads

- Achieve performance benefits of a coarse and fine grain product in one hand pad; fast cut and definitively better finish than competing pads
- Extremely thin and conformable; ideal for deburring, cleaning, blending, and finishing contoured surfaces and tight spaces
- Special coated web design for superior and constant cutting action without added effort from user
- Versatile; ideal for woodworking, metalworking, maintenance operations, and synthetics fabrication

Rotolo Foam Sanding Pads

Application/Grit Recommendation Guide

COARSER ←												→ FINER											
120	150	180	220	240	280	320	400	500	600	800	1000	120	150	180	220	240	280	320	400	500	600	800	1000
Cleaning/Repairing			Final Sanding						Feather Edging			Basecoat Sanding			Clearcoat Sanding								

The better choice for fine sanding flat and curved surfaces



A2750P NO-FIL ROTOLO FOAM ROLLS

- Premium, P-graded, heat-treated aluminum oxide abrasive for consistent surface finish, exceptional performance on all surfaces and coatings
- Foam backing is perfect for hand sanding primer without leaving finger marks; 50% – 60% improvement in tear strength versus conventional paper rolls; perforated for easy sizing
- Non-pigmented, water based stearate No-Fil coating, open coat for best resistance to clogging and loading during sanding

TIER: **BETTER**
 TRADENAME: **A275 OP ROTOLO**
 ABRASIVE: Aluminum Oxide
 OTHER: P-Graded

SIZE (W x L)	GRIT SIZE	ROLLS/STD. PKG.	PART #
4-1/2" x 82'	120	2	636425 35316
	150	2	636425 57584
	180	2	636425 57599
	220	2	636425 57600
	240	2	636425 57602
	280	2	636425 57604
	320	2	636425 57606
	400	2	636425 57608
	500	2	636425 57611
	600	2	636425 57612
	800	2	636425 57613
	1000	2	636425 57616



Flexible Diamond-Coated Hand Pads

Norton flexible diamond coated hand pads combine the durability and aggressiveness of diamond, with a flexible backing.

Applications:

Diamond coated hand pads: shaping, rapid stock removal, touch-up and repair on ceramics, stone, marble, glass, composites and hard materials; polishing of dies and molds
 Quadroflex diamond hand pads: surface conditioning, repairs, and removing flash and burrs on aircraft composites and windmill blades

Size Range:

3-1/2" x 2-1/8"

Grit Range:

60 – 1500


Abrasive Types:

Diamond

Machine Used:





HAND
SANDING

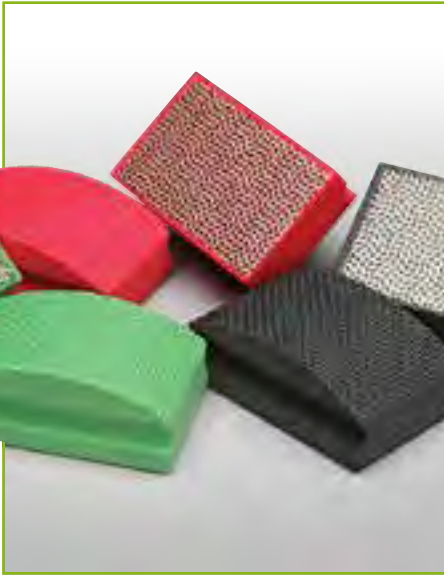

Better choice for shaping, rapid stock removal, surface conditioning, touch-up, repair, and polishing

FLEXIBLE DIAMOND-COATED HAND PADS – CONVENTIONAL AND QUADROFLEX CURVED

- Durable yet lightweight conformable backing is adaptable to a variety of shapes and conditions with long lasting performance; offers a uniform finish for improved surface quality
- Can be used wet or dry; color-coded by grit size for easy identification
- Conventional hand pads with precision dot pattern for an aggressive, consistent, fast cut rate and reduced dust and loading; Quadroflex curved hand pads offer ergonomic advantages and longest life for lowest overall total cost

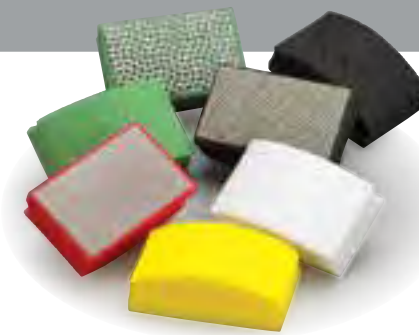

			TIER BETTER		TIER BETTER	
			DIAMOND COATED HAND PADS		QUADROFLEX CURVED DIAMOND COATED HAND PADS	
			ABRASIVE: Diamond		ABRASIVE: Diamond	
SIZE (L x W)	COLOR	GRIT	STD. PKG.	PART #	PART #	
3-1/2 x 2-1/8	Green	60	1	662603 06360	690141 21517	
	Black	120	1	662603 06361	690141 21518	
	Red	200	1	662603 06362	690141 23529	
	Yellow	400	1	662603 05852	690141 23530	
	White	800	1	662603 06363	690141 23531	
	Blue	1500	1	662603 06364		
	Kit (one each of above)			1	662603 07720	

power...
**IN THE PALM OF
YOUR HAND**

New Portable Tools and the specialty abrasive products to go along with them. Access hard-to-reach areas with ease with the Norton Merit line of specialty products.





Put the world right in the palm of your hand with our 2" and 3" Norton Mini Angle Sanders. Small, compact enough to get into those hard-to-reach areas, and powerful enough to finish the job fast and efficiently.

Specifications for:

Weight of tool:

Compressed air:

Maximum permissible operating pressure:

Horsepower:

Free speed:

Air consumption @90psi:

Noise characteristic value in accordance with EN ISO 15744 (ISO 15744):

- A-weighted sound pressure level at workstation
- A-weighted sound power level
- Peak C-weighted instantaneous sound pressure level at workstation

Measurement uncertainty (Standard):

Vibration value according to EN ISO 28927-3:

Recommended lubrications:

Sanding tool specifications:

Applications and suitability:

2" Mini Angle Air Sander 3" Mini Angle Air Sander

1.6 lbs. (0.742kg)

6.2 bar (90psi)

6.2 bar (90psi)

.45

22,000 rpm

85 liters/min (3 CFM)

87.3 dB

98.3 dB

<130 dB

3.00 m/s²

0.84 m/s²

Air oil 20#

Pad Size 2" Collet

Collet Chuck 1/4" (6mm)

Surface preparation, grind welds, spot sanding and light-duty finishing applications.

1.8 lbs. (0.816kg)

6.2 bar (90psi)

6.2 bar (90psi)

.9

20,000 rpm

116 liters/min (4.1 CFM)

83.2 dB

94.2 dB

<130 dB

5.92 m/s²

1.09 m/s²

Air oil 20#

Pad size 3" Collet

Collet Chuck 1/4" (6mm)

NEW

Put the power right in the palm of your hand with our Mini Angle Sanders

MINI ANGLE SANDERS

- A double-bearing spindle generates superb concentricity, reducing vibrations allowing for longer use and finer finishes
- Finesse your projects by having the ultimate control in both precision and power with the speed regulator
- Get better tool handling along with reduced fatigue with the ergonomic and streamlined non-slip grip



DESCRIPTION	STD. PKG.	PART #
Mini Angle Sanders and Kits		
2" Mini Angle Sander	1	662611 50076
2" Kit Includes:	1	662611 50077
• 1 – 2" Sander		
• 25 – 2" 36 Grit Blaze R980P 3-Ply TR Discs (662611 62318)		
• 50 – 2" Medium Grit Rapid Prep Non-Woven TR Discs (662610 09190)		
• 1 – 2" Medium Density Back-Up Pad (662610 55103)		
3" Mini Angle Air Sander	1	699573 82154
3" Kit Includes:	1	699573 82155
• 1 – 3" Sander		
• 25 – 3" 36 Grit Blaze R980P 3-Ply TR discs (662611 62328)		
• 25 – 3" Medium Grit Rapid Prep Non-Woven TR discs (662610 17522)		
• 1 – 3" Medium Density Back-Up Pad (662610 55105)		





Mini-flap discs are ideal for use in tight spaces. They feature layered flaps which wear away evenly during use exposing new abrasive grain. The lightweight plastic backing helps to absorb vibration. They can help eliminate the conventional 2-step process in grinding edges and removing welds and rust.

- Applications:** Grinding, stock removal, edge chamfering/beveling, weld blending, deburring/deflashing, rust removal, blending, cleaning, and finishing in small areas or tight spots.
- Size Range:** 2" and 3" Quick-Change
- Grit Range:** 36 – 120
- Abrasive Grain:** Ceramic Alumina, Zirconia Alumina
- Abrasive Flaps:** Polyester, Poly-cotton
- Attachment:** TR (Type III) and TS (Type II)
- Backing Plate Material:** Extra Heavy-Duty Plastic
- Machine Used:**



Best choice for beveling, blending, deburring, and stock removal in tight spaces



BLAZE R980P CERAMIC ALUMINA

- Premium ceramic alumina abrasive grain lasts 50% – 200% longer than many flap discs on stainless steel, cobalt, chrome, Inconel, titanium and other hard-to-grind materials
- Flexible, high-strength, plastic backing plates absorb vibration for optimized ergonomics
- Y-weight polyester flaps with a supersize grinding aid significantly improve life, grain retention, and fray resistance while providing a cool, noticeably faster cut rate

Better choice for blending, deburring, and stock removal in tight places




BLUEFIRE R884P ZIRCONIA ALUMINA PLUS

- High-performance zirconia alumina plus abrasive for aggressive cut and long life
- Flexible, high-strength, plastic backing plates absorb vibration for optimized ergonomics
- Poly-cotton flaps with semi-open coat provide improved durability and minimizes loading on aluminum



TIER:	BEST	BETTER	BEST	BETTER		
TRADENAME:	BLAZE R980P	BLUEFIRE R884P	BLAZE R980P	BLUEFIRE R884P		
ABRASIVE:	Ceramic Alumina	Zirconia Alumina Plus	Ceramic Alumina	Zirconia Alumina Plus		
FLAP:	Polyester	Polyester	Polyester	Polyester		
BACKING MATERIAL:	Extra Heavy-Duty Plastic	Extra Heavy-Duty Plastic	Extra Heavy-Duty Plastic	Extra Heavy-Duty Plastic		
ATTACHMENT:	TR (Type III)	TR (Type III)	TS (Type II)	TS (Type II)		
SIZE (D)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #
2	36	10	776960 90145	776960 90165	776960 90155	776960 90175
	40	10	776960 90146	776960 90166	776960 90156	776960 90176
	60	10	776960 90147	776960 90167	776960 90157	776960 90177
	80	10	776960 90148	776960 90168	776960 90158	776960 90178
3	120	10	776960 90149	776960 90169	776960 90159	776960 90179
	36	10	776960 90150	776960 90170	776960 90160	776960 90180
	40	10	776960 90151	776960 90171	776960 90161	776960 90181
	60	10	776960 90152	776960 90172	776960 90162	776960 90182
	80	10	776960 90153	776960 90173	776960 90163	776960 90183
	120	10	776960 90154	776960 90174	776960 90164	776960 90184



DESCRIPTION	MAX. RPM	STD. PKG.	TR (TYPE III)	TS (TYPE II)
Mini Flap Disc Back-up Pads				
2" and 3" Medium Density Back Up Pads	30,000	1	088341 60172	088341 68539



Tool-free, twist-on and -off fastening systems make fast work of disc changes to maximize productivity by minimizing downtime.

- Applications:** Fiber and NorKut trimmable hard plastic discs: welding, grinding and blending; heavy metal removal; light deburring and finishing
Cloth discs: light- to medium-pressure grinding; blending, leveling and finishing applications; for use on contours or flat surfaces
Diamond: Grinding ceramic, glass, composites, carbide and ceramic coatings, fiberglass, and reinforced plastics
- Size Range:** 9/16" – 4" diameter
- Grit Range:** 24 – 320
- Abrasive Grain:** Ceramic Alumina, Zirconia Alumina, Aluminum Oxide, Silicon Carbide, Diamond
- Backing:** Fiber, cloth, or polymer
- Cloth Flex:** 3-ply (more aggressive), 2-ply (standard)
- Attachment:** Type TS (II), Type TR (III), and Type TP (I)
- Back-up Pads:** Rubber with hardness variations for different applications
- Machine Used:**



MINI ANGLE SANDER

Coated Abrasive Quick-Change Disc Availability



Fiber

- The most heavy-duty discs with resin over resin construction on heavy-duty vulcanized fiber backing
- Premium grain for applications from heavy stock removal to surface blending



Cloth 3-Ply

- These heavy-duty, 3-ply polyester laminate construction discs are the most aggressive and durable cloth discs on the market



NorKut

- Unique polymer backing resists cracking and breakage and can be cut down up to the 1" core
- Use the cores to grind "pinch" welds and other hard-to-reach areas



Cloth 2-Ply

- Our standard 2-ply laminate construction creates an aggressive and durable cloth disc for flat surfaces



Diamond

- Unique, aggressive, diamond grain pattern on a flexible cloth backing

Quick-Change Attachment Systems and Cross Reference Guide

Each system enables quick, safe disc changes, reducing downtime and operating expenses.

Type TS (Type II)

- Features a turn-on/turn-off style fastener
- Fastener is made of metal



Type TR (Type III)

- Features a roll-on/roll-off style fastener
- Fastener is made of plastic



Type TP (Type I)

- Features a snap-on/snap-off style fastener
- Fastener is made of nylon




NORTON MERIT	TS (Type II)	TR (Type III)	TP (Type I)
3M	Roloc TS/TSM	Roloc TR	Roloc TP
Standard	TS (SocAtt)	TR (Lockit)	TP (ClickOn)
Superior	Type S	Type R	–
Arc	Type S	Type R	Type P
Pferd	Type CD	Type CDR	–
Sait	SAIT-LOK	SAIT-LOK-R	–
Camel	Turn On	Roll On	–
Klingspor	QMC	QRC	–
Garryson	Type S	Type R	–

Material/Application-to-Product Recommendation Guide

	BEST	BETTER	GOOD
	Blaze R980P	BlueFire R884P	Aluminum Oxide Silicon Carbide R422
Stainless Steel / Titanium / Super Alloys	◆	◆	◆
Mild Carbon Steel / Welds		◆	◆
Ferrous Metals / Cast Iron		◆	◆
Brass / Bronze / Aluminum		◆	◆
Paint / Glue / Adhesive			◆
Concrete / Stone / Fiberglass			◆

Application/Grit Recommendation Guide

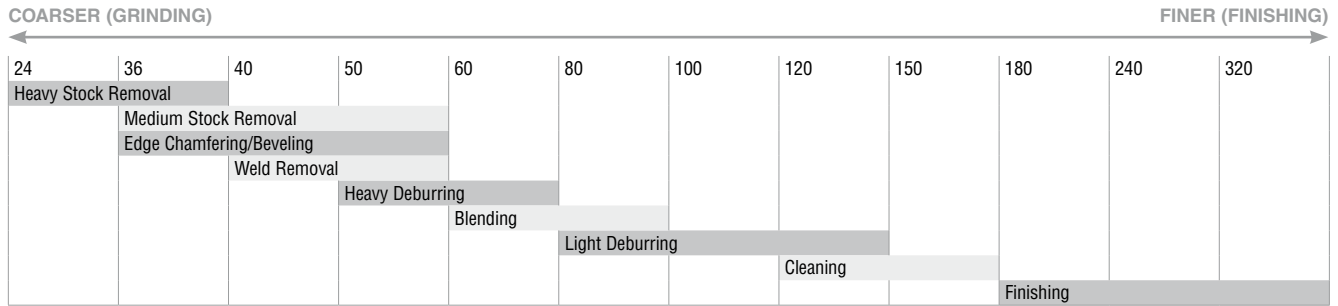

Cross Reference Guide


	TOTAL PERFORMANCE			INITIAL PRICE	
	BEST	BETTER	GOOD		
Abrasive Backing	Ceramic Alumina Fiber	Ceramic Alumina Cloth	Zirconia Alumina Cloth	Aluminum Oxide Cloth	Silicon Carbide Cloth
NORTON	Blaze F980	Blaze R980P	BlueFire R884P		R422
3M	782C, 785C, 787C, 982C, 985C, 987C, 988C	963G/H, 966F, 967F, 997F, 984F, 784F, 947A	561D	361F, 363F	421A, 441D, 461F
Standard	Ceramic, Ceramic Pro	Ceramic Pro, Ceramic	Zirconia	A/O Extra, A/O Pro	Silicon Carbide
Superior	—	Ceramic G.A.	Premium Zirc	A/O with Grinding Aid	—
Arc	—	—	Zirconia/Y Standard	A/O/X Plus Coolant	—
Pferd	CO, CO Cool	Ceramic	ZA Z	Aluminum Oxide A-Plus, Aluminum Oxide A-INOX-FORTE	Silicon Carbide SiC
Sait	7S,7A, 9S	—	Z	3A	C-W
Camel	Ceramic	—	Zirconia AO	—	—
Klingspor	CS570, FS966	CS610	Alumina Zirconia	—	CS333X
Garryson	—	Ceramic	—	—	—

Best choice for tough applications and stainless steel



BLAZE F980 CERAMIC ALUMINA FIBER

- 100% ceramic grain constantly exposes sharper edges to deliver highest productivity at lowest overall costs vs. competitive lower-ratio ceramic discs
- Strong fiber backing, heavier and more rigid than conventional cloth discs, adds strength and tear resistance, and allows additional pressure for better results when grinding difficult materials
- Advanced self-lubricating grain treatment provides coolest cut and significantly faster cut rates; excels on hard-to-grind materials like 300 and 400 Series stainless and exotic alloys



TIER: **BEST**
 TRADENAME: **BLAZE F980**
 ABRASIVE: Ceramic Alumina
 BACKING: Fiber – Heavy Duty
 OTHER: Supersize
 ATTACHMENT: TR (Type III)



SIZE (D)	GRIT	STD. PKG.	PART #
2	24	25	776960 90139
	36	25	662610 58704
	50	25	662610 58705
	60	25	662610 58706
	80	25	662610 58707
3	24	25	776960 90140
	36	25	662610 58708
	50	25	662610 58709
	60	25	662610 58711
	80	25	662610 58712

Quick-Change back-up pads shown at the end of the Quick-Change Disc section.





Best choice for tough applications, titanium, super alloys, and stainless steel (3-ply) or contoured surfaces (2-ply)

BLAZE R980P CERAMIC ALUMINA

- 100% ceramic grain constantly exposes sharper edges to deliver highest productivity at lowest overall costs vs. competitive lower-ratio ceramic discs
- Improved resin bond system maximizes grain retention for longer product life
- Advanced self-lubricating grain treatment provides coolest cut with significantly faster cut rates while minimizing loading on hard-to-grind materials



Better choice for soft metals, wood, stainless steel, and carbon

BLUEFIRE R884P ZIRCONIA ALUMINA

- Premium, versatile, self-sharpening zirconia plus grain provides aggressive cut and up to 30% longer life vs. competitive zirconia discs
- Semi-open coat minimizes loading on soft metals (aluminum, brass, and bronze) and wood, as well as stainless and carbon steels
- Durable Y-weight, polyester waterproof backing stands up to demanding applications: high-pressure and hard-to-grind exotic alloys



Better choice for stainless steel, titanium and other exotic alloys

R801 ZIRCONIA ALUMINA PLUS

- Self-sharpening, zirconia alumina abrasive with grinding aid provides cooler cut, and longer life on hard-to-grind materials
- Durable, Y-weight, 2-ply polyester waterproof blend back stands up to these demanding applications
- Minimized heat build-up allows these discs to outlast conventional aluminum oxide and zirconia alumina discs in many applications



Good choice when initial price is the primary consideration

ALUMINUM OXIDE

- Versatile aluminum oxide abrasive for aggressive cut and longer life than competitive aluminum oxide discs
- Durable Y-weight 2-ply polyester backing and coating for additional life and faster cut rate on moderately-demanding applications
- Good choice when initial price is the primary purchasing consideration



Good choice for non-ferrous materials

R422 SILICON CARBIDE

- Sharp, silicon carbide abrasive provides high initial cut and penetration to resist loading on soft metals
- Strong, X-weight, 2-ply cotton backing construction for extended durability and reduced edge wear
- When completion time is important, sharp silicon carbide abrasive gets non-ferrous blending jobs done quickly

Ceramic Alumina Quick-Change Cloth Discs



TIER:	BEST	BEST	BEST	BEST
TRADENAME:	BLAZE R980P	BLAZE R980P	BLAZE R980P	BLAZE R980P
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Ceramic Alumina	Ceramic Alumina
BACKING:	Polyester 3-Ply Heavy-Duty	Polyester 3-Ply Heavy-Duty	Polyester 2-Ply Standard	Polyester 2-Ply Standard
OTHER:	Supersize TS (Type II)	Supersize TR (Type III)	Supersize TS (Type II)	Supersize TR (Type III)
ATTACHMENT:				

SIZE (D)	GRIT	STD. PKG.	PART #	PART #	PART #	PART #
1-1/2	36	100	662611 62307	662611 62308	636425 95401	
	50	100	662611 62309	662611 62310	636425 95446	
	60	100	662611 62311	662611 62312	636425 95447	636425 95468
	80	100	662611 62313	662611 62314	636425 95450	
	120	100	662610 43379	662610 43380	662610 43416	
2	36	25	662611 62317	662611 62318	636425 95452	636425 95470
	50	25	662611 62319	662611 62320	636425 95456	636425 95472
	60	25	662611 62321	662611 62322	636425 95458	636425 95476
	80	25	662611 62323	662611 62324	636425 95459	636425 95478
	100	25	662610 43382	662610 43383	662610 43418	662610 43419
	120	25	662610 43384	662610 43386	662610 43420	662610 43421
3	36	25	662611 62327	662611 62328	636425 95460	636425 95479
	50	25	662611 62329	662611 62330	636425 95462	636425 95480
	60	25	662611 62331	662611 62332	636425 95463	636425 95481
	80	25	662611 62333	662611 62334	636425 95464	636425 95493
	100	25	662610 43389	662610 43390	662610 43422	662610 43423
	120	52	662610 43391	662610 43392	662610 43424	662610 43425

Quick-Change back-up pads shown at the end of the Quick-Change Disc section.



Zirconia Alumina Quick-Change Cloth Discs



TIER:	BETTER	BETTER	BETTER	BETTER	BETTER
TRADENAME:	BLUEFIRE R884P	BLUEFIRE R884P	R801 ZIRC PLUS	R801 ZIRC PLUS	R801 ZIRC PLUS
ABRASIVE:	Zirconia Alumina	Zirconia Alumina	Zirconia Alumina	Zirconia Alumina	Zirconia Alumina
BACKING:	Polyester 2-Ply Standard	Polyester 2-Ply Standard	Polyester 2-Ply Standard	Polyester 2-Ply Standard	Polyester 2-Ply Standard
OTHER:			Supersize	Supersize	Supersize
ATTACHMENT:	TS (Type II)	TR (Type III)	TS (Type II)	TR (Type III)	TP (Type I)

SIZE (D)	GRIT	STD. PKG.	PART #	PART #	PART #*	PART #*	PART #*
1	36	100				088341 67093 NS	
	40	100			088341 67052 NS	088341 67094 NS	
	50	100				088341 67095 NS	088341 67011 NS
	60	100	662611 38608			088341 67096 NS	088341 67012 NS
	80	100	662611 38607			088341 67097	088341 67013 NS
	120	100				088341 67099	088341 67015 NS
1-1/2	36	100	662611 38624	662611 121041		088341 67102	088341 67018 NS
	50	100				088341 67103	088341 67019 NS
	60	100	662611 38621	662611 121043	088341 67061	088341 67104	
	80	100	662611 38620	662611 121044	088341 67062	088341 67106	
	120	100					
2	24	100	662611 38638 *	662611 138672 *			
	36	100	662611 38637 *	662611 138671	088341 67065	088341 67107	088341 67023
	40	100			088341 67066	088341 67108	
	50	100	662611 38635 *	662611 138670 *	088341 65583	088341 67109	088341 67025
	60	100	662611 38634 *	662611 121048 *	088341 67068	088341 67110	088341 67026
	80	100	662611 38633 *	662611 121049 *	088341 67069	088341 67111	088341 67027
	120	100			088341 67071	088341 67113	088341 67029
3	24	50	662611 38665 *	662611 138675 *			
	36	50	662611 38664 *	662611 138674 *	088341 67072	088341 67114	088341 67030
	40	50			088341 67073		
	50	50	662611 38662 *	662611 138673 *	088341 67074	088341 67116	088341 67032
	60	50	662611 38661 *	662611 121053 *	088341 67075	088341 67117	088341 67033
	80	50	662611 38660 *	662611 121054 *	088341 67076	088341 67118	088341 67034
	120	50			088341 67078	088341 67120	
	120	50					
4	36	50	662611 38683 *		088341 67079		
	50	50	662611 38681 *				
	60	50	662611 137343 *				088341 67040 NS
	80	50	662611 38679 *		088341 67083 NS		
	120	50			088341 67085 NS		

* Standard Package = 25 discs

NS Non-stock, contact your Norton representative for current order quantities and lead-times.

Quick-Change back-up pads shown at the end of the Quick-Change Disc section.






Quick-Change Test Kit "D"

- Part # 088341**65001**
- Includes 150 discs, assorted grits, in 1", 2", and 3" diameters and 3" back-up pads
- Primarily aluminum oxide cloth quick-change discs
- Several zirconia alumina and aluminum oxide FlexEdge discs are included

Aluminum Oxide Quick-Change Cloth Discs



TIER:	GOOD	GOOD	GOOD
ABRASIVE:	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide
	Polyester	Polyester	Polyester
BACKING:	2-Ply Standard	2-Ply Standard	2-Ply Standard
ATTACHMENT:	TS (Type II)	TR (Type III)	TP (Type I)
			

SIZE (D)	GRIT	STD. PKG.	PART #	PART #	PART #	
3/4	40	100			699573 99739	
	50	100	699573 99604		699573 99740	
	60	100	699573 99605	699573 99673	699573 99741	
	80	100	699573 99606	699573 99674	699573 99742	
1	36	100	699573 99614	699573 99682	699573 99750	
	40	100			699573 99751	
	50	100	699573 99616		699573 99752	
	60	100	699573 99617	699573 99685	699573 99753	
	80	100	699573 99618	699573 99686	699573 99754	
	100	100	699573 99619	699573 99687	699573 99755	
	120	100	699573 99620	699573 99688	699573 99756	
	180	100	699573 99622	699573 99690	699573 99758	
240	100	699573 99623	699573 99691	699573 99759		
1-1/2	36	100	699573 99626	699573 99694	699573 99762	
	40	100	699573 99627	699573 99695	699573 99763	
	50	100	699573 99628	699573 99696	699573 99764	
	60	100	699573 99629	699573 99697	699573 99765	
	80	100	699573 99630	699573 99698	699573 99766	
	100	100	699573 99631	699573 99699		
	120	100	699573 99632	699573 99700	699573 99768	
	150	100			699573 99769	
	180	100	699573 99634	699573 99702	699573 99770	
	240	100	699573 99635	699573 99703		
2	24	100	699573 99637	699573 99705	699573 99773	
	36	100	699573 99638	699573 99706	699573 99774	
	40	100	699573 99639	699573 99707	699573 99775	
	50	100	699573 99640	699573 99708	699573 99776	
	60	100	699573 99641	699573 99709	699573 99777	
	80	100	699573 99642	699573 99710	699573 99778	
	100	100	699573 99643	699573 99711	699573 99779	
	120	100	699573 99644	699573 99712	699573 99780	
	150	100	699573 99645	699573 99713	699573 99781	
	180	100	699573 99646	699573 99714	699573 99782	
	240	100	699573 99647	699573 99715	699573 99783	
	320	100	699573 99648	699573 99716	699573 99784	
	3	24	50	699573 99649	699573 99717	699573 99785
		36	50	699573 99650	699573 99718	699573 99786
40		50	699573 99651	699573 99719	699573 99787	
50		50	699573 99652	699573 99720	699573 99788	
60		50	699573 99653	699573 99721	699573 99789	
80		50	699573 99654	699573 99722	699573 99790	
100		50	699573 99655	699573 99723	699573 99791	
120		50	699573 99656	699573 99724	699573 99792	
150		50	699573 99657	699573 99725		
180		50	699573 99658	699573 99726	699573 99794	
240		50	699573 99659	699573 99727	699573 99795	
320		50	699573 99660	699573 99728	699573 99796	
4		36	50	699573 99661	699573 99729	
		50	50		699573 99731	
	60	50	699573 99664		699573 99800	
	80	50		699573 99733	699573 99801	

Quick-Change back-up pads shown at the end of the Quick-Change Disc section.

Silicon Carbide Quick-Change Cloth Discs



TIER:	GOOD	GOOD	GOOD
TRADENAME:	R422	R422	R422
ABRASIVE:	Silicon Carbide	Silicon Carbide	Silicon Carbide
BACKING:	Cotton Standard	Cotton Standard	Cotton Standard
ATTACHMENT:	TS (Type II)	TR (Type III)	TP (Type I)




SIZE (D)	GRIT	STD. PKG.	PART #	PART #	PART #
2	40	100	088341 65252	088341 64275	
	60	100	088341 65254	088341 64163	088341 62168
	80	100	088341 65255	088341 66155	088341 62169
	120	100		088341 64837	088341 62171
	180	100	088341 65259	088341 67313	088341 62173
3	40	50	088341 65267	088341 64277	
	60	50		088341 64850	
	80	50		088341 66159	088341 62188
	120	50	088341 65272	088341 66160	088341 62190
	180	50	088341 65274	088341 68177	

Some part number are non-stock, contact your Norton representative for status, order quantities and lead-times.

Quick-Change back-up pads shown at the end of the Quick-Change Disc section.

Specialty Quick-Change Discs

Better choice for hard-to-grind areas where flexibility is not required

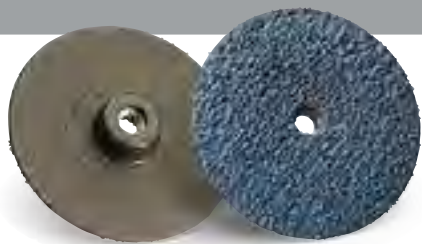

NORKUT ZIRCONIA ALUMINA POLYMER

- Durable zirconia alumina grain is resin bonded to a unique polymer backing which resists cracking and breaking; can be trimmed to the 1 Inch core
- Used with a quick change mandrel: 7/16-20 threaded for hand-held pneumatic grinders or 1/4 inch mandrel for automotive drills
- Use for deburring and blending; use the core to grind pinch welds and other hard-to-reach areas

TIER:	BETTER
TRADENAME:	NORKUT
ABRASIVE:	Zirconia Alumina
BACKING:	Extra HD Polymer
ATTACHMENT:	Threaded Hole

SIZE (D)	GRIT	STD. PKG.	PART #
NorKut Discs			
3	24	20	636425 03656
	36	20	636425 03657
	50	20	636425 03658

TIER:	BETTER
ATTACHMENT:	Threaded Hole

SIZE (D)	STD. PKG.	PART #
Mandrels		
7/16-20 Mandrel	5	636425 03659
1/4" Mandrel	5	636425 03660

Better choice for improved cut rate and finish on ceramics, glass, fiberglass, composites, carbide, and other tough metals and coatings



D7210 DIAMOND QUICK-CHANGE TR (TYPE III)

- Unique, durable diamond abrasive pattern increases life and lowers costs versus standard coated and diamond discs; color-coded backing for easy grit/application identification
- Removes rust and scale on other material; producing metallurgical stamps and coupons

SIZE (D)	COLOR	GRIT	STD. PKG.	PART #
Flexible Diamond Coated Quick-Change TR (Type III) Discs				
2"	Green	60	12	662603 11778
	Black	120	12	662603 11779
	Red	200	12	662603 11780
	Yellow	400	12	662603 11781
	White	800	12	662603 11782

SIZE (D)	COLOR	GRIT	STD. PKG.	PART #
Flexible Diamond Coated Quick-Change TR (Type III) Discs				
3"	Green	60	12	662603 11783
	Black	120	12	662603 11784
	Yellow	400	12	662603 11786



Non-woven quick-change discs are a combination of strong synthetic mesh and quality abrasives, bonded together by a smear-resistant adhesive. The open construction of the non-woven material enables aggressive cutting action and improved surface finish while maintaining its non-loading feature.

- Applications:** Medium-light stock removal, beveling, deburring/deflashing, rust removal, blending, cleaning and finishing, polishing, and decorative finishing
- Size Range:** 3/4" – 4" diameter
- Grit Range:** X-Coarse, Coarse, Medium, Fine, Very Fine, Super Fine
- Abrasive Grain:** Ceramic Alumina, Engineered Aluminum Oxide, Aluminum Oxide, Silicon Carbide
- Attachment:** Quick-Change Type TR (Type III), Type TS (Type II)
- Back-up Pads:** Rubber with hardness variations for different applications



MINI ANGLE SANDER

Quick-Change Attachment Systems and Cross Reference Guide

Each system enables quick, tool-free, safe disc changes, reducing downtime and operating expenses.


Type TS (Type II)

- Features a turn-on/turn-off style fastener
- Fastener is made of metal



Type TR (Type III)

- Features a roll-on/roll-off style fastener
- Fastener is made of plastic



NORTON	TS	TR
3M	Roloc TS/TSM	Roloc TR
Standard	TS (SocAtt)	TR (Lockit)
Superior	Type S	Type R
Arc	Type S	Type R
Pferd	Type CD	Type CDR
Sait	SAIT-LOK	SAIT-LOK-R
Camel	Turn On	Roll On
Klingspor	QMC	QRC
Garryson	Type S	Type R

Application/Grit Recommendation Guide

MOST AGGRESSIVE

LEAST AGGRESSIVE

NORTON MERIT	Rapid Strip	Vortex Rapid Blend Deburring & Blending	Vortex Rapid Prep	Rapid Prep	HS Buffing, Buffing
Scale Removal	Best Choice				
Stock Removal	Best Choice	Second Choice			
Heavy Deburring	Second Choice	Best Choice			
Light Deburring		Best Choice	Second Choice		
Light Finishing			Best Choice	Second Choice	
Blending			Best Choice	Second Choice	
Cleaning			Second Choice	Best Choice	
Finishing				Best Choice	Second Choice

Cross Reference Guide

NORTON MERIT	STRIPPING		HEAVY/LIGHT DEBURRING		LIGHT DEBURRING/BLENDING/CLEANING/FINISHING		
	BEST	BETTER	BEST	BETTER	BEST	BETTER	BETTER
	Blaze Rapid Strip	Rapid Strip	Vortex Rapid Blend	Rapid Blend, Deburring & Blending	Vortex Rapid Prep	Rapid Prep	HS Buffing, Buffing
3M	Clean and Strip XT PRO, Clean and Strip XT PRO Extra Cut	Clean & Strip Clean Strip XT	Deburr and Finish PRO	EXL Unitized	SE	Surf Cond, SL	-
Standard	-	Cleaning Disc	-	500-900 Series Unitized	-	FE, GP, RC	Buff & Blend - HS, Buff & Blend
Fiberal/SIA	-	-	-	-	-	Meteor, Type B & C	-
Superior	-	Type R	-	XL Unitized	-	FD, GD, CC	HS, HD A/O
Arc	-	Arcstrip	-	-	-	Surface Cond	Blend & Finish
Pferd	-	Policlean	-	-	-	Finishing Disc - Hard & Soft	-
Sait	-	SAIT-Strip	-	-	-	HD, GP	Sand-Light Blending
Camel	-	EZ Strip - Black	-	-	-	-	-
Klingspor	-	-	-	-	-	-	-
Garryson	-	-	-	-	-	Surface Cond	-
Bibielle	-	Strip-It Black	-	BUR Unitized	-	DCR	-

Abrasive/Grit/Density Key

ABRASIVE	SILICON CARBIDE			ALUMINUM OXIDE		CERAMIC ALUMINA
	SHARPER, FINER/BRIGHTER SCRATCH PATTERN			MORE DURABLE, LONGER LASTING, POLISHED FINISH		
GRIT SIZE	XC (50)	C (60-80)	M (100-150)	F (180-220)	VF (240-360)	SF (400-600)
	FASTER, AGGRESSIVE CUT, ROUGHER FINISH			REDUCED CUT RATE, FINER FINISH		
DENSITY	2			9		
	SOFT, OPEN, CONFORMABLE, LESS BURNING/LOADING			HARDER, MORE DURABLE, FASTER CUTTING, BETTER FINISH		

3D Quick-Change Stripping Discs



Best choice for removing coatings on a variety of substrates, such as wood, metal and plastics

BLAZE RAPID STRIP CERAMIC ALUMINA

- Blaze ceramic grain cuts 2X faster than competitive discs; leaves a thoroughly cleaned surface, ensuring excellent adhesion in subsequent processes such as coating, painting and soldering
- Open web construction for minimal loading; great alternative to wire brushes
- Rapid Strip material provides a unique combination of aggressive performance, long life, and improved finish



Better choice for removing coatings on a variety of substrates, such as wood, metal and plastics

RAPID STRIP SILICON CARBIDE

- Sharp silicon carbide abrasive provides fast aggressive cutting action
- Open web construction for minimal loading; great alternative to wire brushes
- Advanced resin bond prevents shedding, snagging, gouging, and rework



TIER: **BEST**
 TRADENAME: **BLAZE RAPID STRIP**
 ABRASIVE: Ceramic Alumina
 GRADE: XC
 ATTACHMENT: TR (Type III)

TIER: **BETTER**
 TRADENAME: **RAPID STRIP**
 ABRASIVE: Silicon Carbide
 GRADE: XC
 ATTACHMENT: TR (Type III)



SIZE (DIAMETER)	MAX. RPM	STD. PKG.	PART #	STD. PKG.	PART #
2 x 1/2	15,500	25	666233 03912	10	662610 13402
3 x 1/2	12,000	25	662610 96557	10	662610 13403
4 x 1/2 TR+	8,000	5	666233 03921*	5	662610 16580*

*TR+ attachment show in the group image above

For unified wheels with arbor holes or spindle mounts, see Non-woven Unified Wheels section. Quick-Change back-up pads shown at the end of this section.

3D Quick-Change Deburring & Blending Discs

Best technology for heavy deburring and finishing



BLAZE RAPID BLEND CERAMIC ALUMINA

- Blaze SG ceramic alumina grain provides quickest cut rate and up to 8X longer life than competitive aluminum oxide discs
- Superior resin chemistry resists shedding when used on sharp edges; ideal for deburring
- Abrasive is distributed throughout the entire disc (top, bottom and side) so all three faces can be used versus competitive discs with one bottom layer of abrasive

Best choice for weld blending, polishing and deburring



VORTEX RAPID BLEND ALUMINUM OXIDE

- Patented Vortex agglomerated aluminum oxide grain provides the cutting power of a coarser grit with the finish of finer grits
- Special resin bond for consistent performance with no smearing
- Abrasive is distributed throughout the entire disc (top, bottom and side) so all three faces can be used versus competitive discs with one bottom layer of abrasive

Better choice for light deburring, blending, and cleaning



RAPID BLEND NEX ALUMINUM OXIDE

- Quality aluminum oxide delivers durability and long life
- Resin formula delivers smear-free finishes
- Abrasive is distributed throughout the entire disc (top, bottom and side) so all three faces can be used – versus competitive discs' one bottom layer of abrasive

3D Quick-Change Deburring & Blending TS Discs



TIER:	BEST	BEST
TRADENAME:	BLAZE RAPID BLEND	VORTEX RAPID BLEND
ABRASIVE:	Ceramic Alumina	Engineered Aluminum Oxide
ATTACHMENT:	TS (Type II)	TS (Type II)



SIZE (D x T)	ABRASIVE	GRIT	DENSITY	MAX. RPM	STD. PKG.	PART #	PART #
1 x 1/4	Ceramic Alumina	XC	1	35,000	100	6662331 13920	
1-1/2 x 1/4	Ceramic Alumina	XC	1	35,000	80	6662331 13922	
2 x 1/4	Ceramic Alumina	XC	1	22,000	25	6662331 13925	
	Aluminum Oxide	M	1	22,000	25		662544 97070
3 x 1/4	Ceramic Alumina	XC	1	15,000	25	6662331 13931	
	Aluminum Oxide	M	1	15,000	25		662544 97069

3D Quick-Change Deburring & Blending Discs *continued*

3D Quick-Change Deburring & Blending TR Discs



TIER:	BEST	BEST	BETTER
TRADENAME:	BLAZE RAPID BLEND	VORTEX RAPID BLEND	RAPID BLEND NEX
ABRASIVE:	Ceramic Alumina	Engineered Aluminum Oxide	Aluminum Oxide
ATTACHMENT:	TR (Type III)	TR (Type III)	TR (Type III)

SIZE (D x T)	ABR.	GRIT	DENSITY	MAX. RPM	STD. PKG.	PART #	PART #	PART #	
1 x 1/4	Ceramic Alumina	XC	1	35,000	100	6662331 3919			
1-1/2 x 1/4	Ceramic Alumina	XC	1	35,000	80	6662331 3921			
2 x 1/8	Aluminum Oxide	M	4-6	22,000	60		662544 25632		
	Aluminum Oxide	M	7-9	22,000	60		662544 33509		
2 x 3/16	Aluminum Oxide	M	2-3	22,000	60		662544 28236		
2 x 1/4	Ceramic Alumina	XC	1	22,000	25	6662331 3923			
	Aluminum Oxide	C	7-9	22,000	60			662610 14921	
	Aluminum Oxide	M	1	22,000	25		662544 97067		
	Aluminum Oxide	M	2-3	22,000	60		662544 28237	662610 14897	
	Aluminum Oxide	M	4-6	22,000	60		662544 13660	662610 14911	
	Aluminum Oxide	M	7-9	22,000	60		662544 33510	662610 14935	
	Silicon Carbide	F	2	22,000	60			662610 14889	
	Silicon Carbide	F	3	22,000	60			662610 17306	
	3 x 1/8	Aluminum Oxide	M	4-6	15,000	40		662610 93556	
		Aluminum Oxide	M	7-9	15,000	40		662610 90909	
3 x 3/16	Aluminum Oxide	M	7-9	15,000	40		662544 28239		
3 x 1/4	Ceramic Alumina	XC	1	15,000	25	6662331 3930			
	Aluminum Oxide	C	7-9	15,000	40			662610 14922	
	Aluminum Oxide	M	1	15,000	25		662544 97068		
	Aluminum Oxide	M	2-3	15,000	40		662544 28238	662610 14898	
	Aluminum Oxide	M	4-6	15,000	40		662544 13661	662610 14912	
	Aluminum Oxide	M	7-9	15,000	40		662544 06395	662610 14936	
	Aluminum Oxide	F	4-6	15,000	40			662610 15419	
	Silicon Carbide	F	2	15,000	40			662610 14890	
	Silicon Carbide	F	3	15,000	40			662610 16005	

For unified wheels with arbor holes or spindle mounts, see the Non-woven Unified Wheel section. Quick-Change back-up pads shown at the end of this section.

Quick-Change Surface Preparation Discs

Best choice for aggressive stock removal and blending in one step



RAPID PREP XHD

- Coarse and Medium discs solve your most aggressive stock removal and blending challenges, remove weld lines, weld spatter, weld discoloration and blend surfaces in a single step
- Improve cut control and surface blending over traditional coated discs with our unique combination of a conformable fiber matrix and premium ceramic grain
- XHD Coarse discs for aggressive weld removal and surface blending on steels and Medium discs on softer metals/ alloys

TIER: **BEST**
 TRADENAME: **RAPID PREP XHD**
 ABRASIVE: Ceramic Alumina
 ATTACHMENT: TR (Type III)



SIZE (DIAMETER)	MAX. RPM	STD. PKG.	PART #
Coarse			
2	20,000	50	662611 70271
3	18,000	25	662611 70273
4	12,000	25	662611 70274
Medium			
2	20,000	50	662611 70285
3	18,000	25	662611 70286
4	12,000	25	662611 70287



Quick-Change Surface Preparation Discs

Best choice for finishing and blending applications



VORTEX RAPID PREP

- Proprietary engineered Vortex aluminum oxide abrasive grain and coating method combine maximum cutting speed with the consistent finish of finer grits to reduce process times by 50+% by combining multiple grit sequences to 1 step
- Premium high-loft nylon fiber bonded to a strong nylon scrim backing allows a thick layer of resin bond and grain for extended life and provides added durability and stiffness
- Proprietary Clean Bond resin technology guarantees smear-free finishes even on high nickel content alloys and reduces loading on aluminum and other soft metals

Better choice for finishing and blending applications



RAPID PREP ALUMINUM OXIDE

- Quality aluminum oxide abrasive grain coating provides up to 20% higher cut rate and 50% better performance than competitive products
- Thick layer of grain throughout the product extends life; grain does not sit on top of fibers as it does with other competitive products
- Proprietary Clean Bond resin technology guarantees smear-free finishes even on high nickel content alloys and reduces loading on aluminum and other soft metals

TIER:	BEST	BETTER	BEST	BETTER
TRADENAME:	VORTEX RAPID PREP	RAPID PREP	VORTEX RAPID PREP	RAPID PREP
ABRASIVE:	Engineered A/O	Aluminum Oxide	Engineered A/O	Aluminum Oxide
ATTACHMENT:	TR (Type III)	TR (Type III)	TS (Type II)	TS (Type II)

SIZE (DIAM.)	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #
Extra Coarse						
3/4	25,000	50	666233 25001	666233 40002	666233 35324	
1	25,000	50	666233 25004		666233 25003	666233 40006
1-1/2	20,000	50	666233 25007	666233 40011	666233 25006	666233 40010
2	20,000	50	666233 35326	662610 16373	666233 35325	662610 17819
3	18,000	25	666233 35327	662610 16994	666233 25010	662610 17818
4	12,000	25	666233 35329	662610 16374		
Coarse						
3/4	25,000	50	666233 25013	666233 40021	666233 35410	662610 09515
1	25,000	50	666233 25015	666233 40023	666233 35537	662610 24310
1-1/2	20,000	50	666233 35411	662610 47579	666233 25017	666233 40026
2	20,000	50	666233 35414		666233 35413	662610 09183
3	18,000	25	666233 35417	662610 09194	666233 35416	662610 09186
4	12,000	25	666233 35419	662610 08822		
Medium						
3/4	25,000	50	666233 25020	666233 40032	666233 35420	662544 28059
1	25,000	50	666233 35422	662544 82331	666233 35421	662544 82327
1-1/2	20,000	50	666233 35424	662544 82332	666233 35423	662544 82328
2	20,000	50	666233 35427	662610 09190*	666233 35426	662610 09182
3	18,000	25	666233 35430	662610 17522	666233 35429	662610 09185
4	12,000	25	666233 35432	662610 08821		662610 55350
Fine						
3/4	25,000	50	666233 25026	666233 40058	666233 25025	
1	25,000	50	666233 25029	666233 40064	666233 25028	666233 40062
1-1/2	20,000	50	666233 25032	666233 40070	666233 25031	666233 40068
2	20,000	50	666233 25035	666233 40077	666233 25034	666233 40074
3	18,000	25	666233 25038	666233 40085	666233 25037	666233 40082
4	12,000	25	666233 25041	666233 40092		
Very Fine						
3/4	25,000	50	666233 25044	666233 40044	666233 25043	666233 40042
1	25,000	50	666233 25047	662544 82339	666233 25046	662544 82335
1-1/2	20,000	50	666233 25050	662544 82340	666233 25049	662544 82336
2	20,000	50	666233 35433	662610 09189*	666233 25052	662544 82337
3	18,000	25	666233 35437	662610 09192	666233 35436	662610 09184
4	12,000	25		666233 40053		
Super Fine						
2	20,000	50		662610 091459		
3	18,000	25		662610 091460		

* 25 per standard package.



Quick-Change Buffing/Polishing Discs

Best choice for light removal of paint or rust







BUFFING/POLISHING DISCS

- This aluminum oxide grain and resin bond combination produce a smooth cut rate and smear-free, uniform finish
- Non-woven nylon fibers are laminated to tough yet conformable nylon backing that resists tearing on burrs and sharp edges
- Designed for light removal of coatings oxidation or rust without affecting the base product

TIER:	BEST
TRADENAME:	HIGH-STRENGTH
ABRASIVE:	Aluminum Oxide
ATTACHMENT:	TR (Type III)




BEST	BEST	BETTER	BETTER
HIGH-STRENGTH	HIGH-STRENGTH	BUFFING	BUFFING
Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide
TR (Type III)	TS (Type II)	TR (Type III)	TS (Type II)

SIZE (D)	GRIT	MAX. RPM	STD. PKG.	PART #	STD. PKG.	PART #	PART #	PART #	PART #
1-1/2	M	20,000			100			088341 66368	088341 66392
	F	20,000			100			088341 66369	
2	C	18,000			50			088341 61649	088341 66394
	M	18,000	160	662610 14792	50	088341 64064	088341 64244	088341 66303	088341 66395
	F	18,000			50			088341 66304	088341 66396
	VF	18,000			50	088341 63987	088341 64245	088341 66305	088341 66405
3	C	12,000			25			088341 61651	088341 66397
	M	12,000	80	662610 14793	25	088341 64065	088341 64252	088341 66308	088341 66398
	F	12,000			25			088341 66309	088341 66399
	VF	12,000			25	088341 63559	088341 64255	088341 66310	088341 66403

Quick-Change Back-up Pads

- Hard density pads are for aggressive cutting action
- Medium density pads are for all-purpose applications
- Soft density pads are used for contours and fine finishing work

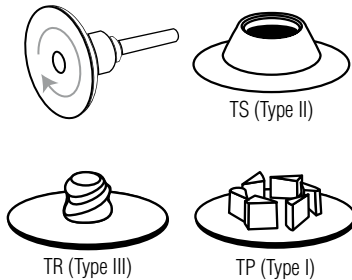

SIZE (DIAMETER)	DENSITY	MAX. RPM	STD. PKG.	TS (TYPE II)	TR (TYPE III)	TP (TYPE I)
Quick-Change Back-up Pads						
9/16		40,000	1	662610 54014 NS		662610 54013 NS
3/4	Medium	40,000	1	088341 64206	088341 64038	088341 64001
1	Medium	40,000	1	088341 64651	088341 64037	088341 64002
1-1/2	Hard	30,000	1	088341 64622		088341 63996
2	Medium	30,000	1	088341 64146	088341 61174	088341 64003
	Hard	30,000	1	088341 64624	088341 64643	088341 63997
	Medium	30,000	1	088341 64198	088341 64922	088341 64004
3	Soft	30,000	1	088341 61625	088341 64641	088341 63949
	Hard	20,000	1	088341 61626	088341 64036	088341 63998
	Medium	20,000	1	088341 64113	088341 64949	088341 64005
4	Soft	20,000	1	088341 64626	088341 64644	088341 63948
	Medium	15,000	1	088341 64135	088341 64655	
4	Medium	8,000	1		636425 55106	
Vendible Quick-Change Back-up Pads						
2	Medium	30,000	5	6662334 1082	6662334 1083	
3	Medium	20,000	5		6662334 1085	

All Quick-Change back-up pads have a 1/4" solid steel shank.

NS Non-stock. Contact your Norton representative for current order quantities and lead-times.

Vendible back-up pad Std. Pkg. Qty: 1 pad per pack; 5 packs per carton. Order in multiples of 5.



Replacement Medium Density Rubber Pads for Quick-Change TP (Type I) Back-up Pads


- When the rubber pad has worn away, but the steel components of your quick-change back-up are still serviceable, order these replacement rubber pads.

SIZE (D)	MODEL #	STD. PKG.	PART #
Quick-Change Replacement Rubber Back-up Pads			
3/4	RR75	1	088341 64008 NS
1	RR10	1	088341 64009 NS
4	RR40	1	088341 64013 NS

NS Non-stock. Contact your Norton representative for current order quantities and lead-times.

Replacement Assemblies and Shanks for Quick-Change Back-up Pad


- Assemblies replace all the steel components of a quick-change back-up pad. This shank replaces the screw-in 1/4" solid steel shank only.



DESCRIPTION	STD. PKG.	PART #
Replacement Mandrels and Nut Assembly		
TP (Type I) Assembly RMN3 for 3 - 4	1	088341 64016 NS
TS (Type II) & TR (Type III) Replacement 1/4" Shank	1	088341 64303

NS Non-stock. Ask your Norton representative for current order quantities and lead-times

Extension Mandrels and Assembly

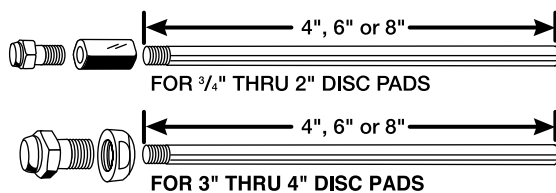


DIAMETER	MODEL #	LENGTH	STD. PKG.	PART #
Extension Mandrels and Assembly - TP (Type I)				
3/4 - 2	EMN-14	4"	1	088341 64017 NS
3/4 - 2	EMN-16	6"	1	088341 64018 NS
3/4 - 2	EMN-18	8"	1	088341 64019 NS
3 - 4	EMN-34	4"	1	088341 64020 NS
3 - 4	EMN-36	6"	1	088341 64026 NS
3 - 4	EMN-38	8"	1	088341 64021 NS

All extension mandrels are non-stock, Contact your Norton representative for current order quantities and lead-times.

MNA-1 Pad Adapters

- Convert a TP (Type I) back-up pad 1/4" diameter solid shank to a threaded shank




DISC DIAMETER	MODEL NO.	STD. PKG.	PART #
MNA-1 Pad Adapters - TP (Type I)			
3/4 - 2	MNA 1/4-20 THD.	1	088341 61176 NS
3/4 - 2	MNA 3/8-24	1	088341 64055 NS
3/4 - 2	MNA 5/8-11	1	088341 63001 NS
3 - 4	MNA 1/4-20	1	088341 63002 NS
3 - 4	MNA 3/8-24	1	088341 64041 NS
3 - 4	MNA 5/8-11	1	088341 64028 NS

All pad adapters are non-stock. Contact your Norton representative for current order quantities and lead-times.

MNA-23 Pad Adapters


- For use on a right angle grinder: convert TS (Type II) and TR (Type III) back-up pad 1/4" diameter solid shanks to threaded shanks.
- The larger 5/8"-11 adapter (for 4-1/2" discs) is used alone to convert to a 5/8"-11 thread.
- The 3/8"-24 insert (for 4" discs) is screwed into the 5/8"-11 adapter to create a 3/8"-24 thread adapter.



DISC DIAMETER	MODEL #	STD. PKG.	PART #
MNA-23 Pad Adapters - TS (Type II) and TR (Type III)			
3/4 - 4	MNA-23 3/8"-24 and 5/8"-11 THD.	1	088341 62764 NS

NS Non-stock. Ask your Norton representative for current order quantities and lead-times

1/4" Diameter Extension Mandrel



USE WITH TP (TYPE I), TS (TYPE II), TR (TYPE III)

MODEL NO.	LENGTH	STD. PKG.	PART #
1/4" Diameter Extension Mandrel 1/4-20 Thread			
EM-144	4"	1	088341 54185
EM-146	6"	1	088341 54186
EM-148	8"	1	088341 54187



Our new Norton pneumatic die grinder quickly and comfortably accomplishes many portable applications without changing machines – including jobs for abrasive specialties (cartridge and spiral rolls...), small diameter flap wheels, mounted points, and carbide burrs.

- Weight of tool:** 1.4 lbs.
- Compressed air:** 6.2 bar (90psi)
- Maximum permissible operating pressure:** 6.2 bar (90psi)
- Recommended operating pressure:** 6.2 bar (90psi)
- Horsepower:** 0.9HP
- Free speed:** 25,000 rpm
- Air consumption @90psi:** 85 l/min (3 CFM)
- Noise characteristic value in accordance with EN ISO 15744 (ISO 15744):**
 - A-weighted sound pressure level at workstation 87.3 dB
 - A-weighted sound power level 98.3 dB
 - Peak C-weighted instantaneous sound pressure level at workstation < 130 dB
 - Measurement uncertainty (Standard) 3 dB
- Vibration value according to EN ISO 28927-12:** 3.00 m/s²
- Measurement uncertainty (Standard):** 0.84 m/s²
- Recommended lubrications:** Air drill oil 20#
- Sanding tool specifications:** Pad Size 2" Collet Chuck 1/8" (3 mm) and 1/4" (6 mm)
- Applications and suitability:** Final surface finishing, chamfering, deburring of architectural millwork, sheet metal and surface prep, zinc casting, aluminum products, injection molds, etc.; general sanding and polishing.

Put the power right in the palm of your hand with our die grinder

NEW



PNEUMATIC DIE GRINDER

- Comfortable during prolonged use thanks to vibration-limiting technology, ergonomic design, and streamlined non-slip grip
- Adaptable to the needs of each job with speed regulation and two collet inserts in 1/8" and 1/4"
- Compatible with many accessories including cartridge rolls, spiral rolls, square pads, cross pads, overlap slotted discs, flap wheels, mounted points and carbide burrs

DESCRIPTION	STD. PKG.	PART #
Norton Pneumatic Die Grinder		
Single Die Grinder with 1/8" and 1/4" collets	1	699573 08000
Die Grinder Kit*	1	699573 08001
Kit includes:		
1 die grinder with 1/8" and 1/4" collets		
100 – 3/8" x 1-1/2" x 1/8", 80 grit Metal R228 cartridge rolls (08834 180232)		
1- M9 cartridge roll mandrel (08834 181209)		
10 – 1" x 1" x 1/4" shank, 60 grit Blaze R920 flap wheels (66261 151170)		
5 – 1" x 1" W220, 1/4" x 1-1/2" spindle Gemini 38A60-P mounted points (614636 24566)		
1 – 1/2" x 1" SF5 Double-Cut carbide burr (699573 08021)		




YouTube

Learn more about how to safely and effectively use a die grinder on our Youtube page <https://nortonsga.us/44yj2> or visit <http://nortonsga.us/diegrinder>



Cartridge rolls are strips of abrasive cloth rolled and glued to form a solid shape that is designed to break down during use and reveal the next layer of abrasive. A valuable abrasive tool for reaching into corners, where larger diameter tools cannot work

- Applications:** Used on inside surfaces and inside corners where other abrasive shapes cannot reach. Typically these are used on high-speed air grinders and are always mounted on a mandrel. Ideal for flash removal, polishing or removing machine tool marks, and edge breaking.
- Stock Shapes:** Cartridge rolls, half-glued
- Grit Range:** 36 - 320
- Abrasive Grain:** Ceramic Alumina, Aluminum Oxide
- Backing:** X-weight cotton, X-weight poly-cotton
- Construction:** All cartridge roll part numbers shown are resin bond, half-glued. Quarter and full glue are also available for quotation as made-to-order products.
- Maximum RPM:** 1/8" to 1/2" – 23,000
5/8" to 1" – 18,000
1" to 1-1/2" – 15,000
- Machine Used:**  DIE GRINDER

Application/Grit Recommendation Guide

COARSER (GRINDING) ←									→ FINER (FINISHING)	
36	40	50	60	80	120	180	240	320		
Blending Out Heavy Machine Marks										
Removing Heavy Burrs										
Applying Heavy Scratch Pattern										
Removing Flash/Parting Lines										
Removing Rust/Scale/Pit Marks										
		Preparing Metal for Painting								
		Blending Out Medium Machine Marks								
				Blending Metal Surfaces						
				Applying Light Scratch Pattern						
						Fine Blending and Cleaning				
							Metal Finishing and Polishing			

Best choice for hard-to-grind materials including super alloys (cobalt, inconel, and titanium) and stainless steel



BLAZE R920 CERAMIC ALUMINA

- Premium ceramic alumina abrasive grain provides greatest productivity with significantly faster cut rates; resists wear resulting in 50% – 300% longer life; supersized for cool cutting
- X-weight cotton cloth provides extended durability, conformability, and superior wear resistance; strong resin bond system provides good grain retention and life
- Constructed of rolled and half-glued abrasive strips that break down to expose next layer of abrasive

Better choice for accessing tight areas and where long life & fast cut are required



NEW

PINK R928 CERAMIC ALUMINA

- Excellent option for reaching into corners and small areas, ceramic grain provides better performance than aluminum oxide or zirconia alumina alternatives
- Improved resin bond system provides longer life; supersized for cool cutting
- Versatile X-weight poly cotton backing for flexibility and life

Good starting specification for flash removal, polishing, or removing machine tool marks and edge breaking on all types of metal



R228 ALUMINUM OXIDE

- Quality aluminum oxide abrasive delivers long life
- X-weight cotton cloth provides extended durability, conformability, and superior wear resistance; strong resin bond system provides good grain retention and life
- Constructed of rolled and half-glued abrasive strips that break down to expose next layer of abrasive



TIER:	BEST	BETTER
TRADENAME:	BLAZE R920	PINK R928
ABRASIVE:	Ceramic Alumina	Ceramic Alumina
OTHER:	Supersize	Supersize

SIZE (D x L x H)	GRIT	STD. PKG.	PART #	PART #
1/4 x 1-1/2 x 1/8	60	100	662611 94384	699573 39765
Use M-9 Mandrel	80	100	662611 94394	699573 39766
	120	100	662611 94397	699573 39767
3/8 x 1-1/2 x 1/8	60	100	662611 94392	699573 39768
Use M-9 Mandrel	80	100	662611 94395	699573 39769
	120	100	662611 94398	699573 39770
1/2 x 1-1/2 x 1/8	60	100	662611 94393	699573 39771
Use M-9 Mandrel	80	100	662611 94396	699573 39772
	120	100	662611 94399	699573 39774



TIER:	GOOD
TRADENAME:	R228
ABRASIVE:	Aluminum Oxide

SIZE (D x L x H)	GRIT	STD. PKG.	PART #
3/16 x 3/4 x 3/32	80	100	088341 80005
3/16 x 1 x 3/32	60	100	088341 80023
Use M-2E Mandrel	80	100	088341 80024
	100	100	088341 80025
	120	100	088341 80026
	150	100	088341 80027
	180	100	088341 80028
	240	100	088341 80030
1/4 x 3/4 x 1/8	60	100	088341 80042
Use M-3 or M-7 Mandrel	80	100	088341 80043
1/4 x 1 x 1/8	50	100	088341 80060
Use M-4 or M-8 Mandrel	60	100	088341 80061
	80	100	088341 80062
	100	100	088341 80063
	120	100	088341 80064
	150	100	088341 80065
	180	100	088341 80066
	320	100	088341 80070
1/4 x 1-1/2 x 1/8	50	100	088341 80079
Use M-9 Mandrel	60	100	088341 80080
	80	100	088341 80081
	100	100	088341 80082
	120	100	088341 80083
	150	100	088341 80084
	180	100	088341 80085
	320	100	088341 80089
1/4 x 2 x 1/8	80	100	088341 80100
Use M-10 Mandrel	120	100	088341 80102
5/16 x 1 x 1/8	80	100	088341 80138
Use M-4 or M-8 Mandrel	120	100	088341 80140
5/16 x 1-1/2 x 1/8	80	100	088341 80157
Use M-9 Mandrel			

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.
Continued



TIER:	GOOD
TRADENAME:	R228
ABRASIVE:	Aluminum Oxide

SIZE (D x L x H)	GRIT	STD. PKG.	PART #
3/8 x 3/4 x 1/8	120	100	088341 80197
Use M-7 Mandrel			
3/8 x 1 x 1/8	60	100	088341 80213
Use M-8 Mandrel	80	100	088341 80214
	100	100	088341 80215
	120	100	088341 80216
	150	100	088341 80217
	180	100	088341 80218
	240	100	088341 80220
3/8 x 1-1/2 x 1/8	36	100	088341 80228
Use M-9 Mandrel	40	100	088341 80229
	50	100	088341 80230
	60	100	088341 80231
	80	100	088341 80232
	100	100	088341 80233
	120	100	088341 80234
	180	100	088341 80236
	240	100	088341 80238
	320	100	088341 80240
3/8 x 2 x 1/8	60	100	088341 80250
Use M-10 Mandrel	80	100	088341 80251
	120	100	088341 80253
1/2 x 3/4 x 1/8	80	100	088341 80270
Use M-7 Mandrel			
1/2 x 1 x 1/8	50	100	088341 80287
Use M-8 Mandrel	60	100	088341 80288
	80	100	088341 80289
	100	100	088341 80290
	120	100	088341 80291
	150	100	088341 80292
	180	100	088341 80293
	240	100	088341 80295

Continued

Refer to the back of this section for mandrels.



TIER: **GOOD**
TRADENAME: **R228**
ABRASIVE: Aluminum Oxide

SIZE (D x L x H)	GRIT	STD. PKG.	PART #
1/2 x 1-1/2 x 1/8 Use M-9 Mandrel	36	100	088341 80304
	40	100	088341 80305
	50	100	088341 80306
	60	100	088341 80307
	80	100	088341 80308
	100	100	088341 80309
	120	100	088341 80310
	150	100	088341 80311
	180	100	088341 80312
	240	100	088341 80314
1/2 x 2 x 1/8 Use M-10 Mandrel	320	100	088341 80316
	60	100	088341 80326
	80	100	088341 80327
1/2 x 2 x 3/16 Use M-17 Mandrel	120	100	088341 80329
	60	100	088341 80350
	80	100	088341 80653
1/2 x 2 x 1/4 Use M-22 Mandrel	120	100	088341 80338
	80	100	088341 80351
5/8 x 1 x 3/16 Use M-15 Mandrel	80	100	088341 80364
5/8 x 1-1/2 x 1/8 Use M-9 Mandrel	60	100	088341 80275
	80	100	088341 80789
	120	100	088341 80394
5/8 x 1-1/2 x 3/16 Use M-16 Mandrel	60	100	088341 80382
	80	100	088341 80383
5/8 x 2 x 1/8 Use M-10 Mandrel	60	100	088341 82505
	80	100	088341 81080
5/8 x 2 x 3/16 Use M-10 Mandrel	50	100	088341 80400
	60	100	088341 80401
	80	100	088341 80402
3/4 x 1 x 1/8 Use M-8 Mandrel	80	100	088341 80469
	120	100	088341 81543
3/4 x 1 x 3/16 Use M-15 Mandrel	80	100	088341 80459
	120	100	088341 80461

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.
Continued




TIER: **GOOD**
TRADENAME: **R228**
ABRASIVE: Aluminum Oxide


SIZE (D x L x H)	GRIT	STD. PKG.	PART #
3/4 x 1-1/2 x 1/8 Use M-9 Mandrel	60	100	088341 80490
	80	100	088341 80527
	120	100	088341 80487
3/4 x 1-1/2 x 3/16 Use M-16 Mandrel	36	100	088341 80474
	50	100	088341 80476
	60	100	088341 80477
	80	100	088341 80478
	120	100	088341 80480
3/4 x 1-1/2 x 1/4 100/box 400/case Use M-21 Mandrel	180	100	088341 80482
	36	100	088341 80907
	60	100	088341 80489
	80	100	088341 80358
1/2 x 2 x 1/8 Use M-10 Mandrel	120	100	088341 80488
	150	100	088341 82807
	60	100	088341 80791
	3/4 x 2 x 3/16 Use M-17 Mandrel	40	100
3/4 x 2 x 1/4 Use M-22 Mandrel	60	100	088341 80496
	80	100	088341 80497
	100	100	088341 80498
	120	100	088341 80499
3/4 x 2 x 1/4 Use M-22 Mandrel	60	100	088341 80506
	80	100	088341 81297
	100	100	088341 80509
1 x 1-1/2 x 1/8 Use M-9 Mandrel	120	100	088341 80507
	80	100	088341 80584
	1 x 1-1/2 x 1/4 Use M-21 Mandrel	36	100
1 x 1-1/2 x 1/4 Use M-21 Mandrel	60	100	088341 80587
	80	100	088341 80583
	1 x 2 x 3/16 Use M-17 Mandrel	60	100
1 x 2 x 1/4 Use M-22 Mandrel	80	100	088341 80592
	60	100	088341 80603
80	100	088341 80606	

Refer to the back of this section for mandrels.



Spiral rolls are strips of abrasive cloth rolled and glued to form a solid shape that is designed to break down during use and reveal the next layer of abrasive.


- Applications:** Used on inside surfaces and inside corners where other abrasive shapes cannot reach. Typically these are used on high-speed air grinders and are always mounted on a mandrel. Ideal for flash removal, polishing, or removing machine tool marks, and edge breaking.
- Shapes:** Full taper (all stock part numbers), half taper, and sidewall taper
- Grit Range:** 36 - 240
- Abrasive Grain:** Ceramic Alumina, Aluminum Oxide
- Backing:** X-weight cotton, X-weight poly cotton
- Construction:** All spiral roll part numbers shown are full tapered, resin bond, half glued. Half-tapered and sidewall-tapered are available for quotation as made-to-order products. Quarter and full glue are also available for quotation as made-to-order products
- Maximum RPM:** 1/8" to 1/2" – 23,000
5/8" to 1" – 18,000
1" to 1-1/2" – 15,000
- Machine Used:**  DIE GRINDER



Full Taper

- Especially useful for grinding/polishing of channels, fillets and radii, and deburring small holes
- Full taper used when the area to be finished is hard to reach with a full cartridge roll
- The tapered roll conforms to smaller areas
- Fits into irregular concaves, contours, channels

All part numbers shown are full tapered



Half Taper

- Used when the area to be finished is not narrow but a beginning point on the roll is needed
- The portion of the roll that is not tapered is then used to finish off the sides

Available for quotation as made-to-order products



Sidewall Taper

- The portion of the roll that is tapered guides the roll down to the area to be finished
- The sidewall then finishes off the sides

Available for quotation as made-to-order products

Application/Grit Recommendation Guide

COARSER (GRINDING) ←					→ FINER (FINISHING)			
36	40	50	60	80	120	180	240	320
Blending Out Heavy Machine Marks								
Removing Heavy Burrs								
Applying Heavy Scratch Pattern								
Removing Flash/Parting Lines								
Removing Rust/Scale/Pit Marks								
		Preparing Metal for Painting						
		Blending Out Medium Machine Marks						
				Blending Metal Surfaces				
				Applying Light Scratch Pattern				
						Fine Blending and Cleaning		
							Metal Finishing and Polishing	

Best choice for hard-to-grind materials including super alloys (cobalt, inconel, and titanium) and stainless steel



BLAZE R920 CERAMIC ALUMINA

- See significantly faster, cooler, burn-free results on the toughest jobs from the premium, sharp, longest-lasting P-graded ceramic abrasive grains and advanced grinding aid lubricant; supersized for cool cutting
- X-weight cotton cloth provides extended durability, conformability, and superior wear resistance; strong resin bond system provides good grain retention and life
- Full taper construction consisting of rolled and half-glued abrasive strips that break down to expose next layer of abrasive

Better choice for accessing tight areas and where long life and fast cut are required



NEW

PINK R928 CERAMIC ALUMINA

- Excellent option for reaching into corners and small areas, ceramic grain provides better performance than aluminum oxide or zirconia alumina alternatives
- Improved resin bond system provides longer life; supersized for fast cutting
- Versatile X-weight poly cotton backing for flexibility and life

Good choice for cooler grinding/polishing of channels, fillets and radii, and deburring small holes at a low initial price



R228 ALUMINUM OXIDE

- Quality aluminum oxide abrasive delivers long life
- X-weight cotton cloth provides extended durability, conformability, and superior wear resistance; strong resin bond system provides good grain retention and life
- Full taper construction consisting of rolled and half-glued abrasive strips that break down to expose next layer of abrasive





TIER:	BEST	BETTER	GOOD
TRADENAME:	BLAZE R920	PINK R928	R228
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Aluminum Oxide
OTHER:	Supersize	Supersize	

SIZE (D x L x H)	GRIT	STD. PKG.	PART #	PART #	PART #
3/8 x 1 x 1/8 Use M-8 Mandrel	60	100			088341 81714
	80	100			088341 81715
	120	100			088341 81717
3/8 x 1-1/2 x 1/8 Use M-9 Mandrel	60	100	662611 94481	699573 39775	088341 81724
	80	100	662611 94490	699573 39785	088341 81708
	120	100	662611 94491	699573 39787	088341 81727
	180	100			088341 81709
1/2 x 1 x 1/8 Use M-8 Mandrel	60	100			088341 81734
	80	100			088341 81735
	120	100			088341 81737
1/2 x 1-1/2 x 1/8 Use M-9 Mandrel	36	100			088341 81230
	50	100			088341 81743
	60	100	662611 94484	699573 39790	088341 81744
	80	100	662611 94492	699573 39791	088341 81745
	100	100			088341 81746
	120	100	662611 94495	699573 39792	088341 81747
	180	100			088341 81749
1/2 x 2 x 1/8 Use M-10 Mandrel	240	100			088341 81750
	60	100			088341 81754
	80	100			088341 81755
5/8 x 1-1/2 x 1/8 Use M-9 Mandrel	120	100			088341 81757
	100	100			088341 81776
	120	100			088341 81777
5/8 x 1-1/2 x 3/16 Use M-16 Mandrel	80	100			088341 81444
3/4 x 1-1/2 x 1/8 Use M-9 Mandrel	60	100			088341 81286
	80	100			088341 80886
3/4 x 1-1/2 x 3/16 Use M-16 Mandrel	60	100			088341 81808
	80	100			088341 81809
	120	100			088341 81811
3/4 x 2 x 3/16 Use M-17 Mandrel	60	100			088341 81820
1 x 1-1/2 x 1/8 Use M-9 Mandrel	60	100		699573 39790	088341 81240
1 x 2 x 3/16 Use M-17 Mandrel	36	100			088341 81875
	60	100			088341 81878
	80	100			088341 81879

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

Refer to the back of this section for mandrels.



Square pads, cross pads and overlap slotted discs are all used on high-speed pneumatic tools for deburring, blending, cleaning, and polishing applications. All of these abrasive specialties are designed for applications in small, tight, hard-to-access locations on parts that are being finished.

Benefits:

Variety of shapes and sizes to fit application and part geometry
Shapes provide flexibility for the application, while eliminating aggressiveness of the sanding action
Cross pads allow visibility of the surface while sanding, to ensure correct amount of material is removed

Grit Range:

50 – 180

Abrasive Grain:

Ceramic Alumina, Aluminum Oxide

Backing:

X-weight cotton, X-weight poly-cotton

Construction

Standard quick-change eyelet for easy mounting and removal on quick-change mandrel minimizes downtime; Mandrel use increases range and versatility


Maximum RPM:

1" Diameter – 25,000 3" Diameter – 12,000 to 14,000
1-1/2" to 2" Diameter – 18,000 to 23,000 4" Diameter – 8,000 to 12,000
2-1/2" Diameter – 14,000 to 18,000 5" to 6" Diameter – 5,500 to 7,500

Machine Used:



Application/Grit Recommendation Guide

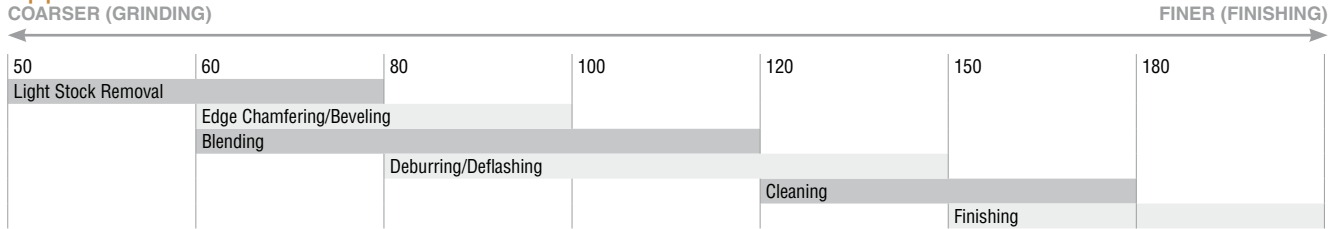

Best choice for hard-to-grind materials including super alloys (cobalt, inconel, and titanium) and stainless steel



BLAZE R920 CERAMIC ALUMINA

- See significantly faster, cooler, burn-free results on the toughest jobs from the sharp, longest-lasting P-graded ceramic abrasive grains and advanced supersize grinding aid for cool cutting
- X-weight cotton cloth provides extended durability, conformability, and superior wear resistance; strong resin bond system provides good grain retention and life
- Corners wear down consistently, exposing fresh abrasive; as these become round, they become less aggressive and run even smoother, with less stock removal – to retain workpiece shape

Better choice for accessing tight areas and where long life & fast cut are required



PINK R928 CERAMIC ALUMINA

- Excellent option for reaching into corners and small areas, ceramic grain provides better performance than aluminum oxide and zirconia alternatives
- Improved resin bond system provides longer life; supersized for cool cutting
- Versatile X-weight poly cotton backing for flexibility and life


Good for most ID deburring and polishing applications



R228 ALUMINUM OXIDE

- Versatile, quality aluminum oxide abrasive grain ensures good cut rate
- X-weight cotton cloth provides extended durability, conformability, and superior wear resistance; strong resin bond system provides good grain retention and life
- Corners wear down consistently, exposing fresh abrasive; as these become round, they become less aggressive and run even smoother, with less stock removal – to retain workpiece shape

Square & Cross Pads, Overlap Slotted Discs



Square Pads


- Corners wear down consistently exposing fresh abrasive; the pad becomes round for less aggressive stock removal
- Grind almost as fast as hard wheels, but are much smoother and easier to control
- For quick blending of channels, fillets, corners, or spotting flat surfaces



		TIER: BEST		BETTE4R		GOOD	
		TRADENAME: BLAZE R920		PINK R928		R228	
		ABRASIVE: Ceramic Alumina		Ceramic Alumina		Aluminum Oxide	
		OTHER: Supersize		Supersize			
SIZE (L x W x T)	EYELET	GRIT	STD. PKG.	PART #	PART #	PART #	
1 x 1 x 6 ply	8-32	80	100			088341	84826
1 x 1 x 8 ply		80	100			088341	84124
1-1/2 x 1-1/2 x 1/2	1/4-20	60	100			088341	84463
		80	100			088341	84125
2 x 2 x 1/2	1/4-20	60	100	662611	94520	699573	40138
		80	100	662611	94552	699573	40139
		120	100	662611	94554	699573	40141
2 x 2 x 3/4	1/4-20	80	100			088341	84394
3 x 3 x 1/4	1/4-20	60	100	662611	94531	699573	40142
		80	100	662611	94555	699573	40143
		120	100	662611	94556	699573	40144
3 x 3 x 1/2	1/4-20	50	100			088341	82152
		60	100	662611	94528	699573	40146
		80	100	662611	94557	699573	40147
		120	100	662611	94558		84336

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

Refer to the back of this section for mandrels.



Cross Pads

- The shape of cross pads enables you to see through to the contact area, and provides greater flexibility than square pads to conform to variable internal diameters
- Used for close-tolerance polishing of small radii and channels, deburring, and finishing of bell-mouth configurations
- All pads are furnished with standard quick-change eyelet, as listed
- Plain hole sizes must be specified and are available for quotation as made-to-order products



TIER:	BEST	BETTER	GOOD
TRADENAME:	BLAZE R920	PINK R928	R228
ABRASIVE:	Ceramic Alumina	Ceramic Alumina	Aluminum Oxide
OTHER:	Supersize	Supersize	

SIZE (L x W x T)	PLY	EYELET	GRIT	STD. PKG.	PART #	PART #	PART #
3/4 x 3/4 x 3/8	8	3-48	80	100			088341 85578
1 x 1 x 3/8	8	3-48	60	100			088341 84943
			80	100			088341 85519
			100	100			088341 84195
			120	100			088341 85164
1-1/2 x 1-1/2 x 1/2	8	8-32	60	100	662611 94496	699573 39793	088341 84258
			80	100	662611 94508	699573 39794	088341 84465
			100	100			088341 82196
			120	100	662611 94511	699573 39804	088341 82148
2 x 2 x 1/2	8	8-32	60	100			088341 82156
			80	100			088341 82157
			120	100			088341 82132
2 x 2 x 3/4	8	8-32	60	100	662611 94502	699573 39806	088341 84128
			80	100	662611 94513	699573 40133	088341 84194
			120	100	662611 94516	699573 40134	
2-1/4 x 2-1/4 x 1/2	8	8-32	80	100			088341 84402
2-1/2 x 2-1/2 x 3/4	8	8-32	80	100			088341 84206
3 x 3 x 1	8	1/4-20	60	100	662611 94504		088341 82135
			80	100	662611 94549		088341 84119
			120	100	662611 94551		088341 84116
3 x 3 x 1	8	1/4-20	60	100		699573 40135	
			80	100		699573 40136*	088341 82140
			120	100		699573 40137	
3 x 3 x 1-1/2	10	1/4-20	80	100			088341 82184
4 x 4 x 1	8	1/4-20	60	100			088341 84142
			80	100			088341 84135
			120	100			088341 84377
4 x 4 x 1-1/2	8	1/4-20	80	100			088341 84129

* Pink R928 3 x 3 x 1 are 8 ply.


Ceramic Alumina and Alumina Oxide cross pads are also available upon request as made-to-order products.

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

Refer to the back of this section for mandrels.



Overlap Slotted Discs



Overlap Slotted Discs

- Used for deburring and polishing radii, holes and cylinder walls
- Our "2 to a set" configuration cuts on the inward motion only
- The "4 to a set" configuration, assembled back to back, cuts on both the inward and outward motions
- All discs are furnished with standard quick-change eyelet
- Plain hole sizes must be specified and are available for quotation as made-to-order products



TIER:	BEST	GOOD
TRADENAME:	BLAZE R920	R228
ABRASIVE:	Ceramic Alumina	Aluminum Oxide
OTHER:	Supersize, 2 Per Set	2 Per Set

DIA.	EYELET	GRIT	STD. PKG.	PART #	PART #
1	8-32	60	100		088341 84346
		80	100		088341 84019
		100	100		088341 84224
		120	100		088341 84151
1-1/4	8-32	60	100		088341 84270
		80	100		088341 84065
		100	100		088341 84291
		120	100		088341 84084
1-1/2	8-32	60	100	662611 95051	088341 84066
		80	100	662611 95368	088341 84079
		100	100		088341 84279
		120	100	662611 95367	088341 86035
1-3/4	8-32	60	100		088341 84655
		80	100		088341 84042
2	8-32	60	100	662611 95054	
		80	100	662611 95055	088341 84076
		100	100		088341 84145
		120	100	662611 95056	088341 84055
2-1/2	8-32	80	100		088341 84444
3	1/4-20	60	100	662611 95057	088341 84041
		80	100	662611 95058	088341 84077
		100	100		088341 84082
		120	100		088341 84344
4	1/4-20	60	100		088341 84000
		120	100		088341 85155
4-1/2	1/4-20	100	100		088341 84431

All overlap slotted discs are available (made-to-order) reinforced with a fiber washer


Ceramic Alumina and Alumina Oxide overlap slotted discs are also available upon request as made-to-order products.

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

Quick-Change Mandrels for Overlap Slotted Discs, Square and Cross Pads

CROSS PAD SIZE DIA.	SQUARE PAD SIZE DIA.	OVERALL LENGTH	MODEL NO.	THD. SIZE	PART #
1/4, 3/8, and 1/2 wide		2-1/2	MM48-4	3-48	088341 83162
3/4, 1 wide	Up thru 1-1/2 sq. x 1/2 thick 2 sq. x 1/4 or 3/8 thick	3	MM32-4	8-32	088341 83163
		4	MM-32-4-4	8-32	088341 21680
		6	MM-32-4-6	8-32	088341 21681
All pads 2-1/2 x 1-1/2 and larger	2 sq. x 1/4 or 1/2 thick and larger	3	MM20-4	1/4-20	088341 83164

For overlap slotted discs, choose a mandrel with the same thread size as the disc




QUICK-CHANGE MANDREL



EXTENDED MANDREL



Best product for blending and polishing contours when smooth running is a primary concern. Used for finishing hard-to-reach areas, removing parting lines, imperfections, and burrs on all surfaces.

- Benefits:** Spiral construction avoids shadow marks and provides smooth, chatter-free cutting action. Achieves close tolerances when finishing curved, contoured, and hard-to-reach areas. Fast cutting and removes toughest metal. Bands are easily removed and replaced.
- Grit Range:** 24 - 320
- Abrasive Grain:** Ceramic Alumina, Aluminum Oxide
- Backing:** X-weight cotton
- Other:** Use with rubber expanding drum
- Machine Used:**  DIE GRINDER

Application/Grit Recommendation Guide

← COARSER (GRINDING)					FINER (FINISHING) →				
24	36	40	50	60	80	120	180	240	320
Heavy Stock Removal									
Blending Out Heavy Machine Marks									
Removing Heavy Burrs									
Applying Heavy Scratch Pattern									
Removing Flash/Parting Lines									
Removing Rust/Scale/Pit Marks									
			Preparing Metal for Painting						
			Blending Out Medium Machine Marks						
					Blending Metal Surfaces				
					Applying Light Scratch Pattern				
							Fine Blending and Cleaning		
								Metal Finishing and Polishing	



Best choice for hard-to-grind materials including super alloys (cobalt, inconel, and titanium) and stainless steel

BLAZE R920 CERAMIC ALUMINA

- See significantly faster, cooler, burn-free results on the toughest jobs from the next-generation of sharp, longest-lasting P-graded ceramic abrasive grains and advanced grinding aid lubricant
- Advanced, full resin bond system designed to promote exceptional grain retention for additional product life
- X-weight cotton backing and spiral construction avoid shadow marks and provide smooth, chatter-free cutting action



Good starting specification for all types of metal

R228 ALUMINUM OXIDE

- Tough and durable quality aluminum oxide abrasive removes tough metal
- X-weight cotton backing and spiral construction avoid shadow marks and provide smooth, chatter-free cutting action
- Achieves close tolerances on curved, contoured, and hard-to-reach areas



TIER: **BEST**
 TRADENAME: **BLAZE R920**
 ABRASIVE: Ceramic Alumina
 OTHER: Supersize

SIZE (D x W)	GRIT	STD. PKG.	PART #
1/2 x 1	40	100	662611 46012
	60	100	662611 46013
	80	100	662611 46014
	120	100	662611 46015
3/4 x 1	40	100	662611 46016
	60	100	662611 46017
	80	100	662611 46018
	120	100	662611 46019
1 x 1	40	100	662611 46020
	60	100	662611 46021
	80	100	662611 46022
	120	100	662611 46023
1-1/2 x 1-1/2	40	100	662611 46024
	60	100	662611 46025
	80	100	662611 46026
	120	100	662611 46027
2 x 2	40	100	662611 46028
	60	100	662611 46029
	80	100	662611 46030
	120	100	662611 46031
3 x 3	40	50	662611 46032
	60	50	662611 46033
	80	50	662611 46034
	120	50	662611 46035



TIER: **GOOD**
 TRADENAME: **R228**
 ABRASIVE: Aluminum Oxide

SIZE (D x W)	GRIT	STOCK PKG. QTY.	NON-STOCK MOQ	PART #
3/8 x 1	80	100/box	300	088341 96645
1/2 x 1/2	50	100/box	300	088341 96228
	80	100/box	300	088341 96179
	100	100/box	300	088341 96189
	120	100/box	300	088341 96069
1/2 x 1	180	100/box	300	088341 96209
	36	100/box	300	088341 96591
	40	100/box	300	088341 96174
	60	100/box	300	088341 96212
1/2 x 2	80	100/box	300	088341 96215
	120	100/box	300	088341 96210
	50	100/box	200	088341 96548
	80	100/box	200	088341 96669
3/4 x 3/4	60	100/box	300	088341 96168
	80	100/box	300	088341 96161
3/4 x 1	36	100/box	300	088341 96261
	40	100/box	300	088341 96517
	50	100/box	300	088341 96515
	60	100/box	300	088341 96070
	80	100/box	300	088341 96071
	120	100/box	300	088341 96219
3/4 x 1-1/2	24	100/box	300	088341 96596
	60	100/box	300	088341 96554
	80	100/box	300	088341 96249
3/4 x 2	80	100/box	200	088341 96756



TIER: **GOOD**
 TRADENAME: **R228**
 ABRASIVE: Aluminum Oxide

SIZE (D x W)	GRIT	STOCK PKG. QTY.	NON-STOCK MOQ	PART #
1 x 1	36	100/box	300	088341 96072
	40	100/box	300	088341 96073
	50	100/box	300	088341 96184
	60	100/box	300	088341 96075
	80	100/box	300	088341 96074
	120	100/box	300	088341 96177
1 x 1-1/2	36	100/box	200	088341 96525
1 x 2	80	100/box	200	088341 96268
	100	100/box	200	088341 96750
1 x 3	36	100/box	100	088341 96665
	50	100/box	100	088341 97688
	60	100/box	100	088341 96676
	80	100/box	100	088341 96195
	120	100/box	100	088341 96197
	1-1/2 x 1-1/2	36	100/box	200
40		100/box	200	088341 96171
50		100/box	200	088341 96176
60		100/box	200	088341 96091
80		100/box	200	088341 96165
120		100/box	200	088341 96066

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

Continued



TIER: **GOOD**
TRADENAME: **R228**
ABRASIVE: Aluminum Oxide

SIZE (D x W)	GRIT	STOCK PKG. QTY.	NON-STOCK MOQ	PART #
1-1/2 x 2	60	100/box	200	088341 96067
	80	100/box	200	088341 96533
1-1/2 x 3	36	100/box	100	088341 97063
	60	100/box	100	088341 96703
	80	100/box	100	088341 96809
	120	100/box	100	088341 96343
	180	100/box	100	088341 97869
2 x 1	80	100/box	200	088341 96166
	120	100/box	200	088341 96595
2 x 2	36	100/box	200	088341 96110
	40	100/box	200	088341 96172
	60	100/box	200	088341 96173
	80	100/box	200	088341 96181
	120	100/box	200	088341 96585
2 x 3	50	100/box	100	088341 96152
	60	100/box	100	088341 96175
	80	100/box	100	088341 96198
2-1/4 x 3	36	100/box	100	088341 97140
	50	100/box	100	088341 96620
	80	100/box	100	088341 96270
	120	100/box	100	088341 96729
	150	100/box	100	088341 95857



TIER: **GOOD**
TRADENAME: **R228**
ABRASIVE: Aluminum Oxide

SIZE (D x W)	GRIT	STOCK PKG. QTY.	NON-STOCK MOQ	PART #
3 x 2	40	100/box	100	088341 96090
	50	100/box	100	088341 96264
	60	100/box	100	088341 96530
	80	100/box	100	088341 96265
3 x 3	120	100/box	100	088341 96531
	24	100/box	100	088341 96256
	36	100/box	100	088341 96262
	40	100/box	100	088341 96555
	50	100/box	100	088341 96253
	60	100/box	100	088341 96188
	80	100/box	100	088341 96159
	100	100/box	100	088341 96250
120	100/box	100	088341 96572	
150	100/box	100	088341 96452	
180	100/box	100	088341 96131	
320	100/box	100	088341 97968	

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

Expanding Rubber Drums

Spiral Bands are easily removed and replaced on the rubber expanding drum.



TIER: **GOOD**
TRADENAME: **RUBBER EXPANDING DRUMS**

DRUM DIAMETER	WIDTH	SHANK DIAMETER	MAX. RPM	STD. PKG.	PART #
1/4	1/2	1/8	30,000	1	088341 96030
3/8	1/2	1/4	30,000	1	088341 96944 NS
3/8	1	1/8	18,000	1	088341 96011 NS
1/2	1/2	1/4	30,000	1	088341 96904
1/2	1	1/4	15,000	1	088341 96906
1/2	1-1/2	1/4	12,000	1	088341 96907
1/2	2	1/4	10,000	1	088341 96908
3/4	1/2	1/4	27,000	1	088341 96909 NS
3/4	3/4	1/4	24,000	1	088341 96910 NS
3/4	1	1/4	17,000	1	088341 96911
3/4	1-1/2	1/4	10,000	1	088341 96912
3/4	2	1/4	10,000	1	088341 96913

NS Non-stock, contact your Norton representative for current order quantities and lead-times.




TIER: **GOOD**
TRADENAME: **RUBBER EXPANDING DRUMS**

DRUM DIAMETER	WIDTH	SHANK DIAMETER	MAX. RPM	STD. PKG.	PART #
1	1/2	1/4	20,000	1	088341 96914 NS
1	1	1/4	18,000	1	088341 96916
1	1-1/2	1/4	10,000	1	088341 96917
1	2	1/4	8,000	1	088341 96918
1-1/2	1	1/4	12,000	1	088341 96921
1-1/2	1-1/2	1/4	10,000	1	088341 96922
1-1/2	2	1/4	8,000	1	088341 96923
2	1	1/4	11,000	1	088341 96926
2	1-1/2	1/4	8,000	1	088341 96927
2	2	1/4	6,000	1	088341 96928
3	1	3/8	3,000	1	088341 96929 NS
3	2	3/8	3,000	1	088341 96930 NS
3	3	3/8	3,000	1	088341 96931



Tapered cone points are strips of abrasive cloth rolled and glued to form a solid shape that is designed to break down during use and reveal the next layer of abrasive. Tapered cone points are similar to cartridge rolls but their shape lends greater accessibility to many difficult-to-reach work areas. They are used for deburring holes and in close tolerance work areas.

- Applications:** Used on inside surfaces and inside corners where other abrasive shapes cannot reach. Typically these are used on high-speed air grinders and are always mounted on a mandrel. Ideal for flash removal, polishing, or removing machine tool marks, and edge breaking.
- Grit Range:** 50 - 320
- Abrasive Grain:** Aluminum Oxide
- Backing:** X-weight cotton
- Construction:** Popular sizes and mandrels are listed, with additional sizes available upon request as made-to-order products
Ceramic alumina and silicon carbide cone points are available upon request as made-to-order products
- Maximum RPM:** 1/8" to 1/2" – 23,000
5/8" to 1" – 18,000
1" to 1-1/2" – 15,000
- Machine Used:**  DIE GRINDER

Application/Grit Recommendation Guide

COARSER (GRINDING) ←									→ FINER (FINISHING)
36	40	50	60	80	120	180	240	320	
Blending Out Heavy Machine Marks									
Removing Heavy Burrs									
Applying Heavy Scratch Pattern									
Removing Flash/Parting Lines									
Removing Rust/Scale/Pit Marks									
		Preparing Metal for Painting							
		Blending Out Medium Machine Marks							
				Blending Metal Surfaces					
				Applying Light Scratch Pattern					
						Fine Blending and Cleaning			
							Metal Finishing and Polishing		



Good starting specification for flash removal, polishing, or removing machine tool marks and edge breaking on all types of metal in difficult-to-reach work areas

R228 ALUMINUM OXIDE TAPERED CONE POINTS

- Quality aluminum oxide abrasive delivers long life
- X-weight cotton cloth provides extended durability, conformability, and superior wear resistance; strong resin bond system provides good grain retention and life
- Full taper construction consisting of rolled and half-glued abrasive strips that break down to expose next layer of abrasive

TIER: GOOD			
TRADENAME: R228			
ABRASIVE: Aluminum Oxide			
SIZE (D x L x H)	GRIT	STD. PKG.	PART #
3/16 x 1 x 2-1/2° Use K-110 Mandrel	50	500	088341 86892
	60	500	088341 86893
	80	500	088341 80918
	100	500	088341 82197
	120	500	088341 82199
	150	500	088341 82200
	180	500	088341 86894
	240	500	088341 86895
320	500	088341 82855	

TIER: GOOD			
TRADENAME: R228			
ABRASIVE: Aluminum Oxide			
SIZE (D x L x H)	GRIT	STD. PKG.	PART #
5/16 x 1-1/2 x 5° Use B-20 Mandrel	80	500	088341 80873
	100	500	088341 82043
	120	500	088341 82717
	150	500	088341 86890
	180	500	088341 82535
	240	500	088341 82044
	320	500	088341 82537

Refer to next page for mandrels.

Continued


Cartridge and Spiral Roll Mandrels

MODEL #	PILOT DIA.	PILOT LENGTH	SHANK DIA.	SHANK LENGTH	OVERALL LENGTH	PART #
Cartridge and Spiral Roll Mandrels						
M-2E	3/32	3/4	1/4	1	3	088341 83799 NS
M-2	3/32	1	1/8	1	3	088341 81202
M-3	1/8	1/2	1/8	1	2-1/2	088341 81203
M-4	1/8	3/4	1/8	1	2-1/2	088341 81204
M-5	1/8	1	1/8	1	2-3/4	088341 81205
M-6	1/8	1-1/2	1/8	1	2-1/2	088341 81206 NS
M-7	1/8	1/2	1/4	1-1/4	2-1/4	088341 81207
M-8	1/8	3/4	1/4	1-1/4	2-1/2	088341 81208
M-9	1/8	1	1/4	1-1/4	2-3/4	088341 81209
M-10	1/8	1-1/2	1/4	1-1/4	3-1/4	088341 81210
M-11	1/8	2	1/4	1-1/4	4	088341 81211 NS
M-12	3/16	1/2	1/8	1-1/4	2-1/4	088341 81212 NS
M-13	3/16	3/4	1/8	1-1/4	2-1/2	088341 81213 NS
M-14	3/16	1/2	1/4	1-1/4	2-1/2	088341 81214 NS
M-15	3/16	3/4	1/4	1-1/4	2-3/4	088341 81215 NS
M-16	3/16	1	1/4	1-1/4	3	088341 81216
M-17	3/16	1-1/2	1/4	1-1/4	3-1/2	088341 81217
M-18	3/16	2	1/4	1-1/4	4	088341 81218
M-19	1/4	1/2	1/4	1-1/4	2-1/2	088341 81219 NS
M-20	1/4	3/4	1/4	1-1/4	2-3/4	088341 81220 NS
M-21	1/4	1	1/4	1-1/4	3	088341 81221
M-22	1/4	1-1/2	1/4	1-1/4	3-1/2	088341 81222
M-23	1/4	2	1/4	1-1/4	4	088341 81223 NS
M-24	5/16	3/4	1/4	1-1/4	2-3/4	088341 81224 NS
M-25	5/16	1	1/4	1-1/4	3	088341 81225 NS
M-26	5/16	1-1/2	1/4	1-1/4	3-1/2	088341 81226 NS
M-27	5/16	2	1/4	1-1/4	4	088341 81227 NS

NS Non-stock. Contact your Norton representative for current order quantities and lead-times.
Standard Package = 1

Recommended Pilot Length for Mandrels

3/4 Roll Length	Use 1/2 Pilot
1 Roll Length	Use 3/4 Pilot
1-1/2 Roll Length	Use 1 Pilot
2 Roll Length	Use 1-1/2 Pilot



Extra Shank Length Mandrels for Cartridge Rolls and Spiral Rolls

MODEL #	SHANK LENGTH	OVERALL LENGTH	PART NO.
Extras Shank Length Mandrels			
M-8-4	4	5-1/4	088341 80116
M-8-6	6	7-1/4	088341 80122
M-9-2.5	2-1/2	4	088341 80096
M-9-3	3	4-1/2	088341 80129
M-9-4	4	5-1/2	088341 80074 NS
M-9-6	6	7-1/2	088341 80131
M-10-4	1-3/4	4	088341 80092 NS
M-10-6	3-3/4	6	088341 80145

All Extra Shank Length mandrels are 1/4" diameter

NS Non-stock. Contact your Norton representative for current order quantities and lead-times.
Standard Package = 1

Tapered Cone Point Mandrels

DESCRIPTION	SHANK	PART #
Cone Point Mandrels		
A-10	1/4	088341 81300
B-20	1/4	088341 81301
C-30	1/4	088341 81302
D-40	1/4	088341 81303
E-50	1/4	088341 81304
F-60	1/4	088341 81305
G-70	1/4	088341 81306
I-90	1/4	088341 81308
K-110	1/8	088341 81310



Standard Package = 1

These test kits feature the most popular range and sizes of our coated specialty products in convenient kit formats. Ideal for small job shops, or for travelling to a job site. Our cartridge roll kits are great when you need a small quantity, but a wide range of grits and sizes



Ceramic Alumina Cartridge Roll Test Kit

- Part # 662610**66726**
- Kit includes a variety of our ceramic alumina cartridge rolls, spiral rolls and mandrels in popular sizes and grits.



Aluminum Oxide Cartridge Roll Test Kit "CR"

- Part # 088341**181061**
- Includes over 120 pieces of our most popular sizes, grits and shapes with their appropriate mandrels.



General Purpose Test Kit "GP"

- Part # 088341**169025**
- Includes samples of various abrasive specialties. One of these kits could be worth the cost of the entire kit by solving your problems in deburring, polishing and grinding.



Porting Test Kit "APK-MO"

- Part # 088341**169032**
- The samples in this kit highlight specialties for general metal and wood working polishing and finishing applications.



Surface Preparation Stars

The perfect item for ID work



SURFACE PREPARATION STARS

- Star shape design is tough yet conformable to intricate shapes and contours without changing the workpiece dimension
- Premium aluminum oxide grain for excellent cutting and finishing
- Firm durable web for high resistance to tearing on burrs and sharp edges

TIER: **BETTER**
 TRADENAME: **SURFACE PREP**
 ABRASIVE: Aluminum Oxide
 ATTACHMENT: 1/4-20 Eyelet

SIZE (D x EYELET)	GRIT	STD. PKG.	PART #
1-1/2" x 1/4-20	C	100	088341 85923
	M	100	088341 85924
	VF	100	088341 85925
2" x 1/4-20	C	100	088341 85926
	M	100	088341 85927
	VF	100	088341 85928
3" x 1/4-20	C	100	088341 85929
	M	100	088341 85678
	VF	100	088341 85931
4" x 1/4-20	C	100	088341 85932
	M	100	088341 85933
	VF	100	088341 85934

Some part number are non-stock, contact your Norton representative for status, order quantities and lead-times.
 1/4-20 eyelets attach to MM20-4 mandrel, Part # 088341**83164** (See description at end of Overlap Slotted Disc Section.)

Cross Buffs

Best choice for blending, cleaning and polishing



CROSS BUFFS

- Unique design is tough yet conformable to intricate shapes and contours without changing the workpiece dimension
- Premium aluminum oxide grain for excellent cutting and finishing
- Firm durable web for high resistance to tearing on burrs and sharp edges

TIER: **BEST** **BETTER**
 TRADENAME: **HIGH STRENGTH** **BUFFING**
 ABRASIVE: Aluminum Oxide Aluminum Oxide
 ATTACHMENT: 8-32 Eyelet 8-32 Eyelet

SIZE (D x W)	GRIT	PLY	STD. PKG.	PART #	PART #
1-1/2 x 1/2	Coarse	2	100		088341 88761
	Medium	2	100	088341 89306	088341 87312
	Very Fine	2	100	088341 89307	088341 88585
1-1/2 x 1/2	Coarse	3	100		666233 01763
	Medium	3	100	088341 89308	088341 87311
	Very Fine	3	100	088341 89309	088341 88586

8-32 eyelets: Attach to MM32-4 mandrel. Part No. 088341**83163** (See description at end of Overlap Slotted Disc Section)

Non-Woven Disc Wheels with 1/4" Steel Shank

Best choice for all of your tough stripping needs on all kinds of surfaces



BLAZE RAPID STRIP DISCS

- Ceramic alumina grain provides 2X cut rate, 2X life over silicon carbide products
- Advanced resin bond does not shed on rust-encrusted pieces, and prevents gouging and rework; does not snag when used for deburring
- Leave a thoroughly cleaned surface that ensures excellent adhesion for subsequent processes such as coating, painting and soldering

Better choice for light deburring and finishing



DISC WHEELS

- Durable, longer lasting aluminum oxide abrasive leaves a more polished finish
- Discs are ganged together to form a wheel that is tough yet conformable to intricate shapes and contours without changing the workpiece dimension
- These wheels are mounted on a 1/4 inch steel mandrel embedded in a strong epoxy core



TIER: **BEST**
TRADENAME: **BLAZE RAPID STRIP**
ABRASIVE: Ceramic Alumina

SIZE (D x W x 1/4 SHANK)	GRIT	PLY	MAX. RPM	STD. PKG.	PART #
4 x 1/2	Extra Coarse	1 Ply	8,000	5	776960 05713
4 x 1	Extra Coarse	2 Ply	8,000	5	666233 75051



TIER: **BETTER**
ABRASIVE: Aluminum Oxide

SIZE (D x W x 1/4 SHANK)	GRIT	PLY	MAX. RPM	STD. PKG.	PART #
2 x 1/2	Medium	2 Ply	12,000	10	088341 31551
2 x 1	Medium	4 Ply	12,000	10	088341 31554
3 x 1/2	Medium	2 Ply	8,000	10	088341 31558
	Very Fine	3 Ply	8,000	10	088341 31560
3 x 1	Medium	4 Ply	8,000	10	088341 31496
	Fine	5 Ply	8,000	10	088341 31557
	Very Fine	5 Ply	8,000	10	088341 31497
4 x 1/2	Fine	3 Ply	6,000	10	088341 31562
4 x 1	Medium	4 Ply	6,000	10	088341 31564
5 x 1/2	Medium	2 Ply	4,000	10	088341 31567
5 x 1	Medium	4 Ply	4,000	10	088341 31570
	Fine	5 Ply	4,000	10	088341 31571

Disc wheels are constructed by number of plies. The actual face width will vary and will not match the listed width exactly. Face width is given for reference only.



Flap wheels are an ideal choice for a wide variety of blending, deburring and finishing applications common in the metal fabrication, welding and polishing industries. Flap wheels are conformable to intricate shapes and contours. Designed to deliver a consistent finish with a uniform rate of cut, flap wheels wear away, continually exposing fresh abrasives.

Applications:

Used for a wide range of metal fabrication and welding applications including stock removal, blending, deburring, cleaning, finishing, and polishing

Size Range:

Flap wheels with mounted steel shanks: 3/8" - 3" diameter
Flap wheels with mounted 1/4"-20 thread: 1" - 3" diameter
Flap wheels with arbor holes: 3" - 16" diameter


Grit Range:

40 - 320

Abrasive Grain:

Ceramic Alumina, Aluminum Oxide Blend, Aluminum Oxide

Machine Used:



DIE GRINDER

BENCH GRINDER


PEDESTAL GRINDER

PORTABLE GRINDER

Shape Recommendation Guide

Shape

Description/Application



Flap Wheels with Mounted Steel Shanks

Wheels are designed with a 1/8" or 1/4" steel shank as an integral part of each wheel. These shanks run through the wheel creating better balance, a reduction of chatter, and reduced operator fatigue. They also permit quick changes on air tools when using other abrasive products.



Flap Wheels with Mounted 1/4"-20 Thread


Wheels are designed with a 1/4"-20 thread and flange as an integral part of the wheel. These threads facilitate the quickest changes on air tools using flap wheels exclusively, as there are no special tools needed to change the flap wheel. Also allow extended reach with accessory mandrels.



Flap Wheels with Arbor Holes

For use on larger portable and fixed-base tools where the wheel must fit on an existing arbor.

Application/Grit Recommendation Guide

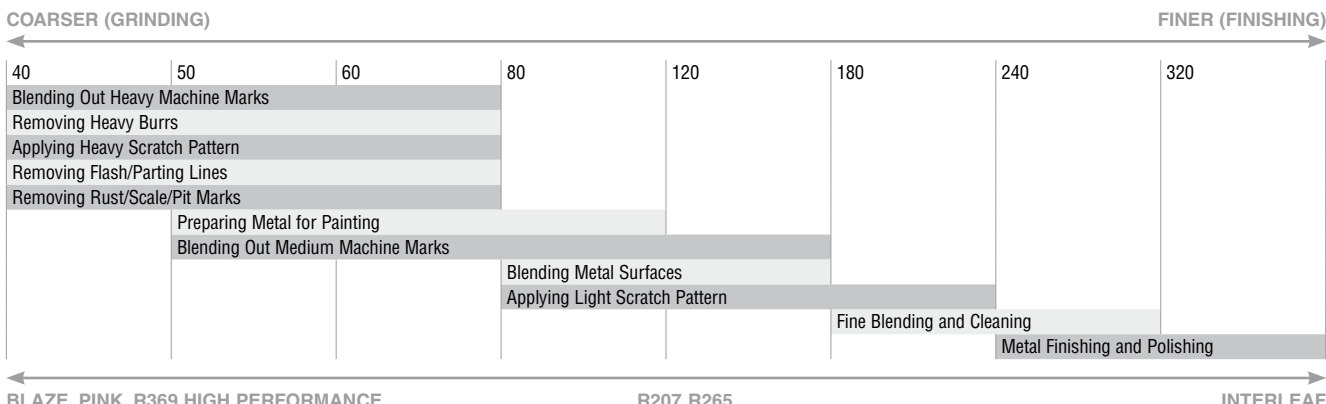

BLAZE, PINK, R369 HIGH PERFORMANCE
See Non-Woven Flap Wheel section for Interleaf Flap Wheels

R207, R265

INTERLEAF



Best choice for hard-to-grind materials, including superalloys (cobalt, inconel, and titanium) and stainless steel!

BLAZE R920 CERAMIC ALUMINA


- See significantly faster, cooler, burn-free results on the toughest jobs from the next-generation of sharp, longest-lasting P-graded ceramic abrasive grains and advanced grinding aid lubricant
- X-weight cotton flaps provide conformability and even wear
- Advanced self-lubricating grain treatment reduces heat on hard-to-grind materials



Better choice for blending, deburring and finishing on a wide range of materials

PINK R928 CERAMIC ALUMINA

- Ceramic grain provides better performance than zirconia alternatives
- Improved resin bond system provides longer life
- Versatile X-weight poly cotton backing for flexibility and life

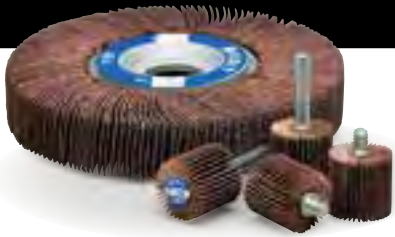

Good choice for more durable flap wheel applications where aggressive cut and superior life are required

R369 HIGH PERFORMANCE ALUMINUM OXIDE BLEND

- Long-lasting premium aluminum oxide blend with 2 to 3 times longer life
- Delivers an excellent cut rate on finishing operations
- Heavy cotton/polyester blended flaps provide extended durability, conformability, and superior wear resistance



Good choice for more flexible flap wheel applications where finish is required

R207 ALUMINUM OXIDE

- P-graded, solid-performing aluminum oxide abrasive delivers uniform stock removal and long life
- Heavy X-weight cotton flaps provide conformability and even wear
- Good general purpose starting specification for small deburring and cleaning jobs



Good choice when initial price is a key purchasing criteria

R265 ALUMINUM OXIDE

- Quality aluminum oxide abrasive provides good cut rate and life
- Heavy cotton/polyester blended flaps provide extended durability, conformability, and superior wear resistance
- Designed for all-purpose use where price is the major consideration



Micro-Mini Flap Wheels with 1/8" Mounted Steel Shanks

- The smallest flap wheels, ranging from 3/8" to 1-3/16" diameter, mounted on a 1/8" diameter steel shank
- Provide fast polishing and light deburring of internal workpieces with holes or grooves as small as 1/2"



TIER: **GOOD**
 TRADENAME: **R369**
 ABRASIVE: Premium Aluminum Oxide
 BACKING: Y-Weight Cotton

SIZE (D x W x SK.)	GRIT	MAX. RPM	STD. PKG.	PART #
3/8 x 3/8 x 1/8	60	40,000	10	088341 37470
	80	40,000	10	088341 37471
	120	40,000	10	088341 37472
	180	40,000	10	088341 37473
	240	40,000	10	088341 37474
5/8 x 5/8 x 1/8	320	40,000	10	088341 37475
	60	37,000	10	088341 37480
	80	37,000	10	088341 37481
	120	37,000	10	088341 37482
	180	37,000	10	088341 37483
5/8 x 3/4 x 1/8	240	37,000	10	088341 37484
	320	37,000	10	088341 37485
	80	37,000	10	088341 37541
	120	37,000	10	088341 37542
	180	37,000	10	088341 37543
5/8 x 3/4 x 1/8	240	37,000	10	088341 37544
	320	37,000	10	088341 37545
	60	35,000	10	088341 37550
	80	35,000	10	088341 37551
	120	35,000	10	088341 37552
3/4 x 3/16 x 1/8	180	35,000	10	088341 37553
	240	35,000	10	088341 37554
	320	35,000	10	088341 37555
	60	35,000	10	088341 37560
	80	35,000	10	088341 37561
3/4 x 3/8 x 1/8	120	35,000	10	088341 37562
	180	35,000	10	088341 37563
	240	35,000	10	088341 37564
	320	35,000	10	088341 37565
	60	35,000	10	088341 37570
3/4 x 1/2 x 1/8	80	35,000	10	088341 37571
	120	35,000	10	088341 37572
	180	35,000	10	088341 37573
	240	35,000	10	088341 37574
	320	35,000	10	088341 37575



TIER: **GOOD**
 TRADENAME: **R369**
 ABRASIVE: Premium Aluminum Oxide
 BACKING: Y-Weight Cotton

SIZE (D x W x SK.)	GRIT	MAX. RPM	STD. PKG.	PART #
3/4 x 5/8 x 1/8	60	35,000	10	088341 37580
	80	35,000	10	088341 37581
	120	35,000	10	088341 37582
	180	35,000	10	088341 37583
	240	35,000	10	088341 37584
3/4 x 3/4 x 1/8	320	35,000	10	088341 37585
	60	35,000	10	088341 37590
	80	35,000	10	088341 37591
	120	35,000	10	088341 37592
	240	35,000	10	088341 37594
1-3/16 x 1/8 x 1/8	320	35,000	10	088341 37595
	80	30,000	10	088341 37491
	120	35,000	10	088341 37492
	180	35,000	10	088341 37493
	320	35,000	10	088341 37495
1-3/16 x 3/16 x 1/8	60	30,000	10	088341 37508
	80	35,000	10	088341 37501
	120	35,000	10	088341 37502
	180	35,000	10	088341 37503
	240	35,000	10	088341 37504
1-3/16 x 3/8 x 1/8	320	35,000	10	088341 37505
	80	30,000	10	088341 37511
	120	35,000	10	088341 37512
	180	35,000	10	088341 37513
	240	35,000	10	088341 37514
3/4 x 1/2 x 1/8	320	35,000	10	088341 37515

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

Micro-Mini Test Kit "MMC"

- Part # 088341**131493**
- Includes five wheels, 3/8" to 1-3/16" diameter in various grits, mounted on a 1/8" diameter hardened steel shank
- The "MMC" kit is ideal for fast polishing and light deburring of internal holes or grooves as small as 1/2"



Mini Flap Wheels with 1/4" Mounted Steel Shanks

- Small flap wheels, ranging from 1" to 3" diameter, mounted on a 1/4" diameter steel shank
- Very durable, long-lasting mini flap wheels for demanding, heavy stock removal applications



		TIER: BEST		TIER: BETTER		TIER: GOOD		TIER: GOOD		TIER: GOOD	
		TRADENAME: BLAZE R920		TRADENAME: PINK R928		TRADENAME: R369		TRADENAME: R207		TRADENAME: R265	
		ABRASIVE: Ceramic Alumina		ABRASIVE: Ceramic Alumina		ABRASIVE: Premium Aluminum Oxide		ABRASIVE: Aluminum Oxide		ABRASIVE: Aluminum Oxide	
		BACKING: X-Weight Cotton		BACKING: X-Weight Poly/Cotton		BACKING: Y-Weight Cotton		BACKING: X-Weight Cotton			
SIZE (D x W x SK.)	GRIT	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	PART #	PART #
1 x 1/2 x 1/4	80	30,000	10							088341 49801	
	120	30,000	10							088341 49802	
1 x 5/8 x 1/4	40	30,000	10				088341 137105				
	60	30,000	10				088341 137100	636425 02576			
	80	30,000	10				088341 137101	636425 02577			
	120	30,000	10				088341 137102	636425 02578			
	180	30,000	10				088341 131536				
1 x 1 x 1/4	240	30,000	10				088341 137104				
	40	30,000	10		699573 39701	088341 131259				088341 49803	
	60	30,000	10	662611 151170	699573 39702	088341 137310		636425 02580		088341 49804	
	80	30,000	10	662611 151171	699573 39703	088341 137311		636425 02581		088341 49805	
	120	30,000	10	662611 151172	699573 39704	088341 137312		636425 02582		088341 49806	
	180	30,000	10			088341 137313				088341 49807	
	240	30,000	10			088341 137114					
1-3/8 x 5/8 x 1/4	320	30,000	10			088341 137315					
	60	30,000	10			088341 137320					
	80	30,000	10			088341 137321					
	120	30,000	10			088341 137322					
1-1/2 x 1/2 x 1/4	180	30,000	10			088341 137323					
	240	30,000	10			088341 137324					
	60	25,000	10							088341 49810	
1-1/2 x 1 x 1/4	80	25,000	10							088341 49811	
	40	25,000	10			088341 135140					
1-1/2 x 1 x 1/4	60	25,000	10			088341 137340		636425 02592		088341 49816	
	80	25,000	10			088341 137141		636425 02593		088341 49817	
	120	25,000	10			088341 137142		636425 02594		088341 49818	
	180	25,000	10			088341 137343					
	240	25,000	10			088341 132101					
1-1/2 x 1-1/2 x 1/4	40	25,000	10			088341 130642					
	60	25,000	10			088341 130643					
	80	25,000	10			088341 130644					
	120	25,000	10			088341 130641					
2 x 1/2 x 1/4	180	25,000	10			088341 130695					
	60	25,000	10							088341 49821	
2 x 1/2 x 1/4	80	25,000	10							088341 49822	
	120	25,000	10							088341 49823	
	40	25,000	10			088341 137158					
2 x 3/4 x 1/4	60	25,000	10			088341 137160					
	80	25,000	10			088341 137161					
	120	25,000	10			088341 137162					
	180	25,000	10			088341 137163					
	180	25,000	10								

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

Continued

Mini Flap Wheels with 1/4" Mounted Steel Shanks *continued*



		TIER: BEST		TIER: BETTER		TIER: GOOD		TIER: GOOD		TIER: GOOD	
		TRADENAME: BLAZE R920		TRADENAME: PINK R928		TRADENAME: R369		TRADENAME: R207		TRADENAME: R265	
		ABRASIVE: Ceramic Alumina		ABRASIVE: Ceramic Alumina		ABRASIVE: Premium Aluminum Oxide		ABRASIVE: Aluminum Oxide		ABRASIVE: Aluminum Oxide	
		BACKING: X-Weight Cotton		BACKING: X-Weight Poly/Cotton		BACKING: Y-Weight Cotton		BACKING: X-Weight Cotton			
SIZE (D x W x SK.)	GRIT	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	PART #	PART #
2 x 1 x 1/4	40	25,000	10		69957 339705	088341 37377				088341 49824	
	50	25,000	10			088341 37169					
	60	25,000	10	66261 151173	69957 339706	088341 37370		636425 02600		088341 49825	
	80	25,000	10	66261 151174	69957 339711	088341 37371		636425 02601		088341 49826	
	120	25,000	10	66261 151175	69957 339712	088341 37372		636425 02602		088341 49827	
	180	25,000	10			088341 37373				088341 49828	
	240	25,000	10			088341 37374					
2 x 1-1/2 x 1/4	40	25,000	10			088341 37183					
	60	25,000	10			088341 37380					
	80	25,000	10			088341 37381					
	120	25,000	10			088341 37382					
	180	25,000	10			088341 37383					
2-1/2 x 1 x 1/4	40	20,000	10			088341 37408					
	60	20,000	10			088341 37410		636425 02608			
	80	20,000	10			088341 37411		636425 02609			
	120	20,000	10			088341 37412		636425 02610			
	180	20,000	10			088341 37413					
	240	20,000	10			088341 37633					
	320	20,000	10			088341 37415					
2-1/2 x 1-1/2 x 1/4	60	20,000	10			088341 37420					
	80	20,000	10			088341 37421					
	120	20,000	10			088341 37422					
3 x 1/2 x 1/4	60	20,000	10					636425 02612		088341 49834	
	80	20,000	10					636425 02613		088341 49835	
	120	20,000	10					636425 02614			
3 x 3/4 x 1/4	60	20,000	10			088341 37440					
	80	20,000	10			088341 37441					
3 x 1 x 1/4	40	20,000	10		69957 339713	088341 37456				088341 49836	
	60	20,000	10	66261 151176	69957 339714	088341 37450		636425 02620		088341 49837	
	80	20,000	10	66261 151177	69957 339715	088341 37451		636425 02621		088341 49838	
	120	20,000	10	66261 151178	69957 339716	088341 37252		636425 02622		088341 49839	
	180	20,000	10			088341 37253				088341 49840	
	240	20,000	10			088341 35339					
	320	20,000	10			088341 35341					
3 x 2 x 1/4	40	12,000	10			088341 37460					
	60	12,000	10			088341 37260					
	80	12,000	10			088341 37261					
	120	12,000	10			088341 37262					
	180	12,000	10			088341 37263					

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.



Mini 1/4" Steel Shank Test Kit "CMM"

- Part # 088341**38004**
- Includes ten wheels, 1" to 3" diameter in various grits mounted on a 1/4" diameter hardened steel shank



Mini Flap Wheels with 1/4"-20 Thread

- Mini flap wheels ranging from 1" to 3" diameter, mounted on a 14-20 thread that allows you to quickly spin the wheels on and off with no tools
- Designed for polishing and finishing intricate surfaces; cost-effective replacement for brushes, rubber points, and felt bobs



TIER:	BETTER	GOOD	GOOD
TRADENAME:	PINK R928	R369	R207
ABRASIVE:	Ceramic Alumina	Premium Aluminum Oxide	Aluminum Oxide
BACKING:	X-Weight Poly/Cotton	Y-Weight Cotton	X-Weight Cotton

SIZE (D x W x THD.)	GRIT	MAX. RPM	STD. PKG.	PART #	PART #	PART #
1 x 5/8 x 1/4-20	60	30,000	10		088341 31001	636425 02624
	80	30,000	10		088341 31002	636425 02625
	120	30,000	10		088341 31003	636425 02626
1 x 1 x 1/4-20	40	30,000	10	699573 39718	088341 31027	
	60	30,000	10	699573 39719	088341 31008	636425 02628
	80	30,000	10	699573 39720	088341 31009	636425 02629
	120	30,000	10	699573 39721	088341 31010	636425 02630
	180	30,000	10		088341 31011	
	240	30,000	10		088341 31012	
1-3/8 x 5/8 x 1/4-20	60	30,000	10		088341 32001	636425 02632
	80	30,000	10		088341 32002	636425 02633
	120	30,000	10		088341 32003	636425 02634
1-5/8 x 1 x 1/4-20	40	25,000	10		088341 32051	
	60	25,000	10		088341 32015	636425 02638
	80	25,000	10		088341 32016	636425 02639
	120	25,000	10		088341 32017	636425 02640
	180	25,000	10		088341 32018	
2 x 1/2 x 1/4-20	80	25,000	10			636425 02643
	120	25,000	10			636425 02644
2 x 3/4 x 1/4-20	60	25,000	10		088341 33008	
	80	25,000	10		088341 33009	
	120	25,000	10		088341 33010	
	180	25,000	10		088341 33011	
2 x 1 x 1/4-20	40	25,000	10	699573 39722	088341 33044	
	60	25,000	10	699573 39723	088341 33015	636425 02646
	80	25,000	10	699573 39735	088341 33016	636425 02647
	120	25,000	10	699573 39736	088341 33017	636425 02648
	180	25,000	10		088341 33018	
	240	25,000	10		088341 33019	
2 x 1-1/2 x 1/4-20	60	25,000	10		088341 35201	
	80	25,000	10		088341 35202	
	120	25,000	10		088341 35203	
2-1/2 x 1 x 1/4-20	40	20,000	10		088341 34061	
	60	20,000	10		088341 34022	636425 02654
	80	20,000	10		088341 34023	
	120	20,000	10		088341 34024	
3 x 1/2 x 1/4-20	80	20,000	10			636425 02659
	120	20,000	10			636425 02660
3 x 3/4 x 1/4-20	80	20,000	10		088341 35009	
	120	20,000	10		088341 35010	
3 x 1 x 1/4-20	40	20,000	10	699573 39737	088341 35230	
	60	20,000	10	699573 39738	088341 35015	636425 02664
	80	20,000	10	699573 39739	088341 35016	636425 02665
	120	20,000	10	699573 39740	088341 35017	636425 02666
	180	20,000	10		088341 35018	
240	20,000	10		088341 35019		

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.
For adapters for flap wheels with 1/4"-20 thread, see the end of this section




Cup-Type Mini Flap Wheels with 1/4" Mounted Steel Shanks


- Primarily used for bottom or side-wall type sanding where conventional tools do not reach
- Cup-type mini flap wheels will not mar your workpiece while reaching flush into areas where other wheels cannot reach

TIER: **GOOD**
 TRADENAME: **R369**
 ABRASIVE: Premium Aluminum Oxide
 BACKING: Y-Weight Cotton


D x W x SK.	MAX. RPM	GRIT	STD. PKG.	PART #
2-1/2 x 1-1/2 x 1/4	20,000	60	10	088341 44463



TYPICAL
WHEELS



CUP WHEELS GET FLUSH INTO CORNERS
AND THE BOTTOMS OF CYLINDERS



Flap Wheel Test Kits

Mini 1/4"-20 Thread Test Kit "CQ"

- Part # 088341**38001**
- Includes ten, 1" to 3" diameter, 1/4"-20 thread mini flap wheels
- Each kit includes a 1/4"-20 QC-4 quick-change adapter

Mini 1/4" Steel Shank Test Kit "CMM"

- Part # 088341**38004**
- Includes ten wheels, 1" to 3" diameter in various grits
- The flap wheels are mounted on a 1/4" diameter hardened steel shank

Micro Mini 1/8" Steel Shank Test Kit "MMC"

- Part # 088341**31493**
- Includes 5 wheels, 3/8" to 1-3/16" in diameter
- The flap wheels are mounted on a 1/8" diameter hardened steel shank
- Ideal for fast polishing and light deburring of holes or grooves



3" – 8" Flap Wheels with Arbor Holes

- Flap wheels ranging from 3" to 8" diameter with arbor holes
- Heavy cotton backing and premium abrasive grains combine to provide superior life with aggressive cut on a wide range of polishing and finishing applications



TIER: **GOOD** **GOOD**

TRADENAME: **R369** **R207**

ABRASIVE: Premium Aluminum Oxide Aluminum Oxide

BACKING: Y-Weight Cotton X-Weight Cotton

SIZE (D x W x H)	GRIT	MAX. RPM	STD. PKG.	PART #	PART #
3 x 2 x 3/8	60	12,000	10	088341 35050	
	80	12,000	10	088341 35051	
	120	12,000	10	088341 35052	
3-1/2 x 1 x 5/8	40	12,000	10	088341 22001	
	50	12,000	10	088341 22002	
	60	12,000	10	088341 22003	
	80	12,000	10	088341 22004	
	120	12,000	10	088341 22006	
	180	12,000	10	088341 22007	
	240	12,000	10	088341 22008	
3-1/2 x 1-1/2 x 5/8	320	12,000	10	088341 22009	
	40	12,000	10	088341 22011	
	50	12,000	10	088341 22012	
	60	12,000	10	088341 22013	
	80	12,000	10	088341 22014	
	120	12,000	10	088341 22016	
	180	12,000	10	088341 22018	
3-1/2 x 2 x 5/8	320	12,000	10	088341 22020	
	40	12,000	10	088341 22022	
	60	12,000	10	088341 22024	
	80	12,000	10	088341 22025	
	120	12,000	10	088341 22027	
4 x 1 x 5/8	180	12,000	10	088341 22028	
	40	12,000	10	088341 22032	
	50	12,000	10	088341 22033	
	60	12,000	10	088341 22034	636425 02673
	80	12,000	10	088341 22035	636425 02674
4 x 1-1/2 x 5/8	120	12,000	10	088341 22037	636425 02675
	180	12,000	10	088341 22038	
	240	12,000	10	088341 22039	
	320	12,000	10	088341 22040	
	40	12,000	10	088341 22042	
	60	12,000	10	088341 22044	
	80	12,000	10	088341 22045	
4 x 2 x 5/8	120	12,000	10	088341 22047	
	240	12,000	10	088341 22050	
	40	12,000	10	088341 22053	
	60	12,000	10	088341 22055	
4 x 2 x 5/8	80	12,000	10	088341 22056	
	120	12,000	10	088341 22058	
	180	12,000	10	088341 22059	
	240	12,000	10	088341 22060	
	320	12,000	10	088341 22061	

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.
For flap wheel with arbor hole adapters and bushings, see the end of this section. A set of reducing bushing will be included for 1" center hole wheels at no charge when purchased with flap wheels and specified on the order.
Continued

3" – 8" Flap Wheels with Arbor Holes *continued*



		TIER: BEST		GOOD		GOOD		GOOD	
		TRADENAME: BLAZE R920		R369		R207		R265	
		ABRASIVE: Ceramic Alumina		Premium Aluminum Oxide		Aluminum Oxide		Aluminum Oxide	
		BACKING: X-Weight Cotton		Y-Weight Cotton		X-Weight Cotton			
SIZE (D x W x H)	GRIT	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
5 x 1-1/2 x 5/8	40	12,000	10		088341 22063				
	50	12,000	10		088341 22064				
	60	12,000	10		088341 22065				
	80	12,000	10		088341 22066				
	120	12,000	10		088341 22068				
	180	12,000	10		088341 22070				
	240	12,000	10		088341 22071				
6 x 1/2 x 1	320	12,000	10		088341 22072				
	40	6,000	10		088341 23001				
	60	6,000	10		088341 23003				
	120	6,000	10		088341 23005				
	150	6,000	10		088341 22198				
6 x 1 x 1	180	6,000	10		088341 23006				
	40	6,000	5		088341 23009			088341 20167	
6 x 1 x 1	50	6,000	5		088341 23010			088341 20168	
	60	6,000	5	662611 46104	088341 23011	636425 02680		088341 20169	
	80	6,000	5	662611 46105	088341 23012	636425 02681		088341 20170	
	100	6,000	5					088341 20171	
	120	6,000	5	662611 46106	088341 23014	636425 02682		088341 20172	
	150	6,000	5		088341 23015				
	180	6,000	5		088341 23016			088341 20174	
	240	6,000	5		088341 23017			088341 20176	
	320	6,000	5		088341 23018			088341 20177	
	6 x 1-1/2 x 1	40	6,000	5		088341 23020			
50		6,000	5		088341 23021				
60		6,000	5		088341 23022	636425 02686			
80		6,000	5		088341 23023	636425 02687			
120		6,000	5		088341 23025				
180		6,000	5		088341 23027				
240		6,000	5		088341 23028				
320		6,000	5		088341 23029				
6 x 2 x 1		40	6,000	5		088341 23031			088341 20189
	50	6,000	5		088341 23032				
	60	6,000	5		088341 23033	636425 02691		088341 20191	
	80	6,000	5		088341 23034	636425 02692		088341 20192	
	100	6,000	5					088341 20198	
	120	6,000	5		088341 23036	636425 02694			
	180	6,000	5		088341 23038			088341 20197	
	240	6,000	5		088341 23039			088341 20199	
	320	6,000	5		088341 23040				
6 x 3 x 1	50	6,000	3		088341 23054				
	60	6,000	3		088341 23055				
	80	6,000	3		088341 23056				
	120	6,000	3		088341 23058				
	180	6,000	3		088341 23060				
8 x 1 x 1	240	6,000	3		088341 23061				
	40	4,500	3		088341 23070				
	50	4,500	3		088341 23071				
	60	4,500	3		088341 23072				
	80	4,500	3		088341 23073				
	120	4,500	3		088341 23075				
	180	4,500	3		088341 23077				
	8 x 2 x 1	40	4,500	3		088341 23092			
50		4,500	3		088341 23093				
60		4,500	3		088341 23094	636425 02700			
80		4,500	3		088341 23095	636425 02701			
120		4,500	3		088341 23097				
180		4,500	3		088341 23099				
240		4,500	3		088341 23100				
320	4,500	3		088341 23101					

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.
For flap wheel with arbor hole adapters and bushings, see the end of this section.
A set of reducing bushing will be included for 1" center hole wheels at no charge when purchased with flap wheels and specified on the order.



10" – 16" Large Flap Wheels with Arbor Holes

Wide range of applications:

- For polishing/grinding jobs in production work as well as clean-up and maintenance jobs
- Work on metals, plastic, rubber and wood

Easy to operate:

- No adjustments, dressing, or preparation required before or during operation

Fewer rejected parts:

- More forgiving than other abrasive products
- Reduce the possibility of flattening, gouging and surface deformation

TIER: **GOOD**
TRADENAME: **R369**
ABRASIVE: Premium Aluminum Oxide
BACKING: Y-Weight Cotton

SIZE (D x W x H)	GRIT	MAX. RPM	STD. PKG.	PART #
10 x 1 x 1-3/4	40	4,000	4	088341 2223
	80	4,000	4	088341 24003
	120	4,000	4	088341 24005
	180	4,000	4	088341 24007
	240	4,000	4	088341 22889
10 x 1-1/2 x 1-3/4	320	4,000	4	088341 24009
	60	4,000	4	088341 24022
	80	4,000	4	088341 24023
10 x 2 x 1-3/4	180	4,000	4	088341 24027
	60	4,000	2	088341 24042
	80	4,000	2	088341 24043
10 x 3 x 1-3/4	120	4,000	2	088341 24045
	180	4,000	2	088341 24047
	60	4,000	2	088341 24077
12 x 1 x 1-3/4	80	4,000	2	088341 22316
	120	4,000	2	088341 22311
	180	4,000	2	088341 22132
12 x 1 x 1-3/4	60	3,000	4	088341 24085
	80	3,000	4	088341 22349
	120	3,000	4	088341 22311
	180	3,000	4	088341 22315
12 x 2 x 1-3/4	40	3,000	2	088341 22248
	50	3,000	2	088341 22249
	60	3,000	2	088341 22250
	120	3,000	2	088341 22269
	150	3,000	2	088341 22270
	180	3,000	2	088341 22271
	240	3,000	2	088341 22273
320	3,000	2	088341 22275	
12 x 4 x 1-3/4	180	2,400	1	088341 20017

TIER: **GOOD**
TRADENAME: **R369**
ABRASIVE: Premium Aluminum Oxide
BACKING: Y-Weight Cotton

SIZE (D x W x H)	GRIT	MAX. RPM	STD. PKG.	PART #
14 x 1 x 1-3/4	60	2,400	1	088341 20020
	120	2,400	1	088341 20022
14 x 2 x 1-3/4	60	2,400	1	088341 20028
	80	2,400	1	088341 23215
	120	2,400	1	088341 22907
14 x 3 x 1-3/4	240	2,400	1	088341 20032
	120	2,400	1	088341 20035
	240	2,000	1	088341 20041
16 x 1 x 1-3/4	80	2,400	1	088341 20043
	120	2,400	1	088341 20044
	240	2,400	1	088341 20046
16 x 2 x 1-3/4	60	2,400	1	088341 20047
	120	2,400	1	088341 20050
	180	2,400	1	088341 20051
16 x 3 x 1-3/4	240	2,400	1	088341 20052
	120	2,400	1	088341 20055

Some part numbers are non-stock; contact your Norton representative for status, order quantities and lead-times.

For flap wheel with arbor hole adapters and bushings, see the end of this section.

Adapter and Bushings for Flap Wheels with Arbor Holes

WHEEL DIAMETER	ADAPTERS	PART #
Shank Adapters		
3-1/2	1/4 Shank	088341 25001
3-1/2	3/8 Shank	088341 25007 NS
4-8	1/4 Shank	088341 25003
Threaded Mounting Adapters		
4-8	5/8-11 Thread	088341 25027
Reducing Bushings		
6-8	1 to 3/8	088341 25016 NS
	1 to 1/2	088341 25017
	1 to 5/8	088341 25018 NS
	1 to 3/4	088341 25019 NS
	1 to 7/8	088341 25020 NS
10-16	1 to 5/8	088341 22069 NS




Standard packages = 1 adapter, 1 pair of bushings
 NS Non-stock. Contact your Norton representative for current order quantities and lead-times.
 For additional aluminum reducing bushings see non-woven convolute wheel section



Adapters for 1/4"-20 Thread Mini and Arbor Hole Flap Wheels

MODEL #	DESCRIPTION	PART #
Adapters		
ADAPT C	Fits 3 x 2 x 3/8 arbor flap wheel	088341 37009 NS
MA-100	Fits A.H. Mini Wheel	088341 37007 NS
QC-8	1/8 x 5/8	088341 37002 NS
QC-4	1/4 SK. Dia. x 5/8 SK. L.	088341 37001
QC-44	1/4 x 4	088341 37003
QC-46	1/4 x 6	088341 37004
QC-48	1/4 x 8	088341 37005
QC-T	1/4-20 Thread	088341 37012
QC-T	3/8-24 Thread	088341 37010

Standard package = 1 adapter
 Other thread sizes available for quotation
 NS Non-stock. Contact your Norton representative for current order quantities and lead-times.

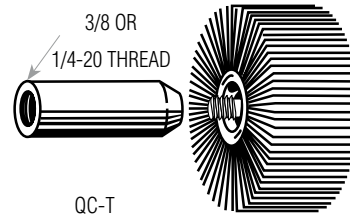



Sand-O-Flex Wheels

With their firm cushioning brushes, Sand-O-Flex's abrasive strips are forced into, around and over corners, hollow and fluted surfaces, and small openings. Pressure is distributed evenly over the surface to prevent loss of detail and the flattening of rounded areas; for sanding metals, woods, plastics, rubber and ceramic.

Sand-O-Flex wheels eliminate the need to hand-sand and are designed to fit most standard equipment. They load quickly and easily by turning the index knob as needed, allowing you to change grit size in minutes. Sand-O-Flex refills are available both scored (for finer, less aggressive work) and unscored. And, with the use of adapters, Sand-O-Flex wheels will fit most electric bench grinders.

Sand-O-Flex Wheel – Model 350-RP

- Diameter: 6-1/2" overall, 4" diameter high-impact plastic body
- 1" wide abrasive strips backed by 8 cushioning brushes
- 1/4" diameter steel shank
- Weight: 9-1/2 oz.
- Maximum operating speed: 2,400 RPM
- Special adapter required for bench grinder use
- Some assembly required

TIER: **GOOD**
TRADENAME: **SAND-O-FLEX**
ABRASIVE: Aluminum Oxide

MODEL #	GRIT	STD. PKG.	PART #
Sand-O-Flex Wheel			
350-RP		1	088341 11051
<i>Comes assembled with 80 grit A/O resin bond scored refill and brushes</i>			
Sand-O-Flex Accessories			
Replacement Brushes for 350-RP; 8 per set		1 set	088341 13003
Resin Bond Refills			
350-RP SCORED	60	10	088341 11052
	80	10	088341 11053
	100	10	088341 12114
	120	10	088341 11054
	180	10	088341 11057
Glue Bond Refills			
350-RP SCORED	80	10	088341 12054
	100	10	088341 12055
	120	10	088341 12056
350-RP UNSCORED	80	10	088341 12044





Non-woven surface finishing flap wheels are an ideal choice for a wide variety of blending and finishing applications common in the metal fabrication, welding and polishing industries. Flap wheels are conformable to intricate shapes and contours. Designed to deliver a consistent finish with a uniform rate of cut, flap wheels wear away continually exposing fresh abrasives.

There are two types of non woven flap wheels: non-woven only abrasive flaps where finishing is the primary application, and interleaf with alternating cloth and non-woven abrasive flaps (less conformable, more aggressive) for stock removal and finishing. Interleaf flap wheels must always be run in the direction indicated by the arrow.


Applications: Used for a wide range of metal fabrication and welding applications including blending, deburring, cleaning, finishing, and polishing

Size Range: Flap wheels with mounted steel shanks: 2" – 4" diameter
Flap wheels with arbor holes: 3" – 12" diameter


Grit Range: 60 – 320

Abrasive Grain: Aluminum Oxide

Machine Used:

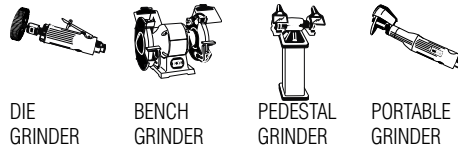

Application/Grit Recommendation Guide

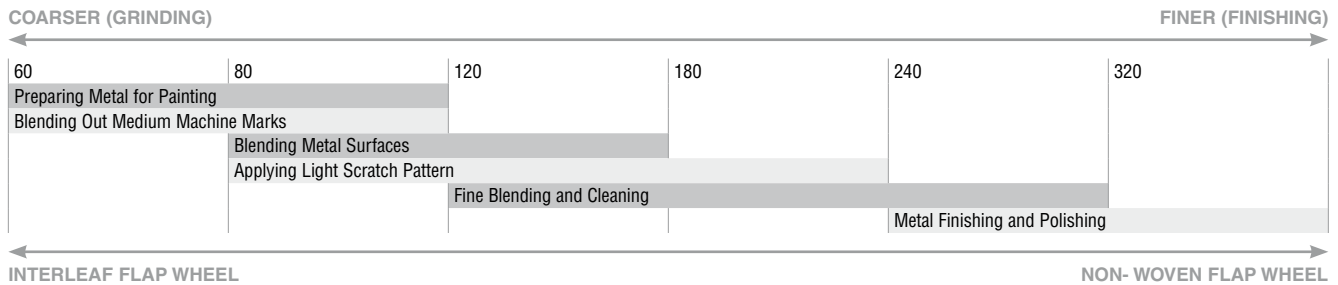

Good choice for fine grit cleaning and blending and finishing applications



INTERLEAF

- Alternating cloth and non-woven flaps make interleaf wheels less conforming and more aggressive than non-woven flap wheels, but less aggressive than all-cloth flap wheels
- Premium aluminum oxide grain with durable resin bond and web that wears away continually exposing fresh abrasives
- Tough yet conformable to intricate shapes and contours without changing the workpiece dimension

Good choice for fine grit light cleaning and finishing




NON-WOVEN

- Premium aluminum oxide grain with durable resin bond and web that wears away continually exposing fresh abrasives
- Tough yet conformable to intricate shapes and contours without changing the workpiece dimension
- Designed with a steel shank as an integral part of the wheel or with an arbor hole

1/4" Mounted Steel Shanks

Wheels are designed with a 1/4" steel shank as an integral part of each wheel. These shanks run through the wheel creating better balance, a reduction of chatter, and reduced operator fatigue. They also permit quick changes on air tools when using other abrasive products.



SIZE (D x W x SK.)	ABRASIVE	COATED GRIT	NON-WOVEN GRIT	MAX. RPM	STD. PKG.	TIER: GOOD GOOD	
						TRADENAME: INTERLEAF	NON-WOVEN
						PART #	PART #
2 x 1 x 1/4	A/O	60	Very Fine	12,000	10	088341 38122	
	A/O	80	Very Fine	12,000	10	088341 38123	
	A/O		Medium	12,000	20		662611 89992*
	A/O	120	Very Fine	12,000	10	088341 44457	
	A/O	180	Very Fine	12,000	10	088341 44458	
2 x 1-1/2 x 1/4	A/O	320	Very Fine	12,000	10	088341 44459	699573 99202
	A/O	80	Very Fine	12,000	10	088341 38125	
	A/O	120	Very Fine	12,000	10	088341 38126	
3 x 1 x 1/4	A/O	320	Very Fine	12,000	10	088341 38128	
	A/O	60	Very Fine	12,000	10	088341 38129	
	A/O	80	Very Fine	12,000	10	088341 38130	
3 x 1 x 1/4	A/O		Medium	12,000	10		088341 31921
	A/O	120	Very Fine	12,000	10	088341 38118	
	A/O	180	Fine	12,000	10	088341 38120	
	A/O	320	Very Fine	12,000	10	088341 38119	
	A/O	120	Very Fine	8,000	10	088341 44460	
3 x 2 x 1/4	A/O	180	Very Fine	8,000	10	088341 44461	
	A/O	80	Very Fine	12,000	10	088341 21115	
4 x 2 x 1/4	A/O	120	Very Fine	12,000	10	088341 20458	

*Standard package quantity = 20

Arbor Hole Mounts

For use on larger portable and fixed-base tools where the wheel must fit on an existing arbor.



SIZE (D x W x SK.)	ABRASIVE	COATED GRIT	NON-WOVEN GRIT	MAX. RPM	STD. PKG.	TIER: GOOD GOOD	
						TRADENAME: INTERLEAF	NON-WOVEN
						PART #	PART #
3 x 2 x 3/8	A/O	60	Very Fine	12,000	10	088341 39000	
	A/O	120	Very Fine	12,000	10	088341 39001	
	A/O	240	Very Fine	12,000	10	088341 39028	
	A/O	320	Very Fine	12,000	10	088341 39024	
4 x 2 x 5/8	A/O	60	Very Fine	12,000	10	088341 26025	
	A/O	240	Very Fine	12,000	10	088341 26014	
	A/O	320	Very Fine	12,000	10	088341 26027	
6 x 1 x 1	A/O	120	Very Fine	6,000	10	088341 26006	
	A/O	240	Very Fine	6,000	10	088341 26030	
6 x 1 x 2	S/C	-	Very Fine	3,000	4		055395 12658
6 x 2 x 1	A/O	80	Very Fine	6,000	10	088341 26009	
	A/O	180	Very Fine	6,000	10	088341 26018	
6 x 3 x 1	A/O	80	Very Fine	6,000	6	088341 26055	
8 x 2 x 3	A/O	-	Medium	2,500	2		055395 12677
12 x 2 x 5	A/O	-	High Strength	1,900	1		055395 62637

Refer to Non-Woven
Convolute Wheel
section for Flap Wheel
Reducing Bushings.

Non-Woven High Strength Discs

Applications include rust/oxide or coating removal, pipe ID and OD polishing, casting cleaning, highlighting (antiquing), contaminant removal, removal of handling marks, gasket removal, cleaning and blending of surface imperfections, prepping prior to soldering, removal of filling materials, cleaning angles and odd shapes. Will not stretch or shed. Ganging increases versatility. For use on larger portable and fixed-base tools where the wheel must fit on an existing arbor.

Best choice for light deburring and finishing



HIGH STRENGTH DISCS

- Premium aluminum oxide grain; engineered for more demanding applications
- Tough but flexible web resists tearing on burrs and sharp edges; and conforms to intricate shapes and contours without changing the workpiece dimension; can be ganged together and used as a wheel
- Smear-free bond excels at producing light satin finishes

TIER: **BEST**

TRADENAME: **HIGH STRENGTH**

ABRASIVE: Aluminum Oxide

SIZE (D x H)	GRIT	MAX. RPM	STD. PKG.	PART #
6 x 1/4	VF	4,000	70	662610 07628
6 x 1/2	M	4,000	70	662610 05073
	VF	4,000	70	662610 04980
8 x 1/2	M	3,000	50	662610 05491
	VF	3,000	50	662610 04506
12 x 1-1/4	VF	1,900	25	662610 08723



FITS HOLE	FOR DISC WIDTH	FOR DISC DIAMETER	SHANK DIAMETER	OVERALL LENGTH	WASHER DIAMETER	STD. PKG.	PART #
Mandrel Assemblies For Using Discs On Edge							
1/4"	1/2" (Standard)	up to 6"	1/4"	2-1/2"	1-1/2"	1	662610 09502
1/2"	1/2" (Standard)	Up to 8"	1/4"	3-1/8"	2-1/4"	1	662610 59420



Flaps of abrasive cloth are stacked, inserted into a holder, and then attached to a mandrel. The flaps are designed to break down during use and reveal the next layer of abrasive.

To create an interleaf bore polisher, cloth flaps are mixed with non-woven flaps.

Applications:

For deburring, sizing, cleaning and polishing the interior diameters of cylinders, tubes and hydraulic fittings. Flaps adjust automatically to inside diameter, polishing the entire surface area with each pass.

Bore polishers are self-centering, so they apply equal pressure to full wall of inside diameter. Spring action design gives faster inside diameter cleaning, deburring and polishing to cylinders, deep bores and tubes.

Interleafed bore polishers are designed to polish and finish in one easy application. The abrasive flaps cut, while the non-woven flaps apply a fine finish.

Grit Range:

60 - 240

Abrasive Grain:

Aluminum Oxide

Application-to-Product Shape Recommendation Guide

Shape	Application
Solid Flaps B-3 Series	 <ul style="list-style-type: none"> For 5/8" to 1" interior diameter bores 3 abrasive packs 1-1/2" wide, bonded to hub Use with QC-5 mandrel Part # 08834154182
Solid Flaps B-4 Series	 <ul style="list-style-type: none"> For 1" to 4" interior diameter bores 4 abrasive packs 1-1/2" wide, bonded to hub Use with BPM-4 mandrel Part # 08834154183
Solid Flaps B-8 Series	 <ul style="list-style-type: none"> For 2" to 5-7/8" interior diameter bores 8 abrasive packs 1-1/2" wide, bonded to hub Use with BPM-8 mandrel Part # 08834154184
Scored Flaps	Available upon request as made-to-order products.
Interleaf	 <p>Cloth flaps are mixed with non-woven flaps. Interleaf bore polishers do double duty. Designed to polish and finish in one easy application, they are the ideal choice when close tolerances must be maintained, while giving an interior a polished finish.</p>

Application/Grit Recommendation Guide

COARSER (MATERIAL REMOVAL) ←					→ FINER (FINISHING)				
60	80	120	180	240	60	80	120	180	240
Blending Out Medium Machine Marks									
Sizing Cylinders									
Deburring Cylinders									
Blending Metal Surfaces									
Cleaning Cylinders									
Applying Light Scratch Pattern									
					Fine Blending and Cleaning				
					Metal Finishing and Polishing				
← SOLID FLAP					INTERLEAF →				
					SCORED				

Aluminum Oxide Bore Polishers

TIER: **GOOD**
TRADENAME: **R369**
ABRASIVE: Aluminum Oxide
BACKING: Y-weight Cotton/Poly

DESCRIPTION	GRIT	MAX. RPM	STD. PKG.	PART #
Bore Polishers – Solid Flap B-3 and B-4 Series				
B-305	60	25,000	10	088341 54190
Fits ID 5/8 to 1	80	25,000	10	088341 54191
	120	25,000	10	088341 54193
	180	25,000	10	088341 54195
	240	25,000	10	088341 54197
B-405	60	22,000	10	088341 54091
Fits ID 1 to 1-1/2	80	22,000	10	088341 54092
	120	22,000	10	088341 54093
	180	22,000	10	088341 54094
B-410	60	20,000	10	088341 54100
Fits ID 1-1/2 to 2	80	20,000	10	088341 54101
	120	20,000	10	088341 54102
	180	20,000	10	088341 54103
	240	20,000	10	088341 54104
B-415	60	16,000	10	088341 54109
Fits ID 2-1/8 to 2-1/2	80	16,000	10	088341 54110
	120	16,000	10	088341 54111
	180	16,000	10	088341 54112
B-420	60	15,000	10	088341 54118
Fits ID 2-1/2 to 3	80	15,000	10	088341 54119
	120	15,000	10	088341 54120
	180	15,000	10	088341 54121
	240	15,000	10	088341 54122
B-425	60	10,000	10	088341 54127
Fits ID 3-1/8 to 4	80	10,000	10	088341 54128
	120	10,000	10	088341 54129
	180	10,000	10	088341 54130

NS Non-stock. Contact your Norton representative for current order quantities and lead-times.


TIER: **GOOD**
TRADENAME: **R369**
ABRASIVE: Aluminum Oxide
BACKING: Y-weight Cotton/Poly

DESCRIPTION	GRIT	MAX. RPM	STD. PKG.	PART #
Bore Polishers – Solid Flap B-8 Series				
B-810	60	16,000	10	088341 54136
Fits ID 2 to 2-1/2	80	16,000	10	088341 54137
	120	16,000	10	088341 54138
	180	16,000	10	088341 54139 NS
	240	16,000	10	088341 54140 NS
	240	16,000	10	088341 54145
B-815	60	15,000	10	088341 54145
Fits ID 2-5/8 to 3	80	15,000	10	088341 54146
	120	15,000	10	088341 54147
	180	15,000	10	088341 54148 NS
	240	15,000	10	088341 54149 NS
B-820	60	10,000	10	088341 54154
Fits ID 3-1/8 to 4	80	10,000	10	088341 54155
	120	10,000	10	088341 54156
	180	10,000	10	088341 54157
	240	10,000	10	088341 54158 NS
	240	10,000	10	088341 54163
B-825	60	8,000	10	088341 54163
Fits ID 4-1/4 to 5-1/4	80	8,000	10	088341 54164
	120	8,000	10	088341 54165
	180	8,000	10	088341 54166
	240	8,000	10	088341 54167
	240	8,000	10	088341 54172
B-830	60	8,000	10	088341 54172
Fits ID 5-1/4 to 5-7/8	80	8,000	10	088341 54173
	120	8,000	10	088341 54174
	180	8,000	10	088341 54175
	240	8,000	10	088341 54176

Bore Polishers – Scored Flaps
Available on request as made-to-order products


Bore Polishers – Interleaf				
B-405 Interleaf	80	22,000	10	088341 50271
Fits ID 1 to 1-1/2	180	22,000	10	088341 50273

Mandrels for Bore Polishers

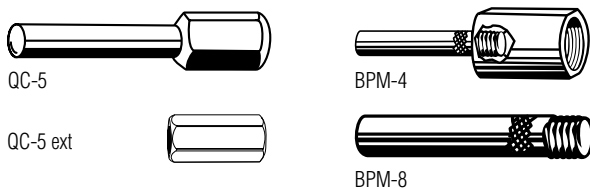

DESCRIPTION	MODEL NO.	THREAD	STD. PKG.	PART #
For B-3 Series	QC-5	5/16-18	1	088341 54182
For B-4 Series	BPM-4	1/2-20	1	088341 54183
For B-8 Series	BPM-8	1/4-20	1	088341 54184

Extension Mandrels for Bore Polishers



DIAMETER x LENGTH	MODEL NO.	THREAD	STD. PKG.	PART #
1/4 x 4	EM-144	1/4-20	1	088341 54185
1/4 x 6	EM-146	1/4-20	1	088341 54186
1/4 x 8	EM-148	1/4-20	1	088341 54187

To extend a B-4 series bore polisher, attach the adapter piece of the BPM-4 mandrel to the bore polisher, then attach the desired length extension mandrel above to the BPM-4 adapter piece. To extend a B-8 series bore polisher, attach the desired length extension mandrel above directly to the bore polisher.

Bore Polisher Test Kit “BP”

- Part # 088341**54181**
- Contains ten bore polishers and two mini 1/4"-20 thread flap wheels in assorted sizes and grits for finishing 1" to 5" interior diameters, and mandrel for 1/4" chuck.





FlexDrum abrasive segments sweep away flaws. Their extreme longevity and perfect balance make them well-suited for automatic as well as offhand use. Hubs and abrasive segments can be combined to fit your job perfectly.

Applications

Blending out parting lines on castings, smoothing out pre-ground welded areas, removing burrs and work flaws, graining stainless, brush-finishing and satin-finishing aluminum, removing rust, deflashing molded plastic and rubber parts, and preparing surfaces for painting or plating.

Size Range:

Diameter of loaded FlexDrum: 8" – 18"
Width of FlexDrum: 1-1/2" – 12"
Custom die-cut segments as well as extra wide segments, in widths up to 144" are also available as made-to-order products.

Grit Range:

50 – 240

Bond:

Resin or glue


Backing:

Heavyweight cotton

Abrasive Grain:

Premium Aluminum Oxide

Shape/Application Recommendation Guide




Plain Segment

- For flat or mildly contoured surfaces




1/4 Scored (SC) Segment

- Great for complex parts
- Provides a fine finish



1/2 Slash (SL) Segment

- Great for mild and moderate contours



Interleaf Segment

- Plain cloth segments are mixed with non-woven segments. Interleaf FlexDrums do double duty. Designed to polish and finish in one easy application,
- Available upon request as made-to-order product

Loading Flex Drum Hubs



FlexDrum hub end plate removes for easy loading of abrasive segments.



Custom profiled segments eliminate break-in resulting in maximum productivity. Contact your sales representative for more information.

Plain Segments – for flat or mildly curved surfaces

TIER: GOOD									
TRADENAME: R369									
ABRASIVE: A/O									
BACKING: Y-weight Cotton									
GRIT: 50									
WIDTH	TRIM LENGTH*	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	PART #
1-1/2	2-3/4	12	088341 55002	088341 55003	088341 55004		088341 55006	088341 55008	088341 55010
2	2-3/4	12	088341 55013	088341 55014	088341 55015	088341 55016		088341 55019	
2	4	20		088341 55313	088341 55314	088341 55315		088341 55318	
2	5	20		088341 55568	088341 55569				
3	2-3/4	12		088341 55026	088341 55027		088341 55029	088341 55031	
3	4	20			088341 55326			088341 55330	
3	5	20		088341 55579			088341 55582	088341 55584	
4	2-3/4	12	088341 55036				088341 55040		
4	4	20	088341 55336	088341 55337	088341 55338		088341 55340		
4	5	20		088341 55590					

All FlexDrum segments are non-stock; contact your Norton representative for current order quantities and lead-times.

1/4" Scored Segments – for complex parts and providing a fine finish

TIER: GOOD									
TRADENAME: R369									
ABRASIVE: A/O									
BACKING: Y-weight Cotton									
GRIT: 50									
WIDTH	TRIM LTH.*	SCORE	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
1-1/2	2-3/4	1/4	12		088341 55083	088341 55084	088341 55085	088341 55086	088341 55088
2	2-3/4	1/4	12	088341 55094	088341 55095	088341 55096	088341 55097	088341 55098	088341 55100
3	2-3/4	1/4	12		088341 55107	088341 55108	088341 55109		088341 55112
4	2-3/4	1/4	12	088341 55117	088341 55118	088341 55119		088341 55121	088341 55123

All FlexDrum segments are non-stock; contact your Norton representative for current order quantities and lead-times.

1/2" Slashed Segments – for mild and moderate contours

TIER: GOOD									
TRADENAME: R369									
ABRASIVE: A/O									
BACKING: Y-weight Cotton									
GRIT: 60									
WIDTH	TRIM LTH.*	SLASH	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
2	4	1/2	20	088341 55420	088341 55421	088341 55423	088341 55425	088341 55427	
2	5	1/2	20			088341 55639			
3	4	1/2	20		088341 55432				
4	4	1/2	20		088341 55445	088341 55447	088341 55449	088341 55451	
4	5	1/2	20		088341 55659				

All FlexDrum segments are non-stock; contact your Norton representative for current order quantities and lead-times.

*Trim Length is the actual usable length of segment when loaded

TECH TIP

FlexDrums can be used for polishing large IDs. Just load half the segments with a wheel diameter 1/2" to 1" larger than the ID of your workpiece.

Hub Units

- FlexDrum hubs are perfectly balanced, last indefinitely and are available in widths from 1-1/2" to 12"
- Extra wide widths are available up to 144" as made-to-order products

MODEL NO.	D x W	ARBOR HOLE/THREAD	SEGMENTS PER HUB	PART #
FlexDrum Hub Units				
81.5-B	2-3/8 x 1-1/2	1 AH	12	088341 40065
82-B	2-3/8 x 2	1 AH	12	088341 41049
		5/8-11 THD	12	088341 40048
83-B	2-3/8 x 3	1 AH	12	088341 41018
		5/8-11 THD	12	088341 40034
84-B	2-3/8 x 4	1 AH	12	088341 40066
		5/8-11 THD	12	088341 40049
122-B	4 x 2	1-1/4 AH	20	088341 40050
123-B	4 x 3	1-1/4 AH	20	088341 40051
124-B	4 x 4	1-1/4 AH	20	088341 40061
142-B	6 x 2	1-1/4 AH	30	088341 40062
143-B	6 x 3	1-1/4 AH	30	69957 99208
144-B	6 x 4	1-1/4 AH	30	088341 41060
840-B2	8 x 2	1-1/4 AH	40	636425 92550
840-B4	8 x 4	1-1/4 AH	40	636425 92548

All FlexDrum hub units are non-stock; contact your Norton representative for current order quantities and lead-times.



**2-3/8" DIAMETER HUB
WITH 1" ARBOR HOLE**

8" WHEEL WHEN LOADED



**2-3/8" DIAMETER HUB ALSO
AVAILABLE WITH 5/8"-11 ARBOR**

8" WHEEL WHEN LOADED



4" DIAMETER HUB

12" WHEEL WHEN LOADED



6" DIAMETER HUB

14" OR 16" WHEEL WHEN LOADED



8" DIAMETER HUB

16" OR 18" WHEEL WHEN LOADED

FlexDrum Reference Charts

FlexDrums can be mounted on any type of arbor.

Weights

DIAMETER	WEIGHT
Weight of Hubs*	
4" Diameter Hub	1.5 lbs./inch of width
6" Diameter Hub	2 lbs./inch of width
8" Diameter Hub	2.5 lbs./inch of width
Weight of Hubs with Segments*	
4" Diameter Hub	3.4 - 4 lbs./inch of width
6" Diameter Hub	5 - 5.5 lbs./inch of width
8" Diameter Hub	6.75 - 7 lbs./inch of width

*Approximate values. Actual weight will depend on abrasive type and overall width of hub.

FlexDrum Maximum RPM

WHEEL DIAMETER	MAXIMUM RPM
8	4,500
12	3,000
14	2,500
16	2,200
18	2,000

Recommended H.P. Required

HUB	H.P.
4" Diameter Hub	1/2 H.P. /inch of width
6" Diameter Hub	3/4 H.P./inch of width
8" Diameter Hub	1 H.P./inch of width

Recommended Surface Feet per Minute for using FlexDrum Wheels on Various Materials

MATERIAL	SFPM
Mild Steel	5,000
Stainless Steel	6,500
Alloy Steel	5,000
Titanium	3,500
Hard Aluminum	5,500
Nonferrous	5,000
Rubber	4,500
Hardwood (edge breaking)	4,000
Softwood	3,500
Thermoplastic	3,000

SPEC CHECK



FlexDrum Hub Specification Chart

MODEL NO.	82-B	121-B	141-B	840-B
Diameter of Finished Wheel	8	12	14 or 16	16 or 18
Diameter of Hub Alone	2-3/8	4	6	8
Arbor Hole	1 or 5/8-11 thd	3/4 to 1-3/4	1 to 3-1/2	1-1/4 to 5
Segments Per Hub	12	20	30	40

How to Determine Diameter of Finished FlexDrums

HUB DIAMETER	TRIM LENGTH (X2)	FINISHED WHEEL
2-3/8	2-3/4	8
4	4	12
4	5	14
6	4	14
6	5	16
8	4	16
8	5	18

TECH TIP

For surface feet per minute, use the following calculation: SFPM=.262 x DIA (in inches) x RPM.



Made from non-woven synthetic fiber mesh, which is impregnated with abrasives and bound with resins, non-woven wheels are designed to create desired surface finish where little or no stock removal is required. The industry's broadest offering is available for light stock removal, deburring, blending, finishing and polishing. Non-woven wheels have an open mesh construction that is waterproof, washable, conformable and non-loading.

Applications:

Cleaning and removing imperfections on metal surfaces, cleaning built-up residue, deburring or finishing a variety of surfaces, blending weld seams or creating decorative finishes. Non-woven surface finishing products have excellent versatility.


Abrasive Grain:

Ceramic Alumina, Engineered Aluminum Oxide, Aluminum Oxide, Silicon Carbide

Grit Range:

Extra Coarse (XC), Coarse (C), Medium (M), Fine (F)

Machine Used:

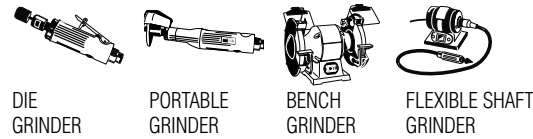

Application/Grit Recommendation Guide

	← MOST AGGRESSIVE		← LEAST AGGRESSIVE →
NORTON	Rapid Strip Wheels	Rapid Blend Unified Wheels	Non-Woven / Interleaf Flap Wheels
Scale Removal	Best Choice		
Painting/Coating Removal	Best Choice		
Stock Removal		Best Choice	
Heavy Deburring		Best Choice	
Polishing			Second Choice
Buffing			Best Choice

Surface Finish Variables

Changes in any one of many factors can affect the surface finish on the workpiece. This chart shows the effect on surface finish by changes in single factors of product specifications. Arrows have been used to signify the trend direction. The arrow length does not signify that the effect of each factor is equal.

Variable Factor	Rough Finish High RMS Reading	Smooth Surface Lower RMS Reading
1. Wheel Speed	Slow ←	→ Fast
2. Feed Speed	Faster (Long Scratch) ←	→ Slower (Short Scratch)
3. Oscillation	No Oscillation ←	→ Oscillation
4. Lubricants	Dry ←	→ Water ←
		→ Soluble Oil ←
		→ Straight Oil
		← Compounds →

Non-Woven Marking System

ABRASIVE	SILICON CARBIDE	ALUMINUM OXIDE		
	← SHARPER, FINER/BRIGHTER SCRATCH PATTERN	→ MORE DURABLE, LONGER LASTING, POLISHED FINISH		
GRIT SIZE	XC (50)	C (60-80)	M (100-150)	F (180-220)
	← FASTER, AGGRESSIVE CUT, ROUGHER FINISH	→ REDUCED CUT RATE, FINER FINISH		
DENSITY	2	9		
	← SOFT, OPEN, CONFORMABLE, LESS BURNING/LOADING	→ HARDER, MORE DURABLE, FASTER CUTTING, BETTER FINISH		

Cross Reference Guide

	STRIPPING	HEAVY/LIGHT DEBURRING	LIGHT DEBURRING/BLENDING/POLISHING	CLEANING/FINISHING	
	BEST	BETTER	BEST	BETTER	GOOD
NORTON	Blaze Rapid Strip	Rapid Strip	Vortex Rapid Blend	Rapid Blend NEX	Non-Woven / Interleaf Flap Wheels
3M	Clean and Strip XT PRO, Clean and Strip XT PRO Extra Cut	Clean Strip	Cut & Polish Unitized, Deburr and Finish PRO	EXL Unitized	Finishing Flap Brush
Standard		Britestrip	800 & 900 Series	500 - 700 Series	Buff & Blend Flap Brush

Rapid Strip Unified Wheels


Best choice for removing rust, scale and paint/coatings on a variety of substrates, such as wood, metal and plastics



BLAZE RAPID STRIP CERAMIC ALUMINA

- Norton Blaze ceramic alumina grain provides 2X cut rate, 2X life over silicon carbide products
- Advanced resin bond does not shed on rust-encrusted pieces, and prevents gouging and rework; does not snag when used for deburring
- Leave a thoroughly cleaned surface that ensures excellent adhesion for subsequent processes such as coating, painting and soldering

Better choice for removing coatings on a variety of substrates such as wood metal and plastics

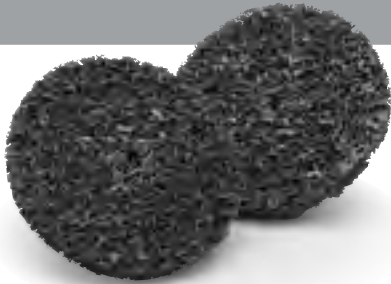

RAPID STRIP SILICON CARBIDE

- Faster cutting, sharp, extra coarse silicon carbide abrasive provides a unique combination of aggressive performance, long life, and improved finish
- Advanced resin bond prevents shedding on rust-encrusted pieces and gouging and rework; does not snag when used for deburring
- Leaves a thoroughly clean surface that ensures excellent adhesion in subsequent processes such as coating, painting and soldering



TIER:	BEST	BETTER
TRADENAME:	BLAZE RAPID STRIP	RAPID STRIP
ABRASIVE:	Ceramic Alumina	Silicon Carbide
GRIT:	Extra Coarse	Extra Coarse

SIZE (D x H)	MAX. RPM	STD. PKG.	PART #	
Arbor Hole				
4 x 1/4	8,000	25	662610 09324	662610 08008
4 x 1/2	8,000	25	666233 04856	662610 07916
6 x 1/4	4,000	15	666233 40171	662610 07988
6 x 1/2	4,000	15	662610 99378	662610 08051



FITS HOLE	FOR DISC WIDTH	FOR DISC DIAMETER	SHANK DIAMETER	OVERALL LENGTH	WASHER DIAMETER	STD. PKG.	PART #
Mandrel Assemblies For Non-Woven Unified Wheels							
1/4"	1/2" (Standard)	up to 6"	1/4"	2-1/2"	1-1/2"	1	662610 09502
1/2"	1/2" (Standard)	Up to 8"	1/4"	3-1/8"	2-1/4"	1	662610 59420

Rapid Blend Unified Wheels *continued*

Designed for maintenance operations needing an efficient and cost-effective method of deburring, polishing, cleaning or finishing metals and composites. Easily preformed for use on a wide variety of shapes/contours. Hold shape well; less wheel dressing. Non-metallic so no contamination of workpiece. Uniform construction maintains part tolerance; prevents cutting or gouging.



Best choice for light weld bead and weld spatter removal, heavy deburring and finishing applications

VORTEX RAPID BLEND ALUMINUM OXIDE

- High-performance, medium grit, engineered aluminum oxide grain and improved resin bond system provide aggressive, fast, stock removal, reduced cycle times, and excellent part quality
- Thick nylon web delivers 2X longer life and faster finishing – with minimal shedding vs competitive wheels
- Controlled porosity ensures cool cutting and improved cut rate

TIER: **BEST**
TRADENAME: **VORTEX RAPID BLEND**
ABRASIVE: Aluminum Oxide

SIZE (D x T x H)	GRIT SIZE	STD. PKG.	MAX. RPM	3 DENSITY PART #	MAX. RPM	5 DENSITY PART #	MAX. RPM	7 DENSITY PART #	MAX. RPM	9 DENSITY PART #
2 x 1/8 x 1/8	M	60			22,000	662544 25657	20,000	662544 10849		
2 x 1/8 x 1/4	M	60					22,000	66261 191446		
2 x 1/4 x 1/4	M	60	18,000	662544 28456	22,000	662544 33504	22,000	662610 80270		
2 x 1 x 1/4	M	15					22,000	662610 80269		
3 x 1/8 x 1/4	M	40			18,000	662610 93448	18,000	662611 91445		
3 x 1/8 x 3/8	M	40			18,000	662544 33503	18,000	662544 01131		
3 x 1/4 x 1/4	M	40	12,000	662544 28454	18,000	662544 14832	18,000	662611 99696		
3 x 1/4 x 3/8	M	40	12,000	662544 33505	12,000	662544 33506				
3 x 1/2 x 1/4	M	20			18,000	662544 32925	18,000	662610 80267	18,000	662544 33507
3 x 1/2 x 3/8	M	20			18,000	662544 33508	18,000	662610 80266	18,000	662544 20696



Better choice for light deburring and blending

RAPID BLEND NEX ALUMINUM OXIDE AND SILICON CARBIDE

- Uniform construction provides extra long life and holds shape well for less wheel dressing
- Smear free resin binder formula provides smear-free finishes
- A great option for light deburring and blending applications

TIER: **BETTER**
TRADENAME: **RAPID BLEND NEX**

SIZE (D x T x H)	ABRASIVE	GRIT	MAX. RPM	STD. PKG.	2 DENSITY PART #	3 DENSITY PART #	4 DENSITY PART #	6 DENSITY PART #	8 DENSITY PART #
1 x 1 x 3/16	A/O	C	30,000	50					662610 14915
	A/O	M	18,000	50	662610 14891				
	A/O	M	30,000	50				662610 14908	662610 14924
	S/C	F	18,000	50	662610 14883				
	S/C	F	30,000	50				662610 14904	662610 14923
2 x 1/8 x 1/4	A/O	M	22,000	60					662610 14927
2 x 1/4 x 1/4	A/O	M	18,000	60	662610 14892				
	A/O	M	22,000	60					662610 14926
	A/O	F	22,000	60				662610 14901	
	S/C	F	18,000	60	662610 14884				
2 x 1/2 x 1/4	A/O	M	22,000	30					662610 14925
3 x 1/4 x 1/4	A/O	C	18,000	40					662610 14919
	A/O	M	18,000	40				662610 14909	662610 14930
	S/C	F	12,000	40	662610 14886				
3 x 1/4 x 3/8	A/O	C	18,000	40					662610 14920
	A/O	M	12,000	40	662610 14895				
	A/O	M	18,000	40				662610 14910	662610 14933
	A/O	F	12,000	40			662610 14899		
	S/C	F	12,000	40	662610 14887	662610 16006			
3 x 1/2 x 1/4	A/O	M	12,000	20	662610 14893				
	A/O	M	18,000	20				662610 14928	
	S/C	F	12,000	20	662610 14885				
3 x 1/2 x 3/8	A/O	M	18,000	20					662610 14929
3 x 1 x 3/8	S/C	XC	18,000	10				662610 14914	
6 x 1/2 x 1	A/O	M	7,500	4					662610 14931
6 x 1 x 1	S/C	F	5,000	2	662610 14888				

Assemblies and Mandrels for Unified Wheels

FITS WHEEL CENTER HOLE	FOR WHEEL WIDTH	FOR WHEEL DIAMETER	SHANK DIAMETER	OVERALL LENGTH	WASHER DIAMETER	3M EQUIVALENT	STD. PKG.	PART #
Mandrel Assemblies for Unified Wheels and Discs On Edge								
3/16	1/8 – 1/2	1 – 2	1/4	2	7/16	994	1	662610 09852
1/4 – 5/16	Up to 1/2	Up to 2	1/4	2	5/8	932	1	662610 15146
1/4 – 5/16	Up to 1	Up to 2	1/4	2-1/2	5/8	932	1	662610 59422
	Up to 1	2 – 3	1/4	2-1/2	1	933	1	662610 59421
3/8	Up to 1/2	2 – 4	1/4	2-1/2	1	990	1	662610 09851
1/2	Up to 1	3 – 6	1/4	3-1/8	1-5/8	934	1	662610 09850
FOR CENTER HOLE	USE WITH UNIFIED WHEEL	SHANK DIAMETER	SHANK LENGTH			3M EQUIVALENT	STD. PKG.	PART #
Threaded Mandrel for Unified Wheels								
3/16	1 x 1 x 3/16	1/4"	1-3/4"			948	5	662610 47584



MANDREL ASSEMBLY 662610**59421**



THREADED MANDREL 662610**47584**



MANDREL ASSEMBLY 662610**59422**






Used in a multitude of operations in almost every industry and on a variety of machines, mounted points are small grinding wheels permanently fastened to its own spindle. These vitrified bond mounted points are available in a wide range of shapes.

- Industries:**
- Aerospace
 - Tool and Die
 - Construction
 - Metal Fabrication
 - Automotive
- Cutlery
 - Mold Shops
 - Stainless Steel Equipment
 - Foundries

- Abrasive Grain:** Aluminum Oxide
Shape Availability: A, B, and W
Machine Used:



DIE AND
PENCIL
GRINDER



HORIZONTAL/
STRAIGHT SHAFT
PORTABLE GRINDER




Measurement Guide

Description of Overhang

Overhang is the distance between the grinder chuck and the abrasive on the spindle. The larger the overhang, the lower the maximum safe operating speed.

Size

Measured by diameter (D) x thickness (T)

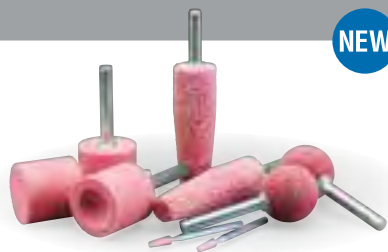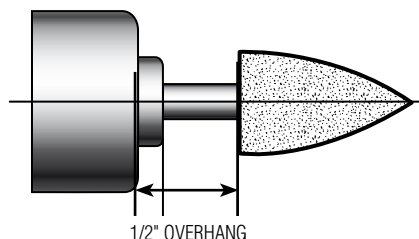

NEW




Better medium grit option for blending and deburring

PINK ALUMINUM OXIDE – VITRIFIED BOND

- Sharp versatile 86A aluminum oxide grain is free cutting and resists burn
- Excellent form holding compared to more friable white aluminum oxides
- Medium grit for blending and deburring

TIER: **BETTER**
TRADENAME: **PINK**
ABRASIVE: 86A Aluminum Oxide

SHAPE	SIZE (D x T)	SPINDLE DIA. †	MAX. RPM*	MIN./STD. PKG.	SPEC	PART #
Vitrified Bond Mounted Points – A Shapes						
A1	3/4 x 2-1/2	1/4	19,800	5/25	86A80-S	690786 45335
A3	1 x 2-3/4	1/4	16,100	5/25	86A80-S	690786 45333
A5	3/4 x 1-1/8	1/4	45,000	5/25	86A80-S	690786 45339
A11	7/8 x 2	1/4	19,860	5/25	86A80-S	690786 45336
A12	11/16 x 1-1/4	1/4	48,000	5/25	86A80-S	690786 45344
A25	1" Ball	1/4	35,620	5/25	86A80-S	690786 45341
A38	1 x 1	1/4	34,500	5/25	86A80-S	690786 45345
Vitrified Bond Mounted Points – B Shapes						
B52	3/8 x 3/4	1/8	45,370	5/25	86A80-S	690786 45334
B53	5/16 x 5/8	1/8	60,000	5/25	86A80-S	690786 45340
B81	3/4 x 3/16	1/8	50,930	5/25	86A80-S	690786 45347
B97	1/8 x 3/8	1/8	105,000	5/25	86A80-S	690786 45337
B121	1/2" Ball	1/8	45,370	5/25	86A80-S	690786 45338
B122	3/8" Ball	1/8	61,650	5/25	86A80-S	690786 45360
B135	1/4 x 1/2	1/8	60,000	5/25	86A80-S	690786 45342
Vitrified Bond Mounted Points – W Shapes						
W163	1/4 x 1/2	1/8	60,000	5/25	86A80-S	690786 45346
W177	3/8 x 3/4	1/8	33,750	5/25	86A80-S	690786 45355
W185	1/2 x 1/2	1/4	61,500	5/25	86A80-S	690786 45354
W200	3/4 x 1/8	1/8	50,930	5/25	86A80-S	690786 45356
W220	1 x 1	1/4	25,500	5/25	86A80-S	690786 45359
W235	1-1/2 x 1/4	1/4	25,470	5/25	86A80-S	690786 45343

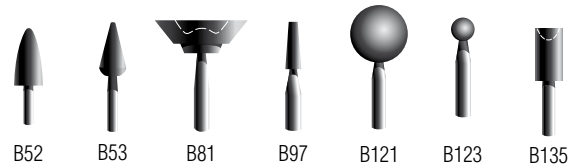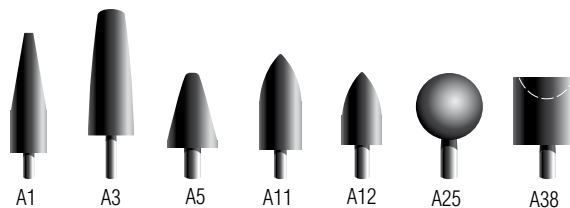

W SHAPES

† Standard spindle size is 1/4" x 1-1/2"

* Maximum RPM valid to 1/2" overhang. See package insert for other overhangs.

Refer to the Precision Offhand/Portable section for the full offering of mounted points.



NEW

Our double-cut style carbide burrs have stronger tooth formulation and numerous cutting edges to outperform other double-cut carbide burrs with better stock removal, granular chip break, and longer life.

Pair up these long-lasting burrs with our pneumatic die grinder to quickly and comfortably accomplish many portable applications on one machine – including jobs using specialties, small diameter flap wheels, and mounted points.

Applications: Deburring, medium-to-light surface cleaning and stock removal, weld removal and prep, chamfering

Shapes: A, B, C, D, E, F, G, H, L, M

Shank Diameter: 1/4"

Machine Used:




DIE GRINDER

Understanding the Product

Burr Dimensions

D1	L1	D2	L2
HEAD DIAMETER	HEAD LENGTH	SHANK DIAMETER	OVERALL BURR LENGTH (OL)

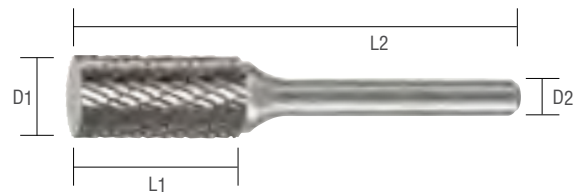

TECH TIP

Each carbide burr is packed individually in a clear, protective plastic case with Norton-blue end-caps. Each burr is marked with the burr head diameter and length for easy identification.

Carbide Burrs Merchandising Display

For those last minute point-of-purchase sales the Carbide Burr merchandiser is an ideal addition to any counter or display shelf. Holds twenty-four burrs in the lockable front display with plenty of storage in the back drawer.



MERCHANDISING DISPLAY


SUB-SHAPE	D	W	H	MIN/STD PKG QTY	PART #
Carbide Burr Merchandising Display	15-1/4"	9-1/4"	16"	1	699573 66825




DISPLAY HEADER CARD



DISPLAY BACKER DECAL

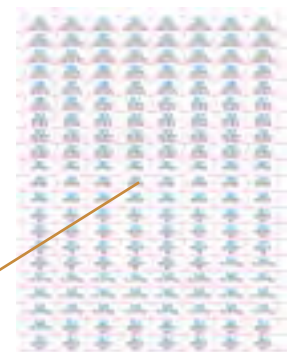

DISPLAY PRODUCT DECALS





Double cut burrs are a popular choice because of their universal cutting style

DOUBLE CUT CARBIDE BURRS

- Hard tungsten carbide burrs with strong tooth formulations and numerous cutting edges for extended life and less changeover downtime versus other cutting tools
- Higher stock removal, and smaller, granular chip-break on hard-to-grind workpieces versus other carbide burrs
- Perform well at higher temperatures and can be used longer than high-speed steel tools – even if your operation generates some heat

Carbide Burrs for Standard Metal Removal



SA Cylindrical without End Cut

The ends of these burrs are flat, with no cutting edges and are used for contour finishing and to get into right-angled corners.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SA1	25,000	1/4"	3/4"	2"	1	699573 08002
SA2	25,000	5/16"	3/4"	2-1/2"	1	699573 08003
SA3	25,000	3/8"	3/4"	2-1/2"	1	699573 08004
SA5	25,000	1/2"	1"	2-3/4"	1	699573 08005
SA5	25,000	1/2"	1"	6"	1	699573 60674



SB Cylindrical with End Cut

The cutting edge at the end of the burr makes these burrs a good choice for contour finishing.


SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SB3	25,000	3/8"	3/4"	2-1/2"	1	699573 08006
SB3	25,000	3/8"	3/4"	6"	1	699573 40156
SB5	25,000	1/2"	1"	2-3/4"	1	699573 08007
SB5	25,000	1/2"	1"	6"	1	699573 40157
SB6	25,000	5/8"	1"	2-3/4"	1	699573 08008



SC Ball-Nosed Cylindrical

Use these round-nosed burrs for smoother operation and better tool control.


SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SC1	25,000	1/4"	3/4"	2"	1	699573 08009
SC2	25,000	5/16"	3/4"	2-1/2"	1	699573 08010
SC3	25,000	3/8"	3/4"	2-1/2"	1	699573 08011
SC3	25,000	3/8"	3/4"	6"	1	699573 60678
SC5	25,000	1/2"	1"	2-3/4"	1	699573 08012
SC5	25,000	1/2"	1"	6"	1	699573 60679
SC5	25,000	1/2"	1"	12"	1	699573 60905
SC6	25,000	5/8"	1"	2-3/4"	1	699573 08013



SD Ball Shape

Use these carbide burrs to create a concave and to hollow out a workpiece.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SD1	25,000	1/4"	1/4"	2"	1	699573 08014
SD2	25,000	5/16"	1/4"	2"	1	699573 08015
SD3	25,000	3/8"	5/16"	2-1/8"	1	699573 08016
SD5	25,000	1/2"	7/16"	2-3/16"	1	699573 08017
SD5	25,000	1/2"	7/16"	6"	1	699573 60686
SD9	25,000	1"	15/16"	2-15/16"	1	699573 60865



SE Oval Shape

Use the oval-shaped carbide burrs for good reach and round head for shaping.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SE3	25,000	3/8"	5/8"	6"	1	699573 40158
SE5	25,000	1/2"	7/8"	6"	1	699573 40159

Carbide Burrs for Standard Metal Removal




SF Ball-Nosed Tree
Designed to round off edges and make concave cuts.

SUB-SHAPE	MAX.-RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SF1	25,000	1/4"	3/4"	2"	1	699573 08018
SF2	25,000	5/16"	3/4"	2-1/2"	1	699573 08019
SF3	25,000	3/8"	3/4"	2-1/2"	1	699573 08020
SF3	25,000	3/8"	3/4"	6"	1	699573 60689
SF5	25,000	1/2"	1"	2-3/4"	1	699573 08021
SF5	25,000	1/2"	1"	6"	1	699573 60691
SF5	25,000	1/2"	1"	12"	1	699573 60904
SF6	25,000	5/8"	1"	2-3/4"	1	699573 08022



SG Tree with Taper
The taper allows access to hard-to-reach areas, such as angled contours.

SUB-SHAPE	MAX.-RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SG1	25,000	1/4"	3/4"	2"	1	699573 08023
SG2	25,000	5/16"	3/4"	2-1/2"	1	699573 08024
SG3	25,000	3/8"	3/4"	2-1/2"	1	699573 08025
SG5	25,000	1/2"	1"	2-3/4"	1	699573 08026
SG5	25,000	1/2"	1"	6"	1	699573 60712
SG6	25,000	5/8"	1"	2-3/4"	1	699573 08027
SG13	25,000	3/4"	1-1/2"	3/4"	1	699573 66821
SG15	25,000	3/4"	1-1/2"	1/4"	1	699573 60886



SH Flame Shape
Great for channel working and shaping due to its long fluted sides and rounded head.

SUB-SHAPE	MAX.-RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SH5	25,000	1/2"	1-1/4"	6"	1	699573 66822



SL Ball-Nosed Cone
This cone shape is excellent for imparting fine finishes.

SUB-SHAPE	MAX.-RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SL2	25,000	5/16"	7/8"	2-3/4"	1	699573 08028
SL3	25,000	3/8"	1 3/16"	2-15/16"	1	699573 08029
SL3	25,000	3/8"	1-1/16"	6"	1	699573 60716
SL4	25,000	1/2"	1 3/16"	3"	1	699573 08030
SL4	25,000	1/2"	1-3/16"	6"	1	699573 60720
SL5	25,000	1/2"	1"	6"	1	699573 40162



SM Pointed Cone
Ideal for rounded edges or reaching difficult, tight areas.

SUB-SHAPE	MAX.-RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SM4	25,000	3/8"	5/8"	6"	1	699573 66824
SM5	25,000	1/2"	7/8"	6"	1	699573 60767

Carbide Burr Kit



SUB-SHAPE	MIN/STD PKG QTY	PART #
Carbide Burr Kit*	1	699573 08060

* Kit Includes one each of: SA5 (699573**08005**), SF3 (699573**08020**), SF5 (699573**08021**), SG5 (699573**08026**), and SL4 (699573**08030**)

Carbide Burrs for Aluminum and Non-Ferrous Materials



SA Cylindrical without End Cut

The ends of these burrs are flat, with no cutting edges and are used for contour finishing and to get into right-angled corners.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SA3 NF	25,000	3/8"	3/4"	2-1/2"	1	699573 40148
SA5 NF	25,000	1/2"	1"	2-3/4"	1	699573 40149



SC Ball-Nosed Cylindrical

Use these round-nosed burrs for smoother operation and better tool control.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SC3 NF	25,000	3/8"	3/4"	2-3/4"	1	699573 40150
SC5 NF	25,000	1/2"	1"	6"	1	699573 60657



SD Ball Shape

Use these carbide burrs to create a concave and to hollow out a workpiece.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SD3 NF	25,000	3/8"	5/16"	2-1/8"	1	699573 66820
SD5 NF	25,000	1/2"	7/16"	2-3/16"	1	699573 40152



SF Ball-Nosed Tree

Designed to round off edges and make concave cuts.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SF1 NF	25,000	1/4"	3/4"	2"	1	699573 40153
SF3 NF	25,000	3/8"	3/4"	2-1/2"	1	699573 40154
SF5 NF	25,000	1/2"	1"	2-3/4"	1	699573 60647



SG Tree with Taper

The taper allows access to hard-to-reach areas, such as angled contours.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SG5 NF	25,000	1/2"	1"	2-3/4"	1	699573 60646



SL Ball-Nosed Cone

This cone shape is excellent for imparting fine finishes.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SL4 NF	25,000	1/2"	1-1/4"	6"	1	699573 60651



SM Pointed Cone

Ideal for rounded edges or reaching difficult, tight areas.

SUB-SHAPE	MAX. RPM	D1	L1	L2	MIN/STD PKG QTY	PART #
SM3 NF	25,000	1/2"	7/8"	2"	1	699573 40155

we've got you covered
**FROM DIY TO TOOLCRIB
TO PRODUCTION FLOOR**

Available in vitrified bond, resin bond, center lap and cotton fiber, and in a variety of shapes our mounted points offer fast, free cutting grinding and finishing capability. Produce sharp edges with the Norton line of sharpening stones - bringing solutions for craftsmen and hobbyists alike for over 190 years.





Resin bond, vitrified bond, center lap, and cotton fiber mounted points are available in a wide range of shapes.

Industries: Aerospace
Tool and Die
Construction
Metal Fabrication
Automotive
Cutlery
Mold Shops
Stainless Steel Equipment
Foundries

Abrasive Grain: Ceramic Alumina, Zirconia Alumina, Zirconia Alumina / Aluminum Oxide Blend, Aluminum Oxide

Shape Availability: A, B, and W

Machine Used:





DIE AND
PENCIL
GRINDER



HORIZONTAL/
STRAIGHT SHAFT
PORTABLE GRINDER

Measurement Guide

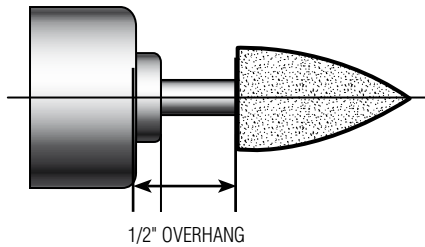


Description of Overhang

Overhang is the distance between the grinder chuck and the abrasive on the spindle. The larger the overhang, the lower the maximum safe operating speed.

Size

Measured by diameter (D) x thickness (T)

Cotton Fiber



Good for blending and polishing

COTTON FIBER ALUMINUM OXIDE - RESIN BOND


- Aluminum oxide grain provides an excellent blend of cut rate and life
- The cotton fibers ensure smooth, chatter-free grinding
- Designed for blending and polishing in one step; use 80 grit for most materials and 120 for polishing and stainless steel applications

TIER: **GOOD**
TRADENAME: **COTTON FIBER**
ABRASIVE: Aluminum Oxide


SHAPE	SIZE (D x T)	SPINDLE DIA. †	MAX. RPM*	MIN./STD. PKG.	SPEC	PART #
Cotton Fiber Mounted Points						
A11	7/8 x 2	1/4	19,860	5/25	A80-HBF3	614636 22664
B52	3/8 x 3/4	1/8	45,370	5/25	A120-HBF3	614636 20242
B121	1/2" Ball	1/8	45,370	5/25	A80-HBF3	614636 22657
W163	1/4 x 1/2	1/8	60,000	5/25	A80-HBF3	614636 22655
			60,000	5/25	A120-HBF3	614636 22656
W176	3/8 x 1/2	1/8	45,370	5/25	A80-HBF3	614636 22654
W185	1/2 x 1/2	1/8	34,500	5/25	A80-HBF3	614636 22649
W187	1/2 x 1	1/8	20,620	5/25	A80-HBF3	614636 22651
W220	1 x 1	1/4	25,500	5/25	A80-HBF3	614636 22646

† Spindle length is 1-1/2"

* Maximum RPM valid to 1/2" overhang. See package insert for other overhangs.

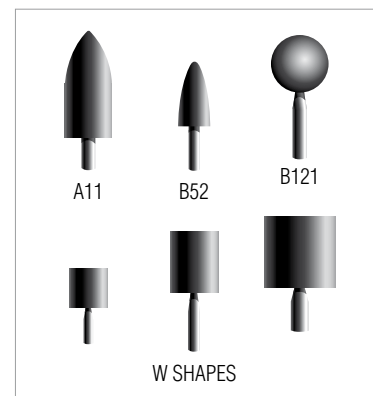

Center Lap



Better for Excell-O center lap and similar machines

CENTER LAP ALUMINUM OXIDE - VITRIFIED BOND

- Specially formulated wheel treatment provides added lubricity to the wheel, minimizing risk of metallurgical damage
- The larger diameter spindle ensures minimal deflection and rigid support
- Precise dimensional tolerances ensure accurate location of part centers

TIER: **BETTER**
 TRADENAME: **CENTER LAP**
 ABRASIVE: Aluminum Oxide

SHAPE	SIZE (D x T)	SPINDLE DIA. †	MAX. RPM*	MIN./STD. PKG.	SPEC	PART #
Center Lap Mounted Points						
-	1/2 x 2**	1/2	65,000	5/25	A80-VVM	614636 21421
-	1 x 2**	1/2	15,900	5/25	A80-VVM	614636 22926

† Spindle length is 1-1/4"

* Maximum RPM valid to 1/2" overhang. See package insert for other overhangs.

** Pointed 60°

TECH TIP

Dress the center lap mounted points frequently to ensure accurate and smooth center holes.



It is the user's responsibility to refer to and comply with ANSI B7.1

Resin Bond



Best choice for fast stock removal

NORZON ZIRCONIA ALUMINA – RESIN BOND

- Zirconia alumina abrasive blend for 2X faster cut rate than standard aluminum oxide
- Strong grain and specially formulated organic bond provide 4X greater life than aluminum oxide points, while reducing vibration and wheel chatter
- Ideal for removing parting lines, fins and small risers from castings, and smoothing and blending of welded areas



Better choice for fast stock removal and long life

CHARGER Z/A & A/O BLEND – RESIN BOND

- Durable zirconia alumina and aluminum oxide abrasive blend delivers 35% faster cut rate than standard aluminum oxide; an aggressive, free cut, and more parts cleaned in less time to substantially increase productivity
- Specially formulated organic bond provides 2X greater life than standard resin bonds while reducing vibration and wheel chatter
- Better choice for removing parting lines, fins and small risers from castings, and smoothing and blending welded areas
- Charger mounted point pre-packed in small packages are ideal for vending machines, pegboards, small jobs, and carrying to job site


TIER: **BEST** **BETTER**
 TRADENAME: **NORZON** **CHARGER**
 ABRASIVE: Zirconia Alumina Zirconia Alumina/Aluminum Oxide

SHAPE	SIZE (D x T)	SPINDLE DIA. †	MAX. RPM*	MIN./STD. PKG.	SPEC	PART #	SPEC	PART #
Resin Bond Mounted Points								
A1	3/4 x 2-1/2	1/4	19,800	5/25	NZ24-UBXR1	614636 16457	Charger	614636 16458
A3	1 x 2-3/4	1/4	16,100	5/25	NZ24-UBXR1	614636 16459	Charger	614636 16460
A5	3/4 x 1-1/8	1/4	45,000	5/25			Charger	614636 16462
A11	7/8 x 2	1/4	19,860	5/25	NZ24-UBXR1	614636 16463	Charger	614636 16464
W189	1/2 x 2	1/4	24,000	5/25	NZ24-UBXR1	614636 16465	Charger	614636 16466
W197	5/8 x 2	1/4	21,000	5/25	NZ24-UBXR1	614636 16467		
W207	3/4 x 1-1/2	1/4	24,000	5/25			Charger	614636 16470
W208	3/4 x 2	1/4	18,750	5/25	NZ24-UBXR1	614636 16471	Charger	614636 16472
W220	1 x 1	1/4	25,500	5/25	NZ24-UBXR1	614636 17520	Charger	614636 17521
			25,500	5 V			Charger	662533 25930
W221	1 x 1-1/2	1/4	19,120	5/25	NZ24-UBXR1	614636 16473	Charger	614636 16474
W222	1 x 2	1/4	15,900	5/25	NZ24-UBXR1	614636 16475	Charger	614636 16476

† Spindle length is 1-1/2"

* Maximum RPM valid to 1/2" overhang. See package insert for other overhangs.

V = Vendible package. Ideal for vending machines and small jobs. Min. Pkg. Qty = number of mounted points per vendible pack. Order in multiples of min qty.

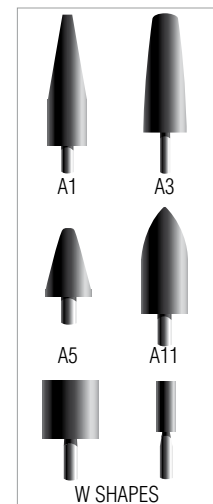

Vitrified Bond


Best choice for high volume operations



QUANTUM CERAMIC ALUMINA – VITRIFIED BOND

- Quantum grain with unique, engineered ceramic grain and shape, specifically developed for high-volume, high-speed alloy grinding operations
- Minimal loading and heat build-up; provide up to 33% longer life and 37% better metal removal rates versus other ceramic points
- Versatile; optimized for all low-, medium-, and high-force vitrified applications
- Oil and Gas 36 grit mounted points; specifically engineered to efficiently grind the carbide matrix material of oil field drill heads

Better medium grit option for blending and deburring

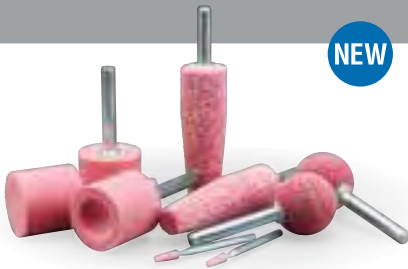

NEW

PINK ALUMINUM OXIDE – VITRIFIED BOND

- Sharp versatile 86A aluminum oxide grain is free cutting and resists burn
- Excellent form holding compared to more friable white aluminum oxides
- Medium grit for blending and deburring

Good value for general purpose, small job shop applications



GEMINI ALUMINUM OXIDE – VITRIFIED BOND

- 38A abrasive is designed to be cool cutting to minimize burn
- High temperature vitrified bond maximizes form holding and life
- Wide grit range for stock removal, blending/deburring, and finishing/polishing

TECH TIP

- For best mounted point performance, always run the mounted point at the maximum allowable speed according to ANSI B7.1. Refer to the speed chart included in each shipment for proper operating speeds.
- Use "A" shapes for medium- to heavy-duty blending.
- Use "B" shapes for light deburring and finishing/polishing.
- Use "W" shapes for offhand and precision grinding of medium to heavy stock.
- Use 36 grit and coarser for rough grinding.
- Use 60 and 90 grits for imparting fine finishes or when grinding on narrow surfaces.



It is the user's responsibility to refer to and comply with ANSI B7.1




Vitrified Bond

TIER:	BEST	BETTER	NEW	GOOD
TRADENAME:	QUANTUM	PINK		GEMINI
ABRASIVE:	Ceramic Alumina	86A Aluminum Oxide		38A Aluminum Oxide

SHAPE	SIZE (D x T)	SPINDLE DIA. †	MAX. RPM*	MIN./STD. PKG.	SPEC	PART #	SPEC	PART #	SPEC	PART #
Vitrified Bond Mounted Points – A Shapes										
A1	3/4 x 2-1/2	1/4	19,800	25/250	Oil & Gas 36	614636 86139				
A1	3/4 x 2-1/2	1/4	19,800	5/25	3NQ80	690831 49139	86A80-S	690786 45335	38A36-T	614636 24374
A1	3/4 x 2-1/2	1/4	19,800	5/25					38A60-P	614636 24375
A3	1 x 2-3/4	1/4	16,100	25/250	Oil & Gas 36	614636 86138				
A3	1 x 2-3/4	1/4	16,100	5/25			86A80-S	690786 45333	38A36-T	614636 24377
A3	1 x 2-3/4	1/4	16,100	5/25					38A60-P	614636 24378
A4	1-1/4 x 1-1/4	1/4	30,560	5/25					38A60-P	614636 24380
A5	3/4 x 1-1/8	1/4	45,000	5/25			86A80-S	690786 45339	38A36-T	614636 24381
A5	3/4 x 1-1/8	1/4	45,000	5/25					38A60-P	614636 24382
A11	7/8 x 2	1/4	19,860	5/25	3NQ80	690831 49141			38A36-T	614636 24384
A11	7/8 x 2	1/4	19,860	5/25			86A80-S	690786 45336	38A60-P	614636 24385
A12	11/16 x 1-1/4	1/4	48,000	5/25			86A80-S	690786 45344	38A60-P	614636 24388
A13	1-1/8 x 1-1/8	1/4	33,950	5/25					38A60-P	614636 24389
A15	1/4 x 1-1/16	1/4	72,750	5/25					38A60-P	614636 24391
A21	1 x 1	1/4	34,500	5/25					38A60-P	614636 24392
A23	3/4 x 1	1/4	39,370	5/25					38A60-P	614636 24394
A24	1/4 x 3/4	1/4	76,500	5/25					38A60-P	614636 24395
A25	1" Ball	1/4	35,620	5/25			86A80-S	690786 45341	38A60-P	614636 24396
A26	5/8" Ball	1/4	61,120	5/25					38A60-P	614636 24397
A31	1-3/8 x 1	1/4	27,780	5/25					38A60-P	614636 24399
A34	1-1/2 x 3/8	1/4	25,470	5/25					38A60-P	614636 24402
A36	1-5/8 x 3/8	1/4	23,520	25/250	Oil & Gas 36	662531 45562				
A36	1-5/8 x 3/8	1/4	23,520	5/25					38A60-P	614636 24404
A37	1-1/4 x 1/4	1/4	30,560	5/25					38A60-P	614636 24405
A38	1 x 1	1/4	34,500	5/25			86A80-S	690786 45345	38A60-P	614636 24406
A39	3/4 x 3/4	1/4	47,250	5/25					38A60-P	614636 24407
A40	3/4" Ball	1/4	47,250	5/25					38A60-P	614636 24408

† Standard spindle size is 1/4" x 1-1/2"

* Maximum RPM valid to 1/2" overhang. See package insert for other overhangs.

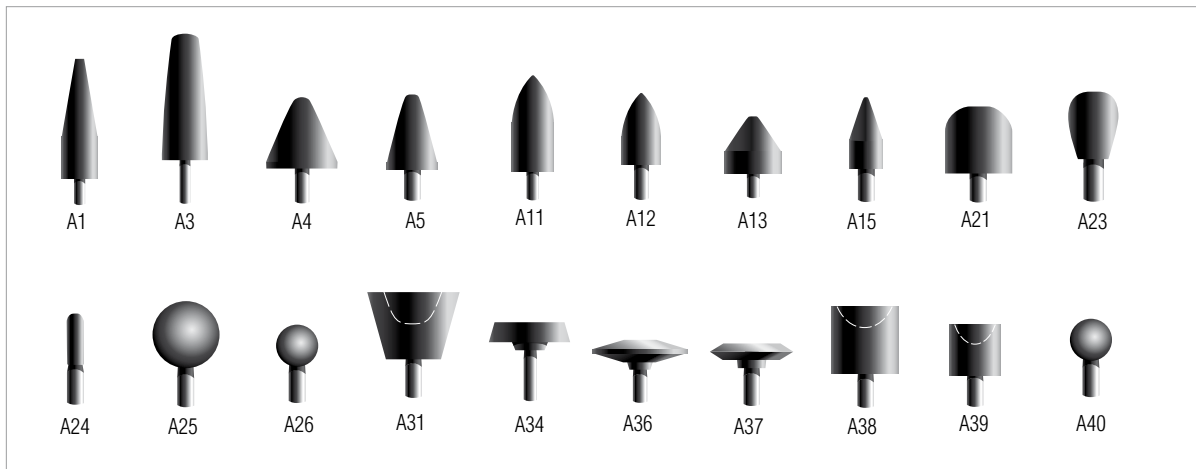

Vitrified Bond

TIER:	BEST	BETTER	NEW	GOOD
TRADENAME:	QUANTUM	PINK		GEMINI
ABRASIVE:	Ceramic Alumina	86A Aluminum Oxide		38A Aluminum Oxide

SHAPE	SIZE (D x T)	SPINDLE DIA. †	MAX. RPM*	MIN./STD. PKG.	SPEC	PART #	SPEC	PART #	SPEC	PART #
Vitrified Bond Mounted Points – B Shapes										
B41	5/8 x 5/8	1/8	33,570	5/25					38A60-P	614636 24410
B42	1/2 X 3/4	1/8	33,570	5/25					38A60-P	614636 24412
B44	7/32 x 3/8	1/8	68,400	5/25					38A60-P	614636 24414
B45	3/16 x 5/16	1/8	104,250	5/25					38A60-P	614636 24415
B46	1/8 x 5/16	1/8	105,000	5/25					38A60-P	614636 24416
B51	7/16 x 3/4	1/8	45,370	5/25					38A60-P	614636 24418
B52	3/8 x 3/4	1/8	45,370	5/25			86A80-S	690786 45334	38A60-P	614636 24420
B52	3/8 x 3/4	1/4	81,000	5/25					38A60-P	614636 24419
B52	3/8 x 3/4	1/8	45,370	5/25					38A90-Q	614636 24422
B53	5/16 x 5/8	1/8	60,000	5/25			86A80-S	690786 45340	38A60-P	614636 24423
B55	1/8 x 1/4	1/8	105,000	5/25					38A60-P	614636 24425
B81	3/4 x 3/16	1/8	50,930	5/25			86A80-S	690786 45347	38A60-P	614636 24437
B91	1/2 x 5/8	1/8	34,500	5/25					38A60-P	614636 24443
B96	1/8 x 1/4	1/8	105,000	5/25					38A90-Q	614636 24449
B97	1/8 x 3/8	1/8	105,000	5/25	3NQ80	690831 49048	86A80-S	690786 45337	38A60-P	614636 24451
B121	1/2" Ball	1/8	45,370	5/25			86A80-S	690786 45338	38A60-P	614636 24466
B122	3/8" Ball	1/8	61,650	5/25	3NQ80	690831 49050	86A80-S	690786 45360	38A60-P	614636 24470
B123	3/16" Ball	1/8	104,250	5/25					38A60-P	614636 24472
B124	1/8" Ball	1/8	105,000	5/25					38A90-Q	614636 24474
B131	1/2 x 1/2	1/8	34,500	5/25					38A60-P	614636 24475
B132	3/8 x 1/2	1/8	45,370	5/25					38A60-P	614636 24479
B135	1/4 x 1/2	1/8	60,000	5/25			86A80-S	690786 45342	38A60-P	614636 24484

† Spindle size is 1/8" or 1/4" x 1-1/2"

* Maximum RPM valid to 1/2" overhang. See package insert for other overhangs.




Vitrified Bond

TIER:	BEST	GOOD	NEW	GOOD
TRADENAME:	QUANTUM	PINK		GEMINI
ABRASIVE:	Ceramic Alumina	86A Aluminum Oxide		38A Aluminum Oxide

SHAPE	SIZE (D x T)	SPINDLE DIA. †	MAX. RPM*	MIN./STD. PKG.	SPEC	PART #	SPEC	PART #	SPEC	PART #
Vitrified Bond Mounted Points – W Shapes										
W144	1/8 x 1/4	1/8	105,000	5/25					38A60-P	614636 24488
W145	1/8 x 3/8	1/8	105,000	5/25					38A60-P	614636 24489
W146	1/8 x 1/2	1/8	105,000	5/25					38A60-P	614636 24491
W152	3/16 x 1/4	1/8	105,000	5/25					38A60-P	614636 24495
W153	3/16 x 3/8	1/8	80,850	5/25					38A60-P	614636 24496
W154	3/16 x 1/2	1/8	70,500	5/25	3NQ80	690831 49133			38A60-P	614636 24497
W162	1/4 x 3/8	1/8	64,800	5/25					38A60-P	614636 24503
W163	1/4 x 1/2	1/8	60,000	5/25			86A80-S	690786 45346	38A60-P	614636 24504
W164	1/4 x 3/4	1/8	45,900	5/25					38A60-P	614636 24505
W170	5/16 x 1/2	1/8	52,500	5/25					38A60-P	614636 24511
W175	3/8 x 3/8	1/8	54,000	5/25					38A60-P	614636 24516
W176	3/8 x 1/2	1/8	45,370	5/25					38A60-P	614636 24517
W177	3/8 x 3/4	1/8	33,750	5/25			86A80-S	690786 45355	38A60-P	614636 24518
W179	3/8 x 1-1/4	1/4	20,415	25/250	Oil & Gas 36	690831 54055				
W185	1/2 x 1/2	1/8	34,500	5/25	3NQ80	690831 49137			38A60-P	614636 24525
W185	1/2 x 1/2	1/4	61,500	5/25			86A80-S	690786 45354	38A60-P	614636 24526
W186	1/2 x 3/4	1/4	51,000	5/25					38A60-P	614636 24528
W188	1/2 x 1-1/2	1/4	30,370	5/25					38A60-P	614636 24530
W189	1/2 x 2	1/4	24,000	25/250	Oil & Gas 36	614636 86137				
W189	1/2 x 2	1/4	24,000	5/25					38A60-P	614636 24531
W196	5/8 x 1	1/4	35,250	5/25					38A60-P	614636 24539
W200	3/4 x 1/8	1/8	50,930	5/25			86A80-S	690786 45356	38A60-P	614636 24543
W200	3/4 x 1/8	1/8	50,930	5/25					38A90-Q	614636 24544
W204	3/4 x 3/4	1/4	42,750	5/25					38A60-P	614636 24549
W205	3/4 x 1	1/4	34,500	5/25					38A60-P	614636 24550
W208	3/4 x 2	1/4	18,750	5/25					38A60-P	614636 24553
W215	1 x 1/8	1/8	38,200	5/25					38A60-P	614636 24560
W216	1 x 1/4	1/4	38,200	5/25					38A60-P	614636 24562
W218	1 x 1/2	1/4	38,200	25/250	Oil & Gas 36	690831 54061				
W218	1 x 1/2	1/4	38,200	5/25					38A60-P	614636 24564
W220	1 x 1	1/4	25,500	5/25			86A80-S	690786 45359	38A60-P	614636 24566
W222	1 x 2	1/4	15,900	5/25					38A60-P	614636 24569
W230	1-1/4 x 1-1/4	1/4	20,400	5/25					38A60-P	614636 24578
W235	1-1/2 x 1/4	1/4	25,470	5/25			86A80-S	690786 45343	38A60-P	614636 24583
W236	1-1/2 x 1/2	1/4	25,470	5/25					38A60-P	614636 24585
W237	1-1/2 x 1	1/4	22,500	5/25					38A60-P	614636 24587
W238	1-1/2 x 1-1/2	1/4	15,600	5/25					38A60-P	614636 24588
W242	2 x 1	1/4	19,100	5/25					38A60-P	614636 24592

† Spindle size is 1/8" or 1/4" x 1-1/2"

* Maximum RPM valid to 1/2" overhang. See package insert for other overhangs.

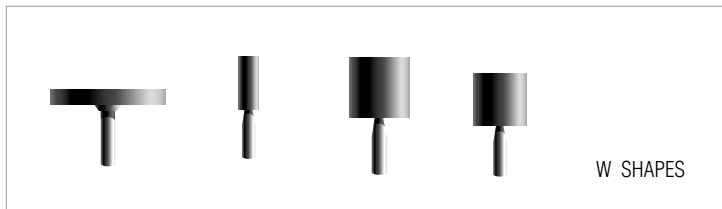



Since 1823, Norton stones have lead the marketplace with conventional and diamond benchstones, waterstones, sharpening systems, files, slips and specialty stones for industrial, commercial and DIY sharpening applications. Our comprehensive line of sharpening and finishing products is the industry's broadest line with premier performance and quality.

Applications:

Deburring, dimensioning, sharpening, honing

Grit Range:

Coarse, Medium, Fine, Extra Fine, Ultra Fine

Abrasive Types:

Aluminum Oxide (India), Silicon Carbide (Crystolon), Arkansas (Soft and Hard Translucent), and Diamond

Machine Used:



HAND SHARPENING

Application-to-Product Recommendation Guide Benchstones

	Coarse/Medium Sharpening	Fine Stoning	Finish Honing
Chip Breakers	–	Fine Crystolon Benchstone	–
Draw Knives	Coarse Crystolon Benchstone	Fine India Benchstone	Hard Arkansas Benchstone
Scrapers	Coarse Crystolon Benchstone	Fine India Benchstone	Hard Arkansas Benchstone
Chisels (Wood)	Coarse Crystolon Benchstone 1000 Waterstone	Fine India Benchstone 4000 Waterstone	Hard Arkansas Benchstone 8000 Waterstone
Plane Blades	Coarse Crystolon Benchstone 1000 Waterstone	Fine India Benchstone 4000 Waterstone	Hard Arkansas Benchstone 8000 Waterstone

Slips

	Coarse/Medium Sharpening	Fine Stoning
Milling Cutter	Medium India Round Edge Slip	Fine India Round Edge Slip
Carbide Tools		Fine Crystolon Slip for Carbide Tools

Abrasive Files

	Coarse/Medium Sharpening	Fine Stoning	Finish Honing
Form Cutter	Coarse or Medium India Knife Blade	Fine India Knife Blade	–
Keyways	Coarse or Medium India Square File	Fine India Square File	–
Lathe Bits	Medium India Square File	Fine India Square File	–
Radius Tools	Medium India Round File	Fine India Round File	–
Reamers	Medium India Reamer Stone	Fine India Reamer Stone	–
Router Bits	–	Fine India Square File	–
Saws	Coarse India Triangular File	Fine India Tapered Triangular File	–
Center Punches	Medium India Triangular File	Fine India Triangular File	–
Magnetic Chucks	Medium Crystolon Round File	Fine India Round File	–
Molding Cutters*	Coarse or Medium India File	Fine India File	–
Countersinks	Coarse India Triangular File	Fine India Triangular File	Hard Arkansas Triangular File
Tap Threads	–	Fine India Triangular File	–

* Select shape to fit configuration

Instructional Videos

YouTube Find the latest instructional sharpening stone videos on our youtube channel at <https://nortonsga.us/kb542>


Ideal for sales training and end-user self-study. Learn to efficiently use these sharpening products to maintain tools at peak performance and prolong their life – to make all your sharpening, honing, etc. applications easier.

Relative Sharpening Comparisons for Norton Products

Crystolon (Silicon Carbide); India (Aluminum Oxide)	Arkansas (Soft, Hard Translucent)	Diamond Stones	Waterstones	Coated Abrasives (Waterproof Sandpaper)		Diamond Compound
			JIS (Japan)	CAMI (USA)	FEP A (Europe)	MICRON Size
Coarse Crystolon					P120	141
				120		127
						116
Coarse India					P150	97
				150		93
						78
Medium Crystolon		Extra Coarse Diamond (220)	Norton 220		P220	65
				220		60
					P240	58
Medium India				240		53.5
					P280	52.5
						50
Fine Crystolon		Coarse Diamond (325)			P320	46
				280		45
					P360	43
Fine India			360	320		40.5
					P400	36
				360		35
Soft Arkansas		Fine Diamond (600)			P600	29
			600	400		25.8
					P800	23
Hard Translucent Arkansas			800	600		22
			Norton 1000	700	P1200	20
				800		16
			1200		P1500	14
						12.6
			1500	1000	P2000	11
						10.3
						9.2
				1500	P2500	9
						8.4
						7.5
			Norton 4000	2000		6
						5
			Norton 8000			3
						1.2
						1
						0.5
			15000			

Benchstones

Better choice for sharpening tools and knives

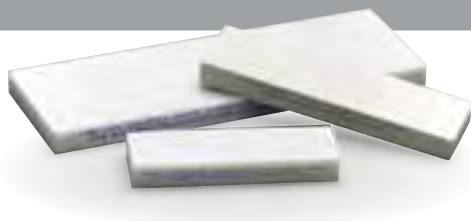


PRECISION BENCHSTONES

- Jewelers' Benchstones – These stones are excellent for sharpening the fine, precision cutting tools used by jewelers, engravers and artisans
- Penknife Precision Benchstones – Ideal for sharpening cutting tools, laboratory blades, surgical instruments, engravers' and die makers' tools, and pocket knives to the keenest edge

TIER: BETTER

SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Precision Benchstones – Jewelers'				
4 x 2 x 3/8	5	Ultra Fine – Hard Translucent Arkansas	HB24	614636 87525
6 x 2 x 3/8	5	Ultra Fine – Hard Translucent Arkansas	HB26	614636 87530
<i>Jewelers' stones are packed in individual boxes within a case. Order in multiples of stones/case.</i>				
Precision Benchstones – Penknife				
3 x 1 x 3/8	5	Extra Fine – Soft Arkansas	SB13	614636 87560
		Ultra Fine – Hard Translucent Arkansas	HB13	614636 87550
4 x 1 x 3/8	5	Extra Fine – Soft Arkansas	SB14	614636 87565
		Ultra Fine – Hard Translucent Arkansas	HB14	614636 87555

Benchstones *continued*

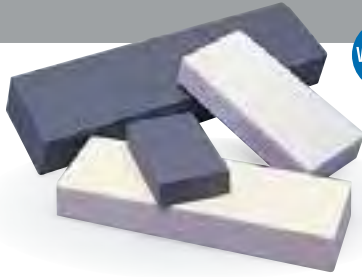

VENDIBLE

Better choice for edge shaping and honing

SINGLE GRIT ABRASIVE BENCHSTONES

- Crystolon – sharp premium silicon carbide abrasive, delivers fast stock removal for quick edge shaping with minimal loading
- India - smooth cutting aluminum oxide abrasive produces a strong, keen, long-lasting edge and is the choice for the best blend of cut rate and finish
- Arkansas – Natural premium Novaculite quarried in Arkansas and available in Soft or Hard Translucent

TIER: BETTER				
SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Single Grit Benchstones – Crystolon (Silicon Carbide)				
4 x 1 x 1/4	5	Coarse	CJB14	614636 85470
	5	Medium	MJB14	614636 85465
	5	Fine	FJB14	614636 85460
	5 V	Fine	FJB14-V	662533 25915+
4 x 1 x 1/2	5	Coarse	CJB24	614636 85485
	5	Medium	MJB24	614636 85480
	5	Fine	FJB24	614636 85475
5 x 2 x 5/8	5	Medium	MJB35	614636 85495
	5	Fine	FJB35	614636 85490
6 x 2 x 1	5	Coarse	CJB6	614636 85510
	5	Medium	MJB6	614636 85505
	5	Fine	FJB6	614636 85500
8 x 2 x 1	5	Coarse	CJB8	614636 85525
	5	Medium	MJB8	614636 85520
	5	Fine	FJB8	614636 85515
8 x 3 x 1/2	5	Coarse	CJB83	614636 54459*
	5	Medium	MJB83	614636 54458*
	5	Fine	FJB83	614636 54457*
11-1/2 x 2-1/2 x 1/2	1	Coarse	JM3	614636 85980#
	1	Medium	JM6	614636 85975#
Single Grit Benchstones – Soft Arkansas				
4 x 2 x 3/4-1	5	Extra Fine	SB4	614636 85670
6 x 2 x 3/4-1	5	Extra Fine	SB6	614636 85675
8 x 2 x 3/4-1	5	Extra Fine	SB8	614636 85680

TIER: BETTER				
SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Single Grit Benchstones – India (Aluminum Oxide)				
4 x 1 x 1/4	5	Coarse	CB14	614636 85580
	5	Medium	MB14	614636 85575
	5	Fine	FB14	614636 85570
	5 V	Fine	FB14-V	662533 25919
4 x 1 x 1/2	5	Coarse	CB24	614636 85595
	5	Medium	MB24	614636 85590
	5	Fine	FB24	614636 85585
5 x 2 x 5/8	5	Medium	MB35	614636 85605
	5	Fine	FB35	614636 85600
6 x 2 x 1	5	Coarse	CB6	614636 85620
	5	Medium	MB6	614636 85615
	5	Fine	FB6	614636 85610
8 x 2 x 1	5	Coarse	CB8	614636 85635
	5	Medium	MB8	614636 85630
	5	Fine	FB8	614636 85625
8 x 3 x 1/2	5	Coarse	CB83	614636 54462*
	5	Medium	MB83	614636 54461*
	5	Fine	FB83	614636 54460*
11-1/2 x 2-1/2 x 1/2	1	Medium	IM6	614636 54214#
	1	Fine	IM9	614636 85970#
Single Grit Benchstones – Hard Translucent Arkansas				
4 x 2 x 3/4-1	5	Ultra Fine	HB4	614636 85655
6 x 2 x 3/4-1	5	Ultra Fine	HB6	614636 85660
8 x 2 x 3/4-1	5	Ultra Fine	HB8	614636 85665
8 x 3 x 1/2	5	Ultra Fine	HTB83	614636 54464*
11-1/2 x 2-1/2 x 1/2	1	Ultra Fine	HM11	614636 85965#

V = Vendible Package. Ideal for vending machines, small jobs, and carrying to job site. Pre-packed in sturdy boxes of 5 per pack. Order by total number of stones needed in multiples of 5.

* May be used as replacement stone for IM-83 Sharpening System.

May be used as replacement stone for IM-313 Sharpening Stone System.

These benchstones (except for 8 x 3 x 1/2 and vendibles) are packed in individual boxes within a case. Order in multiples of stones/case.



Benchstones *continued*

Better choice for economical solution for general sharpening and finishing with one stone




COMBINATION GRIT ABRASIVE BENCHSTONES

- **Crystolon Combination**
Coarse and fine grit sharp-cutting silicon carbide abrasive surfaces for general sharpening (to moderate tolerances) when the speed of sharpening is more important than the fineness of the cutting edges. Gray in color.
- **India Combination**
Coarse and fine grit aluminum oxide abrasive surfaces produce strong, keen, long-lasting edges on quality tools. Orange/brown in color.
- **Crystolon/India Combination**
Fast-sharpening, medium grit silicon carbide (Crystolon) and fine aluminum oxide (India) abrasive surfaces for keen, long-lasting edges on quality tools. Crystolon side is dark gray in color, India side is orange.
- **Giant Combination Stones**
11-1/2" and 12" bench oil stones are used to sharpen large edge tools with long sweeping strokes.

Application-to-Product Recommendation Guide

	FAST CUT STOCK REMOVAL	INITIAL SHARPENING	FINAL SHARPENING	HONING	SHARPEST EDGE
Grit Size	Coarse	Medium	Fine	Extra Fine	Ultra Fine
Abrasive	Crystolon	Crystolon	India	Soft Arkansas	Hard Arkansas
Product/Color	Grey	Grey	Orange	Milky White	Translucent


SIZE (L x W x H)	QTY./CASE	SPEC.	TIER: BETTER	
			PRODUCT #	PART #
Combination Grit Benchstones – Crystolon (Silicon Carbide)				
4 x 1 Round	5	Coarse/Fine	JB64	614636 85435
4 x 1-3/4 x 5/8	5	Coarse/Fine	JB134	614636 85440
5 x 2 x 3/4	5	Coarse/Fine	JB45	614636 85445
6 x 2 x 1	5	Coarse/Fine with Anniversary Box	JB6	614636 85450
8 x 2 x 1	5	Coarse/Fine with Anniversary Box	JB8	614636 85455
11-1/2 x 2-1/2 x 1	2	Coarse/Fine	JUM3	614636 85840
12 x 2-1/2 x 1-1/2	2	Coarse/Fine	JUM4	614636 85855
Combination Grit Benchstones – India (Aluminum Oxide)				
4 x 1 Round	5	Coarse/Fine	IB64	614636 85545
4 x 1-3/4 x 5/8	5	Coarse/Fine	IB134	614636 85550
5 x 2 x 3/4	5	Coarse/Fine	IB45	614636 85555
6 x 2 x 1	5	Coarse/Fine with Anniversary Box	IB6	614636 85560
8 x 2 x 1	5	Coarse/Fine with Anniversary Box	IB8	614636 85565
11-1/2 x 2-1/2 x 1	2	Coarse/Fine	IM2	614636 85851
Combination Grit Benchstones – Crystolon/India				
6 x 2 x 1	5	Medium/Fine	IC6	614636 85643
11-1/2 x 2 x 1	2	Medium/Fine	IC11	614636 87239



These benchstones are packed in individual boxes within a case. Order in multiples of stones/case.

Waterstones

Waterstones are synthetic stones designed to be softer than oil stones. These softer grade stones are used with water as the lubricant (versus oil) to develop a fast cutting slurry. The Norton Waterstone system was designed in a carefully planned sequence to create sharpening efficiency. You get the level of abrasiveness you need at each stage, without wasting time trying to sharpen your tools on a grit that is too fine, too soon.



Better choice for producing superior edges on planes and straight chisels

WATERSTONES


- Synthetic stones designed to work together, with water for fast sharpening, fine finish
- Softer than traditional oilstones - providing lapping action for superb results with low pressure
- Color-coded by grit: 220 grit for repairing badly damaged tools, 1000 grit for initial cut, 4000 grit for excellent finishing, and 8000 grit for polishing



Better choice for raising slurry

PREP STONE

- This synthetic stone enhances the performance of waterstones by speeding up the slurry-making process needed to cut and polish with waterstones
- This prep stone is designed to raise the slurry on waterstones without significantly altering the dimensions of the stone
- Waterstones are great for producing superior edges for planes and straight chisels



Better choice for producing flat surfaces on waterstones

FLATTENING STONE

- Coarse grit silicon carbide stone promotes fast results
- Diagonal grooves increase swarf removal
- Superbly flat with hard bond to produce extremely flat surfaces on all waterstones

SIZE (L x W x H)	QTY./CASE	SPEC.	TIER: BETTER	PART #
Waterstones – Single Grit				
8 x 3 x 1	5	220		614636 89505
	5	1000		614636 89506
	5	4000		614636 89507
	5	8000		614636 89508
Set	1	4 Stones: 220, 1000, 4000, 8000 Grit		614636 24334
Waterstones – Combination Grit				
8 x 3 x 1	5	220 / 1000		614636 24335
	5	1000 / 4000		614636 24450
	5	1000 / 8000		699366 55039
	5	4000 / 8000		614636 24336
Prep Stone				
20mm x 20mm x 3"	5	Aluminum Oxide		662434 39361
Flattening Stone				
9 x 3 x 3/4	5	Silicon Carbide		699366 87444
Waterstone Kit				
N/A	1	Kit includes: 1-220/1000 and 1-4000/8000 waterstone, 1 flattening stone		076607 87943

Waterstones are packed in individual boxes within a case. Order in multiples of stones/case.

TECH TIP

Maximizing Waterstone Performance

- Wet waterstone
- Rub evenly with the prep stone to create slurry
- Evening off the high spots will make for less-frequent flattening of the waterstones
- Waterstones wear concave with use; periodically flatten with flattening stone

Instructional Videos


YouTube Find the latest instructional waterstone and other sharpening stone videos on our youtube channel at <https://nortonsga.us/kb542>

Ideal for sales training and end-user self-study. Learn to efficiently use these sharpening products to maintain tools at peak performance and prolong their life – to make all your sharpening, honing, etc. applications easier.

Diamond Benchstones

Made in the USA, these benchstones have unique stackable non-skid rubber feet designed to keep the diamond plate steady while you sharpen, and efficiently stacked for space-saving storage when not in use. Our simple grit-size color-coding makes them easy to differentiate.

Better choice for producing superior edges on planes and straight chisels

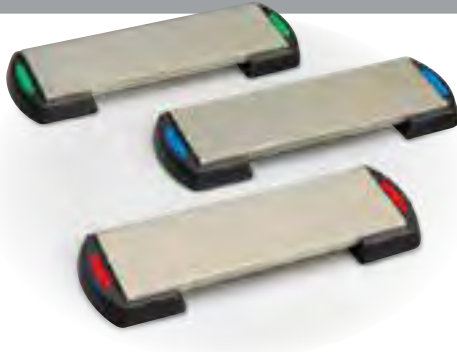

STACKABLE DIAMOND BENCHSTONES

- Flat, diamond surface plated onto a nickel coated steel bar precision ground to a tolerance of .001 in. for fast, even blade and tool edge sharpening
- Continuous diamond sharpening surface for excellent sharpening performance across entire surface of stone
- Choose 220 grit for badly worn tools, 325 for initial sharpening, 600 grit for final sharpening and 1200 for the finest edge
- Color-coded tabs on stones and packaging for easy identification of grit sizes for use and displaying
- Stackable; the stones firmly stack on top of each other for easy, small-profile storage
- Non-skid rubber base stays in place while sharpening for smoother, efficient sharpening

SIZE WITH RUBBER FEET (L x W x H)	QTY./ CASE	SPEC.	TIER: BETTER	
			PRODUCT #	PART #
Stackable Diamond Benchstones				
6 x 2 x 1/4*	5	D220	662532	68082
6 x 2 x 1/4*	5	D325	662532	68081
6 x 2 x 1/4*	5	D600	662532	68080

Diamond benchstones are packed in individual boxes within a case. Order in multiples of stones/case.



6" stones come retail packaged

Sharpening Stone Oil

Better choice for improving sharpening stone performance



SHARPENING STONE OIL

- Highly refined lubricating oil which is specifically formulated for sharpening stone use
- Will not load or "gum-up" sharpening stones, meets U.S. Pharmacopoeia standards for mineral oil purity; may be used around food preparation operations
- Equally ideal for all lubricating jobs

SIZE	QTY./ CASE	SPEC.	TIER: BETTER	
			PRODUCT #	PART #
Sharpening Stone Oil				
4-1/2 oz.	20	Oil	XB1	614636 87760
1 Pint	20	Oil	XB5	614636 87770
1 Quart	5	Oil	XB2	614636 87775
1 Gallon	4	Oil	XB6	662534 57631

TECH TIP

- All oil stones are porous in nature; oil is required to keep the pores open and working efficiently
- Use Norton oil to optimize the performance of Crystolon, India and Arkansas stones
- While sharpening knives, blades and tools, be careful to keep fingers away from sharp edges

Sharpening Systems

Tri-Stone Systems

The base of the tri-stone system acts as an oil reservoir permitting continuous submersion of the unused stones, keeping them clean and saturated, ready for immediate use and years of utility. Rotating the handle brings the desired stone into position for sharpening. All offer a range of replacement stones to replace worn or damaged stones, or substitute different specifications to customize the system.



Better choice for large, straight-edged tool sharpening

IM313 MULTI-OILSTONE SHARPENING SYSTEM

- Considered by many to be the ultimate sharpening system, the IM313 contains three oil stones. The 11-1/2" stone length permits long, sweeping strokes for faster and more precise sharpening and honing of all large, wider straight-edged tools. The heavy base has a non-skid bottom.
- Coarse Crystolon stone quickly restores worn edges for general sharpening; medium Crystolon stone produces the average edge needed for most tools; and fine India stone hones for a sharper edge
- Each IM313 system is included with a pint of Norton oil, plastic angle guide, and reservoir unit



Better choice for a versatile, multi-size tool and knife sharpener

IM200 PROFESSIONAL SHARPENING SYSTEM

- The smaller 8" stone IM200 system provides the same quality sharpening features as the IM313 – making it the perfect choice for small restaurants and home DIYers
- Coarse Crystolon stone quickly restores worn edges for general sharpening; medium Crystolon stone produces the average edge needed for most tools; and fine India stone hones for a sharper edge
- Contains 4-1/2 oz. of lubricating oil, plastic angle guide, and the reservoir unit



Better choice for small straight-edged tool sharpening

IM100 3-IN-1 TOOL AND KNIFE SHARPENING SYSTEM

- The smallest system, designed for general sharpening, the IM100 is an affordable choice for small knives, cutlery, and woodworking tools
- Coarse Crystolon stone quickly restores worn edges for general sharpening; medium Crystolon stone produces the average edge needed for most tools; and fine India stone hones for a sharper edge
- 4-1/2 oz. of lubricating oil and a reservoir unit included

Portable Sharpening Systems



Better choice for all sharpening enthusiasts who carry their system with them

IM83 PORTABLE SHARPENING STONE SYSTEM

- Sturdy metal latches secure the cover and storage case – where small tools can be housed. The IM83 system is designed like all our other sharpening systems; the stones can be replaced to customize the unit to individual requirements
- Ideal for industrial toolrooms, restaurants, knife manufacturers, DIYers, and sportsmen
- Both IM83 systems include 3 sharpening stones, and a reservoir carrying case; the oil stone system also includes 4-1/2 oz. oil
- IM83-W Portable Waterstone System – Tool Repair to Fine Finishes
This portable sharpening system is equipped with a carefully engineered sequence of waterstones for clean, efficient sharpening. The waterstones can easily be maintained with the flattening stone provided
- IM83-O Portable Oil Stone System – Straight-Edged Tool Sharpening
The coarse silicon carbide (Crystolon) stone in this system repairs damaged edges quickly; the medium aluminum oxide (India) stone imparts a durable, smooth cutting edge; and the fine aluminum oxide (India) stone provides the final sharpening and polishing stage

Sharpening Systems *continued*


Portable Sharpening Systems *continued*

SIZE	QTY./CASE	SPEC.	PRODUCT #	PART #
<i>TIER: BETTER</i>				
IM313 Multi-Oilstone Sharpening System				
11-1/2 x 2-1/2 x 1/2	1	1 Coarse Crystolon, 1 Medium Crystolon, and 1 Fine India Stone, 1 Pint Oil, Angle Guide, Reservoir Unit	IM313	614636 85960
IM200 Professional Sharpening System				
8 x 2 x 3/8	1	1 Coarse Crystolon, 1 Medium Crystolon, and 1 Fine India Stone, 4-1/2 oz. Oil, Angle Guide, Reservoir Unit	IM200	614636 91260
IM100 3-in-1 Tool and Knife Sharpening System				
6 x 2 x 1/2	1	1 Coarse Crystolon, 1 Medium Crystolon, and 1 Fine India Stone, 4-1/2 oz. Oil, Reservoir Unit	IM100	614636 85356
IM83 Portable Systems				
8 x 3 x 1/2	1	Oilstones: 1 Coarse Crystolon, 1 Medium India, 1 Fine India, 4-1/2 oz. Oil, Reservoir Carrying Case	IM83-O	662435 82823
8 x 3 x 1	1	Waterstones: 1 ea. of 1000, 4000, 8000 Grit, 1 Flattening Stone, Reservoir Carrying Case	IM83-W	662435 82825

For sharpening system replacement stones: see single grit benchstone charts, or your Norton representative for replacement stones and parts which may be used as replacements or to customize your system.

Abrasive Files

Norton abrasive files hold their shape while imparting the finest, most uniform finish on precision machine parts and in tool and die making. They are ideal for any deburring, chamfering or radiusing job, or for filing delicate parts. Select the file shape that matches the contour of the surface being stoned.

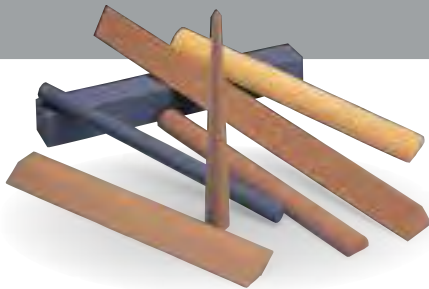

Better choice for any deburring, chamfering or radiusing job, or for filing delicate parts

ABRASIVE FILES

- Crystolon Files – Fast-acting silicon carbide products. Crystolon files are designed for use where moderate tolerances are acceptable, and speed of sharpening is more important than fineness
- India Files – India files are ideal when close tolerance, and strong, keen, long-lasting edges are needed
- Hard Translucent Arkansas Files – Hard Arkansas has an ultra fine grit that produces the finest edge possible while maintaining tolerances unequalled by any other abrasive file. It will also produce a highly polished finish

Square Abrasive Files

Square File applications range from dimensioning keyways to maintain fit, stoning faces on router bits, touching-up edges of reamer teeth, and lapping/honing to close tolerances to produce the finest edge on precision instruments, die work and delicate tools.



SIZE (L x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
<i>TIER: BETTER</i>				
Square Abrasive Files – Crystolon (Silicon Carbide)				
4 x 1/2	5	Medium	MJF44	614636 86045
	5	Fine	FJF44	614636 86040
Square Abrasive Files – Hard Translucent Arkansas				
3 x 1/4	5	Ultra Fine	HF13	614636 86590
3 x 3/8	5	Ultra Fine	HF33	614636 86595
3 x 1/2	5	Ultra Fine	HF43	614636 86600

All square files are bulk packed

TIER: BETTER

SIZE (L x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Square Abrasive Files – India (Aluminum Oxide)				
4 x 1/4	5	Coarse	CF14	614636 86075
	5	Medium	MF14	614636 86070
	5	Fine	FF14	614636 86065
4 x 3/8	5	Coarse	CF34	614636 86090
	5	Medium	MF34	614636 86085
	5	Fine	FF34	614636 86080
4 x 1/2	5	Coarse	CF44	614636 86105
	5	Medium	MF44	614636 86100
	5 V	Medium	MF44-V	662533 25913
	5	Fine	FF44	614636 86095
6 x 1/2	5	Coarse	CF46	614636 86120
	5	Medium	MF46	614636 86115
	5	Fine	FF46	614636 86110
6 x 5/8	5	Medium	MF56	614636 86130
	5	Fine	FF56	614636 86125
	6 x 3/4	5	Coarse	CF66
5		Medium	MF66	614636 86145
5		Fine	FF66	614636 86140
6 x 1	5	Coarse	CF76	614636 86165
	5	Medium	MF76	614636 86160
	5	Fine	FF76	614636 86155

V = Vendible Package. Ideal for vending machines, small jobs, and carrying to job site. Pre-packed in sturdy boxes of 5 per pack. Order by total number of stones needed in multiples of 5.

Abrasive Files *continued*

Triangular Abrasive Files

Triangular Files are used for a variety of deburring, chamfering and radiusing applications including cleaning tap threads, stoning cutting surfaces of milling cutters, lapping honing tools, dies and molds, and putting precision points on center punches.

The India line also offers Tapered Triangles, used by mechanics and tool and die makers to impart the correct edge in the least time.



TIER: BETTER

SIZE (L x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Triangular Abrasive Files – Crystolon (Silicon Carbide)				
4 x 1/4	5	Fine	FJF114	61463686185
4 x 1/2	5	Fine	FJF144	61463686205
Triangular Abrasive Files – Hard Translucent Arkansas				
3 x 1/4	5	Ultra Fine	HF113	61463686620
3 x 3/8	5	Ultra Fine	HF133	61463686625
3 x 1/2	5	Ultra Fine	HF143	61463686630

All Triangular files are bulk packed


Round Abrasive Files

Half Round Files offer both a round and a flat surface for imparting a fine finish on precision machine parts, tools and dies.

Round Files are ideal for deburring, chamfering, radiusing, lapping, honing, cleaning radius tools to a burr-free edge, and dimensioning compound curves on templates.

Round Pointed Files are ideally suited for engravers and die sinkers for stoning difficult recesses on instruments and die tools.

Round Tapered Files are used by craftsmen, woodworkers, and die makers as their unique shape imparts the correct edge quickly.

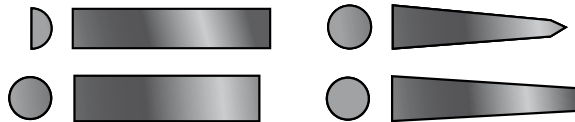

TIER: BETTER

SIZE (L x D)	QTY./CASE	SPEC.	PRODUCT #	PART #
Half Round Abrasive Files – India (Aluminum Oxide)				
4 x 1/4	5	Medium	MF314	61463686355
	5	Fine	FF314	61463686350
4 x 3/8	5	Medium	MF334	61463686385
	5	Fine	FF334	61463686380
4 x 1/2	5	Coarse	CF344	61463686405
	5	Medium	MF344	61463686400
	5	Fine	FF344	61463686395

All Half-Round and Round files are bulk packed

TIER: BETTER

SIZE (L x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Triangular Abrasive Files – India (Aluminum Oxide)				
4 x 1/4	5	Coarse	CF114	61463686240
	5	Medium	MF114	61463686235
	5	Fine	FF114	61463686230
4 x 3/8	5	Coarse	CF134	61463686255
	5	Medium	MF134	61463686250
	5	Fine	FF134	61463686245
4 x 1/2	5	Coarse	CF144	61463686270
	5	Medium	MF144	61463686265
	5	Fine	FF144	61463686260
6 x 1/2	5	Coarse	CF146	61463686285
	5	Medium	MF146	61463686280
	5	Fine	FF146	61463686275
6 x 5/8	5	Medium	MF156	61463686295
	5	Fine	FF156	61463686290
6 x 3/4	5	Medium	MF166	61463686310
	5	Fine	FF166	61463686305
6 x 1	5	Medium	MF176	61463686325
	5	Fine	FF176	61463686320
Triangular Tapered Abrasive Files – India (Aluminum Oxide)				
4 x 1/2 x 1/4	5	Medium	MF544	61463686685
	5	Fine	FF544	61463686680

TIER: BETTER

SIZE (L x D)	QTY./CASE	SPEC.	PRODUCT #	PART #
Round Abrasive Files – Crystolon (Silicon Carbide)				
4 x 1/4	5	Medium	MJF214	61463686430
	5	Fine	FJF214	61463686425
4 x 3/8	5	Medium	MJF234	61463686440
Round Abrasive Files – India (Aluminum Oxide)				
4 x 1/4	5	Coarse	CF214	61463686480
	5	Medium	MF214	61463686475
	5	Fine	FF214	61463686470
4 x 3/8	5	Coarse	CF234	61463686495
	5	Medium	MF234	61463686490
	5	Fine	FF234	61463686485
4 x 1/2	5	Coarse	CF244	61463686510
	5	Medium	MF244	61463686505
	5	Fine	FF244	61463686500
6 x 1/2	5	Coarse	CF246	61463686525
	5	Medium	MF246	61463686520
	5	Fine	FF246	61463686515
6 x 5/8	5	Medium	MF256	61463686535
6 x 3/4	5	Medium	MF266	61463686550
6 x 1	5	Medium	MF276	61463686565
Round Abrasive Files – Hard Translucent Arkansas				
3 x 1/4	5	Ultra Fine	HF813	61463686800
Round Pointed Abrasive Files – India (Aluminum Oxide)				
3 x 5/16 Base	5	Coarse	CF723	61463686750
	5	Medium	MF723	61463686745
	5	Fine	FF723	61463686740
Round Pointed Abrasive Files – Hard Translucent Arkansas				
3 x 1/4 Base	5	Ultra Fine	HF863	61463686825
Round Tapered Abrasive Files – India (Aluminum Oxide)				
4 x 1/2 x 1/4	5	Coarse	CF644	61463686660
	5	Medium	MF644	61463686655
	5	Fine	FF644	61463686650

Abrasive Files *continued*

Diamond-Shaped Abrasive Files

Diamond-shaped Files are precision sharpening favorites for cleaning acute angles in dies and molds, and for stoning geometric chasers and sewing machine feeds.



TIER: BETTER				
SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Diamond-Shaped Abrasive Files – India (Aluminum Oxide)				
4 x 9/16 x 3/16	5	Coarse	CT134	614636 86720
	5	Medium	MT134	614636 86715
	5	Fine	FT134	614636 86710
Diamond-Shaped Abrasive File – Hard Translucent Arkansas				
3 x 1/2 x 3/16	5	Ultra Fine	HF843	614636 86815

All Diamond-shaped files are bulk packed

Beveled Abrasive Files

Beveled Files are preferred by exacting artisans, jewelers, mechanics, and watchmakers for honing the finest of finishes. These extremely hard files provide years of service.



TIER: BETTER				
SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Beveled Abrasive File – Hard Translucent Arkansas				
3 x 3/8 x 1/8	5	Ultra Fine	HF833	614636 86810

All Beveled files are bulk packed

Flat Abrasive Files

The Flat File is the choice of mechanics, artisans and jewelers. This long lasting file produces the finest finishes.



TIER: BETTER				
SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Flat Abrasive File – Hard Translucent Arkansas				
3 x 3/8 x 1/8	5	Ultra Fine	HF823	614636 86805

All Flat files are bulk packed

Oval Abrasive Files

The Oval File's shape makes it ideal for finishing and honing recesses or curved edges of precision instruments.



TIER: BETTER				
SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Oval Abrasive File – Hard Translucent Arkansas				
3 x 1/2 x 3/16	5	Ultra Fine	HF853	614636 86820

All Oval files are bulk packed

Knife Blade Abrasive Files

Knife Blade Files are used by clock and watch makers to quickly sharpen, hone, and maintain the edges and points of cutting tools.



TIER: BETTER				
SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
Knife Blade Abrasive Files – India (Aluminum Oxide)				
4 x 1 x 1/8 Back	5	Coarse	CF724	614636 86780
	5	Medium	MF724	614636 86775
	5	Fine	FF724	614636 86770
Knife Blade Abrasive File – Hard Translucent Arkansas				
3 x 3/4 x 1/8	5	Ultra Fine	HF873	614636 86830

All Knife Blade files are bulk packed

Abrasive File Sets

Hard Translucent Arkansas File Set

This set provides a selection of our most popular square, triangular, round and knife blade files in ultra fine Hard Translucent Arkansas for honing and polishing a wide range of configurations.

Hard Translucent Arkansas-India File Set

This set contains an assortment of files for finishing, honing and polishing applications. It contains a selection of the most popular square, triangular, round and knife blade files in both fine grit India and ultra fine grit Hard Translucent Arkansas.



TIER: BETTER			
SIZE (L x W x H)	QTY./CASE	PRODUCT #	PART #
File Set – Hard Translucent Arkansas			
	1		614636 86839
1 Each of Ultra Fine Hard Arkansas HF13, HF113, HF813, and HF873			
File Set – Hard Translucent Arkansas and India (Aluminum Oxide)			
	1		614636 86840
1 Each of Ultra Fine Hard Arkansas HF13, HF43, HF113, HF813, HF873, and Fine India FF14, FF44, FF114, FF214, FF724			

See the "Norton Professional Sharpening Products and Dressing Sticks Catalog #200" on www.nortonabrasives.com to view the complete list and descriptions of our many sharpening products.


Abrasive Files *continued*

Engravers' Chuck & Points

Engravers' Points are the choice of professional die-makers for cleaning tight corners and recesses where close tolerances and accuracy are a must. The Engravers' Chuck is a knurled nickel-plated tool designed to hold the Engravers' Point.

SIZE (L x POINT)	QTY./CASE	SPEC.	PRODUCT #	PART #
<i>TIER: BETTER</i>				
Engravers' Chuck				
Engravers' Chuck	5		XT1	614636 87485
Engravers' Point – India (Aluminum Oxide)				
1 x 1/8 Point	5	Fine	FT11	614636 87495
Engravers' Point – Soft Arkansas				
1 x 1/8 Point	5	Extra Fine	AT11	614636 87490

All Engravers' Chucks and Points are bulk packed.




Silversmith Precision Files

These aluminum oxide precision-shaped stones are designed for use by silversmiths and mechanics for close tolerance lapping, touching-up instruments, and for cleaning tools and dies.

SIZE	QTY./CASE	SPEC.	PRODUCT #	PART #
<i>TIER: BETTER</i>				
Silversmith Precision Files – India (Aluminum Oxide)				
4 x 5/16 x 3/16 x 5/16 x 1/16 - X	5	Medium	MF414	614636 86855
	5	Fine	FF414	614636 86850
4 x 3/8 x 3/16 x 1/8 x 1/16 - Y	5	Fine	FF424	614636 86910
4 x 1/2 x 1/16 - BB	5	Coarse	CF444	614636 86965
	5	Medium	MF444	614636 86960
	5	Fine	FF444	614636 86955
4 x 1/2 x 1/4 x 5/16 x 1/8 - EE	5	Medium	MF474	614636 87005
	5	Fine	FF474	614636 87000

All Silversmith Precision Files are bulk packed.



Pocket Stones



Better choice for outdoor enthusiasts


POCKET STONES

- Convenient and easily transported
- Ideal for outdoor enthusiasts to sharpen scissors, knives, axes, etc.
- Available in a protective case

SIZE (L x W x H)	QTY./CASE	SPEC.	PRODUCT #	PART #
<i>TIER: BETTER</i>				
Sportsman Pocket Stone – India (Aluminum Oxide)				
3 x 1-1/2 x 1/2	50	Coarse/Fine	IBP4	614636 90705
Pocket Stone – India (Aluminum Oxide)				
4 x 3/4 x 1/4	25	Fine	IBP4	614636 24153
Pocket Stone with Case – India (Aluminum Oxide)				
3 x 7/8 x 3/8 with case	50	Fine	FBP3	614636 91122
Pocket Stone with Case – Crystolon (Silicon Carbide)				
3 x 7/8 x 3/8 with case	50	Fine	JP14	614636 90703
Pocket Stone with Case – Soft Arkansas				
4 x 1 x 3/4 with case; in retail package	5	Extra Fine		662531 42544
Fish Hook Stone With Pouch – Crystolon Half-Round (Silicon Carbide)				
3 x 1/2 with pouch	50	Fine		614636 24072

All Pocket Stones except 662531**42544** are bulk packed.

Abrasive Slips

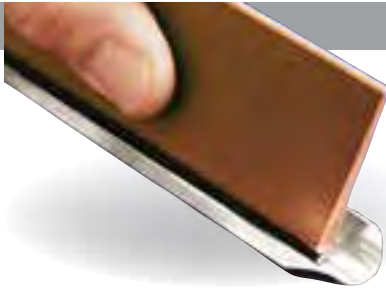

Better choice for imparting fine, uniform finishes

ABRASIVE SLIPS

- Norton abrasive slips impart the finest, most uniform finishes on curved knives and tools, molders' knives, wood gouges, bead planers, and carbide-tipped tools
- The Crystolon and India stones are designed for preliminary sharpening; the Norton Hard Translucent Arkansas stones are the choice for achieving the finest finish possible
- These fast-acting slips hold their shape and are long lasting

Carbide Tool Slips

Crystolon (silicon carbide) Slips are used to maintain the edge of carbide tools – keeping regrinding costs and time to an absolute minimum. Not oil-filled.

Round Edge Slips

Round Edge Slips are ideal for precision sharpening and honing of bead planers, curved knives and tools, molders' knives and wood gouges.




TIER: **BETTER**

SIZE	QTY./ CASE	SPEC.	PRODUCT #	PART #
Carbide Tool Slips – Crystolon (Silicon Carbide)				
3-1/2 x 3/4 x 1/2	5	Coarse	CJT63	614636 87295
	5	Medium	MJT63	614636 87290
	5	Fine	FJT63	614636 87285
Set of Three Above	5	Coarse, Medium & Fine	J63	614636 87300
Carbide Tool Slips – India (Aluminum Oxide)				
2-1/4 x 7/8 x 3/16	5	Medium	MS12	614636 87215
Round Edge Slips – Crystolon (Silicon Carbide)				
4-1/2 x 1-3/4 x 1/4 x 3/32	5	Medium	MJS24	614636 87080
	5	Fine	FJS24	614636 87075
4-1/2 x 1-3/4 x 1/2 x 3/16	5	Coarse	CJS44	614636 87100
	5	Medium	MJS44	614636 87095
	5	Fine	FJS44	614636 87090
6 x 2-1/4 x 3/4 x 3/8	5	Medium	MJS66	614636 87110
	5	Fine	FJS66	614636 87105
Round Edge Slips – India (Aluminum Oxide)				
4 x 1 x 7/16 x 3/16	5	Medium	MS14	614636 87140
	5	Fine	FS14	614636 87135
4-1/2 x 1-3/4 x 1/4 x 3/32	5	Coarse	CS24	614636 87155
	5	Medium	MS24	614636 87150
	5	Fine	FS24	614636 87145
4-1/2 x 1-3/4 x 3/8 x 1/8	5	Coarse	CS34	614636 87170
	5	Medium	MS34	614636 87165
	5	Fine	FS34	614636 87160
4-1/2 x 1-3/4 x 1/2 x 3/16	5	Coarse	CS44	614636 87185
	5	Medium	MS44	614636 87180
	5	Fine	FS44	614636 87175
5 x 1 x 5/16 x 3/32	5	Medium	MS15	614636 87195
	5	Fine	FS15	614636 87190
Round Edge Slips – Soft Arkansas				
4 x 1-3/4 x 3/8 x 1/8	5	Extra Fine	SS4	614636 87055
Round Edge Slips – Hard Translucent Arkansas				
3 x 1-3/4 x 1/4 x 1/16	5	Ultra Fine	HS3	614636 87040
4 x 1-1/4 x 1/4 x 1/8	5	Ultra Fine	HS14	614636 87050
4 x 1-3/4 x 3/8 x 1/8	5	Ultra Fine	HS4	614636 87045

All Slips are bulk packed.

Specialty Stones



Better choice for specific sharpening or deburring applications

SPECIALTY STONES

- Norton continues to offer specialty stones with optimum specifications and unique shapes that conform to, and quickly sharpen, specific tools

Specialty Stones for Machine Tools

Gouge Sharpening Stone

This stone has a unique shape for sharpening and lapping inside and outside curved surfaces on gouges and other cutting tools.

Jointer Stones

These stones provide a fast method of restoring and maintaining the cutting edges of mechanical jointing devices on automatic planers.

Machine Knife Stone

Crystolon (silicon carbide) machine knife stones offer both coarse and fine sides for sharpening and honing paper and cloth-cutting knives and planer knives on the machine. The groove around the middle of the stone protects fingers and provides a secure hold.

Reamer Stones


Durable, fast-cutting stones designed for imparting a professional edge on reamers, taps, and rough rounders on shoe machine tools.

Boat Stones

Boat Stones are medium grit, medium grade stones that are easy to hold and use. Excellent for deburring and breaking sharp edges on dies, fixtures and machined parts, and for deburring grinder magnetic chucks.

SIZE	QTY./CASE	SPEC.	PRODUCT #	PART #
TIER: BETTER				
Gouge Sharpening Stone – India (Aluminum Oxide)				
6 x 2 x 1 x 1/2 x 3/8	5	Fine	FS76	614636 87305
Jointer Stones				
4 x 3/4 x 3/8 – Crystolon (Silicon Carbide)	5	Medium	JE74	614636 87335
4 x 3/4 x 3/8 – India (Aluminum Oxide)	5	Coarse	IE74	614636 87375
Machine Knife Stone – Crystolon (Silicon Carbide)				
4" Diam. x 1-1/2" Thick	5	Coarse/Fine	JB74	614636 87570
Reamer Stones – India (Aluminum Oxide)				
4-1/2 x 1 x 5/16	10	Medium	MT124	614636 87420
	10	Fine	FT124	614636 87415
5 x 1 x 3/16	10	Medium	MT125	614636 87430
	10	Fine	FT125	614636 87425
6 x 1 x 1/4	10	Medium	MT126	614636 87440
	10	Fine	FT126	614636 87435
Boat Stone – Crystolon (Silicon Carbide)				
9 x 2-1/2 x 1-1/2	10	37C80-HV		614636 10369
Boat Stone – India (Aluminum Oxide)				
9 x 2-1/2 x 1-1/2	10	38A60-IVBE		614636 10503

Boat and Reamer Stones are bulk packed. All these other Specialty Stones are packed in individual boxes within a case.

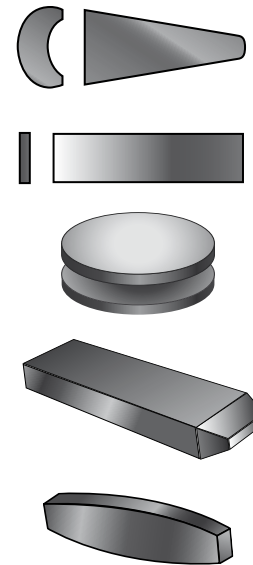

Large Specialty Stones

Tradesmen's Utility Stones

Used for sharpening trimming knives and as an abrasive file in many different industries. The JT910 does not have a handle, while the JT920 and JT930 have wooden handles.

Sickle and Scythe Stones


These silicon carbide stones quickly produce a fast-cutting edge on sickles, scythes, and brush hooks. These stones are most frequently chosen where the speed of sharpening is the primary consideration.

Utility File

A long wedge-shaped stone with four flat sides designed for sharpening coarse cutting edges on cutting implements and edged garden tools. Wooden handles make them easy to use. They will outlast and out-sharpen metal files.


SIZE	QTY./CASE	SPEC.	PRODUCT #	PART #
TIER: BETTER				
Tradesmen's Utility Stones – Crystolon (Silicon Carbide)				
10 x 1-1/4 x 3/4	10	Medium	JT910	614636 87665
14-3/4 Overall (with Handle)	10	Coarse/Fine	JT930	614636 87675
	10	Medium	JT920	614636 87670
Sickle and Scythe Stones				
10 x 1-1/4 x 3/4 Crystolon (Silicon Carbide)	10	Coarse	TJ3	614636 87731
10 x 1-5/16 x 3/4 India (Aluminum Oxide)	10	Coarse	TD1	614636 87715
Utility File – Crystolon (Silicon Carbide)				
14 Overall (w/ Handle)	10	Coarse	JD2	614636 87750

All Large Specialty Stones are bulk packed.



Retail Packaged Sharpening Products

Our retail-packaged line brings Norton quality to your distributor showroom, vending machine, tool crib, and your tool box. Each stone is specifically designed for a popular sharpening application and packaged to sell or carry to the job site.

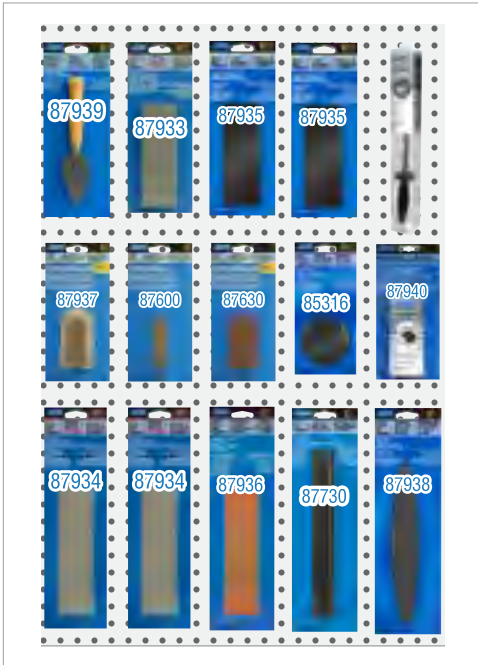

SIZE (L x W x H)	SPEC.	TIER: BETTER	
		QTY./CASE	PART #
Axe and Hatchet Sharpener			
3 x 5/8 round	Coarse/Fine Crystolon (Silicon Carbide)	10	076607 85316
Pocket Knife Sharpener			
3 x 7/8 x 3/8	Fine Crystolon (Silicon Carbide)	5	076607 87600
3 x 7/8 x 3/8 with case	Medium India (Aluminum Oxide)	5	076607 87937
3 x 1-1/2 x 1/2 with case	Coarse/Fine India (Aluminum Oxide)	5	076607 87630
Economy Tool & Knife Benchstone			
6 x 2 x 3/4	Coarse/Fine Crystolon (Silicon Carbide)	5	076607 87933
8 x 2 x 3/4	Coarse/Fine India (Aluminum Oxide)	10	076607 87934
8 x 2 x 1	Coarse/Fine India (Aluminum Oxide)	10	614636 85755
High Quality Tool & Knife Benchstone			
6 x 2 x 3/4	Coarse/Fine Crystolon (Silicon Carbide)	5	076607 87935
Chisel & Planer Blade Sharpener			
8 x 2 x 3/4	Coarse/Fine India (Aluminum Oxide)	10	076607 87936
Household Knife & Tool Sharpener			
7-1/2	Fine Crystolon (Silicon Carbide)	5	076607 87939
Farm Tool Sharpener			
10 x 1-1/4 x 3/4	Coarse Crystolon (Silicon Carbide)	10	076607 87730
Lawn & Garden Tool Sharpener			
9-1/2 x 1-3/8 x 1/2	Medium Crystolon (Silicon Carbide)	10	076607 87938
Sharpening Stone Oil			
4-1/2 oz.	Oil	5	076607 87940
Sharpening Steel			
1/2 x 10	Round file with rubber handle	8	662532 40433
Vitrified Dressing Stick			
1 x 1 x 6	Medium Silicon Carbide	5	076607 10466


Knife and Scissor Sharpener

The knife and scissor mechanical sharpener is a quick and portable tool for hundreds of sharpening applications.

SPECIFICATION	QTY./CASE	PART #
Knife and Scissor Sharpener		
Carbide	6	076607 87520

Norton Professional Sharpening Products and Dressing Sticks

See the "Norton Professional Sharpening Products and Dressing Sticks Catalog #200" on www.nortonabrasives.com to view the complete list and descriptions of our many sharpening products.

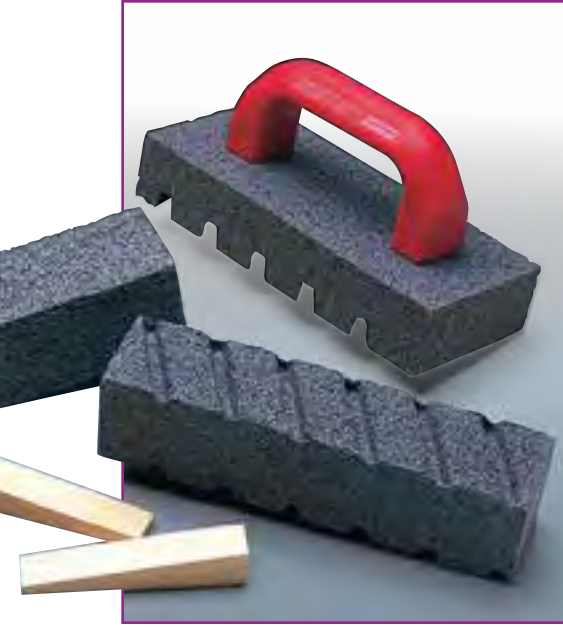

Hard silicon carbide rubbing bricks are used for heavy-duty applications such as rubbing floors, cleaning and scouring castings, rubbing down concrete, and removing mold marks.

Applications:

Floor Rubbing Bricks – are used to rub down concrete and remove mold marks. These are designed to fit the chucks of common concrete floor grinding equipment. Reusable wooden wedges anchor the bricks to the equipment chucks.

Plain Hand Rubbing Bricks – are the choice of mechanics and foundry workers for dressing grinding wheels and cleaning or scouring castings.

Fluted Hand Rubbing Bricks – are used by masons and stone workers for rubbing down concrete and removing mold marks. The diagonal flutes provide sharp edges, a clean shearing action, and carry away debris.

Fluted Hand Rubbing Bricks with Handle – make quick work of removing mold marks and rubbing down concrete. The firmly attached handle reduces fatigue and facilitates overhead, wall, and floor work.

Griddle Bricks – quickly clean away carbon build-up and other residue on your grill without leaving fibers, which grill brushes often do.

Grit Range:
Abrasive Type:
Machine Used:

6 – 120
Silicon Carbide



HAND SANDING



SIZE (L x W x H)	QTY./ CASE	SPEC.	ABRASIVE	PART #
Plain Floor Rubbing Bricks with Wooden Wedges				
4 x 2 x 2	6	C6-R	Silicon Carbide	614636 53292
	6	C10-R	Silicon Carbide	614636 53293
	6	C24-R	Silicon Carbide	614636 53294
	6	C80-R	Silicon Carbide	614636 53295

SIZE (L x W x H)	QTY./ CASE	PART #
Wooden Wedges		
	6	614636 85297

SIZE (L x W x H)	QTY./ CASE	SPEC.	ABRASIVE	PRODUCT #	PART #
Plain Hand Rubbing Bricks					
8 x 2 x 2	5	C24	Silicon Carbide	BP28	614636 87830

SIZE (L x W x H)	QTY./ CASE	SPEC.	ABRASIVE	PRODUCT #	PART #
Fluted Hand Rubbing Bricks					
6 x 2 x 2	5	C20	Silicon Carbide	BF26	614636 87840
8 x 2 x 2	5	C20	Silicon Carbide	BF28	614636 87845

SIZE (L x W x H)	QTY./ CASE	SPEC.	ABRASIVE	PRODUCT #	PART #
Fluted Hand Rubbing Bricks with Handle					
6 x 3 x 1	5	C20	Silicon Carbide	BFH6	614636 87800
8 x 3-1/2 x 1-1/2	5	C20	Silicon Carbide	235	614636 87795

SIZE (L x W x H)	QTY./ CASE	SPEC.	ABRASIVE	PART #
Griddle Brick				
4-1/2 x 3 x 2	5	Medium	Alundum	614636 87870



improve your **PROCESS, PRODUCTIVITY, AND COST POSITION**

You know the industry-leading performance of our engineered abrasives. Norton R&D has now created new formulations of these abrasives with our exclusive, proprietary Norton Vitrium³ (VS3) bond. You won't get better productivity from any other grinding wheels and segments.

- Cooler cutting with better chip clearance; improved coolant flow; significantly reduced burn
- Reduced wheel loading
- Improved part quality
- Improved precision profile; ultra-radius accuracy
- Extended wheel life
- Reduced dressing frequency and cost
- Improved cycle and process time
- Able to run at higher operating speed; increased throughput and productivity
- Leverage existing equipment; optimize machine efficiency



iGrind App

Created by Norton engineers and updated based on feedback from you, the Norton iGrind app features calculators and conversion tools designed to help optimize your grinding processes.

With Norton iGrind, you can calculate the starting parameters for traverse or plunge truing your grinding wheel, determine the ideal setup for delivering coolant to the grinding zone, and convert wheel speeds between RPM, SFPM (Surface Feet Per Minute), and M/Sec to ensure a safe grinding operation.

<https://www.nortonabrasives.com/en-us/igrind>

App Features:

- Wheel Speed Converter
- Traverse Diamond Roll Dressing Calculator
- Coolant Calculator
- Plunge Diamond Roll Dressing Calculator
- Stationary Tool Dressing Calculator




Standard Grinding Wheel and Periphery Shapes




Type 01
Straight Wheels




Type 02
Cylinder Wheels




Type 05
Recessed One Side
Wheels




Type 06
Straight Cup Wheels
(rim and back)



Type 07
Double Recessed
Wheels




Type 11
Taper Cup Wheels



Type 12
Dish Wheels



Type 31
Segments



Type 35 and 36
Discs

How to Read an Abrasive Product Specification

Conventional Grinding Wheels


32A 46 I 8 V BE

Abrasive				Grit Size			Grade			Structure	Bond Type	Norton Symbol
Aluminum Oxide	Ceramic	Silicon Carbide	Zirconia Alumina	Coarse	Medium	Fine	Soft	Medium	Hard	Relative grain spacing	Resin = B	Designates a variation or modification to bond.
23A	Oxide	37C	4NZ	12	30	80	D	I	Q	Dense	Shellac = E	
25A	3SGP	39C	4ZF	14	36	90	E	J	R	↑ 2 4 5 6 8 12 16 19 25 28 ↓ Open	Plastic = P	
32A	3SGR	Crystolon	5ZF	16	46	100	F	K	S		Rubber = R	
32AC (blend)	5SG	Masonry	AZ (blend)	20	54	120	G	L	T		Vitrified = V	
38A	BRG		BlueFire	24	60	150	H	M	u			
48A	SG		Charger (blend)	70	220		N	V				
53A	SXG						O	Y				
55A	NorZon Plus (blend)		NZ				P	Z				
57A	NQ		NZC (blend)									
U57A	Quantum		NZIII									
64A	Targa		NZIV									
86A			NorZon									
90A			ZI									
Alundum												
FabCut												
India												
Gemini												
Metal												
Vortex												

Shelf Life and Proper Storage of Grinding Wheels

It has always been Saint-Gobain Abrasives recommendation that resinoid bonded grinding wheels be used within 2 years from the date of manufacture. This recommendation assumes that resinoid bonded grinding wheels have been stored under ideal storage conditions. It might be true that under ideal storage conditions resinoid bonded grinding wheels can survive without any degradation in strength for well over two years. However, it is always wise to suspect any wheels over two years old and have them reinspected or re-speed tested to determine if there has been any degradation in strength. If the wheels are stored under less than ideal conditions, they might have a much shorter shelf life depending upon the severity of storage conditions. These same comments also apply to rubber and shellac bonded grinding wheels.

As for vitrified grinding wheels, the shelf life is less influenced by humidity and adverse storage conditions as compared to resinoid, rubber or shellac, but even vitrified grinding wheels do not have an infinite shelf life. The best procedure and the best rule of thumb is to have any wheel that is two years old or older re-speed tested and reinspected to ensure it is fit for use. The procedure for having this done and the charges will be explained by our Customer Service Department, but the cost of shipping as well as the cost of re-inspection is the customer's responsibility. Also, any wheels rejected or otherwise lost in the re-inspection process will also be the responsibility of the customer.

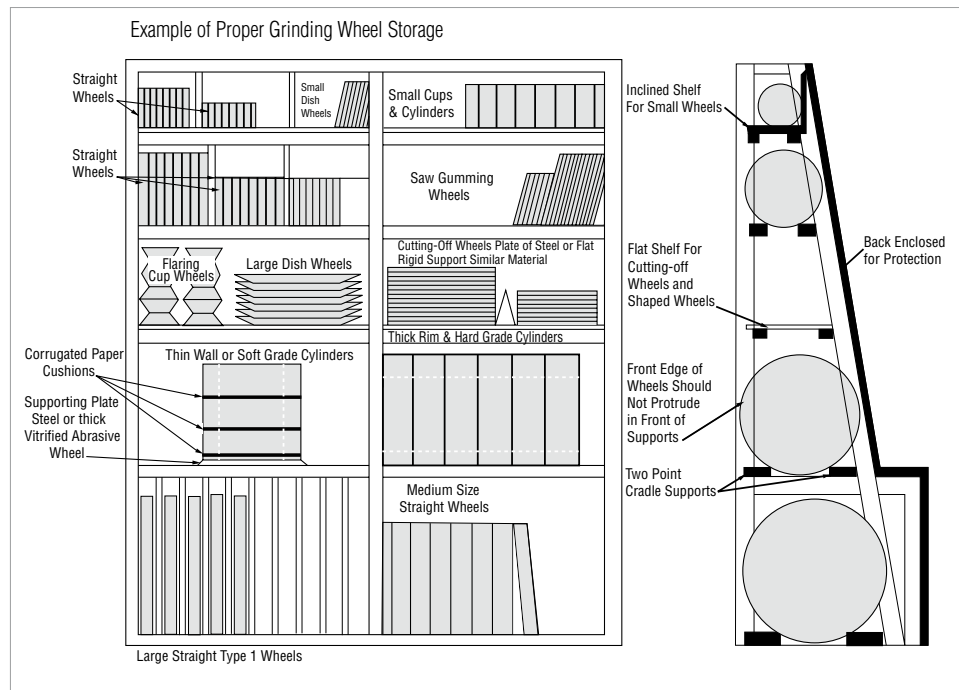

Keep in mind, however, that this procedure is good to verify the reliability of a product but must not be performed until you are ready to consume the wheel. If wheels are sent back after the two year time frame for re-inspection and re-testing and then put back on the shelf, there is no telling how long they will be fit for use after that last inspection. Therefore, these wheels must be consumed as soon as is practical.



The Norton bench and pedestal wheel line consists of numerous wheel diameters and arbor sizes, abrasive types and grit sizes. Our offering answers all metal removal, deburring, shaping and sharpening needs: white aluminum oxide for high-speed tool steels, brown aluminum oxide for carbon steel, and silicon carbide for non-ferrous metals and carbide tooling.

- Applications:** Offhand deburring and sharpening of parts and tools
- Size Range:** 5" – 18"
- Grit Range:** 24 – 150
- Abrasive Types:** Premium Ceramic Alumina, Aluminum Oxide, Silicon Carbide
- Bushings:** Telescopic arbor bushings to fit all popular grinders are packaged with the wheel
- Machine Used:**




BENCH GRINDER



PEDESTAL GRINDER

Application/Grit Recommendation Guide

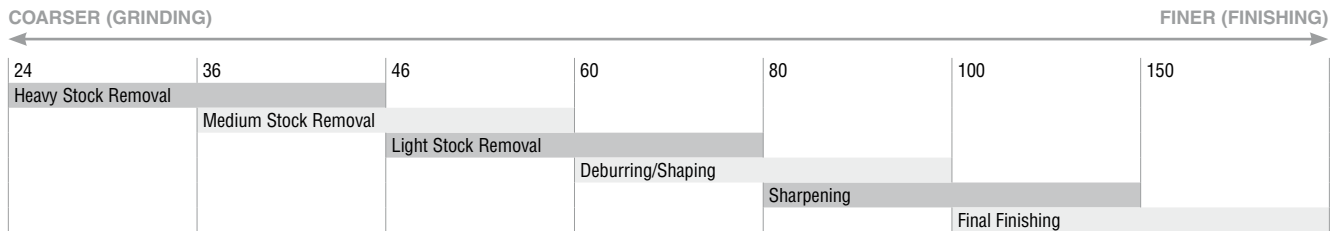

TECH TIP

- Unsecured machines can move, causing grinding breakage and injury. Fixed-based bench and pedestal grinders **MUST** be secured.
- Do not grind wood, plastic, or any other non-metallic material on a bench or pedestal grinder.
- All bench and pedestal wheels must be dressed to prevent loading. Loading can cause excessive heat, damage to the workpiece, and wheel breakage. Dressing exposes new cutting edges and provides chip clearance.
- Recommended starting dressing stick: 1" x 1" x 6" 37C24-SVK Part # 614636**10462**



It is the user's responsibility to refer to and comply with ANSI B7.1

Bench and Pedestal Wheel Arbor Bushings

WHEEL DIAMETER	WHEEL CENTER HOLE	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"
5", 6", 7"	1"	•	•	•	•		
8"	1"		•	•	•		
10"	1-1/4"			•	•	•	
12" x 2"	1-1/4"					•	
12" and 14"	1-1/2"					•	•

These size bushings shipped free of charge with your wheel order.



NEW

Best choice for deburring and tool sharpening on bench and pedestal grinders

PREMIUM CERAMIC ALUMINA 3SG

- Type 01 straight wheel with ceramic alumina grain has fast cut, minimal burn, and long wheel life
- High performance bond for versatility and exceptional form holding
- Especially great for hollow grinding of plane blades and chisels; telescoping bushings to fit popular arbor hole sizes



Better choice for light metal removal and sharpening of high-speed tool steels (55 Rc and higher)

PREMIUM WHITE ALUMINUM OXIDE

- Type 01 straight wheel with premium white aluminum oxide for maximum cut rate and cool grinding action on hardened or high-speed tool steels
- Vitrified bonded for superb shape holding and resistance to wear
- Better choice for deburring and tool sharpening on bench and pedestal grinders; telescoping bushings to fit popular arbor hole sizes



Better choice for light to medium stock removal

57A ALUMINUM OXIDE

- Type 01 straight wheel, the better choice for the end-user that needs a specific grit size and hardness for engineered applications
- Vitrified bond for superb shape holding and resistance to wear
- Excellent choice for deburring and tool sharpening on bench and pedestal grinders



Better choice for medium grit and grade for light to medium stock removal on carbide tooling and non-ferrous materials

39C SILICON CARBIDE

- Type 01 straight wheel with sharp, green silicon carbide; use for performance applications on carbide tooling and non-ferrous materials
- Vitrified bond for superb shape holding and resistance to wear
- Excellent choice for deburring and tool sharpening on bench and pedestal grinders



Good choice for all general-purpose bench and pedestal applications

GEMINI ALUMINUM OXIDE

- Type 01 straight wheel with quality, aluminum oxide for general purpose bench and pedestal grinder applications on steel
- Vitrified bond for superb shape holding and resistance to wear
- Good choice for deburring and tool sharpening on bench and pedestal grinders; telescoping bushings to fit popular arbor hole sizes



Good choice for all general-purpose bench and pedestal applications on non-ferrous materials and carbide tooling

GEMINI SILICON CARBIDE

- Type 01 straight wheel with sharp, green silicon carbide for general-purpose applications on carbide tooling and non-ferrous materials
- Vitrified bond for superb shape holding and resistance to wear
- Available in many sizes and coarse to fine grits; for sharpening to fine shaping applications



TIER:	BEST	BETTER	BETTER
TRADENAME:	PREMIUM CERAMIC ALUMINA	PREMIUM ALUMINUM OXIDE	57A
ABRASIVE:	3SG Ceramic Alumina	White Aluminum Oxide	Brown Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC	PART #	SPEC	PART #	SPEC	PART #
6 x 3/4 x 1	4,140*	1/5	3SG-46K	076607 05411	Medium 60	076607 88246		
	4,140*	1/5	3SG-60I	076607 04684	Fine 100	076607 88247		
	4,140*	1/5	3SG-80K	076607 05412	Very Fine 150	076607 88248		
	4,140*	1/5	3SG-100I	076607 04682				
6 x 1 x 1	4,140*	1/5	3SG-46K	076607 05413	Medium 60	076607 88261		
	4,140*	1/5	3SG-80K	076607 05414	Fine 100	076607 88262		
	4,140	1/5			Very Fine 150	076607 88263		
8 x 1 x 1	3,600	1/5	3SG-46I	076607 04660	Medium 60	076607 88281		
	3,600	1/5	3SG-46K	076607 05421	Fine 100	076607 88282		
	3,600	1/5	3SG-60I	076607 04659	Very Fine 150	076607 88283		
	3,600	1/5	3SG-80K	076607 05422				
	3,600	1/5	3SG-100I	076607 04657				
10 x 1 x 1-1/4	2,485	1/5					57A46-MVBE	662531 16274
	2,485	1/5					57A60-MVBE	662531 16273
10 x 1-1/2 x 1-1/4	2,485	1/5					57A46-MVBE	662531 16280
12 x 1 x 1-1/4	2,070	1/5					57A46-MVBE	662532 20947
12 x 2 x 1-1/2	2,070	1/4					57A30-MVBE	662532 20951
	2,070	1/4					57A36-OVBE	662532 20952
	2,070	1/4					57A46-MVBE	662532 20953
	2,070	1/4					57A60-MVBE	662532 20955
	2,070	1/4					57A24-QVBE	662533 19972
14 x 2 x 1-1/2	1,800	1/3					57A36-OVBE	662533 19973
	1,800	1/3					57A46-MVBE	662533 19974
	1,800	1/3					57A24-QVBE	662533 19976
14 x 2-1/2 x 1-1/2	1,800	1/2					57A46-MVBE	662533 19975
	1,800	1/2					57A36-OVBE	662533 19977
18 x 3 x 1-1/2	1,275	1/2					57A24-QVBE	662534 62610

* Max. RPM for Premium Ceramic Alumina Wheels is 5,410

Bench and Pedestal Wheel Arbor Bushings

WHEEL DIAMETER	WHEEL CENTER HOLE	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"
5", 6", 7"	1"	•	•	•	•		
8"	1"		•	•	•		
10"	1-1/4"			•	•	•	
12" x 2"	1-1/4"					•	
12" and 14"	1-1/2"					•	•

These size bushings shipped free of charge with your wheel order.



TIER: GOOD
TRADENAME: GEMINI ALUMINUM OXIDE
ABRASIVE: Brown Aluminum Oxide



TIER: GOOD
39C (GREEN) / 37C (GRAY)
Silicon Carbide



TIER: GOOD
GEMINI SILICON CARBIDE
Green Silicon Carbide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC	PART #	MIN./STD. PKG.	SPEC	PART #	MIN./STD. PKG.	SPEC	PART #
5 x 1/2 x 1	4,965	1/5	Medium 60/80	076607 88202						
	4,965	1/5	Fine 100/120	076607 88201						
5 x 3/4 x 1	4,965	1/5	Medium 60/80	076607 88210						
	4,965	1/5	Fine 100/120	076607 88205						
5 x 1 x 1	4,965	1/5	Medium 60/80	076607 88225						
	4,140	1/5	Coarse 36/46	662528 36132			1/5	Medium 60	662528 36571	
6 x 1/2 x 1	4,140	1/5	Medium 60/80	662528 36131			1/5	Fine 80	662528 36572	
	4,140	1/5	Fine 100/120	662528 36133			1/5	Extra Fine 120	662528 36573	
	4,140	1/5	Coarse 36/46	076607 88245			1/5	Medium 60	662528 37190	
6 x 3/4 x 1	4,140	1/5	Medium 60/80	076607 88240			1/5	Fine 80	662528 37191	
	4,140	1/5	Fine 100/120	076607 88235			1/5	Extra Fine 120	662528 37192	
	4,140	1/5	Coarse 36/46	076607 88260			1/5	Medium 60	662528 37187	
6 x 1 x 1	4,140	1/5	Medium 60/80	076607 88255			1/5	Fine 80	662528 37193	
	4,140	1/5	Fine 100/120	076607 88250			1/5	Extra Fine 120	662528 37194	
	3,600	1/5	Coarse 36/46	076607 88275			1/5	Medium 60	662529 42300	
7 x 1 x 1	3,600	1/5	Medium 60/80	076607 88270			1/5	Fine 80	662529 42301	
	3,600	1/5	Fine 100/120	076607 88265			1/5	Extra Fine 120	662529 42302	
	3,600	1/5	Coarse 36/46	076607 88278						
8 x 3/4 x 1	3,600	1/5	Medium 60/80	076607 88277						
	3,600	1/5	Fine 100/120	662530 42317						
	3,600	1/5	Very Coarse 24	662530 44454			1/5	Medium 60	662530 44087	
8 x 1 x 1	3,600	1/5	Coarse 36/46	076607 88286			1/5	Fine 80	662530 44534	
	3,600	1/5	Medium 60/80	076607 88285			1/5	Extra Fine 120	662530 44535	
	3,600	1/5	Fine 100/120	076607 88280						
	2,485	1/2	Very Coarse 24	662531 60788	1/5	39C60-IVK	662531 16262	1/2	Medium 60	662531 44536
10 x 1 x 1-1/4	2,485	1/2	Coarse 36/46	076607 88295			1/2	Fine 80	662531 60366	
	2,485	1/2	Medium 60/80	076607 88290						
	2,485	1/2	Fine 100/120	662531 60350						
	2,485	1/2	Coarse 36/46	662531 61250						
10 x 1-1/4 x 1-1/4	2,485	1/2	Medium 60/80	662531 61251						
	2,485	1/2	Coarse 36/46	662531 61393	1/5	39C60-IVK	662531 16265			
10 x 1-1/2 x 1-1/4	2,485	1/2	Medium 60/80	662531 61395						
	2,070	1/2	Coarse 36/46	662532 63052						
12 x 1-1/2 x 1-1/2	2,070	1/2	Medium 60/80	662532 63053						
	2,070						1/2	Medium 60	662532 63359	
12 x 2 x 1-1/4	2,070						1/2	Fine 80	662532 63360	
	2,070	1/2	Very Coarse 24	662532 63054						
12 x 2 x 1-1/2	2,070	1/2	Coarse 36/46	662532 63055						
	2,070	1/2	Medium 60/80	662532 63056	1/4	39C60-KVK	662532 20942			
	1,800				1/3	37C24-RVK	662533 19967			
14 x 2 x 1-1/2	1,800				1/3	39C60-JVK	662533 19968			

Bench and Pedestal Wheel Arbor Bushings

WHEEL DIAMETER	WHEEL CENTER HOLE	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"
5", 6", 7"	1"	•	•	•	•		
8"	1"		•	•	•		
10"	1-1/4"			•	•	•	
12" x 2"	1-1/4"					•	
12" and 14"	1-1/2"					•	•

These size bushings shipped free of charge with your wheel order.



Keep circular saws, band saws and other cutting tools razor sharp when you use the NorZon NZ ZA Type 01 sawgumming wheel. Featuring a resin bond to provide a smooth performance and deliver exceptional strength, this hardy wheel is specially designed for use in timber industries and for woodworking and saw manufacturing applications. Ideal for frequent use, the wheel has a zirconia alumina abrasive that ensures sharp cuts while it enhances the wheel's durability.

Applications: Tool Sharpening
Size Range: 12"
Abrasive Grain: Zirconia Alumina
Shape: Type 01 Straight
Machine Used:



NEW

Best choice for saw sharpening in the timber, woodworking, and saw manufacturing industries

NORZON NZ ZIRCONIA ALUMINA

- Durable, sharp zirconia alumina abrasive delivering the highest performance under frequent use conditions
- Strong, yet smooth-running resin bond
- Designed to excel at shaping and resharpening various types of saws including large circular and band saw blades used primarily for timber harvesting

TIER: **BEST**
 TRADENAME: **NORZON NZ**
 ABRASIVE: Zirconia Alumina

SIZE (D x T x H)	MAX. RPM	STD. PKG.	SPEC	PART #
Type 01 Straight				
12 x 5/8 x 1-1/4	3,025	5	SG2981	662532 62303
12 x 3/4 x 1-1/4	3,025	5	SG2181	662532 62305
12 x 3/4 x 1-1/4	3,025	5	SG2981	662532 62306
12 x 3/4 x 1-1/4	3,025	5	SG2981	662532 62307
12 x 7/8 x 1-1/4	3,025	5	SG2981	662532 62462
12 x 7/8 x 1-1/4	3,025	5	SG2181	662532 62461
12 x 1 x 1-1/4	3,025	5	SG2981	662532 62487 NS

NS Non-stock, Contact your Norton representative for current order quantities and lead-times.



Used on surface, cylindrical, and tool and cutter grinders, Norton precision, form-holding vitrified toolroom wheels maximize your productivity. Available in latest-generation ceramic alumina, aluminum oxide, and silicon carbide – for every ferrous and non-ferrous MRO, small job shop, and production operation.

- Applications:** Surface grinding, tool and cutter grinding, and reshaping
- Shapes:** Type 01 Straight, Type 02 Cylinder, Type 05 and 07 Recessed 1 and 2 Sides, Type 06 and 11 Straight and Flaring Cups, Type 12 Dish, Type 20 Concaved 1 Side, and Type 35 Plate Mounted Disc
- Size Range:** 3/4" – 18" diameter
- Grit Range:** 46 – 220
- Abrasive Grain:** Ceramic Alumina, Aluminum Oxide, Silicon Carbide

Material-to-Product Recommendation Guide

APPLICATION / MATERIAL	PERFORMANCE/PRODUCTIVITY								
	Narrow Contact Area			Medium Contact Area			Wide Contact Area		
	BEST	BETTER	GOOD	BEST	BETTER	GOOD	BEST	BETTER	GOOD
Tool Resharpener									
Heavy Stock Removal (> .004)									
HSS & Tool Steel RC 50-68	5SG46-KVS	32A46-KVBE	38A46-KVBE	5SG46-JVS	32A46-JVBE	38A46-JVBE	5SG46-GVSP	32A46-GVBEP	38A46-GVBEP
							3SGR46-GVP2	48A46-GVP2	38A46-GVP2
Moderate Stock Removal (.002-.004)									
HSS & Tool Steel RC 50-68	5SG60-KVS	32A60-KVBE	38A60-KVBE	5SG60-JVS	32A60-JVBE	38A60-JVBE	5SG60-GVSP	32A60-GVBEP	38A60-GVBEP
							3SGR60-GVP2	48A60-GVP2	
Carbide			39C60-JVK						39C60-JVK
Surface Grinding									
Heavy Stock Removal (> .004)									
HSS & Tool Steel RC 50-68	5NQ46-JVS	32A46-JVBE	38A46-JVBE	5SG46-IVS	32A46-IVBE	38A46-IVBE	5SG46-GVSP	32A46-GVBEP	38A46-GVBEP
400 Series Stainless							3SGR46-GVP2	48A46-GVP2	38A46-GVP2
Soft Steels RC 30-45	5SG46-KVS	32A46-KVBE	38A46-KVBE	5SG46-JVS	32A46-JVBE	38A46-JVBE	5SG46-HVSP	32A46-HVBEP	38A46-HVBEP
300 Series Stainless							3SGR46-HVP2	48A46-HVP2	38A46-HVP2
Cast Iron: Ductile & Gray	5SG46-KVS	32A46-KVBE	38A46-KVBE	5SG46-JVS	32A46-JVBE	38A46-JVBE	5SG46-HVSP	32A46-HVBEP	38A46-HVBEP
							3SGR46-GVP2	48A46-HVP2	38A46-HVP2
Non-ferrous Alloys			39C46-JVK						39C46-IVK
Moderate Stock Removal (.002-.004)									
HSS & Tool Steel RC 50-68	5NQ60-JVS	32A60-JVBE	38A60-JVBE	5SG60-IVS	32A60-IVBE	38A60-IVBE	5SG60-GVSP	32A60-GVBEP	38A60-GVBEP
400 Series Stainless							3SGR60-GVP2	48A60-GVP2	
Soft Steels RC 30-45	5SG60-KVS	32A60-KVBE	38A60-KVBE	5SG60-JVS	32A60-JVBE	38A60-JVBE	3SGR60-HVP2	32A60-HVBEP	38A60-HVBEP
300 Series Stainless								48A60-HVP2	38A60-HVP2
Cast Iron: Ductile & Gray	5SG60-KVS	32A60-KVBE	38A60-KVBE	5SG60-JVS	32A60-JVBE	38A60-JVBE	3SGR60-HVP2	32A60-HVBEP	38A60-HVBEP
								48A60-HVP2	38A60-HVP2
Non-ferrous Alloys			39C60-JVK						39C60-IVK
Light Stock Removal and Finishing (<.001)									
HSS & Tool Steel RC 50-68		32A80-JVBE	38A80-JVBE		32A80-IVBE	38A80-IVBE		32A80-HVBE	38A80-HVBE
400 Series Stainless									
Soft Steels RC 30-45		32A80-KVBE	38A80-KVBE		32A80-JVBE	38A80-JVBE		32A80-IVBE	38A80-IVBE
300 Series Stainless									
Cast Iron: Ductile & Gray		32A80-KVBE	38A80-KVBE		32A80-JVBE	38A80-JVBE		32A80-IVBE	38A80-IVBE
Nonferrous Alloys			39C80-JVK						39C80-HVK

Upgrade to Vitrium³ to improve your process and productivity in 3 ways

Vitrium³ bond (VS3) wheels for enhanced-performance are available with these abrasives: NQ, SG, 32A, and 48A

<p>1. COOL CUTTING</p> <p>VITRIUM³ BOND BOND-PART INTERACTION</p> <p>Improved holding power (using less bond-to-abrasive ratio) exposes a larger grain surface area, improving freer cut rate.</p>	<p>2. PRECISE PROFILE</p> <p>VITRIUM³ WHEEL AFTER 5 GRINDING CYCLES</p> <p>Superior grain-holding properties significantly improve wheel form and corner holding vs. other bond systems – reducing dressing time and dresser wear.</p>	<p>3. HIGH SPEED</p> <p>High Speed – Norton Vitrium³ bond provides the ultimate wheel strength. This allows for high speed operation on equipment designed and rated for high speed.</p>
--	--	--

Vitrified Wheel Bonds

Bond	Description
VS3	Quantum (white) and Norton SG (white): Patented technology produces a strong, exceptionally cool-cutting bond with unprecedented form holding; able to run at higher operating speed; increased throughput and productivity; versatile, for all areas of contact
VS3P	Quantum (white) Norton SG (white): Porous bond; use where heat is an issue; patented technology produces a strong, exceptionally cool-cutting bond with unprecedented form holding; versatile, for all areas of contact
VS	Quantum (green) and Norton SG (blue): High stock removal; narrow/medium contact area; roughing/finishing; cool cutting
VSP	Quantum (green) and Norton SG (blue): Porous bond; use where heat is an issue; high stock removal; medium/wide contact area; cool cutting; high chip clearance
VBE	32A (purple), 38A (white) and 57A (brown): General purpose; narrow/medium contact area; versatile; economical.
VBEP	32A (purple) and 38A (white): Porous bond; use where heat is an issue; medium/wide contact area; cool cutting; high chip clearance; high stock removal
V	38A (orange): For fine grit, form/corner holding applications; narrow contact area
VK	37C (black) and 39C (green): Designed specifically for silicon carbide abrasives; medium to narrow area of contact ; for non-steel applications
VCP	32A (purple) and 23A (blue/grey): Induced-pore, wide contact area, surface/creepfeed grinding applications
VP2	3SGR (ruby), 48A (ruby), 25A (pink) and 38A (white): Unique, controlled-porosity (NORPOR) bond for heat-sensitive applications

TECH TIP

SELECTING A WHEEL WITH THE CORRECT BOND TYPE

- Use VBE, V, VS, VS3, and VK bonds for general purpose applications or medium contact areas.
- Use VBEP, VSP, VS3P, VCP, and VP2 bonds on wide contact areas where heat is an issue.



It is the user's responsibility to refer to and comply with ANSI B7.1

Application/Grit Recommendation Guide

Grit	Requirement	Finish	Minimum Corner Radius
46	General Purpose	32 Ra and rougher	0.020"
60	Commercial Finish	32 Ra and better	0.016"
80 – 100	Fine Finish	20 Ra and better	0.0105"
120	Very Fine Finish	10 Ra and better	0.006"
150	Corner-Form Holding		0.005"
180	Corner-Form Holding		0.0035"
220	Corner-Form Holding		0.0026"

Cross Reference Guide

NORTON	CAMEL	CINCINNATI	RADIAC	TYROLIT	WINTERTHUR
Quantum 5NQ	—	5M5B	—	—	—
3SGR	AS3	3BP	7BP, 8BP	—	—
5SG	SZA	5MSB	7BW, 8BW	—	—
25A	PA	12A	RAA	88A	57A
32A	AZ	4A, 12A, 29A, 32A	32A, WRA	90A	67A, 68A
38A	83A, WA, AZ (Blue)	9A, 10A, 11A, 82A	WA, 9A	88A, 89A	53A, 49A, 42A
48A	—	—	RA	91A	68A
53A	91A, DA	29A, 97A	43A, 45A, 97A, WPA	50A	61A, 64A
57A	94A, CGW, A	A, AK	A	A, 52A	A
37C	—	6C	C	1C	C
39C	—	5C	GC	C	11C

Starting Recommendations for Truing and Dressing Norton Toolroom Wheels

TRUING & DRESSING: DRESSING STICK STARTING RECOMMENDATIONS

Size/ Spec.	High Performance Stick Part #	Size/ Spec.	Conventional Stick Part #
3 x 1/2 x 1/4" Norbide	614636 10148	6 x 1 x 1" 37C24-SVK	614636 10462
		8 x 1 x 1" 37C24-SVK	614636 10471
Other sizes are available. See the Dressing Stick section.			

DRESSING: SINGLE POINT DRESSING TOOL STARTING RECOMMENDATIONS

Wheel Sizes	Tool Shank Diameter	Ceramic (NQ, Norton SG, TG, Etc.), 37C & 39C Wheels	25A, 32A, 38A, 48A, 53A, 57A, 64A, 86A Wheels		
Product No.	Part #	Product No.	Part #		
Up to 7"	3/8	BCSG2M6	662601 57007	BC2M6	662601 95000
	7/16	BCSG2M7	662601 56905	BC2M7	662601 95001
8" to 10"	3/8	BCSG3M6	662601 57008	BC3M6	662601 95002
	7/16	BCSG3M7	662601 56906	BC3M7	662601 95003
12" to 14"	3/8	BCSG5M6	662601 57009	BC5M6	662601 95004
	7/16	BCSG5M7	662601 56907	BC5M7	662601 95005

These tools are a standard recommendation; see the "Diamond Tool" section for additional tools
See the Fliesen Tool section for Furioso tools, engineered specifically for Quantum vitrified wheel dressing

TECH TIP

Wheel Dressing

Single Point Diamond Tools

- Rigidly mount Single Point tools at a 10°-15° angle to the wheel centerline with a line drawn through the center of the wheel, pointing in the direction of wheel travel
- Point of contact should be slightly below centerline of wheel
- Use coolant whenever possible
- Normal infeed is .001" per pass
- Lead selections range from .002" - .010" per wheel revolution
- Rotate the tool 1/4 turn periodically to maintain a sharp point
- Use VBE, V, VS, VK bonds for general purpose applications or medium contact areas.
- Use VBEP, VSP, VS3P, VCP, VP2 bonds on wide contact areas where heat is an issue.

Multi-Point Diamond Tools

- Most multi-point tools are used for straight face dressing
- Tool should have full face contact with the wheel
- With new tool, 3 to 5 passes at .005" per pass should be taken to expose diamonds
- Infeed per pass .001" - .002"
- Use coolant whenever possible
- Use appropriate lead (and traverse rate)

Contact your Norton representative for proper tool selection for Targa (TG) wheels



It is the user's responsibility to refer to and comply with ANSI B7.1

Dressing Ceramic Wheels

- Use our specially designed Norton SG diamond tools when dressing ceramic wheels
- When first using a Norton SG tool, make 3 to 5 passes at .005" infeed to ensure full face contact between the dressing tool and wheel face
- Reduce normal dressing infeed by half. Do not exceed infeed of .002" per pass.
- The lead selection should be between .006" - .030" per wheel revolution. Faster traverse with Norton SG tools generally provides an open wheel face that can maximize productivity of the ceramic abrasive.
- To optimize applications using ceramic abrasives and/or tools, normal dressing parameters must change. Reduce infeed by 25%. Significant reductions in the amount of infeed and frequency of dress will result in substantially lower cost per part ground.
- See the Fliesen Tool section for Furioso tools, engineered specifically for Quantum vitrified wheel dressing.



Single-Pack Toolroom Wheels

The Small Quantity Order Solution

Available in our most popular specification of BEST, BETTER and GOOD performance tiers. Norton single-pack toolroom wheels provide many opportunities:

- Test order small quantities of a variety of wheel specifications
- Display and safely store your most often used wheels
- No need to repackage small orders from bulk shipments
- Ensure your wheel arrives on site undamaged

Troubleshooting Guide

Check the obvious first. Before changing the grinding wheel specification, investigate the following most common causes for most grinding problems:

1. Diamond dressing tool condition (check if worn or dull, rotate tool or replace if necessary)
2. Coolant direction, volume and filtration
3. Wheel dressing procedures (dress more open to free up cut rate, dress more closed to improve finish)

PROBLEM	POSSIBLE CAUSE	CORRECTION
Workpiece burn	Poor coolant direction	Redirect coolant into grinding zone
	Restricted or low coolant volume	Increase coolant volume
	Wheel too hard	Use one grade softer wheel
	Wheel structure too closed	Use porous bond wheel
	Wheel dressed too fine	Dress wheel coarser, more "open"
	Worn dressing tool	Inspect, rotate or replace dressing tool
	Work speed too slow	Increase work speed
	Infeed too fast	Reduce stock removed per pass or upgrade to 5SG or 5NQ
Wheel loading and glazing	Wheel too fine	Use coarser grit or softer grade wheel
	Wheel too hard	Use one grade softer wheel
	Too durable abrasive	Use a sharper, more friable abrasive
	Poor coolant quality	Change coolant or use high detergent type
	Wheel structure too closed	Use a porous bond wheel
	Wheel too finely dressed	Dress wheel very open
	Diamond dressing tool worn	Replace diamond and dress coarse (open)
Chatter	Depth of cut too small	Increase feed and traverse speed
	Unsupported work	Increase work support
	Machine vibration	Check for worn bearings
	Too heavy cut rate	Reduce cut rate
	Wheel too hard	Use one grade softer wheel
	Wheel structure too closed	Use a porous bond wheel
Chatter marks on workpiece	Wheel out of balance	Check wheel balance or try new wheel
	Worn spindle bearings	Check and correct for truth and end play
	Wheel out of truth	Redress wheel and check mounting
	Poorly clamped wheel	Check tightness of mounting nuts
Poor surface finish	Glazed face of wheel	Redress wheel with sharp dressing tool
	Incorrect wheel dress	Dress wheel finer (slow down dressing tool traverse)
	Worn dressing tool	Inspect, rotate, or replace dressing tool
	Too coarse grit size	Use a finer grit size
	Wheel too hard	Use softer grade
Not holding form	Wheel too soft	Use one grade harder wheel
	Wheel structure too open	Use a more closed wheel structure
Not holding corner	Incorrect wheel dress	Dress wheel finer. Face and side true wheel.
	Too large grit size	Use smaller grit size (maximum grit diameter less than 1.5 times corner radius)
	Wheel too soft	Use harder grade wheel
	Wheel structure too open	Use more closed structure wheel

Best choice for versatility, maximum performance and cost savings



QUANTUM (5NQ) CERAMIC ALUMINA

- Revolutionary, proprietary, engineered ceramic grain shape and chemistry for all low-, medium- and high-force applications ranging from cast iron, to stainless steel, and hard-to-grind Inconel and titanium
- Proven tough vitrified bond stands up to extreme grinding forces; perform well on old and new CNC cutting tool, cylindrical and surface grinding machines
- 33% to 100% longer life, 30% higher MRR (material removal rate), and 15% lower threshold power versus competitive ceramic products

Best choice for high productivity, low total per-part grinding cost



SG CERAMIC ALUMINA

- Exceptionally high-performance ceramic alumina and friable aluminum oxide abrasive blend for fast stock removal, cool, superior cutting; 3 - 5 times more life than aluminum oxide wheels; double rough stock removal rate versus conventional abrasives
- High performance bond for versatility (for grinding high speed tool steels, hardened and soft steels, and aerospace alloys) and exceptional form holding
- Self-sharpening abrasive minimizes burn and dressing to maximize sharp edge on tools and dies for longer life in production

Better choice for medium-to-heavy stock removal



32A ALUMINUM OXIDE

- Strong, sharp monocrystalline aluminum oxide grain, ideal for precision production medium-to-heavy stock removal applications
- The most versatile vitrified bond, especially recommended for CNC cutting tool machines, and cylindrical and surface grinding
- Grinds with an exceptional cool, fast cutting action, requires minimum dressing

Good choice for light grinding of tool steel



38A ALUMINUM OXIDE

- Friable aluminum oxide abrasive for cool and burn-free cutting toolroom applications with light-to-moderate feed rates
- The most versatile vitrified bond, especially recommended for CNC cutting tool machines, and cylindrical and surface grinding applications on hard and very heat-sensitive high-speed tool steels; cool fast cutting
- Consistent quality for excellent balance and dimensional accuracy time after time

Good choice for use on general-purpose applications; economical



GEMINI ALUMINUM OXIDE

- Specially blended aluminum oxide abrasive for many surface and cylindrical grinding applications
- Durable vitrified bond for high stock removal on narrow to medium contact areas
- Good general-purpose choice when a broad range of parts are ground on one machine

Vitrified Wheels For Steel Applications



TIER: BEST	TIER: BETTER	TIER: GOOD
TRADENAME: QUANTUM / NORTON SG	TRADENAME: 32A	TRADENAME: 38A
ABRASIVE: Ceramic Alumina	ABRASIVE: Aluminum Oxide	ABRASIVE: Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type O1 Straight									
2 x 1/2 x 3/8	16,235	10/50			32A60-KVBE	662434 28214			
3 x 1/4 x 1/2	10,825	10/50			32A60-KVBE	662435 28696			
3 x 1/2 x 3/8	10,825	10/50			32A60-KVBE	662435 28825	10/50	38A60-JVBE	662435 29032
3 x 1/2 x 1/2	10,825	10/50			32A60-KVBE	662435 28828			
3 x 1 x 1/2	10,825						10/10	38A60-MVBE	662435 29145
	10,825						10/10	38A80-MVBE	662435 29146
4 x 1/4 x 1/2	8,120	1/10			32A60-KVBE	662435 29532	1/10	38A60-KVBE	662435 29777
	8,120						1/10	38A100-IVBE	662435 29782
4 x 1/4 x 3/4	8,120	1/10			32A60-KVBE	662435 29736			
4 x 1/2 x 1/2	8,120						1/10	38A60-KVBE	662435 29947
	8,120						1/10	38A100-KVBE	662435 29954
4 x 1/2 x 3/4	8,120	1/10			32A60-KVBE	662435 29849	1/10	38A60-KVBE	662435 29961
	8,120	1/10			32A80-KVBE	662435 29850			
4 x 1 x 1/2	8,120						1/10	38A60-MVBE	662435 30126
6 x 1/8 x 1-1/4	4,140	1/10			32A80-KVBE	662528 35361	1/10	38A150-LVBE	662528 35506
6 x 1/4 x 1/2	4,140	1/10			32A60-KVBE	662528 35784			
6 x 1/4 x 1-1/4	4,140	1/10			32A60-KVBE	662528 35786	1/10	38A60-KVBE	662528 35803
	4,140						1/10	38A80-KVBE	662528 35807
	4,140						1/10	38A150-KV	662528 35759
6 x 1/2 x 1/2	4,140	1/10			32A60-KVBE	662528 36394	1/10	38A60-KVBE	662528 36530
	4,140						1/10	38A80-KVBE	662528 36548
6 x 1/2 x 1-1/4	4,140	1/10			32A46-KVBE	662528 36380	1/10	38A46-KVBE	662528 36520
	4,140	1/10	5SG60-KVS	662528 03344	32A60-KVBE	662528 36396 B	1/10	38A60-KVBE	662528 36533
	4,140	1/10			32A80-JVBE	662528 36405	1/10	38A80-KVBE	662528 36550
	4,140						1/10	38A120-KVBE	662528 36664
6 x 3/4 x 1/2	4,140	1/10			32A60-KVBE	662528 37420			
6 x 3/4 x 5/8	4,140						1/10	38A60-KVBE	662528 37444
6 x 3/4 x 1-1/4	4,140	1/10			32A60-KVBE	662528 37421	1/10	38A60-KVBE	662528 37445
6 x 1 x 1-1/4	4,140	1/10			32A60-KVBE	662528 37921 B			
7 x 1/8 x 1-1/4	3,275	1/10			32A60-IVBE	662529 39112	1/10	38A80-IVBE	662529 39219
	3,600						1/10	38A100-KVBE	662529 39223
7 x 1/4 x 1-1/4	3,600	1/10			32A46-HVBE	662529 39543	1/10	38A46-HVBE	662529 39690
	3,600	1/10	5NQ46-IVS3	662434 95257	32A46-IVBE	662529 39544	1/10	38A46-IVBE	662529 39691
	3,600	1/10	5NQ60-JVS	662532 93579	32A46-JVBE	662529 39545	1/10	38A46-JVBE	662529 09755
	3,600	1/10	5NQ60-JVS3	662434 95258	32A46-KVBE	662529 39862	1/10	38A60-HVBE	662529 39695
	3,600	1/10	5SG46-IVS	662529 40207 B	32A60-HVBE	662529 39547	1/10	38A60-IVBE	662529 39696
	3,600	1/10			32A60-IVBE	662529 39548 B	1/10	38A60-JVBE	662529 39698
	3,600	1/10	5SG60-IVS	662529 39459 B	32A60-IVBE	662532 88569 S	1/10	38A60-KVBE	662529 39700
	3,600	1/10			32A60-JVBE	662529 39549 B	1/10	38A80-HVBE	662529 39707
	3,600	1/10			32A60-KVBE	662529 39552 B	1/10	38A80-IVBE	662529 39808
	3,600	1/10	5SG60-JVS	662529 39460	32A60-KVBE	662532 88570 S	1/10	38A80-JVBE	662529 39809
	3,600	1/10	5SG60-KVS	662529 39461 B			1/10	38A80-KVBE	662529 39812
	3,600	1/10			32A80-HVBE	662529 39557	1/10	38A100-IVBE	662529 39823
	3,600	1/10	5SG80-IVS	662529 39462	32A80-IVBE	662529 39658 B			
	3,600	1/10	5SG80-JVS	662529 39463	32A80-IVBE	662532 88571 S	1/10	38A100-JVBE	662529 39826
	3,600	1/10	5SG80-KVS	662529 39464	32A80-JVBE	662529 39660 B	1/10	38A100-KVBE	662529 39827
	3,600	1/10	5SG100-JVS	662529 39467	32A80-KVBE	662529 39662 B	1/10	38A100-LVBE	662529 39830
	3,600	1/10	5SG100-KVS	662529 39468 B	32A80-KVBE	662532 88572 S	1/10	38A120-JVBE	662529 39833
	3,600	1/10					1/10	38A120-KVBE	662529 39834
	3,600	1/10			32A100-IVBE	662529 39670 B	1/10	38A150-KVBE	662529 39838
	3,600	1/10			32A100-JVBE	662529 39672	1/10	38A150-LVBE	662529 39839
	3,600	1/10			32A100-IVBE	662532 88573 S	1/10	38A150-MV	662529 39521
	3,600	1/10			32A100-KVBE	662529 39673 B	1/10	38A220-KV	662529 39528
	3,600	1/10					1/10	38A220-LV	662529 39529
	3,600	1/10			32A120-IVBE	662529 39680	1/10	38A220-LVBE	662529 39847
	3,600	1/10			32A120-KVBE	662529 39682	1/10	38A220-MV	662529 39530
	3,600	1/10			32A220-LVBE	662529 39689			
7 x 3/8 x 1-1/4	3,600	1/10			32A60-KVBE	662529 40276	1/10	38A60-KVBE	662529 40294
	3,600	1/10			32A80-KVBE	662529 40284	1/10	38A80-IVBE	662529 40297

B Best Seller; performs well in a variety of applications for many satisfied customers
S Single Pack

Continued

Vitrified Wheels For Steel Applications *continued*



TIER: **BEST** **QUANTUM / NORTON SG** **BETTER** **32A / 48A**
 TRADENAME: Ceramic Alumina Aluminum Oxide
 ABRASIVE: Ceramic Alumina Aluminum Oxide

GOOD **38A / 25A / GEMINI**
 Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type O1 Straight									
7 x 1/2 x 1-1/4	3,600	1/10	5NQ46-HVS3	662533 75053	32A46-FVBEP	662529 41203	1/10	25A46-HVP2	662529 16219
	3,600	1/10	5NQ46-IVS	69083 159103	32A46-GVBE	662529 40862	1/10	25A60-HVP2	662529 16221
	3,600	1/10	5NQ46-IVS3	662533 75052	32A46-GVBEP	662529 41204 B	1/10	38A46-GVBE	662529 41022
	3,600	1/10	5NQ46-JVS	69083 159104	32A46-HVBE	662529 40863 B	1/10	38A46-GVBEP	662529 41323
	3,600	1/10	5NQ60-GVSP	69083 159105	32A46-HVBE	662532 88775 S	1/10	38A46-HVBE	662529 41023
	3,600	1/10	5NQ60-IVS3	662533 75047	32A46-HVBEP	662529 41205 B			
	3,600	1/10	5NQ60-JVS	69083 159106	32A46-HVS3	662434 94107	1/10	38A46-HVBEP	662529 41324
	3,600	1/10	5NQ60-JVS3	662533 75046	32A46-IVBE	662529 40864 B	1/10	38A46-HVP2	662529 16223
	3,600	1/10	3SGP46-GVSP	662529 11717	32A46-IVBE	662532 88776 S	1/10	38A46-IVBE	662529 41024
	3,600	1/10	3SGR46-HVP2	662529 16211	32A46-IVBEP	662529 41206	1/10	38A46-JVBE	662529 41026
	3,600	1/10	3SGR60-HVP2	662529 16213	32A46-IVS3	662434 95357	1	38A46-JVBE	662532 88767 S
	3,600	1/10	5SG46-GVSP	662529 40522	32A46-JVBE	662529 40865 B	1/10	38A46-KVBE	662529 41028
	3,600	1/10	5SG46-HVS3	662533 75050	32A46-JVBE	662532 88777 S	1/10	38A60-HVBE	662529 41035
	3,600	1/10	5SG46-HVSP	662529 41130			1/10	38A60-HVBEP	662529 41330
	3,600	1/10	5SG46-IVS	662529 40193 B	32A46-KVBE	662529 40867 B	1/10	38A60-IVBE	662529 41036
	3,600	1/10	5SG46-IVS	662532 88788 S			1/10	38A60-JVBE	662529 41038
	3,600	1/10			32A54-IVBE	662529 40873	1	38A60-JVBE	662532 88766 S
	3,600	1/10	5SG46-IVSP	662529 40523	32A60-GVBEP	662529 41313	1/10	38A60-KVBE	662529 41041
	3,600	1/10	5SG46-JVS	662529 40194 B	32A60-HVBE	662529 40879 B	1	38A60-KVBE	662532 88769 S
	3,600	1/10	5SG46-JVS	662532 88789 S	32A60-HVBEP	662529 41314	1/10	38A60-LVBE	662529 11677
	3,600	1/10	5SG46-JVS3	662434 95263	32A60-IVBE	662529 40880 B	1/10	38A80-HVBE	662529 41047
	3,600	1/10	5SG46-KVS	662529 40195	32A60-IVBE	662532 88779 S	1/10	38A80-IVBE	662529 41048
	3,600	1/10	5SG60-GVSP	662529 40524	32A60-IVS3	662434 95363	1/10	38A80-JVBE	662529 41049
	3,600	1/10	5SG60-IVS	662529 40196 B	32A60-JVBE	662529 40882 B	1/10	38A80-KVBE	662529 41054
	3,600	1/10			32A60-JVBEP	662529 41316	1	38A80-KVBE	662533 50641 S
	3,600	1/10			32A60-JVS3	662434 95364	1/10	38A80-LVBE	662529 41056
	3,600	1/10	5SG60-IVSP	662529 40525	32A60-KVBE	662529 40885 B	1/10	38A100-IVBE	662529 41163
	3,600	1/10	5SG60-JVS	662529 40197 B	32A60-KVBE	662532 88782 S	1/10	38A100-JVBE	662529 41165
	3,600	1/10			32A60-LVBE	662529 40888	1/10	38A100-KVBE	662529 41168
	3,600	1/10	5SG60-JVS3	662533 75043	32A80-HVBE	662529 40894	1/10	38A120-JVBE	662529 41174
	3,600	1/10	5SG60-KVS	662529 40198	32A80-IVBE	662529 40895 B	1/10	38A120-KVBE	662529 41175
	3,600	1/10	5SG60-LVS	662529 40199	32A80-IVBE	662532 88783 S	1/10	38A150-JVBE	662529 41179
	3,600	1/10	5SG80-IVS	662529 40200	32A80-JVBE	662529 40897 B	1/10	38A150-MV	662529 40595
	3,600	1/10	5SG80-IVSP	662529 40527	32A80-KVBE	662529 40899 B	1/10	38A220-QV	662529 40605
	3,600	1/10	5SG80-JVS	662529 40201 B	32A80-KVBE	662532 88784 S			
	3,600	1/10			32A80-LVBE	662529 40900	10/10	Gemini 46-I	662532 46800
	3,600	1/10	5SG80-KVS	662529 40202	32A100-IVBE	662529 40907	10/10	Gemini 46-J	662532 46802
	3,600	1/10	5SG80-LVS	662529 40203	32A100-JVBE	662529 41008			
	3,600	1/10	5SG100-JVS	662529 40204	32A120-LVBE	662529 41018 B			
	3,600	1/10	5SG100-KVS	662529 40205	32A120-LVBE	662532 88786 S			
	3,600	1/10			48A46-HVP2	662529 16215 B	10/10	Gemini 60-K	662532 46821
	3,600	1/10			48A60-HVP2	662529 16217 B			
	3,600	1/10			32A60-IVBE	662529 41762			
7 x 5/8 x 1-1/4	3,600	1/10	5SG46-IVS	662529 42304	32A46-GVBEP	662529 42070	1/10	38A46-HVBE	662529 41950
7 x 3/4 x 1-1/4	3,600	1/10	5SG46-KVS	662529 42305	32A46-HVBE	662529 41930	1/10	38A46-KVBE	662529 41954
	3,600	1/10	5SG60-JVS	662529 42307	32A46-IVBE	662529 41931	1/10	38A60-IVBE	662529 42207
	3,600	1/10	5SG60-KVS	662529 42308	32A46-KVBE	662529 41935	1/10	38A60-KVBE	662529 42060
	3,600	1/10			32A60-IVBE	662529 41938			
	3,600	1/10			32A60-KVBE	662529 41943			
	3,600	1/10			32A80-IVBE	662529 41946			
7 x 1 x 1-1/4	3,600	1/10	5SG60-JVS	662529 42429	32A46-HVBE	662529 42513	1/10	38A46-HVBE	662529 42534
	3,600	1/10	5SG60-KVS	662529 42430	32A46-JVBE	662529 42268			
	3,600	1/10			32A60-IVBE	662529 42524			
	3,600	1/10			32A60-KVBE	662529 42709			

B Best Seller; performs well in a variety of applications for many satisfied customers
S Single Pack

For non-stock toolroom wheels: if you don't see the toolroom wheel you need in our stock listing, call your local authorized Norton distributor to check our made-to-order non-stock availability – including our revolutionary new Quantum ceramic and Vitrium³ bond wheels.

Vitrified Wheels For Steel Applications *continued*



TIER: **BEST** **QUANTUM / NORTON SG** **BETTER** **32A / 48A**
 TRADENAME: **QUANTUM / NORTON SG** **32A / 48A**
 ABRASIVE: Ceramic Alumina Aluminum Oxide

TIER: **GOOD** **38A / 25A / GEMINI**
 TRADENAME: **38A / 25A / GEMINI**
 ABRASIVE: Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type O1 Straight									
8 x 1/4 x 1-1/4	3,105 / 3,600*	1/10	5SG60-KVS	662530 43351 *	32A46-HVBE	662530 43412	1/10	38A60-IVBE	662530 43431 *
	3,105 / 3,600*	1/10	5SG80-KVS	662530 43353 *	32A46-IVBE	662530 43310	1/10	38A60-JVBE	662530 43432 *
	3,600	1/10			32A46-KVBE	662530 43413	1/10	38A60-KVBE	662530 10825
	3,600	1/10			32A60-IVBE	662530 43416 B	1/10	38A80-IVBE	662530 43437
	3,600	1/10			32A60-IVBE	662532 88796 S	1/10	38A80-JVBE	662530 43439
	3,600	1/10			32A60-JVBE	662530 43417	1/10	38A80-KVBE	662530 43461
	3,600	1/10			32A60-KVBE	662530 43399	1/10	38A100-IVBE	662530 43445
	3,600	1/10			32A80-IVBE	662530 43421	1/10	38A100-KVBE	662530 43447
	3,600	1/10			32A80-KVBE	662530 43458 B	1/10	38A120-KVBE	662530 43450
	3,600	1/10			32A80-KVBE	662532 88797 S	1/10	38A150-KVBE	662530 43451
	3,600	1/10			32A80-LVBE	662530 43425			
	3,600	1/10			32A100-IVBE	662530 43426			
	3,600	1/10			32A100-KVBE	662530 43428			
	3,600	1/10			32A60-KVBE	662530 43565			
	8 x 3/8 x 1-1/4	3,600	1/10			32A60-KVBE	662530 43565		
8 x 1/2 x 1-1/4	3,105 / 3,600*	1/10	5NQ46-HVS3	662533 87211	32A46-GVBEP	662530 43882 B	1/10	25A46-HVP2	662530 19354 *
	3,105	1/10	5NQ46-IVS	690831 59107	32A46-HVBE	662530 43712 B	1/10	38A46-HVBE	662530 43746
	3,105	1/10	5NQ46-IVS3	662533 87212	32A46-HVBE	662532 88800 S			
	3,105 / 3,600*	1/10	5NQ46-JVS	690831 59108 *	32A46-HVBEP	662530 43883 *† B	1/10	38A46-HVBEP	662530 43891 †
	3,105	1/10					1/10	38A46-IVBE	662530 43749
	3,105 / 3,600*	1/10	5NQ60-GVSP	690831 59109			1/10	38A46-JVBE	662530 43752 *
	3,105 / 3,600*	1/10	5NQ60-IVS3	662533 87214 *	32A46-IVBE	662530 43713 B	1/10	38A46-KVBE	662530 43762 *
	3,600	1/10	5NQ60-JVS	690831 59110			1/10	38A60-HVBE	662530 43756
	3,600	1/10	5NQ60-JVS3	662533 87213	32A46-JVBE	662530 43715 B	1/10	38A60-IVBE	662530 43757
	3,105 / 3,600*	1/10	3SGP46-HVSP	662530 11505	32A46-JVBE	662532 88801 * S	1/10	38A60-JVBE	662530 43858 *
	3,600	1/10	3SGP46-JVH	662530 13796	32A46-JVS3	662434 95314	1/10	38A60-KVBE	662530 43861
	3,600	1/10	3SGR46-GVP2	662530 19345	32A46-KVBE	662530 43716 B	1/10	38A80-IVBE	662530 43866
	3,600	1/10	3SGR46-HVP2	662530 19346			1/10	38A80-JVBE	662530 13787
	3,600	1/10	3SGR60-HVP2	662530 19348	32A60-GVBEP	662530 43887 †	1/10	38A80-KVBE	662530 43869
	3,105 / 3,600*	1/10	5SG46-GVSP	662530 43649	32A60-HVBE	662530 43724 *	1/10	38A100-KVBE	662530 43877 *
	3,600	1/10			32A60-HVBEP	662530 43888	10/10	Gemini 46-H	662532 46841 *
	3,105 / 3,600*	1/10	5SG46-HVSP	662530 43915 *†	32A60-IVBE	662530 43725 * B	10/10	Gemini 46-I	662532 46843
	3,105 / 3,600*	1/10	5SG46-IVS	662530 44089 B	32A60-IVBE	662532 88802 * S	10/10	Gemini 46-J	662532 46845 *
	3,105 / 3,600*	1/10	5SG46-IVS	662532 88804 S	32A60-JVBE	662530 43727 * B			
	3,105 / 3,600*	1/10	5SG46-IVS3	662533 87221	32A60-KVBE	662530 43729 * B			
	3,105 / 3,600*	1/10	5SG46-IVSP	662530 43650	32A60-KVBE	662532 88803 * S			
	3,600	1/10	5SG46-JVS	662530 44090 B	32A80-HVBE	662530 43733			
	3,600	1/10	5SG46-JVS	662532 88806 S	32A80-IVBE	662530 43734			
	3,600	1/10	5SG46-KVS	662530 44091	32A80-JVBE	662530 43736			
	3,600	1/10	5SG60-GVSP	662530 43651 †	32A80-KVBE	662530 43737			
	3,600	1/10	5SG60-IVS	662530 44092	32A100-IVBE	662530 43740			
	3,600	1/10	5SG60-IVS3	662533 87225	32A100-KVBE	662530 43742			
	3,600	1/10	5SG60-IVSP	662530 43652	48A46-HVP2	662530 19350 B			
	3,600	1/10	5SG60-JVS	662530 44093 B					
	3,600	1/10	5SG60-KVS	662530 44094					
	3,600	1/10	5SG80-JVS	662530 44096					
	3,600	1/10	5SG80-KVS	662530 44097					
	3,600	1/10	5SG100-KVS	662530 19435					

B Best Seller; performs well in a variety of applications for many satisfied customers

S Single Pack

* Indicates wheel max RPM has been tested to 3,600 as explained in the tech tip below

Continued

TECH TIP

* 8" Type O1 and Type O5 Vitrified Toolroom Wheels' Maximum Operating Speeds:

- Stock NorPor VP2 wheels = 3,600 RPMs
- All other 46 grit, J grade and harder = 3,600 RPMs
- All other 54 grit, I grade and harder = 3,600 RPMs
- All other 60 grit and finer, H grade and harder = 3,600 RPMs
- † Exceptions to the rule: speed-tested to 3,600 RPM
- All other specifications = 3,105 RPMs



It is the user's responsibility to refer to and comply with ANSI B7.1

Vitrified Wheels For Steel Applications *continued*



TIER: BEST	TIER: BETTER	TIER: GOOD
TRADENAME: QUANTUM / NORTON SG	TRADENAME: 32A / 48A	TRADENAME: 38A / 57A
ABRASIVE: Ceramic Alumina	ABRASIVE: Aluminum Oxide	ABRASIVE: Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type O1 Straight									
8 x 3/4 x 1-1/4	3,105	1/10	5NQ46-IVS	690831 59111	32A46-GVBEP	662530 44195	1/10	38A46-HVBE	662530 44175
	3,105	1/10	5NQ46-IVS3	66243 494089	32A46-HVBE	662530 44159	1/10	38A46-IVBE	662530 44177
	3,600	1/10	5NQ46-JVS	690831 59112	32A46-HVBEP	662530 44196 †	1/10	38A46-KVBE	662530 44180
	3,105 / 3,600*	1/10	5NQ46-JVS3	66243 494090 *	32A46-IVBE	662530 44215	1/10	38A60-IVBE	662530 44184 *
	3,105 / 3,600*	1/10	5NQ60-GVS3P	66243 495369	32A46-JVBE	662530 44161 *			
	3,105 / 3,600*	1/10	5NQ60-GVSP	690831 59113	32A46-KVBE	662530 44165 *			
	3,600	1/10	5NQ60-JVS	690831 59114	32A60-GVBEP	662530 44198			
	3,600	1/10			32A60-HVBE	662530 44168			
	3,105 / 3,600*	1/10	5SG46-IVS	662530 44098	32A60-IVBE	662530 44169 *			
	3,600	1/10	3SGP46-JVH	662530 13792	32A60-JVBE	662530 44171			
	3,600	1/10	5SG46-JVS	662530 44099 B	32A60-KVBE	662530 44173			
	3,600	1/10			32A80-KVBE	662530 44064			
	3,600	1/10	5SG60-IVS	662530 44101					
	3,600	1/10	5SG60-JVS	662530 44102					
	3,600	1/10	5SG60-KVS	662530 44103					
8 x 1 x 1-1/4	3,105 / 3,600*	1/10	5SG46-KVS	662530 02588 *	32A46-HVBE	662530 44616	1/10	38A46-IVBE	662530 44636
	3,105 / 3,600*	1/10	5SG60-GVSP	662530 03228 †	32A46-IVBE	662530 44617	1/10	38A60-IVBE	662530 44456 *
	3,600	1/10	5SG60-IVS	662530 02639	32A46-KVBE	662530 44622	1/10	57A60-MVBE	662530 44270
	3,600	1/10			32A60-IVBE	662530 44624			
	3,600	1/10			32A60-KVBE	662530 44629			
10 x 1/4 x 3	2,485					1	38A80-KVBE	662531 49572	
10 x 1/2 x 3	2,485	1			32A60-JVBE	662531 49729	1	38A60-KVBE	662531 49859
	2,485						1	38A80-KVBE	662531 49865
10 x 3/4 x 3	2,485	1			32A46-IVBE	662531 60024	1	38A46-JVBE	662531 60158
	2,485	1			32A60-IVBE	662531 60137	1	38A60-IVBE	662531 60163
	2,485	1			32A60-KVBE	662531 60143			
10 x 1 x 1-1/4	2,485	1			32A60-KVBE	662531 60774			
10 x 1 x 2	2,485	1			32A46-IVBE	662531 60749			
10 x 1 x 3	2,485	1	5SG46-GVSP	662531 60494	32A46-HVBE	662531 60747	1	38A46-IVBE	662531 60889
	2,485	1	5SG46-IVS	662531 60400	32A46-IVBE	662531 60750	1	38A46-JVBE	662531 60892
	2,485	1	5SG46-JVS	662531 60401	32A46-JVBE	662531 60754	1	38A60-IVBE	662531 60898
	2,485	1			32A46-KVBE	662531 60758	1	38A60-KVBE	662531 60900
	2,485	1	5SG46-KVS	662531 60402	32A60-IVBE	662531 60769			
	2,485	1	5SG60-GVSP	662531 60495	32A60-KVBE	662531 60777			
	2,485	1	5SG60-IVS	662531 60403	32A80-KVBE	662531 60782			
	2,485	1	5SG60-JVS	662531 60404					
	2,485	1	5SG60-KVS	662531 60405					
12 x 1/2 x 3	2,070	2			32A60-JVBE	662532 62134			
	2,070	2			32A80-KVBE	662532 62110			
12 x 1/2 x 5	2,070	2			32A60-KVBE	662532 62107			
	2,070	2			32A80-KVBE	662532 62111			
	2,070	1	5SG46-IVS	662532 62204	32A46-GVBEP	662532 62392	1	38A46-JVBE	662532 62281
12 x 3/4 x 3	2,070	1			32A46-HVBE	662532 62260			
	2,070	1			32A46-IVBE	662532 62261			
	2,070	1			32A60-IVBE	662532 62270			
	2,070	1			32A60-KVBE	662532 62273			
12 x 1 x 1-1/4	2,070	1			32A46-KVBE	662532 62570			

B Best Seller; performs well in a variety of applications for many satisfied customers

S Single Wheel Pack

* Indicates wheel max RPM has been tested to 3,600 as explained in the tech tip below

TECH TIP

* 8" Type O1 and Type O5 Vitrified Toolroom Wheels' Maximum Operating Speeds:

- Stock NorPor VP2 wheels = 3,600 RPMs
- All other 46 grit, J grade and harder = 3,600 RPMs
- All other 54 grit, I grade and harder = 3,600 RPMs
- All other 60 grit and finer, H grade and harder = 3,600 RPMs
- † Exceptions to the rule: speed-tested to 3,600 RPM
- All other specifications = 3,105 RPMs




It is the user's responsibility to refer to and comply with ANSI B7.1

Vitrified Wheels For Steel Applications *continued*



TIER:	BEST	BETTER	GOOD
TRADENAME:	QUANTUM / NORTON SG	32A / 48A	38A
ABRASIVE:	Ceramic Alumina	Aluminum Oxide	Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #	
Type O1 Straight 										
12 x 1 x 3	2,070 / 2,710*	1	3SGR46-HVP2	662532 20885*	32A46-GVBEP	662532 62840	1	38A46-HVBE	662532 62700	
	2,070	1	5SG46-HVSP	662532 62488	32A46-HVBE	662532 62562	1	38A46-IVBE	662532 62702	
	2,070	1	5SG46-IVS	662532 62500	32A46-HVBEP	662532 62842	1	38A46-JVBE	662532 62704	
	2,070	1	5SG46-JVS	662532 62501	32A46-IVBE	662532 62564	1	38A60-IVBE	662532 62713	
	2,070	1	5SG46-JVS3	662434 95317	32A46-JVBE	662532 62567				
	2,070	1	5SG46-KVS	662532 62502	32A46-KVBE	662532 62572				
	2,070	1	5SG46-KVS3	662434 95318	32A60-HVBE	662532 62580				
	2,070	1	5SG60-GVSP	662532 62593	32A60-IVBE	662532 62581				
	2,070	1	5SG60-IVS	662532 62503	32A60-KVBE	662532 62689				
	2,070	1	5SG60-JVS	662532 62504	32A80-KVBE	662532 62532				
	2,070 / 2,710*	1	5SG60-KVS	662532 62505	48A60-HVP2	662532 20891*				
	12 x 1 x 5	2,070	1	5SG46-GVSP	662532 62594	32A46-GVBEP	662532 62841	1	38A46-IVBE	662532 62703
		2,070	1	5SG46-IVS	662532 62508	32A46-HVBE	662532 62563	1	38A60-KVBE	662532 62719
		2,070	1	5SG46-JVS	662532 62509 B	32A46-IVBE	662532 62565			
2,070		1	5SG46-KVS	662532 62510	32A46-KVBE	662532 62573				
2,070		1	5SG60-GVSP	662532 62595						
2,070		1	5SG60-IVS	662532 62511	32A60-IVBE	662532 62582				
2,070		1	5SG60-JVS	662532 62512	32A60-JVBE	662532 62686				
2,070		1	5SG60-KVS	662532 62513	32A60-KVBE	662532 62691 B				
2,070		1	5SG80-JVS	662532 62515	32A80-JVBE	662532 62696				
2,070		1			32A80-KVBE	662532 62697				
12 x 1-1/4 x 3	2,070	1			32A46-IVBE	662532 62301				
12 x 1-1/2 x 1-1/4	2,070	1			32A46-KVBE	662532 63146				
12 x 1-1/2 x 3	2,070	1	5SG46-IVS	662532 02820	32A46-HVBE	662532 63143				
	2,070	1			32A46-IVBE	662532 63144				
	2,070	1			32A60-JVBE	662532 63123				
12 x 1-1/2 x 5	2,070	1	5NQ46-IVS	690831 59115	32A46-GVBEP	662532 63192	1	38A46-IVBE	662532 14987	
	2,070	1	5NQ46-IVS3	662434 94092	32A46-HVBE	662532 63128				
	2,070	1	5NQ46-JVS	690831 59116	32A46-IVBE	662532 63145				
	2,070	1	5NQ46-JVS3	662434 94093	32A46-JVBE	662532 63120				
	2,070	1	5NQ60-GVSP	690831 59117	32A60-HVBE	662532 63149				
	2,070	1	5NQ60-JVS	690831 59118	32A60-KVBE	662532 63034				
	2,070	1	3SGP60-GVSP	662532 15030						
	2,070	1	5SG46-GVSP	662532 03453						
	2,070	1	5SG46-IVS	662532 02842						
	2,070	1	5SG46-IVS3	662434 95319						
	2,070	1	5SG46-JVS	662532 02926						
2,070	1	5SG60-GVSP	662532 62596							
12 x 2 x 1-1/4	2,070	1			32A46-KVBE	662532 63461				
	2,070	1			32A46-MVBE	662532 63463				
12 x 2 x 3	2,070	1			32A46-IVBE	662532 63459				
12 x 2 x 5	2,070	1			32A46-HVBE	662532 63403				
	2,070	1			32A46-IVBE	662532 62302				
	2,070	1			32A60-KVBE	662532 63465				
14 x 1/2 x 5	1,800	1	5SG80-KVS	662533 63814	32A60-KVBE	662533 63761				
14 x 3/4 x 5	1,800	1			32A60-KVBE	662533 63772				
14 x 1 x 3	1,800	1	5SG46-IVS	662533 63960	32A46-HVBE	662533 63912				
	1,800	1			32A46-IVBE	662533 63914				
	1,800	1			32A60-IVBE	662533 63927				

* 12" Type O1 Wheel Maximum RPM: NORPOR VP2 Wheels = 2,710; all others = 2,070

B Best Seller; performs well in a variety of applications for many satisfied customers

To maximize the performance of these wheels and finished part quality, refer to the beginning of this section and the "Dressing Solutions" section for truing and dressing products.

For non-stock toolroom wheels: if you don't see the toolroom wheel you need in our stock listing, call your local authorized Norton distributor to check our made-to-order non-stock availability – including our revolutionary new Quantum ceramic and Vitrium³ bond wheels.

Vitrified Wheels For Steel Applications *continued*



TIER: BEST	TIER: BETTER	TIER: GOOD
TRADENAME: QUANTUM / NORTON SG	TRADENAME: 32A	TRADENAME: 38A / 57A
ABRASIVE: Ceramic Alumina	ABRASIVE: Aluminum Oxide	ABRASIVE: Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type O1 Straight									
14 x 1/2 x 5	1,800	1	5SG80-KVS	662533 63814	32A60-KVBE	662533 63761			
14 x 3/4 x 5	1,800	1			32A60-KVBE	662533 63772			
14 x 1 x 3	1,800	1	5SG46-IVS	662533 63960	32A46-HVBE	662533 63912			
	1,800	1			32A46-IVBE	662533 63914			
	1,800	1			32A60-IVBE	662533 63927			
14 x 1 x 5	1,800	1	5SG46-GVSP	662533 64108	32A46-GVBEP	662533 64074	1	38A46-HVBE	662533 64043
	1,800	1	5SG46-HVSP	662533 13990	32A46-HVBE	662533 63913	1	38A60-IVBE	662533 63947
	1,800	1	5SG46-IVS	662533 63970	32A46-IVBE	662533 63915	1	38A60-JVBE	662533 64051
	1,800	1	5SG46-JVS	662533 63971	32A46-JVBE	662533 63919	1	38A60-KVBE	662533 64053
	1,800	1			32A46-KVBE	662533 63921	1	38A80-KVBE	662533 64058
	1,800	1	5SG60-IVS	662533 63974	32A60-GVBEP	662533 64077	1	57A60-KVBE	662533 64065
	1,800	1	5SG60-IVSP	662533 63871	32A60-HVBE	662533 63926	1	57A60-LVBE	662533 64066
	1,800	1	5SG60-JVS	662533 63975	32A60-JVBE	662533 63930	1	57A80-MVBE	662533 64070
	1,800	1	5SG60-KVS	662533 63976	32A60-KVBE	662533 63932			
	1,800	1	5SG80-JVS	662533 63979	32A60-LVBE	662533 64035			
	1,800	1	5SG80-KVS	662533 64003	32A80-JVBE	662533 64038			
	1,800	1			32A80-KVBE	662533 64039			
14 x 1 x 8	1,800	1			32A60-IVBE	662533 63887			
14 x 1-1/2 x 5	1,800	1	5NQ46-HVS3	662533 87216	32A46-GVBEP	662533 64238	1	38A46-HVBE	662533 13968
	1,800	1	5NQ46-IVS3	662533 87219	32A46-HVBE	662533 64335	B 1	38A46-HVBEP	662533 13969
	1,800	1	5NQ46-IVS	690831 59119	32A46-HVBEP	662533 64243	1	38A46-IVBE	662533 64090
	1,800	1	5NQ46-JVS	690831 59120	32A46-JVBE	662533 64336	1	38A46-JVBE	662533 64240
	1,800	1	5NQ46-JVS3	662434 94095	32A46-JVBE	662533 64337	1	38A60-IVBE	662533 64247
	1,800	1	5NQ60-GVS3P	662434 95372	32A46-KVBE	662533 64339			
	1,800	1	5NQ60-GVSP	690831 59122	32A60-HVBE	662533 64340			
	1,800	1	5NQ60-JVS	690831 59124	32A60-IVBE	662533 64239			
	1,800	1	5NQ60-JVS3	662434 94096	32A60-JVBE	662533 64341			
	1,800	1	3SGP46-GVSP	662533 06780	32A60-KVBE	662533 64342			
	1,800	1	3SGP46-HVSP	662533 07025	32A80-JVBE	662533 64246			
	1,800	1	3SGP46-JVH	662533 13976					
	1,800	1	5SG46-GVSP	662533 64320					
	1,800	1	5SG46-HVS3	662533 87231					
	1,800	1	5SG46-HVSP	662533 02625					
	1,800	1	5SG46-IVS	662533 64097					
	1,800	1	5SG46-IVS3	662533 87234					
	1,800	1	5SG46-IVSP	662533 02498					
	1,800	1	5SG46-JVS	662533 64098	B				
	1,800	1	5SG60-IVS	662533 64100					
	1,800	1	5SG60-JVS	662533 64101					
	1,800	1	5SG60-KVS	662533 02160					
	1,800	1	5SG80-KVS	662533 63815					
14 x 2 x 5	1,800	1	5SG60-JVS	662533 64414	32A46-IVBE	662533 64323			
	1,800	1			32A46-JVBE	662533 64508			
	1,800	1			32A46-KVBE	662533 64509			
	1,800	1			32A60-KVBE	662533 64510			

B Best Seller; performs well in a variety of applications for many satisfied customers

Dressing: Single Point Dressing Tool Starting Recommendations

WHEEL SIZES	TOOL SHANK DIAMETER	Ceramic (NQ, Norton SG, TG, etc.), 37C & 39C Wheels		25A, 32A, 38A, 48A, 53A, 57A, 64A, 86A Wheels	
		PRODUCT NO.	PART #	PRODUCT NO.	PART #
12" to 14"	3/8"	BCSG5M6	662601 57009	BC5M6	662601 95004
	7/16"	BCSG5M7	662601 56907	BC5M7	662601 95005



These tools are a standard recommendation; see the "Dressing Solutions" section for additional tools. See the Fliesen Tool section for Furioso tools, engineered specifically for Quantum vitrified wheel dressing.



Vitrified Wheels For Steel Applications *continued*



TIER:	BEST	BETTER	GOOD
TRADENAME:	QUANTUM / NORTON SG	32A / 23A / 48A	38A / 53A / 57A
ABRASIVE:	Ceramic Alumina	Aluminum Oxide	Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type O2 Cylinder 									
6 x 1 x 4	3,600	1/10			32A46-KVBE	662528 38308	1/10	38A80-HVBE	662528 38314
Rim 1"	3,600	1/10			32A60-JVBE	662528 38309			
Plate A47466									
8 x 2 x 5-1/2	2,865						1/8	53A46-KVBE	662530 44942
Rim 1-1/4"									
Plate A50831									
10 x 2 x 7-1/2	2,295	1			32A54-JVG	662531 61687	1	53A60-KVG	662531 61701
Rim 1-1/4"									
(ME62845)									
Plate A110170									
11 x 5	1,910	1			32A30-HVBE	662531 61800			
Rim 1" (ME33437)									
Tape Wound									
11 x 5	1,740	1			32A36-EVBEP	662531 61780	1	38A46-GVBE	662531 61807
Rim 1" (ME52726)	1,910	1			32A36-GVBEP	662531 61808			
Tape Wound	1,910	1			32A46-HVBE	662531 61893			
18 x 5 Rim 1-1/2"	1,065	1			32A30-E19VCP	662534 65142			
(ME15536)									
Tape Wound									
18 x 5 Rim 1-1/2"	1,170	1			23A30-F19VCP	662534 65235			
(ME52719)									
Tape Wound									
Includes Strips									
Type O5 Recessed One Side 									
3/4 x 3/4 x 1/4	43,290	5/40			32A60-KVBE	662434 27582			
Recess 1/S 3/8 x 3/8									
1 x 1 x 1/4	32,470	5/40			32A60-KVBE	662434 27769			
Recess 1/S 1/2 x 1/2									
1 x 1 x 3/8	32,470	5/40			32A60-KVBE	662434 27773			
Recess 1/S 1/2 x 1/2									
1-1/4 x 1 x 3/8	25,975	5/40			32A60-KVBE	662434 27799			
Recess 1/S 5/8 x 1/2									
1-1/2 x 1 x 3/8	25,975	5/40			32A60-KVBE	662434 27938			
Recess 1/S 5/8 x 1/2									
1-1/2 x 1 x 3/8	21,645	5/40			32A60-KVBE	662434 27937			
Recess 1/S 3/4 x 1/2									
2 x 1 x 3/8	16,235	5/40			32A60-KVBE	662434 28329			
Recess 1/S 3/4 x 1/2									
2 x 1-1/2 x 5/8	16,235	10/30			32A60-KVBE	662434 28332			
Recess 1/S 1 x 3/4									
7 x 3/4 x 1-1/4	3,600	1/10	5SG46-IVS	662529 41976	32A46-HVBE	662529 42209	1/10	38A46-IVBE	662529 42222
Rec 1/S 2-3/4 x 1/4	3,600	1/10			32A46-IVBE	662529 42211	1/10	38A60-IVBE	662529 42225
	3,600	1/10			32A46-JVBE	662529 42213			
	3,600	1/10			32A60-IVBE	662529 42217			
	3,600	1/10			32A60-JVBE	662529 42218			
	3,600	1/10			32A60-KVBE	662529 42205			
7 x 1 x 1-1/4	3,600	1/10			32A46-GVBEP	662529 42826			
Rec 1/S 2-3/4 x 1/2	3,600	1/10	3SGR46-HVP2	662529 16228	32A46-HVBE	662529 42688			
	3,600	1/10	5SG46-IVS	662529 42318	32A46-HVBEP	662529 42828			
	3,600	1/10			32A46-IVBE	662529 42691			
	3,600	1/10	5SG46-JVS	662529 42427	32A46-KVBE	662529 42708			
	3,600	1/10			32A60-IVBE	662529 42699			
	3,600	1/10	5SG60-JVS	662529 42431	32A60-JVBE	662529 42701			
	3,600	1/10			32A60-KVBE	662529 42703			
	3,600	1/10			48A46-HVP2	662529 16232			

Continued

For non-stock toolroom wheels: if you don't see the toolroom wheel you need in our stock listing, call your local authorized Norton distributor to check our made-to-order non-stock availability – including our revolutionary new Quantum ceramic and Vitrium³ bond wheels.

Vitrified Wheels For Steel Applications *continued*



TIER: **BEST** **BETTER** **GOOD**
 TRADENAME: **QUANTUM / NORTON SG** **32A / 48A** **38A / GEMINI**
 ABRASIVE: Ceramic Alumina Aluminum Oxide Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type 05 Recessed One Side									
7 x 1 x 1-1/4	3,600	1/10	5NQ46-IVS	662533 50691	32A46-HVBE	662529 42689	1/10	38A46-HVBE	662529 42707
Rec 1/S 3 x 1/2	3,600	1/10	5SG46-IVS	662529 01814	32A46-IVBE	662529 42690	1/10	38A46-IVBE	662529 42809
	3,600	1/10			32A60-IVBE	662529 42686	1/10	38A46-KVBE	662529 42793
	3,600	1/10	5SG60-IVS	662529 06907			1/10	38A60-IVBE	662529 42815
	3,600	1/10	5SG60-IVS3	662434 94102			1/10	38A60-JVBE	662529 42816
	3,600						1/10	38A60-KVBE	662529 42817
	3,600					10/10	Gemini 46-J	662532 46835	
7 x 1-1/4 x 1-1/4	3,600	1/5			32A46-HVBE	662529 42833			
Rec 1/S 2-3/4 x 5/8	3,600	1/5			32A60-IVBE	662529 42859			
	3,600	1/5			32A60-JVBE	662529 42835			
7 x 1-1/2 x 1-1/4	3,600	1/5			32A46-IVBE	662529 42843			
Rec 1/S 2-3/4 x 3/4	3,600	1/5			32A60-IVBE	662529 42844			
8 x 3/4 x 1-1/4	3,105	1/10			32A46-IVBE	662530 44213			
Rec 1/S 3-1/4 x 1/4									
8 x 1 x 1-1/4	3,600						10/10	Gemini 46-J	662532 46850
Rec 1/S 3 x 1/2									
8 x 1 x 1-1/4	3,105	1/10	5SG46-IVS	662530 13543	32A46-IVBE	662530 44790			
Rec 1/S 3-1/4 x 1/2	3,600	1/10			32A46-JVBE	662530 44382			
	3,600	1/10	5SG46-JVS	662530 03301	32A46-JVS3	662434 95329			
	3,600	1/10			32A60-IVBE	662530 44753			
	3,600	1/10			32A60-KVBE	662530 44810			
10 x 3/4 x 2	2,485	1			32A60-JVBE	662531 60189			
Rec Side A									
5 x 3/16 Face Bev									
Side A 75 Deg									
From 1/8" Flat									
12 x 1-1/2 x 3	2,070	1			32A46-IVBE	662532 63186			
Rec 1/S 6 x 1/2									
12 x 1-1/2 x 5	2,070 / 2,710*	1	3SGR46-HVP2	662532 20904*	32A46-HVBEP	662532 63180	1	38A46-IVBE	662532 63175
Rec 1/S 7-1/2 x 1/2	2,070	1	5SG46-GVSP	662532 63127	32A46-IVBE	662532 63166			
	2,070	1			32A46-JVBE	662532 63169			
	2,070	1	5SG46-IVS	662532 02883	32A46-KVBE	662532 63170			
	2,070	1			32A60-KVBE	662532 63172			
				5SG60-IVSP	662532 63050				
14 x 1-1/2 x 5	1,800 / 2,320*	1	3SGR46-GVP2	662533 19953*	32A46-HVBE	662533 64359			
Rec 1/S 8 x 1/2	1,800 / 2,320*	1	3SGR46-HVP2	662533 19954*	32A46-IVBE	662533 64300			
	1,800 / 2,320*	1	3SGR60-HVP2	662533 19956*	32A46-KVBE	662533 64362			
	1,800	1	5SG46-IVS	662533 64102	32A60-JVBE	662533 64364			
	1,800	1	5SG46-IVS3	662434 94106	32A60-KVBE	662533 64365			
	1,800	1	5SG46-JVS	662533 64103					
	1,800	1	5SG60-IVS	662533 64104					
	1,800	1	5SG60-JVS	662533 64105					
14 x 2 x 5	2,320	1	3SGR46-GVP2	662533 19936	48A46-HVP2	662533 19941	1	25A46-HVP2	662533 19945
Rec 1/S 8 x 1/2	2,320	1	3SGR46-HVP2	662533 19937			1	38A46-HVP2	662533 19949
	2,320						1	38A60-HVP2	662533 19951
14 x 2 x 5	1,800	1			32A60-KVBE	662533 64390			
Rec 1/S 8 x 1									

* 12" Type 05 Wheel Maximum RPM: NORPOR VP2 Wheels = 2,710; all others = 2,070

* 14" Type 05 Wheel Maximum RPM: NORPOR VP2 Wheels = 2,320; all others = 1,800

To maximize the performance of these wheels and finished part quality, refer to the beginning of this section and the "Dressing Solutions" section for truing and dressing products.

For non-stock toolroom wheels: if you don't see the toolroom wheel you need in our stock listing, call your local authorized Norton distributor to check our made-to-order non-stock availability – including our revolutionary new Quantum ceramic and Vitrium³ bond wheels.

Vitrified Wheels For Steel Applications *continued*



TIER: BEST	TIER: BETTER	TIER: GOOD
TRADENAME: NORTON SG	TRADENAME: 32A / 48A	TRADENAME: 38A / 25A / 53A
ABRASIVE: Ceramic Alumina	ABRASIVE: Aluminum Oxide	ABRASIVE: Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type 06 Straight Cup									
3-1/2 x 1-1/2 x 1/2	6,550						1/10	38A60-KVBE	662435 29372
Rim 1/2" Back 1/2"									
100mm x 50mm x 20mm	6,550						1/10	38A80-JVBE	662435 30429
Rim 10mm, Back 13mm									
4 x 1-1/2 x 1/2	5,730	1/10			32A60-KVBE	662435 30218			
Rim 1/2" Back 1/2"									
4 x 1-1/2 x 1-1/4	5,730						1/10	38A60-KVBE	662435 30221
Rim 1/2" Back 1/2"									
4 x 2 x 20mm	5,730						1/10	38A80-JVBE	662435 30523
Rim 3/8" Back 1/2"									
5 x 1-1/2 x 1-1/4	4,585	1/10			32A46-KVBE	662528 30832	1/10	38A46-KVBE	662528 30842
Rim 3/8" Back 3/8"	4,585	1/10			32A60-JVBE	662528 30837	1/10	38A60-KVBE	662528 30846
Face Y (ME19243)	4,585	1/10			32A60-KVBE	662528 30838			
5 x 2 x 5/8	4,585	1/10			32A60-JVBE	662528 30987			
Rim 1/2" Back 1/2"									
6 x 1-1/2 x 1/2	3,820	1/10			32A46-KVBE	662528 38458			
Rim 1" Back 1/2"									
6 x 2 x 1-1/4	3,820	1/10			32A46-IVBE	662528 38544	1/10	38A60-KVBE	662528 38486
Rim 1/2" Back 1/2"	3,820	1/10			32A60-JVBE	662528 38538			
7 x 2 x 1-1/4	3,275	1/8			32A46-JVBE	662529 42856			
Rim 1/2" Back 1/2"									
9-1/2 x 1-1/2 x 1-1/2	2,415						1	53A46-LVBE	662531 49136
Rim 1-1/2" Back 5/8"									
10 x 4 x 1-1/2	2,295						1	38A46-IVBE	662531 61797
Rim 1-1/4" Back 1"									
Tape Wound									
12 x 2-1/2 x 7	1,910	1			32A46-LVBE	662532 63614			
Rim 1-1/2" Back 7/8"									
Type 07 Recessed Two Sides									
12 x 2 x 3	2,070	1			32A46-IVBE	662532 63588			
Rec 2/S 5-1/2 x 3/8									
12 x 2 x 3	2,070	1			32A46-HVBE	662532 63590			
Rec 2/S 7-1/4 x 1/2	2,070	1			32A46-JVBE	662532 63348			
12 x 2 x 5	2,070	1			32A46-IVBE	662532 63594			
Rec 2/S 7-1/4 x 1/2									
12 x 2 x 5	2,070	1	5SG46-JVS	662532 09930	32A46-HVBE	662532 63591	1	38A46-IVBE	662532 63600
Rec 2/S 7-1/2 x 1/2	2,070	1			32A46-HVBEP	662532 63603			
	2,070	1			32A46-JVBE	662532 63483			
	2,070	1			32A46-KVBE	662532 63596			
	2,070	1			32A60-IVBE	662532 63597			







Vitrified Wheels For Steel Applications *continued*



TIER: **BEST** **NORTON SG** **BETTER** **32A**
 TRADENAME: **NORTON SG** **32A**
 ABRASIVE: Ceramic Alumina Aluminum Oxide

GOOD **38A**
 Aluminum Oxide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	SPEC.	PART #	MIN./STD. PKG.	SPEC.	PART #
Type 11 Flaring Cup 									
3/2-1/4 x 1-1/4 x 3/4	7,640	1/10			32A60-JVBE	662435 29183	1/10	38A60-JVBE	662435 29197
Rim 1/4" Back 3/8"	7,640	1/10			32A60-KVBE	662435 29187			
Face Z (ME21560)									
3-1/2/2-3/4 x 1-1/2 x 1-1/4	7,640	1/10			32A60-KVBE	662435 29358			
Rim 1/4" Back 3/8"									
Face Z (ME24327)									
4/3 x 1-1/2 x 1-1/4	5,730	1/5	5SG46-IVSP	662435 30127	32A46-IVBE	662435 30240	1/10	38A46-KVBE	662435 30378
Rim 1/4" Back 1/2"	5,730	1/5	5SG46-KVS	662435 03342	32A46-KVBE	662435 30246	1/10	38A60-JVBE	662435 30387
Face Z (ME19237)	5,730	1/5			32A60-JVBE	662435 30256	1/10	38A60-KVBE	662435 30390
	5,730	1/5	5SG60-JVS	662435 30415	32A60-KVBE	662435 30361	1/10	38A80-JVBE	662435 30393
	5,730	1/5					1/10	38A80-KVBE	662435 30395
	5,730	1/5	5SG60-LVS	662435 30417	32A80-KVBE	662435 30368			
	5,730	1/5	5SG80-JVS	662435 30419					
	5,730	1/5	5SG80-KVS	662435 30420					
4-1/2/3-3/4 x 2 x 1-1/4	5,730	1/5			32A46-KVBE	662528 30539			
Rim 1/4"									
Back 1/2"(ME20115)									
5/3-3/4 x 1-3/4 x 1-1/4	4,585	1/5	5SG46-KVS	662528 03291	32A46-JVBE	662528 30858	1/5	38A46-KVBE	662528 30971
Rim 1/4" Back 1/2"	4,585	1/5	5SG60-KVS	662528 30737	32A46-KVBE	662528 30859	1/5	38A60-JVBE	662528 30973
Face Z (ME21563)	4,585	1/5					1/5	38A60-KVBE	662528 30975
	4,585	1/5	5SG60-LVS	662528 30736	32A60-JVBE	662528 30962			
	4,585	1/5			32A60-KVBE	662528 30964			
6/4-1/2 x 2 x 1-1/4	3,820	1/5			32A46-JVBE	662528 38491	1/5	38A46-KVBE	662528 38495
Rim 3/8" Back 1/2"	3,820	1/5			32A46-KVBE	662528 38528	1/5	38A60-KVBE	662528 38497
Face Z (ME19241)	3,820	1/5			32A60-JVBE	662528 38492			
7/5 x 2 x 1-1/4	3,275	1/8			32A46-JVBE	662529 42959	1/8	38A46-HVBE	662529 42963
Rim 3/4" Back 1/2"									
(ME19242)									
Type 12 Dish 									
4 x 1/2 x 3/4	6,207	1/10			32A60-KVBE	662435 30067			
(ME19226)									
6 x 1/2 x 1-1/4	4,140	1/10	5SG60-LVS	662528 36574	32A46-JVBE	662528 36860	1/10	38A60-JVBE	662528 36977
(ME19229)	4,140	1/10			32A60-JVBE	662528 36966			
6 x 3/4 x 1-1/4	4,140	1/10	5SG60-KVS	662528 37771	32A46-KVBE	662528 37732			
(ME19230)	4,140	1/10			32A60-JVBE	662528 37734			
	4,140	1/10			32A60-KVBE	662528 37735			
	4,140	1/10			32A60-KVBE	662528 37735			
7 x 1/2 x 1-1/4	3,600	1/10			32A46-KVBE	662529 41644			
(ME13717)	3,600	1/10			32A60-KVBE	662529 41647			
8 x 3/4 x 1-1/4	3,600						1/10	38A60-KVBE	662530 44319
(ME19231)									
10 x 1 x 1	2,485	1			32A54-JVBE	662531 61196			
(ME38702)									
10 x 1 x 1-1/4	2,485	1			32A54-JVBE	662531 61197			
(ME38702)									
Type 20 Concave One Side 									
14 x 1-1/2 x 5	1,800	1	5SG60-JVS	662533 02265	32A60-JVBE	662533 64250			
Concave from Periphery	1,800	1			32A60-KVBE	662533 64332			
1/2" Deep to 8" Flat Spot									
Type 35 Plate Mounted Disc 									
9 x 2 x 4-15/16	2,550	1			32A46-MVBE	662530 49115			
Rim 2-1/32" (ME31130)	2,550	1			32A60-J25VCF2	662530 06557			
Plate A47248	2,550	1			32A70-JVBEP	662530 49112			

For non-stock toolroom wheels: if you don't see the toolroom wheel you need in our stock listing, call your local authorized Norton distributor to check our made-to-order non-stock availability – including our revolutionary new Quantum ceramic and Vitrium³ bond wheels.



These sharp silicon carbide, vitrified wheels are used for grinding non-ferrous applications.

Applications:

Use 39C (green silicon carbide) for cemented carbides, titanium, metal matrix composites and plasma sprayed materials.
Use 37C (black silicon carbide) on 300 series stainless steels, irons, nonferrous metals (aluminum, brass, bronze and copper) and non-metallic materials (stone, marble, rubber, ceramics and glass).

Shapes:

Type 01 Straight, Type 02 Cylinder, and Type 05 Recessed 1 Side

Size Range:

3" – 14" diameter

Grit Range:


24 – 120

Abrasive Grain:




39C Green Silicon Carbide, 37C Black Silicon Carbide

Vitrified Wheels For Non-Ferrous Applications

TIER: **GOOD**
TRADENAME: **39C / 37C**
ABRASIVE: Silicon Carbide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #	
Type 01 Straight 					
3 x 1/2 x 1/2	10,825	10/50	37C60-MVK	662435 29041	
3 x 1 x 1/2	10,825	10/10	37C60-MVK	662435 29166	
	10,825	10/10	37C80-HVK	662435 29170	
	10,825	10/10	37C80-MVK	662435 29171	
	10,825	10/10	37C100-HVK	662435 29172	
	10,825	10/10	37C100-MVK	662435 29070	
3-1/2 x 1-1/2 x 7/8 (ME622)	7,095	1/10	37C24-SVK	662435 29339	
	7,095	1/10	37C30-SVK	662435 29338	
4 x 1/2 x 1/2	8,120	1/10	37C60-MVK	662435 29960	
	8,120	1/10	39C100-IVK	662435 30064	
6 x 1/2 x 1-1/4	4,140	1/10	39C60-IVK	662528 36706	
	4,140	1/10	39C80-IVK	662528 36816	
	4,140	1/10	39C100-IVK	662528 36827	
	4,140	1/10	39C120-IVK	662528 36836	
6 x 3/4 x 1-1/4	4,140	1/10	39C60-IVK	662528 37584	
	4,140	1/10	39C80-IVK	662528 37598	
	4,140	1/10	39C100-IVK	662528 37717	
	4,140	1/10	39C60-IVK	662528 38161	
6 x 1 x 1-1/4	4,140	1/10	39C80-IVK	662528 38173	
	3,600	1/10	39C80-JVK	662529 40007	
7 x 1/4 x 1-1/4	3,600	1/10	39C100-IVK	662529 40109	
	3,600	1/10	39C120-IVK	662529 40111	
	3,600	1/10	37C46-JVK	662529 41488	
	3,600	1/10	37C60-OVK	662529 41498	
7 x 1/2 x 1-1/4	3,600	1/10	39C60-IVK	662529 41609	
	3,600	1/10	39C60-JVK	662529 41611	
	3,600	1/10	39C60-KVK	662529 41613	
	3,600	1/10	39C80-IVK	662529 41617	
	3,600	1/10	39C80-JVK	662529 41618	
	3,600	1/10	39C100-HVK	662529 41622	
	3,600	1/10	39C100-IVK	662529 41624	
	3,600	1/10	39C120-IVK	662529 41632 B	
	7 x 3/4 x 1-1/4	3,600	1/10	39C80-JVK	662529 42096
		3,600	1/10	39C100-JVK	662529 42104
7 x 1 x 1-1/4	3,600	1/10	39C60-IVK	662529 42666	
	3,600	1/10	39C80-IVK	662529 42413	
	3,600	1/10	39C120-IVK	662529 42416	
8 x 1/4 x 1-1/4	3,600	1/10	39C80-IVK	662530 14526	
8 x 3/8 x 1-1/4	3,600	1/10	39C80-IVK	699366 64144	
8 x 1/2 x 1-1/4	3,600	1/10	39C60-IVK	662530 44013	
	3,600	1/10	39C80-IVK	662530 44015	
	3,600	1/10	39C100-IVK	662530 44017 B	

TIER: **GOOD**
TRADENAME: **39C / 37C**
ABRASIVE: Silicon Carbide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #
Type 01 Straight 				
8 x 3/4 x 1-1/4	3,600	1/10	39C60-JVK	662530 44312
	3,600	1/10	39C80-IVK	662533 50645
	3,600	1/10	39C100-IVK	662530 44314
8 x 1 x 1-1/4	3,600	1/10	39C60-JVK	662530 44770
	3,600	1/10	39C80-IVK	662530 44425 B
	3,600	1/10	39C100-IVK	662530 44379
	2,485	1	39C60-JVK	662531 160348
	2,485	1	39C60-JVK	662531 161640
10 x 1 x 3	2,485	1	39C60-IVK	662532 62985
12 x 1 x 3	2,070	1	39C60-IVK	662532 62988
	2,070	1	39C80-JVK	662532 62988
14 x 1 x 5	1,800	1	39C60-JVK	662533 64206
	1,800	1	39C80-JVK	662533 64208
	1,800	1	39C60-JVK	662533 64242
14 x 1-1/2 x 5	1,800	1	39C60-JVK	662533 64242
14 x 2 x 5	1,800	1	39C60-JVK	662533 64322
Type 02 Cylinder 				
6 x 1 x 4	3,600	1/10	39C60-IVK	662528 38322
Rim 1"	3,600	1/10	39C60-JVK	662528 38324
Plate A47466	3,600	1/10	39C80-IVK	662528 38327
	3,600	1/10	39C100-IVK	662528 38330
	3,600	1/10	39C120-IVK	662528 38193
6 x 1-1/4 x 4	3,600	1/10	39C60-IVK	662528 38345
Rim 1"				
Plate A47466				
10 x 2 x 7	2,100	1	39C60-HVK	662531 161675
Rim 1-1/2"	2,295	1	39C60-JVK	662531 161678
Plate A83831				
Type 05 Recessed One Side 				
14 x 1-1/2 x 5	1,800	1	39C60-IVK	66253364328
Rec 1/5 8 x 1/2				

B = Best Seller, performs well in a variety of applications for many satisfied customers





Large surface grinding wheels are generally used to grind flat stock or flat surfaces within a workpiece. These wheels are typically used on horizontal spindle machines. Applications can vary from heavy, rapid stock removal to precision tolerance operations.

- Applications:**
- Producing flat stock
 - Grinding large molds and dies
 - Sharpening knives, blades and cutlery
 - Manufacturing broaches
- Shape:** Type 01 Straight, Type 07 Recessed 2 Sides
- Size Range:** Stock: 20" diameter
1" – 6" thickness
- Abrasive Grain:** Aluminum Oxide

Cross Reference Guide

NORTON	GOOD GEMINI
Camel	91A
Cincinnati Milacron	29A, 97A
Radiac	WAA, 97A, 45A



Good choice when a broad range of parts are ground on a few machines


GEMINI ALUMINUM OXIDE BLEND

- Specially blended aluminum oxide abrasive for many surface grinding applications
- Porous bond is cool cutting on medium to wide contact areas; high chip clearance and stock removal
- Faster grinding rates remove stock, lower rates produce finer finishes; ideal when a broad range of tool steel parts are ground on a few machines

TIER: **GOOD**
 TRADENAME: **GEMINI**
 ABRASIVE: Aluminum Oxide

SIZE (D x T x H)	RECESS	MAX. RPM	STD. PKG.	SPEC.	PART #
Type 01 Straight Wheels					
20 x 1 x 8	–	1,625	1	Norton Gemini A46-H	662532 46937
20 x 2 x 10	–	1,625	1	Norton Gemini A36-J	662532 46956
Type 07 Recessed Two Sides					
20 x 2 x 8	Recess 2 Sides 11-1/2 x 1/2	1,625	1	Norton Gemini 59A46-I	662532 46949
	Recess 2 Sides 11-1/2 x 1/2	1,625	1	Norton Gemini A46-G VSP	662532 46953
20 x 3 x 8	Recess 2 Sides 11-1/2 x 1/2	1,625	1	Norton Gemini A46-G VSP	662532 46972
	Recessed 2 Sides 11-1/2 x 1/2	1,625	1	Norton Gemini A46-H	662532 46969
	Recess 2 Sides 11-1/2 x 1/2	1,625	1	Norton Gemini A46-I	662532 46960
20 x 3 x 10	Recess 2 Sides 12-1/4 x 3/4	1,625	1	Norton Gemini 59A46-I VSP	662530 58315
	Recess Side A 12-1/2 x 1/2, Side B 12-1/2 x 1	1,625	1	Norton Gemini A36-J VSP	662532 46980
	Recess Side A 12-1/2 x 1/2, Side B 12-1/2 x 1	1,625	1	Norton Gemini A46-D VSP	662532 46988

There are many more sizes and specifications available made-to-your-order. Contact your Norton representative with your custom requirements.

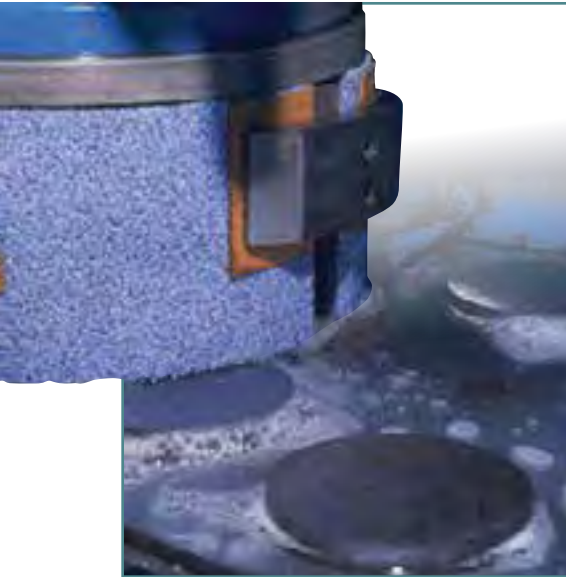


Surface grinding segments are generally used to grind flat stock or flat surfaces within a workpiece. The segment moves over the workpiece in a flat plane or vice versa. Applications can vary from heavy, rapid stock removal to precision tolerance operations.

- Applications:**
- Vertical spindle surface grinding
 - Grinding large molds, dies and plates
 - Producing flat stock
 - Sharpening knives, blades, cutlery
- Abrasive Grain:** Ceramic Alumina, Aluminum Oxide

Material-to-Product Recommendation Guide

MATERIAL	HEAVY-DUTY				GENERAL-DUTY		
	QuantumX 20-G	QuantumX 30-F	86A24-G20VTX2	86A30-E20VTX2	Gemini 30-E	Gemini 30-F	Gemini 30-G
Aluminum				◆	◆		
Bronze (hard)							◆
Cast Iron	◆						◆
Hastalloy			◆		◆		
Inconel		◆			◆		
Hardened Steel	◆				◆		
High Speed Steel	◆				◆		
Soft Steel			◆	◆			◆
Stainless Steel 300				◆	◆		
Stainless Steel 400						◆	

Segment Blueprints

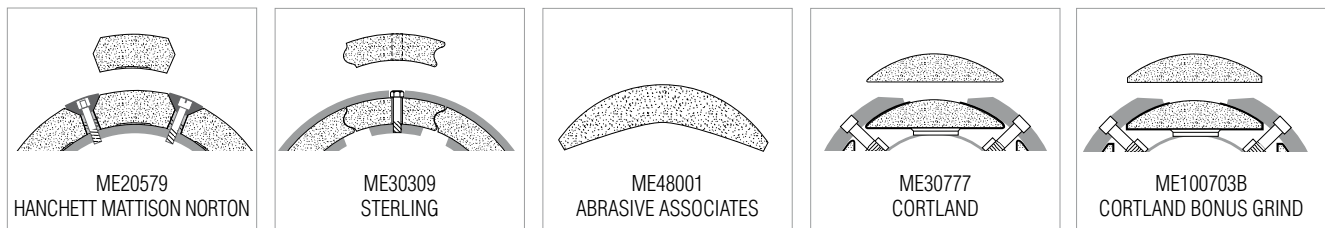

Troubleshooting Guide

PROBLEM	CORRECTION
Segment acting too hard	Increase rate of downfeed Increase table rotation speed (watch amp-meter) Dress more frequently Consider reducing area of table load
Segment acting too soft	Decrease rate of downfeed Decrease table rotation speed Check for abnormal machine vibration
Glazing and/or burning	Choose a softer grade Increase table speed (watch amp-meter)


TECH TIP

- Choose as coarse a grit size as possible in order to remove stock as quickly as possible (in big chips).
- To maximize production, choose the hardest grade possible that will not overload the machine.



It is the user's responsibility to refer to and comply with ANSI B7.1


Best choice for all low-, medium-, and high-force applications ranging from cast iron, to stainless steel and hard-to-grind alloys



QUANTUM AND QUANTUM X CERAMIC ALUMINA

- Revolutionary, versatile engineered ceramic grain shape and chemistry produce highest productivity with the lowest total grinding costs
- 33% to 100% longer life versus competitive ceramic products, 30% plus higher metal removal rate, with 15% plus lower threshold power
- Excellent performance on both old and new machines

Better choice for versatile, consistent performance



86A ALUMINUM OXIDE


- Sharper aluminum oxide abrasive grain delivers cooler-cutting, consistent performance
- Segments available for Hanchett, Mattison Norton, Sterling, Abrasive Associates, Cortland, and Cortland Bonus Grind machines
- Better choice with porous vitrified bond for increased chip clearance and cool cutting in heat-sensitive applications

Good choice when a broad variety of parts are ground on a few machines



GEMINI ALUMINUM OXIDE BLEND

- Specially blended aluminum oxide abrasive for many surface grinding applications
- The porous vitrified bond increases chip clearance and maximizes coolant flow, reduces loading, and is cool cutting in heat-sensitive applications
- For use in Hanchett, Mattison, and Norton, and Cortland and Cortland Bonus Grind chucks on surface grinding machines

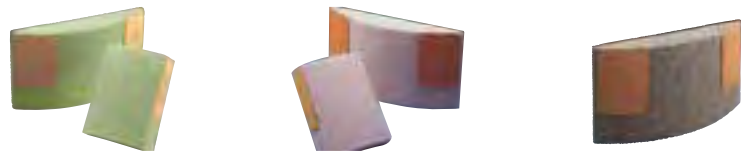

		TIER: BEST		BETTER		GOOD				
		QUANTUM/QUANTUM X		86A		GEMINI				
		Ceramic Alumina		Aluminum Oxide		Aluminum Oxide Blend				
WIDTH	THICK	HEIGHT	BLUEPRINT NO.	STD. PKG.	SPEC.	UPC NO.	SPEC.	UPC NO.		
5	1-1/2	6	ME20579	8	QUANTUMX 20-G	662533 50603		Gemini 30-E	662530 50295	
				8			86A24-H20VTX2	662533 50602	Gemini 30-F	662530 50297
				8			86A30-F12VBEP	614636 50273	Gemini 30-G	662530 50299
				8			86A24-G20VTX2	662533 50595		
6-13/16	1-1/2	6	ME30309	8			86A24-G20VTX2	662533 50595		
				8						
11	2-1/8	6	ME48001	5			86A24-G20VTX2	662533 50586		
11-1/4	2-1/4	6	ME30777	5	QUANTUMX 20-G	662533 50607	86A24-E12VBEP	614636 50279	Gemini 30-E	699366 99706
				5	QUANTUMX 20-H	662533 50608	86A24-G20VTX2	662533 50605	Gemini 30-F	699366 99709
				5	3NQP36-G12VSP	662532 51527			Gemini 30-G	699366 99710
				5			86A30-E12VBEP	614636 50285	Gemini 30-H	662434 47588
				5			86A30-F12VBEP	614636 50287		
				5			86A30-G12VBEP	614636 50289		
11-1/4	2-1/4	8	ME30777	5	QUANTUMX 20-G	662533 50612	86A24-G20VTX2	662533 50609	Gemini 30-E	699366 99712
				5	QUANTUMX 20-H	662533 50615			Gemini 30-F	699366 99716
				5	QUANTUMX 30-E	662533 87810	86A30-E20VTX2	662533 87812	Gemini 30-G	699366 99717
				5	QUANTUMX 30-F	662533 87811	86A30-F20VTX2	662533 87813	Gemini 30-H	662434 47591
				5	3NQP30-F12VSP	662532 38276			Gemini 30-I	662434 47592
				5			86A46-D12VBEP	614636 50442		
11-1/4	3	8	ME100703B	4	QUANTUMX 20-G	662533 50623	86A24-G20VTX2	662533 50617	Gemini 30-E	699366 99725
				4	QUANTUMX 20-H	662533 50624			Gemini 30-F	699366 99727
				4	QUANTUMX 30-E	662533 87808			Gemini 30-G	699366 99728
				4	QUANTUMX 30-F	662533 87809			Gemini 30-H	662434 47594
				4	3NQP30-F12VSP	690831 56473			Gemini 30-I	662434 47595
				4						
	1-5/8			10	Vitrified Burr Remover	614636 50268*				

*Minimum Quantity = 2



Cylindrical wheels are used most often when the part is held between centers and in chucks. There are three methods of cylindrical grinding: plunge, traverse, and angular.

- Plunge grinding – wheel is thrust or plunged into the part
- Traverse grinding – wheel moves across the part
- Angular grinding – wheel contacts the part at an angle

Typical Industries: Automotive, shipbuilding, engine building, bearing, land- and air-based turbine blades, and toolroom

Shape: Type 01 Straight, Type 05 Recessed One Side, and Type 07 Recessed 2 Sides

Size Range: 16", 18", 20", 24" and 30" diameter

Abrasive Grain: Ceramic Alumina and Aluminum Oxide




Stationary Dressing Tool Recommendations for Cylindrical Wheels

Grinding Wheel Diameter	Diamond Carat Weight	Single Point		Multi-Point (Grit)			Multi-Point (Grit)		
		Tool Product/Part #	0° Angle	Tool Product/Part #	Shape	Tool Product/Part #	15° Angle	Shape	
16" - 20"	3/4	BC7M7	662601 95007	BC62	662601 95012	1/4 x 1/2 Rect.	BC63	662601 95013	1/4 x 1/2 Rect.
		NS7M7	662601 95132	2A6D7	662601 95046		2A6E7	662601 95049	
21" +	1	BC10M7	662601 95009	BC61	662601 95011	1/4 x 3/4 Rect.	BC60	662601 95010	1/4 x 3/4 Rect.
		NS10M7	662601 95137	1A6A7	662601 95031		1A6C7	662601 95039	

NS Single Point Diamond Tools are resettable. BC Diamond Tools are not resettable. All tools specified above have 7/16" diameter shanks.

Troubleshooting Guide

PROBLEM	POSSIBLE CAUSES	SUGGESTED CORRECTION
Burn or cracks on workpiece	Wheel too hard	Try softer wheel or make wheel act softer (see Tech Tip on next page)
	Dress is too fine	Dress faster
	Nozzle not directing coolant properly	Redirect flow
	Work speed too slow or wheel speed too fast	Adjust speeds
	Wheel feed too slow causing excess contact time	Increase feed rate
Chatter marks on workpiece	Loose spindle, end play, bearing failure	Check wheel spindle on assembly
	Work drive faults, out-of-truth plate	Check gear action, truth, drive on pin pressure
	Wheel too hard, poor truing, poor mounting	Use softer grade; dress wheel correctly; secure mounting
Poor quality finish	Poor quality dressing	Reduce final depth of dress on wheel
	Diamond insecurely held	Check and replace diamond and secure properly
	Misalignment of head and tail stocks	Check for properly aligned workpiece
	Dirty coolant	Clean coolant frequently; use efficient filter
	Scored workpiece centers	Check and lap center holes as required

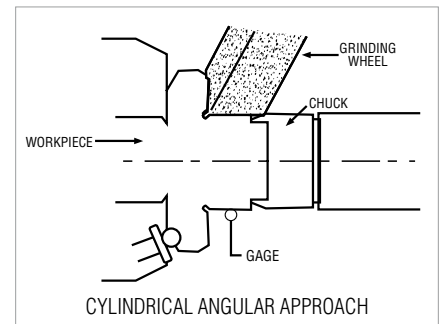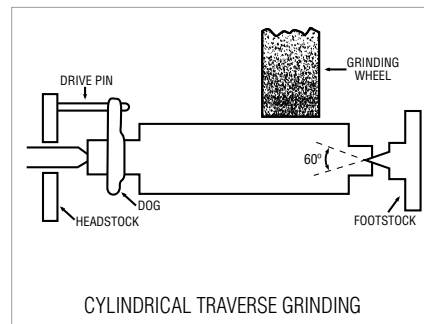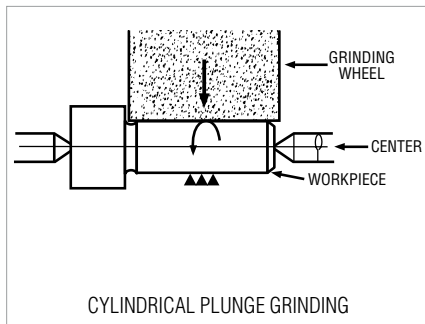

Best choice for highest productivity, lowest total per-part grinding cost

5SG CERAMIC ALUMINA/ALUMINUM OXIDE BLEND

- Exceptionally high-performing seeded gel ceramic alumina and friable aluminum oxide abrasive blend for fast stock removal, cool, superior cutting; 3 - 5 times more life than aluminum oxide wheels; 2 times stock removal rate vs. conventional abrasives
- High-performance versatile bond for cylindrical and surface grinding high-speed tool steels, hardened and soft steels, and aerospace alloys: exceptional form holding
- Self-sharpening abrasive minimizes burn and required dressing, to maximize sharp edge on tools and dies for longer life in production

Better choice for medium to heavy stock removal

32A ALUMINUM OXIDE

- Exceedingly strong, sharp monocrystalline aluminum oxide grain, for precision production medium to heavy stock removal applications
- The most versatile vitrified bond, especially recommended for toolroom, cylindrical, and surface grinding
- Grinds with an exceptional cool; fast cutting action, requires minimum dressing

Better choice for longer wheel life

86A ALUMINUM OXIDE

- Premium abrasive and superior bond system produce high grinding G-Ratios (metal removal/wheel wear) for increased productivity
- Hold form for better part geometry; decreased dress frequency and/or dress compensation
- Engineered for easy use, grind cycles do not need to be altered, no special operator training is needed

Good choice for versatile performance at an economical price

64A ALUMINUM OXIDE BLEND

- Specially blended aluminum oxide abrasive for production cylindrical applications
- A superior vitrified bond that maintains high grinding rates without wheel breakdown
- Good choice for small job shops grinding numerous materials on a few machines

Good choice for smallest volume, lowest initial price applications

GEMINI 2 ALUMINUM OXIDE

- Upgraded aluminum oxide abrasive blend delivers an efficient cut rate and improved grinding wheel life to your precision operations
- Made in the USA, these quality, low initial price wheels are ideal for small- to medium-sized manufacturing facilities that perform a variety of jobs
- Carefully chosen, versatile specifications and sizes meet many cylindrical and surface grinding requirements



		TIER: BEST		BETTER		GOOD	
TRADENAME: 5SG		Ceramic Alumina / Aluminum Oxide		Aluminum Oxide		Aluminum Oxide	
SIZE (D x T x H)	STD. PKG.	SPEC.	PART #	SPEC.	PART #	SPEC.	PART #
Type O1 Straight							
16 x 1 x 5	1	5SG60-JVS	662534 67007	32A60-J8VBE	662534 64836	64A60-K8V127	662534 66722
	1			32A60-K5VBE	662534 64837	Gemini2 60-I	662434 97801
	1					Gemini2 60-K	662434 95077
	1					Gemini2 60-M	662434 97802
	1					Gemini2 100-I	662434 97804
	1					Gemini2 100-K	662434 97806
	1					Gemini2 100-M	662434 97807
16 x 1 x 8	1			32A60-K5VBE	662534 64826		
16 x 1-1/2 x 5	1	5SG60-KVS	662534 67010	32A46-H8VBE	662534 64925		
16 x 2 x 5	1			32A46-J8VBE	662534 64995	64A60-K8V127	662534 66721
	1			32A60-K5VBE	662534 64960	Gemini2 60-I	662434 97810
	1					Gemini2 60-K	662434 95078
	1					Gemini2 100-I	662434 97812
16 x 3 x 5	1					Gemini2 100-K	662434 97815
	1					Gemini2 60-I	662434 97820
	1					Gemini2 100-I	662434 97821
18 x 1 x 5	1					Gemini2 60-I	662434 83777
	1					Gemini2 60-K	662434 97610
	1					Gemini2 60-M	662434 97611
	1					Gemini2 100-I	662434 97612
	1					Gemini2 100-K	662434 97613
	1					Gemini2 100-M	662434 97615
	1						
18 x 2 x 5	1					64A60-K8V127	662534 66719
	1					Gemini2 60-I	662434 83779
	1					Gemini2 60-K	662434 97618
	1					Gemini2 100-I	662434 97619
18 x 3 x 5	1					Gemini2 100-K	662434 97620
	1					Gemini2 60-I	662434 83780
	1					Gemini2 100-I	662434 97621
	1						
20 x 1 x 8	1			86A60-J8V127	690786 08982	Gemini2 60-I	662434 83782
	1			86A80-J8V127	690786 08983	Gemini2 60-K	662434 97840
	1					Gemini2 60-M	662434 97841
	1					Gemini2 100-I	662434 97842
	1					Gemini2 100-K	662434 97843
	1					Gemini2 100-M	662434 97846
20 x 1 x 10	1					Gemini2 60-I	662434 95332
	1					Gemini2 60-K	662434 97789
	1					Gemini2 60-M	662434 97791
	1					Gemini2 100-I	662434 97793
	1					Gemini2 100-K	662434 97796
	1					Gemini2 100-M	662434 97798
20 x 1 x 12	1					Gemini2 60-I	662434 83787
	1					Gemini2 60-K	662434 97827
	1					Gemini2 60-M	662434 97831
	1					Gemini2 100-I	662434 97835
	1					Gemini2 100-K	662434 97837
	1					Gemini2 100-M	662434 97838
20 x 1-1/2 x 5	1			32A46-H8VBE	690786 65382		
20 x 2 x 5	1					64A60-J8V127	690786 66713
20 x 2 x 8	1			32A46-I8VBE	690786 65433	64A60-K8V127	690786 66712
	1			32A60-K5VBE	690786 65490	Gemini2 60-I	662434 83785
	1					Gemini2 60-K	662434 97855
	1					Gemini2 100-I	662434 97856
	1					Gemini2 100-K	662434 97857
20 x 2 x 10	1					Gemini2 60-I	662434 95334
	1					Gemini2 60-K	662434 97848
	1					Gemini2 100-I	662434 97849
	1					Gemini2 100-K	662434 97850
	1						
20 x 2 x 12	1			32A46-I8VBE	690786 65455	Gemini2 60-I	662434 83788
	1					Gemini2 60-K	662434 97851
	1					Gemini2 100-I	662434 97852
	1					Gemini2 100-K	662434 97854

For additional stock cylindrical wheels, see the large surface grinding wheel section of this catalog

Contact your Norton representative with your custom cylindrical wheel requirements. There are many more sizes and specifications available made-to-your-order, including wheels made from Norton 55A and Quantum blank stock. Our revolutionary Norton Quantum and Vitrium³ bond ceramic wheels bring a quantum leap in technology to your operation. See 55A and Quantum Blank Stock FastTrack Service catalog sections for more details.

TIER: BEST		BETTER		GOOD	
TRADENAME: 55G		32A, 86A		64A, GEMINI, OR GEMINI2	
ABRASIVE: Ceramic Alumina / Aluminum Oxide		Aluminum Oxide		Aluminum Oxide	
SIZE (D x T x H)	STD. PKG.	SPEC.	PART #	SPEC.	PART #
Type 01 Straight					
20 x 3 x 8	1			64A46-18V127	690786 66447
	1			64A60-J8V127	690786 08140
	1			Gemini2 60-I	662434 83786
20 x 3 x 10	1			Gemini2 100-I	662434 97862
	1			Gemini2 60-I	662434 95333
	1			Gemini2 100-I	662434 97859
20 x 3 x 12	1			Gemini2 60-I	662434 83789
	1			Gemini2 100-I	662434 97860
24 x 1 x 12	1			Gemini2 60-I	662434 83790
	1			Gemini2 60-K	662434 97863
	1			Gemini2 100-I	662434 97866
	1			Gemini2 100-K	662434 97868
	1			Gemini2 100-M	662434 97870
24 x 2 x 12	1			64A60-K8V127	690831 66710
	1			64A80-K8V127	690831 66711
	1			Gemini2 60-I	662434 83792
	1			Gemini2 60-K	662434 97872
	1			Gemini2 100-I	662434 97873
	1			Gemini2 100-K	662434 97874
	1			Gemini2 60-I	662434 83793
24 x 3 x 12	1			Gemini2 100-I	662434 97877
	1			Gemini2 100-I	662434 97877
30 x 2 x 12	1			64A60-J8V127	692104 66704
	1			Gemini2 60-J	662434 97878
	1			Gemini2 60-L	662434 97986
30 x 3 x 12	1			64A60-J8V127	692104 66697
	1			64A60-K8V127	692104 66698
	1			Gemini2 60-J	662434 97987
	1			Gemini2 60-L	662434 97988
	1			64A60-J8V127	692104 01774
30 x 4 x 12	1			Gemini2 60-J	662434 97989
	1			Gemini2 60-L	662434 97990
	1			Gemini2 60-L	662434 97990
Type 07 Recessed Two Sides					
18 x 2 x 8	1		32A46-18VBE	662534 65110	
Rec 2/S 10-1/2 x 1/2					
20 x 2 x 8	1		32A46-18VBE	690786 65537	
Rec 2/S 11-1/2 x 1/2					
20 x 3 x 8	1		32A46-18VBE	690786 65686	
Rec 2/S 11-1/4 x 1/2					
20 x 3 x 8	1			Gemini 46-H	662532 46969
Rec 2/S 11-1/2 x 1/2					
20 x 3 x 10	1		32A46-18VBE	690786 65575	
Rec 2/S 12-1/4 x 5/8					
20 x 6 x 10	1		32A46-18VBE	690786 65854	
Rec Side A 12-1/4 x 2					
Rec Side B 12-1/4 x 1					

For additional stock cylindrical wheels, see the large surface grinding wheel section of this catalog

Contact your Norton representative with your custom cylindrical wheel requirements. There are many more sizes and specifications available made-to-your-order, including wheels made from Norton 55A and Quantum blank stock. Our revolutionary Norton Quantum and Vitrium³ bond ceramic wheels bring a quantum leap in technology to your operation. See 55A and Quantum Blank Stock FastTrack Service catalog sections for more details.

TECH TIP

To make a wheel act softer:

- Increase work speed
- Increase traverse speed
- Increase infeed
- Decrease wheel speed
- Increase dresser traverse rate
- Increase depth of dress per traverse
- Dress more often

To make a wheel act harder:

- Decrease work speed
- Decrease traverse speed
- Decrease infeed
- Increase wheel speed (do not exceed MAX RPM marked on wheel)
- Dress at slower traverse rate
- Decrease depth of dress per traverse



It is the user's responsibility to refer to and comply with ANSI B7.1



Centerless grinding is a production process that produces extremely close tolerances on metal cylindrical forms or parts. Centerless grinding is used on a wide variety of workpieces. The key components in the process are the grinding wheel, the work rest blade (used to support the work) and the regulating or “feed” wheel (the drive mechanism for the workpiece).

Applications:

- High production operations on large volume continuous grinding
- Parts ranging from miniature roller bearings to train axles and bearings
- Fastener and tool manufacturing
- Steel mills
- Automotive related components
- Bearing
- Machine tools
- Aircraft
- Turbine blades – land- and air-based

Shape:

Centerless wheels: Type 01 Straight
 Feed wheels: Type 01 Straight and Type 07 Recessed 2 Sides

Size Range:

Centerless wheels: 16", 20", and 24" diameter
 Feed wheels: 12" and 14" diameter

Abrasive Grain:

Ceramic Alumina, Aluminum Oxide, Aluminum Oxide/Silicon Carbide Blend

Material-to-Product Recommendation Guide


	55A60-KVS3	55A80-LVS3	32AC90-QB	32AC54-QB	2NQMC54-QB45
Alnico	◆			◆	
Cast Iron	◆			◆	
Hastalloy	◆				
Inconel	◆				
Stainless	◆				
Stainless Steel 300	◆				
Stainless Steel 400	◆				
Steel - Hard or Soft					
Less than 1/2" Diameter		◆			
5/8" to 2 1/2" Diameter	◆				
Over 2 1/2" Diameter	◆				◆
High Speed (commercial finish)	◆				◆
High Speed (fine finish)			◆		

Stationary Dressing Tool Recommendations for Centerless Wheels

Grinding Wheel Diameter	Diamond Carat Weight	Single Point		Indexable Single Point		Multi-point (Grit)	
		Tool Product # Part # 0° Angle	Tool Product # Part # 0° Angle	Tool Product # Part # 0° Angle	Shape	Tool Product # Part # 15° Angle	Shape
11" - 14"	1/2	BC5M7 662601 95005	BCUD5 662601 95025	BC65 662601 95015	3/8 Round	BC63 662601 95013	1/4 x 1/2
		NS5M7 662601 95127	NSUD5 662601 95163	2R6K7 662601 95096		2A6E7 662601 95049	Rectangle
15" - 20"	3/4	BC7M7 662601 95007	N/A	BC62 662601 95012	1/4 x 1/2	BC63 662601 95013	1/4 x 1/2
		NS7M7 662601 95132	NSUD7 662601 95164	2A6D7 662601 95046	Rectangle	2A6E7 662601 95049	Rectangle
21" +	1	BC10M7 662601 95009	N/A	BC61 662601 95011	1/4 x 3/4	BC60 662601 95010	1/4 x 3/4
		NS10M7 662601 95137	NSUD10 662601 95165	1A6A7 662601 95031	Rectangle	1A6C7 662601 95039	Rectangle

Stationary Dressing Tool Recommendations for Feed Wheels

Feed Wheel Diameter	Tool Carat Weight	Tool Shank Diameter	Indexable Single Point	
			Tool Product #	Tool Part #
Up to 14"	1/2	7/16"	NSUD5	662601 95163

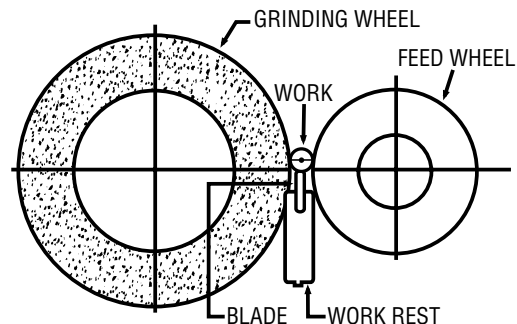

TECH TIP

Proper Wheel Mounting

1. Thoroughly clean spindle and flange bearing area of all dirt and foreign material.
2. Inspect for worn, distorted or damaged areas on flanges and spindle.
3. If mounting a wide centerless wheel on a spindle (i.e., twin-grip), do not use grease or other petroleum lubricants. Use a silicone spray lubricant on the spindle to ease mounting the wheel, if necessary.
4. Ensure mount up arrow is at the top of the wheel. In the case of butted sets, assemble so that the arrow is formed across the top of the wheel face.
5. Ensure proper blotters are installed; one on each flange mating surface. Always use new blotters.
6. Install blotter flange and snug up the bolts only finger tight.
7. Using a torque wrench, tighten all bolts in an alternating pattern from side to side to 15 foot pounds.
8. Repeat the same tightening sequence, increasing the torque to 35 foot pounds.
 - » for wide wheels (18"-20"), torque the bolts at 45 to 50 foot pounds
 - » for narrower wheels (2"-12"), a torque of 35 foot pounds is sufficient
9. Retorque the flange bolts to specification after the first eight hours of operation.

TECH TIP

- Use vitrified bond wheels for form holding and plunge grinding
- Use resinoid bond wheels for stock removal, long irregular parts and faster throughfeed grinding
- Vitrified Centerless Wheel Speeds:
 - » 64A46-KVCE wheels: 6,500 SFPM max. operating speed
 - » All other vitrified centerless stock products: 8,500 SFPM max. operating speed
 - » Always check wheel speed markings on wheels before running wheel



It is the user's responsibility to refer to and comply with ANSI B7.1

TECH TIP

To make a wheel act softer:

- Increase work speed/regulating wheel speed
- Increase throughput speed/regulating wheel speed
- Increase infeed
- Decrease wheel speed
- Dress at a faster traverse rate

To make a wheel act harder:

- Decrease work speed/regulating wheel speed
- Decrease throughput speed/regulating wheel speed
- Decrease infeed
- Increase wheel speed (observe safe limits)



Best choice for cast iron to stainless and hard-to-grind materials and alloys (titanium, Inconel...)

QUANTUM (2NQ) CENTURY45 CERAMIC ALUMINA

- Proprietary 2NQ ceramic abrasive and Century45 (B45) resin bond formulation engineered specifically to maximize productivity of centerless applications
- Achieve over 30% improvement of stock removal, and up to 50% reduction in cycle time
- Less grinding noise significantly improves operator safety

Better choice for performance to price ratio



55A-VS3 ALUMINUM OXIDE

- Monocrystalline 55A aluminum oxide offers superior performance on centerless plunge and throughfeed surface grinders with 2 plus times the life of competitive aluminum oxide wheels
- Vitrium 3 VS3 bond allows cool cutting, high-speed, and precise form holding
- Ideal for simple- to complex-shaped components, with increased productivity; more quality parts at low cost per part

Better choice when one wheel is used to grind several different materials

32AC ALUMINUM OXIDE / SILICON CARBIDE BLEND

- Aluminum oxide/silicon carbide abrasive blend in a strong resin bond is ideal when one wheel is used to grind several different materials from high-to-low tensile strength
- Norton resin bond centerless wheels are the choice for stock removal, long irregular paths, and faster through feed grinding
- Ideal for full range of simple- to complex-shaped components

Good choice for hard-to-grind fasteners

57A ALUMINUM OXIDE WITH FINE / HARD SIDE

- Tough, durable aluminum oxide abrasive for heavy duty work
- Superior vitrified bond system for longer wheel life and excellent form holding when toolroom and centerless grinding
- 3/16 inch thick fine/hard side provides good form holding while grinding stainless and Inconel fasteners

Good choice for grinding a variety of materials, economically

64A ALUMINUM OXIDE BLEND

- Good intermediate type aluminum oxide abrasive blend for production centerless applications
- A superior vitrified bond that maintains high grinding rates without wheel breakdown
- Good choice for small job shops grinding numerous materials on a few machines

Good choice for smallest volume, lowest initial price applications

GEMINI 2 ALUMINUM OXIDE

- Upgraded aluminum oxide abrasive blend delivers an efficient cut rate and improved grinding wheel life to your precision operations
- Made in the USA, these quality, low initial price wheels are ideal for small- to medium-sized manufacturing facilities that perform a variety of jobs
- Carefully chosen, versatile specifications and sizes meet many centerless grinding requirements

Centerless Wheels


		TIER: BEST		BETTER		BETTER		EXPANDED OFFERING		GOOD	
TRADENAME:		QUANTUM CENTURY45 CENTERLESS RESINOID WHEELS		32AC / 32AC CENTURY 45 CENTERLESS RESINOID WHEELS		55A CENTERLESS VITRIFIED WHEELS				53A, 57A, 64A, GEMINI, GEMIN2 CENTERLESS VITRIFIED WHEELS	
ABRASIVE:		Ceramic Alumina		Aluminum Oxide/Silicon Carbide		Aluminum Oxide				Aluminum Oxide	
SIZE (D x T x H)	STD. PKG.	SPEC.	PART #	SPEC.	PART #	SPEC.	PART #	SPEC.	PART #	SPEC.	PART #
Type 01 Straight											
16 x 4 x 10	1									57A80-L8VCN	662534 65001
20 x 2 x 12	1										
20 x 4 x 12	1									64A60-KVCE	690786 66723
	1									64A80-LVCE	690786 66727
20 x 6 x 12	1	2NQMC54-QB45	662434 96406	32AC80-NB45	662434 96398	55A60-KVS3	662533 87817	64A60-KVCE	690786 66729		
	1			32AC54-QB	690786 66545	55A80-LVS	662534 90781	Gemini 60-L	662532 46994		
	1					55A80-MVS	662534 90788				
20 x 8 x 12	1	2NQMC46-QB45	662434 96407	32AC80-NB45	662434 96400	55A60-KVS3	662533 87819	64A60-KVCE	690786 66748		
	1			32AC54-QB	690786 66546	55A80-LVS	662534 90783	64A60-LVCE	690786 66749		
	1					55A80-MVS	662534 90785	64A80-KVCE	690786 66751		
	1							Gemini 54-J	662532 47001		
	1							Gemini2 60-K	662534 51857		
24 x 1-1/2 x 12	1							57A 80/120 O/Q	662531 93575		
w/ 3/16" fine/hard layer	1							57A 80/120 P/R	662533 54449		
24 x 2-1/2 x 12	1							57A A80/120 P/R	662534 91223		
24 x 2-1/2 x 12	1							57A 80/120 O/Q	662532 85629		
w/ 3/16" fine/hard layer	1							57A 80/120 P/R	662533 40540		
24 x 3 x 12	1							64A60-K8V127	690831 66708		
24 x 4 x 12	1							Gemini2 60-K	662534 51860		
	1							Gemini2 100-L	662534 51861		
24 x 6 x 12	1	2NQMC46-QB45	662434 96408	32AC80-NB45	662434 96401	55A80-LVS3	662533 87821	Gemini 60-K	662532 47047		
	1			32AC54-QB	690831 66547			Gemini2 60-K	662534 51862		
24 x 8 x 12	1	2NQMC46-QB45	662434 96409	32AC80-NB45	662434 96403	55A60-KVS	662534 90791	Gemini2 60-K	662534 51864		
	1			32AC54-QB	690831 66548	55A60-LVS	662534 90762				
	1					55A80-LVS3	662533 87825				
	1					55A60-MVS	662534 90782				
24 x 10 x 12	1	2NQMC46-QB45	662434 96410	32AC80-NB45	662434 96404	55A60-KVS3	662533 87830	Gemini2 60-K	662534 51866		
	1			32AC54-QB	690831 66549	55A80-LVS3	662533 87828				
24 x 20 x 12	1			32AC54-QB	690831 66552						
Composed of 2 Wheels 10" Thick (ME90362)	1			32AC54-SB	690831 66553						

Rubber Bond Feed Wheels

		TIER: BETTER	
ABRASIVE:		Aluminum Oxide	
SIZE (D x T x H)	STD. PKG.	SPEC.	PART #
Type 01 Straight			
12 x 2 x 5	1	57A80-RR51	662532 22840
Type 07 Recessed Two Sides			
12 x 4 x 5 Rec 2 Sides 7-1/2 x 1/2	1	57A80-RR51	662532 22844
12 x 6 x 5 Rec Side A 7-1/2 x 1-1/2 Rec Side B 7-1/2 x 1/2	1	57A80-RR51	662532 22846
12 x 6 x 5 Rec 2 Sides 7-1/2 x 1-1/2	1	57A80-RR51	662532 22847
12 x 8 x 5 Rec Side A 7-1/2 x 2-1/2 Rec Side B 7-1/2 x 1-1/2	1	57A80-RR51	662532 22850
14 x 8 x 5 Rec Side A 8 x 2 Rec Side B 8 x 1-1/2	1	57A80-RR51	662533 22859
14 x 20 x 6 Rec 2 Sides 8-1/2 x 1-1/2 Butted Feed Wheels Composed of 2 Wheels 10" Thick (ME91512)	1	57A80-RR51	662533 22196

Plastic Bond Feed Wheels

		TIER: BETTER	
ABRASIVE:		Aluminum Oxide	
SIZE (D x T x H)	STD. PKG.	SPEC.	PART #
Type 07 Recessed Two Sides			
12 x 8 x 5 Rec Side A 7-1/2 x 2-1/2 Rec Side B 7-1/2 x 1-1/2	1	57A80-RP4	662532 22199

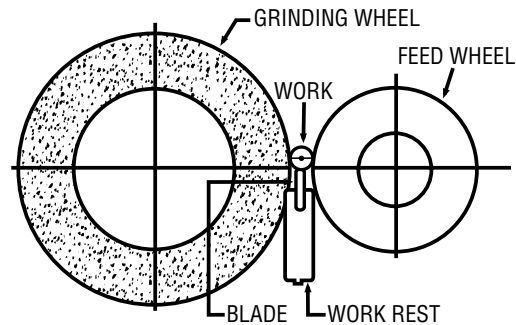

There are many more sizes and specifications available made-to-your-order, including wheels made from our blank stock FastTrack Service for rush orders. Contact your Norton representative with your custom centerless requirements.

Creepfeed Blank Stock FastTrack Service



Norton creepfeed wheels are the best performing creepfeed wheels in the industry. These high-performance blank stock wheels can be altered to your dimensional requirements.

- | | |
|----------------------------|---|
| Applications: | Heat-sensitive, porous grinding of difficult-to-grind alloys |
| Typical Industries: | Aerospace, automotive, toolroom, gear, energy |
| Size Range: | Blank Stock: 16" – 25" diameter
Finished Wheel: 14" – 25" diameter |
| Grade/Porosity: | C28 – F26 |
| Abrasive Grain: | Ceramic Alumina, Fused Aluminum Oxide |

Best choice for versatility, maximum performance, and highest productivity



QUANTUM X CERAMIC ALUMINA AND VORTEX ALUMINUM OXIDE BLEND

- Leading Norton technologies produce the most free-cutting creepfeed wheel: patented pore-induced construction, a blend of Norton Quantum ceramic and Vortex aluminum oxide abrasives, and the newest, strongest Norton bond: Vitrium
- Excel on large area of contact applications with exceptional form and corner-holding and 20+% less power draw; best MRR vs. all other ceramic creepfeed wheels, with reduced cycle times of up to 50%
- Versatile; for all low-, medium- and high-force applications on hard-to-grind Inconel, titanium, and aerospace alloys

Better choice for heat-sensitive, porous grinding of difficult-to-grind alloys



VORTEX ENGINEERED ALUMINUM OXIDE

- High-performance, engineered and optimally spaced fused aluminum oxide abrasive
- High metal removal rates; able to grind large areas of contact with exceptional part integrity and quality and superior surface finish
- Long wheel life: dramatically shorter grinding cycles = less wheel changes and more parts/wheel = high productivity

Key Program Features

- Standard lead-time: 2 weeks
- Alteration Parameters:
 - » Diameter may be altered to 2" smaller than the original blank stock diameter
 - » Thickness may be altered to 1/2 the original blank stock thickness
 - » Bore may be altered to these parameters 5" altered up to 8" max. 8" altered up to 12" max.

TIER: BEST		BETTER		
TRADENAME: QUANTUM X 3NQX, TG CERAMIC UNFINISHED BLANK STOCK		VORTEX A/O UNFINISHED BLANK STOCK		
SIZE (D x T x H)	SPEC.	UF BLANK PART #	SPEC.	UF BLANK PART #
Type O1 Straight				
12 x 1.750 x 3	3NQX60/1-D24VTX2	003105	01586	
12 x 3.500 x 3	3NQX60/1-E24VTX2	003105	01589	
12 x 1 x 3	3NQX60/1-E24VTX2	003105	01590	
12 x 3 x 3	TG2120/1-E24VTX2	003105	01591	
12 x 3.500 x 3	3NQX60/1-C28VTX2	003105	03234	
12 x 1.500 x 3	3NQX60/1-C28VTX2	003105	03235	
16 x 1 x 5	3NQX60-C28VTX2	003104	38575	
	3NQX60-D28VTX2	003104	25238	
	3NQX60-D+28VTX2	003104	79157	
	3NQX60-E24VTX2	003104	25239	
	3NQX80-E+28VTX2	003104	79160	
16 x 3 x 5	3NQX60-C28VTX2	003104	38656	
	3NQX60-D28VTX2	003104	25240	
	3NQX60-D+28VTX2	003104	79158	
	3NQX60-E24VTX2	003104	25241	
	3NQX80-D+28VTX2	003104	79163	
	3NQX80-E+28VTX2	003104	79161	
16 x 4 x 5				IPA60-D29VTX 003103 12485
				IPA60-E26VTX 003103 12486
16 x 5 x 5	3NQX60-D28VTX2	003104	25242	
	3NQX60-E24VTX2	003104	25243	
16 x 6 x 5	3NQX60-C28VTX2	003104	38657	
	3NQX80-D+28VTX2	003104	79164	
	3NQX80-E+28VTX2	003104	79162	
20 x 1 x 8	3NQX60-C28VTX2	003104	38658	
	3NQX60-D28VTX2	003104	25244	
	3NQX60-E24VTX2	003104	25245	
20 x 2-1/2 x 8				IPA60-E26VTX 003103 03130
				IPA60-F17VTX 003103 03131
				IPA80-D29VTX 003103 03132
20 x 3 x 8	3NQX60-C28VTX2	003104	38659	
	3NQX60-D28VTX2	003104	25256	
	3NQX60-E24VTX2	003104	25257	
20 x 4 x 8				IPA60-D29VTX 003103 03133
				IPA60-E26VTX 003103 03134
20 x 5 x 8	3NQX60-D28VTX2	003104	25258	
	3NQX60-E24VTX2	003104	25259	
20 x 6 x 8	3NQX60-C28VTX2	003104	38660	
24 x 4 x 8				IPA60-C29VTX 031039 25091
				IPA60-D29VTX 003104 06547
				IPA60-F26VTX 003103 03135
25 x 2-1/2 x 8				IPA60-E26VTX 003104 04613
25 x 3-1/2 x 8				IPA60-E26VTX 003104 04678



Quantum Blank Stock FastTrack Service



The newest-generation ceramic Norton Quantum vitrified wheels deliver the highest productivity of any wheel in the marketplace. They will grind with superior results in many applications. They can be altered to your specific needs within two weeks of receipt of your order.

- Applications:**
- Centerless plunge and throughfeed grinding
 - Surface grinding
 - Cylindrical grinding
- Size Range:**
Blank Stock: 18" – 30" diameter
Finished Wheel: 16" – 30" diameter
- Grit Range:** 60, 80, and 120
- Grade Range:** I – M
- Abrasive Grain:** Ceramic Alumina

Best choice for versatility, maximum performance, and cost savings



QUANTUM CERAMIC ALUMINA

- Revolutionary, sharp, durable engineered ceramic alumina grain shape and chemistry; highly-porous
- Perform well on old and new machines with 30%+ higher metal removal rate and 15%+ lower threshold power; achieve highest productivity with lowest total grinding cost
- Versatile; for all low-, medium- and high-force applications ranging from cast iron, to stainless steel and hard-to-grind Inconel and titanium

TIER: **BEST**


TRADENAME: **QUANTUM CERAMIC UNFINISHED BLANK STOCK**

SIZE (D x T x H)	SPEC.	UNFINISHED BLANK PART #
Type 01 Straight		
18 x 1 x 5	3NQ80-K10VS	003104 05993
18 x 2 x 5	3NQ80-K10VS	003104 05994
18 x 3 x 5	3NQ80-K10VS	003104 05995
20 x 1 x 8	3NQ80-K10VS	003104 05985
20 x 1 x 12	3NQ80-K10VS	003104 06017
	3NQ120-MVS	003104 05924
20 x 2 x 8	3NQ80-K10VS	003104 06036
20 x 3 x 8	3NQ80-K10VS	003104 06037
20 x 6 x 12	3NQ80-L10VS	003104 06018
20 x 8 x 12	3NQ80-L10VS	003104 06026
24 x 1 x 8	3NQ80-K10VS	003104 06034
24 x 1 x 12	3NQ80-K10VS	003104 06038
24 x 2 x 8	3NQ80-K10VS	003104 06035
24 x 2 x 12	3NQ80-K10VS	003104 06029
24 x 3 x 8	3NQ60-J10VS	003104 25121
	3NQ80-K10VS	003104 06046
24 x 3 x 12	3NQ60-J10VS	003104 25120
	3NQ80-K10VS	003104 06030
24 x 6 x 12	3NQ80-L10VS	003104 06031
24 x 8 x 12	3NQ80-L10VS	003104 06032
24 x 10 x 12	3NQ80-L10VS	003104 06033
30 x 2 x 12	3NQ80-I10VS	003104 27211
	3NQ80-J10VS	003104 06047
	3NQ80-K10VS	003104 06048
30 x 3 x 12	3NQ60-I10VS	003104 27212

There are many finished sizes and specifications available. Contact your local Norton distributor or salesperson with your size and specification requirements for quantity guidelines, quotations and helpful ordering instructions.

Please note "2-week delivery request" if needed, on your order.

55A Blank Stock FastTrack Service

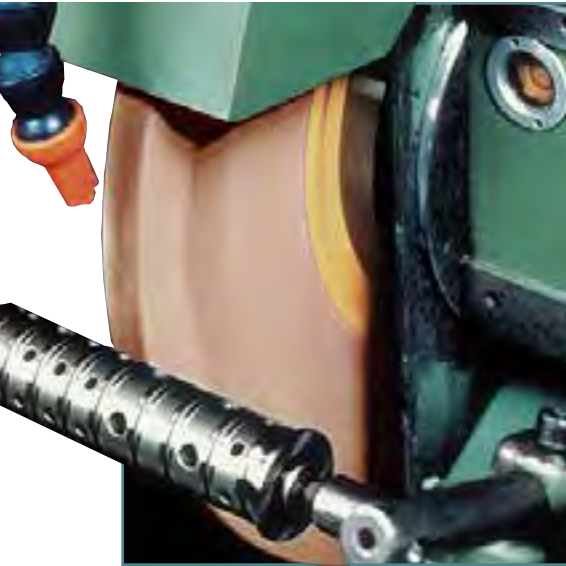

55A-VH blank stock wheels are competitively-priced, monocrystalline grain wheels specifically engineered for numerous carbon steel applications requiring moderate to heavy stock removal rates. They can be altered to your specific needs within two weeks of receipt of your order.

- Applications:** Centerless plunge and throughfeed grinding
Surface grinding
Cylindrical grinding
- Size Range:** Blank Stock: 18" – 42" diameter
Finished Wheel: 16" – 42" diameter
- Grit Range:** 60 – 120
- Grade Range:** I – M
- Abrasive Grain:** Aluminum Oxide

Better choice for precision grinding of carbon steel and cast iron



55A-VH ALUMINUM OXIDE

- Advanced combination of monocrystalline 55A aluminum oxide abrasive and superior VH bond
- Superior performance on centerless plunge and throughfeed, surface, and cylindrical grinders with up to 2X the life of competitive aluminum oxide wheels
- Ideal for simple- to complex-shaped components with increased productivity, more quality parts, and lowest cost per part

TIER: **BETTER**
OTHER: **55A-VH ALUMINUM OXIDE UNFINISHED BLANK STOCK**

SIZE (D x T x H)	GRIT	GRADE	UNFINISHED BLANK PART #
Type 01 Straight			
18 x 1 x 5	80	K	003104 04552
18 x 2 x 5	80	K	003104 04554
18 x 3 x 5	80	K	003104 04555
20 x 1 x 8	60	K	003100 20910
20 x 1 x 12	100	K	003103 02177
	120	K	003103 02220
	120	M	003100 64512
20 x 1-1/2 x 12	80	K	003103 02221
	100	K	003103 02222
20 x 2 x 8	80	K	003100 20918
	100	K	003100 20920
	120	M	003100 64252
20 x 3 x 8	80	K	003104 25116
20 x 3 x 12	80	K	003104 25117
20 x 6 x 12	80	K	003100 20965
24 x 1 x 8	80	K	003100 21884
24 x 1 x 12	60	K	003100 20921
	80	M	003100 20923
24 x 1-1/4 x 12	60	M	003103 02224
24 x 1-1/2 x 8	80	K	003103 02223
24 x 1-1/2 x 12	80	K	003103 02225
	80	M	003103 02226
24 x 2 x 8	80	K	003100 21885
24 x 2 x 12	60	K	003100 20924
	80	I	003100 20926
24 x 3 x 8	80	K	003100 21757
24 x 5 x 12	60	L	003103 02227
24 x 6 x 12	60	K	003100 20968
24 x 8 x 12	100	K	003103 02228
24 x 10 x 12	80	K	003100 20972
30 x 2 x 12	60	L	003100 20929
30 x 3 x 12	60	L	003100 20930
42 x 1-1/2 x 12	60	M	003100 20931

There are many finished sizes and specifications available. Contact your local Norton distributor or salesperson with your size and specification requirements for quantity guidelines, quotations and helpful ordering instructions.

Please note "2-week delivery request" if needed, on your order.

Gear Wheel Blank Stock FastTrack Service



Norton quality non-stock gear wheels are designed to produce high metal removal rates with less power draw. The blank stock wheels below comprise our FastTrack alteration service. All Norton FastTrack wheels are altered on state-of-the-art CNC controlled machines and are finished using Norton dressing wheels. The Norton dressing wheels and machines give these wheels excellent accuracy and repeatability.

Vitrium³ VS3G Bond Wheels

Our revolutionary, exclusive bond platform provides unprecedented wheel performance and finished part accuracy across many precision grinding applications – while lowering process time and cost in three ways:

1. Coolest cutting with maximum chip clearance
2. Optimized precision profile delivers ultra radius accuracy
3. Able to run at higher operating speeds (maximizing your older and newer machines' performances)

Size Range:	Blank Stock: 120mm – 450mm diameter Finished Wheel: 115mm – 450mm diameter
Grit Range:	60 – 120
Abrasive Grain:	Ceramic Alumina and Aluminum Oxide

Key Program Features

- Standard lead time:
 - » 2 weeks
- Alteration Parameters:
 - » Diameter may be altered to 2" smaller than the original blank stock diameter
 - » Thickness may be altered to 1/2 the original blank stock thickness

Best choice for versatility, highest productivity, and lowest total cost

QUANTUM X CERAMIC ALUMINA AND VORTEX ALUMINUM OXIDE BLEND

- Leading Norton technologies produce the most free-cutting gear wheels: patented pore-induced construction, Norton Quantum X ceramic alumina and Vortex aluminum oxide abrasive blend, and strong Norton bond
- Best MRR (metal removal rate) versus all other ceramic gear wheels; reduce grinding cycle times up to 50%, best choice for grinding from solid
- Versatile; for all low-, medium- and high-force applications on hard-to-grind Inconel, titanium, and aerospace alloys; excel on large area of contact applications with exceptional form and corner-holding; 20+% less power draw

Excellent choice for the most demanding operations

TARGA TG, 3TG, 5TG CERAMIC ALUMINA

- The unique elongated shape of our second generation Norton seeded gel ceramic alumina abrasive offers exceptional durability for the most demanding applications and materials
- Consider Targa (TG) when your requirements for SG have been exceeded
- VS3G Vitrium³ bond is the newest, strongest bond in the Norton portfolio: patented pore-induced construction; for all low-, medium- and high-force applications; excels on hard-to-grind aerospace alloys and large areas of contact; exceptional form and corner-holding

Excellent choice for high productivity, low total per-part grinding cost


SG CERAMIC ALUMINA


- High-performance seeded gel ceramic aluminum oxide abrasive provides fast stock removal, cool, superior cutting, and 3X - 5X more life than aluminum oxide wheels, and double rough stock removal rate versus conventional abrasives
- Self-sharpening abrasive for less burn, less dressing; very consistent performing wheel
- 5SG – durable Norton SG and aluminum oxide blend – blue, for high stock removal rates, excellent productivity, long wheel life, low overall grinding cost; versatile, high-performance VS and VSP bonds provide exceptional form holding

Better choice for versatile, consistent performance

86A ALUMINUM OXIDE

- Sharper aluminum oxide abrasive for cooler cutting
- VS3G Vitrium³ bond is the newest, strongest bond in the Norton portfolio: patented pore-induced construction; for all low-, medium- and high-force applications
- Excels on hard-to-grind aerospace alloys and large areas of contact; exceptional form and corner-holding

TIER:	BEST		BEST		BETTER		BETTER	
TRADENAME:	NORTON QUANTUM X: 5NQX NORTON QUANTUM: NQ, 3NQ, 5NQ VS3G = VITRIUM³ BOND		NORTON SEEDED GEL: 3TGP, SG, 5SG VS3G = VITRIUM³ BOND		BRGL VS3G = VITRIUM³ BOND		86A, 25A, X25A VS3G = VITRIUM³ BOND	
ABRASIVE:	Ceramic Alumina Unfinished Blank Stock		Ceramic Alumina Unfinished Blank Stock		BRGL – Ceramic Alumina Unfinished Blank Stock		86A, 25A, X25A – Aluminum Oxide Unfinished Blank Stock	
SIZE (D x T x H)	SPEC.	BLANK PART #	SPEC.	BLANK PART #	SPEC.	BLANK PART #	SPEC.	BLANK PART #
Type O1 Straight 								
Worm Profile Wheels								
220mm x 180mm x 76.2mm					BRGL80-GVPHS	00310048274		
275mm x 125mm x 160mm							86A90-J10VS3G	00310477165
							86A100/5-110VTX2	00310458402
275mm x 160mm x 160mm	5NQM90-J10VS3G	00310491163					86A90-J10VS3G	00310486397
							25A100-110VS3G	00310460909
280mm x 160mm x 115mm	NQ80-H8VS3G	00310448492	SG80-HVX	00310419856			X25A70-G16VPAP	00310410369
							25A80-H8VS3G	00310448494
							86A80-H10VS3G	00310470137
300mm x 125mm x 160mm	3NQ90-J10VH	00310394338					86A100/5-J10VTX2	00310458405
	3NQ90-J10VS3G	00310477165					86A100/5-110VTX2	00310458404
300mm x 160mm x 160mm							86A90-J10VS3G	00310486981
							86A120-J10VS3G	00310486983
320 x 125 x 115	NQ80-H8VS3G	00310472371						
350mm x 104mm x 160mm					BRGL80-GVPHS	00310066976		
					BRGL100-GVPLS	00310066991		
350mm x 125mm x 160mm	3NQ90-H10VS3G	00310448495					25A90-H10VS3G	00310448496
Single Rib Wheels								
120mm x 30mm x 20mm	5NQX100-G20VTX2	00310490920	3TGP80/3-G12VS3G	00310448502				
300mm x 30mm x 50.8mm	5NQX60-G20VTX2	00310490863	3TGP80/3-G12VS3G	00310448501				
300mm x 60mm x 50.8mm	5NQX60-G20VTX2	00310490864	3TGP80/3-G12VS3G	00310448500				
400mm x 50mm x 127mm			3TGP60-G20VSPF	00310404596				
400mm x 60mm x 127mm	5NQX60-G20VTX2	00310490865						
400mm x 75mm x 127mm			3TGP60-G20VSPF	00310404597				
400mm x 100mm x 127mm	5NQX60-G20VTX2	00310490916	3TGP60-G20VSPF	00310404598				
400mm x 150mm x 127mm	5NQX60-G20VTX2	00310490917						
450mm x 50mm x 127mm			3TGP80/3-G12VS3G	00310448499				
450mm x 60mm x 127mm	5NQX60-G20VTX2	00310490918						
450mm x 100mm x 127mm	5NQX60-G20VTX2	00310490921	3TGP80/3-G12VS3G	00310448498				
450mm x 150mm x 127mm	5NQX60-G20VTX2	00310490919	3TGP80/3-G12VS3G	00310448497				

TIER:	BEST		
TRADENAME:	NORTON SEEDED GEL: TG, 5TG, 5SG		
ABRASIVE:	Ceramic Alumina Unfinished Blank Stock		
SIZE (D x T x RIM)	PLATE #	SPEC.	BLANK PART #
Type O2 Plate-Mounted Cylinder 			
3.000 x 3.000 x .600	A311220	5SG80-JVS	00310485211
3.350 x 3.000 x .650	A311220	5SG80-JVS	00310485212
3.750 x 3.000 x .650	A311220	5SG80-JVS	00310485213
4.100 x 3.000 x .700	A311220	5SG80-JVS	00310485214
5.200 x 3.500 x .800	A311250	5SG80-JVS	00310485215
5.700 x 3.500 x .800	A311250	5SG80-JVS	00310485226
7.000 x 3.500 x 1.050	A311251	5SG80-JVS	00310485227
8.400 x 3.500 x 1.050	A311384	5SG80-JVS	00310485228
		TG280-H12V-X575	00310485229
8.346 x 3.500 x 1.043	A311384	5TG80-3-J8VH	00310480245

Gear blank stock alteration orders must include complete blueprint information.

Please ask your Norton representative for appropriate blueprint worksheet to fill in:

- Worm wheel blueprint worksheet: ME161508
- Single rib wheel blueprint worksheet: ME161178



ID, Race and Superfinishing Wheels and Sticks



The most extensive line of Pressed-To-Size ID and Race wheels to choose from to maximize performance and cost savings.

In addition to VFL wheels, VS3L-bonded wheels are also available. VS3L is the Vitrium3 high-strength, cool-cutting bond with improved cutting efficiency, productivity, and wheel life. VFL and VS3L wheels are the fastest way to get Make-to-Order Norton ID and Race Grinding wheels. Norton VFL and VS3L wheels are available in both ceramic abrasives and conventional aluminum oxide abrasives in diameters up to 5".

Additional dimensions and grinding faces are available as made-to-order products with 4-week lead-times.

Wheel Types: Type 01 and 05
Abrasive Types: Ceramic Alumina, Aluminum Oxide

ID and Race Wheels

ID and Race Wheel FastTrack Availability

Type 01 Straight	
Diameter: 0.172" thru 4.532"	Maximum thickness: 3.75"
Type 05 Recessed One Side	
Diameter: 0.407" thru 5"	Maximum thickness: 3.10"

For more program details, ask your Norton sales representative to review the FirstLine VFL & VS3L ID and Race Wheels Brochure #6981 with you.

VFL Availability

ABRASIVE	25A, 32A, 38A, 48A, 53A, 57A, 86A	5TG*	1SG, 3SG, 5SG	32AA	NQ, 1NQ, 3NQ, 5NQ, 1NQP, 3NQP, 5NQP, 1NQM, 3NQM, 5NQM
GRIT	54 - 120	80/1, 120/1	54-120	54-80	54-150
GRADE	J - P	I - M	I - N	I - M	I - N
STRUCTURE	6 (Not Shown)				
BOND	VFL				
WHEEL TYPES	01, 05				
SHAPES	Special faces not available				
SPEED	8,500 SFPM***				
TREAT 22	Not Available				

* 5TG is available in /1 combination, only
 **Speeds up to 12,500 SFPM by request and Safety approval

VS3L Availability

ABRASIVE	25A, 32A, 38A, 55A, 86A	5TG*	1SG, 3SG, 5SG	NQ, 1NQ, 3NQ, 5NQ, 1NQP, 3NQP, 5NQP, 1NQM, 3NQM, 5NQM
GRIT	54-120	80/1, 120/1	54-120	54-150
GRADE	H - P	I - K	I - N	I - N
STRUCTURE	8, 10	8	8, 10	8, 10
BOND	VS3L			
WHEEL TYPES	01, 05			
SHAPES	Special faces not available			
SPEED	8,500 SFPM***			
TREAT 22	Not Available			

* 5TG is available in /1 combination, only
 **Speeds up to 12,500 SFPM by request and Safety approval

Dimensional Tolerances

IF DIAMETER IS:	DIAMETER	THICKNESS	HOLE
0.532" and less	+/- .003"	+ .004" - .000	+ .001" + .006"
> 0.532" - 2.907"	+/- .005"	+/- .005"	+ .001" + .006"
> 2.907" - 4.407"	+/- .015"	+/- .015"	+ .001" + .006"



ID, Race and Superfinishing Wheels and Sticks

Blank Stock FastTrack Made-to-Order Microabrasive Superfinishing Sticks



Superfinishing blank stock encompasses a wide range of different specifications. These blanks can be finished to your dimensional requirements within two weeks from the date that the order is received at Norton Customer Service. Small lots, for test purposes, can be express shipped.

APPLICATIONS	ABRASIVE TYPE – BOND	GRIT RANGE	TREATMENT TYPE
Superfinishing / Finishing	NLA – V	240 – 1200	Sulfur, Wax
	NMVC – VCA		
	NSA – V		
Honing	SG – VS	54 – 220	
	SGG – VS1		

Rubber Finishing Sticks

These sticks are used for manual or mechanical honing on machines where they are mounted in holders or fixtures. Intended for use where precision dimensional limits and grade controls are required, such as die polishing.



SIZE (T x W x L)	STD. PKG./CASE	SPEC.	PART #
Rubber Finishing Sticks			
1/2 x 1/2 x 6	5/20	57A120-B2RR	614636 10608
1/2 x 1 x 6	5/20	57A120-B2RR	614636 10609

our dressing tools
**MAKE THE
PERFECT POINT**

The Norton Winter full line of expertly-crafted stationary and rotary dressing tools - whether stock or custom-engineered - delivers your every application need. And, our expert resetting and relapping services renew used tools to reduce your "cost per dress."

Diamond Stationary Dressing Tools



Our Norton Winter offering is the industry's most comprehensive line of stock and made-to-order products to true (restore the wheel's profile) and dress (opening – to remove stock – or closing to finish) the face of the wheel. In addition to these catalog stock stationary tools, Norton Winter manufactures a full line of custom stationary tools, rotary diamond dressers and truing/dressing devices to meet all your specific application needs.

Applications:

Truing and dressing conventional and superabrasive wheels, straight, step, radius and form dressing

Tool Types:

Stationary: Single Point, Toolroom, Multi-Point, Blade, Form, and Cluster Tools, and Truing Devices

Rotary: Reverse Plated and Infiltrated Form Plunge Diamond Rolls, Diamond CNC Traversing Discs, and Dressing Spindles

Determining the Best Value

Remember that diamonds are a rare commodity—the larger the stone and the better the quality, the higher the initial cost. The key to successful diamond tool productivity and use is based on the "cost per dress." Normally, higher quality diamonds and a proactive resetting program will result in the lowest "cost per dress."

In those situations where a resetting program is not feasible or low initial cost is the primary purchasing consideration, Norton Winter offers a complete line of non-resettable tools.

Resetting Your Used Diamond Tools

Resetting – Minimizing Your Cost


Buying a higher quality diamond is your best value, especially if you participate in a proactive resetting program. Although initial cost may be higher, the payback comes through several factors:

- Diamond durability, providing longer tool life
- Tighter form tolerances
- Consistent finish rates
- Resetting the diamond lowers the overall tooling cost

Used properly, the overall cost of a higher quality, resettable diamond will compare favorably with that of an inexpensive, non-resettable diamond. Initially, the best diamond point is selected for use. When returned, the next best diamond point is selected for resetting, and so on.

To ensure you get the best value for your diamond:

- Rotate the diamond tool ¼ turn periodically to maintain a sharp point
- Use proper flow of coolant to protect the diamond from heat which can create fracturing of the diamond
- Excessive wear on the diamond point may impact the ability to reset the diamond. The widest point of the diamond is referred to as the girth. The diamond girth is buried in a powder metal matrix. Using a diamond into the girth zone might impact the ability to reset other diamond points

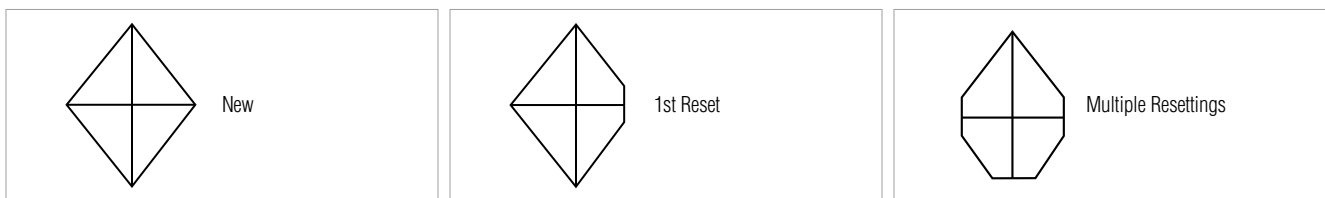

TECH TIP

Selecting the Correct Diamond Tool

To determine the type of dressing tool to use, it is best to think about the desired shape of the wheel face. Finished wheel face shapes are generally categorized into six types, as illustrated below.

Typical Wheel Forms Dressed by Stationary Diamond Tools

Look for the applicable wheel forms beside each product type to help you choose the correct product for your application.




Straight




Tapered




Convex



Concave



Angled



Multi-Angled



Single Point Tools

Our Norton Winter line of single point tools is used in straight and simple form dressing applications. It includes: resettable and non-resettable products, tools for all abrasive types (conventional and advanced ceramic grains) and the technology-leading "Indexable" tool design.

Wheel Forms Dressed by These Tools



STRAIGHT



TAPERED



CONVEX

SPEC CHECK

Selection Guide

Stock Tools for Ceramic Abrasive Wheels

- SG/Ceramic** Engineered for use on ceramic (SG, NQ, Targa, etc.) wheels but may also provide significant benefits when used on conventional abrasive products. These tools are furnished with top quality specially selected diamonds.
- BCSG/Ceramic** Economical alternative to an "SG" tool. Best choice when a disposable tool is preferred.

Stock Tools for Conventional Abrasive Wheels

- NS** Engineered for use on conventional abrasives. These high quality, value-priced tools can be used for a variety of dressing applications.
- BC** Economical alternative to an "NS" tool. Best choice when a disposable tool is preferred.

Selecting the Correct Single Point Tool:


- Identify the wheel abrasive type: aluminum oxide, silicon carbide, or ceramic
- Determine the wheel diameter – to select the optimum carat weight
- Determine the tool holder size – to select appropriate shank diameter

Examples of Single Point Tool Selection

Conventional Wheel Spec:	32A46-IVBE 7" x 1/2" x 1-1/4"
	Machine has a 7/16" tool holder
Tool Selections:	Resettable: NS2M7 or NSUD2 (Indexable)
	Non-Resettable: BC2M7 or BCUD2 (Indexable)
Ceramic Wheel Spec:	5SG60-JVS or 5NQ60-IVS 10" x 1" x 3"
	Machine has a 3/8" tool holder
Tool Selections:	Resettable: SG3M6
	Non-Resettable: BCSG3M6

TECH TIP

- Rigidly mount single point tools at a 10° - 15° angle to the wheel centerline with a line drawn through the center of the wheel, pointing in the direction of wheel travel
- Point of contact should be slightly below centerline of wheel as shown
- Use coolant whenever possible
- Normal infeed is .001" per pass
- Lead selections range from .002" – .010" per wheel revolution
- Rotate the tool 1/4 turn periodically to maintain a sharp point



To optimize applications using ceramic abrasives and/or tools, normal dressing parameters must change. Reduce infeed by 25%. Significant reductions in the amount of infeed and frequency of dress will result in substantially lower cost per part ground.

Single Point Dress Traverse Rate

Select a Lead Value based on desired Surface Finish and run the formula below.

Finish	Lead Value (Per Wheel Revolutions)
For Coarse Finish (approx. 64 RMS)	.008" to .010"
For Medium Finish (approx. 32 RMS)	.005" to .009"
For Fine Finish (approx. 16 RMS)	.002" to .004"

Lead Value x Wheel Speed (RPM) = Traverse Rate in Inches/Minute

- Slower traverse rates result in a closed wheel face and lower surface finish readings on the workpiece.
- Faster traverse rates result in an open wheel face that produces greater stock removal and a rougher workpiece finish.



It is the user's responsibility to refer to and comply with ANSI B7.1

Single Point Tools for Truing/Dressing Ceramic Abrasives



SINGLE POINT TOOLS FOR SG/CERAMIC

- Specially selected broad-shaped, diamond withstands the increased grinding pressures of ceramic abrasives
- Each diamond is hand selected for stone shape, quality and structural integrity for consistent tool performance
- Multi-purpose - can accommodate most straight dressing and simple form dressing applications; stands up to the sharpness of ceramic abrasives (SG, Quantum, Targa, etc.) but can also be used to dress conventional abrasives

Resettable Single Point Tools for SG/Ceramic

- High quality diamond and a proactive resetting program will result in the lowest dressing cost per part for ceramic abrasives



Non-Resettable Single Point Tools for BCSG/Ceramic

- The best selection for ceramic abrasives when a resetting program is not feasible or low initial cost is the primary purchasing consideration

WHEEL DIAMETER	TOOL CARAT WEIGHT	TOOL DIAMETER	TOOL LENGTH	TIER: BEST		GOOD	
				PRODUCT #	3 SETTABLE PTS (2 RESETS) PART #	PRODUCT #	NON-RESETTABLE PART #
Stock Single Point Tools for Truing/Dressing Ceramic Abrasives							
Up to 7"	1/4 (.25)	3/8"	2"	SG2M6	662601 95365	BCSG2M6	662601 57007
		7/16"	2"	SG2M7	662601 95366	BCSG2M7	662601 56905
8" to 10"	1/3 (.33)	3/8"	2"	SG3M6		BCSG3M6	662601 57008
		7/16"	2"	SG3M7	662601 95368	BCSG3M7	662601 56906
11" to 14"	1/2 (.50)	3/8"	2"	SG5M6	662601 95369	BCSG5M6	662601 57009
		7/16"	2"	SG5M7	662601 95370	CSG5M7	662601 56907
15" to 20"	3/4 (.75)	7/16"	2"	SG7M7	662601 95372	BCSG7M	662601 56908
21"+	1 (1.00)	7/16"	2"			BCSG10M7	662601 57010

Standard Package = 1 tool

Wheel Forms Dressed by These Tools

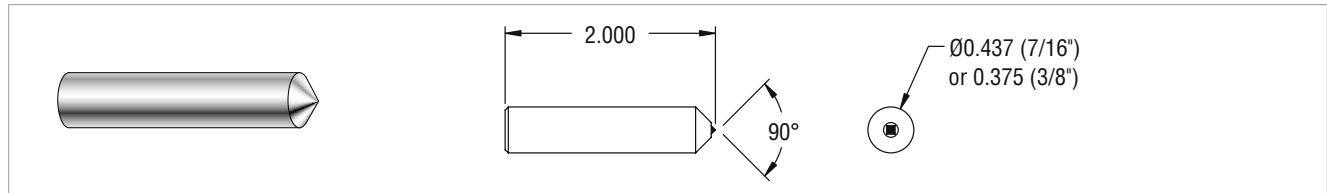


TECH TIP

Stock Single Point Tool Marking System

Diamond Quality	Diamond Size	Shank Design	Shank Diameter
SG/Ceramic	1 = 1/5 (.20) carat	M	6 = 3/8"
BCSG/Ceramic	2 = 1/4 (.25) carat	J	7 = 7/16"
NS	3 = 1/3 (.33) carat		
BC	5 = 1/2 (.50) carat		
	7 = 3/4 (.75) carat		
	10 = 1 carat		

Example: **NS 2 M 6**



Single Point Tools for Truing/Dressing Conventional Abrasives



SINGLE POINT TOOLS FOR CONVENTIONAL ABRASIVES

- Consistent diamond structure and shape for repeatable dressing performance on conventional abrasives
- Well defined, sharp, durable diamond point offers maximum cost effectiveness
- Steeper 60 degree angle head design allows for greater machine and part clearance to produce forms with tighter tolerances

Resettable NS (Norton Standard) Single Point Tools




- Selection of the correct tool and a proactive resetting program will usually result in the lowest dressing cost per part on conventional abrasives with these value priced, high quality diamonds

Non-resettable BC Single Point Tools

- The best selection for conventional abrasives when a resetting program is not feasible or low initial cost is the primary purchasing consideration

		TIER: BETTER			TIER: GOOD		
		TRADENAME: NS (NORTON STANDARD)			TRADENAME: BC		
WHEEL DIAMETER	TOOL CARAT WEIGHT	TOOL DIAMETER	PRODUCT #	2 SETTABLE PTS (1 RESET) PART #	PRODUCT #	NON RESETTABLE PART #	
Stock Single Point Tools for Truing/Dressing Conventional Abrasives							
Internal Wheel	1/5 (.20)	3/8"			BC1M6	662601 95021	
		7/16"			BC1M7	662601 95022	
Up to 7"	1/4 (.25)	3/8"	NS2M6	662601 95116	BC2M6	662601 95000	
		7/16"	NS2M7	662601 95117	BC2M7	662601 95001	
8" to 10"	1/3 (.33)	3/8"	NS3M6	662601 95121	BC3M6	662601 95002	
		7/16"	NS3M7	662601 95122	BC3M7	662601 95003	
11" to 14"	1/2 (.50)	3/8"	NS5M6	662601 95126	BC5M6	662601 95004	
		7/16"	NS5M7	662601 95127	BC5M7	662601 95005	
15" to 20"	3/4 (.75)	3/8"			BC7M6	662601 95006	
		7/16"	NS7M7	662601 95132	BC7M7	662601 95007	
		7/16"	NS7J7*	662601 95130			
21" +	1 (1.00)	3/8"	NS10M6	662601 95136	BC10M6	662601 95008	
		7/16"	NS10M7	662601 95137	BC10M7	662601 95009	
		7/16"	NS10J7*	662601 95135			

* J-shank tools are available in 7/16" diameter with 5/8" head. Standard Package = one tool

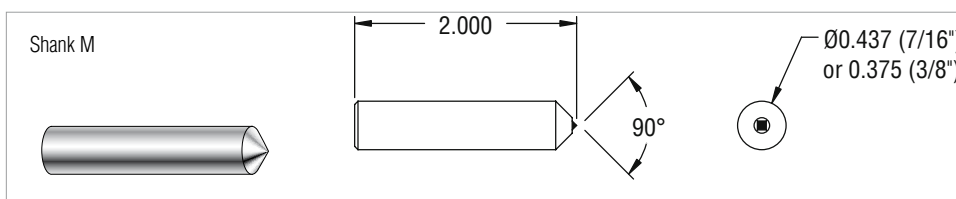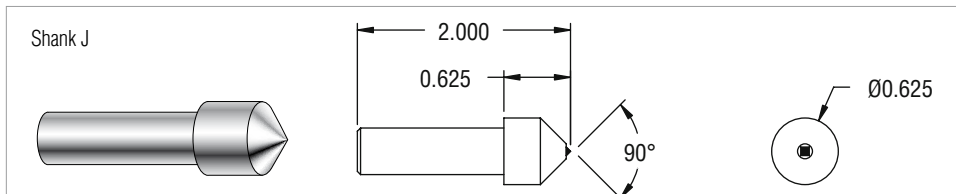

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on www.nortonabrasives.com or your Norton representative for more in-depth information on all Norton Winter superabrasive stock and made-to-order products.

Indexable Single Point Tools

Indexable tools are specifically designed to alleviate any misalignment issues and are the tools of choice for CNC grinders. They feature a two-part construction with the head and shank as separate pieces. After the initial installation, operators simply turn the indexable head with a wrench, while the tool shank remains secure (and aligned) in the tool holder.



INDEXABLE SINGLE POINT TOOLS

- These indexable tools are easily turned without having to remove the tool from the holder, making it easier to turn than conventional tools and increasing frequency of beneficial tool turning
- U-Dex-It and Mini-Dex tools have a 60° included angle head design providing additional form versatility through better machine and part clearance
- Offers an excellent choice for regulating wheels

Indexable Single Point Tools for Truing/Dressing Conventional Abrasives

Resettable NS (Norton Standard) Indexable Single Point Tools

- Selection of the correct tool and a proactive resetting program will usually result in the lowest dressing cost per part on conventional abrasives with these value priced, high quality diamonds
- Ideal for centerless grinders; using standard 5/8" wrench, the head can be turned through the hole in the side of the wheel guard without removing the guard

Resettable NS (Norton Standard) Mini-Dex Indexable Single Point Tools



- Selection of the correct tool and a proactive resetting program will usually result in the lowest dressing cost per part on conventional abrasives with these value priced, high quality diamonds
- Use a standard 7/16" wrench to turn; designed for internal, bearing race, and twist drill flute machines

Non-Resettable Indexable Single Point Tools

- The best selection for conventional abrasives when a resetting program is not feasible or low initial cost is the primary purchasing consideration
- Ideal for centerless grinders; using standard 5/8" wrench, the head can be turned through the hole in the side of the wheel guard without removing the guard

WHEEL DIAMETER	TOOL CARAT WEIGHT	TOOL SIZE	TIER: BETTER		GOOD	
			PRODUCT #	2 SETTABLE PTS (1 RESET) PART #	PRODUCT #	NON-RESETTABLE PART #
Stock Indexable Single Point Tools for Truing/Dressing Conventional Abrasives						
Up to 7"	1/4 (.25)	7/16" x 1-7/16" with 5/8" head			BCUD2	662601 95023
		1/4" x 1-3/16" with 7/16" head	NSMD2	662601 95171		
8" to 10"	1/3 (.33)	7/16" x 1-7/16" with 5/8" head	NSUD3	662601 95162		
11" to 14"	1/2 (.50)	7/16" x 1-7/16" with 5/8" head	NSUD5	662601 95163	BCUD5	662601 95025
15" to 20"	3/4 (.75)	7/16" x 1-7/16" with 5/8" head	NSUD7	662601 95164		

Standard Package = one tool

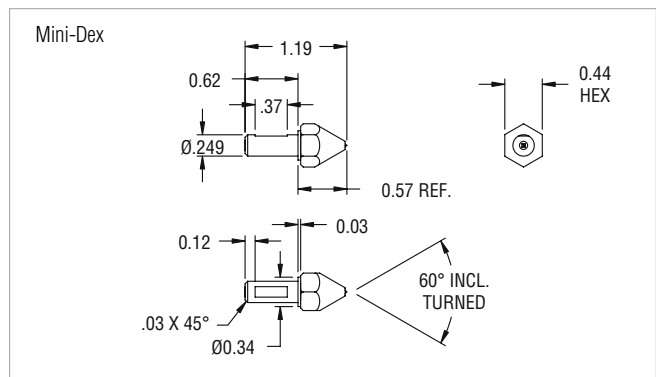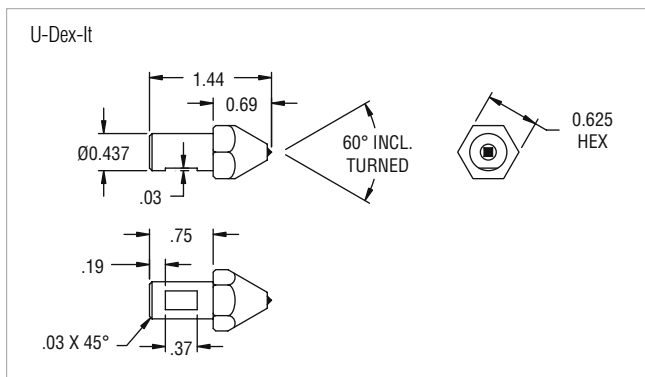



Indexable Single Point Tools *continued*

Indexable Single Point Tools for Truing / Dressing Ceramic Abrasives

Non-Resettable Ceramic Indexable Single Point Tools

- U-Dex-It BCSG tool contain specially selected diamonds to withstand increased ceramic (SG, Quantum, Targa, etc.) grinding pressures
- Ideal for centerless grinders; using standard 5/8" wrench, the head can be turned through the hole in the side of the wheel guard without removing the guard
- The best selection when a resetting program is not feasible or low initial cost is the primary purchasing consideration

			TIER: GOOD	
WHEEL DIAMETER	TOOL CARAT WEIGHT	TOOL SIZE	PRODUCT #	NON-RESETTABLE PART #
Stock Indexable Single Point Tools for Truing/Dressing Ceramic Abrasives				
11" to 14"	1/2 (.50)	7/16" x 1-7/16" with 5/8" head	BCSGUD5	66260159894
<i>Standard Package = one tool</i>				

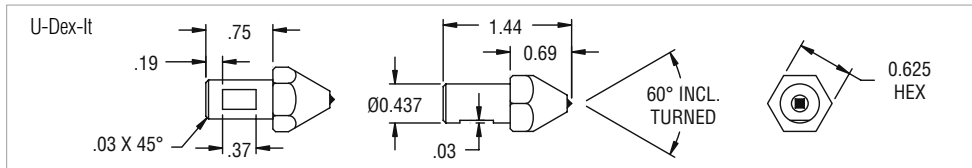

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on www.nortonabrasives.com or your Norton representative for more in-depth information on all Norton Winter superabrasive stock and made-to-order products.

Internal Grinding Tools



Resettable Tools For Internal Grinding

- Q style shank is used on a Heald internal grinder (resettable)

Wheel Forms Dressed by These Tools



STRAIGHT



TAPERED



CONVEX




CONCAVE

TIER: **BEST**

MACHINE TYPE	CARAT WEIGHT	SHANK DIAMETER	TOOL LENGTH	PRODUCT #	2 SETTABLE PTS (1 RESET) PART #
Stock Internal Grinding Tools					
Heald	1/5 (.20)	7/16"	1"	NI21Q7	662601 95180

Standard Package = 1 Tool

Shank Q for Heald Machine

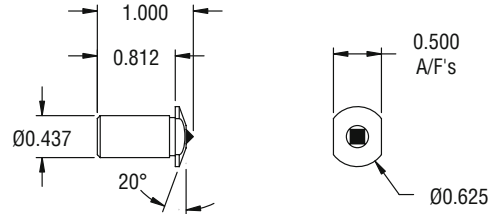

Thread Grinding Tools



Thread Grinding Tools For SG / Ceramic Abrasives


- These wheels are used on J & L and Excello thread grinding machines to accurately dress the grinding wheels that form the desired thread configuration (non-resettable)

TIER: **BEST**

MACHINE TYPE	SHANK DIAMETER	TOOL LENGTH	INCLUDED ANGLE	MAX. RADIUS ON POINT	PRODUCT #	NON-RESETTABLE PART #
Stock Thread Grinding Tools						
J & L	1/4"	1"			38RL4*	662601 95100
J & L	1/4"	1"	80°	.010"	NT1L4	662601 95187
EXCELLO	3/8"	1-5/8"	60°	.010"	NT106	662601 95190

* 38RL4 is a multi-point (grit) 30 - 40 mesh tool
Standard Package = 1 Tool

Wheel Forms Dressed by These Tools




STRAIGHT




TAPERED


NT1L4 for Jones & Lamson Machine

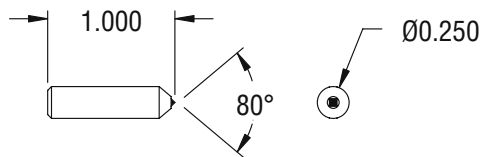

NT106 for Excello Machine

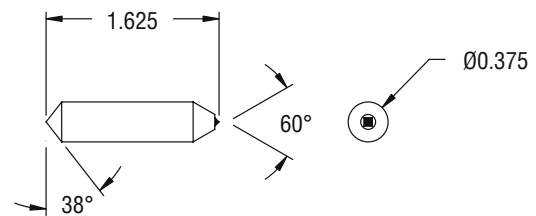

38RL4 for Jones & Lamson Machine

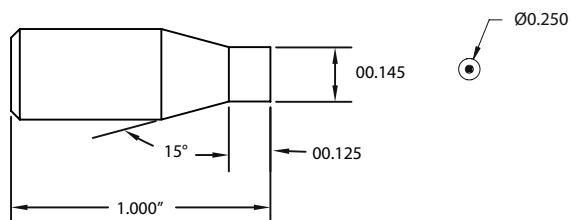

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on www.nortonabrasives.com or your Norton representative for more in-depth information on all Norton Winter superabrasive stock and made-to-order products.



Toolroom Tools

Norton Winter Toolroom Dressing Tools are primarily used on surface grinders to form the grinding wheel to an exact concave or convex radius. Although some tools are designed for use on a specific machine, many radius tools can be used on any grinder having the correct set-up.

Used generally on 8" diameter and smaller vitrified toolroom wheels, our Norton Winter offering includes phono-point, conventional radius, and full ball radius tools.

Wheel Forms Dressed by These Tools



STRAIGHT



CONCAVE




CONVEX



MULTI-ANGLED

Phono-Point Tools



Non-Resettable Phono-Point Tools

- For general toolroom concave and convex dressing on small diameter grinding wheels

INCLUDED ANGLE	SHANK DIAMETER	TOOL LENGTH	TIER: BETTER		GOOD	
			PRODUCT #	NON-RESETTABLE PART #	PRODUCT #	NON-RESETTABLE PART #
Stock Phono-Point Tools						
60°	1/8"	1"	NP1M2	662601 95225	BCPP-60	662601 95017
	3/16"	1"	NP1M3	662601 95226		
	1/4"	1"	NP1M4	662601 95227		
75°	1/8"	1"	NP2M2	662601 95228	BCPP-75	662601 95018
	1/4"	1"	NP2M4	662601 95230		
90°	1/8"	1"	NP3M2	662601 95231	BCPP-90	662601 95019
	3/16"	1"	NP3M3	662601 95232		
	1/4"	1"	NP3M4	662601 95233		

Standard Package = one tool

Wheel Forms Dressed by These Tools



CONVEX



CONCAVE

SPEC CHECK

Phono-Point Tool Marking System



Diamond Type	Included Angle On Diamond	Shank Style	Shank Diameter
NP	1 = 60°	M	2 = 1/8"
BCPP	2 = 75°		3 = 3/16"
	3 = 90°		4 = 1/4"

Example: **NP 1 M 3**

TECH TIP

How to Use Toolroom Tools

- We recommend dressing with coolant. However, if dressing totally dry, allow three to five seconds between passes for diamond to cool.
- Use extremely light cuts from .0002" to .001" maximum.
- Rotate tool if the application and set-up allow.
- Custom Full Ball Radius Tools should be returned for relap after minimum wear.



TYPICAL WHEEL FORMS



Radius Tools

Concave Radius Tools

- This line offers a specially-shaped single point diamond, designed for forming concave radii on small diameter grinding wheels; not resettable.

Convex Radius Tools




- This line offers a specially-shaped single point diamond, designed for forming convex radii on small diameter grinding wheels; not resettable.

Half-Circle Concave Radius Tools (Available as Non-stock Only)

- This line offers a specially-shaped diamond set in the side of the shank for forming half-circle radii on small diameter grinding wheels.
- The tool is rotated to form the radius. Commonly called a "rat tail dresser"; not resettable.

RADIUS SIZE TO BE DRESSED	SHANK DIAMETER	TOOL LENGTH	TIER: BEST		GOOD	
			PRODUCT #	NON-RESETTABLE PART #	PRODUCT #	NON-RESETTABLE PART #
Stock Concave Radius Tools						
.010" to .015"	3/8"	2"	NR1P6	662601 95210		
.016" to .020"	3/8"	2"	NR2P6	662601 95211		
.021" to .032"	3/8"	2"	NR3P6	662601 95212		
.033" to .062"	3/8"	2"	NR4P6	662601 95213	BCRD	662601 95016
.063" to .125"	3/8"	2"	NR5P6	662601 95214	BCRD	662601 95016
.126" to .250"	3/8"	2"	NR6P6	662601 95215	BCRD	662601 95016
Stock Convex Radius Tools						
.020" to .125"	3/8"	2"	NR2M6	662601 95216		
.126" to .250"	3/8"	2"	NR12M6	662601 95217		

Standard Package = one tool

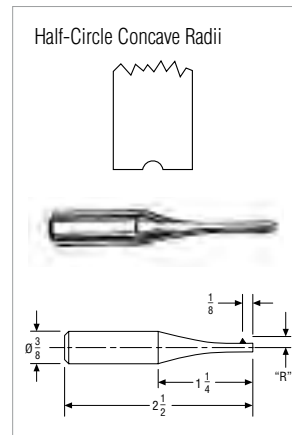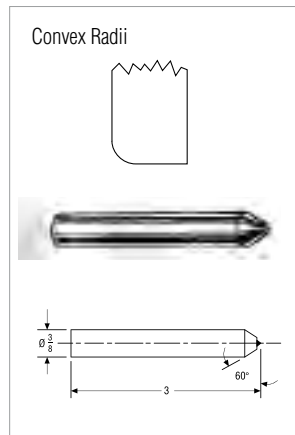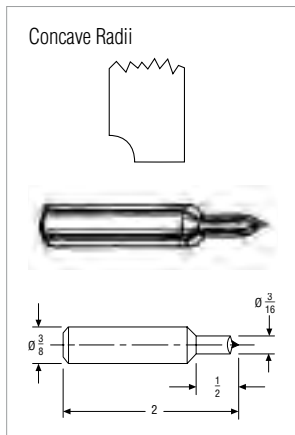

Full-Ball Radius Tools for precision plunge form dressing of concave radii in the center of a grinding wheel are available made to your custom requirements. Ask your Norton representative for details.

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on www.nortonabrasives.com or your Norton representative for more in-depth information on all Norton Winter superabrasive stock and made-to-order products.



Multi-Point (Grit) Tools

Since Norton Winter conventional and high-performance Multi-Point tools never need turning or resetting, they are the most economical way to accomplish a variety of straight, tapered, and step dressing operations on all sizes of cylindrical, centerless, surface, and toolroom grinding wheel applications.

Wheel Forms Dressed by These Tools



STRAIGHT



TAPERED

SPEC CHECK

Selection Guide

- Identify the wheel abrasive type: ceramic (SG, Quantum, Targa), aluminum oxide, or silicon carbide
- Determine the wheel diameter and grit size
- Determine the tool's approach angle to the centerline of the wheel
- Identify the tool holder diameter
- Use 1E shape for angular wheel slide, cylindrical grinding and for shoulder or step truing


Examples of Multi-Point Tool Selection

Conventional Wheel Spec:	32A46-IVBE 7" x 1/2" x 1-1/4" Machine has a 3/8" tool holder
Tool Selection:	1R6J6
Ceramic Wheel Spec:	5SG60-JVS or 5NQ60-IVS 10" x 1" x 3" Machine has a 7/16" tool holder
Tool Selections:	SG1R6J7

TECH TIP

Multi-Point Tools – Straight Face Dressing and Truing

- Most multi-point tools are used for straight face dressing
- Tool should have full face contact with the wheel
- With new tool, 3–5 passes at .005" per pass should be taken to expose diamonds
- Infeed per pass .001" – .002"
- Use coolant whenever possible
- Use appropriate lead (and traverse rate)
- Contact your Norton representative for proper tool selection for Targa wheels



Multi-Point Dress Traverse Rate

Select a Lead Value based on desired Surface Finish and run the formula below.

FINISH	LEAD VALUE (PER WHEEL REVOLUTIONS)
For Coarse Finish (approx. 64 RMS)	.023" to .030" (.58mm – .76mm)
For Medium Finish (approx. 32 RMS)	.013" to .022" (.33mm – .57mm)
For Fine Finish (approx. 16 RMS)	.006" to .012" (.15mm – .33mm)

Lead Value x Wheel Speed (RPM) = Traverse Rate in Inches/Minute

- Slower traverse rates result in a closed wheel face that produces less stock removal and improved workpiece finish.
- Faster traverse rates result in an open wheel face that produces greater stock removal and a rougher workpiece finish.



It is the user's responsibility to refer to and comply with ANSI B7.1

TECH TIP

Optimizing SG Multi-Point Tool Performance

- To optimize applications using ceramic abrasives/tools, normal dressing parameters must change. Significant reductions in the amount of infeed and frequency of dress will result in significantly lower cost per part ground.
- While all SG/Ceramic tools have been designed to improve the efficiency of ceramic grinding applications, they can also offer significant benefits in many applications using conventional abrasives.
- When first using a SG/Ceramic tool, make 3 to 5 passes at .005" infeed to ensure full face contact between the dressing tool and wheel face.
- Reduce normal dressing infeed by half. Do not exceed infeed of .002" per pass.
- The lead selection should be between .006"–.030" per wheel revolution. Faster traverse with a SG/Ceramic tool generally provides an open wheel face that can maximize productivity of the ceramic abrasive.

TECH TIP


Multi-Point Tool Diamond Section Specifications

SHAPE	WIDTH	LENGTH	DEPTH	TOOL APPROACH ANGLE TO WHEEL	FOR WHEEL DIAMETER
1A	1/4"	3/4"	5/16"	0°	Over 20"
2A	1/4"	1/2"	3/8"	0°	15" – 20"
3A	5/32"	3/8"	1/4"	0°	Over 20"
1E	5/32"	3/8"	5/16"	–	
2E	1/4"	1/2"	1/2"	–	20" x 2" and up
1R	1/4" Round		1/4"	0°	Up to 10"
2R	3/8" Round		3/8"	0°	11" – 14"

Multi-Point Tool Marking System

Diamond Shape	Tool Diamond Size	To Dress Grinding Wheels With Grit Size Of:	Shank Design	Shank Diameter
1A	4	= 46 grit	See the following pages for shank configurations	6 = 3/8"
2A	6	= 54 - 100 grit		7 = 7/16"
3A	8	= 120 - 150 grit		8 = 1/2"
1E	12	= 150+ grit		
2E	14	= Special Applications		
1R				
2R				

Example: **1A 6 A 7**



Shape A is used primarily for straight face dressing.



Shape E (double angle top face) is used for standard N-Face wheels, angular wheels, face and side truing of cylindrical wheels, and in step dressing.



Shape R is used for straight face dressing where the tool holder is perpendicular to the wheel face (no drag angle), and on thread grinding machines.

Multi-Point Tools for Straight Dressing

SG MULTI-POINT TOOL SHAPE AND SHANK AVAILABILITY

SHAPE SG1A SHANK A	SHAPE SG1A SHANK C	SHAPE SG2A SHANK D
SHAPE SG2A SHANK E	SHAPE SG1R SHANK J	SHAPE SG2R SHANK K

CONVENTIONAL TOOLROOM MULTI-POINT TOOL SHAPE AND SHANK AVAILABILITY

SHAPE 1A BC-60	SHAPE 1A BC-61	SHAPE 2A BC-62
SHAPE 2A BC-63	SHAPE 1R BC-64	SHAPE 1R BC-65

CONVENTIONAL ABRASIVE MULTI-POINT TOOL SHAPE AND SHANK AVAILABILITY

SHAPE 1A SHANK A	SHAPE 1A SHANK B	SHAPE 1A SHANK C	SHAPE 2A SHANK D	SHAPE 2A SHANK E	SHAPE 3A SHANK F
SHAPE 3A SHANK G	SHAPE 1E SHANK F	SHAPE 1R SHANK J	SHAPE 2R SHANK K	SHAPE 3R SHANK L	

Shapes 3A (F and G Shanks) are used for form, shape, and step truing. Shape 1E is used for angle dressing



MULTI-POINT TOOLS

- Uniformly distributed diamonds in a tough, durable matrix for consistent performance throughout tool life
- Fresh, multiple diamond points exposed in truing operation; no turning or resetting required for faster, more consistent straight face dressing and longer tool life than single point tools
- Overall diamond weight exceeds equivalent single point tool making this the most economical way to dress straight and tapered forms

Multi-Point Tools for Truing and Straight Dressing

Multi-Point Tools For SG/Ceramic Abrasives

- Designed specifically for use on ceramic (SG, Quantum, Targa, etc.) abrasives, SG tools contain a higher diamond concentration to withstand the increased grinding pressures generated by the ceramic abrasives
- These tools have improved life and dress quality; they can also offer significant benefits in many applications when used on conventional abrasives

Standard Multi-Point Tools

- The ideal selection for use on conventional abrasives in high-production applications

BC Multi-Point Tools

- General-purpose tools ideal for conventional toolroom applications with a specially selected diamond size for a broad range of dressing applications

WHEEL DIAMETER	WHEEL GRIT SIZE	TOOL APPROACH ANGLE	TOOL DIAMETER	TIER: BEST SG/CERAMIC		TIER: BETTER STANDARD		TIER: GOOD BC	
				PRODUCT #	PART #	PRODUCT #	PART #	PRODUCT #	PART #
Multi-Point Tools for Straight Dressing									
Up to 10"	54 to 100	0°	7/16"			1R6J7	662601 95088	BC64	662601 95014
		0°	3/8"			1R6J6	662601 95085		
11" to 14"	54 to 100	0°	7/16"	SG2R6K7	662601 95378	2R6K7	662601 95096	BC65	662601 95015
15" to 20"	46	15°	7/16"			2A4E7	662601 95048		
		0°	7/16"	SG2A6D7	662601 95375	2A6D7	662601 95046	BC62	662601 95012
	120 to 150	15°	7/16"	SG2A6E7	662601 95376	2A6E7	662601 95049	BC63	662601 95013
		0°	7/16"			2A8D7	662601 95047		
21" +	46	15°	7/16"			2A8E7	662601 95050		
		0°	7/16"			1A4C7	662601 95038		
	54 to 100	0°	7/16"	SG1A6A7	662601 95373	1A6A7	662601 95031	BC61	662601 95011
		15°	7/16"			1A6B7	662601 95035		
	120 to 150	15°	7/16"	SG1A6C7	662601 95374	1A6C7	662601 95039	BC60	662601 95010
		0°	7/16"			1A8C7	662601 95040		




Standard Package = one tool

Multi-Point Tools for Form, Shape, or Step Dressing Conventional Abrasives


WHEEL DIAMETER	WHEEL GRIT SIZE	TOOL APPROACH ANGLE	TOOL DIAMETER	TIER: BETTER	
				PRODUCT #	PART #
Stock Multi-Point Tools for Form, Shape, and Step Dressing					
All	54 to 100	0°	7/16"	3A6F7	662601 95055
		15°	7/16"	3A6G7	662601 95975

Standard Package = one tool



WHEEL DIAMETER	WHEEL GRIT SIZE	TOOL APPROACH ANGLE	TOOL DIAMETER	TIER: BETTER	
				PRODUCT #	PART #
Stock Multi-Point Tools for Angular Dressing Conventional Abrasives					
All	54 to 100	0°	7/16"	1E6F7	662601 95080

Standard Package = one tool






High Performance Grit Tools

Norton Winter High Performance grit tools are used in the same manner as multi-point tools, but are designed to produce a superior finish. They are used on 120 - 150 grit wheels. The traverse rates are equal to or faster than ordinary tools. Mounted on standard shanks, standard High Performance grit tools have a 3/8" wide by .100" thick diamond impregnated blade with a greater number of sharp points than in ordinary multi-point tools.

Since High Performance grit tools contain a higher concentration of diamond than found in standard multi-point tools, they are well suited for ceramic abrasive applications.


Typical Machines and Applications

- HP4439: cylindrical machines, grinding thrust walls, bearing diameters and multi-diameter shafts with radii
- HP4511: angular machines plunge grinding multi-diameter shafts and plunge grinding on dual-wheel forms
- HP4595: cylindrical machines grinding main bearing and lobes on camshafts
- HP4596: centerless machines step grinding and machines dual-wheel grinding transmission shafts

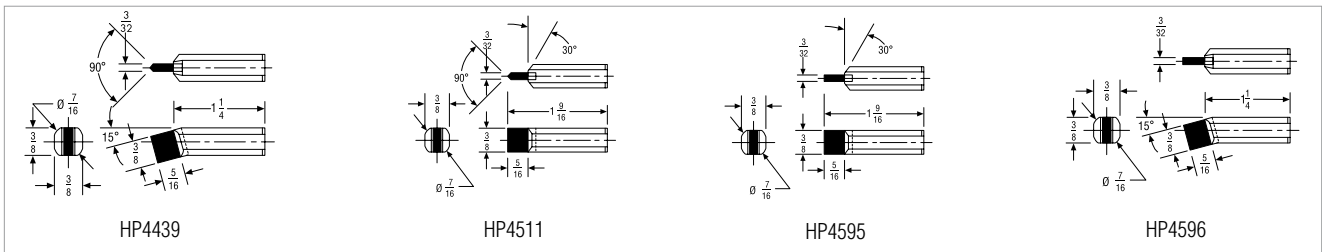

TIER: BEST					
WHEEL DIAMETER	WHEEL GRIT SIZE	SHANK DIAMETER	TOOL LENGTH	PRODUCT #	PART #
Stock High Performance Grit Tools					
Up to 20"	120 to 150	7/16"	1-9/16"	HP4439	662601 95270
Up to 20"	120 to 150	7/16"	1-9/16"	HP4511	662601 95271
Up to 20"	120 to 150	7/16"	1-9/16"	HP4595	662601 95272
Up to 20"	120 to 150	7/16"	1-9/16"	HP4596	662601 95273

Standard Package = one tool




Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on www.nortonabrasives.com or your Norton representative for more in-depth information on all Norton Winter superabrasive stock and made-to-order products.



Blade Tools

With the choice of natural and synthetic diamond in three performance/price tiers, blade tools can meet all your angle, step, and radius dressing requirements for cylindrical, surface, and centerless grinding.

Wheel Forms Dressed by These Tools

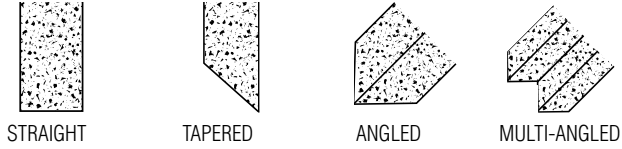

Synthetic Blade Tools – For USB and Quantum

- Synthetic diamond with a controlled diamond shape provides a constant cross section of diamond to the wheel throughout the life of the tool
- Provides consistent wheel conditioning from the first dress to last; economical, long-lasting alternative to chisel-type tools for centerless form grinding
- USB (made-to-order) - for dressing aluminum oxide wheels; Quantum (made-to-order) - for dressing ceramics and silicon carbide wheels

Multi-Cut Blade Tools (Available in Stock and Made-To-Order)


- Manufactured with top quality natural or processed elongated diamond
- Customizable diamond type depending on wheel specification and application requirements
- Durable performing tools in a medium price range

		TIER: BEST			TIER: BETTER	
		TRADENAME: SYNTHETIC BLADE TOOLS			TRADENAME: MULTI-CUT TOOLS	
WHEEL DIAMETER (WIDTH <= 9")	TOOL APPROACH ANGLE	SHANK DIAMETER	PRODUCT #	PART #	PRODUCT #	PART #
Blade Tools						
12" to 17"	0°	7/16"	NQ20A7	079587 47944 NS		
	15°	7/16"	NQ215A7	079587 47945 NS	MC355	662601 95266
18" to 29"	0°	7/16"	NQ30A7	079587 47946 NS		
	15°	7/16"	NQ315A7	079587 47947 NS		
30" - 36"	0°	7/16"	NQ50A7	079587 47948 NS		
	15°	7/16"	NQ515A7	079587 47950 NS		

These stock tools are composed of 1 layer with 3 diamonds. These tools are not resettable or relappable.

NS Non-Stock: Please contact your Norton representative for current lead-times.

Standard Package = one tool

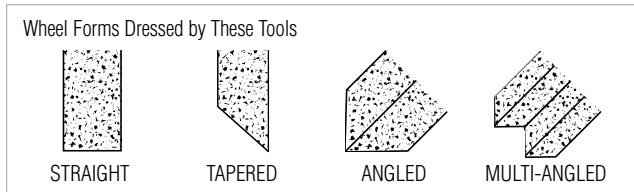

Form Tools

Norton Winter Form Tools have diamond lapped to specific angles and radii required for a particular application, machine, contour dressing system, or CNC operation. Due to the high degree of accuracy necessary, the diamond is of special shape and quality.

Used tools can be relapped - the tip geometry can be restored on worn tools at a reduced cost.

Wheel Forms Dressed by These Tools



CONVEX



CONCAVE



ANGLED



MULTI-ANGLED

TECH TIP

How to Use Form Dressing Tools

- Proper centerline and light infeeds are essential to minimize side pressure. Excessive pressure will cause the diamond to fracture.
- Cone point tools should be rotated approximately 1/4 turn daily.

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on www.nortonabrasives.com or ask your Norton representative for information on our made-to-order form tools for the following machines:

- Jones & Lamson
- Hoglund
- Moore Pantograph
- Dia-Form

Cone Point Tools



CONE POINT TOOLS

- Norton Winter vacuum braze technology used in the manufacturing surpasses all traditional diamond retention methods
- Absolute diamond retention, diamond pullout prevention during the dressing cycle, and longer tool life through multiple relaps
- Diamond is accurately coned to the specific included angle and radius making these tools ideal when the most intricate, precise forms and radii are required


U-Dex-It Cone Point Tool

- Used for precision dressing of intricate forms and radii
- Specially designed with 5/8" indexable head for easy turning during use
- These tools can be relapped

TIER: **BEST**

INCLUDED ANGLE ON DIAMOND	RADIUS ON DIAMOND	TOOL CARAT WEIGHT	SHANK DIAM.	TOOL LENGTH	PRODUCT #	RELAPPABLE PART #
75°	.020"	.50	7/16"	1.678"	CPUD720-7	662601 58981

Standard Package = one tool

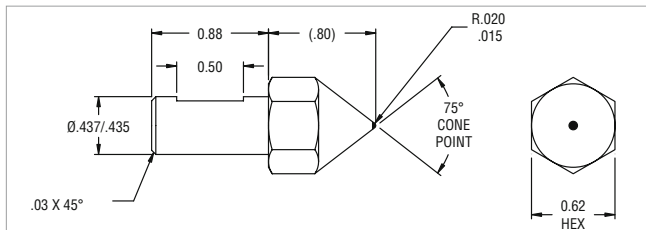


WHEEL FORMS DRESSED BY THESE TOOLS




CONVEX



CONCAVE



ANGLED



MULTI-ANGLED

SPEC CHECK

Cone Point Tool Marking System

Tool Type	Included Angle On Diamond	Radius On Diamond	Carat Weight	Shank Diameter
CP	6 = 60°	05 = .005"	L = .10 - .15	6 = 3/8"
	7 = 75°	10 = .010"	M = .20 - .25	7 = 7/16"
	9 = 90°	15 = .015"	H = .33	
		20 = .020"	X = .50	
		25 = .025"		
		30 = .030"		

Example: **CP 6 10 M-6**

Cone Point Tools *continued*


Standard Cone Point Tool

- These tools are used for precision dressing when the most intricate forms and radii are required; can be relapped


TIER: **BEST**

INCLUDED ANGLE ON DIAMOND	RADIUS ON DIAMOND	TOOL CARAT WEIGHT	SHANK DIAM.	TOOL LENGTH	PRODUCT #	RELAPPABLE PART #
60°	.010"	.20 - .25	3/8"	2"	CP610M-6	662601 95240

Standard Package = one tool

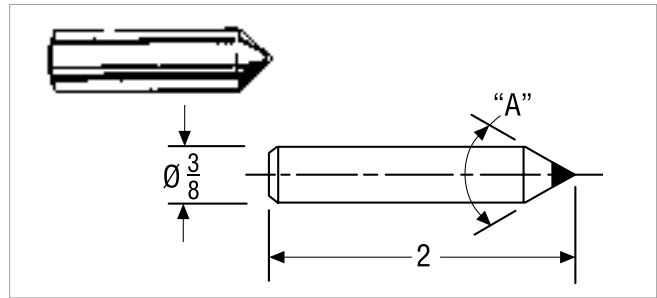

Wheel Forms Dressed by These Tools

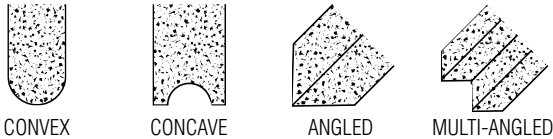

Chisel Point Tools


Chisel Point Tool for Toyoda Grinders

- High-precision chisel point tool designed for forming intricate shapes and radii
- Specifically engineered to fit Toyoda machine series GL32 and GL4, it can also be used on various straight and angle-head grinders – for dressing conventional and ceramic abrasive wheels, sizes 12" to 24"
- This tool can be reset/relapped


TIER: **BEST**

INCLUDED ANGLE ON DIAMOND	RADIUS ON DIAMOND	TOOL CARAT WEIGHT	SHANK DIAM.	TOOL LENGTH	PRODUCT #	RELAPPABLE PART #
55°	.020"	.75	7/16"	1.10"	CHT520-7	662601 03741

Standard Package = one tool

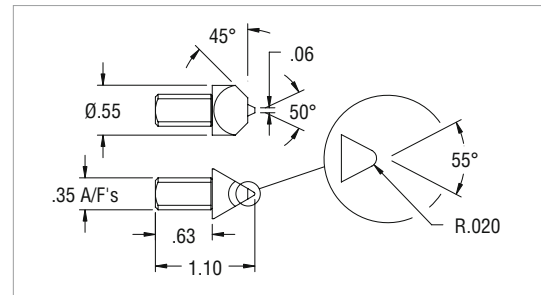

Wheel Forms Dressed by These Tools

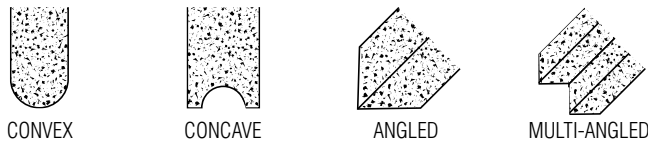

SPEC CHECK

Chisel Point Tool Marking System

Tool Type	Included Angle On Diamond	Radius On Diamond	Carat Weight	Shank Diameter
CH	6 = 60°	05 = .005"	L = .10 - .15	6 = 3/8"
(Natural)	7 = 75°	10 = .010"	M = .20 - .25	7 = 7/16"
Diamond)	9 = 90°	15 = .015"	H = .33	
		20 = .020"	X = .50	
		25 = .025"		
		30 = .030"		

Example: **CH 9 5 M-6**

TECH TIP

Chisel Point Tools

Chisel Point Tools should be rotated 180° when dulling or contour problems occur.

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on www.nortonabrasives.com or your Norton representative for more in-depth information on all Norton Winter superabrasive stock and made-to-order products.



Cluster Tools

Norton Winter Cluster tools are designed specifically for straight face dressing of large diameter, coarse grit grinding wheels on single or double disc, centerless, or surface grinders.

Wheel Forms Dressed by These Tools



STRAIGHT TAPERED


Multi-Point Cluster Tools

- Multi-Point Cluster tools are typically used for straight face dressing on disc and centerless operations
- For greatest efficiency, these tools should be mounted at a 15° angle so that three diamonds are in contact with the wheel face at all times
- The tool should be rotated at frequent intervals; not resettable

TIER: BETTER

DIAMONDS ON FACE	SHANK DIAMETER	TOOL LENGTH	PRODUCT #	NON-RESETTABLE PART #
Stock Multi-Point Cluster Tools				
7	7/16"	1-5/16"	NC7K7	662601 95206

Standard Package = 1 Tool

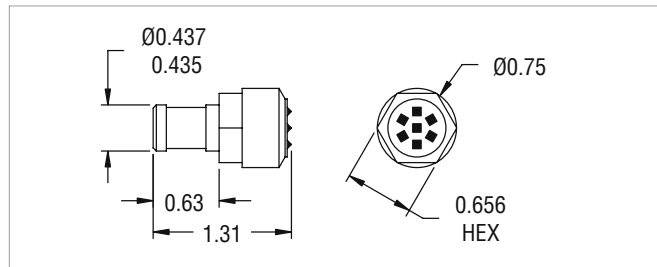

Wheel Forms Dressed by These Tools



STRAIGHT TAPERED


Dia-Pak Tools

- Dia-Pak tools are primarily used in straight face disc grinding, but are extremely versatile and may also be used in centerless and surface operations
- Designed for maximum economy, three layers of diamond are carefully arranged so that a new layer is exposed before the previous layer is completely worn away; not resettable

TIER: BETTER

FOR WHEEL DIAMETERS	DIAMONDS PER LAYER	SHANK DIAMETER	TOOL LENGTH	PRODUCT #	NON-RESETTABLE PART #
Stock Dia-Pak Tools					
Up to 14"	5-4-5	7/16"	2"	DP20	662601 95200
Up to 20"	7-6-7	7/16"	2"	DP30	662601 95201
Any	7-6-7	7/16"	2"	DP35	662601 95202

Standard Package = 1 Tool

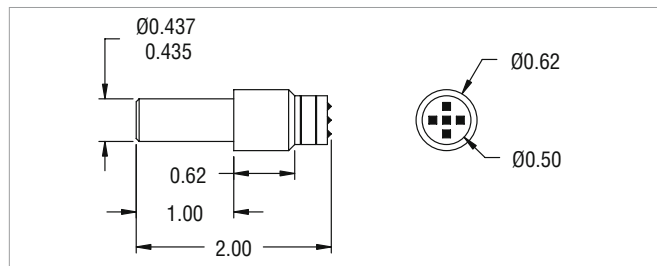

Wheel Forms Dressed by These Tools



STRAIGHT TAPERED

TECH TIP

Cluster and Dia-Pak Tools – Straight face dressing of hard / coarse wheels:


- Tool should approach the wheel at a 15° angle and be rotated periodically to keep three diamonds in contact with the wheel at all times.
- Tools can also be used at a 90° to the wheel face.
- Multi-Point Cluster tools should be rotated at frequent intervals.
- Infeed per pass should not exceed .0015" (.001" with ceramic – Norton SG, Quantum, Targa TG, etc. – wheels).
- Use coolant whenever possible.
- These tools permit a faster traverse rate providing a freer cutting wheel than when dressed by a single-point tool.



Tool Holder/Hand Dresser

- Designed for use when offhand truing and dressing on tool and cutter, or benchstand grinders.
- This stock hand dresser will not rust, and is 10-1/2" long, with a hollow shaft that accepts any tool shank length from 3/4" to 9". The 1-3/4" diameter plastic knob ensures a firm grip. The collet accepts a 7/16" diameter tool shank.

DESCRIPTION	PART NUMBER
Hand Dresser	662601 95020

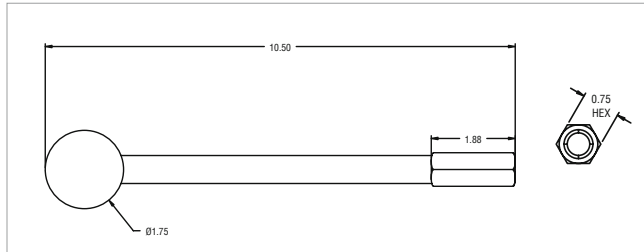

Open or Closed Dressing... You Can Count on Fliesen Tools

Whether dressing a wheel OPEN or CLOSED you can count on Fliesen tools. Open wheels (sharp, free-cutting abrasive grains are exposed) are created by increasing the speed a Fliesen tool moves across the wheel when dressing. Generally considered the most favorable wheel conditioning, open wheels avoid workpiece burn while maximizing a wheel's ability to remove metal quickly when grinding.

Slowing a Fliesen tool as it moves across the wheel creates a closed wheel condition (abrasive grains are smoother, less sharp); a very helpful condition when trying to lower part surface finish readings.

- Harder, H-bond metal formulation tools have been specifically engineered to efficiently dress durable silicon carbide and ceramic wheels
- Furioso Fliesen tools have a unique bond system developed for optimal performance when dressing Norton Quantum (NQ) ceramic wheels
- W-bond Fliesen tools are designed for conventional aluminum oxide wheels



The Benefits of Fliesen Tools

Spend More Time Grinding

Single point, chisel, and cone point tools require operator attention to ensure proper tool rotation at regular intervals. Fliesen tools require no adjustments. Simply install the tool, dress the wheel to break it in, and the tool will do the rest. Operators spend more time grinding – rather than making non-productive dressing adjustments.

Longer Tool Life

Expect long life when using a Fliesen tool. Other stationary tools, made with a single diamond stone, develop flat spots ("wear flats") over time – which create chatter and burn. Fliesen tools use hand-set, fine diamond grit, eliminating the creation of wear flats.

Fliesen Tool Configurations: Plate and Shank

Fliesen tools are available in two basic tool configurations. The most common is a plate configuration, which is somewhat rectangular-shaped with a mounting hole. Fliesen shank tool configurations are plates mounted in shanks of varying sizes and shapes. Most grinding machines accommodate one or the other tool configuration. To find the correct tool configuration for your machine, check the existing dressing tool, or consult your grinding machine manual.

Choosing The Correct Fliesen Tool

Using the chart below, find your desired wheel form – then locate the preferred diamond position. Next, find the correct tool configuration for your machine: plate or shank tool. Follow down that column to find the Fliesen page for your plate or standard shank tool configuration. Go to the appropriate page. Locate the corresponding zone for your wheel diameter and width on the graph. Find that zone number in the part number chart. Next, moving to the right, find your wheel abrasive type and grit size. Locate the part number for your Fliesen tool.


Desired Wheel Form					
Diamond Positions	 Blade Only FR	 Side-Mounted FRS, FAS, FBS, FCS & FDS	 Center-Mounted FAS, FBS, FCS & FDS	 Double-Sided FCSD & FDSD	 Twin FDST, FSST & 1TFAS
TOOL CONFIGURATION					
Plates	 Consult Customer Service	Page 282 – 283	Consult Customer Service	Consult Customer Service	Page 282 – 283
Shank Tools	 Consult Customer Service	Consult Customer Service	Consult Customer Service	Consult Customer Service	Consult Customer Service

Furioso Tools

The new generation of highly wear-resistant stationary diamond dressing tools for dressing modern ceramic abrasives

PERFORMANCE ADVANTAGE

Furioso vs. Standard Blade

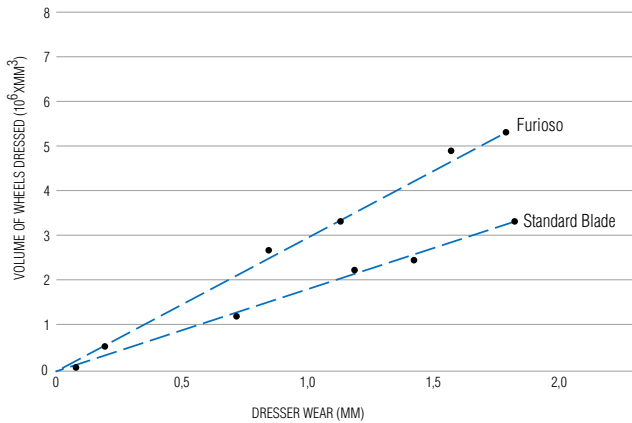


Best choice for optimum performance of Norton Quantum or other ceramic wheels



FLIESEN FURIOSO TOOLS

- The optimized combination of diamond quality, bond and setting pattern when dressing Norton Quantum (NQ) or other ceramic grinding wheels
- Improved wear-resistance and enhanced tool life; excellent dressing behavior with optimum consistency
- Constant surface roughness

Standard Furioso Plate Drawings

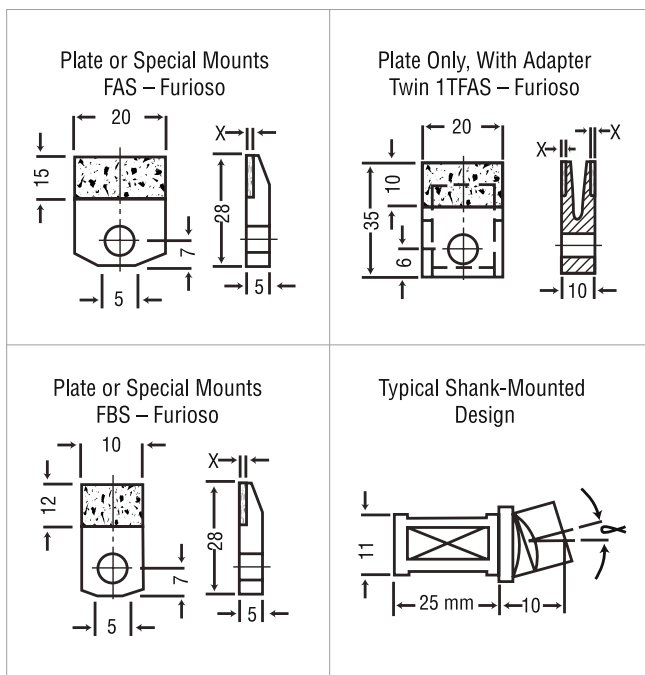


These three pages highlight a small sample of our Fliesen tool offering. Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on www.nortonabrasives.com or ask your Norton representative for complete product listing and information on these tools.

Furioso Plates; Side-Mounted and Twin

Use the Wheel/Tool Graph to identify your grinding wheel's Zone number, and the chart below to find the Furioso tool for your application.




Wheel / Furioso Tool Graph

Select Zone based on wheel diameter and width

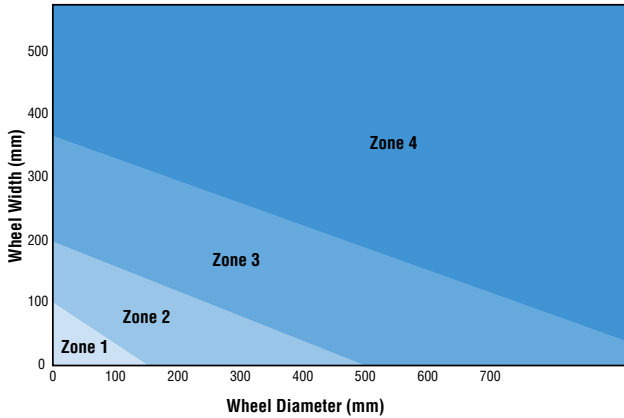

TIER: **BEST**

TO DRESS: **NORTON QUANTUM NQ CERAMIC WHEELS**

ZONE NO. / SERIES	WHEEL GRIT SIZE	TOOL #	PART #	DESCRIPTION
Side-Mounted				
 Zone 2 FBS Series	36 - 54	DT1463	690141 22948 *	FBS 140 Furioso
	54 - 80	DT1462	690141 22947 *	FBS 115 Furioso
	80 - 120	DT1461	690141 22946 *	FBS 90 Furioso
	120 - 180	DT1460	690141 22944 *	FBS 75 Furioso
 Zone 3 FAS Series	36 - 54	DT1467	690141 22952 *	FAS 140 Furioso
	54 - 80	DT1466	601576 90579 *	FAS 115 Furioso
	80 - 120	DT1465	601576 93885 *	FAS 90 Furioso
 Twin Zone 4 1TFAS Series	36 - 54	DT1471	690141 22956 *	1TFAS 140 Furioso
	54 - 80	DT1470	690141 22955 *	1TFAS 115 Furioso
	80 - 120	DT1469	690141 22954 *	1TFAS 90 Furioso
	120 - 180	DT1468	690141 22953 *	1TFAS 75 Furioso

* All Furioso Plates shown ship in 10 business days from receipt of order.

SPEC CHECK

Blade Size

DESCRIPTION	DIMENSION
1 FBS	10 mm thick, 15 mm usable length
2 FAS	20 mm thick, 15 mm usable length
3 TFAS	Twin blade with cooling duct

Diamond Grit Size


DESCRIPTION	FEPA
140	D1181
115	D1001
90	D711
75	D501

Furioso Shank Tools

Made-to-order Furioso shank tools are also available. Ask your Norton representative for ordering assistance.

Side-Mounted Diamond Sections

Tools are available in different offset positions and angles.

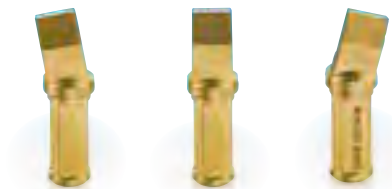

Offset Left,
Specify
angle amount

Zero Offset

Offset Right,
Specify
angle amount

Tipping the Diamond Plates on Shank Tools

Diamond sections can be tipped right or left.



Diamond
Tipped Left,
Specify angle

Diamond
Tipped Right,
Specify angle

There are many different diamonds making up a single plate as this cut-away view shows.



Norton Winter diamond rotary truing and dressing tools provide a very efficient way to modify the shape and topography of your grinding wheels.

Products:

- Form Rolls: Plunge Dressing
 - Infiltrated diamond form rolls
 - Reverse plated diamond form rolls
- Dressing Discs: CNC Traverse Dressing
 - Infiltrated dressing discs
 - BPR dressing discs (for dressing superabrasive wheels)
 - IDW dressing discs (for dressing superabrasive wheels)
- Truing and Dressing Spindles and Devices

Form Roll: Plunge Dressing

- Diamond roll geometry matches geometry of part to be ground
- Roll is fed into grinding wheel to generate the desired form and wheel surface condition
- Used where lowest cycle time and highest accuracy is required

Dressing Disc: CNC Traverse Dressing

- Diamond dressing disc has a thin diamond section that is traversed across the face of the grinding wheel
- Profile is generated with a CNC program or template
- Used for simple profiles or where flexibility is necessary

How to Order Rotary Dressing Tools

Provide the following information to your local sales representative or customer service representative

Legible blueprint of roll, wheel, or part with the following geometry:

- Overall diameter
- Overall length
- Bore size and tolerances required
- Mounting pattern
- Any feature with tolerances less than 0.0002" (5 um) must be clearly defined for engineering review
- If designing from a part, a fully dimensioned part drawing is required
- Abrasive type (natural diamond, synthetic diamond, CVD stones, etc.)
- Specification of wheel to be dressed (need at least the grit type and size)
- Dressing type (Plunge or CNC Profiling)



Request the "Rotary Truing and Dressing" brochure, form # 8535, and contact your Norton representative for more information and expert assistance with your dressing operation.



Brake Controlled Truing Devices

Designed for truing diamond and cBN wheels rapidly, effectively, and with a minimum of superabrasive loss. Recommended for wheels up to 12" in diameter.

Applications:

- Truing straight, cup and cylinder wheels:
- Straight wheels, used on chip breaker, tool and cutter, surface, and cylindrical grinding machines
 - Cup wheels, used on vertical spindle surface grinders
 - Internal grinding wheels
 - Cut-off wheels



Visit <https://nortonsga.us/qnfx2> to watch our True to Form, Dress to Cut video.

Non-Stock 4597 Brake Controlled Truing Device

The 4597 is engineered for heavier and more frequent truing applications. The adjustable speeds allow for varying conditions (between 1050 and 1500 SFPM). It comes complete with a reusable case, two 3" 38A60-M8VBE* vitrified wheels, Truing Device Tips book and a dressing stick. It can be rebuilt using the 4597RK Rebuild Kit.

Worn #4597 Brake Controlled Truing Devices (UPC 662601**95350**) in need of reconditioning (beyond new shoes and springs) may be returned to be rebuilt. Contact Customer Service for return instructions and quote.

Stock 3597 Pacesetter Brake Controlled Truing Device

The Pacesetter model is ideal for light-duty use. The pre-set brake speed requires no adjusting. This model includes one 3" 38A60-M8VBE* vitrified wheel and can be rebuilt using the 3597RK Rebuild Kit.

Stock 4597RK and 3597RK Rebuild Kits

The truing devices can be rebuilt with these kits, consisting of 3 brake shoes, 3 springs, and 3 screws.

ITEM	TIER: BETTER		GOOD	
	PRODUCT NO.	PART #	PRODUCT NO.	PART #
Truing Devices				
4597 Brake Controlled Truing Device	4597	662601 95350 NS		
3597 Pacesetter Brake-Controlled Truing Device	3597	662601 35578		
Truing Device Rebuild Kits				
4597 Rebuild Kit	4597RK	662601 95351		
3597 Pacesetter Rebuild Kit	3597RK	662601 35595		
Replacement Wheels				
3 x 1 x 1/2			38A60-MVBE	662435 29145
			38A80-MVBE	662435 29146
			37C60-MVK	662435 29166
			37C80-HVK	662435 29170
			37C80-MVK	662435 29171
			37C100-HVK	662435 29172
			37C100-MVK	662435 29070

NS Non-Stock: Please contact your Norton representative for current lead-times.

SPEC CHECK

Truing Diamond and cBN Wheels

SUPERABRASIVE WHEEL	TRUING WHEEL SPECIFICATION
Resin and Vitrified Bond	
80, 100, and 120 grits	38A60-MVBE 37C60-MVK
150, 180, and 220 grits	38A80-MVBE 37C80-MVK
320 and finer grits	37C100-HVK
Metal Bond	
80, 100, and 120 grits	38A60-MVBE
150, 180, and 220 grits	38A80-MVBE
240 and finer grits	37C80-HVK

TECH TIP

- Prior to truing the wheel, run a wax crayon over the wheel face. Important: do NOT use any liquid-based ink on superabrasive wheels.
- Any crayon left on the wheel face after truing will reveal untrued areas.
- Indicate the superabrasive wheel runout before starting... usually within .001" to .002", to minimize wheel loss.
- Mount the device spindle parallel to the wheel spindle to ensure proper straight face truing.
- For cup-shaped wheels, the device spindle will be mounted perpendicular to the wheel spindle.
- Always use the brake-controlled truing device dry.
- Bring the diamond/cBN wheel and the truing wheel together until they almost touch.
- Start the diamond/cBN wheel to normal speed; spin the truing wheel in the same direction at point of contact.
- Bring the two wheels together until they touch.
- Make sure the truing wheel is spinning at time of contact.
- Traverse the wheel back and forth at 30 to 60 inches/minute.
- Downfeed .0005" to .001" at the end of each traverse.
- At the end of truing, the diamond/cBN wheel should be smooth and in truth.
- Apply a dressing stick to sharpen the wheel.



It is the user's responsibility to refer to and comply with ANSI B7.1



Regular use of properly selected dressing sticks will help you achieve maximum performance from your grinding wheels.

Applications:
Grit range:
Abrasive grain:
Shape:
Machine Used:


Truing, cleaning, and dressing diamond, cBN, and conventional abrasive grinding wheels
16 – 1200
Aluminum Oxide, Boron Nitride, Silicon Carbide
Square, rectangular, and round



HAND DRESSING

Grinding Wheel-to-Product Recommendation Guide

Selecting the appropriate dressing stick for each application depends on the wheel size, type, speed, specification, and grit size, as well as the workpiece material. Initial starting specifications are listed below. We recommend testing several sticks to find the best one for your application.

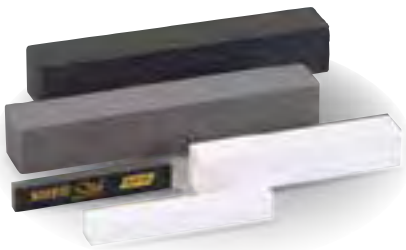

	Product	Specification
Superabrasive Wheels - Resin and Vitrified Bond		
- 80, 100, and 120 grits	Dressing Stick	38A150-HVBE
- 150, 180, and 220 grits	Dressing Stick	38A220-HVBE
- 320 and finer grits	Superfine Stick	NMVC400-J5VCA
Superabrasive Wheels - Metal Bond		
- 80, 100, and 120 grits	Dressing Stick	37C80-NV
- 150, 180, and 220 grits	Dressing Stick	37C150-KV
- 240 and finer grits	Dressing Stick	37C220-KV
Conventional Vitrified Wheels - Vitrified Bond		
- 46 grit and finer and M grade and softer	High Performance Dressing Stick	Norbide
	Conventional Dressing Stick	37C24-SVK

TECH TIP

Dressing Diamond and cBN Wheels

- Resin and Vitrified Bond Diamond, and cBN Wheels: choose a dressing stick one or two grit sizes finer than the abrasive in the wheel – in a soft grade (H or I)
- Metal Bond Diamond, and cBN Wheels: choose a stick the same grit size or one grit size coarser than the abrasive in the wheel – in a medium grade (K–M)



It is the user's responsibility to refer to and comply with ANSI B7.1

Offhand Grinding Wheel Dressing Stick and Holder

This convenient metal holder is widely used by mechanics and foundry-men for truing, dressing and changing the face of the wheel. The JT246 dressing stick – an extra coarse grit silicon carbide for dressing conventional vitrified wheels – is firmly held and adjusted by the knurled control.



SIZE (D x L)	SPEC.	STD. PKG.	TIER: BETTER	
			PRODUCT #	PART #
Offhand Grinding Wheel Dressing Stick and Holder				
1/2 x 6 Round	Silicon Carbide Extra Coarse Grit Round Dressing Stick	5	JT246	614636 87900
10 Overall	Dressing Stick Holder	5	H6	614636 87895

Norbide High-Performance Sticks

For offhand truing and dressing of medium grit, soft- and medium-grade conventional vitrified grinding wheels. Norton Norbide sticks are the hardest sticks you can buy. Made from boron nitride, they are well suited for dressing tool and cutter wheels 10" and smaller, especially cup and saucer shapes.

SIZE (T x W x L*)	STD. PKG.	TIER: BETTER	
		SPEC.	PART #
High Performance Long Life Stick			
1/4 x 1/2 x 3	5	Norbide	614636 10148

* Thickness x Width x Length

Vitrified Dressing Sticks

Aluminum Oxide (White)

For dressing and cleaning diamond and cBN superabrasive wheels.

Silicon Carbide (Black)

Coarse grit (16 - 46) and hard-grade (R and harder) sticks are used for dressing conventional vitrified wheels. Finer grit and softer grades are used for dressing diamond wheels.

SIZE (T x W x L)	TIER: BETTER		PART #
	STD. PKG.	SPEC.	
Vitrified Dressing Sticks – Aluminum Oxide			
3/8 x 3/4 x 4	5	38A150-IVBE	614636 39635
1/2 x 1/2 x 4	5	38A220-HVBE	614636 10555
1/2 x 1/2 x 6	5	38A150-IVBE	614636 10303
	5	38A220-HVBE	614636 10103
1/2 x 3/4 x 4	5	38A60-LVBE	614636 10415
1/2 x 1 x 4	5	38A180-IVBE	614636 99705
3/4 x 3/4 x 4	5	38A60-LVBE	614636 10440
	5	38A80-MVBE	614636 10362
	5	38A90-LV	614636 39632
	5	38A150-HVBE	614636 10291
	5	38A150-IVBE	614636 10368
	5	38A220-HVBE	614636 10290
3/4 x 3/4 x 8	5	38A220-HVBE	614636 10280
1 x 1 x 6	5	38A150-HVBE	614636 10405
	5	38A150-IVBE	614636 10453
	5	38A220-HVBE	614636 10406
1 x 1 x 8	5	38A120-IVBE	614636 10390
	5	38A150-IVBE	614636 10455

SIZE (T x W x L)	TIER: BETTER		PART #
	STD. PKG.	SPEC.	
Vitrified Dressing Sticks – Silicon Carbide			
1/2 x 1/2 x 6	5	37C24-SVK	614636 10285
	5	37C100-LV	614636 10201
	5	37C150-KV	614636 10205
	5	37C150-LV	614636 10206
	5	37C150-MV	614636 10207
	5	37C220-KV	614636 10214
	5	37C150-LV	614636 10375
	5	37C20-SVK	614636 10459
	5	37C24-SVK	614636 10462
	5	37C24-TVK	614636 10354
3/4 x 3/4 x 6	5	37C46-RVK	614636 10466
	5	37C80-NV	614636 10393
	5	37C150-KV	614636 10438
	5	37C220-KV	614636 10398
	5	37C20-SVK	614636 10469
1 x 1 x 6	5	37C24-SVK	614636 10471
	5	37C16-TVK	614636 10482
1 x 1 x 8	5	37C24-TVK	614636 10485
	5	37C24-SVK	614636 10490
Vitrified Round Dressing Sticks – Silicon Carbide			
1/2 x 6	5	37C24-SVK	614636 10371
1 x 6	5	S/C Ex-C (JT276)	614636 87905

Vitrified Superfine Sticks

For dressing diamond and cBN superabrasive wheels.


SIZE (T x W x L)	TIER: BETTER		PART #
	STD. PKG.	SPEC.	
Vitrified Superfine Sticks – Aluminum Oxide			
1 x 1 x 6	5	PCD Coarse - 400 grit	614636 47865
	5	PCD Fine - 800 grit	614636 47867
1 x 1 x 8	5	NSA320-H8V	614636 10597
Vitrified Superfine Sticks – Silicon Carbide			
1/2 x 1/2 x 6	5	NMVC320-J5VCA	614636 10599
	5	NMVC400-J5VCA	614636 50324
1 x 1 x 6	5	NMVC320-J5VCA	614636 10605
	5	NMVC400-J5VCA	614636 50450

Organic Silicon Carbide Micro Dressing Wheel

Type 01 straight dressing wheels with sharp high-purity green silicon carbide abrasive.

For micro-dressing fine grit polyimide superabrasive diamond wheels.

TIER: **BEST**
ABRASIVE: Silicon Carbide

SIZE (D x T x H)	MAX. RPM	MIN./STD. PKG.	SPEC.	PART #
Type 01 Straight 				
200mm x 10mm x 31.75mm	2,870	5	320 Silicon Carbide Organic Micro Dressing Wheels	662532 96349*

* For fine grit diamond Polyimide wheels

For additional silicon carbide wheels that can be used for dressing see page 242 in the Precision Grinding Silicon Carbide Toolroom Wheels section

Diamond and cBN Wheel Mounting, Truing and Dressing Guide

To achieve the best results using Norton Winter diamond and cBN products, the following steps for mounting, truing and dressing should be practiced:

MOUNTING – Putting Wheel on Machine Spindle

- Examine wheel flanges and spindle carefully.
- Be sure flanges' surfaces are clean and free of damage.
- Ensure that the mounting flanges are flat and of equal diameter, especially on wheels with rigid centers, such as vitrified bond wheels.
- Paper or plastic blotters should only be used when mounting superabrasive wheels with vitrified cores. Using paper or plastic blotters on any other core material might result in the wheel loosening during grinding.
- Inspect machine spindle for excessive runout.
 - » TIR (Total Indicated Runout) should be no greater than 0.0002".
- Mount wheel between hand-tightened flanges.
- Using a dial indicator, tap the wheel lightly with a rubber or wooden block to minimize runout to less than .0010".

TRUING – Making Wheel Round and Concentric with the Spindle Axis

- Prior to truing the wheel, run a wax crayon over the wheel face. Important: do not use any liquid-based ink on superabrasive wheels.
- Any crayon left on the wheel face after truing will reveal untrued areas.
- Indicate the superabrasive wheel runout before starting... usually within .001" to .002", to minimize wheel loss.
- Brake controlled truing devices are most commonly used to true Diamond and cBN straight, cup and cylinder wheels.
 - » Mount the device spindle parallel to the wheel spindle to ensure proper straight face truing.
 - » For cup wheels, the device spindle will be mounted perpendicular to the wheel spindle.
 - » Always use brake controlled truing device dry.


DRESSING – Opening the Face of a Trued Wheel

- Dressing the abrasive – a cleaning/sharpening process to expose sharp, free-cutting grit:
 - » For resinoid and vitrified bond wheels, the dressing stick should be one or two grit sizes finer than the abrasive in the diamond/cBN wheel – in a soft grade such as H or I.
 - » For metal bond wheels, choose a stick with the same grit or one grit coarser than the wheel abrasive – in a medium grade (K – N).
 - » See the "Dressing Stick" section for recommendations.

- Tighten flange securely and recheck with indicator.
- Allow a newly mounted wheel to operate for one full minute before grinding.
- The use of one permanent mounting for the life of the wheel is recommended whenever possible:
 - » If the grinding machine has a tapered spindle, mount each straight, flaring cup or dish wheel on a separate collet or adapter.
 - » When changing wheels the entire unit is removed, keeping the wheel in running truth.
 - » When needed again, the entire unit can be placed directly on the spindle or arbor, thereby eliminating the time and abrasive lost in retruing.

- » Bring the diamond/cBN wheel and the truing wheel together until they almost touch.
- » Start the diamond/cBN wheel to normal speed; start the truing wheel in the same direction.
- » Bring the two wheels together until they touch.
- » Make sure the truing wheel is spinning at time of contact.
- » Traverse the wheel back and forth at 30 to 60 inches per minute.
- » Downfeed .0005" to .001" at the end of each traverse.
- » At the end of truing, the diamond/cBN wheel should be smooth and in truth.
- » Apply a dressing stick to sharpen the truing wheel.

- Dressing the core – The core material (the part of the wheel that holds and supports the abrasive-bearing section) should never contact the work piece during grinding; rubbing will generate excessive heat. As the abrasive section of a cup wheel wears, the core material might become exposed, necessitating dressing.
 - » Use a single-point carbide or steel tool to dress an exposed resalloy core.
 - » Clamp the tool in a vise.
 - » Direct the cutting edge accurately to leave a 1/16" of abrasive section exposed.

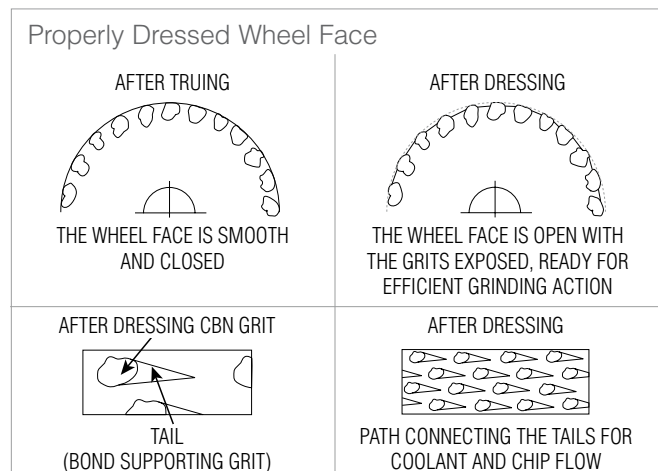



setting a new
industry standard
FOR PRODUCTIVITY

From the most comprehensive stock offering to the industry's largest custom-manufactured availability, our Norton Winter superabrasive product portfolio gives you the most options with uncompromising performance.

- Diamond / cBN Stock Wheels
- B99 Express Made-to-Order Resin Wheels
- CNC Wheels
- Electroplated Products
- Lapping Compound

Norton Winter Diamond Product Identification System / Usage Information

ASD 120 – R 75 B99 1/8

Abrasive Type	Grit Size	Grade	Concentration	Bond	Abrasive Depth
ASD <ul style="list-style-type: none"> Used with B99 and B105 bonds Armored Durable Versatile Use wet or dry Carbide/steel operations 	<ul style="list-style-type: none"> 100S – Roughing 120 – Roughing/cutting-off 150 – Combined roughing and finishing 180 – Improving finish 220, 320 & 400 – Finishing only 10/20 mic 6/12 mic 	Resin Bond R – Norton standard N – Free cutting Metal Bond N – Norton standard Vitrified Bond P – Norton standard R – Most durable	50 <ul style="list-style-type: none"> Most economical For broad area of contact 75 <ul style="list-style-type: none"> Norton standard Freer cutting than 100 Dry grinding with ASD 100 <ul style="list-style-type: none"> Very durable For flood coolants Use with 220 grit or finer Use for cutting-off 115 <ul style="list-style-type: none"> For CNC grinding machines 125 <ul style="list-style-type: none"> Form holding For high volume, high pressure coolant, precision applications on high-speed tool steels 	B99 <ul style="list-style-type: none"> Resin bond Use wet or dry Tool making; resharpening B105 <ul style="list-style-type: none"> Premium resin bond Advanced heat-reducing bond Use dry; reconditioning B610 and B80 <ul style="list-style-type: none"> For CNC grinding machines M99 <ul style="list-style-type: none"> Metal bond 1A1R cut-off Glass and ceramics MSL <ul style="list-style-type: none"> Metal single layer Type 6A2C only Use dry Offhand reconditioning/finishing carbide V99 <ul style="list-style-type: none"> Vitrified bond Offhand finishing of carbide tools Plunge grinding 	1/16" 1/8" 1/4" 9/32" 3/8" 1/2" 3/4" Solid
CD <ul style="list-style-type: none"> Used with B99 bond 					
D <ul style="list-style-type: none"> Used with B99 bond Micron-sized diamond; finishing 					
M3D <ul style="list-style-type: none"> Used with M99 bond 					
M4D <ul style="list-style-type: none"> Used with M99 bond Armored Durable; for non-metallics 					
RMD <ul style="list-style-type: none"> Used with V99 bond 					
SD <ul style="list-style-type: none"> Used with B99 and V99 bonds Norton standard Use wet or dry Free cutting Low horsepower (3/4 hp or less) 					

Norton Winter cBN Product Identification System / Usage Information

CB 120 – T B99 1/8

Abrasive Type	Grit Size	Grade	Bond	Abrasive Depth
CB – cubic Boron Nitride <ul style="list-style-type: none"> Used with B99 bond Armored Use wet or dry 	<ul style="list-style-type: none"> 100 – Roughing 120 – Roughing/cutting-off 150 – Combined roughing and finishing 180 – Improving finish 220, 320, 400 – For finishing only 	Q <ul style="list-style-type: none"> Approx. 50 concentration Type 6A2 Broad area of contact T <ul style="list-style-type: none"> Approx. 75 concentration Norton standard First choice Lower horsepower Broad area of contact Dry grinding Resharpening applications W <ul style="list-style-type: none"> Approx. 100 concentration Most durable High volume coolant Flute polishing Surface grinding Cylindrical grinding 	B99 <ul style="list-style-type: none"> Resin bond Use wet or dry Aztec III <ul style="list-style-type: none"> Premium resin bond Use dry Tool resharpening Aztec .007 <ul style="list-style-type: none"> Premium resin bond Use dry Increased feed rates Heavy stock removal Heavier cuts 	1/16" 1/8" 1/4" 1/2" Solid

Application-to-Product Recommendation Guide – Diamond Wheels

APPLICATION OR COMMON MACHINE TYPE	COMMON WHEEL SIZE, TYPE & BLUEPRINT	APPLICATION VARIABLES		RECOMMENDED SPECIFICATION
Carbide Grinding – Toolroom Production				
Blanchard Grinding Vertical Spindle Surface Grinding	10", 11", 16" & 18" diameters Type 2A2T	Wet – solid carbide	1" or larger pieces	SD100-R75B99E*
			– roughing Small pieces	ASD100-R75B99E*
		Carbide & steel (combination)		ASD100-R75B99E*
Hand Burr Grinding	6" x 3/32" x 1-1/4" Type 1V1P V – 20° ME89562	Dry		ASDC320B-R125B99
Centerless (wet)	Throughfeed Grinding 12", 14", 16", 18" & 20" diameters Type 1A1	Roughing		ASD100-R75B99E*
	Unison Dedtru Grinder 7" x 1" x 1-1/4" Type 1A1			ASD150-R75B99E*
Cutting Off (wet)	6" x .035" x 1-1/4" Type 1A1R ME43572 10" x .050" x 1-1/4" Type 1A1R ME43565	Most durable		ASD100S-R100B99
		Free cutting		SD100-R75B99
				SD120-R100B99
Cylindrical Grinding (wet)	10", 12", 14", 16" & 20" diameters Type 1A1	Wet, rough grinding of cemented carbides, hard (55 Rc+) plasma and ceramic spray coatings		ASD180-R100B99
				ASD180-R75B99E*
				ASD150-R75B99
				ASD120-R75B99
		Wet, finish grinding of all carbides, plasma and ceramic spray coatings		SD220-R100B99E*
Tool Sharpener Bench Grinder (wet)	5" x 1" x 1-1/4" Type 6A2H ME27084 Rim Width (W) = 1-1/16	Tool sharpening		SD320-R50B99
Hand Honing (dry)	Various sizes Type HH1 or HH2			ASD100-R100B99
				SD320-100V99
Lamination Dies (wet)	Various sizes Type 1A1	Surface grinding of carbide		ASD120-R75B99
Surface Grinding (wet) Straight Wheels	Various sizes Type 1A1	Roughing	Durable	ASD100S-R100B99E*
			Free cutting	SD100S-R100B99
		Finishing only		SD220-R100B99
		General purpose		ASD150-R75B99
Tool & Cutter Grinding	Various sizes Type 11V9, 12V9 or 15V9	Wet or dry		ASD120-R7599
Carbide Grinding – Offhand				
Single-Point Carbide Tools	6" x 3/4" x 1-1/4" Type 6A2C ME27853	Wet roughing	Durable	RMD150-P50V99*
			Free cutting	SD150-P50V99
		Wet finishing	Durable	RMD220-P50V99*
			Free cutting	SD220-P50V99
		Wet or dry grinding where free-cutting and self-dressing wheels are required	Roughing	ASD120-R75B99
			Finishing	SD220-R50B99E*

Note: Diamond depths are not indicated in above listings. When ordering, be sure to include Diamond depth (1/16, 1/8, etc.).

*Express Made-To-Order; Refer to the B99E Express Made-to-Order Wheel section.

Application-to-Product Recommendation Guide – cBN Wheels

APPLICATION OR COMMON MACHINE TYPE	COMMON WHEEL SIZE, TYPE & BLUEPRINT	APPLICATION VARIABLES	RECOMMENDED SPECIFICATION
Toolroom Grinding			
Cutter Sharpening Milling Cutters, Broaches, Reamers, etc.	3-3/4" x 1-1/2" x 1-1/4" Type 11V9 ME92192	Dry Wet	Aztec III 120T CB120-TB99
	6" x 1" x 1-1/4" Type 12A2 ME27758	Wet or dry	CB120-TB99
	6" x 3/4" x 1-1/4" Type 12V9 ME48666	Wet or dry	CB120-TB99
	6" x 3/4" x 1-1/4" Type 15V9 ME40633	Wet or dry	CB100-WB99E*
	10" x 1/2" x 3" Type 1A1	Wet or dry	CB100-TB99E*
Surface Grinding	12" x 1/2" x 3" Type 1A1	Wet or dry	CB150-WB99E*
Cylindrical Grinding	Thinner than 1/2" Type DW	Wet or dry	CB100-WB99
	1/2" or thicker Type 1A1	Wet or dry	CB120-TB99E*
Internal Grinding Tools	7" x .040" x 1-1/4" Type 1A1R	Water-base coolant	CB120-WB99E*
Slotting			

Note: cBN depths are not indicated in above listings. When ordering, be sure to include cBN depth (1/16, 1/8, etc.)

**Express Made-To-Order; Refer to the B99E Express Made-to-Order Wheel section.*

Troubleshooting Guide – Dry Grinding


Problem	Possible Causes	Suggested Correction
Burning (excessive heat)	Wheel loaded or glazed	Dress wheel with a dressing stick
	Excessive feed rate	Reduce infeed of wheel or workpiece
	Wheel too durable	Use freer cutting specification or slow down wheel speed
Poor finish	Grit size too coarse	Select a finer grit size
	Excessive feed rate	Reduce infeed of wheel or workpiece
Chatter	Wheel out of truth	True wheel; ensure it is not slipping on mount (See "Mounting, Truing and Dressing Guide")

Troubleshooting Guide – Wet Grinding

Problem	Possible Causes	Suggested Correction
Burning (excessive heat)	Wheel glazed or loaded	Re-dress wheel
	Poor coolant placement	Apply coolant directly to wheel/workpiece interface
	Excessive material removal rate	Reduce downfeed and/or crossfeed
Poor finish	Excessive dressing	Use lighter dressing pressure Stop dressing as soon as wheel starts to consume stick rapidly
	Grit size too coarse	Select a finer grit size
	Poor coolant flow or location	Apply heavy flood so it reaches wheel/work interface
Chatter	Wheel out of truth	True wheel; ensure it is not slipping on mount
Wheel will not cut	Glazed by truing	Dress lightly until wheel opens up
	Wheel loaded	Dress lightly until wheel opens up Increase coolant flow to keep wheel surface clean Never run wheel with coolant turned off
	Low feeds and speeds	Increase feed rate; increase wheel speed (Do not exceed wheel MOS)
	Incorrect coolant flow	Apply coolant to flood wheel/work surface
Slow cutting	Low wheel speed	Increase wheel speed (observe maximum operating speed)
Short wheel life	Excessive dressing	Use lighter dressing pressure
	Wheel too soft or too hard	Change grit or grade; use higher concentration

Material Hardness Scale

Superabrasives is a term used to describe those abrasives of extreme hardness which produce outstanding results when properly used on specific applications. This graph provides a hardness comparison (Knoop Hardness Scale) between diamond and cBN superabrasives, aluminum oxide and silicon carbide standard abrasives, and some common materials these abrasives are used to grind.

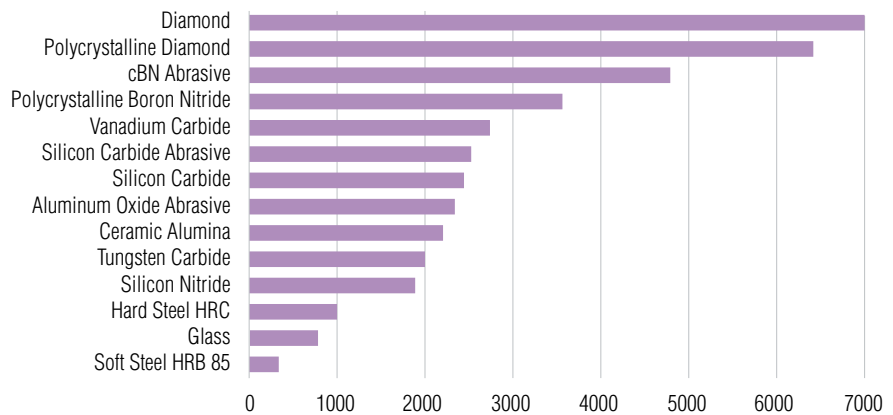

TECH TIP

Avoid Grinding Steel

- Avoid steel when grinding with diamond wheels. Keep the amount of steel ground to an absolute minimum.
- On brazed tools, use aluminum oxide wheel to back off the steel shank.
- A high lubricity grinding fluid should be used.
- For some steels, an armored (AMD) diamond wheel might prove most economical.

Use Rigid Work Support

- All workpieces should be supported firmly during the grinding process. Any amount of vibration will cause wheel wear and produce chatter or wave marks on the ground surface.
- On work ground between centers, centerholds should be properly prepared.
- Minimize work overhang.
- If the ground work is supported by a work finger, ensure the finger is strong enough to provide vibration-free support.

Coolant – Grind Wet

- Diamond wheels should be used with a full flood coolant properly directed toward the grinding zone. Water with a rust inhibitor is recommended.
- Vitrified diamond wheels should be used only with a coolant.
- When flood application can't be used, try mist or spray application.
 - » Use compressed air to "atomize" water or soluble oil.
 - » Direct the spray at the grinding zone to help dissipate heat and prevent heat damage to the work.

Avoid Excessive Feeds

- Excessive feeds will result in premature wheel wear. Excessive feed rates are characterized by:
 - » A hard grinding sound
 - » Chatter
 - » Burn
 - » High wheel wear rate
 - » Vibration

Decimal and Metric Equivalents of Common Fractions

FRACTIONS OF AN INCH	DECIMALS OF AN INCH	MILLIMETERS
1/64	.0156	0.397
1/32	.0313	0.794
3/64	.0469	1.191
1/16	.0625	1.588
5/64	.0781	1.985
3/32	.0938	2.381
7/64	.1094	2.778
1/8	.1250	3.175
9/64	.1406	3.572
5/32	.1563	3.969
11/64	.1719	4.366
3/16	.1875	4.762
13/64	.2031	5.159
7/32	.2188	5.556
15/64	.2344	5.953
1/4	.2500	6.350
17/64	.2656	6.747
9/32	.2813	7.144
19/64	.2969	7.541
5/16	.3135	7.937
21/64	.3281	8.334
11/32	.3438	8.731
23/64	.3594	9.128
3/8	.3750	9.525
25/64	.3906	9.922
13/32	.4063	10.319
27/64	.4219	10.716
7/16	.4375	11.112
29/64	.4531	11.509
15/32	.4688	11.906
31/64	.4844	12.303
1/2	.5000	12.700
33/64	.5156	13.097
17/32	.5313	13.494
35/64	.5469	13.891
9/16	.5625	14.287
37/64	.5781	14.684
19/32	.5938	15.081
39/64	.6094	15.478
5/8	.6250	15.875
41/64	.6406	16.272
21/32	.6563	16.688
43/64	.6719	17.085
11/16	.6875	17.462
45/64	.7031	17.859
23/32	.7188	18.256
47/64	.7344	18.653
3/4	.7500	19.050
49/64	.7645	19.447
25/32	.7813	19.843
51/64	.7969	20.240
13/16	.8125	20.637
53/64	.8281	21.034
27/32	.8438	21.430
55/64	.8594	21.827
7/8	.8750	22.224
57/64	.8906	22.621
29/32	.9063	23.018
59/64	.9219	23.415
15/16	.9375	23.812
61/64	.9531	24.209
31/32	.9688	24.606
63/64	.9844	25.003
1	1.0000	25.400

Expected Surface Finish by Grit Size

Use these charts as guides only. Surface finish is affected by several variables: machine type and condition, type of material ground, coolant, wheel speed, bond system, etc.

DIAMOND

Grit Size	Expected Finish Micro Inch AA	Maximum Depth of Cut per Pass for Grit Size
100	24 to 32	0.001" to 0.002"
120	16 to 18	0.001" to 0.002"
150	14 to 16	0.001" to 0.002"
180	12 to 14	0.0007" to 0.001"
220	10 to 12	0.0007" to 0.001"
320	8	0.0004" to 0.0006"
400	7 to 8	0.0003" to 0.0005"

cBN

Grit Size	Expected Finish With Oscillation	Expected Finish Plunge
100	35 – 40	40 – 45
120	30 – 35	35 – 40
150	25 – 30	30 – 35
180	20 – 25	25 – 30
220	15 – 20	20 – 25
320	10 – 15	15 – 20
400	4 – 8	5 – 10

Recommended Wheel Speeds for Diamond and cBN Wheels

WET GRINDING

	Cup Wheels 11V9, 12V9, 15V9, etc.	Peripheral Wheels 1A1, 1V1, 1A1R, etc.
Diamond Grinding Wheels		
Resin Bond Wheels	4921 to 7874 SFPM 25 to 40 m/s	4921 to 7874 SFPM 25 to 40 m/s
Metal Bond Wheels		3937 to 5906 SFPM 20 to 30 m/s
Vitrified Bond Wheels	2953 to 5906 SFPM 15 to 30 m/s	2953 to 5906 SFPM 15 to 30 m/s

cBN Grinding Wheels

	Cup Wheels 11V9, 12V9, 15V9, etc.	Peripheral Wheels 1A1, 1V1, 1A1R, etc.
Diamond Grinding Wheels		
Resin Bond Wheels	5906 to 9843 SFPM 30 to 50 m/s	5906 to 9843 SFPM 30 to 50 m/s
DRY GRINDING		
Diamond Grinding Wheels		
Resin Bond Wheels	2756 to 3543 SFPM 14 to 18 m/s	2756 to 3543 SFPM 14 to 18 m/s
cBN Grinding Wheels		
Resin Bond Wheels	2953 to 5906 SFPM 15 to 30 m/s	2953 to 5906 SFPM 15 to 30 m/s

Note: These are not the maximum operating speeds (MOS).

Consult ANSI B7.1 or contact your Norton representative for MOS.

Wheel Speed Calculation

To convert M/S to SFPM:	Multiply M/S x 196.85 = SFPM
To convert SFPM to M/S:	Divide SFPM by 196.85 = M/S
To convert RPM to SFPM:	Multiply wheel diameter in inches x RPM x 0.262
M/S = meters/second RPM = Revolutions Per Minute SFPM = Surface Feet Per Minute	



Norton Winter offers an extensive line of stock Diamond and cBN (cubic Boron Nitride) grinding products, including resin, vitrified, metal and MSL (metal single layer) bond offerings, under the "99" quality line. Premium, high-performance stock resin bond options are also available.

Applications:

- B99 Diamond Wheels**
- Sharpening cemented carbide cutting tools
 - Cutting off carbide rod
 - Grinding or cutting off non-ferrous materials such as ceramics or glass
 - Surface grinding dies
 - O.D. grinding spray coatings

B99 cBN Wheels

- Sharpening high-speed (M2, D2, T15, etc.) steel cutting tools
- Surface and ID grinding hardened steel die components
- Precision grinding steel parts Rc 50 or harder

Stock Shapes:

DW Mounted Points, HH1 and HH2 Hand Hones, and 1A1, 1A1R, 1V1P, 4A2P, 6A2C, 6A2H, 11V9, 12A2, 12V9, and 15V9 Wheels

Abrasive Grain:

Diamond and cBN (cubic Boron Nitride)

Abrasive Bonds:

Resin, Metal, Metal Single Layer, and Vitrified

Superior performance for grinding non-ferrous materials



DIAMOND WHEELS

- High quality synthetic diamond
- High material removal rates with longer wheel life vs. conventional green silicon carbide wheels
- Wide variety of stock wheel shapes and bond options available

Diamond Bond Types

BONDS	DESCRIPTION
Diamond Wheel Bonds	
Pre-engineered resin bond – B99	Free cutting; superior form holding; efficient wet or dry
Premium, heavy-duty resin bond – B105	Ideal for dry toolroom reconditioning applications
Metal bond – M99	Ideal for 1A1R cut-off applications and grinding glass or ceramic materials
MSL (metal single layer) diamond tools; no wheel dressing required	Fast stock removal, cool cutting; excellent for dry offhand finishing of carbide
Vitrified bond – V99	Most durable under high grinding forces; excellent for wet, offhand finishing of carbide tools

Superior performance for grinding ferrous materials



cBN WHEELS

- cBN (cubic Boron Nitride) abrasive material is second in hardness to diamond
- Easily cuts difficult-to-grind steel parts Rc 50 or harder
- Highly wear resistant and thermally stable

cBN Bond Types

BONDS	DESCRIPTION
cBN Wheel Bonds	
Pre-engineered resin bond – B99	Free cutting, superior form holding
Premium Aztec III resin bond	Most efficient for dry tool resharpening
Premium Aztec .007 resin bond	Most efficient for dry tool resharpening where heavy stock removal is desired

How to Select Diamond Wheels

SELECT:	
WHEEL SHAPE	Select desired wheel shape
WHEEL DIMENSIONS	D x T x H Select Diameter x Thickness x Hole from the availability tables. Use blueprint numbers where available.
ABRASIVE	Select the abrasive based on horsepower, grinding wet or dry, and contact with steel.
	Resin Bond Wheels:
	ASD Armored diamond, durable. Versatile: can be used wet or dry. Also should be used when carbide and steel are ground in the same operation.
	D Micron-sized diamond. Used for finishing and polishing operations.
	SD Free cutting standard. Used wet or dry; should be used on low horsepower (3/4 hp or less) machines.
	Metal Bond Wheels:
	M4D Armored, durable standard. A strong, blocky crystal designed for high performance on glass, ceramics, refractories and other non-metallics.
	Vitrified Bond Wheels:
	RMD Medium strength. Specifically designed for use with vitrified bonds.
	SD Free cutting standard.
GRIT SIZE	Select the abrasive grit size based on finish and material removal rate required.
	100 Roughing. The most common grit size for roughing operations.
	120 For roughing where 100 is too coarse. Also for cut-off applications.
	150 Medium stock removal plus good finish. For combined roughing and finishing applications.
	180 Medium stock removal plus good finish. To improve finish.
	220 Finishing
	320 Finishing
	400 Fine Finishing
	10/20 Mic Super Fine Finishing
	6/12Mic Super Fine Finishing
GRADE	The hardness of the wheel
	Resin Bond Wheels:
	R Norton standard
	N Free cutting
	Metal Bond Wheels:
	N Norton standard
	Vitrified Bond Wheels:
	P Norton standard
	R Most durable
	CONCENTRATION
50 Most economical. For broad area of contact grinding.	
75 Norton standard. Freer cutting than 100 and the most economical for dry grinding with ASD diamond.	
100 Very durable. Recommended under flood coolant conditions; for use with 220 grit or finer, when durability is required, and for cut-off applications.	
125 Form holding. Used in high volume, high pressure coolant, precision applications on high-speed tool steels.	
BOND	Select the bond based on the material being ground and grinding application.
	Resin Bond:
	B99 Norton standard. Versatile enough to be used wet or dry on most tool making or sharpening applications.
	B105 Premium, heat-reducing bond. For dry toolroom reconditioning applications.
	Metal Bond:
	M99 Best suited for 1A1R cut-off applications as well as grinding glass or ceramic materials.
	MSL Metal Single Layer. Available in shape 6A2C for dry, offhand reconditioning of carbide tools.
	Vitrified Bond:
	V99 Best for wet offhand finishing of carbide tools as well as plunge grinding of carbide tools.
	ABRASIVE DEPTH
1/16	
1/8	
1/4	
9/32	
Solid	

How to Select Stock cBN Wheels

SELECT:			
WHEEL SHAPE	Select desired wheel shape		
WHEEL DIMENSIONS		D x T x H	Select Diameter x Thickness x Hole from the availability tables. Use blueprint numbers where available.
ABRASIVE	Select cBN abrasive to grind hard tool steels such as A2, D2, T15, etc., and tough alloy steels.	Resin Bond Wheels: CB	Norton standard coated cBN (cubic Boron Nitride). Optimized for high performance in resin bond systems.
GRIT SIZE	Select the grit size based on finish and material removal rate required.	100 120 150	Roughing. The most common grit size for roughing operations. For roughing where 100 is too coarse. Also for cut-off applications. Medium stock removal plus good finish. For combined roughing and finishing applications.
GRADE	The hardness of the wheel	Q T W	Approximately 50 concentration. Used on wide area of contact applications. Norton standard. Approximately 75 concentration. T is the first choice for lower horsepower equipment or large area of contact between the wheel and the work piece. Ideal for resharpening applications with 11V9, 12A2, 4A2P, and 15V9 wheel shapes when dry grinding. Most durable. Approximately 100 concentration, W is recommended for high volume coolant operations: flute grinding from solid, flute polishing, surface, and cylindrical grinding.
BOND	Select the bond depending on the type of grinding application.	B99 Aztec III Aztec .007	Norton standard. Pre-engineered for optimal performance with cBN abrasive. Available in all shapes. The advanced heat-reducing, lubricating resin bond. Used for dry grinding tool steels. The premium resin bond for increased feed rates, high stock removal and heavier cuts – when dry grinding tool steels.
ABRASIVE DEPTH	Usable abrasive	1/16 1/8 1/4 Solid	

Competitive Cross Reference Guides

	Abrasives				Bonds						
	Resin Diamond	Resin Diamond	Metal Diamond	Resin/Vitrified cBN	Resin Diamond	Resin Diamond	Metal Diamond	Vitrified Diamond	Resin cBN	Resin cBN	Resin cBN
NORTON WINTER	ASD	SD	M4D	CB	B99/B99E	B105	M99	V99	B99/B99E	B99EF	AZTEC
3M / General Industrial Diamond / Diamond Productions, Inc	CGD, ND	GD, D, MD		CB	PS			V		BC	
Abrasive Technology	SN	S		cBN	B		M		B		
Accurate Diamond Tool	NCD	D, MD		BN	B		M				
Citco	5SD, 6SD	SD	MD	CB	B43, B52		M		B26	C3	
Engis	NMD	D, MD		cBN, CB							
Noritake				CBC		BX4			BD/B38		BX4
Radiac / US Diamond	NCD, WD, 1WD, MDC	D, MD	MD4C	B, CB, BZ	B7Z, BB, B5, B56, BN		M, MF	V	BZ, BN		
Regal Diamond				B, BB	BJ						
Superabrasives, Inc.	MDN	D, MD		B					B82	B5	
Tyrolit / Wickman / Bay State / Cincinnati	SDM, XDL, XDN, D, 7D, CMD	SD, D, 6D, MD	1D	5B, 1BN, BN, BM	BD, BC, BX33, B52, B6	Amigo	MI, MSS, MB		B72, B56, BG, B7	BXU8	Amigo
Wendt / Slip Naxos / Winterthur	SDK			B, BXW					RN	RR	

	ABRASIVES		BONDS	
	UNIVEL/G-FORCE		DIAMOND AND cBN	
NORTON WINTER POLYIMIDE	DIAMOND AD	cBN BX	UNIVEL	G-FORCE
3M / General Industrial Diamond / Diamond Productions, Inc	D	CB	BP	BPP
Citco	SD	CB	P	C5

TECH TIP

- Truing makes the wheel concentric with the spindle
- Dressing opens the wheel's cutting face
- Always true and dress diamond and cBN wheels prior to use
- Diamond and cBN wheels with grit sizes 100 – 180 can be trued with a Brake Controlled Truing Device
- Refer to the "Mounting, Truing and Dressing Guide" for more information



It is the user's responsibility to refer to and comply with ANSI B7.1

TECH TIP

Diamond Grinds:

In general, diamond is used to grind non-ferrous materials, because of an adverse reaction between diamond and iron.

- Cemented carbide
- Glass
- Ceramics
- Fiberglass
- Plastics
- Stone
- Abrasives
- Electronic components and materials

cBN Grinds:

cBN is used to grind ferrous materials.

- High-speed tool steels
- Die steels
- Hardened carbon steels
- Alloy steels
- Aerospace alloys
- Hardened stainless steel
- Abrasion-resistant ferrous materials



It is the user's responsibility to refer to and comply with ANSI B7.1



B99 Express Service

The B99 Express service is designed to offer you up to 65,000 made-to-order choices of resin bond Diamond and cBN wheels. Almost all popular sizes are offered.

12" and less diameter B99 Express wheels will ship in two weeks or less from the date the order is received. 14" and larger wheels are available at standard lead-times.



Our Norton Winter line offers a comprehensive stock product selection to service most of your needs – with the fastest delivery and lowest total costs.

Review this stock section first. If you can not find the specification you need:

- Then refer to the brief descriptions of our B99 Express and CNC lines (following this section)
- See the more in-depth B99 Express product availability in our "Diamond and cBN Superabrasives Standard Catalog" #8068 on www.nortonabrasives.com or contact your Norton representative for a complete listing of made-to-order superabrasive products.



Type DW

- D - Diameter
- T - Thickness
- Y - Spindle Diameter
- SP - Spindle Length

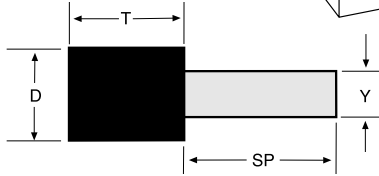



Type HH1

- L - Length
- L1 - Length of Abrasive
- X - Abrasive Depth
- W - Width
- T - Thickness (Back)





Type HH2

- L - Length
- L1 - Length of Abrasive
- X - Abrasive Depth
- W - Width
- T - Thickness (Back)





Type 1A1

- D - Diameter
- X - Abrasive Depth
- H - Hole
- T - Thickness

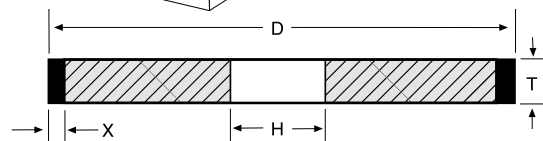

Type 1A1R

- D - Diameter
- X - Abrasive Depth
- H - Hole
- E - Back Thickness
- T - Thickness

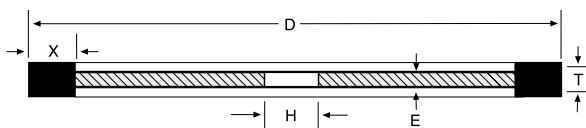

SIZE (D x T)	SPECIFICATION	PART #
Type DW Mounted Points - Diamond		
3/16 x 1/4	SD100-R100B99-SOLID	690141 92238
Steel Spindle 1/8 x 1-1/2		
1/2 x 1/2	SD220-R100B99-SOLID	690141 92249
Steel Spindle 1/4 x 1-1/2		
3/4 x 3/8	SD150-R100B99-SOLID	690141 92251
Steel Spindle 1/4 x 1-1/2		
1 x 1/2	SD100-R100B99-SOLID	690141 92428
Steel Spindle 1/4 x 1-1/2		
Type DW Mounted Points - cBN		
3/16 x 1/4	CB150-WB99-SOLID	690141 92258
Carbide Spindle .125 x 1-3/4		
SIZE (T x W x L)	SPECIFICATION	PART #
Type HH1 Hand Hones - Diamond		
1/4 x 1/4 x 6	ASD220-R100B99-1/16	690141 92139
One 1/16 deep 1" long insert in one 1/4 surface		
1/4 x 3/8 x 4	ASD100-R100B99-1/16	690141 92141
One 1/16 deep 1" long insert in one 3/8 surface	ASD180-R100B99-1/16	690141 92142
	ASD220-R100B99-1/16	690141 91670
	ASD320-R100B99-1/16	690141 91672
	ASD400-R100B99-1/16	690141 92143
	D10/20MIC-R100B99-1/16	690141 92144
	SD320-100V99-1/16	690141 92140
Type HH2 Hand Hones - Diamond		
1/4 x 3/8 x 4	ASD120/220-R100B99-1/16	690141 92150
Two 1/16 deep 1" long inserts in one 3/8 surface	ASD220/320-R100B99-1/16	690141 92178
	ASD220/400-R100B99-1/16	690141 92179
	ASD320/400-R100B99-1/16	690141 92180
	SD220/320-100V99-1/16	690141 92149
SIZE (D x T x H)	SPECIFICATION	PART #
Type 1A1 Straight - Diamond		
1 x 1/4 x 1/4	SD100-R100B99-1/8	690141 92175
1-1/2 x 1/2 x 1/2	D6/12MIC-N100B99-1/8	690141 92176
2 x 1/8 x 1/4	SD100-R100B99-1/8	690141 92184
3 x 1/4 x 3/4	SD180-N100B99-1/8	690141 92187
4 x .020 x 1-1/4	SD320-R100B99-1/8	690141 92188
4 x 1/32 x 1-1/4	SD100S-R100B99-1/4	690141 92192
4 x 1/16 x 1-1/4	SD100S-R100B99-1/4	662602 73583
	SD150-R100B99-1/4	662602 73584
	SD220-R100B99-1/4	662602 73586
4 x 1/8 x 3/4	SD150-R100B99-1/4	690141 92024
4 x 1/8 x 1-1/4	SD150-R100B99-1/4	690141 91677
4 x 1/4 x 1/2	SD150-R100B99-1/4	662602 73590
4 x 1/4 x 3/4	SD150-R100B99-1/4	662602 73592
4 x 1/4 x 1-1/4	SD100S-R100B99-1/4	662602 73587
	SD120-R100B99-1/4	662602 73588
	SD150-R100B99-1/4	662602 73589
4 x 1/2 x 1-1/4	SD150-R100B99-1/4	662602 73594
6 x 1/32 x 1-1/4	SD220-R100B99-1/8	690141 92197
6 x 1/16 x 1-1/4	SD100-R100B99-1/4	662602 73596
	SD150-R100B99-1/4	662602 73597
	SD180-R100B99-1/4	662602 73598
	SD220-R100B99-1/4	662602 73599
6 x 1/8 x 1-1/4	ASD150-R75B99-1/4	662602 73617
	SD100-R100B99-1/4	662602 73611
	SD150-R100B99-1/4	662602 73613
	SD180-R100B99-1/4	662602 73614
	SD220-R100B99-1/4	662602 73615
6 x 1/4 x 1-1/4	ASD100S-R75B99-1/4	690141 92205
	ASD120-R75B99-1/4	690141 92769
	ASD150-R75B99-1/4	662602 73609
	ASD180-R75B99-1/4	690141 92770
	ASD220-R75B99-1/4	690141 92771
	ASD320-R75B99-1/4	690141 92772
	RMD180-P100V99-1/8	690141 92203
	SD120-R100B99-1/4	690141 91691
	SD150-R100B99-1/4	690141 91692
	SD180-R100B99-1/4	690141 91693
	SD220-R100B99-1/4	690141 92764

Standard Package = 1 mounted point, hand hone, or wheel
Continued

SIZE (D x T x H)	SPECIFICATION	PART #
Type 1A1 Straight – Diamond continued		
6 x 3/8 x 1-1/4	ASD120-R75B99-1/4	690141 92773
	ASD150-R75B99-1/4	690141 91695
	SD150-R100B99-1/4	690141 91696
6 x 1/2 x 1-1/4	ASD120-R75B99-1/4	690141 92777
	ASD150-R75B99-1/4	690141 91698
	ASD220-R75B99-1/4	690141 92779
	ASD320-R75B99-1/4	690141 92780
	SD120-R100B99-1/4	662602 73557
	SD150-R100B99-1/4	662602 73561
	SD180-R100B99-1/4	690141 91700
7 x 1/4 x 1-1/4	ASD150-R75B99-1/4	690141 91701
	SD100S-R100B99-1/4	690141 92210
	SD120-R100B99-1/4	662602 73566
	SD150-R100B99-1/4	690141 91703
	SD180-R100B99-1/4	690141 91704
	SD220-R100B99-1/4	690141 91705
7 x 3/8 x 1-1/4	SD120-R100B99-1/4	690141 91849
	SD220-R100B99-1/4	690141 91852
7 x 1/2 x 1-1/4	ASD100-R75B99-1/4	690141 92211
	ASD150-R75B99-1/4	690141 91853
	ASD180-R75B99-1/4	690141 92212
	SD120-R100B99-1/4	690141 91854
	SD150-R100B99-1/4	690141 91855
	SD180-R100B99-1/4	690141 91856
	SD220-R100B99-1/4	690141 91857
	SD150-R100B99-1/4	662602 73574
	ASD120-R75B99-1/4	690141 92305
	ASD180-R100B99-1/4	690141 92306
8 x 1/2 x 1-1/4	ASD150-R75B99-1/4	690141 92310
	ASD150-R75B99-1/4	690141 92311
10 x 1/2 x 3	ASD120-R75B99-1/4	690141 92312
	ASD120-R75B99-1/4	690141 92313
12 x 1/2 x 3	ASD150-R75B99-1/4	690141 92314
12 x 1 x 3	ASD120-R75B99-1/4	690141 92315
12 x 1 x 5	ASD120-R75B99-1/4	690141 92316
14 x 1/2 x 5	ASD150-R75B99-1/4	690141 92317
14 x 1 x 5	ASD120-R75B99-1/4	690141 92318
20 x 1 x 12	ASD120-R75B99-1/4	690141 92319

Standard Package = 1 wheel


SIZE (D x T x H)	SPECIFICATION	PART #
Type 1A1 Straight – cBN		
6 x 1/8 x 1-1/4	CB120-TB99-1/4	662602 73601
6 x 1/4 x 1-1/4	CB120-TB99-1/4	662602 73605
6 x 1/2 x 1-1/4	CB120-TB99-1/4	662602 73607
7 x 1/4 x 1-1/4	CB120-TB99-1/4	690141 92021
7 x 1/2 x 1-1/4	CB120-TB99-1/4	662602 73567
12 x 1/2 x 5	CB150-TB99-1/4	662602 73560
12 x 1 x 5	CB150-TB99-1/4	662602 73562
Type 1A1R Cut-Off – Diamond		
3 x .020 x 1/2 (ME104177)	M4D150-N50M99-1/8	690141 92060
4 x .012 x 1/2 (ME104180)	M4D180-N75M99-1/8	690141 92063
4 x .020 x 1/2 (ME104180)	M4D220-N75M99-1/8	690141 92064
4 x .030 x 1/2 (ME104180)	M4D220-N100M99-1/8	690141 92067
4 x .030 x 1/2 (ME104180)	M4D150-N75M99-1/8	690141 92068
4 x 1/32 x 3/4 (ME43570)	SD100S-R100B99-1/4	690141 92151
4 x 1/32 x 1-1/4 (ME43570)	SD120-R100B99-1/4	690141 91706
5 x .015 x 1/2 (ME104180)	SD100S-R100B99-1/4	690141 92152
6 x .017 x 1-1/4 (ME104180)	M4D220-N100M99-1/8	690141 92070
6 x .025 x 1-1/4 (ME104180)	M4D150-N100M99-1/8	690141 92082
6 x .035 x 5/8 (ME104177)	M4D220-N100M99-1/8	690141 92083
6 x .035 x 1-1/4 (ME43572)	M4D150-N100M99-1/8	690141 92086
	SD100-R75B99-1/4	690141 92155
	ASD100S-R100B99-1/4	690141 92158
	ASD120-R100B99-1/4	690141 92159
	SD100-R100B99-1/4	690141 91858
	SD100S-R100B99-1/4	690141 92156
	SD220-R100B99-1/4	690141 92157

Continued

TECH TIP

Cylindrical Grinding Applications – 1A1 wheels:

- Includes all outside grinding of round parts, even though the finished product is not always a true cylinder
- Infeed at both ends of the traverse to keep wheel face flat
- Use work supports to prevent deflection
- Rough grinding traverse speed should be 1/2 to 2/3 of the thickness of the wheel per work revolution
- Finishing grinding traverse speed should be 1/2" or less per work revolution




It is the user's responsibility to refer to and comply with ANSI B7.1

TECH TIP

Cut-off Applications – 1A1R wheels:

- Use the largest diameter flanges possible
- Use flanges of equal diameter
- Use the thickest wheel possible for increased stiffness and straightness of cut



cBN wheels are used on hardened steels.

Diamond wheels are used to cut or slot carbide, glass or ceramic parts.



It is the user's responsibility to refer to and comply with ANSI B7.1

TECH TIP

Diamond Grinds:

- Cemented carbide
- Glass
- Ceramics
- Fiberglass
- Plastics
- Stone
- Abrasives
- Electronic components and materials

cBN Grinds:

- High-speed tool steels
- Die steels
- Hardened carbon steels
- Alloy steels
- Aerospace alloys
- Hard stainless steel
- Abrasion-resistant ferrous materials

Can't Find Your Specification Here?






Review this stock section first. If you can not find the specification you need:

- Then refer to the brief descriptions of our B99 Express and CNC lines (following this section)
- See the more in-depth B99 Express product availability in our "Diamond and cBN Superabrasives Standard Catalog" #8068 on www.nortonabrasives.com or contact your Norton representative for a complete listing of made-to-order superabrasive products.

SIZE (D x T x H)	SPECIFICATION	PART #
Type 1A1R Cut-Off – Diamond		
6 x .035 x 1-1/4 (ME73316)	ASD100S-R100B99-9/32	690141 92164
	ASD120-R100B99-9/32	690141 92165
	SD100-R100B99-9/32	690141 92161
	SD120-R100B99-9/32	690141 92162
	SD150-R100B99-9/32	690141 92163
	SD100-R50B99-1/8	690141 92166
6 x .045 x 1-1/4 (ME83991)		
6 x .055 x 1-1/4 (ME104177)	M4D100-N75M99-1/8	690141 92099
7 x .035 x 1-1/4 (ME82347)	ASD100-R100B99-1/4	662602 38686
7 x .055 x 1-1/4 (ME104177)	M4D120-N100M99-1/8	690141 92108
8 x .030 x 1-1/4 (ME104180)	M4D180-N75M99-1/8	690141 92110
8 x .045 x 5/8 (ME43569)	SD120-R100B99-1/4	690141 92167
8 x .045 x 1-1/4 (ME43569)	SD120-R100B99-1/4	690141 92169
8 x .050 x 1-1/4 (ME104180)	M4D180-N75M99-1/8	690141 92114
10 x .050 x 1-1/4 (ME 43565)	ASD120-R100B99-1/4	662602 30236
	CD100-R100B99-1/4	690141 92815
	SD120-R100B99-1/4	690141 92170
12 x .070 x 3/4 (ME 43567)	SD150-R100B99-1/4	690141 92173
Type 1A1R Cut-off – cBN		
6 x .035 x 1-1/4 (ME43572)	CB100-WB99-1/4	690141 92160
Type 1V1P Fluting – Diamond		
6 x 3/32 x 1-1/4	ASDC320C-R100B99-1/4	690141 92761
Face Bevel 1 Side 20 Deg	ASD320B-R125B99-1/4	690141 92302
Copper Core (ME89562)		
Type 4A2P Dish – Diamond		
6 x 3/8 x 1-1/4	ASD120-R75B99-1/16	690141 92280
Rim Width 1/4"		
(ME88369)		

Standard Package = 1 wheel

Refer to "Brake Controlled Truing Devices" and "Dressing Sticks" in the Dressing Solutions section for truing and dressing products.

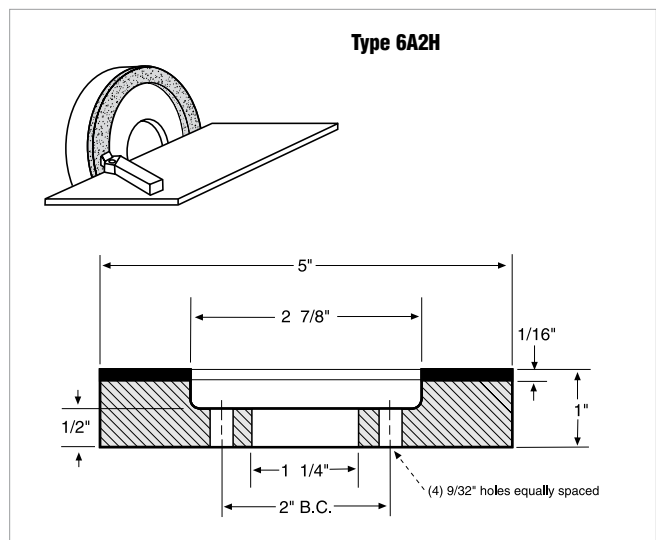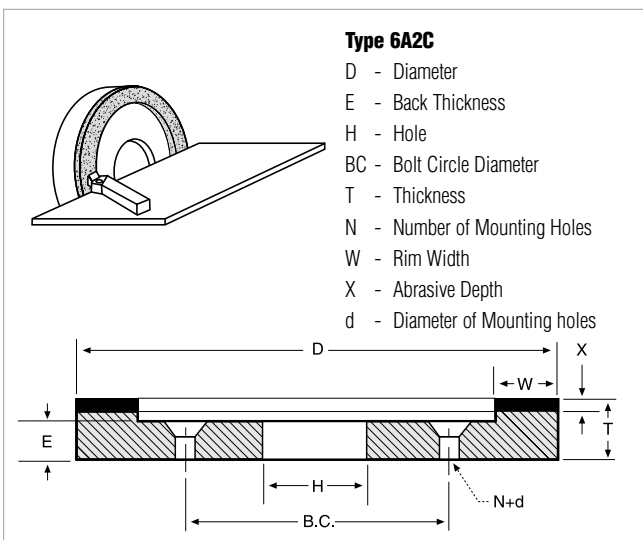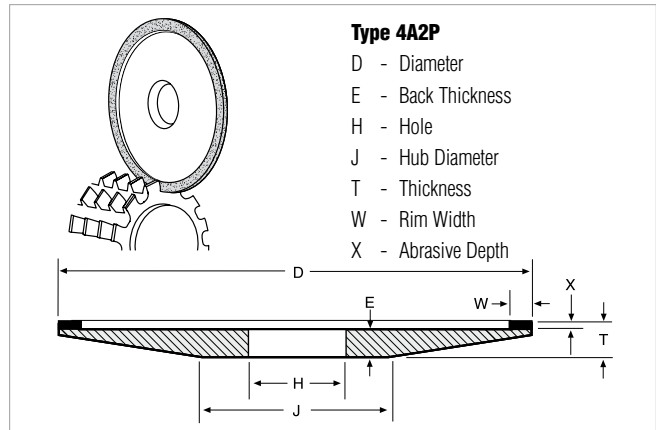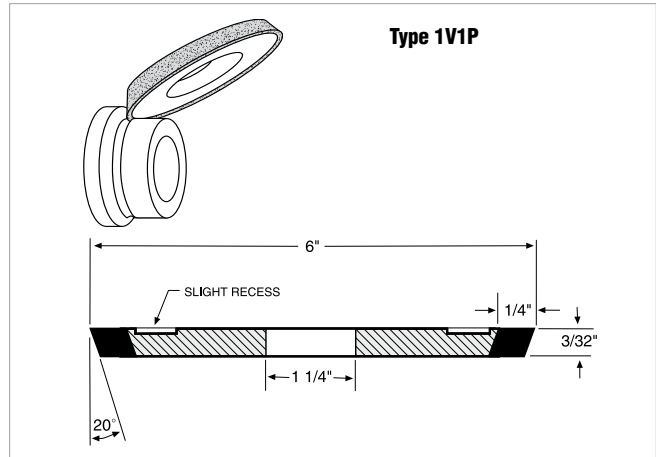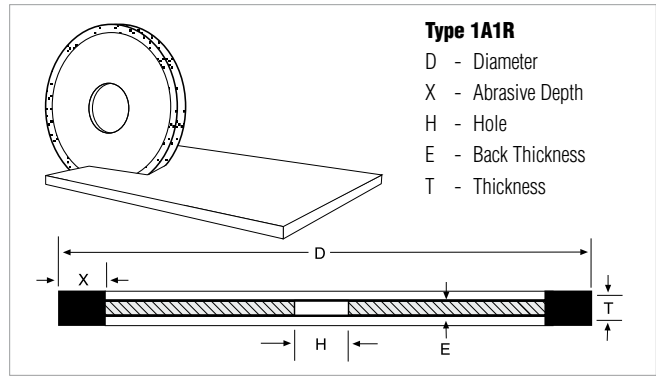

SIZE (D x T x H)	SPECIFICATION	PART #
Type 6A2C Straight cup – Diamond		
6 x 7/16 x 1-1/4 Rim Width 1" (0640185M)	D120/140-H-MSL	662602 69172
6 x 3/4 x 1-1/4 Rim Width 3/4" (ME27853)	SD220-R50B99-1/16	690141 91665
	ASD120-R75B99-1/16	690141 91860
	ASD120-R75B99-1/8	690141 92786
	SD150-P50V99-1/16	690141 92217
6 x 3/4 x 1-1/4 Rim Width 1/2" (ME30621)	SD220-P50V99-1/16	690141 91623
	ASD120-R75B99-1/8	662602 73565

Standard Package = 1 wheel

SIZE (D x T x H)	SPECIFICATION	PART #
Type 6A2H Straight Cup – Diamond		
5 x 1 x 1-1/4 Rim Width 1-1/16" (ME27084)	SD320-R50B99-1/16	690141 92221

Standard Package = 1 wheel

Best choice for dry grinding carbide tools

ASD DIAMOND / B105 RESIN BOND WHEELS

- Premium quality diamond produces keen cutting tools that hold their shape, are easier to sharpen, and require fewer reconditionings
- Advanced, self lubricating bond minimizes heat generation and thermal damage to tool for increases tool life and productivity; lasts more than 2X as long as standard diamond wheels for lowest total wheel costs and highest productivity
- Unique self-dressing core eliminates wheel core damage and downtime to dress core


TIER: **BEST**
BOND: **B105**

SIZE (D x T x H)	SPECIFICATION	PART #
Type 11V9 Flaring Cup – Diamond		
3-3/4 x 1-1/2 x 1-1/4 Insert Length 3/8" (ME92192)	ASD120-R75B105-1/16	690141 91905
	ASD150-R75B105-1/16	690141 91906
	ASD100S-R75B105-1/8	690141 91908
	ASD120-R75B105-1/8	690141 91909
5 x 1-3/4 x 1-1/4 Insert Length 7/16" (ME98298)	ASD150-R75B105-1/8	690141 91910
	ASD120-R75B105-1/16	690141 91913
	ASD150-R75B105-1/16	690141 91914
	ASD100S-R75B105-1/8	690141 91916
	ASD150-R75B105-1/8	690141 91918

TIER: **BETTER**
BOND: **B99**

SIZE (D x T x H)	SPECIFICATION	PART #
Type 11V9 Flaring Cup – Diamond		
3 x 1-1/4 x 3/4 Insert Length 3/8" (ME93912)	ASD120-R75B99-1/16	690141 92291
	ASD150-R75B99-1/16	690141 92292
	SD150-R100B99-1/16	690141 92293
	ASD120-R75B99-1/16	690141 92022
3-3/4 x 1-1/2 x 3/4 Insert Length 3/8" (M92192)		
3-3/4 x 1-1/2 x 1-1/4 Insert Length 3/8" (ME92192)	ASD150C-R50B99-1/8	690141 90751
	ASD120-R75B99-1/16	690141 91660
5 x 1-3/4 x 1-1/4 Insert Length 7/16" (ME98298)	ASD150-R75B99-1/16	690141 91725
	ASD100S-R75B99-1/8	690141 91653
	ASD120-R75B99-1/8	690141 91652
	ASD150-R75B99-1/8	690141 91651
	ASD180-R75B99-1/8	690141 91650
	SD120-R100B99-1/16	690141 91657
	SD150-R100B99-1/16	690141 91656
	SD220-R100B99-1/16	690141 91654
	SD320-R100B99-1/16	690141 92814
	SD100S-R100B99-1/8	690141 92427
	SD120-R100B99-1/8	690141 91649
	SD150-R100B99-1/8	690141 91648
	SD180-R100B99-1/8	690141 91647
	SD220-R100B99-1/8	690141 91646
	ASD100S-R75B99-1/16	690141 91645
	ASD120-R75B99-1/16	690141 91644
	ASD150-R75B99-1/16	690141 91643
	ASD100S-R75B99-1/8	690141 91637
	ASD120-R75B99-1/8	690141 91636
	ASD150-R75B99-1/8	690141 91635
	ASD180-R75B99-1/8	690141 91634
	SD120-R100B99-1/16	690141 91641
	SD150-R100B99-1/16	690141 91640
	SD220-R100B99-1/16	690141 91638
	SD150-R100B99-1/8	690141 91632
	SD180-R100B99-1/8	690141 91631

Standard Package = 1 Wheel

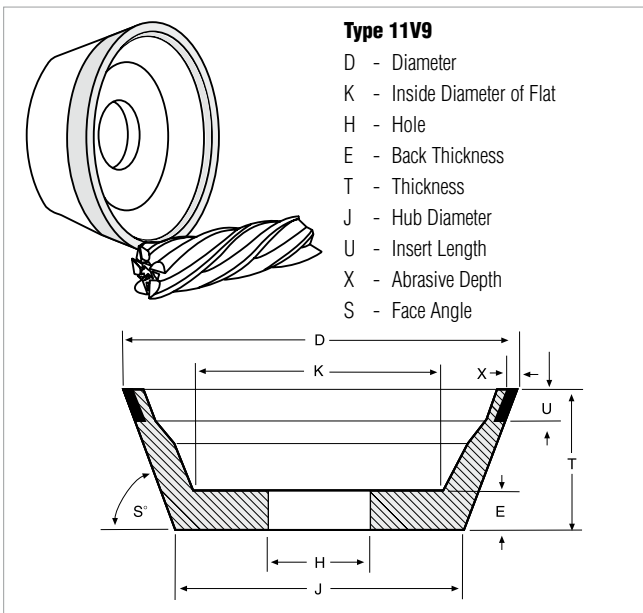

Best choice for dry tool sharpening

AZTEC cBN WHEELS

- Consistent, high quality cBN (cubic Boron Nitride) abrasive which offers 85% longer life than standard cBN wheels
- Advanced heat-reducing bond conducts heat away from the workpiece for freer cutting action and extended wheel life; helps maintains cutting tool steel integrity and extends tool life
- AZTEC III lubricating bond eliminates steel braze and loading; AZTEC .007 allows increased infeed (start at .007) for high stock removal

TIER: **BEST**
BOND: **AZTEC**


SIZE (D x T x H)	SPECIFICATION	PART #
Type 11V9 Flaring Cup – cBN		
3-3/4 x 1-1/2 x 1-1/4 Insert Length 3/8" (ME92192)	AZTEC .007-100-1/16	690141 95683
	AZTEC .007-150-1/16	690141 95679
	AZTEC III 100T-1/16	690141 91832
	AZTEC III 120T-1/16	690141 91833
	AZTEC III 150T-1/16	690141 91834
	AZTEC III 100T-1/8	690141 91838
5 x 1-3/4 x 1-1/4 Insert Length 7/16" (ME98298)	AZTEC III 120T-1/8	690141 91839
	AZTEC III 150T-1/8	690141 91840
	AZTEC .007-100-1/16	690141 95685
	AZTEC III 100T-1/16	690141 91841
	AZTEC III 120T-1/16	690141 91842
	AZTEC III 150T-1/16	690141 91843
	AZTEC .007-100-1/8	690141 95686
	AZTEC .007-150-1/8	690141 95682
	AZTEC III 100T-1/8	690141 91844

Standard Package = 1 Wheel


TIER: **BETTER**
BOND: **B99**

SIZE (D x T x H)	SPECIFICATION	PART #
Type 11V9 Flaring Cup – cBN		
3-3/4 x 1-1/2 x 1-1/4 Insert Length 3/8" (ME92192)	CB100-TB99-1/16	690141 91719
	CB100-TB99-1/8	690141 91722
	CB120-TB99-1/8	690141 91723
	CB150-TB99-1/8	690141 91724
	CB120-WB99-1/16	690141 91720
5 x 1-3/4 x 1-1/4 Insert Length 7/16" (ME98298)	CB120-TB99-1/8	690141 91715
	CB150-TB99-1/8	690141 91716

Standard Package – 1 Wheel



Type 11V9
D - Diameter
K - Inside Diameter of Flat
H - Hole
E - Back Thickness
T - Thickness
J - Hub Diameter
U - Insert Length
X - Abrasive Depth
S - Face Angle

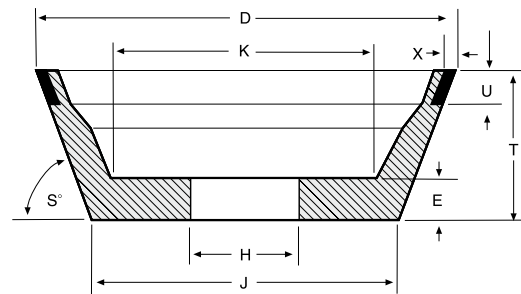

Refer to “Brake Controlled Truing Devices” and “Dressing Sticks” in the Dressing Solutions section for truing and dressing products.

TIER: **BETTER**
BOND: **B99**

SIZE (D x T x H)	SPECIFICATION	PART #
Type 12A2 Dish – Diamond		
4 x 1/2 x 1-1/4 Rim Width 1/4" (ME40745)	SD180-R75B99-1/8	690141 92223
6 x 1 x 1-1/4 Rim Width 3/16" (ME27758)	ASD120-R75B99-1/8 ASD180-R75B99-1/8	690141 91630 690141 92226
Type 12A2 Dish – cBN		
6 x 1 x 1-1/4 Rim Width 3/16" (ME27758)	CB120-TB99-1/16	690141 92227
Type 12V9 Dish – Diamond		
3 x 7/16 x 3/4 Insert Length 7/16" (ME41755)	SD150-R100B99-1/16	690141 92228
4 x 1/2 x 1-1/4 Insert Length 1/4" (ME58734)	SD180-R100B99-1/8	690141 91629
6 x 3/4 x 1-1/4 Insert Length 3/8" (ME48666)	ASD150-R75B99-1/16	690141 91628
Type 12V9 Dish – cBN		
4 x 1/2 x 1-1/4 Insert Length 1/4" (ME58734)	CB120-TB99-1/8	690141 92229
6 x 3/4 x 1-1/4 Insert Length 3/8" (ME48666)	CB120-TB99-1/8 CB150-TB99-1/8	690141 92020 690141 92784
Type 15V9 Dish – Diamond		
6 x 3/4 x 1-1/4 Insert Length 3/8"	SD150-R100B99-1/16	690141 92230

Standard Package = 1 wheel




Can't Find Your Specification Here?

We offer a comprehensive stock product selection to service most of your needs

– with the fastest delivery and lowest total cost.

Review this stock section first. If you can not find the specification you need:

- Then refer to the brief descriptions of our B99 Express and CNC lines (following this section)
- See the more in-depth B99 Express product availability in our "Diamond and cBN Superabrasives Standard Catalog" #8068 on www.nortonabrasives.com or contact your Norton representative for a complete listing of made-to-order superabrasive products.

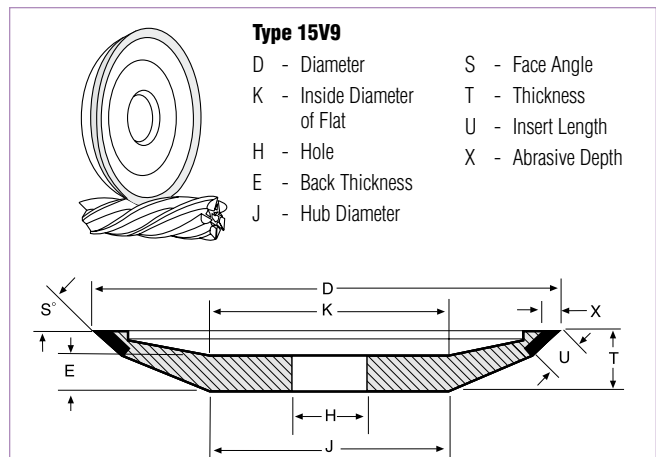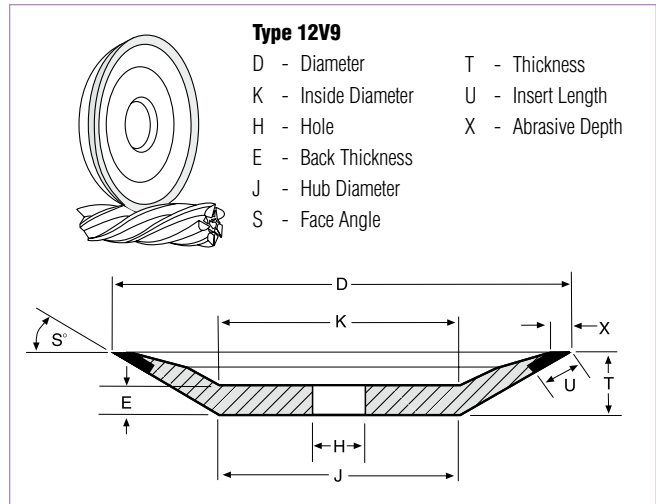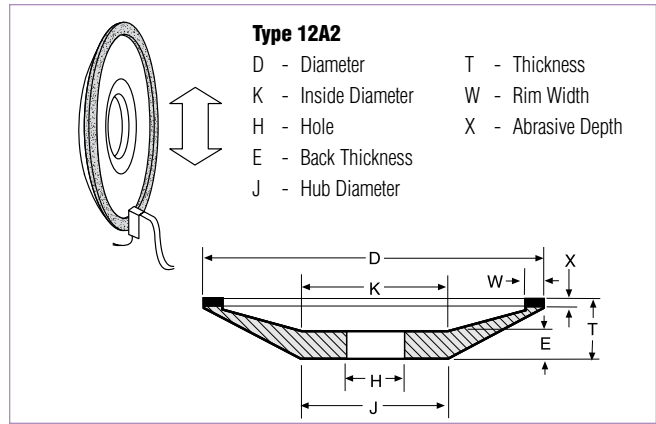

B99 Express Resin Bond Wheels



65,000+ made-to-order resin products; 25 wheel shapes, with one- and two-week lead-times for 12" and less diameter wheels. 14" and larger wheels and 80 grit and coarser wheels are available with standard made-to-order lead-times. If you do not find the resin specification and/or shape you need in our stock offering, you will most likely find it in our B99 Express made-to-order offering.

Applications:

- B99E Diamond Wheels
 - Sharpening cemented carbide cutting tools
 - Cutting-off carbide rod
 - Grinding or cutting-off non-metallic materials such as ceramics or glass
 - Surface grinding dies
 - O.D. grinding spray coatings
- B99E cBN Wheels
 - Sharpening high-speed (M2, D2, T15, etc.) steel cutting tools
 - Surface and ID grinding hardened steel die components
 - Precision grinding steel parts Rc 50 or harder

Superior performing diamond and cBN wheels custom made to your requirements

B99 EXPRESS MADE-TO-ORDER DIAMOND AND cBN RESIN BOND WHEELS

- Superior diamond or cBN abrasives with durable resin bond systems
- With thousands of abrasive, grit, grade, concentration, and bond combinations there is a B99 Express wheel for almost every resin bond application
- Offering exceptional quality and performance, these wheels are made in our state-of-the-art, USA, ISO-certified facilities; excellent performance/price ratio with convenient two-week (or less) lead-times

How to Select B99 Express Made-to-Order Diamond Wheels

SELECT:

WHEEL SHAPE	Select desired wheel shape		
WHEEL DIMENSIONS		D x T x H	Select Diameter x Thickness x Hole from the availability tables in Catalog #8068. Use blueprint numbers where available.
ABRASIVE	Select the abrasive based on horsepower, grinding wet or dry, and contact with steel.	ASD	Armored diamond; most durable. Versatile: can be used wet or dry. ASD should be used when carbide and steel are ground in the same operation.
		SD	Free cutting standard. Can be used wet or dry; should be used on low horsepower (3/4 hp or less) machines.
GRIT SIZE	Select the grit size based on finish and material removal rate required. Note: Standard made-to-order lead-times apply to 80 grit and coarser wheels.	80	Roughing
		100	Roughing. The most common grit size for roughing operations.
		120	For roughing where 100 is too coarse. Also for cut-off applications.
		150	Medium stock removal plus good finish. For combined roughing and finishing applications.
		180	Medium stock removal plus good finish. To improve finish.
		220	Finishing
GRADE	The hardness of the wheel	R	Resin bond standard
		CONCENTRATION	Select the concentration based on grinding wet or dry, material removal rates, and form holding requirements.
		50	Shape 2A2T only. For broad area of contact grinding.
		75	Norton standard. Freer cutting than 100 grit and the most economical for dry grinding with ASD diamond.
BOND	Select the bond based on the material being ground and grinding application.	100	Very durable. Recommended under flood coolant conditions. For use with 220 grit or finer, when durability is required. Also for cut-off applications.
		125	Improved form holding. Used with B99EF bond only for form holding in high-volume, high-pressure coolant applications. Used with ASD abrasive.
		B99E	Norton standard pre-engineered resin bond. Versatile enough to be used wet or dry on most tool making or resharpening applications as well as for grinding non-metallic materials such as ceramics or glass. Available in all shapes.
ABRASIVE DEPTH	Usable abrasive	B99EF	Improved form holding. More durable than B99E. Improved heat dissipation in wet or dry applications. Available in wheel shapes 1V1, 1B1, 1E1, 1EE1, 1F1 and 1FF1.
		1/16	
		1/8	
		1/4	
		1/2	

How to Select B99 Express Made-to-Order cBN Wheels

SELECT:			
WHEEL SHAPE	Select desired wheel shape		
WHEEL DIMENSIONS	Note: Standard made-to-order lead-times apply to 14" and larger wheels.	D x T x H	Select Diameter x Thickness x Hole from the availability tables. Use blueprint numbers where available.
ABRASIVE	Select cBN abrasive to grind hard tool steels such as A2, D2, T15, etc., and tough alloy steels.	CB	Norton standard coated cBN (cubic Boron Nitride). Optimized for high performance in resin bond systems.
GRIT SIZE	Select the grit size based on finish and material removal rate required. Note: Standard made-to-order lead-times apply to 80 grit and coarser wheels.	100	Roughing. The most common grit size for roughing operations.
		120	For roughing where 100 is too coarse. Also for cut-off applications.
		150	Medium stock removal plus good finish. For combined roughing and finishing applications.
		180	Medium stock removal plus good finish. To improve finish.
		220	Finishing
		320	Finishing
GRADE	The hardness of the wheel	T	Norton standard. Approximately 75 concentration, T is the first choice for lower horsepower equipment or wide area of contact between the wheel and the workpiece. Ideal for resharpening applications with 11V9, 12A2, 4A2P, and 15V9 wheel shapes when dry grinding.
		W	Very durable. Approximately 100 concentration, W is recommended for high volume coolant operations: flute grinding from solid, flute polishing, surface, and cylindrical grinding.
		Z	Form holding. Approximately 125 concentration, Z grade is extremely durable and is recommended where long life or form holding is required in high-volume, high-pressure coolant applications. Used with B99EF bond only.
BOND	Select the bond depending on the type of grinding application.	B99E	Norton standard resin bond. Pre-engineered for optimal performance with cBN abrasive. Available in all shapes.
		B99EF	Improved form holding. More durable than B99E. Improved heat dissipation in wet or dry applications. Available in wheel shapes 1V1, 1B1, 1E1, 1EE1, 1F1 and 1FF1.
ABRASIVE DEPTH	Usable abrasive	1/16	
		1/8	
		1/4	
		1/2	

See the more in-depth B99 Express product availability in our "Diamond and cBN Superabrasives Standard Catalog" #8068 on www.nortonabrasives.com or contact your Norton representative for a complete listing of made-to-order superabrasive products.

TECH TIP

Diamond Grinds:

In general, diamond is used to grind non-ferrous materials, because of an adverse reaction between diamond and iron.

- Cemented carbide
- Glass
- Ceramics
- Fiberglass
- Plastics
- Stone
- Abrasives
- Electronic components and materials

cBN Grinds:

cBN is used to grind ferrous materials.

- High-speed tool steels
- Die steels
- Hardened carbon steels
- Alloy steels
- Aerospace alloys
- Hardened stainless steel
- Abrasion-resistant ferrous materials



It is the user's responsibility to refer to and comply with ANSI B7.1



These superior, pre-engineered wheels have been specifically developed to meet the demanding needs of precision cutting tool manufactures as well as re-sharpeners. The use of the highest quality diamond and cBN abrasives matched to superior high temperature bond systems, guarantees high performing wheels. These wheels are manufactured under the strictest quality control protocols ensuring the same, consistent, high-performing product. Cutting tool manufactures who use these wheels report much improved dimensional accuracy and superior cutting edges.

This product offering provides wheel sizes for most CNC machines and wheels shapes to produce the required cutting tool geometries. If you do not find a wheel in this offering to suit your specific needs, a custom-made wheel can be provided.

Applications: CNC cutting tool manufacturing and resharpening: fluting, end fluting, gashing, and OD relief

Diamond CNC Wheels

Best choice for CNC tungsten carbide round tool manufacturing



PARADIGM DIAMOND WHEELS

- Truable online and offline for maximum productivity
- Wear and load resistance deliver superior grinding performance on tough-to-grind carbides with 6-12% cobalt content
- High grain retention and uniform structure generate high G-ratio; up to 2.5 times longer life and 30% higher MRR than existing superabrasive wheels

Better choice for CNC tungsten carbide round tool manufacturing



G-FORCE AND UNIVEL POLYIMIDE DIAMOND WHEELS

- Polyimide bond systems provide superior form-holding and lower-power requirements compared to premium competitive wheels, reducing frequency of dresses, and decreasing chances of burn and heat damage to the part
- Unique bond technology excels on round, carbide and steel tools; excellent depth of cut, traverse rates, and form holding; reduces total grinding costs by 30% or more
- Self-dressing; maintains a consistently sharp grinding edge which allows for lights-out manufacturing

Good choice for short runs and frequent geometry changes







DIAMOND CNC WHEELS

- A price competitive alternative to premium wheels; ideal for short-run manufacturing jobs where frequent wheel profile changes are required
- Consistent wheel-to-wheel performance for reduced cycle times, less dressing = longer wheel life
- Ideal for resharpening and short-run manufacturing operations; competitively-priced while providing good performance

Diamond CNC Wheels

TIER: BEST				BETTER				GOOD			
TRADENAME: PARADIGM				G-FORCE/UNIVEL				NORTON WINTER			
SIZE (D x T x H) U, W	ANGLE V	SPECIFICATION	ABR. DEPTH X	PART #	SPECIFICATION	ABR. DEPTH X	PART #	SPECIFICATION	ABR. DEPTH X	PART #	
TYPE 1A1 – Diamond Flute											
4 x 1/2 x 1-1/4		SD320-D168-P100C	3/8	079587 83055 NS	AD320-UP061 G-Force	1/4	601576 63909				
5 x 3/8 x 1-1/4		SD320-D168-P100C	1/2	079587 83058 NS	AD320-UP061 G-Force	1/2	601576 68409	A4D220-R115B610	1/2	690141 18255	
5 x 1/2 x 1-1/4		SD320-C176-P100C	1/2	079587 83061	AD320-UP061 G-Force	1/2	601576 62240	A4D180-R115B610	1/2	690141 18202	
5 x 5/8 x 1-1/4		SD320-C176-P100C	1/2	079587 83063 NS	AD320-UP061 G-Force	1/2	601576 63486 NS	A4D180-R115B610	1/2	690141 18203 NS	
6 x 1/2 x 1-1/4		SD320-C176-P100C	1/2	079587 83064	AD320-UP061 G-Force	1/4	601576 82133 NS	A4D180-R115B610	1/4	690141 18216 NS	
TYPE 1A1 – Diamond Polish											
5 x 1/2 x 1-1/4					80D1000-100UP731 Univel	1/2	079587 84316 NS				
TYPE 1A1 – Diamond Relief											
6 x 1/2 x 1-1/4		SD320-E168-P100C	1/2	079587 83073 NS	AD320-UP892 G-Force	1/2	690141 17684 NS	A4D180-R115B610	1/2	690141 18217 NS	
TYPE 1A1RN – Diamond Flute											
5 x 3/8 x 1-1/4		SD320-D168-P100C	1/2	079587 83067 NS	AD320-UP061 G-Force	1/2	601576 63501	A4D180-R115B610	1/2	690141 18201	
5 x 1/2 x 1-1/4					AD220-UP061 G-Force	1/2	662603 22280				
5 x 5/8 x 1-1/4					AD220-UP061 G-Force	1/2	601576 64141				
TYPE 1B1 – Diamond Flute											
4 x 3/8 x 1-1/4	V=20°	SD320-D168-P100C	3/8	079587 83054							
TYPE 1B1 – Diamond Flute/Gash											
5 x 3/8 x 1-1/4	V=45°	SD320-E168-P100C	1/2	079587 83065							
TYPE 1B1 – Diamond Gash											
5 x 1/2 x 1-1/4	V=45°	SD320-E168-P100C	1/4	079587 83062 NS							
5 x 1/2 x 1-1/4	V=60°	SD320-E168-P100C	1/4	079587 83060 NS							
5 x 1/2 x 1-1/4	V=30°	SD320-E168-P100C	3/4	079587 83070 NS				A4D320-R115B610	3/4	690141 18207	
								D220-C100-K+925	6mm	601576 13112	
5 x 1/2 x 1-1/4	V=45°	SD320-E168-P100C	3/4	079587 83068 NS	AD320-UP531 G-Force	3/4	662603 29603	A4D320-R115B610	3/4	690141 18208	
								D220-C100-K+925	6mm	601576 23673	
TYPE 1V1 – Diamond Flute											
4 x 3/8 x 1-1/4	V=20°				AD320-UP061 G-Force	1/4	662603 16591	A4D180-R115B610	1/4	690141 18263	
5 x 1/2 x 1-1/4	V=10°	SD320-C176-P100C	1/2	079587 83071 NS	AD320-UP061 G-Force	1/2	662601 16723	A4D180-R115B610	1/2	690141 18204	
5 x 1/2 x 1-1/4	V=20°	SD320-C176-P100C	1/2	079587 83074	AD320-UP061 G-Force	1/2	601576 93843	A4D180-R115B610	1/2	690141 18205	
								D220-C100-K+925	6mm	601576 23953	
5 x 1/2 x 1-1/4	V=30°	SD320-C176-P100C	1/2	079587 83085 NS	AD320-UP671 G-Force	1/2	601576 93841	A4D180-R115B610	1/2	690141 18206	
TYPE 1V1 – Diamond Flute/Gash											
5 x 3/8 x 1-1/4	V=45°				AD320-UP531 G-Force	1/2	601576 96562	A4D320-R115B610	1/2	690141 18257	
TYPE 1V1 – Diamond Gash											
5 x 1/2 x 1-1/4	V=45°				AD320-UP531 G-Force	1/4	662603 29604	A4D320-R115B610	1/4	690141 18209	
5 x 1/2 x 1-1/4	V=60°				AD320-UR331 Univel	1/4	662603 29469				






NS Non-stock, contact your Norton representative for current lead-times.
All holes (bores) are machined to (H7) class fit.

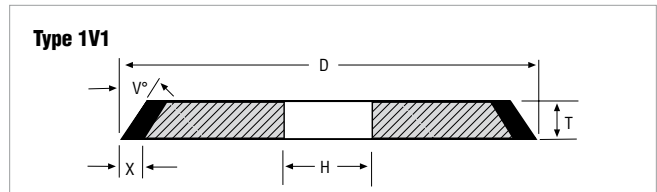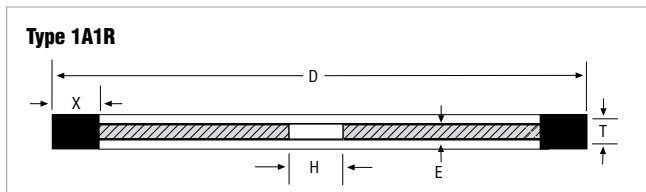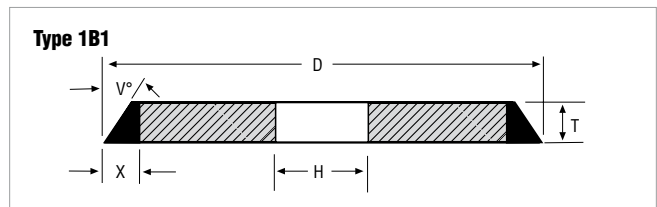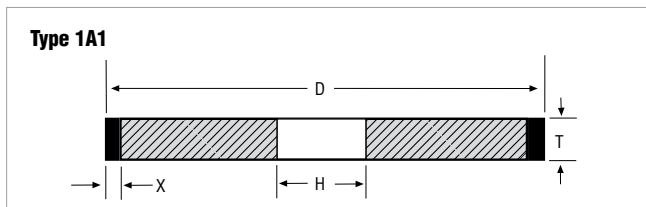

Diamond CNC Wheels

TIER: BEST		BETTER				GOOD				
TRADENAME: PARADIGM		G-FORCE/UNIVEL				NORTON WINTER				
SIZE (D x T x H) U, W	ANGLE V	SPECIFICATION	ABR. DEPTH X	PART #	SPECIFICATION	ABR. DEPTH X	PART #	SPECIFICATION	ABR. DEPTH X	PART #
TYPE 6A2 – Diamond Point										
4 x 1-1/4 x 1-1/4 W=1/4		SD320-E168-P100C	1/4	079587 83057NS	AD320-UP251 G-Force	1/4	690141 18644NS	ASD320C-R100B56	1/4	690141 18219NS
TYPE 11A2 – Diamond Relief										
3 x 1-1/4 x 1-1/4 W=1/4					10D320-NB100U Univel	1/4	601576 92199			
4 x 1-1/4 x 1-1/4 W=1/4		SD320-E168-P100C	1/4	079587 83059NS	AD320-UP701 G-Force	1/4	601576 96315	ASDC320-R100B80	1/4	690141 18213
4 x 1-1/4 x 1-1/4 W=1/4					AD320-UP561 G-Force	1/4	690141 18479NS	ASDC320-R100B80	1/4	690141 18265NS
TYPE 11V5 – Diamond Relief										
4 x 1-1/4 x 1-1/4 V=30° W=1/4					AD320-UP561 G-Force	1/4	690141 17838	ASDC320-R100B80	1/4	690141 18211
4 x 1-1/4 x 1-1/4 V=10° W=3/8					AD320-UP561 G-Force	1/4	690141 17812	ASDC320-R100B80	1/4	690141 18212
TYPE 11V9 – Diamond Relief										
3-3/4 x 1-1/2 x 1-1/4 U=3/8					10D240-PB125-U Univel	1/8	662603 22134	ASDC320-R100B80	1/8	690141 18259
5 x 1-3/4 x 1-1/4 U=5/8					10D240-PB125-U Univel	1/8	662601 18300	ASDC320-R100B80	1/8	690141 18215
TYPE 12V9 – Diamond Relief										
4 x 3/4 x 1-1/4 U=3/8					AD320-UP531 G-Force	1/8	662601 27950NS	ASDC320-R100B80	1/8	690141 18221NS
5 x 3/4 x 1-1/4 U=1/2					AD320-UP531 G-Force	1/8	662601 27911NS	ASDC320-R100B80	1/8	690141 18222NS

NS Non-stock, contact your Norton representative for current lead-times.
All holes (bores) are machined to (H7) class fit.

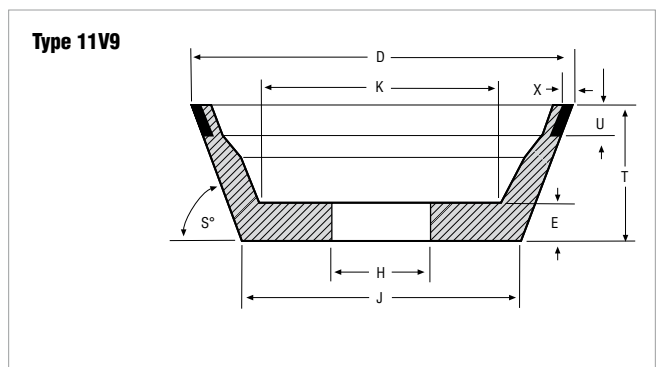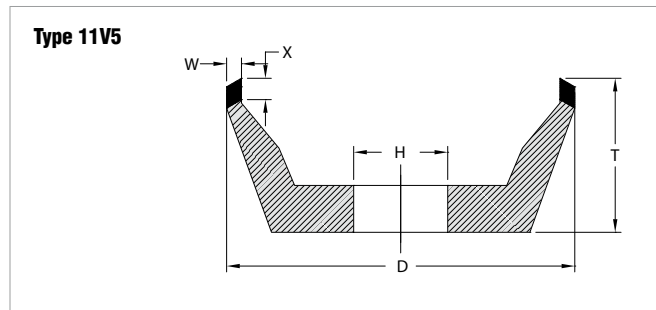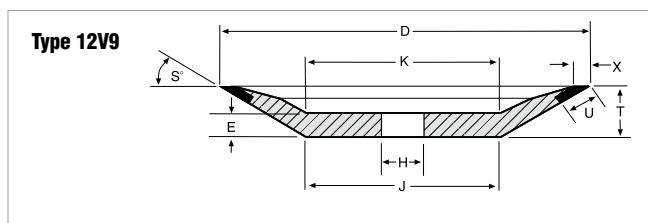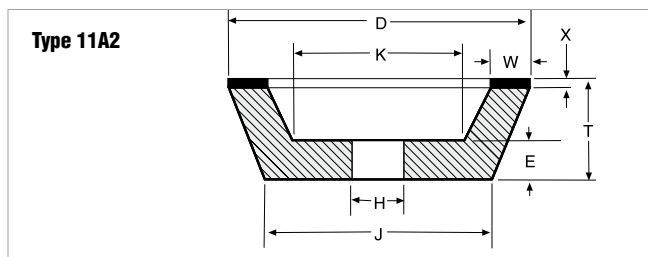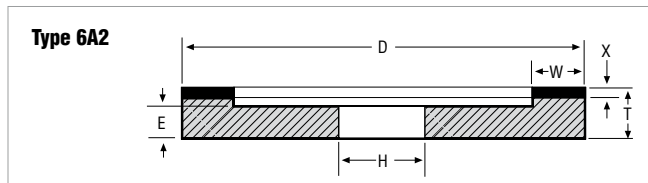

TECH TIP

Diamond Grinds:

In general, diamond is used to grind non-ferrous materials, because it reacts with iron.

- Cemented carbide
- Glass
- Ceramics
- Fiberglass
- Plastics
- Stone
- Abrasives
- Electronic components and materials



It is the user's responsibility to refer to and comply with ANSI B7.1

cBN CNC Wheels



Best choice for CNC HSS round tool manufacturing

G-FORCE / UNIVEL cBN WHEELS

- Truable online and offline for lights-out manufacturing and maximum productivity
- Wear and load resistance deliver superior grinding performance on tough-to-grind carbides with 6-12% cobalt content
- Low specific cutting energy for faster grinding with lower power draw and less burn



Good choice for short runs and frequent geometry changes

cBN CNC WHEELS

- A price competitive alternative to premium wheels; ideal for short-run manufacturing jobs where frequent wheel profile changes are required
- Consistent wheel-to-wheel performance for reduced cycle times, less dressing = longer wheel life
- Ideal for resharpening and short-run manufacturing operations; competitively-priced while providing good performance

TIER: BEST		GOOD				
TRADENAME: G-FORCE/UNIVEL		NORTON WINTER				
SIZE (D x T x H) U, W	ANGLE V	ABR. DEPTH X	PART #	SPECIFICATION	ABR. DEPTH X	PART #
TYPE 1A1 – cBN Flute						
4 x 1/2 x 1-1/4		BX220-UP241 G-Force	1/4	601576 69935 NS	BAM180-WBXD3037	1/4 690141 18223 NS
					B220-V240-KSS920	6mm 601576 23498
5 x 3/8 x 1-1/4		BX220-UP241 G-Force	1/2	690141 18436 NS	BAM320C-WBXD3037	1/2 690141 18256 NS
5 x 1/2 x 1-1/4		BX220-UP241 G-Force	1/2	601576 70869 NS	BAM180-WBXD3037	1/2 690141 18224 NS
					B220-V240-KSS920	6mm 601576 02944
5 x 5/8 x 1-1/4		BX220-UP241 G-Force	1/2	662603 29385 NS	BAM180-WBXD3037	1/2 690141 18225 NS
6 x 1/4 x 1-1/4		BX240-UP241 G-Force	1/4	690141 18435 NS	BAM180-WBXD3037	1/4 690141 18240 NS
TYPE 1A1 – cBN Relief						
6 x 1/2 x 1-1/4		BX320-UP892 G-Force	1/2	690141 17679 NS	BAM180-WBXD3037	1/2 690141 18237 NS
TYPE 1A1RN – cBN Flute						
5 x 1/4 x 1-1/4		BX150-UP241 G-Force	1/2	079587 73216 NS		
5 x 3/8 x 1-1/4		BX150-UP241 G-Force	1/2	079587 73217 NS		
5 x 1/2 x 1-1/4		BX150-UP241 G-Force	1/2	690141 41373 NS		
TYPE 1B1 – cBN Gash						
5 x 1/2 x 1-1/4	V=30°	BX320-UP701 G-Force	3/4	662603 29388 NS	BAM320C-WBXD3037	3/4 690141 18229 NS
5 x 1/2 x 1-1/4	V=45°	BX320-UP531 G-Force	3/4	662603 29391 NS	BAM320C-WBXD3037	3/4 690141 18230 NS
					B220-V240-KSS920	6mm 601576 23542
TYPE 1V1 – cBN Flute						
4 x 3/8 x 1-1/4	V=20°	BX220-UP241 G-Force	1/4	690141 18342 NS	BAM180C-WBXD3037	1/4 690141 18264 NS
5 x 1/2 x 1-1/4	V=20°	BX220-UP241 G-Force	1/2	601576 80042 NS	BAM180-WBXD3037	1/2 690141 18227 NS
					B220-V240-KSS920	6mm 601576 23944 NS
5 x 1/2 x 1-1/4	V=30°	BX220-UP241 G-Force	1/2	601576 91380 NS	BAM180-WBXD3037	1/2 690141 18228 NS
5 x 1/2 x 1-1/4	V=10°	BX220-UP241 G-Force	1/2	662601 19876 NS	BAM180-WBXD3037	1/2 690141 18226 NS
TYPE 1V1 – cBN Flute/Gash						
5 x 3/8 x 1-1/4	V=45°	BX220-UP531 G-Force	1/2	601576 97699 NS	BAM320C-WBXD3037	1/4 690141 18262 NS
					B220-V240-KSS920	6mm 601576 23524
TYPE 1V1 – cBN Gash						
5 x 1/2 x 1-1/4	V=60°	BX320-UR331 Univiel	1/4	662603 29461 NS	BAM320C-WBXD3037	1/4 690141 18232 NS
5 x 1/2 x 1-1/4	V=45°	BX320-UP531 G-Force	1/4	662603 29275 NS	BAM320C-WBXD3037	1/4 690141 18231 NS
					B220-V240-KSS920	6mm 601576 23776

TECH TIP

cBN Grinds:



cBN is used to grind ferrous materials.

- High-speed tool steels
- Die steels
- Hardened carbon steels
- Alloy steels
- Aerospace alloys
- Hardened stainless steel
- Abrasion-resistant ferrous materials



It is the user's responsibility to refer to and comply with ANSI B7.1

NS Non-stock, contact your Norton representative for current lead-times. All holes (bores) are machined to (H7) class fit.





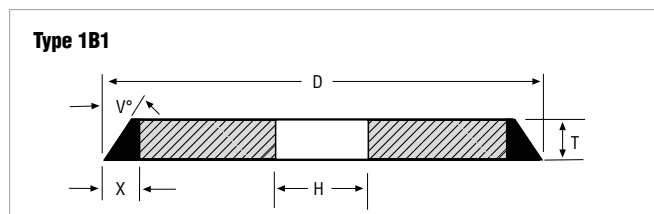
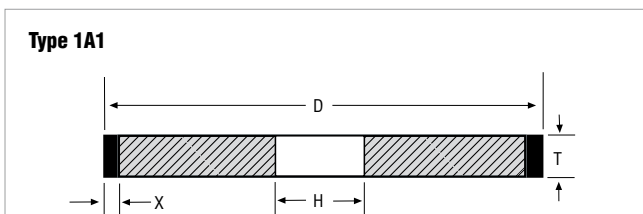


cBN CNC Wheels

TIER: **BEST** **GOOD**
TRADENAME: **G-FORCE/UNIVEL** **NORTON WINTER**

SIZE (D x T x H) U, W	ANGLE V	SPECIFICATION	ABR. DEPTH X	PART #	SPECIFICATION	ABR. DEPTH X	PART #
TYPE 6A2 – cBN Point							
4 x 1-1/4 x 1-1/4 W=1/4		BX320-UP241 G-Force	1/4	690141 18543 NS	CB320C-WBB	1/4	690141 18239 NS
5 x 1-1/4 x 1-1/4 W=1/2		BX320-UP241 G-Force	1/4	690141 18447 NS	CB320C-WBB	1/4	690141 18238 NS
TYPE 11A2 – cBN Relief							
5 x 1-1/2 x 2 W=1/4		BX320-UP531 G-Force	1/4	690141 18406 NS	BAM220-WBE	1/4	690141 18254 NS
TYPE 11A2 – cBN Relief							
4 x 1-1/4 x 1-1/4 W=1/4		BX320-UP531 G-Force	1/4	690141 18445 NS	BAM220-WBE	1/4	690141 18266 NS
TYPE 11V5 – cBN Relief							
4 x 1-1/4 x 1-1/4 W=1/4	V=30°	BX320-UP701 G-Force	1/4	690141 17833 NS	BAM220-WBE	1/4	690141 18233 NS
					B220-J240-KSS63Y	6mm	601576 23563
4 x 1-1/4 x 1-1/4 W=3/8	V=10°	BX320-UP701 G-Force	1/4	690141 17820 NS	BAM220-WBE	1/4	690141 18234 NS
TYPE 11V9 – cBN Relief							
3-3/4 x 1-1/2 x 1-1/4 U=3/8		90B240-PB125-U Univel	1/8	690141 18345 NS	BAM220-WBE	1/8	690141 18260 NS
TYPE 11V9 – cBN Relief							
3-3/4 x 1-1/2 x 1-1/4 U=3/8		90B240-PB125-U Univel	1/8	690141 18029 NS	BAM220-WBE	1/8	690141 18235 NS
5 x 1-3/4 x 2 U=3/8		90B240-PB125-U Univel	1/8	690141 18043 NS	BAM220-WBE	1/8	690141 18248 NS
TYPE 12V9 – cBN Relief							
4 x 3/4 x 1-1/4 U=3/8		BX320-UP531 G-Force	1/8	690141 18470 NS	BAM220-WBE	1/8	690141 18241 NS
5 x 3/4 x 1-1/4 U=1/2		BX320-UP531 G-Force	1/8	690141 18441 NS	BAM220-WBE	1/8	690141 18242 NS

NS Non-stock, contact your Norton representative for current lead-times.
All holes (bores) are machined to (H7) class fit.

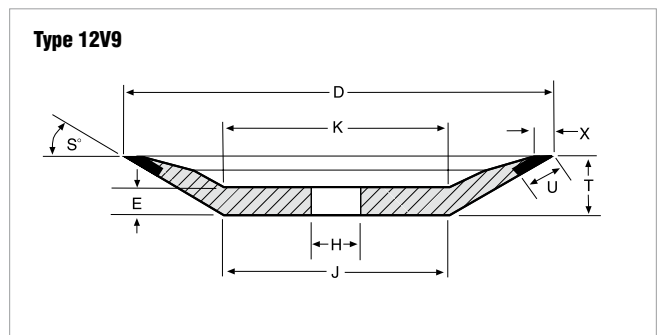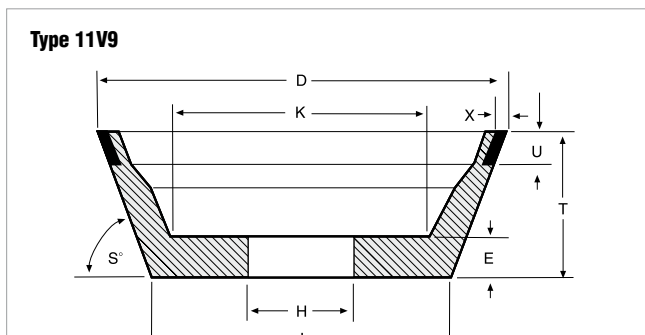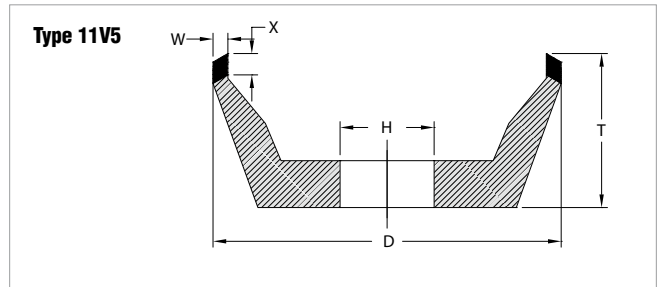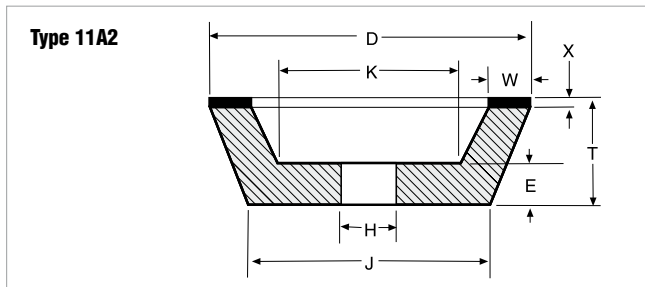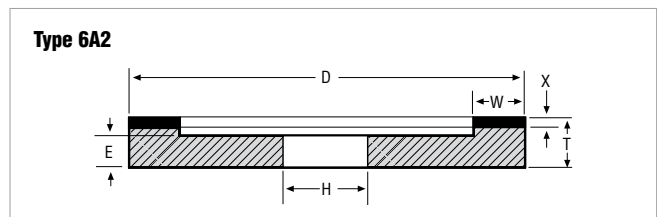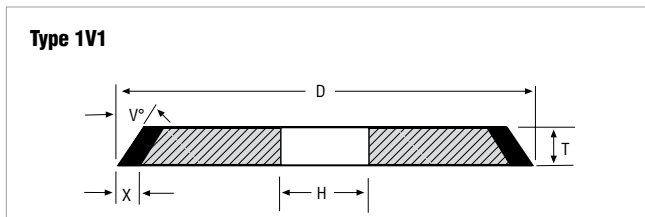

CNC Express Wheel Service for WC and HSS Tools

- G-Force Diamond and cBN wheels altered from blank stock
- Available for a large range of special geometries
- 2-week standard lead time for first-time orders (new part numbers)
- 1-week lead-time for repeat orders (existing part numbers)

How To Request An Express Wheel Quote And Order

Refer to this chart and choose:

- Wheel shape by application
- Diameter "D"
- Thickness "T" from the range of 7/16" to 1/2"
- Hole "H" from the range of 1/2" to 2"
- Angle ("V"), Radius ("R") dimensions from the range provided
- Abrasive depth "X" will always be 1/2" for these CNC wheels
- Specifications required for material and application
- NOTE: Please remember to include the "E" at the end of the specification to indicate Express lead-time is required

CNC Express Blank Stock for Made-To-Order Wheels

Blank Stock Inventory to be altered to your specifications within 5-10 days

Wheel Shape	Tool Material	Application	G-Force Specification AD = Diamond BX = cBN	Diameter D	THK. T	Hole H	Abr. Depth X	Angle (V) or Radius (R)
	WC	Fluting	AD320-UP061E	5	7/16" min. to 1/2" max.	1/2" min. to 2" max.	1/2"	—
	HSS	Fluting	BX320-UP241E	5				
	WC	Fluting	AD320-UP061E	6				
	WC	Fluting	AD320-UP061E	5				
	WC	Fluting	AD320-UP061E	6				
	HSS	Fluting	BX320-UP241E	5				
	WC	Gashing	AD320-UP531E	5				
	HSS	Gashing	BX320-UP531E	5				
	WC	Fluting	AD320-UP061E	5				
	HSS	Fluting	BX320-UP241E	5				
	WC	Fluting	AD320-UP061E	6				
	WC	Fluting	AD320-UP061E	5				
	HSS	Fluting	BX320-UP241E	5				
	WC	Fluting	AD320-UP061E	6				
	WC	Fluting	AD320-UP061E	5				
	HSS	Fluting	BX320-UP241E	5				
	WC	Fluting	AD320-UP061E	6				
	WC	Fluting	AD320-UP061E	5				
	HSS	Fluting	BX320-UP241E	5				
	WC	Fluting	AD320-UP061E	6				

Note: all of the wheel shapes listed can also be designated to have .010 relief(s) 1 side, or 2 sides on 1A1P and 1A1RN wheels.



Our extensive offering of stock diamond and cBN electroplated products has been engineered to meet the diverse demands of traditional and emerging tool and die, ceramic, and composite applications.

Applications: Small hole/ID grinding, deburring, cleaning, honing, precision drilling, forming dies and molds, routing, reaming, blending radii, notching and cutting-off with saw blades in ceramic, tool and die, and composite applications

Product Types:

- Mounted points
- Mandrels
- Drills
- Routers
- Contour tools
- Wheels
- Files
- Saw blades

Abrasive Grain: Diamond or cBN (cubic Boron Nitride)

Maintain tight tolerances and provide superior form holding; can be used wet or dry



ELECTROPLATED PRODUCTS

- Nickel alloy matrix creates a tough, durable bond
- Single layer of abrasive offers an economical choice
- Exposed particles for aggressive cutting action

Identifying Target Markets

An industry is provided beside each product. This key identifies markets that typically use the product.

TARGET MARKET SYMBOLS

● = Ceramics ▲ = Tool & Die ■ = Composites

TECH TIP

Abrasive Applications

Although diamond and cBN (cubic Boron Nitride) are both superabrasives, the use of diamond and cBN varies, depending upon the materials to be ground.

Diamond Grinds:

- Cemented carbide
- Glass
- Ceramics
- Fiberglass
- Plastics
- Composites
- Abrasives
- Stone
- Electronic components and materials

cBN Grinds:

- High-speed tool steels
- Die steel
- Hardened carbon steels
- Hardened stainless steels
- Alloy steels
- Aerospace alloys
- Abrasion-resistant ferrous materials


In general, cBN is used to grind ferrous materials. Diamond is used to grind non-ferrous materials, because of an adverse reaction between diamond and iron.

Made-to-Order Electroplated Product Guide

The stock electroplated products offered on the following pages have been engineered to meet the diversity of demands typical in today's manufacturing environment. When special forms, shapes, and configurations are required, Norton Winter electroplated diamond and cBN products can be fabricated in almost any geometry.

Customer-Supplied Preforms and Blanks


Customers may prefer to manufacture their own preforms/blanks for custom products and in many cases this can reduce cost and lead-times. The instructions below detail the necessary allowances for each grit size. Please refer to these whenever manufacturing blanks.



Area to be plated (female radius)

Female radius must be larger than the finished size required.

Example – If a .500 female radius is required with 60/80 grit, then the blank should be manufactured .011 larger = .511



Area to be plated (male radius)

A male radius must be smaller than the finished size required.

Example – If a .500 male radius is required with 60/80 grit, then the blank should be manufactured .011 smaller = .489

Grit Size Allowance for Plated Products

ALLOWANCE/GRIT SIZE	PARTICLE SIZE
20/30	.035
30/40	.025
40/50	.018
60/80	.011
80/100	.008
100/120	.007
120/140	.006
140/170	.005
170/200	.004
200/230	.0035
270/325	.003
4.5 Micron – 400	.0025
30 Micron – 600	.0016
15 Micron – 1200	.001

This should be used as a guide when manufacturing blanks to be plated with diamond or cBN.

Surface Finish

Use this chart only as a guide. Surface finish is affected by a number of variables: machine type and condition, type of material, coolant, wheel speed, bond system, etc.

Expected RMS Finish

GRIT SIZE	ELECTROPLATED
80	90-125
100	64-90
120	48-64
150	32-48
180	24-32
220	20-24
240	16-20
320	16-20
400	14-20
500	12-13
600	12

Strip and Replate Services

Ask Customer Service for information and quotations on our complete strip and replat services on many electroplated products.

TECH TIP

Coolants

Although coolants may not be necessary, using a coolant produces superior surface finishes, a longer tool life, higher performance, and reduces tool loading.

Feeds

Suggested feeds for jig or internal grinding are from .0002" – .0004" per pass.

Speeds

Maximum Operating Speeds (MOS)

Never exceed the maximum operating speed marked on the superabrasive product being used.

- Electroplated Products: 25,000 SFPM

Maximum speeds of mounted points are a function of the length of overhang and size of the product. Refer to "Safe Operating Speeds" in form #2872, provided with your product.

Recommended Operating Speeds

The preceding speed is the maximum safe speed and not necessarily the most efficient. Superabrasive products operate most effectively at speeds lower than the maximum. The following are general recommendations. cBN products, in many cases, are used effectively at higher speeds.

- Electroplated Diamond Products: 5,000 to 10,000 SFPM
- Electroplated cBN Products: 8,000 to 10,000 SFPM

Calculating Operating Speed

The following formula may be used to quickly calculate wheel speed:


- RPM = Revolutions Per Minute
- SFPM = Surface Feet Per Minute

To convert SFPM to RPM: (Multiply SFPM x 3.82) divided by wheel diameter in inches

Electroplated Mounted Points

Diamond and cBN Mounted Points ● ▲

- Use diamond mounted points for precise, small hole, jig and internal grinding of carbide, ceramics, sapphire, glass, and a variety of tough, super alloys
- For grinding tough, high carbon, high chrome steel, use cBN mounted points
- Mandrels are made of high-speed tool steel to withstand operating pressure

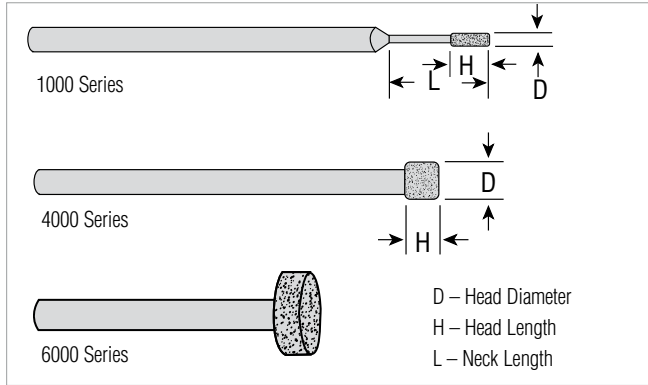

PART #	PRODUCT #	HEAD DIAMETER INCHES	HEAD LENGTH	NECK LENGTH	GRIT SIZE
1000 Series – Diamond					
1/8" Shank x 2-1/4" Overall Length					
66260392429	1016FD	.016	.079	1/8	200
66260392432	1020MD	.020	.079	1/8	150
66260392431	1020FD	.020	.079	1/8	200
66260392436	1025MD	.025	.079	1/8	150
66260392435	1025FD	.025	.079	1/8	200
66260392440	1030MD	.030	.079	1/4	150
66260392439	1030FD	.030	.079	1/4	200
66260392445	1035CD	.035	.118	1/4	100
66260392444	1035MD	.035	.118	1/4	150
66260392443	1035FD	.035	.118	1/4	200
66260392451	1040CD	.040	.118	1/4	100
66260392450	1040MD	.040	.118	1/4	150
66260392449	1040FD	.040	.118	1/4	200
66260392457	1045CD	.045	.118	1/4	100
66260392456	1045MD	.045	.118	1/4	150
66260392455	1045FD	.045	.118	1/4	200
66260392463	1050CD	.050	.118	1/2	100
66260392462	1050MD	.050	.118	1/2	150
66260392461	1050FD	.050	.118	1/2	200
66260392469	1050LCD	.050	.118	1	100
66260392468	1050LMD	.050	.118	1	150
66260392467	1050LFD	.050	.118	1	200
66260392475	1055CD	.055	.118	1/2	100
66260392474	1055MD	.055	.118	1/2	150
66260392473	1055FD	.055	.118	1/2	200
66260392481	1060CD	.060	.157	1/2	100
66260392480	1060MD	.060	.157	1/2	150
66260392479	1060FD	.060	.157	1/2	200
66260392487	1060LCD	.060	.157	1	100
66260392492	1065MD	.065	.157	1/2	150
66260392491	1065FD	.065	.157	1/2	200
66260392499	1070CD	.070	.157	1/2	100
66260392498	1070MD	.070	.157	1/2	150
66260392497	1070FD	.070	.157	1/2	200
66260392505	1070LCD	.070	.157	1	100
66260392511	1075CD	.075	.157	1/2	100
66260392510	1075MD	.075	.157	1/2	150
66260392509	1075FD	.075	.157	1/2	200

Continued

PART #	PRODUCT #	HEAD DIAMETER INCHES	HEAD LENGTH	NECK LENGTH	GRIT SIZE
1000 Series – Diamond (continued)					
1/8" Shank x 2-1/4" Overall Length					
66260392517	1080CD	.080	.157	1/2	100
66260392516	1080MD	.080	.157	1/2	150
66260392515	1080FD	.080	.157	1/2	200
66260392523	1080LCD	.080	.157	1	100
66260392521	1080LFD	.080	.157	1	200
66260392529	1085CD	.085	.157	1/2	100
66260392528	1085MD	.085	.157	1/2	150
66260392535	1090CD	.090	.157	1/2	100
66260392534	1090MD	.090	.157	1/2	150
66260392533	1090FD	.090	.157	1/2	200
66260392541	1090LCD	.090	.157	1	100
66260392540	1090LMD	.090	.157	1	150
66260392547	1095CD	.095	.157	1/2	100
66260392546	1095MD	.095	.157	1/2	150
66260392553	1100CD	.100	.157	1/2	100
66260392552	1100MD	.100	.157	1/2	150
66260392551	1100FD	.100	.157	1/2	200
66260392565	1105CD	.105	.157	1/2	100
66260392563	1105FD	.105	.157	1/2	200
66260392577	1110CD	.110	.157	1/2	100
66260392576	1110MD	.110	.157	1/2	150
66260392583	1110LCD	.110	.157	1	100
66260392589	1115CD	.115	.157	1/2	100
66260392588	1115MD	.115	.157	1/2	150
66260392595	1120CD	.120	.157	1/2	100
66260392594	1120MD	.120	.157	1/2	150
66260392593	1120FD	.120	.157	1/2	200
66260392601	1125CD	.125	.157	1/2	100
66260392600	1125MD	.125	.157	1/2	150
66260392599	1125FD	.125	.157	1/2	200
66260392607	1130CD	.130	.197	1	100
66260392606	1130MD	.130	.197	1	150
66260392613	1135CD	.135	.236	N/A	100
66260392612	1135MD	.135	.236	N/A	150
66260392611	1135FD	.135	.236	N/A	200
66260392619	1140CD	.140	.236	N/A	100
66260392625	1156CD	.156	.236	N/A	100
66260392624	1156MD	.156	.236	N/A	150
66260392623	1156FD	.156	.236	N/A	200
66260392730	1171MD	.171	.236	N/A	150
66260392730	1171MD	.171	.236	N/A	150
66260392737	1187CD	.187	.312	N/A	100
66260392735	1187FD	.187	.312	N/A	200
66260392742	1203MD	.203	.312	N/A	150
66260392741	1203FD	.203	.312	N/A	200
66260392748	1218MD	.218	.312	N/A	150
66260392747	1218FD	.218	.312	N/A	200
66260392755	1250CD	.250	.312	N/A	100
66260392754	1250MD	.250	.312	N/A	150
66260392753	1250FD	.250	.312	N/A	200
66260363450	1750MD	.750	.035	N/A	150

TARGET MARKET SYMBOLS

- = Ceramics
- ▲ = Tool & Die
- = Composites

Electroplated Mounted Points

Diamond and cBN Mounted Points ● ▲

PART #	PRODUCT #	HEAD DIAMETER INCHES	HEAD LENGTH	NECK LENGTH	GRIT SIZE
1000 Series – cBN					
1/8" Shank x 2-1/4" Overall Length					
66260392434	1020MC	.020	.079	1/8	150
66260392442	1030MC	.030	.079	1/4	150
66260392453	1040MC	.040	.118	1/4	150
66260392460	1045CC	.045	.118	1/4	100
66260392466	1050CC	.050	.118	1/2	100
66260392465	1050MC	.050	.118	1/2	150
66260392464	1050FC	.050	.118	1/2	200
66260392484	1060CC	.060	.157	1/2	100
66260392483	1060MC	.060	.157	1/2	150
66260392482	1060FC	.060	.157	1/2	200
66260392496	1065CC	.065	.157	1/2	100
66260392502	1070CC	.070	.157	1/2	100
66260392501	1070MC	.070	.157	1/2	150
66260392500	1070FC	.070	.157	1/2	200
66260392514	1075CC	.075	.157	1/2	100
66260392520	1080CC	.080	.157	1/2	100
66260392532	1085CC	.085	.157	1/2	100
66260392538	1090CC	.090	.157	1/2	100
66260392537	1090MC	.090	.157	1/2	150
66260392536	1090FC	.090	.157	1/2	200
66260392543	1090LMC	.090	.157	1	150
66260392556	1100CC	.100	.157	1/2	100
66260392554	1100FC	.100	.157	1/2	200
66260392561	1100LMC	.100	.157	1	150
66260392568	1105CC	.105	.157	1/2	100
66260392567	1105MC	.105	.157	1/2	150
66260392580	1110CC	.110	.157	1/2	100
66260392578	1110FC	.110	.157	1/2	200
66260392598	1120CC	.120	.157	1/2	100
66260392604	1125CC	.125	.157	1/2	100
66260392603	1125MC	.125	.157	1/2	150
66260392602	1125FC	.125	.157	1/2	200
66260392610	1130CC	.130	.197	1	100
66260392608	1130FC	.130	.197	1	200
66260392616	1135CC	.135	.236	N/A	100
66260392615	1135MC	.135	.236	N/A	150
66260392622	1140CC	.140	.236	N/A	100
66260392628	1156CC	.156	.236	N/A	100
66260392627	1156MC	.156	.236	N/A	150
66260392626	1156FC	.156	.236	N/A	200
66260392734	1171CC	.171	.236	N/A	100
66260392733	1171MC	.171	.236	N/A	150
66260392740	1187CC	.187	.312	N/A	100
66260392739	1187MC	.187	.312	N/A	150
66260392738	1187FC	.187	.312	N/A	200
66260392745	1203MC	.203	.312	N/A	150
66260392751	1218MC	.218	.312	N/A	150
66260392758	1250CC	.250	.312	N/A	100
66260392757	1250MC	.250	.312	N/A	150

PART #	PRODUCT #	HEAD DIAMETER INCHES	HEAD LENGTH	NECK LENGTH	GRIT SIZE
4000 Series – Diamond					
1/4" Shank x 3" Overall Length					
66260392630	4156CD	.156	.250	1	100
66260392629	4156FD	.156	.250	1	200
66260392634	4187CD	.187	.250	1	100
66260392633	4187FD	.187	.250	1	200
66260392638	4203CD	.203	.250	1	100
66260392642	4218CD	.218	.250	1	100
66260392641	4218FD	.218	.250	1	200
66260392646	4236CD	.236	.250	1	100
66260392645	4236FD	.236	.250	1	200
66260392650	4250CD	.250	.250	1	100
66260392649	4250FD	.250	.250	1	200
66260392654	4282CD	.282	.250	N/A	100
66260392653	4282FD	.282	.250	N/A	200
66260392658	4312CD	.312	.375	N/A	100
66260392657	4312FD	.312	.375	N/A	200
66260392662	4375CD	.375	.375	N/A	100
66260392661	4375FD	.375	.375	N/A	200
66260392666	4390CD	.390	.375	N/A	100
66260392670	4406CD	.406	.375	N/A	100
66260392674	4437CD	.437	.375	N/A	100
66260392678	4500CD	.500	.375	N/A	100
66260392677	4500FD	.500	.375	N/A	200
66260392682	4730CD	.730	.375	N/A	100
66260392690	41000CD	1.000	.375	N/A	100
66260392689	41000FD	1.000	.375	N/A	200
4000 Series – cBN					
1/4" Shank x 3" Overall Length					
66260392632	4156CC	.156	.250	1	100
66260392631	4156FC	.156	.250	1	200
66260392636	4187CC	.187	.250	1	100
66260392635	4187FC	.187	.250	1	200
66260392640	4203CC	.203	.250	1	100
66260392639	4203FC	.203	.250	1	200
66260392644	4218CC	.218	.250	1	100
66260392643	4218FC	.218	.250	1	200
66260392648	4236CC	.236	.250	1	100
66260392647	4236FC	.236	.250	1	200
66260392652	4250CC	.250	.250	1	100
66260392651	4250FC	.250	.250	1	200
66260392656	4282CC	.282	.250	N/A	100
66260392655	4282FC	.282	.250	N/A	200
66260392660	4312CC	.312	.375	N/A	100
66260392659	4312FC	.312	.375	N/A	200
66260392664	4375CC	.375	.375	N/A	100
66260392663	4375FC	.375	.375	N/A	200
66260392668	4390CC	.390	.375	N/A	100
66260392672	4406CC	.406	.375	N/A	100
66260392676	4437CC	.437	.375	N/A	100
66260392675	4437FC	.437	.375	N/A	200
66260392680	4500CC	.500	.375	N/A	100
66260392679	4500FC	.500	.375	N/A	200
66260392684	4730CC	.730	.375	N/A	100
66260392692	41000CC	1.000	.375	N/A	100

TARGET MARKET SYMBOLS

● = Ceramics ▲ = Tool & Die ■ = Composites

Electroplated Mounted Points, Mandrels, Tapered Honed and Micro Drills


Diamond and cBN Mounted Points ● ▲

PART #	PRODUCT #	HEAD DIAMETER INCHES	HEAD LENGTH	GRIT SIZE
6000 Series – Diamond				
3/8" Shank x 3-3/4" Overall Length				
66260392694	6406CD	.406	.375	80
66260392693	6406MD	.406	.375	150
66260392698	6437CD	.437	.375	80
66260392697	6437MD	.437	.375	150
66260392702	6500CD	.500	.375	80
66260392701	6500MD	.500	.375	150
66260392706	6562CD	.562	.375	80
66260392710	6625CD	.625	.375	80
66260392709	6625MD	.625	.375	150
66260392718	6750CD	.750	.375	80
66260392717	6750MD	.750	.375	150
66260392721	6875MD	.875	.400	150
66260392726	61000CD	1.000	.500	80

PART #	PRODUCT #	HEAD DIAMETER INCHES	HEAD LENGTH	GRIT SIZE
6000 Series – cBN				
3/8" Shank x 3-3/4" Overall Length				
66260392696	6406CC	.406	.375	80
66260392695	6406MC	.406	.375	150
66260392700	6437CC	.437	.375	80
66260392699	6437MC	.437	.375	150
66260392704	6500CC	.500	.375	80
66260392703	6500MC	.500	.375	150
66260392708	6562CC	.562	.375	80
66260392712	6625CC	.625	.375	80
66260392716	6687CC	.687	.375	80
66260392715	6687MC	.687	.375	150
66260392720	6750CC	.750	.375	80
66260392719	6750MC	.750	.375	150
66260392724	6875CC	.875	.400	80
66260392728	61000CC	1.000	.500	80
66260392727	61000MC	1.000	.500	150

cBN Heavy Stock Removal Mandrels ▲


- For heavy stock removal on jig, internal, and offhand operations on tool steels and hardened aerospace alloys. Made with super coarse abrasive grit for long tool life



PART #	PRODUCT #	HEAD DIAMETER	HEAD LENGTH	SHANK DIAMETER	OVERALL LENGTH	GRIT SIZE
HSR Series – cBN						
66260395426	HSR-1/4	1/4	1/4	3/8	3	60
66260395428	HSR-3/8	3/8	3/8	3/8	3	60
66260395429	HSR-1/2	1/2	3/8	3/8	3-1/2	60
66260395431	HSR-3/4	3/4	3/8	3/8	3-1/2	60
66260395432	HSR-1	1	3/8	3/8	3-1/2	60

Diamond Tapered Honed for Drawing Dies ● ▲ ■


- Used primarily for forming carbide drawing dies, but also can be used for small hole honing in ceramics, fiberglass, plastics, and composite materials

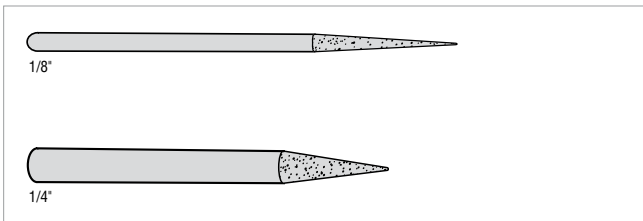

PART #	PRODUCT #	INCLUDED ANGLE	SHANK DIAMETER	GRIT SIZE
Tapered Honed for Drawing Dies – Diamond				
3" Overall Length				
66260395540	TH12-6MD	6°	1/8	150
66260395541	TH12-8MD	8°	1/8	150
66260363371	TH25-12CD	12°	1/4	100
66260395542	TH12-12MD	12°	1/8	150
66260395543	TH25-12MD	12°	1/4	150
66260395544	TH25-14MD	14°	1/4	150
66260395545	TH25-16MD	16°	1/4	150

Diamond Micro Drills ● ▲ ■

- A modification of mounted points, these tools are specifically designed for drilling holes in the .007" to .065" diameter range
- Perfect for drilling sapphire and high density alumina ceramics for hybrid micro-circuit substrates
- M-Series - Carefully-sized, uniformly-shaped diamond particles are used on all M-Series drills
- S-Series - Recommended for adapting to ultrasonic drill heads

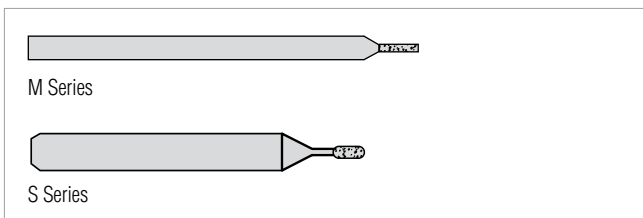

PART #	PRODUCT #	DIAMETER INCHES	HEAD LENGTH	OVERALL LENGTH	GRIT SIZE
M-Series Micro Drills – Diamond					
Shank Diameter .040" (1mm)					
66260395516	M7	.007	.028	11/16	600
66260395517	M10	.010	.049	11/16	400
66260395518	M12	.012	.056	13/16	325
66260395519	M15	.015	.077	13/16	325


PART #	PRODUCT #	DIAMETER INCHES	HEAD LENGTH	OVERALL LENGTH	GRIT SIZE
S-Series Micro Drills – Diamond					
1/8" Shank x 1" Overall Length					
66260395520	S16FD	.016	.062	.093	200
66260392841	S18FD	.018	.062	.125	200
66260395521	S20FD	.020	.062	.125	200
66260395522	S25FD	.025	.093	.156	200
66260395523	S30MD	.030	.093	.156	150
66260395524	S35MD	.035	.093	.187	150
66260395525	S40MD	.040	.125	.218	150
66260395526	S45CD	.045	.125	.218	100
66260395527	S50CD	.050	.125	.250	100
66260395528	S60CD	.060	.125	.312	100
66260395529	S65CD	.065	.125	.312	100

TARGET MARKET SYMBOLS
● = Ceramics ▲ = Tool & Die ■ = Composites

Electroplated Routers and Mounted Contour Tools

Diamond Routers ● ■

- Used with hand operated tools, drill presses, and milling machines
- Ideal for routing and reaming the highly-abrasive materials of alumina, fiberglass, plastics, and other nonmetallic composite materials.

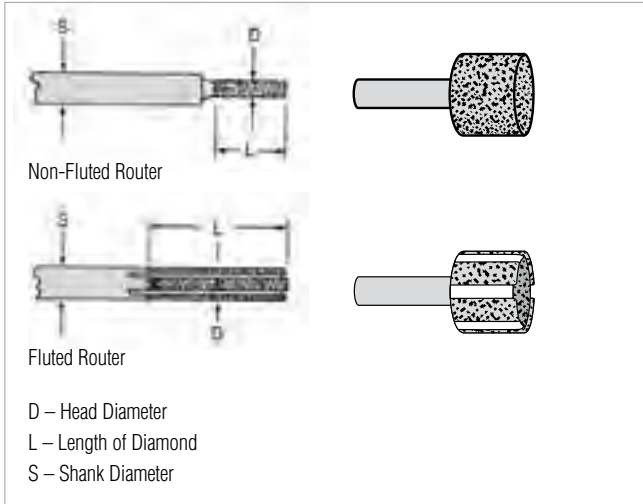


PART #	PRODUCT #	HEAD DIAMETER	LENGTH OF DIAMOND	SHANK DIAMETER	OVERALL LENGTH	GRIT SIZE
Non-Fluted Routers – Diamond						
662603 64302	RNF1410CD	1/4	1	1/4	2-1/2	40
Fluted Routers – Diamond						
662603 64310	RSF1812CD	1/8	1/2	1/4	2-1/2	60
662603 64309	RSF1810CD	1/8	1	1/4	2-1/2	60
662603 64308	RSF1412CD	1/4	1/2	1/4	2-1/2	40
662603 64307	RSF1410CD	1/4	1	1/4	2-1/2	40
662603 02715	RSF3412CD	3/4	1/2	1/2	2-1/2	40

Type 6A2C cup and Type 01 straight bench and pedestal electroplated wheels are available as made-to order products. Contact your Norton representative for availability and quotation.

Diamond and cBN Mounted Contour Tools ● ▲ ■

- For contour grinding applications on carbide, ceramics, glass, ferrites, and many tough alloys and cements. Best suited for blending radii and deburring operations
- Operating speeds: 15,000-20,000 RPM range
- Variety of tool shapes available as stock to satisfy most tool and die and deburring requirements

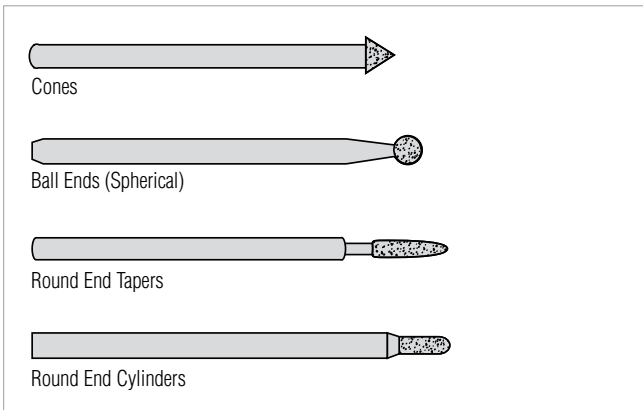

PART #	PRODUCT #	BALL DIAMETER	GRIT SIZE
Ball Ends (Spherical) – Diamond			
1/8" Shank x 2" Overall Length			
662603 95434	BE1CD	3/64	100
662603 95436	BE2CD	1/16	100
662603 95438	BE3CD	5/64	100
662603 95440	BE4CD	3/32	100
662603 95442	BE5CD	1/8	100
662603 95444	BE6CD	3/16	100
662603 95448	BE8CD	3/8	100
662603 95450	BE9CD	1/2	100
Ball Ends (Spherical) – cBN			
1/8" Shank x 2" Overall Length			
662603 95437	BE3CC	5/64	100
662603 95439	BE4CC	3/32	100
662603 95441	BE5CC	1/8	100
662603 95443	BE6CC	3/16	100
662603 95445	BE7CC	1/4	100

PART #	PRODUCT #	SMALL HEAD DIAMETER	LARGE HEAD DIAMETER	HEAD LENGTH	INC. ANGLE	GRIT SIZE
Round End Tapers – Diamond						
1/8" Shank x 2" Overall Length						
662603 95506	RT44CD	.044	.066	5/16	4°	100
662603 95510	RT78CD	.078	.110	5/16	6°	100
Round End Tapers – cBN						
1/8" Shank x 2" Overall Length						
662603 95509	RT78CC	.078	.110	5/16	6°	100

PART #	PRODUCT #	CONE BASE DIAMETER	INCLUDED ANGLE	CONE LENGTH	GRIT SIZE
Cones – Diamond					
1/8" Shank x 2" Overall Length					
662603 95484	C14CD	1/8	14°	1/2	100
662603 95488	C35CD	5/32	35°	1/4	100
662603 95490	C60CD	11/64	60°	5/32	100
662603 95492	C90CD	3/16	90°	3/32	100
Cones – cBN					
1/8" Shank x 2" Overall Length					
662603 95483	C14CC	1/8	14°	1/2	100
662603 95485	C26CC	3/16	26°	13/32	100
662603 95487	C35CC	5/32	35°	1/4	100
662603 95489	C60CC	11/64	60°	5/32	100
662603 95491	C90CC	3/16	90°	3/32	100

PART #	PRODUCT #	HEAD DIAMETER	HEAD LENGTH	GRIT SIZE
Round End Cylinders – Diamond				
1/8" Shank x 2" Overall Length				
662603 95494	RE1CD	1/16	1/4	100
662603 95496	RE2CD	5/64	1/4	100
662603 95498	RE3CD	3/32	1/4	100
662603 95500	RE4CD	1/8	1/4	100
662603 95502	RE5CD	3/16	5/16	100
662603 95504	RE6CD	1/4	5/16	100


TARGET MARKET SYMBOLS

- = Ceramics
- ▲ = Tool & Die
- = Composites

Electroplated Files


Diamond Machine Files ● ▲

- For use in reciprocating hand profiling machines
- Ideal for reworking and finishing carbide dies and molds, blending radii, and deburring and cleaning slots and grooves



Diamond Hand Files ● ▲

- Indispensable aid for the toolroom
- All purpose hand-held tool useful for deburring, notching, dressing, and honing hard, brittle materials



PART #	PRODUCT #	DIMENSIONS	ABRASIVE LOCATION	GRIT SIZE
Machine Files – Diamond				
5/8" Diamond Length, 1/8" Shank, 2" Overall Length				
662603 95585	1ECD	.020 x .125		100
662603 95586	2ECD	.030 x .125		100
662603 95587	3ECD	.040 x .125		100
662603 95589	3FCD	.120 x .040		100
662603 95590	4FCD	.157 x .040		100
662603 95591	5FCD	.203 x .078		100
662603 95592	6FCD	.120 x .040		100
662603 95593	1CCD	.098 x .196		100
662603 95594	2CCD	.120 x .250		100
662603 95596	3TCD	.127 side		100
662603 95598	1RCD	.042 diam.		100
662603 95599	2RCD	.080 diam.		100
662603 95600	3RCD	.127 diam.		100

PART #	PRODUCT #	DIMENSIONS	ABRASIVE LOCATION	GRIT SIZE
Hand Files – Diamond				
6" Overall Length, 1-1/2" Diamond Length				
662603 95605	DF1CD	1/8 x 1/8		100
662603 95606	DF2CD	1/8 x 1/4		100
662603 95607	DF2WCD	1/8 x 1/4		100
662603 95608	DF3CD	1/8 x 3/8		100
662603 92844	DF3FD	1/8 x 3/8		200
662603 95609	DF3WCD	1/8 x 3/8		100
662603 64241	DF3SCD	1/8 x 1/2		100
662603 95611	DF4CD	1/8		100
662603 00134	DF4WCD	1/4		100
662603 95613	DF5CD	1/8		100
662603 92846	DF5FD	1/8		200
662603 95614	DF5WCD	1/4		100
662603 95615	DF6CD	1/8		100


TARGET MARKET SYMBOLS

- = Ceramics
- ▲ = Tool & Die
- = Composites

Electroplated Files and Drills

Diamond Needle Files ● ▲

- Indispensable aid for the toolroom
- An all-purpose hand-held tool, useful for deburring, notching, dressing, and honing hard, brittle materials

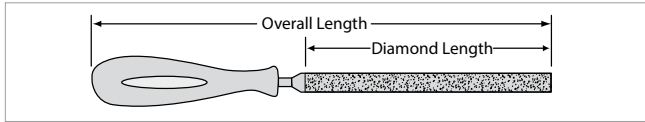

PART #	PRODUCT #	GRIT SIZE
NFK-6 Needle File Kit – Diamond		
662603 64008	NFK-6	
Contains one each of the following:		
	NF1FD	200
	NF2FD	200
	NF3FD	200
	NF4FD	200
	NF5FD	200
	NF6FD	200
DFS-6 Die File Kit – Diamond		
662603 91830	DFS-6	
Contains one each of the following:		
	1571	100
	1572	100
	1573	100
	1574	100
	1575	100
	1576	100

PART #	PRODUCT #	DIMENSIONS	ABRASIVE LOCATION	SHAPE	GRIT SIZE
Needle Files – Diamond					
4-1/4" Diamond Length, 8-1/2" Overall Length					
662603 02432	LNF2CD	.400 x .100		Equaling	100
662603 05611	LNF2FD	.400 x .100		Equaling	200
662603 02898	LNF3CD	.450 x .150		Half Round	100
662603 05612	LNF3FD	.485 x .150		Half Round	200
2-3/4" Diamond Length, 5-3/4" Overall Length, With Handle					
662603 91729	1571	.055 x .190		Flat	100
662603 91730	1572	.075 x .210		Half Round	100
662603 91731	1573	.145 x .145		Triangle	100
662603 91732	1574	.100 x .100		Square	100
662603 91733	1575	.120		Round	100
662603 91734	1576	.055 x .190		Pointed Flat	100
3" Diamond Length, 5-1/2" Overall Length, With Handle					
662603 95575	NF1FD	.150 x .105		Oval	200
662603 95576	NF2FD	.218 x .072		Half Round	200
662603 95577	NF3FD	.205 x .058		Equaling	200
662603 95578	NF4FD	.096 x .096		Square	200
662603 95579	NF5FD	.138 x .138		Triangle	200
662603 95580	NF6FD	.118		Round	200

Needle File Shape and Application Key:

Barrette:	A triangle with diamond on the bottom side only
Crossing:	Elongated oval, with more pointed ends than an oval file; has diamonds all around
Equaling:	A rectangle with diamond on all four sides; ideal for filing both sides of an ID simultaneously
Pointed Flat:	A cone with a flat top with diamond on the sides of the cone

Diamond Core Drills ● ■


- High performance on glass and ceramic applications while providing fast, reliable cutting
- Submersed drilling is highly recommended for optimum operating performance



PART #	PRODUCT #	OUTER DIAMETER	INNER DIAMETER	GRIT SIZE
Core Drills – Diamond				
Straight Tube Type, 2" Overall Length				
662603 95530	A1MD	1/16	.023	150
662603 95531	A2MD	3/32	.048	150
662603 95532	A3MD	1/8	.075	150
662603 95533	A4MD	5/32	.110	150
662603 95534	A5CD	3/16	.140	100
662603 95535	A6CD	1/4	.195	100
662603 95536	A7CD	5/16	.255	100

Diamond Twist Drills ● ■

- Recommended for precision drilling on circuit boards containing fiberglass, nylon, and similar tough, abrasive materials
- Diamond twist drills are also useful for drilling plastics and resin composites and have been successful in drilling soft ductile materials as well as "green" carbide
- Operating procedures are similar to those of standard twist drills



PART #	PRODUCT #	DRILL DIAMETER	DRILL LENGTH	GRIT SIZE
Twist Drills – Diamond				
662603 95549	TW-1/16	1/16	1-3/4	100
662603 95550	TW-1/8	1/8	2-3/4	100
662603 95551	TW-1/4	1/4	4	100

Diameter tolerance equals + or - 1/64.


TARGET MARKET SYMBOLS

- = Ceramics ▲ = Tool & Die ■ = Composites

Electroplated Saw Blades

Diamond Continuous Rim Cut-off Saw Blades ■


- Ideal for cutting-off highly-abrasive materials such as alumina, fiberglass, plastics, and other nonmetallic composite materials



Additional diamond continuous rim and slotted cut-off saw blades, with extended wraps to avoid binding, are available as made-to-order products. Please contact your Norton representative.

Diamond Slotted Cut-off Saw Blades ■


- 3/4" wrap: additional 3/4" of electroplated diamond on the blade core increases life of blade on deep cuts, and reduces binding and grinding on the core



Additional diamond continuous rim and slotted cut-off saw blades, with extended wraps to avoid binding, are available as made-to-order products. Please contact your Norton representative.

Diamond Mounted Saw Blades ■

- Ideal for cutting-off highly-abrasive materials such as alumina, fiberglass, plastics, and other nonmetallic composite materials
- 3/4" wrap - additional 3/4" of electroplated diamond on the blade core increases life of blade on deep cuts, and reduces binding and grinding on the core



PART #	PRODUCT #	DIAM.	OVERALL THICKNESS	HOLE SIZE	GRIT SIZE
Continuous Rim Cut-off Saw Blades – Diamond					
662603 01990	DS2062-250	2	1/16	1/4	40
662603 91474	DS2094-250	2	3/32	1/4	40
662603 91473	DS3094-250	3	3/32	1/4	40
662603 63036	DS3094-375	3	3/32	3/8	40
662603 95554	DS4094-500	4	3/32	1/2	40
662603 00197	DS4094-750	4	3/32	3/4	40
662603 95557	DS8094-625	8	3/32	5/8	40

PART #	PRODUCT #	DIAM.	OVERALL THICKNESS	HOLE SIZE	GRIT SIZE
Slotted Cut-off Saw Blades – Diamond					
662603 01989	DSS2062-250	2	1/16	1/4	40
662603 64258	DSS3094-250	3	3/32	1/4	40
662603 95559	DSS4094-500	4	3/32	1/2	40
662603 95560	DSS6094-500	6	3/32	1/2	40
662603 62981	DSS10125-625	10	1/8	5/8	40
662603 64253	DSS14156-500	14	5/32	1/2	40
662603 62989	DSS14156-1	14	5/32	1	40
662603 95565	DSS16156-1	16	5/32	1	40
662603 95566	DSS18156-1	18	5/32	1	40
Slotted Cut-off Saw Blades with 3/4" Wrap – Diamond					
662603 13423	DSSW4094-750	4	3/32	3/4	40

PART #	PRODUCT #	DIAM.	OVERALL THICKNESS	HOLE SIZE	GRIT SIZE
Mounted Saw Blades – Diamond					
2" Overall Length					
662603 95422	MDS1CD	1	3/32	1/4	40
662603 95423	MDS1-1/2CD	1-1/2	3/32	1/4	40
662603 95424	MDS2CD	2	3/32	3/8	40

TARGET MARKET SYMBOLS

- = Ceramics
- ▲ = Tool & Die
- = Composites



Norton Winter diamond lapping compound polishes all materials – hard and soft. Diamond powders are uniformly distributed in a liquid vehicle for aggressive polishing and consistent part quality. Easy-to-use plastic syringe for quick clean-up.

Applications:

For mold, die, and tool polishing, polishing to final tolerance of ceramic parts, initial charging of lapping plates and discs, and other processes that require mirror finish and close tolerance performance.

Syringe Size:
Type:


5 and 18 gram syringes
Water soluble – when soap/water is used for clean-up
Oil soluble – when solvent is used for clean-up

PRODUCT #	MICRON GRADE	COLOR	PART #
Diamond Compound – Water Soluble			
5 Gram Syringes			
5PS1/4WSSTD	1/4 Ultra Fine	Gray	662603 00362
5PS1/2WSSTD	1/2 Ultra Fine	Lt. Gray	662603 00417
5PS1WSSTD	1 Ultra Fine	Ivory	662603 00368
5PS3WSSTD	3 Super Fine	Yellow	662603 00667
5PS6WSSTD	6 Super Fine	Orange	662603 00372
5PS9WSSTD	9 Super Fine	Green	662603 00375
5PS12WSSTD	12 Super Fine	Aqua	662603 00376
5PS15WSSTD	15 Fine	Blue	662603 00379
5PS30WSSTD	30 Fine	Red	662603 00383
5PS45WSSTD	45 Fine	Brown	662603 00384
5PS60WSSTD	60 Fine	Purple	662603 00388
5PS90WSSTD	90 Fine	Black	662603 00389
18 Gram Syringes			
18PS1/4WSSTD	1/4 Ultra Fine	Gray	662603 00392
18PS1/2WSSTD	1/2 Ultra Fine	Lt. Gray	662603 00394
18PS1WSSTD	1 Ultra Fine	Ivory	662603 00396
18PS3WSSTD	3 Super Fine	Yellow	662603 00398
18PS6WSSTD	6 Super Fine	Orange	662603 00400
18PS9WSSTD	9 Super Fine	Green	662603 00402
18PS15WSSTD	15 Fine	Blue	662603 00406
18PS20WSSTD	20 Fine	Auburn	662603 00408

PRODUCT #	MICRON GRADE	COLOR	PART #
Diamond Compound – Oil Soluble			
5 Gram Syringes			
5PS1/4OSSTD	1/4 UltraFine	Gray	614636 91123 NS
5PS1/2OSSTD	1/2 UltraFine	Lt. Gray	662603 00363
5PS1OSSTD	1 UltraFine	Ivory	614636 91133
5PS3OSSTD	3 Super Fine	Yellow	614636 91138
5PS6OSSTD	6 Super Fine	Orange	614636 91143
5PS9OSSTD	9 Super Fine	Green	614636 91148
5PS15OSSTD	15 Fine	Blue	614636 91153
5PS30OSSTD	30 Fine	Red	614636 91158
5PS45OSSTD	45 Fine	Brown	614636 91163
5PS60OSSTD	60 Fine	Purple	662603 00386
5PS90OSSTD	90 Fine	Black	662603 00390
18 Gram Syringes			
18PS1/4OSSTD	1/4 UltraFine	Gray	662603 00391
18PS1OSSTD	1 UltraFine	Ivory	614636 91134 NS
18PS3OSSTD	3 Super Fine	Yellow	614636 91139
18PS6OSSTD	6 Super Fine	Orange	662603 00399
18PS9OSSTD	9 Super Fine	Green	614636 91149 NS
18PS15OSSTD	15 Fine	Blue	614636 91154
18PS20OSSTD	20 Fine	Auburn	662603 00407
18PS30OSSTD	30 Fine	Red	662603 00409
18PS45OSSTD	45 Fine	Brown	614636 91164 NS
18PS60OSSTD	60 Fine	Purple	662603 00413
18PS90OSSTD	90 Fine	Black	662603 00415

NS Non-stock; contact your Norton representative for current lead-times.

Marking System

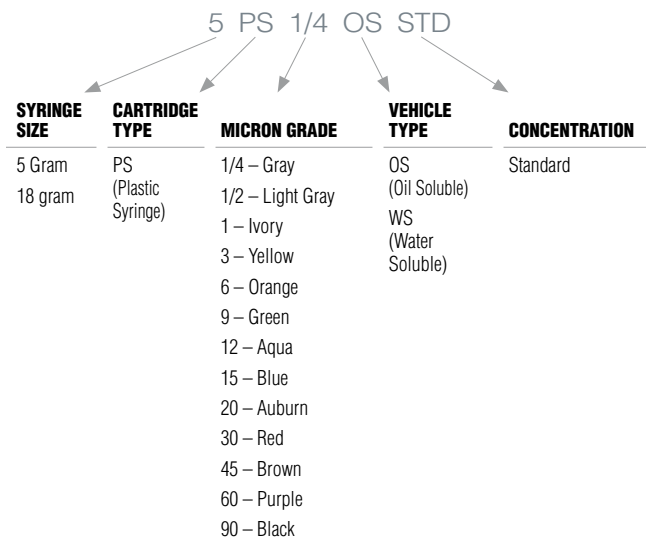

TECH TIP

Diamond Compound Application Guide

APPLICATION	MICRON GRADE	MICRON RANGE	MESH SIZE EQUIV.	COLOR	CONC.
ULTRA FINE Applying finest finishes on metals and ceramics	1/4	(0-1/2)	100,000	Gray	Std.
	1/2	(0-1)	60,000	Lt. Gray	Std.
	1	(0-2)	14,000	Ivory	Std.
SUPER FINE Final finishing of dies, molds, seals, most applications (RMS 4-12)	3	(2-4)	8,000	Yellow	Std.
	6	(4-8)	3,000	Orange	Std.
	9	(8-12)	1,800	Green	Std.
	12	(9-15)	1,500	Aqua	Std.
FINE FINISH Preparatory lapping (RMS 12-20)	15	(12-22)	1,200	Blue	Std.
	20	(15-25)	800	Auburn	Std.
	30	(22-36)	600	Red	Std.
	45	(36-45)	325	Brown	Std.
	60	(54-80)	230	Purple	Std.
	90	(80-100)	170	Black	Std.

the Norton Clipper brand **HITS THE PAVEMENT**

The leader for diamond blades, tools, and light machines for construction and cutting materials is “Redefining Jobsite Muscle – Rugged. Reliable. Affordable.”





With faster cut rates, constant depth of cut, and less downtime, Norton Clipper diamond blades are the choice of professionals versus conventional abrasive blades. Norton Clipper diamond blades are available for high-speed saws, portable hand-held saws, and walk-behind saws. For the full offering of diamond blades, see the Norton Clipper Construction Products Catalog #7719.

- Applications:** Cutting concrete, stone, tile, and other building materials
- Size Range:** 4" – 18"
- Thickness Range:** .080" – .375"
- Segment Height Range:** .210" – .550"
- Abrasive Grain:** Diamond
- Mounting Options:** 1"/20mm universal arbor, 7/8"-5/8"-20mm, DM-7/8"-5/8", 5/8"-11
- Shape:** Type 01
- Machines Used:**



HIGH-SPEED GAS OR ELECTRIC SAW



CIRCULAR SAW




RIGHT-ANGLE GRINDER



WALK-BEHIND SAW

Diamond Blade Rim Types

There are three main diamond blade rim types: segmented, turbo, and continuous rim.

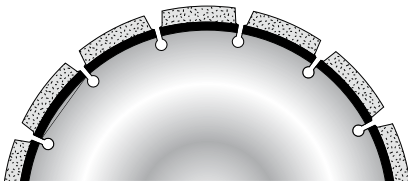


Segmented

- Most aggressive cutting action for general-purpose and masonry applications
- Use when cutting speed and productivity are more important than finish
- Best life, best cut rate, good finish



Turbo

- Aggressive cutting action with a smoother quality of cut than segmented rim blades
- For use on harder materials, such as granite, marble, and stone to reduce chipping
- Better life and cut rate, better finish

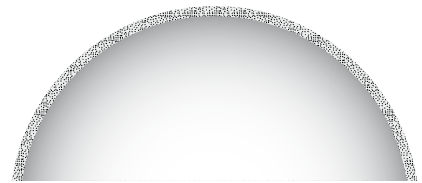

Continuous

- Provides the smoothest of cuts
- Best performance when used wet
- Use on porcelain, tile, marble, and other hard materials requiring a high-quality cut
- Good life, good cut rate, best finish

Material / Application-to-Product Recommendation Guide

Icon	Description	Application
	Multi-Purpose, All Materials	Concrete, reinforced concrete, granite, building materials, thin steel sections, angle iron up to 1/2" material thickness, rebar up to no. 5.
	Natural Stone and Tiles	Ceramic and stone tiles, granite, marble, very hard bricks and other very hard and dense materials.
	Reinforced Concrete and Harder Building Materials	Reinforced concrete, hard bricks, limestone, terrazzo, and other hard materials.
	General Purpose and Masonry Building Materials	Blocks, medium-hard building bricks, paving slabs, concrete roof tiles and other medium-hard materials.
	Asphalt	Asphalt, green concrete, asphalt over concrete, abrasive blocks, mortar and other abrasive materials.

Diamond Performance Tiers

- 5 **Best**
Best Performance
- 4 **Better**
High Performance
- 3 **Value and Good**
Consistent Performance
- 2
- 1

TECH TIP

- Never twist or turn a segmented blade in the cut because it may result in segment breakage
- Never use wet blades dry
- Remove dry blades from cut for 10 seconds of each minute of cut to air cool
- Never operate any saw, wet or dry, without the blade guard



It is the user's responsibility to refer to and comply with ANSI B7.1

For Reinforced Concrete and Harder Building Materials

DRY – Segmented Rim +

DUO EVO				
The unique shape of the DUO EVO segments optimizes the angle of attack while enhancing the evacuation of the debris. With a new manufacturing process, the DUO EVO segments provide an exceptional cutting speed for optimum performance and increased life up to 20% over the original DUO EVO design.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
12 x .110 x 1"/20mm	.590"	6,300	DUOEVO12110	701846 84217
14 x .118 x 1"/20mm	.590"	5,460	DUOEVO14118	701846 84218
16 x .125 x 1"/20mm	.590"	4,500	DUOEVO16125	701846 93356




DUO				
Our exclusive design has become a dominant name in the market. The unique dual segment per land technology provides excellent cutting speed with low vibration and high comfort of cut. The exclusive arrow shape gullets not only indicate blade direction, but also assist in fast removal of cutting debris. Maximum general purpose performance when cutting medium to low reinforcement, hard materials.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
12 x .110 x 1/20mm	.393"	6,300	DUO12110	701846 83611
14 x .110 x 1/20mm	.393"	5,460	DUO14110	701846 83612
14 x .110 x 1/20mm	.393"	5,460	DUO14110 6PK	701846 84430
14 x .110 x 1/20mm	.393"	5,460	DUO14110 12PK	701846 84431
14 x .125 x 1/20mm	.393"	5,460	DUO14125	701846 83613
14 x .125 x 1/20mm	.393"	5,460	DUO14125 6PK	701846 84432
14 x .125 x 1/20mm	.393"	5,460	DUO14125 12PK	701846 84433
16 x .125 x 1/20mm	.393"	4,500	DUO16125	701846 83798



For Asphalt and Abrasive Materials

DRY – Segmented Rim +

DUO ASPHALT				
Dry cutting laser-welded blade for asphalt and green concrete. The laser-welded, wear-retardant drop segments extend blade life. Scoop gullets for faster swarf removal increases cut speed. Stroboscopic indicators to control cut depth and show rotation direction.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
12 x .110 x 1/20mm	.393"	6,300	DUOASP12125	701846 84543
14 x .125 x 1/20mm	.393"	5,460	DUOASP14125	701846 84315
16 x .125 x 1/20mm	.393"	4,500	DUOASP16125	701846 84544



DUO ABRASIVE				
Utilizes the basic characteristics of the original DUO blade and adds a unique segment shape that optimizes the angle of attack while enhancing the evacuation of the particles. The result is an exceptional cutting speed allied with very good performance and life in abrasive materials and concrete block. The bond specification lends additional life when high-speed cutting.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
14 x .110 x 1/20mm	.393"	5,460	DUOAB14110	701846 84291
14 x .125 x 1/20mm	.393"	5,460	DUOAB14125	701846 84292



For General-Purpose and Masonry Building Materials

DRY – Segmented Rim +

CLASSIC				
The improved bond provides longer life at an economical price in medium-hard materials such as concrete with light to medium reinforcement.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
12 x .110 x 1/20mm	.314"	6,300	COHSGP1220	701846 81383
14 x .110 x 1/20mm	.275"	5,460	COHSGP1420	701846 81309
14 x .125 x 1/20mm	.314"	5,460	COHSGP1420P	701846 84268
16 x .125 x 1/20mm	.259"	4,500	COHSGP1620	701846 40356



VALUPLUS				
For value and performance on small- to medium-size jobs. The sintered blade cuts unreinforced soft-to-medium concrete fast on saws up to 13 HP.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
12 x .110 x 1/20mm	.393"	6,300	VPHSGP1220	701846 84180
14 x .110 x 1/20mm	.393"	5,460	VPHSGP1420	701846 84181
14 x .110 x 1/20mm	.393"	5,460	VPHSGP1420 20PK	701846 84428



Multi-Purpose, For All Materials

Dry – Segmented Rim  + 



4X4 MAX CUT

Taking high-speed cutting versatility to an all new level. The same standard features as the 4X4 with its anti-crack gullets and patented depth indicators that not only cool the blade, but also allow the operator to know how deep they are cutting. An all-new bond and diamond specification improves blade life in a wide range of materials while excelling in steel. New segment wear indicators give the operator an idea of remaining blade life.

SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
12 x .118 x 1/20mm	.472"	6,300	4X4MC12118	701846 45927
14 x .125 x 1/20mm	.472"	5,460	4X4MC14125	701846 45926



4X4

Multi-purpose laser welded blade for dry cutting a range of construction materials without sacrificing performance or price. Depth of cut is easily controlled with the patented depth-of-cut indicators cut into the steel core. Anti-crack gullets for enhanced safety cutting steel and metal (up to 5mm thick).

SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
12 x .110 x 1/20mm	.393"	6,300	4X412110	701846 84548
14 x .125 x 1/20mm	.393"	5,460	4X414125	701846 84547
16 x .125 x 1/20mm	.393"	4,500	4X416125	701846 45306



3X3

It's everything expected for high-speed cutting when both performance and price are a factor. The laser welded 3X3 cuts concrete, reinforced concrete, asphalt and abrasive building materials and more. High quality diamond increases the speed of cut on a variety of materials without changing blades. Premium blade characteristics and price point that would normally take multiple sintered blades to achieve.

SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
12 x .118 x 1/20mm	.314"	6,300	3X312118	701846 47500
14 x .118 x 1/20mm	.314"	5,460	3X314118	701846 47499



TECH TIP

High-Speed Hand Saw Blades –
Maximum Blade Cutting Depths and
Recommended Operating Speeds

Note: Diamond blade cutting depths listed are approximate. Actual cutting depth will vary with the exact blade diameter or saw type, or the exact diameter of the blade flanges. Cutting depth will also be reduced if saw components extend below the blade flanges.





BLADE DIAMETER	CUTTING DEPTH	MAXIMUM SPEED (RPM)
12"	4"	6,300
14"	5"	5,460
16"	6"	4,500




It is the user's responsibility to refer to and comply with ANSI B7.1

For Reinforced Concrete and Harder Building Materials




DRY – Crack Chasing  + 

CHARGER    				
A heavy V-shaped segment designed with a special bond and diamond content for maximum removal of grout, mortar jointing, crack chasing and crack widening. Fast cutting and long life in abrasive materials using portable tools. Highly competitive to others of its kind in the market.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x .375 x 7/8-5/8-20mm	.550"	15,000	CGCC0400	701846 83856
7 x .250 x 7/8-5/8-20mm	.550"	8,730	CGCC0700	701846 83859



For Asphalt and Abrasive Materials





Dry – Tuck Pointing  + 

CLASSIC   				
An economical solution for small to medium tuck pointing jobs. High-quality performance for heavy grout removal or mortar jointing. The heavy-duty wide segment reduces wear in abrasive materials.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x .250 x 7/8-5/8	.275"	15,000	CHTUCK0400	701846 81776
4-1/2 x .250 x 7/8-5/8	.275"	13,300	CHTUCK0450	701846 81777
5 x .250 x 7/8-5/8	.275"	12,225	CHTUCK0500	701846 81778
7 x .250 x 7/8-5/8	.275"	8,730	CHTUCK0700	701846 81779
8 x .250 x 7/8-5/8	.275"	7,640	CHTUCK0800	701846 81780





For General-Purpose and Masonry Building Materials

Dry – Segmented Rim  + 





CHARGER    				
High-performance dry cutting of a variety of materials. The segment specification allows extended life and fast cut for medium to large jobs.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x .080 x 7/8-5/8-20mm	.393"	15,000	CGDSEG0400	701846 81505
4-1/2 x .080 x 7/8-5/8-20mm	.393"	13,300	CGDSEG0450	076607 04021
5 x .080 x 7/8-5/8-20mm	.393"	12,225	CGDSEG0500	701846 82851
6 x .080 x 7/8-5/8-20mm	.393"	10,185	CGDSEG0600	701846 83820
7 x .090 x DM-7/8-5/8	.393"	8,730	CGDSEG0700	076607 04020
8 x .090 x DM-7/8-5/8	.393"	7,640	CGDSEG0800	701846 81513
9 x .090 x 7/8-5/8"	.393"	6,600	CGDSEG0900	701846 69483



VALUPLUS  				
For value and performance on small- to medium-size jobs cutting soft abrasive materials like brick and tile. The sintered rim delivers a quality cut and good life.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x .080 x 7/8-5/8-20mm	.315"	15,000	VPSEG0400	701846 84098
4-1/2 x .080 x 7/8-5/8-20mm	.315"	13,300	VPSEG0450	701846 84099
7 x .090 x DM-7/8-5/8	.315"	8,730	VPSEG0700	701846 84100






Dry – Turbo Rim  + 

CHARGER    				
Combines the characteristics of a standard Charger blade with a turbo rim configuration for cutting hard, dense materials with minimal effort. A better bond and diamond concentration for maximum cutting speed, life and quality of cut.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x .080 x 7/8-5/8-20mm	.393"	15,000	CGTURB0400	076607 05475
4-1/2 x .080 x 7/8-5/8-20mm	.393"	13,300	CGTURB0450	076607 04023
5 x .080 x 7/8-5/8-20mm	.393"	12,225	CGTURB0500	701846 82853
7 x .090 x DM-7/8-5/8	.393"	8,730	CGTURB0700	076607 04022
8 x .090 x DM-7/8-5/8	.393"	7,640	CGTURB0800	701846 81512



For Natural Stone and Tiles

Dry – Continuous Rim  + 

CLASSIC   				
An economical solution for small- to medium-size jobs cutting softer ceramic tile and stone materials with efficient cutting ability.				
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x .080 x 7/8-5/8-20mm	.275"	15,000	CON4DT	076607 02793
4-1/2 x .080 x 7/8-5/8-20mm	.275"	13,300	CON45DT	076607 01194
7 x .090 x DM-7/8-5/8	.275"	8,730	CON7DT	076607 02788



For Reinforced Concrete and Harder Building Materials

WET – Medium Aggregates

CHARGER					
The steel core is designed to keep the cut straight while the .410" segment height prolongs cutting wear. Suitable for cutting medium aggregates with up to 35 HP walk-behind saws.					
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	POWER	PART #	UPC #
14 x .125 x 1	.410"	4,365	35hp	CGWCMD1412	70184681366
18 x .125 x 1	.410"	3,395	35hp	CGWCMD1812	70184681368

CLASSIC					
Laser welded blade at an economical price for general purpose cutting of cured concrete, medium-hard aggregate and no steel reinforcement. The bond and diamond combination allow fast cutting action on limited horse powered walk-behind saws.					
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	POWER	PART #	UPC #
14 x .125 x 1	.326"	4,365	35hp	CHWCGP1412	70184681359
18 x .125 x 1	.326"	3,395	35hp	CHWCGP1812	70184681361



For Asphalt and Abrasive Materials

DRY – Green/Cured Concrete

GMAX – MULTI-PURPOSE					
Designed specifically for our GC55/GC25E down-cut green concrete push saw, the GMAX Multi-Purpose blade is excellent in both green and cured concrete. The unique segment specification and anchor slot gullets allow this blade to be used in a variety of applications with outstanding results.					
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	POWER	PART #	UPC #
8 x .095 x 7/8-5/8	.372"	8,730	6hp	NXDGRN0895	70184683758
9 x .110 x 7/8-5/8	.372"	6,600	6hp	EE9110	70184675125
10 x .110 x 1-7/8-5/8	.372"	6,115	6hp	EE10110	70184684508



WET – Asphalt

CHARGER					
For large road and construction jobs with saws up to 35 HP. Higher diamond content increases productivity and offers faster cutting and longer life in asphalt and green concrete applications.					
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	POWER	PART #	UPC #
14 x .125 x 1	.327"	4,365	35hp	CGWASP1412	70184681478
18 x .125 x 1	.307"	3,395	35hp	CGWASP1812	70184681479

CLASSIC					
An economical choice for fast cutting and good life when performing jobs in a variety of abrasive materials such as green concrete and asphalt on saws up to 35 HP.					
SIZE (D x T x H)	SEGMENT HEIGHT	MAX RPM	POWER	PART #	UPC #
14 x .125 x 1	.326"	4,365	35hp	CHWASP1412	70184681375
18 x .125 x 1	.326"	3,395	35hp	CHWASP1812	70184681376



TECH TIP

Walk-Behind Saw Blades –
Maximum Blade Cutting Depths and
Recommended Operating Speeds


Note: Diamond blade cutting depths listed are approximate. Actual cutting depth will vary with the exact blade diameter or saw type, or the exact diameter of the blade flanges. Cutting depth will also be reduced if saw components extend below the blade flanges.

BLADE DIAMETER	CUTTING DEPTH	IDEAL SPEED (RPM)	MAXIMUM SPEED (RPM)
8"	2"	4,536	7,640
9"	2-1/2"	2,640	6,600
10"	3"	2,446	6,115
14"	4-5/8"	2,592	4,365
18"	6-5/8"	2,016	3,395

It is the user's responsibility to refer to and comply with ANSI B7.1




Norton Clipper cup grinders are available in a range of specifications and diameters providing a solution for a number of applications in the building and construction industry. There are many benefits to diamond grinding. It's very fast, low-cost and creates little noise compared to other concrete cutting options. It has become a very popular choice in the commercial construction and DIY home improvement industries.

- Applications:** Used on right angle grinders to grind concrete, stone and masonry materials.
- Size Range:** 4" – 7"
- Segment Height Range:** .177", .210"
- Abrasive Grain:** Diamond
- Mounting Options:** 5/8"-11 attachment optimized for all popular angle grinders, 7/8-5/8"-20mm
- Options:** Standard – single row or double row available
iHD (Infiltrated High-Density) has thicker body, larger ventilation holes for better cooling
- Machines Used:**  RIGHT-ANGLE GRINDER

General-Purpose and Masonry Building Materials


Dry – Cup Grinder  

3X3 WITH iHD TECHNOLOGY 
The 3X3 cup grinder ensures very high material removal rate, extreme comfort while working without vibrations and a self-sharpening feature. These new iHD cups offer the best finishing and longest life even on softer, more abrasive materials.

SIZE (D x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x 5/8"-11	.177"	15,000	3X3CG0400	701846 01763
5 x 5/8"-11	.177"	12,225	3X3CG0500	701846 01766
7 x 5/8"-11	.177"	8,730	3X3CG0700	701846 01769

CHARGER WITH iHD TECHNOLOGY 
The Charger cup grinder ensures a high material removal rate and more comfortable work. These new iHD cups provide a better finish and long life on a wide range of materials.

SIZE (D x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x 5/8"-11	.177"	15,000	CGCG0400	701846 01762
5 x 5/8"-11	.177"	12,225	CGCG0500	701846 01765
7 x 5/8"-11	.177"	8,730	CGCG0700	701846 01768

CLASSIC WITH iHD TECHNOLOGY 
The Classic cup grinder provides efficient material removal rate thanks to the small contact surfaces of the segments. The cups also have flat sides to avoid damaging walls or ceilings during flush grinding.

SIZE (D x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
4 x 5/8"-11	.177"	15,000	CCCG0400	701846 01761
5 x 5/8"-11	.177"	12,225	CCCG0500	701846 01764
7 x 5/8"-11	.177"	8,730	CCCG0700	701846 01767


CLASSIC 
Available in a range of sizes and segment designs for optimum performance by life or by speed. Ideal for leveling all types of masonry materials, brick, block, concrete and stone. Strategically placed hole designs help ventilate dust from the surface to extend the life of the cups.

SIZE (D x H)	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
Single Row for Fast Stock Removal				
4 x 7/8-5/8-20mm	.210"	15,000	CHSCPH0400	701846 82585
5 x 7/8-5/8-20mm	.210"	12,225	CHSCPH0500	701846 84035
7 x 7/8-5/8-20mm	.210"	8,730	CHSCPH0700	701846 82594
4 x 5/8"-11	.210"	15,000	CHSCPT0400	701846 82555
5 x 5/8"-11	.210"	12,225	CHSCPT0500	701846 84036
7 x 5/8"-11	.210"	8,730	CHSCPT0700	701846 82593
Double Row for Long Life, Smooth Finish				
4 x 7/8-5/8-20mm	.210"	15,000	CHDCPH0400	701846 82588
5 x 7/8-5/8-20mm	.210"	12,225	CHDCPH0500	701846 84037
7 x 7/8-5/8-20mm	.210"	8,730	CHDCPH0700	701846 82596
4 x 5/8"-11	.210"	15,000	CHDCPT0400	701846 82586
5 x 5/8"-11	.210"	12,225	CHDCPT0500	701846 84038
7 x 5/8"-11	.210"	8,730	CHDCPT0700	701846 82595

Accessories

VACUUM SHROUD KIT
The Vacuum Shroud's design creates a cyclonic affect extracting dust and debris from the work surface into the support vacuum. This prolongs the life of the grinding cup and grinder and provides a smoother surface while decreasing the chance of dust particle inhalation.

DESCRIPTION	UPC #
Kit includes: one shroud, five different adapter rings to fit most popular right-angle grinders, and one 7" Norton Clipper Classic single row cup wheel	701846 41039

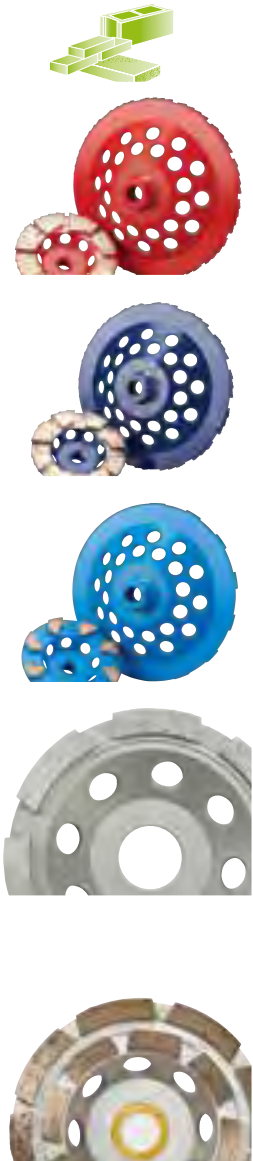



Core bits are cutting tools used to remove a cylindrically shaped piece of material. A core drill is designed to cut a hole and remove a core sample or to drill a hole without leaving material behind. Diamond core bits have diamond cutting tips and are frequently used for drilling in materials such as concrete, stone, and asphalt.

- Applications:** Used on core drills in materials such as concrete, stone and other hard materials
- Size Range:** 2" – 10"
- Segment Height Range:** .254", .393"
- Abrasive Grain:** Diamond
- Mounting Options:** 1-1/4"-7 threads
- Machines Used:**



Reinforced Concrete and Harder Building Materials

WET – Hard Aggregates




PARADIGM Premium diamond in the turbo segment permits the core to penetrate quickly and efficiently into the toughest cured concrete, for significantly increased performance. The 14" tube length with 1-1/4"-7 threads fits a wide range of core drill mounting arbors.

SIZE IN INCHES	SIZE IN MM	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
2"	51mm	.490"	2,000	PDBIT0200	701846 01410
2-1/2"	64mm	.490"	1,300	PDBIT0250	701846 01411
3"	76mm	.490"	1,300	PDBIT 0300	701846 01412
3-1/2"	89mm	.490"	1,300	PDBIT0350	701846 01413
4"	102mm	.490"	1,000	PDBIT0400	701846 01414
4-1/2"	114mm	.490"	800	PDBIT0450	701846 01415
5"	127mm	.490"	800	PDBIT0500	701846 01416
6"	152mm	.490"	665	PDBIT0600	701846 01417
7"	178mm	.490"	600	PDBIT0700	701846 01418
8"	203mm	.490"	500	PDBIT0800	701846 01419
10"	254mm	.490"	400	PDBIT1000	701846 01706



CLASSIC Economical choice for use in harder concrete with heavy reinforcement and masonry materials with good performance.

SIZE IN INCHES	SIZE IN MM	SEGMENT HEIGHT	MAX RPM	PART #	UPC #
2"	51mm	.350"	2,000	CHBIT0200	701846 82762
3"	76mm	.350"	1,300	CHBIT0300	701846 82765
4"	102mm	.350"	1,000	CHBIT0400	701846 82767
6"	152mm	.350"	665	CHBIT0600	701846 82771
8"	203mm	.350"	500	CHBIT0800	701846 82773
10"	254mm	.350"	400	CHBIT1000	701846 82774



TECH TIP

Core Bits – Minimum and Maximum Recommended Operating Speeds

BIT DIAMETER	MINIMUM RPM	IDEAL SPEED (RPM)	MAXIMUM RPM
1"	2,400	3,200	4,000
2"	1,200	1,600	2,000
3"	800	1,050	1,300
4"	600	800	1,000
5"	475	640	800
6"	400	530	665
7"	340	450	600
8"	300	400	500
10"	240	320	400

Note: For half inch increments, go to the next larger bit diameter.



It is the user's responsibility to refer to and comply with ANSI B7.1



High-Speed Gas Saws

No more pre-mixing oil and fuel – the patented iLube option automatically controls mixing for maximum efficiency, and the saw drops to idle speed when the oil is low – eliminating possible machine damage

Walk-Behind Saws

Proven, robust and functional for ideal user comfort. The professionals' choice for outstanding walk behind cutting performance, wet or dry.

Masonry Saws

Norton introduced the first masonry saw over 70 years ago and they have become the industry standard for masons worldwide.

For the full line of quality Norton Clipper equipment, please contact your local Norton sales representative

High-Speed Gas Saws

CP500 SERIES HIGH-SPEED SAWS

The Norton Clipper CP500 high-speed cut-off saw might be new to the market, but it's destined to be an asset on any crew. It's fully designed with the user in mind to not only cut a smooth, fast track, but it's also fully equipped to handle the everyday performance of any jobsite with unremitting durability and reliability. Select a standard model or upgrade to the world's first patented automatic lubrication system, Norton Clipper iLube.

The patented iLube option automatically controls mixing of oil and fuel for maximum efficiency. An electronic sensor will indicate a low oil level and adjust the engine to idle to prevent engine damage.

DESCRIPTION	SHAFT RPM	PART #	UPC #
12" Standard High-Speed Cut-Off Saw	4,500	CP512-300	701846 47559
12" iLube High-Speed Cut-Off Saw	4,500	CP512-300i iLube	701846 47561
14" Standard High-Speed Cut-Off Saw	4,500	CP514-350	701846 47563
14" iLube High-Speed Cut-Off Saw	4,500	CP514-350i iLube	701846 47565

ACCESSORIES

High-Speed Saw Wheel Kit	005101 09845
High-Speed Saw Tool Kit	005101 09846



Walk-Behind Push Saws



GC55 EARLY ENTRY/GREEN SAW

With a compact, light-weight design backed by the reliable Honda 5HP gasoline engine, the GC55 early entry saw is intended for a variety of applications. From green, cured or decorative concrete cutting to expansion joints, the features of this small push saw are hard to beat in a single saw. The low, wide profile of the frame, along with the front mount blade, contribute to producing a more disciplined cut.

UPC #	MOTOR	WEIGHT	GUARD
701846 30005	Honda GX160	115 lbs	10"



C1318P GASOLINE SAW

The next generation of 13HP saws. The C1318P features shock-absorbing handle bars. The new sleek design of the water tank, with increased capacity and improved securing, adds an additional 1.5 gallons of water over the cut. And, a newly-designed belt tensioning system helps keep the saw cutting true and true. All these features, coupled with the Honda 13HP engine, make the C1318P the premiere choice for rental and service work.

UPC #	MOTOR	WEIGHT	GUARD
701846 42453	Honda GX390	220 lbs	18"



C13PE GASOLINE SAW

Rental equipment has to withstand any and all conditions by user and application. For that reason, the Norton Clipper C13PE or CP14PE suits any rental fleet that both the novice and expert will appreciate to hold-up through tough situations. The 18" blade guard, ride-on water system and quick-release blade guard lock all keep safety in mind while the rugged frame, powerful engine and easy-to-use console makes cutting a breeze.

UPC #	MOTOR	WEIGHT	GUARD
701846 47524	Honda GX390	220 lbs	18"

Large Masonry Saws

BBL BLOCKBUSTER LARGE MASONRY SAWS

Having introduced the first masonry saw over 70 years ago, the Norton Clipper BBL heavy-duty block saws have become the industry standard for masons worldwide. These models are equipped with single-phase electric motors and come with a blade capacity of 14" or 20". Extended water pan and open back frame allow cutting of larger materials. The balanced cutting head makes for effortless cutting depth positioning. Having a rugged all-steel frame design with forklift brackets allows these saws to resist twisting and damage during transport around a job site. For other sizes and horsepower machines, or for gasoline-powered versions, contact your Norton sales representative.

DESCRIPTION	HP	PART #	UPC #
BBL547 Blockbuster Saw with Baldor electric motor; 14" blade guard capacity	5	BBL547	701846 83211
BBL527 Blockbuster Saw with Baldor electric motor; 20" blade guard capacity	5	BBL527	701846 83150

ACCESSORIES

Electric Water Pump – PE-1	701846 68392
Conveyor Cart Replacement for BBL	003100 7390



Electric Water Pump



Conveyor Cart Replacement



Compact Masonry Saws

BBC BLOCKBUSTER COMPACT MASONRY SAWS

Combines the performance of a full size masonry saw with the convenience of portability. Also available in gas or electric versions, the BBC saws have a rugged jig-welded frame, durable enough for even the heaviest work load. Standard rear wheel dolly design and removable legs make transport and set-up easy. For other sizes and horsepower machines, or for gasoline-powered versions, contact your Norton sales representative..

DESCRIPTION	HP	PART #	UPC #
BBC157 Blockbuster Saw with Baldor electric motor; 14" blade guard capacity	1.5	BBC157	701846 82488
BBC207 Blockbuster Saw with Baldor electric motor; 14" blade guard capacity	2	BBC207	701846 82501
BBC207 Blockbuster Saw with Baldor electric motor; 20" blade guard capacity	3	BBC307	701846 30011
BBC547 Blockbuster Saw with Honda gasoline motor; 14" blade guard capacity	5.5	BBC547	701846 82175
BBC507 Blockbuster Saw with Honda gasoline motor; 20" blade guard capacity	5.5	BBC507	701846 30012

ACCESSORIES

Electric Water Pump – PE-1	701846 68392
Conveyor Cart Replacement for BBC	003100 7367



Mini Masonry Saws

BBM BLOCKBUSTER MINI MASONRY SAWS

The innovative design of these small masonry saws has been copied many times due to its compact, all-steel unibody construction, giving the best weight-to-strength distribution. A 14" blade capacity and ergonomically-designed, three-position locking, cutting head provides a safe, clear view of the work area. Whether your choice is the 3HP brush motor or the 1.5HP induction motor for heavier commercial use, both come with features such as overload protection, garden hose connection and a channeled-flow water pan to direct dust and slurry away from the operator.

DESCRIPTION	HP	PART #	UPC #
Blockbuster Mini Masonry Saw with AC universal motor; gear drive	3	BBM307	701846 00684
Blockbuster Mini Masonry Saw with Induction motor; belt drive	2	BBM158	701846 26327

ACCESSORIES

Vacuum Adaptor Kit (includes: back splash, adaptor and hardware)	701846 00753
Wet Kit	701846 00704
Stand	701846 00691



Wet Kit



Stand



All saws on this page come equipped with genuine Norton Clipper diamond blades.

get wired
FOR SUCCESS

Our broad wire brush offering includes the shapes, wire configurations and filament materials you'll need for heavy- to light-duty brushing applications.





Our Norton wire brush broad offering includes all the basic shapes and configurations. Informative, attractive packaging clearly explains dimensions, structure, safety and machine usage. All brushes are individually clamshell packaged unless otherwise noted. When using wire brushes, be sure to comply with ANSI B165 "Power-Driven Brushing Tools: Safety Requirement for the Design, Care and Use." and safety documents on www.nortonabrasives.com website.

Applications:

Cleaning rust, scale and dirt; light deburring; edge blending; roughening for adhesion; finishing for appearance; finish preparation prior to plating or painting

Shapes:

Cup, saucer cup, wheel, joint/crack, end brush, hand brush

Wire Design:


Twist knot, crimped, and stringer bead

Other:

Color-coded for easy identification:




Machine Used:

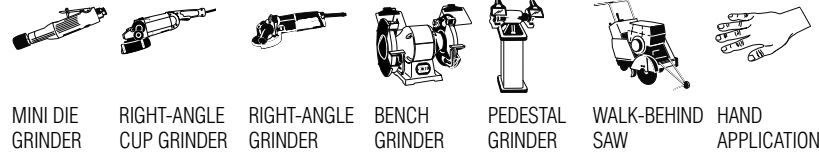

Why Use Wire Brushes vs. Other Brushes, Coated Abrasive, and Surface-Cleaning Products

Norton Wire brushes remove rust and oxidations, paint, slag, weld spatter and other unwanted surface contaminants, without removing any base material. Other products can remove base material along with the surface contaminant. Our flexible wire brushes are able to clean hard-to-reach places and conform to irregular surfaces, which more rigid products cannot do.

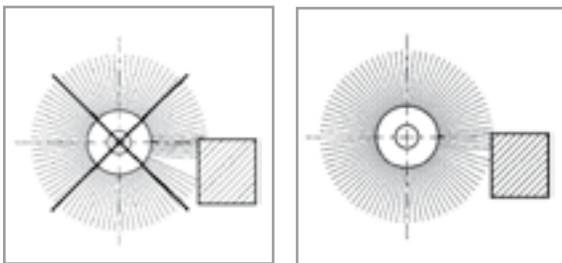

Let the tip of the wire brush do the work – operate the brush with the lightest pressure. If heavy pressure is used, wires will be overstressed, resulting in a wiping action, which, if continued, creates wire fatigue and will shorten brush life. Reversing the rotation periodically sharpens the wire tips for faster cutting action and longer life. Use finest suitable wire size.



Crimped

Standard Twist Knot

Stringer Bead Twist Knot

TECH TIP

When to Use Crimped Wire vs. Standard Twist Knot vs. Stringer Bead Twist Knot Brushes

Crimped Wire Brushes

Crimped wire brushes' individual filaments are supported only by each other – creating extra flexibility.

Ideal for work on irregular surfaces, finer surface finishing, and light- to medium-duty contaminant removal applications.

Standard Twist Knot Wire Brushes

Ensuring longer life, making them the choice for more aggressive applications requiring higher-impact action, and a rougher surface finish.

Standard twist knot brushes are made with straight wire filaments that are twisted together to make more rigid rope- or cable-like pieces.

Stringer Bead Twist Knot Wire Brushes

Stringer bead twist knots (vs. standard twist knots) are more tightly twisted to the end of the knot, creating a narrower face and highest-impact action.

The choice for tough weld scale cleaning, removing the bead scale that occurs at the initial joining of two sections of pipe, root and hot weld pass cleaning, and the most aggressive brushing applications.

Workpiece Material To Wire Brush Recommendation Guide

Workpiece Material	Carbon Steel	Stainless Steel	Brass	Nylon
ALUMINUM		Blue	Orange	Green
BRASS		Blue	Orange	Green
COPPER		Blue	Orange	Green
IRON	Red		Orange	Green
PLASTIC			Orange	Green
CARBON STEEL/METAL	Red		Orange	Green
STAINLESS STEEL		Blue	Orange	Green
WOOD	Red	Blue	Orange	Green

Wire Diameter

Choose the appropriate wire brush wire diameter for the job

- Very fine to fine wire for light-duty applications
- Medium to coarse wire for heavy-duty applications

Wire	Coarse		Medium to Coarse		Medium		Fine		Very Fine	
DIAMETER IN INCHES	.032	.020	.020	.015	.012	.0104	.010	.008	.006	.005
DIAMETER IN MM	.80	.50	.50	.37	.30	.26	.25	.20	.15	.13

TECH TIP

Trim Length

Choose the appropriate trim length for the job. "Trim Length" equals the amount of usable filament:

- Longer trim lengths are more flexible, making them the choice for irregular surfaces
- Shorter trim lengths are fast acting and more rigid, so better for more severe applications

TECH TIP

Filament Do's and Don'ts

Excessive pressure bends and could break brush filaments. Instead of increasing the pressure applied, consider:

- A more aggressive brush:
 - Increasing wire diameter
 - Shorter trim length
- Different brush type, e.g. twist knot versus crimped wire
- Increasing RPM without exceeding the MAX RPMs marked on the brush



To learn which wire style is the best choice for your job and see what makes Norton Wire Brushes the ultimate power tool accessories visit <https://nortonsga.us/wgazw>



Better choice for deburring, removing rust, paint, corrosion and weld spatter from metal surfaces

BLUEFIRE WIRE BRUSHES

- Perfect for removing rust, scale, paint, and dirt from metal and other surface
- Available in a variety of brush types and sizes for large flat areas to small, tight spaces
- Durable design provides a uniform finish while offering the longest life



Good choice for removing rust oxidation, paint, slag and weld spatter without removing base material

GEMINI WIRE BRUSHES

- Ideal low-impact solution for refining surfaces without removing any base material
- Flexible design for cleaning hard-to-reach places and conforming to irregular surfaces, which more rigid products cannot do
- Economically priced yet solid-performing to complement your projects perfectly while bringing real savings to the bottom line




EXPANDED OFFERING

Deburring; roughing; cleaning rust, scale, paint and oxidation; cleaning corners, recesses, and other hard-to-reach areas and removing concrete and large surfaces

WIRE CUP BRUSHES

- Used on right angle cup grinders
- Twist Knot style for heavy-duty applications
- Crimped cup for light- to medium-duty applications

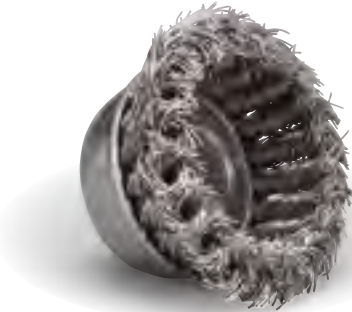

TIER:	BETTER	BETTER
TRADENAME:	BLUEFIRE	BLUEFIRE
WIRE TYPE:	CARBON	STAINLESS

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #
Twist Knot Wire Saucer Cup Brushes - Single Row - With Arbor Hole					
4" x 0.020" x 5/8"-11	7/8"	15,000	5	662528 33483	
5" x 0.020" x 5/8"-11	1-1/8"	12,500	10	662528 35585	662528 35586

Twist Knot Wire Cup Brushes

- Their more rigid structure allows efficient, high-impact cutting and cleaning on more demanding applications.
- Single row construction limits flaring of the brush on corners and angles



TIER:	BETTER	BETTER	BETTER	BETTER	GOOD	GOOD
TRADENAME:	BLUEFIRE	BLUEFIRE	BLUEFIRE	BLUEFIRE	GEMINI	GEMINI
WIRE TYPE:	CARBON	STAINLESS	CARBON	CARBON	CARBON	STAINLESS

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
Twist Knot Wire Cup Brushes - Single Row - With Arbor Hole									
2-3/4" x 0.014" x 5/8"-11	1"	14,000	5					662528 39109	
2-3/4" x 0.014" x 5/8"-11	7/8"	14,000	5					662528 38870	662528 38871
2-3/4" x 0.020" x 5/8"-11	3/4"	14,000	5	699366 53336	699366 53340				
2-3/4" x 0.020" x 5/8"-11	1"	14,000	10					662528 39033	662528 38812
2-3/4" x 0.020" x 5/8"-11	7/8"	14,000	5					662528 38872	
3" x 0.020" x 5/8"-11	7/8"	14,000	5					662528 38835	662538 39127
3" x 0.020" x M10	7/8"	14,000	5					662528 39075	
3-1/2" x 0.020" x 5/8"-11	1-3/8"	13,000	5					662528 38868	
3-1/2" x 0.020" x 5/8"-11	7/8"	13,000	5					662528 38813	
4" x 0.014" x 5/8"-11	1-1/4"	9,000	5					662528 39060	
4" x 0.020" x 5/8"-11	1-1/8"	9,000	10					662528 39103	
4" x 0.020" x 5/8"-11 with bridle	1-1/16"	9,000	5	699366 53345	662528 33947				
4" x 0.023" x 5/8"-11	1-1/4"	9,000	5					662528 39090	
6" x 0.014" x 5/8"-11	1-3/8"	6,600	5					662528 39037	
6" x 0.020" x 5/8"-11	1-3/8"	6,000	5	699366 05965	662533 71115			662528 39104	
6" x 0.023" x 5/8"-11	1-3/8"	6,000	5					662528 39091	
6" x 0.035" x 5/8"-11	1-3/8"	6,000	5	699366 02003					
Twist Knot Wire Cup Brushes - Single Row - With Arbor Hole and Protective Guard									
2-3/4" x 0.020" x 5/8"-11	3/4"	15,000	5					662528 33492	
4" x 0.020" x 5/8"-11	1-1/8"	9,000	5					662528 33496	
5" x 0.020" x 5/8"-11	1-1/8"	6,500	5					662528 33497	
Twist Knot Wire Cup Brushes - Double Row - With Arbor Hole									
6" x 0.020" x 5/8"-11	1-3/8"	6,000	5					699366 53346	

Crimped Wire Cup Brushes

For light- to medium-duty brushing applications on flat or irregular surfaces, and bevel buffing where added flexibility is needed; fast-cutting and flexible, with heavy wire fill

- Machine for cups with arbor holes: right angle cup grinder
- Machine for shank mounted cups: straight in-line grinder, pencil grinder



TIER: **BETTER**
 TRADENAME: **BLUEFIRE**
 WIRE TYPE: **CARBON**

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
High Performance Cable Crimped Wire Cup Brushes - With Arbor Hole and Protective Guard				
3" x (12 x 0.009") x 5/8"-11	7/8"	15,000	5	662528 33493
4" x (12 x 0.009") x 5/8"-11	1-3/16"	9,000	5	662528 33494



TIER: **BETTER** **BETTER** **GOOD**
 TRADENAME: **BLUEFIRE** **BLUEFIRE** **GEMINI**
 WIRE TYPE: **CARBON** **STAINLESS** **CARBON**

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #
Crimped Wire Cup Brushes - With Arbor Hole						
2-3/4" x 0.014" x 5/8"-11	1"	14,000	5			662528 38856
2-3/4" x 0.020" x 3/8"-24	1"	14,000	5			662528 39080
3" x 0.014" x 5/8"-11	13/16"	14,000	5			662528 39076
3" x 0.014" x 5/8"-11	7/8"	14,000	5	699366 53341	662528 36362	
3" x 0.014" x 5/8"-11	1"	14,000	10			662528 39034
4" x 0.014" x 5/8"-11	1-3/16"	9,000	5	699366 53347		
4" x 0.014" x 5/8"-11	1-1/8"	9,000	10			662528 39121
4" x 0.020" x 5/8"-11	1-3/16"	9,000	5		662528 43844	
5" x 0.014" x 5/8"-11	1-3/8"	8,000	5			662528 39105
6" x 0.014" x 5/8"-11	1-1/8"	6,000	5	699366 53348		
6" x 0.020" x 5/8"-11	1-1/8"	6,000	5	699366 53349		



TIER: **GOOD** **GOOD** **GOOD**
 TRADENAME: **GEMINI** **GEMINI** **GEMINI**
 WIRE TYPE: **CARBON** **STAINLESS** **BRASS**

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #
Crimped Wire Cup Brushes - Shank Mounted						
5/8" x 0.005" x 1/8"	1/4"	37,000	100			662528 39087
1-3/4" x 0.006" x 1/4"	1/2"	13,000	10	662528 38857		
1-3/4" x 0.012" x 1/4"	1/2"	13,000	10	662528 38858		
1-3/4" x 0.012" x 1/4"	3/4"	13,000	12	662528 39028		
2" x 0.010" x 1/4"	5/8"	10,500	12		662528 38859	
2" x 0.012" x 1/4"	5/8"	13,000	12	662528 39110		
2-1/4" x 0.014" x 1/4"	5/8"	4,500	10	662528 38860		


Applications range from the toughest, more aggressive surface cleaning applications, including removing weld scale, spatter, extra-heavy rust and corrosion, cleaning pipe joints, or surface roughening to light- to medium- duty surface cleaning and contaminant removal



EXPANDED OFFERING

WIRE WHEEL BRUSHES

- Available in Standard Twist Knot, Stringer Bead Twist Knot, and Crimped
- See specific machines for each wire wheel below

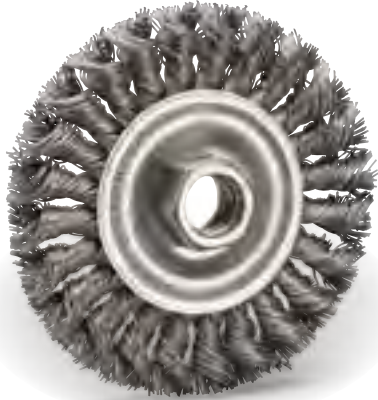

Standard Twist Knot Wire Wheel Brushes

Our twist knot wire design provides added rigidity for extra cutting and cleaning power, and a rougher surface finish.

- Wheel brushes with arbor holes perform well on more aggressive applications requiring high-impact action: tough welding and metal fabrication applications, including removing weld scale, spatter, extra-heavy rust.
- These shank-mounted wheel brushes are used for small-to-medium-duty jobs requiring some flexibility and lighter brushing action for corrosion, or surface roughing applications. These brushes are used on straight shaft, die, pencil grinders, drills and right angle grinders.



TIER:	BETTER	BETTER	BETTER	GOOD	GOOD
TRADENAME:	BLUEFIRE	BLUEFIRE	BLUEFIRE	GEMINI	GEMINI
WIRE TYPE:	CARBON	STAINLESS	PIPELINE	CARBON	STAINLESS

SIZE	FACE WIDTH	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #
Standard Twist Knot Wire Wheel Brushes – With Arbor Hole									
3" x 0.15" x 1/2"-3/8"	3/8"	5/8"	20,000	6	699366 53314				
3" x 0.014" x 3/8"	3/8"	5/8"	25,000	1				662528 39021	
4" x 0.014" x 5/8"-11	5-16"	7/8"	20,000	5				662528 39011	
4" x 0.014" x 5/8"-11	1/2"	7/8"	20,000	10				662528 39052	
4" x 0.020" x 5/8"-11	1/4"	3/4"	20,000	10					662528 39132
4" x 0.020" x 5/8"-11	1/2"	3/4"	20,000	5	662528 38300				
4" x 0.020" x 5/8"-11	1/2"	7/8"	20,000	10				662528 39035	662528 39020
4" x 0.020" x 5/8"-11	1/2"	7/8"	20,000	5				662528 39078	
4" x 0.020" x 5/8"-11	9/16"	7/8"	20,000	10				662528 39019	
4-1/2" x 0.020" x 5/8"-11	1/2"	1"	20,000	5	699366 06275				
4-1/2" x 0.020" x 5/8"-11 (black hub)	1/2"	1"	20,000	6			662528 40466		
4-1/2" x 0.020" x 5/8"-11	1/2"	1"	20,000	6	699366 53331				
4-1/2" x 0.020" x 5/8"-11	1/2"	1"	20,000	5		699366 53333			
5" x 0.020" x 5/8"-11	1/2"	1"	12,500	5	662528 33487	662528 33488			
6" x 0.014" x 5/8"-11	1/2"	1-1/2"	12,000	5				662528 39014	
6" x 0.020" x 5/8"-11	1/2"	1-3/8"	12,000	5	699366 53352	662533 71540			
6" x 0.020" x 5/8"-11	5/8"	1-1/4"	12,000	5				662528 39107	662528 39594
6" x 0.020" x 5/8"-11	1/2"	1-3/8"	12,000	5	699366 53327				
6" x 0.025" x 5/8"-11	5/8"	1-1/4"	9,000	5				662528 39593	



TIER:	GOOD
TRADENAME:	GEMINI
WIRE TYPE:	CARBON

SIZE	FACE WIDTH	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Standard Twist Knot Wire Wheel Brushes - Shank Mounted					
3" x 0.014" x 1/4"	1/4"	5/8"	25,000	12	662528 39015
3-1/4" x 0.014" x 1/4"	3/8"	5/8"	25,000	10	662528 39031
4" x 0.014" x 1/4"	1/2"	7/8"	25,000	8	662528 39032



Stringer Bead Twist Knot Wire Wheel Brushes

The choice for toughest weld scale cleaning; removing the bead scale that occurs at the initial joining of two sections of pipe; root, and hot weld pass cleaning, and the most aggressive brushing applications. Stringer Bead Twist Knot Wire Wheel Brushes are best used on right angle grinders for difficult jobs.



TIER:	BETTER	BETTER	BETTER	BETTER	BETTER	GOOD	GOOD
TRADENAME:	BLUEFIRE	BLUEFIRE	BLUEFIRE	BLUEFIRE	BLUEFIRE	GEMINI	GEMINI
WIRE TYPE:	CARBON	CARBON	CARBON	STAINLESS	STAINLESS	CARBON	STAINLESS
OTHER:		Pipeline	Heavy-Duty		Pipeline		

SIZE	FACE WIDTH	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #
Stringer Bead Knot Wire Wheel Brushes – With Arbor Hole										
3" x 0.020" x 1/4"		1"	20,000	10						662528 39096
4" x 0.020" x 5/8"-11	3/16"	7/8"	20,000	5	699366 06277					
4" x 0.020" x 5/8"-11	3/16"	7/8"	20,000	6*	662528 33489	662528 40467		699366 06278	662528 42233	
4" x 0.020" x 5/8"-11	3/16"	7/8"	20,000	10*	662533 70022					
4" x 0.020" x 5/8"-11	3/16"	7/8"	20,000	10						662528 39036 662528 39039
4" x 0.020" x 5/8"-11	1/4"	7/8"	20,000	5						662528 38997
4" x 0.020" x 5/8"-11	1/2"	7/8"	20,000	10						662528 39130
4" x 0.020" x 5/8"-11	1/2"	1"	20,000	10						662528 39106
4" x 0.020" x M10	3/16"	7/8"	20,000	10						662628 39038
4-1/2" x 0.020" x 5/8"-11	3/16"	1-1/8"	20,000	6			662528 44886			
4-1/2" x 0.020" x 5/8"-11	3/16"	1-1/8"	20,000	6*		662528 42299				
4-1/2" x 0.020" x 5/8"-11	3/16"	3/16"	15,000	5						662528 39111
5" x 0.020" x 5/8"-11	3/16"	7/8"	12,500	10*	662528 33490			662528 33491		
5" x 0.020" x 5/8"-11	1/2"	7/8"	12,500	5						662528 39133
6" x 0.020" x 5/8"-11	3/16"	1-3/8"	9,000	10	699366 53350		662528 44887	699366 53351		
6" x 0.020" x 5/8"-11	3/16"	1-3/8"	9,000	10*			662528 40469			
6-7/8" x 0.020" x 5/8"-11	3/16"	1-1/8"	9,000	10*	699366 53329	662528 40468	662528 43919	662533 71116		
6-7/8" x 0.020" x 5/8"-11	3/16"	1-1/8"	9,000	5						662528 39026
6-7/8" x 0.020" x 5/8"-11	3/16"	1-1/8"	9,000	6	662528 10992					
Double Hub										
9" x 0.020" x 5/8"-11	3/16"	2-1/8"	6,000	6	662528 37993					
Stringer Bead Knot Wire Wheel - With Arbor Hole – For Walk – Behind Machines										
12" x 0.035" x 1"-DP	3/8"	3-1/4"	4,500	2	699366 06280					


*Bulk Packed Item



Radial Wheel

Nylon Radial Wheel Brushes are best used for deburring, surface and light cleaning, adding an edge radius, on ferrous and non-ferrous parts. The long trim length is ideal when used on intricate or irregular parts.

- Machine: Bench and Pedestal, Automated CNC, Inline Grinders



TIER:	GOOD
TRADENAME:	GEMINI
WIRE TYPE:	NYLON

SIZE	FACE WIDTH	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Radial Wheel					
3" x 3/8" x 5/8"	3/8"	15/16"	15,000	12	662528 38842



TIER:	BETTER	GOOD	GOOD
TRADENAME:	BLUEFIRE	GEMINI	GEMINI
WIRE TYPE:	CARBON	CARBON	STAINLESS

Crimped Wire Wheel Brushes

Shank-mounted wheel brushes are used on straight shaft, die, and pencil grinders, and drills. Wheel brushes with arbor holes are used on bench and pedestal grinders. Their extra flexibility and lower impact makes these brushes an excellent choice for cleaning irregular surfaces and finer surface finishing, and light to medium duty surface contaminant removal applications. May be used individually or stacked on a shaft.

- Narrow-faced brushes are ideal for general-purpose brushing of uneven or difficult-to-reach surfaces.
- Medium-faced brushes clean larger surface areas and have longer life.



Crimped Wire Narrow Face - Carbon Steel - with Arbor hole



Crimped Wire - Carbon Steel - Shank Mounted

SIZE	FACE WIDTH	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #
Crimped Wire Wheels Brushes with Narrow Face - With Arbor Hole							
1" x 0.008" x 5/16"	5/32"	3/16"	20,000	20		662528 38949	
2" x 0.014" x 1/2"	3/8"	1/2"	20,000	12		662528 39023	
3" x 0.005" x 1/2"	1/4"	1"	20,000	20			662528 38960
3" x 0.014" x 1/2"	5/8"	1"	20,000	10		662528 39024	
4" x 0.014" x 5/8"-11	7/16"	7/8"	15,000	5		662528 39001	
6" x 0.014" x 1/2"-2	3/4"	1-1/8"	6,500	5	699366 53306		
6" x 0.014" x 5/8"	3/4"	1-1/8"	6,000	5		662528 39097	
6" x 0.014" x 5/8"	3/4"	1-7/16"	6,000	5		662528 39088	
8" x 0.014" x 5/8"	3/4"	1-9/16"	4,000	5		662528 39099	
8" x 0.014" x 5/8"	3/4"	2-1/16"	6,000	5		662528 39089	
8" x 0.014" x 1-1/4"	5/8"	1-1/2"	4,000	5		662528 38978	
Crimped Wire Wheels Brushes with Medium Face - With Arbor Hole							
4-1/2" x 0.014" x 5/8"-11		1"	13,000	6	662533 70278		
6" x 0.014" x 1/2"-2	1"	1-1/8"	6,500	5	699366 53324		
6" x 0.014" x 5/8"	1"	1-1/8"	6,500	5		662528 39098	
8" x 0.014" x 1/2"-2	1-1/16"	1-5/8"	4,500	5	699366 53326		
8" x 0.014" x 5/8"	1"	1-9/16"	4,000	5		662528 39100	
8" x 0.014" x 2"	1"	1-3/8"	4,500	5		662528 39025	
10" x 0.014" x 3/4"	1-9/16"	2-1/2"	3,600	1		662628 39102	
12" x 0.012" x 2"	2"	3-1/4"	3,600	1		662528 39006	



TIER:	GOOD	GOOD	GOOD
TRADENAME:	GEMINI	GEMINI	GEMINI
WIRE TYPE:	CARBON	STAINLESS	BRASS


SIZE	FACE WIDTH	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #
Crimped Wire Wheels Brushes with Narrow Face - Shank Mounted							
3/4" x 0.005" x 3/16"	1/32"	3/16"	37,000	100	662528 39084		
1" x 0.005" x 1/8"	1/8"	5/16"	37,000	100			662528 39085
1-1/2" x 0.008" x 1/4"	1/4"	1/4"	25,000	20	662528 38962		
1-1/2" x 0.0118" x 1/4"	7/16"	3/8"	20,000	12	662528 38999		
1-1/2" x 0.014" x 1/4"	1/4"	1/4"	25,000	20	662528 38963		
2" x 0.006" x 1/4"	3/8"	1/2"	20,000	20	662528 39029		
2" x 0.008" x 1/4"	3/8"	7/16"	25,000	20	662528 38964		
2" x 0.0118" x 1/4"	3/8"	1/2"	20,000	20	662528 39030		
2" x 0.014" x 1/4"	3/8"	7/16"	25,000	12	662528 38965		
2" x 0.020" x 1/4"	3/8"	7/16"	25,000	20	662528 38966		
2-1/2" x 0.008" x 1/4"	7/16"	11/16"	25,000	10	662528 38967		
2-1/2" x 0.014" x 1/4"	7/16"	11/16"	25,000	12	662528 38968		
3" x 0.008" x 1/4"	1/2"	1"	20,000	10	662528 39092		
3" x 0.008" x 1/4"	7/16"	3/4"	25,000	10	662528 38969		
3" x 0.008" x 1/4"	7/16"	3/4"	25,000	12		662528 38972	
3" x 0.0118" x 1/4"	1/2"	1"	20,000	10	662528 39093		
3" x 0.014" x 1/4"	3/8"	1/4"	20,000	12	662528 39000		
3" x 0.014" x 1/4"	7/16"	3/4"	25,000	10	662528 38970		
3" x 0.014" x 1/4"	7/16"	3/4"	25,000	12		662528 38973	
3" x 0.014" x 1/4"	1/2"	1"	20,000	20		662528 39048	
3" x 0.020" x 1/4"	7/16"	3/4"	25,000	12	662528 38971		
3" x 0.020" x 1/4"	1/2"	1"	20,000	12	662528 39096		
4" x 0.014" x 1/4"	1/2"	1"	25,000	12	662528 38974		

Clean and deburr recessed areas or inside diameters of tubes and pipes to proper surface finish; rubber and plastic flash removal; paint and rust removal, and mold and tool polishing

EXPANDED OFFERING

END BRUSHES

- Used on CNC, Robotic, die grinders, and drill presses
- Twist knot wire end brushes for more aggressive cutting
- Crimped wire end brushes for lighter brushing action and contoured surfaces



Twist Knot Wire End Brush


Their added wire rigidity makes these brushes the choice for more aggressive cutting.



TIER:	BETTER	GOOD	GOOD	GOOD
TRADENAME:	BLUEFIRE	GEMINI	GEMINI	GEMINI
WIRE TYPE:	CARBON	CARBON	STAINLESS	BRASS


SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #
Twist Knot Wire End Brushes – Shank-Mounted							
1/2" x 0.006" x 1/4"	1-1/8"	22,000	20		662528 38876		
1/2" x 0.014" x 1/4"	1-1/8"	22,000	20		662528 38877		
3/4" x 0.014" x 1/8"	7/8"	22,000	20		662528 39056		
3/4" x 0.014" x 1/4"	7/8"	22,000	20		662528 38879		
3/4" x 0.020" x 1/4"	7/8"	22,000	20		662528 39057		
3/4" x 0.020" x 1/4"	7/8"	22,000	10*	699366 53316			
3/4" x 0.020" x 1/4"	1"	22,000	20		662528 39116	662528 39118	
3/4" x 0.020" x 1/4"	1-1/8"	22,000	20		662528 38878		
1" x 0.006" x 1/4"	1-1/8"	22,000	20			662528 38885	
1" x 0.010" x 1/4"	1-1/8"	22,000	25			662528 38886	
1" x 0.014" x 1/4"	7/8"	22,000	10*	699366 06279			
1" x 0.014" x 1/4"	1"	22,000	20			662528 38887	662528 38882
1" x 0.020" x 1/4"	7/8"	22,000	10*	699366 53310			
1" x 0.020" x 1/4"	1"	22,000	25		662528 39117		
1" x 0.020" x 1/4"	1"	22,000	20			662528 39119	

* Bulk Packed Item



Insert Circular Flared Crimped Wire End Brush

The flared end configuration facilitates interior side cleaning and will not harm the bottom of the hole.



Encapsulated Hollow Center Crimped Wire End Brush


Their hollow centers effectively allow these brushes to clean around protrusions and also prevent the wires from meshing together. Encapsulating a portion of the wires' length shortens the free wires, increasing the wires' stiffness, thereby creating greater control of the brush.

TIER:	GOOD
TRADENAME:	GEMINI
WIRE TYPE:	CARBON

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Circular Flared Crimped End Brushes – Shank-Mounted				
1-1/2" x 0.006" x 1/4"	7/8"	20,000	12	662528 39108
1-12" x 0.020" x 1/4"	1"	15,000	12	662528 38898
2" x 0.010" x 1/4"	1-1/8"	15,000	10	662528 38899
3" x 0.008" x 1/4"	7/8"	16,000	12	662528 39047

TIER:	GOOD
TRADENAME:	GEMINI
WIRE TYPE:	CARBON

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Encapsulated Hollow Center Crimped Wire End Brush – Shank-Mounted				
1/2" x 0.010" x 1/4"	1"	18,000	20	662528 38907

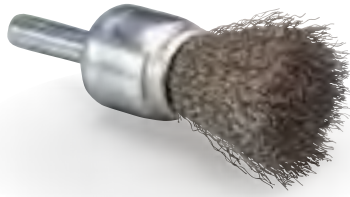

Crimped Wire End Brushes


Designed to generate lighter brushing action and reach into contoured surfaces.



TIER:	BETTER	BETTER	GOOD	GOOD
TRADENAME:	BLUEFIRE	BLUEFIRE	GEMINI	GEMINI
WIRE TYPE:	CARBON	STAINLESS	CARBON	STAINLESS

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #
Crimped Wire End Brushes – Shank-Mounted							
1/4" x 0.005" x 1/8"	7/16"	37,000	12				66252839086
1/2" x 0.005" x 1/4"	1"	25,000	20				66252838902
1/2" x 0.006" x 1/4"	3/8"	25,000	20			66252839040	
1/2" x 0.006" x 1/4"	1"	25,000	20			66252838889	66252839043
1/2" x 0.010" x 1/4"	1"	25,000	20			66252838890	66252839044
1/2" x 0.014" x 1/4"	7/8"	25,000	20			66252839042	
1/2" x 0.014" x 1/4"	1"	25,000	20				66252838888
1/2" x 0.020" x 1/4"	1"	25,000	20			66252838891	
3/4" x 0.006" x 1/4"	1"	22,000	10*		69936606145		
3/4" x 0.010" x 1/4"	3/8"	22,000	20			66252839053	
3/4" x 0.014" x 1/4"	1"	22,000	10*	69936653317			
3/4" x 0.020" x 1/4"	7/8"	22,000	20			66252839112	
3/4" x 0.020" x 1/4"	1"	22,000	20			66252838892	
1" x 0.005" x 1/4"	1"	22,000	20				66252838896
1" x 0.006" x 1/4"	1"	22,000	25			66252839045	66252838838
1" x 0.010" x 1/4"	3/8"	22,000	20			66252839054	
1" x 0.010" x 1/4"	1"	22,000	25				66252839055
1" x 0.010" x 1/4"	1"	22,000	20				66252838897
1" x 0.014" x 1/4"	3/4"	20,000	20			66252839094	
1" x 0.014" x 1/4"	1"	22,000	20			66252839046	
1" x 0.020" x 1/4"	7/8"	22,000	20			66252839095	
1" x 0.020" x 1/4"	1"	22,000	20			66262839113	66252839115
1" x 0.020" x 1/4"	1-3/16"	20,000	10*	69936653309			

* Bulk Packed Item

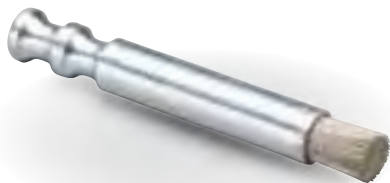

Pencil Crimped Wire End Brush

These brushes are designed to clean counter bores, slots, blind holes, and small crevices; and light spot facing of aluminum or iron sand castings.



TIER:	GOOD
TRADENAME:	GEMINI
WIRE TYPE:	STAINLESS

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Pencil Crimped Wire End Brush – Shank-Mounted				
1/4" x 0.010" x 5/16"	3/8"	10,000	12	66252838906



Pilot End Brush

Specially designed to clean around rivet or bolt holes; the pilot guides the brushes.



TIER:	GOOD
TRADENAME:	GEMINI
WIRE TYPE:	CARBON

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Pilot Crimped Wire End Brush – Shank-Mounted				
1/2" x 0.004" x 1/4"	3/8"	25,000	20	66252838904

Cleaning, polishing, reaming, finishing and removing debris, burrs, rust, residues, and surface contaminants inside cylindrical items, including tubes, pipes, bottles, smooth-sided and threaded holes, and other industrial components



EXPANDED OFFERING

TUBE BRUSHES

- Use manually or fastened to portable or fixed machines (including drills, drill presses, and CNC machines)
- Available in single and double stem providing firm support when working internally
- A wide selection of shapes and filament variations to achieve the best results on many different applications

Single Stem, Single Spiral Tube Brush – With Eye Loop

These spiral brushes have a single layer of filament twisted around a stem wire to create additional strength and higher density fill brushes. This spiral configuration ensures consistent and constant abrasive contact with the tube. Formed eye loop at the end of the stem for convenient hand use.



TIER:	GOOD	GOOD	GOOD	GOOD
TRADENAME:	GEMINI	GEMINI	GEMINI	GEMINI
WIRE TYPE:	CARBON	STAINLESS	BRASS	NYLON

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #
Single Stem, Single Spiral Tube Brush – With Eye Loop							
3/16" x 0.003" x 0.094"	1-1/2"	2,000	12	662528 38822			
3/16" x 0.004" x 0.094"	5/64"	3,000	12	662528 38913			
1/4" x 0.003" x 0.094"	1-1/2"	2,000	12	662528 38823	662528 38824	662528 38840	
1/4" x 0.004" x 0.115"	5/64"	3,000	12	662528 38914			
1/4" x 0.006" x 0.115"	5/64"	3,000	12	662528 38915			
3/8" x 0.004" x 0.125"	2"	2,000	12		662528 38825	662528 38826	
3/8" x 0.004" x 0.132"	1/8"	3,000	12	662528 38916			
3/8" x 0.006" x 0.168"	1/8"	3,000	12	662528 38917			
3/8" x 0.006" x 0.168"	1-1/2"	3,000	12		662528 38946		
7/16" x 0.010" x 0.125"	7/64"	3,000	12				662528 38947
1/2" x 0.008" x 0.221"	9/64"	3,000	12	662528 38918			



Single Stem, Single Spiral Tube Brush


Similar to the single stem, single spiral tube brushes, but without eye loop. These brushes are ideal for complete internal cleaning and deburring of tubes and pipes and intricate area ensuring constant filament to surface contact.



TIER:	GOOD
TRADENAME:	GEMINI
WIRE TYPE:	CARBON

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Single Stem, Single Spiral Tube Brush				
7/16" x 0.005" x 0.125"	11/64"	3,000	12	662528 38911*
1" x 0.010" x 0.250"	2-1/2"	2,000	12	662528 39074*

* No eye loop

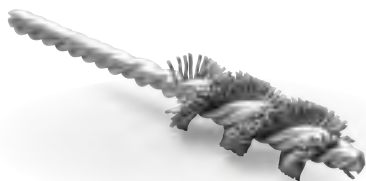


Double Stem, Single Spiral Tube Brush – with Stem

These brushes have two stem wires. This results in a brush with high strength and one with consistent and constant abrasive contact with the tube.



TIER:	GOOD	GOOD
TRADENAME:	GEMINI	GEMINI
WIRE TYPE:	BRASS	NYLON

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #
Double Stem, Single Spiral Tube Brush – With Stem					
1/2" x 0.006" x 0.188"	2"	2,000	12	662528 38839	
3/4" x 0.040" x 0.238"	3/8"	3,000	12		662528 38850

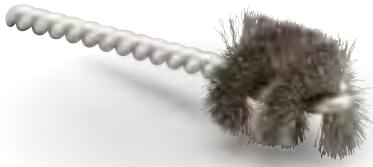

Power Burr, Single Spiral Tube Brush – with Stem

Power burr brushes are used to remove burrs resulting from previous operations. They are designed to remove burrs without creating secondary burrs or leaving sharp edges.



TIER: **GOOD** **GOOD**
 TRADENAME: **GEMINI** **GEMINI**
 WIRE TYPE: **CARBON** **STAINLESS**

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #
Power Burr Single Spiral Tube Brushes – With Stem					
1/4" x 0.004" x 0.125"	1"	2,000	12	662528 39061	662528 39081
3/8" x 0.004" x 0.125"	1"	2,000	12	662528 39062	662528 39050
3/8" x 0.005" x 0.125"	9/64"	2,000	12	662528 38910	
1/2" x 0.005" x 0.188"	1"	2,000	12	662528 39063	662528 39051
5/8" x 0.005" x 0.188"	1"	2,000	12	662528 39064	
3/4" x 0.006" x 0.219"	1"	2,000	12	662528 39065	662528 39082
1" x 0.005" x 0.125"	15/32"	2,000	12	662528 38912	
1" x 0.005" x 0.250"	1"	2,000	12	662528 39066	662528 39083



Double Stem, Double Spiral Tube Brush – With Stem

Brush filaments are twisted between two stem wires with two layers of filament bristles. Each layer is perpendicular to the other with a single stem wire in each of the brush's four sections. This configuration ensures consistent and constant abrasive contact with the tube.



TIER: **GOOD** **GOOD**
 TRADENAME: **GEMINI** **GEMINI**
 WIRE TYPE: **CARBON** **STAINLESS**

SIZE	BRUSH LENGTH	MAX. RPM	STD. PKG.	PART #	PART #
Double Stem, Double Spiral Tube Brush – With Stem					
3/8" x 0.060" x 0.125"	1-1/2"	2,000	12	662528 38827	
1/2" x 0.004" x 0.156"	2"	2,000	12	662528 38828	
1/2" x 0.004" x 0.187"	5/32"	3,000	12	662528 38919	
1/2" x 0.006" x 0.156"	2"	2,000	12	662528 39067	662528 38829
1/2" x 0.006" x 0.187"	5/32"	3,000	12	662528 38920	
5/8" x 0.005" x 0.187"	2"	2,000	12	662528 39068	
5/8" x 0.006" x 0.208"	2"	3,000	12	662528 38921	
5/8" x 0.008" x 0.219"	2"	2,000	12	662528 38831	
5/8" x 0.010" x 0.208"	13/64"	3,000	12	662528 38922	662528 38930
3/4" x 0.004" x 0.250"	2-1/2"	2,000	12	662528 39072	
3/4" x 0.006" x 0.238"	1/4"	3,000	12	662528 38923	
3/4" x 0.006" x 0.250"	2-1/2"	2,000	12	662528 39069	
3/4" x 0.006" x 0.250"	2-1/2"	2,000	12	662528 38832	
3/4" x 0.010" x 0.238"	1/4"	3,000	12	662528 38924	
7/8" x 0.004" x 0.250"	2-1/2"	2,000	12	662528 39073	
7/8" x 0.006" x 0.238"	2"	3,000	12	662528 38925	
7/8" x 0.006" x 0.250"	2-1/2"	2,000	12	662528 39070	
1" x 0.006" x 0.238"	25/64"	3,000	12	662528 38926	
1" x 0.006" x 0.250"	2-1/2"	2,000	12	662528 39071	
1" x 0.010" x 0.238"	2"	3,000	12	662528 38927	
1-1/4" x 0.004" x 0.250"	2-1/2"	2,000	12	662528 38833	
1-1/4" x 0.010" x 0.238"	1/2"	3,000	12	662528 38928	
2" x 0.010" x 0.238"	7/8"	3,000	12	662528 38929	



Encapsulated Double Stem, Double Spiral Tube Brush – With Stem

Encapsulating a portion of the wires' length shortens the free wires, increasing their stiffness, thereby creating greater control of the brush and a brush with the highest filament density and highest strength.



TIER: **GOOD**
 TRADENAME: **GEMINI**
 WIRE TYPE: **CARBON**

SIZE	BRUSH LENGTH	MAX. RPM	STD. PKG.	PART #
Encapsulated Double Stem, Double Spiral Tube Brush – With Stem				
7/8" x 0.010" x 0.250"	2-1/4"	3,000	20	662528 38948



Flue Double Spiral Tube Brushes – With 1/4" x 2" NPT Pipe Nipple with Stem

These aggressive brushes are designed specifically for efficient pipe and boiler cleaning.



TIER: **GOOD**
TRADENAME: **GEMINI**
WIRE TYPE: **CARBON**

SIZE	TRIM ENTH	MAX. RPM	STD. PKG.	PART #
Flue Double Spiral Tube Brushes – With 1/4" x 2" NPT Pipe Nipple – With Stem				
3/4" x 0.010" x 0.238"	1/4"	3,000	12	662528 38931
1" x 0.010" x 0.313"	25/64"	3,000	12	662528 38932
1-1/4" x 0.012" x 0.313"	1/2"	3,000	12	662528 38933
1-3/4" x 0.012" x 0.313"	1/2"	3,000	12	662528 38934
2-1/4" x 0.012" x 0.313"	1/2"	3,000	12	662528 38935
2-3/4" x 0.014" x 0.313"	1/2"	3,000	12	662528 38936



Side-Action Tube (Burrite) Crimped Wire Tube Brushes – with Stem

Their dense side filament configuration creates increased bristle rigidity with minimal flexing, to aggressively clean the tube without changing its geometry or surface finish.



TIER: **GOOD**
TRADENAME: **GEMINI**
WIRE TYPE: **CARBON**

SIZE	TRIM ENTH	MAX. RPM	STD. PKG.	PART #
Side-Action (Burrite) Crimped Wire Tube Brush – With Stem				
1/4" x 0.003" x 0.094"	5/64"	3,000	12	662528 38908
5/16" x 0.005" x 0.094"	9/16"	2,000	10	662528 38834
5/8" x 0.005" x 0.125"	1/4"	3,000	12	662528 38909



Internal Finishing Crimped Wire Tube Brush

This square-trimmed crimped wire brush is used to clean internal surfaces in a single operation because it can simultaneously brush both the sides and bottom of a hole.



TIER: **GOOD**
TRADENAME: **GEMINI**
WIRE TYPE: **CARBON**

SIZE	TRIM LENGTH	FACE WIDTH	MAX. RPM	STD. PKG.	PART #
Internal Finishing Crimped Wire Tube Brushes – With Stem					
1-1/4" x 0.006" x 0.250"	1/2"	3/8"	4,500	10	662528 38945



Micro Abrasive Single Spiral Nylon Tube Brush – With Stem

Micro brushes are ideal for ultra-fine deburring, cleaning, polishing and finishing applications.



TIER: **GOOD**
TRADENAME: **GEMINI**
WIRE TYPE: **NYLON/AO 600 GRIT**

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Micro Abrasive Single Spiral Nylon Tube Brushes – With Stem				
3/16" x 0.012" x 0.093"	3/64"	3,000	12	662528 38853
0.190" x 0.012" x 0.087"	1"	1,500	12	662528 38814
0.260" x 0.012" x 0.115"	1"	1,500	12	662528 38815
0.325" x 0.012" x 0.115"	1"	1,500	12	662528 38816
0.325" x 0.012" x 0.121"	1"	3,000	12	662528 38854
33/64" x 0.012" x 0.175"	3/16"	3,000	12	662528 38855
33/64" x 0.022" x 0.175"	3/16"	3,000	12	662528 38851
1-1/64" x 0.022" x 0.255"	3/8"	3,000	12	662528 38852



TIER: **GOOD**
TRADENAME: **GEMINI**
WIRE TYPE: **NYLON**



Single Spiral Nylon Hand Tube Brush – With Eye Loop

These brushes are made with larger stem wires to give them the strength and rigidity needed for manual cleaning applications.

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #
Single Spiral Nylon Hand Tube Brush – With Eye Loop				
1/4" x 0.005" x 0.094"	9/64"	3,000	12	662528 38937
1/4" x 0.005" x 0.094"	2"	2,000	12	662528 38818
3/8" x 0.005" x 0.094"	2"	2,000	12	662528 38819
3/8" x 0.005" x 0.094"	9/64"	3,000	12	662528 38938
1/2" x 0.008" x 0.094"	3"	3,000	12	662528 38939
1/2" x 0.010" x 0.125"	3"	2,000	12	662528 38820
3/4" x 0.012" x 0.125"	21/64"	3,000	12	662528 38940
3/4" x 0.012" x 0.125"	3"	2,000	12	662528 38821
1" x 0.010" x 0.156"	25/64"	3,000	12	662528 38941
1" x 0.022" x 0.156"	2-1/2"	1,500	12	662528 38817
1-1/4" x 0.010" x 0.156"	1/2"	3,000	12	662528 38942
1-1/4" x 0.010" x 0.219"	1/2"	3,000	12	662528 38943
2" x 0.010" x 0.219"	1/2"	3,000	12	662528 38944

Hand Brushes

Hand brushes come in a variety of handle and filament shapes and styles for most hand scratching applications. They are favored by many in removing scale, surface coatings, or removing weld debris.

For steel/stainless



HAND BRUSHES

- Long handle and shoe handle brushes are made with a high-carbon, brass-coated steel; stainless steel is made with a 304L stainless
- Plastic ergonomic handle scratch brush with curved face to access hard-to-reach places. Crimped wire for longer life. Wires are wrapped up and around the metal post so they never come out.
- Narrow brush allows access into tight areas and slots



TIER: **BETTER** **BETTER** **BETTER** **BETTER** **BETTER** **BETTER** **BETTER**
TRADENAME: **BLUEFIRE** **BLUEFIRE** **BLUEFIRE** **BLUEFIRE** **BLUEFIRE** **BLUEFIRE** **BLUEFIRE**
WIRE TYPE: **CARBON** **STAINLESS** **CARBON** **STAINLESS** **CARBON** **STAINLESS** **CARBON**

SIZE	TRIM LENGTH	MAX. RPM	STD. PKG.	PART #	PART #	PART #	PART #	PART #	PART #	PART #
Hand Scratch Brushes – With Handle										
3" x 19"	1-3/16"	–	12	662528 33948	662528 33950					
4" x 16"	1-3/16"	–	12			662528 33949	662528 33951			
5" x 10"	1-1/8"	–	24					662528 33954	662628 33953	
3" x 7"	1/2"	–	36							662528 33852





When maximum conformability is needed, tough, Norton nylon brushes' flexible nylon filaments embedded with abrasive grain provide exceptional finishing and polishing and eliminate the need for costly and inconsistent hand deburring applications.

Norton nylon brushes are precision-engineered with the highest quality abrasive grains for those markets with the strictest requirements – for easy integration into today's automated machinery, CNC machining centers, transfer lines, robotic cells, and other highly-specialized machinery, as well as hand tools.

- Applications:** Deburring, cleaning, finishing, and polishing
- Brush Configurations:** Radial wheel brushes, narrow face wheel brushes, disc brushes, end brushes, and twisted brushes
- Markets:** Aerospace/aircraft, automotive, construction/utility products, medical, metal finishing, woodworking
- Abrasive Grain:** Ceramic Alumina, Silicon Carbide

Why Choose Nylon Abrasive Brushes?

- Abrasive grain cutting points are increased as the grain is exposed and cut equally when pressure is applied to the side or tip of the filament
- Uniform distribution of grain throughout the filaments allows cutting and finishing performance levels to remain consistent throughout the life of the brush – making Norton abrasive brushes ideal for automated applications
- Heat- and stress-resistant filaments prolong brush life and allow for superior conformability to irregular surface shapes
- The grain impregnated filaments act as a flexible file to deburr and radius edge profiles with precision, without gouging or affecting the overall geometry of a part
- The filaments bend at various angles to fit contours, creating a less prominent, more uniform surface finish in comparison to wire wheels or coated abrasive products
- Brush conformability allows usage on variety of complex part shapes without the need for ultra-precise programming and fixturing that is required with other deburring and finishing tools

Currently, all Norton Blaze ceramic alumina nylon abrasive brushes are custom-made to your exact requirements. The Norton Blaze Nylon Brushes Brochure #8571 provides technical information and product availability. Your Norton representative would be pleased to review availability, quotations, and lead-times with you.



complementing our
ABRASIVES PORTFOLIO

To help you finish the job, Norton tapes, masking products and micro-fiber cloths let you one-stop shop. Our goal is to get it finished faster, easier and with less hassle of multiple vendors and invoices.





Norton masking tapes feature a special solvent-based, rubber adhesive system and strong holding properties. These tapes adhere and release cleanly while providing clean edges on a variety of flat, contoured, and irregular surfaces. Norton sheetings provides superior solvent, paint, and contaminant penetration resistance. Use them during paint preparation and anywhere you need work area protection. Tear-resistant properties allow movement without ripping.

Products:


Attachment Tape, Masking Tape, Masking Film, Sheeting, Masking Paper

Machine Used:



HAND
APPLICATION

Best choice for general industrial application replacing permanent fastening systems (rivets, welds and liquid adhesives)

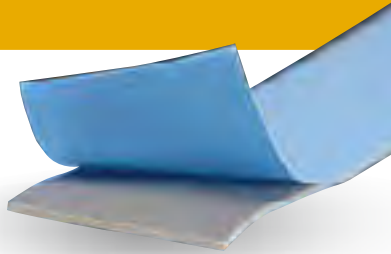

NORTON ATTACHMENT TAPE

- Double sided, gray foam tape used in bonding performance for many interior and exterior commercial applications.
- Incredible conformability and application stretching
- Weather degradation resistance from UV and high temperatures
- Outstanding static shear adhesion
- Excellent performance in T-Block and dynamic shear
- Durable adhesion at elevated temperature
- High shock and stress absorption

DESCRIPTION	THICKNESS	1/4" x 108"	1/2" x 108"	3/4" x 108"	7/8" X 108"	1" X 108"	1-1/2" X 108"
Blue Liner							
Gray Double-Sided Acrylic Foam Tape	.43" (1.1mm)	636425 06044	636425 06045	636425 06046	636425 06047	662611 75888	662611 51041
Rolls/Case		40/1	20/1	10/1	10/1	10/1	6/1
DESCRIPTION	THICKNESS	1/4" X 20 YDS	1/2" X 20 YDS	7/8" X 20 YDS			
Red Liner							
Gray Double-Sided Acrylic Foam Tape	.43" (1.1mm)	636425 05620	636425 05621	-	636425 05622	-	-
Rolls/Case		12/1	12/1		12/1		
Adhesion Promoter							
Brush-Top Can - 220ml		636415 05623					
Rolls/Case		12					

Technical Data

Performance tests are run using standard test procedures. The values presented are typical values and should not be used for specification purposes.

THICKNESS in. (mm)	90° PEEL ADHESION ¹ (3-DAY DWELL) lb/in (N/cm)				T-BLOCK ² lb/in (N/cm)	DYNAMIC SHEAR ³ lb/in (N/cm)	STATIC SHEAR ⁴ 7 Days /1 kg	SERVICE TEMPERATURE
	GLASS	ALUMINUM	S/S	PMMA	ALUMINUM	S/S	S/S	
.43 (1.1)	20 (35)	33 (57)	20 (34)	17 (29)	100 (29)	48 (33)	Pass and Exceeds	-35°F to 200°F (-35°C to 93°C)

¹ Based on ASTM D3330 ² Based on ASTM D897 ³ Based on ASTM D1002 ⁴ Based on ASTM D3654



Best choice for high temperature applications including high-heat curing

PREMIUM HIGH TEMPERATURE GREEN MASKING TAPE

- Ideal for conditions that include exposure to the high-heat curing temperatures found in automobile, truck, bus, and other transportation assembly operations, as well as aerospace manufacturing applications
- Superior strength and excellent cornering ability
- Ideal for high temperatures; can be effectively used up to 250°F (120°C) for 30 minutes without any significant loss of properties or adhesive transfer
- Can also be used up to 175°F (80°C) for one hour without leaving residues after exposure
- UV resistance for 2 days
- Can be exposed to wet sanding without adhesive transfer



Better choice for medium-temperature applications

MEDIUM TEMPERATURE MASKING TAPE

- Designed for excellent performance in moderate-temperature applications
- Can be used up to 220 °F (105°C) for 30 minutes and 175°F (80°C) for one hour without any significant loss of properties; removes cleanly without leaving residues after exposure



Good general-purpose choice

GENERAL PURPOSE MASKING TAPE

- Ideal for splicing, holding, packaging, and general purpose masking
- Good adhesion onto a wide variety of surfaces
- Good performance up to 175°F (80°C) for one hour without any significant loss of properties; removes cleanly without leaving residues after exposure



It delivers very sharp, clean edges on smooth- to moderately-textured surfaces

BLUE CORE 14-DAY TAPE

- Our paint masking tape has a specially formulated adhesive system that provides optimum low- to medium-tack adhesion and clean removal from a variety of surfaces, for up to 14 days
- Blue Core masking tape can be used indoors or out
- The crepe paper backing is designed to enable easy unrolling and to minimize slivering



Better choice for fine line masking needs

FINE LINE BLUE MASKING TAPE

- Masking color separation on plastic (TPO and RIM) automotive fascia, trim, and finished metals in high-temperature OEM bake cycles, aircraft and clean room paint operations
- Thermally-stabilized PVC backing with a rubber-based pressure sensitive adhesive
- Highly conformable, waterproof, and solvent-resistant
- Can be used from 40°F (4.4°C) to 280°F (138°C) without any significant loss of properties; removes cleanly without leaving residues after exposure



TIER:	BEST	BETTER	GOOD	GOOD	BETTER
	PREMIUM HIGH TEMP GREEN	MEDIUM TEMPERATURE	GENERAL PURPOSE	BLUECORE 14 DAY TRAPE	FINE LINE BLUE
CAP CODE	C995	C988	C903		
BACKING	Crepe paper	Crepe paper	Crepe paper	Fine Crepe Paper	PVC
ADHESIVE	Solvent-based rubber	Solvent-based rubber	Solvent-based rubber	Synthetic Rubber	Natural Rubber
TENSILE STRENGTH	3.0 kgf/cm, 29 N/10mm	2.6 kgf/cm, 25 N/10mm	2.5 kgf/cm, 25 N/10mm	23 lbs/in (101 N/25mm)	15 lb/in. of width, 65.6N/25mm
ELONGATION AT BREAK	8.50%	7.0%	7.0%	11%	150%
PEEL ADHESION AT 180° ANGLE	400 gf/cm, 3.9 N/10mm	370 gf/cm, 3.6 N/10mm	300 gf/cm, 2.9 N/10mm		23 oz./in. of width, 6.3N/25mm
TOTAL THICKNESS	120 microns (0.120mm)	110 microns (0.110mm)	100 microns (0.100mm)	5.5 mils (0.14mm)	5.4mils (.14mm)
TEMPERATURE	250°F (120°C) for 30 min. 175°F (80°C) for 1 hour	220°F (105°C) for 30 min. 175°F (80°C) for 1 hour	175°F (80°C) for 1 hour		40°F (4.4°C) to 280°F (138°C)

METRIC	IMPERIAL	ROLLS/CASE	PART #
Premium High-Temp Green Tape			
12mm x 50m	0.47 inches x 54.7 yards	72	699573 10320
18mm x 50m	0.71 inches x 54.7 yards	48	666233 09768
24mm x 50m	0.94 inches x 54.7 yards	36	666233 27752
36mm x 50m	1.42 inches x 54.7 yards	24	699573 10323
48mm x 50m	1.89 inches x 54.7 yards	20	666233 09770
72mm x 50m	2.83 inches x 54.7 yards	12	699573 10325
100mm x 50m	3.93 inches x 54.7 yards	8	699573 45060
200mm x 50m	7.87 inches x 54.7 yards	4	699573 45063
Medium-Temperature Tape			
12mm x 50m	0.47 inches x 54.7 yards	72	699573 10326
18mm x 50m	0.71 inches x 54.7 yards	48	055395 44799
24mm x 50m	0.94 inches x 54.7 yards	36	699573 10327
36mm x 50m	1.42 inches x 54.7 yards	24	662610 70829
48mm x 50m	1.89 inches x 54.7 yards	20	055395 44800
General-Purpose Tape			
18mm x 40m	0.71 inches x 43.7 yards	48	662611 03314
24mm x 40m	0.94 inches x 43.7 yards	36	662611 03315
36mm x 40m	1.42 inches x 43.7 yards	24	699573 45064
48mm x 40m	1.89 inches x 43.7 yards	20	662611 03317
72mm x 40m	2.83 inches x 43.7 yards	12	699573 45065
Blue Core 14-Day Tape			
36mm x 54.8m	1-1/2" x 60 yards	24	076607 21954
48mm x 54.8m	2" x 60 yards	24	076607 21955
<i>Bulk packed as individual rolls</i>			
Fine Line Blue Tape			
3.17mm x 32.9m	1/8 inches x 36 yards	360*	662611 82688
6.35mm x 32.9m	1/4 inches x 36 yards	168*	662611 82686
12.7mm x 32.9m	1/2 inches x 36 yards	78*	662611 82685

* Master case quantity



Good masking choice for multiple transportation applications

ANCHOR BRAND HAND MASK

- IPG's Anchor® brand Hand Mask is a pre-folded, high density polyethylene masking film designed for multiple transportation applications
- The thick and durable 12 micron film is corona treated to resist overspray flaking during paint applications
- This special film is designed with a reinforced top edge formulated to prevent the underlying film from sticking
- Designed to work with multiple hand dispensers and the 1" core fits most masking machines.

	54.8M (60YD) ROLL	90' ROLL	180' ROLL
WIDTH	ROLL HEIGHT	PART #	PART #
24"	5.35"	–	087143 00214
48"	8.78"	–	087143 00216
72"	9.57"	087143 00217	–
99"	13.0"	087143 00218	–
<i>Case</i>		12	12



Good multi-purpose choice provides durability and excellent protection


HIGH DENSITY SHEETING (HDPE)

Our multi-purpose painters' plastic sheeting protects virtually any area from sanding dust and paint overspray with ease – even after repositioning. Our High Density Plastic Sheeting (HDPE) is designed to be one of the strongest most durable products on the market.

- Resists tearing and solvent bleed-through with light weight .31 mil High Density Polyethylene plastic (HDPE)
- Holds in place as it clings to horizontal or vertical surfaces during taping with its natural electrostatic properties
- Attracts and holds sanding debris for a dust-free finish
- Drapes easily over furniture

SIZE	THICKNESS	COLOR	QTY/PACK	PACKS/CASE	PART #
9' x 400'	.31 mil	Clear	1	1	076607 68142
12' x 400'	.31 mil	Clear	1	1	076607 68143

Also available by the pallet.

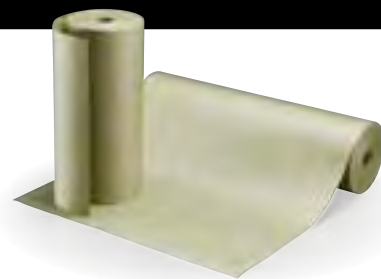

Good choice for all of your masking needs

GREEN MASKING PAPER

- Made from recyclable virgin wood pulp fiber, recycled fiber, or a combination of the two
- These fibers provide a machine finish kraft paper with non-contaminating cleanliness, sustainability, and superior strength properties
- Smooth paper surface ensures no fiber linting leading to rework
- Flexible, easy to work with and shape; conforms to uneven surfaces

SIZE	3"	6"	12"	18"	20"	24"	36"	46"	69"
DESCRIPTION	PART #	PART #	PART #	PART #	PART #	PART #	PART #	PART #	PART #
(750' boxed)	699573 13146	699573 13147	699573 13148	699573 13149	699573 13151	699573 13152	699573 13153	699573 13154	699573 13155
<i>Logs/Case</i>	12/1	6/1	3/1	2/1	1/1	1/1	1/1	1/1	1/1

Order per number of logs:

Each "log" is a total of 36" wide – comprised of the width of the individual roll in inches x the number of rolls/box, e.g. 6" roll x 6 rolls in the box = one 36" wide log; 12" roll x 3 rolls in the box = one 36" wide log, etc., except for the 24" and 36" rolls which are single logs.



A micro-fiber is a single fiber with a thickness less than a human hair that has been split 16 times and woven into various products. The surface area of a micro-fiber product is increased over 15 times, creating millions of spaces between the fibers which trap dirt, grime or liquids, making this product one of the most absorbent materials. These cloths save you labor, time, and additional costs of multiple cleaning products and chemicals.

Applications:

Cleaning Cloth: Used for general-purpose wet or dry applications. Works best when sprayed with a light water mist to deep clean.

Dry Tack Cloth: This woven terry cloth has a low profile to resist snagging and help pick up embedded debris.

Polishing Cloth: Streak-free cleaning of mirrors, optical lens and highly-polished items.

Other:

Color-coded for easy identification

Cleaning Cloth: Blue

Dry Tack Cloth: Red

Polishing Cloth: Yellow

Machine Used:



HAND
APPLICATION

TECH TIP

- Use these micro-fiber cloths dry for general cleaning
- To remove spills, stains or grime, lightly dampen the cloth for best results
- All micro-fiber cloths can be used with or without chemicals
- Micro-fiber cloths can be washed up to 300+ times without losing cleaning and trapping abilities
- Clean often for best results



It is the user's responsibility to refer to and comply with all safety regulations.




DESCRIPTION	COLOR	STD. PKG.	PART #
Micro-Fiber Cleaning Cloth 16" x 16"	Blue	20	076607 05300
Micro-Fiber Dry Tack Cloth 16" x 16"	Red	20	076607 04025
Micro-Fiber Polishing Cloth 16" x 16"	Yellow	20	076607 05301

100 Years of Safety Leadership

The year 2016 marked the 100-year anniversary of the leadership of the former Norton Company in the creation of the first ever safety code for abrasives.

In 1916, following more than a decade of safety research, advocacy, and leadership by the Norton Company (now Norton | Saint-Gobain Abrasives), "The Safety Code for the Use and Care of Abrasive Wheels" was published. This 13-page booklet, containing an unprecedented set of safety device recommendations and procedures, was the spark that changed the entire future of the abrasives industry.

In the 1970s, this code received the ultimate endorsement when selected by OSHA as the basis of new federal regulations concerning abrasive wheel machinery. Today, the ever-evolving "Safety Requirements for the Use, Care and Protection of Abrasive Wheels" (commonly known as the ANSI B7.1 standard) continues to mirror the latest technologies and remains the global authoritative abrasives safety standard.

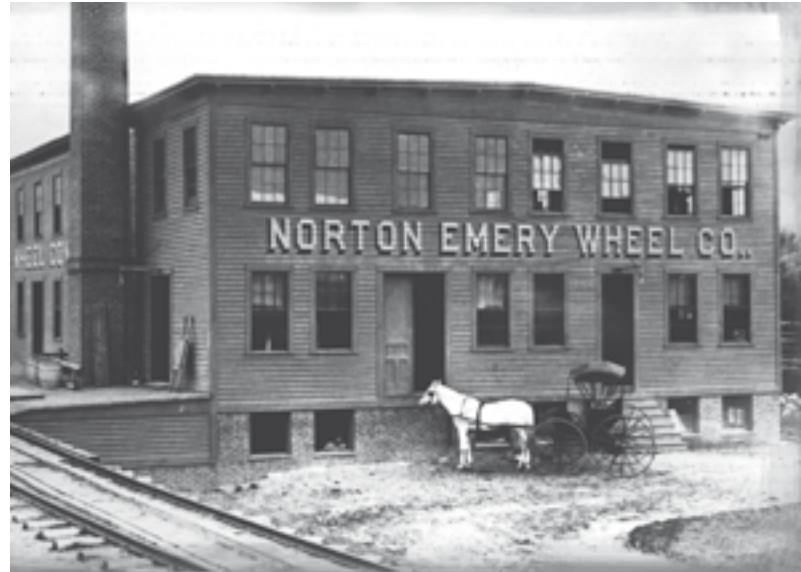

Breakages/Personal Injury

In the event of on-machine breakage of Norton abrasive products, call your local Norton distributor immediately. Whether involving personal injury or not, the abrasive user should leave the equipment and other evidence undisturbed until a Norton sales representative has been notified and conducts an investigation. Prompt action on the part of abrasive users, distributor, and Norton sales personnel is important to ensure swift determination of the breakage cause and to guard against recurrence.



It is the user's responsibility to refer to and comply with ANSI B7.1 and B7.7 – Contact us for a free copy.



Safety Poster

(Form # 7868-English, 7868-French, 7868-Spanish)

To order this poster for your shop,
<mailto:nortonliterature@saint-gobain.com>

Abrasive Safety References



Safety Information on the Web

Norton website nortonsga.us/safety

UAMA (United Abrasives Manufacturers Association) website at
<http://www.safety.uama.org>

YouTube

Safety Videos

Watch our videos on: [YouTube.com/NortonAbrasives](https://www.youtube.com/NortonAbrasives)

- Safety, It's The Smart Thing To Do (Safety information for portable grinding and cutting wheels)
- Foundry Safety
- First in Precision Grinding Safety
- Proper Grinding Wheel Mounting
- Railroad Abrasive Safety
- Coated Abrasive Belt and Disc Safety














UAMA Approved Safety Icons


The UAMA has approved a new set of standardized icons to be used throughout the Abrasive industry to convey safety information to the users. Below are the approved icon types and their definitions.

ICON TYPES	EXAMPLE
<p>Safety Icon: A pictorial whose purpose is to relay safety related information to the user.</p>	
<p>Hazard Alert Icon: This type of safety icon conveys information primarily related to the nature of a hazard. It contains a graphical depiction of the hazard drawn within a yellow equilateral triangle.</p>	
<p>Prohibition Icon: This type of safety icon conveys actions that should not be taken. It consists of a red circular band with a 45° diagonal red band from upper left to lower right. The icon contains a black depiction of what should not be done within the red band on a white background.</p>	
<p>Mandatory Action Icon: This type of safety icon conveys actions that should be taken to avoid hazards. It consists of a white image within a solid blue or black circular surround shape.</p>	
<p>Proper Machine Use Icon: This type of icon is designed to show the use of the wheel on a proper machine. The icon can be a bit more realistic to show components such as a safety guard and an auxiliary handle. The recommended angle of use may also be depicted.</p>	

ICON	MEANING	ICON	MEANING
	Improper use may break wheel and cause serious injury or death.		Always use wheel guard for angle grinder.
	No side grinding. Cutting only.		Always use wheel guard for non-portable machine.
	No side grinding. Cutting only		Protect your eyes.
	No cutting. Side grinding only.		Protect your face.
	No cutting. Side grinding only, grouped icon.		Protect your lungs against dust.

UAMA Approved Safety Icons *continued*

ICON	MEANING	ICON	MEANING
	Do not use a damaged wheel.		Protect your hearing.
	Do not use on High Speed Gas Saws.		Protect your eyes and face.
	Do not use on Angle Grinders.		Protect your eyes and hearing. Combined icon.
	Do not use on die grinders		Protect your eyes, ears and lungs.
	Warning alert symbol.		Protect your hands.
	Read OSHA and ANSI B7.1.		Use matched diameter, relieved flanges.
	Read OSHA and ANSI B7.1. Visit the industry safety page: www.safety.UAMA.org		

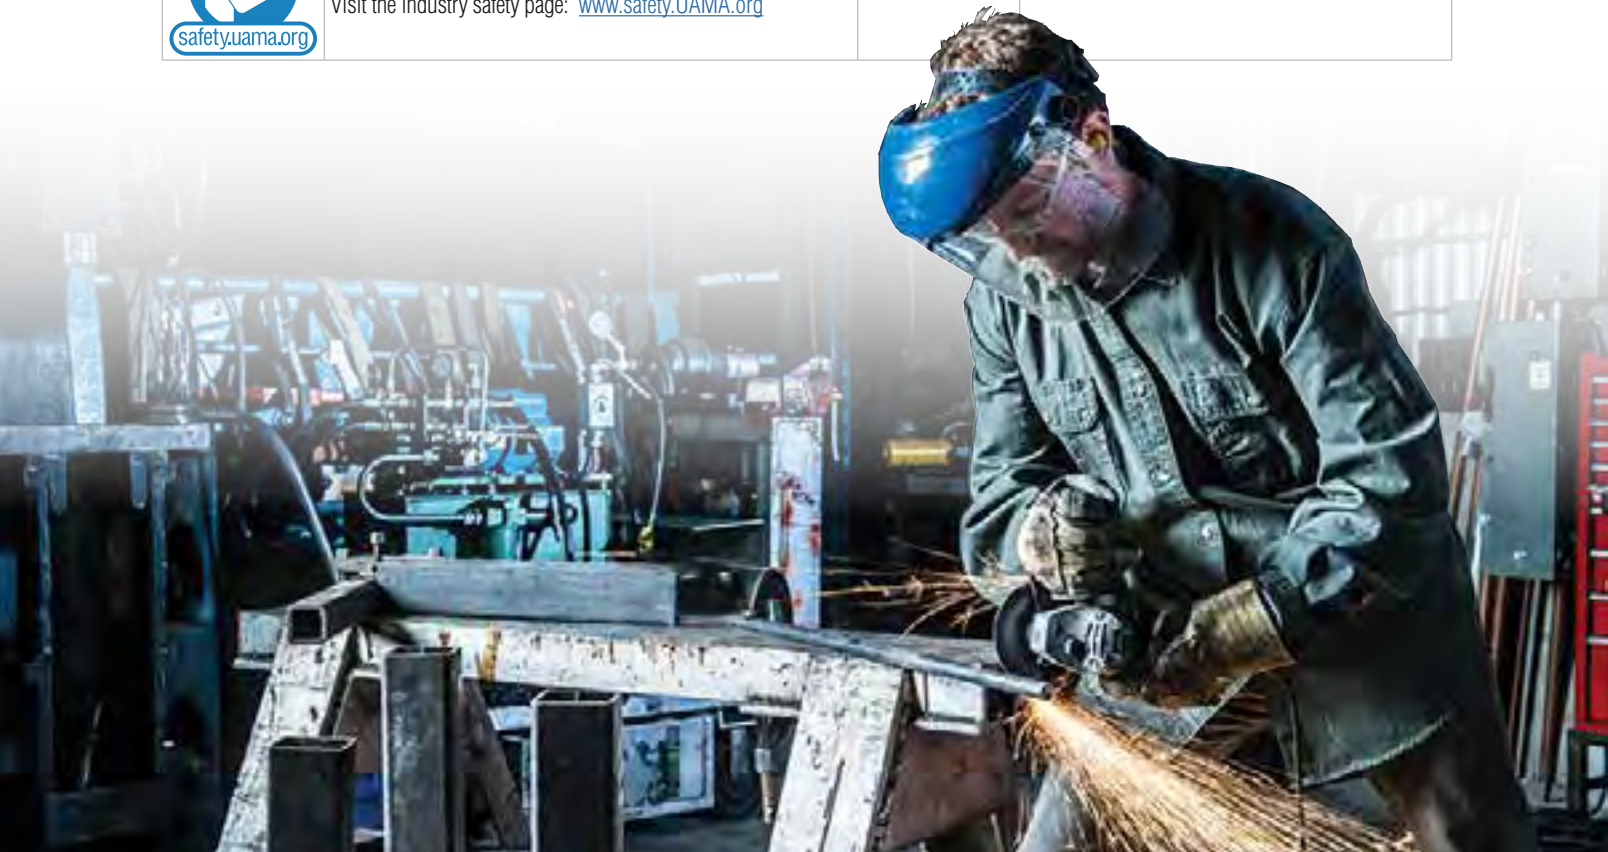

Coated Abrasive Do's and Don'ts


Coated Abrasive Disc and Wheel Safety Do's and Don'ts

Warning








Improper use may cause wheel breakage and serious injury. Comply with ANSI B7.7, OSHA and safety guide provided with the package. Always follow all manufacturer's recommended procedures and safety instructions. Never exceed tool manufacturer's maximum operating speed.

Exposure to DUST generated from workpiece and/or abrasive materials can result in lung damage and/or other physical injury. Use dust capture or local exhaust as stated in the SDS. Wear government-approved respiratory protection and eye and skin protection. Failure to follow this warning can result in serious lung damage and/or physical injury.

Lead Poisoning can develop as a result of inhalation and/or ingestion of the dust generated from sanding any product containing lead, including lead based paint. Lead Poisoning is an illness which can permanently damage the body's physical, neurological and/or reproductive systems. Care must be taken to avoid the inhalation and/or ingestion of dust containing lead

	DO'S	DON'TS
INSPECT / STORAGE / SPEED  	<ul style="list-style-type: none"> • DO read all manuals, operating instructions and warnings • DO read SDS for the disc/wheel and the work-piece material. • DO check all products for damage before mounting. • DO make sure the machine speed does not exceed the speed marked on the package or back up pad. • DO store products prior to use at 35 – 50% relative humidity and 60 – 80°F. 	<ul style="list-style-type: none"> • DON'T use products that have been dropped or damaged. • DON'T use on machines that do not show a MAX RPM speed.
MOUNT / GUARD  	<ul style="list-style-type: none"> • DO use the wheel guard provided with machine. Position it so it protects the operator and covers the wheel. • DO use recommended back up pad or mandrel for the product. • DO run wheels ONLY in direction of directional arrow stenciled on wheel and in core (except Unified Wheels, which can be run in either direction). • DO run discs/wheels in a protected area for one minute before grinding. 	<ul style="list-style-type: none"> • DON'T remove or modify any guard. ALWAYS use a proper guard. • DON'T use excessive pressure when mounting a wheel. Tighten enough only to hold wheel firmly.
PROTECT  	<ul style="list-style-type: none"> • DO wear ANSI Z87+ safety glasses and face protection, if required. • DO wear safety shoes, arm guards, leather gloves and aprons. • DO employ dust controls and/or protective measures appropriate to the material being ground. 	<ul style="list-style-type: none"> • DON'T use products near bystanders if they are not wearing protective equipment.
OPERATE 	<ul style="list-style-type: none"> • DO support work-piece firmly. • DO hold machine firmly in two hands. • DO stop the equipment at once if chattering or vibration occurs during use. Determine cause of the problem and correct before remounting. • DO ease the disc into the work piece at a 5-10o angle to the work piece surface. 	<ul style="list-style-type: none"> • DON'T allow untrained people to handle, store, mount or use discs/wheels. • DON'T twist, jam or bend any wheel. • DON'T force or bump wheel so that the tool motor stalls. • DON'T use discs/wheels in the presence of combustible materials. • DON'T use disc/wheel for applications other than for which they were designed. Refer to ANSI B7.7.

Portable Grinding Safety Do's and Don'ts

	DO'S	DON'TS
INSPECT / SPEED  	<ul style="list-style-type: none"> • DO read all manuals, operating instructions and warnings. • DO read SDS for the wheel and workpiece material. • DO check all wheels for cracks or other damage before mounting. • DO make sure the machine does not exceed the maximum operating speed marked on the wheel. • DO store according to ANSI B7.1. 	<ul style="list-style-type: none"> • DON'T use wheels that have been dropped or damaged. • DON'T use on grinders that do not show a MAX RPM.
MOUNT / GUARD  	<ul style="list-style-type: none"> • DO use an ANSI B7.1 wheel guard. Position it so it protects the operator. • DO be sure wheel hole or threads fit machine properly and that the flanges are clean, flat, undamaged and the proper type. • DO run wheel in a protected area for one minute before grinding. 	<ul style="list-style-type: none"> • DON'T remove or modify any guard. ALWAYS use a proper guard. • DON'T alter a wheel or force it on to the spindle. • DON'T mount more than one wheel on an arbor. • DON'T use excessive pressure when mounting a wheel. Tighten enough only to hold wheel firmly.
PROTECT  	<ul style="list-style-type: none"> • DO wear ANSI Z87+ safety glasses and face protection, if required. • DO wear gloves, hearing and body protection. • DO employ dust controls and/or protective measures appropriate to the material being ground. • DO comply with OSHA regulations 29 CFR 1926.1153 when working on materials containing crystalline silica such as concrete. 	<ul style="list-style-type: none"> • DON'T use wheels near bystanders if they are not wearing protective equipment.
OPERATE 	<ul style="list-style-type: none"> • DO support work-piece firmly. • DO hold grinder firmly with two hands. 	<ul style="list-style-type: none"> • DON'T allow untrained people to handle, store, mount or use wheels. • DON'T use grinding wheels or cutting wheels on pistol grip air Sanders. • DON'T use any cutting wheel for grinding nor apply side pressure on a cutting wheel. Use for CUTTING ONLY. • DON'T use a cutting wheel to cut curves. Cut in straight lines only. • DON'T twist, bend or jam any wheel. • DON'T force or bump wheel so that the tool motor slows or stalls. • DON'T use wheels in the presence of combustible materials. • DON'T use wheels for applications other than for which they were designed.

Dangerous Pairing: Die Grinders and Cut-off Wheels

While die grinders and portable cut-off tools may look similar, they are by no means interchangeable. Several crucial differences exist between the two handheld machines.

GUARD

Cut-off wheels must be used on guarded machines for the safety of the operator and bystanders.

SPEED

Cut-off wheels must be used at or below their maximum operating speed, marked clearly on the side of the wheel. Excessive speed can result in breakage and serious personal injury.


Die grinders often operate above 25,000 rpm and therefore are too fast for abrasive wheels. The speed hazard is increased by the absence of a guard. Portable cut-off tools, however, rotate at speeds compatible with the abrasive wheels for which they are designed. And, their guards prevent use of an oversize wheel.

MOUNTING


Cut-off wheels must be mounted between proper flanges, as described in the national safety standard for abrasive wheels, ANSI B7.1. Die grinders make use of a collet for mounting

Portable cut-off tools use flanges for mounting, flanges designed according to the ANSI B7.1 safety standard.

Now that you have learned the three crucial differences between die grinders and portable cut-off tools – GUARD, SPEED and MOUNTING – be on watch for the dangerous pairing of cut-off wheels and die grinders, and warn your friends and colleagues of the same.

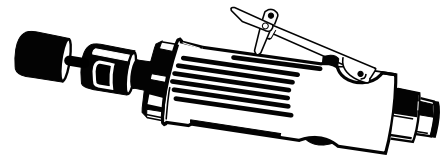

Die Grinder

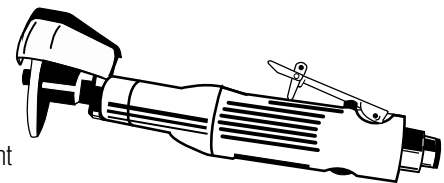

Portable Cut-off Tool

Starting a Grinding Wheel / Ring Test



Pistol Grip Air Sander

A Deadly Equation

Pistol Grip Air Sander + Grinding Wheel = Certain Injury!

- Never use a high-speed air sander as a portable grinder
- Use only sanding discs specifically designed for sanders
- Because the speed of these sanders far exceeds the maximum rated speeds for grinding wheels, a potentially lethal wheel breakage might occur

Starting a Grinding Wheel

ANSI's Procedure for Starting an Abrasive Wheel

This article is designed to remind users of the proper procedure when starting a machine with a new abrasive wheel mounted on it, starting a machine after the machine and wheel have been stored for a period of time, or remounting a wheel. ANSI B7.1 requires the following procedure when starting a newly mounted grinding wheel.

9.8 Starting the Wheel (Requirements)

All abrasive wheels shall be run at operating speeds with the safety guard in place or in a protected enclosure for at least one minute before applying work. During this time no one shall stand in front of or in line with the wheel. (See section 4, for safety guard requirements.) This provision shall apply each time one of the following conditions occur: a) a new wheel has been mounted; or b) a used wheel has been remounted.

E 9.8 Starting the Wheel (Explanatory Information)

An abrasive wheel may be damaged in shipment or storage, or the wheel may be subjected to improper, excessive stresses during mounting. Wheels which have been damaged or are under excessive stress, are likely to fracture within the first minute of rotation at operating speed. While this procedure is most important at the time when an abrasive wheel is mounted or remounted, damage may also occur to a wheel during a shut down of the machine on which it is mounted. The user should evaluate the circumstances and length of machine shut down to determine additional times that the operating rule should be followed.

Improper wheel mounting is a major cause of wheel breakages. Always use proper mounting procedures as outlined in ANSI B7.1, machine manufacturer's instructions and those supplied with the abrasive wheel. Be safe, know and follow the rules!



How to Perform a Ring Test on a Grinding Wheel

One method of grinding wheel inspection is called ring testing. OSHA, ANSI and the grinding wheel manufacturers require this method of grinding wheel inspection. It must be performed BEFORE the wheel is mounted on a grinding machine. Ring testing depends on the damping characteristics of a cracked wheel to alter the sound emitted when the wheel is tapped lightly. It is subject to interpretation by the inspector and is primarily applicable to vitrified bonded wheels. To perform the ring test, wheels should be tapped gently with a light nonmetallic implement, such as the handle of a screw driver for light wheels, or a wooden mallet for heavier wheels.

- Tap wheels about 45 degrees each side of the vertical line and about 1" or 2" from the periphery. Rotate the wheel 45 degrees and repeat the test.
- Large and thick wheels may be given the ring test by striking the wheel on the periphery rather than the side of the wheel.
- A sound and undamaged wheel will give a clear tone. If cracked, there will be a dead sound and not a clear ring and the wheel should not be used.
- Wheels must be dry and free of sawdust when applying the ring test, otherwise the sound may be deadened. The ring test is not applicable to certain wheels because of their size, shape or composition.

Wheel Speed Conversion Table

Conversion Table – Wheel Speeds

REVOLUTIONS PER MINUTE FOR VARIOUS DIAMETERS OF GRINDING WHEELS TO GIVE SURFACE SPEED IN FEET PER MINUTE AS INDICATED (FOR WHEEL MARKING PURPOSES THE CALCULATED RPM FIGURES LISTED BELOW ARE ROUNDED OFF TO THE NEXT 5)

Surface Speed in Feet Per Minute (SFPM)

Diameter of Wheel in Inches	Revolutions Per Minute (RPM)															
	6,500	7,000	7,500	8,000	8,500	9,000	9,500	10,000	12,000	12,500	14,200	16,000	16,500	17,000	19,685	20,000
1	24,828	26,737	28,647	30,558	32,467	34,377	36,287	38,196	45,836	47,745	54,240	61,116	63,025	64,935	75,190	76,395
2	12,414	13,368	14,328	15,278	16,238	17,188	18,143	19,098	22,918	23,875	27,120	30,558	31,510	32,465	37,595	38,195
3	8,276	8,913	9,549	10,186	10,822	11,459	12,096	12,732	15,278	15,915	18,080	20,372	21,010	21,645	25,065	25,465
4	6,207	6,685	7,162	7,640	8,116	8,595	9,072	9,549	11,459	11,940	13,560	15,278	15,755	16,235	18,800	19,100
5	4,966	5,348	5,730	6,112	6,494	6,876	7,258	7,640	9,168	9,550	10,850	12,224	12,605	12,985	15,040	15,280
6	4,138	4,456	4,775	5,092	5,411	5,729	6,048	6,366	7,639	7,960	9,040	10,186	10,505	10,820	12,530	12,730
7	3,547	3,820	4,092	4,366	4,638	4,911	5,183	5,456	6,548	6,820	7,750	8,732	9,005	9,275	10,740	10,915
8	3,103	3,342	3,580	3,820	4,058	4,297	4,535	4,775	5,729	5,970	6,780	7,640	7,880	8,115	9,400	9,550
9	2,758	2,970	3,182	3,396	3,606	3,820	4,032	4,244	5,092	5,305	6,030	6,792	7,000	7,215	8,355	8,490
10	2,483	2,674	2,865	3,056	3,247	3,438	3,629	3,820	4,584	4,775	5,425	6,112	6,300	6,495	7,520	7,640
12	2,069	2,228	2,386	2,546	2,705	2,864	3,023	3,183	3,820	3,980	4,520	5,092	5,250	5,410	6,265	6,365
14	1,773	1,910	2,046	2,182	2,319	2,455	2,592	2,728	3,274	3,410	3,875	4,366	4,500	4,640	5,370	5,455
16	1,552	1,672	1,791	1,910	2,029	2,149	2,268	2,387	2,865	2,985	3,390	3,820	3,940	4,060	4,700	4,775
18	1,379	1,485	1,591	1,698	1,803	1,910	2,016	2,122	2,546	2,655	3,015	3,396	3,500	3,605	4,175	4,245
20	1,241	1,337	1,432	1,528	1,623	1,719	1,814	1,910	2,292	2,390	2,715	3,056	3,150	3,245	3,760	3,820
22	1,128	1,215	1,302	1,388	1,476	1,562	1,649	1,736	2,084	2,170	2,465	2,776	2,865	2,950	3,420	3,470
24	1,034	1,115	1,194	1,274	1,353	1,433	1,512	1,591	1,910	1,990	2,260	2,546	2,625	2,705	3,135	3,185
26	955	1,028	1,101	1,176	1,248	1,322	1,395	1,468	1,762	1,840	2,090	2,352	2,425	2,495	2,890	2,940
28	887	955	1,023	1,092	1,159	1,228	1,296	1,364	1,637	1,705	1,940	2,182	2,250	2,320	2,685	2,730
30	828	891	955	1,018	1,082	1,146	1,210	1,274	1,528	1,595	1,810	2,056	2,100	2,165	2,505	2,545
32	776	836	895	954	1,014	1,074	1,134	1,194	1,432	1,495	1,695	1,910	1,970	2,030	2,350	2,385
34	730	786	843	898	955	1,011	1,067	1,124	1,348	1,405	1,595	1,796	1,855	1,910	2,210	2,245
36	690	742	795	848	902	954	1,007	1,061	1,273	1,330	1,510	1,698	1,750	1,805	2,090	2,120
38	653	704	754	804	854	904	955	1,006	1,206	1,260	1,430	1,608	1,660	1,710	1,980	2,010
40	620	669	716	764	812	860	908	956	1,146	1,195	1,355	1,528	1,575	1,625	1,880	1,910
42	591	636	682	732	775	818	863	908	1,090	1,140	1,295	1,464	1,500	1,545	1,790	1,820

For intermediate diameters not listed use the formula listed in Section 1.2.10 of ANSI B7.1

SFPM = .262 x wheel diameter in inches x RPM.

To convert meters per second (m/s) to SFPM: m/s x 196.85 = SFPM

To convert SFPM to m/s: SFPM/196.85 = m/s.

To convert RPM to SFPM: Wheel Diameter x RPM x 0.262 = SFPM

Silica and What You Need to Know

Background and Health impacts

Silica (SiO₂) is one of the most common minerals in the earth's crust. Glass, beach sand, silicone and granite are all "silica" materials. Products containing silica have been used for thousands of years in building and is a key ingredient in many products we use every day. There are two forms of silica; crystalline and non-crystalline. Crystalline silica is a mineral that occurs in several forms. Quartz, the most common form, is a component of sand, stone, rock concrete, brick, block and mortar. Non-crystalline silica is found in glass, silicon carbide and silicone.

When rocks containing crystalline silica are cut, crushed, ground, drill or used in similar industrial processes, dust particles are produced. These particles are very fine, at least 100 times smaller than ordinary beach sand – known as respirable crystalline silica or RCS. Inhaling very small or respirable crystalline silica particles is most hazardous and may cause multiple diseases such as silicosis, followed in severe cases by lung cancer.

Who is at risk from exposure to crystalline silica?

It is estimated that 2.3 million workers are exposed to crystalline silica on the job. The majority of the workers, about 2 million, are in the construction industry. The hazard exists when specific activities create respirable dust that is released into the air.

The New OSHA Standard

OSHA's recently implemented silica standards for Construction "29 CFR 1926.1153" and General Industry "29 CFR 1910.1053" suggests procedures applicable for work in these environments. This new standard affects all activities that generate silica dust on a jobsite. Trades involving brick, stone, concrete and other materials that are difficult to replace must comply with the standard. This is a change around "process", not specific products.

Impacts on Industry

Industries affected by this regulation include Construction, Glass manufacturing, Pottery products, Structural clay products, Concrete products, Foundries, Cut stone and Stone products, Railroads, Refractory products and Asphalt products manufacturing to name a few. Always read the Safety Data Sheet for the workpiece and abrasive before use.

The Occupational Safety and Health Administration (OSHA) has a number of available resources to help companies understand the general information and requirements to explain the new regulations including:

OSHA's Crystalline Silica Rule: Construction

<https://www.osha.gov/Publications/OSHA3681.pdf>

OSHA Fact Sheet

<https://www.osha.gov/publications/OSHA3682.pdf>

Small Entity Compliance Guide for Respirable Crystalline Silica Standard for Construction

<https://www.osha.gov/publications/OSHA3902.pdf>

Small Entity Compliance Guide for Respirable Crystalline Silica Standard for General Industry and Maritime

<https://www.osha.gov/publications/OSHA3911.pdf>



Product Warranty

WARRANTY – Saint-Gobain Abrasives warrants the products in this catalog to be free from defects in material or workmanship for a period of one year from the date of purchase. Saint-Gobain Abrasives' sole obligation under this warranty shall be to repair or replace, at Saint-Gobain Abrasives' option, any product which is non-conforming provided any such product failure was not caused by a subsequent modification of the product, misuse or a failure to follow any applicable instructions for the product.

EXCEPT FOR THE FOREGOING, SAINT-GOBAIN ABRASIVES EXPRESSLY DISCLAIMS ALL OTHER GUARANTIES AND/OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Liability Limitation

SAINT-GOBAIN'S LIABILITY FOR ANY LOSS OR DAMAGE ARISING OUT OF OR RESULTING FROM THE USE OF THE PRODUCT SHALL NOT EXCEED THE PURCHASE PRICE THEREOF, REGARDLESS OF WHETHER SUCH LIABILITY ARISES IN CONTRACT, TORT (INCLUDING WITHOUT LIMITATION NEGLIGENCE OR STRICT LIABILITY), OR OTHERWISE, AND IN NO EVENT SHALL SAINT-GOBAIN BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND. NO REPRESENTATIVE OF SAINT-GOBAIN, NOR ANY OF SAINT-GOBAIN'S DISTRIBUTORS OR DEALERS, IS AUTHORIZED TO MODIFY THIS WARRANTY OR ISSUE ANY WARRANTY REGARDING THE PRODUCTS IN THIS CATALOG.

Product Quality Complaints

All product quality complaints should be submitted to your local Norton Distributor.

Trademarks

All trademarks used in these pages are trademarks of Saint-Gobain Abrasives unless otherwise indicated.

A275 Original Performance™	Fast Cut™	NorGrip®	Reshaping the World of Precision Grinding™
Abrasive Connection Express®	FastTrack™	NorKut™	Reshaping Your World®
Adalox®	FlexDrum™	NorPor®	RightCut®
Alundum®	FlexEdge™	Norton®	Sand-O-Flex™
AVOS®	Foundry X™	Norton Clipper™	Screen-Bak®
Aztec®	Furioso™	Norton Design® (Parallelogram)	SoftTouch®
Bear-Tex®	Gemini®	Norton Design® (Triple Stripe Design)	Speed-Change™
Because Right Choices Matter™	G-Force™	Norton SG®	Speed-Grip®
Black Ice®	India®	NorZon®	Speed-Lok®
Blaze®	JobPack™	NorZon Plus®	Stick & Sand®
Blue-Bak™	Liquid Ice®	Onyx™	Targa®
Blue-Core™	Long Life™	Pacesetter™	Thin Flex™
BlueFire®	Merit®	Paradigm®	TufBak®
BPR™	MeshPower™	Plyweld®	U-Dex-It™
Century45®	Metalite®	ProSand™	Univel®
Charger™	Mini-Dex™	Pure Ice™	USB™
Classic™	MSL®	QuadroFlex™	Vitrium3®
Clean Bond®	Multi-Air Cyclonic®	Quantum™	Vortex®
Clipper®	Multi-Oilstone®	Rail Cut™	Winter®
Crystolon®	MultiSand™	Rapid Blend®	and others
DiaLast™	The Muscle Behind The Machine®	Rapid Cut™	
Dry Ice®	NEX™	Rapid Finish®	
Duo®	No-Fil®	Rapid Prep™	
Duo Evo™	NORaX®	Rapid Strip®	
Durite®	NorBide®	Red Heat®	

GET ACCESS TO THE INDUSTRY'S BEST SELECTION OF ABRASIVE SOLUTIONS!

Contact Us

To place an order, contact our customer service support center with:

- Customer number and contact name
- Any special shipping needs
- Complete product information:
 - » 11-digit Part Number
 - » Product description
 - » Quantity and unit of measure
 - » Price by unit of measure



U.S. Phone: **800-551-4413** Fax: **800-551-4416**

CDN. Phone: **800-263-6565** Fax: **800-561-9490**

Email: nacustomerservice@saint-gobain.com



To ensure minimal errors and faster turnaround, using electronic media is preferred for placing orders. For assistance with www.abrasiveconnection.com or EDI setup, contact us at:

Email: abrasive.connection@saint-gobain.com

Phone: 888-383-2236

Boost your knowledge and add selling confidence

Sign up for industry leading training from a world leader in abrasives manufacturing. Visit www.nortonabrasives.com/en-us/norton-tech to find out more about our Norton Tech online training.

NORTON **TECH**
School of Abrasives



Put our NEW merchandizing displays to work for you

We offer a complete set of Norton branded merchandising displays and point of sale graphics that can be tailored to your requirements, and support your sales growth for industrial, commercial MRO, and welding distributors. Contact your local Norton sales representative to find out more!



NORTON

SAINT-GOBAIN

The world leader in abrasives for more than 130 years, the Norton brand offers the widest portfolio of grinding, cutting, blending, finishing and polishing solutions which deliver the highest productivity and cost performance ratio in both stock and made-to-order solutions.

NORTON

SAINT-GOBAIN

clipper®

For 80 years, the Clipper brand has been a trusted equipment source on the jobsite. Now, the Norton Clipper brand will cut a new path for future growth with an industry-leading line of diamond products, abrasives, and light equipment to tackle even the toughest construction environment.

NORTON

SAINT-GOBAIN

MERIT®

The Norton Merit brand offers a comprehensive portfolio of specialty abrasive products for offhand and portable power tools. From quick-change discs and cartridge rolls to flap wheels - feel the power behind Norton Merit.

NORTON

SAINT-GOBAIN

WINTER

The world's leading brand for high-quality, innovative diamond and cBN precision grinding products for the automotive, aerospace, bearing, tools and electronics industries. Norton Winter is quality and precision at its finest.

BEST

Highest Productivity Lowest Total Cost

BETTER

Excellent Blend of Performance and Price

GOOD

Consistent Performance – Low Initial Price

www.facebook.com/NortonAbrasivesNA | www.youtube.com/NortonAbrasives | www.nortonabrasives.com

USA CUSTOMER SERVICE:

Toll Free Phone: 1 (800) 551-4413
Toll Free Fax: 1 (800) 551-4416

CANADA CUSTOMER SERVICE:

Toll Free Phone: 1 (800) 263-6565
Toll Free Fax: 1 (800) 561-9490

FORM #7362 REV. 05/19

© Saint-Gobain May 2019.

Norton, Bear-Tex, Clipper, Merit, and Winter are registered trademarks of Saint-Gobain Abrasives.



NO-RISK TEST

