



TOOLING & MACHINERY, INC.

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225

[www.ahbinc.com](http://www.ahbinc.com)

ISO Certified

[customerservice@ahbinc.com](mailto:customerservice@ahbinc.com)





## CATEGORY DEFINITION

Our Norton offering is the industry's most comprehensive line of stock and made-to-order products to true (restore the wheel's profile) and dress (opening – to remove stock – or closing – to finish) the face of the wheel. In addition to these catalog stock stationary tools, Norton manufactures a full line of custom stationary tools, rotary diamond dressers and truing/dressing devices to meet all your specific application needs. Contact us at 1-800-438-4773.

- APPLICATIONS:** Truing and dressing conventional and superabrasive wheels, straight, step, radius and form dressing
- TOOL TYPES:** Single Point, Multi-Point, Blade, Form, Toolroom and Cluster Tools, and Truing Devices

## DETERMINING THE BEST VALUE

- Remember that diamonds are a rare commodity—the larger the stone and the better the quality, the higher the initial cost. The key to successful diamond tool productivity and use is based on the “cost per dress.” Normally, higher quality diamonds and a proactive resetting program will result in the lowest “cost per dress.”
- In those situations where a resetting program is not feasible or low initial cost is the primary purchasing consideration, Norton offers a complete line of non-resettable tools.

## RESETTING YOUR USED DIAMOND TOOLS

### Resetting – Minimizing Your Cost




**Buying a higher quality diamond is your best value, especially if you participate in a proactive resetting program. Although initial cost may be higher, the payback comes through several factors:**

- Diamond durability, providing longer tool life
- Tighter form tolerances
- Consistent finish rates
- Resetting the diamond lowers the overall tooling cost

Used properly, the overall cost of a higher quality, resettable diamond will compare favorably with that of an inexpensive, non-resettable diamond. Initially, the best diamond point is selected for use. When returned, the next best diamond point is selected for resetting, and so on.

### To ensure you get the best value for your diamond:

- Rotate the diamond tool ¼ turn periodically to maintain a sharp point
- Use proper flow of coolant to protect the diamond from heat which can create fracturing of the diamond
- Excessive wear on the diamond point may impact the ability to reset the diamond. The widest point of the diamond is referred to as the girth. The diamond girth is buried in a powder metal matrix. Using a diamond into the girth zone might impact the ability to reset other diamond points

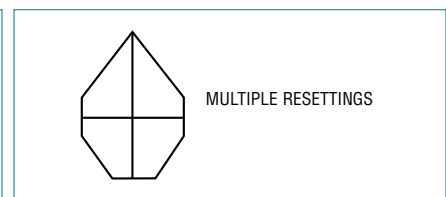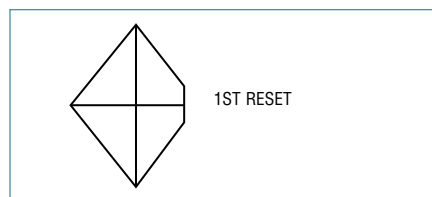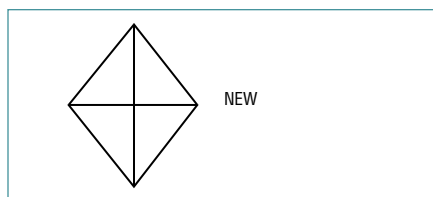


## TECHtip

### SELECTING THE CORRECT DIAMOND TOOL

To determine the type of Norton dressing tool to use, it is best to think about the desired shape of the wheel face. Finished wheel face shapes are generally categorized into six types, as illustrated below.

### TYPICAL WHEEL FORMS DRESSED BY STATIONARY DIAMOND TOOLS

Look for the applicable wheel forms beside each product type to help you choose the correct product for your application.




STRAIGHT




TAPERED



CONVEX



CONCAVE



ANGLED



MULTI-ANGLED

## Single Point Tools

Our Norton line of single point tools is used in straight and simple form dressing applications. It includes: resettable and non-resettable products, tools for all abrasive types (conventional and advanced ceramic grains) and the technology-leading Norton "Indexable" tool design.

### WHEEL FORMS DRESSED BY THESE TOOLS



STRAIGHT



TAPERED



CONVEX



## SPECcheck

### SELECTION GUIDE

#### Stock Tools for Ceramic Abrasive Wheels

**SG/Ceramic** Engineered for use on ceramic (SG, NQ, Targa, etc.) wheels but may also provide significant benefits when used on conventional abrasive products. These tools are furnished with top quality specially selected diamonds.

**BCSG/Ceramic** Economical alternative to an "SG" tool. Best choice when a disposable tool is preferred.

#### Stock Tools for Conventional Abrasive Wheels

**NS** Engineered for use on conventional abrasives. These high quality, value-priced tools can be used for a variety of dressing applications.

**BC** Economical alternative to an "NS" tool. Best choice when a disposable tool is preferred.

#### SELECTING THE CORRECT SINGLE POINT TOOL:


- Identify the wheel abrasive type: aluminum oxide, silicon carbide, or ceramic
- Determine the wheel diameter – to select the optimum carat weight
- Determine the tool holder size – to select appropriate shank diameter

#### EXAMPLES OF SINGLE POINT TOOL SELECTION

<b>Conventional Wheel Spec:</b>	32A46-IVBE 7" x 1/2" x 1-1/4" Customer's machine has a 7/16" tool holder
<b>Tool Selections:</b>	Resettable: NS2M7 or NSUD2 (Indexable) Non-Resettable: BC2M7 or BCUD2 (Indexable)
<b>Ceramic Wheel Spec:</b>	5SG60-JVS or 5NQ60-IVS 10" x 1" x 3" Customer's machine has a 3/8" tool holder
<b>Tool Selections:</b>	Resettable: SG3M6 Non-Resettable: BCSG3M6

## TECHtip

- Rigidly mount single point tools at a 10° - 15° angle to the wheel centerline with a line drawn through the center of the wheel, pointing in the direction of wheel travel.
- Point of contact should be slightly below centerline of wheel as shown.
- Use coolant whenever possible.
- Normal infeed is .001" per pass.
- Lead selections range from .002" - .010" per wheel revolution.
- Rotate the tool 1/4 turn periodically to maintain a sharp point.



To optimize applications using ceramic abrasives and/or tools, normal dressing parameters must change. Reduce infeed by 25%. Significant reductions in the amount of infeed and frequency of dress will result in substantially lower cost per part ground.

#### SINGLE POINT DRESS TRAVERSE RATE

Select a Lead Value based on desired Surface Finish and run the formula below.

FINISH	LEAD VALUE (PER WHEEL REVOLUTIONS)
For Coarse Finish (approx. 64 RMS)	.008" to .010"
For Medium Finish (approx. 32 RMS)	.005" to .009"
For Fine Finish (approx. 16 RMS)	.002" to .004"

LEAD VALUE X WHEEL SPEED (RPM) = TRAVERSE RATE IN INCHES/MINUTE

- Slower traverse rates result in a closed wheel face and lower surface finish readings on the workpiece.
- Faster traverse rates result in an open wheel face that produces greater stock removal and a rougher workpiece finish.



It is the user's responsibility to refer to and comply with ANSI B7.1

## Single Point Tools CONTINUED



### Single Point Tools for Truing/Dressing Ceramic Abrasives

#### SG/CERAMIC SINGLE POINT TOOLS

##### FEATURES

- Specially selected broad-shaped, diamond
- Each diamond is hand selected for stone shape, quality and structural integrity
- Multi-purpose

##### BENEFITS

- Withstands the increased grinding pressures of ceramic abrasives
- Consistent tool performance
- Accommodate most straight dressing and simple form dressing applications
- Stand up to ceramic (Norton SG, NQ, TG, etc.) abrasive sharpness; can also be used to dress conventional abrasives

### RESETTABLE SG/CERAMIC SINGLE POINT TOOLS

#### FEATURES AND BENEFITS

- Norton high quality diamond and a proactive resetting program will result in the lowest dressing cost per part

### NON-RESETTABLE BCSG/CERAMIC SINGLE POINT TOOLS



#### FEATURES AND BENEFITS

- The best selection when a resetting program is not feasible or low initial cost is the primary purchasing consideration

WHEEL DIAMETER	TOOL CARAT WEIGHT	TOOL DIAMETER	TOOL LENGTH	BEST		GOOD	
				PRODUCT NO.	3 SETTABLE PTS (2 RESETS) PART NO.	PRODUCT NO.	NON-RESETTABLE PART NO.
<b>Stock Single Point Tools for Truing/Dressing Ceramic Abrasives</b>							
Up to 7"	1/4 (.25)	3/8"	2"	SG2M6	66260195365	BCSG2M6	66260157007
		7/16"	2"	SG2M7	66260195366	BCSG2M7	66260156905
8" to 10"	1/3 (.33)	3/8"	2"	SG3M6	66260195367	BCSG3M6	66260157008
		7/16"	2"	SG3M7	66260195368	BCSG3M7	66260156906
11" to 14"	1/2 (.50)	3/8"	2"	SG5M6	66260195369	BCSG5M6	66260157009
		7/16"	2"	SG5M7	66260195370	CSG5M7	66260156907
15" to 20"	3/4 (.75)	3/8"	2"	SG7M6	66260195371		
		7/16"	2"	SG7M7	66260195372	BCSG7M	66260156908
21"+	1 (1.00)	7/16"	2"			BCSG10M7	66260157010

STANDARD PACKAGE = 1 TOOL

WHEEL FORMS DRESSED BY THESE TOOLS

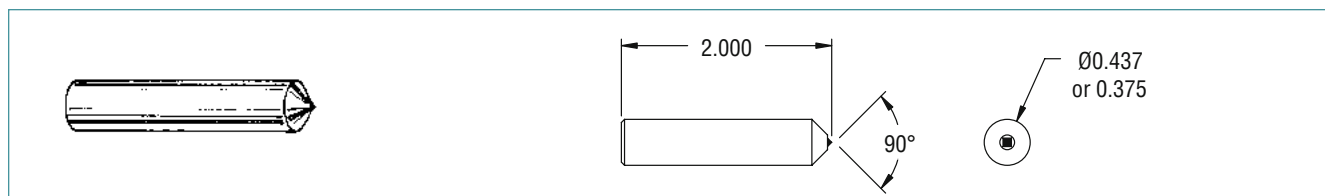


## TECHtip


### STOCK SINGLE POINT TOOL MARKING SYSTEM

DIAMOND QUALITY	DIAMOND SIZE	SHANK DESIGN	SHANK DIAMETER
<b>SG/Ceramic</b>	1 = 1/5 (.20) carat	M	6 = 3/8"
<b>BCSG/Ceramic</b>	2 = 1/4 (.25) carat	J	7 = 7/16"
<b>NS</b>	3 = 1/3 (.33) carat		
<b>BC</b>	5 = 1/2 (.50) carat		
	7 = 3/4 (.75) carat		
	10 = 1 carat		

EXAMPLE: NS 2 M 6



SHANK J



SHANK M

## Single Point Tools CONTINUED



### Single Point Tools for Truing/Dressing Conventional Abrasives CONVENTIONAL SINGLE POINT TOOLS

FEATURES	BENEFITS
■ Consistent diamond structure and shape	■ Repeatable dressing performance
■ Well defined, sharp diamond point	■ Durable; maximum cost effectiveness for dressing conventional abrasives
■ Steeper 60 degree included angle head design	■ Greater machine and part clearance produce forms with tighter tolerances

### RESETTABLE NS (NORTON STANDARD) SINGLE POINT TOOLS

#### FEATURES AND BENEFITS

- High quality diamonds, value priced
- Selection of the correct tool and a proactive resetting program will result in the lowest dressing cost per part

### NON-RESETTABLE BC SINGLE POINT TOOLS




#### FEATURES AND BENEFITS

- The best selection when a resetting program is not feasible or low initial cost is the primary purchasing consideration

WHEEL DIAMETER	TOOL CARAT WEIGHT	TOOL DIAMETER	BETTER		GOOD	
			PRODUCT NO.	2 SETTABLE PTS (1 RESET) PART NO.	PRODUCT NO.	NON RESETTABLE PART NO.
<b>Stock Single Point Tools for Truing/Dressing Conventional Abrasives</b>						
Internal Wheel	1/5 (.20)	3/8" 7/16"			BC1M6 BC1M7	66260195021 66260195022
Up to 7"	1/4 (.25)	3/8" 7/16"	NS2M6 NS2M7	66260195116 66260195117	BC2M6 BC2M7	66260195000 66260195001
8" to 10"	1/3 (.33)	3/8" 7/16"	NS3M6 NS3M7	66260195121 66260195122	BC3M6 BC3M7	66260195002 66260195003
11" to 14"	1/2 (.50)	3/8" 7/16"	NS5M6 NS5M7	66260195126 66260195127	BC5M6 BC5M7	66260195004 66260195005
15" to 20"	3/4 (.75)	7/16" 7/16"	NS7M7 NS7J7	66260195132 66260195130	BC7M6 BC7M7	66260195006 66260195007
21" +	1 (1.00)	3/8" 7/16" 7/16"	NS10M6 NS10M7 NS10J7 *	66260195136 66260195137 66260195135	BC10M6 BC10M7	66260195008 66260195009

\* J-SHANK TOOLS ARE AVAILABLE IN 7/16" DIAMETER WITH 5/8" HEAD  
STANDARD PACKAGE = ONE TOOL

#### WHEEL FORMS DRESSED BY THESE TOOLS

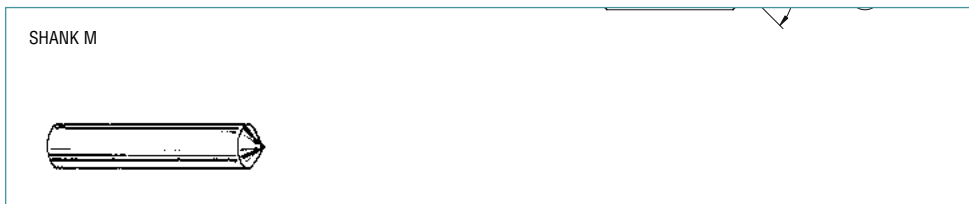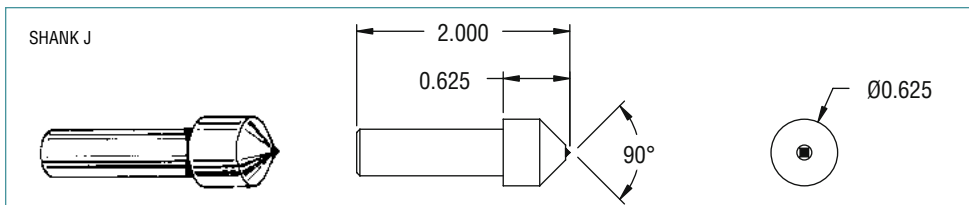

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on [www.nortonindustrial.com](http://www.nortonindustrial.com) or your Norton representative for more in-depth information on all Norton superabrasive stock and made-to-order products.

## Single Point Tools CONTINUED

### Indexable Single Point Tools

Indexable tools are specifically designed to alleviate any misalignment issues and are the tools of choice for CNC grinders. They feature a two-part construction with the head and shank as separate pieces. After the initial installation, operators simply turn the indexable head with a wrench, while the tool shank remains secure (and aligned) in the tool holder.



#### INDEXABLE SINGLE POINT TOOLS

##### FEATURES

- Easily turned without removing tool from the holder
- U-Dex-It and Mini-Dex tools have a 60° included angle head design

##### BENEFITS

- Easier for operators to turn than conventional tools – increasing frequency of beneficial tool turning
- Extended life; less downtime and increased productivity
- Provides additional form versatility through better machine and part clearance
- Excellent choice for regulating wheels

### Indexable Single Point Tools for Truing/Dressing Ceramic Abrasives



#### NON-RESETTABLE BCSGUD/CERAMIC U-DEX-IT INDEXABLE SINGLE POINT TOOLS

##### FEATURES AND BENEFITS

- These U-Dex-It tools contain specially selected diamonds to withstand increased ceramic (SG, Quantum NQ, Targa TG, etc.) grinding pressures
- Ideal for centerless grinders; using standard 5/8" wrench, the head can be turned through the hole in the side of the wheel guard without removing the guard
- The best selection when a resetting program is not feasible or low initial cost is the primary purchasing consideration

WHEEL DIAMETER	TOOL CARAT WEIGHT	TOOL SIZE	GOOD	
			PRODUCT NO.	NON-RESETTABLE PART NO.
<b>Stock Indexable Single Point Tools for Truing/Dressing Ceramic Abrasives</b>				
Up to 7"	1/4 (.25)	7/16" x 1-7/16" with 5/8" head	BCSGUD2	66260162669
11" to 14"	1/2 (.50)	7/16" x 1-7/16" with 5/8" head	BCSGUD5	66260159894
STANDARD PACKAGE = ONE TOOL				

WHEEL FORMS DRESSED BY THESE TOOLS

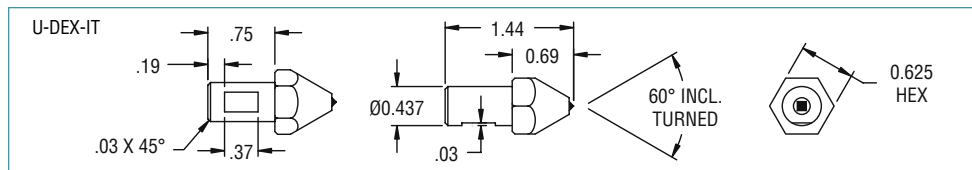

### Indexable Single Point Tools for Truing/Dressing Conventional Abrasives

#### RESETTABLE NORTON STANDARD NSUD U-DEX-IT INDEXABLE SINGLE POINT TOOLS

##### FEATURES AND BENEFITS

- High quality diamonds, value priced
- Ideal for centerless grinders; using standard 5/8" wrench, the head can be turned through the hole in the side of the wheel guard without removing the guard
- Selection of the correct tool and a proactive resetting program will usually result in the lowest dressing cost per part

#### RESETTABLE NORTON STANDARD NSMD MINI-DEX INDEXABLE SINGLE POINT TOOLS

##### FEATURES AND BENEFITS

- High quality diamonds, value priced
- Use a standard 7/16" wrench to turn; designed for internal, bearing race, and twist drill flute machines
- Selection of the correct tool and a proactive resetting program will usually result in the lowest dressing cost per part

#### NON-RESETTABLE BCUD U-DEX-IT INDEXABLE SINGLE POINT TOOLS

##### FEATURES AND BENEFITS



- Ideal for centerless grinders; using standard 5/8" wrench, the head can be turned through the hole in the side of the wheel guard without removing the guard
- The best selection when a resetting program is not feasible or low initial cost is the primary purchasing consideration

## Single Point Tools CONTINUED

### Indexable Single Point Tools for Truing/Dressing Conventional Abrasives CONTINUED

WHEEL DIAMETER	TOOL CARAT WEIGHT	TOOL SIZE	BETTER		GOOD	
			PRODUCT NO.	2 SETTABLE PTS (1 RESET) PART NO.	PRODUCT NO.	NON-RESETTABLE PART NO.
<b>Stock Indexable Single Point Tools for Truing/Dressing Conventional Abrasives</b>						
Up to 7"	1/4 (.25)	7/16" x 1-7/16" with 5/8" head	NSMD2	66260195171	BCUD2	66260195023
		1/4" x 1-3/16" with 7/16" head				
8" to 10"	1/3 (.33)	7/16" x 1-7/16" with 5/8" head	NSUD3	66260195162	BCUD3	66260195024
		1/4" x 1-3/16" with 7/16" head	NSMD3	66260195172		
11" to 14"	1/2 (.50)	7/16" x 1-7/16" with 5/8" head	NSUD5	66260195163	BCUD5	66260195025
15" to 20"	3/4 (.75)	7/16" x 1-7/16" with 5/8" head	NSUD7	66260195164		

STANDARD PACKAGE = ONE TOOL

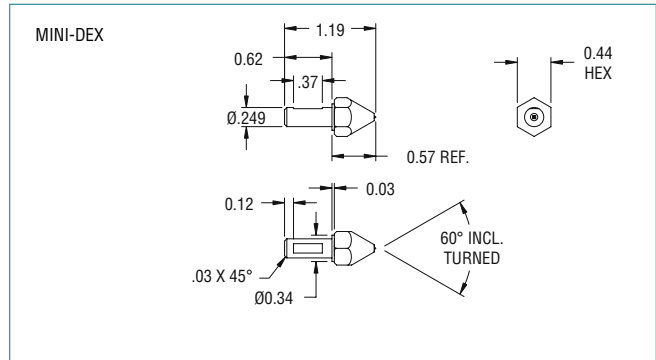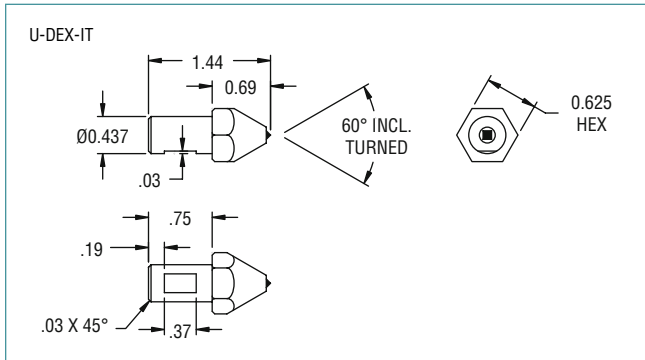

## Internal Grinding Tools



### RESETTABLE INTERNAL GRINDING TOOLS

#### FEATURES AND BENEFITS

- Q style shank is used on a Heald internal grinder (resettable).

MACHINE TYPE	CARAT WEIGHT	SHANK DIAMETER	TOOL LENGTH	BEST	
				PRODUCT NO.	2 SETTABLE PTS (1 RESET) PART NO.
<b>Stock Internal Grinding Tools</b>					
Heald	1/5 (.20)	7/16"	1"	NI21Q7	66260195180

STANDARD PACKAGE = 1 TOOL

#### WHEEL FORMS DRESSED BY THESE TOOLS



STRAIGHT



TAPERED




CONVEX



CONCAVE

#### SHANK Q FOR HEALD MACHINE

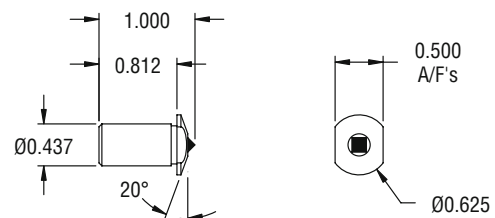



## Single Point Tools CONTINUED

### Thread Grinding Tools



#### RESETTABLE SG/CERAMIC THREAD GRINDING TOOLS

##### FEATURES AND BENEFITS

- These wheels are used on J & L and Excello thread grinding machines to accurately dress the grinding wheels that form the desired thread configuration (non-resettable).

MACHINE TYPE	SHANK DIAMETER	TOOL LENGTH	INCLUDED ANGLE	MAX. RADIUS ON POINT	BEST	
					PRODUCT NO.	NON-RESETTABLE PART NO.
<b>Stock Thread Grinding Tools</b>						
J & L	1/4"	1"			38RL4*	66260195100
J & L	1/4"	1"	80°	.010"	NT1L4	66260195187
EXCELLO	3/8"	1-5/8"	60°	.010"	NT106	66260195190

\* 38RL4 IS A MULTI-POINT (GRIT) 30 - 40 MESH TOOL  
STANDARD PACKAGE = 1 TOOL

WHEEL FORMS DRESSED BY THESE TOOLS




STRAIGHT




TAPERED


NT1L4 FOR JONES & LAMSON MACHINE

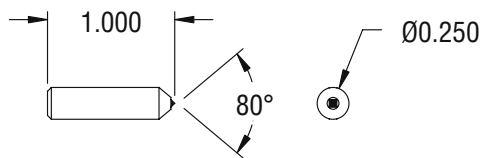

NT106 FOR EXCELLO MACHINE

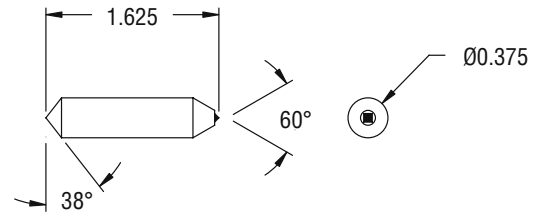

38RL4 FOR JONES & LAMSON MACHINE

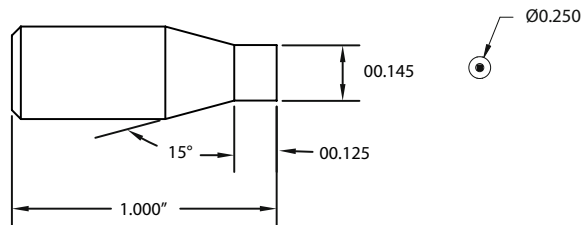

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on [www.nortonindustrial.com](http://www.nortonindustrial.com) or your Norton representative for more in-depth information on all Norton superabrasive stock and made-to-order products.





## Multi-Point (Grit) Tools

Since Norton conventional and high-performance Multi-Point tools never need turning or resetting, they are the most economical way to accomplish a variety of straight, tapered, and step dressing operations on all sizes of cylindrical, centerless, surface, and toolroom grinding wheel applications.

### WHEEL FORMS DRESSED BY THESE TOOLS



STRAIGHT



TAPERED

## NORTON MULTI-POINT TOOLS

### FEATURES

- Uniformly distributed diamonds in a tough, durable matrix
- Fresh, multiple diamond points exposed in truing operation; no turning or resetting required
- Overall diamond weight exceeds equivalent single point tool


### BENEFITS

- Consistent performance throughout tool life
- Faster, more consistent straight face dressing with maximum efficiency and longer tool life than single point tools
- The most economical way to dress straight and tapered forms

## TECHtip

### MULTI-POINT TOOLS – STRAIGHT FACE DRESSING AND TRUING

- Most multi-point tools are used for straight face dressing.
- Tool should have full face contact with the wheel.
- With new tool, 3–5 passes at .005" per pass should be taken to expose diamonds.
- Infeed per pass .001" - .002"
- Use coolant whenever possible.
- Use appropriate lead (and traverse rate).
- Contact your Norton representative for proper tool selection for Targa wheels.



### MULTI-POINT DRESS TRAVERSE RATE

Select a Lead Value based on desired Surface Finish and run the formula below.

FINISH	LEAD VALUE (PER WHEEL REVOLUTIONS)
For Coarse Finish (approx. 64 RMS)	.023" to .030" (.58mm – .76mm)
For Medium Finish (approx. 32 RMS)	.013" to .022" (.33mm – .57mm)
For Fine Finish (approx. 16 RMS)	.006" to .012" (.15mm – .33mm)

LEAD VALUE X WHEEL SPEED (RPM) = TRAVERSE RATE IN INCHES/MINUTE

- Slower traverse rates result in a closed wheel face that produces less stock removal and improved workpiece finish.
- Faster traverse rates result in an open wheel face that produces greater stock removal and a rougher workpiece finish.



It is the user's responsibility to refer to and comply with ANSI B7.1

## SPECcheck

### SELECTING THE CORRECT MULTI-POINT TOOL


- Identify the wheel abrasive type: ceramic (Norton SG, Quantum NQ, Targa TG), aluminum oxide, or silicon carbide
- Determine the wheel diameter and grit size
- Determine the tool's approach angle to the centerline of the wheel
- Identify the tool holder diameter
- Use 1E shape for angular wheel slide, cylindrical grinding and for shoulder or step truing

### EXAMPLES OF MULTI-POINT TOOL SELECTION

- Conventional Wheel Spec:** 32A46-IVBE 7" x 1/2" x 1-1/4"  
Customer's machine has a 3/8" tool holder 1R6J6
- Tool Selection:** 5SG60-JVS or 5NQ60-IVS 10" x 1" x 3"  
**Ceramic Wheel Spec:** Customer's machine has a 7/16" tool holder SG1R6J7
- Tool Selections:** SG1R6J7


## Multi-Point (Grit) Tools CONTINUED

### SPECcheck

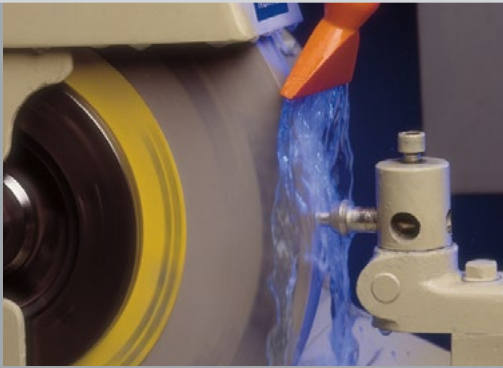


#### MULTI-POINT TOOL DIAMOND SECTION SPECIFICATIONS

SHAPE	WIDTH	LENGTH	DEPTH	TOOL APPROACH ANGLE TO WHEEL	FOR WHEEL DIAMETER
1A	1/4"	3/4"	5/16"	0°	Over 20"
2A	1/4"	1/2"	3/8"	0°	15" – 20"
3A	5/32"	3/8"	1/4"	0°	Over 20"
1E	5/32"	3/8"	5/16"	–	
2E	1/4"	1/2"	1/2"	–	20" x 2" and up
1R	1/4" Round		1/4"	0°	Up to 10"
2R	3/8" Round		3/8"	0°	11" – 14"



A SHAPE IS USED PRIMARILY FOR STRAIGHT FACE DRESSING.



E SHAPE (DOUBLE ANGLE TOP FACE) IS USED FOR STANDARD N-FACE WHEELS, ANGULAR WHEELS, FACE AND SIDE TRUING OF CYLINDRICAL WHEELS, AND IN STEP DRESSING.



R SHAPE IS USED FOR STRAIGHT FACE DRESSING WHERE THE TOOL HOLDER IS PERPENDICULAR TO THE WHEEL FACE (NO DRAG ANGLE), AND ON THREAD GRINDING MACHINES.

#### MULTI-POINT TOOL MARKING SYSTEM

DIAMOND SHAPE	TOOL DIAMOND SIZE	TO DRESS GRINDING WHEELS WITH GRIT SIZE OF:	SHANK DESIGN	SHANK DIAMETER
1A	4	= 46 grit	See the following	6 = 3/8"
2A	6	= 54 - 100 grit	pages for shank	7 = 7/16"
3A	8	= 120 - 150 grit	configurations	8 = 1/2"
1E	12	= 150+ grit		
2E	14	= Special Applications		
1R				
2R				

Example: 1A 6 A 7

### Multi-Point Tools for Straight Dressing

#### SG MULTI-POINT TOOL SHAPE AND SHANK AVAILABILITY

SHAPE SG1A SHANK A



SHAPE SG1A SHANK C



SHAPE SG2A SHANK D



SHAPE SG2A SHANK E



SHAPE SG1R SHANK J



SHAPE SG2R SHANK K



#### CONVENTIONAL TOOLROOM MULTI-POINT TOOL SHAPE AND SHANK AVAILABILITY

SHAPE 1A



BC-60

SHAPE 1A



BC-61

SHAPE 2A



BC-62

SHAPE 2A



BC-63

SHAPE 1R



BC-64

SHAPE 1R



BC-65

#### CONVENTIONAL ABRASIVE MULTI-POINT TOOL SHAPE AND SHANK AVAILABILITY

SHAPE 1A SHANK A



SHAPE 1A SHANK B



SHAPE 1A SHANK C



SHAPE 2A SHANK D



SHAPE 2A SHANK E



SHAPE 3A SHANK F



SHAPE 3A SHANK G



SHAPE 1E SHANK F



SHAPE 1R SHANK J



SHAPE 2R SHANK K



SHAPE 3R SHANK L



SHAPES 3A (F AND G SHANKS) ARE USED FOR FORM, SHAPE, AND STEP TRUING. SHAPE 1E IS USED FOR ANGLE DRESSING

### TECHtip

- To optimize applications using ceramic abrasives/tools, normal dressing parameters must change. Significant reductions in the amount of infeed and frequency of dress will result in significantly lower cost per part ground.
- While all Norton SG/Ceramic tools have been designed to improve the efficiency of ceramic grinding applications, they can also offer significant benefits in many applications using conventional abrasives.
- When first using a Norton SG/Ceramic tool, make 3 to 5 passes at .005" infeed to ensure full face contact between the dressing tool and wheel face.
- Reduce normal dressing infeed by half. Do not exceed infeed of .002" per pass.
- The lead selection should be between .006"-.030" per wheel revolution. Faster traverse with a Norton SG/Ceramic tool generally provides an open wheel face that can maximize productivity of the ceramic abrasive.

## Multi-Point (Grit) Tools CONTINUED

### Multi-Point Tools for Truing and Straight Dressing

#### SG/CERAMIC MULTI-POINT TOOLS

##### FEATURES AND BENEFITS

- Designed specifically for use on ceramic (Norton SG, Quantum NQ, Targa TG, etc.) abrasives, SG tools contain a higher diamond concentration to withstand the increased grinding pressures generated by the ceramic abrasives. These tools have improved life and dress quality; they can also offer significant benefits in many applications using conventional abrasives.

#### STANDARD MULTI-POINT TOOLS

##### FEATURES AND BENEFITS

- The ideal selection for use on conventional abrasives in high-production applications

#### BC MULTI-POINT TOOLS

##### FEATURES AND BENEFITS

- These general-purpose tools are the ideal selection for conventional toolroom applications
- BC multi-point tools contain a specially selected diamond size for a broad range of dressing applications.

WHEEL FORMS  
DRESSED BY  
THESE TOOLS



STRAIGHT

TIER:  
TO DRESS:

BEST	BETTER	GOOD
Ceramic Abrasives	Conventional Abrasives	Conventional Toolroom

WHEEL DIAMETER	WHEEL GRIT SIZE	TOOL APPROACH ANGLE	TOOL DIAMETER	BEST		BETTER		GOOD	
				PRODUCT NO.	PART NO.	PRODUCT NO.	PART NO.	PRODUCT NO.	PART NO.
<b>Multi-Point Tools for Straight Dressing</b>									
Up to 10"	54 to 100	0°	7/16"	SG1R6J7	66260195377	1R6J7	66260195088	BC64	66260195014
		0°	3/8"			1R6J6	66260195085		
11" to 14"	54 to 100	0°	7/16"	SG2R6K7	66260195378	2R6K7	66260195096	BC65	66260195015
		0°	7/16"			2A4D7	66260195045		
15" to 20"	46	0°	7/16"			2A4E7	66260195048		
		15°	7/16"			1B4C7	66260195060		
		15°	7/16"						
	54 to 100	0°	7/16"	SG2A6D7	66260195375	2A6D7	66260195046	BC62	66260195012
		15°	7/16"	SG2A6E7	66260195376	2A6E7	66260195049	BC63	66260195013
		0°	7/16"			2A8D7	66260195047		
21" +	46	0°	7/16"			2A8E7	66260195050		
		15°	7/16"			1A4A7	66260195030		
		15°	7/16"			1A4C7	66260195038		
	54 to 100	0°	7/16"	SG1A6A7	66260195373	1A6A7	66260195031	BC61	66260195011
		15°	7/16"			1A6B7	66260195035		
		15°	7/16"	SG1A6C7	66260195374	1A6C7	66260195039	BC60	66260195010
120 to 150	15°	7/16"			1A8C7	66260195040			


STANDARD PACKAGE = ONE TOOL

### Multi-Point Tools for Form, Shape, or Step Dressing Conventional Abrasives

WHEEL DIAMETER	WHEEL GRIT SIZE	TOOL APPROACH ANGLE	TOOL DIAMETER	BETTER	
				PRODUCT NO.	PART NO.
<b>Stock Multi-Point Tools for Form, Shape, and Step Dressing</b>					
All	54 to 100	0°	7/16"	3A6F7	66260195055
		15°	7/16"	3A6G7	66260195975
	120 to 150	15°	7/16"	3A8G7	66260195058

STANDARD PACKAGE = ONE TOOL

WHEEL FORMS DRESSED BY THESE TOOLS



STRAIGHT



TAPERED


WHEEL DIAMETER	WHEEL GRIT SIZE	TOOL APPROACH ANGLE	TOOL DIAMETER	BETTER	
				PRODUCT NO.	PART NO.
<b>Stock Multi-Point Tools for Angular Dressing Conventional Abrasives</b>					
All	54 to 100	0°	7/16"	1E6F7	66260195080

STANDARD PACKAGE = ONE TOOL

WHEEL FORMS DRESSED BY THESE TOOLS



TAPERED



ANGLED


## High Performance Grit Tools

Norton High Performance grit tools are used in the same manner as multi-point tools, but are designed to produce a superior finish. They are used on 120 - 150 grit wheels. The traverse rates are equal to or faster than ordinary tools. Mounted on standard shanks, standard High Performance grit tools have a 3/8" wide by .100" thick diamond impregnated blade with a greater number of sharp points than in ordinary multi-point tools.

Since High Performance grit tools contain a higher concentration of diamond than found in standard multi-point tools, they are well suited for ceramic abrasive applications.

### Typical Machines and Applications


- HP4439: cylindrical machines, grinding thrust walls, bearing diameters and multi-diameter shafts with radii
- HP4511: angular machines plunge grinding multi-diameter shafts and plunge grinding on dual-wheel forms
- HP4595: cylindrical machines grinding main bearing and lobes on camshafts
- HP4596: centerless machines step grinding and machines dual-wheel grinding transmission shafts

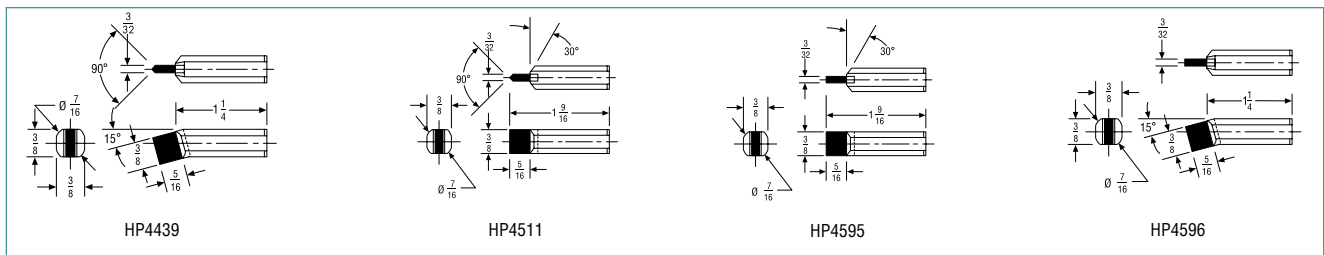

				BEST	
WHEEL DIAMETER	WHEEL GRIT SIZE	SHANK DIAMETER	TOOL LENGTH	PRODUCT NO.	PART NO.
<b>Stock High Performance Grit Tools</b>					
Up to 20"	120 to 150	7/16"	1-9/16"	HP4439	66260195270
Up to 20"	120 to 150	7/16"	1-9/16"	HP4511	66260195271
Up to 20"	120 to 150	7/16"	1-9/16"	HP4595	66260195272
Up to 20"	120 to 150	7/16"	1-9/16"	HP4596	66260195273

STANDARD PACKAGE = ONE TOOL


WHEEL FORMS DRESSED BY THESE TOOLS



## Blade Tools

With the choice of natural and synthetic diamond in three performance/price tiers, Norton blade tools can meet all your angle, step, and radius dressing requirements for cylindrical, surface, and centerless grinding.

WHEEL FORMS DRESSED BY THESE TOOLS

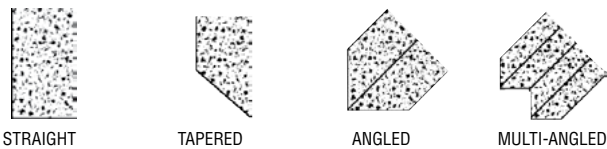

## Blade Tools CONTINUED

### USB (UNIFORM SYNTHETIC BLADE) BLADE TOOLS (ALL ARE MADE-TO-ORDER)

#### FEATURES

- Synthetic diamond with a controlled diamond shape provides a constant cross section of diamond to the wheel throughout the life of the tool

#### BENEFITS

- Provides consistent wheel conditioning from the first dress to last
- Ideal for close tolerance wheel dressing on manual and CNC grinders, long production runs, and critical form and finish applications (e.g. automotive cam, crank, and valve grinding)
- Economical, long-lasting alternative to chisel-type tools for centerless form grinding

### MULTI-CUT BLADE TOOLS (AVAILABLE IN STOCK AND MADE-TO-ORDER)

#### FEATURES

- Manufactured with top quality elongated-shaped natural diamond

#### BENEFITS

- The choice when natural diamond is preferred on surface, cylindrical, and centerless grinders
- Durable performing tools in a medium price range

### LONG LIFE BLADE TOOLS (ALL ARE MADE-TO-ORDER)

#### FEATURES

- Manufactured with processed elongated-shaped natural diamond

#### BENEFITS

- Developed as the first generation of the blade tool line for surface, cylindrical, and centerless grinders
- The choice when initial price is the primary purchasing consideration

					BETTER MULTI-CUT TOOLS	
WHEEL DIAMETER (WIDTH ≤ 9")	TOOL APPROACH ANGLE	SHANK DIAMETER	APPROXIMATE DIAMETER OF DIAMOND	MINIMUM RADIUS AND CONCAVE TO BE DRESSED	PRODUCT NO.	PART NO.
<b>Stock Blade Tools</b>						
12" to 17"	15°	7/16"	.055"	.028	MC355	66260195266
18" to 29"	15°	7/16"	.075"	.038	MC375	66260195267

THESE STOCK TOOLS ARE COMPOSED OF 1 LAYER WITH 3 DIAMONDS. THESE TOOLS ARE NOT RESETTABLE OR RELAPPABLE.  
STANDARD PACKAGE = ONE TOOL

#### WHEEL FORMS DRESSED BY THESE TOOLS




STRAIGHT



TAPERED



ANGLED



MULTI-ANGLED

Refer to our **Diamond and cBN Superabrasive Standard Product Catalog #8068** sections on [www.nortonindustrial.com](http://www.nortonindustrial.com) or your Norton representative for more in-depth information on all Norton superabrasive stock and made-to-order products.



## Form Tools

Norton Form Tools have diamond lapped to specific angles and radii required for a particular application, machine, contour dressing system, or CNC operation. Due to the high degree of accuracy necessary, the diamond is of special shape and quality.


#### WHEEL FORMS DRESSED BY THESE TOOLS



CONVEX



CONCAVE



ANGLED



MULTI-ANGLED

## Form Tools CONTINUED

### CONE POINT TOOLS

#### FEATURES AND BENEFITS


- The Norton vacuum braze technology used in the manufacturing of cone points surpasses all traditional diamond retention methods.
- Benefits of this technology include absolute diamond retention, diamond pullout prevention during the dressing cycle, and longer tool life through multiple relaps.
- Because the diamond is accurately coned to the specific included angle and radius, these tools are ideal when the most intricate, precise forms and radii are required.
- Can be relapped.

### U-Dex-It Cone Point Tool

Used for precision dressing of intricate forms and radii. Specially designed with 5/8" indexable head for easy turning during use. These tools can be relapped.

**BEST**

INCLUDED ANGLE ON DIAMOND	RADIUS ON DIAMOND	TOOL CARAT WEIGHT	SHANK DIAM.	TOOL LENGTH	PRODUCT NO.	RELAPPABLE PART NO.
<b>Stock U-Dex-It Cone Point Tool</b>						
75°	.020"	.50	7/16"	1.678"	CPUD720-7	66260158981
STANDARD PACKAGE = ONE TOOL						

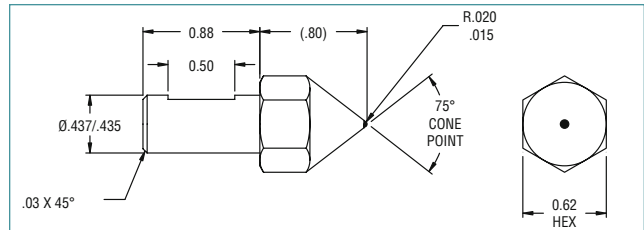

## SPECcheck

### CONE POINT TOOL MARKING SYSTEM

TOOL TYPE	INCLUDED ANGLE ON DIAMOND	RADIUS ON DIAMOND	CARAT WEIGHT	SHANK DIAMETER	
CP	6 = 60°	05 = .005"	L = .10 - .15	6 = 3/8"	
	7 = 75°	10 = .010"	M = .20 - .25	7 = 7/16"	
	9 = 90°	15 = .015"	H = .33		
		20 = .020"	X = .50		
		25 = .025"			
		30 = .030"			

Example: CP 6 10 M-6


#### WHEEL FORMS DRESSED BY THESE TOOLS



CONVEX



CONCAVE



ANGLED




MULTI-ANGLED

### Standard Cone Point Tool

These tools are used for precision dressing when the most intricate forms and radii are required. Can be relapped.

**BEST**

INCLUDED ANGLE ON DIAMOND	RADIUS ON DIAMOND	TOOL CARAT WEIGHT	SHANK DIAM.	TOOL LENGTH	PRODUCT NO.	RELAPPABLE PART NO.
<b>Stock Standard Cone Point Tools</b>						
60°	.010"	.20 - .25	3/8"	2"	CP610M-6	66260195240
STANDARD PACKAGE = ONE TOOL						

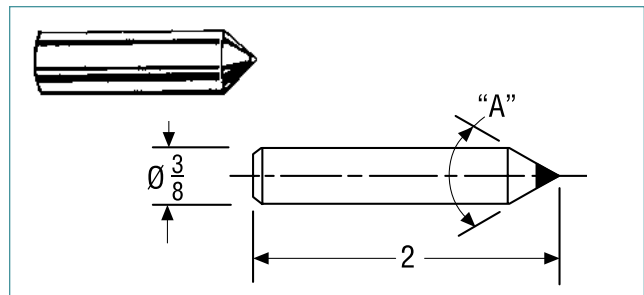


#### WHEEL FORMS DRESSED BY THESE TOOLS



CONVEX



CONCAVE



ANGLED



MULTI-ANGLED

Refer to our Diamond and cBN Superabrasive Standard Product Catalog #8068 sections on [www.nortonindustrial.com](http://www.nortonindustrial.com) or your Norton representative for more in-depth information on all Norton superabrasive stock and made-to-order products.

## TECHtip

### HOW TO USE FORM DRESSING TOOLS

- Form Tools should be used in compliance with the guidelines established for the machine or dress.
- Proper centerline and light infeeds are essential to minimize side pressure. Excessive pressure will cause the diamond to fracture.
- Cone point tools should be rotated approximately 1/4 turn daily.



## Form Tools CONTINUED

### Chisel Point Tool for Toyoda Grinders

High-precision chisel point tool designed for forming intricate shapes and radii. Specifically engineered to fit Toyoda machine series GL32 and GL4, it can also be used on various straight and angle-head grinders – for dressing conventional and ceramic abrasive wheels, sizes 12" to 24". This tool can be reset/relapped.

BEST						
INCLUDED ANGLE ON DIAMOND	RADIUS ON DIAMOND	TOOL CARAT WEIGHT	SHANK DIAM.	TOOL LENGTH	PRODUCT NO.	RELAPPABLE PART NO.
<b>Stock Chisel Point Tool</b>						
55°	.020"	.75	7/16"	1.10"	CHT520-7	66260103741

STANDARD PACKAGE = ONE TOOL

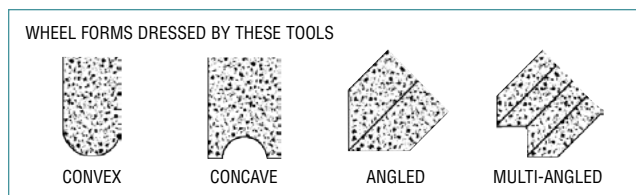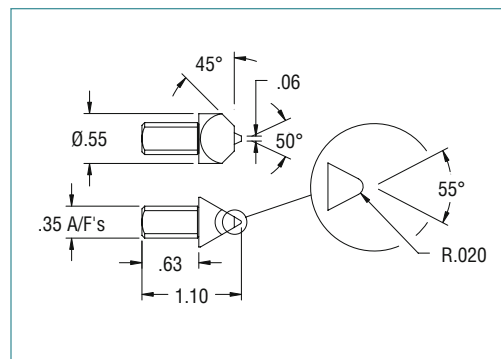

See the “Diamond Form Tool” section on [www.nortonindustrial.com](http://www.nortonindustrial.com) or ask your Norton representative for information on our made-to-order form tools for Jones & Lamson, Moore Pantograph, Hoglund, and Dia-Form Machines.

## SPECcheck

### CHISEL POINT TOOL MARKING SYSTEM

TOOL TYPE	INCLUDED ANGLE ON DIAMOND	RADIUS ON DIAMOND	CARAT WEIGHT	SHANK DIAMETER
CH =	6 = 60°	05 = .005"	L = .10 - .15	6 = 3/8"
Natural	7 = 75°	10 = .010"	M = .20 - .25	7 = 7/16"
Diamond	9 = 90°	15 = .015"	H = .33	
		20 = .020"	X = .50	
		25 = .025"		
		30 = .030"		

Example: CH 9 5 M-6

## TECHtip

### CHISEL POINT TOOLS

Chisel Point Tools should be rotated 180° when dulling or contour problems occur.



## Toolroom Tools

Norton Toolroom Dressing Tools are primarily used on surface grinders to form the grinding wheel to an exact concave or convex radius. Although some tools are designed for use on a specific machine, many radius tools can be used on any grinder having the correct set-up.

Used generally on 8" diameter and smaller vitrified toolroom wheels, Norton offers a selection of phono-point, conventional radius, and full ball radius tools.

### WHEEL FORMS DRESSED BY THESE TOOLS



STRAIGHT



CONCAVE



CONVEX



MULTI-ANGLED



## Phono-Point Tools

For general toolroom concave and convex dressing on small diameter grinding wheels. Not resettable.

INCLUDED ANGLE	SHANK DIAMETER	TOOL LENGTH	BETTER		GOOD	
			PRODUCT NO.	NON-RESETTABLE PART NO.	PRODUCT NO.	NON-RESETTABLE PART NO.
<b>Stock Phono-Point Tools</b>						
60°	1/8"	1"	NP1M2	66260195225	BCPP-60	66260195017
	3/16"		NP1M3	66260195226		
	1/4"		NP1M4	66260195227		
75°	1/8"	1"	NP2M2	66260195228	BCPP-75	66260195018
	1/4"		NP2M4	66260195230		
90°	1/8"	1"	NP3M2	66260195231	BCPP-90	66260195019
	3/16"		NP3M3	66260195232		
	1/4"		NP3M4	66260195233		

STANDARD PACKAGE = ONE TOOL

### WHEEL FORMS DRESSED BY THESE TOOLS





CONVEX




CONCAVE



CONVEX



TYPICAL WHEEL FORMS



## TECHtip

### HOW TO USE TOOLROOM TOOLS

- We recommend dressing with coolant. However, if dressing totally dry, allow three to five seconds between passes for diamond to cool.
- Use extremely light cuts from .0002" to .001" maximum.
- Rotate tool if the application and set-up allow.
- Full Ball Radius Tools should be returned for relap after minimum wear.

## SPECcheck

### PHONO-POINT TOOL MARKING SYSTEM

TOOL TYPE	INCLUDED ANGLE ON DIAMOND	SHANK STYLE	SHANK DIAMETER
NP	1 = 60°	M	2 = 1/8"
BCPP	2 = 75°		3 = 3/16"
	3 = 90°		4 = 1/4"

Example: NP 1 M 3

## Toolroom Tools CONTINUED

### Radius Tools

#### Concave Radius Tools

This line offers a specially-shaped single point diamond, designed for forming concave radii on small diameter grinding wheels. Not resettable.

#### Convex Radius Tools




This line offers a specially-shaped single point diamond, designed for forming convex radii on small diameter grinding wheels. Not resettable.

#### Half-Circle Concave Radius Tools (Available as Non-stock Only)

This line offers a specially-shaped diamond set in the side of the shank for forming half-circle radii on small diameter grinding wheels. The tool is rotated to form the radius. Commonly called a “rat tail dresser.” Not resettable.

RADIUS SIZE TO BE DRESSED	SHANK DIAMETER	TOOL LENGTH	BEST		GOOD	
			PRODUCT NO.	NON-RESETTABLE PART NO.	PRODUCT NO.	NON-RESETTABLE PART NO.
<b>Stock Concave Radius Tools</b>						
.010" to .015"	3/8"	2"	NR1P6	66260195210		
.016" to .020"	3/8"	2"	NR2P6	66260195211		
.021" to .032"	3/8"	2"	NR3P6	66260195212		
.033" to .062"	3/8"	2"	NR4P6	66260195213	BCRD	66260195016
.063" to .125"	3/8"	2"	NR5P6	66260195214	BCRD	66260195016
.126" to .250"	3/8"	2"	NR6P6	66260195215	BCRD	66260195016
<b>Stock Convex Radius Tools</b>						
.020" to .125"	3/8"	2"	NR2M6	66260195216		
.126" to .250"	3/8"	2"	NR12M6	66260195217		
.251" to .500"	3/8"	2"	NR25M6	66260195218		

STANDARD PACKAGE = ONE TOOL

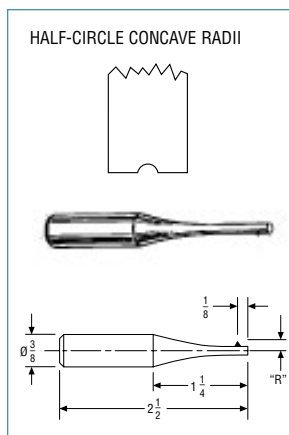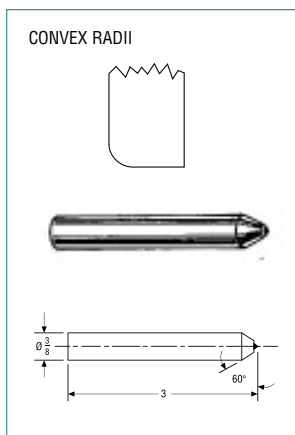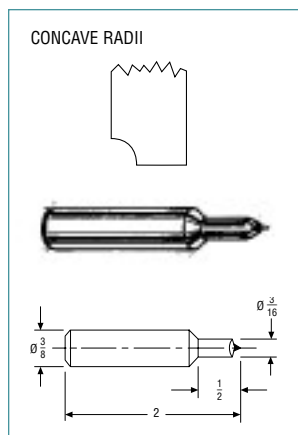

See the “Toolroom Diamond Dressing Tool” section on [www.nortonindustrial.com](http://www.nortonindustrial.com) or ask your Norton representative for information on our made-to-order full ball radius tools for precision plunge form dressing of concave radii in the center of a grinding wheel.

## Cluster Tools

Norton Cluster Tools are designed specifically for straight face dressing of large diameter, coarse grit grinding wheels on single or double disc, centerless, or surface grinders.

### WHEEL FORMS DRESSED BY THESE TOOLS



CONVEX



TAPERED




## Multi-Point Cluster Tools

Multi-Point Cluster tools are typically used for straight face dressing on disc and centerless operations. For greatest efficiency, these tools should be mounted at a 15° angle so that three diamonds are in contact with the wheel face at all times. The tool should be rotated at frequent intervals. Not resettable.

				BETTER	
DIAMONDS ON FACE	SHANK DIAMETER	TOOL LENGTH	PRODUCT NO.	NON-RESETTABLE PART NO.	
<b>Stock Multi-Point Cluster Tools</b>					
7	7/16"	1-5/16"	NC7K7	66260195206	

STANDARD PACKAGE = 1 TOOL

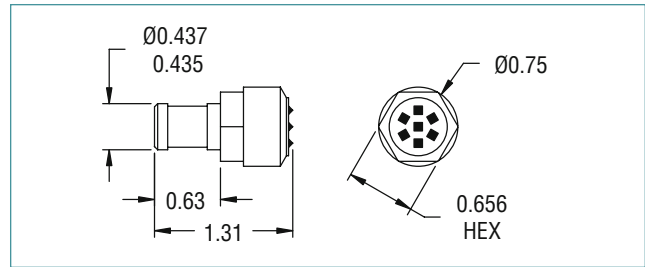

### WHEEL FORMS DRESSED BY THESE TOOLS



STRAIGHT




TAPERED

## Dia-Pak Tools

Dia-Pak tools are primarily used in straight face disc grinding, but are extremely versatile and may also be used in centerless and surface operations. Designed for maximum economy, three layers of diamond are carefully arranged so that a new layer is exposed before the previous layer is completely worn away. Not resettable.

				BETTER	
FOR WHEEL DIAMETERS	DIAMONDS PER LAYER	SHANK DIAMETER	TOOL LENGTH	PRODUCT NO.	NON-RESETTABLE PART NO.
<b>Stock Dia-Pak Tools</b>					
Up to 14"	5-4-5	7/16"	2"	DP20	66260195200
Up to 20"	7-6-7	7/16"	2"	DP30	66260195201
Any	7-6-7	7/16"	2"	DP35	66260195202

STANDARD PACKAGE = 1 TOOL

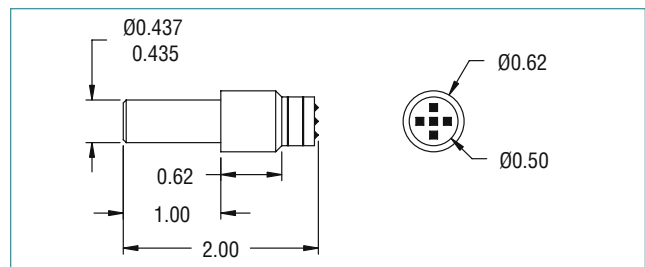

### WHEEL FORMS DRESSED BY THESE TOOLS



STRAIGHT



TAPERED

## TECHtip

### CLUSTER AND DIA-PAK TOOLS – STRAIGHT FACE DRESSING OF HARD / COARSE WHEELS:

- Tool should approach the wheel at a 15° angle and be rotated periodically to keep three diamonds in contact with the wheel at all times.
- Tools can also be used at a 90° to the wheel face.
- Multi-Point Cluster Tools should be rotated at frequent intervals.
- Infeed per pass should not exceed .0015" (.001" with ceramic – Norton SG, Quantum, Targa TG, etc. – wheels).
- Use coolant whenever possible.
- These tools permit a faster traverse rate providing a freer cutting wheel than when dressed by a conventional single-point tool.

**Accessories**


Tool holders typically used in toolroom applications.



**Tool Holder/Hand Dresser**

Designed for use when offhand truing and dressing on tool and cutter, or benchstand grinders. This stock hand dresser will not rust, and is 10-1/2" long, with a hollow shaft that accepts any tool shank length from 3/4" to 9". The 1-3/4" diameter plastic knob ensures a firm grip. The collet accepts a 7/16" diameter tool shank.

DESCRIPTION	PART NUMBER
Hand Dresser	66260195020

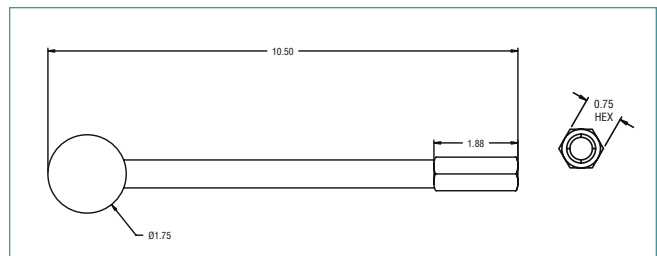

## CATEGORY DEFINITION

### Open or Closed Dressing... You Can Count on Fliesen Tools

Whether dressing a wheel OPEN or CLOSED you can count on Fliesen tools. Open wheels (sharp, free-cutting abrasive grains are exposed) are created by increasing the speed a Fliesen tool moves across the wheel when dressing. Generally considered the most favorable wheel conditioning, open wheels avoid workpiece burn while maximizing a wheel's ability to remove metal quickly when grinding.

Slowing a Fliesen tool as it moves across the wheel creates a closed wheel condition (abrasive grains are smoother, less sharp), a very helpful condition when trying to lower part surface finish readings.

- Harder, H-bond metal formulation tools efficiently dress durable silicon carbide and ceramic wheels
- Furioso Fliesen tools have a unique bond system developed for dressing Quantum (NQ) ceramic wheels
- W-bond Fliesen tools are designed for conventional aluminum oxide wheels



## The Benefits of Fliesen Tools

### Spend More Time Grinding

Single point, chisel, and cone point tools require operator attention to ensure proper tool rotation at regular intervals. Fliesen tools require no adjustments. Simply install the tool, dress the wheel to break it in, and the tool will do the rest. Operators spend more time grinding – rather than making non-productive dressing adjustments.

### Longer Tool Life

Expect long life when using a Fliesen tool. Other stationary tools, made with a single diamond stone, develop flat spots (“wear flats”) over time – which create chatter and burn. Fliesen tools use hand-set, fine diamond grit, eliminating the creation of wear flats.

## Fliesen Tool Configurations: Plate and Shank

Fliesen tools are available in two basic tool configurations. The most common is a plate configuration, which is somewhat rectangular-shaped with a mounting hole. Fliesen shank tool configurations are plates mounted in shanks of varying sizes and shapes. Most grinding machines accommodate one or the other tool configuration. To find the correct tool configuration for your machine, check the existing dressing tool, or consult your grinding machine manual.

## Choosing The Correct Fliesen Tool

Fliesen tools are precisely engineered to impart specific wheel forms. This chart illustrates those various wheel forms and corresponding Fliesen tool diamond positions. See the “Fliesen Tool” section on [www.nortonindustrial.com](http://www.nortonindustrial.com) or ask your Norton representative for complete product listing and information on these tools.

DESIRED WHEEL FORM	Diagram 1		Diagram 2		Diagram 3		Diagram 4		Diagram 5	
DIAMOND POSITIONS										
	BLADE ONLY FR		SIDE-MOUNTED FRS, FAS, FBS, FCS, FDS		CENTER-MOUNTED FAS, FBS, FCS & FDS		DOUBLE-SIDED FCSD & FDSD		TWIN FDST, FSST, AND 1TFAS	

## Need Assistance Ordering Fliesen Tools?



Our customer service teams are ready to assist you. To expedite the process, please have this information on-hand when you call: the diameter, width, grit size, and abrasive type (aluminum oxide, silicon carbide, or ceramic) of the grinding wheel you will be dressing.

**Furioso Tools**

The new generation of highly wear-resistant stationary diamond dressing tools for dressing modern ceramic abrasives

**Performance Advantage**

Furioso vs. Standard Blade

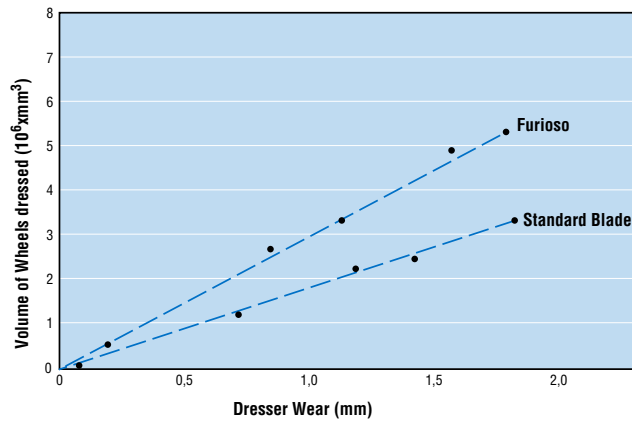

**FURIOSO TOOLS**

BEST CHOICE FOR OPTIMUM PERFORMANCE OF NORTON QUANTUM CERAMIC WHEELS


**FEATURES**

- The optimized combination of diamond quality, bond and setting pattern when dressing Norton Quantum (NQ) ceramic grinding wheels

**BENEFIT**

- Improved wear-resistance
- Excellent dressing behavior
- Constant surface roughness

**Standard Furioso Plate Drawings**

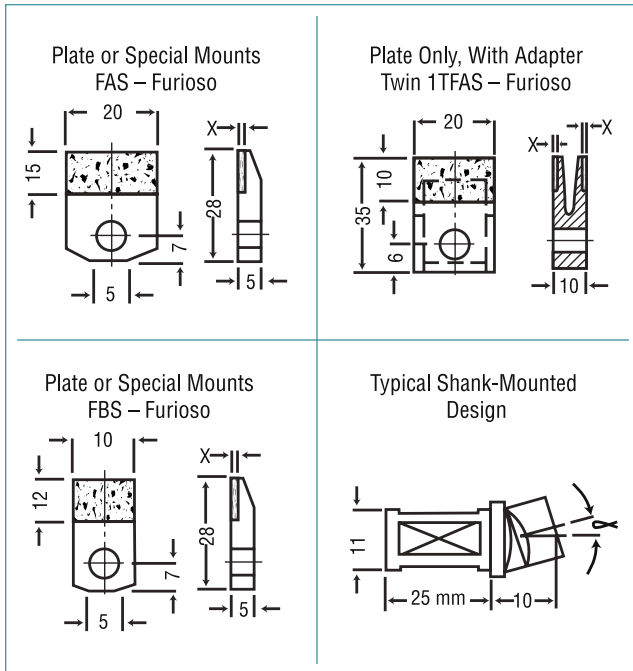


These two pages highlight a small sample of our Fliesen tool offering. See the "Fliesen Tool" section on [www.nortonindustrial.com](http://www.nortonindustrial.com) or ask your Norton representative for complete product listing and information on these tools.

## Furioso Plates; Side-Mounted and Twin

Use the Wheel/Tool Graph to identify your grinding wheel's Zone number, and the chart below to find the Furioso tool for your application.

### Wheel / Furioso Tool Graph

Select Zone based on wheel diameter and width

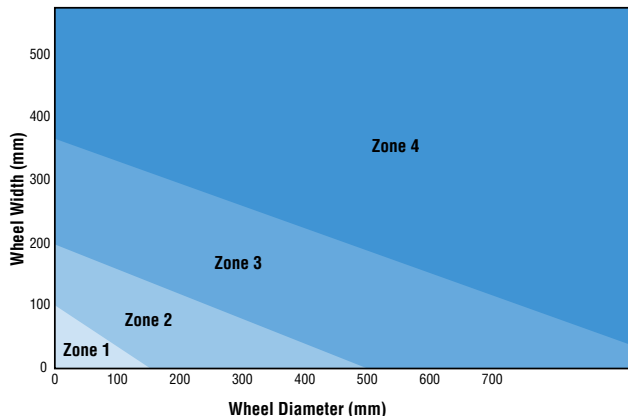

### BEST

TO DRESS:

NORTON QUANTUM NQ CERAMIC WHEELS

	ZONE NO. / SERIES	WHEEL GRIT SIZE	TOOL NO.	PART NO.	DESCRIPTION
<b>Side-Mounted</b>					
	<b>ZONE 2</b> FBS Series	36 - 54	DT1463	69014122948	FBS 140 Furioso
		54 - 80	DT1462	69014122947	FBS 115 Furioso
		80 - 120	DT1461	69014122946	FBS 90 Furioso
		120 - 180	DT1460	69014122944	FBS 75 Furioso
	<b>ZONE 3</b> FAS Series	36 - 54	DT1467	69014122952	FAS 140 Furioso
		54 - 80	DT1466	60157690579	FAS 115 Furioso
		80 - 120	DT1465	60157693885	FAS 90 Furioso
		120 - 180	DT1464	69014122950	FAS 75 Furioso
<b>Twin</b>					
	<b>ZONE 4</b> 1TFAS Series	36 - 54	DT1471	69014122956	1TFAS 140 Furioso
		54 - 80	DT1470	69014122955	1TFAS 115 Furioso
		80 - 120	DT1469	69014122954	1TFAS 90 Furioso
		120 - 180	DT1468	69014122953	1TFAS 75 Furioso

• ALL FURIOSO PLATES SHOWN SHIP IN 10 BUSINESS DAYS FROM RECEIPT OF ORDER.

## SPECcheck

### BLADE SIZE

DESCRIPTION DIMENSION

1	FBS	10 mm thick, 15 mm usable length
2	FAS	20 mm thick, 15 mm usable length
3	TFAS	Twin blade with cooling duct

### DIAMOND GRIT SIZE

DESCRIPTION FEPA

140	D1181
115	D1001
90	D711
75	D501

## Furioso Shank Tools

Made-to-order Furioso shank tools are also available. Ask your Norton representative for ordering assistance.

### Side-Mounted Diamond Sections

Tools are available in different offset positions and angles.




OFFSET LEFT,  
SPECIFY ANGLE  
AMOUNT



ZERO OFFSET



OFFSET RIGHT,  
SPECIFY ANGLE  
AMOUNT



DIAMOND TIPPED  
LEFT, SPECIFY  
ANGLE



DIAMOND  
TIPPED RIGHT,  
SPECIFY ANGLE



THERE ARE MANY  
DIFFERENT DIAMONDS  
MAKING UP A SINGLE  
PLATE AS THIS CUT-AWAY  
VIEW SHOWS.