



COMPLETE
METALWORKING
SOLUTIONS

(800) 991-4225

www.ahbinc.com

ISO Certified

customerservice@ahbinc.com

MFH-RAPTOR

High Feed Milling Cutters



Stable Machining with Greater Chatter Resistance

Reduce Cycle Time During Roughing Applications

Multi-Functional for Various Applications

MFH Mini / Micro High Feed Mills for Small Machining Centers



Tough Edge GH Chipbreaker and Grade PR015S Added



MFH-RAPTOR MICRO

Ø0.375"~Ø0.625" | Ø8mm~Ø16mm



MFH-RAPTOR MINI

Ø0.625"~Ø2.000" | Ø16mm~Ø50mm



MFH-RAPTOR

Ø1.000"~Ø6.000" | Ø25mm~Ø160mm

MFH Series



Convex Cutting Edge Design Reduces Chatter for High-Efficiency Rough Machining
Large Tooling Lineup to Cover a Wide Application Range for Multiple Metalworking Processes

MFH-RAPTOR MICRO

Cutter Diameter $\varnothing 0.375'' \sim \varnothing 0.625''$
Cutter Diameter $\varnothing 8\text{mm} \sim \varnothing 16\text{mm}$

Can Replace Solid End Mills to Reduce Machining Costs

MFH-RAPTOR MINI

Cutter Diameter $\varnothing 0.625'' \sim \varnothing 2.000''$
Cutter Diameter $\varnothing 16\text{mm} \sim \varnothing 50\text{mm}$

Economical Inserts with 4 Cutting Edges

MFH-RAPTOR

Cutter Diameter $\varnothing 1.000'' \sim \varnothing 6.000''$
Cutter Diameter $\varnothing 25\text{mm} \sim \varnothing 160\text{mm}$

3 Different Insert Designs Offer a Variety of Machining Options



1 Reduced Chattering with Convex Cutting Edge Design

Reduces Cutting Forces at Initial Impact with a Convex Helical Edge Design

Cutting Force and Vibration when Approaching the Workpiece (D.O.C. = Half of Cutter Diameter)

Convex Edge Design




MFH Micro
LPGT Insert



MFH Mini
LOGU Insert




MFH
SOMT Insert

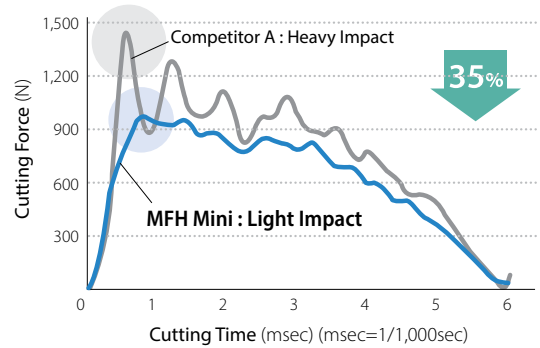


Cutting Conditions: $V_c = 490 \text{ sfm}$, $f_z = 0.039 \text{ ipt}$, $D.O.C. \times a_e = 0.020'' \times 0.315''$ Dry
Cutter Dia. $DC = \varnothing 0.625''$ Workpiece: 1049


2 Wide Application Range for Multiple Metalworking Processes




Face Milling & Shouldering




Slotting




Ramping



Helical Milling



Pocketing



Contouring

For Using MFH: GM and GH chipbreakers are available for all the above applications. LD and FL chipbreakers are not available for helical milling, plunging and contouring of rising wall. (Refer to Page 11)

MFH-RAPTOR MICRO

(Cutter Dia. $\emptyset 0.375'' \sim \emptyset 0.625''$)
(Cutter Dia. $\emptyset 8\text{mm} \sim \emptyset 16\text{mm}$)


Low Resistance and Durable Design Aids in Chatter Resistant Machining

Maximum D.O.C. 0.020" and Stable High Feed Machining on a Wide Range of Applications

1 Stable Machining with Chattering Resistance


Molded Convex Cutting Edge Controls Initial Impact when Entering the Workpiece

Cutting Force Comparison (In-house Evaluation)

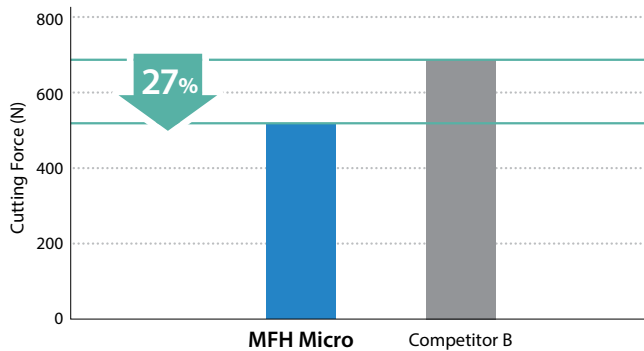

Cutting Conditions: $V_c = 390 \text{ sfm}$, $f_z = 0.024 \text{ ipt}$, $D.O.C. = 0.016''$
Cutter Dia. $\emptyset 0.375''$, Slotting, Dry Workpiece: 1049

Increase in Cutting Force when Entering Work Piece (In-house Evaluation)

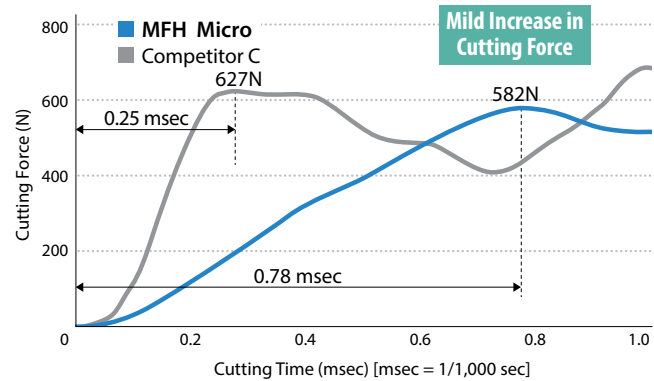


Cutting Conditions: $V_c = 390 \text{ sfm}$, $f_z = 0.024 \text{ ipt}$, $D.O.C. \times a_e = 0.016'' \times 0.197''$
Cutter Dia. $\emptyset 0.375''$, Dry Workpiece: 1049

2 Wide Range of Machining Applications

Wide Range of Machining Applications at a Maximum Depth of Cut of 0.020"

Stable Machining Even with Small Machining Centers

Cutting Performance Map (Cutter Dia. $\emptyset 0.375''$)

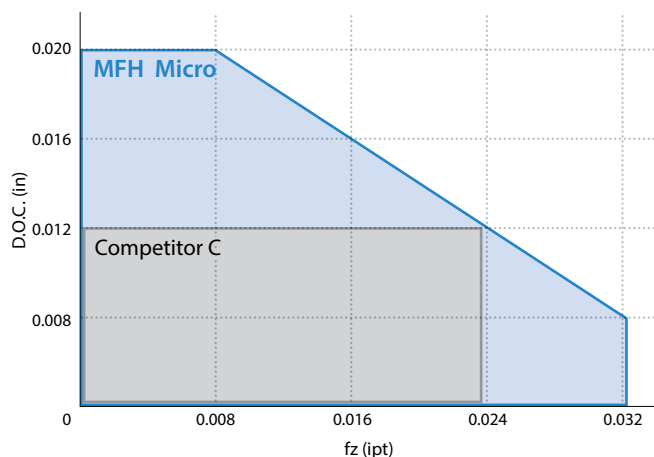

(Internal Evaluation)

3 Can Replace Solid End Mills to Reduce Machining Costs

Suppresses Chattering and Increases Milling Efficiency

MFH Micro Compared to Solid End Mills (Mechanical Parts Slotting 1049)

MFH Micro Q = 15.3 cc/min


$V_c = 490 \text{ sfm}$, $f_z = 0.016 \text{ ipt}$
 $D.O.C. \times a_e = 0.016'' \times 0.394''$, Dry
MFH10-S10-01-2T (2 Flutes)
LPGT010210ER-GM (PR1525)

1.2x
Machining
Efficiency



Solid End Mill Q = 12.2 cc/min

$V_c = 260 \text{ sfm}$, $f_z = 0.002 \text{ ipt}$
 $D.O.C. \times a_e = 0.012'' \times 0.394''$, Dry
 $\emptyset 10\text{mm}$ (4 Flute)



MFH-RAPTOR Mini

(Cutter Dia. $\varnothing 0.625'' \sim \varnothing 2.000''$)
(Cutter Dia. $\varnothing 16\text{mm} \sim \varnothing 50\text{mm}$)

Economical Inserts with 4 Cutting Edges

High Feed Milling for Small Diameters and Small Machining Centers


1 Good Chip Evacuation

NEW GH Chipbreaker
Now Available




MFH Mini Controls Chip Biting with Convex Cutting Edge

MFH Mini

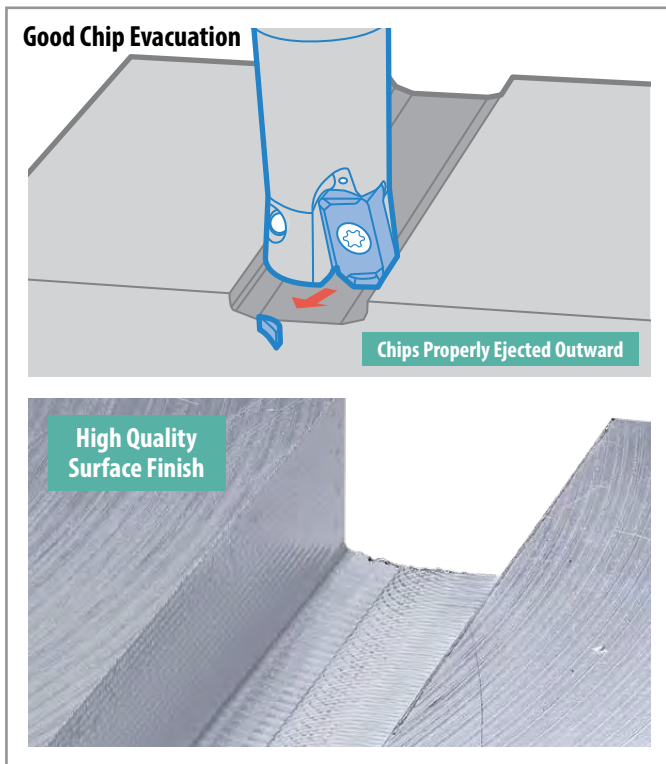

Competitor High Feed Cutter

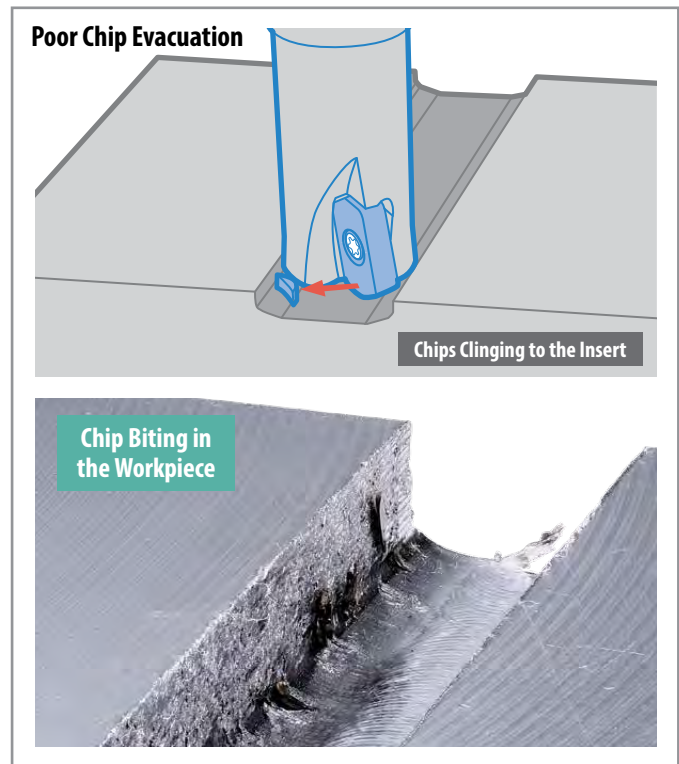


Cutting Conditions: Cutter Dia. $DCX = \varnothing 0.625''$, $V_c = 490$ sfm, $f_z = 0.024$ ipt, $D.O.C. = 0.020''$ (20 Passes): Total $0.394'' \times 0.630''$, Dry Workpiece: Stainless Steel

2 Fine Pitch for Efficient Machining

Cutter Dia. 1.000" Type


MFH Mini



5 Inserts

MFH1000-W100-03-5T47

MFH




2 Inserts

MFH1000-W100-10-2T

3 Suitable for Roughing of Molds

High Feed Machining in Small Machining Centers



MFH-RAPTOR


(Cutter Dia. Ø1.000" ~ Ø6.000")
(Cutter Dia. Ø25mm ~ Ø160mm)

Wide Product Lineup for High Feed Milling Applications

Large Depths of Cut and Low Cutting Forces

1 4 Different Insert Designs Offer a Variety of Machining Options

GM (General Milling)




1st Choice for General Purpose
Multiple Metalworking Processes

NEW GH (Tough Edge)




Tough Edge
Excellent Fracture Resistance

LD (Large D.O.C.)



1st Choice for Large D.O.C.
Available for Scale Removal

FL (Wiper Edge)





Wiper Edge
Roughing and Finishing Even in
Low Horsepower Machining Centers

GH Chipbreaker

Excellent Fracture Resistance

Convex Cutting Edge Design

Reduces cutting force when entering workpiece
Suppresses chattering and fracturing




Tough Edge Design

Combining with PR015S is excellent for
machining hardened material with
improved fracture resistance

i LD Chipbreaker Can Be Used for Both Large D.O.C. and High Feed Machining

Large D.O.C. for Scale Removal


D.O.C. = 0.158"

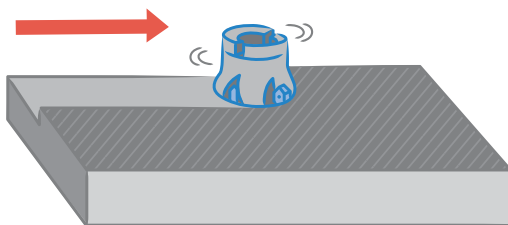

(fz = 0.010 ipt, D.O.C. = 0.158")

High Feed Rates After Scale Removal

fz = 0.059 ipt

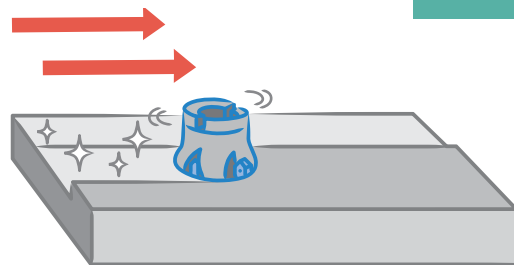

(fz = 0.059 ipt, D.O.C. = 0.079")

MFH2500R-14-5T (Cutter Dia. 2.500", 5 Inserts)

① Roughing for Scale Removal (2 Passes): Large D.O.C.

Vc = 660 sfm, fz = 0.010 ipt
D.O.C. × ae = 0.158" × 1.575"
Vf = 50 in/min


② Roughing (2 Passes) After Scale Removal: High Feed Rate

Vc = 660 sfm, fz = 0.059 ipt
D.O.C. × ae = 0.079" × 1.575", Vf = 298 in/min
Workpiece: Stainless Steel

Conventional 45° Cutter (Cutter Dia. 2.500", 5 Inserts)

Roughing (4 Passes): Constant D.O.C. and Feed Rate

Vc = 660 sfm, fz = 0.010 ipt
D.O.C. × ae = 0.118" × 1.575", Vf = 50 in/min
Workpiece: Structural Steel

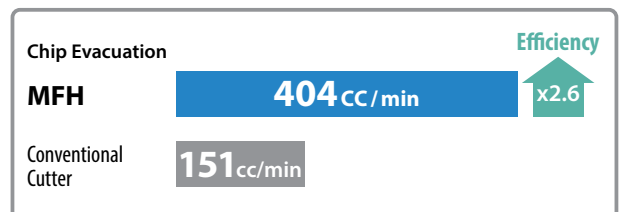

PR1535


MEGACOAT NANO

MEGACOAT NANO Grade PR1535 for stable machining of difficult-to-cut materials such as heat-resistant alloy, titanium alloy and precipitation hardened stainless steel

1 23% Improved Fracture Toughness

An increase in cobalt content yields a substrate with greater toughness. Fracture toughness values are improved by 23% over previous grades.

High Toughness Carbide Base Material




23%
Fracture
Toughness

2 Stability Improvement

The coarse grain structure and uniform particle size correspond to improved heat resistance, with conductivity values decreased by 11%. The uniform structure also reduces crack propagation.

Cracking Comparison by Diamond Indenter (In-house Evaluation)

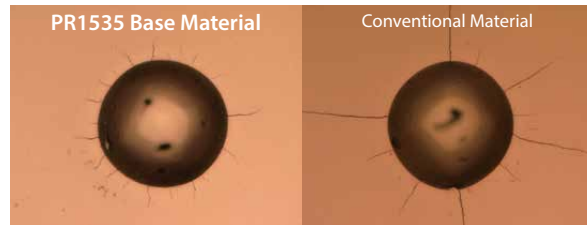

Short Cracks
(High Impact Improvement)

Long Cracks

**Shock
Resistance**

PR015S


MEGACOAT HARD

NEW


Thermal property of the substrate reduces cracks and notch wear with a high hardness and heat-resistant coating for improved wear resistance when machining in hardened materials

MEGACOAT HARD Improves Wear Resistance with High Hardness and High Heat-resistant PVD Layer

Coating Pattern Diagram

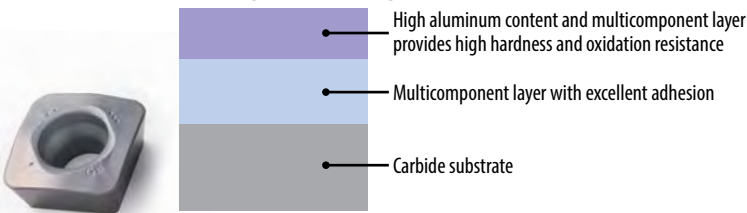


Coating Properties (Internal Evaluation)

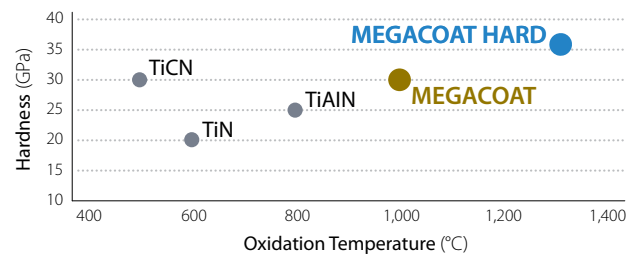


Combining GH chipbreaker and grade PR015S reduces heat cracking and improves fracture resistance for stable machining in hardened material


Cutting Performance Comparison (Internal Evaluation)

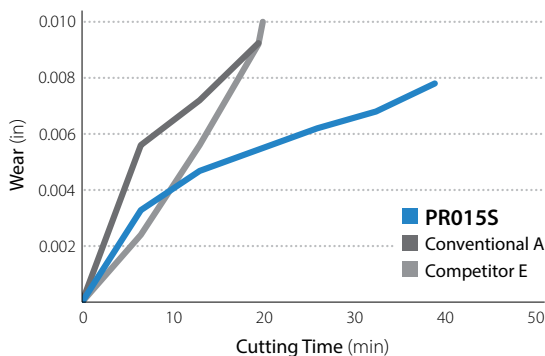

Cutting Conditions:
Vc = 165 sfm,
fz = 0.008ipt,
D.O.C. = 0.039" x 1.240",
Wet
SOMT1405205R-GH
Competitor Tough Edge Chipbreaker
(Flat type)
Workpiece: D2 (55HRC)

Cutting Edge

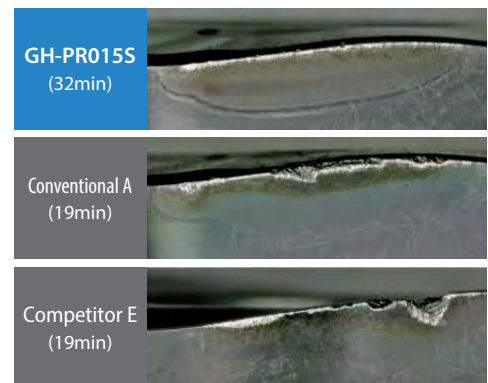

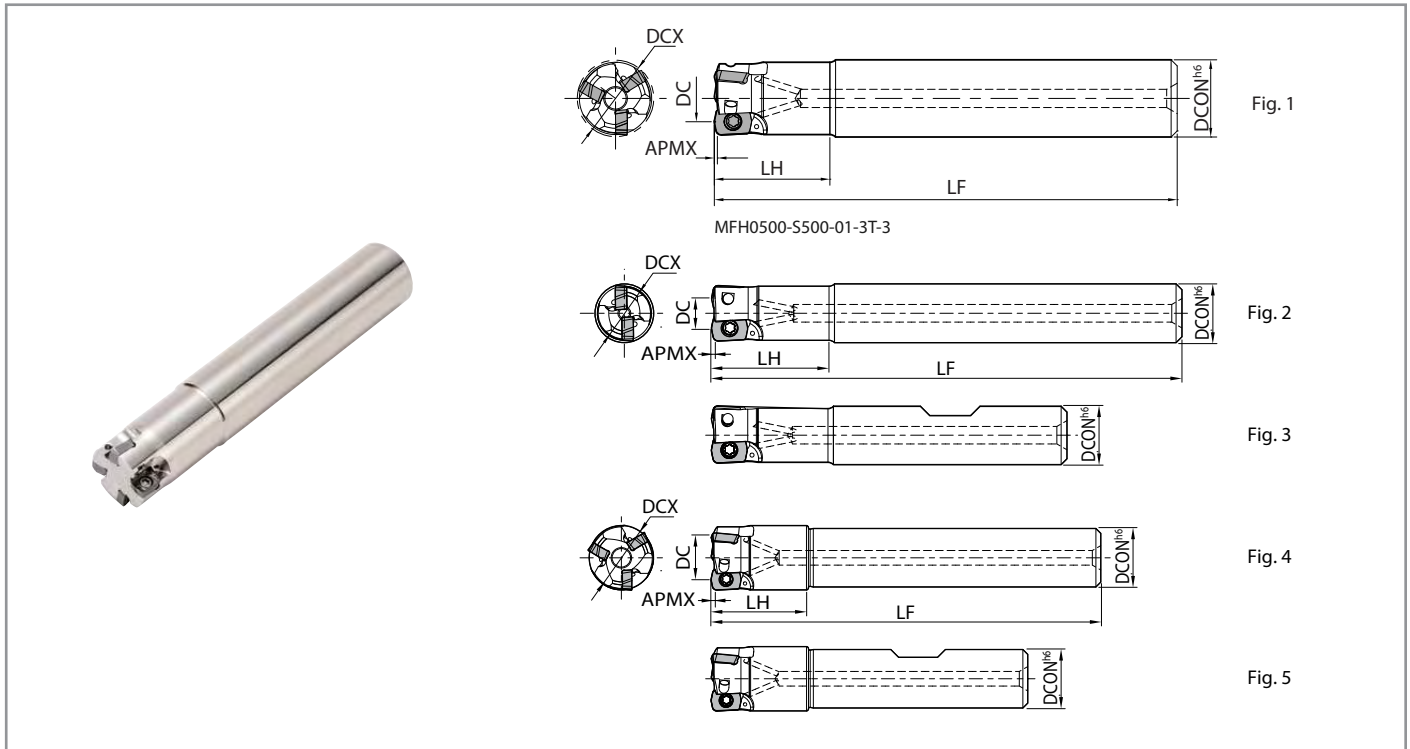

Toolholder Dimensions (Inch Size)

Shank	Part Number	Stock	No. of Inserts	Dimensions (in)						Maximum Ramping Angle	Rake Angle (°)	Coolant Hole	Drawing	Weight (kg)	Max. RPM	Clamp Screw
				DCX	DC	DCON	LF	LH	APMX							
Standard (Cylindrical)	MFH 0375-S375-01-1T-3	■	1	0.375	0.225	0.375	3.000	0.750		3°	+5°	✓	Fig. 1	0.04	16,200	SB-1840TRP
	0500-S500-01-3T-3	●	3	0.500	0.350	0.500	3.000	0.750	0.020	2°				0.07	14,000	
	0625-S625-01-4T35	●	4	0.625	0.475	0.625	3.500	1.000		1.2°				0.12	11,400	

● : Standard Item ■ : Quoted Item (Made to Order)

Toolholder Dimensions (Metric Size)

Shank	Part Number	Stock	No. of Inserts	Dimensions (in)						Maximum Ramping Angle	Rake Angle (°)	Coolant Hole	Drawing	Weight (kg)	Max. RPM	Clamp Screw
				DCX	DC	DCON	LF	LH	APMX							
Standard (Cylindrical)	MFH 08-S10-01-1T	●	1	8	4.2	10	75	16	0.5	4°	+5°	✓	Fig. 2	0.04	20,000	SB-1840TRP
	10-S10-01-2T	●	2	10	6.2	10	80	20		3°				0.04	16,200	
	12-S12-01-3T	●	3	12	8.2	12	80	20		2°				0.06	14,000	
	16-S16-01-4T	●	4	16	12.2	16	90	25		1.2°				0.12	11,400	
Over Size (Cylindrical)	MFH 14-S12-01-3T	●	3	14	10.2	12	80	20	0.5	1.5°	+5°	✓	Fig. 4	0.07	12,500	SB-1840TRP
Standard (Weldon)	MFH 08-W10-01-1T	●	1	8	4.2	10	58	16	0.5	4°	+5°	✓	Fig. 3	0.03	20,000	
	10-W10-01-2T	●	2	10	6.2	10	60	20		3°				0.03	16,200	
	12-W12-01-3T	●	3	12	8.2	12	65	20		2°				0.05	14,000	
	16-W16-01-4T	●	4	16	12.2	16	73	25		1.2°				0.1	11,400	
Over Size (Weldon)	MFH 14-W12-01-3T	●	3	14	10.2	12	65	20	0.5	1.5°	+5°	✓	Fig. 5	0.05	12,500	

● : Standard Item

Spare Parts and Applicable Inserts

Part Number	Spare Parts			Applicable Inserts P8
	Insert Screw	Wrench	Anti-Seize Compound	
	MFH...-01-...	SB-1840TRP	FTP-6	

Caution with Max. Revolution


When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.

Recommended Cutting Conditions P9

Recommended Torque for Insert Screw 1.2 N-m

MFH Micro | Modular End Mill

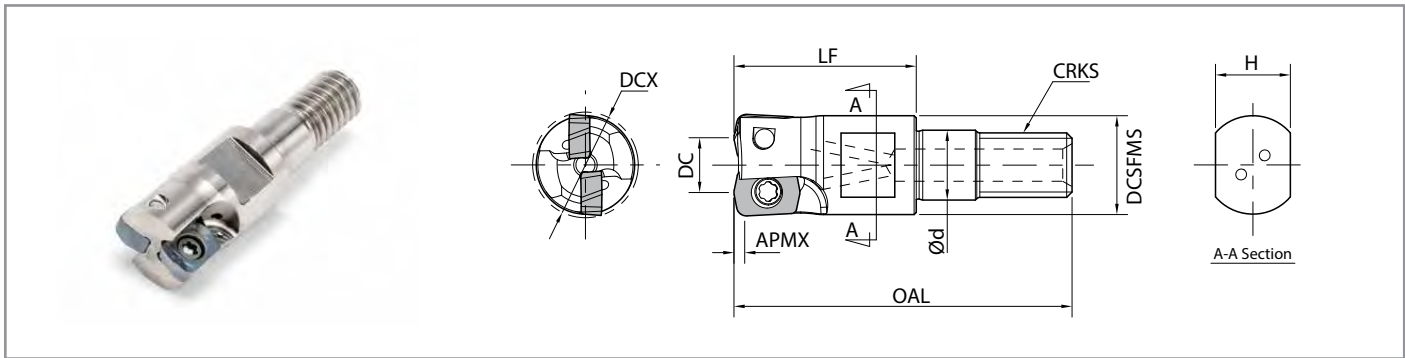




Toolholder Dimensions (Metric Size)

Part Number	Stock	Unit	No. of Inserts	Dimensions (mm)									Maximum Ramping Angle	A.R.	Coolant Hole	Max. RPM					
				DCX	DC	DCSFMS	DCON	OAL	LF	CRKS	H	APMX									
MFH 0500-M06-01-3T	●	inch	3	0.500	0.350	0.441	0.256	1.240	0.669	M6xP1.0	0.276	0.020	2°			14,000					
0625-M08-01-4T	●		4	0.625	0.475	0.579	0.335	1.575	0.866	M8xP1.25	0.472		1.2°			11,400					
MFH 08-M06-01-1T	●	mm	1	8	4.2	9.2	6.5	31.5	17	M6xP1.0	7	0.5	4°	+5°	✓	20,000					
10-M06-01-2T	●		2	10	6.2								3°			16,200					
12-M06-01-3T	●		3	12	8.2	11.2							2°			14,000					
14-M06-01-3T	●		3	14	10.2								1.5°			12,500					
16-M08-01-4T	●		4	16	12.2	14.7							8.5			40	22	M8xP1.25	12	1.2°	11,400

Industry standard threads for adapting to common toolholders (For Ø8mm - Ø14mm screw size: M6 x P1.0).
Check screw specifications for the shank in use.


● : Standard Item


Spare Parts and Applicable Inserts

Part Number	Spare Parts			Applicable Inserts See Below
	Insert Screw	Wrench	Anti-Seize Compound	
				
MFH...-01-...	SB-1840TRP	FTP-6	P-37	LPGT010210ER-GM

Caution with Max. Revolution


When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

 Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.



Recommended Cutting Conditions  P9

Recommended Torque for Insert Clamp 1.2 N-m

Actual End Mill Depth (MFH16-M080-01-4T)

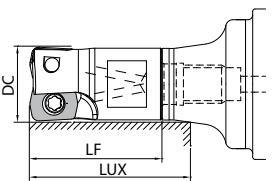	Arbor Part Number	Applicable End Mill		Actual End Mill Depth (mm)
		Part Number	Cutting Dia. (mm)	Dimension (mm)
			DC	LF
BT30K-M08-45	MFH16-M08-01...	Ø16	22	28.8
BT40K-M08-55	MFH16-M08-01...	Ø16	22	28.7


MFH Micro | Applicable Inserts

Insert	Part Number	Dimension (in)					MEGACOAT NANO		CVD
		W1	S	D1	INSL	RE	PR1535	PR1525	CA6535
 General Purpose	LPGT010210ER-GM	0.165	0.086	0.083	0.247	0.039	●	●	●
									


● : Standard Item

MFH Micro | Cutting Performance

Cutter Dia: Ø0.375" ~ Ø0.500"
Cutter Dia: Ø8mm ~ Ø12mm

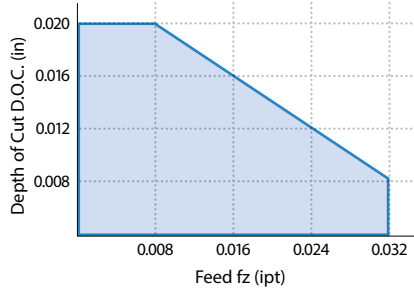

Cutter Dia: Ø0.625"
Cutter Dia: Ø14mm ~ Ø16mm

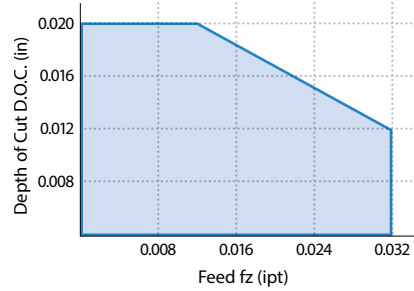

Recommended Cutting Conditions ★ 1st Recommendation ☆ 2nd Recommendation


Chipbreaker	Workpiece Material	Cutter Part Number and Feed Rate (fz: ipt) *Recommended D.O.C. = 0.012" Reference Value					Recommended Insert Grade (Vc: sfm)		
		MFH08-...-1T	MFH0375-...-1T-3 MFH10-...-2T	MFH0500-...-3T(-3) MFH12-...-3T	MFH14-...-3T	MFH0625-...-4T(35) MFH16-...-4T	MEGACOAT NANO		CVD Coated Carbide
							PR1525	PR1535	CA6535
GM	Carbon Steel	0.008~ 0.016 ~0.024		0.008~ 0.020 ~0.031		★ 390- 590 -820	☆ 390- 590 -820	-	
	Alloy Steel	0.008~ 0.016 ~0.024		0.008~ 0.020 ~0.031		★ 330- 520 -720	☆ 330- 520 -720	-	
	Mold Steel (~40 HRc)	0.008~ 0.012 ~0.020		0.008~ 0.016 ~0.024		★ 260- 460 -590	☆ 260- 460 -590	-	
	Mold Steel (40~50 HRc)	0.008~ 0.010 ~0.012		0.008~ 0.010 ~0.016		★ 200- 330 -430	☆ 200- 330 -430	-	
	Austenitic Stainless Steel	0.008~ 0.012 ~0.020		0.008~ 0.016 ~0.024		☆ 330- 520 -660	★ 330- 520 -660	-	
	Martensitic Stainless Steel	0.008~ 0.012 ~0.020		0.008~ 0.016 ~0.024		-	☆ 490- 660 -820	★ 590- 790 -980	
	Precipitation Hardened Stainless Steel	0.008~ 0.016 ~0.024		0.008~ 0.020 ~0.031		-	★ 300- 390 -490	-	
	Gray Cast Iron	0.008~ 0.016 ~0.024		0.008~ 0.020 ~0.031		★ 390- 590 -820	-	-	
	Nodular Cast Iron	0.008~ 0.012 ~0.020		0.008~ 0.016 ~0.024		★ 330- 490 -660	-	-	
	Ni-base Heat-Resistant Alloy	0.008~ 0.010 ~0.012		0.008~ 0.010 ~0.016		-	☆ 70- 100 -160	★ 70- 100 -160	
Titanium Alloy	0.008~ 0.010 ~0.012		0.008~ 0.010 ~0.016		-	★ 130- 200 -260	-		

- Machining with coolant is recommended for Ni-base Heat Resistant Alloy and Titanium Alloy
- The number in bold font is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation.
- Internal coolant is recommended for slotting applications

Case Studies

Mold H13

Vc = 300 sfm (n = 2,400 rpm)
fz = 0.011 ipr
(Vf = 75.984 ipm)
D.O.C. x ae = 0.012" x ~ 0.028"; Dry
MFH0500-S500-01-3T-3
LPGT010210ER-GM PR1535



Chip Evacuation

PR1535

4.5 cc/min

1.3x
Efficiency ↑


Competitor I

3.4 cc/min

PR1535 shows 1.3 times machining efficiency compared to Competitor I
Good cutting edge condition after machining almost doubling the tool life
(User Evaluation)

Industrial Machine Parts 440C

Vc = 590 sfm (n = 3,580 rpm)
fz = 0.016 ipt (Vf = 225.591 ipm)
D.O.C. = 0.016", ae = 0.315", Wet
MFH0625-S625-01-4T35
LPGT010210ER-GM PR1535



Cutting Time

PR1535


7 min

35%
Cutting Time ↓

Competitor J

11 min

PR1535 shows 30% faster cycle time compared to competitor J
(User Evaluation)

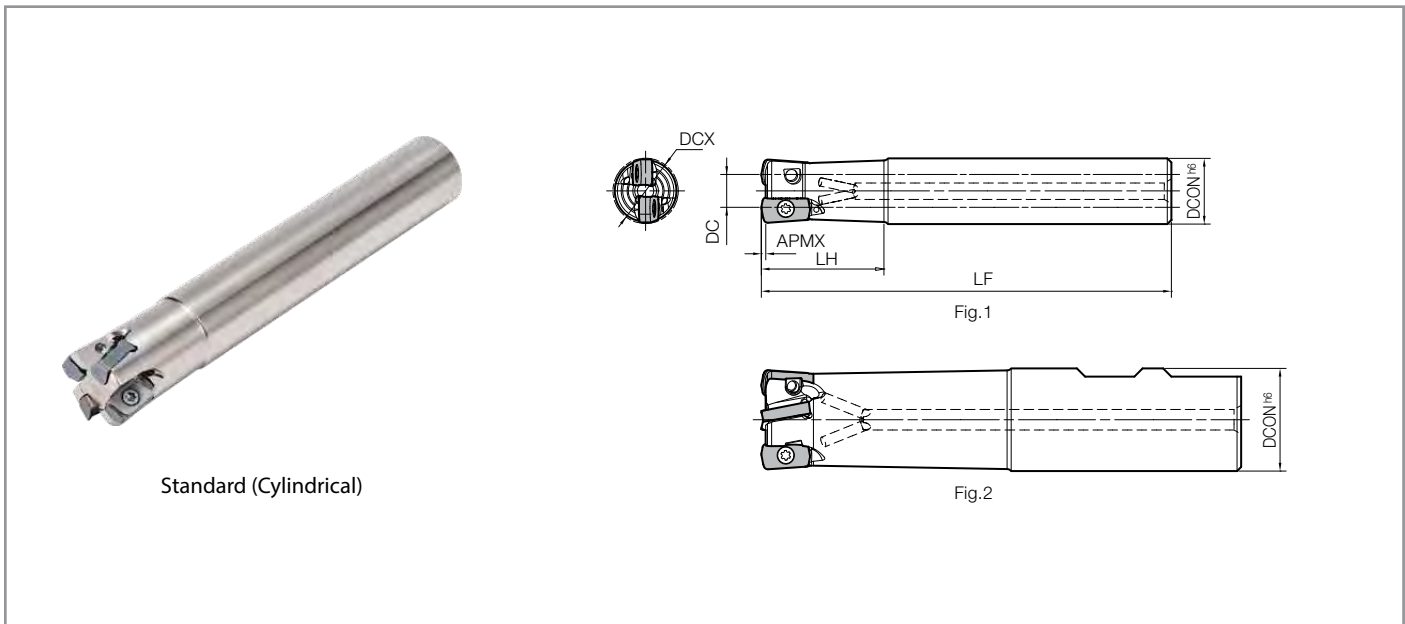




Toolholder Dimensions (Inch Size)

Part Number	Stock	No. of Inserts	Dimensions (in)							Ramping Angle		Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM
			DCX	DC	DCON	LF	LH	APMX	RMPX	A.R.	R.R.						
Standard Shank (Weldon)	MFH 0625-W625-03-2T-3	●	2	0.625	0.310	0.625	3.196	1.250	0.039	2.8°	-10°	-15°	✓	Fig.2	0.1	18,800	
	0750-W750-03-3T-4	●	3	0.750	0.435	0.750	4.070	2.000	0.039	1.7°	-10°	-15°			0.2	15,700	
	1000-W100-03-4T47	●	4	1.000	0.685	1.000	4.820	2.500	0.039	1.2°	-10°	-15°			0.4	13,400	
	1000-W100-03-5T47	●	5	1.000	0.685	1.000	4.820	2.500	0.039	1.2°	-10°	-15°			0.4	13,400	
	1250-W125-03-5T-5	●	5	1.250	0.935	1.250	5.070	2.750	0.039	0.8°	-10°	-15°			0.7	11,400	
	1250-W125-03-6T-5	●	6	1.250	0.935	1.250	5.070	2.750	0.039	0.8°	-10°	-15°			0.7	11,400	
Long Shank (Cylindrical)	MFH 0625-S625-03-2T-6	●	2	0.625	0.310	0.625	6.000	2.000	0.039	2.8°	-10°	-15°	✓	Fig.1	0.2	18,800	
	0750-S750-03-3T65	●	3	0.750	0.435	0.750	6.500	3.000	0.039	1.7°	-10°	-15°			0.3	15,700	
	1000-S100-03-4T-7	●	4	1.000	0.685	1.000	7.000	4.000	0.039	1.2°	-10°	-15°			0.6	13,400	
	1250-S125-03-5T-8	●	5	1.250	0.935	1.250	8.000	4.750	0.039	0.8°	-10°	-15°			1.1	11,400	


● : Standard Item

Spare Parts and Applicable Inserts (Inch Size)


Part Number	Spare Parts			Applicable Inserts ➔ P14
	Insert Screw	Wrench	Anti-Seize Compound	
MFH...-03-...	SB-306STRP 	DTPM-8 Recommended Torque for Insert Clamp 1.2 N·m 	P-37 	LOGU030310ER-GM LOGU030310ER-GH

Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

 Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.

Recommended Cutting Conditions ➔ P15

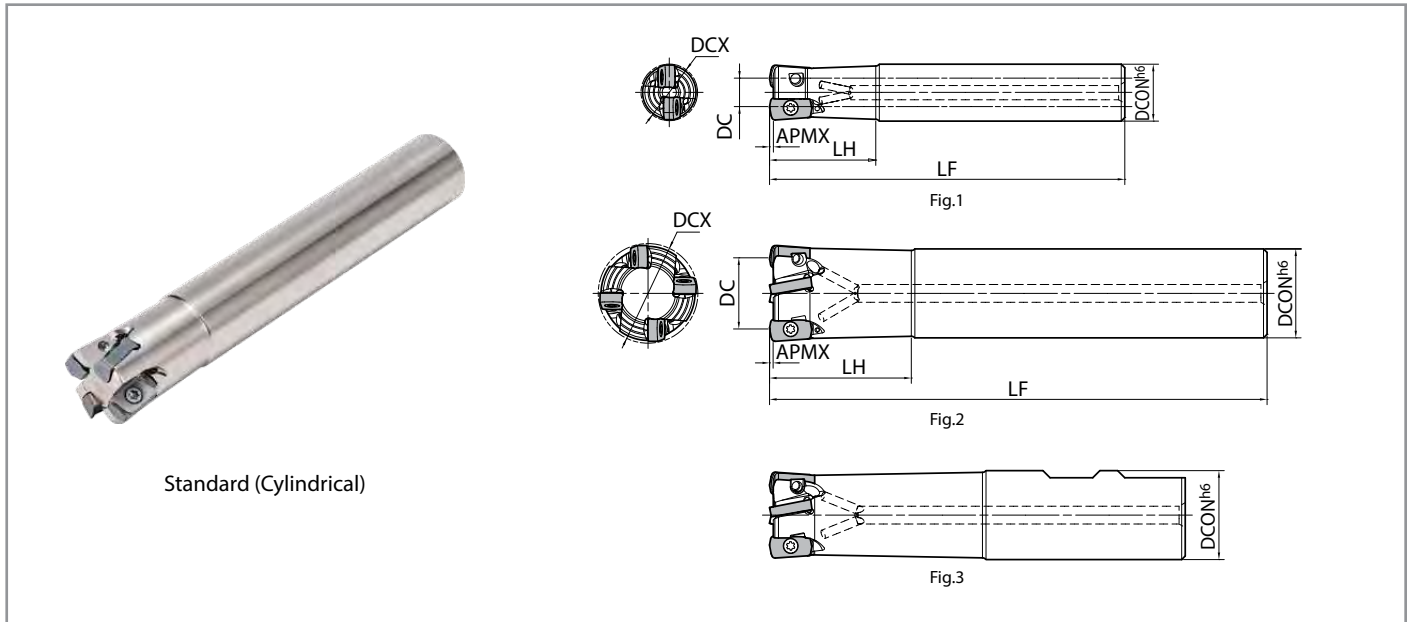




Toolholder Dimensions (Metric Size)

Part Number	Stock	No. of Inserts	Dimensions (mm)							Ramping Angle	Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM
			DCX	DC	DCON	LF	LH	APMX	A.R.		R.R.					
Standard Shank (Cylindrical)	MFH 16-S16-03-2T	●	2	16	8	16	100	30	1	2.8°	-10°	-15°	✓	Fig.1	0.1	18,800
	17-S16-03-2T	●	2	17	9	16	100	20	1	2.5°	-10°	-15°	✓	Fig.2	0.1	17,900
	18-S16-03-2T	●	2	18	10	16	100	20	1	2.1°	-10°	-15°	✓	Fig.2	0.1	17,000
	20-S20-03-3T	●	3	20	12	20	130	50	1	1.7°	-10°	-15°	✓	Fig.1	0.3	15,700
	20-S20-03-4T	●	4	20	12	20	130	50	1	1.7°	-10°	-15°	✓	Fig.1	0.3	15,700
	22-S20-03-3T	●	3	22	14	20	130	30	1	1.4°	-10°	-15°	✓	Fig.2	0.3	14,700
	22-S20-03-4T	●	4	22	14	20	130	30	1	1.4°	-10°	-15°	✓	Fig.2	0.3	14,700
	25-S25-03-4T	●	4	25	17	25	140	60	1	1.2°	-10°	-15°	✓	Fig.1	0.5	13,400
	25-S25-03-5T	●	5	25	17	25	140	60	1	1.2°	-10°	-15°	✓	Fig.1	0.5	13,400
	28-S25-03-4T	●	4	28	20	25	140	40	1	1.0°	-10°	-15°	✓	Fig.2	0.5	12,400
	28-S25-03-5T	●	5	28	20	25	140	40	1	1.0°	-10°	-15°	✓	Fig.2	0.5	12,400
	32-S32-03-5T	●	5	32	24	32	150	70	1	0.8°	-10°	-15°	✓	Fig.1	0.8	11,400
32-S32-03-6T	●	6	32	24	32	150	70	1	0.8°	-10°	-15°	✓	Fig.1	0.8	11,400	
Standard Shank (Weldon)	MFH 16-W16-03-2T	●	2	16	8	16	79	30	1	2.8°	-10°	-15°	✓	Fig.3	0.1	18,800
	20-W20-03-3T	●	3	20	12	20	101	50	1	1.7°	-10°	-15°	✓		0.2	15,700
	20-W20-03-4T	●	4	20	12	20	101	50	1	1.7°	-10°	-15°	✓		0.2	15,700
	25-W25-03-4T	●	4	25	17	25	117	60	1	1.2°	-10°	-15°	✓		0.4	13,400
	25-W25-03-5T	●	5	25	17	25	117	60	1	1.2°	-10°	-15°	✓		0.4	13,400
	32-W32-03-5T	●	5	32	24	32	131	70	1	0.8°	-10°	-15°	✓		0.7	11,400
32-W32-03-6T	●	6	32	24	32	131	70	1	0.8°	-10°	-15°	✓	0.7	11,400		
Long Shank (Cylindrical)	MFH 16-S16-03-2T-150	●	2	16	8	16	150	50	1	2.8°	-10°	-15°	✓	Fig.1	0.2	18,800
	20-S20-03-3T-160	●	3	20	12	20	160	80	1	1.7°	-10°	-15°	✓		0.3	15,700
	25-S25-03-4T-180	●	4	25	17	25	180	100	1	1.2°	-10°	-15°	✓		0.6	13,400
	32-S32-03-5T-200	●	5	32	24	32	200	120	1	0.8°	-10°	-15°	✓		1.1	11,400


● : Standard Item

Spare Parts and Applicable Inserts (Inch Size)


Part Number	Spare Parts			Applicable Inserts P14
	Insert Screw	Wrench	Anti-Seize Compound	
	 SB-3065TRP	 DTPM-8 Recommended Torque for Insert Clamp 1.2 N·m	 P-37	

Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

 Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.

Recommended Cutting Conditions P15

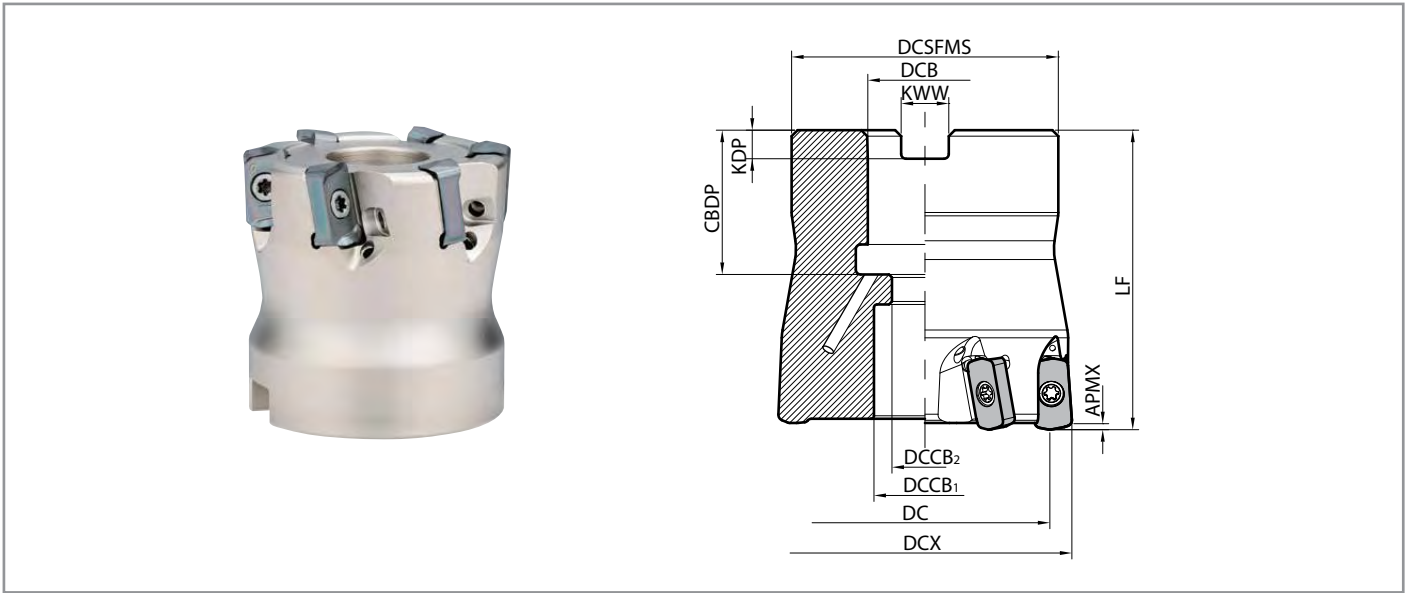

Toolholder Dimensions (Inch Size)

Part Number	Stock	No. of Inserts	Dimensions (in)											Rake Angle (°)		Coolant Hole	Weight (kg)	Max. RPM
			DCX	DC	DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX	A.R.	R.R.			
MFH 1500R-03-5T	●	5	1.500	1.185	1.400	0.500	0.433	0.276	1.575	0.709	0.156	0.250	0.039	-10°	-15°	✓	0.2	10,200
1500R-03-6T	●	6																
2000R-03-8T	●	8	2.000	1.685	1.750	0.750	0.669	0.433	1.968	0.947	0.188	0.312	0.039	-10°	-15°	✓	0.5	8,600

Toolholder Dimensions (Metric Size)

Part Number	Stock	No. of Inserts	Dimensions (mm)											Rake Angle (°)		Coolant Hole	Weight (kg)	Max. RPM
			DCX	DC	DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX	A.R.	R.R.			
MFH 040R-03-5T-M	●	5	40	32	38	16	15	9	40	19	5.6	8.4	1	-10°	-15°	✓	0.2	9,900
040R-03-6T-M	●	6																
MFH 050R-03-8T-M	●	8	50	42	47	22	19	11	50	21	6.3	10.4	1	-10°	-15°	✓	0.5	8,600

Multiple step slot milling is NOT recommended for MFH-Mini face mill diameters above Ø1.300" due to a danger of re-cutting chips

● : Standard Item

Spare Parts and Applicable Inserts (Inch Size)

Part Number	Spare Parts				Applicable Inserts ➔ P14
	Insert Screw	Wrench	Anti-Seize Compound	Arbor Bolt	
MFH1500-03-5T	SB-3065TRP	DTPM-8 Recommended Torque for Insert Clamp 1.2 N-m	P-37	HH1/4-0.75	LOGU030310ER-GM LOGU030310ER-GH
MFH1500-03-6T				HH3/8-1.25	
MFH2000-03-8T				HH3/8-1.25	


Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

🔧 Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.

Recommended Cutting Conditions ➔ P15

MFH Mini | Modular End Mill

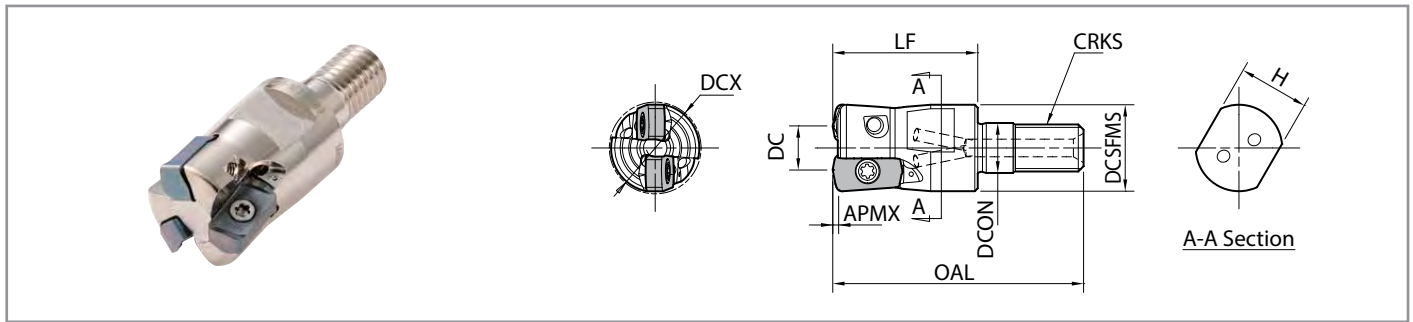

Toolholder Dimensions

Part Number	Stock	Unit	No. of Inserts	Dimensions									Ramping Angle	Rake Angle (°)		Coolant Hole	Max. RPM
				DCX	DC	DCSFMS	DCON	OAL	LF	CRKS (mm)	H	APMX	RMPX	A.R.	R.R.		
MFH 0625-M08-03-2T	●	inch	2	0.625	0.310	0.579	0.335	1.693	0.984	M8xP1.25	0.472	0.039	2.8°	-10°	-15°	✓	18,800
MFH 0750-M10-03-3T	●		3	0.750	0.435	0.728	0.413	1.929	1.181	M10xP1.5	0.591	0.039	1.7°	-10°	-15°	✓	15,700
MFH 1000-M12-03-4T	●		4	1.000	0.685	0.906	0.492	2.244	1.378	M12xP1.75	0.748	0.039	1.2°	-10°	-15°	✓	13,400
1000-M12-03-5T	●		5	1.000	0.685	0.906	0.492	2.244	1.378	M12xP1.75	0.748	0.039	1.2°	-10°	-15°	✓	13,400
MFH 1250-M16-03-5T	●		5	1.250	0.935	1.181	0.669	2.480	1.575	M16xP2	0.945	0.039	0.8°	-10°	-15°	✓	11,400
1250-M16-03-6T	●		6	1.250	0.935	1.181	0.669	2.480	1.575	M16xP2	0.945	0.039	0.8°	-10°	-15°	✓	11,400
MFH 1500-M16-03-6T	●		6	1.500	1.185	1.181	0.669	2.480	1.575	M16xP2	0.945	0.039	0.5°	-10°	-15°	✓	10,200
MFH 16-M08-03-2T	●	mm	2	16	8	14.7	8.5	43	25	M8xP1.25	12	1	2.8°	-10°	-15°	✓	18,880
MFH 17-M08-03-2T	●		2	17	9	14.7	8.5	43	25	M8xP1.25	12	1	2.5°	-10°	-15°	✓	17,900
MFH 18-M08-03-2T	●		2	18	10	14.7	8.5	43	25	M8xP1.25	12	1	2.1°	-10°	-15°	✓	17,000
MFH 20-M10-03-3T	●		3	20	12	18.7	10.5	49	30	M10xP1.5	15	1	1.7°	-10°	-15°	✓	15,700
20-M10-03-4T	●		4	20	12	18.7	10.5	49	30	M10xP1.5	15	1	1.7°	-10°	-15°	✓	15,700
MFH 22-M10-03-3T	●		3	22	14	18.7	10.5	49	30	M10xP1.5	15	1	1.4°	-10°	-15°	✓	14,700
22-M10-03-4T	●		4	22	14	18.7	10.5	49	30	M10xP1.5	15	1	1.4°	-10°	-15°	✓	14,700
MFH 25-M12-03-4T	●		4	25	17	23	12.5	57	35	M12xP1.75	19	1	1.2°	-10°	-15°	✓	13,400
25-M12-03-5T	●		5	25	17	23	12.5	57	35	M12xP1.75	19	1	1.2°	-10°	-15°	✓	13,400
MFH 28-M12-03-4T	●		4	28	20	23	12.5	57	35	M12xP1.75	19	1	1.0°	-10°	-15°	✓	12,400
28-M12-03-5T	●		5	28	20	23	12.5	57	35	M12xP1.75	19	1	1.0°	-10°	-15°	✓	12,400
MFH 32-M16-03-5T	●		5	32	24	30	17	63	40	M16xP2	24	1	0.8°	-10°	-15°	✓	11,400
32-M16-03-6T	●		6	32	24	30	17	63	40	M16xP2	24	1	0.8°	-10°	-15°	✓	11,400

● : Standard Item

Spare Parts and Applicable Inserts

Part Number	Spare Parts			Applicable Inserts ➔ P14
	Insert Screw	Wrench	Anti-Seize Compound	
MFH...-03-...	SB-3065TRP	DTPM-8 Recommended Torque for Insert Clamp 1.2 N·m	P-37	LOGU030310ER-GM LOGU030310ER-GH


Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

🔧 Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.



Recommended Cutting Conditions ➔ P15

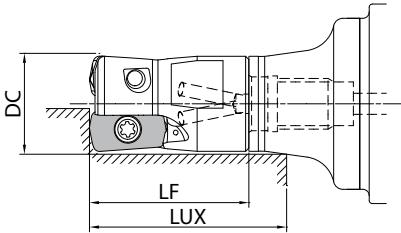Actual End Mill Depth (BT Arbor Metric)

	Arbor Part Number	Applicable End Mill		Actual End Mill Depth (mm)	
		Part Number	Cutting Dia. (mm)	Dimension (mm)	LUX
			DC	LF	
BT30K-M08-45	MFH16-M08-03...	Ø16	25	31.8	
	MFH17-M08-03...	Ø17	25	33.2	
	MFH18-M08-03...	Ø18	25	34.2	
BT30K-M10-45	MFH20-M10-03...	Ø20	30	36.8	
	MFH22-M10-03...	Ø22	30	39.2	
BT30K-M12-45	MFH25-M12-03...	Ø25	35	42.8	
	MFH28-M12-03...	Ø28	35	45.5	
BT40K-M08-55	MFH16-M08-03...	Ø16	25	31.7	
	MFH17-M08-03...	Ø17	25	33.2	
	MFH18-M08-03...	Ø18	25	34.3	
BT40K-M10-60	MFH20-M10-03...	Ø20	30	38.7	
	MFH22-M10-03...	Ø22	30	44.5	
BT40K-M12-55	MFH25-M12-03...	Ø25	35	44.6	
	MFH28-M12-03...	Ø28	35	47.6	
BT40K-M16-65	MFH32-M16-03...	Ø32	40	51.2	

For BT Arbor See [P26](#)


Applicable Inserts

Insert	Part Number	Dimension (in)					MEGACOAT NANO			MEGACOAT HARD	CVD Coated Carbide
		W1	S	D1	INSL	RE	PR1535	PR1525	PR1510	PR0155	CA6535
 General Purpose	LOGU030310ER-GM	0.244	0.156	0.136	0.469	0.039	●	●	●	-	●
 Tough Edge	LOGU030310ER-GH	0.244	0.156	0.136	0.469	0.039	●	●	●	●	-

● : Standard Item


MFH Mini | Cutting Performance

Fine Pitch End Mill




Standard Pitch End Mill

Cutting Dia. Ø0.625" - Ø0.750"
Cutting Dia. Ø16mm - Ø22mm




Standard Pitch End Mill

Cutting Dia. 1.000" - 1.250"
Cutting Dia. Ø25mm - Ø32mm



MFH Mini Face Mill

Cutting Dia. 1.500" - 2.000"
Cutting Dia. Ø40mm - Ø50mm



Caution:
When using fine pitch, reduce the cutting conditions compared with standard type


Chipbreaker	Workpiece Material	Holder Part Number and Feed Rate (fz: ipt) *Recommended D.O.C. = 0.020" Reference Value							Recommended Insert Grade (Vc: sfm)					
		MFH0625...2T (MFH16...2T)	MFH0750...3T (MFH20...3T)	(MFH20...4T)	MFH1000...4T (MFH25...4T)	MFH1000...5T (MFH25...5T)	MFH1250...5T (MFH32...5T)	MFH1250...6T (MFH32...6T)	MFH1500...5T/6T MFH2000...8T	MEGACOAT NANO			MEGACOAT HARD	CVD Coated Carbide
		PR1535	PR1525	PR1510	PR0155	CA6535								
Carbon Steel									☆	★	-	-	-	
	0.008- 0.028 -0.047	0.008- 0.020 -0.031	0.008- 0.031 -0.059	0.008- 0.020 -0.031	0.008- 0.031 -0.059	0.008- 0.020 -0.031	0.008- 0.031 -0.059	0.008- 0.031 -0.059	390-590-820	390-590-820	-	-	-	
Alloy Steel									☆	★	-	-	-	
									330-520-720	330-520-720	-	-	-	
~40 HRC	0.008- 0.020 -0.035	0.008- 0.016 -0.024	0.008- 0.024 -0.047	0.008- 0.016 -0.024	0.008- 0.024 -0.047	0.008- 0.016 -0.024	0.008- 0.024 -0.047	0.008- 0.016 -0.024	☆	☆	-	GH ★	-	
									260-460-590	260-460-590	-	260-460-590	-	
40~50 HRC	0.008- 0.012 -0.020	0.008- 0.010 -0.012	0.008- 0.012 -0.024	0.008- 0.010 -0.012	0.009- 0.012 -0.024	0.008- 0.010 -0.012	0.008- 0.012 -0.024	0.008- 0.012 -0.024	-	☆	-	GH ★	-	
									200-330-430	-	-	200-330-430	-	
50~55 HRC	0.004- 0.012 -0.020	0.004- 0.008 -0.012	0.004- 0.012 -0.020	0.004- 0.008 -0.012	0.004- 0.012 -0.020	0.004- 0.008 -0.012	0.004- 0.012 -0.020	0.004- 0.008 -0.012	-	☆	-	GH ★	-	
									160-230-330	-	-	160-230-330	-	
55~60 HRC	0.0004- 0.0024 -0.0039 (Recommended only with GH chipbreaker)												GH ★	-
									-	-	-	160-200-230	-	
GM	Austenitic Stainless Steel								GM ★	GM ☆	-	-	-	
GH									330-520-660	330-520-660	-	-	-	
	Martensitic Stainless Steel	0.008- 0.020 -0.035	0.008- 0.016 -0.024	0.008- 0.024 -0.047	0.008- 0.016 -0.024	0.008- 0.024 -0.047	0.008- 0.016 -0.024	0.008- 0.024 -0.047	☆	-	-	-	★	
									490-660-820	-	-	-	590-790-980	
	Precipitation Hardened Stainless Steel								★	-	-	-	-	
									300-390-490	-	-	-	-	
	Gray Cast Iron	0.008- 0.028 -0.047	0.008- 0.020 -0.031	0.008- 0.031 -0.059	0.008- 0.020 -0.031	0.008- 0.031 -0.059	0.008- 0.020 -0.031	0.008- 0.031 -0.059	-	-	★	-	-	
									-	-	390-590-820	-	-	
	Nodular Cast Iron	0.008- 0.020 -0.035	0.008- 0.016 -0.024	0.008- 0.024 -0.047	0.008- 0.016 -0.024	0.008- 0.024 -0.047	0.008- 0.016 -0.024	0.008- 0.024 -0.047	-	-	★	-	-	
									-	-	330-490-660	-	-	
	Ni-base Heat-Resistant Alloy	0.008- 0.012 -0.024	0.008- 0.010 -0.016	0.008- 0.016 -0.031	0.008- 0.010 -0.016	0.008- 0.016 -0.031	0.008- 0.010 -0.016	0.008- 0.016 -0.031	☆	-	-	-	★	
									70-100-160	-	-	-	70-100-160	
	Titanium Alloy								GM ★	-	GM ☆	-	-	
									130-200-260	-	100-160-230	-	-	

- Machining with coolant is recommended for Ni-base Heat Resistant Alloy and Titanium Alloy
- The number in bold font is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation.
- Machining with CAT30 or equivalent, feed rate should be reduced to 25% of recommended cutting conditions
- Internal coolant is recommended for slotting applications
- Slotting and pocketing are not recommended for face mill types

Case Studies

Mold Parts
Pre-hardened Steel

Vc = 720 sfm (n = 3,500 rpm)
f = 0.002 ipt (Vf = 27.559 ipm)
D.O.C. x ae = 0.002" x 0.551", Dry
MFH20-S20-03-4T
LOGU030310ER-GM PR1535



Tool Life

PR1535

2.0 H

Tool Life
MAX 2x

Competitor K (4 Flutes)


1.0~1.5 H

PR1535 shows lower cutting load compared with Competitor K making it possible to extend the machining time.

(User Evaluation)

Airplane Parts
Precipitation Hardened Stainless Steel

Vc = 390 sfm (n = 1,530 rpm)
fz = 0.024 ipt (Vf = 144.488 ipm)
D.O.C. x ae = 0.028" x 0.984" Dry
MFH1000-W100-03-4T47 (4 Flutes)
LOGU030310ER-GM (PR1535)



Machining Efficiency

PR1535

100 pcs

Tool Life
1.8x


Competitor L (5 Inserts)

55 pcs

PR1535 maintains good cutting edge condition after machining 100 pcs with stable machining.

(User Evaluation)

MFH | Face Mill (Inch Size)

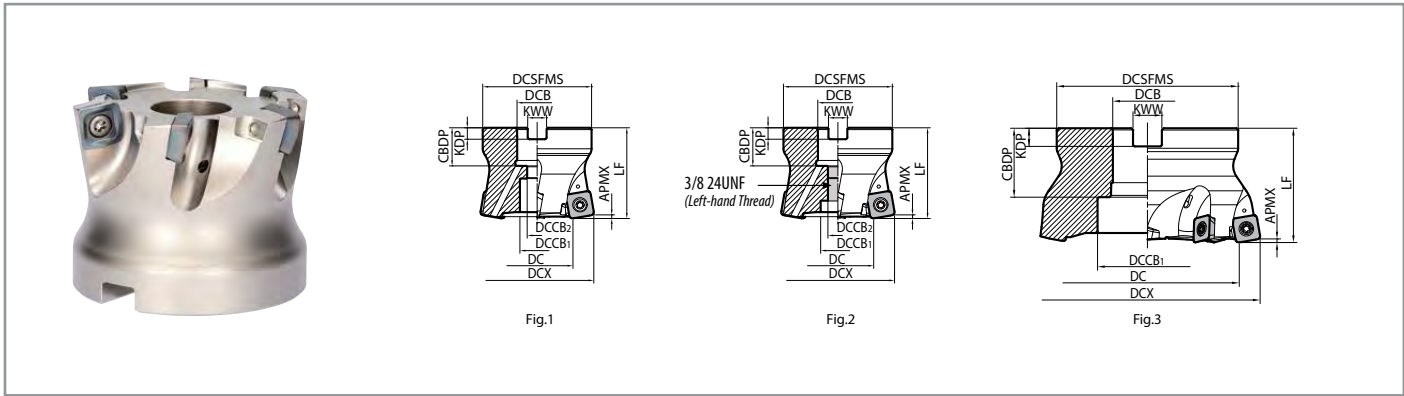

Toolholder Dimensions with SOMT10 Inserts (Inch Size)

Part Number	Stock	No. of Inserts	Dimensions (in)												Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM		
			DCX	DC			DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CDDP	KDP	KWW	APMX	*1APMX ₂					A.R.	R.R.
MFH 2000R-10-4T	●	4	2.000	1.331	1.510	1.469	1.750	0.750	0.669	0.433	1.969	0.947	0.187	0.313	0.059 *2(0.138)	0.047	+10°	-5°	✓	Fig.1	0.4	10,000
2000R-10-5T	●	5	2.000	1.331	1.510	1.469	1.750	0.750	0.669	0.433	1.969	0.947	0.187	0.313			+10°	-5°			0.4	10,000
MFH 2500R-10-5T	●	5	2.500	1.831	2.010	1.969	2.250	0.750	0.669	0.433	1.969	0.75	0.187	0.313			+10°	-4°			0.7	8,800
2500R-10-6T	●	6	2.500	1.831	2.010	1.969	2.250	0.750	0.669	0.433	1.969	0.75	0.187	0.313			+10°	-4°			0.7	8,800
MFH 3000R-10-7T	●	7	3.000	2.331	2.510	2.469	2.750	1.000	0.866	0.551	2.48	1.063	0.236	0.382			+10°	-4°			1.3	7,600

Toolholder Dimensions with SOMT14 Inserts (Inch Size)


Part Number	Stock	No. of Inserts	Dimensions (in)												Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM		
			DCX	DC			DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CDDP	KDP	KWW	APMX	*1APMX ₂					A.R.	R.R.
MFH 2000R-14-4T	●	4	2.000	1.094	1.330	1.291	1.750	0.750	0.500	3/8 24UNF	1.969	0.827	0.187	0.313	0.079 *2(0.197)	0.079	+10°	-10°	✓	Fig.2	0.4	8,800
2000R-14-5T	●	4	2.000	1.094	1.330	1.291	1.750	0.750	0.500		1.969	0.827	0.187	0.313			+10°	-10°			0.4	8,800
MFH 2500R-14-4T	●	4	2.500	1.594	1.830	1.791	2.250	0.750	0.669	0.433	1.969	0.750	0.187	0.313			+10°	-10°			0.6	7,400
2500R-14-5T	●	5	2.500	1.594	1.830	1.791	2.250	0.750	0.669	0.433	1.969	0.750	0.187	0.313			+10°	-10°			0.6	7,400
MFH 3000R-14-5T	●	5	3.000	2.094	2.330	2.291	2.750	1.000	0.866	0.551	2.480	1.063	0.236	0.382	0.079 *2(0.197)	0.079	+10°	-9°	✓	Fig.1	1.2	6,400
3000R-14-6T	●	6	3.000	2.094	2.330	2.291	2.750	1.000	0.866	0.551	2.480	1.063	0.236	0.382			+10°	-9°			1.2	6,400
MFH 4000R-14-6T	●	6	4.000	3.094	3.330	3.291	3.750	1.500	1.299	0.866	2.48	1.181	0.394	0.626			+10°	-7°			2.3	5,600
4000R-14-7T	●	7	4.000	3.094	3.330	3.291	3.750	1.500	1.299	0.866	2.48	1.181	0.394	0.626			+10°	-7°			2.3	5,600
MFH 5000R-14-7T	●	7	5.000	4.094	4.330	4.291	3.750	1.500	2.047	-	2.48	1.496	0.394	0.626			+10°	-7°	✓	Fig.3	2.9	4,800
MFH 6000R-14-8T	●	8	6.000	5.094	5.330	5.291	4.880	2.000	2.835	-	2.48	1.496	0.433	0.752			+10°	-6°			×	

● : Standard Item

Spare Parts and Applicable Inserts (Inch Size)

*1 Refer to LD cutting edge dimensions in figure below *2 Dimension in () is when mounting LD

Part Number	Spare Parts				Applicable Inserts P23	
	Insert Screw	Wrench		Anti-Seize Compound		Mounting Bolt
MFH2000R-10-4T	SB-4090TRPN	DTPM	TTP	P-37	SOMT100420ER-GM SOMT100420ER-LD SOMT100420ER-FL	
MFH2000R-10-5T						
MFH2500R-10-5T		DTPM-15 Recommended Torque for Insert Clamp 3.5 N·m				HH3/8-1.25(H)
MFH2500R-10-6T						
MFH3000R-10-7T		TTP-20 Recommended Torque for Insert Clamp 4.5 N·m				HH1/2-1.25(H)
MFH2000R-14-4T	SB-50120TRP	DTPM	TTP	P-37	XNS610*2	
MFH2500R-14-4T						
MFH2500R-14-5T		DTPM-15 Recommended Torque for Insert Clamp 3.5 N·m			HH3/8-1.25(H)	
MFH3000R-14-5T						
MFH3000R-14-6T		TTP-20 Recommended Torque for Insert Clamp 4.5 N·m			HH1/2-1.25(H)	
MFH4000R-14-6T						
MFH4000R-14-7T		DTPM-15 Recommended Torque for Insert Clamp 3.5 N·m			-	
MFH5000R-14-7T						
MFH6000R-14-8T	TTP-20 Recommended Torque for Insert Clamp 4.5 N·m		-			




Caution with Max. Revolution
When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

🔧 **Coat Anti-Seize Compound (P-37)** thinly on portion of taper and thread prior to installation.

*2 Differential screw (3/8-24UNF)

(H) Optional coolant thru bolt available.
Recommended Cutting Conditions P24-25

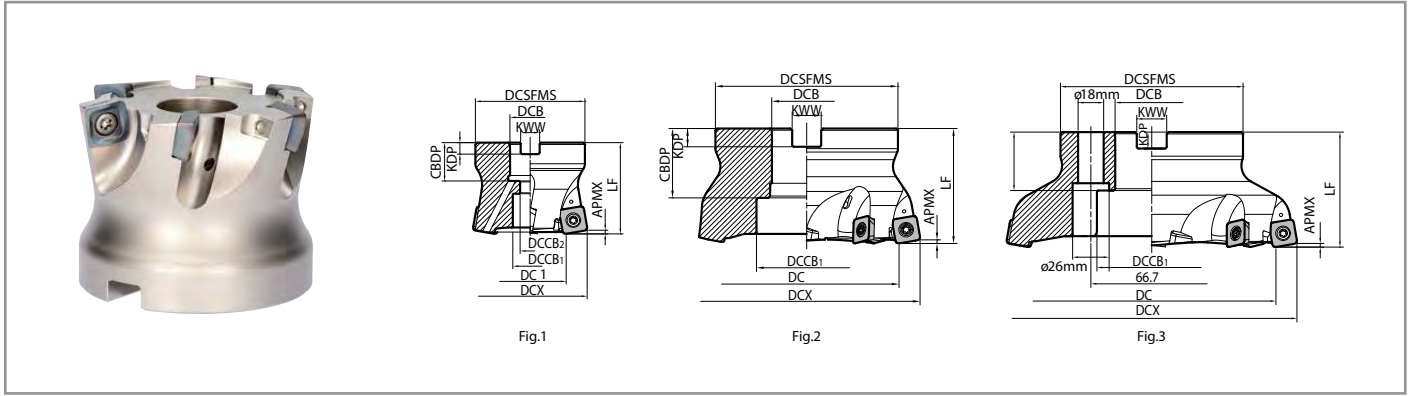

Toolholder Dimensions with SOMT10 Inserts (Metric Size)

Bore Dia.	Part Number	Stock	No. of Inserts	Dimensions (mm)													Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM	
				DCX	DC			DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX	*1APMX ₂	A.R.					R.R.
Inch Spec	MFH 050R-10-4T	●	4	50	33	37.5	36.5	47	0.875"	19	11	50	0.748"	0.197"	0.331"	1.5 *2(3.5)	1.2	+10°	-5°	✓	Fig.1	0.4	10,000
	050R-10-5T	●	5	50	33	37.5	36.5	47	0.875"	19	11	50	0.748"	0.197"	0.331"			+10°	-5°			0.4	10,000
	MFH 063R-10-5T	●	5	63	46	50.5	49.5	60	0.875"	19	11	50	0.748"	0.197"	0.331"			+10°	-4°			0.7	8,800
	063R-10-6T	●	6	63	46	50.5	49.5	60	0.875"	19	11	50	0.748"	0.197"	0.331"			+10°	-4°			0.7	8,800
	MFH 080R-10-7T	●	7	80	63	67.5	66.5	76	1.250"	26	17	63	1.260"	0.315"	0.500"			+10°	-4°			1.3	7,600
Metric Spec	MFH 050R-10-4T-M	●	4	50	33	37.5	36.5	47	22	19	11	50	21	6.3	10.4	1.5 *2(3.5)	1.2	+10°	-5°	✓	Fig.1	0.4	10,000
	050R-10-5T-M	●	5	50	33	37.5	36.5	47	22	19	11	50	21	6.3	10.4			+10°	-5°			0.4	10,000
	MFH 063R-10-5T-22M	●	5	63	46	50.5	49.5	60	22	19	11	50	21	6.3	10.4			+10°	-4°			0.7	8,800
	063R-10-6T-22M	●	6	63	46	50.5	49.5	60	22	19	11	50	21	6.3	10.4			+10°	-4°			0.7	8,800
	063R-10-5T-27M	●	5	63	46	50.5	49.5	60	27	20	13	50	24	7	12.4			+10°	-4°			0.7	8,800
	063R-10-6T-27M	●	6	63	46	50.5	49.5	60	27	20	13	50	24	7	12.4			+10°	-4°			0.7	8,800
	MFH 080R-10-7T-M	●	7	80	63	67.5	66.5	76	27	20	13	63	24	7	12.4			+10°	-4°			1.6	7,600

Toolholder Dimensions with SOMT14 Inserts (Metric Size)

Bore Dia.	Part Number	Stock	No. of Inserts	Dimensions (mm)													Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM	
				DCX	DC			DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX	*1APMX ₂	A.R.					R.R.
Inch Spec	NEW MFH 050R-14-4T	●	4	50	27	33	32	47	0.875"	12	-	50	0.748"	0.197"	0.331"	2 *2(5)	2	+10°	-10°	✓	Fig.1	0.4	8,800
	MFH 063R-14-4T	●	4	63	40	46	45	60	0.875"	19	11	50	0.748"	0.197"	0.331"			+10°	-10°			0.6	7,400
	063R-14-5T	●	5	63	40	46	45	60	0.875"	19	11	50	0.748"	0.197"	0.331"			+10°	-10°			0.6	7,400
	MFH 080R-14-5T	●	5	80	57	63	62	76	1.250"	26	17	63	1.260"	0.315"	0.500"			+10°	-8°			1.3	6,400
	080R-14-6T	●	6	80	57	63	62	76	1.250"	26	17	63	1.260"	0.315"	0.500"			+10°	-8°			1.3	6,400
	MFH 100R-14-6T	●	6	100	77	83	82	96	1.250"	26	17	63	1.260"	0.315"	0.500"			+10°	-7°			2.4	5,600
	100R-14-7T	●	7	100	77	83	82	96	1.250"	26	17	63	1.260"	0.315"	0.500"			+10°	-7°			2.4	5,600
	MFH 125R-14-7T	●	7	125	102	108	107	100	1.500"	55	-	63	1.496"	0.394"	0.625"			+10°	-7°			2.9	4,800
	MFH 160R-14-8T	●	8	160	137	143	142	100	2.000"	72	-	63	1.496"	0.433"	0.750"			+10°	-6°			3.9	4,200
	Metric Spec	NEW MFH 050R-14-4T-M	●	4	50	27	33	32	47	22	12	-	50	21	6.3			10.4	2 *2(5)			2	+10°
MFH 063R-14-4T-22M		●	4	63	40	46	45	60	22	19	11	50	21	6.3	10.4	+10°	-10°	0.6		7,400			
063R-14-5T-22M		●	5	63	40	46	45	60	22	19	11	50	21	6.3	10.4	+10°	-10°	0.6		7,400			
063R-14-4T-27M		●	4	63	40	46	45	60	27	20	13	50	24	7	12.4	+10°	-10°	0.6		7,400			
063R-14-5T-27M		●	5	63	40	46	45	60	27	20	13	50	24	7	12.4	+10°	-10°	0.6		7,400			
MFH 080R-14-5T-M		●	5	80	57	63	62	76	27	20	13	63	24	7	12.4	+10°	-8°	1.4		6,400			
080R-14-6T-M		●	6	80	57	63	62	76	27	20	13	63	24	7	12.4	+10°	-8°	1.4		6,400			
MFH 100R-14-6T-M		●	6	100	77	83	82	96	32	26	17	63	28	8	14.4	+10°	-7°	2.4		5,600			
100R-14-7T-M		●	7	100	77	83	82	96	32	26	17	63	28	8	14.4	+10°	-7°	2.4		5,600			
MFH 125R-14-7T-M		●	7	125	102	108	107	100	40	55	-	63	33	9	16.4	+10°	-7°	2.8		4,800			
MFH 160R-14-8T-M	●	8	160	137	143	142	100	40	68	66.7	63	32	9	16.4	+10°	-6°	3.7	4,200					







Spare Parts and Applicable Inserts **P18**

Recommended Cutting Conditions **P24-25**

● : Standard Item


*1 Refer to LD cutting edge dimensions on page 16 *2 Dimension in () is when mounting LD

Spare Parts and Applicable Inserts (Metric Size)


Part Number	Spare Parts					Applicable Inserts  P23
	Insert Screw	Wrench		Anti-Seize Compound	Mounting Bolt	
		DTPM 	TTP 			
MFH050R-10-...(-M)	SB-4090TRPN	DTPM-15 Recommended Torque for Insert Clamp 3.5 N-m		P-37	HH10×30	SOMT100420ER-GM SOMT100420ER-GH SOMT100420ER-LD SOMT100420ER-FL
MFH063R-10-...(-22M)					HH10×30	
MFH063R-10-...-27M					HH12×35	
MFH080R-10-...					HH16×40	
MFH080R-10-...-M					HH12×35	
MFH050R-14-...(-M)	SB-50120TRP	TTP-20 Recommended Torque for Insert Clamp 4.5 N-m		P-37	W10×30	SOMT140520ER-GM SOMT140520ER-GH SOMT140520ER-LD SOMT140514ER-FL
MFH063R-14-...(-22M)					HH10×30	
MFH063R-14-...-27M					HH12×35	
MFH080R-14-...					HH16×40	
MFH080R-14-...-M					HH12×35	
MFH100R-14-...					HH16×40	
MFH100R-14-...-M					-	
MFH125R-14-...					-	
MFH160R-14-...					-	

Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

 Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.

Holders on Page  **P17**

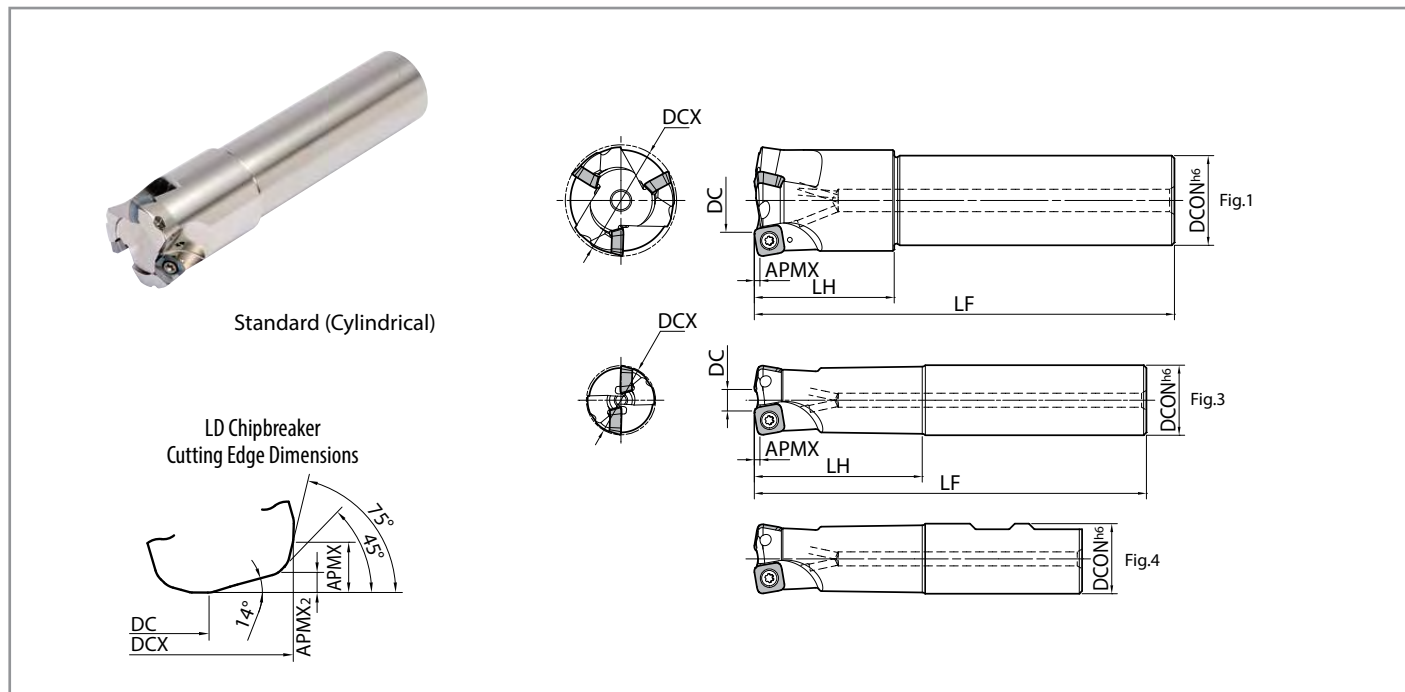




Toolholder Dimensions with SOMT10 Inserts (Inch Size)


Shank	Part Number	Stock	No. of Inserts	Dimensions (in)								Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM	
				DCX	DC			DCON	LF	LH	APMX	APMX ₂	A.R.					R.R.
					GM/GH	LD	FL											
Standard Shank (Weldon)	MFH 1000-W100-10-2T	●	2	1.000	0.331	0.508	0.469	1.000	5.500	3.173	0.059 *(0.138)	0.047	+10°	-5°	✓	Fig.4	0.4	17,000
	MFH 1250-W125-10-2T	●	2	1.250	0.581	0.758	0.719	1.250	6.000	2.750						Fig.4	0.8	14,000
	1250-W125-10-3T	●	3	1.250	0.581	0.758	0.719	1.250	6.000	2.750						Fig.4	0.8	14,000
	MFH 1500-W150-10-3T	●	3	1.500	0.831	1.008	0.969	1.500	6.000	2.000						Fig.4	0.8	11,500
	1500-W150-10-4T	●	4	1.500	0.831	1.008	0.969	1.500	6.000	2.000						Fig.4	0.8	11,500
Long Shank (Cylindrical)	MFH 1000-S100-10-2T-8	●	2	1.000	0.331	0.508	0.469	1.000	8.000	4.750	0.059 *(0.138)	0.047	+10°	-5°	✓	Fig.3	0.8	17,000
	MFH 1250-S125-10-2T-8	●	2	1.250	0.581	0.758	0.719	1.250	8.000	4.750						Fig.3	0.8	14,000
	MFH 1500-S125-10-4T10	●	4	1.500	0.831	1.008	0.969	1.250	10.000	2.000						Fig.1	0.8	11,500

● : Standard Item
*Dimension in () is when mounting LD


Spare Parts and Applicable Inserts (Inch Size)

Part Number	Spare Parts			Applicable Inserts ● P23
	Insert Screw	Wrench	Anti-Seize Compound	
MFH...-10-...	SB-4075TRP 	DTPM-15 Recommended Torque for Insert Clamp 3.5 N·m 	P-37 	SOMT100420ER-GM SOMT100420ER-GH SOMT100420ER-LD SOMT100420ER-FL

Caution with Max. Revolution
When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

 **Coat Anti-Seize Compound (P-37)** thinly on portion of taper and thread prior to installation.

Recommended Cutting Conditions ● P24-25

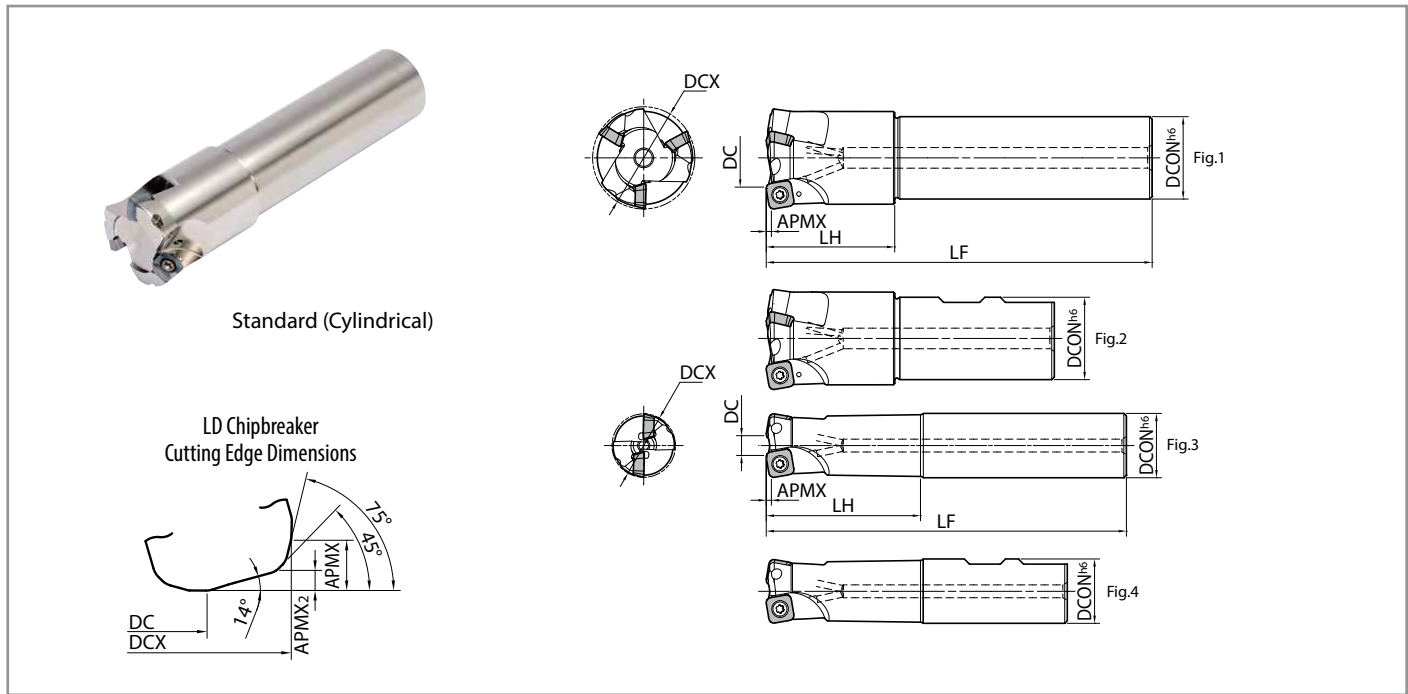

Toolholder Dimensions with SOMT10 Inserts (Metric Size)

Shank	Part Number	Stock	No. of Inserts	Dimensions (mm)								Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM	
				DCX	DC			DCON	LF	LH	APMX	APMX ₂	A.R.					R.R.
					GM/GH	LD	FL											
Standard Shank (Cylindrical)	MFH 25-S25-10-2T	●	2	25	8	12.5	11.5	25	140	60	1.5 *(3.5)	1.2	+10°	-5°	✓	Fig.3	0.4	17,000
	MFH 28-S25-10-2T	●	2	28	11	15.5	14.5	25	140	40						Fig.1	0.5	15,500
	MFH 32-S32-10-2T	●	2	32	15	19.5	18.5	32	150	70						Fig.3	0.8	14,000
	32-S32-10-3T	●	3	32	15	19.5	18.5	32	150	70						Fig.3	0.8	14,000
	MFH 35-S32-10-2T	●	2	35	18	22.5	21.5	32	150	50						Fig.1	0.8	13,000
	35-S32-10-3T	●	3	35	18	22.5	21.5	32	150	50						Fig.1	0.8	13,000
	MFH 40-S32-10-3T	●	3	40	23	27.5	26.5	32	150	50						Fig.1	0.9	11,500
	40-S32-10-4T	●	4	40	23	27.5	26.5	32	150	50						Fig.1	0.9	11,500
Standard Shank (Weldon)	MFH 25-W25-10-2T	●	2	25	8	12.5	11.5	25	117	60	1.5 *(3.5)	1.2	+10°	-5°	✓	Fig.4	0.4	17,000
	MFH 32-W32-10-3T	●	3	32	15	19.5	18.5	32	131	70						Fig.4	0.7	14,000
	MFH 40-W32-10-3T	●	3	40	23	27.5	26.5	32	112	50						Fig.2	0.7	11,500
	40-W32-10-4T	●	4	40	23	27.5	26.5	32	112	50						Fig.2	0.7	11,500
Long Shank (Cylindrical)	MFH 25-S25-10-2T-200	●	2	25	8	12.5	11.5	25	200	120	1.5 *(3.5)	1.2	+10°	-5°	✓	Fig.3	0.6	17,000
	MFH 28-S25-10-2T-200	●	2	28	11	15.5	14.5	25	200	40						Fig.1	0.7	15,500
	MFH 32-S32-10-2T-200	●	2	32	15	19.5	18.5	32	200	120						Fig.3	1.0	14,000
	MFH 35-S32-10-2T-200	●	2	35	18	22.5	21.5	32	200	50						Fig.1	1.4	13,000
	MFH 40-S32-10-4T-250	●	4	40	23	27.5	26.5	32	250	50						Fig.1	1.5	11,500
Extra Long Shank (Cylindrical)	MFH 25-S25-10-2T-300	●	2	25	8	12.5	11.5	25	300	180	1.5 *(3.5)	1.2	+10°	-5°	✓	Fig.3	1.0	17,000
	MFH 28-S25-10-2T-300	●	2	28	11	15.5	14.5	25	300	40						Fig.1	1.1	15,500
	MFH 32-S32-10-2T-300	●	2	32	15	19.5	18.5	32	300	180						Fig.3	1.6	14,000
	MFH 35-S32-10-2T-300	●	2	35	18	22.5	21.5	32	300	50						Fig.1	1.7	13,000
	MFH 40-S32-10-4T-300	●	4	40	23	27.5	26.5	32	300	50						Fig.1	1.8	11,500

● : Standard Item

*Dimension in () is when mounting LD

Spare Parts and Applicable Inserts (Metric Size)


Part Number	Spare Parts			Applicable Inserts P23
	Insert Screw	Wrench	Anti-Seize Compound	
MFH...-10-...	SB-4075TRP	DTPM-15 Recommended Torque for Insert Clamp 3.5 N·m	P-37	SOMT100420ER-GM SOMT100420ER-GH SOMT100420ER-LD SOMT100420ER-FL

Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.

Recommended Cutting Conditions P24-25

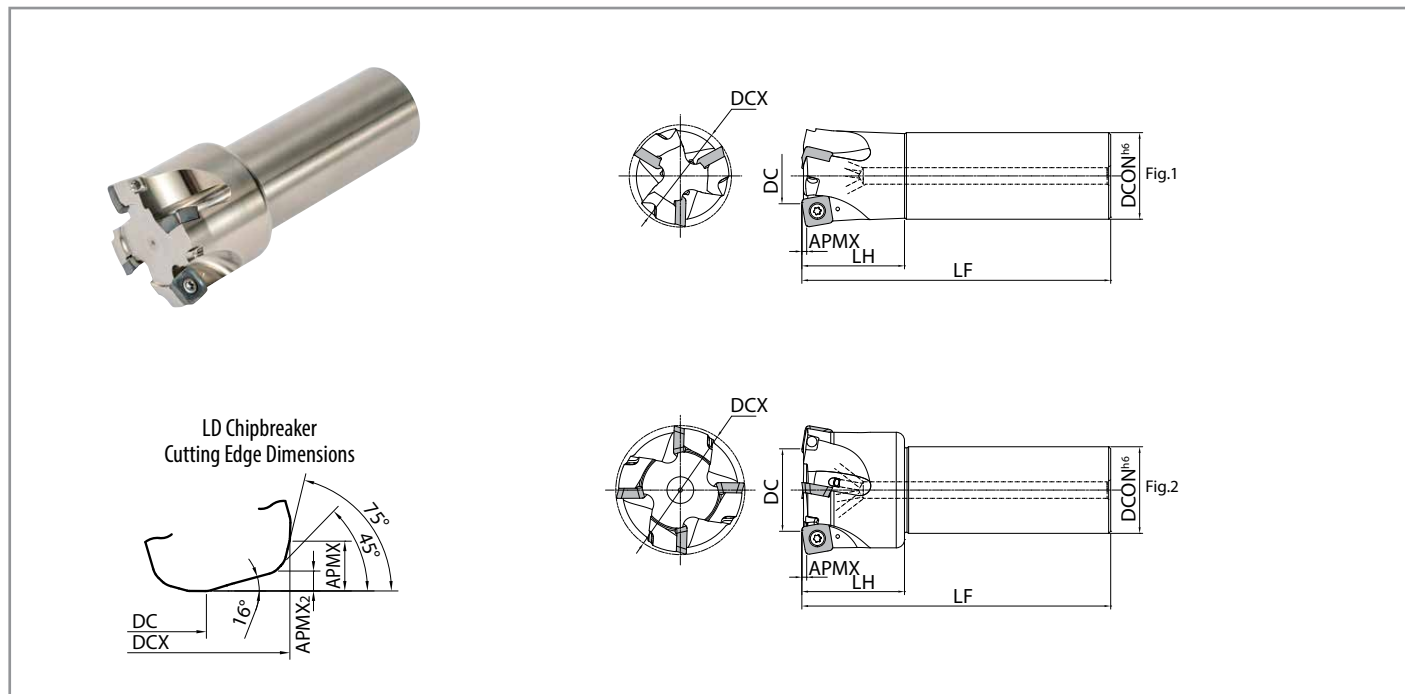

Toolholder Dimensions with SOMT14 Inserts (Metric Size)

Part Number	Stock	No. of Inserts	Dimensions (mm)									Rake Angle (°)		Coolant Hole	Drawing	Weight (kg)	Max. RPM
			DCX	DC			DCON	LF	LH	APMX	APMX ₂	A.R.	R.R.				
				GM/GH	LD	FL											
MFH 50-S42-14-3T	●	3	50	27	33	32	42	150	50	2 *(5)	2	+10°	-10°	✓	Fig.1	1.4	8,800
MFH 63-S42-14-4T	●	4	63	40	46	45	42	150	50				-10°	✓	Fig.2	1.7	7,400
MFH 80-S42-14-5T	●	5	80	57	63	62	42	150	50				-8°	✓	Fig.2	2.3	6,400

● : Standard Item

*Dimension in () is when mounting LD

Spare Parts and Applicable Inserts (Metric Size)


Part Number	Spare Parts			Applicable Inserts ● P23
	Insert Screw	Wrench	Anti-Seize Compound	
	MFH...-14-...	 SB-50120TRP	 TTP-20 Recommended Torque for Insert Clamp 4.5 N-m	

Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.

Recommended Cutting Conditions ● P24-25

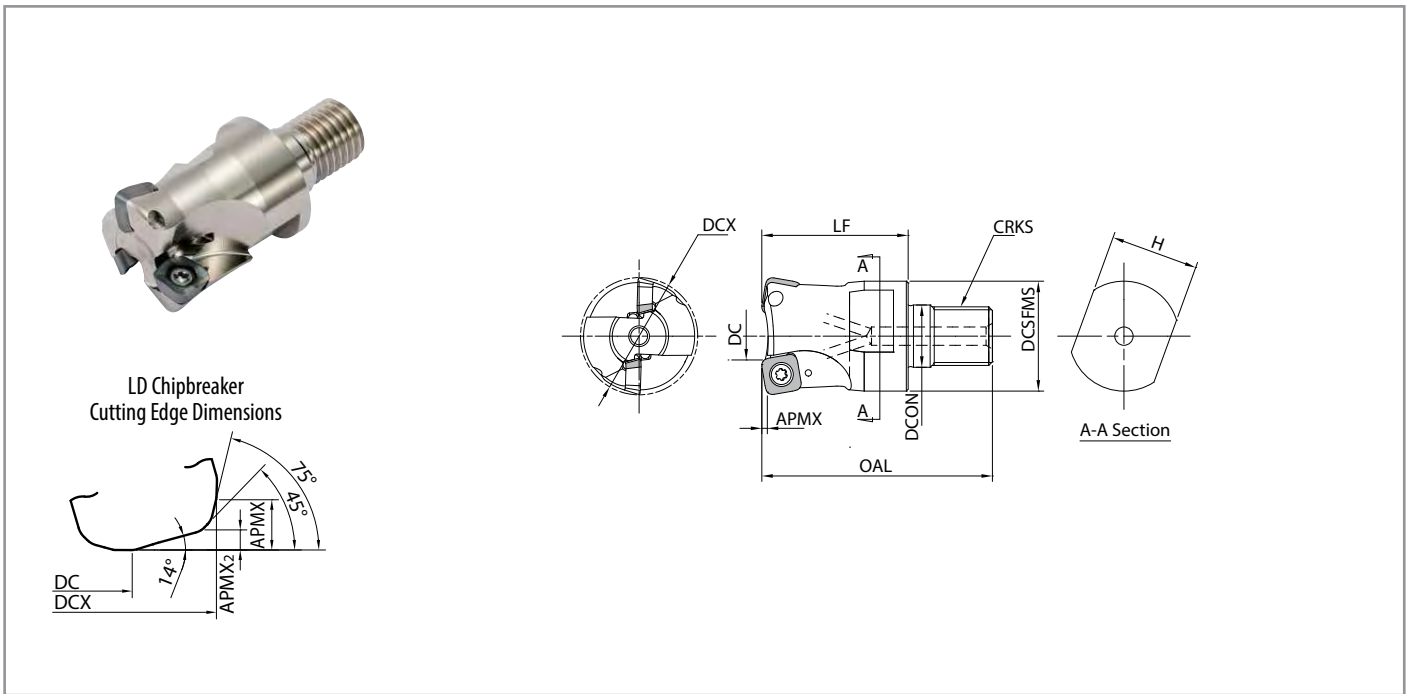

Toolholder Dimensions

Part Number	Stock	No. of Inserts	Dimensions (mm)											Rake Angle (°)		Coolant Hole	Max RPM	
			DCX	DC			DCSFMS	DCON	OAL	LF	CRKS	H	APMX	APMX ₂	A.R.			R.R.
MFH 25-M12-10-2T	●	2	25	8	12.5	11.5	23	12.5	57	35	M12×P1.75	19	1.5 *(3.5)	1.2	+10°	-5°	✓	17,000
MFH 28-M12-10-2T	●	2	28	11	15.5	14.5	23	12.5	57	35	M12×P1.75	19						15,500
MFH 32-M16-10-2T	●	2	32	15	19.5	18.5	30	17	63	40	M16×P2.0	24						14,000
MFH 32-M16-10-3T	●	3	32	15	19.5	18.5	30	17	63	40	M16×P2.0	24						14,000
MFH 35-M16-10-2T	●	2	35	18	22.5	21.5	30	17	63	40	M16×P2.0	24						13,000
MFH 35-M16-10-3T	●	3	35	18	22.5	21.5	30	17	63	40	M16×P2.0	24						13,000
MFH 40-M16-10-3T	●	3	40	23	27.5	26.5	30	17	63	40	M16×P2.0	24						11,500
MFH 40-M16-10-4T	●	4	40	23	27.5	26.5	30	17	63	40	M16×P2.0	24						11,500

● : Standard Item
*Dimension in () is when mounting LD

Spare Parts and Applicable Inserts





Part Number	Spare Parts			Applicable Inserts ➔ P23
	Insert Screw	Wrench	Anti-Seize Compound	
MFH...-10-...	SB-4075TRP	DTPM-15 Recommended Torque for Insert Clamp 3.5 N·m	P-37	SOMT100420ER-GM SOMT100420ER-GH SOMT100420ER-LD SOMT100420ER-FL

Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force.

➔ Coat Anti-Seize Compound (P-37) thinly on portion of taper and thread prior to installation.

Recommended Cutting Conditions ➔ P24-25

Usage Classification	P	Carbon Steel / Alloy Steel		☆	★								
		Mold Steel		☆	★								
		Austenitic Stainless Steel		★	☆								
★ : Roughing / 1st Choice ☆ : Roughing / 2nd Choice ■ : Finishing / 1st Choice □ : Finishing / 2nd Choice	M	Martensitic Stainless Steel		☆								★	
		Gray Cast Iron						★					
	Nodular Cast Iron						★						
	S		Ni-base Heat Resistant Alloy		★								☆
	Titanium Alloy		★			☆							
	H		Hardened Materials				□						
Insert	Part Number	Dimension (in)					Angle (°)	MEGACOAT NANO			MEGACOAT HARD	CVD Coated Carbide	
		IC	S	D1	BS	RE		AN	PR1535	PR1525	PR1510	PR015S	CA6535
 General Purpose	SOMT 100420ER-GM	0.406	0.180	0.181	-	0.079	16°	●	●	●	-	●	
	SOMT 140520ER-GM	0.557	0.219	0.228	-	0.079	16°	●	●	●	-	●	
 Large D.O.C.	SOMT 100420ER-LD	0.411	0.180	0.181	0.035	0.079	16°	●	●	●	-	●	
	SOMT 140520ER-LD	0.581	0.219	0.228	0.063	0.079	16°	●	●	●	-	●	
 Wiper Edge	SOMT 100420ER-FL	0.411	0.180	0.181	0.055	0.079	16°	●	●	●	-	●	
	SOMT 140514ER-FL	0.574	0.219	0.228	0.122	0.055	16°	●	●	●	-	●	
 Tough Edge	SOMT 100420ER-GH	0.411	0.180	0.179	-	0.079	16°	●	●	●	●	-	
	SOMT 140520ER-GH	0.558	0.219	0.228	-	0.079	16°	●	●	●	●	-	


Toolholder Reference Page

P16
P22


● : Standard Item

Cutting Performance (GM / GH / FL Chipbreakers)


MFH1000-W100-10-2T
MFH25-S25-10-2T

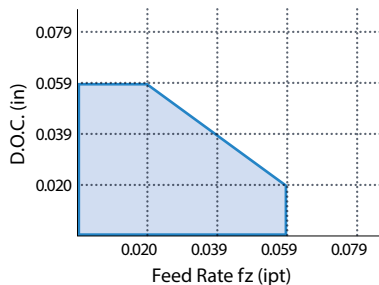


MFH1250-W125-10-○T
MFH32-S32-10-○T

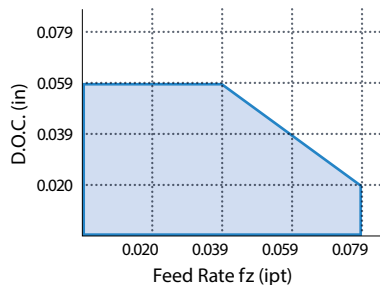


MFH1500-W150-10-○T
MFH40-S32-10-○T

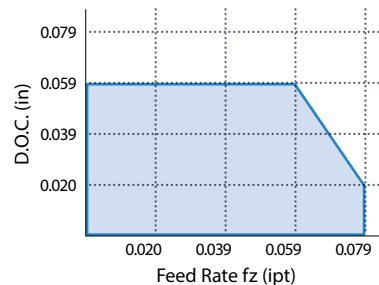

MFH2000R ~ 3000R-10-○T
MFH050R ~ 080R-10-○T

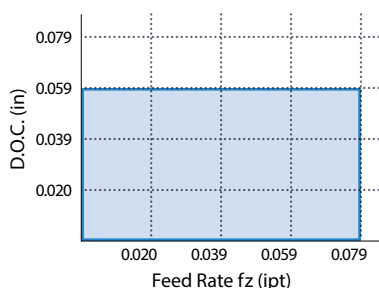

MFH...-14-○T

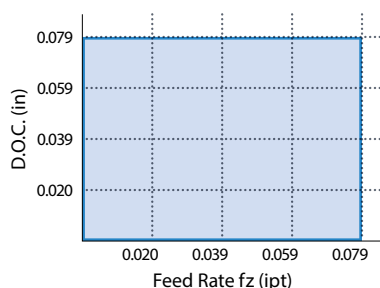

LD Chipbreaker:
MAX D.O.C. for LD chipbreaker is 0.197" (0.138" for SOMT10)
Please refer to P24-25 for feed rate

End Mill:
Please refer to the application map above

Face Mill:
MAX feed rate (inches per tooth) fz = 0.079ipt

Chipbreaker	Workpiece	Holder Part Number and Feed Rate (fz: ipt)					Recommended Insert Grade (Vc: sfm)					
		End Mill Feed Rates			Face Mill Feed Rates		MEGACOAT NANO			MEGACOAT HARD	CVD Coated Carbide	
		MFH1000 MFH25-	MFH1250 MFH32-	MFH1500 MFH40-	MFH...R-10	MFH...-14	PR1535	PR1525	PR1510	PR0155	CA6535	
GM GH	Carbon Steel	① 0.020 - 0.032 - 0.039 ② 0.008 - 0.016 - 0.020	① 0.020 - 0.039 - 0.059 ② 0.012 - 0.028 - 0.039	① 0.020 - 0.047 - 0.071 ② 0.016 - 0.039 - 0.059	0.020 - 0.059 - 0.079		☆ 390 - 590 - 820	★ 390 - 590 - 820	-	-	-	
	Alloy Steel	① 0.020 - 0.032 - 0.039 ② 0.008 - 0.016 - 0.020	① 0.020 - 0.039 - 0.059 ② 0.012 - 0.028 - 0.039	① 0.020 - 0.047 - 0.071 ② 0.016 - 0.039 - 0.059	0.020 - 0.059 - 0.079		☆ 330 - 520 - 720	★ 330 - 520 - 720	-	-	-	
	Mold Steel	~ 40HRc	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		☆ 260 - 460 - 590	☆ 260 - 460 - 590	-	GH ★ 260 - 460 - 590	-
		40~50HRc	① 0.006 - 0.012 - 0.020 ② 0.006 - 0.008 - 0.010	① 0.008 - 0.020 - 0.032 ② 0.008 - 0.012 - 0.018	① 0.008 - 0.024 - 0.035 ② 0.008 - 0.020 - 0.028	0.008 - 0.028 - 0.039		☆ 200 - 330 - 430	☆ 200 - 330 - 430	-	GH ★ 200 - 330 - 430	-
		50~55HRc	① 0.006 - 0.010 - 0.016	① 0.006 - 0.014 - 0.024	① 0.006 - 0.010 - 0.028	0.008 - 0.020 - 0.031		-	☆ 200 - 330 - 430	-	GH ★ 160 - 230 - 330	-
		55~60HRc	① 0.0004 - 0.0024 - 0.0039 (Recommended only with GH chipbreaker)					-	-	-	GH ★ 160 - 200 - 230	-
	Austenitic Stainless Steel	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		GM ☆ 330 - 520 - 660	GM ☆ 330 - 520 - 660	-	-	-	
	Martensitic Stainless Steel	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		☆ 490 - 660 - 820	-	-	-	★ 590 - 790 - 980	
	Precipitation Hardened Stainless Steel	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		★ 300 - 390 - 490	-	-	-	-	
	Gray Cast Iron	① 0.020 - 0.032 - 0.039 ② 0.008 - 0.016 - 0.020	① 0.020 - 0.039 - 0.059 ② 0.012 - 0.028 - 0.039	① 0.020 - 0.047 - 0.071 ② 0.016 - 0.039 - 0.059	0.020 - 0.059 - 0.079		-	-	★ 390 - 590 - 820	-	-	
Nodular Cast Iron	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		-	-	★ 330 - 490 - 660	-	-		
Ni-base Heat Resistant Alloy	① 0.008 - 0.016 - 0.024 ② 0.006 - 0.008 - 0.012	① 0.008 - 0.020 - 0.035 ② 0.008 - 0.016 - 0.024	① 0.008 - 0.024 - 0.039 ② 0.008 - 0.020 - 0.032	0.008 - 0.032 - 0.047		☆ 70 - 100 - 160	-	-	-	★ 70 - 100 - 160		
Titanium Alloy	① 0.008 - 0.016 - 0.024 ② 0.006 - 0.008 - 0.012	① 0.008 - 0.020 - 0.035 ② 0.008 - 0.016 - 0.024	① 0.008 - 0.024 - 0.039 ② 0.008 - 0.020 - 0.032	0.008 - 0.032 - 0.047		GM ★ 130 - 200 - 260	-	GM ☆ 100 - 160 - 230	-	-		
LD	Carbon Steel	① 0.020 - 0.032 - 0.039 ③ 0.002 - 0.004 - 0.008	① 0.020 - 0.039 - 0.059 ③ 0.002 - 0.006 - 0.012	① 0.020 - 0.047 - 0.071 ③ 0.002 - 0.008 - 0.012	① 0.020 - 0.059 - 0.079 ③ 0.002 - 0.008 - 0.012	④ 0.020 - 0.059 - 0.079 ⑤ 0.002 - 0.008 - 0.016	☆ 390 - 590 - 820	★ 390 - 590 - 820	-	-	-	
	Alloy Steel	① 0.020 - 0.032 - 0.039 ③ 0.002 - 0.004 - 0.008	① 0.020 - 0.039 - 0.059 ③ 0.002 - 0.006 - 0.012	① 0.020 - 0.047 - 0.071 ③ 0.002 - 0.008 - 0.012	① 0.020 - 0.059 - 0.079 ③ 0.002 - 0.008 - 0.012	④ 0.020 - 0.059 - 0.079 ⑤ 0.002 - 0.008 - 0.016	☆ 330 - 520 - 720	★ 330 - 520 - 720	-	-	-	
	Mold Steel (~40HRc)	① 0.020 - 0.028 - 0.032 ③ 0.002 - 0.003 - 0.006	① 0.020 - 0.032 - 0.047 ③ 0.002 - 0.004 - 0.008	① 0.020 - 0.039 - 0.063 ③ 0.002 - 0.006 - 0.008	① 0.020 - 0.047 - 0.071 ③ 0.002 - 0.006 - 0.008	④ 0.020 - 0.047 - 0.071 ⑤ 0.002 - 0.006 - 0.012	☆ 260 - 460 - 590	★ 260 - 460 - 590	-	-	-	
	Mold Steel (40~50HRc)	① 0.008 - 0.012 - 0.020 ③ 0.001 - 0.002 - 0.004	① 0.008 - 0.020 - 0.032 ③ 0.001 - 0.003 - 0.006	① 0.008 - 0.024 - 0.035 ③ 0.001 - 0.004 - 0.006	① 0.008 - 0.028 - 0.039 ③ 0.001 - 0.004 - 0.006	④ 0.008 - 0.028 - 0.039 ⑤ 0.001 - 0.004 - 0.008	☆ 200 - 330 - 430	★ 200 - 330 - 430	-	-	-	
	Austenitic Stainless Steel	① 0.020 - 0.028 - 0.032 ③ 0.002 - 0.003 - 0.006	① 0.020 - 0.032 - 0.047 ③ 0.002 - 0.004 - 0.008	① 0.020 - 0.039 - 0.063 ③ 0.002 - 0.006 - 0.008	① 0.020 - 0.047 - 0.071 ③ 0.002 - 0.006 - 0.008	④ 0.020 - 0.047 - 0.071 ⑤ 0.002 - 0.006 - 0.012	★ 330 - 520 - 660	☆ 330 - 520 - 660	-	-	-	
	Martensitic Stainless Steel	① 0.020 - 0.028 - 0.032 ③ 0.002 - 0.003 - 0.006	① 0.020 - 0.032 - 0.047 ③ 0.002 - 0.004 - 0.008	① 0.020 - 0.039 - 0.063 ③ 0.002 - 0.006 - 0.008	① 0.020 - 0.047 - 0.071 ③ 0.002 - 0.006 - 0.008	④ 0.020 - 0.047 - 0.071 ⑤ 0.002 - 0.006 - 0.012	☆ 490 - 660 - 820	-	-	-	★ 590 - 790 - 980	
	Precipitation Hardened Stainless Steel	① 0.020 - 0.028 - 0.032 ③ 0.002 - 0.003 - 0.006	① 0.020 - 0.032 - 0.047 ③ 0.002 - 0.004 - 0.008	① 0.020 - 0.039 - 0.063 ③ 0.002 - 0.006 - 0.008	① 0.020 - 0.047 - 0.071 ③ 0.002 - 0.006 - 0.008	④ 0.020 - 0.047 - 0.071 ⑤ 0.002 - 0.006 - 0.012	★ 300 - 390 - 490	-	-	-	-	
	Gray Cast Iron	① 0.020 - 0.032 - 0.039 ③ 0.002 - 0.004 - 0.008	① 0.020 - 0.039 - 0.059 ③ 0.002 - 0.006 - 0.012	① 0.020 - 0.047 - 0.071 ③ 0.002 - 0.008 - 0.012	① 0.020 - 0.059 - 0.079 ③ 0.002 - 0.008 - 0.012	④ 0.020 - 0.059 - 0.079 ⑤ 0.002 - 0.008 - 0.016	-	-	★ 390 - 590 - 820	-	-	
	Nodular Cast Iron	① 0.020 - 0.028 - 0.032 ③ 0.002 - 0.003 - 0.006	① 0.020 - 0.032 - 0.047 ③ 0.002 - 0.004 - 0.008	① 0.020 - 0.039 - 0.063 ③ 0.002 - 0.006 - 0.008	① 0.020 - 0.047 - 0.071 ③ 0.002 - 0.006 - 0.008	④ 0.020 - 0.047 - 0.071 ⑤ 0.002 - 0.006 - 0.012	-	-	★ 330 - 490 - 660	-	-	
	Ni-base Heat Resistant Alloy	① 0.008 - 0.016 - 0.024 ③ 0.001 - 0.002 - 0.004	① 0.008 - 0.020 - 0.035 ③ 0.001 - 0.003 - 0.006	① 0.008 - 0.024 - 0.039 ③ 0.001 - 0.004 - 0.006	① 0.008 - 0.032 - 0.047 ③ 0.001 - 0.004 - 0.006	④ 0.008 - 0.032 - 0.047 ⑤ 0.001 - 0.004 - 0.008	☆ 70 - 100 - 160	-	-	-	★ 70 - 100 - 160	
Titanium Alloy	① 0.008 - 0.016 - 0.024 ③ 0.001 - 0.002 - 0.004	① 0.008 - 0.020 - 0.035 ③ 0.001 - 0.003 - 0.006	① 0.008 - 0.024 - 0.039 ③ 0.001 - 0.004 - 0.006	① 0.008 - 0.032 - 0.047 ③ 0.001 - 0.004 - 0.006	④ 0.008 - 0.032 - 0.047 ⑤ 0.001 - 0.004 - 0.008	★ 130 - 200 - 260	-	☆ 100 - 160 - 230	-	-		


① For D.O.C. ≤ 0.039" • Machining with coolant is recommended for Ni-base Heat Resistant Alloy and Titanium Alloy
 ② For D.O.C. 0.040 - 0.059" • The figure in bold font is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation.
 ③ For D.O.C. 0.040 - 0.138" • Machining with CAT30 or equivalent, feed rate should be reduced to 25% of recommended cutting conditions
 ④ For D.O.C. ≤ 0.079" • Internal coolant is recommended for slotting applications
 ⑤ For D.O.C. 0.080 - 0.197" • For finishing, maximum recommended feed is f = 0.059 ipt for **SOMT14-LD** type, f = 0.035 ipt for **SOMT10-LD** type, f = 0.118 ipt for **SOMT14-FL** type, f = 0.055 ipt for **SOMT10-FL** type

Chipbreaker	Workpiece	Holder Part Number and Feed Rate (fz: ipt)					Recommended Insert Grade (Vc: sfm)				
		End Mill Feed Rates			Face Mill Feed Rates		MEGACOAT NANO			MEGACOAT HARD	CVD Coated Carbide
		MFH1000 MFH25-	MFH1250 MFH32-	MFH1500 MFH40-	MFH...R-10	MFH...-14	PR1535	PR1525	PR1510	PR0155	CA6535
FL	Carbon Steel	① 0.020 - 0.032 - 0.039 ② 0.008 - 0.016 - 0.020	① 0.020 - 0.039 - 0.059 ② 0.012 - 0.028 - 0.039	① 0.020 - 0.047 - 0.071 ② 0.016 - 0.039 - 0.059	0.020 - 0.059 - 0.079		☆ 390 - 590 - 820	★ 390 - 590 - 820	-	-	-
	Alloy Steel	① 0.020 - 0.032 - 0.039 ② 0.008 - 0.016 - 0.020	① 0.020 - 0.039 - 0.059 ② 0.012 - 0.028 - 0.039	① 0.020 - 0.047 - 0.071 ② 0.016 - 0.039 - 0.059	0.020 - 0.059 - 0.079		☆ 330 - 520 - 720	★ 330 - 520 - 720	-	-	-
	Mold Steel (~40HRC)	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		☆ 260 - 460 - 590	★ 260 - 460 - 590	-	-	-
	Mold Steel (40~50HRC)	① 0.006 - 0.012 - 0.020 ② 0.006 - 0.008 - 0.010	① 0.008 - 0.020 - 0.032 ② 0.008 - 0.012 - 0.018	① 0.008 - 0.024 - 0.035 ② 0.008 - 0.020 - 0.028	0.008 - 0.028 - 0.039		☆ 200 - 330 - 430	★ 200 - 330 - 430	-	-	-
	Austenitic Stainless Steel	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		★ 330 - 520 - 660	☆ 330 - 520 - 660	-	-	-
	Martensitic Stainless Steel	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		☆ 490 - 660 - 820	-	-	-	★ 590 - 790 - 980
	Precipitation Hardened Stainless Steel	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		★ 300 - 390 - 490	-	-	-	-
	Gray Cast Iron	① 0.020 - 0.032 - 0.039 ② 0.008 - 0.016 - 0.020	① 0.020 - 0.039 - 0.059 ② 0.012 - 0.028 - 0.039	① 0.020 - 0.047 - 0.071 ② 0.016 - 0.039 - 0.059	0.020 - 0.059 - 0.079		-	-	★ 390 - 590 - 820	-	-
	Nodular Cast Iron	① 0.020 - 0.028 - 0.032 ② 0.008 - 0.012 - 0.016	① 0.020 - 0.032 - 0.047 ② 0.012 - 0.024 - 0.032	① 0.020 - 0.039 - 0.063 ② 0.016 - 0.032 - 0.047	0.020 - 0.047 - 0.071		-	-	★ 330 - 490 - 660	-	-
	Ni-base Heat Resistant Alloy	① 0.008 - 0.016 - 0.024 ② 0.006 - 0.008 - 0.012	① 0.008 - 0.020 - 0.035 ② 0.008 - 0.016 - 0.024	① 0.008 - 0.024 - 0.039 ② 0.008 - 0.020 - 0.032	0.008 - 0.032 - 0.047		☆ 70 - 100 - 160	-	-	-	★ 70 - 100 - 160
	Titanium Alloy	① 0.008 - 0.016 - 0.024 ② 0.006 - 0.008 - 0.012	① 0.008 - 0.020 - 0.035 ② 0.008 - 0.016 - 0.024	① 0.008 - 0.024 - 0.039 ② 0.008 - 0.020 - 0.032	0.008 - 0.032 - 0.047		★ 130 - 200 - 260	-	☆ 100 - 160 - 230	-	-

- ① For D.O.C. ≤ 0.039"
 - ② For D.O.C. 0.040 - 0.059"
 - ③ For D.O.C. 0.040 - 0.138"
 - ④ For D.O.C. ≤ 0.079"
 - ⑤ For D.O.C. 0.080 - 0.197"
- Machining with coolant is recommended for Ni-base Heat Resistant Alloy and Titanium Alloy
 - The figure in bold font is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation.
 - Machining with CAT30 or equivalent, feed rate should be reduced to 25% of recommended cutting conditions
 - Internal coolant is recommended for slotting applications
 - For finishing, maximum recommended feed is f = 0.059 ipt for **SOMT14-LD** type, f = 0.035 ipt for **SOMT10-LD** type, f = 0.118 ipt for **SOMT14-FL** type, f = 0.055 ipt for **SOMT10-FL** type

Case Studies

Construction Machine Parts 1025



Vc = 720 sfm (n = 1,750 rpm)
 f = 0.028 ipr (Vf = 192.913 ipm)
 D.O.C. × ae = 0.059" × 1.181", Dry
 MFH1500-W150-10-4T
 SOMT100420ER-GM PR1525

Cutting Time

PR1525

950 Sec




Competitor N (90° Cutter)

3,800 Sec

PR1525 features a higher number of passes compared to Competitor N, but the machining time was reduced by 75% because the feed rate can be increased by 7 times. (User Evaluation)

Clutch 304

Reduced Chattering

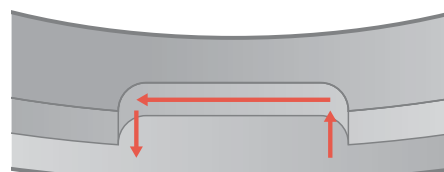

Vc = 400 sfm (n = 1,190 rpm), fz = 0.047 ipt (Vf = 112.205 ipm)
 D.O.C. × ae = 0.039" × 0.787", Dry
 MFH1250-W125-10-2T (2 Flutes), SOMT100420ER-GM (PR1535)

Cutting Time

PR1535

58 cc/min




Competitor M

36 cc/min

PR1535 shows stable machining while Competitor M generated chattering. PR1535 maintained a good cutting edge condition with stable machining. (User Evaluation)

BT Arbor (for Exchangeable Head / Two Face Contact)

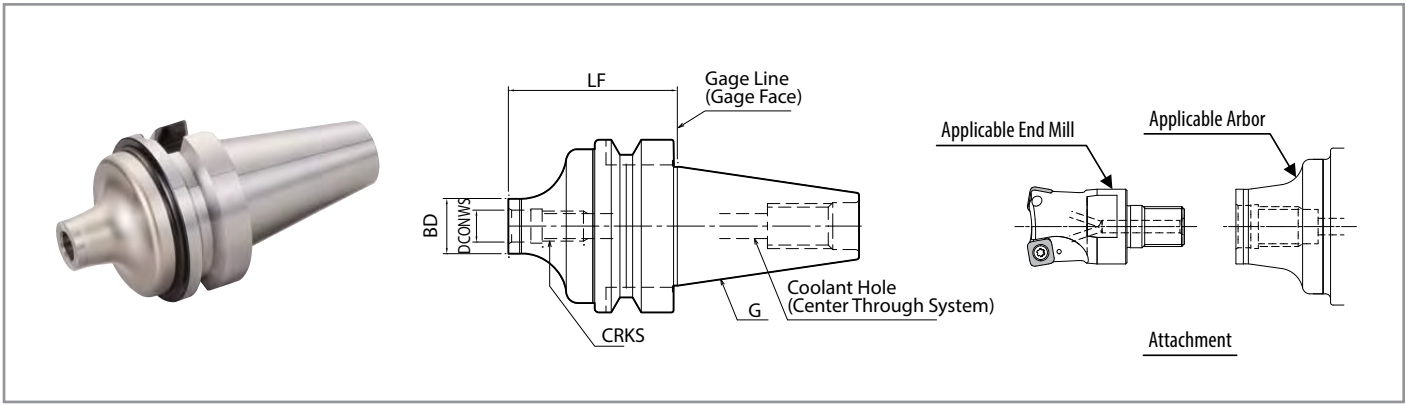

Holder Dimensions


Part Number	Stock	Dimensions (mm)				Coolant Hole	Arbor (Two Face Clamping)	Applicable End Mill (Head)
		L	BD	DCONWS	CRKS			
BT30K- M08-45	<input type="checkbox"/>	45	14.7	8.5	M8×P1.25	✓	BT30	MFH..-M08..
	<input checked="" type="checkbox"/>	45	18.7	10.5	M10×P1.5		BT30	MFH..-M10..
	<input checked="" type="checkbox"/>	45	23	12.5	M12×P1.75		BT30	MFH..-M12..
BT40K- M08-55	<input type="checkbox"/>	55	14.7	8.5	M8×P1.25	✓	BT40	MFH..-M08..
	<input type="checkbox"/>	60	18.7	10.5	M10×P1.5		BT40	MFH..-M10..
	<input type="checkbox"/>	55	23	12.5	M12×P1.75		BT40	MFH..-M12..
	<input type="checkbox"/>	65	30	17	M16×P2.0		BT40	MFH..-M16..

Actual End Mill Depth (BT Arbor Metric)


● : Standard Item □ : Made to Order

Arbor Part Number	Applicable End Mill			Actual End Mill Depth (mm)
	Part Number	Cutting Dia. (mm)	Dimension (mm)	LUX
		DC	LF	
BT30K- M08-45	MFH16-M08-01...	16	22	28.8
	MFH16-M08-03...	16	25	31.8
	MFH17-M08-03...	17	25	33.2
	MFH18-M08-03...	18	25	34.2
	MFH20-M10-03...	20	30	36.8
	MFH22-M10-03...	22	30	39.2
M10-45	MFH25-M12-..	25	35	42.8
	MFH28-M12-..	28	35	45.5
BT40K- M08-55	MFH16-M08-01...	16	22	28.7
	MFH16-M08-03...	16	25	31.7
	MFH17-M08-03...	17	25	33.2
M10-60	MFH18-M08-03...	18	25	34.3
	MFH20-M10-03...	20	30	38.7
	MFH22-M10-03...	22	30	44.5
M12-55	MFH25-M12-..	25	35	44.6
	MFH28-M12-..	28	35	47.6
M16-65	MFH32-M16-..	32	40	51.2
	MFH35-M16-10...	35	40	60.2
	MFH40-M16-10...	40	40	64

Arbor Identification System

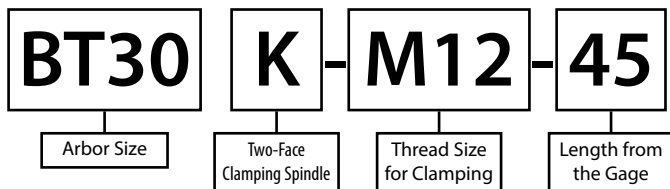

Approximate Programming Radius Adjustment

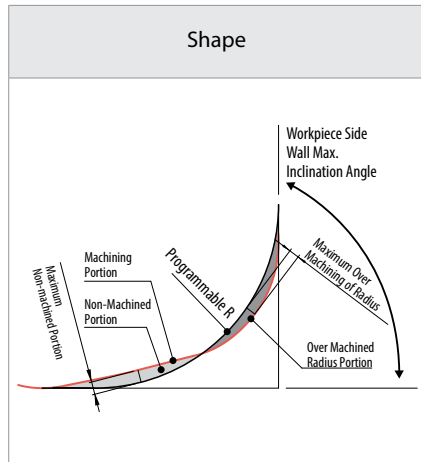

MFH Micro			MFH Mini		
Programmable R (in)	Maximum Over Machining of Radius (in)	Over Machined Radius Portion (in)	Programmable R (in)	Maximum Over Machining of Radius (in)	Maximum Non-machined Portion (in)
R0.039	0	0.0083	R0.063 (Recommended)	0	0.0154
R0.047 (Recommended)	0	0.0067	R0.079	0.0035	0.0138
R0.059	0.0032	0.0039	R0.098	0.0102	0.0102
R0.079	0.0110	0.0004	R0.118	0.0181	0.0067

MFH Micro / MFH Mini: Cutting Edge Angle $\gamma(^{\circ}) = 12^{\circ}$, Side Wall Max. Inclination Angle = 90°

MFH (GM / GH)						
Cutter	Insert	Cutting Edge Angle $\gamma(^{\circ})$	Programmable R (in) (Recommended)	Maximum Over Machining of Radius (in)	Maximum Non-machined Portion (in)	Workpiece Side Wall Max. Inclination Angle
MFH... -10-...	GM / GH	10°	R0.118	0	0.034	90°
	LD	14°	R0.148	0	0.027	65°
	FL	14°	R0.118	0	0.035	80°
MFH... -14-...	GM / GH	10°	R0.148	0	0.054	90°
	LD	16°	R0.197	0	0.042	65°
	FL	13°	R0.118	0	0.054	80°

Ramping Reference Data

Cutter Type	Cutter Dia. DCX (in)	-	0.375"	0.500"	-	0.625"
	Cutter Dia. DCX (mm)	8mm	10mm	12mm	14mm	16mm
MFH Micro	Max. Ramping Angle RMPX ($^{\circ}$)	4.0 $^{\circ}$	3.0 $^{\circ}$	2.0 $^{\circ}$	1.5 $^{\circ}$	1.2 $^{\circ}$
	tan RMPX	0.070	0.052	0.035	0.026	0.021

Cutter Type	Cutter Dia. DCX (in)	0.625"	-	-	0.750"	-	1.000"	-	1.250"	1.500"	2.000"
	Cutter Dia. DCX (mm)	16mm	17mm	18mm	20mm	22mm	25mm	28mm	32mm	40mm	50mm
MFH Mini	Max. Ramping Angle RMPX ($^{\circ}$)	2.8 $^{\circ}$	2.5 $^{\circ}$	2.1 $^{\circ}$	1.7 $^{\circ}$	1.4 $^{\circ}$	1.2 $^{\circ}$	1 $^{\circ}$	0.8 $^{\circ}$	0.5 $^{\circ}$	0.4 $^{\circ}$
	tan RMPX	0.049	0.042	0.037	0.030	0.024	0.021	0.017	0.014	0.009	0.007

Cutter Type	Cutter Dia. DCX (in)	1.000"	-	1.250"	-	1.500"	2.000"	2.500"	3.000"
	Cutter Dia. DCX (mm)	25mm	28mm	32mm	35mm	40mm	50mm	63mm	80mm
MFH (MFH...-10-...)	Max. Ramping Angle RMPX ($^{\circ}$)	5 $^{\circ}$	4.5 $^{\circ}$	4 $^{\circ}$	3.5 $^{\circ}$	3 $^{\circ}$	2.5 $^{\circ}$	2 $^{\circ}$	1 $^{\circ}$
	tan RMPX	0.087	0.078	0.070	0.061	0.052	0.043	0.035	0.017

Cutter Type	Cutter Dia. DCX (in)	2.000"	2.500"	3.000"	4.000"	5.000"	6.000"
	Cutter Dia. DCX (mm)	50mm	63mm	80mm	100mm	125mm	160mm
MFH (MFH...-14-...)	Max. Ramping Angle RMPX ($^{\circ}$)	2 $^{\circ}$	1.8 $^{\circ}$	1 $^{\circ}$	0.5 $^{\circ}$	0.4 $^{\circ}$	0.2 $^{\circ}$
	tan RMPX	0.035	0.031	0.017	0.009	0.007	0.003

Decrease Ramping Angle if Chips Become Excessively Long


Ramping angle should be under RMPX (maximum ramping angle) in the cutting conditions above

Reduce recommended feed rate in recommended cutting conditions by 70%

Multiple step slot milling is NOT recommended for MFH-Mini face mill diameters above $\phi 1.3"$ due to a danger of re-cutting chips

Formula for Max. Cutting Length (L) at Max. Ramping Angle

$$L = \frac{D.O.C.}{\tan RMPX}$$

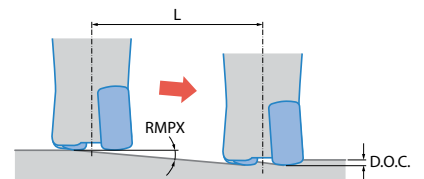


Helical Milling

For Helical milling, use between Min. Drilling Dia. and Max. Drilling Dia.



Exceeding Max. Machining Dia.

Center Core Remains After Machining



Under Min. Machining Dia.

Center Core Hits Holder Body



Cutter Type	Min. Drilling Dia.	Max. Drilling Dia.	Max. Ramping Depth per Cycle
MFH Micro	2xDCX-0.138"	2xDCX-0.079"	0.020"
MFH Mini	2xDCX-0.315"	2xDCX-0.079"	0.039"
MFH (MFH...-10-...)	2xDCX-0.709"	2xDCX-0.079"	GM = 0.059"
MFH (MFH...-14-...)	2xDCX-0.984"	2xDCX-0.079"	GM = 0.079"


- Keep machine depth per rotation less than max D.O.C. (S) in cutter dimensions chart
- Feed rate should be reduced to 50% of the recommended cutting conditions
- Use caution to eliminate incidences caused by producing long chips

Drilling

Cutter Type	Max. Drilling Depth (Pd)	Min. Cutting Length (X) for Flat Bottom Surface
MFH Micro	0.020"	DCX-0.138"
MFH Mini	0.039"	DCX-0.354"

Unit: inch

Cutter Type	GM		LD		FL	
	Max. Drilling Depth (Pd)	Min. Cutting Length (X) for Flat Bottom Surface	Max. Drilling Depth (Pd)	Min. Cutting Length (X) for Flat Bottom Surface	Max. Drilling Depth (Pd)	Min. Cutting Length (X) for Flat Bottom Surface
MFH (MFH...-10-...)	0.059"	DCX-0.709"	0.059"	DCX-0.551"	0.059"	DCX-0.591"
MFH (MFH...-14-...)	0.079"	DCX-0.945"	0.079"	DCX-0.709"	0.079"	DCX-0.748"

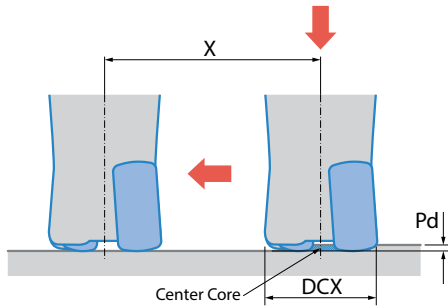


[Drilling Depth]

See Max. Drilling Depth (Pd) in the above cutting conditions

Traversing after Drilling

- It is recommended to reduce feed by 25% of recommendation on **Page 24-25** until Center Core is removed
- Axial feed rate recommendation per revolution is 0.008 ipr while drilling

Plunging




LD and FL chipbreakers are not available for plunging

Reduce feed rate to $fz \leq 0.008 \text{ipt}$ when plunging


Cutter Type	Insert	Maximum Width of Cut (ae)
MFH Micro	LPGT01...	0.067"
MFH Mini	LOGU03...	0.138"
MFH (MFH...-10-...)	SOMT10...	0.315"
MFH (MFH...-14-...)	SOMT14...	0.453"

3D Machining


GM chipbreaker is available for all applications.




Face Milling & Shouldering




Slotting




Ramping



Helical Milling



Pocketing



Contouring

Insert	Ramping	Contouring (Rising Wall Angle)	Plunging	Helical Milling	Pocketing
GM / GH	✓	✓ (90°)	✓	✓	✓
LD	✓	Limit (65°)	×	×	×
FL	✓	Limit (80°)	×	×	×

Some applications are not available depending on chipbreaker.

For FL and LD type, there is a limit of rising wall angle during contouring.



KYOCERA Precision Tools

102 Industrial Park Road
Hendersonville, NC 28792
Customer Service | 800.823.7284 - Option 1
Technical Support | 800.823.7284 - Option 2



W | Official Website | www.kyoceraprecisiontools.com
W | Distributor Website | <http://mykpti.kyocera.com>
E | cuttingtools@kyocera.com