

AHB

TOOLING & MACHINERY

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225

www.ahbinc.com

ISO Certified

customerservice@ahbinc.com

DIA  EDGE

AXD SERIES



MULTI-FUNCTIONAL MILLING CUTTER WITH UNIQUE
TECHNOLOGY FOR HIGH-SPEED AND HIGH EFFICIENCY MACHINING

 MITSUBISHI MATERIALS U.S.A.

TOOL NEWS | B116A



ABOUT OUR BRAND

Your manufacturing success is our success.

It's simple. We want to provide high-quality cutting tool products that help deliver unparalleled performance and control for you to manufacture precisely perfect products every day.

Our long heritage of building partnerships through cutting tool solutions to metal working manufacturers, like yours, has given Mitsubishi Materials USA a solid reputation as an industry leader. We understand the importance of getting it right the first time by delivering high-quality cutting tool product brands to help overcome machining challenges to improve machining processes.

Your success is our success and is the driving force behind our innovative products. Our product brands, DIAEDGE and MOLDINO, are trusted globally in the metal manufacturing and die & mold industries for delivering expertly-designed manufactured tools of the trade for highly specialized industries like yours.

With the acquisition of MOLDINO Tool Engineering, Ltd, our traditional Mitsubishi Materials USA cutting tool product line is now sold under the DIAEDGE product brand name.

Brands you can trust:

 **MITSUBISHI MATERIALS U.S.A.**

TRUSTED PRODUCT BRANDS

 **DIAEDGE**

 **MOLDINO**


For Machining of Aluminum and Titanium Alloys

AXD Series

Features

Multi Functional Milling

AXD Series for excellent multi-functional performance.


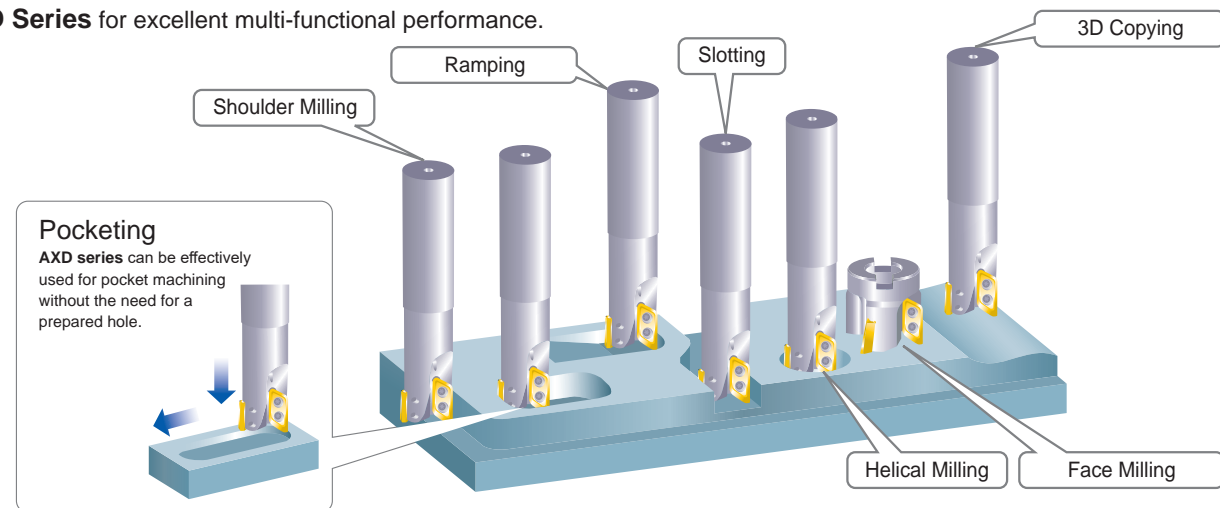


Designed for High Speed, Efficiency and Safety

At high spindle speeds the double clamping screws prevent insert displacement caused by centrifugal force. The double clamping offers both reliability and safety.

<Cutting Conditions>
 Tool : AXD4000UR0204A
 AXD7000UR0203A
 Insert : XDGX175008PDFR-GL
 XDGX227008PDFR-GL
 Spindle Speed : 20000min⁻¹
 Cutting Mode : Air Cutting

Insert Displacement due to Centrifugal Force

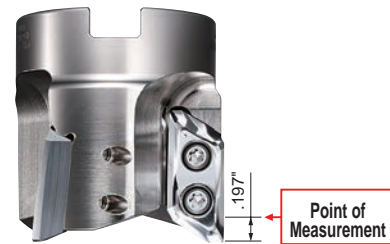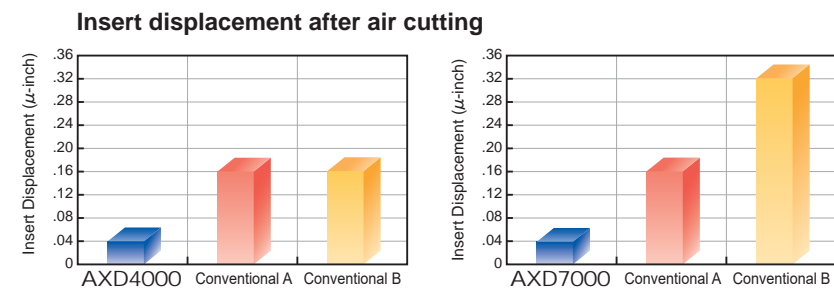

High Spindle Speeds Possible

Safe and reliable high spindle speed milling can be achieved due to the use of the double screw clamping and Mitsubishi Material's proprietary "Anti Fly Insert" mechanism (Double AFI).



High Balance Quality

To prevent vibration under high spindle speeds the holder is balanced to G6.3 or better at 10000min⁻¹, according to the ISO1940 standard. (The holder is balanced without the inserts and the screws in place)

AXD Insert Grades

Al-Ti-Cr-N Accumulated Coating Series

MP6100/MP9100

A fusion of separate coating technologies; PVD and multi-layering provides extra toughness.

Base Layer High Al-(Al, Ti)N
 The new technology Al-(Al, Ti)N coating provides stabilisation of the high hardness phase and succeeds in dramatically improving wear, crater and welding resistance.

Al-Ti-Cr-N Based PVD Coating

Ideal Layers for Different Workpiece Materials

| | | |
|--------------------|---|---------------------------|
| P MP6100 | (Al,Cr)N Tough! Against Thermal Cracks | Thermal Cracks |
| S MP9100 | CrN Tough! Resistant to Chipping | Chipping from Welding |

Multi-layering of the coating prevents any cracks penetrating through to the substrate.
 *Graphical Representation.

DLC Coated LC15TF

DLC coating prevents the chips from welding to the rake face that provides improved surface finishes and high efficiency machining. LC15TF can be used for both wet and dry machining.

Micro-Grain Cemented Carbide

TF15

Micro-grain cemented carbide with superior resistance to wear and fracturing. TF15 ensures stable cutting and efficient machining of aluminium alloys. The special mirror treatment on the rake face prevents chip welding for reliability and longer tool life.

GM Breaker

AXD4000



Improved fracture resistance compared to GL breaker


GL, GLA Breaker

AXD4000
AXD7000



Low cutting resistance breaker with emphasises on good sharpness

Use of AXD4000 and AXD7000

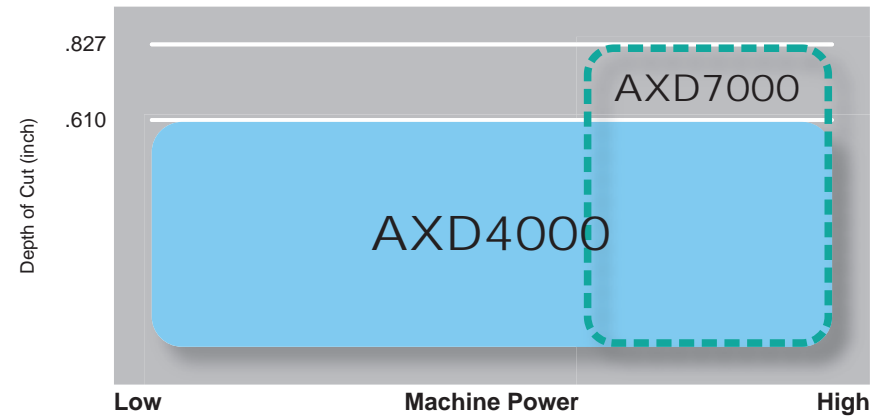


MULTI FUNCTIONAL MILLING

<ALUMINIUM ALLOY TO DIFFICULT-TO-CUT MATERIAL CUTTING>



AXD4000

P M K N S H
 Steel Non-ferrous Metal Heat Resistant Alloy

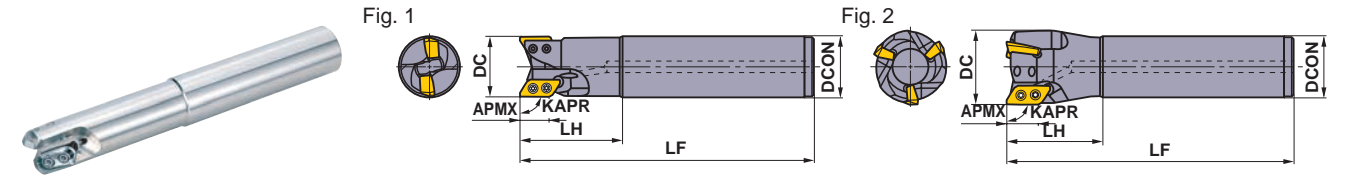

Right hand tool holder only.

Shank Type

With Coolant Hole

(inch)

| DC | Type | Insert Corner Radius RE | Order Number | Stock R | *1 No.T | LF | LH | DCON | WT (lbs) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|-------|--------|-------------------------|--------------------|---------|---------|-------|-------|-------|----------|------|---|------|-------------|
| | | | | | | | | | | | | | |
| 1.000 | B Type | .157-.197 | AXD4000UR162SA12SB | ● | 2 | 6.000 | 2.000 | .750 | .6 | .583 | 49000 | 2 | XDGX1750 |
| 1.000 | A Type | .016-.125 | AXD4000UR162SA16SA | ● | 2 | 6.000 | 2.000 | 1.000 | 1.1 | .610 | 49000 | 1 | XDGX1750 |
| 1.000 | B Type | .157-.197 | AXD4000UR162SA16SB | ● | 2 | 6.000 | 2.000 | 1.000 | 1.1 | .583 | 49000 | 1 | XDGX1750 |
| 1.000 | A Type | .016-.125 | AXD4000UR162SA16LA | ● | 2 | 8.500 | 3.000 | 1.000 | 1.6 | .610 | 49000 | 1 | XDGX1750 |
| 1.000 | B Type | .157-.197 | AXD4000UR162SA16LB | ● | 2 | 8.500 | 3.000 | 1.000 | 1.6 | .583 | 49000 | 1 | XDGX1750 |
| 1.250 | A Type | .016-.125 | AXD4000UR202SA20SA | ● | 2 | 6.000 | 2.000 | 1.250 | 1.8 | .610 | 48000 | 1 | XDGX1750 |
| 1.250 | B Type | .157-.197 | AXD4000UR202SA20SB | ● | 2 | 6.000 | 2.000 | 1.250 | 1.8 | .583 | 48000 | 1 | XDGX1750 |
| 1.250 | A Type | .016-.125 | AXD4000UR202SA20LA | ● | 2 | 9.000 | 3.500 | 1.250 | 2.7 | .610 | 48000 | 1 | XDGX1750 |
| 1.250 | B Type | .157-.197 | AXD4000UR202SA20LB | ● | 2 | 9.000 | 3.500 | 1.250 | 2.7 | .583 | 48000 | 1 | XDGX1750 |
| 1.500 | A Type | .016-.125 | AXD4000UR243SA20SA | ● | 3 | 6.000 | 2.000 | 1.250 | 1.9 | .610 | 41000 | 2 | XDGX1750 |
| 1.500 | B Type | .157-.197 | AXD4000UR243SA20SB | ● | 3 | 6.000 | 2.000 | 1.250 | 1.9 | .583 | 41000 | 2 | XDGX1750 |
| 1.500 | A Type | .016-.125 | AXD4000UR243SA20LA | ● | 3 | 9.000 | 2.000 | 1.250 | 2.9 | .610 | 41000 | 2 | XDGX1750 |
| 1.500 | B Type | .157-.197 | AXD4000UR243SA20LB | ● | 3 | 9.000 | 2.000 | 1.250 | 2.9 | .583 | 41000 | 2 | XDGX1750 |

*1 Number of Teeth

Note 1) The maximum allowable revolutions are set to ensure tool and insert stability.

Note 2) When using the tool at high spindle speeds, ensure that the tool and chuck are correctly balanced.

Note 3) For insert with a corner radius of .063 inch and above, as corner radius increases the LF and LH dimension decreases.


Spare Parts

(inch)

| | | |
|----------------------|------------------|-------------------------------|
| | | |
| Clamp Screw TS3SB | Wrench TKY08D | Anti-seize Lubricant MK1KS |

* Clamp Torque (lbf-in) : TS3SB=13

● : USA Stock

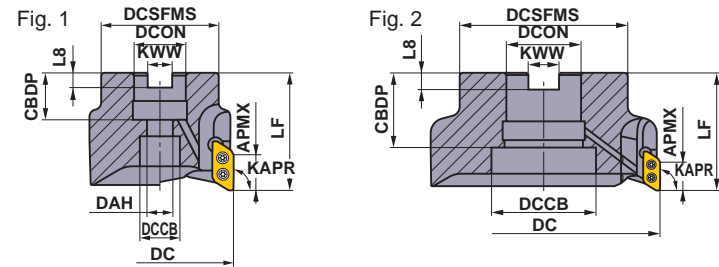

Right hand tool holder only.

| DC | DCON | Set Bolt | Geometry |
|--------------|-------|------------|----------|
| 1.500 | .500 | HSCU25014H | |
| 2.000 | .750 | HSCU37513H | |
| 2.500, 3.000 | 1.000 | HSCU50014H | |
| 3.000 | 1.250 | HSCU62516H | |
| 4.000 | 1.500 | HSCU75016H | |
| 5.000 | 1.500 | MBAU75016H | |

Arbor Type

| DC | Type | Insert Corner Radius RE | Order Number | Stock R | *1 No.T | LF | DCON | WT (lbs) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|-------|--------|-------------------------|-----------------|---------|---------|-------|-------|----------|------|---|------|-------------|
| | | | | | | | | | | | | |
| 1.500 | B Type | .157-.197 | AXD4000UR1502B | □ | 2 | 2.000 | .500 | .6 | .583 | 41000 | 1 | XDGX1750 |
| 1.500 | A Type | .016-.125 | AXD4000UR1503A | ● | 3 | 2.000 | .500 | .6 | .610 | 41000 | 1 | XDGX1750 |
| 1.500 | B Type | .157-.197 | AXD4000UR1503B | ● | 3 | 2.000 | .500 | .6 | .583 | 41000 | 1 | XDGX1750 |
| 2.000 | A Type | .016-.125 | AXD4000UR0202A | ● | 2 | 2.000 | .750 | .9 | .610 | 35000 | 1 | XDGX1750 |
| 2.000 | B Type | .157-.197 | AXD4000UR0202B | □ | 2 | 2.000 | .750 | .9 | .583 | 35000 | 1 | XDGX1750 |
| 2.000 | A Type | .016-.125 | AXD4000UR0203A | ● | 3 | 2.000 | .750 | .9 | .610 | 35000 | 1 | XDGX1750 |
| 2.000 | B Type | .157-.197 | AXD4000UR0203B | □ | 3 | 2.000 | .750 | .9 | .583 | 35000 | 1 | XDGX1750 |
| 2.000 | A Type | .016-.125 | AXD4000UR0204A | ● | 4 | 2.000 | .750 | .9 | .610 | 35000 | 1 | XDGX1750 |
| 2.000 | B Type | .157-.197 | AXD4000UR0204B | ● | 4 | 2.000 | .750 | .9 | .583 | 35000 | 1 | XDGX1750 |
| 2.500 | A Type | .016-.125 | AXD4000UR2504CA | ● | 4 | 2.000 | 1.000 | 1.4 | .610 | 30000 | 1 | XDGX1750 |
| 2.500 | B Type | .157-.197 | AXD4000UR2504CB | □ | 4 | 2.000 | 1.000 | 1.4 | .583 | 30000 | 1 | XDGX1750 |
| 3.000 | A Type | .016-.125 | AXD4000UR0303CA | ● | 3 | 2.000 | 1.000 | 1.9 | .610 | 27000 | 1 | XDGX1750 |
| 3.000 | B Type | .157-.197 | AXD4000UR0303CB | ● | 3 | 2.000 | 1.000 | 1.9 | .583 | 27000 | 1 | XDGX1750 |
| 3.000 | A Type | .016-.125 | AXD4000UR0305CA | ● | 5 | 2.000 | 1.000 | 1.8 | .610 | 27000 | 1 | XDGX1750 |
| 3.000 | B Type | .157-.197 | AXD4000UR0305CB | ● | 5 | 2.000 | 1.000 | 1.8 | .583 | 27000 | 1 | XDGX1750 |
| 3.000 | A Type | .016-.125 | AXD4000UR0303DA | ● | 3 | 2.500 | 1.250 | 2.9 | .610 | 27000 | 1 | XDGX1750 |
| 3.000 | B Type | .157-.197 | AXD4000UR0303DB | □ | 3 | 2.500 | 1.250 | 2.9 | .583 | 27000 | 1 | XDGX1750 |
| 3.000 | A Type | .016-.125 | AXD4000UR0305DA | ● | 5 | 2.500 | 1.250 | 2.9 | .610 | 27000 | 1 | XDGX1750 |
| 3.000 | B Type | .157-.197 | AXD4000UR0305DB | ● | 5 | 2.500 | 1.250 | 2.9 | .583 | 27000 | 1 | XDGX1750 |
| 4.000 | A Type | .016-.125 | AXD4000UR0404EA | ● | 4 | 2.500 | 1.500 | 5.5 | .610 | 23000 | 1 | XDGX1750 |
| 4.000 | B Type | .157-.197 | AXD4000UR0404EB | □ | 4 | 2.500 | 1.500 | 5.5 | .583 | 23000 | 1 | XDGX1750 |
| 4.000 | A Type | .016-.125 | AXD4000UR0406EA | ● | 6 | 2.500 | 1.500 | 5.5 | .610 | 23000 | 1 | XDGX1750 |
| 4.000 | B Type | .157-.197 | AXD4000UR0406EB | □ | 6 | 2.500 | 1.500 | 5.5 | .583 | 23000 | 1 | XDGX1750 |
| 5.000 | A Type | .016-.125 | AXD4000UR0505EA | ● | 5 | 2.500 | 1.500 | 6.7 | .610 | 20000 | 2 | XDGX1750 |
| 5.000 | B Type | .157-.197 | AXD4000UR0505EB | □ | 5 | 2.500 | 1.500 | 6.7 | .583 | 20000 | 2 | XDGX1750 |
| 5.000 | A Type | .016-.125 | AXD4000UR0507EA | ● | 7 | 2.500 | 1.500 | 6.7 | .610 | 20000 | 2 | XDGX1750 |
| 5.000 | B Type | .157-.197 | AXD4000UR0507EB | □ | 7 | 2.500 | 1.500 | 6.7 | .583 | 20000 | 2 | XDGX1750 |

*1 Number of Teeth

Note 1) The maximum allowable revolutions are set to ensure tool and insert stability.

Note 2) When using the tool at high spindle speeds, ensure that the tool and chuck are correctly balanced.

Note 3) For insert with a corner radius of .063 inch and above, as corner radius increases the LF and LH dimension decreases.

● : USA Stock □ : Made to Order

Mounting Dimensions

| DC | Cutter Body Type | DCON | CBDP | DAH | DCCB | LCCB | DCSFMS | KWW | L8 | Fig. |
|-------|------------------|-------|-------|------|-------|------|--------|------|------|------|
| 1.500 | AXD4000UR150_A | .500 | .630 | .276 | .433 | .500 | 1.440 | .250 | .156 | 1 |
| 1.500 | AXD4000UR150_B | .500 | .630 | .276 | .433 | .465 | 1.440 | .250 | .156 | 1 |
| 2.000 | AXD4000UR020_A | .750 | .748 | .413 | .433 | .582 | 1.750 | .313 | .187 | 1 |
| 2.000 | AXD4000UR020_B | .750 | .748 | .413 | .433 | .548 | 1.750 | .313 | .187 | 1 |
| 2.500 | AXD4000UR25_CA | 1.000 | .984 | .539 | .787 | .622 | 2.190 | .375 | .219 | 1 |
| 2.500 | AXD4000UR25_CB | 1.000 | .984 | .539 | .787 | .587 | 2.190 | .375 | .219 | 1 |
| 3.000 | AXD4000UR03_CA | 1.000 | .945 | .539 | .787 | .661 | 2.190 | .375 | .219 | 1 |
| 3.000 | AXD4000UR03_CB | 1.000 | .945 | .539 | .787 | .627 | 2.190 | .375 | .219 | 1 |
| 3.000 | AXD4000UR03_DA | 1.250 | 1.260 | .669 | 1.024 | .767 | 2.880 | .500 | .281 | 1 |
| 3.000 | AXD4000UR03_DB | 1.250 | 1.260 | .669 | 1.024 | .733 | 2.880 | .500 | .281 | 1 |
| 4.000 | AXD4000UR04_EA | 1.500 | 1.181 | .787 | 1.181 | .925 | 3.810 | .625 | .375 | 1 |
| 4.000 | AXD4000UR04_EB | 1.500 | 1.181 | .787 | 1.181 | .891 | 3.810 | .625 | .375 | 1 |
| 5.000 | AXD4000UR05_EA | 1.500 | 1.575 | — | 2.205 | .846 | 3.810 | .625 | .375 | 2 |
| 5.000 | AXD4000UR05_EB | 1.500 | 1.575 | — | 2.205 | .812 | 3.810 | .625 | .375 | 2 |

Spare Parts

| Clamp Screw | Wrench | Anti-seize Lubricant |
|-------------|--------|----------------------|
| TS3SB | TKY08D | MK1KS |

* Clamp Torque (lbf-in) : TS3SB=13

MULTI FUNCTIONAL MILLING

<ALUMINIUM ALLOY TO DIFFICULT-TO-CUT MATERIAL CUTTING>

AXD4000

Material selection buttons: P (Steel), M, K, N (Non-ferrous Metal), S (Heat Resistant Alloy), H.



Metric Standard

Shank Type

With Coolant Hole

| DC | Type | Insert Corner Radius RE | Order Number | Stock R | *1 No.T | LF | LH | DCON | WT (kg) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|----|--------|-------------------------|--------------------|---------|---------|-----|----|------|---------|------|---|------|-------------|
| | | | | | | | | | | | | | |
| 20 | B Type | 4.0-5.0 | AXD4000R201SA20SB | ★ | 1 | 110 | 35 | 20 | 0.22 | 14.8 | 15000 | 1 | XDGX1750 |
| 25 | A Type | 0.4-3.2 | AXD4000R252SA25SA | ★ | 2 | 125 | 50 | 25 | 0.38 | 15.5 | 49000 | 1 | XDGX1750 |
| 25 | B Type | 4.0-5.0 | AXD4000R252SA25SB | ★ | 2 | 125 | 50 | 25 | 0.38 | 14.8 | 49000 | 1 | XDGX1750 |
| 25 | A Type | 0.4-3.2 | AXD4000R252SA25LA | ★ | 2 | 170 | 80 | 25 | 0.53 | 15.5 | 49000 | 1 | XDGX1750 |
| 25 | B Type | 4.0-5.0 | AXD4000R252SA25LB | ★ | 2 | 170 | 80 | 25 | 0.53 | 14.8 | 49000 | 1 | XDGX1750 |
| 28 | A Type | 0.4-3.2 | AXD4000R282SA25SA | ★ | 2 | 125 | 50 | 25 | 0.41 | 15.5 | 48500 | 2 | XDGX1750 |
| 28 | B Type | 4.0-5.0 | AXD4000R282SA25SB | ★ | 2 | 125 | 50 | 25 | 0.41 | 14.8 | 48500 | 2 | XDGX1750 |
| 28 | A Type | 0.4-3.2 | AXD4000R282SA25ELA | ★ | 2 | 220 | 50 | 25 | 0.76 | 15.5 | 48500 | 2 | XDGX1750 |
| 28 | B Type | 4.0-5.0 | AXD4000R282SA25ELB | ★ | 2 | 220 | 50 | 25 | 0.76 | 14.8 | 48500 | 2 | XDGX1750 |
| 32 | A Type | 0.4-3.2 | AXD4000R322SA32SA | ★ | 2 | 150 | 50 | 32 | 0.80 | 15.5 | 48000 | 1 | XDGX1750 |
| 32 | B Type | 4.0-5.0 | AXD4000R322SA32SB | ★ | 2 | 150 | 50 | 32 | 0.80 | 14.8 | 48000 | 1 | XDGX1750 |
| 32 | A Type | 0.4-3.2 | AXD4000R322SA32LA | ★ | 2 | 200 | 80 | 32 | 1.09 | 15.5 | 48000 | 1 | XDGX1750 |
| 32 | B Type | 4.0-5.0 | AXD4000R322SA32LB | ★ | 2 | 200 | 80 | 32 | 1.09 | 14.8 | 48000 | 1 | XDGX1750 |
| 35 | A Type | 0.4-3.2 | AXD4000R352SA32SA | ★ | 2 | 150 | 50 | 32 | 0.84 | 15.5 | 45000 | 2 | XDGX1750 |
| 35 | B Type | 4.0-5.0 | AXD4000R352SA32SB | ★ | 2 | 150 | 50 | 32 | 0.84 | 14.8 | 45000 | 2 | XDGX1750 |
| 35 | A Type | 0.4-3.2 | AXD4000R352SA32ELA | ★ | 2 | 250 | 50 | 32 | 1.45 | 15.5 | 45000 | 2 | XDGX1750 |
| 35 | B Type | 4.0-5.0 | AXD4000R352SA32ELB | ★ | 2 | 250 | 50 | 32 | 1.45 | 14.8 | 45000 | 2 | XDGX1750 |
| 40 | A Type | 0.4-3.2 | AXD4000R403SA32SA | ★ | 3 | 150 | 50 | 32 | 0.87 | 15.5 | 41000 | 2 | XDGX1750 |
| 40 | B Type | 4.0-5.0 | AXD4000R403SA32SB | ★ | 3 | 150 | 50 | 32 | 0.87 | 14.8 | 41000 | 2 | XDGX1750 |
| 40 | A Type | 0.4-3.2 | AXD4000R403SA42SA | ★ | 3 | 170 | 80 | 42 | 1.53 | 15.5 | 41000 | 1 | XDGX1750 |
| 40 | B Type | 4.0-5.0 | AXD4000R403SA42SB | ★ | 3 | 170 | 80 | 42 | 1.53 | 14.8 | 41000 | 1 | XDGX1750 |
| 40 | A Type | 0.4-3.2 | AXD4000R403SA32ELA | ★ | 3 | 250 | 50 | 32 | 1.48 | 15.5 | 41000 | 2 | XDGX1750 |
| 40 | B Type | 4.0-5.0 | AXD4000R403SA32ELB | ★ | 3 | 250 | 50 | 32 | 1.48 | 14.8 | 41000 | 2 | XDGX1750 |

*1 Number of Teeth

Note 1) The maximum allowable revolutions are set to ensure tool and insert stability.

Before operating the tool read the operational guidance on page 30.

Note 2) When using the tool at high spindle speeds, ensure that the tool and chuck are correctly balanced.



Note 3) Note for inserts with a corner radius of 1.6 and above, as corner radius increases the LF and LH dimensions decrease.

Spare Parts




| DC | Clamp Screw | Wrench | Anti-seize Lubricant |
|-----|-------------|--------|----------------------|
| 20 | TS3SBS | TKY08D | MK1KS |
| >20 | TS3SB | TKY08D | MK1KS |

* Clamp Torque (N • m) : TS3SBS=1.5, TS3SB=1.5

★ : Stocked in Japan

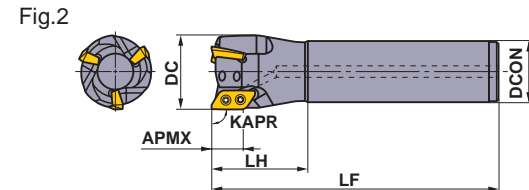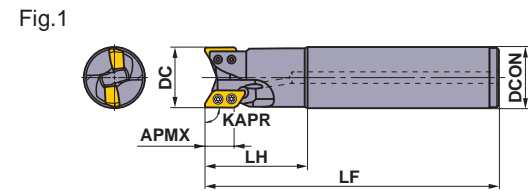

Right hand tool holder only. (mm)

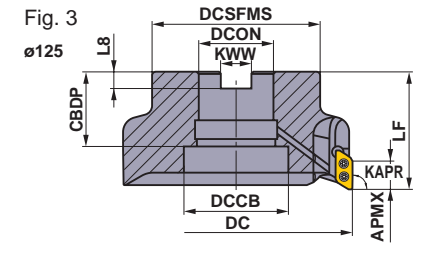

Right hand tool holder only.

Metric Standard

For metric arbors

Arbor Type

DCON=inch size, With Coolant Hole

| DC | Type | Insert Corner Radius RE | Order Number | Stock R | *1 No.T | LF | DCON | WT (kg) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|-----|--------|-------------------------|-----------------|---------|---------|----|-------|---------|------|---|------|-------------|
| | | | | | | | | | | | | |
| 80 | B Type | 4.0-5.0 | AXD4000R08005CB | ★ | 5 | 50 | 25.4 | 1.0 | 14.8 | 27000 | 2 | XDGX1750 |
| 100 | A Type | 0.4-3.2 | AXD4000R10006DA | ★ | 6 | 63 | 31.75 | 2.0 | 15.5 | 23000 | 2 | XDGX1750 |
| 100 | B Type | 4.0-5.0 | AXD4000R10006DB | ★ | 6 | 63 | 31.75 | 2.0 | 14.8 | 23000 | 2 | XDGX1750 |
| 125 | A Type | 0.4-3.2 | AXD4000R12507EA | ★ | 7 | 63 | 38.1 | 2.8 | 15.5 | 20000 | 3 | XDGX1750 |
| 125 | B Type | 4.0-5.0 | AXD4000R12507EB | ★ | 7 | 63 | 38.1 | 2.8 | 14.8 | 20000 | 3 | XDGX1750 |

DCON=mm size, With Coolant Hole

| DC | Type | Insert Corner Radius RE | Order Number | Stock R | *1 No.T | LF | DCON | WT (kg) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|-----|--------|-------------------------|------------------|---------|---------|----|------|---------|------|---|------|-------------|
| | | | | | | | | | | | | |
| 40 | B Type | 4.0-5.0 | AXD4000-040A02RB | ★ | 2 | 50 | 16 | 0.3 | 14.8 | 41000 | 1 | XDGX1750 |
| 40 | A Type | 0.4-3.2 | AXD4000-040A03RA | ★ | 3 | 50 | 16 | 0.3 | 15.5 | 41000 | 1 | XDGX1750 |
| 40 | B Type | 4.0-5.0 | AXD4000-040A03RB | ★ | 3 | 50 | 16 | 0.3 | 14.8 | 41000 | 1 | XDGX1750 |
| 50 | A Type | 0.4-3.2 | AXD4000-050A02RA | ★ | 2 | 50 | 22 | 0.4 | 15.5 | 35000 | 2 | XDGX1750 |
| 50 | B Type | 4.0-5.0 | AXD4000-050A02RB | ★ | 2 | 50 | 22 | 0.4 | 14.8 | 35000 | 2 | XDGX1750 |
| 50 | A Type | 0.4-3.2 | AXD4000-050A04RA | ★ | 4 | 50 | 22 | 0.4 | 15.5 | 35000 | 2 | XDGX1750 |
| 50 | B Type | 4.0-5.0 | AXD4000-050A04RB | ★ | 4 | 50 | 22 | 0.4 | 14.8 | 35000 | 2 | XDGX1750 |
| 63 | A Type | 0.4-3.2 | AXD4000-063A05RA | ★ | 5 | 50 | 22 | 0.6 | 15.5 | 30000 | 2 | XDGX1750 |
| 63 | B Type | 4.0-5.0 | AXD4000-063A05RB | ★ | 5 | 50 | 22 | 0.6 | 14.8 | 30000 | 2 | XDGX1750 |
| 80 | A Type | 0.4-3.2 | AXD4000-080A05RA | ★ | 5 | 50 | 27 | 1.0 | 15.5 | 27000 | 2 | XDGX1750 |
| 80 | B Type | 4.0-5.0 | AXD4000-080A05RB | ★ | 5 | 50 | 27 | 1.0 | 14.8 | 27000 | 2 | XDGX1750 |
| 100 | A Type | 0.4-3.2 | AXD4000-100A06RA | ★ | 6 | 63 | 32 | 2.0 | 15.5 | 23000 | 2 | XDGX1750 |
| 100 | B Type | 4.0-5.0 | AXD4000-100A06RB | ★ | 6 | 63 | 32 | 2.0 | 14.8 | 23000 | 2 | XDGX1750 |
| 125 | A Type | 0.4-3.2 | AXD4000-125B07RA | ★ | 7 | 63 | 40 | 2.8 | 15.5 | 20000 | 3 | XDGX1750 |
| 125 | B Type | 4.0-5.0 | AXD4000-125B07RB | ★ | 7 | 63 | 40 | 2.8 | 14.8 | 20000 | 3 | XDGX1750 |

*1 Number of Teeth

Note 1) The maximum allowable revolutions are set to ensure tool and insert stability.

Before operating the tool read the operational guidance on page 30.

Note 2) When using the tool at high spindle speeds, ensure that the tool and chuck are correctly balanced.

Note 3) Note for inserts with a corner radius of 1.6 and above, as corner radius increases the LF and LH dimensions decrease.




Mounting Dimensions

(mm)

| DC | Cutter Body Type | DCON | CBDP | DAH | DCCB | LCCB | DCSFMS | KWW | L8 | Fig. |
|-----|------------------|-------|------|------|------|-------|--------|------|------|------|
| 40 | AXD4000-040A | 16 | 18 | 8.5 | 12 | 10.40 | 34 | 8.4 | 5.6 | 1 |
| 50 | AXD4000-050A | 22 | 20 | 11.0 | 17 | 15.99 | 45 | 10.4 | 6.3 | 2 |
| 63 | AXD4000-063A | 22 | 20 | 11.0 | 17 | 19.99 | 50 | 10.4 | 6.3 | 2 |
| 80 | AXD4000R080 | 25.4 | 26 | 13.0 | 20 | 14.49 | 60 | 9.5 | 6.0 | 2 |
| 80 | AXD4000-080A | 27 | 23 | 13.0 | 20 | 14.49 | 60 | 12.4 | 7.0 | 2 |
| 100 | AXD4000R100 | 31.75 | 32 | 17.0 | 26 | 18.99 | 70 | 12.7 | 8.0 | 2 |
| 100 | AXD4000-100A | 32 | 26 | 17.0 | 26 | 24.99 | 78 | 14.4 | 8.0 | 2 |
| 125 | AXD4000R125 | 38.1 | 40 | — | 56 | 20.99 | 90 | 15.9 | 10.0 | 3 |
| 125 | AXD4000-125B | 40 | 40 | — | 56 | 20.99 | 90 | 16.4 | 9.0 | 3 |

Spare Parts


(mm)

| Image | Part Name | Part Number |
|---|----------------------|-------------|
|  | Clamp Screw | TS3SB |
|  | Wrench | TKY08D |
|  | Anti-seize Lubricant | MK1KS |

* Clamp Torque (N • m) : TS3SB=1.5



Fig

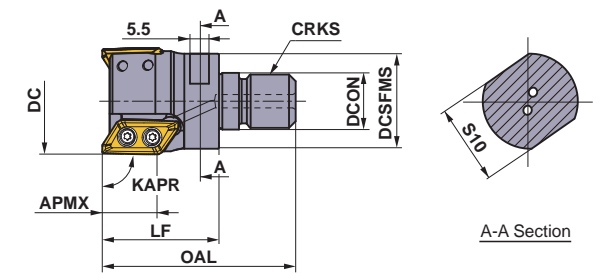

Right hand tool holder only.

NEW

Screw-in Type

With Coolant Hole

(mm)

| DC | Type | Insert Corner Radius RE | Order Number | Stock R | *1 No.T | DCON | DCSFMS | OAL | LF | S10 | CRKS | WT (kg) | APMX | Max. Spindle Speed (min ⁻¹) | Insert Type |
|----|--------|-------------------------|--------------------|---------|---------|------|--------|-----|----|-----|------|---------|------|---|-------------|
| | | | | | | | | | | | | | | | |
| 25 | B Type | 4.0-5.0 | AXD4000R252AM1228B | ★ | 2 | 12.5 | 23.5 | 50 | 28 | 19 | M12 | 0.06 | 14.8 | 49000 | XDGX1750 |
| 28 | A Type | 0.4-3.2 | AXD4000R282AM1228A | ★ | 2 | 12.5 | 23.5 | 50 | 28 | 19 | M12 | 0.07 | 15.0 | 48500 | XDGX1750 |
| 28 | B Type | 4.0-5.0 | AXD4000R282AM1228B | ★ | 2 | 12.5 | 23.5 | 50 | 28 | 19 | M12 | 0.07 | 14.8 | 48500 | XDGX1750 |
| 32 | A Type | 0.4-3.2 | AXD4000R322AM1635A | ★ | 2 | 17.0 | 28.5 | 58 | 35 | 24 | M16 | 0.15 | 15.0 | 48000 | XDGX1750 |
| 32 | B Type | 4.0-5.0 | AXD4000R322AM1635B | ★ | 2 | 17.0 | 28.5 | 58 | 35 | 24 | M16 | 0.15 | 14.8 | 48000 | XDGX1750 |
| 35 | A Type | 0.4-3.2 | AXD4000R353AM1635A | ★ | 3 | 17.0 | 28.5 | 58 | 35 | 24 | M16 | 0.15 | 15.0 | 41000 | XDGX1750 |
| 35 | B Type | 4.0-5.0 | AXD4000R353AM1635B | ★ | 3 | 17.0 | 28.5 | 58 | 35 | 24 | M16 | 0.15 | 14.8 | 41000 | XDGX1750 |
| 40 | A Type | 0.4-3.2 | AXD4000R403AM1635A | ★ | 3 | 17.0 | 28.5 | 58 | 35 | 24 | M16 | 0.18 | 15.0 | 38000 | XDGX1750 |
| 40 | B Type | 4.0-5.0 | AXD4000R403AM1635B | ★ | 3 | 17.0 | 28.5 | 58 | 35 | 24 | M16 | 0.18 | 14.8 | 38000 | XDGX1750 |

*1 Number of Teeth




Note 1) For screw-in type arbors, refer to pages 31 to 34.

Note 2) The maximum allowable revolutions are set to ensure tool and insert stability.

Before operating the tool read the operational guidance on page 30.


Spare Parts

(mm)

| Image | Part Name | Part Number |
|---|----------------------|-------------|
|  | Clamp Screw | TS3SB |
|  | Wrench | TKY08D |
|  | Anti-seize Lubricant | MK1KS |

* Clamp Torque (N • m) : TS3SB=1.5

**Parts Sold Separately
Arbor Mounting Spanner**

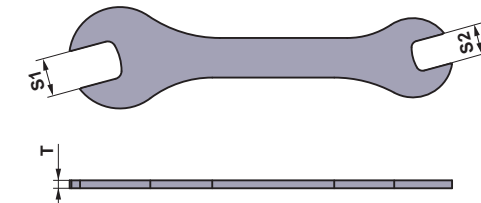

(mm)

| Order Number | Dimensions | | |
|--------------|------------|------|---|
| | S1 | * S2 | T |
| AKY1924050A | 24 | 19 | 5 |

* Clamp Torque (N • m) : 19 = 80, 24 = 90

Note 1) Due to the structure of the head, it may not be possible to use a commercially available spanner to attach the arbor. It is recommended to use the dedicated spanner.

★ : Stocked in Japan

Inserts

| Workpiece Material | P | Steel | ◆ | ◆ | ◆ | This is the selection guideline for AXD4000. Please note that the cutting conditions differ depending on multiple factors, for more details refer to the Recommended Cutting Conditions. Edge Preparation E : Round F : Sharp | | | | | | | | | |
|--------------------|-------------------|-----------------|--------|--------|---------|--|------|------------|------|------|------|------|----------|--|--|
| | N | Aluminum Alloys | ◆ | ◆ | ◆ | | | | | | | | | | |
| | S | Titanium Alloys | ◆ | ◆ | ◆ | | | | | | | | | | |
| Shape | Order Number | Class | Honing | Stock | | | | Dimensions | | | | | Geometry | | |
| | | | | Coated | Carbide | | | L | LE | S | BS | RE* | | | |
| | | | | LC15TF | MP6120 | MP9120 | TF15 | | | | | | | | |
| GL Breaker | XDGX175004PDFR-GL | G | F | ★ | ● | ● | ● | .906 | .665 | .197 | .067 | .016 | | | |
| | XDGX175008PDFR-GL | G | F | ★ | ● | ● | ● | .906 | .669 | .197 | .051 | .031 | | | |
| | XDGX175012PDFR-GL | G | F | ★ | ● | ● | ● | .906 | .669 | .197 | .035 | .047 | | | |
| | XDGX175016PDFR-GL | G | F | ★ | ● | ● | ● | .866 | .646 | .197 | .055 | .063 | | | |
| | XDGX175020PDFR-GL | G | F | ★ | ● | ● | ● | .866 | .646 | .197 | .039 | .079 | | | |
| | XDGX175024PDFR-GL | G | F | ★ | ● | ● | ● | .866 | .646 | .197 | .024 | .094 | | | |
| | XDGX175030PDFR-GL | G | F | ★ | ● | ● | ● | .831 | .634 | .197 | .031 | .118 | | | |
| | XDGX175032PDFR-GL | G | F | ★ | ● | ● | ● | .831 | .634 | .197 | .024 | .125 | | | |
| | XDGX175040PDFR-GL | G | F | ★ | ● | ● | ● | .787 | .614 | .197 | .031 | .157 | | | |
| | XDGX175050PDFR-GL | G | F | ★ | ● | ● | ● | .764 | .602 | .197 | .016 | .197 | | | |
| GM Breaker | XDGX175004PDER-GM | G | E | ● | ● | ● | ● | .906 | .669 | .197 | .067 | .016 | | | |
| | XDGX175008PDER-GM | G | E | ● | ● | ● | ● | .906 | .669 | .197 | .051 | .031 | | | |
| | XDGX175012PDER-GM | G | E | ● | ● | ● | ● | .906 | .669 | .197 | .035 | .047 | | | |
| | XDGX175016PDER-GM | G | E | ● | ● | ● | ● | .866 | .626 | .197 | .055 | .063 | | | |
| | XDGX175020PDER-GM | G | E | ● | ● | ● | ● | .866 | .626 | .197 | .039 | .079 | | | |
| | XDGX175024PDER-GM | G | E | ● | ● | ● | ● | .866 | .626 | .197 | .024 | .094 | | | |
| | XDGX175030PDER-GM | G | E | ● | ● | ● | ● | .831 | .630 | .197 | .031 | .118 | | | |
| | XDGX175032PDER-GM | G | E | ● | ● | ● | ● | .831 | .630 | .197 | .024 | .125 | | | |
| | XDGX175040PDER-GM | G | E | ● | ● | ● | ● | .787 | .583 | .197 | .019 | .157 | | | |
| | XDGX175050PDER-GM | G | E | ● | ● | ● | ● | .764 | .591 | .197 | .016 | .197 | | | |
| GM Breaker | XDGX175004PDFR-GM | G | F | ● | ● | ● | ● | .906 | .669 | .197 | .067 | .016 | | | |
| | XDGX175008PDFR-GM | G | F | ● | ● | ● | ● | .906 | .669 | .197 | .051 | .031 | | | |
| | XDGX175012PDFR-GM | G | F | ● | ● | ● | ● | .906 | .669 | .197 | .035 | .047 | | | |
| | XDGX175016PDFR-GM | G | F | ● | ● | ● | ● | .866 | .626 | .197 | .055 | .063 | | | |
| | XDGX175020PDFR-GM | G | F | ● | ● | ● | ● | .866 | .626 | .197 | .039 | .079 | | | |
| | XDGX175024PDFR-GM | G | F | ● | ● | ● | ● | .866 | .626 | .197 | .024 | .094 | | | |
| | XDGX175030PDFR-GM | G | F | ● | ● | ● | ● | .831 | .630 | .197 | .031 | .118 | | | |
| | XDGX175032PDFR-GM | G | F | ● | ● | ● | ● | .831 | .630 | .197 | .024 | .125 | | | |
| | XDGX175040PDFR-GM | G | F | ● | ● | ● | ● | .787 | .583 | .197 | .019 | .157 | | | |
| | XDGX175050PDFR-GM | G | F | ● | ● | ● | ● | .764 | .591 | .197 | .016 | .197 | | | |

* Be aware that the corner R(RE) has a different shape than the machined workpiece R.
When a GM breaker is recommended, stress the dimensional precision of the workpiece shape.

Holder and Insert Corner Radius Combination

| Holder | A Type Holder | | | | | B Type Holder | | | | |
|---------------------------|---|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | (Inch) AXD4000UR○○○○○A AXD4000UR○○○○○B (Metric) AXD4000○○○○○○○A AXD4000R○○○○○○○B | | | | | | | | | |
| Insert Corner Radius (RE) | .016" | .031" | .047" | .063" | .079" | .094" | .118" | .125" | .157" | .197" |
| | XDGX175004PDFR | XDGX175008PDFR | XDGX175012PDFR | XDGX175016PDFR | XDGX175020PDFR | XDGX175024PDFR | XDGX175030PDFR | XDGX175032PDFR | XDGX175040PDFR | XDGX175050PDFR |


Not interchangeable with the corresponding inserts of A type and B type holders.

● : USA Stock ★ : Stocked in Japan
<10 inserts in one case>

AXD4000 Selection of Insert


It is necessary to choose the best insert according to the cutting conditions. Please select an insert from the tables below.
1st recommendation for stable cutting condition is the GL breaker with a strong cutting edge.

Selection of Insert According to the Feed per Tooth and the Required Cutting Depth

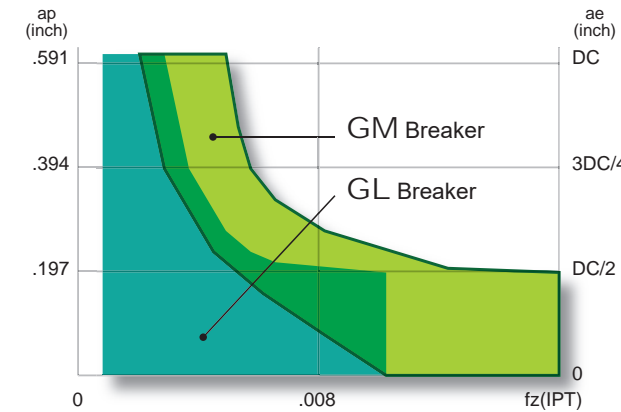


1st recommendation for machining aluminum alloys is GL breaker.
Under high-load conditions such as deep or high feed cutting, it is advisable to use the GM breaker.


Selection of Insert According to the Width of Cut and the Required Cutting Depth

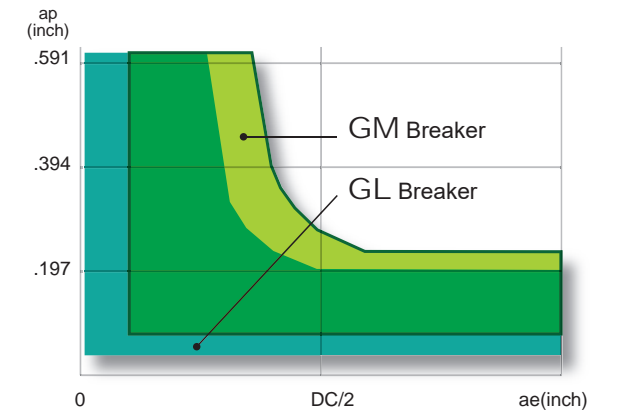

Selection of Insert According to Cutting Edge

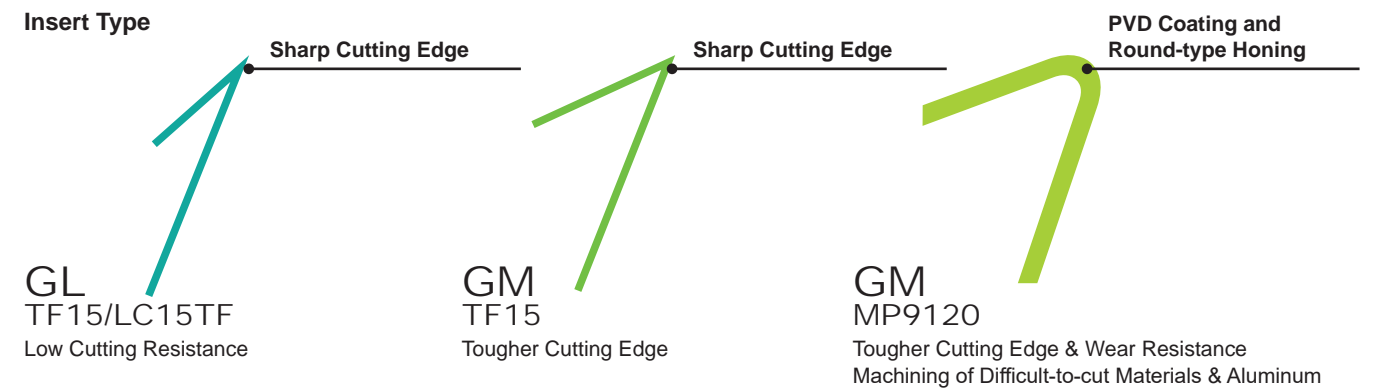

Selection of insert according to wear resistance

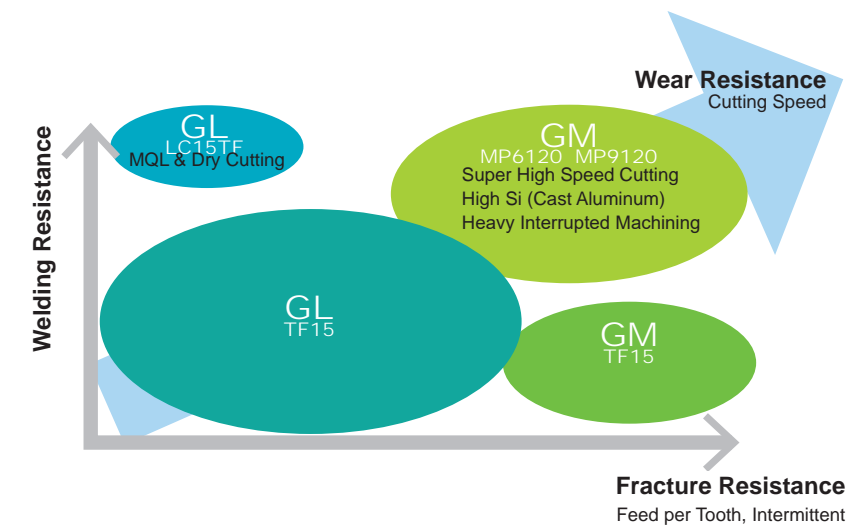

Recommended Cutting Conditions

■ Cutting Speed

(inch)

| Workpiece Material | | Grade | Breaker | Cutting Speed vc (SFM) | |
|--------------------|--------------------------|---------------------------|----------------|------------------------------|-------------------|
| P | Mild Steel | ≤180HB | MP6120 | GM | 655 (490—720) |
| | Carbon Steel Alloy Steel | 180—280HB | MP6120 | GM | 655 (490—720) |
| N | Aluminum Alloys | Si <5% | TF15 LC15TF | GL | 3280 (655—9840) |
| | | | TF15 MP9120 | GM | 3280 (655—9840) |
| | | 5% ≤ Si ≤ 10% Si > 10% | MP9120 | GM | 3280 (655—9840) |
| S | Titanium Alloys | — | MP9120 | GM | 130 (100—195) |

■ Feed per Tooth

(inch)

| Workpiece Material | Breaker | Cutting Width ae | Depth of Cut ap | Feed per Tooth (IPT) | | | | | | | | | | |
|--------------------|------------|---------------------|--------------------|--------------------------|-----------|---------|-----------|---------------|----------------|--------|--------|--------|--------|--------|
| | | | | Cutting Edge Diameter DC | | | | | | | | | | |
| | | | | — | 1.000" | 1.250" | 1.500" | 2.000"—3.000" | 4.000", 5.000" | | | | | |
| | | 20mm | 25,28mm | 32,35mm | 40mm | 50—80mm | 100,125mm | | | | | | | |
| P | Mild Steel | ≤180HB | GM | ≤ .25 DC | ≤ .197 | ≤ .002 | ≤ .006 | ≤ .006 | ≤ .007 | ≤ .007 | ≤ .007 | | | |
| | | | | | ≤ .394 | ≤ .002 | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .006 | | | |
| | | | | | ≤ .571 | ≤ .002 | ≤ .004 | ≤ .004 | ≤ .005 | ≤ .005 | — | | | |
| | | | | ≤ .5 DC | ≤ .197 | ≤ .002 | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .007 | ≤ .007 | | | |
| | | | | | ≤ .394 | — | ≤ .004 | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 | | | |
| | | | | | ≤ .571 | — | ≤ .003 | ≤ .004 | ≤ .004 | ≤ .005 | — | | | |
| | | | | ≤ .75 DC | ≤ .197 | ≤ .002 | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .006 | | | |
| | | | | | ≤ .394 | — | ≤ .004 | ≤ .004 | ≤ .005 | ≤ .005 | ≤ .005 | | | |
| | | | | DC (Slot) | ≤ .197 | ≤ .002 | ≤ .004 | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 | | | |
| | | | | Carbon Steel Alloy Steel | 180—280HB | GM | ≤ .25 DC | ≤ .197 | ≤ .002 | ≤ .006 | ≤ .006 | ≤ .007 | ≤ .007 | ≤ .007 |
| | | | | | | | | ≤ .394 | ≤ .002 | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .006 |
| | | | | | | | | ≤ .571 | ≤ .002 | ≤ .004 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| ≤ .5 DC | ≤ .197 | ≤ .002 | ≤ .005 | | | | ≤ .006 | ≤ .006 | ≤ .007 | ≤ .007 | | | | |
| | ≤ .394 | — | ≤ .004 | | | | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 | | | | |
| | ≤ .571 | — | ≤ .003 | | | | ≤ .004 | ≤ .004 | ≤ .005 | — | | | | |
| ≤ .75 DC | ≤ .197 | ≤ .002 | ≤ .005 | | | | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .006 | | | | |
| | ≤ .394 | — | ≤ .004 | | | | ≤ .004 | ≤ .005 | ≤ .005 | ≤ .005 | | | | |
| DC (Slot) | ≤ .197 | ≤ .002 | ≤ .004 | | | | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 | | | | |

(Note 1) The above cutting conditions are determined based on high workpiece and machine rigidity, where no vibration occurred. If vibrations occur make adjustments according to the machining conditions.

(Note 2) Note, vibrations may occur in the following conditions.

- When using long tool overhang.
- When pocket machining corner radii.
- When the workpiece has poor clamping rigidity or when the machine rigidity or workpiece rigidity is low, vibrations can occur easily, if so, reduce cutting conditions such as width and depth of cut and feed per tooth.

(inch)



| Workpiece Material | Breaker | Cutting Width ae | Depth of Cut ap | Feed per Tooth (IPT) | | | | | | | | |
|--------------------|-----------------|---------------------------|--------------------|--------------------------|----------|---------|-----------|---------------|----------------|--------|--------|--------|
| | | | | Cutting Edge Diameter DC | | | | | | | | |
| | | | | — | 1.000" | 1.250" | 1.500" | 2.000"—3.000" | 4.000", 5.000" | | | |
| | | 20mm | 25,28mm | 32,35mm | 40mm | 50—80mm | 100,125mm | | | | | |
| N | Aluminum Alloys | Si <5% | GL | ≤ .25 DC | ≤ .197 | ≤ .002 | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .010 | |
| | | | | | ≤ .394 | ≤ .002 | ≤ .008 | ≤ .008 | ≤ .008 | ≤ .008 | ≤ .008 | |
| | | | | | ≤ .571 | ≤ .002 | ≤ .006 | ≤ .006 | ≤ .006 | ≤ .006 | ≤ .006 | |
| | | | | ≤ .5 DC | ≤ .197 | ≤ .002 | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .010 | |
| | | | | | ≤ .394 | — | ≤ .008 | ≤ .008 | ≤ .008 | ≤ .008 | ≤ .008 | |
| | | | | | ≤ .571 | — | ≤ .006 | ≤ .006 | ≤ .006 | ≤ .006 | ≤ .006 | |
| | | | ≤ .75 DC | ≤ .197 | ≤ .002 | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .010 | | |
| | | | | ≤ .394 | — | ≤ .008 | ≤ .008 | ≤ .008 | ≤ .008 | ≤ .008 | | |
| | | | | ≤ .571 | — | ≤ .006 | ≤ .006 | ≤ .006 | ≤ .006 | ≤ .006 | | |
| | | | DC (Slot) | ≤ .197 | ≤ .002 | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .010 | | |
| | | | GM | ≤ .25 DC | ≤ .197 | ≤ .002 | ≤ .014 | ≤ .014 | ≤ .016 | ≤ .016 | ≤ .016 | |
| | | | | | ≤ .394 | ≤ .002 | ≤ .012 | ≤ .012 | ≤ .014 | ≤ .014 | ≤ .014 | |
| | | ≤ .571 | | | ≤ .002 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .012 | ≤ .012 | | |
| | | ≤ .5 DC | | ≤ .197 | ≤ .002 | ≤ .014 | ≤ .014 | ≤ .014 | ≤ .016 | ≤ .016 | | |
| | | | | ≤ .394 | — | ≤ .012 | ≤ .012 | ≤ .012 | ≤ .014 | ≤ .014 | | |
| | | | | ≤ .571 | — | ≤ .008 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .012 | | |
| | | ≤ .75 DC | ≤ .197 | ≤ .002 | ≤ .012 | ≤ .012 | ≤ .012 | ≤ .014 | ≤ .014 | | | |
| | | | ≤ .394 | — | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .012 | | | |
| | | | ≤ .571 | — | ≤ .008 | ≤ .008 | ≤ .008 | ≤ .010 | ≤ .010 | | | |
| | | DC (Slot) | ≤ .197 | ≤ .002 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .014 | ≤ .014 | | | |
| | | 5% ≤ Si ≤ 10% Si > 10% | GM | ≤ .25 DC | ≤ .197 | ≤ .002 | ≤ .014 | ≤ .014 | ≤ .016 | ≤ .016 | ≤ .016 | |
| | | | | | ≤ .394 | ≤ .002 | ≤ .012 | ≤ .012 | ≤ .014 | ≤ .014 | ≤ .014 | |
| | | | | | ≤ .571 | ≤ .002 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .012 | ≤ .012 | |
| | | | | ≤ .5 DC | ≤ .197 | ≤ .002 | ≤ .014 | ≤ .014 | ≤ .014 | ≤ .016 | ≤ .016 | |
| ≤ .394 | — | | | | ≤ .012 | ≤ .012 | ≤ .012 | ≤ .014 | ≤ .014 | | | |
| ≤ .571 | — | | | | ≤ .008 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .012 | | | |
| ≤ .75 DC | ≤ .197 | | ≤ .002 | ≤ .012 | ≤ .012 | ≤ .012 | ≤ .014 | ≤ .014 | | | | |
| | ≤ .394 | | — | ≤ .010 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .012 | | | | |
| | ≤ .571 | | — | ≤ .008 | ≤ .008 | ≤ .008 | ≤ .010 | ≤ .010 | | | | |
| DC (Slot) | ≤ .197 | | ≤ .002 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .014 | ≤ .014 | | | | |
| S | Titanium Alloys | | — | GM | ≤ .25 DC | ≤ .197 | ≤ .002 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 |
| | | | | | | ≤ .394 | ≤ .002 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 |
| | | ≤ .571 | | | | ≤ .002 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 | |
| | | ≤ .5 DC | | | ≤ .197 | ≤ .002 | ≤ .003 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 | |
| | | | | | ≤ .394 | — | ≤ .003 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 | |
| | | | | | ≤ .571 | — | ≤ .003 | ≤ .004 | ≤ .004 | ≤ .004 | ≤ .004 | |
| | | ≤ .75 DC | | ≤ .197 | ≤ .002 | ≤ .002 | ≤ .003 | ≤ .004 | ≤ .004 | ≤ .004 | | |
| | | | | ≤ .394 | — | ≤ .002 | ≤ .003 | ≤ .004 | ≤ .004 | ≤ .004 | | |
| | | | | ≤ .571 | — | ≤ .002 | ≤ .003 | ≤ .004 | ≤ .004 | ≤ .004 | | |
| | | DC (Slot) | | ≤ .197 | ≤ .002 | ≤ .002 | ≤ .002 | ≤ .002 | ≤ .002 | ≤ .002 | | |

(Note 1) The above cutting conditions are determined based on high workpiece and machine rigidity, where no vibration occurred. If vibrations occur make adjustments according to the machining conditions.

(Note 2) Note, vibrations may occur in the following conditions.

- When using long tool overhang.
- When pocket machining corner radii.
- When the workpiece has poor clamping rigidity or when the machine rigidity or workpiece rigidity is low, vibrations can occur easily, if so, reduce cutting conditions such as width and depth of cut and feed per tooth.

Ramping / Helical Cutting (Aluminum Alloy)

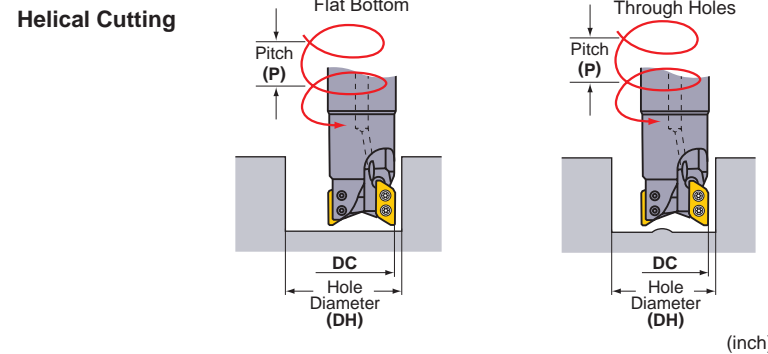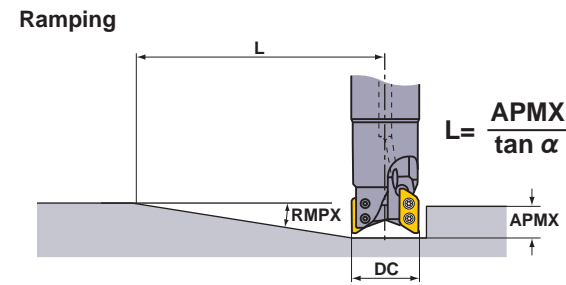

| Type | DC | RE | Ramping | | Helical Cutting (Blind Hole, Flat Bottom) | | | | Helical Cutting (Through Hole) | |
|--------|-----------------|-----------|---------|----------|---|--------|---------|--------|--------------------------------|--------|
| | | | RMPX | L *1 | DH max. | P max. | DH min. | P max. | DH min. | P max. |
| A Type | .787 [20mm] | .016-.047 | 20.7° | 1.65 | 1.524 *2 | .551 | 1.421 | .551 | .866 | .079 |
| | | .063-.094 | 19.9° | 1.69 | 1.429 *3 | .512 | 1.362 | .512 | .866 | .079 |
| | | .118-.125 | 18.9° | 1.81 | 1.319 *4 | .472 | 1.311 | .472 | .866 | .039 |
| | 1.000 | .016-.047 | 22.6° | 1.50 | 1.949 *2 | .551 | 1.832 | .551 | 1.267 | .315 |
| | | .063-.094 | 22.1° | 1.54 | 1.854 *3 | .512 | 1.766 | .512 | 1.267 | .315 |
| | | .118-.125 | 20.7° | 1.65 | 1.728 *4 | .472 | 1.707 | .472 | 1.267 | .315 |
| | 1.102 [28mm] | .016-.047 | 19.2° | 1.77 | 2.154 *2 | .551 | 2.047 | .551 | 1.417 | .315 |
| | | .063-.094 | 18.5° | 1.85 | 2.059 *3 | .512 | 1.984 | .512 | 1.417 | .315 |
| | | .118-.125 | 16.7° | 2.05 | 1.949 *4 | .472 | 1.925 | .472 | 1.417 | .276 |
| | 1.250 | .016-.047 | 15.6° | 2.20 | 2.449 *2 | .551 | 2.331 | .551 | 1.762 | .433 |
| | | .063-.094 | 14.9° | 2.32 | 2.354 *3 | .512 | 2.264 | .512 | 1.762 | .394 |
| | | .118-.125 | 14.0° | 2.48 | 2.244 *4 | .472 | 2.203 | .472 | 1.762 | .394 |
| | 1.378 [35mm] | .016-.047 | 13.4° | 2.60 | 2.705 *2 | .551 | 2.591 | .551 | 1.969 | .433 |
| | | .063-.094 | 12.7° | 2.71 | 2.610 *3 | .512 | 2.531 | .512 | 1.969 | .394 |
| | | .118-.125 | 11.8° | 2.95 | 2.500 *4 | .472 | 2.472 | .472 | 1.969 | .354 |
| | 1.500 | .016-.047 | 13.0° | 2.68 | 2.933 *2 | .551 | 2.827 | .551 | 2.262 | .512 |
| | | .063-.094 | 12.3° | 2.83 | 2.839 *3 | .512 | 2.760 | .512 | 2.262 | .512 |
| | | .118-.125 | 11.6° | 2.99 | 2.728 *4 | .472 | 2.701 | .472 | 2.262 | .472 |
| | 2.000 | .016-.047 | 8.7° | 4.02 | 3.933 *2 | .551 | 3.827 | .551 | 3.258 | .551 |
| | | .063-.094 | 8.2° | 4.25 | 3.839 *3 | .512 | 3.757 | .512 | 3.257 | .512 |
| | | .118-.125 | 7.6° | 4.61 | 3.728 *4 | .472 | 3.696 | .472 | 3.257 | .472 |
| | 2.500 | .016-.047 | 6.6° | 5.28 | 4.933 *2 | .551 | 4.824 | .551 | 4.259 | .551 |
| | | .063-.094 | 6.1° | 5.75 | 4.839 *3 | .512 | 4.756 | .512 | 4.259 | .512 |
| | | .118-.125 | 5.7° | 6.14 | 4.728 *4 | .472 | 4.695 | .472 | 4.258 | .472 |
| 3.000 | .016-.047 | 5.3° | 6.61 | 5.933 *2 | .551 | 5.824 | .551 | 5.260 | .551 | |
| | .063-.094 | 4.9° | 7.13 | 5.839 *3 | .512 | 5.756 | .512 | 5.260 | .512 | |
| | .118-.125 | 4.5° | 7.76 | 5.728 *4 | .472 | 5.746 | .472 | 5.259 | .472 | |
| 4.000 | .016-.047 | 3.8° | 9.21 | 7.933 *2 | .551 | 7.824 | .551 | 7.261 | .551 | |
| | .063-.094 | 3.5° | 10.00 | 7.839 *3 | .512 | 7.755 | .512 | 7.261 | .512 | |
| | .118-.125 | 3.2° | 10.94 | 7.728 *4 | .472 | 7.694 | .472 | 7.260 | .472 | |
| 5.000 | .016-.047 | 2.9° | 12.05 | 9.933 *2 | .551 | 9.823 | .551 | 9.261 | .551 | |
| | .063-.094 | 2.7° | 12.95 | 9.839 *3 | .512 | 9.755 | .512 | 9.261 | .512 | |
| | .118-.125 | 2.5° | 14.02 | 9.728 *4 | .472 | 9.693 | .472 | 9.260 | .472 | |

| Type | DC | RE | Ramping | | Helical Cutting (Blind Hole, Flat Bottom) | | | | Helical Cutting (Through Hole) | |
|--------|-----------------|------|---------|-------|---|--------|---------|--------|--------------------------------|--------|
| | | | RMPX | L *1 | DH max. | P max. | DH min. | P max. | DH min. | P max. |
| B Type | .787 [20mm] | .157 | 17.5° | 1.850 | 1.240 | .394 | 1.252 | .394 | .866 | .039 |
| | | .197 | 16.6° | 2.795 | 1.161 | .236 | 1.224 | .276 | .866 | .039 |
| | 1.000 | .157 | 17.9° | 1.81 | 1.665 | .394 | 1.635 | .394 | 1.269 | .236 |
| | | .197 | 14.7° | 2.24 | 1.587 | .354 | 1.596 | .354 | 1.269 | .197 |
| | 1.102 [28mm] | .157 | 14.1° | 2.323 | 1.870 | .394 | 1.858 | .394 | 1.417 | .236 |
| | | .197 | 13° | 2.559 | 1.791 | .354 | 1.827 | .354 | 1.417 | .197 |
| | 1.250 | .157 | 12.9° | 2.56 | 2.165 | .394 | 2.130 | .394 | 1.762 | .354 |
| | | .197 | 12.2° | 2.72 | 2.087 | .354 | 2.090 | .354 | 1.762 | .315 |
| | 1.378 [35mm] | .157 | 10.8° | 3.071 | 2.421 | .394 | 2.402 | .394 | 1.969 | .315 |
| | | .197 | 10.2° | 3.268 | 2.343 | .354 | 2.370 | .354 | 1.969 | .315 |
| | 1.500 | .157 | 10.7° | 3.11 | 2.650 | .394 | 2.622 | .394 | 2.261 | .394 |
| | | .197 | 10.1° | 3.31 | 2.571 | .354 | 2.583 | .354 | 2.261 | .354 |
| 2.000 | .157 | 6.9° | 4.84 | 3.650 | .394 | 3.621 | .394 | 3.257 | .394 | |
| | .197 | 6.5° | 5.12 | 3.571 | .354 | 3.580 | .354 | 3.256 | .354 | |
| 2.500 | .157 | 5.1° | 6.54 | 4.650 | .394 | 4.600 | .394 | 4.258 | .394 | |
| | .197 | 4.8° | 6.97 | 4.571 | .354 | 4.578 | .354 | 4.257 | .354 | |
| 3.000 | .157 | 4.1° | 8.15 | 5.650 | .394 | 5.619 | .394 | 5.258 | .394 | |
| | .197 | 3.8° | 8.78 | 5.571 | .354 | 5.578 | .354 | 5.258 | .354 | |
| 4.000 | .157 | 2.9° | 11.54 | 7.650 | .394 | 7.618 | .394 | 7.259 | .394 | |
| | .197 | 2.7° | 12.36 | 7.571 | .354 | 7.577 | .354 | 7.258 | .354 | |
| 5.000 | .157 | 2.2° | 15.20 | 9.650 | .394 | 9.618 | .394 | 9.260 | .394 | |
| | .197 | 2.1° | 15.91 | 9.571 | .354 | 9.577 | .354 | 9.259 | .354 | |

The recommended ramping or helical cutting feed is .002IPT or less.

*1. Using the maximum ramping angle, the distance to reach the maximum depth of cut is as follows:

L=(maximum depth of cut APMX / tan α). Maximum depth of cut A type is .610", B type is .583".

*2. The maximum diameter when machining a blind hole with a flat face using a corner radius of .047".

*3. The maximum diameter when machining a blind hole with a flat face using a corner radius of .094".

*4. The maximum diameter when machining a blind hole with a flat face using a corner radius of .125".

For other corner radius, use to following formula. {(cutting edge diameter DC) - (corner radius RE) - β} x2


| DC | β |
|-----------|-------|
| 1.0-1.25" | .010" |
| 1.5-5.0" | .018" |

Max. Drilling Depth (Aluminum Alloy)

| Type | RE | Max. Drilling Depth (inch) | | | |
|--------|-----------|----------------------------|---------|---------|-----------------|
| | | φ.787" | φ1.000" | φ1.250" | φ1.500"-φ5.000" |
| A Type | .016-.047 | .209 | .205 | .205 | .209 |
| | .063-.094 | .189 | .181 | .185 | .189 |
| | .118-.125 | .169 | .146 | .165 | .173 |
| B Type | .157 | .146 | .106 | .142 | .150 |
| | .197 | .134 | .091 | .130 | .138 |

The recommended drilling feed is .002 IPT or less.


AXD4000 can be effectively used for pocket machining without the need for a prepared hole.



MULTI FUNCTIONAL MILLING
<CUTTING FOR ALUMINUM ALLOY>



AXD7000

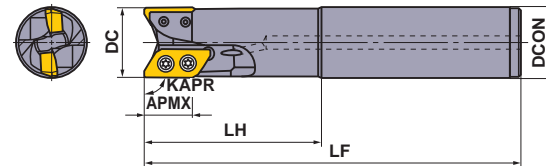

Right hand tool holder only.

Shank Type

With Coolant Hole

| DC | Type | Insert Corner Radius RE | Order Number | Stock | | *1 No.T | LF | LH | DCON | WT (lbs) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|-------|--------|-------------------------|--------------------|-------|------|---------|-------|-------|-------|----------|------|---|------|-------------|
| | | | | R | No.T | | | | | | | | | |
| 1.250 | A Type | .031-.125 | AXD7000UR202SA20SA | ● | 2 | 2 | 6.000 | 2.000 | 1.250 | .6 | .827 | 41000 | 1 | XDGX2270 |
| 1.250 | B Type | .157-.197 | AXD7000UR202SA20SB | ● | 2 | 2 | 6.000 | 2.000 | 1.250 | .6 | .803 | 41000 | 1 | XDGX2270 |
| 1.500 | A Type | .031-.125 | AXD7000UR242SA24SA | ● | 2 | 2 | 7.000 | 3.000 | 1.500 | 1.1 | .827 | 36000 | 1 | XDGX2270 |
| 1.500 | B Type | .157-.197 | AXD7000UR242SA24SB | ● | 2 | 2 | 7.000 | 3.000 | 1.500 | 1.1 | .803 | 36000 | 1 | XDGX2270 |

*1 Number of Teeth


Note 1) The maximum allowable revolutions are set to ensure tool and insert stability.

Before operating the tool read the operational guidance on page 30.

Note 2) When using the tool at high spindle speeds, ensure that the tool and chuck are correctly balanced.

Note 3) Note for inserts with a corner radius of 1.6 and above, as corner radius increases the LF and LH dimensions decrease.

Note 4) No hole for data carrier.

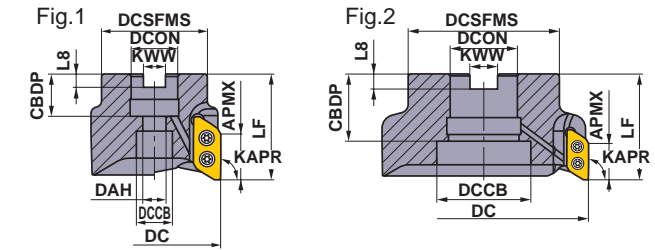

Right hand tool holder only.

| DC | DCON | Set Bolt | Geometry | |
|-------|-------|------------|----------|--|
| 2.000 | .750 | HSCU37513H | ① | |
| 3.000 | 1.250 | HSCU62516H | | |
| 4.000 | 1.500 | HSCU75016H | | |
| 5.000 | 1.500 | MBAU75016H | ② | |

Arbor Type

| DC | Type | Insert Corner Radius RE | Order Number | Stock | | *1 No.T | LF | DCON | WT (lbs) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|-------|--------|-------------------------|-----------------|-------|------|---------|-------|-------|----------|------|---|------|-------------|
| | | | | R | No.T | | | | | | | | |
| 2.000 | A Type | .031-.125 | AXD7000UR0203A | ● | 3 | 3 | 2.000 | .750 | .9 | .827 | 30000 | 1 | XDGX2270 |
| 2.000 | B Type | .157-.197 | AXD7000UR0203B | ● | 3 | 3 | 2.000 | .750 | .9 | .803 | 30000 | 1 | XDGX2270 |
| 3.000 | A Type | .031-.125 | AXD7000UR0303DA | ● | 3 | 3 | 2.500 | 1.250 | 2.6 | .827 | 23000 | 1 | XDGX2270 |
| 3.000 | B Type | .157-.197 | AXD7000UR0303DB | ● | 3 | 3 | 2.500 | 1.250 | 2.6 | .803 | 23000 | 1 | XDGX2270 |
| 4.000 | A Type | .031-.125 | AXD7000UR0405EA | ● | 5 | 5 | 2.500 | 1.500 | 5.4 | .827 | 19000 | 1 | XDGX2270 |
| 4.000 | B Type | .157-.197 | AXD7000UR0405EB | □ | 5 | 5 | 2.500 | 1.500 | 5.4 | .803 | 19000 | 1 | XDGX2270 |
| 5.000 | A Type | .031-.125 | AXD7000UR0506EA | ● | 6 | 6 | 2.500 | 1.500 | 6.6 | .827 | 16000 | 2 | XDGX2270 |
| 5.000 | B Type | .157-.197 | AXD7000UR0506EB | □ | 6 | 6 | 2.500 | 1.500 | 6.6 | .803 | 16000 | 2 | XDGX2270 |

*1 Number of Teeth

Note 1) The maximum allowable revolutions are set to ensure tool and insert stability.

Note 2) When using the tool at high spindle speeds, ensure that the tool and chuck are correctly balanced.

Note 3) For insert with a corner radius of .063 inch and above, as corner radius increases the LF and LH dimension decreases.

Mounting Dimensions

| DC | Order Number | DCON | CBDP | DAH | DCCB | LCCB | DCSFMS | KWW | L8 | Fig. |
|-------|-----------------|-------|-------|-------|-------|------|--------|------|------|------|
| 2.000 | AXD7000UR0203A | .750 | .748 | .415 | .600 | .591 | 1.875 | .313 | .187 | 1 |
| 2.000 | AXD7000UR0203B | .750 | .748 | .415 | .600 | .055 | 1.875 | .313 | .187 | 1 |
| 3.000 | AXD7000UR0303DA | 1.250 | 1.260 | .669 | 1.024 | .080 | 2.750 | .500 | .281 | 1 |
| 3.000 | AXD7000UR0303DB | 1.250 | 1.260 | .669 | 1.024 | .076 | 2.750 | .500 | .281 | 1 |
| 4.000 | AXD7000UR0405EA | 1.500 | 1.181 | .787 | 1.181 | .914 | 3.810 | .625 | .375 | 1 |
| 4.000 | AXD7000UR0405EB | 1.500 | 1.181 | .787 | 1.181 | .835 | 3.810 | .625 | .375 | 1 |
| 5.000 | AXD7000UR0506EA | 1.500 | 1.575 | 2.205 | 1.181 | .794 | 3.810 | .625 | .375 | 2 |
| 5.000 | AXD7000UR0506EB | 1.500 | 1.575 | 2.205 | 1.181 | .873 | 3.810 | .625 | .375 | 2 |

Spare Parts

| DC | Clamp Screw | Wrench | Anti-seize Lubricant |
|-----------------------|-------------|--------|----------------------|
| Shank 1.200 | TS4SB | TKY15D | MK1KS |
| Shank 1.500 and Arbor | TS4SBL | TKY15D | MK1KS |


* Clamp Torque (lbf-in) : TS4SB = 31, TS4SBL = 31

MULTI FUNCTIONAL MILLING
 <ALUMINIUM ALLOY TO DIFFICULT-TO-CUT MATERIAL CUTTING>



AXD7000

- P Steel
- M
- K
- N Non-ferrous Metal
- S Heat Resistant Alloy
- H

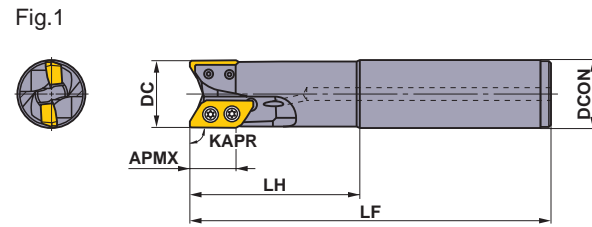


Right hand tool holder only.

Metric Standard

Shank Type

With Coolant Hole

| DC | Type | Insert Corner Radius RE | Order Number | Stock | *1 No.T | LF | LH | DCON | WT (kg) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|----|--------|-------------------------|-------------------|-------|---------|-----|----|------|---------|------|---|------|-------------|
| | | | | R | | | | | | | | | |
| 32 | A Type | 0.8-3.2 | AXD7000R322SA32SA | ★ | 2 | 170 | 80 | 32 | 0.85 | 21.0 | 41000 | 1 | XDGX2270 |
| 32 | B Type | 4.0-5.0 | AXD7000R322SA32SB | ★ | 2 | 170 | 80 | 32 | 0.85 | 20.4 | 41000 | 1 | XDGX2270 |
| 40 | A Type | 0.8-3.2 | AXD7000R402SA42SA | ★ | 2 | 170 | 80 | 42 | 1.44 | 21.0 | 36000 | 1 | XDGX2270 |
| 40 | B Type | 4.0-5.0 | AXD7000R402SA42SB | ★ | 2 | 170 | 80 | 42 | 1.44 | 20.4 | 36000 | 1 | XDGX2270 |

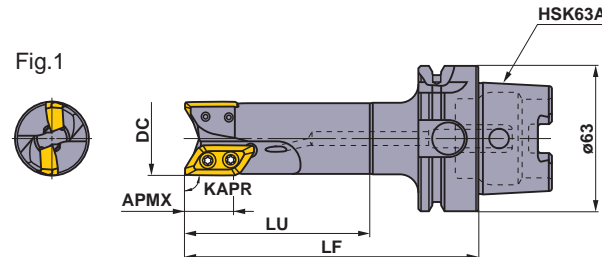

Right hand tool holder only.

Metric Standard

HSK63A Shank Type

With Coolant Hole

| DC | Type | Insert Corner Radius RE | Order Number | Stock | *1 No.T | LF | LH | WT (kg) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|----|--------|-------------------------|---------------------|-------|---------|-----|----|---------|------|---|------|-------------|
| | | | | R | | | | | | | | |
| 32 | A Type | 0.8-3.2 | AXD7000R03202A-H63A | ★ | 2 | 127 | 80 | 1.06 | 21.0 | 41000 | 1 | XDGX2270 |
| 40 | A Type | 0.8-3.2 | AXD7000R04002A-H63A | ★ | 2 | 132 | 85 | 1.34 | 21.0 | 36000 | 1 | XDGX2270 |
| 50 | A Type | 0.8-3.2 | AXD7000R05003A-H63A | ★ | 3 | 137 | 90 | 2.40 | 21.0 | 30000 | 1 | XDGX2270 |

*1 Number of Teeth

Note 1) The maximum allowable revolutions are set to ensure tool and insert stability.

Before operating the tool read the operational guidance on page 30.

Note 2) When using the tool at high spindle speeds, ensure that the tool and chuck are correctly balanced.

Note 3) Note for inserts with a corner radius of 1.6 and above, as corner radius increases the LF and LH dimensions decrease.


Note 4) No hole for data carrier.

Spare Parts

| DC | Clamp Screw | Wrench | Anti-seize Lubricant |
|--------|-------------|--------|----------------------|
| 32 | TS4SB | TKY15D | MK1KS |
| 40, 50 | TS4SBL | TKY15D | MK1KS |

* Clamp Torque (N • m) : TS4SB=3.5, TS4SBL=3.5

★ : Stocked in Japan

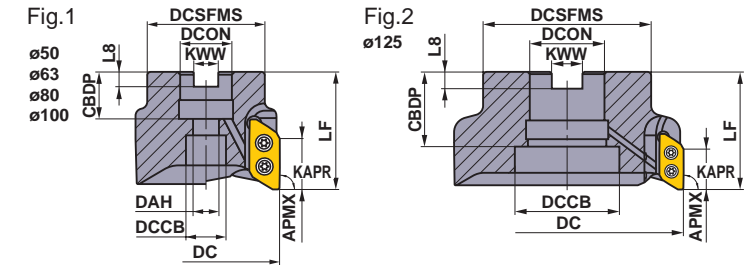

Right hand tool holder only.

Metric Standard

For metric arbors

Arbor Type

DCON=inch size, With Coolant Hole

| DC | Type | Insert Corner Radius RE | Order Number | Stock | *1 No.T | LF | DCON | WT (kg) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|-----|--------|-------------------------|-----------------|-------|---------|----|-------|---------|------|---|------|-------------|
| | | | | R | | | | | | | | |
| 80 | A Type | 0.8-3.2 | AXD7000R08004CA | ★ | 4 | 63 | 25.4 | 1.2 | 21.0 | 23000 | 1 | XDGX2270 |
| 80 | B Type | 4.0-5.0 | AXD7000R08004CB | ★ | 4 | 63 | 25.4 | 1.2 | 20.4 | 23000 | 1 | XDGX2270 |
| 100 | A Type | 0.8-3.2 | AXD7000R10005DA | ★ | 5 | 63 | 31.75 | 1.8 | 21.0 | 19000 | 1 | XDGX2270 |
| 100 | B Type | 4.0-5.0 | AXD7000R10005DB | ★ | 5 | 63 | 31.75 | 1.8 | 20.4 | 19000 | 1 | XDGX2270 |
| 125 | A Type | 0.8-3.2 | AXD7000R12506EA | ★ | 6 | 63 | 38.1 | 2.7 | 21.0 | 16000 | 2 | XDGX2270 |
| 125 | B Type | 4.0-5.0 | AXD7000R12506EB | ★ | 6 | 63 | 38.1 | 2.7 | 20.4 | 16000 | 2 | XDGX2270 |

DCON=mm size, With Coolant Hole

| DC | Type | Insert Corner Radius RE | Order Number | Stock | *1 No.T | LF | DCON | WT (kg) | APMX | Max. Spindle Speed (min ⁻¹) | Fig. | Insert Type |
|-----|--------|-------------------------|------------------|-------|---------|----|------|---------|------|---|------|-------------|
| | | | | R | | | | | | | | |
| 50 | A Type | 0.8-3.2 | AXD7000-050A03RA | ★ | 3 | 50 | 22 | 0.4 | 21.0 | 30000 | 1 | XDGX2270 |
| 50 | B Type | 4.0-5.0 | AXD7000-050A03RB | ★ | 3 | 50 | 22 | 0.4 | 20.4 | 30000 | 1 | XDGX2270 |
| 63 | A Type | 0.8-3.2 | AXD7000-063A03RA | ★ | 3 | 50 | 22 | 0.5 | 21.0 | 25000 | 1 | XDGX2270 |
| 63 | B Type | 4.0-5.0 | AXD7000-063A03RB | ★ | 3 | 50 | 22 | 0.5 | 20.4 | 25000 | 1 | XDGX2270 |
| 80 | A Type | 0.8-3.2 | AXD7000-080A04RA | ★ | 4 | 63 | 27 | 1.2 | 21.0 | 23000 | 1 | XDGX2270 |
| 80 | B Type | 4.0-5.0 | AXD7000-080A04RB | ★ | 4 | 63 | 27 | 1.2 | 20.4 | 23000 | 1 | XDGX2270 |
| 100 | A Type | 0.8-3.2 | AXD7000-100A05RA | ★ | 5 | 63 | 32 | 1.8 | 21.0 | 19000 | 1 | XDGX2270 |
| 100 | B Type | 4.0-5.0 | AXD7000-100A05RB | ★ | 5 | 63 | 32 | 1.8 | 20.4 | 19000 | 1 | XDGX2270 |
| 125 | A Type | 0.8-3.2 | AXD7000-125B06RA | ★ | 6 | 63 | 40 | 2.7 | 21.0 | 16000 | 2 | XDGX2270 |
| 125 | B Type | 4.0-5.0 | AXD7000-125B06RB | ★ | 6 | 63 | 40 | 2.7 | 20.4 | 16000 | 2 | XDGX2270 |

*1 Number of Teeth

Note 1) The maximum allowable revolutions are set to ensure tool and insert stability.

Before operating the tool read the operational guidance on page 30.

Note 2) When using the tool at high spindle speeds, ensure that the tool and chuck are correctly balanced.

Note 3) Note for inserts with a corner radius of 1.6 and above, as corner radius increases the LF and LH dimensions decrease.

Mounting Dimensions

(mm)

| DC | Cutter Body Type | DCON | CBDP | DAH | DCCB | LCCB | DCSFMS | KWW | L8 | Fig. |
|-----|------------------|-------|------|------|------|-------|--------|------|------|------|
| 50 | AXD7000-050A | 22 | 20 | 11.0 | 17 | 20.72 | 45 | 10.4 | 6.3 | 1 |
| 63 | AXD7000-063A | 22 | 20 | 11.0 | 17 | 20.72 | 50 | 10.4 | 6.3 | 1 |
| 80 | AXD7000R080 | 25.4 | 26 | 13.0 | 20 | 26.72 | 63 | 9.5 | 6.0 | 1 |
| 80 | AXD7000-080A | 27 | 23 | 13.0 | 20 | 26.72 | 63 | 12.4 | 7.0 | 1 |
| 100 | AXD7000R100 | 31.75 | 32 | 17.0 | 26 | 18.72 | 70 | 12.7 | 8.0 | 1 |
| 100 | AXD7000-100A | 32 | 26 | 17.0 | 26 | 24.72 | 70 | 14.4 | 8.0 | 1 |
| 125 | AXD7000R125 | 38.1 | 40 | — | 56 | 20.72 | 90 | 15.9 | 10.0 | 2 |
| 125 | AXD7000-125B | 40 | 40 | — | 56 | 20.72 | 90 | 16.4 | 9.0 | 2 |

Spare Parts

(mm)

| Image | Part Name | Part Number |
|-------|----------------------|-------------|
| | Clamp Screw | TS4SBL |
| | Wrench | TKY15D |
| | Anti-seize Lubricant | MK1KS |

* Clamp Torque (N • m) : TS4SBL=3.5

Inserts

(inch)

| Workpiece Material | P | Steel | ◆ | ◆ | ◆ | | | | | This is the selection guideline for AXD7000. Please note that the cutting conditions differ depending on multiple factors, for more details refer to the Recommended Cutting Conditions. Edge Preparation E : Round F : Sharp | | | |
|--------------------|--------------------|-----------------|--------|--------|--------|--------|------|-------|------|--|------|------|----------|
| | N | Aluminum Alloys | ◆ | ◆ | ◆ | | | | | | | | |
| | S | Titanium Alloys | ◆ | ◆ | ◆ | | | | | | | | |
| Shape | Order Number | Class | Honing | Stock | | | | L | LE | S | BS | RE* | Geometry |
| | | | | LC15TF | MP6120 | MP9120 | TF15 | | | | | | |
| | XDGX227008PDFR-GL | G | F | ● | | | ● | 1.181 | .850 | .276 | .079 | .031 | |
| | XDGX227016PDFR-GL | G | F | ● | | | ● | 1.181 | .854 | .276 | .047 | .063 | |
| | XDGX227020PDFR-GL | G | F | ● | | | ● | 1.181 | .854 | .276 | .031 | .079 | |
| | XDGX227024PDER-GL | G | F | ● | | | ● | 1.181 | .854 | .276 | .031 | .094 | |
| | XDGX227030PDFR-GL | G | F | ● | | | ● | 1.134 | .835 | .276 | .031 | .118 | |
| | XDGX227032PDFR-GL | G | F | ● | | | ● | 1.134 | .835 | .276 | .024 | .125 | |
| | XDGX227040PDFR-GL | G | F | ● | | | ● | 1.083 | .811 | .276 | .035 | .157 | |
| | XDGX227050PDFR-GL | G | F | ● | | | ● | 1.063 | .799 | .276 | .016 | .197 | |
| | XDGX227008PDER-GLA | G | E | ● | ● | | | 1.181 | .854 | .276 | .079 | .031 | |
| | XDGX227016PDER-GLA | G | E | ● | ● | | | 1.181 | .854 | .276 | .047 | .063 | |
| | XDGX227020PDER-GLA | G | E | ● | ● | | | 1.181 | .854 | .276 | .031 | .079 | |
| | XDGX227024PDER-GLA | G | E | ● | ● | | | 1.181 | .854 | .276 | .031 | .094 | |
| | XDGX227030PDER-GLA | G | E | ● | ● | | | 1.134 | .831 | .276 | .031 | .118 | |
| | XDGX227032PDER-GLA | G | E | ● | ● | | | 1.134 | .831 | .276 | .024 | .125 | |
| | XDGX227040PDER-GLA | G | E | ● | ● | | | 1.083 | .803 | .276 | .035 | .157 | |
| | XDGX227050PDER-GLA | G | E | ● | ● | | | 1.063 | .795 | .276 | .016 | .197 | |

* GLA breaker corner R (RE) is designed with almost the same corner R as the machined corner R of a workpiece.
* Be aware that the corner R(RE) has a different shape than the machined workpiece R.

Holder and Insert Corner Radius Combination

| Holder | A Type Holder | | | | | B Type Holder | | | | | | | | |
|---------------------------|---------------|-------------------|------------------|-------------------|------------------|-------------------|------------------|-------------------|------------------|-------------------|--|-------------------|--|-------------------|
| | (Inch) | AXD7000UR ○○○○ A | AXD7000UR ○○○○ A | AXD7000UR ○○○○ A | AXD7000UR ○○○○ A | (Inch) | AXD7000UR ○○○○ B | AXD7000UR ○○○○ B | AXD7000UR ○○○○ B | | | | | |
| | (Metric) | AXD7000R ○○○○ A | AXD7000R ○○○○ A | AXD7000R ○○○○ A | AXD7000R ○○○○ A | (Metric) | AXD7000R ○○○○ B | AXD7000R ○○○○ B | AXD7000R ○○○○ B | | | | | |
| Insert Corner Radius (RE) | | XDGX 227008PD-R-G | | XDGX 227016PD-R-G | | XDGX 227020PD-R-G | | XDGX 227030PD-R-G | | XDGX 227032PD-R-G | | XDGX 227040PD-R-G | | XDGX 227050PD-R-G |

Not interchangeable with the corresponding inserts of the A type and B type holders.

● : USA Stock ★ : Stocked in Japan
<10 inserts in one case>

Recommended Cutting Conditions

■ Cutting Speed

(inch)

| Workpiece Material | | Grade | Breaker | Cutting Speed vc (SFM) | |
|--------------------|--------------------------|---------------------------|---------|------------------------------|-------------------|
| P | Mild Steel | ≤180HB | MP6120 | GLA | 655 (490—720) |
| | Carbon Steel Alloy Steel | 180—280HB | MP6120 | GLA | 655 (490—720) |
| N | Aluminum Alloys | Si < 5% | LC15TF | GL | 3280 (655—9840) |
| | | | TF15 | GL | 3280 (655—9840) |
| | | 5% ≤ Si ≤ 10% Si > 10% | LC15TF | GL | 3280 (655—9840) |
| S | Titanium Alloys | — | MP9120 | GLA | 130 (100—195) |

■ Feed per Tooth

(inch)

| Workpiece Material | Breaker | Cutting Width ae | Depth of Cut ap | Feed per Tooth (IPT) | | | | |
|-------------------------------|-----------|---------------------|--------------------|--------------------------|----------------|--------------------------|----------------------------|--------|
| | | | | Cutting Edge Diameter DC | | | | |
| | | | | 1.250" 32mm | 1.500" 40mm | 2.000"—3.000" 50—80mm | 4.000",5.000" 100,125mm | |
| P Mild Steel | ≤180HB | GLA | ≤ .25 DC | ≤ .197 | ≤ .007 | ≤ .008 | ≤ .008 | ≤ .008 |
| | | | | ≤ .394 | ≤ .006 | ≤ .007 | ≤ .007 | ≤ .007 |
| | | | | ≤ .591 | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .006 |
| | | | | ≤ .987 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | ≤ .5 DC | ≤ .197 | ≤ .007 | ≤ .008 | ≤ .008 | ≤ .008 |
| | | | | ≤ .394 | ≤ .006 | ≤ .007 | ≤ .007 | ≤ .007 |
| | | | | ≤ .591 | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .006 |
| | | | | ≤ .987 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | ≤ .75 DC | ≤ .197 | ≤ .006 | ≤ .006 | ≤ .007 | ≤ .007 |
| | | | | ≤ .394 | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 |
| | | | | ≤ .591 | ≤ .004 | ≤ .004 | ≤ .005 | ≤ .005 |
| | | | | — | — | — | — | — |
| DC (Slot) | ≤ .197 | ≤ .005 | ≤ .006 | ≤ .007 | ≤ .007 | | | |
| | ≤ .394 | ≤ .004 | ≤ .005 | ≤ .006 | ≤ .006 | | | |
| | — | — | — | — | — | | | |
| | — | — | — | — | — | | | |
| N Carbon Steel Alloy Steel | 180—280HB | GLA | ≤ .25 DC | ≤ .197 | ≤ .007 | ≤ .008 | ≤ .008 | ≤ .008 |
| | | | | ≤ .394 | ≤ .006 | ≤ .007 | ≤ .007 | ≤ .007 |
| | | | | ≤ .591 | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .006 |
| | | | | ≤ .987 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | ≤ .5 DC | ≤ .197 | ≤ .007 | ≤ .008 | ≤ .008 | ≤ .008 |
| | | | | ≤ .394 | ≤ .006 | ≤ .007 | ≤ .007 | ≤ .007 |
| | | | | ≤ .591 | ≤ .005 | ≤ .006 | ≤ .006 | ≤ .006 |
| | | | | ≤ .987 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | ≤ .75 DC | ≤ .197 | ≤ .006 | ≤ .006 | ≤ .007 | ≤ .007 |
| | | | | ≤ .394 | ≤ .005 | ≤ .005 | ≤ .006 | ≤ .006 |
| | | | | ≤ .591 | ≤ .004 | ≤ .004 | ≤ .005 | ≤ .005 |
| | | | | — | — | — | — | — |
| DC (Slot) | ≤ .197 | ≤ .005 | ≤ .006 | ≤ .007 | ≤ .007 | | | |
| | ≤ .394 | ≤ .004 | ≤ .005 | ≤ .006 | ≤ .006 | | | |
| | — | — | — | — | — | | | |
| | — | — | — | — | — | | | |

(Note 1) The above cutting conditions are determined based on high workpiece and machine rigidity, where no vibration occurred. If vibrations occur make adjustments according to the machining conditions.

(Note 2) Note, vibrations may occur in the following conditions.

- When using long tool overhang.
- When the workpiece has poor clamping rigidity or when the machine rigidity or workpiece rigidity is low, vibrations can occur easily, if so, reduce the cutting conditions.
- When pocket machining corner radii.

■ Feed per Tooth

(inch)

| Workpiece Material | Breaker | Cutting Width ae | Depth of Cut ap | Feed per Tooth (IPT) | | | | | | | |
|----------------------|---------|---------------------|----------------------|--------------------------|----------------|--------------------------|----------------------------|--------|--------|--------|---|
| | | | | Cutting Edge Diameter DC | | | | | | | |
| | | | | 1.250" 32mm | 1.500" 40mm | 2.000"—3.000" 50—80mm | 4.000",5.000" 100,125mm | | | | |
| N Aluminum Alloys | Si < 5% | GL | ≤ .25 DC | ≤ .197 | ≤ .014 | ≤ .016 | ≤ .016 | ≤ .016 | | | |
| | | | | ≤ .394 | ≤ .012 | ≤ .014 | ≤ .014 | ≤ .014 | | | |
| | | | | ≤ .591 | ≤ .010 | ≤ .012 | ≤ .012 | ≤ .012 | | | |
| | | | | ≤ .987 | ≤ .008 | ≤ .010 | ≤ .010 | ≤ .010 | | | |
| | | | ≤ .5 DC | ≤ .197 | ≤ .014 | ≤ .014 | ≤ .016 | ≤ .016 | | | |
| | | | | ≤ .394 | ≤ .012 | ≤ .012 | ≤ .014 | ≤ .014 | | | |
| | | | | ≤ .591 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .012 | | | |
| | | | | ≤ .987 | ≤ .008 | ≤ .008 | ≤ .010 | ≤ .010 | | | |
| | | | ≤ .75 DC | ≤ .197 | ≤ .012 | ≤ .012 | ≤ .014 | ≤ .014 | | | |
| | | | | ≤ .394 | ≤ .010 | ≤ .010 | ≤ .012 | ≤ .012 | | | |
| | | | | ≤ .591 | ≤ .008 | ≤ .008 | ≤ .010 | ≤ .010 | | | |
| | | | | ≤ .987 | ≤ .006 | ≤ .006 | ≤ .008 | ≤ .008 | | | |
| | | | DC (Slot) | ≤ .197 | ≤ .010 | ≤ .012 | ≤ .014 | ≤ .014 | | | |
| | | | | ≤ .394 | ≤ .008 | ≤ .010 | ≤ .012 | ≤ .012 | | | |
| | | | | ≤ .591 | ≤ .006 | ≤ .008 | ≤ .010 | ≤ .010 | | | |
| | | | | ≤ .987 | ≤ .004 | ≤ .006 | ≤ .008 | ≤ .008 | | | |
| | | | S Titanium Alloys | — | GLA | ≤ .25 DC | ≤ .197 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | | | | | ≤ .394 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | | | | | ≤ .591 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | | | | | ≤ .987 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | | | | ≤ .5 DC | ≤ .197 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | | | | | ≤ .394 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | | | | | ≤ .591 | ≤ .004 | ≤ .005 | ≤ .005 | — |
| | | | | | | | ≤ .987 | — | ≤ .004 | ≤ .004 | — |
| ≤ .75 DC | ≤ .197 | ≤ .004 | | | | ≤ .005 | ≤ .005 | — | | | |
| | ≤ .394 | ≤ .004 | | | | ≤ .005 | ≤ .005 | — | | | |
| | ≤ .591 | ≤ .004 | | | | ≤ .005 | ≤ .005 | — | | | |
| | ≤ .987 | — | | | | ≤ .004 | ≤ .004 | — | | | |
| DC (Slot) | ≤ .197 | ≤ .003 | | | | ≤ .003 | ≤ .003 | — | | | |
| | ≤ .394 | ≤ .002 | | | | ≤ .003 | ≤ .003 | — | | | |
| | — | — | | | | — | — | — | | | |
| | — | — | | | | — | — | — | | | |


(Note 1) The above cutting conditions are determined based on high workpiece and machine rigidity, where no vibration occurred. If vibrations occur make adjustments according to the machining conditions.

(Note 2) Note, vibrations may occur in the following conditions.


- When using long tool overhang.
- When the workpiece has poor clamping rigidity or when the machine rigidity or workpiece rigidity is low, vibrations can occur easily, if so, reduce the cutting conditions.
- When pocket machining corner radii.

Ramping / Helical Cutting (Aluminum Alloy)


Ramping

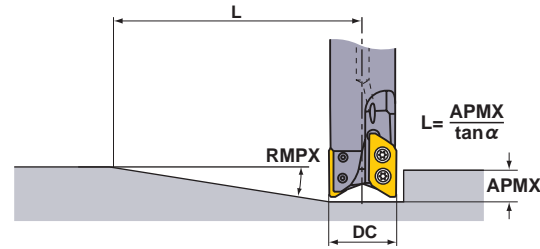

Helical Cutting



Helical Cutting

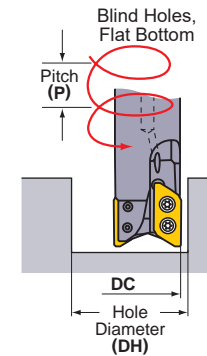

| Type | DC | RE | Ramping | |
|--------|-----------|------------|---------|--------|
| | | | RMPX | L *1 |
| A Type | 1.250 | .031-.094 | 20° | 2.272 |
| | | .118,.125 | 19.3° | 2.362 |
| | 1.500 | .031-.094 | 14.1° | 3.292 |
| | | .118,.125 | 13.3° | 3.498 |
| | 2.000 | .031-.094 | 9.8° | 4.788 |
| | | .118,.125 | 9.1° | 5.163 |
| 3.000 | .031-.094 | 5.3° | 8.915 | |
| | .118,.125 | 4.9° | 9.647 | |
| 4.000 | .031-.094 | 4.2° | 11.262 | |
| | .118,.125 | 3.8° | 12.451 | |
| 5.000 | .031-.094 | 2.5° | 18.941 | |
| | .118,.125 | 2.2° | 21.527 | |
| B Type | 1.250 | .157, .197 | 18° | 2.471 |
| | | .157, .197 | 11° | 4.131 |
| | 2.000 | .157, .197 | 8° | 5.714 |
| | | .157, .197 | 4° | 11.483 |
| | 4.000 | .157, .197 | 3° | 15.322 |
| | | .157, .197 | 2° | 22.995 |

| Type | DC | RE | Helical Cutting | |
|--------|-----------|-----------|-----------------|--------|
| | | | DH min. | P max. |
| A Type | 1.250 | .031-.094 | 1.535 | .315 |
| | | .118,.125 | 1.535 | .315 |
| | 1.500 | .031-.094 | 2.047 | .394 |
| | | .118,.125 | 2.047 | .394 |
| | 2.000 | .031-.094 | 3.031 | .551 |
| | | .118,.125 | 3.031 | .472 |
| 3.000 | .031-.094 | 5.000 | .551 | |
| | .118,.125 | 5.000 | .512 | |
| 4.000 | .031-.094 | 6.969 | .669 | |
| | .118,.125 | 6.969 | .591 | |
| 5.000 | .031-.094 | 9.016 | .512 | |
| | .118,.125 | 9.016 | .472 | |
| B Type | 1.250 | .157 | 1.535 | .276 |
| | | .197 | 1.535 | .276 |
| | 1.500 | .157 | 2.047 | .315 |
| | | .197 | 2.047 | .315 |
| | 2.000 | .157 | 3.031 | .433 |
| | | .197 | 3.031 | .433 |
| 3.000 | .157 | 5.000 | .433 | |
| | .197 | 5.000 | .433 | |
| 4.000 | .157 | 6.969 | .472 | |
| | .197 | 6.969 | .472 | |
| 5.000 | .157 | 9.016 | .433 | |
| | .197 | 9.016 | .433 | |

| Type | DC | RE | BS | Helical Cutting (Blind Hole, Flat Bottom) | | | |
|--------|--------|------|-------|---|--------|------------|--------|
| | | | | DH max. *2 | P max. | DH min. *3 | P max. |
| A Type | 1.250" | .031 | .079 | 2.417 | .787 | 2.276 | .787 |
| | | .063 | .047 | 2.354 | .748 | 2.276 | .748 |
| | | .079 | .031 | 2.323 | .709 | 2.276 | .748 |
| | | .094 | .016 | 2.291 | .709 | 2.276 | .748 |
| | | .118 | .031 | 2.244 | .669 | 2.193 | .669 |
| | | .125 | .024 | 2.228 | .669 | 2.193 | .669 |
| | 1.500" | .031 | .079 | 2.902 | .787 | 2.776 | .787 |
| | | .063 | .047 | 2.839 | .748 | 2.776 | .748 |
| | | .079 | .031 | 2.807 | .709 | 2.776 | .748 |
| | | .094 | .016 | 2.776 | .709 | 2.776 | .748 |
| | | .118 | .031 | 2.728 | .669 | 2.693 | .669 |
| | | .125 | .024 | 2.713 | .669 | 2.693 | .669 |
| | 2.000" | .031 | .079 | 3.902 | .787 | 3.768 | .787 |
| | | .063 | .047 | 3.839 | .748 | 3.768 | .748 |
| | | .079 | .031 | 3.807 | .709 | 3.768 | .748 |
| | | .094 | .016 | 3.776 | .709 | 3.768 | .748 |
| | | .118 | .031 | 3.728 | .669 | 3.768 | .669 |
| | | .125 | .024 | 3.713 | .669 | 3.687 | .669 |
| | 3.000" | .031 | .079 | 5.902 | .787 | 5.768 | .787 |
| | | .063 | .047 | 5.839 | .748 | 5.768 | .748 |
| | | .079 | .031 | 5.807 | .709 | 5.768 | .748 |
| | | .094 | .016 | 5.776 | .709 | 5.768 | .748 |
| | | .118 | .031 | 5.728 | .669 | 5.686 | .669 |
| | | .125 | .024 | 5.713 | .669 | 5.686 | .669 |
| 4.000" | .031 | .079 | 7.902 | .787 | 7.768 | .787 | |
| | .063 | .047 | 7.839 | .748 | 7.768 | .748 | |
| | .079 | .031 | 7.807 | .709 | 7.768 | .748 | |
| | .094 | .016 | 7.776 | .709 | 7.768 | .748 | |
| | .118 | .031 | 7.728 | .669 | 7.686 | .669 | |
| | .125 | .024 | 7.713 | .669 | 7.686 | .669 | |
| 5.000" | .031 | .079 | 9.902 | .669 | 9.767 | .630 | |
| | .063 | .047 | 9.839 | .630 | 9.767 | .630 | |
| | .079 | .031 | 9.807 | .630 | 9.767 | .630 | |
| | .094 | .016 | 9.776 | .630 | 9.767 | .630 | |
| | .118 | .031 | 9.728 | .551 | 9.685 | .551 | |
| | .125 | .024 | 9.713 | .551 | 9.685 | .551 | |
| B Type | 1.250" | .157 | .035 | 2.165 | .630 | 2.106 | .630 |
| | | .197 | .016 | 2.087 | .591 | 2.070 | .591 |
| | 1.500" | .157 | .035 | 2.650 | .630 | 2.605 | .630 |
| | | .197 | .016 | 2.571 | .591 | 2.569 | .591 |
| | 2.000" | .157 | .035 | 3.650 | .630 | 3.599 | .630 |
| | | .197 | .016 | 3.571 | .591 | 3.563 | .591 |
| | 3.000" | .157 | .035 | 5.650 | .551 | 5.597 | .551 |
| | | .197 | .016 | 5.571 | .551 | 5.561 | .551 |
| | 4.000" | .157 | .035 | 7.650 | .591 | 7.597 | .591 |
| | | .197 | .016 | 7.571 | .591 | 7.561 | .591 |
| | 5.000" | .157 | .035 | 9.650 | .472 | 9.597 | .472 |
| | | .197 | .016 | 9.571 | .472 | 9.560 | .472 |

(Note) The recommended ramping feed is .002 IPT or under.

*1 L (Max. Depth of Cut = .591" / tan α). Cutters' moving distance until depth of cut reaches APMX at a maximum ramping angle.

Maximum depth of cut A type is .827", B type is .803".

*2 The maximum diameter when machining a blind hole with a flat face using a corner radius of .031" for A type and .157" for B type.

Other than that, find with the below formula.

{(cutting edge diameter DC) - (corner radius) - 0.3} x 2

*3 The minimum diameter when machining a blind hole with a flat face using a corner radius of .031" for A type and .157" for B type.


Other than that, find with the below formula.

{(cutting edge diameter DC) - (corner radius) - (Width of wiper edge BS) - 0.1} x 2

Max. Drilling Depth (Aluminum Alloy)

| Type | RE | Max. Drilling Depth |
|--------|------------|---------------------|
| A Type | .031-.094 | .197 |
| | .118, .125 | .177 |
| B Type | .157 | .157 |
| | .197 | .138 |

AXD7000 can be effectively used for pocket machining without the need for a prepared hole.



(Note) The recommended ramping feed is .002 IPT or under.

*1 L (Max. Depth of Cut = .591" / tan α). Cutters' moving distance until depth of cut reaches APMX at a maximum ramping angle.

Maximum depth of cut A type is .827", B type is .803".

*2 The maximum diameter when machining a blind hole with a flat face using a corner radius of .031" for A type and .157" for B type. Other than that, find with the below formula.

{(cutting edge diameter DC) - (corner radius) - 0.3} x 2

*3 The minimum diameter when machining a blind hole with a flat face using a corner radius of .031" for A type and .157" for B type. Other than that, find with the below formula.

{(cutting edge diameter DC) - (corner radius) - (Width of wiper edge BS) - 0.1} x 2

Operation Guidance

Only use the inserts and parts provided by Mitsubishi Materials with this tool. Use of the correct insert clamp screws is especially important to ensure overall tool safety. Do not use damaged or worn clamp screws.

| Type | AXD4000 | | AXD7000 | |
|--|---------|-----------------|---------|-----------------|
| Cutting Edge Diameter DC (inch) | ø.787" | ø1.000"-ø5.000" | ø1.250" | ø1.500"-ø5.000" |
| Clamp Screw Number | TS3SBS | TS3SB | TS4SB | TS4SBL |
| Overall Length L (inch) | .256 | .315 | .353 | .413 |
| Clamp Torque (lbf-in) | 13 | 13 | 31 | 31 |





Figure 1

When tightening the clamp screws, follow the order in Figure 1.
 The maximum allowable spindle speeds are shown in Table 1.
 Ensure that the cutter operates under the maximum allowable spindle speed.
 The maximum allowable spindle speeds for safety purposes are determined in accordance with ISO15641 (Milling Cutters for high speed machining—Safety requirements).

Maximum Allowable Spindle Speed (min⁻¹)

- The maximum allowable Spindle Speed listed in each table is set at the maximum balance (balance: ISO1940) accuracy of G6.3 or higher under the condition that the insert does not fly off or the body gets damaged due to centrifugal force.
- Even if the insert is used within the maximum allowable spindle speed, if the spindle speed exceeds the values listed in the table below, set the balance accuracy along with an arbor or milling chuck to G6.3 or better. It is also recommended to replace the clamp screw with a new one each time the insert is replaced.
- The balance accuracy of the AXD series is G6.3 at 10000 min⁻¹ with just the holder alone (with no insert or clamp screw attached).
- Use a machining tool that has safety measures in place in case there is damage to the cutter body.

Maximum Allowable Spindle Speed (min⁻¹) When Balancing With an Arbor or Milling Chuck Has Not Occurred

AXD4000


| Cutting Edge Diameter DC (inch) | ø.787" | ø1.000" | ø1.250" | ø1.500" | ø2.000" | ø2.500" | ø3.000" | ø4.000" | ø5.000" |
|---|--------|---------|---------|---------|---------|---------|---------|---------|---------|
| Max. Spindle Speed (min ⁻¹) | 15000 | 12000 | 9500 | 7600 | 6000 | 4800 | 3800 | 3000 | 2400 |

AXD7000

| Cutting Edge Diameter DC (inch) | ø1.250" | ø1.500" | ø2.000" | ø2.500" | ø3.000" | ø4.000" | ø5.000" |
|---|---------|---------|---------|---------|---------|---------|---------|
| Max. Spindle Speed (min ⁻¹) | 9500 | 7600 | 6000 | 4800 | 3800 | 3000 | 2400 |

When setting the spindle speed, take into consideration the maximum allowable spindle speed of the arbor or milling chuck.
 Use the specified set bolt when using the arbor type with through coolant.
 The inserts have sharp cutting edges and handling them with bare hands may cause injuries. Always wear safety gloves when handling the indexable inserts.

SCREW-IN HOLDERS STRAIGHT SHANK TYPE

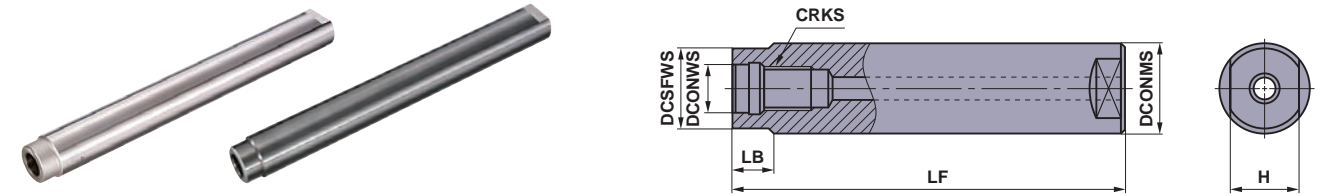


Steel Shank Type

| CRKS | Order Number | Stock | DCONMS | LF | DCONWS | DCSFWS | LB | H | WT |
|------|----------------------|-------|--------|--------|--------|--------|------|------|-----|
| M12 | SCU16M12S125S | ● | 1.000 | 4.921 | .492 | .925 | .394 | .748 | .9 |
| M12 | SCU16M12S245L | ● | 1.000 | 9.646 | .492 | .925 | .394 | .748 | 2.0 |
| M16 | SCU20M16S140S | ● | 1.250 | 5.512 | .669 | 1.122 | .591 | .945 | 1.8 |
| M16 | SCU20M16S280L | ● | 1.250 | 11.024 | .669 | 1.122 | .591 | .945 | 3.5 |

Metric Standard

| CRKS | Order Number | Stock | DCONMS | LF | DCONWS | DCSFWS | LB | H | WT |
|------|---------------------|-------|--------|-----|--------|--------|----|----|-----|
| M12 | SC25M12S125S | ★ | 25 | 125 | 12.5 | 23.5 | 10 | 19 | 0.4 |
| M12 | SC25M12S245L | ★ | 25 | 245 | 12.5 | 23.5 | 10 | 19 | 0.8 |
| M16 | SC32M16S140S | ★ | 32 | 140 | 17.0 | 28.5 | 15 | 24 | 0.8 |
| M16 | SC32M16S280L | ★ | 32 | 280 | 17.0 | 28.5 | 15 | 24 | 1.6 |

● : USA Stock ★ : Stocked in Japan

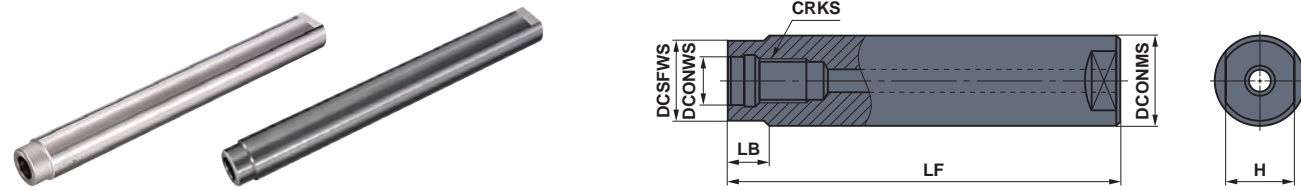

Carbide Shank Type

(inch)

| CRKS | Order Number | Stock | DCONMS | LF | DCONWS | DCSFWS | LB | H | WT (lbs) |
|------|----------------|-------|--------|--------|--------|--------|------|------|----------|
| M12 | SCU16M12S125SW | ● | 1.000 | 4.921 | .492 | .925 | .394 | .748 | 1.8 |
| M12 | SCU16M12S245LW | ● | 1.000 | 9.646 | .492 | .925 | .394 | .748 | 3.5 |
| M16 | SCU20M16S140SW | ● | 1.250 | 5.512 | .669 | 1.122 | .591 | .945 | 3.1 |
| M16 | SCU20M16S280LW | ● | 1.250 | 11.024 | 1.250 | 1.122 | .591 | .945 | 6.4 |

Metric Standard


(mm)

| CRKS | Order Number | Stock | DCONMS | LF | DCONWS | DCSFWS | LB | H | WT (kg) |
|------|---------------|-------|--------|-----|--------|--------|----|----|---------|
| M12 | SC25M12S125SW | ★ | 25 | 125 | 12.5 | 23.5 | 10 | 19 | 0.8 |
| M12 | SC25M12S245LW | ★ | 25 | 245 | 12.5 | 23.5 | 10 | 19 | 1.5 |
| M16 | SC32M16S140SW | ★ | 32 | 140 | 17.0 | 28.5 | 15 | 24 | 1.4 |
| M16 | SC32M16S280LW | ★ | 32 | 280 | 17.0 | 28.5 | 15 | 24 | 2.8 |

● : USA Stock ★ : Stocked in Japan

SCREW-IN HOLDERS

HSK63A Shank Arbor

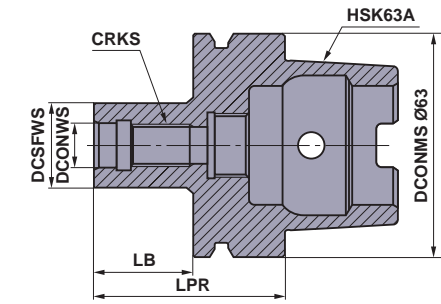


Metric Standard

The coolant tube has been already set.

(mm)

| CRKS | Order Number | Stock | DCONWS | DCSFWS | LPR | LB | WT (kg) |
|------|-------------------|-------|--------|--------|-----|----|---------|
| M12 | SC25M12S27-HSK63A | ★ | 12.5 | 23.5 | 53 | 27 | 0.7 |
| M16 | SC32M16S28-HSK63A | ★ | 17.0 | 28.5 | 54 | 28 | 0.8 |

BT30 Shank Arbor

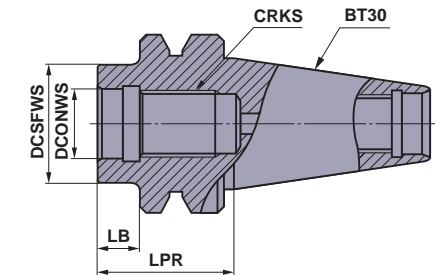


Metric Standard

(mm)

| CRKS | Order Number | Stock | DCONWS | DCSFWS | LPR | LB | WT (kg) |
|------|-----------------|-------|--------|--------|-----|----|---------|
| M12 | SC25M12S10-BT30 | ★ | 12.5 | 23.5 | 32 | 10 | 0.4 |
| M16 | SC32M16S10-BT30 | ★ | 17.0 | 28.5 | 32 | 10 | 0.4 |

BT40 Shank Arbor

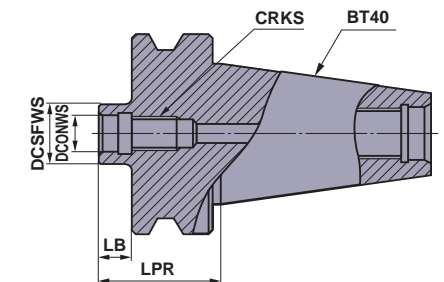

Metric Standard

(mm)

| CRKS | Order Number | Stock | DCONWS | DCSFWS | LPR | LB | WT (kg) |
|------|-----------------|-------|--------|--------|-----|----|---------|
| M12 | SC25M12S10-BT40 | ★ | 12.5 | 23.5 | 37 | 10 | 1 |
| M16 | SC32M16S10-BT40 | ★ | 17.0 | 28.5 | 37 | 10 | 1 |

ARBORS

Arbors for Screw-in Tools

How to Install the Screw-in Head


- Thoroughly clean the clamp section of the head and the arbor with an air blower or brush before installation.
- Tighten the head at the recommended torque and ensure that there is no gap between the head and arbor.



| Screw Size | Recommended Torque (lb-ft) | Wrench Size (inch) |
|------------|----------------------------|--------------------|
| M12 | 59.0 | .748 |
| M16 | 66.4 | .945 |

- Due to the structure of the screw-in head of the AXD, it may not be possible to use a commercially available spanner to attach the arbor. It is recommended to use the dedicated spanner.
- Cutting tools become extremely hot during cutting. Never touch them with bare hands after operation as this may produce a risk of injuries or burns.

Parts Sold Separately Arbor Mounting Spanner

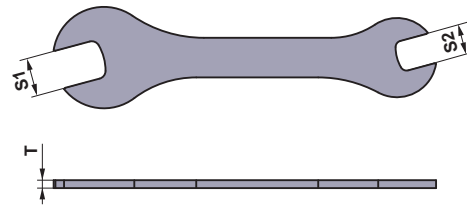




| Order Number | Dimensions (inch) | | |
|--------------|-------------------|------|------|
| | S1 | S2 | T |
| AKY1924050A | .945 | .748 | .197 |

* Clamp Torque (lb-ft) : $.748 = 59.0$, $.945 = 66.4$

Technical Data

Excellent Wall Accuracy

Specially designed G-class inserts with a helical cutting edge for excellent wall accuracy.

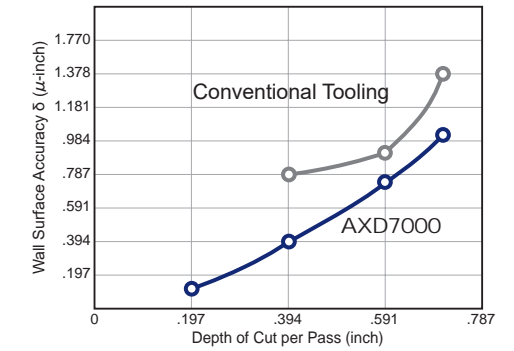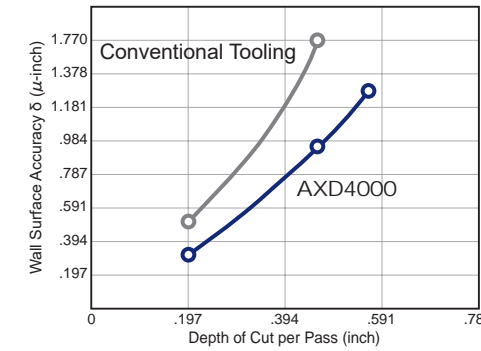

<Cutting Conditions>
 Tool : AXD4000UR243SA20SA
 Insert : XDGX175008PDFR-GL
 Grade : TF15
 Workpiece Material : Aluminum Alloy
 Cutting Speed : 3280 SFM
 Feed per Tooth : .004 IPT
 Width of Cut : .118 inch
 Cutting Mode : Wet Cutting



<Cutting Conditions>
 Tool : AXD7000UR242SA24SA
 Insert : XDGX227008PDFR-GL
 Grade : TF15
 Workpiece Material : Aluminum Alloy
 Cutting Speed : 7870 SFM
 Feed per Tooth : .004 IPT
 Width of Cut : .118 inch
 Cutting Mode : Wet Cutting

Low Resistance Inserts


An optimised helical flank and a flank angle offer cutting edge strength and provide a large rake angle to reduce cutting resistance. Additionally a convex cutting edge is incorporated to ensure effective chip flow.

<Cutting Conditions>
 Workpiece Material : Aluminum Alloy
 Tool : DC=Ø2.000 inch
 Insert : RE=.031R, GL Breaker TF15
 Cutting Speed : vc=3280 SFM
 Feed per Tooth : .008 IPT
 Depth of Cut : ap=.984 inch
 Width of Cut : ae=.394 inch
 Cutting Mode : Wet Cutting, Single tooth

Cutting Resistance

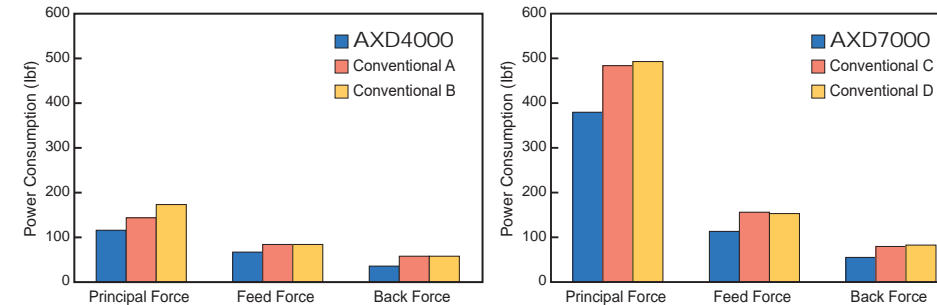


Comparison of Surface Finishes Improved Surface Finishes by Reducing Feed Mark

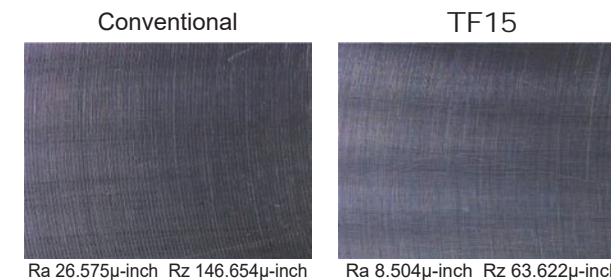

<Cutting Conditions>
 Workpiece Material : AISI 7075
 Tool : AXD4000-050A04RA
 Insert : AXD4000-GM
 Grade : TF15
 Cutting Speed : 3280 SFM
 Feed per Tooth : .006 IPT
 Width of Cut : 1.181 inch
 Depth of Cut : .020 inch
 Cutting Mode : Single Tooth
 Internal Coolant : BT40

Cutting Performance on Titanium Alloy Stable Tool Life under High-load Conditions



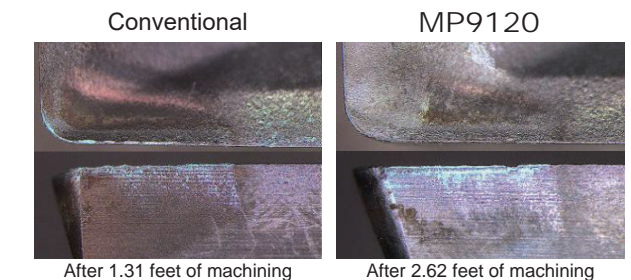


<Cutting Conditions>
 Workpiece Material : Titanium Alloy
 Tool : AXD4000-050A04RA
 Insert : XDGX175004PDER-GM
 Grade : MP9120
 Cutting Speed : 100 SFM
 Feed per Tooth : .004 IPT
 Width of Cut : 1.575 inch
 Depth of Cut : .079 inch
 Cutting Mode : Wet (Int. and Ext.)
 Single Tooth

Cutting Performance



Cutting of Aluminum Alloy Cast Iron : Si Content 9%



2.3 times longer tool life due to tougher cutting edge & PVD coating

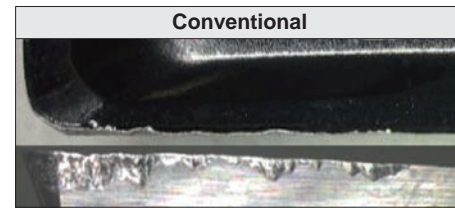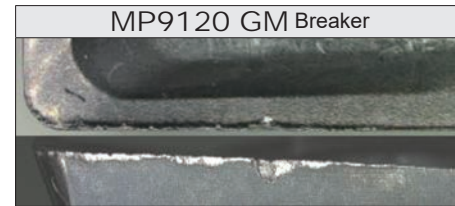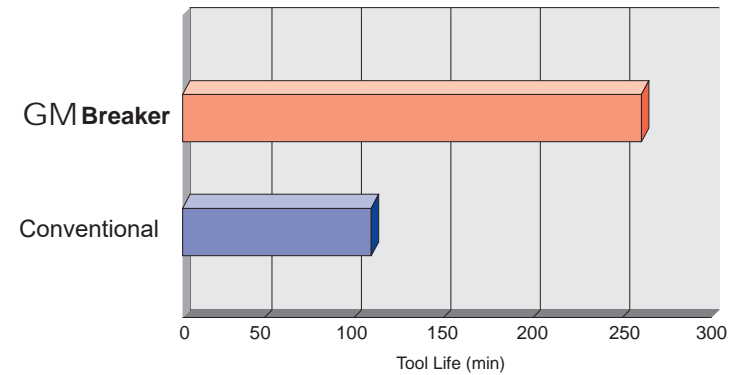

<Cutting Conditions>
 Workpiece Material : Aluminum Alloy Cast Iron : Si Content 9%
 Tool : AXD4000-040A02RA
 Insert : XDGX175008PDER-GM
 Cutting Speed : 3150 SFM
 Feed : .004 IPT
 Depth of Cut : ap=.236 inch ae=1.299 inch
 Cutting Mode : Wet

Application Examples
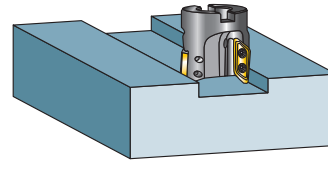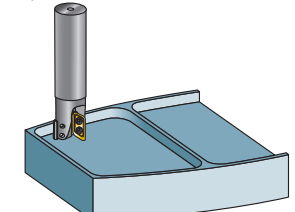
| Tool | AXD4000UR0202A | AXD4000UR0202SA20SA |
|----------------------|--|--|
| Insert (Grade) | XDGX175030PDFR-GL(TF15) | XDGX175030PDFR-GL(TF15) |
| Workpiece | Aluminum Alloys  | Aluminum Alloys  |
| Cutting Conditions | Spindle Speed (min ⁻¹) | 27000 |
| | Cutting Speed (SFM) | 13910 |
| | Feed per Tooth (IPT) | .011 |
| | Depth of Cut (inch) | .236 |
| | Width of Cut (inch) | 1.969 |
| | Metal Removal Rate (inch ³ /min) | 282 |
| Cutting Mode | Wet | Wet |
| Machine Spindle Type | M/C-HSK80F | CAT50 |
| Result | Although tool overhang was significant, the low cutting resistance compared with conventional products enabled stable milling. | Compared with conventional products, tool rigidity is high, obtaining an excellent surface finish. |
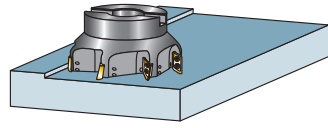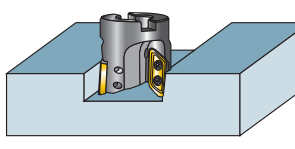
| Tool | AXD4000R12507EA | AXD7000UR0203A |
|----------------------|--|---|
| Insert (Grade) | XDGX175008PDFR-GL(TF15) | XDGX227040PDFR-GL(TF15) |
| Workpiece | Aluminum Alloys  | Aluminum Alloys  |
| Cutting Conditions | Spindle Speed (min ⁻¹) | 5000 |
| | Cutting Speed (SFM) | 6430 |
| | Feed per Tooth (IPT) | .012 |
| | Depth of Cut (inch) | .197 |
| | Width of Cut (inch) | 3.150 |
| | Metal Removal Rate (inch ³ /min) | 256 |
| Cutting Mode | Wet | MQL |
| Machine Spindle Type | CAT50 | M/C-HSK63/80A |
| Result | Compared with conventional products, cutting resistance is low, and feed rate per tooth was improved by 20%. | AXD displayed lower cutting resistance and achieved a high metal removal rate of up to 593inch ³ /min. |

Please note that the machining performed in the application examples is dependent on the rigidity of the machine used and the rigidity of the workpiece and clamping.



MITSUBISHI MATERIALS U.S.A. CORPORATION

California Office (Headquarters)

3535 Hyland Avenue, Suite 200
Costa Mesa, CA 92626
Customer Service: 800.523.0800
Technical Service: 800.486.2341

North Carolina-MTEC (Marketing & Technical Center)

105 Corporate Center Drive, Suite A
 Mooresville, NC 28117
Main: 980.312.3100
Fax: 704.746.9292

Chicago Office (Engineering)

300 N. Martingale Road, Suite 500
Schaumburg, IL 60173
Main: 847.252.6300
Fax: 847.519.1732

Toronto Office (Canada Branch)

3535 Laird Road, Units 15 & 16
Mississauga, Ontario, Canada L5L 5Y7
Main: 905.814.0240
Fax: 905.814.0245

MMC Metal de Mexico, S.A. DE C.V.

Av. La Cañada No. 16,
Parque Industrial Bernardo
Quintana, El Marques,
Queretaro C.P. 76246 MEXICO
Main: +52.442.221.61.36
Fax: +52.442.221.61.34

Detroit Office (Moldino CS)

41700 Gardenbrook Road, Suite 120
Novi, MI 48375
Main: 248.308.2620
Fax: 248.308.2627

For Your Safety

- Don't handle inserts and chips without gloves.
- Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage.
- Please use safety covers and wear safety glasses.
- When using compounded cutting oils, please take fire precautions.
- When attaching inserts or spare parts, please use only the correct wrench or driver.
- When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.



Product Brands Crafted by Mitsubishi Materials U.S.A.



www.diaedgetools.com
www.mmus-carbide.com

Tools specifications subject to change without notice.

B116A-US-2022.10



**COMPLETE
METALWORKING
SOLUTIONS**

(800) 991-4225

www.ahbinc.com

ISO Certified

customerservice@ahbinc.com