

# AHB

TOOLING & MACHINERY

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225

[www.ahbinc.com](http://www.ahbinc.com)

ISO Certified

[customerservice@ahbinc.com](mailto:customerservice@ahbinc.com)



## DIA EDGE

# ALIMASTER

HIGHLY EFFICIENT, MULTI-FUNCTIONAL  
MACHINING OF ALUMINUM ALLOYS

 MITSUBISHI MATERIALS U.S.A.

TOOL NEWS | B264A





# ABOUT OUR BRAND

**Your manufacturing success is our success.**

It's simple. We want to provide high-quality cutting tool products that help deliver unparalleled performance and control for you to manufacture precisely perfect products every day.

Our long heritage of building partnerships through cutting tool solutions to metal working manufacturers, like yours, has given Mitsubishi Materials USA a solid reputation as an industry leader. We understand the importance of getting it right the first time by delivering high-quality cutting tool product brands to help overcome machining challenges to improve machining processes.

Your success is our success and is the driving force behind our innovative products. Our product brands, DIAEDGE and MOLDINO, are trusted globally in the metal manufacturing and die & mold industries for delivering expertly-designed manufactured tools of the trade for highly specialized industries like yours.

With the acquisition of MOLDINO Tool Engineering, Ltd, our traditional Mitsubishi Materials USA cutting tool product line is now sold under the DIAEDGE product brand name.

**Brands you can trust:**

 **MITSUBISHI MATERIALS U.S.A.**

TRUSTED PRODUCT BRANDS

 **DIAEDGE**

 **MOLDINO**




## High Efficiency Machining of Aluminum Alloys

# New Alimaster NEW

Helical internal thru-coolant holes combined with an optimized cutting edge geometry enables highly efficient machining.

### Strengthened Center Cutting Edges

Optimized center cutting edges provide strength and reliability even when plunging.

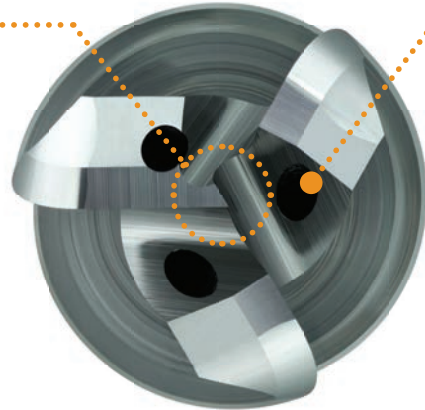

### Helical Coolant Holes

Chip discharge during plunging, ramping and grooving have been significantly improved, for stable, high efficiency cutting. Helical holes maintain a stable coolant supply even after re-grinding.

### Ideal Flute Geometry

The cross sectional geometry of the flutes is perfect for efficient chip discharge and prevents chip jamming commonly associated with high feed machining of aluminum.

Square End Mill, 3 Flute  
**A3SA**



### Irregular Helix and Curved Flute Exit Geometry

Suppresses chatter to enable excellent surface finishes.

Radius End Mill, 3 Flute  
**A3SARB**





## High Efficiency & Economy



# DLC Coating NEW

By adopting a unique DLC coating with excellent adhesion and weld-resistance, cutting friction is reduced thereby providing extra stability and efficiency. Additionally, wet or dry cutting is possible for slot milling and contouring.

Square End Mill, 3 Flute  
**DLC3SA**

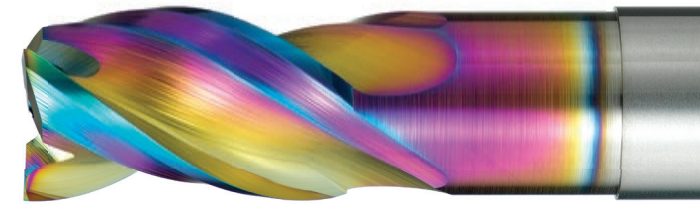



Radius End Mill, 3 Flute  
**DLC3SARB**

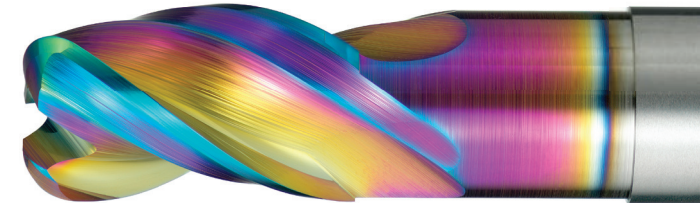


DLC coatings may differ naturally in color. This has no effect on quality or performance.

## Dry Slot Milling - Comparison when Machining Different Materials

Superior weld-resistance combined with chip evacuation properties enables high efficiency slot milling even at large depths of cut.

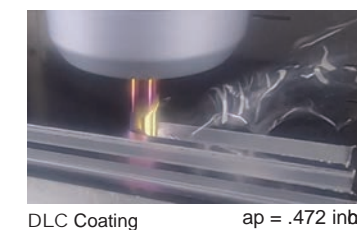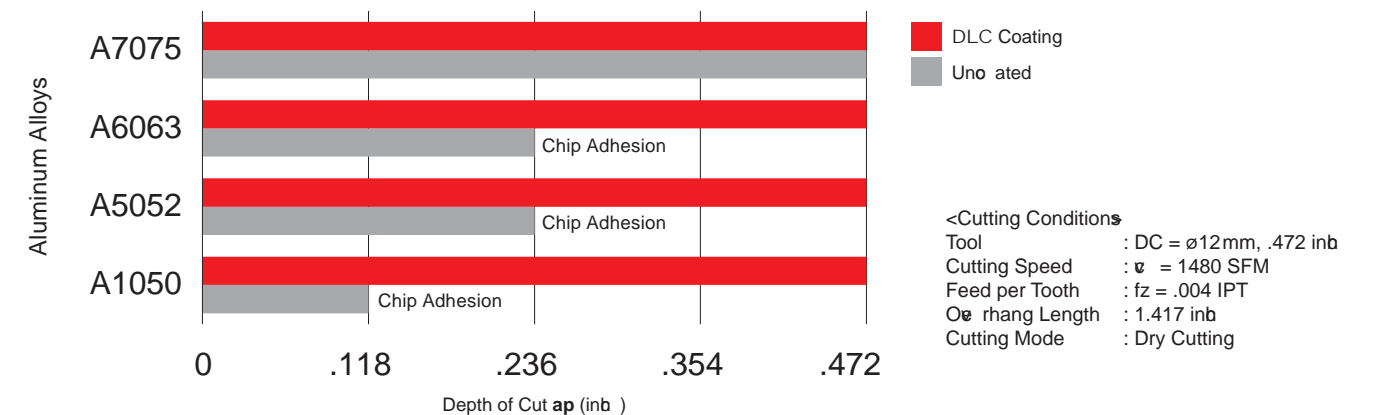

DLC Coating ap = .472 inb

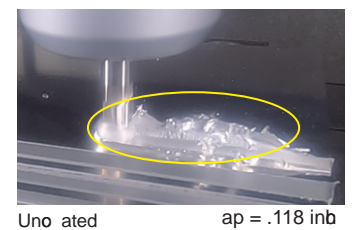

Uncoated ap = .118 inb


\* Air blow both internal and external is used to effectively evacuate chips.



## Cutting Performance

### With DLC Coating - Example of Dry Machining A7075 Material

Multi-functional dry machining is possible.

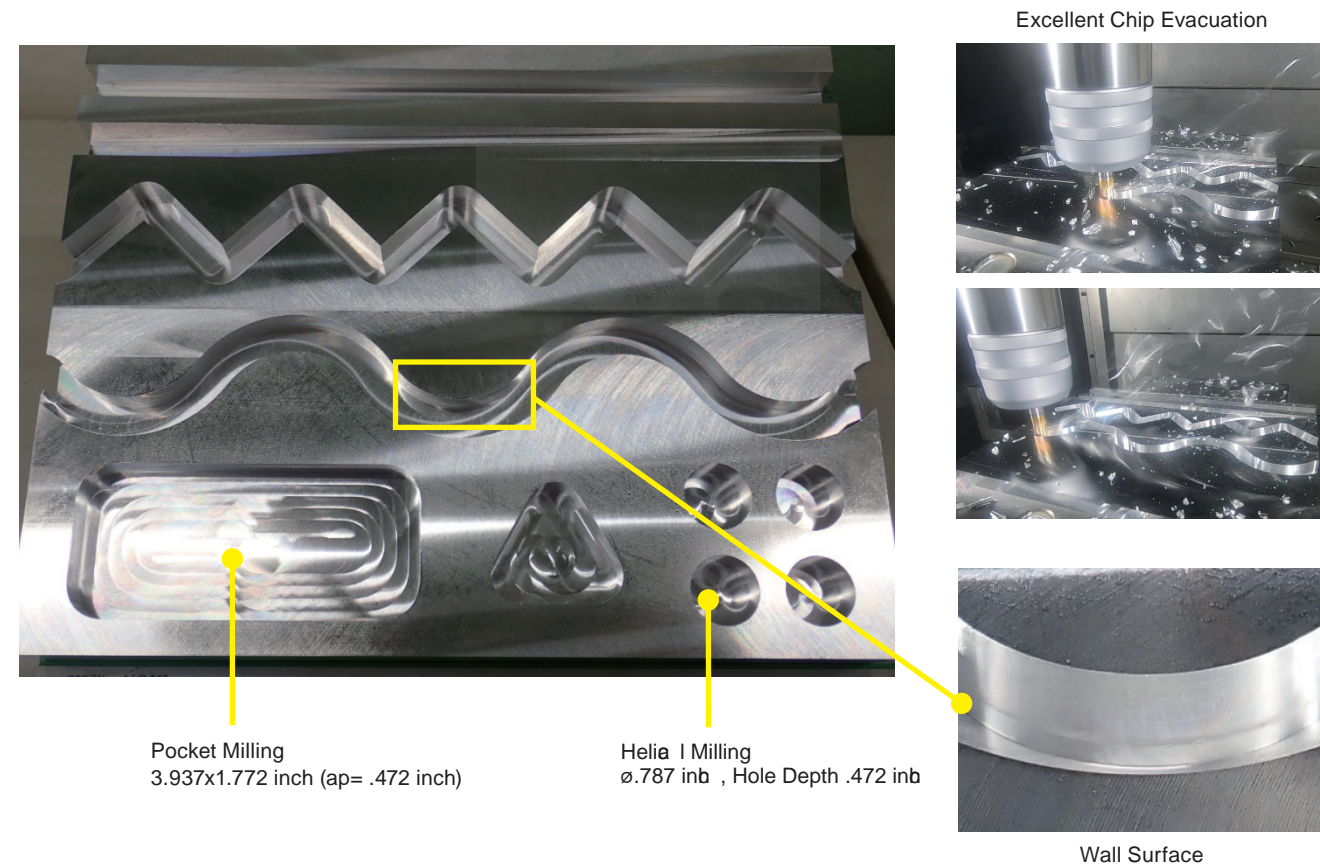

Pocket Milling  
3.937x1.772 inch (ap= .472 inch)

Helix Milling  
ø.787 inb , Hole Depth .472 inb

Wall Surface


<Cutting Conditions>  
Workpiece Material : A7050  
Tool : DLC3SA120N36C  
Cutting Mode : Dry Cutting  
Machine : Vertia I M/C

Cutting Mode	Revolution n (min <sup>-1</sup> )	Cutting Speed vc (SFM)	Feed Rate vf (IPM)	Feed per Tooth fz (IPT)	Depth of Cut ap	Width of Cut ae
Slot Milling	12000	1480	171.7	.004	.472	.472
Ramping : 3°	12000	1480	70.9	.002	.472	.472
Helix Milling	12000	1480	70.9	.002	Pitch .079	-
Pocket Milling	12000	1480	171.7	.004	.472	.142

\* Air blow both internal and external is used to effectively evacuate chips.

### Uncoated Type - Slot Machining A7050 Material

Utilizing internal coolant and optimized cutting edge geometry enables double the efficiency levels of conventional products.

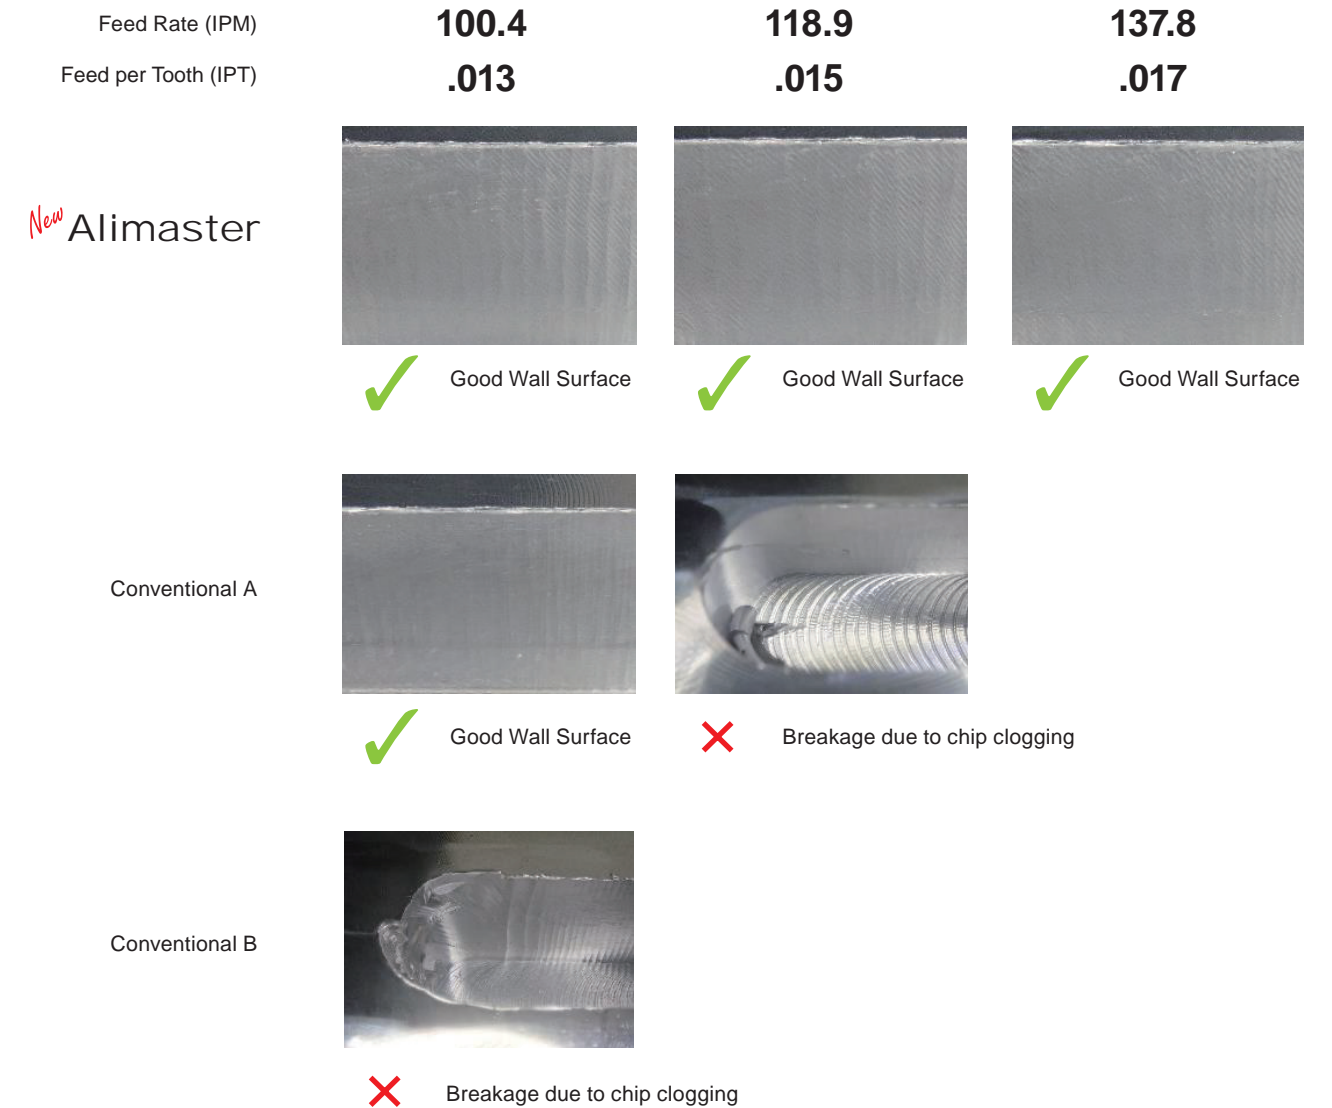

Feed Rate (IPM)

100.4

118.9

137.8


Feed per Tooth (IPT)

.013

.015

.017

New Alimaster



✓ Good Wall Surface




✓ Good Wall Surface




✓ Good Wall Surface

Conventional A



✓ Good Wall Surface



✗ Breakage due to chip clogging

Conventional B



✗ Breakage due to chip clogging

<Cutting Conditions>  
Workpiece Material : A7050  
Tool : A3SA120N36C  
DC = ø.472 inb  
Cutting Speed : v = 330 SFM  
Depth of Cut : ap = .472 inb  
Overhang Length : 1.417 inb  
Cutting Mode : Internal Coolant  
(Water-soluble Coolants)

# High Efficiency Machining of Aluminum Alloys


## Cutting Performance

### Uncoated Type - Plunge Machining A7050 Material

Higher feed rates than conventional products brings greater machining efficiencies.


Feed Rate (IPM)	40.9	50.4	59.8
Feed per Rev. (IPT)	.005	.006	.007

New Alimaster

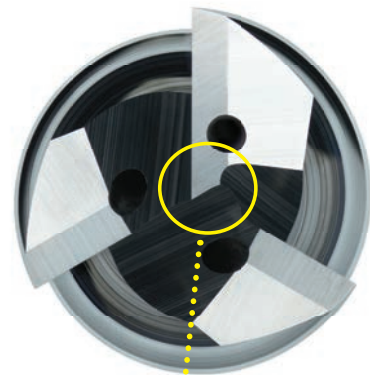


Strengthened Center Cutting Edges

After F = 59.8 IPM, fz = .007 IPT Plunging



New Alimaster ✓



Conventional Fracture ✗


<Cutting Conditions>  
 Workpiece Material : A7050  
 Tool : A3SA120N36C  
 DC = ø.472 inb  
 Cutting Speed : v = 985 SFM  
 Depth of Cut : ap = .472 inb  
 Overhang Length : 1.417 inb  
 Cutting Mode : Internal Coolant  
 (Water-soluble Coolants)

## DLC3SA NEW

End mill, Short cut length, 3 flute, with multiple internal through coolant holes



Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-hardened Steel, Hardened Steel (<=45HRC)	Hardened Steel (<=55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
---	--	--------------------------	-------------------------	----------------------------	-------------------------------------	--------------	----------------

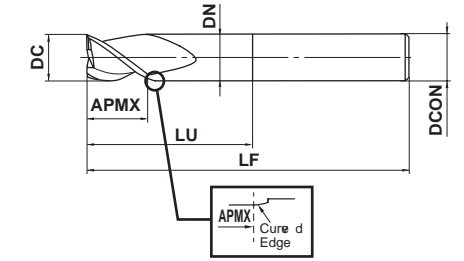

	DC=12	DC>12		
	0 - 0.020	0 - 0.030		
	12 ≤ DCON ≤ 16	20 ≤ DCON ≤ 25		
	0 - 0.011	0 - 0.013		

- Stability and reliability even when botting, ramping and plunging.
- DLC coating aids in providing excellent chip evacuation.

Order Number	DC	APMX	LU	DN	LF	DCON	No.F*	Stock
DLC3SA120N36C	12	18	36	11.4	80	12	3	●
DLC3SA160N48C	16	24	48	15.4	90	16	3	●
DLC3SA200N55C	20	30	55	18	100	20	3	●
DLC3SA250N55C	25	37.5	55	23	100	25	3	●

\* Number of Flutes

DC = Cutting Dia.  
 APMX = Depth of Cut Max  
 LU = Usable Length  
 DN = Neck Dia.  
 LF = Functional Length  
 DCON = Connection Dia.

● : USA Stock


# High Efficiency Machining of Aluminum Alloys

## DLC3SARB NEW

Corner radius end mill, Short cut length, 3 flute, with multiple internal through coolant holes



Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-hardened Steel, Hardened Steel (<=45HRC)	Hardened Steel (<=55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
---	--	--------------------------	-------------------------	----------------------------	-------------------------------------	--------------	----------------

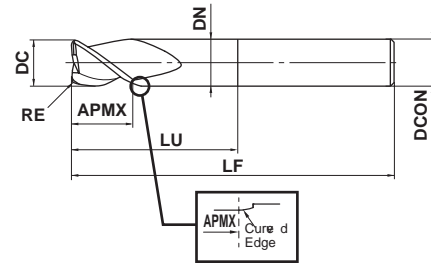

	DC=12	DC>12		
	0 - 0.020	0 - 0.030		
	12 ≤ DCON ≤ 16	20 ≤ DCON ≤ 25		
	0 - 0.011	0 - 0.013		

- Stability and reliability are enhanced when botting, ramping and plunging.
- DLC coating aids in providing excellent lubrication.

Order Number	DC	RE	APMX	LU	DN	LF	DCON	No.F*	Stock
DLC3SARB120R100N36C	12	1	18	36	11.4	80	12	3	●
DLC3SARB120R200N36C	12	2	18	36	11.4	80	12	3	●
DLC3SARB120R300N36C	12	3	18	36	11.4	80	12	3	●
DLC3SARB160R200N48C	16	2	24	48	15.4	90	16	3	●
DLC3SARB160R300N48C	16	3	24	48	15.4	90	16	3	●
DLC3SARB160R400N48C	16	4	24	48	15.4	90	16	3	●
DLC3SARB200R200N55C	20	2	30	55	18	100	20	3	●
DLC3SARB200R300N55C	20	3	30	55	18	100	20	3	●
DLC3SARB200R400N55C	20	4	30	55	18	100	20	3	●
DLC3SARB250R200N55C	25	2	37.5	55	23	100	25	3	●
DLC3SARB250R300N55C	25	3	37.5	55	23	100	25	3	●
DLC3SARB250R400N55C	25	4	37.5	55	23	100	25	3	●
DLC3SARB250R500N55C	25	5	37.5	55	23	100	25	3	●

\* Number of Flutes

DC = Cutting Dia.      DN = Neck Dia.  
 RE = Corner Radius      LF = Functional Length  
 APMX = Depth of Cut Max      DCON = Connection Dia.  
 LU = Usable Length


● : USA Stock

## A3SA NEW

End mill, Short cut length, 3 flute, with multiple internal thru-coolant holes



Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-hardened Steel, Hardened Steel (<=45HRC)	Hardened Steel (<=55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
---	--	--------------------------	-------------------------	----------------------------	-------------------------------------	--------------	----------------

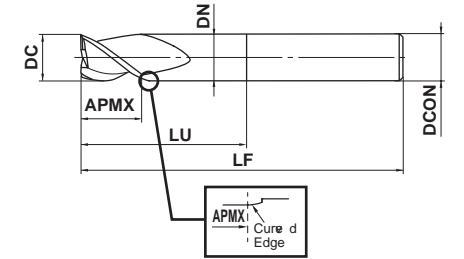

	DC=12	DC>12		
	0 - 0.020	0 - 0.030		
	12 ≤ DCON ≤ 16	20 ≤ DCON ≤ 25		
	0 - 0.011	0 - 0.013		

- Stability and reliability are enhanced when botting, ramping and plunging.
- The cross sectional geometry of the flutes is perfect for efficient chip discharge.

Order Number	DC	APMX	LU	DN	LF	DCON	No.F*	Stock
A3SA120N36C	12	18	36	11.4	80	12	3	●
A3SA160N48C	16	24	48	15.4	90	16	3	●
A3SA200N55C	20	30	55	18	100	20	3	●
A3SA250N55C	25	37.5	55	23	100	25	3	●

\* Number of Flutes


DC = Cutting Dia.      LF = Functional Length  
 APMX = Depth of Cut Max      DCON = Connection Dia.  
 LU = Usable Length  
 DN = Neck Dia.




# High Efficiency Machining of Aluminum Alloys

## A3SARB NEW

Corner radius end mill, Short cut length, 3 flute, with multiple internal thru-coolant holes



Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-hardened Steel, Hardened Steel (<=45HRC)	Hardened Steel (<=55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
---	--	--------------------------	-------------------------	----------------------------	-------------------------------------	--------------	----------------

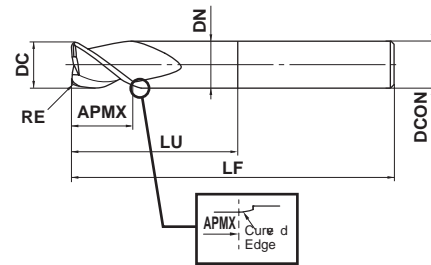

	DC=12	DC>12			
	0 - 0.020	0 - 0.030			
	12 ≤ DCON ≤ 16	20 ≤ DCON ≤ 25			
	0 - 0.011	0 - 0.013			

- Stability and reliability are enhanced when boring, ramping and plunging.
- The cross sectional geometry of the flutes is perfect for efficient chip discharge.

Order Number	DC	RE	APMX	LU	DN	LF	DCON	No.F*	Stock
A3SARB120R100N36C	12	1	18	36	11.4	80	12	3	●
A3SARB120R200N36C	12	2	18	36	11.4	80	12	3	●
A3SARB120R300N36C	12	3	18	36	11.4	80	12	3	●
A3SARB160R200N48C	16	2	24	48	15.4	90	16	3	●
A3SARB160R300N48C	16	3	24	48	15.4	90	16	3	●
A3SARB160R400N48C	16	4	24	48	15.4	90	16	3	●
A3SARB200R200N55C	20	2	30	55	18	100	20	3	●
A3SARB200R300N55C	20	3	30	55	18	100	20	3	●
A3SARB200R400N55C	20	4	30	55	18	100	20	3	●
A3SARB250R200N55C	25	2	37.5	55	23	100	25	3	●
A3SARB250R300N55C	25	3	37.5	55	23	100	25	3	●
A3SARB250R400N55C	25	4	37.5	55	23	100	25	3	●
A3SARB250R500N55C	25	5	37.5	55	23	100	25	3	●

\* Number of Flutes

- DC = Cutting Dia.
- RE = Corner Radius
- APMX = Depth of Cut Max
- LU = Usable Length
- DN = Nose Dia.
- LF = Functional Length
- DCON = Connection Dia.

● : USA Stock

# A3SA/A3SARB, DLC3SA/DLC3SARB

## Recommended Cutting Conditions

Use high efficiency cutting conditions when the machine and workpiece rigidity, and chip evacuation properties are sufficient. Use lower, general-purpose cutting conditions when the machine or workpiece rigidity or chip evacuation properties are insufficient.

## High Efficiency Conditions

Workpiece Material	Aluminum Alloy						
	Dia.DC (mm)	Dia.DC (in.)	Cutting Speed (SFM)	Rev. lution (min <sup>-1</sup> )	Feed Rate (IPM)	Depth of Cut ae	Depth of Cut ap
12	.472		4070	33000	590.6	.236	.472
16	.630		5445	33000	787.4	.315	.630
20	.787		6790	33000	1023.6	.394	.787
25	.984		8495	33000	1259.8	.492	.984

Workpiece Material	Aluminum Alloy					
	Dia.DC (mm)	Dia.DC (in.)	Cutting Speed (SFM)	Rev. lution (min <sup>-1</sup> )	Feed Rate (IPM)	Depth of Cut ap
12	.472		4070	33000	590.6	.236
16	.630		5445	33000	787.4	.315
20	.787		6790	33000	1023.6	.394
25	.984		8495	33000	1259.8	.492

## General-purpose Conditions

Workpiece Material	Aluminum Alloy						
	Dia.DC (mm)	Dia.DC (in.)	Cutting Speed (SFM)	Rev. lution (min <sup>-1</sup> )	Feed Rate (IPM)	Depth of Cut ae	Depth of Cut ap
12	.472		1970	16000	283.5	.236	.472
16	.630		1970	12000	283.5	.315	.630
20	.787		1970	9500	291.3	.394	.787
25	.984		1970	7600	287.4	.492	.984

Workpiece Material	Aluminum Alloy					
	Dia.DC (mm)	Dia.DC (in.)	Cutting Speed (SFM)	Rev. lution (min <sup>-1</sup> )	Feed Rate (IPM)	Depth of Cut ap
12	.472		1970	16000	283.5	.236
16	.630		1970	12000	283.5	.315
20	.787		1970	9500	291.3	.394
25	.984		1970	7600	287.4	.492

- Note 1) It is recommended to use a water-soluble coolant. It is also possible to use air blow (external/internal) for DLC coated types.
- Note 2) Climb milling is recommended for side cutting.
- Note 3) This table shows the cutting condition with less than 4D overhang length. If more than 4D, spindle speed, feed rate and depth of cut could be reduced.
- Note 4) When ramping, consider the chip discharge and use a feed rate 50% lower than the boring conditions above and also use a ramping angle of 5° or less.
- Note 5) If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, reduce the revolution and feed rate proportionately within the range described in the above table, or reduce the depth and width of cut.







**MITSUBISHI MATERIALS U.S.A. CORPORATION**

**California Office (Headquarters)**

3535 Hyland Avenue, Suite 200  
Costa Mesa, CA 92626  
Customer Service: 800.523.0800  
Technical Service: 800.486.2341

**North Carolina-MTEC (Marketing & Technical Center)**

105 Corporate Center Drive, Suite A  
 Mooresville, NC 28117  
Main: 980.312.3100  
Fax: 704.746.9292

**Chicago Office (Engineering)**

300 N. Martingale Road, Suite 500  
Schaumburg, IL 60173  
Main: 847.252.6300  
Fax: 847.519.1732

**Toronto Office (Canada Branch)**

3535 Laird Road, Units 15 & 16  
Mississauga, Ontario, Canada L5L 5Y7  
Main: 905.814.0240  
Fax: 905.814.0245

**MMC Metal de Mexico, S.A. DE C.V.**

Av. La Cañada No. 16,  
Parque Industrial Bernardo  
Quintana, El Marques,  
Queretaro C.P. 76246 MEXICO  
Main: +52.442.221.61.36  
Fax: +52.442.221.61.34

**Detroit Office (Moldino CS)**

41700 Gardenbrook Road, Suite 120  
Novi, MI 48375  
Main: 248.308.2620  
Fax: 248.308.2627

**For Your Safety**

- Don't handle inserts and chips without gloves.
- Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage.
- Please use safety covers and wear safety glasses.
- When using compounded cutting oils, please take fire precautions.
- When attaching inserts or spare parts, please use only the correct wrench or driver.
- When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.



Product Brands Crafted by Mitsubishi Materials U.S.A.



[www.DIAEDGE.MMUS.com](http://www.DIAEDGE.MMUS.com)  
[www.mmus-carbide.com](http://www.mmus-carbide.com)

Tools specifications subject to change without notice.

B264A-US-2021.10



**COMPLETE  
METALWORKING  
SOLUTIONS**

**(800) 991-4225**

[www.ahbinc.com](http://www.ahbinc.com)

ISO Certified

[customerservice@ahbinc.com](mailto:customerservice@ahbinc.com)