

 **MITSUBISHI MATERIALS**



**COMPLETE
METALWORKING
SOLUTIONS**

(800) 991-4225
www.ahbinc.com
ISO Certified
customerservice@ahbinc.com

IMPACT MIRACLE END MILL SERIES

**REVOLUTIONARY MACHINING
OF HARDENED STEEL**



TOOL NEWS B231A

For Machining of Hardened Steel


IMPACT MIRACLE End Mill Series

IMPACT MIRACLE REVOLUTION




IMPACT MIRACLE REVOLUTION Coating

A combination of the (Al, Cr, Si) N coating with improved lubricity and a high oxidization temperature, together with the (Al, Ti, Si) N coating layer that displays excellent wear and adhesion to other coating layers, enables efficient and reliable machining of hardened steels.

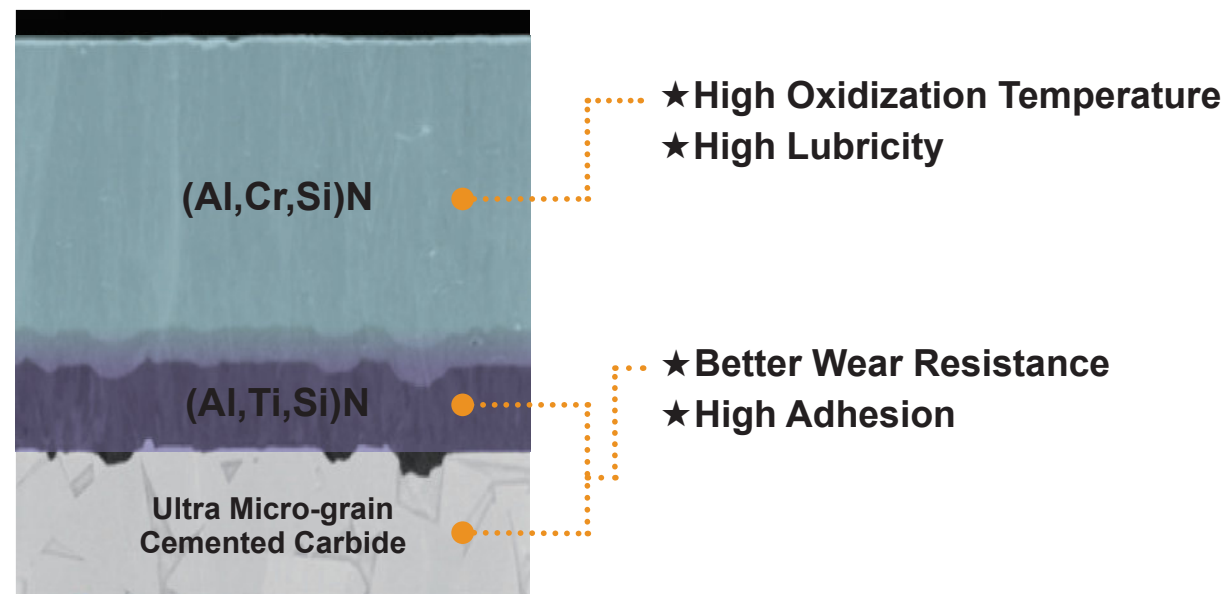

The coating may appear to be a different color, but this does not affect performance.

Selection According to the Hardness of the Workpiece Material

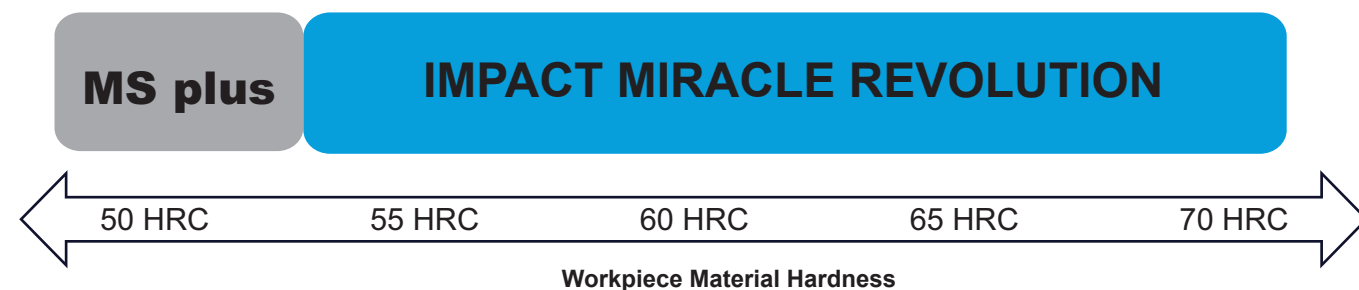

SERIES SELECTION CHART

| Flutes | Type | Use | Specifications | Shape | Units | Dia. DC | | Corner Radius RE | | Max. DC | DC≤.239" | Shank Size | Number of Items | Material | | | Page |
|----------------------|---------|---|--|-------|-------|---------|------|------------------|------|---------|----------|------------|-----------------|----------|---|-------------------|------|
| | | | | | | Min. | Max. | Min. | Max. | | | | | APMX | P | H | |
| | | | | | | | | | | | | | | | | | |
| Square | | | | | | | | | | | | | | | | | |
| 2 | VFR2MV | For high efficiency | Low resistance and irregular helix | | mm | 0.5 | 6.0 | — | — | 15 | 4, 6 | 9 | ○ | ○ | ○ | P.7 | |
| 4 | VFR4MV | For high efficiency | Low resistance and irregular helix | | mm | 6.0 | 20.0 | — | — | 50 | 6 | 6 | ○ | ○ | ○ | P.9 | |
| 4, 6 | VFRSD | For high speed machining | High fracture resistance | | mm | 1.0 | 12.0 | — | — | 24 | 6 | 12 | ○ | ○ | ○ | P.10 | |
| 4, 6 | VFRMD | For high speed machining | High fracture resistance | | in | .031 | .500 | — | — | 1.094 | .250 | 10 | ○ | ○ | ○ | P.12 | |
| | | | | | mm | 1.0 | 25.0 | — | — | 60 | 6 | 18 | ○ | ○ | ○ | P.14 | |
| 6 | VFRLD | For high speed machining | High fracture resistance | | mm | 6.0 | 25.0 | — | — | 92 | 6 | 7 | ○ | ○ | ○ | P.16 | |
| Ball Nose | | | | | | | | | | | | | | | | | |
| 2 | VFR2SSB | For general purpose | Short Shank Type | | mm | 1.0 | 12.0 | 0.5 | 6.0 | 12 | 4, 6 | 12 | ○ | ○ | ○ | P.17 | |
| 2 | VFR2SB | For general purpose | High fracture resistance | | mm | 0.2 | 20.0 | 0.1 | 10.0 | 38 | 3, 4, 6 | 36 | ○ | ○ | ○ | P.18 | |
| 2 | VFR2SBF | For mirror finishes | Special geometry for mirror machining | | mm | 1.0 | 6.0 | 0.5 | 3.0 | 12 | 4, 6 | 8 | ○ | ○ | ○ | P.20 | |
| 2 | VFR2XLB | For high-precision vertical machining | Long neck type | | mm | 0.2 | 6.0 | 0.1 | 3.0 | 6 | 4, 6 | 74 | ○ | ○ | ○ | P.22 I P.24 | |
| 4 | VFR4MB | For high-efficiency finishing machining | Versatile 4-flute design | | mm | 1.0 | 12.0 | 0.5 | 6.0 | 22 | 6 | 9 | ○ | ○ | ○ | P.26 | |
| Corner Radius | | | | | | | | | | | | | | | | | |
| 4 | VFRPSRB | For strong and high-precision machining | Completely seamless curved R edge DC≥1.5 For high precision machining. 1.5≤DC≤5 | | mm | 0.5 | 12.0 | 0.05 | 3.0 | 18 | 6 | 97 | ○ | ○ | ○ | P.28 I P.30 | |
| 6 | VFRSDRB | For high speed machining | High helix and fracture resistance | | mm | 3.0 | 12.0 | 0.3 | 1.0 | 12 | 6 | 13 | ○ | ○ | ○ | P.33 | |
| 6 | VFRMDRB | For high speed machining | High helix and fracture resistance | | mm | 3.0 | 20.0 | 0.3 | 2.0 | 45 | 6 | 21 | ○ | ○ | ○ | P.35 | |

= NEW

For High Speed Machining

Square End Mill

VFRSD/MD/LD NEW

Corner Radius End Mill

VFRSDRB/MDRB NEW

Ideal Choice for High-Efficiency Machining of High-Hardness Materials

To successfully achieve high-speed machining with multi-flute end mills, high helix angle flute geometry provided the sharpness and negative rake end cutting edges provided the strength and reliability.


High Helix Angle 45°

Improved sharper geometry for to high-hardness steel.




Negative Rake Angle Cutting Edges

Improved chipping resistance.

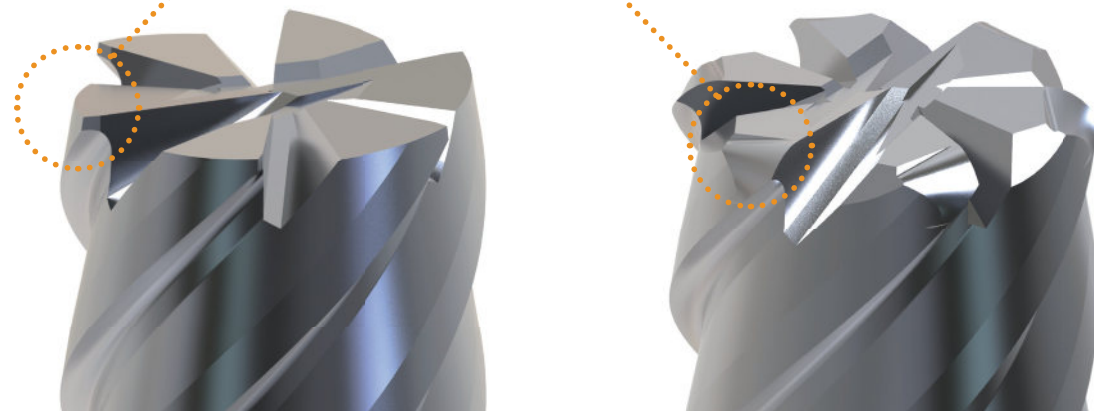




HAP72 (67.0 HRC) Tool Life Comparison

Compared to conventional products, more than 1.5 times longer tool life during stable machining was achieved.

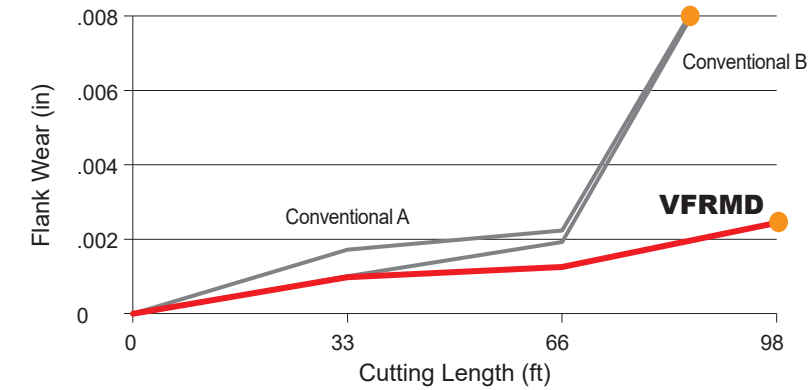

<Cutting Conditions>
 Material : HAP72 (67.0 HRC)
 Tool : VFRMDD0600
 DC= .236"
 Revolution : n=5300 min⁻¹
 Cutting Speed : vc=330 SFM
 Table Feed : vf=70.9 IPM
 Depth of Cut : ap=.236"
 ae=.004"
 Overhang : .866"
 Cutting Mode : Down(climb) Cut
 Machine : Vertical MC (BT30)

● : Photo taken at this length of cutting.



VFRMD


Conventional A

Conventional B

Stable machining time: In the graph, the sudden increase in wear is interpreted as an indication that the tool damage is preventing stable machining of the workpiece.




SKD11 (59.2 HRC) Tool Life Comparison

Compared to conventional products, more than 2 times longer tool life during stable machining was achieved.

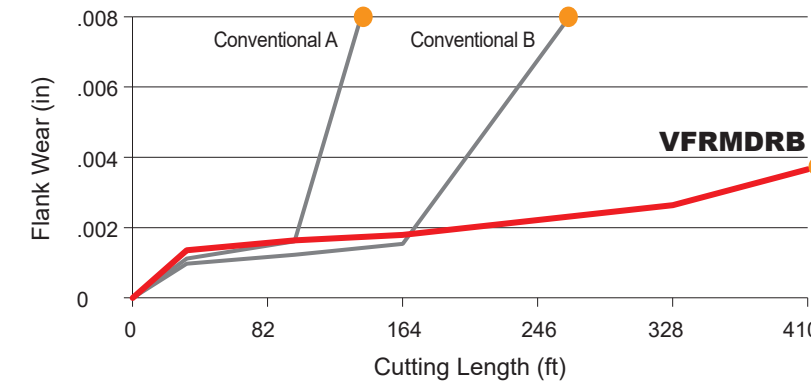

<Cutting Conditions>
 Material : JIS SKD11 (59.2 HRC)
 Tool : VFRMDRBD0600R050
 DC= .236"
 Revolution : n=8000 min⁻¹
 Cutting Speed : vc=490 SFM
 Table Feed : vf=94.5 IPM
 Depth of Cut : ap=.197"
 ae=.004"
 Overhang : .866"
 Cutting Mode : Air blow
 Down(climb) Cut
 Machine : Horizontal MC (BT40)

● : Photo taken after this length of cutting.

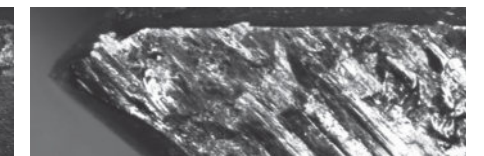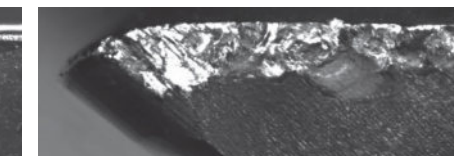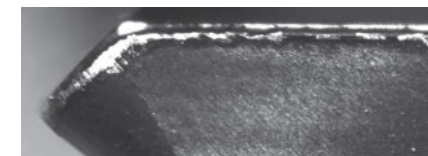

VFRMDRB

Conventional A

Conventional B


Compatible with high-speed Machining

Square End Mill


VFR2MV/4MV NEW

Suppresses Chatter and Vibration and Provides Consistent Surface Finishes

Chatter and vibrations are suppressed through the use of irregular helix flutes and irregular pitch flute geometry pitch, combined with a highly rigid center cross section.

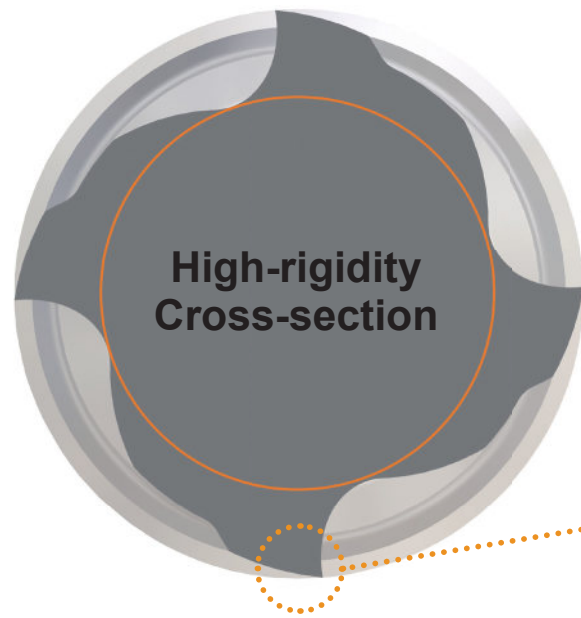

High-rigidity Cross-section

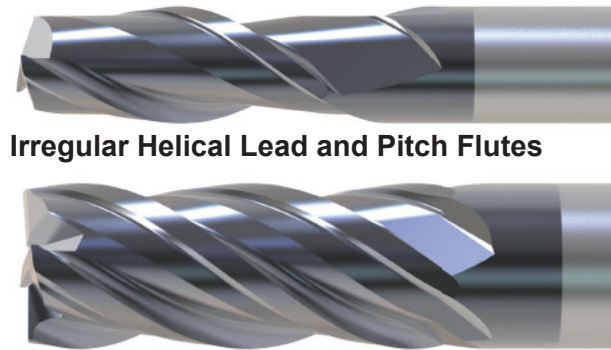


Irregular Helical Lead and Pitch Flutes

Positive Rake Angle Cutting Edges

Low cutting resistance contributes to a stable surface finishes.

Comparison of Surface Finishes - Machining SKD61 (53.0 HRC)

Demonstrates excellent chatter resistance when machining hardened steel.

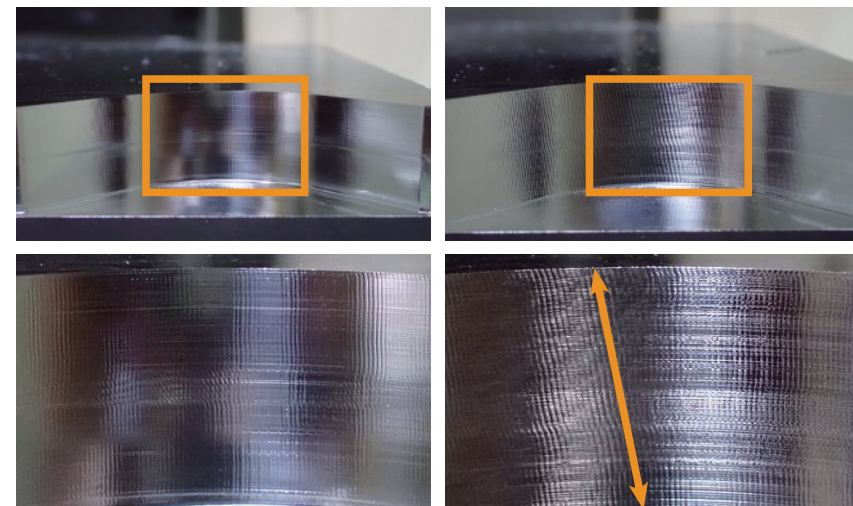


VFR4MV

Conventional

Chatter and vibration occurred

Workpiece geometry with R .709



<Cutting Conditions>

Material : JIS SKD61 (53.0 HRC)
Tool : VFR4MVD0600

DC= .236"

Revolution : n=5300 min⁻¹

Cutting Speed : vc=330 SFM

Table Feed : vf=41.7 IPM

Depth of Cut : ap=.472"

ae=.012"

Cutting Mode : Air blow

Down(climb) Cut

Corner radius machining

Machine : Vertical MC (BT30)

DC = Cutting Dia.

APMX = Depth of Cut Max.

LF = Functional Length


DCONMS = Connection Dia.

VFR2MV NEW

End mill, Medium cut length, 2 flute, Irregular helix flutes, For hardened materials



| | | | | | | | |
|---|---|-------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC) | Hardened Steel (≤55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

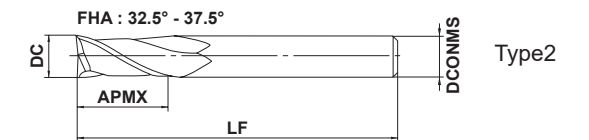

| | | | | |
|--------|--|--|--|--|
| DC | | | | |
| 0 | | | | |
| -0.020 | | | | |
| DCONMS | | | | |
| 0 | | | | |
| -0.005 | | | | |

● Irregular helix angle and irregular pitch flutes, combined with a highly rigid center suppresses chatter and vibration.

| Order Number | DC | APMX | LF | DCONMS | Flutes | Stock | Type |
|--------------|-----|------|----|--------|--------|-------|------|
| VFR2MVD0050 | 0.5 | 1.3 | 40 | 4 | 2 | ● | 1 |
| VFR2MVD0100 | 1 | 2.5 | 40 | 4 | 2 | ● | 1 |
| VFR2MVD0150 | 1.5 | 3.8 | 40 | 4 | 2 | ● | 1 |
| VFR2MVD0200 | 2 | 5 | 40 | 4 | 2 | ● | 1 |
| VFR2MVD0250 | 2.5 | 6.3 | 40 | 4 | 2 | ● | 1 |
| VFR2MVD0300 | 3 | 7.5 | 50 | 6 | 2 | ● | 1 |
| VFR2MVD0400 | 4 | 10 | 50 | 6 | 2 | ● | 1 |
| VFR2MVD0500 | 5 | 12.5 | 50 | 6 | 2 | ● | 1 |
| VFR2MVD0600 | 6 | 15 | 50 | 6 | 2 | ● | 2 |

● : USA Stock

For Machining of Hardened Steel

VFR2MV

End mill, Medium cut length, 2 flute, Irregular helix flutes, For hardened materials



Recommended Cutting Conditions

(in)

| Material | Carbon Steel, Tool Steel Pre-hardened Steel(35– 45HRC) | | | Hardened Steel (45– 55HRC) | | | Hardened Steel (55– 62HRC) | | | Hardened Steel (62– 70HRC) | | | |
|------------|---|--------------------|------------------------|------------------------------------|--------------------|------------------------|------------------------------------|--------------------|------------------------|------------------------------------|--------------------|------------------------|-------|
| | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of Cut ae, ap | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of Cut ae, ap | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of Cut ae, ap | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of Cut ae, ap | |
| .5 | .020 | 40000 | 39.4 | .0006 | 40000 | 37.8 | .0006 | 30000 | 23.6 | .0004 | 19100 | 10.2 | .0004 |
| 1.0 | .039 | 40000 | 78.7 | .0024 | 32000 | 63.0 | .0024 | 16000 | 21.7 | .0020 | 9600 | 7.1 | .0004 |
| 1.5 | .059 | 40000 | 118.1 | .0047 | 32000 | 74.8 | .0031 | 10600 | 19.7 | .0031 | 6400 | 6.3 | .0020 |
| 2.0 | .079 | 30000 | 118.1 | .0071 | 24000 | 74.8 | .0039 | 8100 | 15.7 | .0039 | 4800 | 4.7 | .0031 |
| 2.5 | .098 | 24000 | 102.4 | .0098 | 19000 | 63.0 | .0051 | 6400 | 13.8 | .0051 | 3800 | 3.9 | .0031 |
| 3.0 | .118 | 20000 | 90.6 | .0118 | 16000 | 55.1 | .0059 | 5400 | 11.8 | .0059 | 3200 | 3.5 | .0031 |
| 4.0 | .157 | 15000 | 78.7 | .0157 | 12000 | 47.2 | .0079 | 4000 | 9.4 | .0079 | 2400 | 3.2 | .0039 |
| 5.0 | .197 | 12000 | 63.0 | .0197 | 9000 | 35.4 | .0098 | 3200 | 7.5 | .0079 | 1900 | 2.8 | .0039 |
| 6.0 | .236 | 10000 | 55.1 | .0236 | 7000 | 27.6 | .0118 | 2700 | 6.3 | .0079 | 1600 | 2.4 | .0039 |

Depth of cut

≤Please refer to the list above for depth of cut.



DC: Dia.

Note 1) When slotting, reduce the revolutions by 50 – 70% and the feed rate by 40 – 60%.

Note 2) If the depth of cut is shallow, the revolution and feed rate can be increased.

Note 3) Vibration damping end mills are more effective in suppressing chatter and vibration compared to general end mills, but these may still occur if the rigidity of the machine or the workpiece material is low. In this case, please adjust the spindle speed, feed rate, and depth of cut according to the table above.

VFR4MV NEW

End mill, Medium cut length, 4 flute, Irregular helix flutes, For hardened materials



| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC) | Hardened Steel (≤55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
|---|---|-------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| | ○ | ◎ | ◎ | | | | |



| DC ≤ 12 | DC > 12 |
|--------------|--------------|
| 0 - 0.020 | 0 - 0.030 |



| DCONMS=6 | DCONMS=8, 10 | DCONMS=12, 16 | DCONMS=20 |
|--------------|--------------|---------------|--------------|
| 0 - 0.005 | 0 - 0.006 | 0 - 0.008 | 0 - 0.009 |

● Irregular helix angle and irregular pitch flutes, combined with a highly rigid center suppresses chatter and vibration.



(mm)

| Order Number | DC | APMX | LF | DCONMS | Flutes | Stock | Type |
|--------------------|----|------|-----|--------|--------|-------|------|
| VFR4MVD0600 | 6 | 15 | 50 | 6 | 4 | ● | 1 |
| VFR4MVD0800 | 8 | 20 | 60 | 8 | 4 | ● | 1 |
| VFR4MVD1000 | 10 | 25 | 70 | 10 | 4 | ● | 1 |
| VFR4MVD1200 | 12 | 30 | 90 | 12 | 4 | ● | 1 |
| VFR4MVD1600 | 16 | 40 | 100 | 16 | 4 | ● | 1 |
| VFR4MVD2000 | 20 | 50 | 110 | 20 | 4 | ● | 1 |

Recommended Cutting Conditions

(in)

| Material | Carbon Steel, Tool Steel Pre-hardened Steel(35– 45HRC) | | | Hardened Steel (45– 55HRC) | | | Hardened Steel (55– 62HRC) | | | Hardened Steel (62– 70HRC) | | | |
|-----------|---|--------------------|------------------------|------------------------------------|--------------------|------------------------|------------------------------------|--------------------|------------------------|------------------------------------|--------------------|------------------------|-------|
| | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae, ap | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae, ap | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae, ap | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae, ap | |
| 6 | .236 | 10000 | 82.7 | .0236 | 7000 | 55.1 | .0118 | 2700 | 12.6 | .0079 | 1600 | 5.1 | .0039 |
| 8 | .315 | 8000 | 59.1 | .0315 | 5600 | 43.3 | .0157 | 2000 | 9.4 | .0079 | 1200 | 3.9 | .0039 |
| 10 | .394 | 6400 | 55.1 | .0394 | 4500 | 37.4 | .0197 | 1600 | 8.3 | .0118 | 960 | 3.2 | .0079 |
| 12 | .472 | 5400 | 47.2 | .0394 | 3800 | 33.9 | .0197 | 1300 | 6.3 | .0118 | 800 | 2.4 | .0079 |
| 16 | .630 | 2400 | 21.7 | .1181 | 1200 | 11.0 | .0315 | 1000 | 5.1 | .0118 | 600 | 2.0 | .0079 |
| 20 | .787 | 1900 | 18.9 | .1575 | 1000 | 9.4 | .0394 | 800 | 3.9 | .0118 | 480 | 1.6 | .0079 |

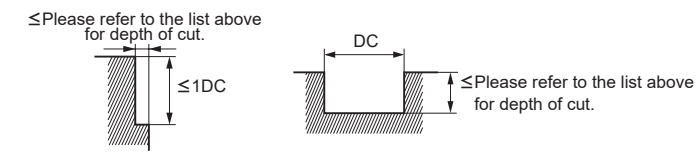

DC: Dia.

Note 1) When slotting, reduce the revolutions by 50 – 70% and the feed rate by 40 – 60%.

Note 2) If the depth of cut is shallow, the revolution and feed rate can be increased.

Note 3) Vibration damping end mills are more effective in suppressing chatter and vibration compared to general end mills, but these may still occur if the rigidity of the machine or the workpiece material is low. In this case, please adjust the spindle speed, feed rate, and depth of cut according to the table above.

● : USA Stock


For Machining of Hardened Steel

VFRSD NEW

End mill, Short cut length, 4/6 flute, For hardened materials



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ○ | ○ | | | | |

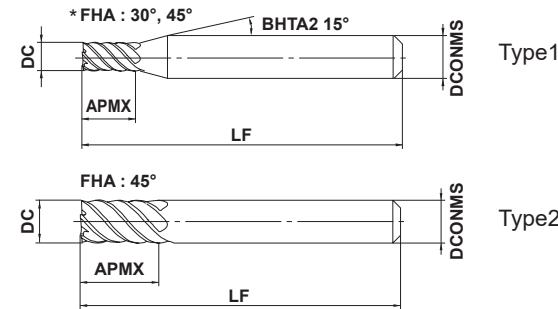

| | | | | |
|----------|--------------|-----------|--|--|
| DC | | | | |
| 0 | | | | |
| -0.020 | | | | |
| DCONMS=6 | DCONMS=8, 10 | DCONMS=12 | | |
| 0 | 0 | 0 | | |
| -0.005 | -0.006 | -0.008 | | |

● A sharp cutting edge and improved chipping resistance enable highly efficient machining.

| Order Number | DC | APMX | LF | DCONMS | Flutes | Stock | Type |
|--------------|-----|------|----|--------|--------|-------|------|
| VFRSDD0100 | 1 | 2 | 45 | 6 | 4 | ● | 1 |
| VFRSDD0150 | 1.5 | 3 | 45 | 6 | 4 | ● | 1 |
| VFRSDD0200 | 2 | 4 | 45 | 6 | 4 | ● | 1 |
| VFRSDD0250 | 2.5 | 5 | 45 | 6 | 4 | ● | 1 |
| VFRSDD0300 | 3 | 6 | 45 | 6 | 6 | ● | 1 |
| VFRSDD0350 | 3.5 | 7 | 45 | 6 | 6 | ● | 1 |
| VFRSDD0400 | 4 | 8 | 45 | 6 | 6 | ● | 1 |
| VFRSDD0500 | 5 | 10 | 50 | 6 | 6 | ● | 1 |
| VFRSDD0600 | 6 | 12 | 50 | 6 | 6 | ● | 2 |
| VFRSDD0800 | 8 | 16 | 60 | 8 | 6 | ● | 2 |
| VFRSDD1000 | 10 | 20 | 70 | 10 | 6 | ● | 2 |
| VFRSDD1200 | 12 | 24 | 75 | 12 | 6 | ● | 2 |

* FHA : DC<3 mm=30°, DC≥3 mm=45°

DC = Cutting Dia. LF = Functional Length
 APMX = Depth of Cut Max. DCONMS = Connection Dia.

● : USA Stock

Recommended Cutting Conditions

| Material | Hardened steel (45—55HRC) | | | Hardened steel (55—62HRC) | | | Hardened steel (62—70HRC) | | |
|-----------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|
| | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae |
| 1 | 40000 | 47.2 | .0020 | 40000 | 31.5 | .0012 | 32000 | 19.7 | .0008 |
| 2 | 40000 | 78.7 | .0039 | 24000 | 39.4 | .0020 | 16000 | 23.6 | .0020 |
| 3 | 32000 | 149.6 | .0079 | 16000 | 74.8 | .0039 | 11000 | 47.2 | .0020 |
| 4 | 24000 | 173.2 | .0079 | 12000 | 86.6 | .0039 | 8000 | 51.2 | .0020 |
| 6 | 16000 | 228.3 | .0118 | 8000 | 114.2 | .0079 | 5300 | 70.9 | .0039 |
| 8 | 12000 | 228.3 | .0157 | 6000 | 114.2 | .0079 | 4000 | 70.9 | .0039 |
| 10 | 9600 | 228.3 | .0197 | 4800 | 114.2 | .0118 | 3200 | 70.9 | .0079 |
| 12 | 8000 | 189.0 | .0236 | 4000 | 94.5 | .0118 | 2700 | 59.1 | .0079 |

Depth of cut

≤ Please refer to the list above for depth of cut.
≤ 1.5DC

Depth of cut

≤ Please refer to the list above for depth of cut.
≤ 1.0DC

DC: Dia.

Slot milling with small diameter tools

| Material | Hardened steel (45—55HRC) | | | Hardened steel (55—62HRC) | | |
|----------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|
| | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ap | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ap |
| 1 | 15000 | 11.8 | .0039 | 9500 | 4.3 | .0020 |
| 2 | 8000 | 12.6 | .0079 | 4800 | 7.5 | .0039 |

Depth of cut

≤ Please refer to the list above for depth of cut.

DC: Dia.

Note 1) If the depth of cut is shallow, the revolution and feed rate can be increased.

Note 2) If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate, and depth of cut according to the table above.


For Machining of Hardened Steel

VFRMD NEW - Inch Sizes

End mill, Medium cut length, 4/6 flute, For hardened materials



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

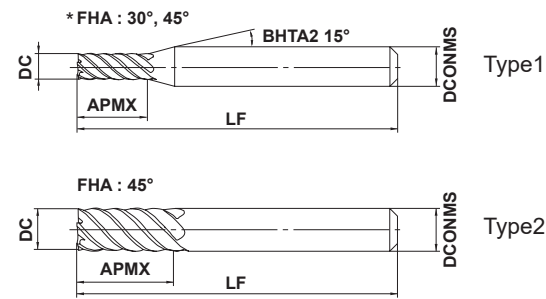

| | | |
|--|--|---|
| DC ≤ .5000" | DC = .5000" | |
| $\begin{matrix} 0 \\ - .0008 \end{matrix}$ | $\begin{matrix} 0 \\ - .0012 \end{matrix}$ | |
| DCONMS = .2500" | DCONMS = .3125", .3750" | DCONMS = .5000" |
| $\begin{matrix} 0 \\ - .005 \end{matrix}$ | $\begin{matrix} 0 \\ - .006 \end{matrix}$ | $\begin{matrix} 0 \\ - .008 \end{matrix}$ |

● A sharp cutting edge and improved chipping resistance enable highly efficient machining.

| Order Number | DC | APMX | LF | DCONMS | Flutes | Stock | Type |
|--------------|-------|--------|-----|--------|--------|-------|------|
| VFRMDDU0313 | .0313 | .0938 | 2.5 | .2500 | 4 | ● | 1 |
| VFRMDDU0625 | .0625 | .1875 | 2.5 | .2500 | 4 | ● | 1 |
| VFRMDDU0938 | .0938 | .2813 | 2.5 | .2500 | 4 | ● | 1 |
| VFRMDDU1250 | .1250 | .3750 | 2.5 | .2500 | 6 | ● | 1 |
| VFRMDDU1563 | .1563 | .5000 | 2.5 | .2500 | 6 | ● | 1 |
| VFRMDDU1875 | .1875 | .5630 | 2.5 | .2500 | 6 | ● | 1 |
| VFRMDDU2500 | .2500 | .5630 | 3.5 | .2500 | 6 | ● | 2 |
| VFRMDDU3125 | .3125 | .6875 | 4.0 | .3125 | 6 | ● | 2 |
| VFRMDDU3750 | .3750 | .8125 | 4.0 | .3750 | 6 | ● | 2 |
| VFRMDDU5000 | .5000 | 1.0938 | 4.5 | .5000 | 6 | ● | 2 |

* FHA: DC < .1250" = 30°, DC ≥ .1250" = 45°

DC = Cutting Dia. LF = Functional Length
 APMX = Depth of Cut Max. DCONMS = Connection Dia.

● : USA Stock

Recommended Cutting Conditions

| Material | Hardened steel (45–55HRC) | | | Hardened steel (55–62HRC) | | | Hardened steel (62–70HRC) | | |
|--------------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|
| | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae |
| .0313 | 40000 | 43.3 | .0016 | 40000 | 31.5 | .00094 | 36000 | 19.6 | .00063 |
| .0625 | 40000 | 70.8 | .0031 | 30000 | 37.8 | .00190 | 20000 | 22.0 | .00130 |
| .0938 | 40000 | 102.0 | .0047 | 20000 | 43.0 | .00280 | 13000 | 26.6 | .00190 |
| .1250 | 30000 | 161.0 | .0063 | 15000 | 82.0 | .00380 | 10000 | 49.6 | .00250 |
| .1563 | 24000 | 170.0 | .0078 | 12000 | 86.0 | .00470 | 8000 | 51.0 | .00310 |
| .1875 | 20000 | 189.0 | .0094 | 10000 | 94.5 | .00560 | 6700 | 55.0 | .00380 |
| .2500 | 15000 | 228.0 | .0130 | 7500 | 114.0 | .00750 | 5000 | 70.8 | .00500 |
| .3125 | 12000 | 228.0 | .0160 | 6000 | 114.0 | .00940 | 4000 | 70.8 | .00630 |
| .3750 | 10000 | 228.0 | .0190 | 5000 | 114.0 | .01100 | 3300 | 70.8 | .00750 |
| .5000 | 7500 | 177.0 | .0250 | 3800 | 90.5 | .01500 | 2500 | 55.0 | .01000 |

| | | |
|--------------|--|--|
| Depth of cut | <p>≤ Please refer to the list above for depth of cut. ≤ 1.5DC</p> | <p>≤ Please refer to the list above for depth of cut. ≤ 1.0DC</p> |
|--------------|--|--|

DC: Dia.


For Machining of Hardened Steel

VFRMD NEW

End mill, Medium cut length, 4/6 flute, For hardened materials



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

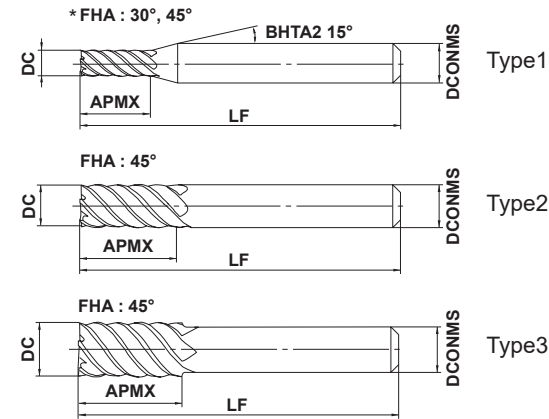

| | | | | |
|----------|--------------|---------------|---------------|--|
| DC ≤ 12 | DC > 12 | | | |
| 0 | 0 | | | |
| -0.020 | -0.030 | | | |
| DCONMS=6 | DCONMS=8, 10 | DCONMS=12, 16 | DCONMS=20, 25 | |
| 0 | 0 | 0 | 0 | |
| -0.005 | -0.006 | -0.008 | -0.009 | |

● A sharp cutting edge and improved chipping resistance enable highly efficient machining.

| Order Number | DC | APMX | LF | DCONMS | Flutes | Stock | Type |
|--------------|-----|------|-----|--------|--------|-------|------|
| VFRMDD0100 | 1 | 3.5 | 60 | 6 | 4 | ● | 1 |
| VFRMDD0150 | 1.5 | 5 | 60 | 6 | 4 | ● | 1 |
| VFRMDD0200 | 2 | 7 | 60 | 6 | 4 | ● | 1 |
| VFRMDD0250 | 2.5 | 8 | 60 | 6 | 4 | ● | 1 |
| VFRMDD0300 | 3 | 10 | 60 | 6 | 6 | ● | 1 |
| VFRMDD0400 | 4 | 12 | 60 | 6 | 6 | ● | 1 |
| VFRMDD0500 | 5 | 15 | 60 | 6 | 6 | ● | 1 |
| VFRMDD0600 | 6 | 15 | 60 | 6 | 6 | ● | 2 |
| VFRMDD0800 | 8 | 20 | 75 | 8 | 6 | ● | 2 |
| VFRMDD1000 | 10 | 25 | 80 | 10 | 6 | ● | 2 |
| VFRMDD1200 | 12 | 30 | 100 | 12 | 6 | ● | 2 |
| VFRMDD1400 | 14 | 35 | 105 | 12 | 6 | ● | 3 |
| VFRMDD1500 | 15 | 40 | 110 | 16 | 6 | ● | 1 |
| VFRMDD1600 | 16 | 40 | 110 | 16 | 6 | ● | 2 |
| VFRMDD1800 | 18 | 40 | 120 | 16 | 6 | ● | 3 |
| VFRMDD2000 | 20 | 45 | 125 | 20 | 6 | ● | 2 |
| VFRMDD2200 | 22 | 45 | 135 | 20 | 6 | ● | 3 |
| VFRMDD2500 | 25 | 60 | 160 | 25 | 6 | ● | 2 |

* FHA : DC<3 mm=30°, DC≥3 mm=45°

DC = Cutting Dia. LF = Functional Length
APMX = Depth of Cut Max. DCONMS = Connection Dia.

● : USA Stock

Recommended Cutting Conditions

| Material | Hardened steel (45—55HRC) | | | Hardened steel (55—62HRC) | | | Hardened steel (62—70HRC) | | | |
|-----------|---------------------------|---------------------------------|-----------------|---------------------------|---------------------------------|-----------------|---------------------------|---------------------------------|-----------------|-----------------|
| | Dia. DC (mm) | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae |
| 1 | .039 | 40000 | 47.2 | .0020 | 40000 | 31.5 | .0012 | 32000 | 19.7 | .0008 |
| 2 | .079 | 40000 | 78.7 | .0039 | 24000 | 39.4 | .0020 | 16000 | 23.6 | .0020 |
| 3 | .118 | 32000 | 149.6 | .0079 | 16000 | 74.8 | .0039 | 11000 | 47.2 | .0020 |
| 4 | .157 | 24000 | 173.2 | .0079 | 12000 | 86.6 | .0039 | 8000 | 51.2 | .0020 |
| 6 | .236 | 16000 | 228.3 | .0118 | 8000 | 114.2 | .0079 | 5300 | 70.9 | .0039 |
| 8 | .315 | 12000 | 228.3 | .0157 | 6000 | 114.2 | .0079 | 4000 | 70.9 | .0039 |
| 10 | .394 | 9600 | 228.3 | .0197 | 4800 | 114.2 | .0118 | 3200 | 70.9 | .0079 |
| 12 | .472 | 8000 | 189.0 | .0236 | 4000 | 94.5 | .0118 | 2700 | 59.1 | .0079 |
| 16 | .630 | 6000 | 141.7 | .0315 | 3000 | 70.9 | .0197 | 2000 | 43.3 | .0118 |
| 20 | .787 | 4800 | 114.2 | .0394 | 2400 | 55.1 | .0197 | 1600 | 34.6 | .0118 |
| 25 | .984 | 3800 | 90.6 | .0394 | 1900 | 43.3 | .0197 | 1300 | 28.3 | .0118 |

Depth of cut

≤ Please refer to the list above for depth of cut.
≤ 1.5DC

Depth of cut

≤ Please refer to the list above for depth of cut.
≤ 1.0DC

DC: Dia.

Slot milling with small diameter tools

| Material | Hardened steel (45—55HRC) | | | Hardened steel (55—62HRC) | | | |
|----------|---------------------------|---------------------------------|-----------------|---------------------------|---------------------------------|-----------------|-----------------|
| | Dia. DC (mm) | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ap | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ap |
| 1 | .039 | 15000 | 11.8 | .0039 | 9500 | 4.3 | .0020 |
| 2 | .079 | 8000 | 12.6 | .0079 | 4800 | 7.5 | .0039 |

Depth of cut

≤ Please refer to the list above for depth of cut.

DC: Dia.

Note 1) If the depth of cut is shallow, the revolution and feed rate can be increased.

Note 2) If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate, and depth of cut according to the table above.


For Machining of Hardened Steel

VFRLD NEW

End mill, Long cut length, 6 flute, For hardened materials



| | | | | | | | |
|---|---|-------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC) | Hardened Steel (≤55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

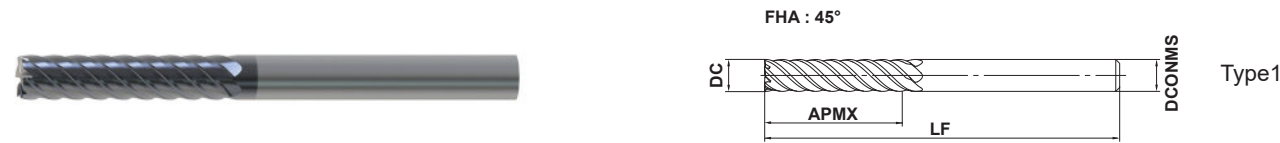

| | | | | |
|--|--------------|--------------|---------------|---------------|
| | DC ≤ 12 | DC > 12 | | |
| | 0 - 0.020 | 0 - 0.030 | | |
| | DCONMS=6 | DCONMS=8, 10 | DCONMS=12, 16 | DCONMS=20, 25 |
| | 0 - 0.005 | 0 - 0.006 | 0 - 0.008 | 0 - 0.009 |

● A sharp cutting edge and improved chipping resistance enable highly efficient machining.

| Order Number | DC | APMX | LF | DCONMS | Flutes | Stock | Type |
|--------------|----|------|-----|--------|--------|-------|------|
| VFRLDD0600 | 6 | 26 | 70 | 6 | 6 | ● | 1 |
| VFRLDD0800 | 8 | 36 | 90 | 8 | 6 | ● | 1 |
| VFRLDD1000 | 10 | 46 | 100 | 10 | 6 | ● | 1 |
| VFRLDD1200 | 12 | 56 | 110 | 12 | 6 | ● | 1 |
| VFRLDD1600 | 16 | 66 | 130 | 16 | 6 | ● | 1 |
| VFRLDD2000 | 20 | 76 | 140 | 20 | 6 | ● | 1 |
| VFRLDD2500 | 25 | 92 | 180 | 25 | 6 | ● | 1 |

Recommended Cutting Conditions

| Material | Hardened steel (45–55HRC) | | | Hardened steel (55–62HRC) | | | Hardened steel (62–70HRC) | | |
|----------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|
| | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae |
| 6 | 2200 | 18.1 | .0024 | 1900 | 13.4 | .0012 | 1500 | 10.2 | .0012 |
| 8 | 1700 | 16.9 | .0031 | 1400 | 12.6 | .0016 | 1100 | 9.4 | .0016 |
| 10 | 1300 | 15.7 | .0039 | 1100 | 12.2 | .0020 | 890 | 8.3 | .0020 |
| 12 | 1100 | 14.2 | .0047 | 930 | 11.0 | .0024 | 740 | 7.9 | .0024 |
| 16 | 840 | 12.2 | .0063 | 700 | 8.7 | .0031 | 560 | 6.7 | .0031 |
| 20 | 670 | 10.2 | .0079 | 560 | 7.5 | .0039 | 450 | 5.9 | .0039 |
| 25 | 530 | 9.1 | .0098 | 450 | 6.7 | .0051 | 360 | 4.7 | .0051 |



Note 1) If the depth of cut is shallow, the revolution and feed rate can be increased.

Note 2) If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate, and depth of cut according to the table above.


● : USA Stock

VFR2SSB

Ball nose, Short cut length, Short shank, 2 flute, For hardened materials



| | | | | | | | |
|---|---|-------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC) | Hardened Steel (≤55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

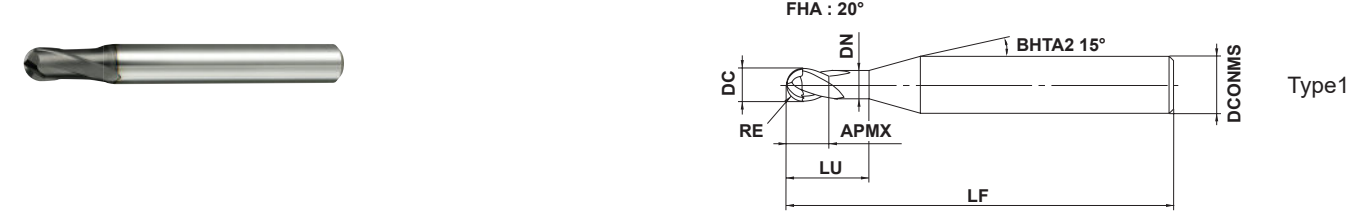

| | | | | |
|--|--------------|--------------|--------------|--|
| | RE | | | |
| | ±0.005 | | | |
| | DCONMS=4, 6 | DCONMS=8, 10 | DCONMS=12 | |
| | 0 - 0.005 | 0 - 0.006 | 0 - 0.008 | |

● Optimization of the flute geometry, helix and rake angles have improved the overall edge strength.

| Order Number | RE | DC | APMX | LU | DN | LF | DCONMS | Flutes | Stock | Type |
|-----------------|------|-----|------|----|------|----|--------|--------|-------|------|
| VFR2SSBR0050S04 | 0.5 | 1 | 1 | 2 | 0.94 | 40 | 4 | 2 | ● | 1 |
| VFR2SSBR0050 | 0.5 | 1 | 1 | 2 | 0.94 | 40 | 6 | 2 | ● | 1 |
| VFR2SSBR0075S04 | 0.75 | 1.5 | 1.5 | 3 | 1.44 | 40 | 4 | 2 | ● | 1 |
| VFR2SSBR0075 | 0.75 | 1.5 | 1.5 | 3 | 1.44 | 40 | 6 | 2 | ● | 1 |
| VFR2SSBR0100 | 1 | 2 | 2 | 4 | 1.9 | 45 | 6 | 2 | ● | 1 |
| VFR2SSBR0150 | 1.5 | 3 | 3 | 6 | 2.9 | 45 | 6 | 2 | ● | 1 |
| VFR2SSBR0200 | 2 | 4 | 4 | 8 | 3.9 | 45 | 6 | 2 | ● | 1 |
| VFR2SSBR0250 | 2.5 | 5 | 5 | 10 | 4.9 | 50 | 6 | 2 | ● | 1 |
| VFR2SSBR0300 | 3 | 6 | 6 | 12 | 5.85 | 50 | 6 | 2 | ● | 2 |
| VFR2SSBR0400 | 4 | 8 | 8 | 14 | 7.85 | 60 | 8 | 2 | ● | 2 |
| VFR2SSBR0500 | 5 | 10 | 10 | 18 | 9.7 | 70 | 10 | 2 | ● | 2 |
| VFR2SSBR0600 | 6 | 12 | 12 | 22 | 11.7 | 75 | 12 | 2 | ● | 2 |

RE = Corner Radius LU = Usable Length DCONMS = Connection Dia.
 DC = Cutting Dia. DN = Neck Dia.
 APMX = Depth of Cut Max. LF = Functional Length


For Machining of Hardened Steel

VFR2SB

Ball nose, Short cut length, 2 flute, For hardened materials



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

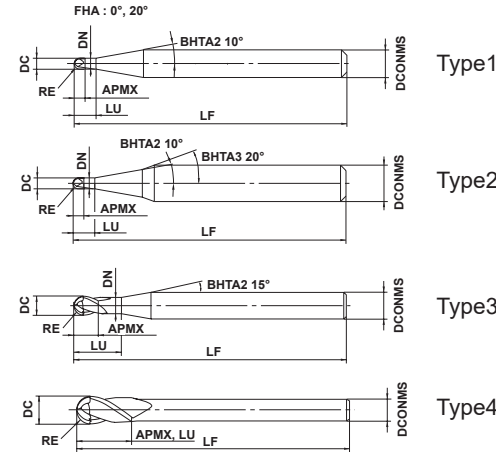

| | | | | |
|--------------|--------------|--------------|---------------|--------------|
| RE ≤ 6 | RE > 6 | | | |
| ±0.005 | ±0.010 | | | |
| DCONMS=3 | DCONMS=4, 6 | DCONMS=8, 10 | DCONMS=12, 16 | DCONMS=20 |
| 0 - 0.004 | 0 - 0.005 | 0 - 0.006 | 0 - 0.008 | 0 - 0.009 |

● Optimization of the flute geometry, helix and rake angles have improved the overall edge strength.

(mm)

| Order Number | RE | DC | APMX | LU | DN | LF | DCONMS | Flutes | Stock | Type |
|----------------|------|-----|------|-----|------|-----|--------|--------|-------|------|
| VFR2SBR0010 | 0.1 | 0.2 | 0.2 | 0.4 | 0.17 | 45 | 4 | 2 | ● | 1 |
| VFR2SBR0010S06 | 0.1 | 0.2 | 0.2 | 0.4 | 0.17 | 50 | 6 | 2 | ● | 2 |
| VFR2SBR0015 | 0.15 | 0.3 | 0.3 | 0.6 | 0.27 | 45 | 4 | 2 | ● | 1 |
| VFR2SBR0015S06 | 0.15 | 0.3 | 0.3 | 0.6 | 0.27 | 50 | 6 | 2 | ● | 2 |
| VFR2SBR0020 | 0.2 | 0.4 | 0.4 | 0.8 | 0.36 | 45 | 4 | 2 | ● | 1 |
| VFR2SBR0020S06 | 0.2 | 0.4 | 0.4 | 0.8 | 0.36 | 50 | 6 | 2 | ● | 2 |
| VFR2SBR0030 | 0.3 | 0.6 | 0.6 | 1.2 | 0.56 | 45 | 4 | 2 | ● | 3 |
| VFR2SBR0030S06 | 0.3 | 0.6 | 0.6 | 1.2 | 0.56 | 50 | 6 | 2 | ● | 3 |
| VFR2SBR0040 | 0.4 | 0.8 | 0.8 | 1.6 | 0.76 | 45 | 4 | 2 | ● | 3 |
| VFR2SBR0040S06 | 0.4 | 0.8 | 0.8 | 1.6 | 0.76 | 50 | 6 | 2 | ● | 3 |
| VFR2SBR0050 | 0.5 | 1 | 1 | 2 | 0.94 | 45 | 4 | 2 | ● | 3 |
| VFR2SBR0050S06 | 0.5 | 1 | 1 | 2 | 0.94 | 50 | 6 | 2 | ● | 3 |
| VFR2SBR0060 | 0.6 | 1.2 | 1.2 | 2.4 | 1.14 | 45 | 4 | 2 | ● | 3 |
| VFR2SBR0060S06 | 0.6 | 1.2 | 1.2 | 2.4 | 1.14 | 50 | 6 | 2 | ● | 3 |
| VFR2SBR0070 | 0.7 | 1.4 | 1.4 | 2.8 | 1.34 | 45 | 4 | 2 | ● | 3 |
| VFR2SBR0070S06 | 0.7 | 1.4 | 1.4 | 2.8 | 1.34 | 50 | 6 | 2 | ● | 3 |
| VFR2SBR0075 | 0.75 | 1.5 | 1.5 | 3 | 1.44 | 45 | 4 | 2 | ● | 3 |
| VFR2SBR0075S06 | 0.75 | 1.5 | 1.5 | 3 | 1.44 | 50 | 6 | 2 | ● | 3 |
| VFR2SBR0080 | 0.8 | 1.6 | 1.6 | 3.2 | 1.54 | 45 | 4 | 2 | ● | 3 |
| VFR2SBR0080S06 | 0.8 | 1.6 | 1.6 | 3.2 | 1.54 | 50 | 6 | 2 | ● | 3 |
| VFR2SBR0090 | 0.9 | 1.8 | 1.8 | 3.6 | 1.74 | 45 | 4 | 2 | ● | 3 |
| VFR2SBR0090S06 | 0.9 | 1.8 | 1.8 | 3.6 | 1.74 | 50 | 6 | 2 | ● | 3 |
| VFR2SBR0100 | 1 | 2 | 2 | 4 | 1.9 | 50 | 4 | 2 | ● | 3 |
| VFR2SBR0100S06 | 1 | 2 | 2 | 4 | 1.9 | 60 | 6 | 2 | ● | 3 |
| VFR2SBR0125S06 | 1.25 | 2.5 | 2.5 | 5 | 2.4 | 60 | 6 | 2 | ● | 3 |
| VFR2SBR0150 | 1.5 | 3 | 3 | 6 | 2.9 | 70 | 6 | 2 | ● | 3 |
| VFR2SBR0150S03 | 1.5 | 3 | 3 | — | — | 60 | 3 | 2 | ● | 4 |
| VFR2SBR0200 | 2 | 4 | 4 | 8 | 3.9 | 70 | 6 | 2 | ● | 3 |
| VFR2SBR0200S04 | 2 | 4 | 4 | — | — | 60 | 4 | 2 | ● | 4 |
| VFR2SBR0250 | 2.5 | 5 | 5 | 10 | 4.9 | 80 | 6 | 2 | ● | 3 |
| VFR2SBR0300 | 3 | 6 | 12 | — | — | 80 | 6 | 2 | ● | 4 |
| VFR2SBR0400 | 4 | 8 | 14 | — | — | 90 | 8 | 2 | ● | 4 |
| VFR2SBR0500 | 5 | 10 | 18 | — | — | 100 | 10 | 2 | ● | 4 |
| VFR2SBR0600 | 6 | 12 | 22 | — | — | 110 | 12 | 2 | ● | 4 |
| VFR2SBR0800 | 8 | 16 | 30 | — | — | 140 | 16 | 2 | ● | 4 |
| VFR2SBR1000 | 10 | 20 | 38 | — | — | 160 | 20 | 2 | ● | 4 |

RE = Corner Radius LU = Usable Length DCONMS= Connection Dia.
 DC = Cutting Dia. DN = Neck Dia.
 APMX = Depth of Cut Max. LF = Functional Length

● : USA Stock

Ball nose, Short cut length, Short shank, 2 flute, For hardened materials **VFR2SSB**


Ball nose, Short cut length, 2 flute, For hardened materials **VFR2SB**

Recommended Cutting Conditions

(in)

| Material | Hardened Steel (45—55HRC) | | | | | | Hardened Steel (55—62HRC) | | | | | | Hardened Steel (62—70HRC) | | | | | | |
|----------------------------|---------------------------------|-----------------|---------------------------------|-----------------|-----------------|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|-----------------|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|-----------------|-----------------|---------------------------------|
| | $\alpha \leq 15^\circ$ | | $\alpha > 15^\circ$ | | Depth of cut ap | Depth of cut ae | $\alpha \leq 15^\circ$ | | $\alpha > 15^\circ$ | | Depth of cut ap | Depth of cut ae | $\alpha \leq 15^\circ$ | | $\alpha > 15^\circ$ | | Depth of cut ap | Depth of cut ae | |
| Corner Radius RE (mm) (in) | Revolution (min ⁻¹) | Feed rate (IPM) | Revolution (min ⁻¹) | Feed rate (IPM) | | | Revolution (min ⁻¹) | Feed rate (IPM) | Revolution (min ⁻¹) | Feed rate (IPM) | | | Revolution (min ⁻¹) | Feed rate (IPM) | Revolution (min ⁻¹) | Feed rate (IPM) | | | Revolution (min ⁻¹) |
| 0.1 | .004 | 40000 | 12.6 | 40000 | 9.4 | .0001 | .0008 | 40000 | 12.6 | 40000 | 6.3 | .0001 | .0008 | 40000 | 12.6 | 40000 | 6.3 | .0001 | .0008 |
| 0.15 | .006 | 40000 | 25.2 | 40000 | 22.0 | .0004 | .0012 | 40000 | 25.2 | 40000 | 15.7 | .0003 | .0012 | 40000 | 25.2 | 40000 | 15.7 | .0002 | .0012 |
| 0.2 | .008 | 40000 | 63.0 | 40000 | 47.2 | .0008 | .0016 | 40000 | 55.1 | 40000 | 39.4 | .0006 | .0016 | 40000 | 47.2 | 40000 | 39.4 | .0004 | .0016 |
| 0.3 | .012 | 40000 | 126.0 | 40000 | 63.0 | .0012 | .0024 | 40000 | 110.2 | 40000 | 47.2 | .0010 | .0024 | 40000 | 78.7 | 40000 | 47.2 | .0008 | .0024 |
| 0.4 | .016 | 40000 | 252.0 | 40000 | 94.5 | .0020 | .0031 | 40000 | 157.5 | 40000 | 63.0 | .0016 | .0031 | 40000 | 110.2 | 40000 | 63.0 | .0012 | .0031 |
| 0.5 | .020 | 40000 | 315.0 | 40000 | 126.0 | .0024 | .0039 | 40000 | 220.5 | 40000 | 94.5 | .0020 | .0039 | 40000 | 141.7 | 32000 | 51.2 | .0016 | .0039 |
| 0.75 | .030 | 40000 | 378.0 | 40000 | 157.5 | .0035 | .0059 | 40000 | 283.5 | 32000 | 98.4 | .0030 | .0059 | 32000 | 177.2 | 21000 | 47.2 | .0020 | .0059 |
| 1 | .039 | 40000 | 378.0 | 39000 | 185.0 | .0043 | .0079 | 40000 | 315.0 | 24000 | 94.5 | .0039 | .0079 | 24000 | 149.6 | 16000 | 39.4 | .0028 | .0079 |
| 1.25 | .049 | 40000 | 409.4 | 32000 | 177.2 | .0047 | .0098 | 37000 | 318.9 | 19000 | 90.6 | .0043 | .0098 | 19000 | 133.9 | 13000 | 39.4 | .0031 | .0098 |
| 1.5 | .059 | 40000 | 472.4 | 27000 | 169.3 | .0051 | .0118 | 32000 | 303.1 | 16000 | 86.6 | .0047 | .0118 | 16000 | 126.0 | 11000 | 34.6 | .0035 | .0118 |
| 2 | .079 | 32000 | 428.3 | 20000 | 141.7 | .0059 | .0157 | 24000 | 244.1 | 12000 | 74.8 | .0051 | .0157 | 12000 | 94.5 | 8000 | 31.5 | .0039 | .0157 |
| 2.5 | .098 | 25000 | 354.3 | 16000 | 114.2 | .0079 | .0197 | 19000 | 208.7 | 9600 | 66.9 | .0059 | .0197 | 9600 | 82.7 | 6000 | 23.6 | .0039 | .0197 |
| 3 | .118 | 21000 | 330.7 | 13000 | 102.4 | .0098 | .0236 | 16000 | 189.0 | 8000 | 63.0 | .0079 | .0236 | 8000 | 66.9 | 5000 | 23.6 | .0043 | .0236 |
| 4 | .157 | 16000 | 252.0 | 10000 | 78.7 | .0118 | .0315 | 12000 | 141.7 | 6000 | 47.2 | .0079 | .0315 | 6000 | 55.1 | 4000 | 18.9 | .0043 | .0315 |
| 5 | .197 | 13000 | 204.7 | 8000 | 66.9 | .0197 | .0394 | 10000 | 126.0 | 4800 | 37.8 | .0079 | .0394 | 4800 | 43.3 | 3000 | 16.5 | .0047 | .0394 |
| 6 | .236 | 9000 | 141.7 | 6000 | 51.2 | .0197 | .0472 | 7000 | 86.6 | 3600 | 28.3 | .0118 | .0472 | 3600 | 33.9 | 2200 | 12.2 | .0047 | .0472 |
| 8 | .315 | 6000 | 94.5 | 4000 | 39.4 | .0197 | .0630 | 5000 | 63.0 | 2500 | 19.7 | .0118 | .0630 | 2500 | 25.6 | 1500 | 9.4 | .0059 | .0630 |
| 10 | .394 | 4500 | 70.9 | 3000 | 30.7 | .0197 | .0787 | 4000 | 51.2 | 1800 | 14.2 | .0118 | .0787 | 1800 | 18.5 | 1000 | 6.3 | .0059 | .0787 |


Depth of cut



Note 1) If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, please adjust the revolution, feed rate and depth of cut.

Note 2) If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, reduce the revolution and feed rate proportionately.

Note 3) α is the inclination angle of the machined surface.




VFR2SBF

Ball nose, Short cut length, 2 flute, For mirror finishing



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

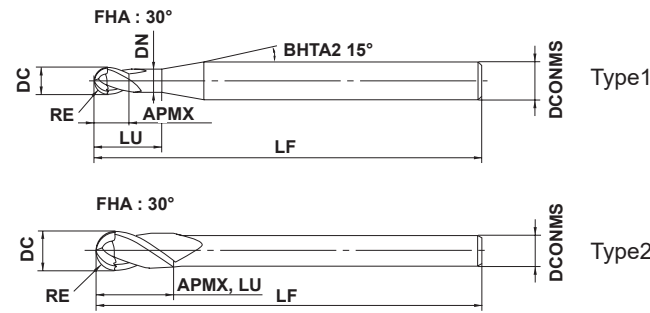

| | | | | |
|--------|---------|--|--|--|
| RE | | | | |
| ±0.010 | | | | |
| DCONMS | | | | |
| h5 | 0 | | | |
| | - 0.005 | | | |

● Ball nose geometry for mirror finishing.


| Order Number | RE | DC | APMX | LU | DN | LF | DCONMS | Flutes | Stock | Type |
|--------------|------|-----|------|----|------|----|--------|--------|-------|------|
| VFR2SBFR0050 | 0.5 | 1 | 1 | 2 | 0.94 | 45 | 4 | 2 | ● | 1 |
| VFR2SBFR0075 | 0.75 | 1.5 | 1.5 | 3 | 1.44 | 45 | 4 | 2 | ● | 1 |
| VFR2SBFR0100 | 1 | 2 | 2 | 4 | 1.9 | 60 | 6 | 2 | ● | 1 |
| VFR2SBFR0125 | 1.25 | 2.5 | 2.5 | 5 | 2.4 | 60 | 6 | 2 | ● | 1 |
| VFR2SBFR0150 | 1.5 | 3 | 3 | 6 | 2.9 | 70 | 6 | 2 | ● | 1 |
| VFR2SBFR0200 | 2 | 4 | 4 | 8 | 3.9 | 70 | 6 | 2 | ● | 1 |
| VFR2SBFR0250 | 2.5 | 5 | 5 | 10 | 4.9 | 80 | 6 | 2 | ● | 1 |
| VFR2SBFR0300 | 3 | 6 | 12 | — | — | 80 | 6 | 2 | ● | 2 |

RE = Corner Radius LU = Usable Length DCONMS= Connection Dia.
 DC = Cutting Dia. DN = Neck Dia.
 APMX = Depth of Cut Max. LF = Functional Length

● : USA Stock

Recommended Cutting Conditions

| Material | Carbon Steel, Alloy Steel (180–280HB) Alloy Steel (<=350HB), Pre-hardened Steel (35–45HRC) Hardened Steel (45–62HRC) | | | | | | Hardened Steel (62–70HRC) | | | | | | | |
|-------------|--|-------|------------------------------------|--------------------|------------------------------------|--------------------|---------------------------|-----------------------|------------------------------------|--------------------|------------------------------------|--------------------|-----------------------|-----------------------|
| | Corner Radius RE | | $\alpha \leq 15^\circ$ | | $\alpha > 15^\circ$ | | Depth of cut a_p | Depth of cut a_e | $\alpha \leq 15^\circ$ | | $\alpha > 15^\circ$ | | Depth of cut a_p | Depth of cut a_e |
| | (mm) | (in) | Revolution (min ⁻¹) | Feed rate (IPM) | Revolution (min ⁻¹) | Feed rate (IPM) | | | Revolution (min ⁻¹) | Feed rate (IPM) | Revolution (min ⁻¹) | Feed rate (IPM) | | |
| 0.5 | .020 | 40000 | 31.5 | 40000 | 31.5 | .0003 | .0003 | 40000 | 22.0 | 40000 | 22.0 | .0002 | .0002 | |
| 0.75 | .030 | 40000 | 31.5 | 40000 | 31.5 | .0004 | .0004 | 40000 | 22.0 | 40000 | 22.0 | .0003 | .0003 | |
| 1 | .039 | 35000 | 41.3 | 35000 | 41.3 | .0004 | .0004 | 35000 | 27.6 | 35000 | 27.6 | .0004 | .0004 | |
| 1.25 | .049 | 35000 | 41.3 | 35000 | 41.3 | .0005 | .0005 | 35000 | 27.6 | 35000 | 27.6 | .0004 | .0004 | |
| 1.5 | .059 | 35000 | 41.3 | 35000 | 41.3 | .0006 | .0006 | 35000 | 27.6 | 35000 | 27.6 | .0005 | .0005 | |
| 2 | .079 | 25000 | 39.4 | 25000 | 39.4 | .0007 | .0007 | 25000 | 29.5 | 25000 | 29.5 | .0006 | .0006 | |
| 2.5 | .098 | 25000 | 39.4 | 25000 | 39.4 | .0008 | .0008 | 25000 | 29.5 | 25000 | 29.5 | .0006 | .0006 | |
| 3 | .118 | 25000 | 39.4 | 25000 | 39.4 | .0008 | .0008 | 25000 | 29.5 | 25000 | 29.5 | .0006 | .0006 | |




Note 1) The tools are recommended for use only when finishing.

Note 2) Air blowing or oil mist are recommended as coolants.

Note 3) Note the following points when using the tools.

- Avoid using equipment abruptly without proper preparation. After sufficiently energizing equipment, ensure that there will be no changes to the depth of cut due to elongation of the main axis during machining etc.
- If the tools are used immediately after rough machining of a surface, large uneven areas (cusp heights) will cause deflection of the tools and waviness of the machined surface. Therefore, it is recommended to add a medium finish machining process which uses the same value of a_e as indicated in the table above.

Note 4) α is the inclination angle of the machined surface.



VFR2XLB



Ball nose, Long neck, 2 flute, For hardened materials



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|



Effective length for inclined angle

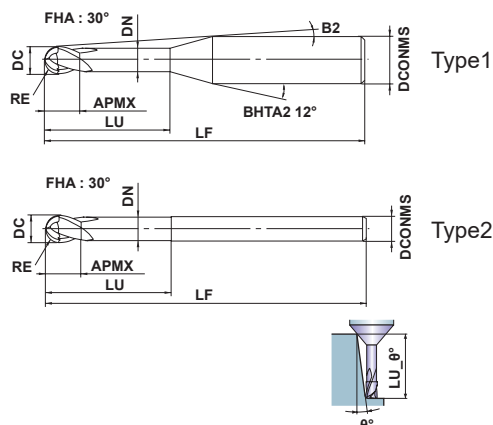

| | | | | |
|--------|--------|--|--|--|
| RE | | | | |
| ±0.005 | | | | |
| DCONMS | | | | |
| h5 | 0 | | | |
| | -0.005 | | | |

- Precise machining of vertical walls is possible due to a back taper and a strong, seamless ball nose cutting edge geometry.

| Order Number | RE | DC | APMX | LU | DN | B2 | LF | DCONMS | Flutes | Stock | Type | Effective length for inclined angle | | | |
|--------------------|------|-----|------|-----|------|-------|----|--------|--------|-------|------|-------------------------------------|-----|-----|------|
| | | | | | | | | | | | | 0.5° | 1° | 2° | 3° |
| VFR2XLB0010N005 | 0.1 | 0.2 | 0.15 | 0.5 | 0.18 | 11.5° | 50 | 4 | 2 | ★ | 1 | 0.5 | 0.5 | 0.6 | 0.7 |
| VFR2XLB0010N010 | 0.1 | 0.2 | 0.15 | 1 | 0.18 | 10.9° | 50 | 4 | 2 | ● | 1 | 1 | 1.1 | 1.2 | 1.3 |
| VFR2XLB0015N010 | 0.15 | 0.3 | 0.24 | 1 | 0.28 | 10.9° | 50 | 4 | 2 | ● | 1 | 1 | 1.1 | 1.2 | 1.3 |
| VFR2XLB0015N015 | 0.15 | 0.3 | 0.24 | 1.5 | 0.28 | 10.4° | 50 | 4 | 2 | ● | 1 | 1.6 | 1.6 | 1.8 | 2 |
| VFR2XLB0015N020 | 0.15 | 0.3 | 0.24 | 2 | 0.28 | 9.9° | 50 | 4 | 2 | ● | 1 | 2.1 | 2.2 | 2.4 | 2.6 |
| VFR2XLB0020N010 | 0.2 | 0.4 | 0.3 | 1 | 0.37 | 11° | 50 | 4 | 2 | ● | 1 | 1 | 1.1 | 1.2 | 1.3 |
| VFR2XLB0020N015 | 0.2 | 0.4 | 0.3 | 1.5 | 0.37 | 10.4° | 50 | 4 | 2 | ● | 1 | 1.5 | 1.6 | 1.7 | 1.9 |
| VFR2XLB0020N020 | 0.2 | 0.4 | 0.3 | 2 | 0.37 | 9.9° | 50 | 4 | 2 | ● | 1 | 2.1 | 2.2 | 2.3 | 2.6 |
| VFR2XLB0020N025 | 0.2 | 0.4 | 0.3 | 2.5 | 0.37 | 9.5° | 50 | 4 | 2 | ★ | 1 | 2.6 | 2.7 | 2.9 | 3.3 |
| VFR2XLB0020N030 | 0.2 | 0.4 | 0.3 | 3 | 0.37 | 9.1° | 50 | 4 | 2 | ● | 1 | 3.1 | 3.2 | 3.5 | 3.9 |
| VFR2XLB0020N040 | 0.2 | 0.4 | 0.3 | 4 | 0.37 | 8.4° | 50 | 4 | 2 | ★ | 1 | 4.2 | 4.3 | 4.7 | 5.2 |
| VFR2XLB0025N015 | 0.25 | 0.5 | 0.37 | 1.5 | 0.47 | 10.4° | 50 | 4 | 2 | ● | 1 | 1.5 | 1.6 | 1.7 | 1.9 |
| VFR2XLB0025N020 | 0.25 | 0.5 | 0.37 | 2 | 0.47 | 9.9° | 50 | 4 | 2 | ● | 1 | 2.1 | 2.1 | 2.3 | 2.6 |
| VFR2XLB0025N025 | 0.25 | 0.5 | 0.37 | 2.5 | 0.47 | 9.5° | 50 | 4 | 2 | ● | 1 | 2.6 | 2.7 | 2.9 | 3.2 |
| VFR2XLB0025N030 | 0.25 | 0.5 | 0.37 | 3 | 0.47 | 9.1° | 50 | 4 | 2 | ● | 1 | 3.1 | 3.2 | 3.5 | 3.9 |
| VFR2XLB0025N040 | 0.25 | 0.5 | 0.37 | 4 | 0.47 | 8.3° | 50 | 4 | 2 | ● | 1 | 4.1 | 4.3 | 4.7 | 5.2 |
| VFR2XLB0030N020 | 0.3 | 0.6 | 0.45 | 2 | 0.57 | 9.9° | 50 | 4 | 2 | ● | 1 | 2.1 | 2.2 | 2.4 | 2.6 |
| VFR2XLB0030N020S06 | 0.3 | 0.6 | 0.45 | 2 | 0.57 | 10.6° | 50 | 6 | 2 | ● | 1 | 2.1 | 2.2 | 2.4 | 2.6 |
| VFR2XLB0030N030 | 0.3 | 0.6 | 0.45 | 3 | 0.57 | 9° | 50 | 4 | 2 | ● | 1 | 3.1 | 3.3 | 3.6 | 4 |
| VFR2XLB0030N030S06 | 0.3 | 0.6 | 0.45 | 3 | 0.57 | 9.9° | 50 | 6 | 2 | ★ | 1 | 3.1 | 3.3 | 3.6 | 4 |
| VFR2XLB0030N040 | 0.3 | 0.6 | 0.45 | 4 | 0.57 | 8.2° | 50 | 4 | 2 | ★ | 1 | 4.2 | 4.4 | 4.8 | 5.3 |
| VFR2XLB0030N050 | 0.3 | 0.6 | 0.45 | 5 | 0.57 | 7.6° | 50 | 4 | 2 | ★ | 1 | 5.2 | 5.5 | 6 | 6.6 |
| VFR2XLB0030N060 | 0.3 | 0.6 | 0.45 | 6 | 0.57 | 7.1° | 50 | 4 | 2 | ● | 1 | 6.3 | 6.6 | 7.2 | 7.9 |
| VFR2XLB0040N030 | 0.4 | 0.8 | 0.6 | 3 | 0.77 | 8.9° | 50 | 4 | 2 | ● | 1 | 3.1 | 3.3 | 3.6 | 3.9 |
| VFR2XLB0040N040 | 0.4 | 0.8 | 0.6 | 4 | 0.77 | 8.2° | 50 | 4 | 2 | ● | 1 | 4.2 | 4.4 | 4.8 | 5.2 |
| VFR2XLB0040N060 | 0.4 | 0.8 | 0.6 | 6 | 0.77 | 6.9° | 50 | 4 | 2 | ● | 1 | 6.3 | 6.5 | 7.2 | 7.9 |
| VFR2XLB0040N080 | 0.4 | 0.8 | 0.6 | 8 | 0.77 | 6° | 50 | 4 | 2 | ★ | 1 | 8.4 | 8.7 | 9.5 | 10.6 |
| VFR2XLB0050N030 | 0.5 | 1 | 0.75 | 3 | 0.96 | 8.7° | 50 | 4 | 2 | ● | 1 | 3.2 | 3.4 | 3.7 | 4.1 |
| VFR2XLB0050N030S06 | 0.5 | 1 | 0.75 | 3 | 0.96 | 9.8° | 50 | 6 | 2 | ● | 1 | 3.2 | 3.4 | 3.7 | 4.1 |
| VFR2XLB0050N040 | 0.5 | 1 | 0.75 | 4 | 0.96 | 7.9° | 50 | 4 | 2 | ● | 1 | 4.3 | 4.5 | 4.9 | 5.4 |
| VFR2XLB0050N040S06 | 0.5 | 1 | 0.75 | 4 | 0.96 | 9.2° | 50 | 6 | 2 | ● | 1 | 4.3 | 4.5 | 4.9 | 5.4 |
| VFR2XLB0050N060 | 0.5 | 1 | 0.75 | 6 | 0.96 | 6.7° | 50 | 4 | 2 | ● | 1 | 6.3 | 6.5 | 7.2 | 7.9 |

● : USA Stock ★ : Stocked in Japan

| Order Number | RE | DC | APMX | LU | DN | B2 | LF | DCONMS | Flutes | Stock | Type | Effective length for inclined angle | | | |
|--------------------|------|-----|------|----|------|------|----|--------|--------|-------|------|-------------------------------------|------|------|------|
| | | | | | | | | | | | | 0.5° | 1° | 2° | 3° |
| VFR2XLB0050N060S06 | 0.5 | 1 | 0.75 | 6 | 0.96 | 8.2° | 50 | 6 | 2 | ● | 1 | 6.3 | 6.5 | 7.2 | 7.9 |
| VFR2XLB0050N080 | 0.5 | 1 | 0.75 | 8 | 0.96 | 5.8° | 50 | 4 | 2 | ● | 1 | 8.5 | 8.9 | 9.7 | 10.7 |
| VFR2XLB0050N100 | 0.5 | 1 | 0.75 | 10 | 0.96 | 5.1° | 50 | 4 | 2 | ● | 1 | 10.6 | 11.1 | 12.1 | 13.4 |
| VFR2XLB0050N120 | 0.5 | 1 | 0.75 | 12 | 0.96 | 4.6° | 50 | 4 | 2 | ● | 1 | 12.7 | 13.2 | 14.5 | 16 |
| VFR2XLB0075N060 | 0.75 | 1.5 | 1.1 | 6 | 1.44 | 6.3° | 50 | 4 | 2 | ● | 1 | 6.3 | 6.6 | 7.2 | 7.9 |
| VFR2XLB0075N060S06 | 0.75 | 1.5 | 1.1 | 6 | 1.44 | 8° | 50 | 6 | 2 | ● | 1 | 6.3 | 6.6 | 7.2 | 7.9 |
| VFR2XLB0075N080 | 0.75 | 1.5 | 1.1 | 8 | 1.44 | 5.4° | 50 | 4 | 2 | ● | 1 | 8.4 | 8.8 | 9.6 | 10.6 |
| VFR2XLB0075N080S06 | 0.75 | 1.5 | 1.1 | 8 | 1.44 | 7.2° | 50 | 6 | 2 | ● | 1 | 8.4 | 8.8 | 9.6 | 10.6 |
| VFR2XLB0075N100 | 0.75 | 1.5 | 1.1 | 10 | 1.44 | 4.7° | 50 | 4 | 2 | ★ | 1 | 10.5 | 11 | 12 | 13.2 |
| VFR2XLB0075N120 | 0.75 | 1.5 | 1.1 | 12 | 1.44 | 4.2° | 50 | 4 | 2 | ● | 1 | 12.6 | 13.1 | 14.4 | 15.9 |
| VFR2XLB0075N140 | 0.75 | 1.5 | 1.1 | 14 | 1.44 | 3.8° | 50 | 4 | 2 | ★ | 1 | 14.7 | 15.3 | 16.8 | 18.5 |
| VFR2XLB0075N160 | 0.75 | 1.5 | 1.1 | 16 | 1.44 | 3.4° | 60 | 4 | 2 | ★ | 1 | 16.8 | 17.5 | 19.2 | 21.2 |
| VFR2XLB0100N060 | 1 | 2 | 1.5 | 6 | 1.94 | 5.8° | 50 | 4 | 2 | ● | 1 | 6.3 | 6.6 | 7.1 | 7.8 |
| VFR2XLB0100N060S06 | 1 | 2 | 1.5 | 6 | 1.94 | 7.8° | 50 | 6 | 2 | ● | 1 | 6.3 | 6.6 | 7.1 | 7.8 |
| VFR2XLB0100N080 | 1 | 2 | 1.5 | 8 | 1.94 | 4.8° | 50 | 4 | 2 | ● | 1 | 8.4 | 8.8 | 9.5 | 10.5 |
| VFR2XLB0100N080S06 | 1 | 2 | 1.5 | 8 | 1.94 | 6.9° | 50 | 6 | 2 | ● | 1 | 8.4 | 8.8 | 9.5 | 10.5 |
| VFR2XLB0100N100 | 1 | 2 | 1.5 | 10 | 1.94 | 4.2° | 50 | 4 | 2 | ★ | 1 | 10.5 | 10.9 | 11.9 | 13.1 |
| VFR2XLB0100N100S06 | 1 | 2 | 1.5 | 10 | 1.94 | 6.2° | 50 | 6 | 2 | ● | 1 | 10.5 | 10.9 | 11.9 | 13.1 |
| VFR2XLB0100N120 | 1 | 2 | 1.5 | 12 | 1.94 | 3.6° | 50 | 4 | 2 | ● | 1 | 12.6 | 13.1 | 14.3 | 15.8 |
| VFR2XLB0100N120S06 | 1 | 2 | 1.5 | 12 | 1.94 | 5.6° | 50 | 6 | 2 | ● | 1 | 12.6 | 13.1 | 14.3 | 15.8 |
| VFR2XLB0100N160 | 1 | 2 | 1.5 | 16 | 1.94 | 2.9° | 60 | 4 | 2 | ● | 1 | 16.8 | 17.5 | 19.1 | * |
| VFR2XLB0100N160S06 | 1 | 2 | 1.5 | 16 | 1.94 | 4.7° | 60 | 6 | 2 | ★ | 1 | 16.8 | 17.5 | 19.1 | 21.1 |
| VFR2XLB0100N200 | 1 | 2 | 1.5 | 20 | 1.94 | 2.4° | 60 | 4 | 2 | ● | 1 | 20.9 | 21.8 | 23.9 | * |
| VFR2XLB0100N200S06 | 1 | 2 | 1.5 | 20 | 1.94 | 4° | 60 | 6 | 2 | ★ | 1 | 20.9 | 21.8 | 23.9 | 26.4 |
| VFR2XLB0125N100 | 1.25 | 2.5 | 1.9 | 10 | 2.4 | 3.5° | 60 | 4 | 2 | ★ | 1 | 10.4 | 10.8 | 11.8 | 12.9 |
| VFR2XLB0125N150 | 1.25 | 2.5 | 1.9 | 15 | 2.4 | 2.5° | 60 | 4 | 2 | ★ | 1 | 15.6 | 16.3 | 17.8 | * |
| VFR2XLB0150N100 | 1.5 | 3 | 2.3 | 10 | 2.9 | 5.5° | 60 | 6 | 2 | ● | 1 | 10.4 | 10.8 | 11.7 | 12.9 |
| VFR2XLB0150N120 | 1.5 | 3 | 2.3 | 12 | 2.9 | 4.9° | 60 | 6 | 2 | ● | 1 | 12.5 | 13 | 14.1 | 15.5 |
| VFR2XLB0150N160 | 1.5 | 3 | 2.3 | 16 | 2.9 | 4° | 70 | 6 | 2 | ● | 1 | 16.7 | 17.3 | 18.9 | 20.8 |
| VFR2XLB0150N200 | 1.5 | 3 | 2.3 | 20 | 2.9 | 3.4° | 70 | 6 | 2 | ● | 1 | 20.8 | 21.7 | 23.7 | 26.1 |
| VFR2XLB0150N250 | 1.5 | 3 | 2.3 | 25 | 2.9 | 2.8° | 70 | 6 | 2 | ● | 1 | 26.1 | 27.2 | 29.7 | * |
| VFR2XLB0150N300 | 1.5 | 3 | 2.3 | 30 | 2.9 | 2.5° | 70 | 6 | 2 | ● | 1 | 31.3 | 32.6 | 35.7 | * |
| VFR2XLB0200N100 | 2 | 4 | 3 | 10 | 3.9 | 4.5° | 70 | 6 | 2 | ● | 1 | 10.4 | 10.8 | 11.6 | 12.7 |
| VFR2XLB0200N120 | 2 | 4 | 3 | 12 | 3.9 | 3.9° | 70 | 6 | 2 | ● | 1 | 12.5 | 12.9 | 14 | 15.4 |
| VFR2XLB0200N160 | 2 | 4 | 3 | 16 | 3.9 | 3.1° | 70 | 6 | 2 | ● | 1 | 16.6 | 17.3 | 18.8 | 20.7 |
| VFR2XLB0200N200 | 2 | 4 | 3 | 20 | 3.9 | 2.6° | 70 | 6 | 2 | ● | 1 | 20.8 | 21.7 | 23.6 | * |
| VFR2XLB0200N250 | 2 | 4 | 3 | 25 | 3.9 | 2.1° | 70 | 6 | 2 | ● | 1 | 26 | 27.1 | 29.6 | * |
| VFR2XLB0200N300 | 2 | 4 | 3 | 30 | 3.9 | 1.8° | 70 | 6 | 2 | ★ | 1 | 31.2 | 32.6 | * | * |
| VFR2XLB0250N200 | 2.5 | 5 | 3.8 | 20 | 4.9 | 1.5° | 70 | 6 | 2 | ● | 1 | 20.8 | 21.6 | * | * |
| VFR2XLB0250N250 | 2.5 | 5 | 3.8 | 25 | 4.9 | 1.2° | 70 | 6 | 2 | ★ | 1 | 26 | 27.1 | * | * |
| VFR2XLB0300N180 | 3 | 6 | 6 | 18 | 5.85 | — | 80 | 6 | 2 | ★ | 2 | * | * | * | * |
| VFR2XLB0300N300 | 3 | 6 | 6 | 30 | 5.85 | — | 80 | 6 | 2 | ● | 2 | * | * | * | * |

* No interference

RE = Corner Radius LU = Usable Length DCONMS = Connection Dia.
 DC = Cutting Dia. DN = Neck Dia.
 APMX = Depth of Cut Max. LF = Functional Length

VFR2XLB


Ball nose, Long neck, 2 flute, For hardened materials

Recommended Cutting Conditions

(in)

| Material | | | | Hardened Steel (45—55HRC) | | | | Hardened Steel (55—70HRC) | | | |
|------------------|------|----------------|------|---------------------------------|-----------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|-----------------|
| | | | | Revolution (min ⁻¹) | Feed Rate (IPM) | Depth of Cut ap | Width of Cut ae | Revolution (min ⁻¹) | Feed Rate (IPM) | Depth of Cut ap | Width of Cut ae |
| Corner Radius RE | | Neck length LU | | Revolution (min ⁻¹) | Feed Rate (IPM) | Depth of Cut ap | Width of Cut ae | Revolution (min ⁻¹) | Feed Rate (IPM) | Depth of Cut ap | Width of Cut ae |
| (mm) | (in) | (mm) | (in) | | | | | | | | |
| 0.1 | .004 | 0.5 | .020 | 40000 | 11.8 | .00012 | .0004 | 40000 | 11.8 | .00008 | .0004 |
| 0.1 | .004 | 1 | .039 | 40000 | 11.8 | .00008 | .0004 | 40000 | 11.8 | .00008 | .0004 |
| 0.15 | .006 | 1 | .039 | 40000 | 19.7 | .00028 | .0006 | 40000 | 19.7 | .00020 | .0006 |
| 0.15 | .006 | 1.5 | .059 | 40000 | 19.7 | .00020 | .0006 | 40000 | 19.7 | .00012 | .0006 |
| 0.15 | .006 | 2 | .079 | 40000 | 19.7 | .00012 | .0006 | 40000 | 19.7 | .00008 | .0006 |
| 0.2 | .008 | 1 | .039 | 40000 | 55.1 | .00059 | .0008 | 40000 | 55.1 | .00039 | .0008 |
| 0.2 | .008 | 1.5 | .059 | 40000 | 39.4 | .00039 | .0008 | 40000 | 39.4 | .00024 | .0008 |
| 0.2 | .008 | 2 | .079 | 40000 | 39.4 | .00039 | .0008 | 40000 | 39.4 | .00024 | .0008 |
| 0.2 | .008 | 2.5 | .098 | 40000 | 27.6 | .00020 | .0008 | 40000 | 27.6 | .00012 | .0008 |
| 0.2 | .008 | 3 | .118 | 40000 | 27.6 | .00020 | .0008 | 40000 | 27.6 | .00012 | .0008 |
| 0.2 | .008 | 4 | .157 | 40000 | 23.6 | .00016 | .0008 | 40000 | 19.7 | .00012 | .0008 |
| 0.25 | .010 | 1.5 | .059 | 40000 | 78.7 | .00079 | .0010 | 40000 | 78.7 | .00059 | .0010 |
| 0.25 | .010 | 2 | .079 | 40000 | 78.7 | .00079 | .0010 | 40000 | 78.7 | .00059 | .0010 |
| 0.25 | .010 | 2.5 | .098 | 40000 | 59.1 | .00059 | .0010 | 40000 | 59.1 | .00039 | .0010 |
| 0.25 | .010 | 3 | .118 | 40000 | 47.2 | .00059 | .0010 | 40000 | 47.2 | .00039 | .0010 |
| 0.25 | .010 | 4 | .157 | 36000 | 35.4 | .00394 | .0010 | 36000 | 35.4 | .00028 | .0010 |
| 0.3 | .012 | 2 | .079 | 40000 | 110.2 | .0012 | .0012 | 40000 | 110.2 | .0008 | .0012 |
| 0.3 | .012 | 3 | .118 | 40000 | 110.2 | .0012 | .0012 | 40000 | 110.2 | .0008 | .0012 |
| 0.3 | .012 | 4 | .157 | 35000 | 78.7 | .0008 | .0012 | 35000 | 78.7 | .0006 | .0012 |
| 0.3 | .012 | 5 | .197 | 30000 | 39.4 | .0004 | .0012 | 30000 | 39.4 | .0003 | .0012 |
| 0.3 | .012 | 6 | .236 | 30000 | 31.5 | .0003 | .0012 | 30000 | 31.5 | .0002 | .0012 |
| 0.4 | .016 | 3 | .118 | 40000 | 118.1 | .0016 | .0016 | 40000 | 118.1 | .0012 | .0016 |
| 0.4 | .016 | 4 | .157 | 40000 | 118.1 | .0008 | .0016 | 40000 | 118.1 | .0006 | .0016 |
| 0.4 | .016 | 6 | .236 | 30000 | 63.0 | .0008 | .0016 | 30000 | 63.0 | .0004 | .0016 |
| 0.4 | .016 | 8 | .315 | 25000 | 39.4 | .0004 | .0016 | 25000 | 39.4 | .0003 | .0016 |
| 0.5 | .020 | 3 | .118 | 40000 | 157.5 | .0020 | .0020 | 40000 | 157.5 | .0016 | .0020 |
| 0.5 | .020 | 4 | .157 | 40000 | 157.5 | .0020 | .0020 | 40000 | 157.5 | .0016 | .0020 |
| 0.5 | .020 | 6 | .236 | 35000 | 78.7 | .0012 | .0020 | 35000 | 78.7 | .0008 | .0020 |
| 0.5 | .020 | 8 | .315 | 30000 | 63.0 | .0008 | .0020 | 30000 | 63.0 | .0004 | .0020 |
| 0.5 | .020 | 10 | .394 | 20000 | 39.4 | .0004 | .0020 | 20000 | 39.4 | .0004 | .0020 |
| 0.5 | .020 | 12 | .472 | 20000 | 39.4 | .0004 | .0020 | 20000 | 31.5 | .0003 | .0020 |
| 0.75 | .030 | 6 | .236 | 40000 | 196.9 | .0028 | .0030 | 40000 | 157.5 | .0024 | .0030 |
| 0.75 | .030 | 8 | .315 | 40000 | 196.9 | .0028 | .0030 | 40000 | 137.8 | .0024 | .0030 |
| 0.75 | .030 | 10 | .394 | 40000 | 177.2 | .0024 | .0030 | 40000 | 94.5 | .0024 | .0030 |
| 0.75 | .030 | 12 | .472 | 32000 | 133.9 | .0016 | .0030 | 32000 | 78.7 | .0016 | .0030 |
| 0.75 | .030 | 14 | .551 | 16000 | 59.1 | .0016 | .0030 | 16000 | 47.2 | .0012 | .0030 |
| 0.75 | .030 | 16 | .630 | 13000 | 47.2 | .0012 | .0030 | 13000 | 47.2 | .0008 | .0030 |
| 1 | .039 | 6 | .236 | 40000 | 236.2 | .0039 | .0039 | 40000 | 133.9 | .0039 | .0039 |
| 1 | .039 | 8 | .315 | 40000 | 196.9 | .0039 | .0039 | 40000 | 118.1 | .0039 | .0039 |
| 1 | .039 | 10 | .394 | 40000 | 196.9 | .0031 | .0039 | 40000 | 118.1 | .0028 | .0039 |
| 1 | .039 | 12 | .472 | 40000 | 196.9 | .0031 | .0039 | 40000 | 102.4 | .0020 | .0039 |
| 1 | .039 | 16 | .630 | 32000 | 137.8 | .0020 | .0039 | 32000 | 66.9 | .0012 | .0039 |
| 1 | .039 | 20 | .787 | 10000 | 39.4 | .0016 | .0039 | 10000 | 39.4 | .0012 | .0039 |
| 1.25 | .049 | 10 | .394 | 36000 | 196.9 | .0047 | .0098 | 36000 | 102.4 | .0043 | .0098 |
| 1.25 | .049 | 15 | .591 | 36000 | 181.1 | .0031 | .0098 | 36000 | 78.7 | .0030 | .0098 |

Depth of Cut




- Note 1) When the inclination angle of machined surface is large, or machining with large cutting load such as in a corner area, reduce the revolution and feed rate.
- Note 2) If the depth of cut is shallow, the revolution and feed rate can be increased.
- Note 3) Cutting conditions may differ considerably due to the tool overhang, depth of cut and machine tool condition. Please use the table above as a reference starting point.

(in)

| Material | | | | Hardened Steel (45—55HRC) | | | | Hardened Steel (55—70HRC) | | | |
|------------------|------|----------------|-------|---------------------------------|-----------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|-----------------|
| | | | | Revolution (min ⁻¹) | Feed Rate (IPM) | Depth of Cut ap | Width of Cut ae | Revolution (min ⁻¹) | Feed Rate (IPM) | Depth of Cut ap | Width of Cut ae |
| Corner Radius RE | | Neck length LU | | Revolution (min ⁻¹) | Feed Rate (IPM) | Depth of Cut ap | Width of Cut ae | Revolution (min ⁻¹) | Feed Rate (IPM) | Depth of Cut ap | Width of Cut ae |
| (mm) | (in) | (mm) | (in) | | | | | | | | |
| 1.5 | .059 | 10 | .394 | 32000 | 200.8 | .0059 | .0118 | 32000 | 86.6 | .0059 | .0118 |
| 1.5 | .059 | 12 | .472 | 32000 | 200.8 | .0051 | .0118 | 32000 | 86.6 | .0051 | .0118 |
| 1.5 | .059 | 16 | .630 | 32000 | 177.2 | .0039 | .0118 | 32000 | 70.9 | .0039 | .0118 |
| 1.5 | .059 | 20 | .787 | 27000 | 149.6 | .0039 | .0118 | 27000 | 63.0 | .0024 | .0118 |
| 1.5 | .059 | 25 | .984 | 21000 | 106.3 | .0031 | .0118 | 21000 | 47.2 | .0024 | .0118 |
| 1.5 | .059 | 30 | 1.181 | 9000 | 39.4 | .0031 | .0118 | 9000 | 27.6 | .0020 | .0118 |
| 2 | .079 | 10 | .394 | 24000 | 189.0 | .0079 | .0157 | 24000 | 86.6 | .0079 | .0157 |
| 2 | .079 | 12 | .472 | 24000 | 189.0 | .0079 | .0157 | 24000 | 86.6 | .0079 | .0157 |
| 2 | .079 | 16 | .630 | 24000 | 149.6 | .0059 | .0157 | 24000 | 59.1 | .0059 | .0157 |
| 2 | .079 | 20 | .787 | 24000 | 149.6 | .0059 | .0157 | 24000 | 59.1 | .0059 | .0157 |
| 2 | .079 | 25 | .984 | 24000 | 149.6 | .0059 | .0157 | 24000 | 43.3 | .0039 | .0157 |
| 2 | .079 | 30 | 1.181 | 24000 | 118.1 | .0039 | .0157 | 24000 | 43.3 | .0031 | .0157 |
| 2.5 | .098 | 20 | .787 | 19000 | 133.9 | .0079 | .0197 | 19000 | 55.1 | .0079 | .0197 |
| 2.5 | .098 | 25 | .984 | 19000 | 133.9 | .0079 | .0197 | 19000 | 55.1 | .0079 | .0197 |
| 3 | .118 | 18 | .709 | 16000 | 137.8 | .0098 | .0236 | 16000 | 39.4 | .0079 | .0236 |
| 3 | .118 | 30 | 1.181 | 16000 | 137.8 | .0079 | .0236 | 16000 | 39.4 | .0079 | .0236 |

Depth of Cut



- Note 1) When the inclination angle of machined surface is large, or machining with large cutting load such as in a corner area, reduce the revolution and feed rate.
- Note 2) If the depth of cut is shallow, the revolution and feed rate can be increased.
- Note 3) Cutting conditions may differ considerably due to the tool overhang, depth of cut and machine tool condition. Please use the table above as a reference starting point.


For Machining of Hardened Steel

VFR4MB

Ball nose, Medium cut length, 4 flute, For hardened materials



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

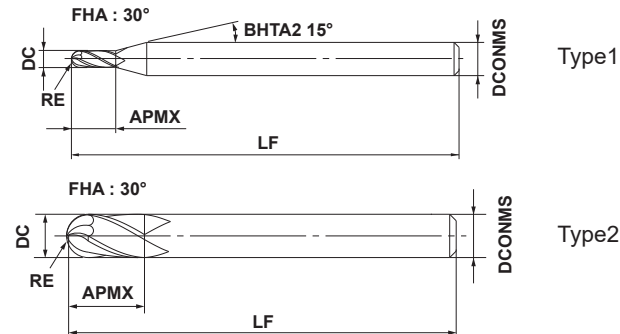

| | | | | |
|--------------------|--------------|--------------|--|--|
| RE | | | | |
| ±0.010 | | | | |
| DCONMS=6 | DCONMS=8, 10 | DCONMS=12 | | |
| h6 0 - 0.008 | 0 - 0.009 | 0 - 0.011 | | |

● The 4-flute geometry with a cutting edge extending to the center achieves a long tool life and enables high efficiency machining.

(mm)

| Order Number | RE | DC | APMX | LF | BHTA2 | DCONMS | Flutes | Stock | Type |
|--------------|-----|----|------|-----|-------|--------|--------|-------|------|
| VFR4MBR0050 | 0.5 | 1 | 2.5 | 50 | 15 | 6 | 4 | ● | 1 |
| VFR4MBR0100 | 1 | 2 | 6 | 60 | 15 | 6 | 4 | ● | 1 |
| VFR4MBR0150 | 1.5 | 3 | 8 | 70 | 15 | 6 | 4 | ● | 1 |
| VFR4MBR0200 | 2 | 4 | 8 | 70 | 15 | 6 | 4 | ● | 1 |
| VFR4MBR0250 | 2.5 | 5 | 12 | 80 | 15 | 6 | 4 | ● | 1 |
| VFR4MBR0300 | 3 | 6 | 12 | 80 | — | 6 | 4 | ● | 2 |
| VFR4MBR0400 | 4 | 8 | 14 | 90 | — | 8 | 4 | ● | 2 |
| VFR4MBR0500 | 5 | 10 | 18 | 100 | — | 10 | 4 | ● | 2 |
| VFR4MBR0600 | 6 | 12 | 22 | 110 | — | 12 | 4 | ★ | 2 |

RE = Corner Radius LF = Functional Length
 DC = Cutting Dia. BHTA2 = Body Half Taper Angle
 APMX = Depth of Cut Max. DCONMS = Connection Dia.

● : USA Stock ★ : Stocked in Japan

VFR4MB


Ball nose, Medium cut length, 4 flute, For hardened materials

Recommended Cutting Conditions

(in)

| Material | Hardened Steel (45—55HRC) | | | | | | Hardened Steel (55—65HRC) | | | | | | Hardened Steel (65—70HRC) | | | | | | |
|----------------------------|---------------------------------|-----------------|---------------------------------|-----------------|-----------------|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|-----------------|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|-----------------|-----------------|---------------------------------|
| | $\alpha \leq 15^\circ$ | | $\alpha > 15^\circ$ | | Depth of cut ap | Depth of cut ae | $\alpha \leq 15^\circ$ | | $\alpha > 15^\circ$ | | Depth of cut ap | Depth of cut ae | $\alpha \leq 15^\circ$ | | $\alpha > 15^\circ$ | | Depth of cut ap | Depth of cut ae | |
| Corner Radius RE (mm) (in) | Revolution (min ⁻¹) | Feed rate (IPM) | Revolution (min ⁻¹) | Feed rate (IPM) | | | Revolution (min ⁻¹) | Feed rate (IPM) | Revolution (min ⁻¹) | Feed rate (IPM) | | | Revolution (min ⁻¹) | Feed rate (IPM) | Revolution (min ⁻¹) | Feed rate (IPM) | | | Revolution (min ⁻¹) |
| 0.5 | .020 | 40000 | 315.0 | 40000 | 149.6 | .0024 | .004 | 40000 | 220.5 | 40000 | 122.0 | .0020 | .004 | 40000 | 185.0 | 32000 | 66.9 | .0012 | .004 |
| 1.0 | .039 | 40000 | 378.0 | 40000 | 220.5 | .0043 | .008 | 40000 | 315.0 | 28000 | 122.0 | .0039 | .008 | 24000 | 196.9 | 16000 | 47.2 | .0024 | .008 |
| 1.5 | .059 | 40000 | 472.4 | 32000 | 220.5 | .0051 | .012 | 32000 | 303.2 | 19000 | 114.2 | .0047 | .012 | 16000 | 165.4 | 11000 | 43.3 | .0028 | .012 |
| 2.0 | .079 | 32000 | 433.1 | 24000 | 185.0 | .0059 | .016 | 24000 | 244.1 | 14000 | 98.4 | .0051 | .016 | 12000 | 122.0 | 8000 | 39.4 | .0031 | .016 |
| 2.5 | .098 | 25000 | 354.3 | 19000 | 149.6 | .0079 | .020 | 19000 | 208.7 | 12000 | 86.6 | .0059 | .020 | 9600 | 106.3 | 6000 | 30.7 | .0031 | .020 |
| 3.0 | .118 | 21000 | 330.7 | 15000 | 133.9 | .0098 | .024 | 16000 | 189.0 | 9600 | 78.7 | .0079 | .024 | 8000 | 90.6 | 5000 | 30.7 | .0035 | .024 |
| 4.0 | .157 | 16000 | 252.0 | 12000 | 102.4 | .0118 | .031 | 12000 | 141.7 | 7200 | 63.0 | .0079 | .031 | 6000 | 74.8 | 4000 | 24.4 | .0035 | .031 |
| 5.0 | .197 | 13000 | 204.7 | 9600 | 86.6 | .0197 | .039 | 10000 | 126.0 | 5800 | 51.2 | .0079 | .039 | 4800 | 59.1 | 3000 | 21.7 | .0039 | .039 |
| 6.0 | .236 | 9000 | 141.7 | 7200 | 66.9 | .0197 | .047 | 7000 | 86.6 | 4300 | 37.0 | .0118 | .047 | 3600 | 43.3 | 2200 | 15.7 | .0039 | .047 |

Depth of cut




Note 1) If the depth of cut is shallow, the revolution and feed rate can be increased.

Please reduce the feed rate when the surface finish is important.

Note 2) If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, please adjust the revolution, feed rate and depth of cut.

Note 3) α is the inclination angle of the machined surface.




For Machining of Hardened Steel

VFRPSRB

Corner radius, Short cut length, 4 flute, For hardened materials



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|

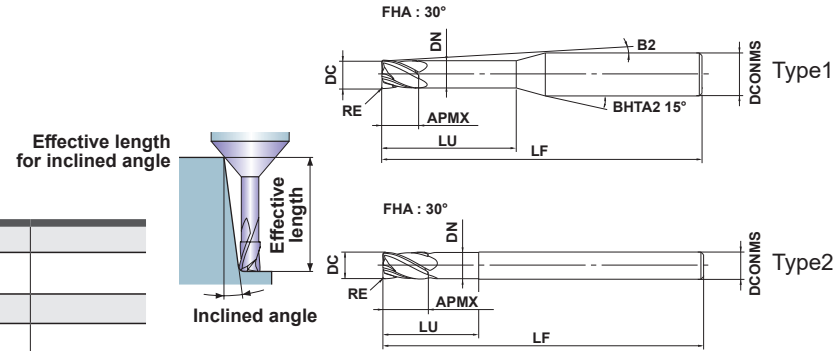

| | | | |
|--------------|--------------|-----------|--|
| 0.5 ≤ DC ≤ 6 | 6 < DC ≤ 12 | | |
| ±0.005 | ±0.007 | | |
| 0.5 ≤ DC ≤ 6 | 6 < DC ≤ 12 | | |
| 0 | 0 | | |
| -0.01 | -0.015 | | |
| DCONMS=6 | DCONMS=8, 10 | DCONMS=12 | |
| 0 | 0 | 0 | |
| -0.005 | -0.006 | -0.008 | |

● Completely seamless curved R edge. DC ≥ 1.5

● The wiper edge and strong back taper achieve high precision machining. 1.5 ≤ DC ≤ 5

| Order Number | DC | RE | APMX | LU | DN | B2 | LF | DCONMS | Flutes | Stock | Type | Effective length for inclined angle | | | |
|----------------------|-----|------|------|----|------|------|----|--------|--------|-------|------|-------------------------------------|------|------|------|
| | | | | | | | | | | | | 0.5° | 1° | 2° | 3° |
| VFRPSRBD0050R005N020 | 0.5 | 0.05 | 0.5 | 2 | 0.47 | 12.6 | 50 | 6 | 4 | ★ | 1 | 2.1 | 2.2 | 2.3 | 2.5 |
| VFRPSRBD0050R010N020 | 0.5 | 0.1 | 0.5 | 2 | 0.47 | 12.7 | 50 | 6 | 4 | ★ | 1 | 2.1 | 2.2 | 2.3 | 2.5 |
| VFRPSRBD0060R005N020 | 0.6 | 0.05 | 0.6 | 2 | 0.57 | 12.5 | 50 | 6 | 4 | ● | 1 | 2.1 | 2.2 | 2.4 | 2.6 |
| VFRPSRBD0060R010N020 | 0.6 | 0.1 | 0.6 | 2 | 0.57 | 12.5 | 50 | 6 | 4 | ★ | 1 | 2.1 | 2.2 | 2.3 | 2.6 |
| VFRPSRBD0060R010N040 | 0.6 | 0.1 | 0.6 | 4 | 0.57 | 10.8 | 50 | 6 | 4 | ★ | 1 | 4.2 | 4.4 | 4.7 | 5.1 |
| VFRPSRBD0060R020N020 | 0.6 | 0.2 | 0.6 | 2 | 0.57 | 12.6 | 50 | 6 | 4 | ● | 1 | 2.1 | 2.2 | 2.2 | 2.6 |
| VFRPSRBD0080R005N040 | 0.8 | 0.05 | 0.8 | 4 | 0.77 | 10.7 | 50 | 6 | 4 | ★ | 1 | 4.2 | 4.4 | 4.7 | 5.1 |
| VFRPSRBD0080R010N040 | 0.8 | 0.1 | 0.8 | 4 | 0.77 | 10.7 | 50 | 6 | 4 | ● | 1 | 4.2 | 4.4 | 4.7 | 5.1 |
| VFRPSRBD0080R020N040 | 0.8 | 0.2 | 0.8 | 4 | 0.77 | 10.8 | 50 | 6 | 4 | ● | 1 | 4.2 | 4.4 | 4.7 | 5.1 |
| VFRPSRBD0080R030N040 | 0.8 | 0.3 | 0.8 | 4 | 0.77 | 10.8 | 50 | 6 | 4 | ● | 1 | 4.2 | 4.4 | 4.7 | 5 |
| VFRPSRBD0100R005N040 | 1 | 0.05 | 1 | 4 | 0.96 | 10.4 | 50 | 6 | 4 | ★ | 1 | 4.3 | 4.5 | 4.9 | 5.4 |
| VFRPSRBD0100R010N040 | 1 | 0.1 | 1 | 4 | 0.96 | 10.4 | 50 | 6 | 4 | ● | 1 | 4.3 | 4.5 | 4.9 | 5.4 |
| VFRPSRBD0100R010N060 | 1 | 0.1 | 1 | 6 | 0.96 | 9.1 | 50 | 6 | 4 | ● | 1 | 6.4 | 6.7 | 7.3 | 7.9 |
| VFRPSRBD0100R020N040 | 1 | 0.2 | 1 | 4 | 0.96 | 10.5 | 50 | 6 | 4 | ● | 1 | 4.3 | 4.5 | 4.7 | 5.3 |
| VFRPSRBD0100R020N060 | 1 | 0.2 | 1 | 6 | 0.96 | 9.2 | 50 | 6 | 4 | ★ | 1 | 6.4 | 6.7 | 7.3 | 7.8 |
| VFRPSRBD0100R030N040 | 1 | 0.3 | 1 | 4 | 0.96 | 10.5 | 50 | 6 | 4 | ★ | 1 | 4.3 | 4.5 | 4.6 | 5.3 |
| VFRPSRBD0100R040N040 | 1 | 0.4 | 1 | 4 | 0.96 | 10.6 | 50 | 6 | 4 | ★ | 1 | 4.3 | 4.5 | 4.5 | 5.3 |
| VFRPSRBD0150R010N040 | 1.5 | 0.1 | 1.5 | 4 | 1.42 | 10.2 | 50 | 6 | 4 | ● | 1 | 4.2 | 4.4 | 4.8 | 5.2 |
| VFRPSRBD0150R010N060 | 1.5 | 0.1 | 1.5 | 6 | 1.42 | 8.8 | 50 | 6 | 4 | ● | 1 | 6.3 | 6.6 | 7.1 | 7.7 |
| VFRPSRBD0150R010N100 | 1.5 | 0.1 | 1.5 | 10 | 1.42 | 6.9 | 50 | 6 | 4 | ★ | 1 | 10.5 | 10.9 | 11.7 | 12.7 |
| VFRPSRBD0150R020N040 | 1.5 | 0.2 | 1.5 | 4 | 1.42 | 10.2 | 50 | 6 | 4 | ● | 1 | 4.2 | 4.4 | 4.6 | 5.2 |
| VFRPSRBD0150R020N060 | 1.5 | 0.2 | 1.5 | 6 | 1.42 | 8.8 | 50 | 6 | 4 | ● | 1 | 6.3 | 6.6 | 7.1 | 7.7 |
| VFRPSRBD0150R020N100 | 1.5 | 0.2 | 1.5 | 10 | 1.42 | 7 | 50 | 6 | 4 | ● | 1 | 10.5 | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0150R030N040 | 1.5 | 0.3 | 1.5 | 4 | 1.42 | 10.3 | 50 | 6 | 4 | ★ | 1 | 4.2 | 4.4 | 4.5 | 5.2 |
| VFRPSRBD0150R030N060 | 1.5 | 0.3 | 1.5 | 6 | 1.42 | 8.9 | 50 | 6 | 4 | ● | 1 | 6.3 | 6.6 | 7.1 | 7.6 |
| VFRPSRBD0150R030N100 | 1.5 | 0.3 | 1.5 | 10 | 1.42 | 7 | 50 | 6 | 4 | ● | 1 | 10.5 | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0150R050N040 | 1.5 | 0.5 | 1.5 | 4 | 1.42 | 10.5 | 50 | 6 | 4 | ● | 1 | 4.2 | 4.4 | 4.3 | 5.1 |
| VFRPSRBD0150R050N060 | 1.5 | 0.5 | 1.5 | 6 | 1.42 | 9 | 50 | 6 | 4 | ● | 1 | 6.3 | 6.6 | 7.1 | 7.6 |

RE = Corner Radius LU = Usable Length DCONMS = Connection Dia.
 DC = Cutting Dia. DN = Neck Dia.
 APMX = Depth of Cut Max. LF = Functional Length

● : USA Stock ★ : Stocked in Japan

| Order Number | DC | RE | APMX | LU | DN | B2 | LF | DCONMS | Flutes | Stock | Type | Effective length for inclined angle | | | |
|----------------------|-----|-----|------|----|------|-----|----|--------|--------|-------|------|-------------------------------------|------|------|------|
| | | | | | | | | | | | | 0.5° | 1° | 2° | 3° |
| VFRPSRBD0150R050N100 | 1.5 | 0.5 | 1.5 | 10 | 1.42 | 7.1 | 50 | 6 | 4 | ● | 1 | 10.5 | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0200R010N060 | 2 | 0.1 | 2 | 6 | 1.9 | 8.4 | 50 | 6 | 4 | ● | 1 | 6.3 | 6.6 | 7.1 | 7.6 |
| VFRPSRBD0200R010N100 | 2 | 0.1 | 2 | 10 | 1.9 | 6.5 | 50 | 6 | 4 | ● | 1 | 10.5 | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0200R010N150 | 2 | 0.1 | 2 | 15 | 1.9 | 5.1 | 50 | 6 | 4 | ★ | 1 | 15.7 | 16.2 | 17.4 | 18.8 |
| VFRPSRBD0200R020N060 | 2 | 0.2 | 2 | 6 | 1.9 | 8.4 | 50 | 6 | 4 | ● | 1 | 6.3 | 6.6 | 7.1 | 7.6 |
| VFRPSRBD0200R020N100 | 2 | 0.2 | 2 | 10 | 1.9 | 6.5 | 50 | 6 | 4 | ● | 1 | 10.5 | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0200R020N150 | 2 | 0.2 | 2 | 15 | 1.9 | 5.1 | 50 | 6 | 4 | ● | 1 | 15.7 | 16.2 | 17.4 | 18.8 |
| VFRPSRBD0200R030N060 | 2 | 0.3 | 2 | 6 | 1.9 | 8.5 | 50 | 6 | 4 | ★ | 1 | 6.3 | 6.6 | 7 | 7.6 |
| VFRPSRBD0200R030N100 | 2 | 0.3 | 2 | 10 | 1.9 | 6.6 | 50 | 6 | 4 | ● | 1 | 10.5 | 10.8 | 11.6 | 12.6 |
| VFRPSRBD0200R030N150 | 2 | 0.3 | 2 | 15 | 1.9 | 5.1 | 50 | 6 | 4 | ★ | 1 | 15.7 | 16.2 | 17.4 | 18.8 |
| VFRPSRBD0200R030N200 | 2 | 0.3 | 2 | 20 | 1.9 | 4.2 | 60 | 6 | 4 | ★ | 1 | 20.8 | 21.5 | 23.1 | 25 |
| VFRPSRBD0200R050N060 | 2 | 0.5 | 2 | 6 | 1.9 | 8.6 | 50 | 6 | 4 | ● | 1 | 6.3 | 6.5 | 7 | 7.5 |
| VFRPSRBD0200R050N100 | 2 | 0.5 | 2 | 10 | 1.9 | 6.6 | 50 | 6 | 4 | ● | 1 | 10.5 | 10.8 | 11.6 | 12.5 |
| VFRPSRBD0200R050N150 | 2 | 0.5 | 2 | 15 | 1.9 | 5.2 | 50 | 6 | 4 | ● | 1 | 15.6 | 16.2 | 17.4 | 18.7 |
| VFRPSRBD0200R050N200 | 2 | 0.5 | 2 | 20 | 1.9 | 4.2 | 60 | 6 | 4 | ● | 1 | 20.8 | 21.5 | 23.1 | 24.9 |
| VFRPSRBD0250R030N080 | 2.5 | 0.3 | 2.5 | 8 | 2.35 | 6.9 | 50 | 6 | 4 | ● | 1 | 8.3 | 8.6 | 9.2 | 10 |
| VFRPSRBD0250R030N150 | 2.5 | 0.3 | 2.5 | 15 | 2.35 | 4.7 | 50 | 6 | 4 | ● | 1 | 15.6 | 16.1 | 17.3 | 18.7 |
| VFRPSRBD0250R050N080 | 2.5 | 0.5 | 2.5 | 8 | 2.35 | 7 | 50 | 6 | 4 | ● | 1 | 8.3 | 8.6 | 9.2 | 9.9 |
| VFRPSRBD0250R050N150 | 2.5 | 0.5 | 2.5 | 15 | 2.35 | 4.7 | 50 | 6 | 4 | ★ | 1 | 15.6 | 16.1 | 17.3 | 18.6 |
| VFRPSRBD0250R100N080 | 2.5 | 1 | 2.5 | 8 | 2.35 | 7.3 | 50 | 6 | 4 | ● | 1 | 8.3 | 8.6 | 9.1 | 9.8 |
| VFRPSRBD0300R010N100 | 3 | 0.1 | 3 | 10 | 2.85 | 5.5 | 60 | 6 | 4 | ● | 1 | 10.4 | 10.8 | 11.6 | 12.5 |
| VFRPSRBD0300R010N150 | 3 | 0.1 | 3 | 15 | 2.85 | 4.2 | 60 | 6 | 4 | ★ | 1 | 15.6 | 16.1 | 17.3 | 18.7 |
| VFRPSRBD0300R020N100 | 3 | 0.2 | 3 | 10 | 2.85 | 5.5 | 60 | 6 | 4 | ● | 1 | 10.4 | 10.8 | 11.6 | 12.5 |
| VFRPSRBD0300R020N150 | 3 | 0.2 | 3 | 15 | 2.85 | 4.2 | 60 | 6 | 4 | ● | 1 | 15.6 | 16.1 | 17.3 | 18.7 |
| VFRPSRBD0300R020N200 | 3 | 0.2 | 3 | 20 | 2.85 | 3.4 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.5 | 23.1 | 24.9 |
| VFRPSRBD0300R030N100 | 3 | 0.3 | 3 | 10 | 2.85 | 5.6 | 60 | 6 | 4 | ● | 1 | 10.4 | 10.8 | 11.5 | 12.5 |
| VFRPSRBD0300R030N150 | 3 | 0.3 | 3 | 15 | 2.85 | 4.2 | 60 | 6 | 4 | ● | 1 | 15.6 | 16.1 | 17.3 | 18.7 |
| VFRPSRBD0300R030N200 | 3 | 0.3 | 3 | 20 | 2.85 | 3.4 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.5 | 23 | 24.9 |
| VFRPSRBD0300R050N100 | 3 | 0.5 | 3 | 10 | 2.85 | 5.6 | 60 | 6 | 4 | ● | 1 | 10.4 | 10.7 | 11.5 | 12.4 |
| VFRPSRBD0300R050N150 | 3 | 0.5 | 3 | 15 | 2.85 | 4.2 | 60 | 6 | 4 | ● | 1 | 15.6 | 16.1 | 17.3 | 18.6 |
| VFRPSRBD0300R050N200 | 3 | 0.5 | 3 | 20 | 2.85 | 3.4 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.4 | 23 | 24.8 |
| VFRPSRBD0300R100N100 | 3 | 1 | 3 | 10 | 2.85 | 5.8 | 60 | 6 | 4 | ★ | 1 | 10.4 | 10.7 | 11.4 | 12.3 |
| VFRPSRBD0300R100N150 | 3 | 1 | 3 | 15 | 2.85 | 4.3 | 60 | 6 | 4 | ● | 1 | 15.5 | 16.1 | 17.2 | 18.5 |
| VFRPSRBD0300R100N200 | 3 | 1 | 3 | 20 | 2.85 | 3.5 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.4 | 22.9 | 24.7 |
| VFRPSRBD0400R010N120 | 4 | 0.1 | 4 | 12 | 3.85 | 3.6 | 60 | 6 | 4 | ● | 1 | 12.5 | 12.9 | 13.9 | 15 |
| VFRPSRBD0400R010N200 | 4 | 0.1 | 4 | 20 | 3.85 | 2.4 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.5 | 23.1 | * |
| VFRPSRBD0400R020N120 | 4 | 0.2 | 4 | 12 | 3.85 | 3.7 | 60 | 6 | 4 | ★ | 1 | 12.5 | 12.9 | 13.9 | 15 |
| VFRPSRBD0400R020N200 | 4 | 0.2 | 4 | 20 | 3.85 | 2.4 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.5 | 23.1 | * |
| VFRPSRBD0400R030N120 | 4 | 0.3 | 4 | 12 | 3.85 | 3.7 | 60 | 6 | 4 | ● | 1 | 12.5 | 12.9 | 13.8 | 15 |
| VFRPSRBD0400R030N200 | 4 | 0.3 | 4 | 20 | 3.85 | 2.4 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.5 | 23 | * |
| VFRPSRBD0400R030N300 | 4 | 0.3 | 4 | 30 | 3.85 | 1.7 | 70 | 6 | 4 | ★ | 1 | 31.1 | 32.2 | * | * |
| VFRPSRBD0400R050N120 | 4 | 0.5 | 4 | 12 | 3.85 | 3.7 | 60 | 6 | 4 | ● | 1 | 12.5 | 12.9 | 13.8 | 14.9 |
| VFRPSRBD0400R050N200 | 4 | 0.5 | 4 | 20 | 3.85 | 2.5 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.4 | 23 | * |
| VFRPSRBD0400R050N300 | 4 | 0.5 | 4 | 30 | 3.85 | 1.7 | 70 | 6 | 4 | ● | 1 | 31.1 | 32.1 | * | * |
| VFRPSRBD0400R100N120 | 4 | 1 | 4 | 12 | 3.85 | 3.8 | 60 | 6 | 4 | ● | 1 | 12.4 | 12.8 | 13.7 | 14.8 |
| VFRPSRBD0400R100N200 | 4 | 1 | 4 | 20 | 3.85 | 2.5 | 60 | 6 | 4 | ● | 1 | 20.7 | 21.4 | 22.9 | * |

* No interference

VFRPSRB

Corner radius, Short cut length, 4 flute, For hardened materials

(mm)

| Order Number | DC | RE | APMX | LU | DN | B2 | LF | DCONMS | Flutes | Stock | Type | Effective length for inclined angle | | | |
|----------------------|----|-----|------|----|------|-----|-----|--------|--------|-------|------|-------------------------------------|------|----|----|
| | | | | | | | | | | | | 0.5° | 1° | 2° | 3° |
| VFRPSRBD0400R100N300 | 4 | 1 | 4 | 30 | 3.85 | 1.7 | 70 | 6 | 4 | ● | 1 | 31.1 | 32.1 | * | * |
| VFRPSRBD0500R050N150 | 5 | 0.5 | 5 | 15 | 4.85 | 1.7 | 60 | 6 | 4 | ★ | 1 | 15.6 | 16.1 | * | * |
| VFRPSRBD0500R100N150 | 5 | 1 | 5 | 15 | 4.85 | 1.8 | 60 | 6 | 4 | ● | 1 | 15.5 | 16.1 | * | * |
| VFRPSRBD0600R010N180 | 6 | 0.1 | 9 | 18 | 5.85 | — | 70 | 6 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0600R020N180 | 6 | 0.2 | 9 | 18 | 5.85 | — | 70 | 6 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0600R030N180 | 6 | 0.3 | 9 | 18 | 5.85 | — | 70 | 6 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0600R050N180 | 6 | 0.5 | 9 | 18 | 5.85 | — | 70 | 6 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0600R100N180 | 6 | 1 | 9 | 18 | 5.85 | — | 70 | 6 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0600R200N180 | 6 | 2 | 9 | 18 | 5.85 | — | 70 | 6 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0800R020N240 | 8 | 0.2 | 12 | 24 | 7.85 | — | 90 | 8 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0800R030N240 | 8 | 0.3 | 12 | 24 | 7.85 | — | 90 | 8 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0800R050N240 | 8 | 0.5 | 12 | 24 | 7.85 | — | 90 | 8 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0800R100N240 | 8 | 1 | 12 | 24 | 7.85 | — | 90 | 8 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD0800R200N240 | 8 | 2 | 12 | 24 | 7.85 | — | 90 | 8 | 4 | ★ | 2 | * | * | * | * |
| VFRPSRBD1000R030N300 | 10 | 0.3 | 15 | 30 | 9.7 | — | 100 | 10 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD1000R050N300 | 10 | 0.5 | 15 | 30 | 9.7 | — | 100 | 10 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD1000R100N300 | 10 | 1 | 15 | 30 | 9.7 | — | 100 | 10 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD1000R200N300 | 10 | 2 | 15 | 30 | 9.7 | — | 100 | 10 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD1000R300N300 | 10 | 3 | 15 | 30 | 9.7 | — | 100 | 10 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD1200R050N360 | 12 | 0.5 | 18 | 36 | 11.7 | — | 110 | 12 | 4 | ★ | 2 | * | * | * | * |
| VFRPSRBD1200R100N360 | 12 | 1 | 18 | 36 | 11.7 | — | 110 | 12 | 4 | ● | 2 | * | * | * | * |
| VFRPSRBD1200R200N360 | 12 | 2 | 18 | 36 | 11.7 | — | 110 | 12 | 4 | ★ | 2 | * | * | * | * |
| VFRPSRBD1200R300N360 | 12 | 3 | 18 | 36 | 11.7 | — | 110 | 12 | 4 | ● | 2 | * | * | * | * |

* No interference

RE = Corner Radius LU = Usable Length DCONMS = Connection Dia.
 DC = Cutting Dia. DN = Neck Dia.
 APMX = Depth of Cut Max. LF = Functional Length


● : USA Stock ★ : Stocked in Japan

Recommended Cutting Conditions

(in)

| Material | Hardened Steel (45—55HRC) | | | | Hardened Steel (55—65HRC) | | | | Hardened Steel (65—70HRC) | | | | | | | | |
|----------|---------------------------|------------------|------------------|------------|---------------------------|--------------|--------------|------------|---------------------------|--------------|--------------|------------|----------------------|--------------|--------------|-------|------|
| | Dia. DC | Corner Radius RE | Usable Length LU | Revolution | Feed Rate | Depth of Cut | Width of Cut | Revolution | Feed Rate | Depth of Cut | Width of Cut | Revolution | Feed Rate | Depth of Cut | Width of Cut | | |
| | (mm) | (in) | (mm) | (in) | (mm) | (in) | (mm) | (in) | (min ⁻¹) | (IPM) | ap | ae | (min ⁻¹) | (IPM) | ap | ae | |
| 0.5 | .020 | 0.05 | .002 | 2 | .079 | 25000 | 39.4 | .0002 | .004 | 19000 | 29.9 | .0002 | .003 | 13000 | 20.1 | .0001 | .003 |
| | | | | | | 25000 | 39.4 | .0003 | .004 | 19000 | 29.9 | .0002 | .003 | 13000 | 20.1 | .0002 | .003 |
| 0.6 | .024 | 0.05 | .002 | 2 | .079 | 21000 | 39.4 | .0002 | .004 | 16000 | 29.9 | .0002 | .003 | 11000 | 20.1 | .0001 | .003 |
| | | | | | | 21000 | 39.4 | .0003 | .004 | 16000 | 29.9 | .0002 | .003 | 11000 | 20.1 | .0002 | .003 |
| 0.6 | .024 | 0.1 | .004 | 2 | .157 | 18000 | 35.0 | .0002 | .004 | 16000 | 29.9 | .0002 | .003 | 11000 | 20.1 | .0002 | .003 |
| | | | | | | 24000 | 43.3 | .0004 | .004 | 19000 | 35.0 | .0003 | .003 | 16000 | 29.9 | .0002 | .003 |
| 0.8 | .031 | 0.05 | .002 | 4 | .157 | 16000 | 29.9 | .0006 | .005 | 12000 | 22.4 | .0004 | .004 | 7900 | 15.0 | .0004 | .004 |
| | | | | | | 16000 | 29.9 | .0008 | .005 | 12000 | 22.4 | .0006 | .004 | 7900 | 15.0 | .0004 | .004 |
| 0.8 | .031 | 0.2 | .008 | 4 | .157 | 20000 | 37.4 | .0012 | .005 | 16000 | 29.9 | .0010 | .004 | 12000 | 22.4 | .0008 | .004 |
| | | | | | | 20000 | 37.4 | .0012 | .005 | 16000 | 29.9 | .0010 | .004 | 12000 | 22.4 | .0008 | .004 |
| 1 | .039 | 0.05 | .002 | 4 | .157 | 13000 | 39.4 | .0006 | .006 | 9500 | 29.9 | .0004 | .005 | 6400 | 20.1 | .0004 | .005 |
| | | | | | | 13000 | 39.4 | .0008 | .006 | 9500 | 29.9 | .0006 | .005 | 6400 | 20.1 | .0006 | .005 |
| 1 | .039 | 0.1 | .004 | 6 | .236 | 11000 | 35.0 | .0006 | .005 | 6400 | 20.1 | .0004 | .004 | 6400 | 20.1 | .0004 | .004 |
| | | | | | | 16000 | 51.2 | .0012 | .006 | 9500 | 29.9 | .0010 | .005 | 6400 | 20.1 | .0008 | .005 |
| 1 | .039 | 0.2 | .008 | 6 | .236 | 13000 | 39.4 | .0008 | .005 | 6400 | 20.1 | .0008 | .004 | 6400 | 20.1 | .0006 | .004 |
| | | | | | | 16000 | 51.2 | .0012 | .006 | 9500 | 29.9 | .0010 | .005 | 6400 | 20.1 | .0008 | .005 |
| 1 | .039 | 0.4 | .016 | 4 | .157 | 16000 | 51.2 | .0016 | .006 | 9500 | 29.9 | .0012 | .005 | 6400 | 20.1 | .0010 | .005 |
| | | | | | | 14000 | 66.9 | .0010 | .009 | 11000 | 36.2 | .0006 | .008 | 7200 | 22.4 | .0004 | .008 |
| 1.5 | .059 | 0.1 | .004 | 6 | .236 | 11000 | 55.1 | .0010 | .007 | 9200 | 28.7 | .0006 | .006 | 5700 | 18.1 | .0004 | .006 |
| | | | | | | 11000 | 55.1 | .0010 | .007 | 9200 | 28.7 | .0006 | .006 | 5700 | 18.1 | .0004 | .006 |
| 1.5 | .059 | 0.2 | .008 | 4 | .157 | 14000 | 66.9 | .0020 | .009 | 11000 | 36.2 | .0014 | .008 | 7200 | 22.4 | .0010 | .008 |
| | | | | | | 11000 | 55.1 | .0020 | .007 | 9200 | 28.7 | .0014 | .006 | 5700 | 18.1 | .0010 | .006 |
| 1.5 | .059 | 0.3 | .012 | 4 | .157 | 16000 | 74.8 | .0030 | .009 | 13000 | 39.4 | .0020 | .008 | 8000 | 25.2 | .0014 | .008 |
| | | | | | | 13000 | 59.1 | .0030 | .007 | 10000 | 31.9 | .0020 | .006 | 6400 | 20.1 | .0014 | .006 |
| 1.5 | .059 | 0.3 | .012 | 10 | .394 | 13000 | 59.1 | .0030 | .007 | 10000 | 31.9 | .0020 | .006 | 6400 | 20.1 | .0014 | .006 |
| | | | | | | 16000 | 74.8 | .0031 | .009 | 13000 | 39.4 | .0022 | .008 | 8000 | 25.2 | .0016 | .008 |
| 1.5 | .059 | 0.5 | .020 | 4 | .157 | 16000 | 74.8 | .0031 | .009 | 13000 | 39.4 | .0022 | .008 | 8000 | 25.2 | .0016 | .008 |
| | | | | | | 13000 | 59.1 | .0031 | .007 | 10000 | 31.9 | .0022 | .006 | 6400 | 20.1 | .0016 | .006 |
| 1.5 | .059 | 0.5 | .020 | 10 | .394 | 13000 | 59.1 | .0031 | .007 | 10000 | 31.9 | .0022 | .006 | 6400 | 20.1 | .0016 | .006 |
| | | | | | | 11000 | 66.9 | .0010 | .012 | 8600 | 39.4 | .0008 | .011 | 5400 | 25.2 | .0006 | .011 |
| 2 | .079 | 0.1 | .004 | 6 | .236 | 8600 | 55.1 | .0010 | .009 | 6900 | 32.7 | .0008 | .009 | 4300 | 20.5 | .0006 | .009 |
| | | | | | | 6400 | 39.4 | .0008 | .007 | 5200 | 24.4 | .0006 | .007 | 3200 | 15.4 | .0004 | .007 |
| 2 | .079 | 0.2 | .008 | 6 | .236 | 11000 | 66.9 | .0022 | .012 | 8600 | 39.4 | .0014 | .011 | 5400 | 25.2 | .0010 | .011 |
| | | | | | | 8600 | 55.1 | .0022 | .009 | 6900 | 32.7 | .0014 | .009 | 4300 | 20.5 | .0010 | .009 |
| 2 | .079 | 0.2 | .008 | 15 | .591 | 6400 | 39.4 | .0016 | .007 | 5200 | 24.4 | .0010 | .007 | 3200 | 15.4 | .0008 | .006 |
| | | | | | | 12000 | 74.8 | .0031 | .012 | 6900 | 43.3 | .0022 | .011 | 6000 | 16.5 | .0016 | .011 |
| 2 | .079 | 0.3 | .012 | 10 | .394 | 9500 | 59.1 | .0031 | .009 | 7600 | 36.2 | .0022 | .009 | 4800 | 22.4 | .0016 | .009 |
| | | | | | | 7200 | 43.3 | .0026 | .007 | 5700 | 27.2 | .0018 | .007 | 3600 | 16.9 | .0012 | .006 |
| 2 | .079 | 0.3 | .012 | 20 | .787 | 7200 | 43.3 | .0026 | .007 | 5700 | 27.2 | .0018 | .007 | 3600 | 16.9 | .0012 | .006 |
| | | | | | | 12000 | 74.8 | .0033 | .012 | 9500 | 43.3 | .0024 | .011 | 6000 | 28.3 | .0016 | .011 |
| 2 | .079 | 0.5 | .020 | 6 | .236 | 9500 | 59.1 | .0033 | .009 | 7600 | 36.2 | .0024 | .009 | 4800 | 22.4 | .0016 | .009 |
| | | | | | | 7200 | 43.3 | .0028 | .007 | 5700 | 27.2 | .0018 | .007 | 3600 | 16.9 | .0014 | .006 |
| 2 | .079 | 0.5 | .020 | 20 | .787 | 7200 | 43.3 | .0028 | .007 | 5700 | 27.2 | .0018 | .007 | 3600 | 16.9 | .0014 | .006 |
| | | | | | | 9500 | 74.8 | .0031 | .015 | 7600 | 55.1 | .0022 | .014 | 4800 | 33.9 | .0016 | .013 |
| 2.5 | .098 | 0.3 | .012 | 8 | .315 | 7600 | 59.1 | .0031 | .012 | 6100 | 43.3 | .0022 | .011 | 3800 | 27.2 | .0016 | .011 |
| | | | | | | 9500 | 74.8 | .0035 | .015 | 7600 | 55.1 | .0024 | .014 | 4800 | 33.9 | .0016 | .013 |
| 2.5 | .098 | 0.5 | .020 | 15 | .591 | 7600 | 59.1 | .0035 | .012 | 6100 | 43.3 | .0024 | .011 | 3800 | 27.2 | .0016 | .011 |
| | | | | | | 9500 | 74.8 | .0059 | .013 | 7600 | 55.1 | .0035 | .012 | 4800 | 33.9 | .0026 | .012 |

Depth of Cut



Note 1) The cutting conditions above are a guide only to machining with cutting edges with a corner radius. When machining with peripheral cutting edges, use the minimum feed rate as a guide.
 Note 2) If depth of cut is shallow, the revolution and feed rate can be increased.
 Note 3) For profile machining such as molds, machining conditions may differ considerably depending on the workpiece geometry, machining methods and depth of cut. Reduce the feed rate especially when machining the corner sections of a workpiece.
 Note 4) If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, please adjust the revolution, feed rate and depth of cut.

VFRPSRB


Corner radius, Short cut length, 4 flute, For hardened materials

Recommended Cutting Conditions

(in)

| Material | | | | Hardened Steel (45—55HRC) | | | | Hardened Steel (55—65HRC) | | | | Hardened Steel (65—70HRC) | | | | | |
|----------|------------------|------------------|------|---------------------------|-----------|--------------|--------------|---------------------------|-----------|--------------|--------------|---------------------------|-----------|--------------|--------------|-------|------|
| | | | | Revolution | Feed Rate | Depth of Cut | Width of Cut | Revolution | Feed Rate | Depth of Cut | Width of Cut | Revolution | Feed Rate | Depth of Cut | Width of Cut | | |
| Dia. DC | Corner Radius RE | Usable Length LU | | (min ⁻¹) | (IPM) | ap | ae | (min ⁻¹) | (IPM) | ap | ae | (min ⁻¹) | (IPM) | ap | ae | | |
| 3 | .118 | 0.1 | .004 | 10 | .394 | 8100 | 74.8 | .0010 | .024 | 6500 | 47.2 | .0008 | .022 | 4100 | 28.7 | .0006 | .022 |
| 3 | .118 | 0.1 | .004 | 15 | .591 | 6500 | 63.0 | .0010 | .019 | 5200 | 37.0 | .0008 | .017 | 3200 | 22.8 | .0006 | .017 |
| 3 | .118 | 0.2 | .008 | 10 | .394 | 8100 | 74.8 | .0022 | .024 | 6500 | 47.2 | .0016 | .022 | 4100 | 28.7 | .0010 | .022 |
| 3 | .118 | 0.2 | .008 | 15 | .591 | 6500 | 63.0 | .0022 | .019 | 5200 | 37.0 | .0016 | .017 | 3200 | 22.8 | .0010 | .017 |
| 3 | .118 | 0.2 | .008 | 20 | .787 | 6500 | 63.0 | .0022 | .019 | 5200 | 37.0 | .0016 | .017 | 3200 | 22.8 | .0010 | .017 |
| 3 | .118 | 0.3 | .012 | 10 | .394 | 9000 | 86.6 | .0033 | .024 | 7200 | 51.2 | .0022 | .022 | 4500 | 31.9 | .0016 | .022 |
| 3 | .118 | 0.3 | .012 | 15 | .591 | 7200 | 66.9 | .0033 | .019 | 5800 | 39.4 | .0022 | .017 | 3600 | 25.6 | .0016 | .017 |
| 3 | .118 | 0.3 | .012 | 20 | .787 | 7200 | 66.9 | .0033 | .019 | 5800 | 39.4 | .0022 | .017 | 3600 | 25.6 | .0016 | .017 |
| 3 | .118 | 0.5 | .020 | 10 | .394 | 9000 | 86.6 | .0035 | .024 | 7200 | 51.2 | .0024 | .022 | 4500 | 31.9 | .0018 | .022 |
| 3 | .118 | 0.5 | .020 | 15 | .591 | 7200 | 66.9 | .0035 | .019 | 5800 | 39.4 | .0024 | .017 | 3600 | 25.6 | .0018 | .017 |
| 3 | .118 | 0.5 | .020 | 20 | .787 | 7200 | 66.9 | .0035 | .019 | 5800 | 39.4 | .0024 | .017 | 3600 | 25.6 | .0018 | .017 |
| 3 | .118 | 1 | .039 | 10 | .394 | 9000 | 86.6 | .0059 | .021 | 7200 | 51.2 | .0039 | .020 | 4500 | 31.9 | .0028 | .020 |
| 3 | .118 | 1 | .039 | 15 | .591 | 7200 | 66.9 | .0059 | .017 | 5800 | 39.4 | .0039 | .016 | 3600 | 25.6 | .0028 | .016 |
| 3 | .118 | 1 | .039 | 20 | .787 | 7200 | 78.7 | .0059 | .017 | 5800 | 39.4 | .0039 | .016 | 3600 | 25.6 | .0028 | .016 |
| 4 | .157 | 0.1 | .004 | 12 | .472 | 6100 | 66.9 | .0098 | .031 | 4900 | 38.2 | .0008 | .029 | 3000 | 24.0 | .0006 | .029 |
| 4 | .157 | 0.1 | .004 | 20 | .787 | 4900 | 55.1 | .0098 | .024 | 3900 | 30.7 | .0008 | .024 | 2400 | 19.3 | .0006 | .023 |
| 4 | .157 | 0.2 | .008 | 12 | .472 | 6100 | 66.9 | .0022 | .031 | 4900 | 38.2 | .0016 | .029 | 3000 | 24.0 | .0010 | .029 |
| 4 | .157 | 0.2 | .008 | 20 | .787 | 4900 | 55.1 | .0022 | .024 | 3900 | 30.7 | .0016 | .024 | 2400 | 19.3 | .0010 | .023 |
| 4 | .157 | 0.3 | .012 | 12 | .472 | 6800 | 74.8 | .0033 | .031 | 5400 | 43.3 | .0022 | .030 | 3400 | 26.8 | .0016 | .029 |
| 4 | .157 | 0.3 | .012 | 20 | .787 | 5400 | 59.1 | .0033 | .024 | 4300 | 34.3 | .0022 | .024 | 2700 | 21.3 | .0016 | .023 |
| 4 | .157 | 0.3 | .012 | 30 | 1.181 | 4100 | 43.3 | .0026 | .020 | 3200 | 25.6 | .0018 | .018 | 2000 | 16.1 | .0014 | .017 |
| 4 | .157 | 0.5 | .020 | 12 | .472 | 6800 | 74.8 | .0035 | .031 | 5400 | 43.3 | .0024 | .030 | 3400 | 26.8 | .0018 | .029 |
| 4 | .157 | 0.5 | .020 | 20 | .787 | 5400 | 59.1 | .0035 | .026 | 4300 | 34.3 | .0024 | .024 | 2700 | 21.3 | .0018 | .023 |
| 4 | .157 | 0.5 | .020 | 30 | 1.181 | 4100 | 43.3 | .0030 | .020 | 3200 | 25.6 | .0020 | .018 | 2000 | 16.1 | .0014 | .017 |
| 4 | .157 | 1 | .039 | 12 | .472 | 6800 | 74.8 | .0059 | .028 | 5400 | 43.3 | .0039 | .026 | 3400 | 26.8 | .0028 | .026 |
| 4 | .157 | 1 | .039 | 20 | .787 | 5400 | 59.1 | .0059 | .022 | 4300 | 34.3 | .0039 | .021 | 2700 | 21.3 | .0028 | .021 |
| 4 | .157 | 1 | .039 | 30 | 1.181 | 4100 | 43.3 | .0039 | .016 | 3200 | 25.6 | .0030 | .016 | 2000 | 16.1 | .0022 | .016 |
| 5 | .197 | 0.5 | .020 | 15 | .591 | 6400 | 70.9 | .0039 | .051 | 5100 | 39.4 | .0026 | .047 | 3200 | 25.2 | .0018 | .043 |
| 5 | .197 | 1 | .039 | 15 | .591 | 6400 | 70.9 | .0059 | .043 | 5100 | 39.4 | .0039 | .039 | 3200 | 25.2 | .0030 | .039 |
| 6 | .236 | 0.1 | .004 | 18 | .709 | 4800 | 59.1 | .0012 | .059 | 3800 | 36.2 | .0008 | .055 | 2400 | 22.4 | .0006 | .051 |
| 6 | .236 | 0.2 | .008 | 18 | .709 | 4800 | 59.1 | .0024 | .059 | 3800 | 36.2 | .0016 | .055 | 2400 | 22.4 | .0012 | .051 |
| 6 | .236 | 0.3 | .012 | 18 | .709 | 5300 | 66.9 | .0035 | .059 | 4200 | 39.4 | .0024 | .055 | 2700 | 25.2 | .0018 | .051 |
| 6 | .236 | 0.5 | .020 | 18 | .709 | 5300 | 66.9 | .0039 | .059 | 4200 | 39.4 | .0026 | .055 | 2700 | 25.2 | .0018 | .051 |
| 6 | .236 | 1 | .039 | 18 | .709 | 5300 | 66.9 | .0059 | .055 | 4200 | 39.4 | .0039 | .047 | 2700 | 25.2 | .0030 | .047 |
| 6 | .236 | 2 | .079 | 18 | .709 | 5300 | 66.9 | .0118 | .051 | 4200 | 39.4 | .0079 | .043 | 2700 | 25.2 | .0059 | .043 |
| 8 | .315 | 0.2 | .008 | 24 | .945 | 3600 | 43.3 | .0024 | .079 | 2900 | 27.2 | .0016 | .071 | 1800 | 16.9 | .0012 | .071 |
| 8 | .315 | 0.3 | .012 | 24 | .945 | 4000 | 51.2 | .0035 | .079 | 3200 | 29.9 | .0024 | .071 | 2000 | 18.9 | .0018 | .071 |
| 8 | .315 | 0.5 | .020 | 24 | .945 | 4000 | 51.2 | .0037 | .079 | 3200 | 29.9 | .0026 | .071 | 2000 | 18.9 | .0018 | .071 |
| 8 | .315 | 1 | .039 | 24 | .945 | 4000 | 51.2 | .0059 | .071 | 3200 | 29.9 | .0039 | .067 | 2000 | 18.9 | .0030 | .063 |
| 8 | .315 | 2 | .079 | 24 | .945 | 4000 | 51.2 | .0118 | .067 | 3200 | 29.9 | .0079 | .063 | 2000 | 18.9 | .0059 | .059 |
| 10 | .394 | 0.3 | .012 | 30 | 1.181 | 3200 | 39.4 | .0035 | .098 | 2500 | 24.0 | .0024 | .091 | 1600 | 15.0 | .0018 | .091 |
| 10 | .394 | 0.5 | .020 | 30 | 1.181 | 3200 | 39.4 | .0037 | .098 | 2500 | 24.0 | .0026 | .091 | 1600 | 15.0 | .0018 | .091 |
| 10 | .394 | 1 | .039 | 30 | 1.181 | 3200 | 39.4 | .0059 | .091 | 2500 | 24.0 | .0039 | .083 | 1600 | 15.0 | .0030 | .079 |
| 10 | .394 | 2 | .079 | 30 | 1.181 | 3200 | 39.4 | .0118 | .083 | 2500 | 24.0 | .0079 | .079 | 1600 | 15.0 | .0059 | .075 |
| 10 | .394 | 3 | .118 | 30 | 1.181 | 3200 | 39.4 | .0177 | .075 | 2500 | 24.0 | .0118 | .067 | 1600 | 15.0 | .0079 | .067 |
| 12 | .472 | 0.5 | .020 | 36 | 1.417 | 2700 | 37.4 | .0039 | .118 | 2100 | 20.1 | .0026 | .110 | 1300 | 12.6 | .0020 | .106 |
| 12 | .472 | 1 | .039 | 36 | 1.417 | 2700 | 37.4 | .0059 | .106 | 2100 | 20.1 | .0039 | .098 | 1300 | 12.6 | .0030 | .094 |
| 12 | .472 | 2 | .079 | 36 | 1.417 | 2700 | 37.4 | .0118 | .102 | 2100 | 20.1 | .0079 | .094 | 1300 | 12.6 | .0059 | .091 |
| 12 | .472 | 3 | .118 | 36 | 1.417 | 2700 | 37.4 | .0177 | .091 | 2100 | 20.1 | .0118 | .083 | 1300 | 12.6 | .0079 | .079 |

Depth of Cut




VFRSDRB NEW

Conner radius, Short cut length, 6 flute, For hardened materials



| | | | | | | | |
|---|--|--------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC) | Hardened Steel (<=55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

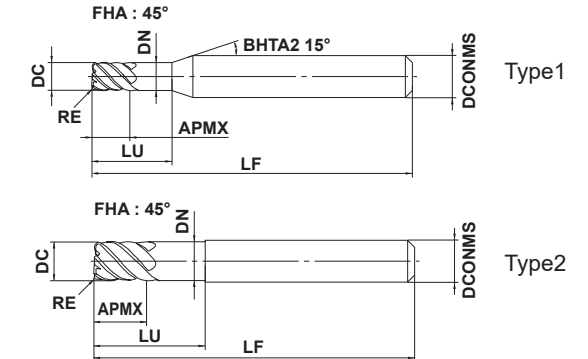

| | | | |
|----------|--------------|-----------|--|
| DC | | | |
| 0 | | | |
| - 0.020 | | | |
| DCONMS=6 | DCONMS=8, 10 | DCONMS=12 | |
| 0 | | | |
| - 0.005 | - 0.006 | - 0.008 | |

● A sharp cutting edge and improved chipping resistance enable highly efficient machining.

(mm)

| Order Number | DC | RE | APMX | LU | DN | LF | DCONMS | Flutes | Stock | Type |
|------------------|----|-----|------|----|------|----|--------|--------|-------|------|
| VFRSDRBD0300R030 | 3 | 0.3 | 3 | 9 | 2.9 | 45 | 6 | 6 | ● | 1 |
| VFRSDRBD0400R030 | 4 | 0.3 | 4 | 12 | 3.9 | 45 | 6 | 6 | ● | 1 |
| VFRSDRBD0500R030 | 5 | 0.3 | 5 | 15 | 4.9 | 50 | 6 | 6 | ● | 1 |
| VFRSDRBD0600R030 | 6 | 0.3 | 6 | 18 | 5.85 | 50 | 6 | 6 | ● | 2 |
| VFRSDRBD0600R050 | 6 | 0.5 | 6 | 18 | 5.85 | 50 | 6 | 6 | ● | 2 |
| VFRSDRBD0600R100 | 6 | 1 | 6 | 18 | 5.85 | 50 | 6 | 6 | ● | 2 |
| VFRSDRBD0800R030 | 8 | 0.3 | 8 | 24 | 7.85 | 60 | 8 | 6 | ● | 2 |
| VFRSDRBD0800R050 | 8 | 0.5 | 8 | 24 | 7.85 | 60 | 8 | 6 | ● | 2 |
| VFRSDRBD0800R100 | 8 | 1 | 8 | 24 | 7.85 | 60 | 8 | 6 | ● | 2 |
| VFRSDRBD1000R050 | 10 | 0.5 | 10 | 30 | 9.7 | 70 | 10 | 6 | ● | 2 |
| VFRSDRBD1000R100 | 10 | 1 | 10 | 30 | 9.7 | 70 | 10 | 6 | ● | 2 |
| VFRSDRBD1200R050 | 12 | 0.5 | 12 | 36 | 11.7 | 75 | 12 | 6 | ● | 2 |
| VFRSDRBD1200R100 | 12 | 1 | 12 | 36 | 11.7 | 75 | 12 | 6 | ● | 2 |

- RE = Corner Radius
- DC = Cutting Dia.
- APMX = Depth of Cut Max.
- LU = Usable Length
- DN = Neck Dia.
- LF = Functional Length
- DCONMS = Connection Dia.

● : USA Stock

For Machining of Hardened Steel

VFRSDRB

Conner radius, Short cut length, 6 flute, For hardened materials

Recommended Cutting Conditions

(in)

| Material | Hardened steel (45-55HRC) | | | Hardened steel (55-62HRC) | | | Hardened steel (62-70HRC) | | | | |
|----------|---------------------------|------------------------------------|--------------------|---------------------------|------------------------------------|--------------------|---------------------------|------------------------------------|--------------------|--------------------|-------|
| | Dia. DC (mm) (in) | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | |
| | 3 | .118 | 32000 | 149.6 | .0079 | 16000 | 74.8 | .0039 | 11000 | 47.2 | .0020 |
| | 4 | .157 | 24000 | 173.2 | .0079 | 12000 | 86.6 | .0039 | 8000 | 51.2 | .0020 |
| | 6 | .236 | 16000 | 228.3 | .0118 | 8000 | 114.2 | .0079 | 5300 | 70.9 | .0039 |
| | 8 | .315 | 12000 | 228.3 | .0157 | 6000 | 114.2 | .0079 | 4000 | 70.9 | .0039 |
| | 10 | .394 | 9600 | 228.3 | .0197 | 4800 | 114.2 | .0118 | 3200 | 70.9 | .0079 |
| | 12 | .472 | 8000 | 189.0 | .0236 | 4000 | 94.5 | .0118 | 2700 | 59.1 | .0079 |

Please refer to the list above for depth of cut.
≤1.5DC

Please refer to the list above for depth of cut.
≤1.0DC

DC: Dia.

Note 1) If the depth of cut is shallow, the revolution and feed rate can be increased.


Note 2) If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate, and depth of cut according to the table above.

VFRMDRB NEW

Corner radius, Medium cut length, 6 flute, For hardened materials



| | | | | | | | |
|---|---|-------------------------|-------------------------|----------------------------|--|---------------|-----------------|
| Carbon Steel, Alloy Steel, Cast Iron (<30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC) | Hardened Steel (≤55HRC) | Hardened Steel (>55HRC) | Austenitic Stainless Steel | Titanium Alloys, Heat Resistant Alloys | Copper Alloys | Aluminum Alloys |
| | ○ | ◎ | ◎ | | | | |

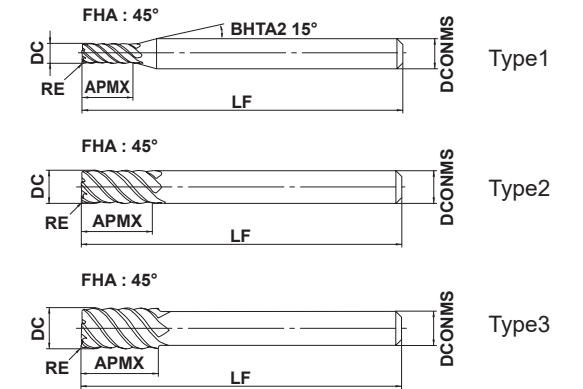

| | | | | |
|----|--------------|--------------|---------------|--------------|
| h5 | DC ≤ 12 | DC > 12 | | |
| | 0 - 0.020 | 0 - 0.030 | | |
| h5 | DCONMS=6 | DCONMS=8, 10 | DCONMS=12, 16 | DCONMS=20 |
| | 0 - 0.005 | 0 - 0.006 | 0 - 0.008 | 0 - 0.009 |

● A sharp cutting edge and improved chipping resistance enable highly efficient machining.

(mm)

| Order Number | DC | RE | APMX | LF | DCONMS | Flutes | Stock | Type |
|------------------|----|-----|------|-----|--------|--------|-------|------|
| VFRMDRBD0300R030 | 3 | 0.3 | 10 | 60 | 6 | 6 | ● | 1 |
| VFRMDRBD0400R030 | 4 | 0.3 | 12 | 60 | 6 | 6 | ● | 1 |
| VFRMDRBD0500R030 | 5 | 0.3 | 15 | 60 | 6 | 6 | ● | 1 |
| VFRMDRBD0600R030 | 6 | 0.3 | 15 | 60 | 6 | 6 | ● | 2 |
| VFRMDRBD0600R050 | 6 | 0.5 | 15 | 60 | 6 | 6 | ● | 2 |
| VFRMDRBD0600R100 | 6 | 1 | 15 | 60 | 6 | 6 | ● | 2 |
| VFRMDRBD0800R030 | 8 | 0.3 | 20 | 75 | 8 | 6 | ● | 2 |
| VFRMDRBD0800R050 | 8 | 0.5 | 20 | 75 | 8 | 6 | ● | 2 |
| VFRMDRBD0800R100 | 8 | 1 | 20 | 75 | 8 | 6 | ● | 2 |
| VFRMDRBD1000R030 | 10 | 0.3 | 25 | 80 | 10 | 6 | ● | 2 |
| VFRMDRBD1000R050 | 10 | 0.5 | 25 | 80 | 10 | 6 | ● | 2 |
| VFRMDRBD1000R100 | 10 | 1 | 25 | 80 | 10 | 6 | ● | 2 |
| VFRMDRBD1200R050 | 12 | 0.5 | 30 | 100 | 12 | 6 | ● | 2 |
| VFRMDRBD1200R100 | 12 | 1 | 30 | 100 | 12 | 6 | ● | 2 |
| VFRMDRBD1600R100 | 16 | 1 | 40 | 110 | 16 | 6 | ● | 2 |
| VFRMDRBD1600R150 | 16 | 1.5 | 40 | 110 | 16 | 6 | ● | 2 |
| VFRMDRBD1800R100 | 18 | 1 | 40 | 120 | 16 | 6 | ● | 3 |
| VFRMDRBD1800R150 | 18 | 1.5 | 40 | 120 | 16 | 6 | ● | 3 |
| VFRMDRBD2000R100 | 20 | 1 | 45 | 125 | 20 | 6 | ● | 2 |
| VFRMDRBD2000R150 | 20 | 1.5 | 45 | 125 | 20 | 6 | ● | 2 |
| VFRMDRBD2000R200 | 20 | 2 | 45 | 125 | 20 | 6 | ● | 2 |

RE = Corner Radius APMX = Depth of Cut Max. DCONMS = Connection Dia.
DC = Cutting Dia. LF = Functional Length

● : USA Stock

VFRMDRB

Corner radius, Medium cut length, 6 flute, For hardened materials

Recommended Cutting Conditions

(in)

| Material | Hardened steel (45–55HRC) | | | Hardened steel (55–62HRC) | | | Hardened steel (62–70HRC) | | | |
|-----------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|---------------------------------|-----------------|-----------------|-------|
| | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut ae | |
| 3 | .118 | 32000 | 149.6 | .0079 | 16000 | 74.8 | .0039 | 11000 | 47.2 | .0020 |
| 4 | .157 | 24000 | 173.2 | .0079 | 12000 | 86.6 | .0039 | 8000 | 51.2 | .0020 |
| 6 | .236 | 16000 | 228.3 | .0118 | 8000 | 114.2 | .0079 | 5300 | 70.9 | .0039 |
| 8 | .315 | 12000 | 228.3 | .0157 | 6000 | 114.2 | .0079 | 4000 | 70.9 | .0039 |
| 10 | .394 | 9600 | 228.3 | .0197 | 4800 | 114.2 | .0118 | 3200 | 70.9 | .0079 |
| 12 | .472 | 8000 | 189.0 | .0236 | 4000 | 94.5 | .0118 | 2700 | 59.1 | .0079 |
| 16 | .630 | 6000 | 141.7 | .0315 | 3000 | 70.9 | .0197 | 2000 | 43.3 | .0118 |
| 20 | .787 | 4800 | 114.2 | .0394 | 2400 | 55.1 | .0197 | 1600 | 34.6 | .0118 |

| Depth of cut | Please refer to the list above for depth of cut. | | Please refer to the list above for depth of cut. | |
|--------------|--|--------|--|--------|
| | Diagram | ≤1.5DC | Diagram | ≤1.0DC |
| | | | | |

DC: Dia.

Note 1) If the depth of cut is shallow, the revolution and feed rate can be increased.


Note 2) If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate, and depth of cut according to the table above.

Ball nose, Medium cut length, 4-Flute

VFR4MB


Higher efficiencies from increased feed rates when finish machining.

Shorter machining times while maintaining good surface finishes.

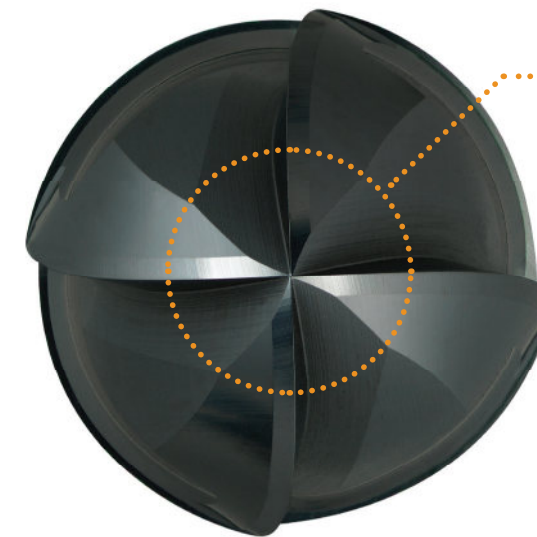

Versatile 4-flute design


All 4-flutes extend from the center to the periphery. This enables high feeds at any cutting angle and negates the need to calculate different machining conditions.

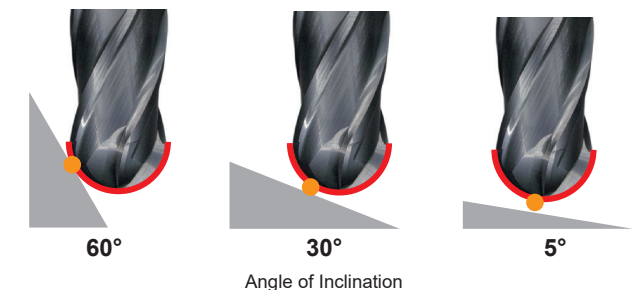

Correct Use of 2- and 4-Flute Geometries

2-flute geometries usually have a larger chip pocket and are better for rough machining with greater depths of cut that produce a larger volume of chips.

4-flute geometries can increase efficiency and reduce wear when used for finishing at small depths of cut. Additionally, using a 4-flute geometry is advantageous when machining harder materials at reduced depths of cut.

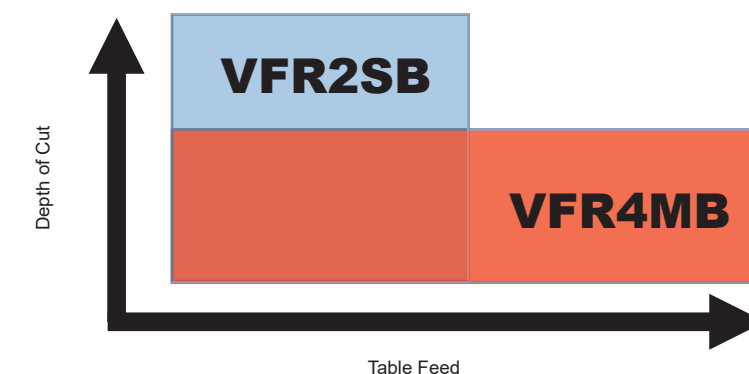



Cutting Performance

Comparison of the Surface Finish - Machining ASP23 (62HRC)


The 4-flute type is superior for high efficiency machining, but when used at the same feed rate as a 2-flute type, the quality of the finished surface can be improved.

VFR4MB

2-Flute conventional product

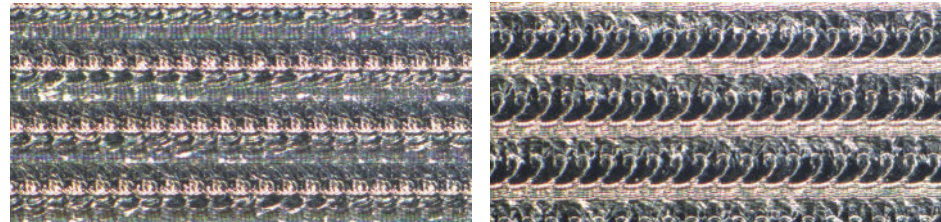

Ra: 11 µm
Rz: 40 µm




Ra: 13 µm
Rz: 64 µm


<Cutting Conditions>
Material : ASP23(62HRC)
Tool : VFR4MBR0400 DC=.315"
Revolution : n=12000 min⁻¹
Table Feed : vf=141.7 IPM
Depth of Cut : ap=.008"
ae=.031"
Overhang Length : .787"
Cutting Mode : Air blow
Down Cut

Comparison of Wear Resistance Surface - Machining HAP72 (69HRC)


IMPACT MIRACLE REVOLUTION end mills demonstrate excellent wear resistance even when machining high hardness workpiece materials.

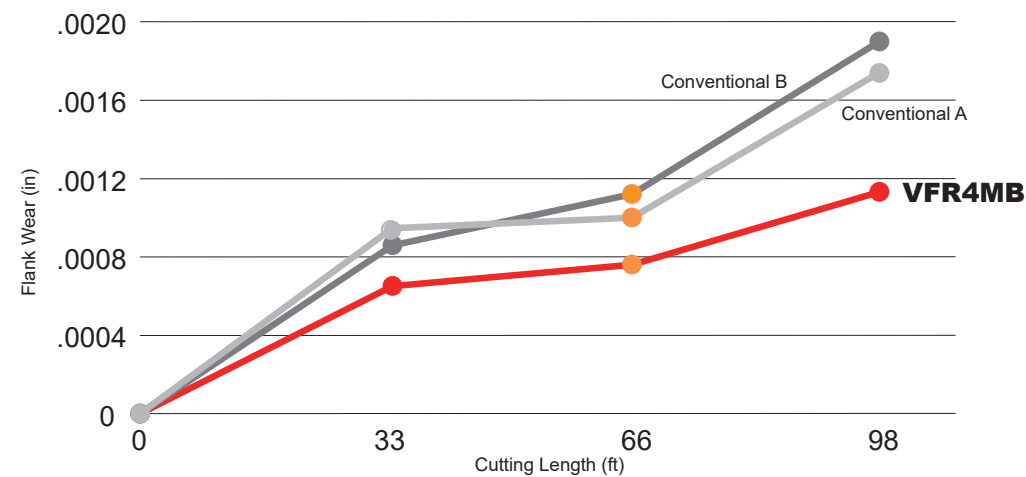


Taken after a cutting length of 66'



VFR4MB



Conventional A



Conventional B

<Cutting Conditions>
Material : HAP72(69HRC)
Tool : VFR4MBR0100 DC=2mm
Revolution : n=16000 min⁻¹
Table Feed : f=47.2 IPM
Depth of Cut : ap=.0024"
ae=.002"
Overhang Length : .669"
Cutting Mode : Air blow
Down Cut
Machine : Vertical MC


Ball nose, Medium cut length, 4-Flute

VFR4MB

High efficiency and high precision finishing of press mold parts (60HRC)


Issues from Customer

- ① Issue with machining efficiency due to the curvature of the workpiece material so a corner radius end mill cannot be used.
- ② A 4-flute type was used to machine, but at the tip, the chip discharge was poor and resulted in a torn surface finish. The tool was changed to a 2-flute type.
- ③ The 2-flute type showed excessive wear after a long cut length and necessitated a tool change because the surface finish accuracy could not be maintained.

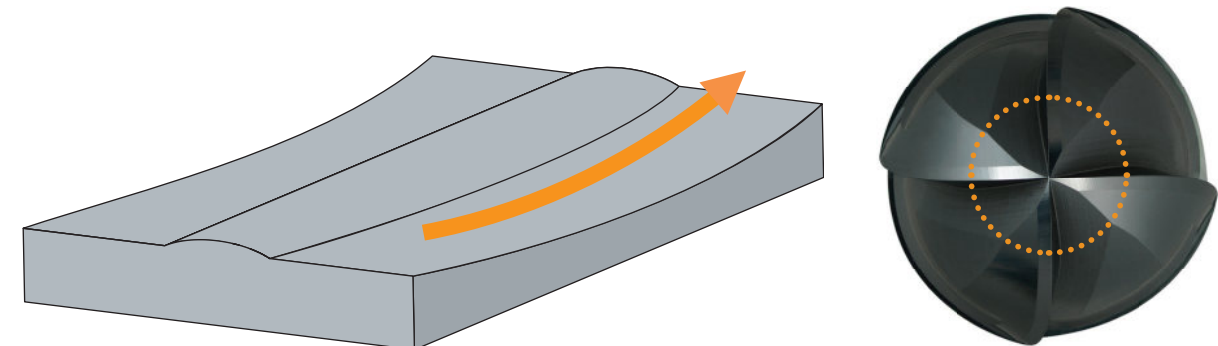

<Cutting Conditions>
Material : AISI D2(60HRC)
Revolution : n=6000 min⁻¹
Table Feed : vf=110.2 IPM
Depth of Cut : ap=.001"
ae=Setting surface roughness 6.3z
Cutting Mode : Dry Cutting
Machine : Vertical MC(BBT50)
Cutting Time : 120 min

Results after machining for 120 min

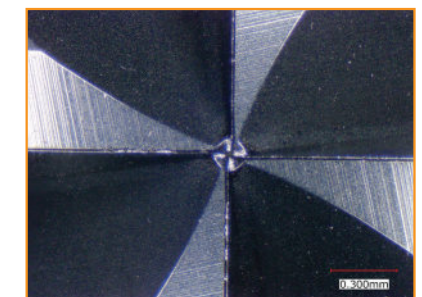

VFR4MB End Cutting Edge Condition

Flank Wear: 669 µm


Comments from Customer Evaluation

- VFR4MB showed almost no wear and no change in surface roughness even though the tip was overworked on the contours of a press mold.
- By making it possible to machine with a single end mill, the costs were reduced and the time problems which required a tool change every 2 hours of machining or more were resolved. In addition, the feed rate could be increased by 1.5 which shortened the machining time.

Revolutionary Machining of Hardened Steel

VFR2SSB/VFR2SB


Ball Nose End Mill, 2 flute

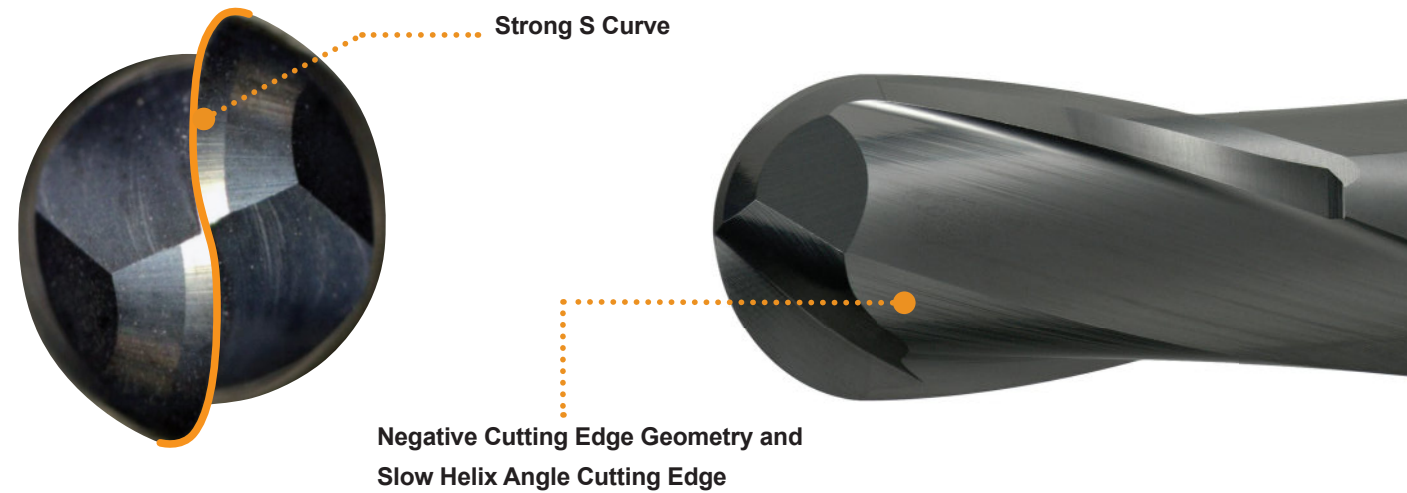

Cutting Edge: Optimization of the flute geometry, helix and rake angles have improved the edge strength in all areas.
Carbide Substrate: High grade carbide ideal for machining hardened materials.


VFR2SBF

Ball Nose End Mill, 2 flute, For mirror finishing

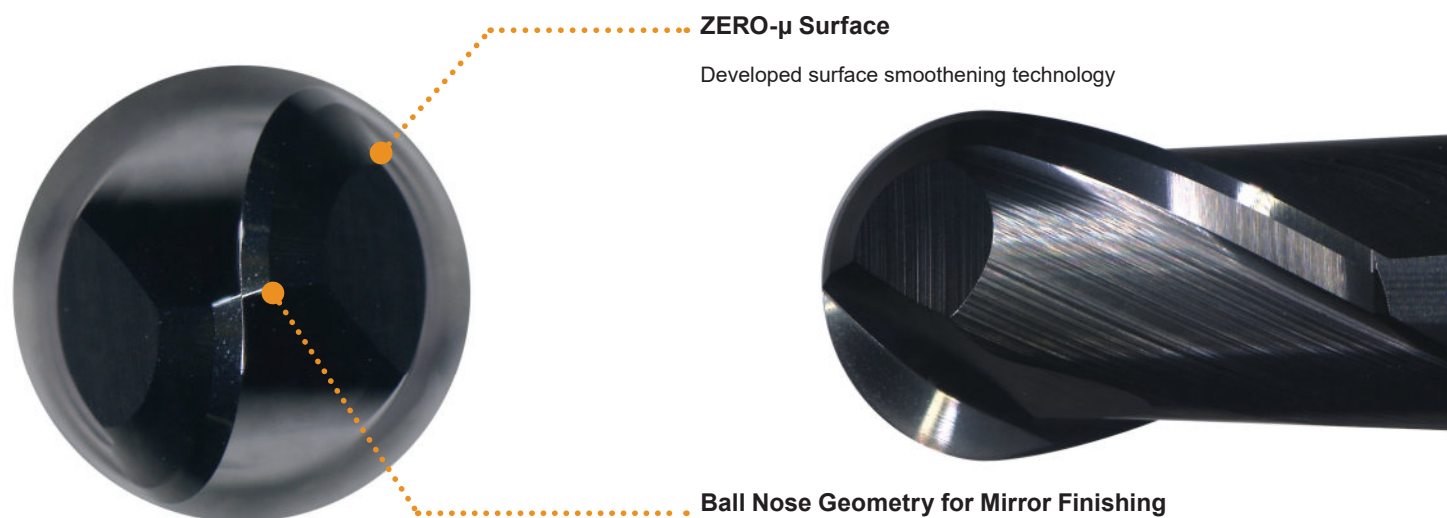


Application Example


VFR2SB



ASP23
(62HRC)




AISI M2
(64HRC)




HAP72
(68HRC)

<Cutting Conditions>
Material : High Speed Steel
1.969"x1.969"x1.969"
Tool : VFR2SBR0300
Cutting Mode : Air Blow
Machine : Vertical MC

Rough Machining Path

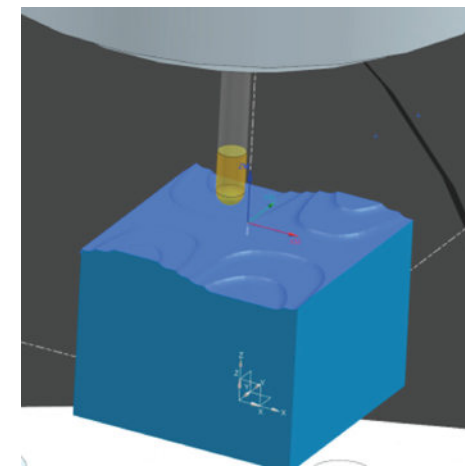

Medium and Finish Machining Path (Tilt Angle 30°)

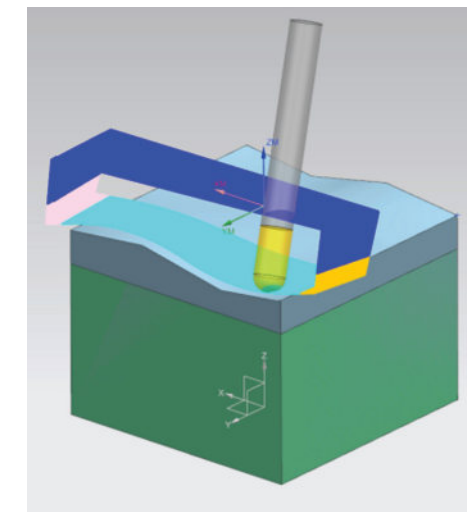


Cutting Time: 234 min
Tools Used: 4

| Process | RE | n (min ⁻¹) | vf (IPM) | ap | ae | Finishing Allowance | Cutting Time (h:m:s) | Number of Tools |
|-------------------------|--------------|---------------------------|-------------|------|------|---------------------|----------------------|-----------------|
| Rough Machining | 3.0mm, .118" | 12000 | 63.0 | .014 | .039 | .008 | 1:01:45 | 2 |
| Medium Finish Machining | 3.0mm, .118" | 8000 | 19.7 | .012 | .004 | .002 | 0:49:15 | 1 |
| Finish Machining | 3.0mm, .118" | 12000 | 27.6 | .004 | .001 | — | 2:03:19 | 1 |

Application Example


VFR2SBF

Material : Pre-hardened Steel

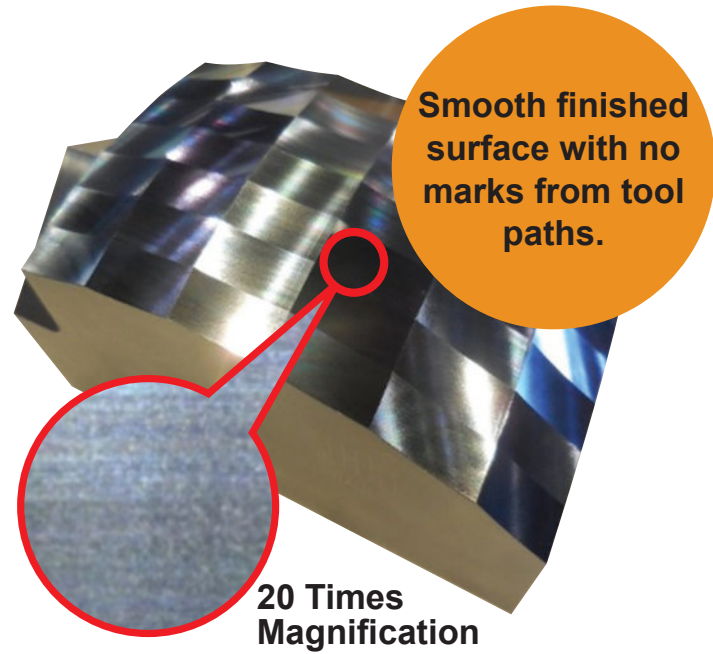



20 Times Magnification

By using 5-axis machining, cutting at the tip of the ball nose can be avoided.

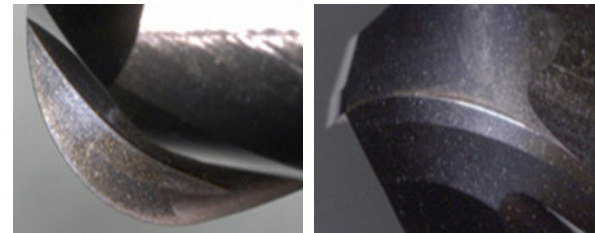

Excellent tool conditions after 31 hours of finish machining.

A surface roughness of Rz: 31 μm or lower can be achieved.

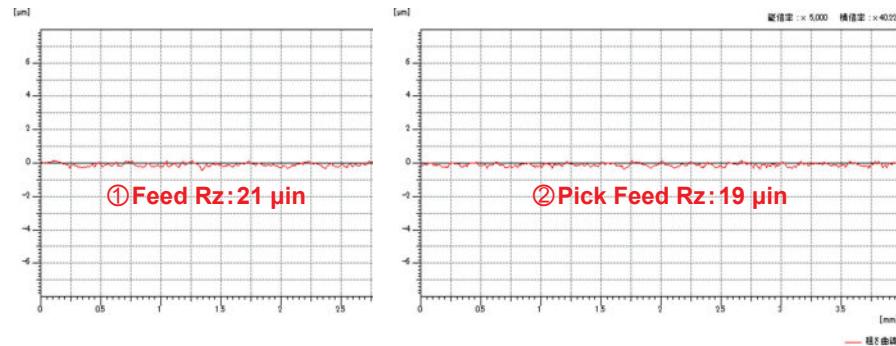

Cutting Conditions Holder: HSK-A63


(in)

| Process | Order Number | Coolant | n (min ⁻¹) | vc (SFM) | vf (IPM) | fz (IPT) | ap | ae | Finishing Allowance | Cutting Time (h : m) |
|---|-----------------|----------|------------------------|------------|-------------|----------------|-----------------------------|-----------|---------------------|----------------------|
| Rough Machining Side Finish Machining | VQMHRBD1600R500 | Air Blow | 3000 2000 | 490 330 | 70.9 9.4 | .0059 .0012 | 1.260 — | .039 — | .008 0 | 0:24 |
| Chamfer and Medium Finish Machining | MP2SBR0300 | Air Blow | 13000 | 805 | 102.4 | .0039 | Along the Surface p0.1 | — | .001 | 0:46 |
| Finish Machining | VFR2SBFR0300 | MQL | 20000 | 1230 | 23.6 | .0006 | Along the Surface p0.015 | — | 0 | 31:10 |

Precision-Corner Radius End Mill, 4 Flute

VFRPSRB

A seamless edge geometry that is resistant to chipping, together with a wiper edge and strong back taper enables high precision machining.

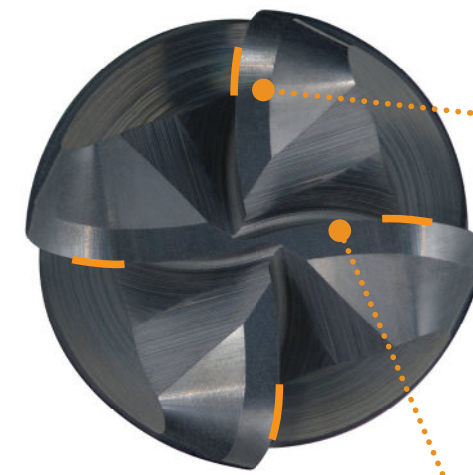

Equipped with a wiper edge of $DC \geq .059''$

Improves the surface finish of the bottom machined face.



Strong Back Taper of $.059'' \leq DC \leq .197''$


Reduces chatter and vibration when machining vertical walls.

Optimal Seamless Shape of $DC \geq .059''$

Suppresses chipping.

High Precision Corner Radius Accuracy

The corner radius of VFRPSRB is measured as follows, based on the absolute center of the corner radius.

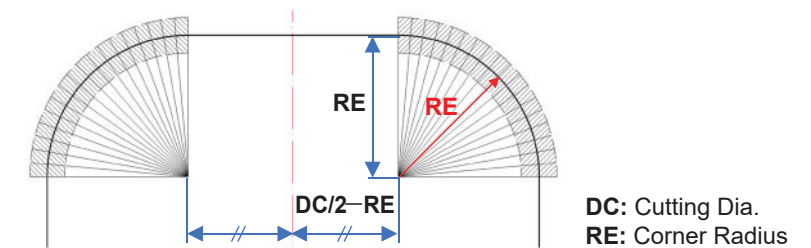


| | | | | |
|----------------|------------------------------|-----------------|-------------------------------|---------------|
| VFRPSRB | $.020'' \leq DC \leq .236''$ | : $\pm .0002''$ | Conventional Precision Radius | $\pm .0004''$ |
| | $.315'' \leq DC \leq .472''$ | : $\pm .0003''$ | | |

For Machining of Hardened Steel

Completely Seamless Curved R Edge, $DC \geq .059''$


A stable machined surface is achieved by a seamless blend between the radius and flank geometry.

VFRPSRB

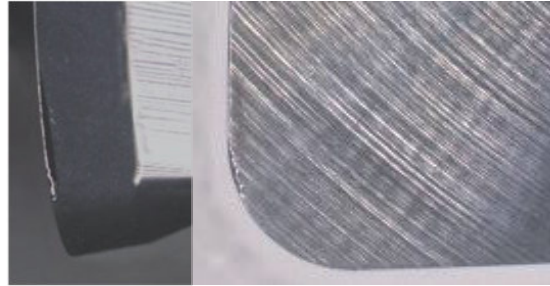

Due to the seamless geometry, chipping is suppressed and wear progression is stabilized.

Conventional

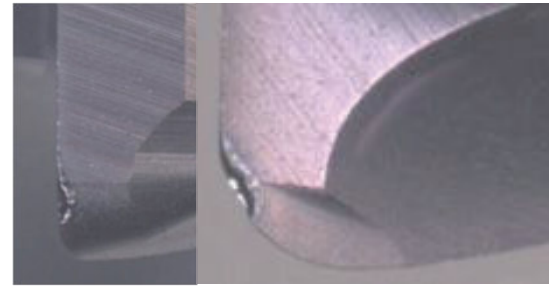


Chipping occurs because the stress is concentrated on the joint between the flank and corner edge geometry.



Equipped with a Wiper Edge, $DC \geq .059''$

A smooth surface finish is possible by utilising a wiper edge.

VFRPSRB

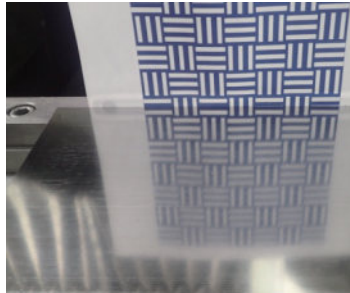



Conventional

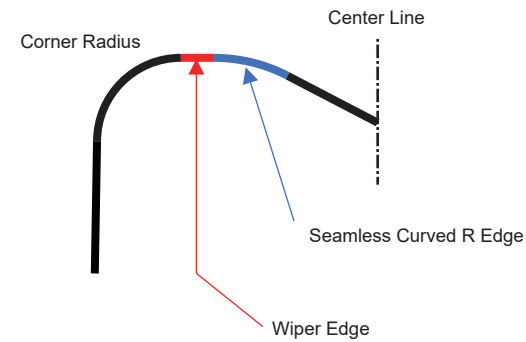

Cutting Performance

Wear Resistance Comparison - Machining High Speed Tool Steel (68HRC)

Excellent wear resistance when machining high-hardness steel.

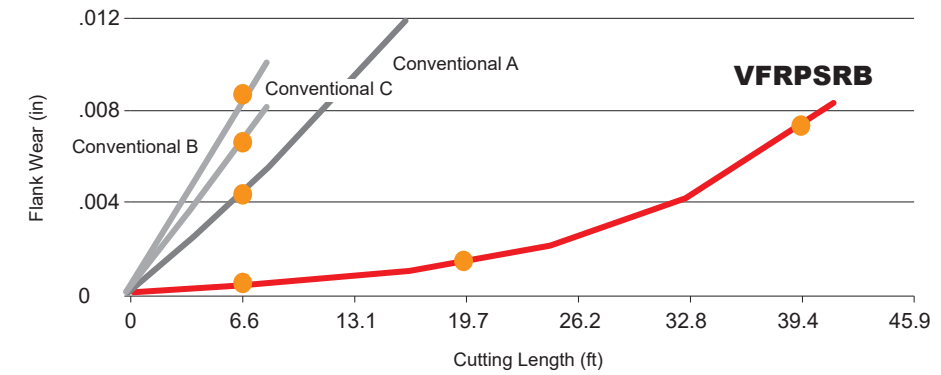


| | After Machining 6.6' | After Machining 19.7' | After Machining 39.4' |
|----------------|----------------------|-----------------------|-----------------------|
| VFRPSRB | | | |
| Conventional A | | | - |
| Conventional B | | | - |
| Conventional C | | | - |

<Cutting Conditions>
 Material : Powder High Speed Tool Steel (68HRC)
 Tool : VFRPSRBD0600R050N180
 Revolution : $n=5500 \text{ min}^{-1}$
 Table Feed : $f=26.0 \text{ IPM}$
 Feed per Tooth : $.0012 \text{ IPT}$
 Depth of Cut : $ap=.004''$
 $ae=.004''$
 Overhang Length : $.709''$
 Cutting Mode : Air blow
 Machine : Vertical MC (BT30)

Ball Nose End Mill, Long Neck, 2 Flute

VFR2XLB

Precise machining of vertical walls is possible due to a back taper and a strong, seamless ball nose cutting edge geometry.

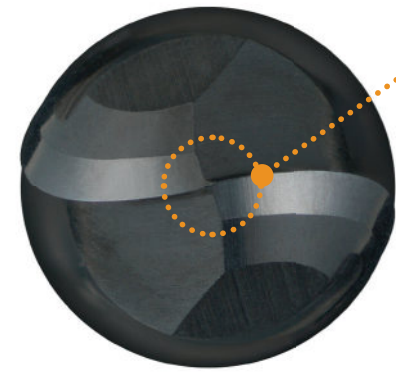

Ball Nose Optimization

Ideal center flute geometry for finish machining.

Rake Angle Optimization

Optimum geometry provides a sharp edge together with fracture resistance that enables excellent surface finishes.

Strong Back Taper


Reduces chatter and vibration when machining vertical walls.




Cutting Performance

Wear Resistance Comparison - Machining ASP23 (62HRC)

Greatly improved wear resistance for high precision machining.

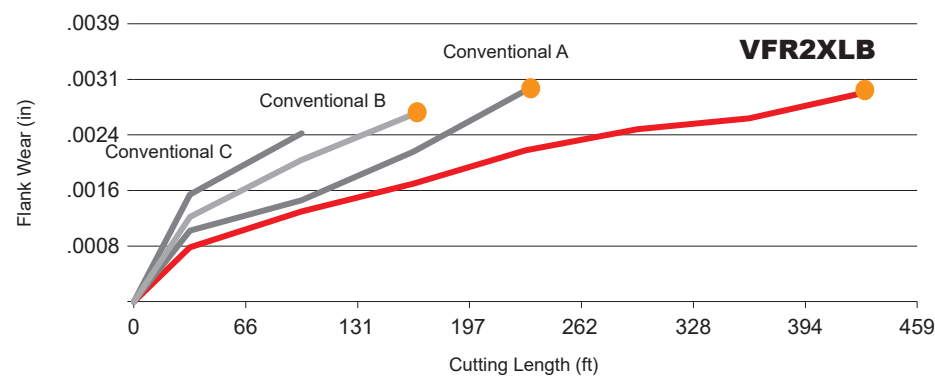


<Cutting Conditions>
 Material : ASP23 (62HRC)
 Tool : VFR2XLB R0100N120
 Revolution : n=16000min⁻¹
 Table Feed : vf=63.0 IPM
 Feed per Tooth : .002 IPT
 Depth of Cut : ap=.002"x10
 ae=.004"x10
 Overhang Length : .709"
 Cutting Mode : Air blow
 Machine : Vertical MC (HSK-E32)




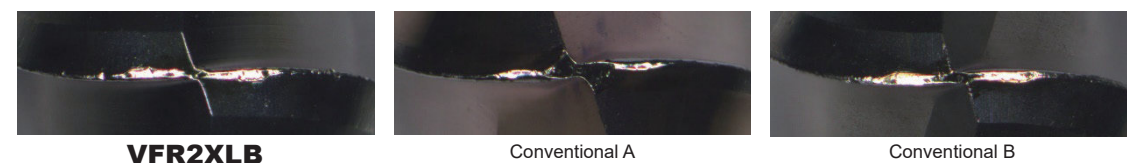


Cutting Edge Geometry for Finishing

Sharp but strong cutting edge enables good surface finishes.

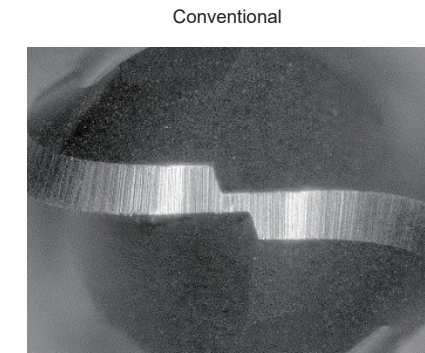



Comparison of Surface Finishes

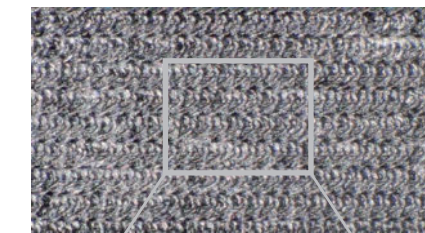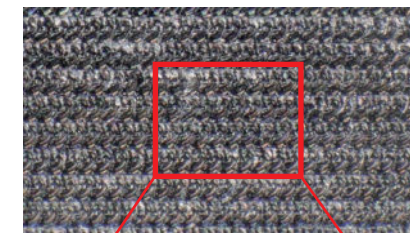

Sharp edges leave a uniform finish.

A dull edge leaves an undefined finish.

Comparison of Surface Roughness (Feed Side)

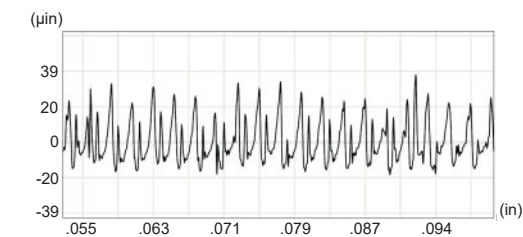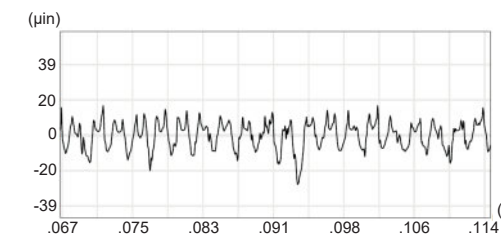

Application Example

Machining of a Bevel Gear Mold

Ideal for machining high-hardness precision, cold forging molds of 65HRC or higher.

(in)

| No. | Process | Tool Used | vc (SFM) | n (min ⁻¹) | vf (IPM) | ap | ae | Next Process Finishing Allowance | 3D Model Post Machining |
|-----|-----------------------------------|----------------------|----------|------------------------|----------|-------|-------|----------------------------------|---|
| 1 | Rough Machining (Central Helical) | VFR2SBR0400 | 260 | 3,200 | 5.1 | .118 | .024 | .004 |  |
| 2 | Rough Pocket Milling① | VFR2SBR0200 | 260 | 6,300 | 9.8 | .035 | .012 | .008 |  |
| 3 | Rough Pocket Milling② | VFR2XLBR0150N100 | 195 | 6,300 | 7.5 | .035 | .006 | .008 |  |
| 4 | Semi-finish Machining | VFR2XLBR0100N100 | 260 | 12,700 | 9.8 | .008 | .004 | .004 |  |
| 5 | Deep Wall Finish Machining | VFR2XLBR0100N100 | 260 | 12,700 | 9.8 | .004 | .0012 | 0 |  |
| 6 | Bottom Face Finish Machining | VFRPSRBD0300R050N100 | 130 | 4,500 | 10.6 | .004 | .004 | 0 |  |
| 7 | Upper Surface Milling | VFRPSRBD0600R050N180 | 130 | 2,100 | 19.7 | .0008 | .020 | 0 |  |
| 8 | Chamfering | VC2CD0600 | 165 | 2,700 | 4.3 | .020 | .008 | 0 |  |

<Cutting Conditions>
 Material : SKH51
 1.969"x1.969"x.984"
 Machine : Vertical MC (HSK-E32)



Application Example

Comparison of Surface Finishes - Machining of Dies Used for Plastic Molding

Ideal surface finishes of dies can be achieved.

Material: Steel die used for Plastic Molding (M340 58HRC)

(in)

| Process | Tools Used | n (min ⁻¹) | vf (IPM) | ap | ae | Coolant |
|-----------------------|------------------|------------------------|----------|-------|-------|---------|
| Semi-finish Machining | VFR2XLBR0050N040 | 18000 | 35.4 | .0008 | .0008 | MQL |
| | VFR2XLBR0100N060 | 17500 | 47.2 | .0012 | .0039 | |
| Finish Machining | VFR2XLBR0050N040 | 18000 | 35.4 | .0008 | .0008 | |
| | VFR2XLBR0100N060 | 17500 | 47.2 | .0012 | .0031 | |



VFR2XLB Has a smooth surface




Conventional

Comparison of Surface Finishes - Machining AISI D2

Excellent surface finishes compared to those machined by conventional tools.



VFR2XLB

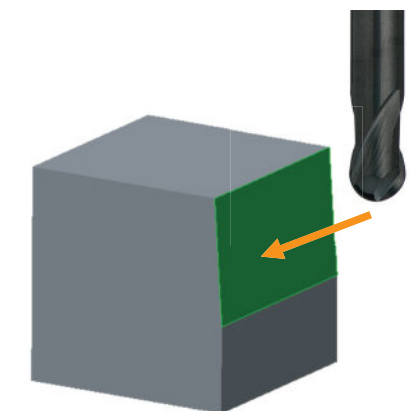

Cutting Form: 1° Taper Cutting




Conventional: Cloudy surface finish


<Cutting Conditions>
 Material : AISI D2 (60HRC)
 Tool : VFR2XLBR0100N100
 Revolution : n=19000min⁻¹
 Table Feed : vf=26.8 IPM
 Depth of Cut : ap=.0008"
 ae=.0008"
 Overhang Length : .630"
 Cutting Mode : Air blow
 Machine : Vertical MC (HSK-E32)

Cutting Performance


AISI H13 (52HRC)

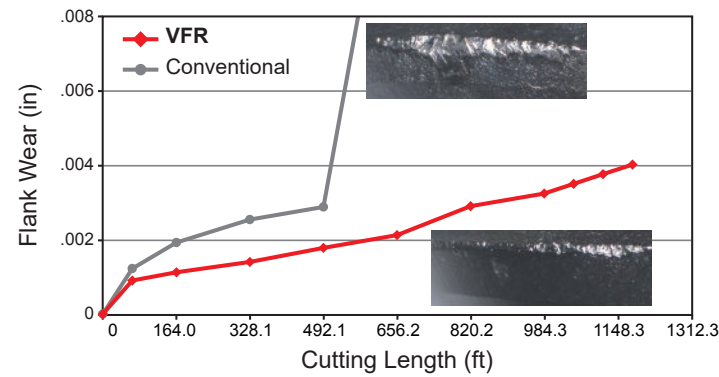


<Cutting Conditions>
 Material : AISI H13 (52HRC)
 Tool : VFR2SBR0300
 Revolution : n=17000 min⁻¹
 Table Feed : vf=66.9 IPM
 Feed per Tooth : fz=.002 IPT
 Depth of Cut : ap=.079", ae=.012"
 Overhang Length : .866"
 Cutting Mode : Air blow
 Machine : Vertical MC (HSK-A63)

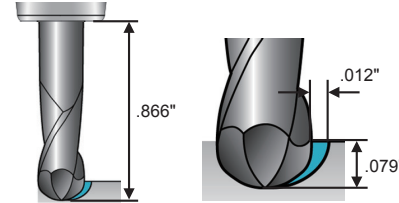


AISI D2 (60HRC)

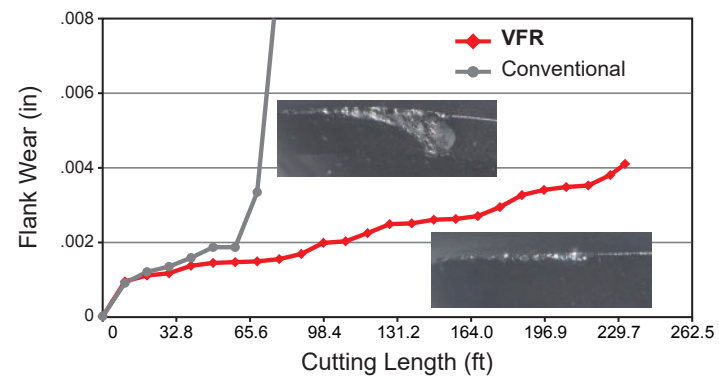


<Cutting Conditions>
 Material : AISI D2 (60HRC)
 Tool : VFR2SBR0300
 Revolution : n=5400 min⁻¹
 Table Feed : vf=21.3 IPM
 Feed per Tooth : fz=.002 IPT
 Depth of Cut : ap=.079", ae=.008"
 Overhang Length : .866"
 Cutting Mode : Air Blow
 Machine : Vertical MC (HSK-A63)

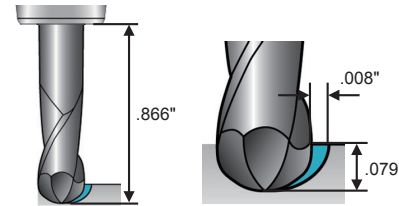


ASP23 (62HRC)

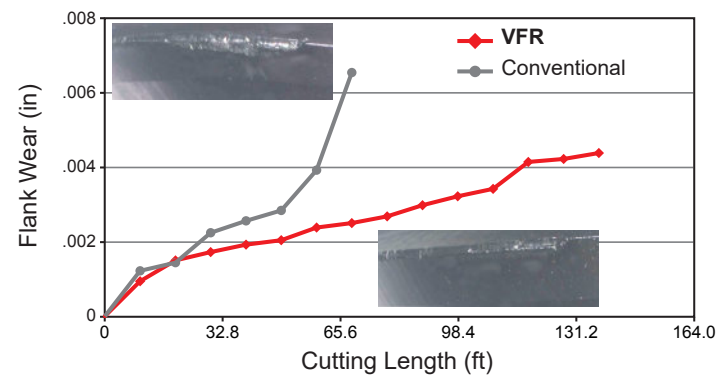


<Cutting Conditions>
 Material : ASP23 (62HRC)
 Tool : VFR2SBR0300
 Revolution : n=5400 min⁻¹
 Table Feed : vf=21.3 IPM
 Feed per Tooth : fz=.002 IPT
 Depth of Cut : ap=.079", ae=.008"
 Overhang Length : .866"
 Cutting Mode : Air Blow
 Machine : Vertical MC (HSK-A63)

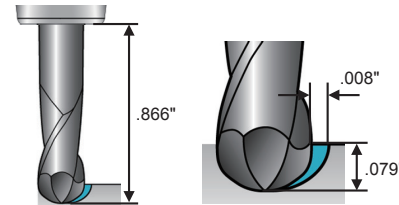

AISI M2 (64HRC)

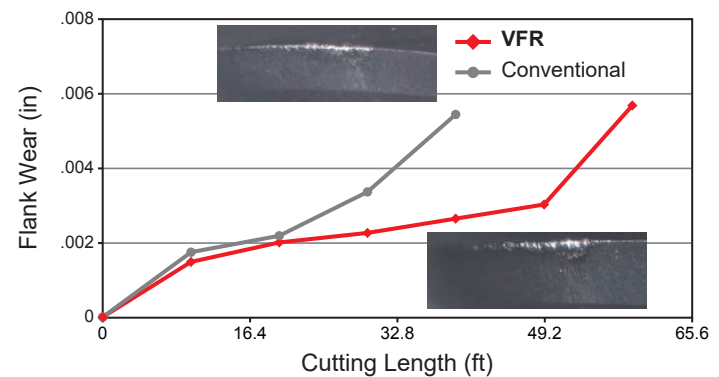


<Cutting Conditions>
 Material : AISI M2 (64HRC)
 Tool : VFR2SBR0300
 Revolution : n=5400 min⁻¹
 Table Feed : vf=21.3 IPM
 Feed per Tooth : fz=.002 IPT
 Depth of Cut : ap=.079", ae=.008"
 Overhang Length : .866"
 Cutting Mode : Air Blow
 Machine : Vertical MC (HSK-A63)

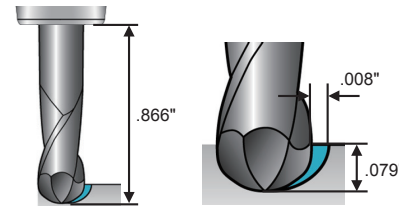


Cutting Performance

AISI H13 (52 HRC) Comparison of Machined Surface

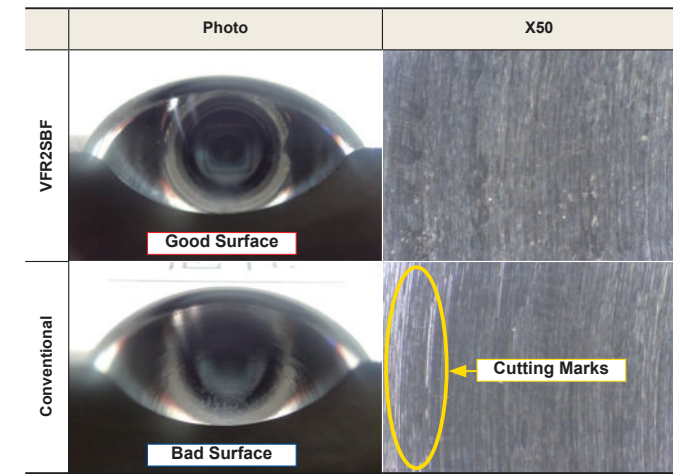

Model Shape

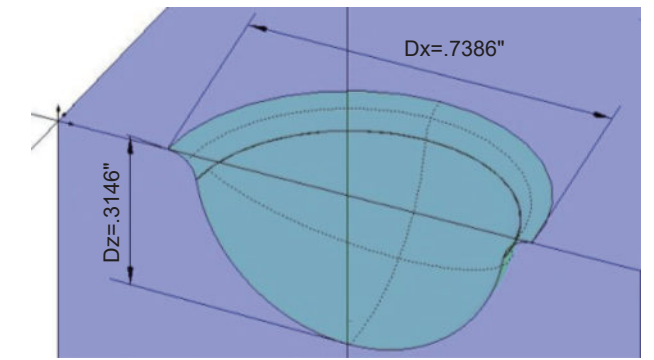

<Cutting Conditions>
 Material : AISI H13 (52HRC)
 Tool : VFR2SBFR0300
 Revolution : n=32000 min⁻¹
 Cutting Speed : vc=1980 SFM
 Table Feed : vf=50.4 IPM

Feed per Tooth : fz=.001 IPT
 Depth of Cut : ap=.001", ae=.001"
 Overhang Length : .591"
 Cutting Mode : Air Blow
 Machine : Vertical MC (HSK-E25)



MITSUBISHI MATERIALS U.S.A. CORPORATION

**California Office
(Headquarters)**

3535 Hyland Avenue, Suite 200
Costa Mesa, CA 92626
Customer Service: 800.523.0800
Technical Service: 800.486.2341

**Chicago Office
(Engineering)**

300 N. Martingale Road, Suite 500
Schaumburg, IL 60173
Main: 847.252.6300
Fax: 847.519.1732

MMC Metal de Mexico, S.A. DE C.V.

Av. La Cañada No.16,
Parque Industrial Bernardo
Quintana, El Marques,
Queretaro C.P. 76246 MEXICO
Main: +52.442.221.61.36
Fax: +52.442.221.61.34

**North Carolina-MTEC
(Marketing & Technical Center)**

105 Corporate Center Drive, Suite A
Mooresville, NC 28117
Main: 980.312.3100
Fax: 704.746.9292

**Toronto Office
(Canada Branch)**

600 Matheson Blvd. Unit 5 (Office)
Mississauga, ON L5R 4C1
Main: 905.814.0240
Fax: 905.814.0245

**Detroit Office
(Moldino CS)**

2001 Orndorf Drive
Brighton, MI 48116
Main: 248.308.2620
Fax: 248.308.2627

FOR YOUR SAFETY

- Don't handle inserts and chips without gloves.
- Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage.
- Please use safety covers and wear safety glasses.
- When using compounded cutting oils, please take fire precautions.
- When attaching inserts or spare parts, please use only the correct wrench or driver.
- When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

www.mmc-carbide.com/us

Tools specifications subject to change without notice.

B231A-US-2026.4



**COMPLETE
METALWORKING
SOLUTIONS**

(800) 991-4225

www.ahbinc.com
ISO Certified
customerservice@ahbinc.com