

CUTTING TOOLS 2020-2021

TURNING TOOLS
MILLING TOOLS
DRILLING TOOLS

AHB

TOOLING & MACHINERY

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225

www.ahbinc.com

ISO Certified

customerservice@ahbinc.com

DIA  EDGE

MSTAR END MILLS




MSMHZD

Slotting, Medium cut length, 3 flute



CARBIDE

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
○	○	○		○	○	○	



DC ≤ 12	DC > 12			
0 - 0.020	0 - 0.030			
4 ≤ DCON ≤ 6	8 ≤ DCON ≤ 10	12 ≤ DCON ≤ 16	DCON = 20	
0 - 0.008	0 - 0.009	0 - 0.011	0 - 0.013	

● A single end mill for both plunging and slotting.

(mm)

Order Number	DC	APMX	LF	DCON	No. of Flutes	Stock	Type
MSMHZDD0100	1	2	45	4	3	★	1
MSMHZDD0150	1.5	3	45	4	3	★	1
MSMHZDD0200	2	4	50	6	3	●	1
MSMHZDD0250	2.5	5	50	6	3	●	1
MSMHZDD0300	3	6	50	6	3	●	1
MSMHZDD0350	3.5	8	50	6	3	●	1
MSMHZDD0400	4	8	50	6	3	●	1
MSMHZDD0450	4.5	10	50	6	3	●	1
MSMHZDD0500	5	10	50	6	3	●	1
MSMHZDD0550	5.5	13	50	6	3	●	1
MSMHZDD0600	6	13	60	6	3	●	2
MSMHZDD0650	6.5	16	60	8	3	●	1
MSMHZDD0700	7	16	60	8	3	●	1
MSMHZDD0750	7.5	16	60	8	3	●	1
MSMHZDD0800	8	19	70	8	3	●	2
MSMHZDD0850	8.5	19	70	10	3	●	1
MSMHZDD0900	9	19	70	10	3	●	1
MSMHZDD0950	9.5	19	70	10	3	●	1
MSMHZDD1000	10	22	80	10	3	●	2
MSMHZDD1100	11	22	80	12	3	●	1
MSMHZDD1200	12	26	90	12	3	●	2
MSMHZDD1300	13	26	90	12	3	●	3
MSMHZDD1400	14	26	90	12	3	●	3
MSMHZDD1500	15	26	110	16	3	●	1
MSMHZDD1600	16	30	110	16	3	●	2
MSMHZDD2000	20	32	140	20	3	●	2

RECOMMENDED CUTTING CONDITIONS

Shoulder milling

Work Material	Carbon steel, Cast iron, Alloy steel (-30HRC)			Alloy steel, Tool steel, Pre-hardened steel			Austenitic stainless steel, Titanium alloy			Heat resistant alloy		
	AISI 1050, AISI 35, AISI P20 etc.			AISI H13, AISI W1-10, AISI P21 etc.			AISI 304, AISI 306, Ti-6Al-4V etc.			Inconel718 etc.		
DC (mm)	Revolution (min ⁻¹)	Table feed (mm/min) (IPM)		Revolution (min ⁻¹)	Table feed (mm/min) (IPM)		Revolution (min ⁻¹)	Table feed (mm/min) (IPM)		Revolution (min ⁻¹)	Table feed (mm/min) (IPM)	
1	19000	600	23.6	13000	310	12.2	10000	200	7.9	9500	65	2.6
1.5	14000	600	23.6	9000	310	12.2	7500	210	8.3	6400	75	3.0
2	11000	600	23.6	7200	310	12.2	6000	210	8.3	4800	75	3.0
3	8500	770	30.3	5300	380	15.0	4400	220	8.7	3200	100	3.9
4	7200	850	33.5	4400	480	18.9	3700	250	9.8	2400	130	5.1
6	5300	940	37.0	3200	490	19.3	2700	270	10.6	1600	130	5.1
8	4000	1010	39.8	2400	560	22.0	2000	280	11.0	1200	120	4.7
10	3200	1000	39.4	1900	480	18.9	1600	300	11.8	950	110	4.3
12	2700	950	37.4	1600	440	17.3	1300	300	11.8	800	90	3.5
16	2000	720	28.3	1200	350	13.8	1000	260	10.2	600	70	2.8
20	1600	600	23.6	1000	290	11.4	800	240	9.4	480	60	2.4

Depth of cut

0.05DC

DC: Dia.

Plunging

Work Material	Carbon steel, Cast iron, Alloy steel (-30HRC)			Alloy steel, Tool steel, Pre-hardened steel			Austenitic stainless steel, Titanium alloy		
	AISI 1050, AISI 35, AISI P20 etc.			AISI H13, AISI W1-10, AISI P21 etc.			AISI 304, AISI 306, Ti-6Al-4V etc.		
DC (mm)	Revolution (min ⁻¹)	Table feed (mm/min) (IPM)		Revolution (min ⁻¹)	Table feed (mm/min) (IPM)		Revolution (min ⁻¹)	Table feed (mm/min) (IPM)	
1	13000	80	3.1	10000	50	2.0	6000	10	0.4
1.5	12000	120	4.7	8000	80	3.1	6000	20	0.8
2	11000	200	7.9	7200	140	5.5	6000	30	1.2
3	8500	250	9.8	5300	180	7.1	4200	50	2.0
4	7200	300	11.8	4400	210	8.3	3300	60	2.4
6	5300	300	11.8	3200	210	8.3	2200	70	2.8
8	4000	320	12.6	2400	220	8.7	1600	80	3.1
10	3200	340	13.4	1900	240	9.4	1300	70	2.8
12	2700	320	12.6	1600	220	8.7	1100	70	2.8
16	2000	250	9.8	1200	180	7.1	800	55	2.2
20	1600	200	7.9	1000	140	5.5	640	55	2.2

Depth of cut

DC: Dia.

Slotting

Work Material	Carbon steel, Cast iron, Alloy steel (-30HRC)			Alloy steel, Tool steel, Pre-hardened steel			Austenitic stainless steel, Titanium alloy			Heat resistant alloy		
	AISI 1050, AISI 35, AISI P20 etc.			AISI H13, AISI W1-10, AISI P21 etc.			AISI 304, AISI 306, Ti-6Al-4V etc.			Inconel718 etc.		
DC (mm)	Revolution (min ⁻¹)	Table feed (mm/min) (IPM)		Revolution (min ⁻¹)	Table feed (mm/min) (IPM)		Revolution (min ⁻¹)	Table feed (mm/min) (IPM)		Revolution (min ⁻¹)	Table feed (mm/min) (IPM)	
1	13000	130	5.1	10000	80	3.1	6000	30	1.2	5700	25	1.0
1.5	12000	250	9.8	8000	150	5.9	6000	60	2.4	3800	30	1.2
2	11000	500	19.7	7200	260	10.2	6000	130	5.1	2800	35	1.4
3	8500	640	25.2	5300	320	12.6	4200	130	5.1	1900	50	2.0
4	7200	650	25.6	4400	370	14.6	3300	140	5.5	1400	70	2.8
6	5300	720	28.3	3200	380	15.0	2200	140	5.5	950	70	2.8
8	4000	780	30.7	2400	430	16.9	1600	140	5.5	720	60	2.4
10	3200	770	30.3	1900	370	14.6	1300	150	5.9	570	50	2.0
12	2700	730	28.7	1600	340	13.4	1100	150	5.9	480	40	1.6
16	2000	600	23.6	1200	290	11.4	800	130	5.1	360	30	1.2
20	1600	500	19.7	1000	240	9.4	640	120	4.7	290	25	1.0

Depth of cut

DC: Dia.

Note 1) When cutting austenitic stainless steel, the use of water-soluble cutting fluid is especially effective.

Note 2) If the depth of cut is smaller than this table, feed rate can be increased.

Note 3) If the rigidity of the machine or the work material installation is very low, or chattering is generated, please reduce the revolution and the feed rate proportionately.

SQUARE

BALL

RADIUS

TAPER

BARREL

ROUGHING

I

SOLID END MILLS

MSTAR END MILLS



MSMHZD - Inch sizes

Slotting, Medium cut length, 3 flute



CARBIDE

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
○	○	○		○	○	○	

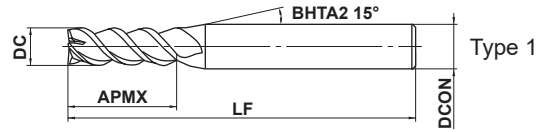

SQUARE

BALL

RADIUS

TAPER

BARREL

ROUGHING

SOLID END MILLS

	DC < .5000"	DC ≥ .5000"			
	0 - .0008"	0 - .0012"			
	.2500" ≤ DCON ≤ .3750"	.5000" ≤ DCON ≤ .6250"	DCON = .7500"		
	0 - .00035"	0 - .00043"	0 - .00051"		

● A single end mill for both plunging and slotting.

(inch)

Order Number	DC	APMX	LF	DCON	No. of Flutes	Stock	Type
MSMHZDD1/16	.0625	.125	2.000	.2500	3	●	1
MSMHZDD5/64	.0781	.156	2.000	.2500	3	●	1
MSMHZDD3/32	.0938	.188	2.000	.2500	3	●	1
MSMHZDD7/64	.1094	.250	2.000	.2500	3	●	1
MSMHZDD1/8	.1250	.313	2.000	.2500	3	●	2
MSMHZDD5/32	.1563	.313	2.000	.2500	3	●	1
MSMHZDD3/16	.1875	.406	2.000	.2500	3	●	1
MSMHZDD7/32	.2188	.406	2.000	.2500	3	●	1
MSMHZDD1/4	.2500	.625	2.500	.2500	3	●	2
MSMHZDD9/32	.2813	.625	2.500	.3750	3	●	1
MSMHZDD5/16	.3125	.750	2.750	.3750	3	●	1
MSMHZDD11/32	.3438	.750	2.750	.3750	3	●	2
MSMHZDD3/8	.3750	.750	3.000	.3750	3	●	2
MSMHZDD13/32	.4063	.875	3.000	.5000	3	●	1
MSMHZDD7/16	.4375	.875	3.000	.5000	3	●	1
MSMHZDD15/32	.4688	1.000	3.500	.5000	3	●	2
MSMHZDD1/2	.5000	1.000	3.500	.5000	3	●	2
MSMHZDD9/16	.5625	1.000	3.500	.6250	3	●	1
MSMHZDD5/8	.6250	1.125	4.250	.6250	3	●	2
MSMHZDD3/4	.7500	1.250	5.500	.7500	3	●	1


RECOMMENDED CUTTING CONDITIONS

Shoulder milling

Work Material	Carbon steel, Cast iron, Alloy steel (-30HRC)			Alloy steel, Tool steel, Pre-hardened steel			Austenitic stainless steel, Titanium alloy		
	AISI 1050, AISI 35, AISI P20 etc.			AISI H13, AISI W1-10, AISI P21 etc.			AISI 304, AISI 306, Ti-6Al-4V etc.		
DC (inch)	Revolution	Table feed		Revolution	Table feed		Revolution	Table feed	
	(min ⁻¹)	(mm/min)	(IPM)	(min ⁻¹)	(mm/min)	(IPM)	(min ⁻¹)	(mm/min)	(IPM)
.0625	13000	550	21.7	8500	310	12.2	7100	200	7.9
.1250	8000	770	30.3	5100	380	15.0	4200	220	8.7
.1875	6300	880	34.6	3800	490	19.3	3200	250	9.8
.2500	5000	950	37.4	3000	500	19.7	2500	270	10.6
.3125	4000	1000	39.4	2400	560	22.0	2000	280	11.0
.3750	3300	1000	39.4	2000	490	19.3	1700	290	11.4
.4375	2900	970	38.2	1700	450	17.7	1400	300	11.8
.5000	2500	860	33.9	1500	420	16.5	1300	300	11.8
.5625	2200	790	31.1	1300	370	14.6	1100	280	11.0
.6250	2000	720	28.3	1200	350	13.8	1000	260	10.2
.7500	1700	610	24.0	1000	290	11.4	800	240	9.4

Depth of cut

$\leq 0.2DC$ ($DC > \phi.1094$)
 $\leq 0.1DC$ ($DC \leq \phi.1250$)



$\leq 1.5DC$


DC: Dia.

Plunging

Work Material	Carbon steel, Cast iron, Alloy steel (-30HRC)			Alloy steel, Tool steel, Pre-hardened steel			Austenitic stainless steel, Titanium alloy		
	AISI 1050, AISI 35, AISI P20 etc.			AISI H13, AISI W1-10, AISI P21 etc.			AISI 304, AISI 306, Ti-6Al-4V etc.		
DC (inch)	Revolution	Table feed		Revolution	Table feed		Revolution	Table feed	
	(min ⁻¹)	(mm/min)	(IPM)	(min ⁻¹)	(mm/min)	(IPM)	(min ⁻¹)	(mm/min)	(IPM)
.0625	11000	120	4.7	7600	80	3.1	6000	20	0.8
.1250	8000	260	10.2	5000	180	7.1	4000	50	2.0
.1875	6300	300	11.8	3800	210	8.3	2700	60	2.4
.2500	5000	310	12.2	3000	210	8.3	2000	70	2.8
.3125	4000	320	12.6	2400	220	8.7	1600	80	3.1
.3750	3300	330	13.0	2000	240	9.4	1300	70	2.8
.4375	2900	330	13.0	1700	220	8.7	1100	70	2.8
.5000	2500	310	12.2	1500	210	8.3	1000	70	2.8
.5625	2200	270	10.6	1300	180	7.1	900	60	2.4
.6250	2000	250	9.8	1200	180	7.1	800	55	2.2
.7500	1700	200	7.9	1000	140	5.5	700	55	2.2

Depth of cut

$\leq 1DC$ ($DC \geq \phi.0781$)
 $\leq 0.5DC$ ($DC < \phi.0938$)

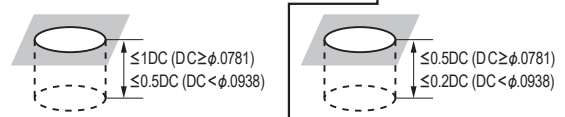

$\leq 0.5DC$ ($DC \geq \phi.0781$)
 $\leq 0.2DC$ ($DC < \phi.0938$)


DC: Dia.

Slotting

Work Material	Carbon steel, Cast iron, Alloy steel (-30HRC)			Alloy steel, Tool steel, Pre-hardened steel			Austenitic stainless steel, Titanium alloy		
	AISI 1050, AISI 35, AISI P20 etc.			AISI H13, AISI W1-10, AISI P21 etc.			AISI 304, AISI 306, Ti-6Al-4V etc.		
DC (inch)	Revolution	Table feed		Revolution	Table feed		Revolution	Table feed	
	(min ⁻¹)	(mm/min)	(IPM)	(min ⁻¹)	(mm/min)	(IPM)	(min ⁻¹)	(mm/min)	(IPM)
.0625	11000	230	9.1	7600	150	5.9	6000	60	2.4
.1250	8000	600	23.6	5000	320	12.6	4000	130	5.1
.1875	6300	660	26.0	3800	360	14.2	2700	140	5.5
.2500	5000	720	28.3	3000	390	15.4	2000	140	5.5
.3125	4000	780	30.7	2400	430	16.9	1600	140	5.5
.3750	3300	740	29.1	2000	380	15.0	1300	150	5.9
.4375	2900	730	28.7	1700	340	13.4	1100	150	5.9
.5000	2500	700	27.6	1500	330	13.0	1000	140	5.5
.5625	2200	630	24.8	1300	300	11.8	900	140	5.5
.6250	2000	600	23.6	1200	290	11.4	800	130	5.1
.7500	1700	510	20.1	1000	240	9.4	700	120	4.7

Depth of cut

$\leq 1DC$ ($DC \geq \phi.0781$)
 $\leq 0.5DC$ ($DC < \phi.0938$)

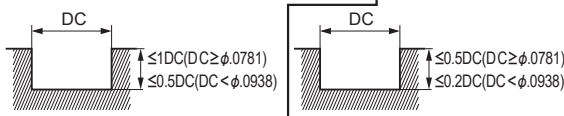

$\leq 0.5DC$ ($DC \geq \phi.0781$)
 $\leq 0.2DC$ ($DC < \phi.0938$)

DC: Dia.

Note 1) When cutting austenitic stainless steel, the use of water-soluble cutting fluid is especially effective.

Note 2) If the depth of cut is smaller than this table, feed rate can be increased.

Note 3) If the rigidity of the machine or the work material installation is very low, or chattering is generated, please reduce the revolution and the feed rate proportionately.

SQUARE

BALL

RADIUS

TAPER

BARREL

ROUGHING

-

SOLID END MILLS