

AHB

TOOLING & MACHINERY

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225

www.ahbinc.com

ISO Certified

customerservice@ahbinc.com



DIA  EDGE

VQ4MVM

HIGH-PERFORMANCE SMART MIRACLE END MILL

 MITSUBISHI MATERIALS U.S.A.

TOOL NEWS | B197A-H



ABOUT OUR BRAND

Your manufacturing success is our success.

It's simple. We want to provide high-quality cutting tool products that help deliver unparalleled performance and control for you to manufacture precisely perfect products every day.

Our long heritage of building partnerships through cutting tool solutions to metal working manufacturers, like yours, has given Mitsubishi Materials USA a solid reputation as an industry leader. We understand the importance of getting it right the first time by delivering high-quality cutting tool product brands to help overcome machining challenges to improve machining processes.

Your success is our success and is the driving force behind our innovative products. Our product brands, DIAEDGE and MOLDINO, are trusted globally in the metal manufacturing and die & mold industries for delivering expertly-designed manufactured tools of the trade for highly specialized industries like yours.

With the acquisition of MOLDINO Tool Engineering, Ltd, our traditional Mitsubishi Materials USA cutting tool product line is now sold under the DIAEDGE product brand name.

Brands you can trust:

 **MITSUBISHI MATERIALS U.S.A.**

TRUSTED PRODUCT BRANDS

DIAEDGE

 **MOLDINO**

High-Performance End Mill


SMART MIRACLE End Mill Series VQ4MVM

Multi-functional end mill capable of steep ramping when machining a wide range of materials.

Ramping is a method of sinking gradually as the tool traverses.


This eliminates the need for a pilot hole when machining pockets, thereby reducing costs through tool consolidation. Compared to direct plunge cutting, ramping enables simultaneous multi-axis feed at high speeds to lower machining times. This method is ideal for machining wide and shallow pockets.

VQ4MVM provides high-performance and multi-functionality. It can perform shoulder milling, grooving, and helical machining, as well as ramping angles of up to 30° in carbon and alloy steels.

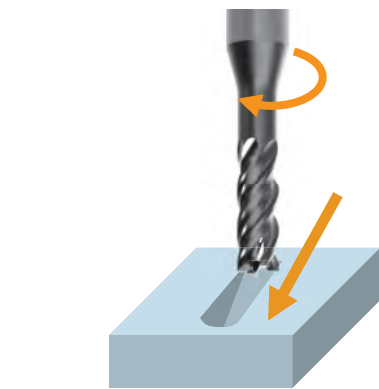


Steep Ramping Capability

27 sec




Conventional Helical Milling
7 passes needed


14 sec




VQ4MVM
Helical and Ramping
Only 1 pass needed

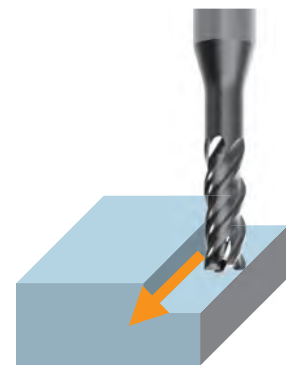

Shoulder Milling



Slot Milling

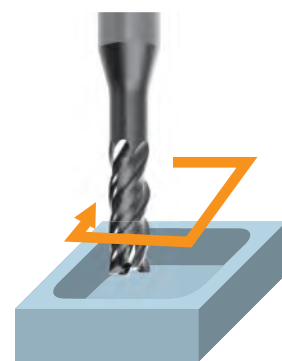

Pocket Milling



Helical Milling

SMART MIRACLE End Mill Series

Newly-developed coating with improved wear resistance.


The smoothing treatment of the coating layer reduces cutting resistance and significantly improves chip discharge.

SMART MIRACLE Coating (Al,Cr)N coating is the most suitable coating for higher efficiency machining.


ZERO-μ Surface The original surface treatment technology provides a smooth coating layer.

Secondary Gash

A first and secondary gash provides high capacity chip evacuation that far exceeds conventional designs when ramping.

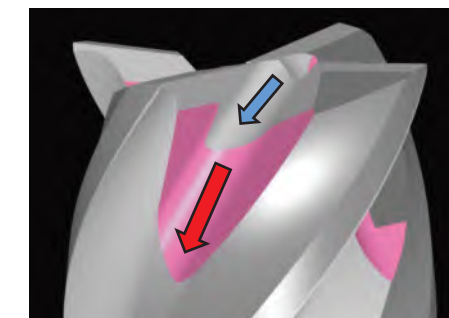

1st Gash




2nd Gash



Micro Relief Angle

This exerts a margin effect that provides a guide during machining.

Combined with irregular helix flutes, vibration damping and suppression of burrs are improved.

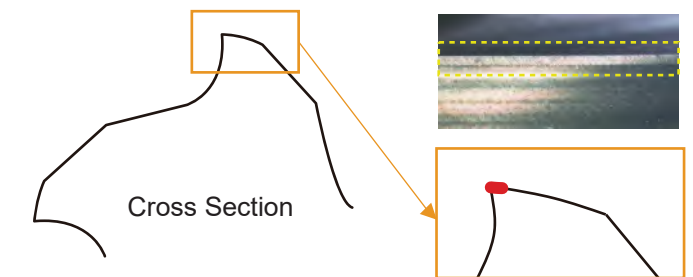


Irregular helix flutes and the micro relief angle improve vibration damping and provide excellent surface finishes.

ANSI 304 $vc=330$ SFM, $fz=.002$ IPT, $ap=.197$ inch, $ae=.118$ inch




VQ4MVM

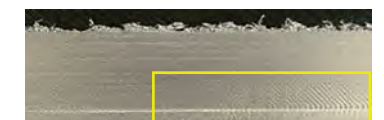

Conventional Chatter vibration



Chip Pocket and Highly Rigid Geometry

VQ4MVM is suitable for steep ramping and chip evacuation performance due to the highly rigid geometry.

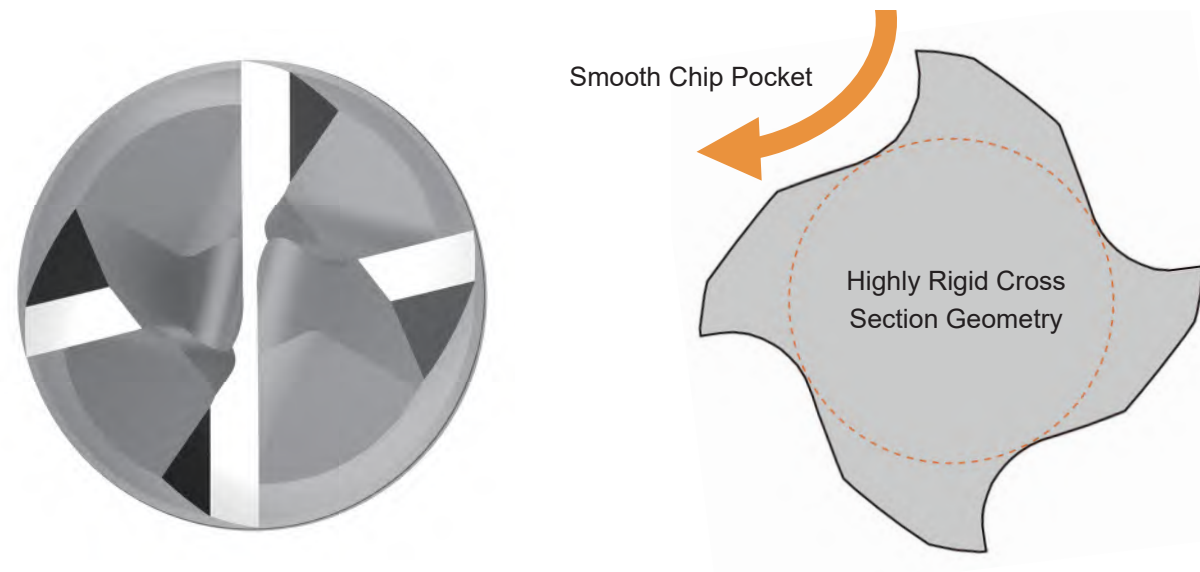

Comparison of Ramping Angles when Machining 304

Provided a good machined surface when machining with a ramping angle of 25°. The cutting conditions used in this comparison test differ from the recommended conditions. Please check the recommended conditions before commercial use.

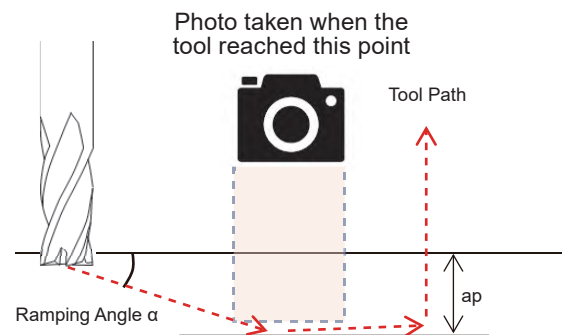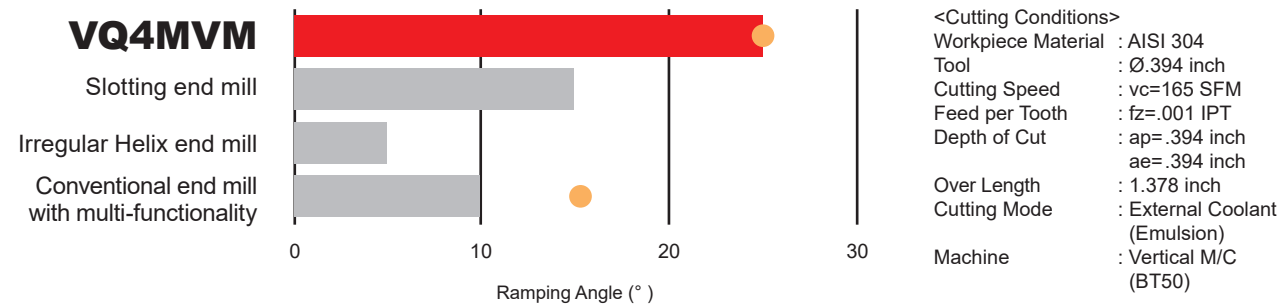

● : Machining Surface



VQ4MVM 25°




Conventional end mill 15°

Comparison of Continuous Pocketing when Machining 1055

During continuous machining of small pockets, steep ramping reliably shortens machining time.

Workpiece Material : AISI 1055 Pocket Size 1.969" x 1.181" x .394" R=8
 Tool : Ø.394 inch

Simulated by **VQ4MVM**

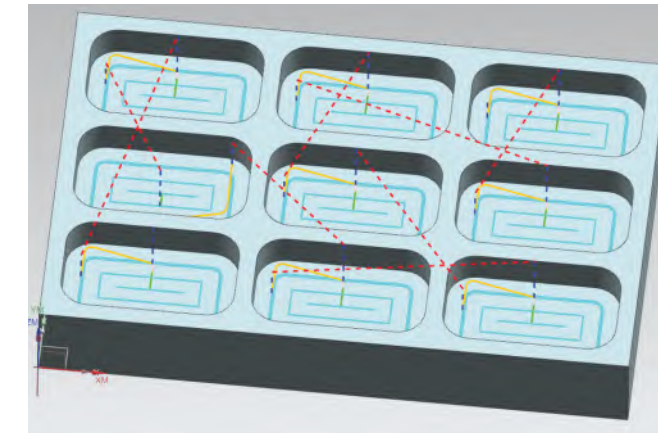

Total Cycle Time 4:35

Ramping Angle 17° At the start of machining

<Cutting Conditions>
 Cutting Speed : vc=330 SFM
 Feed per Tooth : fz=.002 IPT
 Depth of Cut : ap=.394 inch


Rough Cutting

<Cutting Conditions>
 Cutting Speed : vc=330 SFM
 Feed per Tooth : fz=.003 IPT
 Depth of Cut : ap=.394 inch
 ae≤.197 inch

Finish Cutting

<Cutting Conditions>
 Cutting Speed : vc=330 SFM
 Feed per Tooth : fz=.003 IPT
 Depth of Cut : ap=.394 inch
 ae≤.197 inch

Simulated Conventional Machining

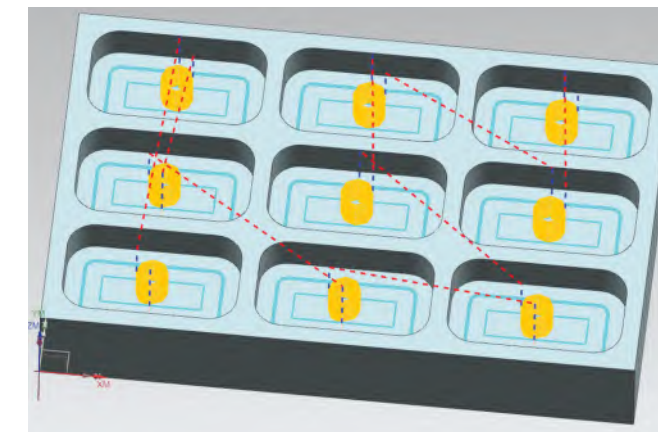

Total Cycle Time 6:42

Helical Angle 2° At the start of machining

<Cutting Conditions>
 Cutting Speed : vc=330 SFM
 Feed per Tooth : fz=.003 IPT
 Depth of Cut : ap=.394 inch

Same cutting conditions for roughing and finishing

Rough Cutting

<Cutting Conditions>
 Cutting Speed : vc=330 SFM
 Feed per Tooth : fz=.003 IPT
 Depth of Cut : ap=.394 inch
 ae≤.197 inch

Finish Cutting

<Cutting Conditions>
 Cutting Speed : vc=330 SFM
 Feed per Tooth : fz=.003 IPT
 Depth of Cut : ap=.394 inch
 ae≤.197 inch



High-Performance End Mill SMART MIRACLE End Mill Series

VQ4MVM

End mill, Medium cut length, 4 flute, For multi-functional machining



Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
○	○			○	○		

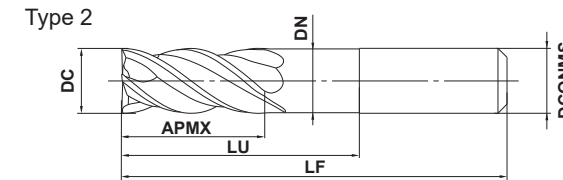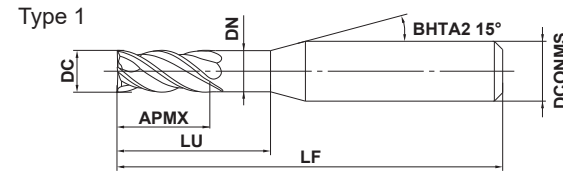

DC ≤ 12					
0 - 0.020					
DCONMS=6					
0 - 0.008					
DCONMS8, 10	DCONMS=12				
0 - 0.009	0 - 0.011				

- Multi-functional end mill that enables steep ramping angles.
- Chip evacuation is improved by widening the radial cutting edge pocket.

Order Number	Dimensions (mm)						No. of Flutes	Stock	Type
	DC	APMX	LU	DN	LF	DCONMS			
VQ4MVMD0400N180	4	11	18	3.85	50	6	4	●	1
VQ4MVMD0500N180	5	13	18	4.85	50	6	4	●	1
VQ4MVMD0600N200	6	13	20	5.85	60	6	4	●	2
VQ4MVMD0800N240	8	19	24	7.85	60	8	4	●	2
VQ4MVMD1000N300	10	22	30	9.70	70	10	4	●	2
VQ4MVMD1200N360	12	26	36	11.70	75	12	4	●	2

Note 1) SMART MIRACLE Coating has very low electrical conductivity. Therefore, an external contact type of tool setter (electric transmitted) may not work. When measuring the tool length, please use an internal contact type (non-electrical type) or a laser tool setter.

DC = Cutting dia. DN = Neck dia.
 APMX = Depth of cut max. LF = Functional length
 LU = Usable length DCONMS = Connection dia.

Recommended Cutting Conditions

Side Milling

Workpiece Material	Mild Steel, Carbon Steel Alloy Steel (180-280HB)				Pre-Hardened Steel (≤45HRC) Alloy Tool Steel				Austenitic Stainless Steel Ferritic and Martensitic Stainless Steel, Titanium Alloys			
	AISI 1045, AISI 4140				NAK, PX5, SKD, SKT				AISI 304, AISI 316, AISI 410, AISI 430, Ti-5Al-5V-Mo-3Cr			
Dia. DC (mm) (inch)	Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)	Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)	Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)
4 .157	9500	55.1	.236	.047	5600	19.3	.157	.016	6400	18.5	.157	.024
5 .197	7600	55.1	.295	.059	4500	19.7	.197	.020	5100	18.5	.197	.035
6 .236	6400	55.1	.354	.071	3700	19.7	.236	.024	4200	22.8	.236	.047
8 .315	4800	51.2	.472	.094	2800	20.5	.315	.031	3200	24.8	.315	.059
10 .394	3800	47.2	.591	.118	2200	18.1	.394	.039	2500	26.0	.394	.071
12 .472	3200	39.4	.709	.142	1900	17.7	.472	.039	2100	24.0	.472	.094



Workpiece Material	Precipitation Hardening Stainless Steel Cobalt Chromium Alloys				Heat Resistant Alloys			
	AISI 630, AISI 631				Inconel718			
Dia. DC (mm) (inch)	Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)	Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)
4 .157	5600	19.3	.157	.031	2400	4.7	.157	.016
5 .197	4500	19.7	.197	.039	1900	4.7	.197	.020
6 .236	3700	19.7	.236	.047	1600	5.1	.236	.024
8 .315	2800	20.5	.315	.063	1200	5.1	.315	.031
10 .394	2200	18.1	.394	.079	950	5.5	.394	.039
12 .472	1900	17.7	.472	.094	800	5.5	.472	.047



Note 1) SMART MIRACLE coating has very low electrical conductivity. Therefore, an external contact type of tool setter (electric transmitted) may not work. When measuring the tool length, please use an internal contact type (non-electrical type) or a laser tool setter.

Note 2) When cutting austenitic stainless steels and titanium alloys, the use of water-soluble cutting fluid is effective.

Note 3) If the depth of cut is shallow, the revolution and feed rate can be increased.

Note 4) If the rigidity of the machine or the work materials installation is very low, or chattering and noise are generated, reduce the revolution and feed rate proportionately.

● : USA Stock

Recommended Cutting Conditions

Slot Milling and Ramping

Dia. DC (mm) (inch)		Mild Steel, Carbon Steel Alloy Steel (180-280HB) AISI 1045, AISI 4140				Pre-Hardened Steel (≤45HRC) Alloy Tool Steel NAK, PX5, SKD, SKT				Austenitic Stainless Steel Ferritic and Martensitic Stainless Steel, Titanium Alloys AISI 304, AISI 316, AISI 410, AISI 430, Ti-5Al-5V-Mo-3Cr			
		Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)	Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)	Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)
4	.157	8000	33.1	.157	.157	4800	8.3	.079	.157	4800	11.0	.157	.157
5	.197	6400	33.1	.197	.197	3800	8.3	.098	.197	3800	11.0	.197	.197
6	.236	5300	33.1	.236	.236	3200	9.1	.118	.236	3200	11.8	.236	.236
8	.315	4000	29.1	.315	.315	2400	9.4	.157	.315	2400	12.6	.315	.315
10	.394	3200	26.8	.394	.394	1900	10.6	.197	.394	1900	13.8	.394	.394
12	.472	2700	22.4	.472	.472	1600	10.2	.236	.472	1600	13.4	.472	.472

Dia. DC (mm) (inch)		Precipitation Hardening Stainless Steel Cobalt Chromium Alloys AISI 630, AISI 631				Heat Resistant Alloys Inconel718			
		Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)	Revolution (min ⁻¹)	Feed rate (IPM)	Depth of cut ap (inch)	Depth of cut ae (inch)
4	.157	4000	9.8	.079	.157	2000	3.7	.047	.157
5	.197	3200	9.8	.098	.197	1600	3.7	.059	.197
6	.236	2700	11.4	.118	.236	1300	3.8	.071	.236
8	.315	2000	10.2	.157	.315	990	3.9	.094	.315
10	.394	1600	9.1	.197	.394	800	4.7	.118	.394
12	.472	1300	8.3	.236	.472	660	4.3	.142	.472

- Note 1) SMART MIRACLE coating has very low electrical conductivity. Therefore, an external contact type of tool setter (electric transmitted) may not work. When measuring the tool length, please use an internal contact type (non-electrical type) or a laser tool setter.
- Note 2) When cutting austenitic stainless steels and titanium alloys, the use of water-soluble cutting fluid is effective.
- Note 3) When performing machining with a strong ramping angle, a high gripping force holder is recommended.
- Note 4) When performing ramping deeper than the recommended depth of cut, please divide the process into multiple steps within the recommended depth of cut.
- Note 5) If the rigidity of the machine or the work materials installation is very low, or chattering and noise are generated, reduce the revolution and feed rate proportionately.

Feed Rate Factor for Ramping

Dia. DC (mm) (inch)		Mild Steel, Carbon Steel Alloy Steel (180-280HB)						Pre-Hardened Steel (≤45HRC) Alloy Tool Steel			Austenitic Stainless Steel Ferritic and Martensitic Stainless Steel Titanium Alloys				
		Slot Milling Feed %						Slot Milling Feed %			Slot Milling Feed %				
		1°	5°	10°	15°	20°	25°	30°	1°	5°	10°	1°	5°	10°	15°
4	.157	100	90	80	80	60	60	60	80	70	60	90	80	70	50
5	.197	100	90	80	80	60	60	60	80	70	60	90	80	70	50
6	.236	100	90	80	80	60	60	60	80	70	60	90	80	70	60
8	.315	100	95	90	90	90	75	75	70	60	50	90	80	70	60
10	.394	100	95	95	95	90	80	80	70	60	50	80	70	60	50
12	.472	100	95	95	95	90	80	80	70	60	50	80	70	60	50

Dia. DC (mm) (inch)		Precipitation Hardening Stainless Steel Cobalt Chromium Alloys					Heat Resistant Alloys	
		Slot Milling Feed %					Slot Milling Feed %	
		1°	5°	10°	15°	20°	1°	5°
4	.157	90	80	70	60	60	90	80
5	.197	90	80	70	60	60	90	80
6	.236	90	80	70	60	60	90	80
8	.315	90	80	70	60	60	90	80
10	.394	80	80	70	60	60	80	70
12	.472	80	80	70	60	60	80	70

- Note 1) SMART MIRACLE coating has very low electrical conductivity. Therefore, an external contact type of tool setter (electric transmitted) may not work. When measuring the tool length, please use an internal contact type (non-electrical type) or a laser tool setter.
- Note 2) When performing ramping, please use the feed rate shown on the previous page multiplied by the coefficient.
- Note 3) When cutting austenitic stainless steels and titanium alloys, the use of water-soluble cutting fluid is effective.
- Note 4) When performing machining with large ramping angles, a high-grip holder is recommended. Also, if the machine or workpiece material lacks rigidity, or if chipping occurs on the cutting edge, adjust the ramping angle and feed rate.
- Note 5) When performing ramping deeper than the recommended depth of cut, please divide the process into multiple steps within the recommended depth of cut.



MITSUBISHI MATERIALS U.S.A. CORPORATION

California Office (Headquarters)

3535 Hyland Avenue, Suite 200
Costa Mesa, CA 92626
Customer Service: 800.523.0800
Technical Service: 800.486.2341

North Carolina-MTEC (Marketing & Technical Center)

105 Corporate Center Drive, Suite A
 Mooresville, NC 28117
Main: 980.312.3100
Fax: 704.746.9292

Chicago Office (Engineering)

300 N. Martingale Road, Suite 500
Schaumburg, IL 60173
Main: 847.252.6300
Fax: 847.519.1732

Toronto Office (Canada Branch)

600 Matheson Blvd. Unit 5 (Office)
Mississauga, ON L5R 4C1
Main: 905.814.0240
Fax: 905.814.0245

MMC Metal de Mexico, S.A. DE C.V.

Av. La Cañada No. 16,
Parque Industrial Bernardo
Quintana, El Marques,
Queretaro C.P. 76246 MEXICO
Main: +52.442.221.61.36
Fax: +52.442.221.61.34

Detroit Office (Moldino CS)

41700 Gardenbrook Road, Suite 120
Novi, MI 48375
Main: 248.308.2620
Fax: 248.308.2627

For Your Safety

- Don't handle inserts and chips without gloves.
- Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage.
- Please use safety covers and wear safety glasses.
- When using compounded cutting oils, please take fire precautions.
- When attaching inserts or spare parts, please use only the correct wrench or driver.
- When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.



Product Brands Crafted by Mitsubishi Materials U.S.A.



www.diaedgetools.com
www.mmc-carbide.com/us

Tools specifications subject to change without notice.

B197A-H-US-2024.4



**COMPLETE
METALWORKING
SOLUTIONS**

(800) 991-4225

www.ahbinc.com

ISO Certified

customerservice@ahbinc.com