

 MITSUBISHI MATERIALS

**AHB**  
TOOLING & MACHINERY

COMPLETE  
METALWORKING  
SOLUTIONS

(800) 991-4225

[www.ahbinc.com](http://www.ahbinc.com)

ISO Certified

[customerservice@ahbinc.com](mailto:customerservice@ahbinc.com)

# VQT5MVRB

CORNER RADIUS END MILL FOR  
HIGH EFFICIENCY TITANIUM  
ALLOY MACHINING



**TOOL NEWS B230A**

# VQT5MVRB


Combining 5 flutes and a through coolant hole enables high efficiency rough machining of titanium alloys.

## Corner Radius (Emphasis on Sharpness)

A unique rake angle improves cutting resistance and chip discharge. The seamless blend between the corner radius and peripheral cutting edge suppresses abnormal wear and provides a stable tool life.

## 5 Flutes

Having the same chip evacuation properties of a 4 flute type enables deep slot milling. The additional flute and deep cutting capability reduces the number of passes.

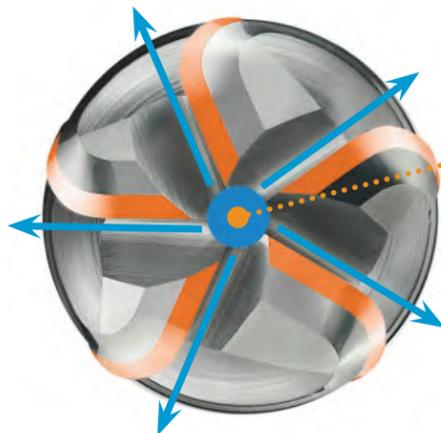

## Coolant Hole

The center coolant provides a stable supply of cutting fluid and dramatically improves chip evacuation. This also cools the cutting edge and prevents chip biting.



## Irregular Helix

Chatter and vibration are controlled even during deep shoulder machining and also provides excellent component surface finishes.

## Application Example

**Material removal rate : 250cc/min achieved!**

Large depths of cut when slotting (DC x 2) in titanium alloy dramatically shortens rough machining times.

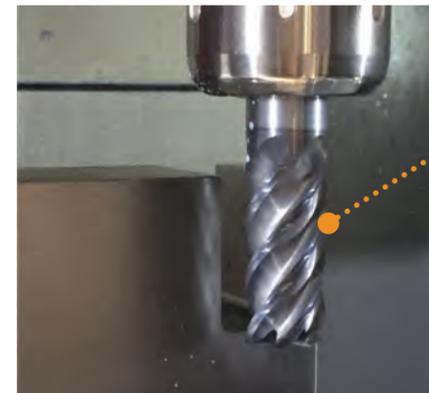

Machined Surface

<Cutting Conditions>  
Workpiece Material : Ti-6Al-4V  
Tool : VQT5MVRB250R400N075C  
Revolution : n=636 min<sup>-1</sup>  
Feed Rate : vf=8.110 IPM  
Depth of Cut : ap=1.969 inch (DCx2)  
Width of Cut : ae=.984 inch (Slot)  
Overhang Length : 2.953 inch (DCx3)  
Cutting Mode : Slot Milling  
Internal Coolant +  
External Coolant (Emulsion)  
Machine : Vertical MC (BT50)


# Corner Radius End Mill for High Efficiency Titanium Alloy Machining

## VQT5MVRB NEW

Corner radius, Medium cut length, 5 flute, Irregular helix flutes, With coolant hole



Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (<=45HRC)	Hardened Steel (<=55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
---	--	--------------------------	-------------------------	----------------------------	----------------------	--------------	----------------

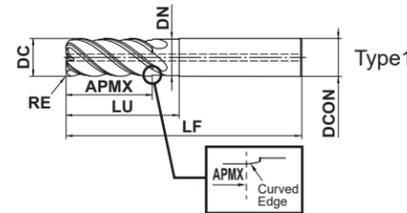

RE				
±0.02				
DC ≤ 16	20 ≤ DC ≤ 25			
0 - 0.03	0 - 0.04			
DCON = 16	20 ≤ DCON ≤ 25			
0 - 0.011	0 - 0.013			

- Flute geometry suitable for deep slotting and effective chip evacuation.
- Sharp cutting edges provide long tool life when machining titanium alloys.

Order Number	DC	RE	APMX	LU	DN	LF	DCON	No.F	Stock	Type
VQT5MVRB160R100N48C	16	1	34	48	15.5	120	16	5	●	1
VQT5MVRB160R300N48C	16	3	34	48	15.5	120	16	5	●	1
VQT5MVRB160R400N48C	16	4	34	48	15.5	120	16	5	●	1
VQT5MVRB200R100N60C	20	1	44	60	19.5	135	20	5	●	1
VQT5MVRB200R300N60C	20	3	44	60	19.5	135	20	5	●	1
VQT5MVRB200R400N60C	20	4	44	60	19.5	135	20	5	●	1
VQT5MVRB200R600N60C	20	6	44	60	19.5	135	20	5	●	1
VQT5MVRB250R100N75C	25	1	54	75	24.5	155	25	5	●	1
VQT5MVRB250R300N75C	25	3	54	75	24.5	155	25	5	●	1
VQT5MVRB250R400N75C	25	4	54	75	24.5	155	25	5	●	1
VQT5MVRB250R600N75C	25	6	54	75	24.5	155	25	5	●	1

Note 1) SMART MIRACLE coating has very low electrical conductivity; therefore, an external contact type of tool setter (electric transmitted) may not work.

\* When measuring the tool length, please use an internal contact type (non-electricity type) or a laser tool setter.  
\* Number of Flutes

DC = Dia.                      DN = Neck Dia.  
RE = Corner Radius        LF = Overall Length  
APMX = Length of Cut      DCON = Shank Dia.  
LU = Neck Length

● : Inventory maintained.

## Recommended Cutting Conditions

### Shoulder Milling

Overhang Length DC×1 (DC=Dia.) (inch)

Workpiece Material	DC		RE		Cutting Speed vc (SFM)	Revolution n (min-1)	Feed Rate vf (IPM)	Depth of Cut ap	Width of Cut ae
	(mm)	(inch)	(mm)	(inch)					
Titanium Alloys Ti-6Al-4V etc.	16	.630	1	.039	260	1600	31.5	1.260	.097
			3	.118	260	1600	31.5	1.260	.094
			4	.157	260	1600	31.5	1.260	.094
	20	.787	1	.039	260	1300	25.6	1.575	.118
			3	.118	260	1300	25.6	1.575	.118
			4	.157	260	1300	25.6	1.575	.118
	25	.984	1	.039	260	1000	19.7	1.969	.150
			3	.118	260	1000	19.7	1.969	.150
			4	.157	260	1000	19.7	1.969	.150
	25	.984	3	.118	260	1000	19.7	1.969	.150
			4	.157	260	1000	19.7	1.969	.150
			6	.236	260	1000	19.7	1.969	.150



### Slot Milling


Depth of Cut DC×1 (inch)

Workpiece Material	DC		RE		Cutting Speed vc (SFM)	Revolution n (min-1)	Feed Rate vf (IPM)	Depth of Cut ap
	(mm)	(inch)	(mm)	(inch)				
Titanium Alloys Ti-6Al-4V etc.	16	.630	1	.039	195	1200	16.5	.630
			3	.118	195	1200	16.5	.630
			4	.157	195	1200	11.8	.630
	20	.787	1	.039	195	950	13.0	.787
			3	.118	195	950	13.0	.787
			4	.157	195	950	13.0	.787
	25	.984	1	.039	165	640	8.7	.984
			3	.118	165	640	8.7	.984
			4	.157	165	640	8.7	.984
	25	.984	3	.118	165	640	8.7	.984
			4	.157	165	640	8.7	.984
			6	.236	165	640	6.3	.984



Depth of Cut DC×2 (inch)

Workpiece Material	DC		RE		Cutting Speed vc (SFM)	Revolution n (min-1)	Feed Rate vf (IPM)	Depth of Cut ap
	(mm)	(inch)	(mm)	(inch)				
Titanium Alloys Ti-6Al-4V etc.	16	.630	1	.039	195	1200	9.4	1.260
			3	.118	195	1200	9.4	1.260
			4	.157	195	1200	7.1	1.260
	20	.787	1	.039	195	950	7.5	1.575
			3	.118	195	950	7.5	1.575
			4	.157	195	950	7.5	1.575
	25	.984	1	.039	165	640	5.1	1.969
			3	.118	165	640	5.1	1.969
			4	.157	165	640	5.1	1.969
	25	.984	3	.118	165	640	5.1	1.969
			4	.157	165	640	5.1	1.969
			6	.236	165	640	3.8	1.969



(Note 1) SMART MIRACLE coating has very low electrical conductivity; therefore, an external contact type of tool setter (electric transmitted) may not work.

When measuring the tool length, please use an internal contact type (non-electricity type) or a laser tool setter.

(Note 2) When cutting titanium alloys, the use of water-soluble cutting fluid is effective.  
(Note 3) The irregular helix flute end mill has a larger effect on controlling vibration when compared to standard end mills. However, if the rigidity of the machine or the work material installation is poor, vibration or abnormal sound can occur. In this case, please reduce the revolution and the feed rate proportionately, or set a lower depth of cut.

(Note 4) If the depth of cut is smaller, the revolution and the feed rate can be increased.

(Note 5) When machining deep slots where the depth of cut exceeds the diameter DC, use a high strength holder or one equipped with a retaining mechanism.

Additionally ensure the clamping and workpiece material rigidity are sufficient. Refer to page 9 for Holder recommendation.

(Note 6) When machining a deep slot exceeding 1D, use a holder with a high gripping strength or an anti slippage mechanism. Also, make sure that the clamping force and rigidity are sufficient before use.

# Cutting Performance

## Slot Milling with Deep Depths of Cut in Titanium Alloy

The seamless corner radii achieves stable tool life.

Conventional



Fractures ( After 6 slots )



## VQT5MVRB




After 17 slots

<Cutting Conditions>  
 Workpiece Material : Ti-6Al-4V  
 Tool : VQT5MVRB160R300N048C  
 Revolution :  $n=1200 \text{ min}^{-1}$   
 Feed Rate :  $vf=26.0 \text{ IPM}$   
 Depth of Cut :  $ap=.630 \text{ inch}$   
 Width of Cut :  $ae=.630 \text{ inch (slot)}$   
 Cutting Length :  $2.362 \text{ inch (1 slot)}$   
 Overhang Length :  $1.890 \text{ inch (DC}\times\text{3)}$   
 Cutting Mode : Slot Milling  
 Internal Coolant + External Coolant (Emulsion)  
 Machine : Vertical MC (BT50)


Machine

Triple Tool Life



## Comparison of Maximum Cutting Feed for Titanium Alloy Slot Milling

When compared with conventional products, high efficiency milling can be achieved.

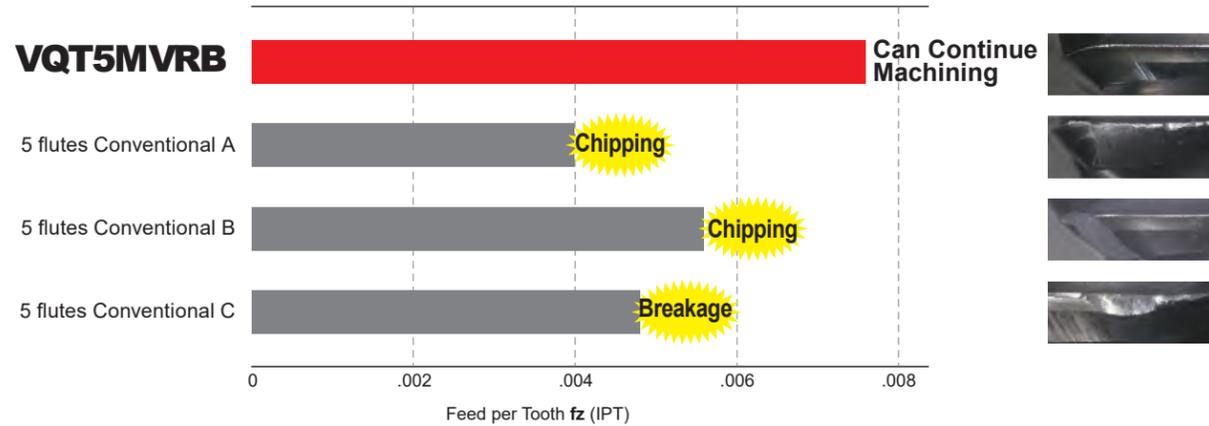


<Cutting Conditions>  
 Workpiece Material : Ti-6Al-4V  
 Tool : VQT5MVRB160R300N048C  
 Revolution :  $n=1200 \text{ min}^{-1}$   
 Depth of Cut :  $ap=.630 \text{ inch}$   
 Width of Cut :  $ae=.630 \text{ inch (Slot)}$   
 Cutting Length :  $2.362 \text{ inch (1 slot)}$   
 Overhang Length :  $1.890 \text{ inch (DC}\times\text{3)}$   
 Cutting Mode : Slot Milling  
 Internal Coolant + External Coolant (Emulsion)  
 Machine : Vertical MC (BT50)

# Key Point for High Efficiency Machining of Titanium Alloys

For high efficiency machining, it is recommended to use a precision, high strength holder to prevent pull out of the tool. Some high strength holders require modification of the cutting tool shank.




Never Pull Down  
 Great Reliability in the  
 Aircraft Industry

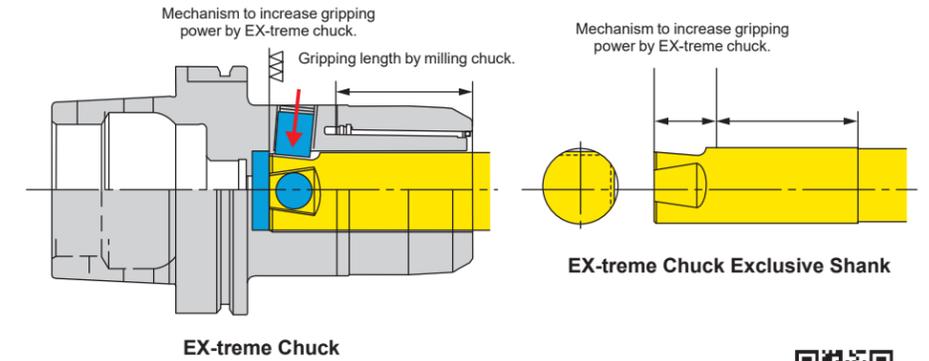

<https://www.nikken-kosakusho.co.jp/en/>




MST corporation  
 Superior Rigidity and  
 Thick Body Design

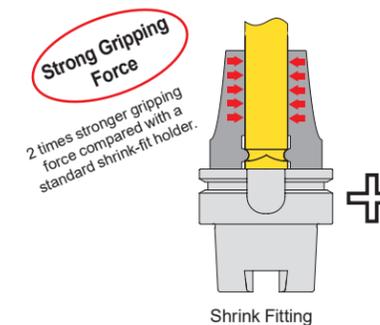

Shrink-fit Holder with Anti Slippage Capability

SLIMLINE Z

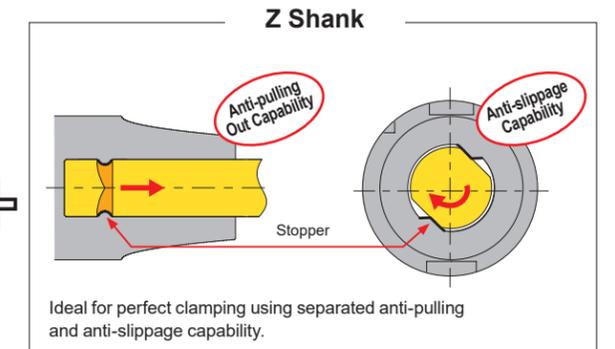

<http://www.mst-corp.co.jp/en/slimline/z/>





**MITSUBISHI MATERIALS U.S.A. CORPORATION**

**California Office  
(Headquarters)**

3535 Hyland Avenue, Suite 200  
Costa Mesa, CA 92626  
Customer Service: 800.523.0800  
Technical Service: 800.486.2341

**Chicago Office  
(Engineering)**

300 N. Martingale Road, Suite 500  
Schaumburg, IL 60173  
Main: 847.252.6300  
Fax: 847.519.1732

**MMC Metal de Mexico, S.A. DE C.V.**

Av. La Cañada No.16,  
Parque Industrial Bernardo  
Quintana, El Marques,  
Queretaro C.P. 76246 MEXICO  
Main: +52.442.221.61.36  
Fax: +52.442.221.61.34

**North Carolina-MTEC  
(Marketing & Technical Center)**

105 Corporate Center Drive, Suite A  
Mooresville, NC 28117  
Main: 980.312.3100  
Fax: 704.746.9292

**Toronto Office  
(Canada Branch)**

600 Matheson Blvd. Unit 5 (Office)  
Mississauga, ON L5R 4C1  
Main: 905.814.0240  
Fax: 905.814.0245

**Detroit Office  
(Moldino CS)**

41700 Gardenbrook Road, Suite 120  
Novi, MI 48375  
Main: 248.308.2620  
Fax: 248.308.2627

**FOR YOUR SAFETY**

- Don't handle inserts and chips without gloves.
- Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage.
- Please use safety covers and wear safety glasses.
- When using compounded cutting oils, please take fire precautions.
- When attaching inserts or spare parts, please use only the correct wrench or driver.
- When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

[www.mmc-carbide.com/us](http://www.mmc-carbide.com/us)

Tools specifications subject to change without notice.

B230A-US-2022.4



**COMPLETE  
METALWORKING  
SOLUTIONS**

**(800) 991-4225**

[www.ahbinc.com](http://www.ahbinc.com)

ISO Certified

[customerservice@ahbinc.com](mailto:customerservice@ahbinc.com)