UNION TOOL

Tungsten Carbide End Mills
UNIMAX Series · V Series
Vol.22

AHB
TOOLING & MACHINERY
COMPLETE METALWORKING SOLUTIONS
(800) 991-4225
ISO Certified
www.ahbinc.com
customerservice@ahbinc.com




UNION TOOL CO.

Simplified Table
1 Flute
2 Flutes
3 Flutes
4 Flutes
5 Flutes
6 Flutes
10 Flutes
φ3mm Shank V Series
UDC·PCD Series
CBN Series
Square
Square
Long Neck Square
Radius
Radius
Long Neck Radius
Taper Neck Radius
Ball
Ball
Long Neck Ball
Taper Neck Ball
Taper
Barrel
Spiral V Cutter
Drill
Technical Data

UNIMAX End Mills Tool Finder

- Our catalogue PDF data and DXF files can be downloaded.
- Products that meet your needs can be searched by tool types, sizes, series names and work materials.

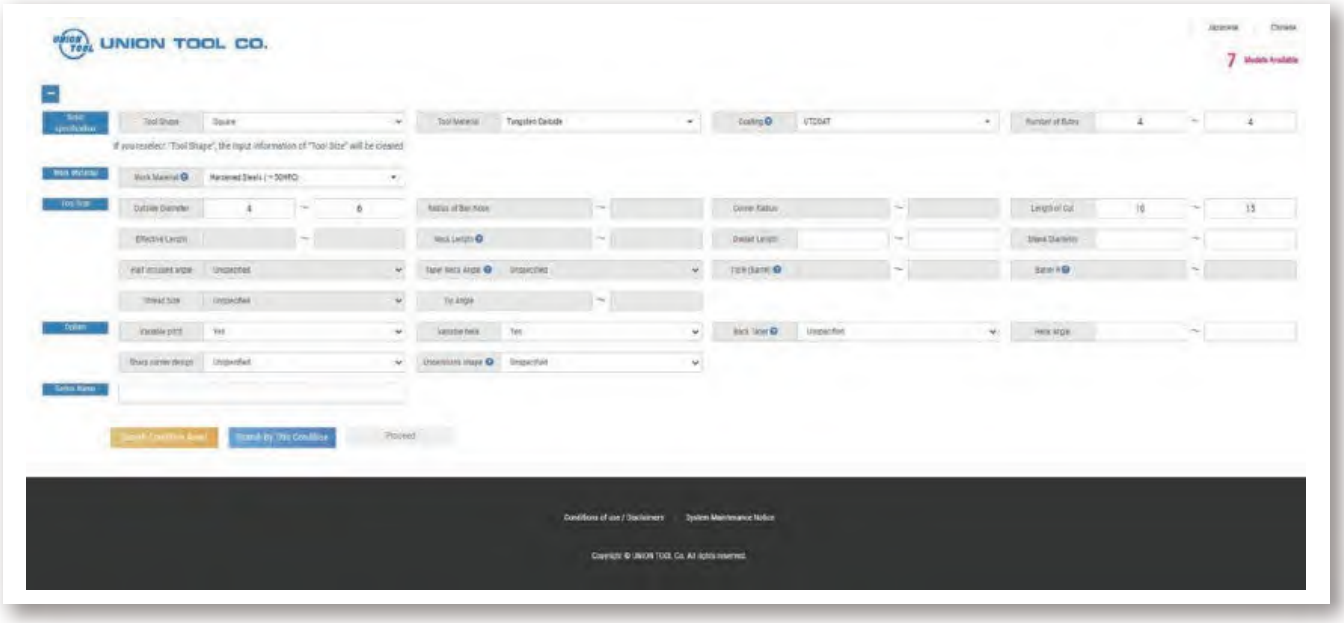

▼ View from here ▼

For smart devices

For computers

UNIMAX end mill tool finder

Search

●Simplified Table

●1 Flute

●2 Flutes

●3 Flutes

●4 Flutes

●5 Flutes

●6 Flutes


●10 Flutes


●φ3mm Shank V Series／α-1～α-53

●For Cemented Carbide UDC·PCD／β-1～β-67


●CBN Series／γ-1～γ-38


●Square／A-1～A-106 


●Long Neck Square／B-1～B-64 

●Radius／C-1～C-22 

●Long Neck Radius／D-1～D-114 

●Taper Neck Radius／E-1～E-10 

●Ball / Long Shank Ball／F-1～F-48 

●Long Neck Ball／G-1～G-96 

●Taper Neck Ball／H-1～H-28 

●Taper／I-1～I-8 

●Barrel／J-1～J-6 

●Spiral V Cutter／K-1～K-2 

●Drill／L-1～L-22 

●Technical Data／Z-1～Z-7

Index

Alphabetical Order

Model Number	Page	Characteristic
A		
AZS	B-41	3 Flute Long Neck Square
C		
CAS	A-41	2 Flute Square
CBN-LBF 2000	γ-9	2 Flute CBN Long Neck Ball
CBN-LBF 4000	γ-15	4 Flute CBN Long Neck Ball
CBN-LBSF	γ-5	2 Flute CBN Long Neck Ball
CBN-LRF 2000	γ-23	2 Flute CBN Long Neck Radius
CBN-LRF 4000	γ-33	4 Flute CBN Long Neck Radius
CBN-PLB	γ-3	2 Flute CBN Long Neck Ball
CBN-RSF	γ-19	1 Flute CBN Long Neck Radius
C-CER	B-15	2 Flute Long Neck Square for Deep Rib Milling
C-CES 2000	A-15	2 Flute Square
C-CES 2000S	A-29	2 Flute Square (Sharp Corner)
C-CES 4000	A-47	4 Flute Square
C-CES 4000S	A-53	4 Flute Square (Sharp Corner)
C-CRS	C-1	2 Flute Radius
C-CTE 2000	I-1	2 Flute Taper
C-CTE 4000	I-5	4 Flute Taper
CEHS	A-55	4 Flute Square
CESUS	A-89	4 Flute Square
CFB	F-33	3 Flute Ball
CFLB	G-91	3 Flute Long Neck Ball
CLRS	D-21	2 Flute Long Neck Radius
CNRS	C-5	4 Flute Radius
COVB	J-1	4 Flute Oval Barrel Form
CPR	B-33	2 Flute Long Neck Square
CPRB	G-87	2 Flute Long Neck Ball
CPRL	B-37	2 Flute Long Neck Square (Long Shank)
CPS	A-39	2 Flute Square
CRRS	D-93	4 Flute Long Neck Radius
CSEB	F-25	2 Flute Ball (R0.05/0.2 Length of Cut: Single Flute)
CSELB	G-57	2 Flute Long Neck Ball for Deep Rib Milling
CSS	A-1	2 Flute Square

Model Number	Page	Characteristic
C		
CSTB	J-3	4 Flute Standard Taper Barrel Form
C-UMD	L-9	2 Flute UNIMAX Drill
CWB	F-17	2 Flute Ball
CWLB	G-45	2 Flute Long Neck Ball
CWTB	J-5	4 Flute Wide Taper Barrel Form
CXERS	C-9	4 Flute Radius
CXES	A-77	4 Flute Square
CXLRS	D-103	5 Flute Long Neck Radius
CXRS	C-15	5 Flute Radius
CXS	B-57	4 Flute Long Neck Square
CZS	A-63	4 Flute Square
D		
DCB	F-31	2 Flute Ball
DCES 2000	A-35	2 Flute Square
DCES 4000	A-93	4 Flute Square
DCLB	G-73	2 Flute Long Neck Ball
DCLRS	D-99	4 Flute Long Neck Radius
DCLS	B-25	2 Flute Long Neck Square
DCTNB	H-21	2 Flute Taper Neck Ball
DLC-ALES	A-43	3 Flute Square
DLC-AZS	B-45	3 Flute Long Neck Square
DLC-CFB	F-39	3 Flute Ball
DLCES 2000	A-37	2 Flute Square
DLCES 4000	A-95	4 Flute Square
DLCLB	G-77	2 Flute Long Neck Ball
DLCLRS	D-35	2 Flute Long Neck Radius
DLCLS	B-29	2 Flute Long Neck Square
H		
HBL	F-15	2 Flute Ball (Long Shank)
HFB	F-43	4 Flute Ball
HFB-S	F-44	4 Flute Ball (Short Shank)
HFTNB	H-23	3 Flute Taper Neck Ball
HGB	F-1	2 Flute Ball

Index

Alphabetical Order

Model Number	Page	Characteristic
H		
HGLB	G-1	2 Flute Long Neck Ball
HGLRS	D-41	4 Flute Long Neck Radius
HGRRS	D-111	5 Flute / 6 Flute Long Neck Radius
HGS	A-97	6 Flute Square
HHRS	D-107	4 Flute / 6 Flute Long Neck Radius
HLRS 2000	D-1	2 Flute Long Neck Radius
HLRS 2000E	D-1	2 Flute Long Neck Radius (High Radius Accuracy)
HLRS 4000	D-61	4 Flute Long Neck Radius
HLS 2000	B-1	2 Flute Long Neck Square
HLS 4000	B-51	4 Flute Long Neck Square
HMERS	C-19	4 Flute / 6 Flute Radius
HMS	A-103	3-6 Flute Square
HRRS	D-85	4 Flute Long Neck Radius
HRRS-S	D-91	4 Flute Long Neck Radius (Short Shank)
HSB	F-9	2 Flute Ball (R0.05: Single Flute)
HSB-S	F-13	2 Flute Ball (Short Shank)
HSLB	G-37	2 Flute Long Neck Ball
HTNB	H-1	2 Flute Taper Neck Ball
HTNRS	E-1	4 Flute Taper Neck Radius
HWB	F-3	2 Flute Ball
HWB-S	F-3	2 Flute Ball (Short Shank)
HWLB	G-13	2 Flute Long Neck Ball
HWLB-S	G-13	2 Flute Long Neck Ball (Short Shank)
P		
PMD STD	L-19	P Series Non-coat Gun Barrel Drill
PMD PLT	L-20	P Series Non-coat Gun Barrel Drill for Pilot Hole Drilling
PSM	L-20	P Series Non-coat Gun Barrel Drill
S		
SV	K-1	2 Flute Spiral Chamfering Cutter
U		
UDCB	β-25	2 Flute Ball
UDCBF	β-21	2 Flute Ball
UDCBH	β-19	2 Flute Ball
UDCLB	β-37	2 Flute Long Neck Ball

Model Number	Page	Characteristic
U		
UDCLBF	β-31	2 Flute Long Neck Ball
UDCLBH	β-27	2 Flute Long Neck Ball
UDCLRS	β-53	2 Flute Long Neck Radius
UDCLRSF	β-47	2 Flute Long Neck Radius
UDCLRSH	β-43	2 Flute Long Neck Radius
UDCMX	β-63	2 Flute Drill
UDCRRS	β-57	6 Flute / 10 Flute Long Neck Radius
UDCSB	β-23	2 Flute Ball
UDCSLB	β-35	2 Flute Long Neck Ball
UDCT	β-65	2 Flute Thread Mill
UPDLB	β-41	1 Flute Long Neck Ball
UPDLRS	β-61	1 Flute Long Neck Radius
UTDF	L-1	2 Flute UNIMAX Flat Drill
UTDLX	L-15	2 Flute UNIMAX Drill (Long Flute)
UTDSX	L-7	2 Flute UNIMAX Drill (Short Flute)
V		
VCBN-LBF	α-5	2 Flute CBN Long Neck Ball (Short Shank)
VCBN-LBSF	α-3	2 Flute CBN Long Neck Ball (Short Shank)
VCBN-LRF	α-7	2 Flute CBN Long Neck Radius (Short Shank)
VCES 2000	α-9	2 Flute Square (Short Shank)
VCES 4000	α-13	4 Flute Square (Short Shank)
VCSELB	α-47	2 Flute Long Neck Ball (Short Shank)
VCWLB	α-43	2 Flute Long Neck Ball (Short Shank)
VDLC-AZS	α-23	3 Flute Long Neck Square (Short Shank)
VDLCLB	α-49	2 Flute Long Neck Ball (Short Shank)
VDLCLS	α-19	2 Flute Long Neck Square (Short Shank)
VHGB	α-31	2 Flute Ball (Short Shank)
VHGLB	α-35	2 Flute Long Neck Ball (Short Shank)
VHGLRS	α-25	4 Flute Long Neck Radius (Short Shank)
VHLRS	α-29	2 Flute Long Neck Radius (Short Shank)
VHLS	α-15	2 Flute Long Neck Square (Short Shank)
VHSLB	α-37	2 Flute Long Neck Ball (Short Shank)
VHWB	α-33	2 Flute Ball (Short Shank)


How to find your tool


Cover page

Search by diameter



P.34～95

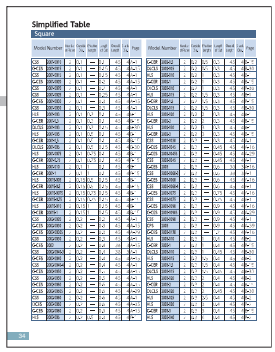


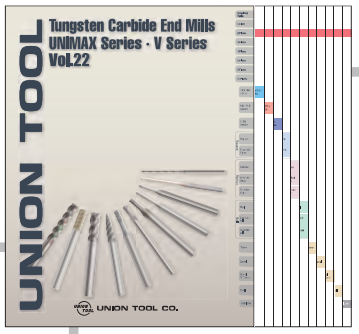

INDEX


Search by end geometry

P.12～25

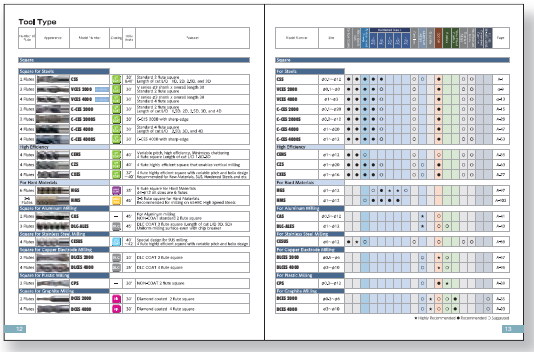


P.26～33

Search by series name

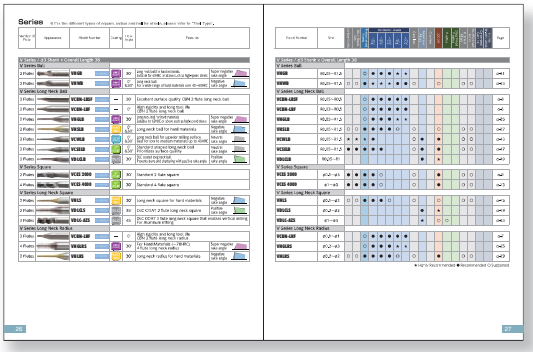

To the main description

INDEX

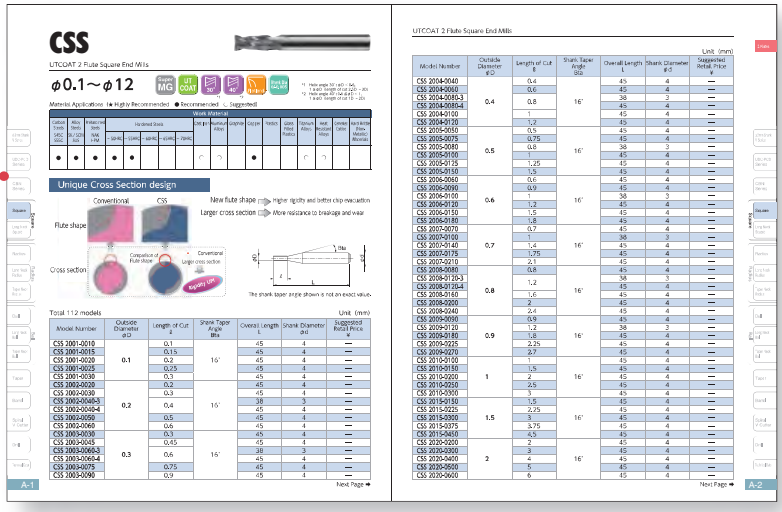

INDEX

Icon Guide Lines

unit : mm

Tool Material

- Super MG — Super Micro Grain
- CBN — CBN
- MG — Micro Grain
- Binderless PCD — Binderless PCD

Coating

- HMG COAT — HMGCOAT
- MICRO COAT — UT MICRO COAT
- HMW COAT — HMWCOAT
- UTS COAT — UTSCOAT
- HARD MAX — HARDMAX
- UDC — UDC
- UTW COAT — UTWCOAT
- DIA — DIA
- UT COAT — UTCOAT
- DLC — DLC

Geometry

- R — Corner Radius Design
- Back Taper Geometry — Back Taper Geometry
- Sharp Corner — Sharp Corner Design
- Variable Pitch — Variable Pitch
- Flatland — Flatland Design
- Variable Helix — Variable Helix
- X Thinning — X Thinning Design

Shank Diameter Tolerance

- Shank Dia 0/-0.003 — Tolerance of Shank Diameter : 0/-0.003
- Shank Dia 0/-0.004 — Tolerance of Shank Diameter : 0/-0.004
- Shank Dia 0/-0.005 — Tolerance of Shank Diameter : 0/-0.005

Ball Radius Tolerance

- R ±0.002 — Ball Radius Tolerance : ±0.002
- R ±0.005 — Ball Radius Tolerance : ±0.005
- R ±0.003 — Ball Radius Tolerance : ±0.003
- R ±0.007 — Ball Radius Tolerance : ±0.007
- R ±0.004 — Ball Radius Tolerance : ±0.004
- R ±0.01 — Ball Radius Tolerance : ±0.01

Form Tolerance

- Form ±0.01 — Form Tolerance

Corner Radius Tolerance

- R ±0.002 — Corner Radius Tolerance : ±0.002
- R ±0.01 — Corner Radius Tolerance : ±0.01
- R ±0.003 — Corner Radius Tolerance : ±0.003
- R ±0.015 — Corner Radius Tolerance : ±0.015
- R ±0.005 — Corner Radius Tolerance : ±0.005
- R ±0.02 — Corner Radius Tolerance : ±0.02

Half Included Angle Tolerance

- ±5′ — Half Included Angle Tolerance : ±5′

Helix Angle

- 0° — Helix Angle 0°
- 42°~45° — Helix Angle 42°~45°
- 20° — Helix Angle 20°
- 45° — Helix Angle 45°
- 24° — Helix Angle 24°
- 0° — Helix Angle 0°
- 25° — Helix Angle 25°
- 10° — Helix Angle 10°
- 30° — Helix Angle 30°
- 20° — Helix Angle 20°
- 35° — Helix Angle 35°
- 30° — Helix Angle 30°
- 37°~40° — Helix Angle 37°~40°
- 35° — Helix Angle 35°
- 40° — Helix Angle 40°
- 40° — Helix Angle 40°
- 40°~42° — Helix Angle 40°~42°


Features of Coating

★Highly Recommended ●Recommended ○Suggested △Satisfactory

Coating Series		Hardness (HV)	Heat Resistance	Toughness	Lubricant Efficiency	Recommended Use
Ceramics based	HMGCOAT	3700～4200	★	○	●	For Steels
	HMWCOAT	3700～4000	★	●	●	
	HARDMAX	3500～4000	★	○	●	
	UTWCOAT	2800～3300	●	★	★	For Copper / Raw Materials up to 55HRC
	UTCOAT	3000～3500	●	●	★	For Copper / Raw Materials up to 55HRC
	UTSCOAT	3000～3500	●	●	★	For Stainless Steels
DLC	DLC	4000～6000	△	△	★	For Copper / Aluminum / Plastics
Diamond	DIA	around 9000	△	△	●	For Graphite
	UDC	around 9000	△	○	●	For Cemented Carbide / Hard Brittle Materials

How to find best coating for your material applications

Ball

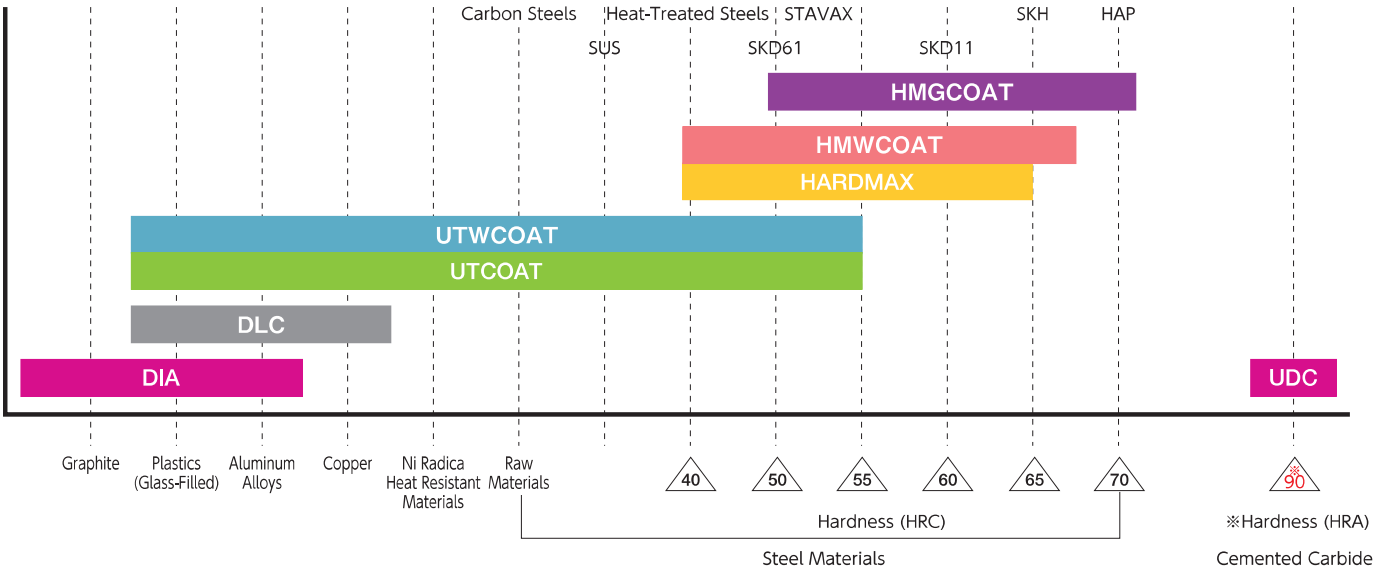

CAUTION

Advisory for Safe Use of End Mills


Correct application and operation is strongly advised to avoid clogging, abrasion, etc, that could cause serious accidents or injuries.
Ignition or sparks generated during milling could lead to fire or extreme damage to the work piece.
End Mills are made with very sharp cutting edges and must be handled with extra care.

- Never touch the cutting edge with your bare hands, as this could cause serious injury. Special caution is required when opening the package.
- Dropping the tool could cause breakage or flying debris, leading to serious injury.
- During milling, unexpected impact or shock on the tool could cause breakage or flying debris. Ensure to use protective items such as safety glasses and a face guard.
- For best results, fine parameter adjustment may be required, depending on the materials; milling shape and strategy; machine rigidity and spindle capability.
- Use a machine that has high rigidity and generates a low level of vibration. Recommend setting the runout control value at 5μm or below for the small diameter tools ϕ1 or below.
- Do not use flammable cutting oils.

Advisory for Regrinding End Mills

- Never regrind the tool without wearing safety glasses and a face guard.

Square • Radius

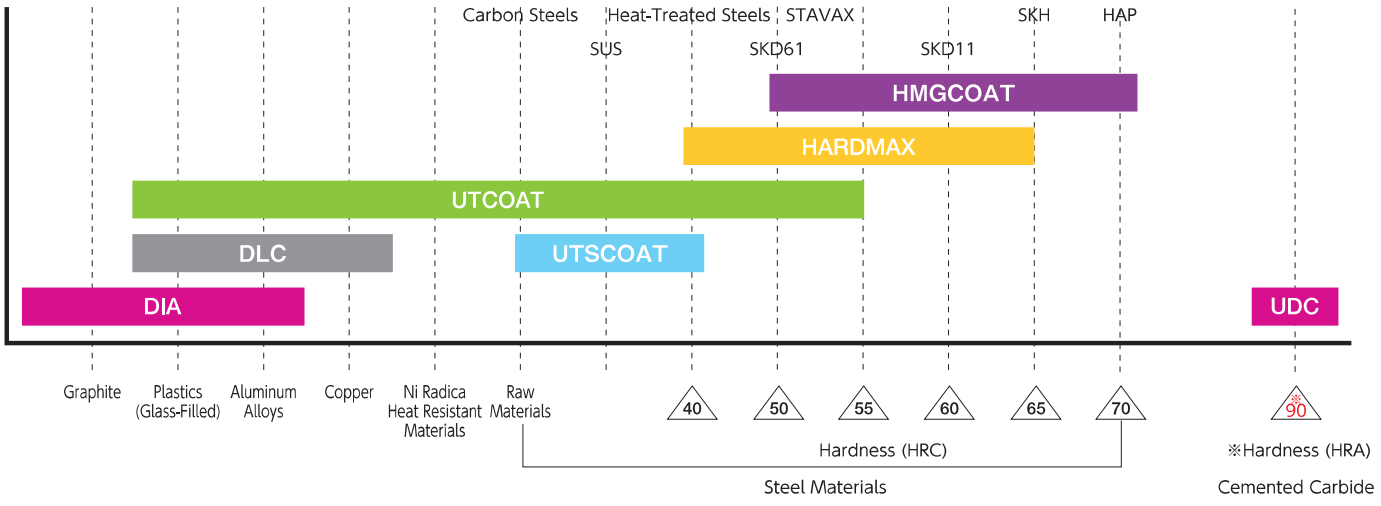

V Series
φ3 Shank × Overall length 38※mm

※The overall length of VCBN series is 35mm.

VCBN-LBSF
2 Flutes For Super Finishing
CBN Long Neck Ball

α-3

VCBN-LBF
2 Flutes For Finishing and Long Tool Life
CBN Long Neck Ball

α-5

VCBN-LRF
2 Flutes For Finishing and Long Tool Life
CBN Long Neck Radius

α-7

VCES2000
2 Flutes Square

α-9

VCES4000
4 Flutes Square

α-13

VDLCLS
2 Flutes DLCCOAT
Long Neck Square for Copper Electrode Milling

α-19

VDLC-AZS
3 Flutes DLCCOAT
Long Neck Square for Aluminum Milling

α-23

VHGLRS
4 Flutes
Long Neck Radius for Hard Materials (~70HRC)

α-25

VHGB
2 Flutes Ball for Hard Materials (~70HRC)

α-31

VHWB
2 Flutes Ball for Hard Materials
Available for a wide range of hard materials over 40-60HRC

α-33

VCWLB
2 Flutes For Superior Milling Surface
Long Neck Ball
Best for Low to Medium Hard Materials up to 40HRC.

α-43

For Cemented Carbide and Hard Brittle Materials
UDC Series

UDCSB
2 Flutes For High Toughness Cemented Carbide
Ball

β-23

UDCSLB
2 Flutes For High Toughness Cemented Carbide
Long Neck Ball

β-35

UDCLRSH
2 Flutes For High Efficiency and Long Life
Long Neck Radius

β-43

NEW PRODUCTS

DLCCOAT Series

DLCES2000

2 Flutes DLCCOAT Square
A-37

DLC-ALES

3 Flutes DLCCOAT
Square for Aluminum Milling
A-43

DLCES4000

4 Flutes DLCCOAT Square
A-95

DLCLS

2 Flutes DLCCOAT
Long Neck Square for Copper Electrode Milling
B-29

DLCLRS

2 Flutes DLCCOAT
Long Neck Radius for Copper Electrode Milling
D-35

CBN Series

CBN-LBF4000
Y-15
4 Flutes Long Neck Ball for Finishing
High Efficiency and
Long Life


UTCOAT Series

CEHS

4 Flutes For Minimizing Chattering
High Efficiency Square
A-55

CLRS

2 Flutes For Low to Medium Hardness,
Non-ferrous Materials
Long Neck Radius
D-21

HMGCOAT Series

HGS

6 Flutes Square for
Hard Materials
A-97

HMWCOAT Series

HWB
HWB-S

2 Flutes Ball / Short Shank Ball for
Hard Materials Available for
a wide range of hard materials over 40-60HRC
F-3

HWLB-S

2 Flutes Short Shank Long Neck Ball
for Hard Materials Available for
a wide range of hard materials over 40-60HRC
G-13

UTWCOAT Series

CWB

2 Flutes For Superior Milling Surface
Ball
For Low to Medium Hard Materials up to 40HRC.
F-17


CWLB

2 Flutes For Superior Milling Surface
Long Neck Ball
For Low to Medium Hard Materials up to 40HRC.
G-45

Tool Chart


Square / Long Neck Square for Steels


Note: The recommended ranges below are for reference only. For details, please refer to the material application table on each page.

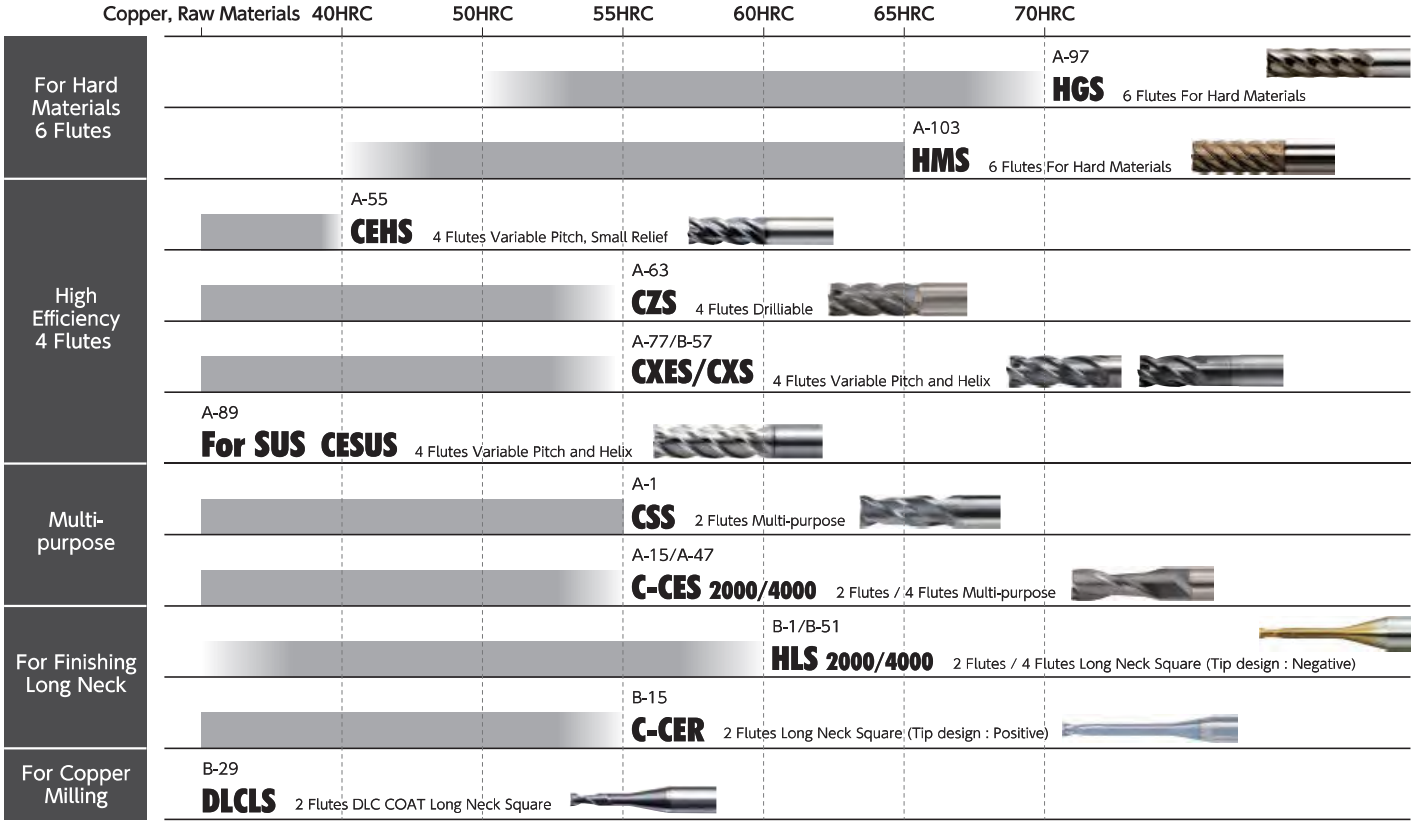

Ball / Long Neck Ball for Steels

Note: The recommended ranges below are for reference only. For details, please refer to the material application table on each page.

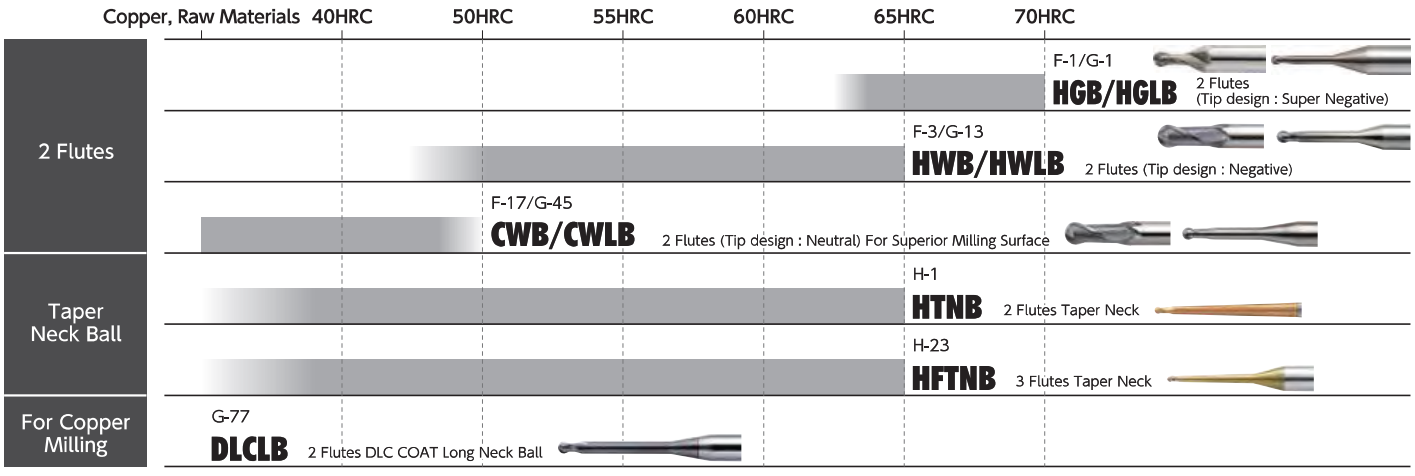


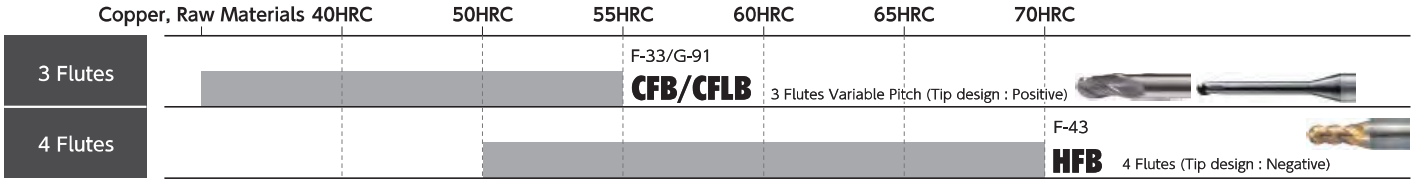

Tool Chart

Radius / Long Neck Radius for Steels

Note: The recommended ranges below are for reference only. For details, please refer to the material application table on each page.

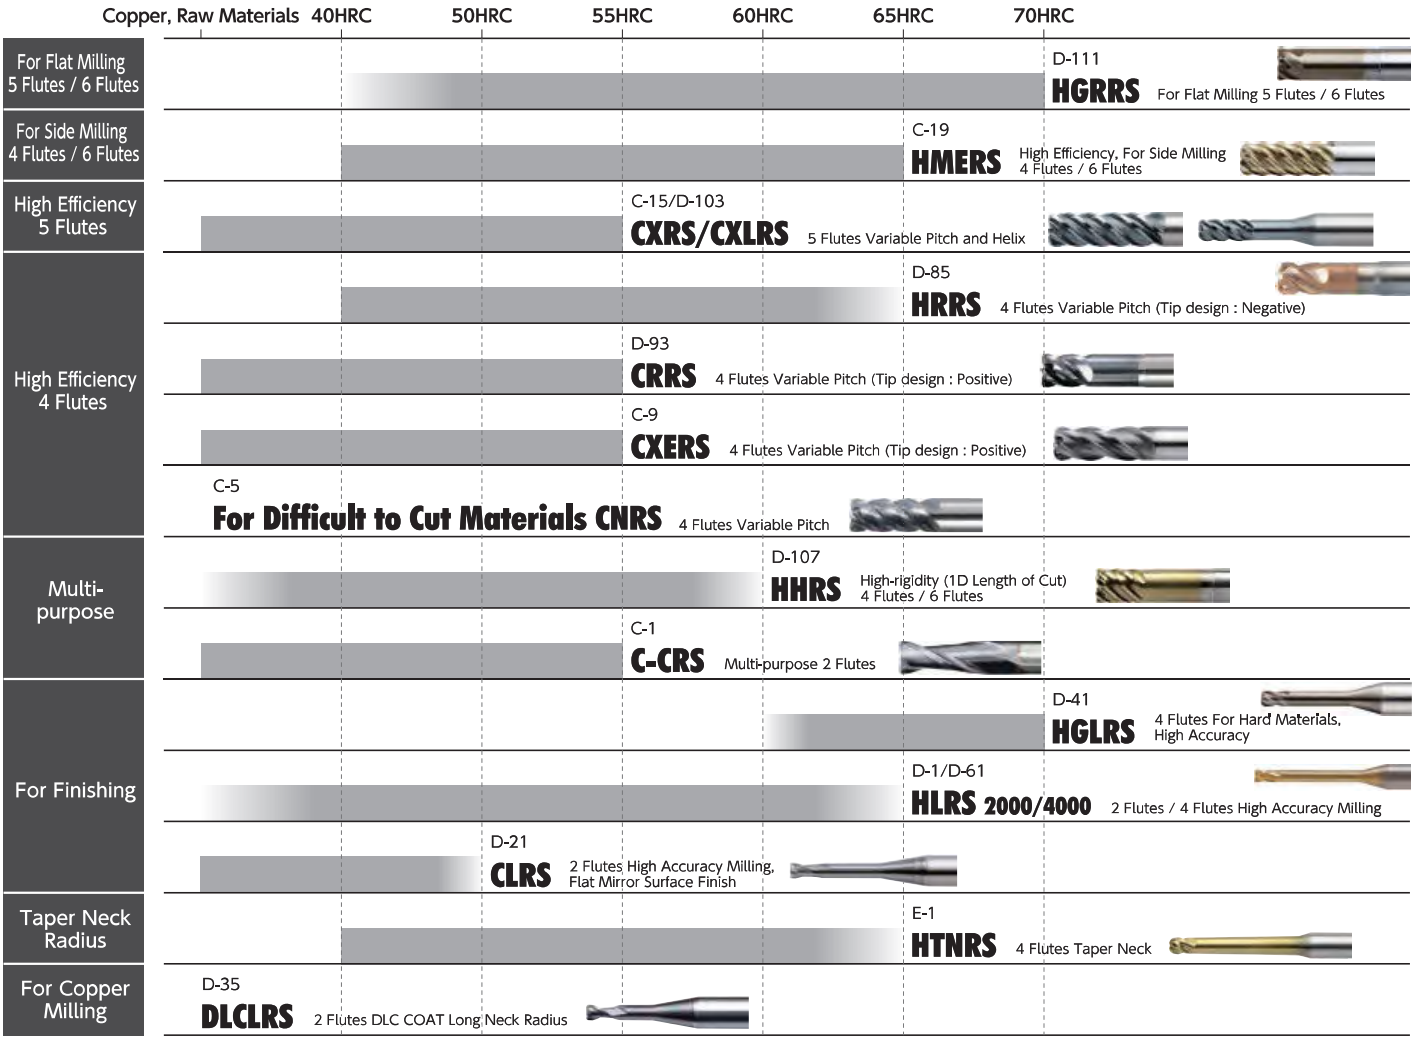









Tool Type

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features
Square					
Square for Steels					
2 Flutes		**CSS**	UT COAT	30° &40°	Standard 2 flute square Length of cut L/D 1D, 2D, 2.5D, and 3D
2 Flutes		**VCES 2000** V Series	UT COAT	30°	V series ϕ3 shank x overall length 38 Standard 2 flute square
4 Flutes		**VCES 4000** V Series	UT COAT	30°	V series ϕ3 shank x overall length 38 Standard 4 flute square
2 Flutes		**C-CES 2000**	UT COAT	30°	Standard 2 flute square Length of cut L/D 1.5D, 2D, 2.5D, 3D, and 4D
2 Flutes		**C-CES 2000S**	UT COAT	30°	C-CES 2000 with sharp edge
4 Flutes		**C-CES 4000**	UT COAT	30°	Standard 4 flute square Length of cut L/D 2.5D, 3D, and 4D
4 Flutes		**C-CES 4000S**	UT COAT	30°	C-CES 4000 with sharp edge
High Efficiency					
4 Flutes		**CEHS**	UT COAT	40°	Variable pitch, high efficiency, Minimizes chattering 4 flute square Length of cut L/D 1.5D-3D
4 Flutes		**CZS**	UT COAT	40°	4 flute highly efficient square that enables vertical milling
4 Flutes		**CXES**	UT COAT	37° ~40°	4 flute highly efficient square with variable pitch and helix design Recommended for Raw Materials, SUS, Hardened Steels and etc
For Hard Materials					
6 Flutes		**HGS**	HMG COAT	35°	6 flute square for Hard Materials ϕ1-ϕ12 all sizes are 6 flutes
3-6 Flutes		**HMS**	HARD MAX	45°	3-6 flute square for Hard Materials Recommended for milling on 65HRC High Speed Steels
Square for Aluminum Milling					
2 Flutes		**CAS**	—	45°	For Aluminum milling NON-COAT standard 2 flute square
3 Flutes		**DLC-ALES**	DLC	45°	DLC COAT 3 flute square (Length of cut L/D 3D, 5D) Uniform milling surface even with chip breaker
Square for Stainless Steel Milling					
4 Flutes		**CESUS**	UTS COAT	40° ~42°	Special design for SUS milling 4 flute highly efficient square with variable pitch and helix design
Square for Copper Electrode Milling					
2 Flutes		**DLCES 2000**	DLC	20°	DLC COAT 2 flute square
4 Flutes		**DLCES 4000**	DLC	25°	DLC COAT 4 flute square
Square for Plastic Milling					
2 Flutes		**CPS**	—	30°	NON-COAT 2 flute square
Square for Graphite Milling					
2 Flutes		**DCES 2000**	DIA	30°	Diamond coated 2 flute square
4 Flutes		**DCES 4000**	DIA	30°	Diamond coated 4 flute square

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	~55 HRC	~60 HRC	~65 HRC	~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
Square																				
For Steels																				
CSS	φ0.1~φ12	●	●	●	●	●				○	○		●			○	○			A-1
VCES 2000	φ0.1~φ3	●	●	●	●	○				○			●			○	○			α-9
VCES 4000	φ1~φ3	●	●	●	●	○				○			●			○	○			α-13
C-CES 2000	φ0.1~φ20	●	●	●	●	○				○			●			○	○			A-15
C-CES 2000S	φ0.2~φ12	●	●	●	●	○				○			●			○	○			A-29
C-CES 4000	φ1~φ20	●	●	●	●	○				○			●			○	○			A-47
C-CES 4000S	φ1~φ12	●	●	●	●	○				○			●			○	○			A-53
High Efficiency																				
CEHS	φ1~φ12	●	●	○						○			○			○	○			A-55
CZS	φ1~φ20	●	●	●	●	○				○	○		●			○	○			A-63
CXES	φ1~φ16	●	●	●	●	○				○	○		●			○	○			A-77
For Hard Materials																				
HGS	φ1~φ12				○	●	★	★	○											A-97
HMS	φ1~φ12			○	●	●	●	●												A-103
For Aluminum Milling																				
CAS	φ0.5~φ12										★		○							A-41
DLC-ALES	φ1~φ12										★		○	○						A-43
For Stainless Steel Milling																				
CESUS	φ6~φ12	●	★	○						○			○			○	○			A-89
For Copper Electrode Milling																				
DLCES 2000	φ0.5~φ6										○		★	○						A-37
DLCES 4000	φ3~φ10										○		★	○						A-95
For Plastic Milling																				
CPS	φ0.3~φ12										○		●	★						A-39
For Graphite Milling																				
DCES 2000	φ0.2~φ6										○	★	○	○	●				○	A-35
DCES 4000	φ3~φ10										○	★	○	○	●				○	A-93

★ Highly Recommended ● Recommended ○ Suggested









Tool Type

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
Long Neck Square						
Long Neck Square for Steels						
High Precision, for Finishing						
2 Flutes		**VHLS** V Series	HARD MAX	30°	V series ϕ3 shank x overall length 38 2 flute long neck square for Hard Materials	Negative rake angle 
2 Flutes		**HLS 2000**	HARD MAX	30°	2 flute long neck square for Hard Materials	Negative rake angle 
2 Flutes		**C-CER**	UT COAT	30°	From Raw Materials and SUS to 55HRC 2 flute long neck square	Positive rake angle 
4 Flutes		**HLS 4000**	HARD MAX	30°	4 flute long neck square for Hard Materials	Negative rake angle 
High Efficiency						
4 Flutes		**CXS**	UT COAT	37° ~40°	4 flute highly efficient square with variable pitch and helix design Effective length L/D=3~ about 5 times	
Long Neck Square for Aluminum Milling						
3 Flutes		**VDLC-AZS** V Series	DLC	45°	V series ϕ3 shank x overall length 38 DLC COAT 3 flute highly efficient long neck square that enables vertical milling	
3 Flutes		**AZS**	—	45°	NON-COAT 3 flute long neck square that enables vertical milling	
3 Flutes		**DLC-AZS**	DLC	45°	AZS with DLC coating	
Long Neck Square for Plastic Milling						
2 Flutes		**CPR**	—	30°	NON-COAT 2 flute long neck square	
2 Flutes		**CPRL**	—	30°	CPR with long shank Long neck & long shank	
Long Neck Square for Graphite Milling						
2 Flutes		**DCLS**	DIA	30°	Diamond coated 2 flute long neck square	
Long Neck Square for Copper Electrode Milling						
2 Flutes		**VDLCLS** V Series	DLC	35°	V series ϕ3 shank x overall length 38 DLC COAT 2 flute long neck square	Positive rake angle 
2 Flutes		**DLCLS**	DLC	35°	DLC COAT 2 flute long neck square	Positive rake angle 
Radius						
Radius for Steels						
2 Flutes		**C-CRS**	UT COAT	30°	Standard	Neutral rake angle 
High Efficiency						
4 Flutes		**CXERS**	UT COAT	37° ~40°	4 flute highly efficient radius with variable pitch and helix design From Raw Materials and SUS to 55HRC	Positive rake angle 
5 Flutes		**CXRS**	UT COAT	42° ~45°	5 flute highly efficient radius with variable pitch and helix design From Raw Materials and SUS to 55HRC	Positive rake angle 
4 Flutes		**CNRS**	UT COAT	45°	4 flute radius with variable pitch and high helix For Titanium Alloys and Heat Resistant Alloys milling	Positive rake angle 

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	~55 HRC	~60 HRC	~65 HRC	~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
Long Neck Square																				
For Steels																				
High Precision, for Finishing																				
VHLS	φ0.1~φ2	○	○	●	●	●	○			○			○			○	○			α-15
HLS 2000	φ0.1~φ6	○	○	●	●	●	○			○			○			○	○			B-1
C-CER	φ0.1~φ6	●	●	●	●	○				○			●			○	○			B-15
HLS 4000	φ1~φ6	○	○	●	●	●	○			○			○			○	○			B-51
High Efficiency																				
CXS	φ1~φ12	●	●	●	●	○				○			●			○	○			B-57
For Aluminum Milling																				
VDLC-AZS	φ1~φ3										★		○	○						α-23
AZS	φ1~φ12										★		○	○						B-41
DLC-AZS	φ1~φ12										★		○	○						B-45
For Plastic Milling																				
CPR	φ0.5~φ6										○		●	★						B-33
CPRL	φ0.5~φ4										○		●	★						B-37
For Graphite Milling																				
DCLS	φ0.4~φ6										○	★	○	○	●				○	B-25
For Copper Electrode Milling																				
VDLCLS	φ0.2~φ2										●		★							α-19
DLCLS	φ0.1~φ3										●		★							B-29
Radius																				
For Steels																				
C-CRS	φ1~φ12	●	●	●	●	●				○			●			○	○			C-1
High Efficiency																				
CXERS	φ1~φ12	●	●	●	●	●				○			●			○	○			C-9
CXRS	φ3~φ12	●	●	●	●	●				○	○		●			○	○			C-15
CNRS	φ6~φ12	●	●	●	●	●				○	○		●			★	★			C-5

★ Highly Recommended ● Recommended ○ Suggested










Tool Type

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
For Hard Materials						
4-6 Flutes		**HMERS**	HARD MAX	45°	For Hard Materials (~65HRC) 4-6 flute radius	Negative rake angle 
Long Neck Radius						
Long Neck Radius for Steels						
High Precision, for Finishing						
2 Flutes		**VHLRS** V Series	HARD MAX	30°	V series ϕ3 shank x overall length 38 2 flute long neck radius for Hard Materials	Negative rake angle 
2 Flutes		**HLRS 2000/E**	HARD MAX	30°	2 flute long neck radius for Hard Materials	Negative rake angle 
2 Flutes		**CLRS**	UT COAT	30°	For low to medium, non-ferrous materials 2 flute long neck radius Improved mirror surface finish when flat milling.	Tip negative flat surface
4 Flutes		**VHGLRS** V Series	HMG COAT	30°	V series ϕ3 shank x overall length 38 For hard materials (~70HRC) 4 flute long neck radius	Super negative rake angle 
4 Flutes		**HGLRS**	HMG COAT	30°	For Hard Materials (~70HRC) 4 flute long neck radius	Super negative rake angle 
4 Flutes		**HLRS 4000**	HARD MAX	30°	4 flute long neck radius for Hard Materials	Negative rake angle 
High Efficiency						
4 Flutes		**HRRS**	HARD MAX	45°	4 flute highly efficient long neck radius with variable pitch and back taper geometry	Negative rake angle 
4 Flutes		**HRRS-S**	HARD MAX	45°	HRRS with short shank	Negative rake angle 
4 Flutes		**CRRS**	UT COAT	45°	From Raw Materials and SUS to 55HRC 4 flute highly efficient long neck radius with effective length L/D=3 times	Positive rake angle 
5 Flutes		**CXLRS**	UT COAT	42° ~45°	Effective length L/D=3~4 times 5 flute highly efficient long neck radius with variable pitch and helix design	Positive rake angle 
5-6 Flutes		**HGRRS**	HMG COAT	45°	For Hard Materials (~70HRC) 5-6 flute highly efficient long neck radius with effective length L/D=3 times	Super negative rake angle 
High Rigidity						
4-6 Flutes		**HHRS**	HARD MAX	30° &45°	For Hard Materials 4-6 flute long neck radius with effective length L/D=3 times	Positive rake angle 
CBN Long Neck Radius						
1 Flute		**CBN-RSF**	—	0°	SF series provides excellent surface finish 1 flute long neck radius	
2 Flutes		**VCBN-LRF** V Series	—	0°	V series ϕ3 shank x overall length 35 2 flute long neck radius	
2 Flutes		**CBN-LRF 2000**	—	0°	High rigidity and long tool life 2 flute long neck radius	
4 Flutes		**CBN-LRF 4000**	—	0°	High rigidity and long tool life 4 flute long neck radius	
Long Neck Radius for Graphite Milling						
4 Flutes		**DCLRS**	DIA	30°	Diamond coated 4 flute long neck radius	
Long Neck Radius for Copper Electrode Milling						
2 Flutes		**DLCLRS**	DLC	35°	DLC COAT 2 flute long neck radius	Positive rake angle 

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	~55 HRC	~60 HRC	~65 HRC	~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
For Hard Materials																				
HMERS	φ3~φ12			○	●	●	●	●												C-19
Long Neck Radius																				
For Steels																				
High Precision, for Finishing																				
VHLRS	φ0.2~φ2	○	○	●	●	●	●	○		○			●			○	○			α-29
HLRS 2000/E	φ0.2~φ6	○	○	●	●	●	●	○		○			●			○	○			D-1
CLRS	φ0.2~φ6	●	●	●	●	○				○	●		●			○	○			D-21
VHGLRS	φ0.2~φ3			○	●	●	●	★	★											α-25
HGLRS	φ0.2~φ6			○	●	●	●	★	★											D-41
HLRS 4000	φ0.2~φ6	○	○	●	●	●	●	○		○			○			○	○			D-61
High Efficiency																				
HRRS	φ2~φ12			●	●	●	●	○		○										D-85
HRRS-S	φ2~φ12			●	●	●	●	○		○										D-91
CRRS	φ2~φ12	●	●	●	●	●				○	○		●			●	●			D-93
CXLRS	φ3~φ12	●	●	●	●	●				○	○		●			○	○			D-103
HGRRS	φ2~φ12			○	●	●	★	●	●											D-111
High Rigidity																				
HHRS	φ3~φ12	○	○	●	●	●	○			○			○			○	○			D-107
CBN																				
CBN-RSF	φ0.2~φ2						●	●												γ-19
VCBN-LRF	φ0.1~φ1			○	●	●	●	●	●											α-7
CBN-LRF 2000	φ0.1~φ3			○	●	●	●	●	●											γ-23
CBN-LRF 4000	φ0.1~φ3			○	●	●	●	●	●											γ-33
For Graphite Milling																				
DCLRS	φ1~φ6										○	★	○	○	●				○	D-99
For Copper Electrode Milling																				
DLCLRS	φ0.2~φ3										●		★							D-35

★ Highly Recommended ● Recommended ○ Suggested




Tool Type

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
UDC Long Neck Radius for Cemented Carbide and Hard Brittle Materials						
1 Flute		**UPDLRS**	—	0°	1 flute long neck radius with binderless PCD After milling with UDC, improve mirror surface finish by using UPD	
2 Flutes		**UDCLRSH**	UDC	0°	High efficiency 2 flute long neck radius	
2 Flutes		**UDCLRSF**	UDC	0°	Excellent surface finish 2 flute long neck radius	
2 Flutes		**UDCLRS**	UDC	0°	Lower costs 2 flute long neck radius	
6-10 Flutes		**UDCRRS**	UDC	40°	For roughing 6-10 flute highly efficient long neck radius	
Taper Neck Radius						
Taper Neck Radius for Steels						
4 Flutes		**HTNRS**	HARD MAX	45°	4 flute taper neck radius for Hard Materials Variable pitch & high helix & back taper geometry	Negative rake angle 
Ball						
Ball for Steels						
2 Flutes		**VHGB** V Series	HMG COAT	30°	V series ϕ3 shank x overall length 38 For Hard Materials 2 flute ball	Super negative rake angle 
2 Flutes		**HGB**	HMG COAT	30°	For Hard Materials (~70HRC) 2 flute ball	Super negative rake angle 
2 Flutes		**VHWB** V Series	HMW COAT	0° &30°	V series ϕ3 shank x overall length 38 For Hard Materials 2 flute ball	Negative rake angle 
2 Flutes		**HWB / HWB-S**	HMW COAT	0° &30°	2 flute ball (-S: short shank) For a wide range of Hard Materials over 40~60HRC	Negative rake angle 
2 Flutes		**HSB** Production to end in March 2026	HARD MAX	0° &30°	2 flute ball for Hard Materials Successor product: HWB	Super negative rake angle 
2 Flutes		**HSB-S** Production to end in March 2026	HARD MAX	30°	HSB with short shank Successor product: HWB-S	Super negative rake angle 
2 Flutes		**CWB**	UTW COAT	0° &30°	Ball for superior milling surface Best for low to medium materials up to 40HRC	Neutral rake angle 
2 Flutes		**CSEB** Production to end in March 2026	UT COAT	0° &30°	Standard 2 flute ball Excellent surface quality Successor product: CWB	Neutral rake angle 
3 Flutes		**CFB**	UT COAT	30°	From Raw Materials, SUS, Aluminum to 55HRC 3 flute highly efficient ball for excellent surface quality	Positive rake angle 
4 Flutes		**HFB**	HARD MAX	40°	4 flute ball for Hard Materials High feed and highly efficient milling	Negative rake angle 
4 Flutes		**HFB-S**	HARD MAX	40°	HFB with short shank	Negative rake angle 
Long Shank Ball						
2 Flutes		**HBL**	HARD MAX	30°	HB with long shank 2 flute long shank ball (straight shank)	Positive rake angle 
Ball for Aluminum Milling						
3 Flutes		**DLC-CFB**	DLC	30°	DLC coating 3 flute ball	

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	Hardened Steels ~55 HRC	Hardened Steels ~60 HRC	Hardened Steels ~65 HRC	Hardened Steels ~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
UDC for Cemented Carbide and Hard Brittle Materials																				
UPDLRS	ϕ0.2~ϕ2																	★	●	β-61
UDCLRSH	ϕ0.5~ϕ2														○			★	●	β-43
UDCLRSF	ϕ0.25~ϕ2														○			★	●	β-47
UDCLRS	ϕ0.3~ϕ2														○			★	●	β-53
UDCRRS	ϕ1~ϕ6														○			★	●	β-57
Taper Neck Radius																				
Taper Neck Radius for Steels																				
HTNRS	ϕ1~ϕ6			●	●	●	●	○		○										E-1
Ball																				
Ball for Steels																				
VHGB	R0.05~R1.5			○	●	●	●	★	★											α-31
HGB	R0.05~R3			○	●	●	●	★	★											F-1
VHWB	R0.05~R1.5	○	○	●	★	★	★	●	●	○			○			○	○			α-33
HWB / HWB-S	R0.03~R6	○	○	●	★	★	★	●	●	○			○			○	○			F-3
HSB	R0.03~R6	○	○	●	●	●	●	○		○			○			○	○			F-9
HSB-S	R0.1~R2	○	○	●	●	●	●	○		○			○			○	○			F-13
CWB	R0.05~R6	★	★	★	●					○	●		●			○	○			F-17
CSEB	R0.05~R6	●	●	●	●	●				○	●		●			○	○			F-25
CFB	R0.3~R6	●	●	●	●	●				○	●		●	○		●	●			F-33
HFB	R1~R6				●	●	●	●	●											F-43
HFB-S	R1~R6				●	●	●	●	●											F-44
Long Shank Ball																				
HBL	R1.5~R6	○	○	●	●	●	○			○			●			○	○			F-15
Ball for Aluminum Milling																				
DLC-CFB	R0.3~R6										★		○	○						F-39

★ Highly Recommended ● Recommended ○ Suggested

Tool Type

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
Ball for Graphite Milling						
2 Flutes		**DCB**	DIA	35°	Diamond coated 2 flute ball	
UDC Ball for Cemented Carbide and Hard Brittle Materials						
2 Flutes		**UDCBH**	UDC	0°	High efficiency 2 flute ball	
2 Flutes		**UDCBF**	UDC	0°	Excellent surface finish 2 flute ball	
2 Flutes		**UDCSB**	UDC	10°	For high toughness cemented carbide 2 flute ball	
2 Flutes		**UDCB**	UDC	0°	Lower costs 2 flute ball	
Long Neck Ball						
Long Neck Ball for Steels						
2 Flutes		**VHGLB** V Series	HMG COAT	30°	V series ϕ3 shank x overall length 38 2 flute long neck ball for Hard Materials	Super negative rake angle 
2 Flutes		**HGLB**	HMG COAT	30°	For Hard Materials (~70HRC) 2 flute long neck ball	Super negative rake angle 
2 Flutes		**HWLB / HWLB-S**	HMW COAT	0° &30°	2 flute long neck ball (-S: short shank) For a wide range of Hard Materials over 40~60HRC	Negative rake angle 
2 Flutes		**VHSLB** V Series	HARD MAX	0° &30°	V series ϕ3 shank x overall length 38 2 flute long neck ball for Hard Materials	Negative rake angle 
2 Flutes		**HSLB** Production to end in March 2026	HARD MAX	0° &30°	2 flute long neck ball for Hard Materials Successor product: HWLB	Negative rake angle 
2 Flutes		**VCWLB** V Series	UTW COAT	0° &30°	V series ϕ3 shank x overall length 38 2 flute long neck ball Best for low to medium materials up to 40HRC	Neutral rake angle 
2 Flutes		**CWLB**	UTW COAT	0° &30°	Long neck ball for superior milling surface Best for low to medium materials up to 40HRC	Neutral rake angle 
2 Flutes		**VCSELB** V Series	UT COAT	0° &30°	V series ϕ3 shank x overall length 38 Standard 2 flute long neck ball	Neutral rake angle 
2 Flutes		**CSELB** Production to end in March 2026	UT COAT	0° &30°	Standard 2 flute long neck ball Excellent surface quality Successor product: CWLB	Neutral rake angle 
3 Flutes		**CFLB**	UT COAT	30°	From Raw Materials, SUS, Aluminum to 55HRC 3 flute long neck ball for excellent surface quality	Positive rake angle 
CBN Long Neck Ball						
2 Flutes		**CBN-PLB**	—	0°	For super mirror milling (burnishing effect) 2 flute long neck ball	
2 Flutes		**VCBN-LBSF** V Series	—	20°	V series ϕ3 shank x overall length 35 Excellent surface quality 2 flute long neck ball	
2 Flutes		**CBN-LBSF**	—	20°	Excellent surface quality 2 flute long neck ball	
2 Flutes		**VCBN-LBF** V Series	—	0°	V series ϕ3 shank x overall length 35 High rigidity and long tool life 2 flute long neck ball	
2 Flutes		**CBN-LBF 2000**	—	0°	High rigidity and long tool life 2 flute long neck ball	
4 Flutes		**CBN-LBF 4000**	—	30°	High rigidity and long tool life 4 flute long neck ball	



Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	Hardened Steels ~55 HRC	Hardened Steels ~60 HRC	Hardened Steels ~65 HRC	Hardened Steels ~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
For Graphite Milling																				
DCB	R0.5~R6										○	★	○	○	●				○	F-31
UDC for Cemented Carbide and Hard Brittle Materials																				
UDCBH	R0.1~R3														○			★	●	β-19
UDCBF	R0.1~R3														○			★	●	β-21
UDCSB	R1.5~R3														○			★	●	β-23
UDCB	R0.1~R3														○			★	●	β-25
Long Neck Ball																				
Long Neck Ball for Steels																				
VHGLB	R0.05~R1.5			○	●	●	●	★	★											α-35
HGLB	R0.05~R3			○	●	●	●	★	★											G-1
HWLB / HWLB-S	R0.05~R3	○	○	●	★	★	★	●	●	○			○			○	○			G-13
VHSLB	R0.05~R1.5	○	○	●	●	●	●	○		○			○			○	○			α-37
HSLB	R0.05~R3	○	○	●	●	●	●	○		○			○			○	○			G-37
VCWLB	R0.05~R1.5	★	★	★	●					○	●		●			○	○			α-43
CWLB	R0.05~R3	★	★	★	●					○	●		●			○	○			G-45
VCSELB	R0.05~R1.5	●	●	●	●	●				○	●		●			○	○			α-47
CSELB	R0.05~R3	●	●	●	●	●				○	●		●			○	○			G-57
CFLB	R0.3~R3	●	●	●	●	●				○	●		●	○		●	●			G-91
CBN Long Neck Ball																				
CBN-PLB	R0.2~R1			○	●	●	●	●	●											γ-3
VCBN-LBSF	R0.05~R0.5			○	●	●	●	●	●											α-3
CBN-LBSF	R0.05~R1			○	●	●	●	●	●											γ-5
VCBN-LBF	R0.03~R0.5			○	●	●	●	●	●											α-5
CBN-LBF 2000	R0.05~R2			○	●	●	●	●	●											γ-9
CBN-LBF 4000	R0.5~R1			○	●	●	●	●	●											γ-15

★ Highly Recommended ● Recommended ○ Suggested

Tool Type

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
Long Neck Ball for Copper Electrode Milling						
2 Flutes		**VDLCLB** V Series	DLC	30°	V series ϕ3 shank x overall length 38 DLC coating 2 flute long neck ball	Positive rake angle 
2 Flutes		**DLCLB**	DLC	30°	DLC coating 2 flute long neck ball	Positive rake angle 
Long Neck Ball for Plastic Milling						
2 Flutes		**CPRB**	—	30°	NON-COAT 2 flute long neck ball	
Long Neck Ball for Graphite Milling						
2 Flutes		**DCLB**	DIA	35°	Diamond coated 2 flute long neck ball	
UDC Long Neck Ball for Cemented Carbide and Hard Brittle Materials						
1 Flute		**UPDLB**	—	0°	1 flute long neck ball with binderless PCD After milling with UDC, improve mirror surface finish by using UPD	
2 Flutes		**UDCLBH**	UDC	0°	High efficiency 2 flute long neck ball	
2 Flutes		**UDCLBF**	UDC	0°	Excellent surface finish 2 flute long neck ball	
2 Flutes		**UDCSLB**	UDC	10°	For high toughness cemented carbide 2 flute long neck ball	
2 Flutes		**UDCLB**	UDC	0°	Lower costs 2 flute long neck ball	

Taper Neck Ball

Taper Neck Ball for Steels						
2 Flutes		**HTNB**	HARD MAX	30°	2 flute taper neck ball	Positive rake angle 
3 Flutes		**HFTNB**	HARD MAX	40°	For Hard Materials 3 flute taper neck ball	Negative rake angle 
Taper Neck Ball for Graphite Milling						
2 Flutes		**DCTNB**	DIA	35°	Diamond coated 2 flute taper neck ball	

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	Hardened Steels ~55 HRC	Hardened Steels ~60 HRC	Hardened Steels ~65 HRC	Hardened Steels ~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
For Copper Electrode Milling																				
VDLCLB	R0.05~R1										●		★							α-49
DLCLB	R0.05~R3										●		★							G-77
For Plastic Milling																				
CPRB	R0.2~R3										○		●	★						G-87
For Graphite Milling																				
DCLB	R0.2~R3										○	★	○	○	●				○	G-73
UDC for Cemented Carbide and Hard Brittle Materials																				
UPDLB	R0.1~R1																	★	●	β-41
UDCLBH	R0.2~R3														○			★	●	β-27
UDCLBF	R0.1~R3														○			★	●	β-31
UDCSLB	R1.5~R3														○			★	●	β-35
UDCLB	R0.1~R3														○			★	●	β-37

Taper Neck Ball

For Steels																				
HTNB	R0.1~R2	○	○	●	●	●	●	●		○			●			○	○			H-1
HFTNB	R0.5~R2	○	○	●	●	●	●	●		○						○	○			H-23
For Graphite Milling																				
DCTNB	R0.5~R1										○	★	○	○	●				○	H-21

★ Highly Recommended ● Recommended ○ Suggested

Tool Type








Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
Taper / Barrel / Chamfering / Drill						
Taper						
2 Flutes		**C-CTE 2000**	UT COAT	25° &30°	2 flute taper end mill Half included angle 30'~15°	
4 Flutes		**C-CTE 4000**	UT COAT	30°	4 flute taper end mill Half included angle 30'~7°	
Barrel Form						
4 Flutes		**COVB**	UT COAT	—	Oval barrel form Suitable for narrow area with small inclined angle	
4 Flutes		**CSTB**	UT COAT	—	Standard taper barrel form Suitable for highly efficient finishing with larger barrel R	
4 Flutes		**CWTB**	UT COAT	—	Wide taper barrel form Suitable for highly efficient finishing with wide taper angle	
NON-COAT for Chamfering						
2 Flutes		**SV**	—	30°	NON-COAT and half included angle 45° Peripheral spiral shape designed for reducing burrs	
Drill						
Over All Length 38.1 x Shank Diameter 3.175 mm P Series Micro Diameter Drill / Chamfering Cutter and Center Drill						
2 Flutes		**PMD STD**	—	—	NON-COAT micro diameter drill Flute length L/D=10 times	4-facet drill point
2 Flutes		**PMD PLT**	—	—	NON-COAT micro diameter drill for pilot drilling Flute length L/D=2 times	4-facet drill point
1 Flute		**PSM**	—	0°	NON-COAT chamfering, counter sink, and center drill Half included angle 45°	—
Flat Drill						
2 Flutes		**UTDF**	UT COAT	30°	Size M4 - M12 for drilling pilot holes before tapping	Point angle 180°
Carbide Drill						
2 Flutes		**UTDSX**	MICRO COAT	30°	Short slot length L/D=5 times Diameter tolerance 0/-0.01	Point angle 130° X thinning
2 Flutes		**C-UMD**	MICRO COAT	24°	Medium slot length Diameter tolerance 0/-0.01	Point angle 150°
2 Flutes		**UTDLX**	MICRO COAT	30°	Long slot length L/D=15 times Diameter tolerance 0/-0.01	Point angle 130° X thinning
UDC Drill / Thread Mills						
2 Flutes		**UDCMX**	UDC	30°	For Cemented Carbide and Hard Brittle Materials Drill	
2 Flutes		**UDCT**	UDC	—	For Cemented Carbide and Hard Brittle Materials Thread mill	

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	~55 HRC	~60 HRC	~65 HRC	~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
Taper / Barrel / Chamfering / Drill																				
Taper																				
C-CTE 2000	φ0.2~φ2.5	●	●	●	●	●				○			○							I-1
C-CTE 4000	φ3~φ10	●	●	●	●	●				○			○							I-5
Barrel Form																				
COVB	Tip R1 and R2	●	●	●	●	●				○	●		●			○	○			J-1
CSTB	Tip R1~R3	●	●	●	●	●				○	●		●			○	○			J-3
CWTB	Tip R1	●	●	●	●	●				○	●		●			○	○			J-5
NON-COAT for Chamfering																				
SV	φ3~φ12	●	●	●						○	○		○	○						K-1
Drill																				
P Series Over All Length 38.1 x Shank Diameter 3.175 mm Micro Diameter Drill / Chamfering Cutter and Center Drill																				
PMD STD	φ0.02~φ0.1	○	○							○	●		●	●						L-19
PMD PLT	φ0.02~φ0.1	○	○							○	●		●	●						L-20
PSM	φ1 X half included angle 45°	○	○							○	●		●	●						L-20
Flat Drill																				
UTDF	φ2~φ12	●	●	○						●	●									L-1
Carbide Drill																				
UTDSX	φ0.3~φ2	●	●	○						○	●		○			○	○			L-7
C-UMD	φ0.1~φ3	●	●	○						○	●		○			○	○			L-9
UTDLX	φ0.3~φ3	●	●	○						○	●		○			○	○			L-15
UDC Drill / Thread Mill																				
UDCMX	φ0.3~φ7														●			★	●	β-63
UDCT	M2~M8														○			★	●	β-65

★ Highly Recommended ● Recommended ○ Suggested

Series

※ For the different types of square, radius and ball for steels, please refer to “Tool Type”.

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
V Series / φ3 Shank x Overall Length 38						
V Series Ball						
2 Flutes		**VHGB** V Series	HMG COAT	30°	Long neck ball for hard materials Suitable for 60HRC or above such as high-speed steels	Super negative rake angle 
2 Flutes		**VHWB** V Series	HMG COAT	0° &30°	Long neck ball For a wide range of hard materials over 40~60HRC	Negative rake angle 
V Series Long Neck Ball						
2 Flutes		**VCBN-LBSF** V Series	—	20°	Excellent surface quality CBN 2 flute long neck ball	
2 Flutes		**VCBN-LBF** V Series	—	0°	High rigidity and long tool life CBN 2 flute long neck ball	
2 Flutes		**VHGLB** V Series	HMG COAT	30°	Long neck ball for hard materials Suitable for 60HRC or above such as high-speed steels	Super negative rake angle 
2 Flutes		**VHSLB** V Series	HARD MAX	0° &30°	Long neck ball for hard materials	Negative rake angle 
2 Flutes		**VCWLB** V Series	UTW COAT	0° &30°	Long neck ball for superior milling surface Best for low to medium materials up to 40HRC	Neutral rake angle 
2 Flutes		**VCSELB** V Series	UT COAT	0° &30°	Standard shaped long neck ball Prioritizes surface quality	Neutral rake angle 
2 Flutes		**VDLCLB** V Series	DLC	30°	DLC coated long neck ball Prevents burrs and chattering with positive rake angle	Positive rake angle 
V Series Square						
2 Flutes		**VCES 2000** V Series	UT COAT	30°	Standard 2 flute square	
4 Flutes		**VCES 4000** V Series	UT COAT	30°	Standard 4 flute square	
V Series Long Neck Square						
2 Flutes		**VHLS** V Series	HARD MAX	30°	Long neck square for hard materials	Negative rake angle 
2 Flutes		**VDLCLS** V Series	DLC	35°	DLC COAT 2 flute long neck square	Positive rake angle 
3 Flutes		**VDLC-AZS** V Series	DLC	45°	DLC COAT 3 flute long neck square that enables vertical milling For Aluminum milling	
V Series Long Neck Radius						
2 Flutes		**VCBN-LRF** V Series	—	0°	High rigidity and long tool life CBN 2 flute long neck radius	
4 Flutes		**VHGLRS** V Series	HMG COAT	30°	For Hard Materials (~70HRC) 4 flute long neck radius	Super negative rake angle 
2 Flutes		**VHLRS** V Series	HARD MAX	30°	Long neck radius for hard materials	Negative rake angle 

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	Hardened Steels ~55 HRC	Hardened Steels ~60 HRC	Hardened Steels ~65 HRC	Hardened Steels ~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
V Series / ϕ3 Shank x Overall Length 38																				
V Series Ball																				
VHGB	R0.05~R1.5			○	●	●	●	★	★											α-31
VHWB	R0.05~R1.5	○	○	●	★	★	★	●	●	○			○			○	○			α-33
V Series Long Neck Ball																				
VCBN-LBSF	R0.05~R0.5			○	●	●	●	●	●											α-3
VCBN-LBF	R0.03~R0.5			○	●	●	●	●	●											α-5
VHGLB	R0.05~R1.5			○	●	●	●	★	★											α-35
VHSLB	R0.05~R1.5	○	○	●	●	●	●	○		○			○			○	○			α-37
VCWLB	R0.05~R1.5	★	★	★	●					○	●		●			○	○			α-43
VCSELB	R0.05~R1.5	●	●	●	●	●				○	●		●			○	○			α-47
VDLCLB	R0.05~R1										●		★							α-49
V Series Square																				
VCES 2000	ϕ0.1~ϕ3	●	●	●	●	○				○			●			○	○			α-9
VCES 4000	ϕ1~ϕ3	●	●	●	●	○				○			●			○	○			α-13
V Series Long Neck Square																				
VHLS	ϕ0.1~ϕ2	○	○	●	●	●	○			○			○			○	○			α-15
VDLCLS	ϕ0.2~ϕ2										●		★							α-19
VDLC-AZS	ϕ1~ϕ3										★		○	○						α-23
V Series Long Neck Radius																				
VCBN-LRF	ϕ0.1~ϕ1			○	●	●	●	●	●											α-7
VHGLRS	ϕ0.2~ϕ3			○	●	●	●	★	★											α-25
VHLRS	ϕ0.2~ϕ2	○	○	●	●	●	●	○		○			●			○	○			α-29

★ Highly Recommended ● Recommended ○ Suggested

Series

※ For the different types of square, radius and ball for steels, please refer to “Tool Type”.







Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features
CBN					
CBN Long Neck Ball					
2 Flutes		**CBN-PLB**	—	0°	For super mirror milling (burnishing effect) 2 flute long neck ball
2 Flutes		**VCBN-LBSF** V Series	—	20°	V series ϕ3 shank x overall length 38 Excellent surface quality CBN 2 flute long neck ball
2 Flutes		**CBN-LBSF**	—	20°	Excellent surface quality 2 flute long neck ball
2 Flutes		**VCBN-LBF** V Series	—	0°	V series ϕ3 shank x overall length 38 High rigidity and long tool life CBN 2 flute long neck ball
2 Flutes		**CBN-LBF 2000**	—	0°	High rigidity and long tool life 2 flute long neck ball
4 Flutes		**CBN-LBF 4000**	—	30°	High rigidity and long tool life 4 flute long neck ball
CBN Long Neck Radius					
1 Flute		**CBN-RSF**	—	0°	Excellent surface finish 1 flute long neck radius
2 Flutes		**VCBN-LRF** V Series	—	0°	V series ϕ3 shank x overall length 38 High rigidity and long tool life CBN 2 flute long neck radius
2 Flutes		**CBN-LRF 2000**	—	0°	High rigidity and long tool life 2 flute long neck radius
4 Flutes		**CBN-LRF 4000**	—	0°	High rigidity and long tool life 4 flute long neck radius
UDC for Cemented Carbide and Hard Brittle Materials					
UDC Ball					
2 Flutes		**UDCBH**	UDC	0°	High efficiency 2 flute ball
2 Flutes		**UDCBF**	UDC	0°	Excellent surface finish 2 flute ball
2 Flutes		**UDCSB**	UDC	10°	For high toughness cemented carbide 2 flute ball
2 Flutes		**UDCB**	UDC	0°	Lower costs 2 flute ball
UDC Long Neck Ball					
2 Flutes		**UDCLBH**	UDC	0°	High efficiency 2 flute long neck ball
2 Flutes		**UDCLBF**	UDC	0°	Excellent surface finish 2 flute long neck ball
2 Flutes		**UDCSLB**	UDC	10°	For high toughness cemented carbide 2 flute long neck ball
2 Flutes		**UDCLB**	UDC	0°	Lower costs 2 flute long neck ball
UDC Long Neck Radius					
2 Flutes		**UDCLRSH**	UDC	0°	High efficiency 2 flute long neck radius
2 Flutes		**UDCLRSF**	UDC	0°	Excellent surface finish 2 flute long neck radius
2 Flutes		**UDCLRS**	UDC	0°	Lower costs 2 flute long neck radius
6-10 Flutes		**UDCRRS**	UDC	40°	6-10 flute highly efficient long neck radius for roughing

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	Hardened Steels ~55 HRC	Hardened Steels ~60 HRC	Hardened Steels ~65 HRC	Hardened Steels ~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
CBN																				
CBN Long Neck Ball																				
CBN-PLB	R0.2~R1			○	●	●	●	●	●											γ-3
VCBN-LBSF	R0.05~R0.5			○	●	●	●	●	●											α-3
CBN-LBSF	R0.05~R1			○	●	●	●	●	●											γ-5
VCBN-LBF	R0.03~R0.5			○	●	●	●	●	●											α-5
CBN-LBF 2000	R0.05~R2			○	●	●	●	●	●											γ-9
CBN-LBF 4000	R0.5~R1			○	●	●	●	●	●											γ-15
CBN Long Neck Radius																				
CBN-RSF	φ0.2~φ2						●	●												γ-19
VCBN-LRF	φ0.1~φ1			○	●	●	●	●	●											α-7
CBN-LRF 2000	φ0.1~φ3			○	●	●	●	●	●											γ-23
CBN-LRF 4000	φ0.1~φ3			○	●	●	●	●	●											γ-33
UDC for Cemented Carbide and Hard Brittle Materials																				
UDC Ball																				
UDCBH	R0.1~R3														○			★	●	β-19
UDCBF	R0.1~R3														○			★	●	β-21
UDCSB	R1.5~R3														○			★	●	β-23
UDCB	R0.1~R3														○			★	●	β-25
UDC Long Neck Ball																				
UDCLBH	R0.2~R3														○			★	●	β-27
UDCLBF	R0.1~R3														○			★	●	β-31
UDCSLB	R1.5~R3														○			★	●	β-35
UDCLB	R0.1~R3														○			★	●	β-37
UDC Long Neck Radius																				
UDCLRSH	φ0.5~φ2														○			★	●	β-43
UDCLRSF	φ0.25~φ2														○			★	●	β-47
UDCLRS	φ0.3~φ2														○			★	●	β-53
UDCRRS	φ1~φ6														○			★	●	β-57

★ Highly Recommended ● Recommended ○ Suggested

Series

※ For the different types of square, radius and ball for steels, please refer to “Tool Type”.

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
UDC Drill						
2 Flutes		**UDCMX**	UDC	30°	Drills for Cemented Carbide and Hard Brittle Materials	
UDC for Threading						
2 Flutes		**UDCT**	UDC	—	Thread mills for Cemented Carbide and Hard Brittle Materials	
PCD for Finishing Cemented Carbide and Hard Brittle Materials						
1 Flute		**UPDLRS**	—	0°	1 flute long neck radius with binderless PCD After milling with UDC, improve mirror surface finish by using UPD	
1 Flute		**UPDLB**	—	0°	1 flute long neck ball with binderless PCD After milling with UDC, improve mirror surface finish by using UPD	
For Copper Electrode Milling						
2 Flutes		**DLCES 2000**	DLC	20°	DLC COAT 2 flute square	Positive rake angle 
4 Flutes		**DLCES 4000**	DLC	25°	DLC COAT 4 flute square	Positive rake angle 
2 Flutes		**VDLCLS** V Series	DLC	35°	V series ϕ3 shank x overall length 38 DLC COAT 2 flute long neck square	Positive rake angle 
2 Flutes		**DLCLS**	DLC	35°	DLC COAT 2 flute long neck square	Positive rake angle 
2 Flutes		**DLCLRS**	DLC	35°	DLC COAT 2 flute long neck radius	Positive rake angle 
2 Flutes		**VDLCLB** V Series	DLC	30°	V series ϕ3 shank x overall length 38 DLC coating 2 flute long neck ball	Positive rake angle 
2 Flutes		**DLCLB**	DLC	30°	DLC coating 2 flute long neck ball	Positive rake angle 
For Stainless Steel Milling						
4 Flutes		**CESUS**	UTS COAT	40° ~42°	Special design for SUS milling 4 flute highly efficient square with variable pitch and helix design	
For Aluminum Milling						
2 Flutes		**CAS**	—	45°	NON-COAT 2 flute square	
3 Flutes		**AZS**	—	45°	NON-COAT 3 flute highly efficient long neck square that enables vertical milling	
3 Flutes		**VDLC-AZS** V Series	DLC	45°	V series ϕ3 shank x overall length 38 For Aluminum milling DLC COAT 3 flute long neck square that enables vertical milling	
3 Flutes		**DLC-AZS**	DLC	45°	AZS with DLC coating DLC COAT 3 flute long neck square	
3 Flutes		**DLC-ALES**	DLC	45°	DLC COAT 3 flute square (Length of cut L/D 3D, 5D) Uniform milling surface even with chip breaker	
3 Flutes		**DLC-CFB**	DLC	30°	DLC COAT 3 flute ball	
NON-COAT for Plastic Milling						
2 Flutes		**CPS**	—	30°	NON-COAT 2 flute square	
2 Flutes		**CPR**	—	30°	NON-COAT 2 flute long neck square	
2 Flutes		**CPRL**	—	30°	CPR with long shank NON-COAT 2 flute Long neck & long shank	
2 Flutes		**CPRB**	—	30°	NON-COAT 2 flute long neck ball	

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	~55 HRC	~60 HRC	~65 HRC	~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
UDC Drill																				
UDCMX	φ0.3~φ7														●			★	●	β-63
UDC for Threading																				
UDCT	M2~M8														○			★	●	β-65
PCD for Finishing Cemented Carbide and Hard Brittle Materials																				
UPDLRS	φ0.2~φ2																	★	●	β-61
UPDLB	R0.1~R1																	★	●	β-41
For Copper Electrode Milling																				
DLCES 2000	φ0.5~φ6										○		★	○						A-37
DLCES 4000	φ3~φ10										○		★	○						A-95
VDLCLS	φ0.2~φ2										●		★							α-19
DLCLS	φ0.1~φ3										●		★							B-29
DLCLRS	φ0.2~φ3										●		★							D-35
VDLCLB	R0.05~R1										●		★							α-49
DLCLB	R0.05~R3										●		★							G-77
For Stainless Steel Milling																				
CESUS	φ6~φ12	●	★	○						○			○			○	○			A-89
For Aluminum Milling																				
CAS	φ0.5~φ12										★		○							A-41
AZS	φ1~φ12										★		○	○						B-41
VDLC-AZS	φ1~φ3										★		○	○						α-23
DLC-AZS	φ1~φ12										★		○	○						B-45
DLC-ALES	φ1~φ12										★		○	○						A-43
DLC-CFB	R0.3~R6										★		○	○						F-39
NON-COAT for Plastic Milling																				
CPS	φ0.3~φ12										○		●	★						A-39
CPR	φ0.5~φ6										○		●	★						B-33
CPRL	φ0.5~φ4										○		●	★						B-37
CPRB	R0.2~R3										○		●	★						G-87

★ Highly Recommended ● Recommended ○ Suggested

Series

※ For the different types of square, radius and ball for steels, please refer to “Tool Type”.

Number of Flute	Appearance	Model Number	Coating	Helix Angle	Features	
Diamond Coating for Graphite Milling						
2 Flutes		**DCES 2000**	DIA	30°	Diamond coated 2 flute square	
4 Flutes		**DCES 4000**	DIA	30°	Diamond coated 4 flute square	
2 Flutes		**DCLS**	DIA	30°	Diamond coated 2 flute long neck square	
4 Flutes		**DCLRS**	DIA	30°	Diamond coated 4 flute long neck radius	
2 Flutes		**DCB**	DIA	35°	Diamond coated 2 flute ball	
2 Flutes		**DCLB**	DIA	35°	Diamond coated 2 flute long neck ball	
2 Flutes		**DCTNB**	DIA	35°	Diamond coated 2 flute taper neck ball	
Barrel Form						
4 Flutes		**COVB**	UT COAT	—	Oval barrel form Suitable for narrow area with small inclined angle	
4 Flutes		**CSTB**	UT COAT	—	Standard taper barrel form Suitable for highly efficient finishing with larger barrel R	
4 Flutes		**CWTB**	UT COAT	—	Wide taper barrel form Suitable for highly efficient finishing with wide taper angle	
NON-COAT for Chamfering						
2 Flutes		**SV**	—	30°	NON-COAT and half included angle 45° Peripheral spiral shape designed for reducing burrs	
Drill						
Over All Length 38.1 x Shank Diameter 3.175 mm P Series Micro Diameter Drill / Chamfering Cutter and Center Drill						
2 Flutes		**PMD STD**	—	—	NON-COAT micro diameter drill Flute length L/D=10 times	4-facet drill point
2 Flutes		**PMD PLT**	—	—	NON-COAT micro diameter drill for pilot drilling Flute length L/D=2 times	4-facet drill point
1 Flute		**PSM**	—	0°	NON-COAT for chamfering, counter sink, and center drill Half included angle 45°	—
Flat Drill						
2 Flutes		**UTDF**	UT COAT	30°	Size M4 - M12 for drilling pilot holes before tapping	Point angle 180°
Carbide Drill						
2 Flutes		**UTDSX**	MICRO COAT	30°	Short slot length L/D=5 times Diameter tolerance 0/-0.01	Point angle 130° X thinning
2 Flutes		**C-UMD**	MICRO COAT	24°	Medium slot length Diameter tolerance 0/-0.01	Point angle 150°
2 Flutes		**UTDLX**	MICRO COAT	30°	Long slot length L/D=15 times Diameter tolerance 0/-0.01	Point angle 130° X thinning

Model Number	Size	Carbon Steels	Alloy Steels SUS	Prehardened Steels	Hardened Steels ~50 HRC	~55 HRC	~60 HRC	~65 HRC	~70 HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	Page
Diamond Coating for Graphite Milling																				
DCES 2000	ϕ0.2~ϕ6										○	★	○	○	●				○	A-35
DCES 4000	ϕ3~ϕ10										○	★	○	○	●				○	A-93
DCLS	ϕ0.4~ϕ6										○	★	○	○	●				○	B-25
DCLRS	ϕ1~ϕ6										○	★	○	○	●				○	D-99
DCB	R0.5~R6										○	★	○	○	●				○	F-31
DCLB	R0.2~R3										○	★	○	○	●				○	G-73
DCTNB	R0.5~R1										○	★	○	○	●				○	H-21
Barrel Form																				
COVB	Tip R1 and R2	●	●	●	●	●				○	●		●			○	○			J-1
CSTB	Tip R1~R3	●	●	●	●	●				○	●		●			○	○			J-3
CWTB	Tip R1	●	●	●	●	●				○	●		●			○	○			J-5
NON-COAT for Chamfering																				
SV	ϕ3~ϕ12	●	●	●						○	○		○	○						K-1
Drill																				
Over All Length 38.1 x Shank Diameter 3.175 mm P Series Micro Diameter Drill / Chamfering Cutter and Center Drill																				
PMD STD	ϕ0.02~ϕ0.1	○	○							○	●		●	●						L-19
PMD PLT	ϕ0.02~ϕ0.1	○	○							○	●		●	●						L-20
PSM	ϕ1 x half included angle 45°	○	○							○	●		●	●						L-20
Flat Drill																				
UTDF	ϕ2~ϕ12	●	●	○						●	●									L-1
Carbide Drill																				
UTDSX	ϕ0.3~ϕ2	●	●	○						○	●		○			○	○			L-7
C-UMD	ϕ0.1~ϕ3	●	●	○						○	●		○			○	○			L-9
UTDLX	ϕ0.3~ϕ3	●	●	○						○	●		○			○	○			L-15

★ Highly Recommended ● Recommended ○ Suggested

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSS	2001-0010	2	0.1	—	0.1	45	4	A-1
C-CES	2001-0015	2	0.1	—	0.15	45	4	A-15
CSS	2001-0015	2	0.1	—	0.15	45	4	A-1
C-CES	2001-0020	2	0.1	—	0.2	45	4	A-15
CSS	2001-0020	2	0.1	—	0.2	45	4	A-1
CSS	2001-0025	2	0.1	—	0.25	45	4	A-1
C-CES	2001-0030	2	0.1	—	0.3	45	4	A-15
CSS	2001-0030	2	0.1	—	0.3	45	4	A-1
HLS	2001-003	2	0.1	0.3	0.1	45	4	B-1
C-CER	2001-0.3	2	0.1	0.3	0.1	45	4	B-15
DLCLS	2001-003	2	0.1	0.3	0.15	45	4	B-30
HLS	2001-005	2	0.1	0.5	0.1	45	4	B-1
C-CER	2001-0.5	2	0.1	0.5	0.1	45	4	B-15
DLCLS	2001-005	2	0.1	0.5	0.15	45	4	B-30
HLS	2001-0075	2	0.1	0.75	0.1	45	4	B-1
C-CER	2001-0.75	2	0.1	0.75	0.1	45	4	B-15
HLS	2001-010	2	0.1	1	0.1	45	4	B-1
C-CER	2001-1	2	0.1	1	0.1	45	4	B-15
HLS	20015-005	2	0.15	0.5	0.15	45	4	B-1
C-CER	20015-0.5	2	0.15	0.5	0.15	45	4	B-15
HLS	20015-0075	2	0.15	0.75	0.15	45	4	B-1
C-CER	20015-0.75	2	0.15	0.75	0.15	45	4	B-15
HLS	20015-010	2	0.15	1	0.15	45	4	B-1
C-CER	20015-1	2	0.15	1	0.15	45	4	B-15
CSS	2002-0020	2	0.2	—	0.2	45	4	A-1
C-CES	2002-0030	2	0.2	—	0.3	45	4	A-15
C-CES	2002-0030S	2	0.2	—	0.3	45	4	A-29
CSS	2002-0030	2	0.2	—	0.3	45	4	A-1
C-CES	2002	2	0.2	—	0.4	38	3	A-15
CSS	2002-0040-3	2	0.2	—	0.4	38	3	A-1
C-CES	2002-0040	2	0.2	—	0.4	45	4	A-15
CSS	2002-0040-4	2	0.2	—	0.4	45	4	A-1
C-CES	2002-0050	2	0.2	—	0.5	45	4	A-15
CSS	2002-0050	2	0.2	—	0.5	45	4	A-1
C-CES	2002-0060	2	0.2	—	0.6	45	4	A-15
C-CES	2002-0060S	2	0.2	—	0.6	45	4	A-29
CSS	2002-0060	2	0.2	—	0.6	45	4	A-1
DCES	2002-0060	2	0.2	—	0.6	45	4	A-35
C-CES	2002-0080	2	0.2	—	0.8	45	4	A-15
HLS	2002-005	2	0.2	0.5	0.3	45	4	B-1

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CER	2002-0.5	2	0.2	0.5	0.3	45	4	B-15
DLCLS	2002-005	2	0.2	0.5	0.3	45	4	B-30
HLS	2002-010	2	0.2	1	0.3	45	4	B-1
C-CER	2002-1	2	0.2	1	0.3	45	4	B-15
DLCLS	2002-010	2	0.2	1	0.3	45	4	B-30
HLS	2002-015	2	0.2	1.5	0.3	45	4	B-1
C-CER	2002-1.5	2	0.2	1.5	0.3	45	4	B-15
DLCLS	2002-015	2	0.2	1.5	0.3	45	4	B-30
HLS	2002-020	2	0.2	2	0.3	45	4	B-1
C-CER	2002-2	2	0.2	2	0.3	45	4	B-15
HLS	2002-030	2	0.2	3	0.3	45	4	B-1
C-CER	2002-3	2	0.2	3	0.3	45	4	B-15
CSS	2003-0030	2	0.3	—	0.3	45	4	A-1
C-CES	2003-0045	2	0.3	—	0.45	45	4	A-16
C-CES	2003-0045S	2	0.3	—	0.45	45	4	A-29
CSS	2003-0045	2	0.3	—	0.45	45	4	A-1
C-CES	2003	2	0.3	—	0.6	38	3	A-16
CSS	2003-0060-3	2	0.3	—	0.6	38	3	A-1
C-CES	2003-0060	2	0.3	—	0.6	45	4	A-16
CSS	2003-0060-4	2	0.3	—	0.6	45	4	A-1
C-CES	2003-0075	2	0.3	—	0.75	45	4	A-16
CSS	2003-0075	2	0.3	—	0.75	45	4	A-1
C-CES	2003-0090	2	0.3	—	0.9	45	4	A-16
C-CES	2003-0090S	2	0.3	—	0.9	45	4	A-29
CSS	2003-0090	2	0.3	—	0.9	45	4	A-1
CPS	2003	2	0.3	—	0.9	45	4	A-39
C-CES	2003-0120	2	0.3	—	1.2	45	4	A-16
HLS	2003-010	2	0.3	1	0.4	45	4	B-2
C-CER	2003-1	2	0.3	1	0.4	45	4	B-15
DLCLS	2003-010	2	0.3	1	0.45	45	4	B-30
HLS	2003-015	2	0.3	1.5	0.4	45	4	B-2
C-CER	2003-1.5	2	0.3	1.5	0.4	45	4	B-15
DLCLS	2003-015	2	0.3	1.5	0.45	45	4	B-30
HLS	2003-020	2	0.3	2	0.4	45	4	B-2
C-CER	2003-2	2	0.3	2	0.4	45	4	B-15
DLCLS	2003-020	2	0.3	2	0.45	45	4	B-30
HLS	2003-025	2	0.3	2.5	0.4	45	4	B-2
HLS	2003-030	2	0.3	3	0.4	45	4	B-2
C-CER	2003-3	2	0.3	3	0.4	45	4	B-15
HLS	2003-040	2	0.3	4	0.4	45	4	B-2

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLS	2003-060	2	0.3	6	0.4	45	4	B-2
HLS	2003-090	2	0.3	9	0.4	45	4	B-2
CSS	2004-0040	2	0.4	—	0.4	45	4	A-2
C-CES	2004-0060	2	0.4	—	0.6	45	4	A-16
C-CES	2004-0060S	2	0.4	—	0.6	45	4	A-29
CSS	2004-0060	2	0.4	—	0.6	45	4	A-2
C-CES	2004	2	0.4	—	0.8	38	3	A-16
CSS	2004-0080-3	2	0.4	—	0.8	38	3	A-2
C-CES	2004-0080	2	0.4	—	0.8	45	4	A-16
CSS	2004-0080-4	2	0.4	—	0.8	45	4	A-2
C-CES	2004-0100	2	0.4	—	1	45	4	A-16
CSS	2004-0100	2	0.4	—	1	45	4	A-2
C-CES	2004-0120	2	0.4	—	1.2	45	4	A-16
C-CES	2004-0120S	2	0.4	—	1.2	45	4	A-29
CSS	2004-0120	2	0.4	—	1.2	45	4	A-2
CPS	2004	2	0.4	—	1.2	45	4	A-39
C-CES	2004-0160	2	0.4	—	1.6	45	4	A-16
DLCLS	2004-010	2	0.4	1	0.6	45	4	B-30
HLS	2004-015	2	0.4	1.5	0.6	45	4	B-2
HLS	2004-020	2	0.4	2	0.6	45	4	B-2
C-CER	2004-2	2	0.4	2	0.6	45	4	B-16
DLCLS	2004-020	2	0.4	2	0.6	45	4	B-30
DCLS	2004-020	2	0.4	2	0.8	45	4	B-25
HLS	2004-025	2	0.4	2.5	0.6	45	4	B-2
HLS	2004-030	2	0.4	3	0.6	45	4	B-2
C-CER	2004-3	2	0.4	3	0.6	45	4	B-16
DLCLS	2004-030	2	0.4	3	0.6	45	4	B-30
HLS	2004-035	2	0.4	3.5	0.6	45	4	B-2
HLS	2004-040	2	0.4	4	0.6	45	4	B-2
C-CER	2004-4	2	0.4	4	0.6	45	4	B-16
DCLS	2004-040	2	0.4	4	0.8	45	4	B-25
HLS	2004-050	2	0.4	5	0.6	45	4	B-2
C-CER	2004-5	2	0.4	5	0.6	45	4	B-16
DCLS	2004-060	2	0.4	6	0.8	45	4	B-25
HLS	2004-080	2	0.4	8	0.6	45	4	B-2
HLS	2004-120	2	0.4	12	0.6	45	4	B-2
CSS	2005-0050	2	0.5	—	0.5	45	4	A-2
C-CES	2005-0075	2	0.5	—	0.75	45	4	A-16
C-CES	2005-0075S	2	0.5	—	0.75	45	4	A-29
CSS	2005-0075	2	0.5	—	0.75	45	4	A-2

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CAS	2005-0075	2	0.5	—	0.75	45	4	A-41
C-CES	2005	2	0.5	—	0.8	38	3	A-16
CSS	2005-0080	2	0.5	—	0.8	38	3	A-2
C-CES	2005-0100	2	0.5	—	1	45	4	A-16
CSS	2005-0100	2	0.5	—	1	45	4	A-2
C-CES	2005-0125	2	0.5	—	1.25	45	4	A-16
CSS	2005-0125	2	0.5	—	1.25	45	4	A-2
DLCES	2005-0150	2	0.5	—	1.5	40	4	A-37
C-CES	2005-0150	2	0.5	—	1.5	45	4	A-16
C-CES	2005-0150S	2	0.5	—	1.5	45	4	A-29
CSS	2005-0150	2	0.5	—	1.5	45	4	A-2
DCES	2005-0150	2	0.5	—	1.5	45	4	A-35
CPS	2005	2	0.5	—	1.5	45	4	A-39
C-CES	2005-0200	2	0.5	—	2	45	4	A-16
HLS	2005-015	2	0.5	1.5	0.7	45	4	B-2
HLS	2005-020	2	0.5	2	0.7	45	4	B-2
C-CER	2005-2	2	0.5	2	0.7	45	4	B-16
DLCLS	2005-020	2	0.5	2	0.75	45	4	B-30
CPR	2005-2	2	0.5	2	1	38	3	B-33
DCLS	2005-020	2	0.5	2	1	45	4	B-25
HLS	2005-025	2	0.5	2.5	0.7	45	4	B-2
HLS	2005-030	2	0.5	3	0.7	45	4	B-2
DLCLS	2005-030	2	0.5	3	0.75	45	4	B-30
HLS	2005-040	2	0.5	4	0.7	45	4	B-2
C-CER	2005-4	2	0.5	4	0.7	45	4	B-16
DLCLS	2005-040	2	0.5	4	0.75	45	4	B-30
CPR	2005-4	2	0.5	4	1	38	3	B-33
DCLS	2005-040	2	0.5	4	1	45	4	B-25
CPRL	2005-4	2	0.5	4	1	80	4	B-37
HLS	2005-050	2	0.5	5	0.7	45	4	B-2
HLS	2005-060	2	0.5	6	0.7	45	4	B-2
C-CER	2005-6	2	0.5	6	0.7	45	4	B-16
DLCLS	2005-060	2	0.5	6	0.75	45	4	B-30
CPR	2005-6	2	0.5	6	1	38	3	B-33
DCLS	2005-060	2	0.5	6	1	45	4	B-25
CPRL	2005-6	2	0.5	6	1	80	4	B-37
HLS	2005-080	2	0.5	8	0.7	45	4	B-2
C-CER	2005-8	2	0.5	8	0.7	45	4	B-16
CPRL	2005-8	2	0.5	8	1	80	4	B-37
HLS	2005-100	2	0.5	10	0.7	50	4	B-2

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CPRL	2005-10	2	0.5	10	1	80	4	B-37
HLS	2005-150	2	0.5	15	0.7	50	4	B-2
CSS	2006-0060	2	0.6	—	0.6	45	4	A-2
C-CES	2006-0090	2	0.6	—	0.9	45	4	A-16
C-CES	2006-0090S	2	0.6	—	0.9	45	4	A-29
CSS	2006-0090	2	0.6	—	0.9	45	4	A-2
C-CES	2006	2	0.6	—	1	38	3	A-16
CSS	2006-0100	2	0.6	—	1	38	3	A-2
C-CES	2006-0120	2	0.6	—	1.2	45	4	A-16
CSS	2006-0120	2	0.6	—	1.2	45	4	A-2
C-CES	2006-0150	2	0.6	—	1.5	45	4	A-16
CSS	2006-0150	2	0.6	—	1.5	45	4	A-2
C-CES	2006-0180	2	0.6	—	1.8	45	4	A-16
CSS	2006-0180	2	0.6	—	1.8	45	4	A-2
CPS	2006	2	0.6	—	1.8	45	4	A-39
C-CES	2006-0240	2	0.6	—	2.4	45	4	A-16
HLS	2006-020	2	0.6	2	0.9	45	4	B-2
C-CER	2006-2	2	0.6	2	0.9	45	4	B-16
DLCLS	2006-020	2	0.6	2	0.9	45	4	B-30
DCLS	2006-020	2	0.6	2	1.2	45	4	B-25
HLS	2006-030	2	0.6	3	0.9	45	4	B-2
DLCLS	2006-030	2	0.6	3	0.9	45	4	B-30
HLS	2006-040	2	0.6	4	0.9	45	4	B-2
C-CER	2006-4	2	0.6	4	0.9	45	4	B-16
DLCLS	2006-040	2	0.6	4	0.9	45	4	B-30
CPR	2006-4	2	0.6	4	1.2	38	3	B-33
DCLS	2006-040	2	0.6	4	1.2	45	4	B-25
HLS	2006-050	2	0.6	5	0.9	45	4	B-2
HLS	2006-060	2	0.6	6	0.9	45	4	B-2
C-CER	2006-6	2	0.6	6	0.9	45	4	B-16
DLCLS	2006-060	2	0.6	6	0.9	45	4	B-30
CPR	2006-6	2	0.6	6	1.2	38	3	B-33
DCLS	2006-060	2	0.6	6	1.2	45	4	B-25
HLS	2006-070	2	0.6	7	0.9	45	4	B-2
HLS	2006-080	2	0.6	8	0.9	45	4	B-2
C-CER	2006-8	2	0.6	8	0.9	45	4	B-16
DCLS	2006-080	2	0.6	8	1.2	45	4	B-25
HLS	2006-100	2	0.6	10	0.9	45	4	B-2
C-CER	2006-10	2	0.6	10	0.9	45	4	B-16
DCLS	2006-100	2	0.6	10	1.2	45	4	B-25

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLS	2006-120	2	0.6	12	0.9	50	4	B-2
HLS	2006-180	2	0.6	18	0.9	50	4	B-2
CSS	2007-0070	2	0.7	—	0.7	45	4	A-2
C-CES	2007	2	0.7	—	1	38	3	A-16
CSS	2007-0100	2	0.7	—	1	38	3	A-2
C-CES	2007-0105S	2	0.7	—	1.05	45	4	A-29
C-CES	2007-0140	2	0.7	—	1.4	45	4	A-16
CSS	2007-0140	2	0.7	—	1.4	45	4	A-2
C-CES	2007-0175	2	0.7	—	1.75	45	4	A-16
CSS	2007-0175	2	0.7	—	1.75	45	4	A-2
C-CES	2007-0210	2	0.7	—	2.1	45	4	A-16
CSS	2007-0210	2	0.7	—	2.1	45	4	A-2
CPS	2007	2	0.7	—	2.1	45	4	A-39
C-CES	2007-0280	2	0.7	—	2.8	45	4	A-16
HLS	2007-020	2	0.7	2	1	45	4	B-3
C-CER	2007-2	2	0.7	2	1	45	4	B-16
C-CER	2007-3	2	0.7	3	1	45	4	B-16
HLS	2007-040	2	0.7	4	1	45	4	B-3
C-CER	2007-4	2	0.7	4	1	45	4	B-16
CPR	2007-4	2	0.7	4	1.4	38	3	B-33
DCLS	2007-040	2	0.7	4	1.4	45	4	B-26
HLS	2007-060	2	0.7	6	1	45	4	B-3
C-CER	2007-6	2	0.7	6	1	45	4	B-16
CPR	2007-6	2	0.7	6	1.4	38	3	B-33
DCLS	2007-060	2	0.7	6	1.4	45	4	B-26
HLS	2007-080	2	0.7	8	1	45	4	B-3
C-CER	2007-8	2	0.7	8	1	45	4	B-16
DCLS	2007-080	2	0.7	8	1.4	45	4	B-26
HLS	2007-100	2	0.7	10	1	50	4	B-3
C-CER	2007-10	2	0.7	10	1	50	4	B-16
DCLS	2007-100	2	0.7	10	1.4	45	4	B-26
CSS	2008-0080	2	0.8	—	0.8	45	4	A-2
C-CES	2008	2	0.8	—	1.2	38	3	A-16
CSS	2008-0120-3	2	0.8	—	1.2	38	3	A-2
C-CES	2008-0120	2	0.8	—	1.2	45	4	A-16
C-CES	2008-0120S	2	0.8	—	1.2	45	4	A-29
CSS	2008-0120-4	2	0.8	—	1.2	45	4	A-2
C-CES	2008-0160	2	0.8	—	1.6	45	4	A-16
CSS	2008-0160	2	0.8	—	1.6	45	4	A-2
C-CES	2008-0200	2	0.8	—	2	45	4	A-16

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSS	2008-0200	2	0.8	—	2	45	4	A-2
C-CES	2008-0240	2	0.8	—	2.4	45	4	A-16
C-CES	2008-0240S	2	0.8	—	2.4	45	4	A-29
CSS	2008-0240	2	0.8	—	2.4	45	4	A-2
CPS	2008	2	0.8	—	2.4	45	4	A-39
C-CES	2008-0320	2	0.8	—	3.2	45	4	A-16
HLS	2008-030	2	0.8	3	1.2	45	4	B-3
DLCLS	2008-030	2	0.8	3	1.2	45	4	B-30
HLS	2008-040	2	0.8	4	1.2	45	4	B-3
C-CER	2008-4	2	0.8	4	1.2	45	4	B-16
DLCLS	2008-040	2	0.8	4	1.2	45	4	B-30
DCLS	2008-040	2	0.8	4	1.6	45	4	B-26
HLS	2008-050	2	0.8	5	1.2	45	4	B-3
HLS	2008-060	2	0.8	6	1.2	45	4	B-3
C-CER	2008-6	2	0.8	6	1.2	45	4	B-16
DLCLS	2008-060	2	0.8	6	1.2	45	4	B-30
DCLS	2008-060	2	0.8	6	1.6	45	4	B-26
CPR	2008-6	2	0.8	6	1.6	45	4	B-33
HLS	2008-080	2	0.8	8	1.2	45	4	B-3
C-CER	2008-8	2	0.8	8	1.2	45	4	B-16
DCLS	2008-080	2	0.8	8	1.6	45	4	B-26
CPR	2008-8	2	0.8	8	1.6	45	4	B-33
HLS	2008-100	2	0.8	10	1.2	50	4	B-3
C-CER	2008-10	2	0.8	10	1.2	50	4	B-16
DCLS	2008-100	2	0.8	10	1.6	45	4	B-26
HLS	2008-120	2	0.8	12	1.2	50	4	B-3
C-CER	2008-12	2	0.8	12	1.2	50	4	B-16
HLS	2008-160	2	0.8	16	1.2	50	4	B-3
HLS	2008-240	2	0.8	24	1.2	60	4	B-3
CSS	2009-0090	2	0.9	—	0.9	45	4	A-2
C-CES	2009	2	0.9	—	1.2	38	3	A-16
CSS	2009-0120	2	0.9	—	1.2	38	3	A-2
C-CES	2009-0135S	2	0.9	—	1.35	45	4	A-30
C-CES	2009-0180	2	0.9	—	1.8	45	4	A-16
CSS	2009-0180	2	0.9	—	1.8	45	4	A-2
C-CES	2009-0225	2	0.9	—	2.25	45	4	A-16
CSS	2009-0225	2	0.9	—	2.25	45	4	A-2
C-CES	2009-0270	2	0.9	—	2.7	45	4	A-16
CSS	2009-0270	2	0.9	—	2.7	45	4	A-2
CPS	2009	2	0.9	—	2.7	45	4	A-39

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CES	2009-0360	2	0.9	—	3.6	45	4	A-16
HLS	2009-040	2	0.9	4	1.3	45	4	B-3
C-CER	2009-4	2	0.9	4	1.3	45	4	B-16
HLS	2009-060	2	0.9	6	1.3	45	4	B-3
C-CER	2009-6	2	0.9	6	1.3	45	4	B-16
CPR	2009-6	2	0.9	6	1.8	45	4	B-33
HLS	2009-080	2	0.9	8	1.3	45	4	B-3
C-CER	2009-8	2	0.9	8	1.3	45	4	B-16
HLS	2009-100	2	0.9	10	1.3	45	4	B-3
C-CER	2009-10	2	0.9	10	1.3	45	4	B-16
CPR	2009-10	2	0.9	10	1.8	45	4	B-33
HLS	2009-150	2	0.9	15	1.3	50	4	B-3
C-CER	2009-15	2	0.9	15	1.3	50	4	B-16
CSS	2010-0100	2	1	—	1	45	4	A-2
C-CES	2010-0150	2	1	—	1.5	45	4	A-17
C-CES	2010-0150S	2	1	—	1.5	45	4	A-30
CSS	2010-0150	2	1	—	1.5	45	4	A-2
CAS	2010-0150	2	1	—	1.5	45	4	A-41
C-CES	2010-0200	2	1	—	2	45	4	A-17
CSS	2010-0200	2	1	—	2	45	4	A-2
C-CES	2010	2	1	—	2.5	45	4	A-17
CSS	2010-0250	2	1	—	2.5	45	4	A-2
C-CES	2010-0300	2	1	—	3	45	4	A-17
C-CES	2010-0300S	2	1	—	3	45	4	A-30
CSS	2010-0300	2	1	—	3	45	4	A-2
DLCES	2010-0300	2	1	—	3	45	4	A-37
DCES	2010-0300	2	1	—	3	45	4	A-35
CPS	2010	2	1	—	3	50	4	A-39
C-CES	2010-0400	2	1	—	4	45	4	A-17
DLCES	2010-0400	2	1	—	4	50	4	A-37
HLS	2010-030	2	1	3	1.5	45	4	B-3
DLCLS	2010-030	2	1	3	1.5	45	4	B-30
HLS	2010-040	2	1	4	1.5	45	4	B-3
C-CER	2010-4	2	1	4	1.5	45	4	B-16
DLCLS	2010-040	2	1	4	1.5	45	4	B-30
DCLS	2010-040	2	1	4	2	45	4	B-26
HLS	2010-050	2	1	5	1.5	45	4	B-3
HLS	2010-060	2	1	6	1.5	45	4	B-3
C-CER	2010-6	2	1	6	1.5	45	4	B-16
DLCLS	2010-060	2	1	6	1.5	45	4	B-30

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
DCLS	2010-060	2	1	6	2	45	4	B-26
CPR	2010-6	2	1	6	2	45	4	B-33
CPRL	2010-6	2	1	6	2	80	4	B-37
HLS	2010-070	2	1	7	1.5	45	4	B-3
HLS	2010-080	2	1	8	1.5	45	4	B-3
C-CER	2010-8	2	1	8	1.5	45	4	B-16
DLCLS	2010-080	2	1	8	1.5	45	4	B-30
DCLS	2010-080	2	1	8	2	45	4	B-26
CPR	2010-8	2	1	8	2	45	4	B-33
CPRL	2010-8	2	1	8	2	80	4	B-37
HLS	2010-090	2	1	9	1.5	45	4	B-3
HLS	2010-100	2	1	10	1.5	45	4	B-3
C-CER	2010-10	2	1	10	1.5	45	4	B-16
DLCLS	2010-100	2	1	10	1.5	45	4	B-30
DCLS	2010-100	2	1	10	2	45	4	B-26
CPR	2010-10	2	1	10	2	45	4	B-33
CPRL	2010-10	2	1	10	2	80	4	B-37
HLS	2010-120	2	1	12	1.5	45	4	B-3
C-CER	2010-12	2	1	12	1.5	45	4	B-16
CPR	2010-12	2	1	12	2	45	4	B-33
CPRL	2010-12	2	1	12	2	80	4	B-37
HLS	2010-140	2	1	14	1.5	45	4	B-3
CPRL	2010-14	2	1	14	2	80	4	B-37
HLS	2010-160	2	1	16	1.5	50	4	B-3
C-CER	2010-16	2	1	16	1.5	50	4	B-16
DCLS	2010-160	2	1	16	2	50	4	B-26
CPR	2010-16	2	1	16	2	50	4	B-33
CPRL	2010-16	2	1	16	2	80	4	B-37
HLS	2010-180	2	1	18	1.5	55	4	B-3
CPRL	2010-18	2	1	18	2	80	4	B-37
HLS	2010-200	2	1	20	1.5	55	4	B-3
C-CER	2010-20	2	1	20	1.5	55	4	B-16
DCLS	2010-210	2	1	21	2	55	4	B-26
CPR	2010-21	2	1	21	2	55	4	B-33
CPRL	2010-21	2	1	21	2	80	4	B-37
HLS	2010-250	2	1	25	1.5	70	4	B-3
HLS	2010-300	2	1	30	1.5	70	4	B-3
HMS	3010-0250	3	1	—	2.5	45	4	A-103
DLC-ALES	3010-0300	3	1	—	3	60	4	A-43
HMS	3010-0350	3	1	—	3.5	45	4	A-103

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
DLC-ALES	3010-0500	3	1	—	5	60	4	A-43
DLC-AZS	3010-030	3	1	3	2	60	4	B-45
AZS	3010-030	3	1	3	2	60	4	B-42
DLC-AZS	3010-050	3	1	5	2	60	4	B-45
AZS	3010-050	3	1	5	2	60	4	B-42
CZS	4010-0150	4	1	—	1.5	50	4	A-64
CXES	4010-0150	4	1	—	1.5	50	4	A-78
CEHS	4010-0150	4	1	—	1.5	50	4	A-57
CEHS	4010-0220	4	1	—	2.2	50	4	A-57
C-CES	4010	4	1	—	2.5	45	4	A-47
C-CES	4010S	4	1	—	2.5	45	4	A-53
CZS	4010-0250	4	1	—	2.5	50	4	A-64
CXES	4010-0250	4	1	—	2.5	50	4	A-78
C-CES	4010-0300	4	1	—	3	45	4	A-47
CEHS	4010-0300	4	1	—	3	50	4	A-57
CXES	4010-0300	4	1	—	3	60	4	A-78
C-CES	4010-0400	4	1	—	4	45	4	A-47
CXES	4010-0400	4	1	—	4	60	4	A-78
CXES	4010-0500	4	1	—	5	60	4	A-78
CXS	4010-030	4	1	3	1.5	50	4	B-57
HLS	4010-040	4	1	4	1	50	4	B-51
CXS	4010-050	4	1	5	1.5	70	4	B-57
HLS	4010-060	4	1	6	1	50	4	B-51
CXS	4010-060	4	1	6	1.5	70	4	B-57
HLS	4010-080	4	1	8	1	50	4	B-51
HLS	4010-100	4	1	10	1	50	4	B-51
HLS	4010-120	4	1	12	1	50	4	B-51
HLS	4010-160	4	1	16	1	60	4	B-51
HGS	6010-0200	6	1	—	2	45	4	A-100
HGS	6010-0300	6	1	—	3	45	4	A-100
C-CES	2011	2	1.1	—	2.5	45	4	A-17
CZS	4011-0250	4	1.1	—	2.5	50	4	A-64
C-CES	2012-0180	2	1.2	—	1.8	45	4	A-17
C-CES	2012-0180S	2	1.2	—	1.8	45	4	A-30
C-CES	2012-0240	2	1.2	—	2.4	45	4	A-17
C-CES	2012-0300	2	1.2	—	3	45	4	A-17
C-CES	2012-0360	2	1.2	—	3.6	45	4	A-17
C-CES	2012-0360S	2	1.2	—	3.6	45	4	A-30
CPS	2012	2	1.2	—	3.6	50	4	A-39
C-CES	2012	2	1.2	—	4	45	4	A-17

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CES	2012-0480	2	1.2	—	4.8	45	4	A-17
HLS	2012-040	2	1.2	4	1.8	45	4	B-4
HLS	2012-060	2	1.2	6	1.8	45	4	B-4
C-CER	2012-6	2	1.2	6	1.8	45	4	B-16
CPR	2012-6	2	1.2	6	2.4	45	4	B-33
HLS	2012-080	2	1.2	8	1.8	45	4	B-4
C-CER	2012-8	2	1.2	8	1.8	45	4	B-16
CPR	2012-8	2	1.2	8	2.4	45	4	B-33
HLS	2012-100	2	1.2	10	1.8	45	4	B-4
C-CER	2012-10	2	1.2	10	1.8	45	4	B-16
CPR	2012-10	2	1.2	10	2.4	45	4	B-33
HLS	2012-120	2	1.2	12	1.8	45	4	B-4
C-CER	2012-12	2	1.2	12	1.8	45	4	B-16
CPR	2012-12	2	1.2	12	2.4	50	4	B-33
HLS	2012-160	2	1.2	16	1.8	50	4	B-4
C-CER	2012-16	2	1.2	16	1.8	50	4	B-16
HLS	2012-200	2	1.2	20	1.8	60	4	B-4
CZS	4012-0250	4	1.2	—	2.5	50	4	A-64
HLS	4012-060	4	1.2	6	1.2	50	4	B-51
HLS	4012-080	4	1.2	8	1.2	50	4	B-51
HLS	4012-100	4	1.2	10	1.2	50	4	B-51
HLS	4012-120	4	1.2	12	1.2	50	4	B-51
HLS	4012-160	4	1.2	16	1.2	60	4	B-51
C-CES	2013	2	1.3	—	4	45	4	A-17
CZS	4013-0300	4	1.3	—	3	50	4	A-64
C-CES	2014	2	1.4	—	4	45	4	A-17
HLS	2014-060	2	1.4	6	2.1	45	4	B-4
C-CER	2014-6	2	1.4	6	2.1	45	4	B-16
CPR	2014-6	2	1.4	6	2.8	45	4	B-34
HLS	2014-080	2	1.4	8	2.1	45	4	B-4
C-CER	2014-8	2	1.4	8	2.1	45	4	B-16
HLS	2014-100	2	1.4	10	2.1	45	4	B-4
C-CER	2014-10	2	1.4	10	2.1	45	4	B-16
CPR	2014-10	2	1.4	10	2.8	45	4	B-34
HLS	2014-120	2	1.4	12	2.1	45	4	B-4
C-CER	2014-12	2	1.4	12	2.1	45	4	B-16
HLS	2014-140	2	1.4	14	2.1	45	4	B-4
C-CER	2014-14	2	1.4	14	2.1	45	4	B-16
HLS	2014-160	2	1.4	16	2.1	50	4	B-4
C-CER	2014-16	2	1.4	16	2.1	50	4	B-16

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CPR	2014-16	2	1.4	16	2.8	50	4	B-34
HLS	2014-220	2	1.4	22	2.1	55	4	B-4
C-CER	2014-22	2	1.4	22	2.1	55	4	B-16
CZS	4014-0300	4	1.4	—	3	50	4	A-64
HLS	4014-060	4	1.4	6	1.4	50	4	B-52
HLS	4014-080	4	1.4	8	1.4	50	4	B-52
HLS	4014-100	4	1.4	10	1.4	50	4	B-52
HLS	4014-120	4	1.4	12	1.4	50	4	B-52
HLS	4014-140	4	1.4	14	1.4	60	4	B-52
HLS	4014-160	4	1.4	16	1.4	60	4	B-52
HLS	4014-220	4	1.4	22	1.4	60	4	B-52
CSS	2015-0150	2	1.5	—	1.5	45	4	A-2
C-CES	2015-0225	2	1.5	—	2.25	45	4	A-17
C-CES	2015-0225S	2	1.5	—	2.25	45	4	A-30
CSS	2015-0225	2	1.5	—	2.25	45	4	A-2
CAS	2015-0225	2	1.5	—	2.25	45	4	A-41
C-CES	2015-0300	2	1.5	—	3	45	4	A-17
CSS	2015-0300	2	1.5	—	3	45	4	A-2
C-CES	2015-0375	2	1.5	—	3.75	45	4	A-17
CSS	2015-0375	2	1.5	—	3.75	45	4	A-2
C-CES	2015	2	1.5	—	4	45	4	A-17
C-CES	2015-0450	2	1.5	—	4.5	45	4	A-17
C-CES	2015-0450S	2	1.5	—	4.5	45	4	A-30
CSS	2015-0450	2	1.5	—	4.5	45	4	A-2
DLCES	2015-0450	2	1.5	—	4.5	45	4	A-37
DCES	2015-0450	2	1.5	—	4.5	45	4	A-35
CPS	2015	2	1.5	—	4.5	50	4	A-39
C-CES	2015-0600	2	1.5	—	6	45	4	A-17
DLCES	2015-0600	2	1.5	—	6	50	4	A-37
HLS	2015-040	2	1.5	4	2.3	45	4	B-4
DLCLS	2015-060	2	1.5	6	2.25	45	4	B-30
HLS	2015-060	2	1.5	6	2.3	45	4	B-4
C-CER	2015-6	2	1.5	6	2.3	45	4	B-17
DCLS	2015-060	2	1.5	6	3	45	4	B-26
CPR	2015-6	2	1.5	6	3	45	4	B-34
CPRL	2015-6	2	1.5	6	3	80	4	B-37
HLS	2015-080	2	1.5	8	2.3	45	4	B-4
C-CER	2015-8	2	1.5	8	2.3	45	4	B-17
CPRL	2015-8	2	1.5	8	3	80	4	B-37
DLCLS	2015-100	2	1.5	10	2.25	45	4	B-30

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLS	2015-100	2	1.5	10	2.3	45	4	B-4
C-CER	2015-10	2	1.5	10	2.3	45	4	B-17
DCLS	2015-100	2	1.5	10	3	45	4	B-26
CPR	2015-10	2	1.5	10	3	45	4	B-34
CPRL	2015-10	2	1.5	10	3	80	4	B-37
HLS	2015-120	2	1.5	12	2.3	45	4	B-4
C-CER	2015-12	2	1.5	12	2.3	45	4	B-17
HLS	2015-140	2	1.5	14	2.3	50	4	B-4
C-CER	2015-14	2	1.5	14	2.3	50	4	B-17
CPR	2015-14	2	1.5	14	3	50	4	B-34
CPRL	2015-14	2	1.5	14	3	80	4	B-37
HLS	2015-160	2	1.5	16	2.3	50	4	B-4
C-CER	2015-16	2	1.5	16	2.3	50	4	B-17
DCLS	2015-160	2	1.5	16	3	50	4	B-26
CPR	2015-16	2	1.5	16	3	50	4	B-34
CPRL	2015-16	2	1.5	16	3	80	4	B-37
HLS	2015-180	2	1.5	18	2.3	55	4	B-4
C-CER	2015-18	2	1.5	18	2.3	55	4	B-17
HLS	2015-200	2	1.5	20	2.3	55	4	B-4
C-CER	2015-20	2	1.5	20	2.3	55	4	B-17
DCLS	2015-210	2	1.5	21	3	55	4	B-26
CPR	2015-21	2	1.5	21	3	55	4	B-34
CPRL	2015-21	2	1.5	21	3	80	4	B-37
HLS	2015-250	2	1.5	25	2.3	70	4	B-4
HLS	2015-300	2	1.5	30	2.3	70	4	B-4
HLS	2015-350	2	1.5	35	2.3	70	4	B-4
HLS	2015-400	2	1.5	40	2.3	80	4	B-4
HLS	2015-450	2	1.5	45	2.3	80	4	B-4
HMS	3015-0400	3	1.5	—	4	45	4	A-103
HMS	3015-0600	3	1.5	—	6	45	4	A-103
DLC-AZS	3015-045	3	1.5	4.5	3	60	4	B-45
AZS	3015-045	3	1.5	4.5	3	60	4	B-42
CZS	4015-0225	4	1.5	—	2.25	50	4	A-64
CXES	4015-0225	4	1.5	—	2.25	50	4	A-78
CEHS	4015-0350	4	1.5	—	3.5	50	4	A-57
C-CES	4015	4	1.5	—	3.75	45	4	A-47
C-CES	4015S	4	1.5	—	3.75	45	4	A-53
CXES	4015-0375	4	1.5	—	3.75	50	4	A-78
CZS	4015-0400	4	1.5	—	4	50	4	A-64
C-CES	4015-0450	4	1.5	—	4.5	45	4	A-47

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CES	4015-0600	4	1.5	—	6	45	4	A-47
CXES	4015-0600	4	1.5	—	6	50	4	A-78
CXS	4015-045	4	1.5	4.5	2.25	50	4	B-57
HLS	4015-060	4	1.5	6	1.5	50	4	B-52
CXS	4015-070	4	1.5	7	2.25	70	4	B-57
HLS	4015-080	4	1.5	8	1.5	50	4	B-52
CXS	4015-085	4	1.5	8.5	2.25	70	4	B-57
HLS	4015-100	4	1.5	10	1.5	50	4	B-52
HLS	4015-120	4	1.5	12	1.5	50	4	B-52
HLS	4015-140	4	1.5	14	1.5	60	4	B-52
HLS	4015-160	4	1.5	16	1.5	60	4	B-52
HLS	4015-180	4	1.5	18	1.5	60	4	B-52
HLS	4015-200	4	1.5	20	1.5	60	4	B-52
HGS	6015-0300	6	1.5	—	3	45	4	A-100
HGS	6015-0450	6	1.5	—	4.5	45	4	A-100
C-CES	2016	2	1.6	—	5	45	4	A-17
HLS	2016-060	2	1.6	6	2.4	45	4	B-4
C-CER	2016-6	2	1.6	6	2.4	45	4	B-17
CPR	2016-6	2	1.6	6	3.2	50	4	B-34
HLS	2016-080	2	1.6	8	2.4	45	4	B-4
C-CER	2016-8	2	1.6	8	2.4	45	4	B-17
HLS	2016-100	2	1.6	10	2.4	45	4	B-4
C-CER	2016-10	2	1.6	10	2.4	45	4	B-17
HLS	2016-120	2	1.6	12	2.4	45	4	B-4
C-CER	2016-12	2	1.6	12	2.4	45	4	B-17
HLS	2016-140	2	1.6	14	2.4	50	4	B-4
C-CER	2016-14	2	1.6	14	2.4	50	4	B-17
HLS	2016-160	2	1.6	16	2.4	50	4	B-4
C-CER	2016-16	2	1.6	16	2.4	50	4	B-17
HLS	2016-180	2	1.6	18	2.4	55	4	B-4
C-CER	2016-18	2	1.6	18	2.4	55	4	B-17
HLS	2016-200	2	1.6	20	2.4	55	4	B-4
C-CER	2016-20	2	1.6	20	2.4	55	4	B-17
HLS	2016-260	2	1.6	26	2.4	60	4	B-4
C-CER	2016-26	2	1.6	26	2.4	60	4	B-17
CZS	4016-0400	4	1.6	—	4	50	4	A-64
HLS	4016-060	4	1.6	6	1.6	50	4	B-52
HLS	4016-080	4	1.6	8	1.6	50	4	B-52
HLS	4016-100	4	1.6	10	1.6	50	4	B-52
HLS	4016-120	4	1.6	12	1.6	50	4	B-52

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLS	4016-140	4	1.6	14	1.6	60	4	B-52
HLS	4016-160	4	1.6	16	1.6	60	4	B-52
HLS	4016-180	4	1.6	18	1.6	60	4	B-52
HLS	4016-200	4	1.6	20	1.6	60	4	B-52
HLS	4016-260	4	1.6	26	1.6	60	4	B-52
C-CES	2017	2	1.7	—	5	45	4	A-17
CZS	4017-0400	4	1.7	—	4	50	4	A-64
C-CES	2018-0270	2	1.8	—	2.7	45	4	A-17
C-CES	2018-0270S	2	1.8	—	2.7	45	4	A-30
C-CES	2018-0360	2	1.8	—	3.6	45	4	A-17
C-CES	2018-0450	2	1.8	—	4.5	45	4	A-17
C-CES	2018	2	1.8	—	5	45	4	A-17
C-CES	2018-0540	2	1.8	—	5.4	45	4	A-17
C-CES	2018-0540S	2	1.8	—	5.4	45	4	A-30
C-CES	2018-0720	2	1.8	—	7.2	45	4	A-17
HLS	2018-060	2	1.8	6	2.7	45	4	B-5
C-CER	2018-6	2	1.8	6	2.7	45	4	B-17
HLS	2018-080	2	1.8	8	2.7	45	4	B-5
C-CER	2018-8	2	1.8	8	2.7	45	4	B-17
HLS	2018-100	2	1.8	10	2.7	45	4	B-5
C-CER	2018-10	2	1.8	10	2.7	45	4	B-17
HLS	2018-120	2	1.8	12	2.7	45	4	B-5
C-CER	2018-12	2	1.8	12	2.7	45	4	B-17
HLS	2018-140	2	1.8	14	2.7	50	4	B-5
C-CER	2018-14	2	1.8	14	2.7	50	4	B-17
HLS	2018-160	2	1.8	16	2.7	50	4	B-5
C-CER	2018-16	2	1.8	16	2.7	50	4	B-17
HLS	2018-180	2	1.8	18	2.7	55	4	B-5
C-CER	2018-18	2	1.8	18	2.7	55	4	B-17
HLS	2018-200	2	1.8	20	2.7	55	4	B-5
C-CER	2018-20	2	1.8	20	2.7	55	4	B-17
HLS	2018-250	2	1.8	25	2.7	60	4	B-5
C-CER	2018-25	2	1.8	25	2.7	60	4	B-17
CZS	4018-0400	4	1.8	—	4	50	4	A-64
HLS	4018-060	4	1.8	6	1.8	50	4	B-52
HLS	4018-080	4	1.8	8	1.8	50	4	B-52
HLS	4018-100	4	1.8	10	1.8	50	4	B-52
HLS	4018-120	4	1.8	12	1.8	50	4	B-52
HLS	4018-140	4	1.8	14	1.8	60	4	B-52
HLS	4018-160	4	1.8	16	1.8	60	4	B-52

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLS	4018-180	4	1.8	18	1.8	60	4	B-52
HLS	4018-200	4	1.8	20	1.8	60	4	B-52
HLS	4018-250	4	1.8	25	1.8	70	4	B-52
C-CES	2019	2	1.9	—	5	45	4	A-17
CZS	4019-0400	4	1.9	—	4	50	4	A-64
CSS	2020-0200	2	2	—	2	45	4	A-2
C-CES	2020-0300	2	2	—	3	45	4	A-17
C-CES	2020-0300S	2	2	—	3	45	4	A-30
CSS	2020-0300	2	2	—	3	45	4	A-2
CAS	2020-0300	2	2	—	3	45	4	A-41
C-CES	2020-0400	2	2	—	4	45	4	A-17
CSS	2020-0400	2	2	—	4	45	4	A-2
C-CES	2020-0500	2	2	—	5	45	4	A-17
CSS	2020-0500	2	2	—	5	45	4	A-2
C-CES	2020	2	2	—	6	45	4	A-17
C-CES	2020-0600S	2	2	—	6	45	4	A-30
CSS	2020-0600	2	2	—	6	45	4	A-2
DLCES	2020-0600	2	2	—	6	45	4	A-37
DCES	2020-0600	2	2	—	6	45	4	A-35
CPS	2020	2	2	—	6	55	4	A-39
C-CES	2020-0800	2	2	—	8	45	4	A-17
DLCES	2020-0800	2	2	—	8	50	4	A-37
HLS	2020-060	2	2	6	3	45	4	B-5
C-CER	2020-6	2	2	6	3	45	4	B-17
DCLS	2020-060	2	2	6	4	50	4	B-26
HLS	2020-080	2	2	8	3	45	4	B-5
C-CER	2020-8	2	2	8	3	45	4	B-17
DLCLS	2020-080	2	2	8	3	50	4	B-30
CPR	2020-8	2	2	8	4	50	4	B-34
CPRL	2020-8	2	2	8	4	80	4	B-38
HLS	2020-100	2	2	10	3	45	4	B-5
C-CER	2020-10	2	2	10	3	45	4	B-17
DCLS	2020-100	2	2	10	4	50	4	B-26
CPR	2020-10	2	2	10	4	50	4	B-34
CPRL	2020-10	2	2	10	4	80	4	B-38
HLS	2020-120	2	2	12	3	45	4	B-5
C-CER	2020-12	2	2	12	3	45	4	B-17
DLCLS	2020-120	2	2	12	3	50	4	B-30
CPR	2020-12	2	2	12	4	50	4	B-34
CPRL	2020-12	2	2	12	4	80	4	B-38

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLS	2020-140	2	2	14	3	50	4	B-5
C-CER	2020-14	2	2	14	3	50	4	B-17
CPR	2020-14	2	2	14	4	50	4	B-34
CPRL	2020-14	2	2	14	4	80	4	B-38
HLS	2020-160	2	2	16	3	50	4	B-5
C-CER	2020-16	2	2	16	3	50	4	B-17
DLCLS	2020-160	2	2	16	3	50	4	B-30
DCLS	2020-160	2	2	16	4	50	4	B-26
CPR	2020-16	2	2	16	4	50	4	B-34
CPRL	2020-16	2	2	16	4	80	4	B-38
HLS	2020-180	2	2	18	3	55	4	B-5
C-CER	2020-18	2	2	18	3	55	4	B-17
CPR	2020-18	2	2	18	4	55	4	B-34
CPRL	2020-18	2	2	18	4	80	4	B-38
HLS	2020-200	2	2	20	3	55	4	B-5
C-CER	2020-20	2	2	20	3	55	4	B-17
DCLS	2020-210	2	2	21	4	55	4	B-26
CPR	2020-21	2	2	21	4	55	4	B-34
CPRL	2020-21	2	2	21	4	80	4	B-38
HLS	2020-250	2	2	25	3	60	4	B-5
C-CER	2020-25	2	2	25	3	60	4	B-17
DCLS	2020-260	2	2	26	4	55	4	B-26
CPR	2020-26	2	2	26	4	55	4	B-34
CPRL	2020-26	2	2	26	4	80	4	B-38
HLS	2020-300	2	2	30	3	70	4	B-5
C-CER	2020-30	2	2	30	3	70	4	B-17
CPR	2020-32	2	2	32	4	70	4	B-34
CPRL	2020-32	2	2	32	4	80	4	B-38
HLS	2020-350	2	2	35	3	80	4	B-5
HLS	2020-400	2	2	40	3	90	4	B-5
CPRL	2020-40	2	2	40	4	100	4	B-38
HLS	2020-500	2	2	50	3	100	4	B-5
HLS	2020-600	2	2	60	3	110	4	B-5
HMS	3020-0400	3	2	—	4	45	4	A-103
DLC-ALES	3020-0600	3	2	—	6	60	4	A-43
HMS	3020-0700	3	2	—	7	45	4	A-103
DLC-ALES	3020-1000	3	2	—	10	60	4	A-43
DLC-AZS	3020-060	3	2	6	4	60	4	B-45
AZS	3020-060	3	2	6	4	60	4	B-42
DLC-AZS	3020-100	3	2	10	4	60	4	B-45

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
AZS	3020-100	3	2	10	4	60	4	B-42
CZS	4020-0300	4	2	—	3	50	4	A-64
CXES	4020-0300	4	2	—	3	50	4	A-78
CEHS	4020-0300	4	2	—	3	50	4	A-57
CEHS	4020-0450	4	2	—	4.5	50	4	A-57
C-CES	4020	4	2	—	5	45	4	A-47
CXES	4020-0500	4	2	—	5	50	4	A-78
C-CES	4020-0600	4	2	—	6	45	4	A-47
C-CES	4020S	4	2	—	6	45	4	A-53
CZS	4020-0600	4	2	—	6	50	4	A-64
CEHS	4020-0600	4	2	—	6	50	4	A-57
CXES	4020-0600	4	2	—	6	60	4	A-78
C-CES	4020-0800	4	2	—	8	45	4	A-47
CXES	4020-0800	4	2	—	8	60	4	A-78
CXES	4020-1000	4	2	—	10	60	4	A-78
HLS	4020-060	4	2	6	2	50	4	B-52
CXS	4020-060	4	2	6	3	50	4	B-57
HLS	4020-080	4	2	8	2	50	4	B-52
CXS	4020-090	4	2	9	3	70	4	B-57
HLS	4020-100	4	2	10	2	50	4	B-52
CXS	4020-110	4	2	11	3	70	4	B-57
HLS	4020-120	4	2	12	2	50	4	B-52
HLS	4020-140	4	2	14	2	60	4	B-52
HLS	4020-160	4	2	16	2	60	4	B-52
HLS	4020-180	4	2	18	2	60	4	B-52
HLS	4020-200	4	2	20	2	60	4	B-52
HLS	4020-250	4	2	25	2	70	4	B-52
HLS	4020-300	4	2	30	2	70	4	B-52
HGS	6020-0400	6	2	—	4	45	4	A-100
HGS	6020-0600	6	2	—	6	45	4	A-100
C-CES	2021	2	2.1	—	6	45	4	A-17
CZS	4021-0600	4	2.1	—	6	50	4	A-64
C-CES	2022	2	2.2	—	6	45	4	A-17
CZS	4022-0600	4	2.2	—	6	50	4	A-64
C-CES	2023	2	2.3	—	6	45	4	A-17
CZS	4023-0600	4	2.3	—	6	50	4	A-64
C-CES	2024	2	2.4	—	8	45	4	A-17
CZS	4024-0600	4	2.4	—	6	50	4	A-64
CSS	2025-0250	2	2.5	—	2.5	50	4	A-3
C-CES	2025-0375	2	2.5	—	3.75	45	4	A-18

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CES	2025-0375S	2	2.5	—	3.75	45	4	A-30
CSS	2025-0375	2	2.5	—	3.75	50	4	A-3
CAS	2025-0375	2	2.5	—	3.75	50	6	A-41
C-CES	2025-0500	2	2.5	—	5	45	4	A-18
CSS	2025-0500	2	2.5	—	5	50	4	A-3
C-CES	2025-0625	2	2.5	—	6.25	45	4	A-18
CSS	2025-0625	2	2.5	—	6.25	50	4	A-3
C-CES	2025-0750	2	2.5	—	7.5	45	4	A-18
CSS	2025-0750	2	2.5	—	7.5	50	4	A-3
CPS	2025	2	2.5	—	7.5	55	4	A-39
C-CES	2025	2	2.5	—	8	45	4	A-18
C-CES	2025-1000	2	2.5	—	10	50	4	A-18
HLS	2025-080	2	2.5	8	3.7	45	4	B-5
C-CER	2025-8	2	2.5	8	3.7	45	4	B-17
HLS	2025-100	2	2.5	10	3.7	45	4	B-5
C-CER	2025-10	2	2.5	10	3.7	45	4	B-17
HLS	2025-120	2	2.5	12	3.7	45	4	B-5
C-CER	2025-12	2	2.5	12	3.7	45	4	B-17
CPR	2025-12	2	2.5	12	5	55	4	B-34
HLS	2025-140	2	2.5	14	3.7	50	4	B-5
C-CER	2025-14	2	2.5	14	3.7	50	4	B-17
HLS	2025-160	2	2.5	16	3.7	50	4	B-5
C-CER	2025-16	2	2.5	16	3.7	50	4	B-17
HLS	2025-180	2	2.5	18	3.7	55	4	B-5
C-CER	2025-18	2	2.5	18	3.7	55	4	B-17
HLS	2025-200	2	2.5	20	3.7	55	4	B-5
C-CER	2025-20	2	2.5	20	3.7	55	4	B-17
CPR	2025-21	2	2.5	21	5	55	4	B-34
HLS	2025-250	2	2.5	25	3.7	60	4	B-5
C-CER	2025-25	2	2.5	25	3.7	60	4	B-17
HLS	2025-300	2	2.5	30	3.7	70	4	B-5
C-CER	2025-30	2	2.5	30	3.7	70	4	B-17
HLS	2025-400	2	2.5	40	3.7	90	4	B-5
HLS	2025-500	2	2.5	50	3.7	100	4	B-5
DLC-AZS	3025-075	3	2.5	7.5	5	60	4	B-45
AZS	3025-075	3	2.5	7.5	5	60	4	B-42
CZS	4025-0375	4	2.5	—	3.75	50	4	A-64
CXES	4025-0375	4	2.5	—	3.75	50	4	A-78
CEHS	4025-0550	4	2.5	—	5.5	50	4	A-57
C-CES	4025	4	2.5	—	6.25	45	4	A-47

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CES	4025S	4	2.5	—	6.25	45	4	A-53
CXES	4025-0625	4	2.5	—	6.25	50	4	A-78
C-CES	4025-0750	4	2.5	—	7.5	50	4	A-47
CZS	4025-0800	4	2.5	—	8	50	4	A-64
C-CES	4025-1000	4	2.5	—	10	50	4	A-47
CXES	4025-1000	4	2.5	—	10	50	4	A-78
CXS	4025-075	4	2.5	7.5	3.75	50	4	B-57
HLS	4025-080	4	2.5	8	2.5	50	4	B-53
CXS	4025-110	4	2.5	11	3.75	70	4	B-57
HLS	4025-120	4	2.5	12	2.5	50	4	B-53
CXS	4025-135	4	2.5	13.5	3.75	70	4	B-57
HLS	4025-160	4	2.5	16	2.5	60	4	B-53
HLS	4025-200	4	2.5	20	2.5	60	4	B-53
HLS	4025-250	4	2.5	25	2.5	70	4	B-53
HLS	4025-300	4	2.5	30	2.5	70	4	B-53
C-CES	2026	2	2.6	—	8	45	6	A-18
CZS	4026-0800	4	2.6	—	8	50	4	A-64
C-CES	2027	2	2.7	—	8	45	6	A-18
CZS	4027-0800	4	2.7	—	8	50	4	A-64
C-CES	2028	2	2.8	—	8	45	6	A-18
CZS	4028-0800	4	2.8	—	8	50	4	A-64
C-CES	2029	2	2.9	—	8	45	6	A-18
CZS	4029-0800	4	2.9	—	8	50	4	A-64
CSS	2030-0300	2	3	—	3	50	6	A-3
C-CES	2030-0450	2	3	—	4.5	45	6	A-18
C-CES	2030-0450S	2	3	—	4.5	45	6	A-30
CSS	2030-0450	2	3	—	4.5	50	6	A-3
CAS	2030-0450	2	3	—	4.5	50	6	A-41
CPS	2030SS	2	3	—	4.5	60	3	A-39
C-CES	2030-0600	2	3	—	6	45	6	A-18
CSS	2030-0600	2	3	—	6	50	6	A-3
CPS	2030SSL	2	3	—	6	100	3	A-39
C-CES	2030-0750	2	3	—	7.5	45	6	A-18
CSS	2030-0750	2	3	—	7.5	50	6	A-3
C-CES	2030	2	3	—	8	45	6	A-18
C-CES	2030-0900	2	3	—	9	45	6	A-18
C-CES	2030-0900S	2	3	—	9	45	6	A-30
DCES	2030-0900	2	3	—	9	45	6	A-35
CSS	2030-0900	2	3	—	9	50	6	A-3
DLCES	2030-0900	2	3	—	9	50	6	A-37

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CAS	2030-0900	2	3	—	9	50	6	A-41
CPS	2030	2	3	—	9	60	6	A-39
C-CES	2030-1200	2	3	—	12	50	6	A-18
HLS	2030-080	2	3	8	4.5	45	6	B-6
C-CER	2030-8	2	3	8	4.5	45	6	B-18
CPR	2030-8	2	3	8	6	70	6	B-34
HLS	2030-100	2	3	10	4.5	45	6	B-6
C-CER	2030-10	2	3	10	4.5	45	6	B-18
HLS	2030-120	2	3	12	4.5	50	6	B-6
C-CER	2030-12	2	3	12	4.5	50	6	B-18
DLCLS	2030-120	2	3	12	4.5	60	6	B-30
CPR	2030-12	2	3	12	6	70	6	B-34
CPRL	2030-12	2	3	12	6	100	6	B-38
HLS	2030-140	2	3	14	4.5	50	6	B-6
C-CER	2030-14	2	3	14	4.5	50	6	B-18
HLS	2030-160	2	3	16	4.5	60	6	B-6
C-CER	2030-16	2	3	16	4.5	60	6	B-18
DLCLS	2030-160	2	3	16	4.5	60	6	B-30
DCLS	2030-160	2	3	16	6	70	6	B-26
CPR	2030-16	2	3	16	6	70	6	B-34
CPRL	2030-16	2	3	16	6	100	6	B-38
HLS	2030-180	2	3	18	4.5	60	6	B-6
C-CER	2030-18	2	3	18	4.5	60	6	B-18
HLS	2030-200	2	3	20	4.5	60	6	B-6
C-CER	2030-20	2	3	20	4.5	60	6	B-18
DLCLS	2030-200	2	3	20	4.5	60	6	B-30
DCLS	2030-210	2	3	21	6	70	6	B-26
CPR	2030-21	2	3	21	6	70	6	B-34
CPRL	2030-21	2	3	21	6	100	6	B-38
HLS	2030-250	2	3	25	4.5	70	6	B-6
C-CER	2030-25	2	3	25	4.5	70	6	B-18
DCLS	2030-260	2	3	26	6	70	6	B-26
CPR	2030-26	2	3	26	6	70	6	B-34
CPRL	2030-26	2	3	26	6	100	6	B-38
HLS	2030-300	2	3	30	4.5	80	6	B-6
C-CER	2030-30	2	3	30	4.5	80	6	B-18
DCLS	2030-320	2	3	32	6	80	6	B-26
CPR	2030-32	2	3	32	6	80	6	B-34
CPRL	2030-32	2	3	32	6	100	6	B-38
HLS	2030-350	2	3	35	4.5	80	6	B-6

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CER	2030-35	2	3	35	4.5	80	6	B-18
HLS	2030-400	2	3	40	4.5	90	6	B-6
C-CER	2030-40	2	3	40	4.5	90	6	B-18
CPR	2030-42	2	3	42	6	90	6	B-34
HLS	2030-500	2	3	50	4.5	100	6	B-6
HMS	3030-0600	3	3	—	6	50	6	A-103
DLC-ALES	3030-0900	3	3	—	9	60	6	A-43
HMS	3030-1000	3	3	—	10	60	6	A-103
HMS	3030-1500	3	3	—	15	60	6	A-103
DLC-ALES	3030-1500	3	3	—	15	60	6	A-43
DLC-AZS	3030-090	3	3	9	6	70	6	B-45
AZS	3030-090	3	3	9	6	70	6	B-42
DLC-AZS	3030-150	3	3	15	6	70	6	B-45
AZS	3030-150	3	3	15	6	70	6	B-42
CXES	4030-0450	4	3	—	4.5	50	6	A-78
CZS	4030-0450	4	3	—	4.5	60	6	A-64
CEHS	4030-0450	4	3	—	4.5	60	6	A-57
CEHS	4030-0650	4	3	—	6.5	60	6	A-57
C-CES	4030-0750	4	3	—	7.5	45	6	A-47
CXES	4030-0750	4	3	—	7.5	50	6	A-78
C-CES	4030	4	3	—	8	45	6	A-47
C-CES	4030S	4	3	—	8	45	6	A-53
CZS	4030-0800	4	3	—	8	60	6	A-64
C-CES	4030-0900	4	3	—	9	50	6	A-47
DLCES	4030-0900	4	3	—	9	50	6	A-95
DCES	4030-0900	4	3	—	9	50	6	A-93
CXES	4030-0900	4	3	—	9	60	6	A-78
CEHS	4030-0900	4	3	—	9	60	6	A-57
C-CES	4030-1200	4	3	—	12	50	6	A-47
DCES	4030-1200	4	3	—	12	50	6	A-93
DLCES	4030-1200	4	3	—	12	55	6	A-95
CXES	4030-1200	4	3	—	12	60	6	A-78
CXES	4030-1500	4	3	—	15	60	6	A-78
HLS	4030-080	4	3	8	3	50	6	B-53
CXS	4030-090	4	3	9	4.5	50	6	B-58
HLS	4030-120	4	3	12	3	50	6	B-53
CXS	4030-130	4	3	13	4.5	70	6	B-58
HLS	4030-160	4	3	16	3	60	6	B-53
CXS	4030-160	4	3	16	4.5	70	6	B-58
HLS	4030-200	4	3	20	3	60	6	B-53

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLS	4030-250	4	3	25	3	70	6	B-53
HLS	4030-300	4	3	30	3	70	6	B-53
HLS	4030-400	4	3	40	3	80	6	B-53
HGS	6030-0600	6	3	—	6	50	6	A-100
HGS	6030-0900	6	3	—	9	60	6	A-100
HGS	6030-1500	6	3	—	15	60	6	A-100
C-CES	2031	2	3.1	—	10	45	6	A-18
CZS	4031-0800	4	3.1	—	8	60	6	A-64
C-CES	2032	2	3.2	—	10	45	6	A-18
CZS	4032-0800	4	3.2	—	8	60	6	A-64
C-CES	2033	2	3.3	—	10	45	6	A-18
CZS	4033-0800	4	3.3	—	8	60	6	A-64
C-CES	2034	2	3.4	—	10	45	6	A-18
CZS	4034-0800	4	3.4	—	8	60	6	A-64
C-CES	2035	2	3.5	—	10	45	6	A-18
C-CER	2035-12	2	3.5	12	5	50	6	B-18
C-CER	2035-15	2	3.5	15	5	60	6	B-18
C-CER	2035-16	2	3.5	16	5	60	6	B-18
C-CER	2035-20	2	3.5	20	5	60	6	B-18
C-CER	2035-25	2	3.5	25	5	70	6	B-18
C-CER	2035-30	2	3.5	30	5	70	6	B-18
C-CER	2035-35	2	3.5	35	5	80	6	B-18
DLC-AZS	3035-105	3	3.5	10.5	7	70	6	B-46
AZS	3035-105	3	3.5	10.5	7	70	6	B-42
CEHS	4035-0800	4	3.5	—	8	60	6	A-57
CXES	4035-0900	4	3.5	—	9	60	6	A-78
C-CES	4035	4	3.5	—	10	45	6	A-48
CZS	4035-1000	4	3.5	—	10	60	6	A-64
C-CES	2036	2	3.6	—	10	45	6	A-18
CZS	4036-1000	4	3.6	—	10	60	6	A-64
C-CES	2037	2	3.7	—	10	45	6	A-18
CZS	4037-1000	4	3.7	—	10	60	6	A-64
C-CES	2038	2	3.8	—	11	45	6	A-18
CZS	4038-1000	4	3.8	—	10	60	6	A-64
C-CES	2039	2	3.9	—	11	45	6	A-18
CZS	4039-1000	4	3.9	—	10	60	6	A-65
CSS	2040-0400	2	4	—	4	50	6	A-3
C-CES	2040-0600	2	4	—	6	50	6	A-18
C-CES	2040-0600S	2	4	—	6	50	6	A-30
CSS	2040-0600	2	4	—	6	50	6	A-3

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CAS	2040-0600	2	4	—	6	50	6	A-41
CPS	2040SS	2	4	—	6	60	4	A-39
C-CES	2040-0800	2	4	—	8	50	6	A-18
CSS	2040-0800	2	4	—	8	50	6	A-3
CPS	2040SSL	2	4	—	8	100	4	A-39
C-CES	2040-1000	2	4	—	10	50	6	A-18
CSS	2040-1000	2	4	—	10	50	6	A-3
C-CES	2040	2	4	—	11	45	6	A-18
C-CES	2040-1200	2	4	—	12	50	6	A-18
C-CES	2040-1200S	2	4	—	12	50	6	A-30
CSS	2040-1200	2	4	—	12	50	6	A-3
DLCES	2040-1200	2	4	—	12	50	6	A-37
DCES	2040-1200	2	4	—	12	50	6	A-35
CAS	2040-1200	2	4	—	12	50	6	A-41
CPS	2040	2	4	—	12	60	6	A-39
C-CES	2040-1600	2	4	—	16	60	6	A-18
HLS	2040-120	2	4	12	6	50	6	B-6
C-CER	2040-12	2	4	12	6	50	6	B-18
CPR	2040-12	2	4	12	8	70	6	B-34
HLS	2040-160	2	4	16	6	60	6	B-6
C-CER	2040-16	2	4	16	6	60	6	B-18
CPR	2040-16	2	4	16	8	70	6	B-34
CPR	2040-18	2	4	18	8	70	6	B-34
CPRL	2040-18	2	4	18	8	100	6	B-38
HLS	2040-200	2	4	20	6	60	6	B-6
C-CER	2040-20	2	4	20	6	60	6	B-18
DCLS	2040-210	2	4	21	8	70	6	B-26
CPR	2040-21	2	4	21	8	70	6	B-34
CPR	2040-24	2	4	24	8	70	6	B-34
CPRL	2040-24	2	4	24	8	100	6	B-38
HLS	2040-250	2	4	25	6	70	6	B-6
C-CER	2040-25	2	4	25	6	70	6	B-18
DCLS	2040-260	2	4	26	8	70	6	B-26
HLS	2040-300	2	4	30	6	70	6	B-6
C-CER	2040-30	2	4	30	6	70	6	B-18
DCLS	2040-320	2	4	32	8	70	6	B-26
CPR	2040-32	2	4	32	8	70	6	B-34
CPRL	2040-32	2	4	32	8	100	6	B-38
HLS	2040-350	2	4	35	6	80	6	B-6
C-CER	2040-35	2	4	35	6	80	6	B-18

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CPR	2040-36	2	4	36	8	70	6	B-34
HLS	2040-400	2	4	40	6	90	6	B-6
C-CER	2040-40	2	4	40	6	90	6	B-18
DCLS	2040-420	2	4	42	8	80	6	B-26
CPR	2040-42	2	4	42	8	80	6	B-34
HLS	2040-450	2	4	45	6	90	6	B-6
C-CER	2040-45	2	4	45	6	90	6	B-18
HLS	2040-500	2	4	50	6	100	6	B-6
C-CER	2040-50	2	4	50	6	100	6	B-18
CPR	2040-52	2	4	52	8	100	6	B-34
HLS	2040-600	2	4	60	6	110	6	B-6
DLC-ALES	3040-1200	3	4	—	12	60	6	A-43
DLC-ALES	3040-2000	3	4	—	20	60	6	A-43
DLC-AZS	3040-120	3	4	12	8	70	6	B-46
AZS	3040-120	3	4	12	8	70	6	B-42
DLC-AZS	3040-200	3	4	20	8	70	6	B-46
AZS	3040-200	3	4	20	8	70	6	B-42
CXES	4040-0600	4	4	—	6	50	6	A-78
CZS	4040-0600	4	4	—	6	60	6	A-65
CEHS	4040-0600	4	4	—	6	60	6	A-57
HMS	4040-0800	4	4	—	8	50	6	A-103
CEHS	4040-0900	4	4	—	9	60	6	A-57
CXES	4040-1000	4	4	—	10	50	6	A-78
C-CES	4040	4	4	—	11	45	6	A-48
C-CES	4040S	4	4	—	11	45	6	A-53
CZS	4040-1100	4	4	—	11	60	6	A-65
DLCES	4040-1200	4	4	—	12	50	6	A-95
DCES	4040-1200	4	4	—	12	50	6	A-93
HMS	4040-1200	4	4	—	12	60	6	A-103
C-CES	4040-1200	4	4	—	12	60	6	A-48
CXES	4040-1200	4	4	—	12	60	6	A-78
CEHS	4040-1200	4	4	—	12	60	6	A-57
C-CES	4040-1600	4	4	—	16	60	6	A-48
CXES	4040-1600	4	4	—	16	60	6	A-78
DCES	4040-1600	4	4	—	16	60	6	A-93
CXES	4040-2000	4	4	—	20	60	6	A-78
HMS	4040-2000	4	4	—	20	70	6	A-103
HLS	4040-120	4	4	12	4	50	6	B-53
CXS	4040-120	4	4	12	6	50	6	B-58
HLS	4040-160	4	4	16	4	60	6	B-53

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CXS	4040-170	4	4	17	6	70	6	B-58
HLS	4040-200	4	4	20	4	60	6	B-53
CXS	4040-210	4	4	21	6	70	6	B-58
HLS	4040-250	4	4	25	4	70	6	B-53
HLS	4040-300	4	4	30	4	70	6	B-53
HLS	4040-350	4	4	35	4	80	6	B-53
HLS	4040-400	4	4	40	4	90	6	B-53
HLS	4040-450	4	4	45	4	90	6	B-53
HLS	4040-500	4	4	50	4	100	6	B-53
HGS	6040-0800	6	4	—	8	50	6	A-100
HGS	6040-1200	6	4	—	12	60	6	A-100
HGS	6040-2000	6	4	—	20	70	6	A-100
C-CES	2041	2	4.1	—	11	45	6	A-18
CZS	4041-1100	4	4.1	—	11	60	6	A-65
C-CES	2042	2	4.2	—	11	45	6	A-18
CZS	4042-1100	4	4.2	—	11	60	6	A-65
C-CES	2043	2	4.3	—	11	45	6	A-18
CZS	4043-1100	4	4.3	—	11	60	6	A-65
C-CES	2044	2	4.4	—	11	45	6	A-18
CZS	4044-1100	4	4.4	—	11	60	6	A-65
C-CES	2045	2	4.5	—	11	45	6	A-18
DLC-AZS	3045-135	3	4.5	13.5	9	70	6	B-46
AZS	3045-135	3	4.5	13.5	9	70	6	B-42
CEHS	4045-1000	4	4.5	—	10	60	6	A-57
C-CES	4045	4	4.5	—	11	45	6	A-48
CZS	4045-1100	4	4.5	—	11	60	6	A-65
CXES	4045-1150	4	4.5	—	11.5	60	6	A-78
C-CES	2046	2	4.6	—	11	45	6	A-18
CZS	4046-1100	4	4.6	—	11	60	6	A-65
C-CES	2047	2	4.7	—	11	45	6	A-18
CZS	4047-1100	4	4.7	—	11	60	6	A-65
C-CES	2048	2	4.8	—	13	50	6	A-18
CZS	4048-1100	4	4.8	—	11	60	6	A-65
C-CES	2049	2	4.9	—	13	50	6	A-18
CZS	4049-1100	4	4.9	—	11	60	6	A-65
CSS	2050-0500	2	5	—	5	50	6	A-3
C-CES	2050-0750	2	5	—	7.5	50	6	A-19
C-CES	2050-0750S	2	5	—	7.5	50	6	A-30
CSS	2050-0750	2	5	—	7.5	50	6	A-3
CAS	2050-0750	2	5	—	7.5	50	6	A-41

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CES	2050-1000	2	5	—	10	50	6	A-19
CSS	2050-1000	2	5	—	10	50	6	A-3
C-CES	2050-1250	2	5	—	12.5	50	6	A-19
CSS	2050-1250	2	5	—	12.5	60	6	A-3
C-CES	2050	2	5	—	13	50	6	A-19
C-CES	2050-1500	2	5	—	15	50	6	A-19
C-CES	2050-1500S	2	5	—	15	50	6	A-30
CAS	2050-1500	2	5	—	15	50	6	A-41
DLCES	2050-1500	2	5	—	15	55	6	A-37
CSS	2050-1500	2	5	—	15	60	6	A-3
CPS	2050	2	5	—	15	60	6	A-39
C-CES	2050-2000	2	5	—	20	60	6	A-19
HLS	2050-160	2	5	16	7.5	60	6	B-6
C-CER	2050-16	2	5	16	7.5	60	6	B-18
CPR	2050-16	2	5	16	10	80	6	B-34
HLS	2050-200	2	5	20	7.5	60	6	B-6
C-CER	2050-20	2	5	20	7.5	60	6	B-18
CPR	2050-22	2	5	22	10	80	6	B-34
HLS	2050-250	2	5	25	7.5	60	6	B-6
C-CER	2050-25	2	5	25	7.5	60	6	B-18
HLS	2050-300	2	5	30	7.5	80	6	B-6
C-CER	2050-30	2	5	30	7.5	80	6	B-18
CPR	2050-32	2	5	32	10	80	6	B-34
HLS	2050-350	2	5	35	7.5	80	6	B-6
C-CER	2050-35	2	5	35	7.5	80	6	B-18
HLS	2050-400	2	5	40	7.5	80	6	B-6
C-CER	2050-40	2	5	40	7.5	80	6	B-18
HLS	2050-500	2	5	50	7.5	110	6	B-6
C-CER	2050-50	2	5	50	7.5	110	6	B-18
HLS	2050-600	2	5	60	7.5	120	6	B-6
DLC-ALES	3050-1500	3	5	—	15	60	6	A-43
DLC-ALES	3050-2500	3	5	—	25	70	6	A-43
DLC-AZS	3050-150	3	5	15	10	70	6	B-46
AZS	3050-150	3	5	15	10	70	6	B-42
DLC-AZS	3050-250	3	5	25	10	70	6	B-46
AZS	3050-250	3	5	25	10	70	6	B-42
CXES	4050-0750	4	5	—	7.5	50	6	A-78
CZS	4050-0750	4	5	—	7.5	60	6	A-65
CEHS	4050-0750	4	5	—	7.5	60	6	A-57
HMS	4050-1000	4	5	—	10	50	6	A-103

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CEHS	4050-1100	4	5	—	11	60	6	A-57
C-CES	4050-1250	4	5	—	12.5	50	6	A-48
CXES	4050-1250	4	5	—	12.5	50	6	A-78
C-CES	4050	4	5	—	13	50	6	A-48
C-CES	4050S	4	5	—	13	50	6	A-53
CZS	4050-1300	4	5	—	13	60	6	A-65
HMS	4050-1500	4	5	—	15	60	6	A-103
C-CES	4050-1500	4	5	—	15	60	6	A-48
CXES	4050-1500	4	5	—	15	60	6	A-78
CEHS	4050-1500	4	5	—	15	60	6	A-57
C-CES	4050-2000	4	5	—	20	60	6	A-48
CXES	4050-2000	4	5	—	20	60	6	A-78
HMS	4050-2500	4	5	—	25	70	6	A-103
CXES	4050-2500	4	5	—	25	70	6	A-78
CXS	4050-150	4	5	15	7.5	50	6	B-58
HLS	4050-160	4	5	16	5	60	6	B-53
CXS	4050-210	4	5	21	7.5	70	6	B-58
HLS	4050-250	4	5	25	5	70	6	B-53
CXS	4050-260	4	5	26	7.5	70	6	B-58
HLS	4050-350	4	5	35	5	80	6	B-53
HLS	4050-500	4	5	50	5	110	6	B-53
HGS	6050-1000	6	5	—	10	50	6	A-100
HGS	6050-1500	6	5	—	15	60	6	A-100
HGS	6050-2500	6	5	—	25	70	6	A-100
C-CES	2051	2	5.1	—	13	50	6	A-19
CZS	4051-1300	4	5.1	—	13	60	6	A-65
C-CES	2052	2	5.2	—	13	50	6	A-19
CZS	4052-1300	4	5.2	—	13	60	6	A-65
C-CES	2053	2	5.3	—	13	50	6	A-19
CZS	4053-1300	4	5.3	—	13	60	6	A-65
C-CES	2054	2	5.4	—	13	50	6	A-19
CZS	4054-1300	4	5.4	—	13	60	6	A-65
C-CES	2055	2	5.5	—	13	50	6	A-19
CEHS	4055-1250	4	5.5	—	12.5	60	6	A-57
C-CES	4055	4	5.5	—	13	50	6	A-48
CZS	4055-1300	4	5.5	—	13	60	6	A-65
CXES	4055-1400	4	5.5	—	14	60	6	A-78
C-CES	2056	2	5.6	—	13	50	6	A-19
CZS	4056-1300	4	5.6	—	13	60	6	A-65
C-CES	2057	2	5.7	—	13	50	6	A-19

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CZS	4057-1300	4	5.7	—	13	60	6	A-65
C-CES	2058	2	5.8	—	13	50	6	A-19
CZS	4058-1300	4	5.8	—	13	60	6	A-65
C-CES	2059	2	5.9	—	13	50	6	A-19
CZS	4059-1300	4	5.9	—	13	60	6	A-65
CSS	2060-0600	2	6	—	6	50	6	A-3
C-CES	2060-0900	2	6	—	9	50	6	A-19
C-CES	2060-0900S	2	6	—	9	50	6	A-30
CSS	2060-0900	2	6	—	9	50	6	A-3
CAS	2060-0900	2	6	—	9	50	6	A-41
C-CES	2060-1200	2	6	—	12	50	6	A-19
CSS	2060-1200	2	6	—	12	50	6	A-3
CPR	2060-12	2	6	—	12	80	6	B-34
C-CES	2060	2	6	—	13	50	6	A-19
C-CES	2060-1500	2	6	—	15	50	6	A-19
CAS	2060-1500	2	6	—	15	50	6	A-41
CSS	2060-1500	2	6	—	15	60	6	A-3
C-CES	2060-1800	2	6	—	18	50	6	A-19
C-CES	2060-1800S	2	6	—	18	50	6	A-30
CSS	2060-1800	2	6	—	18	60	6	A-3
DLCES	2060-1800	2	6	—	18	60	6	A-37
DCES	2060-1800	2	6	—	18	60	6	A-35
CPS	2060	2	6	—	18	60	6	A-39
C-CES	2060-2400	2	6	—	24	60	6	A-19
HLS	2060-200	2	6	20	9	80	6	B-6
C-CER	2060-20	2	6	20	9	80	6	B-18
HLS	2060-300	2	6	30	9	80	6	B-6
C-CER	2060-30	2	6	30	9	80	6	B-18
DCLS	2060-320	2	6	32	12	80	6	B-26
HLS	2060-400	2	6	40	9	100	6	B-6
C-CER	2060-40	2	6	40	9	100	6	B-18
DCLS	2060-420	2	6	42	12	80	6	B-26
CPR	2060-42	2	6	42	12	80	6	B-34
HLS	2060-500	2	6	50	9	120	6	B-6
C-CER	2060-50	2	6	50	9	120	6	B-18
CPR	2060-52	2	6	52	12	120	6	B-34
HLS	2060-600	2	6	60	9	120	6	B-6
C-CER	2060-60	2	6	60	9	120	6	B-18
DCLS	2060-630	2	6	63	12	120	6	B-26
CPR	2060-63	2	6	63	12	120	6	B-34

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
DLC-ALES	3060-1800	3	6	—	18	60	6	A-43
DLC-ALES	3060-3000	3	6	—	30	80	6	A-43
DLC-AZS	3060-180	3	6	18	12	70	6	B-46
AZS	3060-180	3	6	18	12	70	6	B-42
DLC-AZS	3060-300	3	6	30	12	70	6	B-46
AZS	3060-300	3	6	30	12	70	6	B-42
CXES	4060-0900	4	6	—	9	50	6	A-79
CZS	4060-0900	4	6	—	9	60	6	A-65
CEHS	4060-0900	4	6	—	9	60	6	A-57
CESUS	4060-0900	4	6	—	9	60	6	A-90
C-CES	4060	4	6	—	13	50	6	A-48
C-CES	4060S	4	6	—	13	50	6	A-53
CZS	4060-1300	4	6	—	13	60	6	A-65
CEHS	4060-1300	4	6	—	13	60	6	A-57
CESUS	4060-1300	4	6	—	13	60	6	A-90
C-CES	4060-1500	4	6	—	15	50	6	A-48
CXES	4060-1500	4	6	—	15	50	6	A-79
C-CES	4060-1800	4	6	—	18	60	6	A-48
CZS	4060-1800	4	6	—	18	60	6	A-65
CXES	4060-1800	4	6	—	18	60	6	A-79
CEHS	4060-1800	4	6	—	18	60	6	A-57
CESUS	4060-1800	4	6	—	18	60	6	A-90
DLCES	4060-1800	4	6	—	18	60	6	A-95
DCES	4060-1800	4	6	—	18	60	6	A-93
DCES	4060-1800L	4	6	—	18	100	6	A-93
C-CES	4060-2400	4	6	—	24	60	6	A-48
DCES	4060-2400	4	6	—	24	60	6	A-93
DLCES	4060-2400	4	6	—	24	65	6	A-95
CXES	4060-2400	4	6	—	24	70	6	A-79
CXES	4060-3000	4	6	—	30	80	6	A-79
CXS	4060-180	4	6	18	9	50	6	B-58
HLS	4060-200	4	6	20	6	80	6	B-53
CXS	4060-260	4	6	26	9	70	6	B-58
HLS	4060-300	4	6	30	6	90	6	B-53
CXS	4060-320	4	6	32	9	70	6	B-58
HLS	4060-400	4	6	40	6	100	6	B-53
HLS	4060-500	4	6	50	6	110	6	B-53
HGS	6060-1200	6	6	—	12	50	6	A-100
HMS	6060-1300	6	6	—	13	50	6	A-103
HGS	6060-1800	6	6	—	18	60	6	A-100

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HMS	6060-1800	6	6	—	18	60	6	A-103
HMS	6060-2600	6	6	—	26	70	6	A-103
HGS	6060-3000	6	6	—	30	70	6	A-100
C-CES	2061	2	6.1	—	16	60	8	A-19
C-CES	2062	2	6.2	—	16	60	8	A-19
C-CES	2063	2	6.3	—	16	60	8	A-19
C-CES	2064	2	6.4	—	16	60	8	A-19
C-CES	2065	2	6.5	—	16	60	8	A-19
C-CES	4065	4	6.5	—	16	60	8	A-48
CZS	4065-1600	4	6.5	—	16	70	8	A-65
CXES	4065-1650	4	6.5	—	16.5	60	8	A-79
C-CES	2066	2	6.6	—	16	60	8	A-19
C-CES	2067	2	6.7	—	16	60	8	A-19
C-CES	2068	2	6.8	—	16	60	8	A-19
C-CES	2069	2	6.9	—	16	60	8	A-19
C-CES	2070	2	7	—	16	60	8	A-19
CSS	2070-1750	2	7	—	17.5	70	8	A-3
CSS	2070-2100	2	7	—	21	80	8	A-3
DLC-AZS	3070-210	3	7	21	14	80	8	B-46
AZS	3070-210	3	7	21	14	80	8	B-42
DLC-AZS	3070-350	3	7	35	14	80	8	B-46
AZS	3070-350	3	7	35	14	80	8	B-42
CZS	4070-1050	4	7	—	10.5	70	8	A-65
CEHS	4070-1050	4	7	—	10.5	70	8	A-57
CESUS	4070-1050	4	7	—	10.5	70	8	A-90
CXES	4070-1050	4	7	—	10.5	100	6	A-79
C-CES	4070	4	7	—	16	60	8	A-48
CZS	4070-1600	4	7	—	16	70	8	A-65
CEHS	4070-1600	4	7	—	16	70	8	A-57
CESUS	4070-1600	4	7	—	16	70	8	A-90
CXES	4070-1750	4	7	—	17.5	70	8	A-79
CZS	4070-2100	4	7	—	21	70	8	A-65
CEHS	4070-2100	4	7	—	21	70	8	A-57
CESUS	4070-2100	4	7	—	21	70	8	A-90
C-CES	2071	2	7.1	—	16	60	8	A-19
C-CES	2072	2	7.2	—	16	60	8	A-19
C-CES	2073	2	7.3	—	16	60	8	A-19
C-CES	2074	2	7.4	—	16	60	8	A-19
C-CES	2075	2	7.5	—	16	60	8	A-19
C-CES	4075	4	7.5	—	16	60	8	A-48

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CZS	4075-1600	4	7.5	—	16	70	8	A-65
CXES	4075-1900	4	7.5	—	19	60	8	A-79
C-CES	2076	2	7.6	—	19	60	8	A-19
C-CES	2077	2	7.7	—	19	60	8	A-19
C-CES	2078	2	7.8	—	19	60	8	A-19
C-CES	2079	2	7.9	—	19	60	8	A-19
CSS	2080-0800	2	8	—	8	70	8	A-3
CSS	2080-1200	2	8	—	12	70	8	A-3
CAS	2080-1200	2	8	—	12	80	8	A-41
C-CES	2080-1600	2	8	—	16	60	8	A-20
CSS	2080-1600	2	8	—	16	70	8	A-3
C-CES	2080	2	8	—	19	60	8	A-20
C-CES	2080-2000	2	8	—	20	60	8	A-20
CSS	2080-2000	2	8	—	20	70	8	A-3
CAS	2080-2000	2	8	—	20	80	8	A-41
C-CES	2080-2400	2	8	—	24	80	8	A-20
C-CES	2080-2400S	2	8	—	24	80	8	A-30
CSS	2080-2400	2	8	—	24	80	8	A-3
CPS	2080	2	8	—	24	80	8	A-39
C-CES	2080-3200	2	8	—	32	80	8	A-20
DLC-ALES	3080-2400	3	8	—	24	70	8	A-43
DLC-ALES	3080-4000	3	8	—	40	90	8	A-43
DLC-AZS	3080-240	3	8	24	16	80	8	B-46
AZS	3080-240	3	8	24	16	80	8	B-42
DLC-AZS	3080-400	3	8	40	16	80	8	B-46
AZS	3080-400	3	8	40	16	80	8	B-42
CXES	4080-1200	4	8	—	12	60	8	A-79
CZS	4080-1200	4	8	—	12	70	8	A-65
CEHS	4080-1200	4	8	—	12	70	8	A-57
CESUS	4080-1200	4	8	—	12	70	8	A-90
C-CES	4080	4	8	—	19	60	8	A-48
C-CES	4080S	4	8	—	19	60	8	A-53
CZS	4080-1900	4	8	—	19	70	8	A-65
CEHS	4080-1900	4	8	—	19	70	8	A-57
CESUS	4080-1900	4	8	—	19	70	8	A-90
C-CES	4080-2000	4	8	—	20	60	8	A-48
CXES	4080-2000	4	8	—	20	60	8	A-79
CZS	4080-2400	4	8	—	24	70	8	A-65
CXES	4080-2400	4	8	—	24	70	8	A-79
CEHS	4080-2400	4	8	—	24	70	8	A-57

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CESUS	4080-2400	4	8	—	24	70	8	A-90
C-CES	4080-2400	4	8	—	24	80	8	A-48
DLCES	4080-2400	4	8	—	24	80	8	A-95
DCES	4080-2400	4	8	—	24	80	8	A-93
C-CES	4080-3200	4	8	—	32	80	8	A-48
CXES	4080-3200	4	8	—	32	80	8	A-79
DCES	4080-3200	4	8	—	32	80	8	A-93
CXES	4080-4000	4	8	—	40	90	8	A-79
CXS	4080-240	4	8	24	12	60	8	B-58
CXS	4080-340	4	8	34	12	90	8	B-58
CXS	4080-420	4	8	42	12	90	8	B-58
HGS	6080-1600	6	8	—	16	60	8	A-100
HMS	6080-1900	6	8	—	19	60	8	A-103
HGS	6080-2400	6	8	—	24	70	8	A-100
HMS	6080-2400	6	8	—	24	70	8	A-103
HMS	6080-3600	6	8	—	36	90	8	A-103
HGS	6080-4000	6	8	—	40	90	8	A-100
C-CES	2081	2	8.1	—	19	70	10	A-20
C-CES	2082	2	8.2	—	19	70	10	A-20
C-CES	2083	2	8.3	—	19	70	10	A-20
C-CES	2084	2	8.4	—	19	70	10	A-20
C-CES	2085	2	8.5	—	19	70	10	A-20
C-CES	4085	4	8.5	—	19	70	10	A-48
CZS	4085-1900	4	8.5	—	19	80	10	A-66
CXES	4085-2150	4	8.5	—	21.5	70	10	A-79
C-CES	2086	2	8.6	—	19	70	10	A-20
C-CES	2087	2	8.7	—	19	70	10	A-20
C-CES	2088	2	8.8	—	19	70	10	A-20
C-CES	2089	2	8.9	—	19	70	10	A-20
C-CES	2090	2	9	—	19	70	10	A-20
CSS	2090-2250	2	9	—	22.5	80	10	A-3
CSS	2090-2700	2	9	—	27	80	10	A-3
DLC-AZS	3090-270	3	9	27	18	90	10	B-46
AZS	3090-270	3	9	27	18	90	10	B-42
DLC-AZS	3090-450	3	9	45	18	90	10	B-46
AZS	3090-450	3	9	45	18	90	10	B-42
CZS	4090-1350	4	9	—	13.5	80	10	A-66
CEHS	4090-1350	4	9	—	13.5	80	10	A-57
CESUS	4090-1350	4	9	—	13.5	80	10	A-90
CXES	4090-1350	4	9	—	13.5	140	8	A-79

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CES	4090	4	9	—	19	70	10	A-48
CZS	4090-1900	4	9	—	19	80	10	A-66
CEHS	4090-1900	4	9	—	19	80	10	A-57
CESUS	4090-1900	4	9	—	19	80	10	A-90
CXES	4090-2250	4	9	—	22.5	80	10	A-79
CZS	4090-2700	4	9	—	27	80	10	A-66
CEHS	4090-2700	4	9	—	27	80	10	A-57
CESUS	4090-2700	4	9	—	27	80	10	A-90
C-CES	2091	2	9.1	—	19	70	10	A-20
C-CES	2092	2	9.2	—	19	70	10	A-20
C-CES	2093	2	9.3	—	19	70	10	A-20
C-CES	2094	2	9.4	—	19	70	10	A-20
C-CES	2095	2	9.5	—	19	70	10	A-20
C-CES	4095	4	9.5	—	19	70	10	A-48
CZS	4095-1900	4	9.5	—	19	80	10	A-66
CXES	4095-2400	4	9.5	—	24	70	10	A-79
C-CES	2096	2	9.6	—	22	70	10	A-20
C-CES	2097	2	9.7	—	22	70	10	A-20
C-CES	2098	2	9.8	—	22	70	10	A-20
C-CES	2099	2	9.9	—	22	70	10	A-20
CSS	2100-1000	2	10	—	10	70	10	A-3
CSS	2100-1500	2	10	—	15	70	10	A-3
CAS	2100-1500	2	10	—	15	80	10	A-41
C-CES	2100-2000	2	10	—	20	70	10	A-20
CSS	2100-2000	2	10	—	20	70	10	A-3
C-CES	2100	2	10	—	22	70	10	A-20
C-CES	2100-2500	2	10	—	25	70	10	A-20
CSS	2100-2500	2	10	—	25	80	10	A-3
CAS	2100-2500	2	10	—	25	80	10	A-41
C-CES	2100-3000	2	10	—	30	80	10	A-20
C-CES	2100-3000S	2	10	—	30	80	10	A-30
CSS	2100-3000	2	10	—	30	80	10	A-3
CPS	2100	2	10	—	30	80	10	A-39
C-CES	2100-4000	2	10	—	40	90	10	A-20
DLC-ALES	3100-3000	3	10	—	30	80	10	A-43
DLC-ALES	3100-5000	3	10	—	50	100	10	A-43
DLC-AZS	3100-300	3	10	30	20	90	10	B-46
AZS	3100-300	3	10	30	20	90	10	B-42
DLC-AZS	3100-500	3	10	50	20	90	10	B-46
AZS	3100-500	3	10	50	20	90	10	B-42

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CXES	4100-1500	4	10	—	15	70	10	A-79
CZS	4100-1500	4	10	—	15	80	10	A-66
CEHS	4100-1500	4	10	—	15	80	10	A-58
CESUS	4100-1500	4	10	—	15	80	10	A-90
C-CES	4100	4	10	—	22	70	10	A-48
C-CES	4100S	4	10	—	22	70	10	A-53
CZS	4100-2200	4	10	—	22	80	10	A-66
CEHS	4100-2200	4	10	—	22	80	10	A-58
CESUS	4100-2200	4	10	—	22	80	10	A-90
C-CES	4100-2500	4	10	—	25	70	10	A-48
CXES	4100-2500	4	10	—	25	70	10	A-79
CZS	4100-3000	4	10	—	30	80	10	A-66
CXES	4100-3000	4	10	—	30	80	10	A-79
CEHS	4100-3000	4	10	—	30	80	10	A-58
CESUS	4100-3000	4	10	—	30	80	10	A-90
C-CES	4100-3000	4	10	—	30	90	10	A-48
DCES	4100-3000	4	10	—	30	90	10	A-93
DLCES	4100-3000	4	10	—	30	100	10	A-95
C-CES	4100-4000	4	10	—	40	90	10	A-48
CXES	4100-4000	4	10	—	40	90	10	A-79
DCES	4100-4000	4	10	—	40	90	10	A-93
CXES	4100-5000	4	10	—	50	100	10	A-79
CXS	4100-300	4	10	30	15	70	10	B-58
CXS	4100-420	4	10	42	15	100	10	B-58
CXS	4100-520	4	10	52	15	100	10	B-58
HGS	6100-2000	6	10	—	20	70	10	A-100
HMS	6100-2200	6	10	—	22	70	10	A-103
HGS	6100-3000	6	10	—	30	80	10	A-100
HMS	6100-3000	6	10	—	30	80	10	A-103
HMS	6100-4600	6	10	—	46	100	10	A-103
HGS	6100-5000	6	10	—	50	100	10	A-100
C-CES	2105	2	10.5	—	22	75	12	A-20
C-CES	4105	4	10.5	—	22	75	12	A-48
CZS	4105-2200	4	10.5	—	22	100	12	A-66
C-CES	2110	2	11	—	22	75	12	A-20
CSS	2110-2750	2	11	—	27.5	80	12	A-3
CSS	2110-3300	2	11	—	33	80	12	A-3
DLC-AZS	3110-330	3	11	33	22	110	12	B-46
AZS	3110-330	3	11	33	22	110	12	B-42
DLC-AZS	3110-550	3	11	55	22	110	12	B-46

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
AZS	3110-550	3	11	55	22	110	12	B-42
CZS	4110-1650	4	11	—	16.5	100	12	A-66
CEHS	4110-1650	4	11	—	16.5	100	12	A-58
CESUS	4110-1650	4	11	—	16.5	100	12	A-90
CXES	4110-1650	4	11	—	16.5	150	10	A-79
C-CES	4110	4	11	—	22	75	12	A-48
CZS	4110-2200	4	11	—	22	100	12	A-66
CESUS	4110-2200	4	11	—	22	100	12	A-90
CEHS	4110-2400	4	11	—	24	100	12	A-58
CXES	4110-2750	4	11	—	27.5	100	12	A-79
CZS	4110-3300	4	11	—	33	100	12	A-66
CEHS	4110-3300	4	11	—	33	100	12	A-58
CESUS	4110-3300	4	11	—	33	100	12	A-90
C-CES	2115	2	11.5	—	22	75	12	A-20
C-CES	4115	4	11.5	—	22	75	12	A-48
CZS	4115-2200	4	11.5	—	22	100	12	A-66
CSS	2120-1200	2	12	—	12	80	12	A-3
CSS	2120-1800	2	12	—	18	80	12	A-3
CAS	2120-1800	2	12	—	18	90	12	A-41
C-CES	2120-2400	2	12	—	24	75	12	A-20
CSS	2120-2400	2	12	—	24	80	12	A-3
C-CES	2120	2	12	—	26	75	12	A-20
C-CES	2120-3000	2	12	—	30	75	12	A-20
CSS	2120-3000	2	12	—	30	80	12	A-3
CAS	2120-3000	2	12	—	30	90	12	A-41
C-CES	2120-3600	2	12	—	36	90	12	A-20
C-CES	2120-3600S	2	12	—	36	90	12	A-30
CSS	2120-3600	2	12	—	36	90	12	A-3
CPS	2120	2	12	—	36	90	12	A-39
C-CES	2120-4800	2	12	—	48	100	12	A-20
DLC-ALES	3120-3600	3	12	—	36	100	12	A-43
DLC-ALES	3120-6000	3	12	—	60	110	12	A-43
DLC-AZS	3120-360	3	12	36	24	110	12	B-46
AZS	3120-360	3	12	36	24	110	12	B-42
DLC-AZS	3120-600	3	12	60	24	110	12	B-46
AZS	3120-600	3	12	60	24	110	12	B-42
CXES	4120-1800	4	12	—	18	90	12	A-79
CZS	4120-1800	4	12	—	18	100	12	A-66
CEHS	4120-1800	4	12	—	18	100	12	A-58
CESUS	4120-1800	4	12	—	18	100	12	A-90

Simplified Table

Square

Model Number		Number of Flutes	Outside Dia.	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CES	4120	4	12	—	26	75	12	A-48
C-CES	4120S	4	12	—	26	75	12	A-53
CZS	4120-2600	4	12	—	26	100	12	A-66
CEHS	4120-2600	4	12	—	26	100	12	A-58
CESUS	4120-2600	4	12	—	26	100	12	A-90
C-CES	4120-3000	4	12	—	30	75	12	A-48
CXES	4120-3000	4	12	—	30	90	12	A-79
C-CES	4120-3600	4	12	—	36	90	12	A-48
CZS	4120-3600	4	12	—	36	100	12	A-66
CXES	4120-3600	4	12	—	36	100	12	A-79
CEHS	4120-3600	4	12	—	36	100	12	A-58
CESUS	4120-3600	4	12	—	36	100	12	A-90
C-CES	4120-4800	4	12	—	48	100	12	A-48
CXES	4120-4800	4	12	—	48	110	12	A-79
C-CES	4120-5000	4	12	—	50	100	12	A-48
CXES	4120-6000	4	12	—	60	120	12	A-79
CXS	4120-360	4	12	36	18	90	12	B-58
CXS	4120-520	4	12	52	18	110	12	B-58
CXS	4120-620	4	12	62	18	110	12	B-58
HGS	6120-2400	6	12	—	24	75	12	A-100
HMS	6120-2600	6	12	—	26	75	12	A-103
HGS	6120-3600	6	12	—	36	100	12	A-100
HMS	6120-3600	6	12	—	36	100	12	A-103
HMS	6120-5600	6	12	—	56	120	12	A-103
HGS	6120-6000	6	12	—	60	120	12	A-100
CXES	4130-1950	4	13	—	19.5	160	12	A-79
CZS	4130-2600	4	13	—	26	110	12	A-66
C-CES	4140	4	14	—	26	80	12	A-48
C-CES	2160	2	16	—	32	110	16	A-20
CZS	4160-2400	4	16	—	24	110	16	A-66
C-CES	4160	4	16	—	32	110	16	A-48
CZS	4160-3200	4	16	—	32	110	16	A-66
CXES	4160-4000	4	16	—	40	110	16	A-79
C-CES	2180	2	18	—	32	110	20	A-20
C-CES	4180	4	18	—	32	110	20	A-48
C-CES	2200	2	20	—	38	110	20	A-20
CZS	4200-3000	4	20	—	30	125	20	A-66
C-CES	4200	4	20	—	38	110	20	A-48
CZS	4200-4000	4	20	—	40	125	20	A-66

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWB	20006-0006	2	R0.03	—	0.06	50	4	F-5
HSB	20006-0006	2	R0.03	—	0.06	50	4	F-9
HWB	20008-0008	2	R0.04	—	0.08	50	4	F-5
HSB	20008-0008	2	R0.04	—	0.08	50	4	F-9
HSB	1001-0020-6	1	R0.05	—	0.2	50	6	F-9
CSEB	1001-0020-6	1	R0.05	—	0.2	50	6	F-26
HGB	2001-0010	2	R0.05	—	0.1	50	4	F-2
HWB	2001-0010	2	R0.05	—	0.1	50	4	F-5
HSB	2001-0010	2	R0.05	—	0.1	50	4	F-9
CWB	2001-0010	2	R0.05	—	0.1	50	4	F-20
CSEB	2001-0010	2	R0.05	—	0.1	50	4	F-26
HWLB	2001-002S	2	R0.05	0.2	0.08	35	4	G-17
HGLB	2001-002	2	R0.05	0.2	0.08	45	4	G-4
HWLB	2001-002	2	R0.05	0.2	0.08	45	4	G-17
HSLB	2001-002	2	R0.05	0.2	0.08	45	4	G-38
CWLB	2001-002	2	R0.05	0.2	0.08	45	4	G-49
CSELB	2001-002	2	R0.05	0.2	0.08	45	4	G-59
HWLB	2001-003S	2	R0.05	0.3	0.08	35	4	G-17
HGLB	2001-003	2	R0.05	0.3	0.08	45	4	G-4
HWLB	2001-003	2	R0.05	0.3	0.08	45	4	G-17
HSLB	2001-003	2	R0.05	0.3	0.08	45	4	G-38
CWLB	2001-003	2	R0.05	0.3	0.08	45	4	G-49
CSELB	2001-003	2	R0.05	0.3	0.08	45	4	G-59
DLCLB	2001-003	2	R0.05	0.3	0.08	45	4	G-77
HWLB	2001-004S	2	R0.05	0.4	0.08	35	4	G-17
HWLB	2001-005S	2	R0.05	0.5	0.08	35	4	G-17
HGLB	2001-005	2	R0.05	0.5	0.08	45	4	G-4
HWLB	2001-005	2	R0.05	0.5	0.08	45	4	G-17
HSLB	2001-005	2	R0.05	0.5	0.08	45	4	G-38
CWLB	2001-005	2	R0.05	0.5	0.08	45	4	G-49
CSELB	2001-005	2	R0.05	0.5	0.08	45	4	G-59
DLCLB	2001-005	2	R0.05	0.5	0.08	45	4	G-77
HGB	20015-0015	2	R0.075	—	0.15	50	4	F-2
HWLB	20015-003S	2	R0.075	0.3	0.12	35	4	G-17
HGLB	20015-003	2	R0.075	0.3	0.12	45	4	G-4
HWLB	20015-003	2	R0.075	0.3	0.12	45	4	G-17
HSLB	20015-003	2	R0.075	0.3	0.12	45	4	G-38
CWLB	20015-003	2	R0.075	0.3	0.12	45	4	G-49
CSELB	20015-003	2	R0.075	0.3	0.12	45	4	G-59
DLCLB	20015-003	2	R0.075	0.3	0.12	45	4	G-77

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	20015-005S	2	R0.075	0.5	0.12	35	4	G-17
HGLB	20015-005	2	R0.075	0.5	0.12	45	4	G-4
HWLB	20015-005	2	R0.075	0.5	0.12	45	4	G-17
HSLB	20015-005	2	R0.075	0.5	0.12	45	4	G-38
CWLB	20015-005	2	R0.075	0.5	0.12	45	4	G-49
CSELB	20015-005	2	R0.075	0.5	0.12	45	4	G-59
DLCLB	20015-005	2	R0.075	0.5	0.12	45	4	G-77
HGLB	20015-0075	2	R0.075	0.75	0.12	45	4	G-4
HWLB	20015-010S	2	R0.075	1	0.12	35	4	G-17
HGLB	20015-010	2	R0.075	1	0.12	45	4	G-4
HWLB	20015-010	2	R0.075	1	0.12	45	4	G-17
CWLB	20015-010	2	R0.075	1	0.12	45	4	G-49
CSELB	20015-010	2	R0.075	1	0.12	45	4	G-59
DLCLB	20015-010	2	R0.075	1	0.12	45	4	G-77
HWB	2002-0020S	2	R0.1	—	0.2	35	4	F-5
HSB	2002-0020S	2	R0.1	—	0.2	35	4	F-14
HWB	2002-0020	2	R0.1	—	0.2	50	4	F-5
CWB	2002-0020	2	R0.1	—	0.2	50	4	F-20
HSB	2002-0020-6	2	R0.1	—	0.2	50	6	F-9
CSEB	2002-0020-6	2	R0.1	—	0.2	50	6	F-26
HGB	2002-0030	2	R0.1	—	0.3	50	4	F-2
HWB	2002-0030	2	R0.1	—	0.3	50	4	F-5
HSB	2002-0030	2	R0.1	—	0.3	50	4	F-9
CWB	2002-0030	2	R0.1	—	0.3	50	4	F-20
CSEB	2002-0030	2	R0.1	—	0.3	50	4	F-26
HWLB	2002-003S	2	R0.1	0.3	0.16	35	4	G-17
HGLB	2002-003	2	R0.1	0.3	0.16	45	4	G-4
HWLB	2002-003	2	R0.1	0.3	0.16	45	4	G-17
HSLB	2002-003	2	R0.1	0.3	0.16	45	4	G-38
CWLB	2002-003	2	R0.1	0.3	0.16	45	4	G-49
CSELB	2002-003	2	R0.1	0.3	0.16	45	4	G-59
DLCLB	2002-003	2	R0.1	0.3	0.16	45	4	G-77
HWLB	2002-005S	2	R0.1	0.5	0.16	35	4	G-17
HGLB	2002-005	2	R0.1	0.5	0.16	45	4	G-4
HWLB	2002-005	2	R0.1	0.5	0.16	45	4	G-17
HSLB	2002-005	2	R0.1	0.5	0.16	45	4	G-38
CWLB	2002-005	2	R0.1	0.5	0.16	45	4	G-49
CSELB	2002-005	2	R0.1	0.5	0.16	45	4	G-59
DLCLB	2002-005	2	R0.1	0.5	0.16	45	4	G-77
HWLB	2002-005-6	2	R0.1	0.5	0.16	50	6	G-17

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2002-005-6	2	R0.1	0.5	0.16	50	6	G-59
HWLB	2002-0075S	2	R0.1	0.75	0.16	35	4	G-17
HGLB	2002-0075	2	R0.1	0.75	0.16	45	4	G-4
HWLB	2002-0075	2	R0.1	0.75	0.16	45	4	G-17
CWLB	2002-0075	2	R0.1	0.75	0.16	45	4	G-49
CSELB	2002-0075	2	R0.1	0.75	0.16	45	4	G-59
HWLB	2002-010S	2	R0.1	1	0.16	35	4	G-17
HGLB	2002-010	2	R0.1	1	0.16	45	4	G-4
HWLB	2002-010	2	R0.1	1	0.16	45	4	G-17
HSLB	2002-010	2	R0.1	1	0.16	45	4	G-38
CWLB	2002-010	2	R0.1	1	0.16	45	4	G-49
CSELB	2002-010	2	R0.1	1	0.16	45	4	G-59
DLCLB	2002-010	2	R0.1	1	0.16	45	4	G-77
HWLB	2002-010-6	2	R0.1	1	0.16	50	6	G-17
CSELB	2002-010-6	2	R0.1	1	0.16	50	6	G-59
HWLB	2002-0125	2	R0.1	1.25	0.16	45	4	G-17
CSELB	2002-0125	2	R0.1	1.25	0.16	45	4	G-59
HWLB	2002-015S	2	R0.1	1.5	0.16	35	4	G-17
HGLB	2002-015	2	R0.1	1.5	0.16	45	4	G-4
HWLB	2002-015	2	R0.1	1.5	0.16	45	4	G-17
HSLB	2002-015	2	R0.1	1.5	0.16	45	4	G-38
CWLB	2002-015	2	R0.1	1.5	0.16	45	4	G-49
CSELB	2002-015	2	R0.1	1.5	0.16	45	4	G-59
DLCLB	2002-015	2	R0.1	1.5	0.16	45	4	G-77
CSELB	2002-015-6	2	R0.1	1.5	0.16	50	6	G-59
HWLB	2002-0175S	2	R0.1	1.75	0.16	35	4	G-17
CSELB	2002-0175	2	R0.1	1.75	0.16	45	4	G-59
HWLB	2002-020S	2	R0.1	2	0.16	35	4	G-17
HGLB	2002-020	2	R0.1	2	0.16	45	4	G-4
HWLB	2002-020	2	R0.1	2	0.16	45	4	G-17
HSLB	2002-020	2	R0.1	2	0.16	45	4	G-38
CWLB	2002-020	2	R0.1	2	0.16	45	4	G-49
CSELB	2002-020	2	R0.1	2	0.16	45	4	G-59
CSELB	2002-020-6	2	R0.1	2	0.16	50	6	G-59
CSELB	2002-0225	2	R0.1	2.25	0.16	45	4	G-59
HWLB	2002-025	2	R0.1	2.5	0.16	45	4	G-17
CSELB	2002-025	2	R0.1	2.5	0.16	45	4	G-59
HWLB	2002-030	2	R0.1	3	0.16	45	4	G-17
CWLB	2002-030	2	R0.1	3	0.16	45	4	G-49
CSELB	2002-030	2	R0.1	3	0.16	45	4	G-59

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWB	2003-0030S	2	R0.15	—	0.3	35	4	F-5
HSB	2003-0030S	2	R0.15	—	0.3	35	4	F-14
HGB	2003-0030	2	R0.15	—	0.3	50	4	F-2
HWB	2003-0030	2	R0.15	—	0.3	50	4	F-5
HSB	2003-0030	2	R0.15	—	0.3	50	4	F-9
CWB	2003-0030	2	R0.15	—	0.3	50	4	F-20
CSEB	2003-0030	2	R0.15	—	0.3	50	4	F-26
HSB	2003-0030-6	2	R0.15	—	0.3	50	6	F-9
CSEB	2003-0030-6	2	R0.15	—	0.3	50	6	F-26
HGB	2003-0045	2	R0.15	—	0.45	50	4	F-2
HWB	2003-0045	2	R0.15	—	0.45	50	4	F-5
HSB	2003-0045	2	R0.15	—	0.45	50	4	F-9
CWB	2003-0045	2	R0.15	—	0.45	50	4	F-20
CSEB	2003-0045	2	R0.15	—	0.45	50	4	F-26
HWLB	2003-005S	2	R0.15	0.5	0.24	35	4	G-17
HGLB	2003-005	2	R0.15	0.5	0.24	45	4	G-4
HWLB	2003-005	2	R0.15	0.5	0.24	45	4	G-17
HSLB	2003-005	2	R0.15	0.5	0.24	45	4	G-38
CWLB	2003-005	2	R0.15	0.5	0.24	45	4	G-49
CSELB	2003-005	2	R0.15	0.5	0.24	45	4	G-59
CSELB	2003-006	2	R0.15	0.6	0.24	45	4	G-59
DLCLB	2003-006	2	R0.15	0.6	0.24	45	4	G-79
HWLB	2003-0075S	2	R0.15	0.75	0.24	35	4	G-17
HGLB	2003-0075	2	R0.15	0.75	0.24	45	4	G-4
HWLB	2003-0075	2	R0.15	0.75	0.24	45	4	G-17
HSLB	2003-0075	2	R0.15	0.75	0.24	45	4	G-38
CWLB	2003-0075	2	R0.15	0.75	0.24	45	4	G-49
CSELB	2003-0075	2	R0.15	0.75	0.24	45	4	G-59
HWLB	2003-010S	2	R0.15	1	0.24	35	4	G-17
HGLB	2003-010	2	R0.15	1	0.24	45	4	G-4
HWLB	2003-010	2	R0.15	1	0.24	45	4	G-17
HSLB	2003-010	2	R0.15	1	0.24	45	4	G-38
CWLB	2003-010	2	R0.15	1	0.24	45	4	G-49
CSELB	2003-010	2	R0.15	1	0.24	45	4	G-59
DLCLB	2003-010	2	R0.15	1	0.24	45	4	G-79
HWLB	2003-010-6	2	R0.15	1	0.24	50	6	G-17
CSELB	2003-010-6	2	R0.15	1	0.24	50	6	G-59
HWLB	2003-0125	2	R0.15	1.25	0.24	45	4	G-17
CSELB	2003-0125	2	R0.15	1.25	0.24	45	4	G-59
HWLB	2003-015S	2	R0.15	1.5	0.24	35	4	G-17

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HGLB	2003-015	2	R0.15	1.5	0.24	45	4	G-4
HWLB	2003-015	2	R0.15	1.5	0.24	45	4	G-17
HSLB	2003-015	2	R0.15	1.5	0.24	45	4	G-38
CWLB	2003-015	2	R0.15	1.5	0.24	45	4	G-49
CSELB	2003-015	2	R0.15	1.5	0.24	45	4	G-59
DLCLB	2003-015	2	R0.15	1.5	0.24	45	4	G-79
HWLB	2003-015-6	2	R0.15	1.5	0.24	50	6	G-17
CSELB	2003-015-6	2	R0.15	1.5	0.24	50	6	G-59
CSELB	2003-0175	2	R0.15	1.75	0.24	45	4	G-59
HWLB	2003-020S	2	R0.15	2	0.24	35	4	G-17
HGLB	2003-020	2	R0.15	2	0.24	45	4	G-4
HWLB	2003-020	2	R0.15	2	0.24	45	4	G-17
HSLB	2003-020	2	R0.15	2	0.24	45	4	G-38
CWLB	2003-020	2	R0.15	2	0.24	45	4	G-49
CSELB	2003-020	2	R0.15	2	0.24	45	4	G-59
DLCLB	2003-020	2	R0.15	2	0.24	45	4	G-79
CSELB	2003-020-6	2	R0.15	2	0.24	50	6	G-59
CSELB	2003-0225	2	R0.15	2.25	0.24	45	4	G-59
HWLB	2003-025S	2	R0.15	2.5	0.24	35	4	G-19
HGLB	2003-025	2	R0.15	2.5	0.24	45	4	G-4
HWLB	2003-025	2	R0.15	2.5	0.24	45	4	G-19
CWLB	2003-025	2	R0.15	2.5	0.24	45	4	G-49
CSELB	2003-025	2	R0.15	2.5	0.24	45	4	G-59
HWLB	2003-030S	2	R0.15	3	0.24	35	4	G-19
HGLB	2003-030	2	R0.15	3	0.24	45	4	G-4
HWLB	2003-030	2	R0.15	3	0.24	45	4	G-19
HSLB	2003-030	2	R0.15	3	0.24	45	4	G-38
CWLB	2003-030	2	R0.15	3	0.24	45	4	G-49
CSELB	2003-030	2	R0.15	3	0.24	45	4	G-59
HWLB	2003-035	2	R0.15	3.5	0.24	45	4	G-19
HWLB	2003-040	2	R0.15	4	0.24	45	4	G-19
HSLB	2003-040	2	R0.15	4	0.24	45	4	G-38
CWLB	2003-040	2	R0.15	4	0.24	45	4	G-49
CSELB	2003-040	2	R0.15	4	0.24	45	4	G-59
HWLB	2003-045	2	R0.15	4.5	0.24	45	4	G-19
HWLB	2003-050	2	R0.15	5	0.24	45	4	G-19
CWLB	2003-050	2	R0.15	5	0.24	45	4	G-49
CSELB	2003-050	2	R0.15	5	0.24	45	4	G-59
HWB	2004-0040S	2	R0.2	—	0.4	35	4	F-5
HSB	2004-0040S	2	R0.2	—	0.4	35	4	F-14

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HGB	2004-0040	2	R0.2	—	0.4	50	4	F-2
HWB	2004-0040	2	R0.2	—	0.4	50	4	F-5
HSB	2004-0040	2	R0.2	—	0.4	50	4	F-9
CWB	2004-0040	2	R0.2	—	0.4	50	4	F-20
CSEB	2004-0040	2	R0.2	—	0.4	50	4	F-26
HSB	2004-0040-6	2	R0.2	—	0.4	50	6	F-9
CSEB	2004-0040-6	2	R0.2	—	0.4	50	6	F-26
HGB	2004-0060	2	R0.2	—	0.6	50	4	F-2
HWB	2004-0060	2	R0.2	—	0.6	50	4	F-5
HSB	2004-0060	2	R0.2	—	0.6	50	4	F-9
CWB	2004-0060	2	R0.2	—	0.6	50	4	F-20
CSEB	2004-0060	2	R0.2	—	0.6	50	4	F-26
HWLB	2004-005S	2	R0.2	0.5	0.32	35	4	G-19
HGLB	2004-005	2	R0.2	0.5	0.32	45	4	G-4
HWLB	2004-005	2	R0.2	0.5	0.32	45	4	G-19
HSLB	2004-005	2	R0.2	0.5	0.32	45	4	G-38
CWLB	2004-005	2	R0.2	0.5	0.32	45	4	G-49
CSELB	2004-005	2	R0.2	0.5	0.32	45	4	G-60
HGLB	2004-0075	2	R0.2	0.75	0.32	45	4	G-4
HWLB	2004-0075	2	R0.2	0.75	0.32	45	4	G-19
HSLB	2004-0075	2	R0.2	0.75	0.32	45	4	G-38
CWLB	2004-0075	2	R0.2	0.75	0.32	45	4	G-49
CSELB	2004-0075	2	R0.2	0.75	0.32	45	4	G-60
HWLB	2004-010S	2	R0.2	1	0.32	35	4	G-19
HGLB	2004-010	2	R0.2	1	0.32	45	4	G-4
HWLB	2004-010	2	R0.2	1	0.32	45	4	G-19
HSLB	2004-010	2	R0.2	1	0.32	45	4	G-38
CWLB	2004-010	2	R0.2	1	0.32	45	4	G-49
CSELB	2004-010	2	R0.2	1	0.32	45	4	G-60
DLCLB	2004-010	2	R0.2	1	0.32	45	4	G-79
HGLB	2004-010-6	2	R0.2	1	0.32	50	6	G-4
HWLB	2004-010-6	2	R0.2	1	0.32	50	6	G-19
CWLB	2004-010-6	2	R0.2	1	0.32	50	6	G-49
CSELB	2004-010-6	2	R0.2	1	0.32	50	6	G-60
CPRB	2004-1	2	R0.2	1	0.4	45	4	G-87
HGLB	2004-0125	2	R0.2	1.25	0.32	45	4	G-4
CSELB	2004-0125	2	R0.2	1.25	0.32	45	4	G-60
HWLB	2004-015S	2	R0.2	1.5	0.32	35	4	G-19
HGLB	2004-015	2	R0.2	1.5	0.32	45	4	G-4
HWLB	2004-015	2	R0.2	1.5	0.32	45	4	G-19

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HSLB	2004-015	2	R0.2	1.5	0.32	45	4	G-38
CWLB	2004-015	2	R0.2	1.5	0.32	45	4	G-49
CSELB	2004-015	2	R0.2	1.5	0.32	45	4	G-60
HGLB	2004-015-6	2	R0.2	1.5	0.32	50	6	G-4
HWLB	2004-015-6	2	R0.2	1.5	0.32	50	6	G-19
CSELB	2004-015-6	2	R0.2	1.5	0.32	50	6	G-60
CSELB	2004-0175	2	R0.2	1.75	0.32	45	4	G-60
HWLB	2004-020S	2	R0.2	2	0.32	35	4	G-19
HGLB	2004-020	2	R0.2	2	0.32	45	4	G-4
HWLB	2004-020	2	R0.2	2	0.32	45	4	G-19
HSLB	2004-020	2	R0.2	2	0.32	45	4	G-38
CWLB	2004-020	2	R0.2	2	0.32	45	4	G-49
CSELB	2004-020	2	R0.2	2	0.32	45	4	G-60
DLCLB	2004-020	2	R0.2	2	0.32	45	4	G-79
DCLB	2004-0020	2	R0.2	2	0.32	45	4	G-73
HGLB	2004-020-6	2	R0.2	2	0.32	50	6	G-4
HWLB	2004-020-6	2	R0.2	2	0.32	50	6	G-19
CWLB	2004-020-6	2	R0.2	2	0.32	50	6	G-49
CSELB	2004-020-6	2	R0.2	2	0.32	50	6	G-60
CPRB	2004-2	2	R0.2	2	0.4	45	4	G-87
CSELB	2004-0225	2	R0.2	2.25	0.32	45	4	G-60
HWLB	2004-025S	2	R0.2	2.5	0.32	35	4	G-19
HGLB	2004-025	2	R0.2	2.5	0.32	45	4	G-4
HWLB	2004-025	2	R0.2	2.5	0.32	45	4	G-19
CWLB	2004-025	2	R0.2	2.5	0.32	45	4	G-49
CSELB	2004-025	2	R0.2	2.5	0.32	45	4	G-60
HGLB	2004-025-6	2	R0.2	2.5	0.32	50	6	G-4
CSELB	2004-025-6	2	R0.2	2.5	0.32	50	6	G-60
HWLB	2004-030S	2	R0.2	3	0.32	35	4	G-19
HGLB	2004-030	2	R0.2	3	0.32	45	4	G-4
HWLB	2004-030	2	R0.2	3	0.32	45	4	G-19
HSLB	2004-030	2	R0.2	3	0.32	45	4	G-38
CWLB	2004-030	2	R0.2	3	0.32	45	4	G-49
CSELB	2004-030	2	R0.2	3	0.32	45	4	G-60
DLCLB	2004-030	2	R0.2	3	0.32	45	4	G-79
DCLB	2004-0030	2	R0.2	3	0.32	45	4	G-73
HGLB	2004-030-6	2	R0.2	3	0.32	50	6	G-4
HWLB	2004-030-6	2	R0.2	3	0.32	50	6	G-19
CWLB	2004-030-6	2	R0.2	3	0.32	50	6	G-49
CSELB	2004-030-6	2	R0.2	3	0.32	50	6	G-60

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CPRB	2004-3	2	R0.2	3	0.4	45	4	G-87
HWLB	2004-035S	2	R0.2	3.5	0.32	35	4	G-19
HGLB	2004-035	2	R0.2	3.5	0.32	45	4	G-4
HWLB	2004-035	2	R0.2	3.5	0.32	45	4	G-19
CWLB	2004-035	2	R0.2	3.5	0.32	45	4	G-49
CSELB	2004-035	2	R0.2	3.5	0.32	45	4	G-60
HWLB	2004-040S	2	R0.2	4	0.32	35	4	G-19
HGLB	2004-040	2	R0.2	4	0.32	45	4	G-4
HWLB	2004-040	2	R0.2	4	0.32	45	4	G-19
HSLB	2004-040	2	R0.2	4	0.32	45	4	G-38
CWLB	2004-040	2	R0.2	4	0.32	45	4	G-49
CSELB	2004-040	2	R0.2	4	0.32	45	4	G-60
DLCLB	2004-040	2	R0.2	4	0.32	45	4	G-79
DCLB	2004-0040	2	R0.2	4	0.32	45	4	G-73
CSELB	2004-040-6	2	R0.2	4	0.32	50	6	G-60
HWLB	2004-045	2	R0.2	4.5	0.32	45	4	G-19
CSELB	2004-045	2	R0.2	4.5	0.32	45	4	G-60
HWLB	2004-050	2	R0.2	5	0.32	45	4	G-19
CWLB	2004-050	2	R0.2	5	0.32	45	4	G-49
CSELB	2004-050	2	R0.2	5	0.32	45	4	G-60
DCLB	2004-0050	2	R0.2	5	0.32	45	4	G-73
HWLB	2004-060	2	R0.2	6	0.32	45	4	G-19
HSLB	2004-060	2	R0.2	6	0.32	45	4	G-38
CWLB	2004-060	2	R0.2	6	0.32	45	4	G-49
CSELB	2004-060	2	R0.2	6	0.32	45	4	G-60
HGB	2005-0050	2	R0.25	—	0.5	50	4	F-2
HWB	2005-0050	2	R0.25	—	0.5	50	4	F-5
HSB	2005-0050	2	R0.25	—	0.5	50	4	F-9
CWB	2005-0050	2	R0.25	—	0.5	50	4	F-20
CSEB	2005-0050	2	R0.25	—	0.5	50	4	F-26
HSB	2005-0050-6	2	R0.25	—	0.5	50	6	F-9
CSEB	2005-0050-6	2	R0.25	—	0.5	50	6	F-26
HGB	2005-0075	2	R0.25	—	0.75	50	4	F-2
HWB	2005-0075	2	R0.25	—	0.75	50	4	F-5
HSB	2005-0075	2	R0.25	—	0.75	50	4	F-9
CWB	2005-0075	2	R0.25	—	0.75	50	4	F-20
CSEB	2005-0075	2	R0.25	—	0.75	50	4	F-26
HWLB	2005-0075S	2	R0.25	0.75	0.4	35	4	G-19
HWLB	2005-010S	2	R0.25	1	0.4	35	4	G-19
HGLB	2005-010	2	R0.25	1	0.4	45	4	G-4

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	2005-010	2	R0.25	1	0.4	45	4	G-19
HSLB	2005-010	2	R0.25	1	0.4	45	4	G-38
CWLB	2005-010	2	R0.25	1	0.4	45	4	G-49
CSELB	2005-010	2	R0.25	1	0.4	45	4	G-60
DLCLB	2005-010	2	R0.25	1	0.4	45	4	G-79
CSELB	2005-0125	2	R0.25	1.25	0.4	45	4	G-60
HWLB	2005-015S	2	R0.25	1.5	0.4	35	4	G-19
HGLB	2005-015	2	R0.25	1.5	0.4	45	4	G-4
HWLB	2005-015	2	R0.25	1.5	0.4	45	4	G-19
HSLB	2005-015	2	R0.25	1.5	0.4	45	4	G-38
CWLB	2005-015	2	R0.25	1.5	0.4	45	4	G-49
CSELB	2005-015	2	R0.25	1.5	0.4	45	4	G-60
HWLB	2005-015-6	2	R0.25	1.5	0.4	50	6	G-19
CSELB	2005-015-6	2	R0.25	1.5	0.4	50	6	G-60
CSELB	2005-0175	2	R0.25	1.75	0.4	45	4	G-60
HWLB	2005-020S	2	R0.25	2	0.4	35	4	G-19
HGLB	2005-020	2	R0.25	2	0.4	45	4	G-4
HWLB	2005-020	2	R0.25	2	0.4	45	4	G-19
HSLB	2005-020	2	R0.25	2	0.4	45	4	G-38
CWLB	2005-020	2	R0.25	2	0.4	45	4	G-49
CSELB	2005-020	2	R0.25	2	0.4	45	4	G-60
DLCLB	2005-020	2	R0.25	2	0.4	45	4	G-79
DCLB	2005-0020	2	R0.25	2	0.4	45	4	G-73
HWLB	2005-020-6	2	R0.25	2	0.4	50	6	G-19
CWLB	2005-020-6	2	R0.25	2	0.4	50	6	G-49
CSELB	2005-020-6	2	R0.25	2	0.4	50	6	G-60
CPRB	2005-2	2	R0.25	2	0.8	45	4	G-87
CSELB	2005-0225	2	R0.25	2.25	0.4	45	4	G-60
HWLB	2005-025S	2	R0.25	2.5	0.4	35	4	G-19
HGLB	2005-025	2	R0.25	2.5	0.4	45	4	G-4
HWLB	2005-025	2	R0.25	2.5	0.4	45	4	G-19
CWLB	2005-025	2	R0.25	2.5	0.4	45	4	G-49
CSELB	2005-025	2	R0.25	2.5	0.4	45	4	G-60
CSELB	2005-025-6	2	R0.25	2.5	0.4	50	6	G-60
HWLB	2005-030S	2	R0.25	3	0.4	35	4	G-19
HGLB	2005-030	2	R0.25	3	0.4	45	4	G-4
HWLB	2005-030	2	R0.25	3	0.4	45	4	G-19
HSLB	2005-030	2	R0.25	3	0.4	45	4	G-38
CWLB	2005-030	2	R0.25	3	0.4	45	4	G-49
CSELB	2005-030	2	R0.25	3	0.4	45	4	G-60

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
DLCLB	2005-030	2	R0.25	3	0.4	45	4	G-79
DCLB	2005-0030	2	R0.25	3	0.4	45	4	G-73
HWLB	2005-030-6	2	R0.25	3	0.4	50	6	G-19
CWLB	2005-030-6	2	R0.25	3	0.4	50	6	G-49
CSELB	2005-030-6	2	R0.25	3	0.4	50	6	G-60
HGLB	2005-035	2	R0.25	3.5	0.4	45	4	G-4
HWLB	2005-035	2	R0.25	3.5	0.4	45	4	G-21
CSELB	2005-035	2	R0.25	3.5	0.4	45	4	G-60
HWLB	2005-040S	2	R0.25	4	0.4	35	4	G-21
HGLB	2005-040	2	R0.25	4	0.4	45	4	G-4
HWLB	2005-040	2	R0.25	4	0.4	45	4	G-21
HSLB	2005-040	2	R0.25	4	0.4	45	4	G-38
CWLB	2005-040	2	R0.25	4	0.4	45	4	G-49
CSELB	2005-040	2	R0.25	4	0.4	45	4	G-60
DLCLB	2005-040	2	R0.25	4	0.4	45	4	G-79
HWLB	2005-040-6	2	R0.25	4	0.4	50	6	G-21
CWLB	2005-040-6	2	R0.25	4	0.4	50	6	G-49
CSELB	2005-040-6	2	R0.25	4	0.4	50	6	G-60
CPRB	2005-4	2	R0.25	4	0.8	45	4	G-87
HGLB	2005-045	2	R0.25	4.5	0.4	45	4	G-4
HWLB	2005-045	2	R0.25	4.5	0.4	45	4	G-21
CSELB	2005-045	2	R0.25	4.5	0.4	45	4	G-60
HWLB	2005-050S	2	R0.25	5	0.4	35	4	G-21
HGLB	2005-050	2	R0.25	5	0.4	45	4	G-4
HWLB	2005-050	2	R0.25	5	0.4	45	4	G-21
CWLB	2005-050	2	R0.25	5	0.4	45	4	G-49
CSELB	2005-050	2	R0.25	5	0.4	45	4	G-60
DLCLB	2005-050	2	R0.25	5	0.4	45	4	G-79
CSELB	2005-055	2	R0.25	5.5	0.4	45	4	G-60
HGLB	2005-060	2	R0.25	6	0.4	45	4	G-4
HWLB	2005-060	2	R0.25	6	0.4	45	4	G-21
HSLB	2005-060	2	R0.25	6	0.4	45	4	G-38
CWLB	2005-060	2	R0.25	6	0.4	45	4	G-49
CSELB	2005-060	2	R0.25	6	0.4	45	4	G-60
DCLB	2005-0060	2	R0.25	6	0.4	45	4	G-73
CPRB	2005-6	2	R0.25	6	0.8	45	4	G-87
HWLB	2005-070	2	R0.25	7	0.4	45	4	G-21
CSELB	2005-070	2	R0.25	7	0.4	45	4	G-60
HWLB	2005-080	2	R0.25	8	0.4	45	4	G-21
CWLB	2005-080	2	R0.25	8	0.4	45	4	G-49

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2005-080	2	R0.25	8	0.4	45	4	G-60
CPRB	2005-8	2	R0.25	8	0.8	45	4	G-87
CSELB	2005-090	2	R0.25	9	0.4	45	4	G-60
DCLB	2005-0100	2	R0.25	10	0.4	45	4	G-73
HWLB	2005-100	2	R0.25	10	0.4	50	4	G-21
CWLB	2005-100	2	R0.25	10	0.4	50	4	G-49
CSELB	2005-100	2	R0.25	10	0.4	50	4	G-60
CPRB	2005-10	2	R0.25	10	0.8	50	4	G-87
HWB	2006-0060S	2	R0.3	—	0.6	35	4	F-5
HSB	2006-0060S	2	R0.3	—	0.6	35	4	F-14
HGB	2006-0060	2	R0.3	—	0.6	50	4	F-2
HWB	2006-0060	2	R0.3	—	0.6	50	4	F-5
HSB	2006-0060	2	R0.3	—	0.6	50	4	F-10
CWB	2006-0060	2	R0.3	—	0.6	50	4	F-20
CSEB	2006-0060	2	R0.3	—	0.6	50	4	F-26
HSB	2006-0060-6	2	R0.3	—	0.6	50	6	F-10
CSEB	2006-0060-6	2	R0.3	—	0.6	50	6	F-26
HGB	2006-0090	2	R0.3	—	0.9	50	4	F-2
HWB	2006-0090	2	R0.3	—	0.9	50	4	F-5
HSB	2006-0090	2	R0.3	—	0.9	50	4	F-10
CWB	2006-0090	2	R0.3	—	0.9	50	4	F-20
CSEB	2006-0090	2	R0.3	—	0.9	50	4	F-26
HWLB	2006-010S	2	R0.3	1	0.48	35	4	G-21
HGLB	2006-010	2	R0.3	1	0.48	45	4	G-5
HWLB	2006-010	2	R0.3	1	0.48	45	4	G-21
HSLB	2006-010	2	R0.3	1	0.48	45	4	G-38
CWLB	2006-010	2	R0.3	1	0.48	45	4	G-50
CSELB	2006-010	2	R0.3	1	0.48	45	4	G-61
DLCLB	2006-010	2	R0.3	1	0.48	45	4	G-79
HWLB	2006-0125	2	R0.3	1.25	0.48	45	4	G-21
CSELB	2006-0125	2	R0.3	1.25	0.48	45	4	G-61
HWLB	2006-015S	2	R0.3	1.5	0.48	35	4	G-21
HGLB	2006-015	2	R0.3	1.5	0.48	45	4	G-5
HWLB	2006-015	2	R0.3	1.5	0.48	45	4	G-21
HSLB	2006-015	2	R0.3	1.5	0.48	45	4	G-38
CWLB	2006-015	2	R0.3	1.5	0.48	45	4	G-50
CSELB	2006-015	2	R0.3	1.5	0.48	45	4	G-61
HGLB	2006-015-6	2	R0.3	1.5	0.48	50	6	G-5
HWLB	2006-015-6	2	R0.3	1.5	0.48	50	6	G-21
HSLB	2006-015-6	2	R0.3	1.5	0.48	50	6	G-38
CSELB	2006-015-6	2	R0.3	1.5	0.48	50	6	G-61
CSELB	2006-0175	2	R0.3	1.75	0.48	45	4	G-61
HWLB	2006-020S	2	R0.3	2	0.48	35	4	G-21
HGLB	2006-020	2	R0.3	2	0.48	45	4	G-5
HWLB	2006-020	2	R0.3	2	0.48	45	4	G-21
HSLB	2006-020	2	R0.3	2	0.48	45	4	G-38
CWLB	2006-020	2	R0.3	2	0.48	45	4	G-50
CSELB	2006-020	2	R0.3	2	0.48	45	4	G-61
DLCLB	2006-020	2	R0.3	2	0.48	45	4	G-79
DCLB	2006-0020	2	R0.3	2	0.48	45	4	G-73
HGLB	2006-020-6	2	R0.3	2	0.48	50	6	G-5
HWLB	2006-020-6	2	R0.3	2	0.48	50	6	G-21
CWLB	2006-020-6	2	R0.3	2	0.48	50	6	G-50
CSELB	2006-020-6	2	R0.3	2	0.48	50	6	G-61
CPRB	2006-2	2	R0.3	2	1	45	4	G-87
CSELB	2006-0225	2	R0.3	2.25	0.48	45	4	G-61
HWLB	2006-025S	2	R0.3	2.5	0.48	35	4	G-21
HGLB	2006-025	2	R0.3	2.5	0.48	45	4	G-5
HWLB	2006-025	2	R0.3	2.5	0.48	45	4	G-21
HSLB	2006-025	2	R0.3	2.5	0.48	45	4	G-38
CWLB	2006-025	2	R0.3	2.5	0.48	45	4	G-50
CSELB	2006-025	2	R0.3	2.5	0.48	45	4	G-61
HGLB	2006-025-6	2	R0.3	2.5	0.48	50	6	G-5
CSELB	2006-025-6	2	R0.3	2.5	0.48	50	6	G-61
HWLB	2006-030S	2	R0.3	3	0.48	35	4	G-21
HGLB	2006-030	2	R0.3	3	0.48	45	4	G-5
HWLB	2006-030	2	R0.3	3	0.48	45	4	G-21
HSLB	2006-030	2	R0.3	3	0.48	45	4	G-38
CWLB	2006-030	2	R0.3	3	0.48	45	4	G-50
CSELB	2006-030	2	R0.3	3	0.48	45	4	G-61
DLCLB	2006-030	2	R0.3	3	0.48	45	4	G-79
DCLB	2006-0030	2	R0.3	3	0.48	45	4	G-73
HGLB	2006-030-6	2	R0.3	3	0.48	50	6	G-5
HWLB	2006-030-6	2	R0.3	3	0.48	50	6	G-21
HSLB	2006-030-6	2	R0.3	3	0.48	50	6	G-38
CWLB	2006-030-6	2	R0.3	3	0.48	50	6	G-50
CSELB	2006-030-6	2	R0.3	3	0.48	50	6	G-61
HWLB	2006-035S	2	R0.3	3.5	0.48	35	4	G-21
HGLB	2006-035	2	R0.3	3.5	0.48	45	4	G-5
HWLB	2006-035	2	R0.3	3.5	0.48	45	4	G-21

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CWLB	2006-035	2	R0.3	3.5	0.48	45	4	G-50
CSELB	2006-035	2	R0.3	3.5	0.48	45	4	G-61
HWLB	2006-040S	2	R0.3	4	0.48	35	4	G-21
HGLB	2006-040	2	R0.3	4	0.48	45	4	G-5
HWLB	2006-040	2	R0.3	4	0.48	45	4	G-21
HSLB	2006-040	2	R0.3	4	0.48	45	4	G-38
CWLB	2006-040	2	R0.3	4	0.48	45	4	G-50
CSELB	2006-040	2	R0.3	4	0.48	45	4	G-61
DLCLB	2006-040	2	R0.3	4	0.48	45	4	G-79
DCLB	2006-0040	2	R0.3	4	0.48	45	4	G-73
HWLB	2006-040-6	2	R0.3	4	0.48	50	6	G-21
CWLB	2006-040-6	2	R0.3	4	0.48	50	6	G-50
CSELB	2006-040-6	2	R0.3	4	0.48	50	6	G-61
CPRB	2006-4	2	R0.3	4	1	45	4	G-87
HGLB	2006-045	2	R0.3	4.5	0.48	45	4	G-5
HWLB	2006-045	2	R0.3	4.5	0.48	45	4	G-21
CSELB	2006-045	2	R0.3	4.5	0.48	45	4	G-61
HWLB	2006-050S	2	R0.3	5	0.48	35	4	G-21
HGLB	2006-050	2	R0.3	5	0.48	45	4	G-5
HWLB	2006-050	2	R0.3	5	0.48	45	4	G-21
HSLB	2006-050	2	R0.3	5	0.48	45	4	G-38
CWLB	2006-050	2	R0.3	5	0.48	45	4	G-50
CSELB	2006-050	2	R0.3	5	0.48	45	4	G-61
DLCLB	2006-050	2	R0.3	5	0.48	45	4	G-79
HWLB	2006-050-6	2	R0.3	5	0.48	50	6	G-21
CSELB	2006-050-6	2	R0.3	5	0.48	50	6	G-61
HGLB	2006-055	2	R0.3	5.5	0.48	45	4	G-5
CSELB	2006-055	2	R0.3	5.5	0.48	45	4	G-61
HWLB	2006-060S	2	R0.3	6	0.48	35	4	G-21
HGLB	2006-060	2	R0.3	6	0.48	45	4	G-5
HWLB	2006-060	2	R0.3	6	0.48	45	4	G-21
HSLB	2006-060	2	R0.3	6	0.48	45	4	G-38
CWLB	2006-060	2	R0.3	6	0.48	45	4	G-50
CSELB	2006-060	2	R0.3	6	0.48	45	4	G-61
DLCLB	2006-060	2	R0.3	6	0.48	45	4	G-79
DCLB	2006-0060	2	R0.3	6	0.48	45	4	G-73
HWLB	2006-060-6	2	R0.3	6	0.48	50	6	G-21
CWLB	2006-060-6	2	R0.3	6	0.48	50	6	G-50
CSELB	2006-060-6	2	R0.3	6	0.48	50	6	G-61
CPRB	2006-6	2	R0.3	6	1	45	4	G-87

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2006-065	2	R0.3	6.5	0.48	45	4	G-61
HWLB	2006-070	2	R0.3	7	0.48	45	4	G-21
CSELB	2006-070	2	R0.3	7	0.48	45	4	G-61
HGLB	2006-080	2	R0.3	8	0.48	45	4	G-5
HWLB	2006-080	2	R0.3	8	0.48	45	4	G-21
HSLB	2006-080	2	R0.3	8	0.48	45	4	G-38
CWLB	2006-080	2	R0.3	8	0.48	45	4	G-50
CSELB	2006-080	2	R0.3	8	0.48	45	4	G-61
CSELB	2006-080-6	2	R0.3	8	0.48	50	6	G-61
CPRB	2006-8	2	R0.3	8	1	45	4	G-87
HWLB	2006-090	2	R0.3	9	0.48	45	4	G-21
CSELB	2006-090	2	R0.3	9	0.48	45	4	G-61
HGLB	2006-100	2	R0.3	10	0.48	45	4	G-5
DCLB	2006-0100	2	R0.3	10	0.48	45	4	G-73
HWLB	2006-100	2	R0.3	10	0.48	50	4	G-21
HSLB	2006-100	2	R0.3	10	0.48	50	4	G-38
CWLB	2006-100	2	R0.3	10	0.48	50	4	G-50
CSELB	2006-100	2	R0.3	10	0.48	50	4	G-61
HWLB	2006-100-6	2	R0.3	10	0.48	50	6	G-21
HSLB	2006-100-6	2	R0.3	10	0.48	50	6	G-38
CSELB	2006-100-6	2	R0.3	10	0.48	50	6	G-61
DCLB	2006-0120	2	R0.3	12	0.48	45	4	G-73
HWLB	2006-120	2	R0.3	12	0.48	50	4	G-21
CSELB	2006-120	2	R0.3	12	0.48	50	4	G-61
CFB	3006-0090	3	R0.3	—	0.9	50	4	F-33
DLC-CFB	3006-0090	3	R0.3	—	0.9	50	4	F-39
CFLB	3006-020	3	R0.3	2	0.48	50	4	G-92
CFLB	3006-030	3	R0.3	3	0.48	50	4	G-92
CFLB	3006-040	3	R0.3	4	0.48	50	4	G-92
CFLB	3006-060	3	R0.3	6	0.48	50	4	G-92
HSB	2007-0100	2	R0.35	—	1	50	4	F-10
CWB	2007-0100	2	R0.35	—	1	50	4	F-20
CSEB	2007-0100	2	R0.35	—	1	50	4	F-26
HWLB	2007-020	2	R0.35	2	0.56	45	4	G-21
CSELB	2007-020	2	R0.35	2	0.56	45	4	G-61
HWLB	2007-040	2	R0.35	4	0.56	45	4	G-21
CSELB	2007-040	2	R0.35	4	0.56	45	4	G-61
HWLB	2007-060	2	R0.35	6	0.56	45	4	G-21
CSELB	2007-060	2	R0.35	6	0.56	45	4	G-61
CSELB	2007-080	2	R0.35	8	0.56	45	4	G-61

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HSB	2008-0080S	2	R0.4	—	0.8	35	4	F-14
HWB	2008-0080	2	R0.4	—	0.8	50	4	F-5
HSB	2008-0080	2	R0.4	—	0.8	50	4	F-10
CWB	2008-0080	2	R0.4	—	0.8	50	4	F-20
CSEB	2008-0080	2	R0.4	—	0.8	50	4	F-26
HSB	2008-0080-6	2	R0.4	—	0.8	50	6	F-10
CSEB	2008-0080-6	2	R0.4	—	0.8	50	6	F-26
HGB	2008-0120	2	R0.4	—	1.2	50	4	F-2
HWB	2008-0120	2	R0.4	—	1.2	50	4	F-5
HSB	2008-0120	2	R0.4	—	1.2	50	4	F-10
CWB	2008-0120	2	R0.4	—	1.2	50	4	F-20
CSEB	2008-0120	2	R0.4	—	1.2	50	4	F-26
HWLB	2008-015	2	R0.4	1.5	0.64	45	4	G-23
HWLB	2008-020S	2	R0.4	2	0.64	35	4	G-23
HGLB	2008-020	2	R0.4	2	0.64	45	4	G-5
HWLB	2008-020	2	R0.4	2	0.64	45	4	G-23
HSLB	2008-020	2	R0.4	2	0.64	45	4	G-39
CWLB	2008-020	2	R0.4	2	0.64	45	4	G-50
CSELB	2008-020	2	R0.4	2	0.64	45	4	G-61
DLCLB	2008-020	2	R0.4	2	0.64	45	4	G-79
HWLB	2008-020-6	2	R0.4	2	0.64	50	6	G-23
CWLB	2008-020-6	2	R0.4	2	0.64	50	6	G-50
CSELB	2008-020-6	2	R0.4	2	0.64	50	6	G-61
CPRB	2008-2	2	R0.4	2	1.1	45	4	G-87
HGLB	2008-025	2	R0.4	2.5	0.64	45	4	G-5
HWLB	2008-025	2	R0.4	2.5	0.64	45	4	G-23
HWLB	2008-030S	2	R0.4	3	0.64	35	4	G-23
HGLB	2008-030	2	R0.4	3	0.64	45	4	G-5
HWLB	2008-030	2	R0.4	3	0.64	45	4	G-23
HSLB	2008-030	2	R0.4	3	0.64	45	4	G-39
CWLB	2008-030	2	R0.4	3	0.64	45	4	G-50
CSELB	2008-030	2	R0.4	3	0.64	45	4	G-61
DLCLB	2008-030	2	R0.4	3	0.64	45	4	G-79
HWLB	2008-030-6	2	R0.4	3	0.64	50	6	G-23
CWLB	2008-030-6	2	R0.4	3	0.64	50	6	G-50
CSELB	2008-030-6	2	R0.4	3	0.64	50	6	G-61
HWLB	2008-040S	2	R0.4	4	0.64	35	4	G-23
HGLB	2008-040	2	R0.4	4	0.64	45	4	G-5
HWLB	2008-040	2	R0.4	4	0.64	45	4	G-23
HSLB	2008-040	2	R0.4	4	0.64	45	4	G-39

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CWLB	2008-040	2	R0.4	4	0.64	45	4	G-50
CSELB	2008-040	2	R0.4	4	0.64	45	4	G-61
DLCLB	2008-040	2	R0.4	4	0.64	45	4	G-79
HWLB	2008-040-6	2	R0.4	4	0.64	50	6	G-23
CWLB	2008-040-6	2	R0.4	4	0.64	50	6	G-50
CSELB	2008-040-6	2	R0.4	4	0.64	50	6	G-61
CPRB	2008-4	2	R0.4	4	1.1	45	4	G-87
HGLB	2008-050	2	R0.4	5	0.64	45	4	G-5
HWLB	2008-050	2	R0.4	5	0.64	45	4	G-23
CWLB	2008-050	2	R0.4	5	0.64	45	4	G-50
CSELB	2008-050	2	R0.4	5	0.64	45	4	G-61
HWLB	2008-060S	2	R0.4	6	0.64	35	4	G-23
HGLB	2008-060	2	R0.4	6	0.64	45	4	G-5
HWLB	2008-060	2	R0.4	6	0.64	45	4	G-23
HSLB	2008-060	2	R0.4	6	0.64	45	4	G-39
CWLB	2008-060	2	R0.4	6	0.64	45	4	G-50
CSELB	2008-060	2	R0.4	6	0.64	45	4	G-61
DLCLB	2008-060	2	R0.4	6	0.64	45	4	G-79
CSELB	2008-060-6	2	R0.4	6	0.64	50	6	G-61
CPRB	2008-6	2	R0.4	6	1.1	45	4	G-87
HGLB	2008-070	2	R0.4	7	0.64	45	4	G-5
HWLB	2008-070	2	R0.4	7	0.64	45	4	G-23
CSELB	2008-070	2	R0.4	7	0.64	45	4	G-61
HGLB	2008-080	2	R0.4	8	0.64	45	4	G-5
HWLB	2008-080	2	R0.4	8	0.64	45	4	G-23
HSLB	2008-080	2	R0.4	8	0.64	45	4	G-39
CWLB	2008-080	2	R0.4	8	0.64	45	4	G-50
CSELB	2008-080	2	R0.4	8	0.64	45	4	G-61
DLCLB	2008-080	2	R0.4	8	0.64	45	4	G-79
CSELB	2008-080-6	2	R0.4	8	0.64	50	6	G-61
CPRB	2008-8	2	R0.4	8	1.1	45	4	G-87
CSELB	2008-090	2	R0.4	9	0.64	45	4	G-61
DCLB	2008-0100	2	R0.4	10	0.64	45	4	G-73
HWLB	2008-100	2	R0.4	10	0.64	50	4	G-23
HSLB	2008-100	2	R0.4	10	0.64	50	4	G-39
CWLB	2008-100	2	R0.4	10	0.64	50	4	G-50
CSELB	2008-100	2	R0.4	10	0.64	50	4	G-61
CSELB	2008-100-6	2	R0.4	10	0.64	50	6	G-61
CPRB	2008-10	2	R0.4	10	1.1	50	4	G-87
CSELB	2008-120	2	R0.4	12	0.64	45	4	G-61

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	2008-120	2	R0.4	12	0.64	50	4	G-23
CWLB	2008-120	2	R0.4	12	0.64	50	4	G-50
DCLB	2008-0120	2	R0.4	12	0.64	50	4	G-73
HWLB	2008-160	2	R0.4	16	0.64	50	4	G-23
CSELB	2008-160	2	R0.4	16	0.64	50	4	G-61
DCLB	2008-0160	2	R0.4	16	0.64	50	4	G-73
CFB	3008-0120	3	R0.4	—	1.2	50	4	F-33
DLC-CFB	3008-0120	3	R0.4	—	1.2	50	4	F-39
CFLB	3008-040	3	R0.4	4	0.64	50	4	G-92
CFLB	3008-060	3	R0.4	6	0.64	50	4	G-92
CFLB	3008-080	3	R0.4	8	0.64	50	4	G-92
HSB	2009-0130	2	R0.45	—	1.3	50	4	F-10
CWB	2009-0130	2	R0.45	—	1.3	50	4	F-20
CSEB	2009-0130	2	R0.45	—	1.3	50	4	F-26
CSELB	2009-020	2	R0.45	2	0.72	45	4	G-62
HWLB	2009-040	2	R0.45	4	0.72	45	4	G-23
CSELB	2009-040	2	R0.45	4	0.72	45	4	G-62
CSELB	2009-060	2	R0.45	6	0.72	45	4	G-62
HWLB	2009-080	2	R0.45	8	0.72	45	4	G-23
CSELB	2009-080	2	R0.45	8	0.72	45	4	G-62
CSELB	2009-100	2	R0.45	10	0.72	45	4	G-62
CSELB	2009-120	2	R0.45	12	0.72	45	4	G-62
HWLB	2009-120	2	R0.45	12	0.72	50	4	G-23
CSELB	2009-140	2	R0.45	14	0.72	50	4	G-62
CSELB	2009-160	2	R0.45	16	0.72	50	4	G-62
CSELB	2009-180	2	R0.45	18	0.72	55	4	G-62
HWB	2010-0100S	2	R0.5	—	1	35	4	F-5
HSB	2010-0100S	2	R0.5	—	1	35	4	F-14
HWB	2010-0100	2	R0.5	—	1	50	4	F-5
HSB	2010-0100	2	R0.5	—	1	50	4	F-10
CWB	2010-0100	2	R0.5	—	1	50	4	F-20
CSEB	2010-0100	2	R0.5	—	1	50	4	F-26
HSB	2010-0100-6	2	R0.5	—	1	50	6	F-10
CSEB	2010-0100-6	2	R0.5	—	1	50	6	F-26
HGB	2010-0150	2	R0.5	—	1.5	50	4	F-2
HWB	2010-0150	2	R0.5	—	1.5	50	4	F-5
HSB	2010-0150	2	R0.5	—	1.5	50	4	F-10
CWB	2010-0150	2	R0.5	—	1.5	50	4	F-20
CSEB	2010-0150	2	R0.5	—	1.5	50	4	F-26
HWB	2010-0250	2	R0.5	—	2.5	50	4	F-5

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HSB	2010-0250	2	R0.5	—	2.5	50	4	F-10
CWB	2010-0250	2	R0.5	—	2.5	50	4	F-20
CSEB	2010-0250	2	R0.5	—	2.5	50	4	F-26
DCB	2010	2	R0.5	—	5	60	4	F-31
HWLB	2010-015S	2	R0.5	1.5	0.8	35	4	G-23
HWLB	2010-015	2	R0.5	1.5	0.8	45	4	G-23
HWLB	2010-020S	2	R0.5	2	0.8	35	4	G-23
HGLB	2010-020	2	R0.5	2	0.8	45	4	G-5
HWLB	2010-020	2	R0.5	2	0.8	45	4	G-23
HSLB	2010-020	2	R0.5	2	0.8	45	4	G-39
CWLB	2010-020	2	R0.5	2	0.8	45	4	G-50
CSELB	2010-020	2	R0.5	2	0.8	45	4	G-62
DLCLB	2010-020	2	R0.5	2	0.8	45	4	G-79
HGLB	2010-020-6	2	R0.5	2	0.8	50	6	G-5
HWLB	2010-025S	2	R0.5	2.5	0.8	35	4	G-23
HGLB	2010-025	2	R0.5	2.5	0.8	45	4	G-5
HWLB	2010-025	2	R0.5	2.5	0.8	45	4	G-23
HSLB	2010-025	2	R0.5	2.5	0.8	45	4	G-39
CWLB	2010-025	2	R0.5	2.5	0.8	45	4	G-50
CSELB	2010-025	2	R0.5	2.5	0.8	45	4	G-62
HWLB	2010-030S	2	R0.5	3	0.8	35	4	G-23
HGLB	2010-030	2	R0.5	3	0.8	45	4	G-5
HWLB	2010-030	2	R0.5	3	0.8	45	4	G-23
HSLB	2010-030	2	R0.5	3	0.8	45	4	G-39
CWLB	2010-030	2	R0.5	3	0.8	45	4	G-50
CSELB	2010-030	2	R0.5	3	0.8	45	4	G-62
DLCLB	2010-030	2	R0.5	3	0.8	45	4	G-79
DCLB	2010-0030	2	R0.5	3	0.8	45	4	G-74
HGLB	2010-030-6	2	R0.5	3	0.8	50	6	G-5
HWLB	2010-030-6	2	R0.5	3	0.8	50	6	G-23
HSLB	2010-030-6	2	R0.5	3	0.8	50	6	G-39
CWLB	2010-030-6	2	R0.5	3	0.8	50	6	G-50
CSELB	2010-030-6	2	R0.5	3	0.8	50	6	G-62
CPRB	2010-3	2	R0.5	3	1.2	45	4	G-88
HWLB	2010-040S	2	R0.5	4	0.8	35	4	G-23
HGLB	2010-040	2	R0.5	4	0.8	45	4	G-5
HWLB	2010-040	2	R0.5	4	0.8	45	4	G-23
HSLB	2010-040	2	R0.5	4	0.8	45	4	G-39
CWLB	2010-040	2	R0.5	4	0.8	45	4	G-50
CSELB	2010-040	2	R0.5	4	0.8	45	4	G-62

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
DLCLB	2010-040	2	R0.5	4	0.8	45	4	G-79
HGLB	2010-040-6	2	R0.5	4	0.8	50	6	G-5
HWLB	2010-040-6	2	R0.5	4	0.8	50	6	G-23
HSLB	2010-040-6	2	R0.5	4	0.8	50	6	G-39
CWLB	2010-040-6	2	R0.5	4	0.8	50	6	G-50
CSELB	2010-040-6	2	R0.5	4	0.8	50	6	G-62
CPRB	2010-4	2	R0.5	4	1.2	45	4	G-88
HGLB	2010-050	2	R0.5	5	0.8	45	4	G-5
HWLB	2010-050	2	R0.5	5	0.8	45	4	G-23
HSLB	2010-050	2	R0.5	5	0.8	45	4	G-39
CWLB	2010-050	2	R0.5	5	0.8	45	4	G-50
CSELB	2010-050	2	R0.5	5	0.8	45	4	G-62
DLCLB	2010-050	2	R0.5	5	0.8	45	4	G-79
DCLB	2010-0050	2	R0.5	5	0.8	45	4	G-74
HGLB	2010-050-6	2	R0.5	5	0.8	50	6	G-5
HWLB	2010-050-6	2	R0.5	5	0.8	50	6	G-23
CSELB	2010-050-6	2	R0.5	5	0.8	50	6	G-62
HWLB	2010-060S	2	R0.5	6	0.8	35	4	G-23
HGLB	2010-060	2	R0.5	6	0.8	45	4	G-5
HWLB	2010-060	2	R0.5	6	0.8	45	4	G-23
HSLB	2010-060	2	R0.5	6	0.8	45	4	G-39
CWLB	2010-060	2	R0.5	6	0.8	45	4	G-50
CSELB	2010-060	2	R0.5	6	0.8	45	4	G-62
DLCLB	2010-060	2	R0.5	6	0.8	45	4	G-79
DCLB	2010-0060	2	R0.5	6	0.8	45	4	G-74
HGLB	2010-060-6	2	R0.5	6	0.8	50	6	G-5
HWLB	2010-060-6	2	R0.5	6	0.8	50	6	G-23
HSLB	2010-060-6	2	R0.5	6	0.8	50	6	G-39
CWLB	2010-060-6	2	R0.5	6	0.8	50	6	G-50
CSELB	2010-060-6	2	R0.5	6	0.8	50	6	G-62
CPRB	2010-6	2	R0.5	6	1.2	45	4	G-88
HGLB	2010-070	2	R0.5	7	0.8	45	4	G-5
HWLB	2010-070	2	R0.5	7	0.8	45	4	G-23
HSLB	2010-070	2	R0.5	7	0.8	45	4	G-39
CWLB	2010-070	2	R0.5	7	0.8	45	4	G-50
CSELB	2010-070	2	R0.5	7	0.8	45	4	G-62
HGLB	2010-070-6	2	R0.5	7	0.8	50	6	G-5
HWLB	2010-070-6	2	R0.5	7	0.8	50	6	G-23
CSELB	2010-070-6	2	R0.5	7	0.8	50	6	G-62
HWLB	2010-080S	2	R0.5	8	0.8	40	4	G-23

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HGLB	2010-080	2	R0.5	8	0.8	45	4	G-5
HWLB	2010-080	2	R0.5	8	0.8	45	4	G-23
HSLB	2010-080	2	R0.5	8	0.8	45	4	G-39
CWLB	2010-080	2	R0.5	8	0.8	45	4	G-50
CSELB	2010-080	2	R0.5	8	0.8	45	4	G-62
DLCLB	2010-080	2	R0.5	8	0.8	45	4	G-79
DCLB	2010-0080	2	R0.5	8	0.8	45	4	G-74
HGLB	2010-080-6	2	R0.5	8	0.8	50	6	G-5
HWLB	2010-080-6	2	R0.5	8	0.8	50	6	G-23
CWLB	2010-080-6	2	R0.5	8	0.8	50	6	G-50
CSELB	2010-080-6	2	R0.5	8	0.8	50	6	G-62
CPRB	2010-8	2	R0.5	8	1.2	45	4	G-88
HWLB	2010-090	2	R0.5	9	0.8	45	4	G-25
CWLB	2010-090	2	R0.5	9	0.8	45	4	G-50
CSELB	2010-090	2	R0.5	9	0.8	45	4	G-62
HWLB	2010-100S	2	R0.5	10	0.8	40	4	G-25
HGLB	2010-100	2	R0.5	10	0.8	45	4	G-5
HWLB	2010-100	2	R0.5	10	0.8	45	4	G-25
HSLB	2010-100	2	R0.5	10	0.8	45	4	G-39
CWLB	2010-100	2	R0.5	10	0.8	45	4	G-50
CSELB	2010-100	2	R0.5	10	0.8	45	4	G-62
DLCLB	2010-100	2	R0.5	10	0.8	45	4	G-79
DCLB	2010-0100-08	2	R0.5	10	0.8	45	4	G-74
HGLB	2010-100-6	2	R0.5	10	0.8	50	6	G-5
HWLB	2010-100-6	2	R0.5	10	0.8	50	6	G-25
HSLB	2010-100-6	2	R0.5	10	0.8	50	6	G-39
CWLB	2010-100-6	2	R0.5	10	0.8	50	6	G-50
CSELB	2010-100-6	2	R0.5	10	0.8	50	6	G-62
CPRB	2010-10	2	R0.5	10	1.2	45	4	G-88
DCLB	2010-0100	2	R0.5	10	1.5	60	4	G-74
HGLB	2010-120	2	R0.5	12	0.8	45	4	G-5
HWLB	2010-120	2	R0.5	12	0.8	45	4	G-25
HSLB	2010-120	2	R0.5	12	0.8	45	4	G-39
CWLB	2010-120	2	R0.5	12	0.8	45	4	G-50
CSELB	2010-120	2	R0.5	12	0.8	45	4	G-62
DLCLB	2010-120	2	R0.5	12	0.8	45	4	G-79
DCLB	2010-0120	2	R0.5	12	0.8	50	4	G-74
CWLB	2010-120-6	2	R0.5	12	0.8	50	6	G-50
CSELB	2010-120-6	2	R0.5	12	0.8	50	6	G-62
CPRB	2010-12	2	R0.5	12	1.2	45	4	G-88

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HGLB	2010-140	2	R0.5	14	0.8	45	4	G-5
HWLB	2010-140	2	R0.5	14	0.8	50	4	G-25
HSLB	2010-140	2	R0.5	14	0.8	50	4	G-39
CWLB	2010-140	2	R0.5	14	0.8	50	4	G-50
CSELB	2010-140	2	R0.5	14	0.8	50	4	G-62
HWLB	2010-140-6	2	R0.5	14	0.8	60	6	G-25
CSELB	2010-140-6	2	R0.5	14	0.8	60	6	G-62
CPRB	2010-14	2	R0.5	14	1.2	50	4	G-88
HGLB	2010-160	2	R0.5	16	0.8	50	4	G-5
HWLB	2010-160	2	R0.5	16	0.8	50	4	G-25
HSLB	2010-160	2	R0.5	16	0.8	50	4	G-39
CWLB	2010-160	2	R0.5	16	0.8	50	4	G-50
CSELB	2010-160	2	R0.5	16	0.8	50	4	G-62
DCLB	2010-0160	2	R0.5	16	0.8	50	4	G-74
CSELB	2010-160-6	2	R0.5	16	0.8	60	6	G-62
CPRB	2010-16	2	R0.5	16	1.2	50	4	G-88
HWLB	2010-180	2	R0.5	18	0.8	55	4	G-25
CWLB	2010-180	2	R0.5	18	0.8	55	4	G-50
CSELB	2010-180	2	R0.5	18	0.8	55	4	G-62
HWLB	2010-200	2	R0.5	20	0.8	55	4	G-25
HSLB	2010-200	2	R0.5	20	0.8	55	4	G-39
CWLB	2010-200	2	R0.5	20	0.8	55	4	G-50
CSELB	2010-200	2	R0.5	20	0.8	55	4	G-62
CSELB	2010-200-6	2	R0.5	20	0.8	70	6	G-62
CPRB	2010-20	2	R0.5	20	1.2	55	4	G-88
DCLB	2010-0200	2	R0.5	20	1.5	60	4	G-74
HWLB	2010-220-6	2	R0.5	22	0.8	70	6	G-25
CSELB	2010-220-6	2	R0.5	22	0.8	70	6	G-62
CFB	3010-0150	3	R0.5	—	1.5	50	4	F-33
DLC-CFB	3010-0150	3	R0.5	—	1.5	50	4	F-39
CFLB	3010-025	3	R0.5	2.5	0.8	50	4	G-92
CFLB	3010-030	3	R0.5	3	0.8	50	4	G-92
CFLB	3010-040	3	R0.5	4	0.8	50	4	G-92
CFLB	3010-050	3	R0.5	5	0.8	50	4	G-92
CFLB	3010-060	3	R0.5	6	0.8	50	4	G-92
CFLB	3010-080	3	R0.5	8	0.8	50	4	G-92
CFLB	3010-100	3	R0.5	10	0.8	50	4	G-92
CFLB	3010-120	3	R0.5	12	0.8	50	4	G-92
HSB	2011-0160	2	R0.55	—	1.6	50	4	F-10
CWB	2011-0160	2	R0.55	—	1.6	50	4	F-20
CSEB	2011-0160	2	R0.55	—	1.6	50	4	F-26
HWB	2012-0180	2	R0.6	—	1.8	50	4	F-5
HSB	2012-0180	2	R0.6	—	1.8	50	4	F-10
CWB	2012-0180	2	R0.6	—	1.8	50	4	F-20
CSEB	2012-0180	2	R0.6	—	1.8	50	4	F-26
HWLB	2012-020	2	R0.6	2	0.96	45	4	G-25
CSELB	2012-025	2	R0.6	2.5	0.96	45	4	G-62
HWLB	2012-030	2	R0.6	3	0.96	45	4	G-25
CWLB	2012-030	2	R0.6	3	0.96	45	4	G-51
HWLB	2012-040	2	R0.6	4	0.96	45	4	G-25
HSLB	2012-040	2	R0.6	4	0.96	45	4	G-39
CWLB	2012-040	2	R0.6	4	0.96	45	4	G-51
CSELB	2012-040	2	R0.6	4	0.96	45	4	G-62
HWLB	2012-060	2	R0.6	6	0.96	45	4	G-25
HSLB	2012-060	2	R0.6	6	0.96	45	4	G-39
CWLB	2012-060	2	R0.6	6	0.96	45	4	G-51
CSELB	2012-060	2	R0.6	6	0.96	45	4	G-62
CSELB	2012-060-6	2	R0.6	6	0.96	50	6	G-62
HWLB	2012-080	2	R0.6	8	0.96	45	4	G-25
HSLB	2012-080	2	R0.6	8	0.96	45	4	G-39
CWLB	2012-080	2	R0.6	8	0.96	45	4	G-51
CSELB	2012-080	2	R0.6	8	0.96	45	4	G-62
CSELB	2012-080-6	2	R0.6	8	0.96	50	6	G-62
CPRB	2012-8	2	R0.6	8	1.3	45	4	G-88
HWLB	2012-100	2	R0.6	10	0.96	45	4	G-25
CWLB	2012-100	2	R0.6	10	0.96	45	4	G-51
CSELB	2012-100	2	R0.6	10	0.96	45	4	G-62
CSELB	2012-100-6	2	R0.6	10	0.96	50	6	G-62
HWLB	2012-120	2	R0.6	12	0.96	45	4	G-25
CWLB	2012-120	2	R0.6	12	0.96	45	4	G-51
CSELB	2012-120	2	R0.6	12	0.96	45	4	G-62
CSELB	2012-120-6	2	R0.6	12	0.96	50	6	G-62
CPRB	2012-12	2	R0.6	12	1.3	45	4	G-88
HWLB	2012-140	2	R0.6	14	0.96	50	4	G-25
CSELB	2012-140	2	R0.6	14	0.96	50	4	G-62
HWLB	2012-160	2	R0.6	16	0.96	50	4	G-25
CWLB	2012-160	2	R0.6	16	0.96	50	4	G-51
CSELB	2012-160	2	R0.6	16	0.96	50	4	G-62
CSELB	2012-160-6	2	R0.6	16	0.96	60	6	G-62
CSELB	2012-180	2	R0.6	18	0.96	55	4	G-62

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2012-200	2	R0.6	20	0.96	60	4	G-62
HSB	2013-0190	2	R0.65	—	1.9	50	4	F-10
CWB	2013-0190	2	R0.65	—	1.9	50	4	F-20
CSEB	2013-0190	2	R0.65	—	1.9	50	4	F-26
HSB	2014-0210	2	R0.7	—	2.1	50	4	F-10
CWB	2014-0210	2	R0.7	—	2.1	50	4	F-20
CSEB	2014-0210	2	R0.7	—	2.1	50	4	F-26
HWLB	2014-060	2	R0.7	6	1.12	45	4	G-25
CSELB	2014-060	2	R0.7	6	1.12	45	4	G-63
HWLB	2014-080	2	R0.7	8	1.12	45	4	G-25
CSELB	2014-080	2	R0.7	8	1.12	45	4	G-63
CPRB	2014-8	2	R0.7	8	1.4	45	4	G-88
HWLB	2014-120	2	R0.7	12	1.12	45	4	G-25
CSELB	2014-120	2	R0.7	12	1.12	45	4	G-63
CPRB	2014-12	2	R0.7	12	1.4	45	4	G-88
CSELB	2014-160	2	R0.7	16	1.12	50	4	G-63
CPRB	2014-16	2	R0.7	16	1.4	50	4	G-88
HWB	2015-0150S	2	R0.75	—	1.5	35	4	F-5
HSB	2015-0150S	2	R0.75	—	1.5	35	4	F-14
HWB	2015-0150	2	R0.75	—	1.5	50	4	F-5
HSB	2015-0150	2	R0.75	—	1.5	50	4	F-10
CWB	2015-0150	2	R0.75	—	1.5	50	4	F-20
CSEB	2015-0150	2	R0.75	—	1.5	50	4	F-26
HSB	2015-0150-6	2	R0.75	—	1.5	50	6	F-10
CSEB	2015-0150-6	2	R0.75	—	1.5	50	6	F-26
HWB	2015-0200	2	R0.75	—	2	50	4	F-5
HSB	2015-0200	2	R0.75	—	2	50	4	F-10
CWB	2015-0200	2	R0.75	—	2	50	4	F-20
CSEB	2015-0200	2	R0.75	—	2	50	4	F-26
HGB	2015-0225	2	R0.75	—	2.25	50	4	F-2
HWB	2015-0225	2	R0.75	—	2.25	50	4	F-5
HSB	2015-0225	2	R0.75	—	2.25	50	4	F-10
CWB	2015-0225	2	R0.75	—	2.25	50	4	F-20
CSEB	2015-0225	2	R0.75	—	2.25	50	4	F-26
HWB	2015-0400	2	R0.75	—	4	50	4	F-5
HSB	2015-0400	2	R0.75	—	4	50	4	F-10
CWB	2015-0400	2	R0.75	—	4	50	4	F-20
CSEB	2015-0400	2	R0.75	—	4	50	4	F-26
HWLB	2015-030S	2	R0.75	3	1.2	35	4	G-25
HGLB	2015-030	2	R0.75	3	1.2	45	4	G-6

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	2015-030	2	R0.75	3	1.2	45	4	G-25
HSLB	2015-030	2	R0.75	3	1.2	45	4	G-39
CWLB	2015-030	2	R0.75	3	1.2	45	4	G-51
CSELB	2015-030	2	R0.75	3	1.2	45	4	G-63
HGLB	2015-030-6	2	R0.75	3	1.2	50	6	G-6
HWLB	2015-040S	2	R0.75	4	1.2	35	4	G-25
HGLB	2015-040	2	R0.75	4	1.2	45	4	G-6
HWLB	2015-040	2	R0.75	4	1.2	45	4	G-25
HSLB	2015-040	2	R0.75	4	1.2	45	4	G-39
CWLB	2015-040	2	R0.75	4	1.2	45	4	G-51
CSELB	2015-040	2	R0.75	4	1.2	45	4	G-63
DLCLB	2015-040	2	R0.75	4	1.2	45	4	G-81
HWLB	2015-060S	2	R0.75	6	1.2	35	4	G-25
HGLB	2015-060	2	R0.75	6	1.2	45	4	G-6
HWLB	2015-060	2	R0.75	6	1.2	45	4	G-25
HSLB	2015-060	2	R0.75	6	1.2	45	4	G-39
CWLB	2015-060	2	R0.75	6	1.2	45	4	G-51
CSELB	2015-060	2	R0.75	6	1.2	45	4	G-63
DLCLB	2015-060	2	R0.75	6	1.2	45	4	G-81
DCLB	2015-0060	2	R0.75	6	1.2	45	4	G-74
HGLB	2015-060-6	2	R0.75	6	1.2	50	6	G-6
HWLB	2015-060-6	2	R0.75	6	1.2	50	6	G-25
HSLB	2015-060-6	2	R0.75	6	1.2	50	6	G-39
CWLB	2015-060-6	2	R0.75	6	1.2	50	6	G-51
CSELB	2015-060-6	2	R0.75	6	1.2	50	6	G-63
CPRB	2015-6	2	R0.75	6	1.45	45	4	G-88
HWLB	2015-080S	2	R0.75	8	1.2	40	4	G-25
HGLB	2015-080	2	R0.75	8	1.2	45	4	G-6
HWLB	2015-080	2	R0.75	8	1.2	45	4	G-25
HSLB	2015-080	2	R0.75	8	1.2	45	4	G-39
CWLB	2015-080	2	R0.75	8	1.2	45	4	G-51
CSELB	2015-080	2	R0.75	8	1.2	45	4	G-63
HGLB	2015-080-6	2	R0.75	8	1.2	50	6	G-6
HWLB	2015-080-6	2	R0.75	8	1.2	50	6	G-25
CWLB	2015-080-6	2	R0.75	8	1.2	50	6	G-51
CSELB	2015-080-6	2	R0.75	8	1.2	50	6	G-63
CPRB	2015-8	2	R0.75	8	1.45	45	4	G-88
HWLB	2015-100S	2	R0.75	10	1.2	40	4	G-25
HGLB	2015-100	2	R0.75	10	1.2	45	4	G-6
HWLB	2015-100	2	R0.75	10	1.2	45	4	G-25

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HSLB	2015-100	2	R0.75	10	1.2	45	4	G-39
CWLB	2015-100	2	R0.75	10	1.2	45	4	G-51
CSELB	2015-100	2	R0.75	10	1.2	45	4	G-63
DCLB	2015-0100	2	R0.75	10	1.2	45	4	G-74
HGLB	2015-100-6	2	R0.75	10	1.2	50	6	G-6
HWLB	2015-100-6	2	R0.75	10	1.2	50	6	G-25
HSLB	2015-100-6	2	R0.75	10	1.2	50	6	G-39
CWLB	2015-100-6	2	R0.75	10	1.2	50	6	G-51
CSELB	2015-100-6	2	R0.75	10	1.2	50	6	G-63
CPRB	2015-10	2	R0.75	10	1.45	45	4	G-88
HGLB	2015-120	2	R0.75	12	1.2	45	4	G-6
HWLB	2015-120	2	R0.75	12	1.2	45	4	G-25
HSLB	2015-120	2	R0.75	12	1.2	45	4	G-39
CWLB	2015-120	2	R0.75	12	1.2	45	4	G-51
CSELB	2015-120	2	R0.75	12	1.2	45	4	G-63
DLCLB	2015-120	2	R0.75	12	1.2	50	4	G-81
HGLB	2015-120-6	2	R0.75	12	1.2	50	6	G-6
CSELB	2015-120-6	2	R0.75	12	1.2	50	6	G-63
CPRB	2015-12	2	R0.75	12	1.45	45	4	G-88
HGLB	2015-140	2	R0.75	14	1.2	45	4	G-6
HWLB	2015-140	2	R0.75	14	1.2	50	4	G-25
CWLB	2015-140	2	R0.75	14	1.2	50	4	G-51
CSELB	2015-140	2	R0.75	14	1.2	50	4	G-63
HGLB	2015-160	2	R0.75	16	1.2	50	4	G-6
HWLB	2015-160	2	R0.75	16	1.2	50	4	G-25
HSLB	2015-160	2	R0.75	16	1.2	50	4	G-39
CWLB	2015-160	2	R0.75	16	1.2	50	4	G-51
CSELB	2015-160	2	R0.75	16	1.2	50	4	G-63
DCLB	2015-0160	2	R0.75	16	1.2	50	4	G-74
HWLB	2015-160-6	2	R0.75	16	1.2	60	6	G-25
CSELB	2015-160-6	2	R0.75	16	1.2	60	6	G-63
CPRB	2015-16	2	R0.75	16	1.45	50	4	G-88
HWLB	2015-180	2	R0.75	18	1.2	55	4	G-25
HSLB	2015-180	2	R0.75	18	1.2	55	4	G-39
CWLB	2015-180	2	R0.75	18	1.2	55	4	G-51
CSELB	2015-180	2	R0.75	18	1.2	55	4	G-63
DLCLB	2015-180	2	R0.75	18	1.2	55	4	G-81
HWLB	2015-200	2	R0.75	20	1.2	55	4	G-25
HSLB	2015-200	2	R0.75	20	1.2	55	4	G-39
CWLB	2015-200	2	R0.75	20	1.2	55	4	G-51

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2015-200	2	R0.75	20	1.2	55	4	G-63
HGLB	2015-200	2	R0.75	20	1.2	60	4	G-6
CSELB	2015-200-6	2	R0.75	20	1.2	60	6	G-63
CPRB	2015-20	2	R0.75	20	1.45	55	4	G-88
HWLB	2015-220	2	R0.75	22	1.2	55	4	G-25
CSELB	2015-220	2	R0.75	22	1.2	55	4	G-63
HWLB	2015-250	2	R0.75	25	1.2	65	4	G-25
CWLB	2015-250	2	R0.75	25	1.2	65	4	G-51
CSELB	2015-250	2	R0.75	25	1.2	65	4	G-63
HWLB	2015-300	2	R0.75	30	1.2	70	4	G-25
CSELB	2015-300	2	R0.75	30	1.2	70	4	G-63
CFB	3015-0225	3	R0.75	—	2.25	50	4	F-33
DLC-CFB	3015-0225	3	R0.75	—	2.25	50	4	F-39
CFLB	3015-040	3	R0.75	4	1.2	50	4	G-92
CFLB	3015-060	3	R0.75	6	1.2	50	4	G-92
CFLB	3015-080	3	R0.75	8	1.2	50	4	G-92
CFLB	3015-100	3	R0.75	10	1.2	50	4	G-92
CFLB	3015-120	3	R0.75	12	1.2	50	4	G-92
CFLB	3015-160	3	R0.75	16	1.2	50	4	G-92
HSB	2016-0240	2	R0.8	—	2.4	50	4	F-10
CWB	2016-0240	2	R0.8	—	2.4	50	4	F-20
CSEB	2016-0240	2	R0.8	—	2.4	50	4	F-26
HWLB	2016-040	2	R0.8	4	1.28	45	4	G-27
HSLB	2016-040	2	R0.8	4	1.28	45	4	G-39
CWLB	2016-040	2	R0.8	4	1.28	45	4	G-51
CSELB	2016-040	2	R0.8	4	1.28	45	4	G-63
HWLB	2016-080	2	R0.8	8	1.28	45	4	G-27
HSLB	2016-080	2	R0.8	8	1.28	45	4	G-39
CWLB	2016-080	2	R0.8	8	1.28	45	4	G-51
CSELB	2016-080	2	R0.8	8	1.28	45	4	G-63
CPRB	2016-8	2	R0.8	8	1.5	45	4	G-88
HWLB	2016-120	2	R0.8	12	1.28	45	4	G-27
HSLB	2016-120	2	R0.8	12	1.28	45	4	G-39
CWLB	2016-120	2	R0.8	12	1.28	45	4	G-51
CSELB	2016-120	2	R0.8	12	1.28	45	4	G-63
CPRB	2016-12	2	R0.8	12	1.5	45	4	G-88
HWLB	2016-160	2	R0.8	16	1.28	50	4	G-27
CWLB	2016-160	2	R0.8	16	1.28	50	4	G-51
CSELB	2016-160	2	R0.8	16	1.28	50	4	G-63
CPRB	2016-16	2	R0.8	16	1.5	50	4	G-88

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	2016-200	2	R0.8	20	1.28	55	4	G-27
CWLB	2016-200	2	R0.8	20	1.28	55	4	G-51
CSELB	2016-200	2	R0.8	20	1.28	55	4	G-63
CPRB	2016-20	2	R0.8	20	1.5	55	4	G-88
HSB	2017-0250	2	R0.85	—	2.5	50	4	F-10
CWB	2017-0250	2	R0.85	—	2.5	50	4	F-20
CSEB	2017-0250	2	R0.85	—	2.5	50	4	F-26
HSB	2018-0270	2	R0.9	—	2.7	50	4	F-10
CWB	2018-0270	2	R0.9	—	2.7	50	4	F-20
CSEB	2018-0270	2	R0.9	—	2.7	50	4	F-26
HWLB	2018-040	2	R0.9	4	1.44	45	4	G-27
CSELB	2018-040	2	R0.9	4	1.44	45	4	G-63
HWLB	2018-060	2	R0.9	6	1.44	45	4	G-27
CWLB	2018-060	2	R0.9	6	1.44	45	4	G-51
CSELB	2018-060	2	R0.9	6	1.44	45	4	G-63
HWLB	2018-080	2	R0.9	8	1.44	45	4	G-27
CWLB	2018-080	2	R0.9	8	1.44	45	4	G-51
CSELB	2018-080	2	R0.9	8	1.44	45	4	G-63
CPRB	2018-8	2	R0.9	8	1.6	45	4	G-88
HWLB	2018-100	2	R0.9	10	1.44	45	4	G-27
CSELB	2018-100	2	R0.9	10	1.44	45	4	G-63
HWLB	2018-120	2	R0.9	12	1.44	45	4	G-27
CWLB	2018-120	2	R0.9	12	1.44	45	4	G-51
CSELB	2018-120	2	R0.9	12	1.44	45	4	G-63
CPRB	2018-12	2	R0.9	12	1.6	45	4	G-88
HWLB	2018-160	2	R0.9	16	1.44	50	4	G-27
CSELB	2018-160	2	R0.9	16	1.44	50	4	G-63
CPRB	2018-16	2	R0.9	16	1.6	50	4	G-88
CSELB	2018-180	2	R0.9	18	1.44	55	4	G-63
HWLB	2018-200	2	R0.9	20	1.44	55	4	G-27
CSELB	2018-200	2	R0.9	20	1.44	55	4	G-63
CPRB	2018-20	2	R0.9	20	1.6	55	4	G-88
CSELB	2018-220	2	R0.9	22	1.44	60	4	G-63
CSELB	2018-250	2	R0.9	25	1.44	65	4	G-63
HWLB	2018-300	2	R0.9	30	1.44	70	4	G-27
CSELB	2018-300	2	R0.9	30	1.44	70	4	G-63
HSB	2019-0280	2	R0.95	—	2.8	50	4	F-10
CWB	2019-0280	2	R0.95	—	2.8	50	4	F-20
CSEB	2019-0280	2	R0.95	—	2.8	50	4	F-26
HWB	2020-0200S	2	R1	—	2	35	4	F-5

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HSB	2020-0200S	2	R1	—	2	35	4	F-14
HWB	2020-0200	2	R1	—	2	50	4	F-5
HSB	2020-0200	2	R1	—	2	50	4	F-10
CWB	2020-0200	2	R1	—	2	50	4	F-20
CSEB	2020-0200	2	R1	—	2	50	4	F-26
HSB	2020-0200-6	2	R1	—	2	60	6	F-10
CSEB	2020-0200-6	2	R1	—	2	60	6	F-26
HGB	2020-0300	2	R1	—	3	50	4	F-2
HWB	2020-0300	2	R1	—	3	50	4	F-5
HSB	2020-0300	2	R1	—	3	50	4	F-10
CWB	2020-0300	2	R1	—	3	60	4	F-20
CSEB	2020-0300	2	R1	—	3	60	4	F-26
HWB	2020-0600	2	R1	—	6	60	4	F-5
HSB	2020-0600	2	R1	—	6	60	4	F-10
CWB	2020-0600	2	R1	—	6	60	4	F-20
CSEB	2020-0600	2	R1	—	6	60	4	F-26
DCB	2020	2	R1	—	10	70	4	F-31
HWLB	2020-030S	2	R1	3	1.6	35	4	G-27
HGLB	2020-030	2	R1	3	1.6	45	4	G-6
HWLB	2020-030	2	R1	3	1.6	45	4	G-27
HSLB	2020-030	2	R1	3	1.6	45	4	G-40
CWLB	2020-030	2	R1	3	1.6	45	4	G-51
CSELB	2020-030	2	R1	3	1.6	45	4	G-64
HGLB	2020-030-6	2	R1	3	1.6	50	6	G-6
HWLB	2020-040S	2	R1	4	1.6	35	4	G-27
HGLB	2020-040	2	R1	4	1.6	45	4	G-6
HWLB	2020-040	2	R1	4	1.6	45	4	G-27
HSLB	2020-040	2	R1	4	1.6	45	4	G-40
CWLB	2020-040	2	R1	4	1.6	45	4	G-51
CSELB	2020-040	2	R1	4	1.6	45	4	G-64
DLCLB	2020-040	2	R1	4	1.6	45	4	G-81
DCLB	2020-0040	2	R1	4	1.6	45	4	G-74
HGLB	2020-040-6	2	R1	4	1.6	50	6	G-6
HWLB	2020-040-6	2	R1	4	1.6	50	6	G-27
HSLB	2020-040-6	2	R1	4	1.6	50	6	G-40
CWLB	2020-040-6	2	R1	4	1.6	50	6	G-51
CSELB	2020-040-6	2	R1	4	1.6	50	6	G-64
CPRB	2020-4	2	R1	4	1.7	45	4	G-88
HWLB	2020-060S	2	R1	6	1.6	35	4	G-27
HGLB	2020-060	2	R1	6	1.6	45	4	G-6

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	2020-060	2	R1	6	1.6	45	4	G-27
HSLB	2020-060	2	R1	6	1.6	45	4	G-40
CWLB	2020-060	2	R1	6	1.6	45	4	G-51
CSELB	2020-060	2	R1	6	1.6	45	4	G-64
DLCLB	2020-060	2	R1	6	1.6	45	4	G-81
DCLB	2020-0060	2	R1	6	1.6	45	4	G-74
HGLB	2020-060-6	2	R1	6	1.6	50	6	G-6
HWLB	2020-060-6	2	R1	6	1.6	50	6	G-27
HSLB	2020-060-6	2	R1	6	1.6	50	6	G-40
CWLB	2020-060-6	2	R1	6	1.6	50	6	G-51
CSELB	2020-060-6	2	R1	6	1.6	50	6	G-64
CPRB	2020-6	2	R1	6	1.7	45	4	G-88
HWLB	2020-080S	2	R1	8	1.6	40	4	G-27
HGLB	2020-080	2	R1	8	1.6	45	4	G-6
HWLB	2020-080	2	R1	8	1.6	45	4	G-27
HSLB	2020-080	2	R1	8	1.6	45	4	G-40
CWLB	2020-080	2	R1	8	1.6	45	4	G-51
CSELB	2020-080	2	R1	8	1.6	45	4	G-64
DLCLB	2020-080	2	R1	8	1.6	45	4	G-81
DCLB	2020-0080	2	R1	8	1.6	45	4	G-74
HGLB	2020-080-6	2	R1	8	1.6	50	6	G-6
HWLB	2020-080-6	2	R1	8	1.6	50	6	G-27
CWLB	2020-080-6	2	R1	8	1.6	50	6	G-51
CSELB	2020-080-6	2	R1	8	1.6	50	6	G-64
CPRB	2020-8	2	R1	8	1.7	45	4	G-88
HWLB	2020-100S	2	R1	10	1.6	40	4	G-27
HGLB	2020-100	2	R1	10	1.6	45	4	G-6
HWLB	2020-100	2	R1	10	1.6	45	4	G-27
HSLB	2020-100	2	R1	10	1.6	45	4	G-40
CWLB	2020-100	2	R1	10	1.6	45	4	G-51
CSELB	2020-100	2	R1	10	1.6	45	4	G-64
DLCLB	2020-100	2	R1	10	1.6	45	4	G-81
DCLB	2020-0100	2	R1	10	1.6	45	4	G-74
HGLB	2020-100-6	2	R1	10	1.6	50	6	G-6
HWLB	2020-100-6	2	R1	10	1.6	50	6	G-27
HSLB	2020-100-6	2	R1	10	1.6	50	6	G-40
CWLB	2020-100-6	2	R1	10	1.6	50	6	G-51
CSELB	2020-100-6	2	R1	10	1.6	50	6	G-64
CPRB	2020-10	2	R1	10	1.7	45	4	G-88
HWLB	2020-120S	2	R1	12	1.6	40	4	G-27

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HGLB	2020-120	2	R1	12	1.6	45	4	G-6
HWLB	2020-120	2	R1	12	1.6	45	4	G-27
HSLB	2020-120	2	R1	12	1.6	45	4	G-40
CWLB	2020-120	2	R1	12	1.6	45	4	G-51
CSELB	2020-120	2	R1	12	1.6	45	4	G-64
DCLB	2020-0120	2	R1	12	1.6	45	4	G-74
DLCLB	2020-120	2	R1	12	1.6	50	4	G-81
HGLB	2020-120-6	2	R1	12	1.6	50	6	G-6
HWLB	2020-120-6	2	R1	12	1.6	50	6	G-27
HSLB	2020-120-6	2	R1	12	1.6	50	6	G-40
CWLB	2020-120-6	2	R1	12	1.6	50	6	G-51
CSELB	2020-120-6	2	R1	12	1.6	50	6	G-64
CPRB	2020-12	2	R1	12	1.7	45	4	G-88
CSELB	2020-130	2	R1	13	1.6	45	4	G-64
HGLB	2020-140	2	R1	14	1.6	45	4	G-6
HWLB	2020-140S	2	R1	14	1.6	45	4	G-27
HWLB	2020-140	2	R1	14	1.6	50	4	G-27
HSLB	2020-140	2	R1	14	1.6	50	4	G-40
CWLB	2020-140	2	R1	14	1.6	50	4	G-51
CSELB	2020-140	2	R1	14	1.6	50	4	G-64
DLCLB	2020-140	2	R1	14	1.6	50	4	G-81
CPRB	2020-14	2	R1	14	1.7	50	4	G-88
HGLB	2020-160	2	R1	16	1.6	45	4	G-6
HWLB	2020-160S	2	R1	16	1.6	45	4	G-27
HWLB	2020-160	2	R1	16	1.6	50	4	G-27
HSLB	2020-160	2	R1	16	1.6	50	4	G-40
CWLB	2020-160	2	R1	16	1.6	50	4	G-51
CSELB	2020-160	2	R1	16	1.6	50	4	G-64
DLCLB	2020-160	2	R1	16	1.6	50	4	G-81
DCLB	2020-0160	2	R1	16	1.6	50	4	G-74
HWLB	2020-160-6	2	R1	16	1.6	60	6	G-27
CWLB	2020-160-6	2	R1	16	1.6	60	6	G-51
CSELB	2020-160-6	2	R1	16	1.6	60	6	G-64
CPRB	2020-16	2	R1	16	1.7	50	4	G-88
HWLB	2020-180S	2	R1	18	1.6	45	4	G-27
HWLB	2020-180	2	R1	18	1.6	55	4	G-27
CWLB	2020-180	2	R1	18	1.6	55	4	G-51
CSELB	2020-180	2	R1	18	1.6	55	4	G-64
HWLB	2020-200S	2	R1	20	1.6	50	4	G-27
HWLB	2020-200	2	R1	20	1.6	55	4	G-27

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HSLB	2020-200	2	R1	20	1.6	55	4	G-40
CWLB	2020-200	2	R1	20	1.6	55	4	G-51
CSELB	2020-200	2	R1	20	1.6	55	4	G-64
DLCLB	2020-200	2	R1	20	1.6	55	4	G-81
HGLB	2020-200	2	R1	20	1.6	60	4	G-6
DCLB	2020-0200-16	2	R1	20	1.6	60	4	G-74
HWLB	2020-200-6	2	R1	20	1.6	70	6	G-27
CWLB	2020-200-6	2	R1	20	1.6	70	6	G-51
CSELB	2020-200-6	2	R1	20	1.6	70	6	G-64
CPRB	2020-20	2	R1	20	1.7	55	4	G-88
DCLB	2020-0200	2	R1	20	3	70	4	G-74
HWLB	2020-220	2	R1	22	1.6	60	4	G-27
CSELB	2020-220	2	R1	22	1.6	60	4	G-64
CPRB	2020-22	2	R1	22	1.7	60	4	G-88
HGLB	2020-250	2	R1	25	1.6	60	4	G-6
HWLB	2020-250	2	R1	25	1.6	65	4	G-27
HSLB	2020-250	2	R1	25	1.6	65	4	G-40
CWLB	2020-250	2	R1	25	1.6	65	4	G-51
CSELB	2020-250	2	R1	25	1.6	65	4	G-64
DLCLB	2020-250	2	R1	25	1.6	65	4	G-81
DCLB	2020-0250	2	R1	25	1.6	65	4	G-74
HWLB	2020-250-6	2	R1	25	1.6	80	6	G-27
CSELB	2020-250-6	2	R1	25	1.6	80	6	G-64
CPRB	2020-25	2	R1	25	1.7	65	4	G-88
DCLB	2020-0250-30	2	R1	25	3	65	4	G-74
CSELB	2020-270	2	R1	27	1.6	65	4	G-64
HGLB	2020-300	2	R1	30	1.6	70	4	G-6
HWLB	2020-300	2	R1	30	1.6	70	4	G-27
HSLB	2020-300	2	R1	30	1.6	70	4	G-40
CWLB	2020-300	2	R1	30	1.6	70	4	G-51
CSELB	2020-300	2	R1	30	1.6	70	4	G-64
DCLB	2020-0300-16	2	R1	30	1.6	70	4	G-74
HWLB	2020-300-6	2	R1	30	1.6	80	6	G-27
CSELB	2020-300-6	2	R1	30	1.6	80	6	G-64
CPRB	2020-30	2	R1	30	1.7	70	4	G-88
DCLB	2020-0300	2	R1	30	3	70	4	G-74
CSELB	2020-320	2	R1	32	1.6	70	4	G-64
HWLB	2020-350	2	R1	35	1.6	80	4	G-29
CWLB	2020-350	2	R1	35	1.6	80	4	G-51
CSELB	2020-350	2	R1	35	1.6	80	4	G-64

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2020-350-6	2	R1	35	1.6	80	6	G-64
DCLB	2020-0350	2	R1	35	3	70	4	G-74
HWLB	2020-400	2	R1	40	1.6	80	4	G-29
CWLB	2020-400	2	R1	40	1.6	80	4	G-51
CSELB	2020-400	2	R1	40	1.6	80	4	G-64
DCLB	2020-0400	2	R1	40	1.6	80	4	G-74
CSELB	2020-400-6	2	R1	40	1.6	90	6	G-64
CFB	3020-0300	3	R1	—	3	50	4	F-33
DLC-CFB	3020-0300	3	R1	—	3	50	4	F-39
CFLB	3020-040	3	R1	4	1.6	50	4	G-92
CFLB	3020-060	3	R1	6	1.6	50	4	G-92
CFLB	3020-080	3	R1	8	1.6	50	4	G-92
CFLB	3020-100	3	R1	10	1.6	50	4	G-92
CFLB	3020-120	3	R1	12	1.6	50	4	G-92
CFLB	3020-140	3	R1	14	1.6	50	4	G-92
CFLB	3020-160	3	R1	16	1.6	50	4	G-92
CFLB	3020-180	3	R1	18	1.6	55	4	G-92
CFLB	3020-200	3	R1	20	1.6	55	4	G-92
HFB	4020-0300S	4	R1	—	3	40	4	F-44
HFB	4020-0300	4	R1	—	3	50	4	F-43
HFB	4020-0300-6	4	R1	—	3	50	6	F-43
HSB	2025-0250	2	R1.25	—	2.5	50	4	F-10
CWB	2025-0250	2	R1.25	—	2.5	50	4	F-20
CSEB	2025-0250	2	R1.25	—	2.5	50	4	F-26
HSB	2025-0250-6	2	R1.25	—	2.5	60	6	F-10
CSEB	2025-0250-6	2	R1.25	—	2.5	60	6	F-26
HGB	2025-0375	2	R1.25	—	3.75	50	4	F-2
HSB	2025-0375	2	R1.25	—	3.75	50	4	F-10
CWB	2025-0375	2	R1.25	—	3.75	50	4	F-20
CSEB	2025-0375	2	R1.25	—	3.75	50	4	F-26
HSB	2025-0600	2	R1.25	—	6	60	4	F-10
CWB	2025-0600	2	R1.25	—	6	60	4	F-20
CSEB	2025-0600	2	R1.25	—	6	60	4	F-26
HWLB	2025-060	2	R1.25	6	2	45	4	G-29
CWLB	2025-060	2	R1.25	6	2	45	4	G-52
CSELB	2025-060	2	R1.25	6	2	45	4	G-64
CSELB	2025-080	2	R1.25	8	2	45	4	G-64
HWLB	2025-100	2	R1.25	10	2	45	4	G-29
CWLB	2025-100	2	R1.25	10	2	45	4	G-52
CSELB	2025-100	2	R1.25	10	2	45	4	G-64

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	2025-150	2	R1.25	15	2	50	4	G-29
CWLB	2025-150	2	R1.25	15	2	50	4	G-52
CSELB	2025-150	2	R1.25	15	2	50	4	G-64
HWLB	2025-200	2	R1.25	20	2	55	4	G-29
CWLB	2025-200	2	R1.25	20	2	55	4	G-52
CSELB	2025-200	2	R1.25	20	2	55	4	G-64
HWLB	2025-250	2	R1.25	25	2	65	4	G-29
CSELB	2025-250	2	R1.25	25	2	65	4	G-64
HWLB	2025-300	2	R1.25	30	2	70	4	G-29
CSELB	2025-300	2	R1.25	30	2	70	4	G-64
CSELB	2025-350	2	R1.25	35	2	70	4	G-64
HSB	2030-0300S	2	R1.5	—	3	40	6	F-14
HWB	2030-0300	2	R1.5	—	3	50	6	F-5
HSB	2030-0300	2	R1.5	—	3	50	6	F-10
CWB	2030-0300	2	R1.5	—	3	50	6	F-21
CSEB	2030-0300	2	R1.5	—	3	50	6	F-26
HGB	2030-0450	2	R1.5	—	4.5	50	6	F-2
HWB	2030-0450	2	R1.5	—	4.5	70	6	F-5
HSB	2030-0450	2	R1.5	—	4.5	70	6	F-10
CWB	2030-0450	2	R1.5	—	4.5	70	6	F-21
CSEB	2030-0450	2	R1.5	—	4.5	70	6	F-26
HBL	2030-0800	2	R1.5	—	4.5	80	3	F-15
HWB	2030-0800	2	R1.5	—	8	70	6	F-5
HSB	2030-0800	2	R1.5	—	8	70	6	F-10
CWB	2030-0800	2	R1.5	—	8	70	6	F-21
CSEB	2030-0800	2	R1.5	—	8	70	6	F-26
DCB	2030	2	R1.5	—	15	80	4	F-31
HWLB	2030-060-4S	2	R1.5	6	2.4	35	4	G-29
HWLB	2030-060-3	2	R1.5	6	2.4	60	3	G-29
CWLB	2030-060-3	2	R1.5	6	2.4	60	3	G-52
CSELB	2030-060-3	2	R1.5	6	2.4	60	3	G-64
HWLB	2030-060-4	2	R1.5	6	2.4	60	4	G-29
HSLB	2030-060-4	2	R1.5	6	2.4	60	4	G-40
CWLB	2030-060-4	2	R1.5	6	2.4	60	4	G-52
CSELB	2030-060-4	2	R1.5	6	2.4	60	4	G-64
HGLB	2030-060	2	R1.5	6	2.4	60	6	G-6
HWLB	2030-060	2	R1.5	6	2.4	60	6	G-29
HSLB	2030-060	2	R1.5	6	2.4	60	6	G-40
CWLB	2030-060	2	R1.5	6	2.4	60	6	G-52
CSELB	2030-060	2	R1.5	6	2.4	60	6	G-64

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	2030-080-4S	2	R1.5	8	2.4	40	4	G-29
HGLB	2030-080	2	R1.5	8	2.4	60	6	G-6
HWLB	2030-080	2	R1.5	8	2.4	60	6	G-29
HSLB	2030-080	2	R1.5	8	2.4	60	6	G-40
CWLB	2030-080	2	R1.5	8	2.4	60	6	G-52
CSELB	2030-080	2	R1.5	8	2.4	60	6	G-64
CPRB	2030-8	2	R1.5	8	2.5	60	6	G-89
HWLB	2030-100-4S	2	R1.5	10	2.4	40	4	G-29
HGLB	2030-100	2	R1.5	10	2.4	60	6	G-6
HWLB	2030-100	2	R1.5	10	2.4	60	6	G-29
HSLB	2030-100	2	R1.5	10	2.4	60	6	G-40
CWLB	2030-100	2	R1.5	10	2.4	60	6	G-52
CSELB	2030-100	2	R1.5	10	2.4	60	6	G-64
DLCLB	2030-100	2	R1.5	10	2.4	60	6	G-81
CPRB	2030-10	2	R1.5	10	2.5	60	6	G-89
HWLB	2030-120-4S	2	R1.5	12	2.4	40	4	G-29
HGLB	2030-120	2	R1.5	12	2.4	60	6	G-6
HWLB	2030-120	2	R1.5	12	2.4	60	6	G-29
HSLB	2030-120	2	R1.5	12	2.4	60	6	G-40
CWLB	2030-120	2	R1.5	12	2.4	60	6	G-52
CSELB	2030-120	2	R1.5	12	2.4	60	6	G-64
DLCLB	2030-120	2	R1.5	12	2.4	60	6	G-81
CPRB	2030-12	2	R1.5	12	2.5	60	6	G-89
HGLB	2030-140	2	R1.5	14	2.4	60	6	G-6
HWLB	2030-140	2	R1.5	14	2.4	60	6	G-29
HSLB	2030-140	2	R1.5	14	2.4	60	6	G-40
CWLB	2030-140	2	R1.5	14	2.4	60	6	G-52
CSELB	2030-140	2	R1.5	14	2.4	60	6	G-64
DLCLB	2030-140	2	R1.5	14	2.4	60	6	G-81
CSELB	2030-150	2	R1.5	15	2.4	60	6	G-64
HWLB	2030-160-4S	2	R1.5	16	2.4	45	4	G-29
HGLB	2030-160	2	R1.5	16	2.4	60	6	G-6
HWLB	2030-160	2	R1.5	16	2.4	60	6	G-29
HSLB	2030-160	2	R1.5	16	2.4	60	6	G-40
CWLB	2030-160	2	R1.5	16	2.4	60	6	G-52
CSELB	2030-160	2	R1.5	16	2.4	60	6	G-64
DLCLB	2030-160	2	R1.5	16	2.4	60	6	G-81
DCLB	2030-0160	2	R1.5	16	2.4	60	6	G-74
CPRB	2030-16	2	R1.5	16	2.5	60	6	G-89
HGLB	2030-180	2	R1.5	18	2.4	60	6	G-6

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWLB	2030-180	2	R1.5	18	2.4	60	6	G-29
CSELB	2030-180	2	R1.5	18	2.4	60	6	G-64
HWLB	2030-200-4S	2	R1.5	20	2.4	50	4	G-29
DCLB	2030-0200	2	R1.5	20	2.4	60	6	G-74
HGLB	2030-200	2	R1.5	20	2.4	70	6	G-6
HWLB	2030-200	2	R1.5	20	2.4	70	6	G-29
HSLB	2030-200	2	R1.5	20	2.4	70	6	G-40
CWLB	2030-200	2	R1.5	20	2.4	70	6	G-52
CSELB	2030-200	2	R1.5	20	2.4	70	6	G-64
DLCLB	2030-200	2	R1.5	20	2.4	70	6	G-81
CPRB	2030-20	2	R1.5	20	2.5	70	6	G-89
HGLB	2030-220	2	R1.5	22	2.4	70	6	G-6
HWLB	2030-220	2	R1.5	22	2.4	70	6	G-29
CSELB	2030-220	2	R1.5	22	2.4	70	6	G-64
HGLB	2030-250	2	R1.5	25	2.4	70	6	G-6
HWLB	2030-250	2	R1.5	25	2.4	70	6	G-29
HSLB	2030-250	2	R1.5	25	2.4	70	6	G-40
CWLB	2030-250	2	R1.5	25	2.4	70	6	G-52
CSELB	2030-250	2	R1.5	25	2.4	70	6	G-64
DLCLB	2030-250	2	R1.5	25	2.4	70	6	G-81
DCLB	2030-0250	2	R1.5	25	2.4	70	6	G-74
CPRB	2030-25	2	R1.5	25	2.5	70	6	G-89
HGLB	2030-270	2	R1.5	27	2.4	70	6	G-6
CSELB	2030-270	2	R1.5	27	2.4	70	6	G-64
HGLB	2030-300	2	R1.5	30	2.4	70	6	G-6
HWLB	2030-300	2	R1.5	30	2.4	70	6	G-29
HSLB	2030-300	2	R1.5	30	2.4	70	6	G-40
CWLB	2030-300	2	R1.5	30	2.4	70	6	G-52
CSELB	2030-300	2	R1.5	30	2.4	70	6	G-64
DLCLB	2030-300	2	R1.5	30	2.4	70	6	G-81
DCLB	2030-0300-S6	2	R1.5	30	2.4	80	6	G-74
CPRB	2030-30	2	R1.5	30	2.5	70	6	G-89
DCLB	2030-0300	2	R1.5	30	4.5	80	4	G-74
CSELB	2030-320	2	R1.5	32	2.4	80	6	G-64
HWLB	2030-350	2	R1.5	35	2.4	80	6	G-29
CWLB	2030-350	2	R1.5	35	2.4	80	6	G-52
CSELB	2030-350	2	R1.5	35	2.4	80	6	G-64
CPRB	2030-35	2	R1.5	35	2.5	80	6	G-89
HWLB	2030-400	2	R1.5	40	2.4	80	6	G-29
CWLB	2030-400	2	R1.5	40	2.4	80	6	G-52
CSELB	2030-400	2	R1.5	40	2.4	80	6	G-64
DCLB	2030-0400-S6	2	R1.5	40	2.4	80	6	G-74
DCLB	2030-0400	2	R1.5	40	4.5	80	4	G-74
CFB	3030-0450	3	R1.5	—	4.5	60	6	F-33
DLC-CFB	3030-0450	3	R1.5	—	4.5	60	6	F-39
CFLB	3030-080	3	R1.5	8	2.4	60	6	G-92
CFLB	3030-100	3	R1.5	10	2.4	60	6	G-92
CFLB	3030-120	3	R1.5	12	2.4	60	6	G-92
CFLB	3030-160	3	R1.5	16	2.4	60	6	G-92
CFLB	3030-200	3	R1.5	20	2.4	70	6	G-92
CFLB	3030-250	3	R1.5	25	2.4	70	6	G-92
HFB	4030-0450S	4	R1.5	—	4.5	40	4	F-44
HFB	4030-0450	4	R1.5	—	4.5	60	6	F-43
CWB	2035-0520	2	R1.75	—	5.2	70	6	F-21
CSEB	2035-0520	2	R1.75	—	5.2	70	6	F-26
HWLB	2035-100	2	R1.75	10	2.8	60	6	G-29
CSELB	2035-100	2	R1.75	10	2.8	60	6	G-65
CSELB	2035-150	2	R1.75	15	2.8	60	6	G-65
HWLB	2035-200	2	R1.75	20	2.8	65	6	G-29
CSELB	2035-200	2	R1.75	20	2.8	65	6	G-65
CSELB	2035-250	2	R1.75	25	2.8	70	6	G-65
HWLB	2035-300	2	R1.75	30	2.8	70	6	G-29
CSELB	2035-300	2	R1.75	30	2.8	70	6	G-65
CSELB	2035-400	2	R1.75	40	2.8	90	6	G-65
CSELB	2035-450	2	R1.75	45	2.8	90	6	G-65
HSB	2040-0400S	2	R2	—	4	40	6	F-14
HWB	2040-0400	2	R2	—	4	50	6	F-6
HSB	2040-0400	2	R2	—	4	50	6	F-10
CWB	2040-0400	2	R2	—	4	50	6	F-21
CSEB	2040-0400	2	R2	—	4	50	6	F-26
HGB	2040-0600	2	R2	—	6	50	6	F-2
HWB	2040-0600-4	2	R2	—	6	70	4	F-6
HSB	2040-0600-4	2	R2	—	6	70	4	F-10
CWB	2040-0600-4	2	R2	—	6	70	4	F-21
CSEB	2040-0600-4	2	R2	—	6	70	4	F-26
HWB	2040-0600	2	R2	—	6	70	6	F-6
HSB	2040-0600	2	R2	—	6	70	6	F-10
CWB	2040-0600	2	R2	—	6	70	6	F-21
CSEB	2040-0600	2	R2	—	6	70	6	F-26
HBL	2040-1000	2	R2	—	6	100	4	F-15

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HWB	2040-0800	2	R2	—	8	70	6	F-6
HSB	2040-0800	2	R2	—	8	70	6	F-10
CWB	2040-0800	2	R2	—	8	70	6	F-21
CSEB	2040-0800	2	R2	—	8	70	6	F-26
DCB	2040	2	R2	—	20	100	4	F-31
HWLB	2040-080-4S	2	R2	8	3.2	35	4	G-29
HWLB	2040-080-4	2	R2	8	3.2	70	4	G-29
HSLB	2040-080-4	2	R2	8	3.2	70	4	G-40
CWLB	2040-080-4	2	R2	8	3.2	70	4	G-52
CSELB	2040-080-4	2	R2	8	3.2	70	4	G-65
HGLB	2040-080	2	R2	8	3.2	70	6	G-7
HWLB	2040-080	2	R2	8	3.2	70	6	G-29
HSLB	2040-080	2	R2	8	3.2	70	6	G-40
CWLB	2040-080	2	R2	8	3.2	70	6	G-52
CSELB	2040-080	2	R2	8	3.2	70	6	G-65
CPRB	2040-10	2	R2	10	3	70	6	G-89
HWLB	2040-100-4S	2	R2	10	3.2	40	4	G-29
HGLB	2040-100	2	R2	10	3.2	70	6	G-7
HWLB	2040-100	2	R2	10	3.2	70	6	G-29
HSLB	2040-100	2	R2	10	3.2	70	6	G-40
CWLB	2040-100	2	R2	10	3.2	70	6	G-52
CSELB	2040-100	2	R2	10	3.2	70	6	G-65
DLCLB	2040-100	2	R2	10	3.2	70	6	G-81
CPRB	2040-12	2	R2	12	3	70	6	G-89
HWLB	2040-120-4S	2	R2	12	3.2	40	4	G-29
HGLB	2040-120	2	R2	12	3.2	70	6	G-7
HWLB	2040-120	2	R2	12	3.2	70	6	G-29
HSLB	2040-120	2	R2	12	3.2	70	6	G-40
CWLB	2040-120	2	R2	12	3.2	70	6	G-52
CSELB	2040-120	2	R2	12	3.2	70	6	G-65
HGLB	2040-140	2	R2	14	3.2	70	6	G-7
HWLB	2040-140	2	R2	14	3.2	70	6	G-29
CWLB	2040-140	2	R2	14	3.2	70	6	G-52
CSELB	2040-140	2	R2	14	3.2	70	6	G-65
CSELB	2040-150	2	R2	15	3.2	70	6	G-65
DLCLB	2040-150	2	R2	15	3.2	70	6	G-81
CPRB	2040-16	2	R2	16	3	70	6	G-89
HWLB	2040-160-4S	2	R2	16	3.2	45	4	G-29
HGLB	2040-160	2	R2	16	3.2	70	6	G-7
HWLB	2040-160	2	R2	16	3.2	70	6	G-29

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HSLB	2040-160	2	R2	16	3.2	70	6	G-40
CWLB	2040-160	2	R2	16	3.2	70	6	G-52
CSELB	2040-160	2	R2	16	3.2	70	6	G-65
DCLB	2040-0160	2	R2	16	3.2	70	6	G-74
HGLB	2040-180	2	R2	18	3.2	70	6	G-7
HWLB	2040-180	2	R2	18	3.2	70	6	G-29
CSELB	2040-180	2	R2	18	3.2	70	6	G-65
CPRB	2040-20	2	R2	20	3	70	6	G-89
HWLB	2040-200-4S	2	R2	20	3.2	50	4	G-29
HGLB	2040-200	2	R2	20	3.2	70	6	G-7
HWLB	2040-200	2	R2	20	3.2	70	6	G-29
HSLB	2040-200	2	R2	20	3.2	70	6	G-40
CWLB	2040-200	2	R2	20	3.2	70	6	G-52
CSELB	2040-200	2	R2	20	3.2	70	6	G-65
DLCLB	2040-200	2	R2	20	3.2	70	6	G-81
DCLB	2040-0200	2	R2	20	3.2	70	6	G-74
HGLB	2040-220	2	R2	22	3.2	70	6	G-7
HWLB	2040-220	2	R2	22	3.2	70	6	G-31
CSELB	2040-220	2	R2	22	3.2	70	6	G-65
CPRB	2040-25	2	R2	25	3	70	6	G-89
HWLB	2040-250-4S	2	R2	25	3.2	55	4	G-31
HGLB	2040-250	2	R2	25	3.2	70	6	G-7
HWLB	2040-250	2	R2	25	3.2	70	6	G-31
HSLB	2040-250	2	R2	25	3.2	70	6	G-40
CWLB	2040-250	2	R2	25	3.2	70	6	G-52
CSELB	2040-250	2	R2	25	3.2	70	6	G-65
DLCLB	2040-250	2	R2	25	3.2	70	6	G-81
DCLB	2040-0250	2	R2	25	3.2	70	6	G-74
HGLB	2040-270	2	R2	27	3.2	70	6	G-7
CSELB	2040-270	2	R2	27	3.2	70	6	G-65
CPRB	2040-30	2	R2	30	3	70	6	G-89
HWLB	2040-300-4S	2	R2	30	3.2	60	4	G-31
HGLB	2040-300	2	R2	30	3.2	70	6	G-7
HWLB	2040-300	2	R2	30	3.2	70	6	G-31
HSLB	2040-300	2	R2	30	3.2	70	6	G-40
CWLB	2040-300	2	R2	30	3.2	70	6	G-52
CSELB	2040-300	2	R2	30	3.2	70	6	G-65
DLCLB	2040-300	2	R2	30	3.2	70	6	G-81
DCLB	2040-0300	2	R2	30	3.2	70	6	G-74
DCLB	2040-0300-60	2	R2	30	6	100	4	G-74

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2040-320	2	R2	32	3.2	80	6	G-65
CPRB	2040-35	2	R2	35	3	80	6	G-89
HGLB	2040-350	2	R2	35	3.2	80	6	G-7
HWLB	2040-350	2	R2	35	3.2	80	6	G-31
CWLB	2040-350	2	R2	35	3.2	80	6	G-52
CSELB	2040-350	2	R2	35	3.2	80	6	G-65
CPRB	2040-40	2	R2	40	3	90	6	G-89
DLCLB	2040-400	2	R2	40	3.2	80	6	G-81
HGLB	2040-400	2	R2	40	3.2	90	6	G-7
HWLB	2040-400	2	R2	40	3.2	90	6	G-31
HSLB	2040-400	2	R2	40	3.2	90	6	G-40
CWLB	2040-400	2	R2	40	3.2	90	6	G-52
CSELB	2040-400	2	R2	40	3.2	90	6	G-65
DCLB	2040-0400-S6	2	R2	40	3.2	90	6	G-74
DCLB	2040-0400	2	R2	40	6	100	4	G-74
CPRB	2040-45	2	R2	45	3	90	6	G-89
HWLB	2040-450	2	R2	45	3.2	90	6	G-31
CWLB	2040-450	2	R2	45	3.2	90	6	G-52
CSELB	2040-450	2	R2	45	3.2	90	6	G-65
CPRB	2040-50	2	R2	50	3	100	6	G-89
HWLB	2040-500	2	R2	50	3.2	100	6	G-31
CSELB	2040-500	2	R2	50	3.2	100	6	G-65
DCLB	2040-0500-S6	2	R2	50	3.2	100	6	G-74
DCLB	2040-0500	2	R2	50	6	100	4	G-74
HWLB	2040-600	2	R2	60	3.2	120	6	G-31
CSELB	2040-600	2	R2	60	3.2	120	6	G-65
DCLB	2040-0600	2	R2	60	6	100	4	G-74
CFB	3040-0600-4	3	R2	—	6	70	4	F-33
DLC-CFB	3040-0600-4	3	R2	—	6	70	4	F-39
CFB	3040-0600	3	R2	—	6	70	6	F-33
DLC-CFB	3040-0600	3	R2	—	6	70	6	F-39
CFLB	3040-100	3	R2	10	3.2	70	6	G-92
CFLB	3040-120	3	R2	12	3.2	70	6	G-92
CFLB	3040-160	3	R2	16	3.2	70	6	G-92
CFLB	3040-200	3	R2	20	3.2	70	6	G-92
CFLB	3040-250	3	R2	25	3.2	70	6	G-92
CFLB	3040-300	3	R2	30	3.2	70	6	G-92
HFB	4040-0600S	4	R2	—	6	45	6	F-44
HFB	4040-0600	4	R2	—	6	70	6	F-43
CWB	2045-0670	2	R2.25	—	6.7	70	6	F-21
CSEB	2045-0670	2	R2.25	—	6.7	70	6	F-27
HWB	2050-0500	2	R2.5	—	5	50	6	F-6
HSB	2050-0500	2	R2.5	—	5	50	6	F-10
CWB	2050-0500	2	R2.5	—	5	50	6	F-21
CSEB	2050-0500	2	R2.5	—	5	50	6	F-27
HGB	2050-0750	2	R2.5	—	7.5	50	6	F-2
HWB	2050-0750	2	R2.5	—	7.5	80	6	F-6
HSB	2050-0750	2	R2.5	—	7.5	80	6	F-10
CWB	2050-0750	2	R2.5	—	7.5	80	6	F-21
CSEB	2050-0750	2	R2.5	—	7.5	80	6	F-27
HWB	2050-0800	2	R2.5	—	8	80	6	F-6
HSB	2050-0800	2	R2.5	—	8	80	6	F-10
CWB	2050-0800	2	R2.5	—	8	80	6	F-21
CSEB	2050-0800	2	R2.5	—	8	80	6	F-27
HWB	2050-1200	2	R2.5	—	12	80	6	F-6
HSB	2050-1200	2	R2.5	—	12	80	6	F-10
CWB	2050-1200	2	R2.5	—	12	80	6	F-21
CSEB	2050-1200	2	R2.5	—	12	80	6	F-27
DCB	2050	2	R2.5	—	20	100	5	F-31
HWLB	2050-100	2	R2.5	10	4	70	6	G-31
HSLB	2050-100	2	R2.5	10	4	70	6	G-40
CWLB	2050-100	2	R2.5	10	4	70	6	G-52
CSELB	2050-100	2	R2.5	10	4	70	6	G-65
HWLB	2050-150	2	R2.5	15	4	70	6	G-31
CWLB	2050-150	2	R2.5	15	4	70	6	G-52
CSELB	2050-150	2	R2.5	15	4	70	6	G-65
CPRB	2050-20	2	R2.5	20	3.5	70	6	G-89
HWLB	2050-200	2	R2.5	20	4	70	6	G-31
HSLB	2050-200	2	R2.5	20	4	70	6	G-40
CWLB	2050-200	2	R2.5	20	4	70	6	G-52
CSELB	2050-200	2	R2.5	20	4	70	6	G-65
DCLB	2050-0200	2	R2.5	20	4	70	6	G-74
CPRB	2050-25	2	R2.5	25	3.5	70	6	G-89
HWLB	2050-250	2	R2.5	25	4	70	6	G-31
CWLB	2050-250	2	R2.5	25	4	70	6	G-52
CSELB	2050-250	2	R2.5	25	4	70	6	G-65
CPRB	2050-30	2	R2.5	30	3.5	80	6	G-89
HWLB	2050-300	2	R2.5	30	4	80	6	G-31
CWLB	2050-300	2	R2.5	30	4	80	6	G-52
CSELB	2050-300	2	R2.5	30	4	80	6	G-65

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
DCLB	2050-0300	2	R2.5	30	4	80	6	G-74
CPRB	2050-35	2	R2.5	35	3.5	80	6	G-89
CSELB	2050-350	2	R2.5	35	4	80	6	G-65
HWLB	2050-400	2	R2.5	40	4	90	6	G-31
CSELB	2050-400	2	R2.5	40	4	90	6	G-65
CSELB	2050-450	2	R2.5	45	4	100	6	G-65
CSELB	2050-500	2	R2.5	50	4	100	6	G-65
CFB	3050-0750	3	R2.5	—	7.5	80	6	F-33
DLC-CFB	3050-0750	3	R2.5	—	7.5	80	6	F-39
CWB	2055-0820	2	R2.75	—	8.2	80	6	F-21
CSEB	2055-0820	2	R2.75	—	8.2	80	6	F-27
HWB	2060-0600	2	R3	—	6	50	6	F-6
HSB	2060-0600	2	R3	—	6	50	6	F-10
CWB	2060-0600	2	R3	—	6	50	6	F-21
CSEB	2060-0600	2	R3	—	6	50	6	F-27
HGB	2060-0900	2	R3	—	9	50	6	F-2
HWB	2060-0900	2	R3	—	9	80	6	F-6
HSB	2060-0900	2	R3	—	9	80	6	F-10
CWB	2060-0900	2	R3	—	9	80	6	F-21
CSEB	2060-0900	2	R3	—	9	80	6	F-27
HWB	2060-1200	2	R3	—	12	80	6	F-6
HSB	2060-1200	2	R3	—	12	80	6	F-10
CWB	2060-1200	2	R3	—	12	80	6	F-21
CSEB	2060-1200	2	R3	—	12	80	6	F-27
HBL	2060-1400	2	R3	—	18	140	6	F-15
DCB	2060	2	R3	—	30	150	6	F-31
HGLB	2060-100	2	R3	10	4.8	80	6	G-7
HWLB	2060-100	2	R3	10	4.8	80	6	G-31
HSLB	2060-100	2	R3	10	4.8	80	6	G-40
CWLB	2060-100	2	R3	10	4.8	80	6	G-52
CSELB	2060-100	2	R3	10	4.8	80	6	G-65
DLCLB	2060-100	2	R3	10	4.8	80	6	G-81
HWLB	2060-150S	2	R3	15	4.8	45	6	G-31
HGLB	2060-150	2	R3	15	4.8	80	6	G-7
HWLB	2060-150	2	R3	15	4.8	80	6	G-31
HSLB	2060-150	2	R3	15	4.8	80	6	G-40
CWLB	2060-150	2	R3	15	4.8	80	6	G-52
CSELB	2060-150	2	R3	15	4.8	80	6	G-65
DLCLB	2060-150	2	R3	15	4.8	80	6	G-81
HGLB	2060-180	2	R3	18	4.8	80	6	G-7

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2060-180	2	R3	18	4.8	80	6	G-65
HWLB	2060-200S	2	R3	20	4.8	50	6	G-31
HGLB	2060-200	2	R3	20	4.8	80	6	G-7
HWLB	2060-200	2	R3	20	4.8	80	6	G-31
HSLB	2060-200	2	R3	20	4.8	80	6	G-40
CWLB	2060-200	2	R3	20	4.8	80	6	G-52
CSELB	2060-200	2	R3	20	4.8	80	6	G-65
DLCLB	2060-200	2	R3	20	4.8	80	6	G-81
CSELB	2060-220	2	R3	22	4.8	80	6	G-65
HGLB	2060-250	2	R3	25	4.8	80	6	G-7
HWLB	2060-250	2	R3	25	4.8	80	6	G-31
CWLB	2060-250	2	R3	25	4.8	80	6	G-52
CSELB	2060-250	2	R3	25	4.8	80	6	G-65
CSELB	2060-270	2	R3	27	4.8	80	6	G-65
HWLB	2060-300S	2	R3	30	4.8	60	6	G-31
HGLB	2060-300	2	R3	30	4.8	80	6	G-7
HWLB	2060-300	2	R3	30	4.8	80	6	G-31
HSLB	2060-300	2	R3	30	4.8	80	6	G-40
CWLB	2060-300	2	R3	30	4.8	80	6	G-52
CSELB	2060-300	2	R3	30	4.8	80	6	G-65
DLCLB	2060-300	2	R3	30	4.8	80	6	G-81
DCLB	2060-0300	2	R3	30	4.8	80	6	G-74
CPRB	2060-30	2	R3	30	6	80	6	G-89
CSELB	2060-320	2	R3	32	4.8	80	6	G-65
HGLB	2060-350	2	R3	35	4.8	80	6	G-7
HWLB	2060-350	2	R3	35	4.8	80	6	G-31
CWLB	2060-350	2	R3	35	4.8	80	6	G-52
CSELB	2060-350	2	R3	35	4.8	80	6	G-65
HGLB	2060-400	2	R3	40	4.8	90	6	G-7
HWLB	2060-400	2	R3	40	4.8	90	6	G-31
HSLB	2060-400	2	R3	40	4.8	90	6	G-40
CWLB	2060-400	2	R3	40	4.8	90	6	G-52
CSELB	2060-400	2	R3	40	4.8	90	6	G-65
DCLB	2060-0400	2	R3	40	4.8	100	6	G-74
HWLB	2060-450	2	R3	45	4.8	100	6	G-31
CWLB	2060-450	2	R3	45	4.8	100	6	G-52
CSELB	2060-450	2	R3	45	4.8	100	6	G-65
HGLB	2060-500	2	R3	50	4.8	120	6	G-7
HWLB	2060-500	2	R3	50	4.8	120	6	G-31
CWLB	2060-500	2	R3	50	4.8	120	6	G-52

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CSELB	2060-500	2	R3	50	4.8	120	6	G-65
DCLB	2060-0500	2	R3	50	4.8	120	6	G-74
CPRB	2060-50	2	R3	50	6	120	6	G-89
HWLB	2060-600	2	R3	60	4.8	120	6	G-31
CWLB	2060-600	2	R3	60	4.8	120	6	G-52
CSELB	2060-600	2	R3	60	4.8	120	6	G-65
DCLB	2060-0600	2	R3	60	4.8	120	6	G-74
DCLB	2060-0700	2	R3	70	4.8	120	6	G-74
DCLB	2060-0800	2	R3	80	4.8	120	6	G-74
CFB	3060-0900	3	R3	—	9	80	6	F-33
DLC-CFB	3060-0900	3	R3	—	9	80	6	F-39
CFLB	3060-200	3	R3	20	4.8	80	6	G-92
CFLB	3060-250	3	R3	25	4.8	80	6	G-92
CFLB	3060-300	3	R3	30	4.8	80	6	G-92
CFLB	3060-350	3	R3	35	4.8	80	6	G-92
CFLB	3060-400	3	R3	40	4.8	90	6	G-92
HFB	4060-0900S	4	R3	—	9	50	6	F-44
HFB	4060-0900	4	R3	—	9	80	6	F-43
CWB	2065-0970	2	R3.25	—	9.7	90	8	F-21
CSEB	2065-0970	2	R3.25	—	9.7	90	8	F-27
CWB	2070-1050	2	R3.5	—	10.5	90	8	F-21
CSEB	2070-1050	2	R3.5	—	10.5	90	8	F-27
CWB	2075-1120	2	R3.75	—	11.2	90	8	F-21
CSEB	2075-1120	2	R3.75	—	11.2	90	8	F-27
HWB	2080-0800	2	R4	—	8	60	8	F-6
HSB	2080-0800	2	R4	—	8	60	8	F-10
CWB	2080-0800	2	R4	—	8	60	8	F-21
CSEB	2080-0800	2	R4	—	8	60	8	F-27
HWB	2080-1200	2	R4	—	12	90	8	F-6
HSB	2080-1200	2	R4	—	12	90	8	F-10
CWB	2080-1200	2	R4	—	12	90	8	F-21
CSEB	2080-1200	2	R4	—	12	90	8	F-27
HWB	2080-1400	2	R4	—	14	90	8	F-6
HSB	2080-1400	2	R4	—	14	90	8	F-10
CWB	2080-1400	2	R4	—	14	90	8	F-21
CSEB	2080-1400	2	R4	—	14	90	8	F-27
HBL	2080-1600	2	R4	—	20	160	8	F-15
DCB	2080	2	R4	—	40	150	8	F-31
CFB	3080-1200	3	R4	—	12	90	8	F-33
DLC-CFB	3080-1200	3	R4	—	12	90	8	F-39

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CFB	3080-1200LS	3	R4	—	12	120	8	F-33
DLC-CFB	3080-1200LS	3	R4	—	12	120	8	F-39
HFB	4080-1200S	4	R4	—	12	60	8	F-44
HFB	4080-1200	4	R4	—	12	90	8	F-43
CWB	2085-1270	2	R4.25	—	12.7	100	10	F-21
CSEB	2085-1270	2	R4.25	—	12.7	100	10	F-27
CWB	2090-1350	2	R4.5	—	13.5	100	10	F-21
CSEB	2090-1350	2	R4.5	—	13.5	100	10	F-27
HWB	2100-1000	2	R5	—	10	70	10	F-6
HSB	2100-1000	2	R5	—	10	70	10	F-10
CWB	2100-1000	2	R5	—	10	70	10	F-21
CSEB	2100-1000	2	R5	—	10	70	10	F-27
HWB	2100-1500	2	R5	—	15	100	10	F-6
HSB	2100-1500	2	R5	—	15	100	10	F-10
CWB	2100-1500	2	R5	—	15	100	10	F-21
CSEB	2100-1500	2	R5	—	15	100	10	F-27
HWB	2100-1800	2	R5	—	18	100	10	F-6
HSB	2100-1800	2	R5	—	18	100	10	F-10
CWB	2100-1800	2	R5	—	18	100	10	F-21
CSEB	2100-1800	2	R5	—	18	100	10	F-27
HBL	2100-1800	2	R5	—	25	180	10	F-15
DCB	2100	2	R5	—	50	180	10	F-31
CFB	3100-1500	3	R5	—	15	100	10	F-33
DLC-CFB	3100-1500	3	R5	—	15	100	10	F-39
HFB	4100-1500S	4	R5	—	15	60	10	F-44
HFB	4100-1500	4	R5	—	15	100	10	F-43
CWB	2110-1650	2	R5.5	—	16.5	110	12	F-21
CSEB	2110-1650	2	R5.5	—	16.5	110	12	F-27
HWB	2120-1200	2	R6	—	12	75	12	F-6
HSB	2120-1200	2	R6	—	12	75	12	F-10
CWB	2120-1200	2	R6	—	12	75	12	F-21
CSEB	2120-1200	2	R6	—	12	75	12	F-27
HWB	2120-1800	2	R6	—	18	110	12	F-6
HSB	2120-1800	2	R6	—	18	110	12	F-10
CWB	2120-1800	2	R6	—	18	110	12	F-21
CSEB	2120-1800	2	R6	—	18	110	12	F-27
HWB	2120-2200	2	R6	—	22	110	12	F-6
HSB	2120-2200	2	R6	—	22	110	12	F-10
CWB	2120-2200	2	R6	—	22	110	12	F-21
CSEB	2120-2200	2	R6	—	22	110	12	F-27

Simplified Table

Ball

Model Number		Number of Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HBL	2120-2000	2	R6	—	25	200	12	F-15
DCB	2120	2	R6	—	55	180	12	F-31
CFB	3120-1800	3	R6	—	18	110	12	F-33
DLC-CFB	3120-1800	3	R6	—	18	110	12	F-39
HFB	4120-1800S	4	R6	—	18	60	12	F-44
HFB	4120-1800	4	R6	—	18	110	12	F-43

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CLRS	2002-002-005	2	0.2	R0.02	0.5	0.2	50	4	D-26
CLRS	2002-002-010	2	0.2	R0.02	1	0.2	50	4	D-26
CLRS	2002-002-015	2	0.2	R0.02	1.5	0.2	50	4	D-26
HLRS	2002-005-005E	2	0.2	R0.05	0.5	0.2	50	4	D-1
CLRS	2002-005-005	2	0.2	R0.05	0.5	0.2	50	4	D-26
DLCLRS	2002-005-010	2	0.2	R0.05	1	0.2	45	4	D-35
HLRS	2002-005-010E	2	0.2	R0.05	1	0.2	50	4	D-1
CLRS	2002-005-010	2	0.2	R0.05	1	0.2	50	4	D-26
DLCLRS	2002-005-015	2	0.2	R0.05	1.5	0.2	45	4	D-35
HLRS	2002-005-015E	2	0.2	R0.05	1.5	0.2	50	4	D-1
CLRS	2002-005-015	2	0.2	R0.05	1.5	0.2	50	4	D-26
HLRS	2002-005-020E	2	0.2	R0.05	2	0.2	50	4	D-1
HLRS	4002-002-003	4	0.2	R0.02	0.3	0.12	50	4	D-61
HGLRS	4002-002-005	4	0.2	R0.02	0.5	0.12	50	4	D-45
HLRS	4002-002-005	4	0.2	R0.02	0.5	0.12	50	4	D-61
HGLRS	4002-002-010	4	0.2	R0.02	1	0.12	50	4	D-45
HLRS	4002-002-010	4	0.2	R0.02	1	0.12	50	4	D-61
HLRS	4002-002-015	4	0.2	R0.02	1.5	0.12	50	4	D-61
HGLRS	4002-002-020	4	0.2	R0.02	2	0.12	50	4	D-45
HLRS	4002-002-020	4	0.2	R0.02	2	0.12	50	4	D-61
HLRS	4002-005-003	4	0.2	R0.05	0.3	0.12	50	4	D-61
HGLRS	4002-005-005	4	0.2	R0.05	0.5	0.12	50	4	D-45
HGLRS	4002-005-010	4	0.2	R0.05	1	0.12	50	4	D-45
HGLRS	4002-005-020	4	0.2	R0.05	2	0.12	50	4	D-45
CLRS	2003-002-010	2	0.3	R0.02	1	0.3	50	4	D-26
CLRS	2003-002-020	2	0.3	R0.02	2	0.3	50	4	D-26
DLCLRS	2003-005-010	2	0.3	R0.05	1	0.3	45	4	D-35
HLRS	2003-005-010E	2	0.3	R0.05	1	0.3	50	4	D-1
CLRS	2003-005-010	2	0.3	R0.05	1	0.3	50	4	D-26
HLRS	2003-005-015E	2	0.3	R0.05	1.5	0.3	50	4	D-1
DLCLRS	2003-005-020	2	0.3	R0.05	2	0.3	45	4	D-35
HLRS	2003-005-020E	2	0.3	R0.05	2	0.3	50	4	D-1
CLRS	2003-005-020	2	0.3	R0.05	2	0.3	50	4	D-26
HLRS	2003-005-025E	2	0.3	R0.05	2.5	0.3	50	4	D-1
HLRS	2003-005-030E	2	0.3	R0.05	3	0.3	50	4	D-1
HLRS	4003-002-003	4	0.3	R0.02	0.3	0.18	50	4	D-61
HGLRS	4003-002-005	4	0.3	R0.02	0.5	0.18	50	4	D-45
HLRS	4003-002-005	4	0.3	R0.02	0.5	0.18	50	4	D-61
HGLRS	4003-002-010	4	0.3	R0.02	1	0.18	50	4	D-45
HLRS	4003-002-010	4	0.3	R0.02	1	0.18	50	4	D-61

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HGLRS	4003-002-015	4	0.3	R0.02	1.5	0.18	50	4	D-45
HLRS	4003-002-015	4	0.3	R0.02	1.5	0.18	50	4	D-61
HGLRS	4003-002-020	4	0.3	R0.02	2	0.18	50	4	D-45
HLRS	4003-002-020	4	0.3	R0.02	2	0.18	50	4	D-61
HLRS	4003-005-003	4	0.3	R0.05	0.3	0.18	50	4	D-61
HGLRS	4003-005-005	4	0.3	R0.05	0.5	0.18	50	4	D-45
HLRS	4003-005-005	4	0.3	R0.05	0.5	0.18	50	4	D-61
HGLRS	4003-005-010	4	0.3	R0.05	1	0.18	50	4	D-45
HGLRS	4003-005-020	4	0.3	R0.05	2	0.18	50	4	D-45
CLRS	2004-002-010	2	0.4	R0.02	1	0.4	50	4	D-26
CLRS	2004-002-020	2	0.4	R0.02	2	0.4	50	4	D-26
CLRS	2004-002-030	2	0.4	R0.02	3	0.4	50	4	D-26
HLRS	2004-005-010E	2	0.4	R0.05	1	0.4	50	4	D-1
CLRS	2004-005-010	2	0.4	R0.05	1	0.4	50	4	D-26
HLRS	2004-005-015E	2	0.4	R0.05	1.5	0.4	50	4	D-1
DLCLRS	2004-005-020	2	0.4	R0.05	2	0.4	45	4	D-35
HLRS	2004-005-020E	2	0.4	R0.05	2	0.4	50	4	D-1
CLRS	2004-005-020	2	0.4	R0.05	2	0.4	50	4	D-26
DLCLRS	2004-005-030	2	0.4	R0.05	3	0.4	45	4	D-35
HLRS	2004-005-030E	2	0.4	R0.05	3	0.4	50	4	D-1
CLRS	2004-005-030	2	0.4	R0.05	3	0.4	50	4	D-26
HLRS	2004-005-040E	2	0.4	R0.05	4	0.4	50	4	D-1
HLRS	2004-01-010	2	0.4	R0.1	1	0.4	50	4	D-1
CLRS	2004-01-010	2	0.4	R0.1	1	0.4	50	4	D-26
HLRS	2004-01-015	2	0.4	R0.1	1.5	0.4	50	4	D-1
DLCLRS	2004-01-020	2	0.4	R0.1	2	0.4	45	4	D-35
HLRS	2004-01-020	2	0.4	R0.1	2	0.4	50	4	D-1
CLRS	2004-01-020	2	0.4	R0.1	2	0.4	50	4	D-26
DLCLRS	2004-01-030	2	0.4	R0.1	3	0.4	45	4	D-35
HLRS	2004-01-030	2	0.4	R0.1	3	0.4	50	4	D-1
CLRS	2004-01-030	2	0.4	R0.1	3	0.4	50	4	D-26
HLRS	2004-01-040	2	0.4	R0.1	4	0.4	50	4	D-1
HLRS	4004-002-005	4	0.4	R0.02	0.5	0.24	50	4	D-61
HGLRS	4004-002-010	4	0.4	R0.02	1	0.24	50	4	D-45
HLRS	4004-002-010	4	0.4	R0.02	1	0.24	50	4	D-61
HGLRS	4004-002-020	4	0.4	R0.02	2	0.24	50	4	D-45
HLRS	4004-002-020	4	0.4	R0.02	2	0.24	50	4	D-61
HLRS	4004-005-005	4	0.4	R0.05	0.5	0.24	50	4	D-61
HGLRS	4004-005-010	4	0.4	R0.05	1	0.24	50	4	D-45
HLRS	4004-005-010	4	0.4	R0.05	1	0.24	50	4	D-61

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4004-005-015	4	0.4	R0.05	1.5	0.24	50	4	D-61
HGLRS	4004-005-020	4	0.4	R0.05	2	0.24	50	4	D-45
HLRS	4004-005-020	4	0.4	R0.05	2	0.24	50	4	D-61
HGLRS	4004-01-010	4	0.4	R0.1	1	0.24	50	4	D-45
HLRS	4004-01-010	4	0.4	R0.1	1	0.24	50	4	D-61
HGLRS	4004-01-020	4	0.4	R0.1	2	0.24	50	4	D-45
HLRS	4004-01-020	4	0.4	R0.1	2	0.24	50	4	D-61
HLRS	2005-005-010	2	0.5	R0.05	1	0.5	50	4	D-1
CLRS	2005-005-010	2	0.5	R0.05	1	0.5	50	4	D-26
DLCLRS	2005-005-020	2	0.5	R0.05	2	0.5	45	4	D-35
HLRS	2005-005-020	2	0.5	R0.05	2	0.5	50	4	D-1
CLRS	2005-005-020	2	0.5	R0.05	2	0.5	50	4	D-26
DLCLRS	2005-005-030	2	0.5	R0.05	3	0.5	45	4	D-35
HLRS	2005-005-030	2	0.5	R0.05	3	0.5	50	4	D-1
CLRS	2005-005-030	2	0.5	R0.05	3	0.5	50	4	D-26
DLCLRS	2005-005-040	2	0.5	R0.05	4	0.5	45	4	D-35
HLRS	2005-005-040	2	0.5	R0.05	4	0.5	50	4	D-1
HLRS	2005-005-050	2	0.5	R0.05	5	0.5	50	4	D-1
CLRS	2005-005-050	2	0.5	R0.05	5	0.5	50	4	D-26
HLRS	2005-01-010	2	0.5	R0.1	1	0.5	50	4	D-1
CLRS	2005-01-010	2	0.5	R0.1	1	0.5	50	4	D-26
DLCLRS	2005-01-020	2	0.5	R0.1	2	0.5	45	4	D-35
HLRS	2005-01-020	2	0.5	R0.1	2	0.5	50	4	D-1
CLRS	2005-01-020	2	0.5	R0.1	2	0.5	50	4	D-26
DLCLRS	2005-01-030	2	0.5	R0.1	3	0.5	45	4	D-35
HLRS	2005-01-030	2	0.5	R0.1	3	0.5	50	4	D-1
CLRS	2005-01-030	2	0.5	R0.1	3	0.5	50	4	D-26
DLCLRS	2005-01-040	2	0.5	R0.1	4	0.5	45	4	D-35
HLRS	2005-01-040	2	0.5	R0.1	4	0.5	50	4	D-1
HLRS	2005-01-050	2	0.5	R0.1	5	0.5	50	4	D-1
CLRS	2005-01-050	2	0.5	R0.1	5	0.5	50	4	D-26
HLRS	2005-01-060	2	0.5	R0.1	6	0.5	50	4	D-1
HGLRS	4005-002-010	4	0.5	R0.02	1	0.3	50	4	D-45
HLRS	4005-002-010	4	0.5	R0.02	1	0.3	50	4	D-63
HGLRS	4005-002-020	4	0.5	R0.02	2	0.3	50	4	D-45
HLRS	4005-002-020	4	0.5	R0.02	2	0.3	50	4	D-63
HGLRS	4005-002-030	4	0.5	R0.02	3	0.3	50	4	D-45
HGLRS	4005-005-010	4	0.5	R0.05	1	0.3	50	4	D-45
HLRS	4005-005-010	4	0.5	R0.05	1	0.3	50	4	D-63
HGLRS	4005-005-020	4	0.5	R0.05	2	0.3	50	4	D-45

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4005-005-020	4	0.5	R0.05	2	0.3	50	4	D-63
HGLRS	4005-005-030	4	0.5	R0.05	3	0.3	50	4	D-45
HGLRS	4005-01-010	4	0.5	R0.1	1	0.3	50	4	D-45
HLRS	4005-01-010	4	0.5	R0.1	1	0.3	50	4	D-63
HGLRS	4005-01-020	4	0.5	R0.1	2	0.3	50	4	D-45
HLRS	4005-01-020	4	0.5	R0.1	2	0.3	50	4	D-63
HGLRS	4005-01-030	4	0.5	R0.1	3	0.3	50	4	D-45
DLCLRS	2006-005-020	2	0.6	R0.05	2	0.6	45	4	D-35
HLRS	2006-005-020	2	0.6	R0.05	2	0.6	50	4	D-3
CLRS	2006-005-020	2	0.6	R0.05	2	0.6	50	4	D-26
DLCLRS	2006-005-030	2	0.6	R0.05	3	0.6	45	4	D-35
HLRS	2006-005-030	2	0.6	R0.05	3	0.6	50	4	D-3
DLCLRS	2006-005-040	2	0.6	R0.05	4	0.6	45	4	D-35
HLRS	2006-005-040	2	0.6	R0.05	4	0.6	50	4	D-3
CLRS	2006-005-040	2	0.6	R0.05	4	0.6	50	4	D-26
DLCLRS	2006-005-060	2	0.6	R0.05	6	0.6	45	4	D-35
HLRS	2006-005-060	2	0.6	R0.05	6	0.6	50	4	D-3
CLRS	2006-005-060	2	0.6	R0.05	6	0.6	50	4	D-26
HLRS	2006-005-080	2	0.6	R0.05	8	0.6	50	4	D-3
DLCLRS	2006-01-020	2	0.6	R0.1	2	0.6	45	4	D-35
HLRS	2006-01-020	2	0.6	R0.1	2	0.6	50	4	D-3
HLRS	2006-01-020E	2	0.6	R0.1	2	0.6	50	4	D-3
CLRS	2006-01-020	2	0.6	R0.1	2	0.6	50	4	D-26
DLCLRS	2006-01-030	2	0.6	R0.1	3	0.6	45	4	D-35
HLRS	2006-01-030	2	0.6	R0.1	3	0.6	50	4	D-3
HLRS	2006-01-030E	2	0.6	R0.1	3	0.6	50	4	D-3
DLCLRS	2006-01-040	2	0.6	R0.1	4	0.6	45	4	D-35
HLRS	2006-01-040	2	0.6	R0.1	4	0.6	50	4	D-3
HLRS	2006-01-040E	2	0.6	R0.1	4	0.6	50	4	D-3
CLRS	2006-01-040	2	0.6	R0.1	4	0.6	50	4	D-26
DLCLRS	2006-01-060	2	0.6	R0.1	6	0.6	45	4	D-35
HLRS	2006-01-060	2	0.6	R0.1	6	0.6	50	4	D-3
CLRS	2006-01-060	2	0.6	R0.1	6	0.6	50	4	D-26
HLRS	2006-01-080	2	0.6	R0.1	8	0.6	50	4	D-3
HLRS	2006-02-020	2	0.6	R0.2	2	0.6	50	4	D-3
HLRS	2006-02-030	2	0.6	R0.2	3	0.6	50	4	D-3
HLRS	2006-02-040	2	0.6	R0.2	4	0.6	50	4	D-3
HLRS	2006-02-060	2	0.6	R0.2	6	0.6	50	4	D-3
HLRS	2006-02-080	2	0.6	R0.2	8	0.6	50	4	D-3
HGLRS	4006-005-020	4	0.6	R0.05	2	0.36	50	4	D-45

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4006-005-020	4	0.6	R0.05	2	0.36	50	4	D-63
HGLRS	4006-005-040	4	0.6	R0.05	4	0.36	50	4	D-45
HLRS	4006-005-040	4	0.6	R0.05	4	0.36	50	4	D-63
HGLRS	4006-01-020	4	0.6	R0.1	2	0.36	50	4	D-45
HLRS	4006-01-020	4	0.6	R0.1	2	0.36	50	4	D-63
HGLRS	4006-01-040	4	0.6	R0.1	4	0.36	50	4	D-45
HLRS	4006-01-040	4	0.6	R0.1	4	0.36	50	4	D-63
HLRS	2007-01-040	2	0.7	R0.1	4	0.7	50	4	D-3
HLRS	2007-01-060	2	0.7	R0.1	6	0.7	50	4	D-3
HLRS	2007-02-040	2	0.7	R0.2	4	0.7	50	4	D-3
HLRS	2007-02-060	2	0.7	R0.2	6	0.7	50	4	D-3
CLRS	2008-005-020	2	0.8	R0.05	2	0.8	50	4	D-26
DLCLRS	2008-005-040	2	0.8	R0.05	4	0.8	45	4	D-37
HLRS	2008-005-040	2	0.8	R0.05	4	0.8	50	4	D-3
CLRS	2008-005-040	2	0.8	R0.05	4	0.8	50	4	D-26
DLCLRS	2008-005-060	2	0.8	R0.05	6	0.8	45	4	D-37
HLRS	2008-005-060	2	0.8	R0.05	6	0.8	50	4	D-3
CLRS	2008-005-060	2	0.8	R0.05	6	0.8	50	4	D-26
HLRS	2008-005-080	2	0.8	R0.05	8	0.8	50	4	D-3
CLRS	2008-005-080	2	0.8	R0.05	8	0.8	50	4	D-26
CLRS	2008-01-020	2	0.8	R0.1	2	0.8	50	4	D-26
DLCLRS	2008-01-040	2	0.8	R0.1	4	0.8	45	4	D-37
HLRS	2008-01-040	2	0.8	R0.1	4	0.8	50	4	D-3
CLRS	2008-01-040	2	0.8	R0.1	4	0.8	50	4	D-26
DLCLRS	2008-01-060	2	0.8	R0.1	6	0.8	45	4	D-37
HLRS	2008-01-060	2	0.8	R0.1	6	0.8	50	4	D-3
CLRS	2008-01-060	2	0.8	R0.1	6	0.8	50	4	D-26
HLRS	2008-01-080	2	0.8	R0.1	8	0.8	50	4	D-3
CLRS	2008-01-080	2	0.8	R0.1	8	0.8	50	4	D-26
CLRS	2008-02-020	2	0.8	R0.2	2	0.8	50	4	D-26
DLCLRS	2008-02-040	2	0.8	R0.2	4	0.8	45	4	D-37
HLRS	2008-02-040	2	0.8	R0.2	4	0.8	50	4	D-3
CLRS	2008-02-040	2	0.8	R0.2	4	0.8	50	4	D-26
DLCLRS	2008-02-060	2	0.8	R0.2	6	0.8	45	4	D-37
HLRS	2008-02-060	2	0.8	R0.2	6	0.8	50	4	D-3
CLRS	2008-02-060	2	0.8	R0.2	6	0.8	50	4	D-26
HLRS	2008-02-080	2	0.8	R0.2	8	0.8	50	4	D-3
CLRS	2008-02-080	2	0.8	R0.2	8	0.8	50	4	D-26
HLRS	4008-002-020	4	0.8	R0.02	2	0.48	50	4	D-63
HLRS	4008-002-030	4	0.8	R0.02	3	0.48	50	4	D-63

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4008-002-040	4	0.8	R0.02	4	0.48	50	4	D-63
HLRS	4008-002-060	4	0.8	R0.02	6	0.48	50	4	D-63
HLRS	4008-002-080	4	0.8	R0.02	8	0.48	50	4	D-63
HGLRS	4008-005-020	4	0.8	R0.05	2	0.48	50	4	D-45
HLRS	4008-005-020	4	0.8	R0.05	2	0.48	50	4	D-63
HLRS	4008-005-030	4	0.8	R0.05	3	0.48	50	4	D-63
HGLRS	4008-005-040	4	0.8	R0.05	4	0.48	50	4	D-45
HLRS	4008-005-040	4	0.8	R0.05	4	0.48	50	4	D-63
HGLRS	4008-005-060	4	0.8	R0.05	6	0.48	50	4	D-45
HLRS	4008-005-060	4	0.8	R0.05	6	0.48	50	4	D-63
HGLRS	4008-01-020	4	0.8	R0.1	2	0.48	50	4	D-45
HLRS	4008-01-020	4	0.8	R0.1	2	0.48	50	4	D-63
HLRS	4008-01-030	4	0.8	R0.1	3	0.48	50	4	D-63
HGLRS	4008-01-040	4	0.8	R0.1	4	0.48	50	4	D-45
HLRS	4008-01-040	4	0.8	R0.1	4	0.48	50	4	D-63
HGLRS	4008-01-060	4	0.8	R0.1	6	0.48	50	4	D-45
HLRS	4008-01-060	4	0.8	R0.1	6	0.48	50	4	D-63
HGLRS	4008-02-020	4	0.8	R0.2	2	0.48	50	4	D-45
HLRS	4008-02-020	4	0.8	R0.2	2	0.48	50	4	D-63
HLRS	4008-02-030	4	0.8	R0.2	3	0.48	50	4	D-63
HGLRS	4008-02-040	4	0.8	R0.2	4	0.48	50	4	D-45
HLRS	4008-02-040	4	0.8	R0.2	4	0.48	50	4	D-63
HGLRS	4008-02-060	4	0.8	R0.2	6	0.48	50	4	D-45
HLRS	4008-02-060	4	0.8	R0.2	6	0.48	50	4	D-63
HLRS	2010-005-020	2	1	R0.05	2	1	50	4	D-3
CLRS	2010-005-020	2	1	R0.05	2	1	50	4	D-27
HLRS	2010-005-030	2	1	R0.05	3	1	50	4	D-3
HLRS	2010-005-040	2	1	R0.05	4	1	50	4	D-3
CLRS	2010-005-040	2	1	R0.05	4	1	50	4	D-27
HLRS	2010-005-050	2	1	R0.05	5	1	50	4	D-3
HLRS	2010-005-060	2	1	R0.05	6	1	50	4	D-3
CLRS	2010-005-060	2	1	R0.05	6	1	50	4	D-27
HLRS	2010-005-080	2	1	R0.05	8	1	50	4	D-3
CLRS	2010-005-080	2	1	R0.05	8	1	50	4	D-27
HLRS	2010-005-100	2	1	R0.05	10	1	50	4	D-3
CLRS	2010-005-100	2	1	R0.05	10	1	50	4	D-27
HLRS	2010-005-120	2	1	R0.05	12	1	55	4	D-3
HLRS	2010-005-160	2	1	R0.05	16	1	60	4	D-3
HLRS	2010-005-200	2	1	R0.05	20	1	60	4	D-3
DLCLRS	2010-01-020	2	1	R0.1	2	1	45	4	D-37

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2010-01-020	2	1	R0.1	2	1	50	4	D-3
HLRS	2010-01-020E	2	1	R0.1	2	1	50	4	D-3
CLRS	2010-01-020	2	1	R0.1	2	1	50	4	D-27
HLRS	2010-01-030	2	1	R0.1	3	1	50	4	D-3
DLCLRS	2010-01-040	2	1	R0.1	4	1	45	4	D-37
HLRS	2010-01-040	2	1	R0.1	4	1	50	4	D-3
HLRS	2010-01-040E	2	1	R0.1	4	1	50	4	D-3
CLRS	2010-01-040	2	1	R0.1	4	1	50	4	D-27
HLRS	2010-01-050	2	1	R0.1	5	1	50	4	D-3
DLCLRS	2010-01-060	2	1	R0.1	6	1	45	4	D-37
HLRS	2010-01-060	2	1	R0.1	6	1	50	4	D-3
HLRS	2010-01-060E	2	1	R0.1	6	1	50	4	D-3
CLRS	2010-01-060	2	1	R0.1	6	1	50	4	D-27
HLRS	2010-01-080	2	1	R0.1	8	1	50	4	D-5
CLRS	2010-01-080	2	1	R0.1	8	1	50	4	D-27
HLRS	2010-01-100	2	1	R0.1	10	1	50	4	D-5
CLRS	2010-01-100	2	1	R0.1	10	1	50	4	D-27
HLRS	2010-01-120	2	1	R0.1	12	1	55	4	D-5
HLRS	2010-01-160	2	1	R0.1	16	1	60	4	D-5
HLRS	2010-01-200	2	1	R0.1	20	1	60	4	D-5
C-CRS	2010-02	2	1	R0.2	–	2	45	4	C-1
DLCLRS	2010-02-020	2	1	R0.2	2	1	45	4	D-37
HLRS	2010-02-020	2	1	R0.2	2	1	50	4	D-5
HLRS	2010-02-020E	2	1	R0.2	2	1	50	4	D-5
CLRS	2010-02-020	2	1	R0.2	2	1	50	4	D-27
HLRS	2010-02-030	2	1	R0.2	3	1	50	4	D-5
DLCLRS	2010-02-040	2	1	R0.2	4	1	45	4	D-37
HLRS	2010-02-040	2	1	R0.2	4	1	50	4	D-5
HLRS	2010-02-040E	2	1	R0.2	4	1	50	4	D-5
CLRS	2010-02-040	2	1	R0.2	4	1	50	4	D-27
HLRS	2010-02-050	2	1	R0.2	5	1	50	4	D-5
DLCLRS	2010-02-060	2	1	R0.2	6	1	45	4	D-37
HLRS	2010-02-060	2	1	R0.2	6	1	50	4	D-5
HLRS	2010-02-060E	2	1	R0.2	6	1	50	4	D-5
CLRS	2010-02-060	2	1	R0.2	6	1	50	4	D-27
HLRS	2010-02-080	2	1	R0.2	8	1	50	4	D-5
CLRS	2010-02-080	2	1	R0.2	8	1	50	4	D-27
HLRS	2010-02-100	2	1	R0.2	10	1	50	4	D-5
CLRS	2010-02-100	2	1	R0.2	10	1	50	4	D-27
HLRS	2010-02-120	2	1	R0.2	12	1	55	4	D-5

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2010-02-160	2	1	R0.2	16	1	60	4	D-5
HLRS	2010-02-200	2	1	R0.2	20	1	60	4	D-5
C-CRS	2010-03	2	1	R0.3	–	2	45	4	C-1
HLRS	2010-03-020	2	1	R0.3	2	1	50	4	D-5
HLRS	2010-03-020E	2	1	R0.3	2	1	50	4	D-5
HLRS	2010-03-030	2	1	R0.3	3	1	50	4	D-5
HLRS	2010-03-040	2	1	R0.3	4	1	50	4	D-5
HLRS	2010-03-040E	2	1	R0.3	4	1	50	4	D-5
HLRS	2010-03-050	2	1	R0.3	5	1	50	4	D-5
HLRS	2010-03-060	2	1	R0.3	6	1	50	4	D-5
HLRS	2010-03-060E	2	1	R0.3	6	1	50	4	D-5
HLRS	2010-03-080	2	1	R0.3	8	1	50	4	D-5
HLRS	2010-03-100	2	1	R0.3	10	1	50	4	D-5
HLRS	2010-03-120	2	1	R0.3	12	1	55	4	D-5
HLRS	2010-03-160	2	1	R0.3	16	1	60	4	D-5
HLRS	2010-03-200	2	1	R0.3	20	1	60	4	D-5
HGLRS	4010-002-020	4	1	R0.02	2	0.8	50	4	D-47
HLRS	4010-002-020	4	1	R0.02	2	0.8	50	4	D-63
HGLRS	4010-002-030	4	1	R0.02	3	0.8	50	4	D-47
HLRS	4010-002-030	4	1	R0.02	3	0.8	50	4	D-63
HGLRS	4010-002-040	4	1	R0.02	4	0.8	50	4	D-47
HLRS	4010-002-040	4	1	R0.02	4	0.8	50	4	D-63
HGLRS	4010-002-050	4	1	R0.02	5	0.8	50	4	D-47
HLRS	4010-002-050	4	1	R0.02	5	0.8	50	4	D-63
HLRS	4010-002-060	4	1	R0.02	6	0.8	50	4	D-63
DCLRS	4010-002-060	4	1	R0.02	6	2	50	4	D-99
HLRS	4010-002-080	4	1	R0.02	8	0.8	50	4	D-63
HLRS	4010-002-100	4	1	R0.02	10	0.8	50	4	D-63
DCLRS	4010-002-100	4	1	R0.02	10	2	50	4	D-99
HLRS	4010-002-120	4	1	R0.02	12	0.8	55	4	D-63
DCLRS	4010-002-200	4	1	R0.02	20	2	60	4	D-99
HGLRS	4010-005-020	4	1	R0.05	2	0.8	50	4	D-47
HLRS	4010-005-020	4	1	R0.05	2	0.8	50	4	D-63
HGLRS	4010-005-030	4	1	R0.05	3	0.8	50	4	D-47
HLRS	4010-005-030	4	1	R0.05	3	0.8	50	4	D-63
HGLRS	4010-005-040	4	1	R0.05	4	0.8	50	4	D-47
HLRS	4010-005-040	4	1	R0.05	4	0.8	50	4	D-63
HGLRS	4010-005-050	4	1	R0.05	5	0.8	50	4	D-47
HLRS	4010-005-050	4	1	R0.05	5	0.8	50	4	D-65
HGLRS	4010-005-060	4	1	R0.05	6	0.8	50	4	D-47

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4010-005-060	4	1	R0.05	6	0.8	50	4	D-65
DCLRS	4010-005-060	4	1	R0.05	6	2	50	4	D-99
HGLRS	4010-005-080	4	1	R0.05	8	0.8	50	4	D-47
HLRS	4010-005-080	4	1	R0.05	8	0.8	50	4	D-65
HGLRS	4010-005-100	4	1	R0.05	10	0.8	50	4	D-47
HLRS	4010-005-100	4	1	R0.05	10	0.8	50	4	D-65
DCLRS	4010-005-100	4	1	R0.05	10	2	50	4	D-99
HLRS	4010-005-120	4	1	R0.05	12	0.8	55	4	D-65
DCLRS	4010-005-200	4	1	R0.05	20	2	60	4	D-99
CXERS	4010-01-025	4	1	R0.1	–	2.5	50	4	C-9
HGLRS	4010-01-020	4	1	R0.1	2	0.8	50	4	D-47
HLRS	4010-01-020	4	1	R0.1	2	0.8	50	4	D-65
HGLRS	4010-01-030	4	1	R0.1	3	0.8	50	4	D-47
HLRS	4010-01-030	4	1	R0.1	3	0.8	50	4	D-65
HGLRS	4010-01-040	4	1	R0.1	4	0.8	50	4	D-47
HLRS	4010-01-040	4	1	R0.1	4	0.8	50	4	D-65
HGLRS	4010-01-050	4	1	R0.1	5	0.8	50	4	D-47
HLRS	4010-01-050	4	1	R0.1	5	0.8	50	4	D-65
HGLRS	4010-01-060	4	1	R0.1	6	0.8	50	4	D-47
HLRS	4010-01-060	4	1	R0.1	6	0.8	50	4	D-65
HGLRS	4010-01-080	4	1	R0.1	8	0.8	50	4	D-47
HLRS	4010-01-080	4	1	R0.1	8	0.8	50	4	D-65
HGLRS	4010-01-100	4	1	R0.1	10	0.8	50	4	D-47
HLRS	4010-01-100	4	1	R0.1	10	0.8	50	4	D-65
HLRS	4010-01-120	4	1	R0.1	12	0.8	55	4	D-65
CXERS	4010-02-025	4	1	R0.2	–	2.5	50	4	C-9
HGLRS	4010-02-020	4	1	R0.2	2	0.8	50	4	D-47
HLRS	4010-02-020	4	1	R0.2	2	0.8	50	4	D-65
HGLRS	4010-02-030	4	1	R0.2	3	0.8	50	4	D-47
HLRS	4010-02-030	4	1	R0.2	3	0.8	50	4	D-65
HGLRS	4010-02-040	4	1	R0.2	4	0.8	50	4	D-47
HLRS	4010-02-040	4	1	R0.2	4	0.8	50	4	D-65
HGLRS	4010-02-050	4	1	R0.2	5	0.8	50	4	D-47
HLRS	4010-02-050	4	1	R0.2	5	0.8	50	4	D-65
HGLRS	4010-02-060	4	1	R0.2	6	0.8	50	4	D-47
HLRS	4010-02-060	4	1	R0.2	6	0.8	50	4	D-65
HGLRS	4010-02-080	4	1	R0.2	8	0.8	50	4	D-47
HLRS	4010-02-080	4	1	R0.2	8	0.8	50	4	D-65
HGLRS	4010-02-100	4	1	R0.2	10	0.8	50	4	D-47
HLRS	4010-02-100	4	1	R0.2	10	0.8	50	4	D-65

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4010-02-120	4	1	R0.2	12	0.8	55	4	D-65
CXERS	4010-03-025	4	1	R0.3	–	2.5	50	4	C-9
HLRS	4010-03-020	4	1	R0.3	2	0.8	50	4	D-65
HLRS	4010-03-030	4	1	R0.3	3	0.8	50	4	D-65
HLRS	4010-03-040	4	1	R0.3	4	0.8	50	4	D-65
HLRS	4010-03-050	4	1	R0.3	5	0.8	50	4	D-65
HLRS	4010-03-060	4	1	R0.3	6	0.8	50	4	D-65
HLRS	4010-03-080	4	1	R0.3	8	0.8	50	4	D-65
HLRS	4010-03-100	4	1	R0.3	10	0.8	50	4	D-65
HLRS	4010-03-120	4	1	R0.3	12	0.8	55	4	D-65
HLRS	4010-03-160	4	1	R0.3	16	0.8	60	4	D-65
HLRS	2012-02-060	2	1.2	R0.2	6	1.2	50	4	D-5
HLRS	2012-02-120	2	1.2	R0.2	12	1.2	55	4	D-5
HLRS	2012-02-200	2	1.2	R0.2	20	1.2	60	4	D-5
HLRS	2012-03-060	2	1.2	R0.3	6	1.2	50	4	D-5
HLRS	2012-03-120	2	1.2	R0.3	12	1.2	55	4	D-5
HLRS	2012-03-200	2	1.2	R0.3	20	1.2	60	4	D-5
HLRS	4012-01-040	4	1.2	R0.1	4	0.96	50	4	D-65
HLRS	4012-01-060	4	1.2	R0.1	6	0.96	50	4	D-65
HLRS	4012-01-100	4	1.2	R0.1	10	0.96	50	4	D-65
HLRS	4012-02-040	4	1.2	R0.2	4	0.96	50	4	D-65
HLRS	4012-02-060	4	1.2	R0.2	6	0.96	50	4	D-65
HLRS	4012-02-100	4	1.2	R0.2	10	0.96	50	4	D-65
HLRS	4012-03-040	4	1.2	R0.3	4	0.96	50	4	D-65
HLRS	4012-03-060	4	1.2	R0.3	6	0.96	50	4	D-65
HLRS	4012-03-100	4	1.2	R0.3	10	0.96	50	4	D-65
HLRS	2015-005-040	2	1.5	R0.05	4	1.5	50	4	D-5
CLRS	2015-005-040	2	1.5	R0.05	4	1.5	50	4	D-27
HLRS	2015-005-060	2	1.5	R0.05	6	1.5	50	4	D-5
CLRS	2015-005-060	2	1.5	R0.05	6	1.5	50	4	D-27
HLRS	2015-005-080	2	1.5	R0.05	8	1.5	50	4	D-5
CLRS	2015-005-080	2	1.5	R0.05	8	1.5	50	4	D-27
HLRS	2015-005-100	2	1.5	R0.05	10	1.5	50	4	D-5
HLRS	2015-01-040	2	1.5	R0.1	4	1.5	50	4	D-5
CLRS	2015-01-040	2	1.5	R0.1	4	1.5	50	4	D-27
HLRS	2015-01-060	2	1.5	R0.1	6	1.5	50	4	D-5
CLRS	2015-01-060	2	1.5	R0.1	6	1.5	50	4	D-27
HLRS	2015-01-080	2	1.5	R0.1	8	1.5	50	4	D-5
CLRS	2015-01-080	2	1.5	R0.1	8	1.5	50	4	D-27
HLRS	2015-01-100	2	1.5	R0.1	10	1.5	50	4	D-5

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CLRS	2015-01-120	2	1.5	R0.1	12	1.5	50	4	D-27
HLRS	2015-01-120	2	1.5	R0.1	12	1.5	55	4	D-5
HLRS	2015-01-160	2	1.5	R0.1	16	1.5	55	4	D-5
HLRS	2015-01-200	2	1.5	R0.1	20	1.5	60	4	D-5
C-CRS	2015-02	2	1.5	R0.2	–	3	45	4	C-1
HLRS	2015-02-040	2	1.5	R0.2	4	1.5	50	4	D-7
CLRS	2015-02-040	2	1.5	R0.2	4	1.5	50	4	D-27
DLCLRS	2015-02-060	2	1.5	R0.2	6	1.5	45	4	D-37
HLRS	2015-02-060	2	1.5	R0.2	6	1.5	50	4	D-7
CLRS	2015-02-060	2	1.5	R0.2	6	1.5	50	4	D-27
HLRS	2015-02-080	2	1.5	R0.2	8	1.5	50	4	D-7
CLRS	2015-02-080	2	1.5	R0.2	8	1.5	50	4	D-27
DLCLRS	2015-02-100	2	1.5	R0.2	10	1.5	45	4	D-37
HLRS	2015-02-100	2	1.5	R0.2	10	1.5	50	4	D-7
CLRS	2015-02-120	2	1.5	R0.2	12	1.5	50	4	D-27
HLRS	2015-02-120	2	1.5	R0.2	12	1.5	55	4	D-7
HLRS	2015-02-160	2	1.5	R0.2	16	1.5	55	4	D-7
HLRS	2015-02-200	2	1.5	R0.2	20	1.5	60	4	D-7
C-CRS	2015-03	2	1.5	R0.3	–	3	45	4	C-1
HLRS	2015-03-040	2	1.5	R0.3	4	1.5	50	4	D-7
CLRS	2015-03-040	2	1.5	R0.3	4	1.5	50	4	D-27
HLRS	2015-03-060	2	1.5	R0.3	6	1.5	50	4	D-7
CLRS	2015-03-060	2	1.5	R0.3	6	1.5	50	4	D-27
HLRS	2015-03-080	2	1.5	R0.3	8	1.5	50	4	D-7
CLRS	2015-03-080	2	1.5	R0.3	8	1.5	50	4	D-27
HLRS	2015-03-100	2	1.5	R0.3	10	1.5	50	4	D-7
CLRS	2015-03-120	2	1.5	R0.3	12	1.5	50	4	D-27
HLRS	2015-03-120	2	1.5	R0.3	12	1.5	55	4	D-7
HLRS	2015-03-160	2	1.5	R0.3	16	1.5	55	4	D-7
HLRS	2015-03-200	2	1.5	R0.3	20	1.5	60	4	D-7
C-CRS	2015-05	2	1.5	R0.5	–	3	45	4	C-1
HLRS	2015-05-040	2	1.5	R0.5	4	1.5	50	4	D-7
CLRS	2015-05-040	2	1.5	R0.5	4	1.5	50	4	D-27
HLRS	2015-05-060	2	1.5	R0.5	6	1.5	50	4	D-7
CLRS	2015-05-060	2	1.5	R0.5	6	1.5	50	4	D-27
HLRS	2015-05-080	2	1.5	R0.5	8	1.5	50	4	D-7
CLRS	2015-05-080	2	1.5	R0.5	8	1.5	50	4	D-27
HLRS	2015-05-100	2	1.5	R0.5	10	1.5	50	4	D-7
CLRS	2015-05-120	2	1.5	R0.5	12	1.5	50	4	D-27
HLRS	2015-05-120	2	1.5	R0.5	12	1.5	55	4	D-7
HLRS	2015-05-160	2	1.5	R0.5	16	1.5	55	4	D-7
HLRS	2015-05-200	2	1.5	R0.5	20	1.5	60	4	D-7
DCLRS	4015-002-120	4	1.5	R0.02	12	3	55	4	D-99
DCLRS	4015-002-200	4	1.5	R0.02	20	3	60	4	D-99
DCLRS	4015-002-300	4	1.5	R0.02	30	3	80	4	D-99
HGLRS	4015-005-030	4	1.5	R0.05	3	1.2	50	4	D-47
HLRS	4015-005-030	4	1.5	R0.05	3	1.2	50	4	D-67
HGLRS	4015-005-040	4	1.5	R0.05	4	1.2	50	4	D-47
HLRS	4015-005-040	4	1.5	R0.05	4	1.2	50	4	D-67
HGLRS	4015-005-060	4	1.5	R0.05	6	1.2	50	4	D-47
HLRS	4015-005-060	4	1.5	R0.05	6	1.2	50	4	D-67
HGLRS	4015-005-080	4	1.5	R0.05	8	1.2	50	4	D-47
HLRS	4015-005-080	4	1.5	R0.05	8	1.2	50	4	D-67
HGLRS	4015-005-100	4	1.5	R0.05	10	1.2	50	4	D-47
HLRS	4015-005-120	4	1.5	R0.05	12	1.2	55	4	D-67
DCLRS	4015-005-120	4	1.5	R0.05	12	3	55	4	D-99
HLRS	4015-005-160	4	1.5	R0.05	16	1.2	60	4	D-67
DCLRS	4015-005-200	4	1.5	R0.05	20	3	60	4	D-99
DCLRS	4015-005-300	4	1.5	R0.05	30	3	80	4	D-99
CXERS	4015-01-0375	4	1.5	R0.1	–	3.75	50	4	C-9
HGLRS	4015-01-030	4	1.5	R0.1	3	1.2	50	4	D-47
HLRS	4015-01-030	4	1.5	R0.1	3	1.2	50	4	D-67
HGLRS	4015-01-040	4	1.5	R0.1	4	1.2	50	4	D-47
HLRS	4015-01-040	4	1.5	R0.1	4	1.2	50	4	D-67
HGLRS	4015-01-060	4	1.5	R0.1	6	1.2	50	4	D-47
HLRS	4015-01-060	4	1.5	R0.1	6	1.2	50	4	D-67
HGLRS	4015-01-080	4	1.5	R0.1	8	1.2	50	4	D-47
HLRS	4015-01-080	4	1.5	R0.1	8	1.2	50	4	D-67
HGLRS	4015-01-100	4	1.5	R0.1	10	1.2	50	4	D-47
HLRS	4015-01-100	4	1.5	R0.1	10	1.2	50	4	D-67
HGLRS	4015-01-120	4	1.5	R0.1	12	1.2	50	4	D-47
HLRS	4015-01-120	4	1.5	R0.1	12	1.2	55	4	D-67
HLRS	4015-01-160	4	1.5	R0.1	16	1.2	60	4	D-67
HLRS	4015-01-180	4	1.5	R0.1	18	1.2	60	4	D-67
CXERS	4015-02-0375	4	1.5	R0.2	–	3.75	50	4	C-9
HGLRS	4015-02-030	4	1.5	R0.2	3	1.2	50	4	D-47
HLRS	4015-02-030	4	1.5	R0.2	3	1.2	50	4	D-67
HGLRS	4015-02-040	4	1.5	R0.2	4	1.2	50	4	D-47
HLRS	4015-02-040	4	1.5	R0.2	4	1.2	50	4	D-67
HGLRS	4015-02-060	4	1.5	R0.2	6	1.2	50	4	D-47

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4015-02-060	4	1.5	R0.2	6	1.2	50	4	D-67
HGLRS	4015-02-080	4	1.5	R0.2	8	1.2	50	4	D-47
HLRS	4015-02-080	4	1.5	R0.2	8	1.2	50	4	D-67
HGLRS	4015-02-100	4	1.5	R0.2	10	1.2	50	4	D-47
HLRS	4015-02-100	4	1.5	R0.2	10	1.2	50	4	D-67
HGLRS	4015-02-120	4	1.5	R0.2	12	1.2	50	4	D-47
HLRS	4015-02-120	4	1.5	R0.2	12	1.2	55	4	D-67
HLRS	4015-02-160	4	1.5	R0.2	16	1.2	60	4	D-67
HLRS	4015-02-180	4	1.5	R0.2	18	1.2	60	4	D-67
CXERS	4015-03-0375	4	1.5	R0.3	–	3.75	50	4	C-9
HGLRS	4015-03-030	4	1.5	R0.3	3	1.2	50	4	D-49
HLRS	4015-03-030	4	1.5	R0.3	3	1.2	50	4	D-67
HGLRS	4015-03-040	4	1.5	R0.3	4	1.2	50	4	D-49
HLRS	4015-03-040	4	1.5	R0.3	4	1.2	50	4	D-67
HGLRS	4015-03-060	4	1.5	R0.3	6	1.2	50	4	D-49
HLRS	4015-03-060	4	1.5	R0.3	6	1.2	50	4	D-67
HGLRS	4015-03-080	4	1.5	R0.3	8	1.2	50	4	D-49
HLRS	4015-03-080	4	1.5	R0.3	8	1.2	50	4	D-67
HGLRS	4015-03-100	4	1.5	R0.3	10	1.2	50	4	D-49
HLRS	4015-03-100	4	1.5	R0.3	10	1.2	50	4	D-67
HGLRS	4015-03-120	4	1.5	R0.3	12	1.2	50	4	D-49
HLRS	4015-03-120	4	1.5	R0.3	12	1.2	55	4	D-67
HLRS	4015-03-160	4	1.5	R0.3	16	1.2	60	4	D-67
HLRS	4015-03-180	4	1.5	R0.3	18	1.2	60	4	D-67
HLRS	4015-05-030	4	1.5	R0.5	3	1.2	50	4	D-67
HGLRS	4015-05-040	4	1.5	R0.5	4	1.2	50	4	D-49
HLRS	4015-05-040	4	1.5	R0.5	4	1.2	50	4	D-67
HGLRS	4015-05-060	4	1.5	R0.5	6	1.2	50	4	D-49
HLRS	4015-05-060	4	1.5	R0.5	6	1.2	50	4	D-67
HGLRS	4015-05-080	4	1.5	R0.5	8	1.2	50	4	D-49
HLRS	4015-05-080	4	1.5	R0.5	8	1.2	50	4	D-67
HGLRS	4015-05-100	4	1.5	R0.5	10	1.2	50	4	D-49
HLRS	4015-05-100	4	1.5	R0.5	10	1.2	50	4	D-67
HGLRS	4015-05-120	4	1.5	R0.5	12	1.2	50	4	D-49
HLRS	4015-05-120	4	1.5	R0.5	12	1.2	55	4	D-67
HLRS	4015-05-160	4	1.5	R0.5	16	1.2	60	4	D-67
HLRS	4015-05-180	4	1.5	R0.5	18	1.2	60	4	D-67
HLRS	4018-02-080	4	1.8	R0.2	8	1.44	50	4	D-69
HLRS	4018-02-100	4	1.8	R0.2	10	1.44	50	4	D-69
HLRS	4018-02-120	4	1.8	R0.2	12	1.44	55	4	D-69

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4018-02-140	4	1.8	R0.2	14	1.44	55	4	D-69
HLRS	4018-02-160	4	1.8	R0.2	16	1.44	60	4	D-69
HLRS	2020-005-040	2	2	R0.05	4	2	50	4	D-7
CLRS	2020-005-040	2	2	R0.05	4	2	50	4	D-28
HLRS	2020-005-060	2	2	R0.05	6	2	50	4	D-7
CLRS	2020-005-060	2	2	R0.05	6	2	50	4	D-28
HLRS	2020-005-080	2	2	R0.05	8	2	50	4	D-7
CLRS	2020-005-080	2	2	R0.05	8	2	50	4	D-28
HLRS	2020-005-100	2	2	R0.05	10	2	50	4	D-7
CLRS	2020-005-100	2	2	R0.05	10	2	50	4	D-28
HLRS	2020-01-040	2	2	R0.1	4	2	50	4	D-7
HLRS	2020-01-040E	2	2	R0.1	4	2	50	4	D-7
CLRS	2020-01-040	2	2	R0.1	4	2	50	4	D-28
HLRS	2020-01-060	2	2	R0.1	6	2	50	4	D-7
HLRS	2020-01-060E	2	2	R0.1	6	2	50	4	D-7
CLRS	2020-01-060	2	2	R0.1	6	2	50	4	D-28
HLRS	2020-01-080	2	2	R0.1	8	2	50	4	D-7
HLRS	2020-01-080E	2	2	R0.1	8	2	50	4	D-7
CLRS	2020-01-080	2	2	R0.1	8	2	50	4	D-28
DLCLRS	2020-01-080	2	2	R0.1	8	2	50	4	D-37
HLRS	2020-01-100	2	2	R0.1	10	2	50	4	D-7
HLRS	2020-01-100E	2	2	R0.1	10	2	50	4	D-7
CLRS	2020-01-100	2	2	R0.1	10	2	50	4	D-28
CLRS	2020-01-120	2	2	R0.1	12	2	50	4	D-28
DLCLRS	2020-01-120	2	2	R0.1	12	2	50	4	D-37
HLRS	2020-01-120	2	2	R0.1	12	2	55	4	D-7
HLRS	2020-01-120E	2	2	R0.1	12	2	55	4	D-7
DLCLRS	2020-01-160	2	2	R0.1	16	2	50	4	D-37
HLRS	2020-01-160	2	2	R0.1	16	2	60	4	D-7
CLRS	2020-01-160	2	2	R0.1	16	2	60	4	D-28
HLRS	2020-01-200	2	2	R0.1	20	2	60	4	D-7
HLRS	2020-01-260	2	2	R0.1	26	2	70	4	D-7
HLRS	2020-01-300	2	2	R0.1	30	2	70	4	D-7
C-CRS	2020-02	2	2	R0.2	–	4	45	4	C-1
HLRS	2020-02-040	2	2	R0.2	4	2	50	4	D-7
HLRS	2020-02-040E	2	2	R0.2	4	2	50	4	D-7
CLRS	2020-02-040	2	2	R0.2	4	2	50	4	D-28
HLRS	2020-02-060	2	2	R0.2	6	2	50	4	D-7
HLRS	2020-02-060E	2	2	R0.2	6	2	50	4	D-7
CLRS	2020-02-060	2	2	R0.2	6	2	50	4	D-28

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2020-02-080	2	2	R0.2	8	2	50	4	D-7
HLRS	2020-02-080E	2	2	R0.2	8	2	50	4	D-7
CLRS	2020-02-080	2	2	R0.2	8	2	50	4	D-28
DLCLRS	2020-02-080	2	2	R0.2	8	2	50	4	D-37
HLRS	2020-02-100	2	2	R0.2	10	2	50	4	D-7
HLRS	2020-02-100E	2	2	R0.2	10	2	50	4	D-7
CLRS	2020-02-100	2	2	R0.2	10	2	50	4	D-28
CLRS	2020-02-120	2	2	R0.2	12	2	50	4	D-28
DLCLRS	2020-02-120	2	2	R0.2	12	2	50	4	D-37
HLRS	2020-02-120	2	2	R0.2	12	2	55	4	D-9
HLRS	2020-02-120E	2	2	R0.2	12	2	55	4	D-9
DLCLRS	2020-02-160	2	2	R0.2	16	2	50	4	D-37
HLRS	2020-02-160	2	2	R0.2	16	2	60	4	D-9
CLRS	2020-02-160	2	2	R0.2	16	2	60	4	D-28
HLRS	2020-02-200	2	2	R0.2	20	2	60	4	D-9
HLRS	2020-02-260	2	2	R0.2	26	2	70	4	D-9
HLRS	2020-02-300	2	2	R0.2	30	2	70	4	D-9
C-CRS	2020-03	2	2	R0.3	–	4	45	4	C-1
HLRS	2020-03-040	2	2	R0.3	4	2	50	4	D-9
HLRS	2020-03-040E	2	2	R0.3	4	2	50	4	D-9
CLRS	2020-03-040	2	2	R0.3	4	2	50	4	D-28
HLRS	2020-03-060	2	2	R0.3	6	2	50	4	D-9
HLRS	2020-03-060E	2	2	R0.3	6	2	50	4	D-9
CLRS	2020-03-060	2	2	R0.3	6	2	50	4	D-28
HLRS	2020-03-080	2	2	R0.3	8	2	50	4	D-9
HLRS	2020-03-080E	2	2	R0.3	8	2	50	4	D-9
CLRS	2020-03-080	2	2	R0.3	8	2	50	4	D-28
HLRS	2020-03-100	2	2	R0.3	10	2	50	4	D-9
HLRS	2020-03-100E	2	2	R0.3	10	2	50	4	D-9
CLRS	2020-03-100	2	2	R0.3	10	2	50	4	D-28
CLRS	2020-03-120	2	2	R0.3	12	2	50	4	D-28
HLRS	2020-03-120	2	2	R0.3	12	2	55	4	D-9
HLRS	2020-03-120E	2	2	R0.3	12	2	55	4	D-9
HLRS	2020-03-160	2	2	R0.3	16	2	60	4	D-9
CLRS	2020-03-160	2	2	R0.3	16	2	60	4	D-28
HLRS	2020-03-200	2	2	R0.3	20	2	60	4	D-9
HLRS	2020-03-260	2	2	R0.3	26	2	70	4	D-9
HLRS	2020-03-300	2	2	R0.3	30	2	70	4	D-9
C-CRS	2020-05	2	2	R0.5	–	4	45	4	C-1
HLRS	2020-05-040	2	2	R0.5	4	2	50	4	D-9

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2020-05-040E	2	2	R0.5	4	2	50	4	D-9
CLRS	2020-05-040	2	2	R0.5	4	2	50	4	D-28
HLRS	2020-05-060	2	2	R0.5	6	2	50	4	D-9
HLRS	2020-05-060E	2	2	R0.5	6	2	50	4	D-9
CLRS	2020-05-060	2	2	R0.5	6	2	50	4	D-28
HLRS	2020-05-080	2	2	R0.5	8	2	50	4	D-9
HLRS	2020-05-080E	2	2	R0.5	8	2	50	4	D-9
CLRS	2020-05-080	2	2	R0.5	8	2	50	4	D-28
HLRS	2020-05-100	2	2	R0.5	10	2	50	4	D-9
HLRS	2020-05-100E	2	2	R0.5	10	2	50	4	D-9
CLRS	2020-05-100	2	2	R0.5	10	2	50	4	D-28
CLRS	2020-05-120	2	2	R0.5	12	2	50	4	D-28
HLRS	2020-05-120	2	2	R0.5	12	2	55	4	D-9
HLRS	2020-05-120E	2	2	R0.5	12	2	55	4	D-9
HLRS	2020-05-160	2	2	R0.5	16	2	60	4	D-9
CLRS	2020-05-160	2	2	R0.5	16	2	60	4	D-28
HLRS	2020-05-200	2	2	R0.5	20	2	60	4	D-9
HLRS	2020-05-260	2	2	R0.5	26	2	70	4	D-9
HLRS	2020-05-300	2	2	R0.5	30	2	70	4	D-9
HGLRS	4020-002-040	4	2	R0.02	4	1.6	50	4	D-49
HLRS	4020-002-040	4	2	R0.02	4	1.6	50	4	D-69
HGLRS	4020-002-060	4	2	R0.02	6	1.6	50	4	D-49
HLRS	4020-002-060	4	2	R0.02	6	1.6	50	4	D-69
HGLRS	4020-002-080	4	2	R0.02	8	1.6	50	4	D-49
HLRS	4020-002-080	4	2	R0.02	8	1.6	50	4	D-69
HGLRS	4020-002-100	4	2	R0.02	10	1.6	50	4	D-49
HLRS	4020-002-100	4	2	R0.02	10	1.6	50	4	D-69
HLRS	4020-002-120	4	2	R0.02	12	1.6	55	4	D-69
HLRS	4020-002-160	4	2	R0.02	16	1.6	60	4	D-69
HLRS	4020-002-200	4	2	R0.02	20	1.6	60	4	D-69
HGLRS	4020-005-040	4	2	R0.05	4	1.6	50	4	D-49
HLRS	4020-005-040	4	2	R0.05	4	1.6	50	4	D-69
HGLRS	4020-005-060	4	2	R0.05	6	1.6	50	4	D-49
HLRS	4020-005-060	4	2	R0.05	6	1.6	50	4	D-69
HGLRS	4020-005-080	4	2	R0.05	8	1.6	50	4	D-49
HLRS	4020-005-080	4	2	R0.05	8	1.6	50	4	D-69
HGLRS	4020-005-100	4	2	R0.05	10	1.6	50	4	D-49
HLRS	4020-005-100	4	2	R0.05	10	1.6	50	4	D-69
DCLRS	4020-005-100	4	2	R0.05	10	4	50	4	D-100
HLRS	4020-005-120	4	2	R0.05	12	1.6	55	4	D-69

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4020-005-160	4	2	R0.05	16	1.6	60	4	D-69
HLRS	4020-005-200	4	2	R0.05	20	1.6	60	4	D-69
DCLRS	4020-005-200	4	2	R0.05	20	4	60	4	D-100
CXERS	4020-01-050	4	2	R0.1	–	5	50	4	C-9
HGLRS	4020-01-040	4	2	R0.1	4	1.6	50	4	D-49
HLRS	4020-01-040	4	2	R0.1	4	1.6	50	4	D-69
HGLRS	4020-01-060	4	2	R0.1	6	1.6	50	4	D-49
HLRS	4020-01-060	4	2	R0.1	6	1.6	50	4	D-69
HGLRS	4020-01-080	4	2	R0.1	8	1.6	50	4	D-49
HLRS	4020-01-080	4	2	R0.1	8	1.6	50	4	D-69
HGLRS	4020-01-100	4	2	R0.1	10	1.6	50	4	D-49
HLRS	4020-01-100	4	2	R0.1	10	1.6	50	4	D-69
HGLRS	4020-01-120	4	2	R0.1	12	1.6	50	4	D-49
HLRS	4020-01-120	4	2	R0.1	12	1.6	55	4	D-69
HGLRS	4020-01-160	4	2	R0.1	16	1.6	60	4	D-49
HLRS	4020-01-160	4	2	R0.1	16	1.6	60	4	D-69
HGLRS	4020-01-200	4	2	R0.1	20	1.6	60	4	D-49
HLRS	4020-01-200	4	2	R0.1	20	1.6	60	4	D-69
HLRS	4020-01-240	4	2	R0.1	24	1.6	70	4	D-69
CXERS	4020-02-050	4	2	R0.2	–	5	50	4	C-9
HGLRS	4020-02-040	4	2	R0.2	4	1.6	50	4	D-49
HLRS	4020-02-040	4	2	R0.2	4	1.6	50	4	D-69
HGLRS	4020-02-060	4	2	R0.2	6	1.6	50	4	D-49
HLRS	4020-02-060	4	2	R0.2	6	1.6	50	4	D-69
HGLRS	4020-02-080	4	2	R0.2	8	1.6	50	4	D-49
HLRS	4020-02-080	4	2	R0.2	8	1.6	50	4	D-69
HGLRS	4020-02-100	4	2	R0.2	10	1.6	50	4	D-49
HLRS	4020-02-100	4	2	R0.2	10	1.6	50	4	D-69
DCLRS	4020-02-100	4	2	R0.2	10	4	50	4	D-100
HGLRS	4020-02-120	4	2	R0.2	12	1.6	50	4	D-49
HLRS	4020-02-120	4	2	R0.2	12	1.6	55	4	D-69
HGLRS	4020-02-160	4	2	R0.2	16	1.6	60	4	D-49
HLRS	4020-02-160	4	2	R0.2	16	1.6	60	4	D-69
HGLRS	4020-02-200	4	2	R0.2	20	1.6	60	4	D-49
HLRS	4020-02-200	4	2	R0.2	20	1.6	60	4	D-69
DCLRS	4020-02-200	4	2	R0.2	20	4	60	4	D-100
HLRS	4020-02-240	4	2	R0.2	24	1.6	70	4	D-69
DCLRS	4020-02-300	4	2	R0.2	30	4	80	4	D-100
CXERS	4020-03-050	4	2	R0.3	–	5	50	4	C-9
HGLRS	4020-03-040	4	2	R0.3	4	1.6	50	4	D-49
HLRS	4020-03-040	4	2	R0.3	4	1.6	50	4	D-69
HGLRS	4020-03-060	4	2	R0.3	6	1.6	50	4	D-49
HLRS	4020-03-060	4	2	R0.3	6	1.6	50	4	D-69
HRRS	4020-03-06S	4	2	R0.3	6	2	45	4	D-91
HRRS	4020-03-06	4	2	R0.3	6	2	70	4	D-85
HGLRS	4020-03-080	4	2	R0.3	8	1.6	50	4	D-49
HLRS	4020-03-080	4	2	R0.3	8	1.6	50	4	D-69
HGLRS	4020-03-100	4	2	R0.3	10	1.6	50	4	D-49
HLRS	4020-03-100	4	2	R0.3	10	1.6	50	4	D-69
HGLRS	4020-03-120	4	2	R0.3	12	1.6	50	4	D-49
HLRS	4020-03-120	4	2	R0.3	12	1.6	55	4	D-69
HGLRS	4020-03-160	4	2	R0.3	16	1.6	60	4	D-49
HLRS	4020-03-160	4	2	R0.3	16	1.6	60	4	D-69
HGLRS	4020-03-200	4	2	R0.3	20	1.6	60	4	D-49
HLRS	4020-03-200	4	2	R0.3	20	1.6	60	4	D-69
HLRS	4020-03-240	4	2	R0.3	24	1.6	70	4	D-69
CXERS	4020-05-050	4	2	R0.5	–	5	50	4	C-9
HGLRS	4020-05-040	4	2	R0.5	4	1.6	50	4	D-51
HLRS	4020-05-040	4	2	R0.5	4	1.6	50	4	D-71
HGLRS	4020-05-060	4	2	R0.5	6	1.6	50	4	D-51
HLRS	4020-05-060	4	2	R0.5	6	1.6	50	4	D-71
HRRS	4020-05-06S	4	2	R0.5	6	2	45	4	D-91
HRRS	4020-05-06	4	2	R0.5	6	2	70	4	D-85
CRRS	4020-05-06	4	2	R0.5	6	2	70	4	D-93
HGLRS	4020-05-080	4	2	R0.5	8	1.6	50	4	D-51
HLRS	4020-05-080	4	2	R0.5	8	1.6	50	4	D-71
HGLRS	4020-05-100	4	2	R0.5	10	1.6	50	4	D-51
HLRS	4020-05-100	4	2	R0.5	10	1.6	50	4	D-71
DCLRS	4020-05-100	4	2	R0.5	10	4	50	4	D-100
HGLRS	4020-05-120	4	2	R0.5	12	1.6	50	4	D-51
HLRS	4020-05-120	4	2	R0.5	12	1.6	55	4	D-71
HGLRS	4020-05-160	4	2	R0.5	16	1.6	60	4	D-51
HLRS	4020-05-160	4	2	R0.5	16	1.6	60	4	D-71
HGLRS	4020-05-200	4	2	R0.5	20	1.6	60	4	D-51
HLRS	4020-05-200	4	2	R0.5	20	1.6	60	4	D-71
DCLRS	4020-05-200	4	2	R0.5	20	4	60	4	D-100
HLRS	4020-05-240	4	2	R0.5	24	1.6	70	4	D-71
HLRS	4020-05-260	4	2	R0.5	26	1.6	70	4	D-71
HLRS	4020-05-300	4	2	R0.5	30	1.6	70	4	D-71
DCLRS	4020-05-300	4	2	R0.5	30	4	80	4	D-100

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HGRRS	5020-05-06	5	2	R0.5	6	1	50	4	D-112
HLRS	2025-01-100	2	2.5	R0.1	10	2.5	50	4	D-9
HLRS	2025-01-200	2	2.5	R0.1	20	2.5	60	4	D-9
HLRS	2025-01-300	2	2.5	R0.1	30	2.5	70	4	D-9
C-CRS	2025-02	2	2.5	R0.2	–	5	45	4	C-1
HLRS	2025-02-100	2	2.5	R0.2	10	2.5	50	4	D-9
HLRS	2025-02-200	2	2.5	R0.2	20	2.5	60	4	D-9
HLRS	2025-02-300	2	2.5	R0.2	30	2.5	70	4	D-9
C-CRS	2025-03	2	2.5	R0.3	–	5	45	4	C-1
HLRS	2025-03-100	2	2.5	R0.3	10	2.5	50	4	D-9
HLRS	2025-03-200	2	2.5	R0.3	20	2.5	60	4	D-9
HLRS	2025-03-300	2	2.5	R0.3	30	2.5	70	4	D-9
C-CRS	2025-05	2	2.5	R0.5	–	5	45	4	C-1
HLRS	2025-05-100	2	2.5	R0.5	10	2.5	50	4	D-9
HLRS	2025-05-200	2	2.5	R0.5	20	2.5	60	4	D-9
HLRS	2025-05-300	2	2.5	R0.5	30	2.5	70	4	D-9
HLRS	4025-01-060	4	2.5	R0.1	6	2	50	4	D-71
HLRS	4025-01-080	4	2.5	R0.1	8	2	50	4	D-71
HLRS	4025-01-100	4	2.5	R0.1	10	2	50	4	D-71
HLRS	4025-01-160	4	2.5	R0.1	16	2	60	4	D-71
HLRS	4025-01-200	4	2.5	R0.1	20	2	60	4	D-71
HLRS	4025-01-300	4	2.5	R0.1	30	2	70	4	D-71
HLRS	4025-02-060	4	2.5	R0.2	6	2	50	4	D-71
HLRS	4025-02-080	4	2.5	R0.2	8	2	50	4	D-71
HLRS	4025-02-100	4	2.5	R0.2	10	2	50	4	D-71
HLRS	4025-02-160	4	2.5	R0.2	16	2	60	4	D-71
HLRS	4025-02-200	4	2.5	R0.2	20	2	60	4	D-71
HLRS	4025-02-300	4	2.5	R0.2	30	2	70	4	D-71
CXERS	4025-03-0625	4	2.5	R0.3	–	6.25	50	4	C-9
HLRS	4025-03-060	4	2.5	R0.3	6	2	50	4	D-71
HLRS	4025-03-080	4	2.5	R0.3	8	2	50	4	D-71
HLRS	4025-03-100	4	2.5	R0.3	10	2	50	4	D-71
HLRS	4025-03-160	4	2.5	R0.3	16	2	60	4	D-71
HLRS	4025-03-200	4	2.5	R0.3	20	2	60	4	D-71
HLRS	4025-03-300	4	2.5	R0.3	30	2	70	4	D-71
CXERS	4025-05-0625	4	2.5	R0.5	–	6.25	50	4	C-9
HLRS	4025-05-060	4	2.5	R0.5	6	2	50	4	D-71
HLRS	4025-05-080	4	2.5	R0.5	8	2	50	4	D-71
HLRS	4025-05-100	4	2.5	R0.5	10	2	50	4	D-71
HLRS	4025-05-160	4	2.5	R0.5	16	2	60	4	D-71

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4025-05-200	4	2.5	R0.5	20	2	60	4	D-71
HLRS	4025-05-300	4	2.5	R0.5	30	2	70	4	D-71
CLRS	2030-01-060	2	3	R0.1	6	2	50	6	D-29
HLRS	2030-01-060	2	3	R0.1	6	3	55	6	D-11
HLRS	2030-01-060E	2	3	R0.1	6	3	55	6	D-11
CLRS	2030-01-100	2	3	R0.1	10	2	50	6	D-29
CLRS	2030-01-120	2	3	R0.1	12	2	60	6	D-29
HLRS	2030-01-120	2	3	R0.1	12	3	55	6	D-11
CLRS	2030-01-160	2	3	R0.1	16	2	60	6	D-29
HLRS	2030-01-160	2	3	R0.1	16	3	60	6	D-11
HLRS	2030-01-160E	2	3	R0.1	16	3	60	6	D-11
HLRS	2030-01-180	2	3	R0.1	18	3	60	6	D-11
CLRS	2030-01-200	2	3	R0.1	20	2	60	6	D-29
HLRS	2030-01-200	2	3	R0.1	20	3	60	6	D-11
CLRS	2030-01-250	2	3	R0.1	25	2	70	6	D-29
HLRS	2030-01-260	2	3	R0.1	26	3	70	6	D-11
HLRS	2030-01-300	2	3	R0.1	30	3	70	6	D-11
HLRS	2030-01-360	2	3	R0.1	36	3	80	6	D-11
C-CRS	2030-02	2	3	R0.2	–	10	45	6	C-1
CLRS	2030-02-060	2	3	R0.2	6	3	50	6	D-29
HLRS	2030-02-060	2	3	R0.2	6	3	55	6	D-11
HLRS	2030-02-060E	2	3	R0.2	6	3	55	6	D-11
CLRS	2030-02-100	2	3	R0.2	10	3	50	6	D-29
HLRS	2030-02-120	2	3	R0.2	12	3	55	6	D-11
CLRS	2030-02-120	2	3	R0.2	12	3	60	6	D-29
DLCLRS	2030-02-120	2	3	R0.2	12	3	60	6	D-37
HLRS	2030-02-160	2	3	R0.2	16	3	60	6	D-11
HLRS	2030-02-160E	2	3	R0.2	16	3	60	6	D-11
CLRS	2030-02-160	2	3	R0.2	16	3	60	6	D-29
HLRS	2030-02-180	2	3	R0.2	18	3	60	6	D-11
HLRS	2030-02-200	2	3	R0.2	20	3	60	6	D-11
CLRS	2030-02-200	2	3	R0.2	20	3	60	6	D-29
DLCLRS	2030-02-200	2	3	R0.2	20	3	60	6	D-37
CLRS	2030-02-250	2	3	R0.2	25	3	70	6	D-29
HLRS	2030-02-260	2	3	R0.2	26	3	70	6	D-11
HLRS	2030-02-300	2	3	R0.2	30	3	70	6	D-11
HLRS	2030-02-360	2	3	R0.2	36	3	80	6	D-11
C-CRS	2030-03	2	3	R0.3	–	10	45	6	C-1
CLRS	2030-03-060	2	3	R0.3	6	3	50	6	D-29
HLRS	2030-03-060	2	3	R0.3	6	3	55	6	D-11

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2030-03-060E	2	3	R0.3	6	3	55	6	D-11
CLRS	2030-03-100	2	3	R0.3	10	3	50	6	D-29
HLRS	2030-03-120	2	3	R0.3	12	3	55	6	D-11
CLRS	2030-03-120	2	3	R0.3	12	3	60	6	D-29
DLCLRS	2030-03-120	2	3	R0.3	12	3	60	6	D-37
HLRS	2030-03-160	2	3	R0.3	16	3	60	6	D-11
HLRS	2030-03-160E	2	3	R0.3	16	3	60	6	D-11
CLRS	2030-03-160	2	3	R0.3	16	3	60	6	D-29
HLRS	2030-03-180	2	3	R0.3	18	3	60	6	D-11
HLRS	2030-03-200	2	3	R0.3	20	3	60	6	D-11
CLRS	2030-03-200	2	3	R0.3	20	3	60	6	D-29
DLCLRS	2030-03-200	2	3	R0.3	20	3	60	6	D-37
CLRS	2030-03-250	2	3	R0.3	25	3	70	6	D-29
HLRS	2030-03-260	2	3	R0.3	26	3	70	6	D-11
HLRS	2030-03-300	2	3	R0.3	30	3	70	6	D-11
HLRS	2030-03-360	2	3	R0.3	36	3	80	6	D-11
C-CRS	2030-05	2	3	R0.5	–	10	45	6	C-1
CLRS	2030-05-060	2	3	R0.5	6	3	50	6	D-29
HLRS	2030-05-060	2	3	R0.5	6	3	55	6	D-11
HLRS	2030-05-060E	2	3	R0.5	6	3	55	6	D-11
CLRS	2030-05-100	2	3	R0.5	10	3	50	6	D-29
HLRS	2030-05-120	2	3	R0.5	12	3	55	6	D-11
CLRS	2030-05-120	2	3	R0.5	12	3	60	6	D-29
DLCLRS	2030-05-120	2	3	R0.5	12	3	60	6	D-37
HLRS	2030-05-160	2	3	R0.5	16	3	60	6	D-11
HLRS	2030-05-160E	2	3	R0.5	16	3	60	6	D-11
CLRS	2030-05-160	2	3	R0.5	16	3	60	6	D-29
HLRS	2030-05-180	2	3	R0.5	18	3	60	6	D-11
HLRS	2030-05-200	2	3	R0.5	20	3	60	6	D-11
CLRS	2030-05-200	2	3	R0.5	20	3	60	6	D-29
DLCLRS	2030-05-200	2	3	R0.5	20	3	60	6	D-37
CLRS	2030-05-250	2	3	R0.5	25	3	70	6	D-29
HLRS	2030-05-260	2	3	R0.5	26	3	70	6	D-11
HLRS	2030-05-300	2	3	R0.5	30	3	70	6	D-11
HLRS	2030-05-360	2	3	R0.5	36	3	80	6	D-11
C-CRS	2030-10	2	3	R1	–	10	45	6	C-1
CLRS	2030-10-060	2	3	R1	6	3	50	6	D-29
HLRS	2030-10-060	2	3	R1	6	3	55	6	D-13
HLRS	2030-10-060E	2	3	R1	6	3	55	6	D-13
CLRS	2030-10-100	2	3	R1	10	3	50	6	D-29

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2030-10-120	2	3	R1	12	3	55	6	D-13
CLRS	2030-10-120	2	3	R1	12	3	60	6	D-29
HLRS	2030-10-160	2	3	R1	16	3	60	6	D-13
HLRS	2030-10-160E	2	3	R1	16	3	60	6	D-13
CLRS	2030-10-160	2	3	R1	16	3	60	6	D-29
HLRS	2030-10-180	2	3	R1	18	3	60	6	D-13
HLRS	2030-10-200	2	3	R1	20	3	60	6	D-13
CLRS	2030-10-200	2	3	R1	20	3	60	6	D-29
CLRS	2030-10-250	2	3	R1	25	3	70	6	D-29
HLRS	2030-10-260	2	3	R1	26	3	70	6	D-13
HLRS	2030-10-300	2	3	R1	30	3	70	6	D-13
HLRS	2030-10-360	2	3	R1	36	3	80	6	D-13
HGLRS	4030-005-040	4	3	R0.05	4	2.4	50	6	D-51
HLRS	4030-005-040	4	3	R0.05	4	2.4	55	6	D-73
HGLRS	4030-005-060	4	3	R0.05	6	2.4	50	6	D-51
HLRS	4030-005-060	4	3	R0.05	6	2.4	55	6	D-73
HGLRS	4030-005-080	4	3	R0.05	8	2.4	50	6	D-51
HLRS	4030-005-080	4	3	R0.05	8	2.4	55	6	D-73
HGLRS	4030-005-100	4	3	R0.05	10	2.4	50	6	D-51
HLRS	4030-005-100	4	3	R0.05	10	2.4	55	6	D-73
HGLRS	4030-005-120	4	3	R0.05	12	2.4	50	6	D-51
HLRS	4030-005-120	4	3	R0.05	12	2.4	55	6	D-73
HGLRS	4030-005-160	4	3	R0.05	16	2.4	60	6	D-51
HLRS	4030-005-160	4	3	R0.05	16	2.4	60	6	D-73
DCLRS	4030-005-160	4	3	R0.05	16	6	60	4	D-100
HGLRS	4030-005-200	4	3	R0.05	20	2.4	60	6	D-51
HLRS	4030-005-200	4	3	R0.05	20	2.4	60	6	D-73
DCLRS	4030-005-200	4	3	R0.05	20	6	60	4	D-100
DCLRS	4030-005-300	4	3	R0.05	30	6	80	4	D-100
HMERS	4030-01-075	4	3	R0.1	–	7.5	60	6	C-20
HGLRS	4030-01-040	4	3	R0.1	4	2.4	50	6	D-51
HLRS	4030-01-040	4	3	R0.1	4	2.4	55	6	D-73
HGLRS	4030-01-060	4	3	R0.1	6	2.4	50	6	D-51
HLRS	4030-01-060	4	3	R0.1	6	2.4	55	6	D-73
HGLRS	4030-01-080	4	3	R0.1	8	2.4	50	6	D-51
HLRS	4030-01-080	4	3	R0.1	8	2.4	55	6	D-73
HGLRS	4030-01-100	4	3	R0.1	10	2.4	50	6	D-51
HLRS	4030-01-100	4	3	R0.1	10	2.4	55	6	D-73
HHRS	4030-01-100	4	3	R0.1	10	3	60	6	D-107
HGLRS	4030-01-120	4	3	R0.1	12	2.4	50	6	D-51

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4030-01-120	4	3	R0.1	12	2.4	55	6	D-73
HGLRS	4030-01-160	4	3	R0.1	16	2.4	60	6	D-51
HLRS	4030-01-160	4	3	R0.1	16	2.4	60	6	D-73
HLRS	4030-01-180	4	3	R0.1	18	2.4	60	6	D-73
HGLRS	4030-01-200	4	3	R0.1	20	2.4	60	6	D-51
HLRS	4030-01-200	4	3	R0.1	20	2.4	60	6	D-73
HLRS	4030-01-240	4	3	R0.1	24	2.4	70	6	D-73
HLRS	4030-01-260	4	3	R0.1	26	2.4	70	6	D-73
HLRS	4030-01-300	4	3	R0.1	30	2.4	70	6	D-73
HMERS	4030-02-075	4	3	R0.2	–	7.5	60	6	C-20
CXERS	4030-02-075	4	3	R0.2	–	7.5	60	6	C-9
HGLRS	4030-02-040	4	3	R0.2	4	2.4	50	6	D-51
HLRS	4030-02-040	4	3	R0.2	4	2.4	55	6	D-73
HGLRS	4030-02-060	4	3	R0.2	6	2.4	50	6	D-51
HLRS	4030-02-060	4	3	R0.2	6	2.4	55	6	D-73
HGLRS	4030-02-080	4	3	R0.2	8	2.4	50	6	D-51
HLRS	4030-02-080	4	3	R0.2	8	2.4	55	6	D-73
HGLRS	4030-02-100	4	3	R0.2	10	2.4	50	6	D-51
HLRS	4030-02-100	4	3	R0.2	10	2.4	55	6	D-73
HHRS	4030-02-100	4	3	R0.2	10	3	60	6	D-107
HGLRS	4030-02-120	4	3	R0.2	12	2.4	50	6	D-51
HLRS	4030-02-120	4	3	R0.2	12	2.4	55	6	D-73
HGLRS	4030-02-160	4	3	R0.2	16	2.4	60	6	D-51
HLRS	4030-02-160	4	3	R0.2	16	2.4	60	6	D-73
DCLRS	4030-02-160	4	3	R0.2	16	6	60	4	D-100
HLRS	4030-02-180	4	3	R0.2	18	2.4	60	6	D-73
HGLRS	4030-02-200	4	3	R0.2	20	2.4	60	6	D-51
HLRS	4030-02-200	4	3	R0.2	20	2.4	60	6	D-73
DCLRS	4030-02-200	4	3	R0.2	20	6	60	4	D-100
HLRS	4030-02-240	4	3	R0.2	24	2.4	70	6	D-73
HLRS	4030-02-260	4	3	R0.2	26	2.4	70	6	D-73
HLRS	4030-02-300	4	3	R0.2	30	2.4	70	6	D-73
DCLRS	4030-02-300	4	3	R0.2	30	6	80	4	D-100
HLRS	4030-02-360	4	3	R0.2	36	2.4	80	6	D-73
HMERS	4030-03-075	4	3	R0.3	–	7.5	60	6	C-20
CXERS	4030-03-075	4	3	R0.3	–	7.5	60	6	C-9
HGLRS	4030-03-040	4	3	R0.3	4	2.4	50	6	D-51
HLRS	4030-03-040	4	3	R0.3	4	2.4	55	6	D-73
HGLRS	4030-03-060	4	3	R0.3	6	2.4	50	6	D-51
HLRS	4030-03-060	4	3	R0.3	6	2.4	55	6	D-73
HGLRS	4030-03-080	4	3	R0.3	8	2.4	50	6	D-51
HLRS	4030-03-080	4	3	R0.3	8	2.4	55	6	D-73
HGLRS	4030-03-100	4	3	R0.3	10	2.4	50	6	D-51
HLRS	4030-03-100	4	3	R0.3	10	2.4	55	6	D-73
HGLRS	4030-03-120	4	3	R0.3	12	2.4	50	6	D-51
HLRS	4030-03-120	4	3	R0.3	12	2.4	55	6	D-73
HLRS	4030-03-140	4	3	R0.3	14	2.4	55	6	D-73
HGLRS	4030-03-160	4	3	R0.3	16	2.4	60	6	D-51
HLRS	4030-03-160	4	3	R0.3	16	2.4	60	6	D-73
HGLRS	4030-03-200	4	3	R0.3	20	2.4	60	6	D-51
HLRS	4030-03-200	4	3	R0.3	20	2.4	60	6	D-73
HLRS	4030-03-240	4	3	R0.3	24	2.4	70	6	D-73
HLRS	4030-03-260	4	3	R0.3	26	2.4	70	6	D-73
HLRS	4030-03-300	4	3	R0.3	30	2.4	70	6	D-73
HLRS	4030-03-360	4	3	R0.3	36	2.4	80	6	D-73
HMERS	4030-05-075	4	3	R0.5	–	7.5	60	6	C-20
CXERS	4030-05-075	4	3	R0.5	–	7.5	60	6	C-9
HGLRS	4030-05-040	4	3	R0.5	4	2.4	50	6	D-51
HLRS	4030-05-040	4	3	R0.5	4	2.4	55	6	D-75
HGLRS	4030-05-060	4	3	R0.5	6	2.4	50	6	D-51
HLRS	4030-05-060	4	3	R0.5	6	2.4	55	6	D-75
HGLRS	4030-05-080	4	3	R0.5	8	2.4	50	6	D-51
HLRS	4030-05-080	4	3	R0.5	8	2.4	55	6	D-75
HGLRS	4030-05-100	4	3	R0.5	10	2.4	50	6	D-51
HLRS	4030-05-100	4	3	R0.5	10	2.4	55	6	D-75
HHRS	4030-05-100	4	3	R0.5	10	3	60	6	D-107
HGLRS	4030-05-120	4	3	R0.5	12	2.4	50	6	D-51
HLRS	4030-05-120	4	3	R0.5	12	2.4	55	6	D-75
HGLRS	4030-05-160	4	3	R0.5	16	2.4	60	6	D-51
HLRS	4030-05-160	4	3	R0.5	16	2.4	60	6	D-75
DCLRS	4030-05-160	4	3	R0.5	16	6	60	4	D-100
HGLRS	4030-05-200	4	3	R0.5	20	2.4	60	6	D-51
HLRS	4030-05-200	4	3	R0.5	20	2.4	60	6	D-75
DCLRS	4030-05-200	4	3	R0.5	20	6	60	4	D-100
HLRS	4030-05-240	4	3	R0.5	24	2.4	70	6	D-75
HLRS	4030-05-260	4	3	R0.5	26	2.4	70	6	D-75
HLRS	4030-05-300	4	3	R0.5	30	2.4	70	6	D-75
DCLRS	4030-05-300	4	3	R0.5	30	6	80	4	D-100
HLRS	4030-05-360	4	3	R0.5	36	2.4	80	6	D-75
HRRS	4030-08-09-3S	4	3	R0.8	9	3	50	3	D-91

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HRRS	4030-08-09S	4	3	R0.8	9	3	50	6	D-91
HRRS	4030-08-09-3	4	3	R0.8	9	3	70	3	D-85
HRRS	4030-08-09	4	3	R0.8	9	3	70	6	D-85
CRRS	4030-08-09	4	3	R0.8	9	3	70	6	D-93
HGLRS	4030-10-060	4	3	R1	6	2.4	50	6	D-53
HLRS	4030-10-060	4	3	R1	6	2.4	55	6	D-75
HGLRS	4030-10-080	4	3	R1	8	2.4	50	6	D-53
HLRS	4030-10-080	4	3	R1	8	2.4	55	6	D-75
HGLRS	4030-10-100	4	3	R1	10	2.4	50	6	D-53
HLRS	4030-10-100	4	3	R1	10	2.4	55	6	D-75
HGLRS	4030-10-120	4	3	R1	12	2.4	50	6	D-53
HLRS	4030-10-120	4	3	R1	12	2.4	55	6	D-75
HGLRS	4030-10-160	4	3	R1	16	2.4	60	6	D-53
HLRS	4030-10-160	4	3	R1	16	2.4	60	6	D-75
HGLRS	4030-10-200	4	3	R1	20	2.4	60	6	D-53
HLRS	4030-10-200	4	3	R1	20	2.4	60	6	D-75
HLRS	4030-10-240	4	3	R1	24	2.4	70	6	D-75
HLRS	4030-10-260	4	3	R1	26	2.4	70	6	D-75
HLRS	4030-10-300	4	3	R1	30	2.4	70	6	D-75
HLRS	4030-10-360	4	3	R1	36	2.4	80	6	D-75
CXRS	5030-05-0600	5	3	R0.5	–	6	50	6	C-16
CXRS	5030-05-0900	5	3	R0.5	–	9	50	6	C-16
CXLRS	5030-05-09	5	3	R0.5	9	6	50	6	D-104
CXLRS	5030-05-12	5	3	R0.5	12	6	50	6	D-104
HGRRS	5030-08-09	5	3	R0.8	9	1.5	60	4	D-112
CLRS	2040-01-080	2	4	R0.1	8	4	60	6	D-30
HLRS	2040-01-080	2	4	R0.1	8	4	65	6	D-13
HLRS	2040-01-080E	2	4	R0.1	8	4	65	6	D-13
CLRS	2040-01-120	2	4	R0.1	12	4	60	6	D-30
HLRS	2040-01-120	2	4	R0.1	12	4	65	6	D-13
CLRS	2040-01-160	2	4	R0.1	16	4	60	6	D-30
HLRS	2040-01-160	2	4	R0.1	16	4	65	6	D-13
HLRS	2040-01-200	2	4	R0.1	20	4	65	6	D-13
HLRS	2040-01-200E	2	4	R0.1	20	4	65	6	D-13
CLRS	2040-01-200	2	4	R0.1	20	4	70	6	D-30
HLRS	2040-01-240	2	4	R0.1	24	4	70	6	D-13
CLRS	2040-01-250	2	4	R0.1	25	4	70	6	D-30
CLRS	2040-01-300	2	4	R0.1	30	4	80	6	D-30
HLRS	2040-01-320	2	4	R0.1	32	4	80	6	D-13
HLRS	2040-01-480	2	4	R0.1	48	4	100	6	D-13

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
C-CRS	2040-02	2	4	R0.2	–	12	45	6	C-2
CLRS	2040-02-080	2	4	R0.2	8	4	60	6	D-30
HLRS	2040-02-080	2	4	R0.2	8	4	65	6	D-13
HLRS	2040-02-080E	2	4	R0.2	8	4	65	6	D-13
CLRS	2040-02-120	2	4	R0.2	12	4	60	6	D-30
HLRS	2040-02-120	2	4	R0.2	12	4	65	6	D-13
CLRS	2040-02-160	2	4	R0.2	16	4	60	6	D-30
HLRS	2040-02-160	2	4	R0.2	16	4	65	6	D-13
HLRS	2040-02-200	2	4	R0.2	20	4	65	6	D-13
HLRS	2040-02-200E	2	4	R0.2	20	4	65	6	D-13
CLRS	2040-02-200	2	4	R0.2	20	4	70	6	D-30
HLRS	2040-02-240	2	4	R0.2	24	4	70	6	D-13
CLRS	2040-02-250	2	4	R0.2	25	4	70	6	D-30
CLRS	2040-02-300	2	4	R0.2	30	4	80	6	D-30
HLRS	2040-02-320	2	4	R0.2	32	4	80	6	D-13
HLRS	2040-02-480	2	4	R0.2	48	4	100	6	D-13
C-CRS	2040-03	2	4	R0.3	–	12	45	6	C-2
CLRS	2040-03-080	2	4	R0.3	8	4	60	6	D-30
HLRS	2040-03-080	2	4	R0.3	8	4	65	6	D-13
HLRS	2040-03-080E	2	4	R0.3	8	4	65	6	D-13
CLRS	2040-03-120	2	4	R0.3	12	4	60	6	D-30
HLRS	2040-03-120	2	4	R0.3	12	4	65	6	D-13
CLRS	2040-03-160	2	4	R0.3	16	4	60	6	D-30
HLRS	2040-03-160	2	4	R0.3	16	4	65	6	D-13
HLRS	2040-03-200	2	4	R0.3	20	4	65	6	D-13
HLRS	2040-03-200E	2	4	R0.3	20	4	65	6	D-13
CLRS	2040-03-200	2	4	R0.3	20	4	70	6	D-30
HLRS	2040-03-240	2	4	R0.3	24	4	70	6	D-13
CLRS	2040-03-250	2	4	R0.3	25	4	70	6	D-30
CLRS	2040-03-300	2	4	R0.3	30	4	80	6	D-30
HLRS	2040-03-320	2	4	R0.3	32	4	80	6	D-13
HLRS	2040-03-480	2	4	R0.3	48	4	100	6	D-13
C-CRS	2040-05	2	4	R0.5	–	12	45	6	C-2
CLRS	2040-05-080	2	4	R0.5	8	4	60	6	D-30
HLRS	2040-05-080	2	4	R0.5	8	4	65	6	D-13
HLRS	2040-05-080E	2	4	R0.5	8	4	65	6	D-13
CLRS	2040-05-120	2	4	R0.5	12	4	60	6	D-30
HLRS	2040-05-120	2	4	R0.5	12	4	65	6	D-13
CLRS	2040-05-160	2	4	R0.5	16	4	60	6	D-30
HLRS	2040-05-160	2	4	R0.5	16	4	65	6	D-13

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2040-05-200	2	4	R0.5	20	4	65	6	D-13
HLRS	2040-05-200E	2	4	R0.5	20	4	65	6	D-13
CLRS	2040-05-200	2	4	R0.5	20	4	70	6	D-30
HLRS	2040-05-240	2	4	R0.5	24	4	70	6	D-13
CLRS	2040-05-250	2	4	R0.5	25	4	70	6	D-30
CLRS	2040-05-300	2	4	R0.5	30	4	80	6	D-30
HLRS	2040-05-320	2	4	R0.5	32	4	80	6	D-13
HLRS	2040-05-480	2	4	R0.5	48	4	100	6	D-13
C-CRS	2040-10	2	4	R1	–	12	45	6	C-2
CLRS	2040-10-080	2	4	R1	8	4	60	6	D-30
HLRS	2040-10-080	2	4	R1	8	4	65	6	D-15
HLRS	2040-10-080E	2	4	R1	8	4	65	6	D-15
CLRS	2040-10-120	2	4	R1	12	4	60	6	D-30
HLRS	2040-10-120	2	4	R1	12	4	65	6	D-15
CLRS	2040-10-160	2	4	R1	16	4	60	6	D-30
HLRS	2040-10-160	2	4	R1	16	4	65	6	D-15
HLRS	2040-10-200	2	4	R1	20	4	65	6	D-15
HLRS	2040-10-200E	2	4	R1	20	4	65	6	D-15
CLRS	2040-10-200	2	4	R1	20	4	70	6	D-30
HLRS	2040-10-240	2	4	R1	24	4	70	6	D-15
CLRS	2040-10-250	2	4	R1	25	4	70	6	D-30
CLRS	2040-10-300	2	4	R1	30	4	80	6	D-30
HLRS	2040-10-320	2	4	R1	32	4	80	6	D-15
HLRS	2040-10-480	2	4	R1	48	4	100	6	D-15
HGLRS	4040-005-080	4	4	R0.05	8	3.2	60	6	D-53
HLRS	4040-005-080	4	4	R0.05	8	3.2	65	6	D-75
HGLRS	4040-005-120	4	4	R0.05	12	3.2	60	6	D-53
HLRS	4040-005-120	4	4	R0.05	12	3.2	65	6	D-75
HGLRS	4040-005-160	4	4	R0.05	16	3.2	60	6	D-53
HLRS	4040-005-160	4	4	R0.05	16	3.2	65	6	D-75
HGLRS	4040-005-200	4	4	R0.05	20	3.2	70	6	D-53
HLRS	4040-005-200	4	4	R0.05	20	3.2	70	6	D-75
HLRS	4040-005-240	4	4	R0.05	24	3.2	70	6	D-75
HLRS	4040-005-320	4	4	R0.05	32	3.2	80	6	D-75
HMERS	4040-01-100	4	4	R0.1	–	10	60	6	C-20
HGLRS	4040-01-080	4	4	R0.1	8	3.2	60	6	D-53
HLRS	4040-01-080	4	4	R0.1	8	3.2	65	6	D-75
HGLRS	4040-01-120	4	4	R0.1	12	3.2	60	6	D-53
HLRS	4040-01-120	4	4	R0.1	12	3.2	65	6	D-75
HHRS	4040-01-120	4	4	R0.1	12	4	60	6	D-107

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HGLRS	4040-01-160	4	4	R0.1	16	3.2	60	6	D-53
HLRS	4040-01-160	4	4	R0.1	16	3.2	65	6	D-75
HGLRS	4040-01-200	4	4	R0.1	20	3.2	70	6	D-53
HLRS	4040-01-200	4	4	R0.1	20	3.2	70	6	D-75
HGLRS	4040-01-240	4	4	R0.1	24	3.2	70	6	D-53
HLRS	4040-01-240	4	4	R0.1	24	3.2	70	6	D-75
HGLRS	4040-01-300	4	4	R0.1	30	3.2	70	6	D-53
HLRS	4040-01-320	4	4	R0.1	32	3.2	80	6	D-75
HLRS	4040-01-480	4	4	R0.1	48	3.2	100	6	D-75
HMERS	4040-02-100	4	4	R0.2	–	10	60	6	C-20
CXERS	4040-02-100	4	4	R0.2	–	10	60	6	C-10
HGLRS	4040-02-080	4	4	R0.2	8	3.2	60	6	D-53
HLRS	4040-02-080	4	4	R0.2	8	3.2	65	6	D-75
HGLRS	4040-02-120	4	4	R0.2	12	3.2	60	6	D-53
HLRS	4040-02-120	4	4	R0.2	12	3.2	65	6	D-75
HHRS	4040-02-120	4	4	R0.2	12	4	60	6	D-107
HGLRS	4040-02-160	4	4	R0.2	16	3.2	60	6	D-53
HLRS	4040-02-160	4	4	R0.2	16	3.2	65	6	D-75
HGLRS	4040-02-200	4	4	R0.2	20	3.2	70	6	D-53
HLRS	4040-02-200	4	4	R0.2	20	3.2	70	6	D-75
DCLRS	4040-02-200	4	4	R0.2	20	8	60	6	D-100
HGLRS	4040-02-240	4	4	R0.2	24	3.2	70	6	D-53
HLRS	4040-02-240	4	4	R0.2	24	3.2	70	6	D-75
HGLRS	4040-02-300	4	4	R0.2	30	3.2	70	6	D-53
DCLRS	4040-02-300	4	4	R0.2	30	8	80	6	D-100
HLRS	4040-02-320	4	4	R0.2	32	3.2	80	6	D-75
DCLRS	4040-02-400	4	4	R0.2	40	8	80	6	D-100
HLRS	4040-02-480	4	4	R0.2	48	3.2	100	6	D-75
HMERS	4040-03-100	4	4	R0.3	–	10	60	6	C-20
CXERS	4040-03-100	4	4	R0.3	–	10	60	6	C-10
HGLRS	4040-03-080	4	4	R0.3	8	3.2	60	6	D-53
HLRS	4040-03-080	4	4	R0.3	8	3.2	65	6	D-77
HGLRS	4040-03-120	4	4	R0.3	12	3.2	60	6	D-53
HLRS	4040-03-120	4	4	R0.3	12	3.2	65	6	D-77
CRRS	4040-03-12	4	4	R0.3	12	4	60	6	D-93
HRRS	4040-03-12-6	4	4	R0.3	12	4	70	6	D-85
HLRS	4040-03-140	4	4	R0.3	14	3.2	65	6	D-77
HGLRS	4040-03-160	4	4	R0.3	16	3.2	60	6	D-53
HLRS	4040-03-160	4	4	R0.3	16	3.2	65	6	D-77
HGLRS	4040-03-200	4	4	R0.3	20	3.2	70	6	D-53

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4040-03-200	4	4	R0.3	20	3.2	70	6	D-77
HRRS	4040-03-20-6	4	4	R0.3	20	4	70	6	D-85
HGLRS	4040-03-240	4	4	R0.3	24	3.2	70	6	D-53
HLRS	4040-03-240	4	4	R0.3	24	3.2	70	6	D-77
HGLRS	4040-03-300	4	4	R0.3	30	3.2	70	6	D-53
HLRS	4040-03-320	4	4	R0.3	32	3.2	80	6	D-77
HLRS	4040-03-480	4	4	R0.3	48	3.2	100	6	D-77
CXERS	4040-04-100	4	4	R0.4	–	10	60	6	C-10
HMERS	4040-05-100	4	4	R0.5	–	10	60	6	C-20
CXERS	4040-05-100	4	4	R0.5	–	10	60	6	C-10
HGLRS	4040-05-080	4	4	R0.5	8	3.2	60	6	D-53
HLRS	4040-05-080	4	4	R0.5	8	3.2	65	6	D-77
HGLRS	4040-05-120	4	4	R0.5	12	3.2	60	6	D-53
HLRS	4040-05-120	4	4	R0.5	12	3.2	65	6	D-77
HRRS	4040-05-12S	4	4	R0.5	12	4	50	4	D-91
HRRS	4040-05-12-6S	4	4	R0.5	12	4	50	6	D-91
HHRS	4040-05-120	4	4	R0.5	12	4	60	6	D-107
CRRS	4040-05-12	4	4	R0.5	12	4	60	6	D-93
HRRS	4040-05-12	4	4	R0.5	12	4	70	4	D-85
CRRS	4040-05-12-4	4	4	R0.5	12	4	70	4	D-93
HRRS	4040-05-12-6	4	4	R0.5	12	4	70	6	D-85
HGLRS	4040-05-160	4	4	R0.5	16	3.2	60	6	D-53
HLRS	4040-05-160	4	4	R0.5	16	3.2	65	6	D-77
HGLRS	4040-05-200	4	4	R0.5	20	3.2	70	6	D-53
HLRS	4040-05-200	4	4	R0.5	20	3.2	70	6	D-77
HRRS	4040-05-20-6	4	4	R0.5	20	4	70	6	D-85
DCLRS	4040-05-200	4	4	R0.5	20	8	60	6	D-100
HGLRS	4040-05-240	4	4	R0.5	24	3.2	70	6	D-53
HLRS	4040-05-240	4	4	R0.5	24	3.2	70	6	D-77
HGLRS	4040-05-300	4	4	R0.5	30	3.2	70	6	D-53
DCLRS	4040-05-300	4	4	R0.5	30	8	80	6	D-100
HLRS	4040-05-320	4	4	R0.5	32	3.2	80	6	D-77
HLRS	4040-05-400	4	4	R0.5	40	3.2	100	6	D-77
DCLRS	4040-05-400	4	4	R0.5	40	8	80	6	D-100
HLRS	4040-05-480	4	4	R0.5	48	3.2	100	6	D-77
HMERS	4040-10-100	4	4	R1	–	10	60	6	C-20
CXERS	4040-10-100	4	4	R1	–	10	60	6	C-10
HGLRS	4040-10-080	4	4	R1	8	3.2	60	6	D-53
HLRS	4040-10-080	4	4	R1	8	3.2	65	6	D-77
HGLRS	4040-10-120	4	4	R1	12	3.2	60	6	D-53

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4040-10-120	4	4	R1	12	3.2	65	6	D-77
HRRS	4040-10-12S	4	4	R1	12	4	50	4	D-91
HRRS	4040-10-12-6S	4	4	R1	12	4	50	6	D-91
HHRS	4040-10-120	4	4	R1	12	4	60	6	D-107
HRRS	4040-10-12	4	4	R1	12	4	70	4	D-85
CRRS	4040-10-12-4	4	4	R1	12	4	70	4	D-93
HRRS	4040-10-12-6	4	4	R1	12	4	70	6	D-85
CRRS	4040-10-12	4	4	R1	12	4	70	6	D-93
HGLRS	4040-10-160	4	4	R1	16	3.2	60	6	D-53
HLRS	4040-10-160	4	4	R1	16	3.2	65	6	D-77
HGLRS	4040-10-200	4	4	R1	20	3.2	70	6	D-53
HLRS	4040-10-200	4	4	R1	20	3.2	70	6	D-77
HRRS	4040-10-20-6	4	4	R1	20	4	70	6	D-85
HGLRS	4040-10-240	4	4	R1	24	3.2	70	6	D-53
HLRS	4040-10-240	4	4	R1	24	3.2	70	6	D-77
HGLRS	4040-10-300	4	4	R1	30	3.2	70	6	D-53
HLRS	4040-10-320	4	4	R1	32	3.2	80	6	D-77
HLRS	4040-10-480	4	4	R1	48	3.2	100	6	D-77
CXRS	5040-05-0800	5	4	R0.5	–	8	60	6	C-16
CXRS	5040-05-1200	5	4	R0.5	–	12	60	6	C-16
HGRRS	5040-05-12	5	4	R0.5	12	2	60	4	D-112
HGRRS	5040-05-12-6	5	4	R0.5	12	2	60	6	D-112
CXLRS	5040-05-12	5	4	R0.5	12	8	60	6	D-104
CXLRS	5040-05-16	5	4	R0.5	16	8	60	6	D-104
CXRS	5040-10-0800	5	4	R1	–	8	60	6	C-16
CXRS	5040-10-1200	5	4	R1	–	12	60	6	C-16
HGRRS	5040-10-12	5	4	R1	12	2	60	4	D-112
HGRRS	5040-10-12-6	5	4	R1	12	2	60	6	D-112
CXLRS	5040-10-12	5	4	R1	12	8	60	6	D-104
CXLRS	5040-10-16	5	4	R1	16	8	60	6	D-104
C-CRS	2050-02	2	5	R0.2	–	15	50	6	C-2
HLRS	2050-02-200	2	5	R0.2	20	5	70	6	D-15
HLRS	2050-02-400	2	5	R0.2	40	5	90	6	D-15
C-CRS	2050-03	2	5	R0.3	–	15	50	6	C-2
HLRS	2050-03-200	2	5	R0.3	20	5	70	6	D-15
HLRS	2050-03-400	2	5	R0.3	40	5	90	6	D-15
C-CRS	2050-05	2	5	R0.5	–	15	50	6	C-2
HLRS	2050-05-200	2	5	R0.5	20	5	70	6	D-15
HLRS	2050-05-400	2	5	R0.5	40	5	90	6	D-15
C-CRS	2050-10	2	5	R1	–	15	50	6	C-2

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2050-10-200	2	5	R1	20	5	70	6	D-15
HLRS	2050-10-400	2	5	R1	40	5	90	6	D-15
HLRS	4050-005-160	4	5	R0.05	16	4	65	6	D-77
HLRS	4050-005-200	4	5	R0.05	20	4	70	6	D-77
HLRS	4050-005-400	4	5	R0.05	40	4	100	6	D-77
HMERS	4050-01-125	4	5	R0.1	–	12.5	60	6	C-20
HLRS	4050-01-160	4	5	R0.1	16	4	65	6	D-77
HLRS	4050-01-200	4	5	R0.1	20	4	70	6	D-77
HLRS	4050-01-400	4	5	R0.1	40	4	100	6	D-77
HMERS	4050-02-125	4	5	R0.2	–	12.5	60	6	C-20
CXERS	4050-02-125	4	5	R0.2	–	12.5	60	6	C-10
HLRS	4050-02-160	4	5	R0.2	16	4	65	6	D-77
HHRS	4050-02-160	4	5	R0.2	16	5	60	6	D-107
HLRS	4050-02-200	4	5	R0.2	20	4	70	6	D-77
HLRS	4050-02-400	4	5	R0.2	40	4	100	6	D-77
HMERS	4050-03-125	4	5	R0.3	–	12.5	60	6	C-20
CXERS	4050-03-125	4	5	R0.3	–	12.5	60	6	C-10
HLRS	4050-03-160	4	5	R0.3	16	4	65	6	D-77
HLRS	4050-03-200	4	5	R0.3	20	4	70	6	D-77
HLRS	4050-03-400	4	5	R0.3	40	4	100	6	D-77
CXERS	4050-04-125	4	5	R0.4	–	12.5	60	6	C-10
HMERS	4050-05-125	4	5	R0.5	–	12.5	60	6	C-20
CXERS	4050-05-125	4	5	R0.5	–	12.5	60	6	C-10
HLRS	4050-05-160	4	5	R0.5	16	4	65	6	D-77
HHRS	4050-05-160	4	5	R0.5	16	5	60	6	D-107
HLRS	4050-05-200	4	5	R0.5	20	4	70	6	D-77
HLRS	4050-05-400	4	5	R0.5	40	4	100	6	D-77
HMERS	4050-10-125	4	5	R1	–	12.5	60	6	C-20
CXERS	4050-10-125	4	5	R1	–	12.5	60	6	C-10
HLRS	4050-10-160	4	5	R1	16	4	65	6	D-77
HLRS	4050-10-200	4	5	R1	20	4	70	6	D-77
HLRS	4050-10-400	4	5	R1	40	4	100	6	D-77
HRRS	4050-12-15S	4	5	R1.2	15	5	50	6	D-91
HRRS	4050-12-15	4	5	R1.2	15	5	70	6	D-86
CRRS	4050-12-15	4	5	R1.2	15	5	70	6	D-93
HLRS	2060-01-120	2	6	R0.1	12	6	65	6	D-15
HLRS	2060-01-120E	2	6	R0.1	12	6	65	6	D-15
CLRS	2060-01-150	2	6	R0.1	15	6	60	6	D-31
HLRS	2060-01-200	2	6	R0.1	20	6	70	6	D-15
CLRS	2060-01-200	2	6	R0.1	20	6	70	6	D-31

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
CLRS	2060-01-300	2	6	R0.1	30	6	80	6	D-31
HLRS	2060-01-300	2	6	R0.1	30	6	100	6	D-15
HLRS	2060-01-300E	2	6	R0.1	30	6	100	6	D-15
CLRS	2060-01-400	2	6	R0.1	40	6	90	6	D-31
HLRS	2060-01-600	2	6	R0.1	60	6	120	6	D-15
C-CRS	2060-02	2	6	R0.2	–	15	50	6	C-2
HLRS	2060-02-120	2	6	R0.2	12	6	65	6	D-15
HLRS	2060-02-120E	2	6	R0.2	12	6	65	6	D-15
CLRS	2060-02-150	2	6	R0.2	15	6	60	6	D-31
HLRS	2060-02-200	2	6	R0.2	20	6	70	6	D-15
CLRS	2060-02-200	2	6	R0.2	20	6	70	6	D-31
CLRS	2060-02-300	2	6	R0.2	30	6	80	6	D-31
HLRS	2060-02-300	2	6	R0.2	30	6	100	6	D-15
HLRS	2060-02-300E	2	6	R0.2	30	6	100	6	D-15
CLRS	2060-02-400	2	6	R0.2	40	6	90	6	D-31
HLRS	2060-02-600	2	6	R0.2	60	6	120	6	D-15
C-CRS	2060-03	2	6	R0.3	–	15	50	6	C-2
HLRS	2060-03-120	2	6	R0.3	12	6	65	6	D-15
HLRS	2060-03-120E	2	6	R0.3	12	6	65	6	D-15
CLRS	2060-03-150	2	6	R0.3	15	6	60	6	D-31
HLRS	2060-03-200	2	6	R0.3	20	6	70	6	D-15
CLRS	2060-03-200	2	6	R0.3	20	6	70	6	D-31
CLRS	2060-03-300	2	6	R0.3	30	6	80	6	D-31
HLRS	2060-03-300	2	6	R0.3	30	6	100	6	D-15
HLRS	2060-03-300E	2	6	R0.3	30	6	100	6	D-15
CLRS	2060-03-400	2	6	R0.3	40	6	90	6	D-31
HLRS	2060-03-600	2	6	R0.3	60	6	120	6	D-15
C-CRS	2060-05	2	6	R0.5	–	15	50	6	C-2
HLRS	2060-05-120	2	6	R0.5	12	6	65	6	D-15
HLRS	2060-05-120E	2	6	R0.5	12	6	65	6	D-15
CLRS	2060-05-150	2	6	R0.5	15	6	60	6	D-31
HLRS	2060-05-200	2	6	R0.5	20	6	70	6	D-15
CLRS	2060-05-200	2	6	R0.5	20	6	70	6	D-31
CLRS	2060-05-300	2	6	R0.5	30	6	80	6	D-31
HLRS	2060-05-300	2	6	R0.5	30	6	100	6	D-15
HLRS	2060-05-300E	2	6	R0.5	30	6	100	6	D-15
CLRS	2060-05-400	2	6	R0.5	40	6	90	6	D-31
HLRS	2060-05-600	2	6	R0.5	60	6	120	6	D-15
C-CRS	2060-10	2	6	R1	–	15	50	6	C-2
HLRS	2060-10-120	2	6	R1	12	6	65	6	D-15

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	2060-10-120E	2	6	R1	12	6	65	6	D-15
CLRS	2060-10-150	2	6	R1	15	6	60	6	D-31
HLRS	2060-10-200	2	6	R1	20	6	70	6	D-15
CLRS	2060-10-200	2	6	R1	20	6	70	6	D-31
CLRS	2060-10-300	2	6	R1	30	6	80	6	D-31
HLRS	2060-10-300	2	6	R1	30	6	100	6	D-15
HLRS	2060-10-300E	2	6	R1	30	6	100	6	D-15
CLRS	2060-10-400	2	6	R1	40	6	90	6	D-31
HLRS	2060-10-600	2	6	R1	60	6	120	6	D-15
C-CRS	2060-15	2	6	R1.5	–	15	50	6	C-2
C-CRS	2060-20	2	6	R2	–	15	50	6	C-2
HLRS	4060-005-120	4	6	R0.05	12	4.8	65	6	D-79
HLRS	4060-005-160	4	6	R0.05	16	4.8	65	6	D-79
HLRS	4060-005-200	4	6	R0.05	20	4.8	70	6	D-79
HLRS	4060-005-240	4	6	R0.05	24	4.8	70	6	D-79
HLRS	4060-005-300	4	6	R0.05	30	4.8	100	6	D-79
HLRS	4060-005-480	4	6	R0.05	48	4.8	120	6	D-79
HGLRS	4060-01-120	4	6	R0.1	12	4.8	60	6	D-55
HLRS	4060-01-120	4	6	R0.1	12	4.8	65	6	D-79
HGLRS	4060-01-160	4	6	R0.1	16	4.8	60	6	D-55
HLRS	4060-01-160	4	6	R0.1	16	4.8	65	6	D-79
HLRS	4060-01-180	4	6	R0.1	18	4.8	70	6	D-79
HGLRS	4060-01-200	4	6	R0.1	20	4.8	70	6	D-55
HLRS	4060-01-200	4	6	R0.1	20	4.8	70	6	D-79
HGLRS	4060-01-240	4	6	R0.1	24	4.8	70	6	D-55
HLRS	4060-01-240	4	6	R0.1	24	4.8	70	6	D-79
HGLRS	4060-01-300	4	6	R0.1	30	4.8	100	6	D-55
HLRS	4060-01-300	4	6	R0.1	30	4.8	100	6	D-79
HLRS	4060-01-480	4	6	R0.1	48	4.8	120	6	D-79
CXERS	4060-02-150	4	6	R0.2	–	15	60	6	C-10
HGLRS	4060-02-120	4	6	R0.2	12	4.8	60	6	D-55
HLRS	4060-02-120	4	6	R0.2	12	4.8	65	6	D-79
HGLRS	4060-02-160	4	6	R0.2	16	4.8	60	6	D-55
HLRS	4060-02-160	4	6	R0.2	16	4.8	65	6	D-79
HLRS	4060-02-180	4	6	R0.2	18	4.8	70	6	D-79
HGLRS	4060-02-200	4	6	R0.2	20	4.8	70	6	D-55
HLRS	4060-02-200	4	6	R0.2	20	4.8	70	6	D-79
HGLRS	4060-02-240	4	6	R0.2	24	4.8	70	6	D-55
HLRS	4060-02-240	4	6	R0.2	24	4.8	70	6	D-79
HGLRS	4060-02-300	4	6	R0.2	30	4.8	100	6	D-55

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4060-02-300	4	6	R0.2	30	4.8	100	6	D-79
DCLRS	4060-02-300	4	6	R0.2	30	12	100	6	D-100
HLRS	4060-02-480	4	6	R0.2	48	4.8	120	6	D-79
DCLRS	4060-02-600	4	6	R0.2	60	12	120	6	D-100
CXERS	4060-03-150	4	6	R0.3	–	15	60	6	C-10
HGLRS	4060-03-120	4	6	R0.3	12	4.8	60	6	D-55
HLRS	4060-03-120	4	6	R0.3	12	4.8	65	6	D-79
HGLRS	4060-03-160	4	6	R0.3	16	4.8	60	6	D-55
HLRS	4060-03-160	4	6	R0.3	16	4.8	65	6	D-79
HLRS	4060-03-180	4	6	R0.3	18	4.8	70	6	D-79
HRRS	4060-03-18	4	6	R0.3	18	6	90	6	D-86
CRRS	4060-03-18	4	6	R0.3	18	6	90	6	D-93
HGLRS	4060-03-200	4	6	R0.3	20	4.8	70	6	D-55
HLRS	4060-03-200	4	6	R0.3	20	4.8	70	6	D-79
HGLRS	4060-03-240	4	6	R0.3	24	4.8	70	6	D-55
HLRS	4060-03-240	4	6	R0.3	24	4.8	70	6	D-79
HGLRS	4060-03-300	4	6	R0.3	30	4.8	100	6	D-55
HLRS	4060-03-300	4	6	R0.3	30	4.8	100	6	D-79
HRRS	4060-03-30	4	6	R0.3	30	6	90	6	D-86
HLRS	4060-03-480	4	6	R0.3	48	4.8	120	6	D-79
CXERS	4060-04-150	4	6	R0.4	–	15	60	6	C-10
CXERS	4060-05-150	4	6	R0.5	–	15	60	6	C-10
CNRS	4060-05-16	4	6	R0.5	–	16	90	6	C-5
HGLRS	4060-05-120	4	6	R0.5	12	4.8	60	6	D-55
HLRS	4060-05-120	4	6	R0.5	12	4.8	65	6	D-79
HGLRS	4060-05-160	4	6	R0.5	16	4.8	60	6	D-55
HLRS	4060-05-160	4	6	R0.5	16	4.8	65	6	D-79
HLRS	4060-05-180	4	6	R0.5	18	4.8	70	6	D-79
HRRS	4060-05-18S	4	6	R0.5	18	6	50	6	D-91
CRRS	4060-05-18	4	6	R0.5	18	6	60	6	D-93
HRRS	4060-05-18	4	6	R0.5	18	6	90	6	D-86
HGLRS	4060-05-200	4	6	R0.5	20	4.8	70	6	D-55
HLRS	4060-05-200	4	6	R0.5	20	4.8	70	6	D-79
HGLRS	4060-05-240	4	6	R0.5	24	4.8	70	6	D-55
HLRS	4060-05-240	4	6	R0.5	24	4.8	70	6	D-79
HGLRS	4060-05-300	4	6	R0.5	30	4.8	100	6	D-55
HLRS	4060-05-300	4	6	R0.5	30	4.8	100	6	D-79
HRRS	4060-05-30	4	6	R0.5	30	6	90	6	D-86
DCLRS	4060-05-300	4	6	R0.5	30	12	100	6	D-100
HLRS	4060-05-400	4	6	R0.5	40	4.8	100	6	D-79

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HLRS	4060-05-480	4	6	R0.5	48	4.8	120	6	D-79
DCLRS	4060-05-600	4	6	R0.5	60	12	120	6	D-100
CXERS	4060-10-150	4	6	R1	–	15	60	6	C-10
CNRS	4060-10-16	4	6	R1	–	16	90	6	C-5
HGLRS	4060-10-120	4	6	R1	12	4.8	60	6	D-55
HLRS	4060-10-120	4	6	R1	12	4.8	65	6	D-79
HGLRS	4060-10-160	4	6	R1	16	4.8	60	6	D-55
HLRS	4060-10-160	4	6	R1	16	4.8	65	6	D-79
HLRS	4060-10-180	4	6	R1	18	4.8	70	6	D-79
HRRS	4060-10-18S	4	6	R1	18	6	50	6	D-91
CRRS	4060-10-18	4	6	R1	18	6	60	6	D-93
HRRS	4060-10-18	4	6	R1	18	6	90	6	D-86
HGLRS	4060-10-200	4	6	R1	20	4.8	70	6	D-55
HLRS	4060-10-200	4	6	R1	20	4.8	70	6	D-79
HGLRS	4060-10-240	4	6	R1	24	4.8	70	6	D-55
HLRS	4060-10-240	4	6	R1	24	4.8	70	6	D-79
HGLRS	4060-10-300	4	6	R1	30	4.8	100	6	D-55
HLRS	4060-10-300	4	6	R1	30	4.8	100	6	D-79
HRRS	4060-10-30	4	6	R1	30	6	90	6	D-86
HLRS	4060-10-400	4	6	R1	40	4.8	100	6	D-79
HLRS	4060-10-480	4	6	R1	48	4.8	120	6	D-79
CXERS	4060-12-150	4	6	R1.2	–	15	60	6	C-10
HRRS	4060-15-18S	4	6	R1.5	18	6	50	6	D-91
HRRS	4060-15-18	4	6	R1.5	18	6	90	6	D-86
CRRS	4060-15-18	4	6	R1.5	18	6	90	6	D-93
HRRS	4060-15-30	4	6	R1.5	30	6	90	6	D-86
HRRS	4060-20-18S	4	6	R2	18	6	50	6	D-91
HRRS	4060-20-18	4	6	R2	18	6	90	6	D-86
CXRS	5060-05-1200	5	6	R0.5	–	12	70	6	C-16
CXRS	5060-05-1800	5	6	R0.5	–	18	70	6	C-16
CXLRS	5060-05-18	5	6	R0.5	18	12	70	6	D-104
CXLRS	5060-05-24	5	6	R0.5	24	12	70	6	D-104
CXRS	5060-10-1200	5	6	R1	–	12	70	6	C-16
CXRS	5060-10-1800	5	6	R1	–	18	70	6	C-16
CXLRS	5060-10-18	5	6	R1	18	12	70	6	D-104
CXLRS	5060-10-24	5	6	R1	24	12	70	6	D-104
HMERS	6060-01-130	6	6	R0.1	–	13	60	6	C-20
HHRS	6060-01-210	6	6	R0.1	21	6	60	6	D-107
HMERS	6060-02-130	6	6	R0.2	–	13	60	6	C-20
HHRS	6060-02-210	6	6	R0.2	21	6	60	6	D-107

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HMERS	6060-03-130	6	6	R0.3	–	13	60	6	C-20
HGRRS	6060-03-18	6	6	R0.3	18	2.5	60	6	D-112
HHRS	6060-03-210	6	6	R0.3	21	6	60	6	D-107
HMERS	6060-05-130	6	6	R0.5	–	13	60	6	C-20
HGRRS	6060-05-18	6	6	R0.5	18	2.5	60	6	D-112
HHRS	6060-05-210	6	6	R0.5	21	6	60	6	D-107
HMERS	6060-10-130	6	6	R1	–	13	60	6	C-20
HGRRS	6060-10-18	6	6	R1	18	2.5	60	6	D-112
HHRS	6060-10-210	6	6	R1	21	6	60	6	D-107
HMERS	6060-15-130	6	6	R1.5	–	13	60	6	C-20
HGRRS	6060-15-18	6	6	R1.5	18	2.5	60	6	D-112
C-CRS	2080-05	2	8	R0.5	–	20	60	8	C-2
C-CRS	2080-10	2	8	R1	–	20	60	8	C-2
C-CRS	2080-15	2	8	R1.5	–	20	60	8	C-2
C-CRS	2080-20	2	8	R2	–	20	60	8	C-2
C-CRS	2080-25	2	8	R2.5	–	20	60	8	C-2
CXERS	4080-02-200	4	8	R0.2	–	20	70	8	C-10
CXERS	4080-03-200	4	8	R0.3	–	20	70	8	C-10
HRRS	4080-03-24	4	8	R0.3	24	8	100	8	D-86
CRRS	4080-03-24	4	8	R0.3	24	8	100	8	D-93
HRRS	4080-03-40	4	8	R0.3	40	8	100	8	D-86
CXERS	4080-04-200	4	8	R0.4	–	20	70	8	C-10
CNRS	4080-05-16	4	8	R0.5	–	16	100	8	C-5
CXERS	4080-05-200	4	8	R0.5	–	20	70	8	C-10
HRRS	4080-05-24S	4	8	R0.5	24	8	60	8	D-91
HRRS	4080-05-24	4	8	R0.5	24	8	100	8	D-86
CRRS	4080-05-26	4	8	R0.5	26	8	70	8	D-93
HRRS	4080-05-40	4	8	R0.5	40	8	100	8	D-86
CNRS	4080-10-16	4	8	R1	–	16	100	8	C-5
CXERS	4080-10-200	4	8	R1	–	20	70	8	C-10
HRRS	4080-10-24S	4	8	R1	24	8	60	8	D-91
HRRS	4080-10-24	4	8	R1	24	8	100	8	D-86
CRRS	4080-10-26	4	8	R1	26	8	70	8	D-93
HRRS	4080-10-40	4	8	R1	40	8	100	8	D-86
CXERS	4080-12-200	4	8	R1.2	–	20	70	8	C-10
CXERS	4080-15-200	4	8	R1.5	–	20	70	8	C-10
CXERS	4080-20-200	4	8	R2	–	20	70	8	C-10
HRRS	4080-20-24S	4	8	R2	24	8	60	8	D-91
HRRS	4080-20-24	4	8	R2	24	8	100	8	D-86
CRRS	4080-20-24	4	8	R2	24	8	100	8	D-93

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HRRS	4080-20-40	4	8	R2	40	8	100	8	D-86
HRRS	4080-30-24S	4	8	R3	24	8	60	8	D-91
HRRS	4080-30-24	4	8	R3	24	8	100	8	D-86
CXRS	5080-05-1600	5	8	R0.5	–	16	70	8	C-16
CXRS	5080-05-2400	5	8	R0.5	–	24	70	8	C-16
CXLRS	5080-05-24	5	8	R0.5	24	16	70	8	D-104
CXLRS	5080-05-32	5	8	R0.5	32	16	70	8	D-104
CXRS	5080-10-1600	5	8	R1	–	16	70	8	C-16
CXRS	5080-10-2400	5	8	R1	–	24	70	8	C-16
CXLRS	5080-10-24	5	8	R1	24	16	70	8	D-104
CXLRS	5080-10-32	5	8	R1	32	16	70	8	D-104
HMERS	6080-02-190	6	8	R0.2	–	19	70	8	C-20
HMERS	6080-03-190	6	8	R0.3	–	19	70	8	C-20
HHRS	6080-03-260	6	8	R0.3	26	8	80	8	D-108
HMERS	6080-05-190	6	8	R0.5	–	19	70	8	C-20
HGRRS	6080-05-24	6	8	R0.5	24	3.4	70	8	D-112
HHRS	6080-05-260	6	8	R0.5	26	8	80	8	D-108
HMERS	6080-10-190	6	8	R1	–	19	70	8	C-20
HGRRS	6080-10-24	6	8	R1	24	3.4	70	8	D-112
HHRS	6080-10-260	6	8	R1	26	8	80	8	D-108
HMERS	6080-20-190	6	8	R2	–	19	70	8	C-20
HGRRS	6080-20-24	6	8	R2	24	3.4	70	8	D-112
C-CRS	2100-05	2	10	R0.5	–	25	70	10	C-2
C-CRS	2100-10	2	10	R1	–	25	70	10	C-2
C-CRS	2100-15	2	10	R1.5	–	25	70	10	C-2
C-CRS	2100-20	2	10	R2	–	25	70	10	C-2
C-CRS	2100-25	2	10	R2.5	–	25	70	10	C-2
C-CRS	2100-30	2	10	R3	–	25	70	10	C-2
CXERS	4100-02-250	4	10	R0.2	–	25	80	10	C-10
CXERS	4100-03-250	4	10	R0.3	–	25	80	10	C-10
HRRS	4100-03-30S	4	10	R0.3	30	10	65	10	D-91
HRRS	4100-03-30	4	10	R0.3	30	10	110	10	D-86
CRRS	4100-03-30	4	10	R0.3	30	10	110	10	D-93
HRRS	4100-03-50	4	10	R0.3	50	10	110	10	D-86
CXERS	4100-04-250	4	10	R0.4	–	25	80	10	C-10
CXERS	4100-05-250	4	10	R0.5	–	25	80	10	C-10
CNRS	4100-05-26	4	10	R0.5	–	26	110	10	C-5
HRRS	4100-05-30S	4	10	R0.5	30	10	65	10	D-91
CRRS	4100-05-30	4	10	R0.5	30	10	80	10	D-93
HRRS	4100-05-30	4	10	R0.5	30	10	110	10	D-86

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HRRS	4100-05-50	4	10	R0.5	50	10	110	10	D-86
CXERS	4100-10-250	4	10	R1	–	25	80	10	C-10
CNRS	4100-10-26	4	10	R1	–	26	110	10	C-5
HRRS	4100-10-30S	4	10	R1	30	10	65	10	D-91
CRRS	4100-10-30	4	10	R1	30	10	80	10	D-93
HRRS	4100-10-30	4	10	R1	30	10	110	10	D-86
HRRS	4100-10-50	4	10	R1	50	10	110	10	D-86
CXERS	4100-12-250	4	10	R1.2	–	25	80	10	C-10
CXERS	4100-15-250	4	10	R1.5	–	25	80	10	C-10
CNRS	4100-15-26	4	10	R1.5	–	26	110	10	C-5
CXERS	4100-20-250	4	10	R2	–	25	80	10	C-10
CNRS	4100-20-26	4	10	R2	–	26	110	10	C-5
HRRS	4100-20-30S	4	10	R2	30	10	65	10	D-91
HRRS	4100-20-30	4	10	R2	30	10	110	10	D-86
CRRS	4100-20-30	4	10	R2	30	10	110	10	D-93
HRRS	4100-20-50	4	10	R2	50	10	110	10	D-86
HRRS	4100-30-30S	4	10	R3	30	10	65	10	D-91
HRRS	4100-30-30	4	10	R3	30	10	110	10	D-86
CXRS	5100-05-2000	5	10	R0.5	–	20	80	10	C-16
CXRS	5100-05-3000	5	10	R0.5	–	30	80	10	C-16
CXLRS	5100-05-30	5	10	R0.5	30	20	80	10	D-104
CXLRS	5100-05-40	5	10	R0.5	40	20	80	10	D-104
CXRS	5100-10-2000	5	10	R1	–	20	80	10	C-16
CXRS	5100-10-3000	5	10	R1	–	30	80	10	C-16
CXLRS	5100-10-30	5	10	R1	30	20	80	10	D-104
CXLRS	5100-10-40	5	10	R1	40	20	80	10	D-104
CXRS	5100-15-2000	5	10	R1.5	–	20	80	10	C-16
CXRS	5100-15-3000	5	10	R1.5	–	30	80	10	C-16
CXLRS	5100-15-30	5	10	R1.5	30	20	80	10	D-104
CXLRS	5100-15-40	5	10	R1.5	40	20	80	10	D-104
CXRS	5100-20-2000	5	10	R2	–	20	80	10	C-16
CXRS	5100-20-3000	5	10	R2	–	30	80	10	C-16
CXLRS	5100-20-30	5	10	R2	30	20	80	10	D-104
CXLRS	5100-20-40	5	10	R2	40	20	80	10	D-104
HMERS	6100-02-220	6	10	R0.2	–	22	80	10	C-20
HMERS	6100-03-220	6	10	R0.3	–	22	80	10	C-20
HHRS	6100-03-310	6	10	R0.3	31	10	80	10	D-108
HMERS	6100-05-220	6	10	R0.5	–	22	80	10	C-20
HGRRS	6100-05-30	6	10	R0.5	30	4.2	80	10	D-112
HHRS	6100-05-310	6	10	R0.5	31	10	80	10	D-108

Simplified Table

Radius

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HMERS	6100-10-220	6	10	R1	–	22	80	10	C-20
HGRRS	6100-10-30	6	10	R1	30	4.2	80	10	D-112
HHRS	6100-10-310	6	10	R1	31	10	80	10	D-108
HMERS	6100-15-220	6	10	R1.5	–	22	80	10	C-20
HMERS	6100-20-220	6	10	R2	–	22	80	10	C-20
HGRRS	6100-20-30	6	10	R2	30	4.2	80	10	D-112
C-CRS	2120-05	2	12	R0.5	–	25	75	12	C-2
C-CRS	2120-10	2	12	R1	–	25	75	12	C-2
C-CRS	2120-15	2	12	R1.5	–	25	75	12	C-2
C-CRS	2120-20	2	12	R2	–	25	75	12	C-2
C-CRS	2120-25	2	12	R2.5	–	25	75	12	C-2
C-CRS	2120-30	2	12	R3	–	25	75	12	C-2
CXERS	4120-02-300	4	12	R0.2	–	30	100	12	C-10
CXERS	4120-03-300	4	12	R0.3	–	30	100	12	C-10
HRRS	4120-03-36	4	12	R0.3	36	12	120	12	D-86
CRRS	4120-03-36	4	12	R0.3	36	12	120	12	D-93
HRRS	4120-03-60	4	12	R0.3	60	12	120	12	D-86
CXERS	4120-04-300	4	12	R0.4	–	30	100	12	C-10
CNRS	4120-05-26	4	12	R0.5	–	26	120	12	C-5
CXERS	4120-05-300	4	12	R0.5	–	30	100	12	C-10
HRRS	4120-05-36S	4	12	R0.5	36	12	75	12	D-91
HRRS	4120-05-36	4	12	R0.5	36	12	120	12	D-86
CRRS	4120-05-36	4	12	R0.5	36	12	120	12	D-93
HRRS	4120-05-60	4	12	R0.5	60	12	120	12	D-86
CNRS	4120-10-26	4	12	R1	–	26	120	12	C-5
CXERS	4120-10-300	4	12	R1	–	30	100	12	C-10
HRRS	4120-10-36S	4	12	R1	36	12	75	12	D-91
HRRS	4120-10-36	4	12	R1	36	12	120	12	D-86
CRRS	4120-10-36	4	12	R1	36	12	120	12	D-93
HRRS	4120-10-60	4	12	R1	60	12	120	12	D-86
CXERS	4120-12-300	4	12	R1.2	–	30	100	12	C-10
CNRS	4120-15-26	4	12	R1.5	–	26	120	12	C-5
CXERS	4120-15-300	4	12	R1.5	–	30	100	12	C-10
CNRS	4120-20-26	4	12	R2	–	26	120	12	C-5
CXERS	4120-20-300	4	12	R2	–	30	100	12	C-10
HRRS	4120-20-36S	4	12	R2	36	12	75	12	D-91
HRRS	4120-20-36	4	12	R2	36	12	120	12	D-86
CRRS	4120-20-36	4	12	R2	36	12	120	12	D-93
HRRS	4120-20-60	4	12	R2	60	12	120	12	D-86
CXERS	4120-30-300	4	12	R3	–	30	100	12	C-10

Model Number		Number of Flutes	Outside Dia.	Corner Radius	Effective Length	Length of Cut	Overall Length	Shank Dia.	Page
HRRS	4120-40-36S	4	12	R4	36	12	75	12	D-91
HRRS	4120-40-36	4	12	R4	36	12	120	12	D-86
CXRS	5120-05-2400	5	12	R0.5	–	24	80	12	C-16
CXRS	5120-05-3600	5	12	R0.5	–	36	100	12	C-16
CXLRS	5120-05-36	5	12	R0.5	36	24	80	12	D-104
CXLRS	5120-05-48	5	12	R0.5	48	24	100	12	D-104
CXRS	5120-10-2400	5	12	R1	–	24	80	12	C-16
CXRS	5120-10-3600	5	12	R1	–	36	100	12	C-16
CXLRS	5120-10-36	5	12	R1	36	24	80	12	D-104
CXLRS	5120-10-48	5	12	R1	48	24	100	12	D-104
CXRS	5120-15-2400	5	12	R1.5	–	24	80	12	C-16
CXRS	5120-15-3600	5	12	R1.5	–	36	100	12	C-16
CXLRS	5120-15-36	5	12	R1.5	36	24	80	12	D-104
CXLRS	5120-15-48	5	12	R1.5	48	24	100	12	D-104
CXRS	5120-20-2400	5	12	R2	–	24	80	12	C-16
CXRS	5120-20-3600	5	12	R2	–	36	100	12	C-16
CXLRS	5120-20-36	5	12	R2	36	24	80	12	D-104
CXLRS	5120-20-48	5	12	R2	48	24	100	12	D-104
HMERS	6120-02-260	6	12	R0.2	–	26	100	12	C-20
HMERS	6120-03-260	6	12	R0.3	–	26	100	12	C-20
HHRS	6120-03-370	6	12	R0.3	37	12	100	12	D-108
HMERS	6120-05-260	6	12	R0.5	–	26	100	12	C-20
HGRRS	6120-05-36	6	12	R0.5	36	5	90	12	D-112
HHRS	6120-05-370	6	12	R0.5	37	12	100	12	D-108
HMERS	6120-10-260	6	12	R1	–	26	100	12	C-20
HGRRS	6120-10-36	6	12	R1	36	5	90	12	D-112
HHRS	6120-10-370	6	12	R1	37	12	100	12	D-108
HMERS	6120-15-260	6	12	R1.5	–	26	100	12	C-20
HMERS	6120-20-260	6	12	R2	–	26	100	12	C-20
HGRRS	6120-20-36	6	12	R2	36	5	90	12	D-112

V Series

ϕ3mm Shank End Mills




Recommended for improved milling quality and cost reduction!

ϕ3 mm Shank V series

ϕ3 mm Shank (h4 tolerance) × Overall length 38* mm

Fixed size of ϕ3 Shank x Overall Length 38 mm
ϕ3 shank is used to save valuable carbide material. h4 tolerance is compatible for both shrink fit and collet holders. More series to follow in the future.
(*The overall length of VCBN series is 35 mm.)

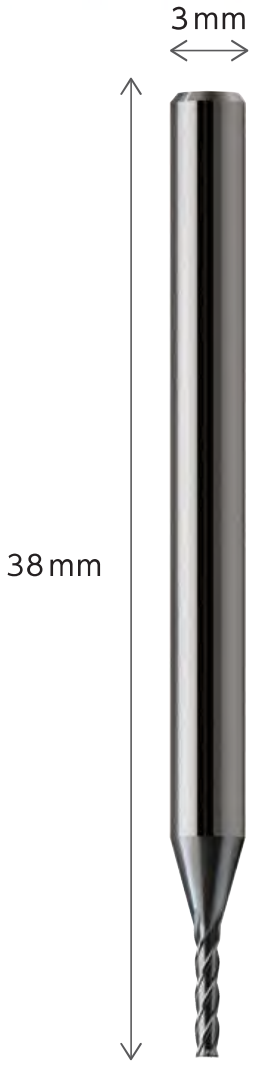


Cost effective

PCB drills mass production technology is applied to end mills
To attain affordable prices, we applied our existing and proven automatic mass production technology for blank rods, flute grinding, coating and inspection to these new end mills.

High Quality

Small diameter V series are high-precision as a result of using the latest in-house technologies.
We developed new grinding machines specialized for small diameter end mills for high-precision milling that will innovate manufacturing technology for high-precision, high-efficiency milling.


Our in-house developed production facility for PCB tools

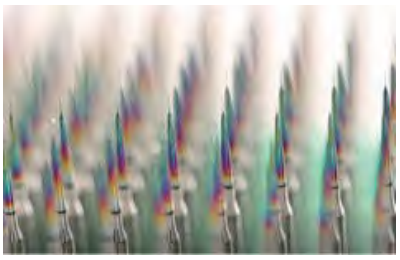
Over 5million coated PCB tools manufactured every month


Carefully crafted in Mitsuke of Niigata prefecture

PCB: Printed Circuit Board

More eco-friendly compared to ϕ4 shank

Outside Diameter ϕ4
× Overall Length 45mm



About 6.3g


Outside Diameter ϕ3
× Overall Length 38mm



About 3.0g

About 52% reduction in cemented carbide usage

Find the best coating for your material applications

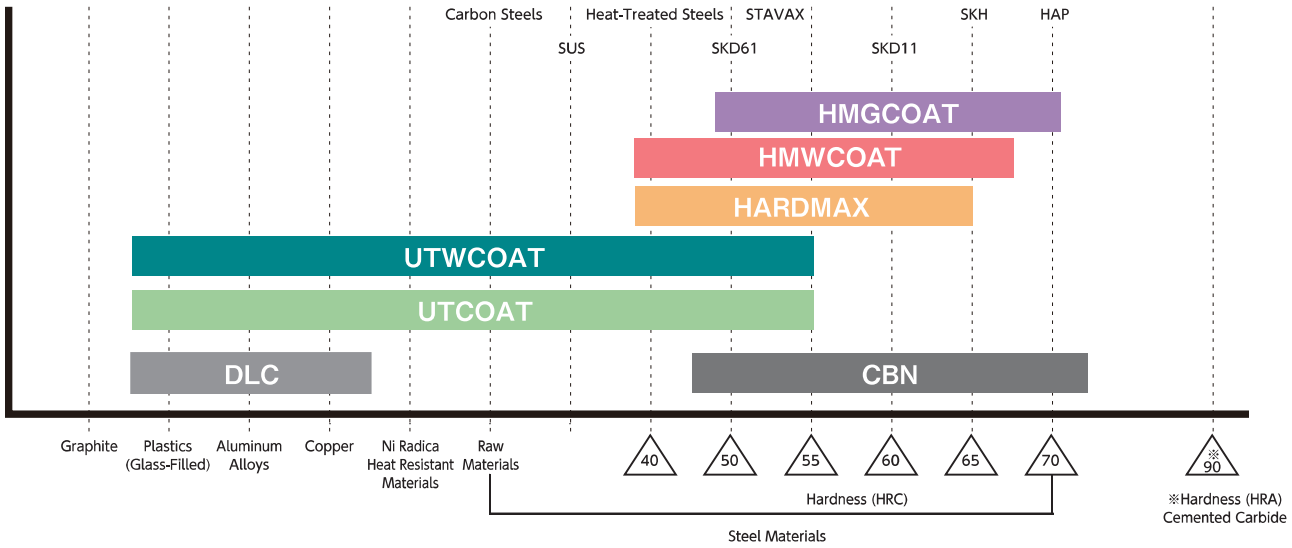

	For Copper, Aluminum DLC	For Raw Materials ~ 55HRC UT COAT / UTW COAT	For Hard Materials (40~65 HRC) HARD MAX / HMW COAT	For Hard Materials (50~70 HRC) HMG COAT	CBN
Square		VCES2000 VCES4000			
Long Neck Square	VDLC-AZS VDLCLS		VHLS		
Long Neck Radius			VHLRS	VHGLRS	VCBN-LRF
Ball			VHWB	VHGB	
Long Neck Ball	VDLCLB	VCWLB VCSELB	VHSLB	VHGLB	VCBN-LBSF VCBN-LBF

VCBN-LBSF CBN 2 Flutes Short Shank Long Neck Ball End Mills

V Series CBN Long Neck Ball

NEW

CBN


Shank Dia 0/-0.003

20°


R ±0.002

Back Taper Geometry



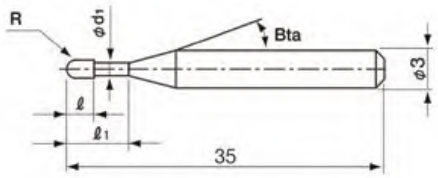

The shank taper angle shown is not an exact value.



Helix angle 20°





Label Sample



#001 R0.5 R+0.001/0.000

Ball radius accuracy measurements are printed on the label to support high precision milling.

For better surface finish

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
		○	●	●	●	●	●										


Total 20 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°	Suggested Retail Price ¥
VCBN-LBSF 2001-002	R0.05	0.2	0.07	0.09	15°	0.22	0.23	0.24	0.25	0.27	—
VCBN-LBSF 2001-003	R0.05	0.3	0.07	0.09	15°	0.33	0.34	0.35	0.37	0.40	—
VCBN-LBSF 20015-003	R0.075	0.3	0.1	0.14	15°	0.33	0.34	0.36	0.37	0.40	—
VCBN-LBSF 20015-0045	R0.075	0.45	0.1	0.14	15°	0.49	0.50	0.52	0.54	0.58	—
VCBN-LBSF 2002-003	R0.1	0.3	0.13	0.19	15°	0.34	0.35	0.36	0.37	0.40	—
VCBN-LBSF 2002-006	R0.1	0.6	0.13	0.19	15°	0.65	0.67	0.69	0.71	0.77	—
VCBN-LBSF 2003-005	R0.15	0.5	0.22	0.28	15°	0.57	0.59	0.60	0.62	0.67	—
VCBN-LBSF 2003-0075	R0.15	0.75	0.22	0.28	15°	0.83	0.85	0.88	0.91	0.98	—
VCBN-LBSF 2004-005	R0.2	0.5	0.32	0.38	15°	0.51	0.53	0.54	0.56	0.59	—
VCBN-LBSF 2004-010	R0.2	1	0.32	0.38	15°	1.03	1.06	1.10	1.13	1.21	—
VCBN-LBSF 2005-010	R0.25	1	0.4	0.48	15°	1.03	1.06	1.09	1.12	1.20	—
VCBN-LBSF 2005-015	R0.25	1.5	0.4	0.48	15°	1.54	1.59	1.64	1.70	1.82	—
VCBN-LBSF 2006-010	R0.3	1	0.48	0.58	15°	1.02	1.05	1.08	1.11	1.18	—
VCBN-LBSF 2006-015	R0.3	1.5	0.48	0.58	15°	1.54	1.59	1.64	1.69	1.81	—
VCBN-LBSF 2006-020	R0.3	2	0.48	0.58	15°	2.06	2.12	2.19	2.26	2.43	—
VCBN-LBSF 2008-020	R0.4	2	0.6	0.78	15°	2.05	2.11	2.18	2.25	2.40	—
VCBN-LBSF 2010-015	R0.5	1.5	0.7	0.96	15°	1.56	1.60	1.64	1.68	1.79	—
VCBN-LBSF 2010-020	R0.5	2	0.7	0.96	15°	2.07	2.13	2.19	2.26	2.41	—
VCBN-LBSF 2010-025	R0.5	2.5	0.7	0.96	15°	2.59	2.67	2.75	2.83	3.03	—
VCBN-LBSF 2010-030	R0.5	3	0.7	0.96	15°	3.11	3.20	3.30	3.41	3.65	—

VCBN-LBSF Milling Conditions

WORK MATERIAL			HEAT-TREATED STEELS / HARDENED STEELS STAVAX / ELMAX / HAP10 / HAP72 (~68HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
2001-002	**R0.05**	0.2	30,000	80	0.003 or below	0.006 or below
2001-003	**R0.05**	0.3	30,000	70	0.003 or below	0.006 or below
20015-003	**R0.075**	0.3	30,000	180	0.004 or below	0.008 or below
20015-0045	**R0.075**	0.45	30,000	150	0.004 or below	0.008 or below
2002-003	**R0.1**	0.3	30,000	240	0.005 or below	0.01 or below
2002-006	**R0.1**	0.6	30,000	200	0.005 or below	0.01 or below
2003-005	**R0.15**	0.5	30,000	300	0.005 or below	0.01 or below
2003-0075	**R0.15**	0.75	30,000	250	0.005 or below	0.01 or below
2004-005	**R0.2**	0.5	30,000	360	0.005 or below	0.01 or below
2004-010	**R0.2**	1	30,000	300	0.005 or below	0.01 or below
2005-010	**R0.25**	1	30,000	420	0.005 or below	0.01 or below
2005-015	**R0.25**	1.5	30,000	350	0.005 or below	0.01 or below
2006-010	**R0.3**	1	30,000	500	0.01 or below	0.015 or below
2006-015	**R0.3**	1.5	30,000	500	0.01 or below	0.015 or below
2006-020	**R0.3**	2	30,000	350	0.01 or below	0.015 or below
2008-020	**R0.4**	2	30,000	620	0.01 or below	0.015 or below
2010-015	**R0.5**	1.5	30,000	750	0.01 or below	0.02 or below
2010-020	**R0.5**	2	30,000	750	0.01 or below	0.02 or below
2010-025	**R0.5**	2.5	30,000	750	0.01 or below	0.02 or below
2010-030	**R0.5**	3	30,000	500	0.01 or below	0.02 or below



Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Recommend oil mist to avoid tool damage.

Comparison of ϕ3 shank (VCBN-LBSF) and ϕ4 shank (CBN-LBSF)

Roughness comparison on finished surface R0.3 × EL1.5


Work material : ELMAX (61 HRC)
Pocket Size : 9 × 9 × 1.5 mm

<Roughing condition>
- Tool : HSB R0.5 × L1
- Coolant : Air blow
- n : 30,000 min^{-1}
- Vf : 1,000 mm/min
- a_p : 0.1 mm
- a_e : 0.3 mm
- Allowance : 0.01 mm
- Cycle time : 3 min

<Semi-finishing>
- Tool : HSB R0.5 × L1
- Coolant : Air blow
- n : 30,000 min^{-1}
- Vf : 1,000 mm/min
- a_p : 0.02 mm
- a_e : 0.05 mm
- Allowance : 0.005 mm
- Cycle time : 11 min

<Finishing condition>
- Tool : CBN R0.3 × EL1.5
- Coolant : Oil mist
- n : 30,000 min^{-1}
- Vf : 550 mm/min
- a_p : 0.015 mm
- a_e : 0.035 mm
- Allowance : 0 mm
- Cycle time : 20 min



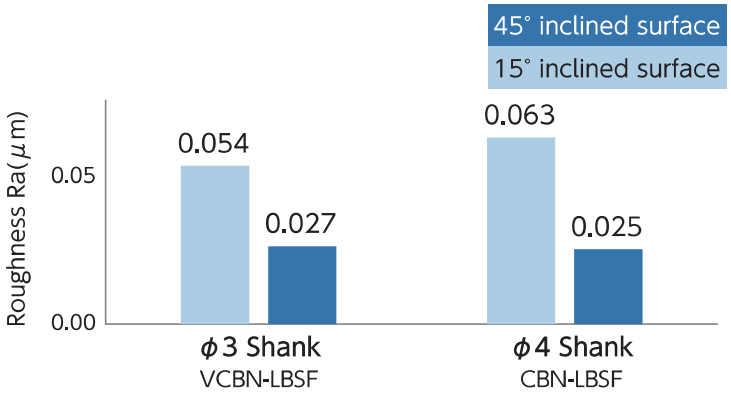

VCBN-LBF

CBN 2 Flutes Short Shank Long Neck Ball End Mills

V Series CBN Long Neck Ball

NEW

CBN


Shank Dia 0/-0.003


0°

R ±0.002 R0.03

R ±0.003 R0.05~R0.5

Back Taper Geometry



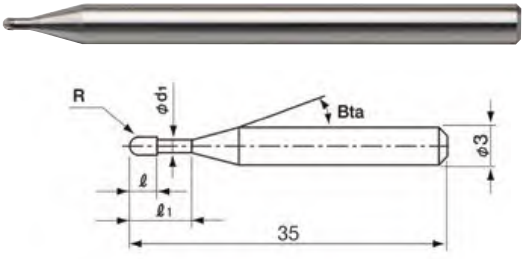

The shank taper angle shown is not an exact value.

Straight Flute





Label Sample



#001 ϕD0.600 R+0.003/0.000

Diameter and ball radius accuracy measurements are printed on the label to support high precision milling.

For longer tool life

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
		○	●	●	●	●	●										

Total 23 models


Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter ϕd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°	Suggested Retail Price ¥
VCBN-LBF 20006-0015	R0.03	0.15	0.05	0.055	15°	0.16	0.17	0.18	0.19	0.20	—
VCBN-LBF 20006-0025	R0.03	0.25	0.05	0.055	15°	0.26	0.28	0.29	0.30	0.33	—
VCBN-LBF 2001-003	R0.05	0.3	0.08	0.09	15°	0.32	0.34	0.35	0.36	0.40	—
VCBN-LBF 2001-005	R0.05	0.5	0.08	0.09	15°	0.53	0.55	0.57	0.59	0.64	—
VCBN-LBF 20015-0045	R0.075	0.45	0.15	0.14	15°	0.49	0.50	0.52	0.54	0.58	—
VCBN-LBF 20015-0075	R0.075	0.75	0.15	0.14	15°	0.79	0.82	0.85	0.88	0.95	—
VCBN-LBF 2002-0045	R0.1	0.45	0.16	0.19	15°	0.49	0.51	0.52	0.54	0.58	—
VCBN-LBF 2002-0075	R0.1	0.75	0.16	0.19	15°	0.79	0.82	0.85	0.88	0.95	—
VCBN-LBF 2003-005	R0.15	0.5	0.24	0.28	15°	0.57	0.59	0.60	0.62	0.67	—
VCBN-LBF 2003-009	R0.15	0.9	0.24	0.28	15°	0.97	1.00	1.04	1.07	1.15	—
VCBN-LBF 2004-005	R0.2	0.5	0.32	0.38	15°	0.51	0.52	0.54	0.55	0.58	—
VCBN-LBF 2004-010	R0.2	1	0.32	0.38	15°	1.03	1.06	1.09	1.13	1.21	—
VCBN-LBF 2004-012	R0.2	1.2	0.32	0.38	15°	1.22	1.26	1.30	1.35	1.44	—
VCBN-LBF 2005-012	R0.25	1.2	0.4	0.48	15°	1.22	1.26	1.30	1.34	1.43	—
VCBN-LBF 2005-015	R0.25	1.5	0.4	0.48	15°	1.53	1.58	1.63	1.68	1.80	—
VCBN-LBF 2006-010	R0.3	1	0.48	0.58	15°	1.02	1.05	1.08	1.11	1.18	—
VCBN-LBF 2006-015	R0.3	1.5	0.48	0.58	15°	1.53	1.57	1.62	1.68	1.79	—
VCBN-LBF 2006-020	R0.3	2	0.48	0.58	15°	2.05	2.11	2.18	2.25	2.41	—
VCBN-LBF 2008-020	R0.4	2	0.6	0.78	15°	2.04	2.10	2.17	2.24	2.39	—
VCBN-LBF 2010-015	R0.5	1.5	0.7	0.98	15°	1.53	1.57	1.61	1.66	1.76	—
VCBN-LBF 2010-020	R0.5	2	0.7	0.98	15°	2.05	2.11	2.17	2.23	2.38	—
VCBN-LBF 2010-025	R0.5	2.5	0.7	0.98	15°	2.57	2.64	2.72	2.81	3.00	—
VCBN-LBF 2010-030	R0.5	3	0.7	0.98	15°	3.09	3.18	3.28	3.38	3.62	—

VCBN-LBF Milling Conditions

WORK MATERIAL			HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
20006-0015	**R0.03**	0.15	60,000	90	0.001	0.002	60,000	70	0.001	0.002	60,000	50	0.001	0.002
20006-0025	**R0.03**	0.25	60,000	70	0.001	0.002	60,000	60	0.001	0.002	60,000	50	0.001	0.002
2001-003	**R0.05**	0.3	30,000	200	0.005	0.005	30,000	150	0.003	0.005	30,000	100	0.002	0.005
2001-005	**R0.05**	0.5	30,000	150	0.003	0.005	30,000	120	0.003	0.005	30,000	90	0.002	0.005
20015-0045	**R0.075**	0.45	30,000	350	0.005	0.005	30,000	270	0.004	0.005	30,000	200	0.003	0.005
20015-0075	**R0.075**	0.75	30,000	220	0.004	0.005	30,000	160	0.004	0.005	30,000	100	0.003	0.005
2002-0045	**R0.1**	0.45	30,000	580	0.005	0.005	30,000	480	0.005	0.005	30,000	370	0.005	0.005
2002-0075	**R0.1**	0.75	30,000	420	0.005	0.005	30,000	330	0.005	0.005	30,000	230	0.005	0.005
2003-005	**R0.15**	0.5	30,000	1,000	0.005	0.005	30,000	950	0.005	0.005	30,000	620	0.005	0.005
2003-009	**R0.15**	0.9	30,000	760	0.005	0.005	30,000	600	0.005	0.005	30,000	430	0.005	0.005
2004-005	**R0.2**	0.5	30,000	1,580	0.005	0.01	30,000	1,330	0.005	0.01	30,000	860	0.005	0.005
2004-010	**R0.2**	1	30,000	1,200	0.005	0.01	30,000	950	0.005	0.01	30,000	730	0.005	0.005
2004-012	**R0.2**	1.2	30,000	1,050	0.005	0.01	30,000	800	0.005	0.01	30,000	620	0.005	0.005
2005-012	**R0.25**	1.2	30,000	1,480	0.01	0.01	30,000	1,180	0.01	0.01	30,000	860	0.005	0.01
2005-015	**R0.25**	1.5	30,000	1,300	0.01	0.01	30,000	1,000	0.01	0.01	30,000	760	0.005	0.01
2006-010	**R0.3**	1	30,000	2,400	0.02	0.03	30,000	1,900	0.02	0.03	30,000	1,080	0.01	0.02
2006-015	**R0.3**	1.5	30,000	2,000	0.02	0.03	30,000	1,500	0.02	0.03	30,000	1,000	0.01	0.02
2006-020	**R0.3**	2	28,700	1,700	0.02	0.02	28,700	1,300	0.02	0.02	28,700	920	0.01	0.01
2008-020	**R0.4**	2	30,000	2,500	0.02	0.03	30,000	2,100	0.02	0.03	30,000	1,700	0.01	0.02
2010-015	**R0.5**	1.5	30,000	3,700	0.04	0.05	30,000	3,400	0.03	0.04	30,000	2,300	0.025	0.03
2010-020	**R0.5**	2	30,000	3,500	0.04	0.04	30,000	3,200	0.03	0.04	30,000	2,200	0.02	0.03
2010-025	**R0.5**	2.5	30,000	3,300	0.04	0.04	30,000	3,000	0.03	0.04	30,000	2,100	0.02	0.03
2010-030	**R0.5**	3	29,000	3,100	0.03	0.04	29,000	2,770	0.03	0.03	29,000	2,000	0.02	0.02

Note:
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
・Recommend oil mist to avoid tool damage.



Comparison of ϕ3 shank (VCBN-LBF) and ϕ4 shank (CBN-LBF)


Hemispherical + Flat milling example R0.1 x Effective Length 0.45

<Milling condition>

・Work material : HAP72 (67 HRC)
・Coolant : Oil mist
・Milling shape : Hemisphere (R2) + Flat (Width 2)
・Cycle time : About 3 h 40 min / 6 pcs


n : 30,000 min^{-1}
Vf : 370 mm/min
a_p : 0.005 mm
a_e : 0.005 mm
Allowance : 0.005 mm

<Milling shape>

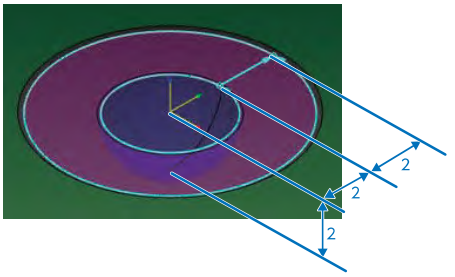


<Surface roughness>

Roughness measurement position

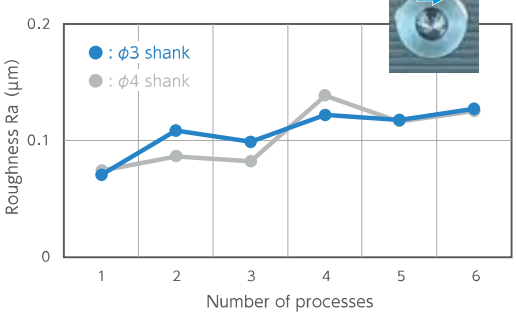

<Hemispherical surface condition>

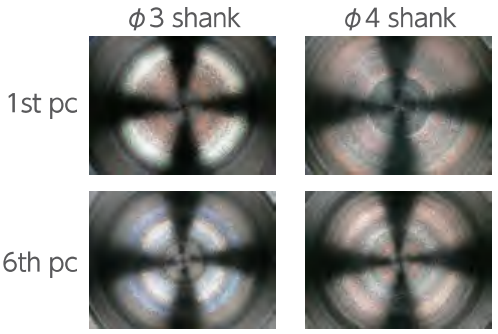

VCBN-LRF

CBN
2 Flutes Short Shank Long Neck Radius End Mills

V Series CBN Long Neck Radius

NEW

CBN

Shank Dia 0/-0.003

0°

R


R ±0.002


CR≦0.03

R ±0.003

CR≧0.05

Back Taper Geometry



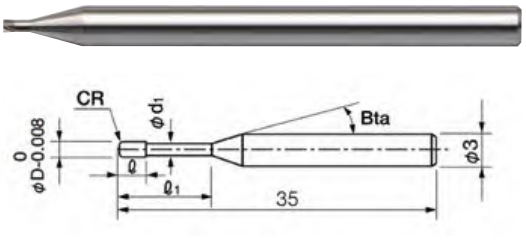

The shank taper angle shown is not an exact value.

Label Sample



#001 φD0.997 R+0.001/0.000

Diameter and Corner R accuracy measurements are printed on the label to support high precision milling.

Straight Flute





For longer tool life

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
		○	●	●	●	●	●										

Total 20 models


Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°	Suggested Retail Price ¥
VCBN-LRF 2001-002002	0.1	R0.02	0.2	0.04	0.09	15°	0.22	0.23	0.24	0.25	0.27	—
VCBN-LRF 2001-003002	0.1	R0.03	0.2	0.04	0.09	15°	0.21	0.23	0.24	0.25	0.27	—
VCBN-LRF 2002-002005	0.2	R0.02	0.5	0.08	0.19	15°	0.53	0.55	0.57	0.59	0.65	—
VCBN-LRF 2002-005005	0.2	R0.05	0.5	0.08	0.19	15°	0.53	0.55	0.57	0.59	0.64	—
VCBN-LRF 2003-002005	0.3	R0.02	0.5	0.13	0.28	15°	0.56	0.58	0.61	0.63	0.68	—
VCBN-LRF 2003-005005	0.3	R0.05	0.5	0.13	0.28	15°	0.56	0.58	0.60	0.62	0.68	—
VCBN-LRF 2003-010005	0.3	R0.1	0.5	0.13	0.28	15°	0.56	0.58	0.60	0.62	0.66	—
VCBN-LRF 2004-002005	0.4	R0.02	0.5	0.24	0.38	15°	0.51	0.53	0.55	0.57	0.62	—
VCBN-LRF 2004-005005	0.4	R0.05	0.5	0.24	0.38	15°	0.51	0.52	0.54	0.56	0.61	—
VCBN-LRF 2004-010005	0.4	R0.1	0.5	0.24	0.38	15°	0.50	0.52	0.54	0.56	0.60	—
VCBN-LRF 2005-002010	0.5	R0.02	1	0.3	0.48	15°	1.02	1.06	1.10	1.14	1.24	—
VCBN-LRF 2005-005010	0.5	R0.05	1	0.3	0.48	15°	1.02	1.06	1.10	1.14	1.23	—
VCBN-LRF 2005-010010	0.5	R0.1	1	0.3	0.48	15°	1.02	1.06	1.09	1.13	1.22	—
VCBN-LRF 2006-005010	0.6	R0.05	1	0.3	0.58	15°	1.02	1.06	1.10	1.14	1.23	—
VCBN-LRF 2006-010010	0.6	R0.1	1	0.3	0.58	15°	1.02	1.06	1.09	1.13	1.22	—
VCBN-LRF 2008-005010	0.8	R0.05	1	0.56	0.78	15°	1.02	1.06	1.10	1.14	1.23	—
VCBN-LRF 2008-010010	0.8	R0.1	1	0.56	0.78	15°	1.02	1.06	1.09	1.13	1.22	—
VCBN-LRF 2010-002020	1	R0.02	2	0.7	0.98	15°	2.06	2.13	2.21	2.30	2.48	—
VCBN-LRF 2010-005020	1	R0.05	2	0.7	0.98	15°	2.06	2.13	2.21	2.29	2.48	—
VCBN-LRF 2010-010020	1	R0.1	2	0.7	0.98	15°	2.06	2.13	2.20	2.28	2.47	—

VCBN-LRF Milling Conditions

WORK MATERIAL				HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-002002	**0.1**	R0.02	0.2	30,000	90	0.002	0.01	30,000	60	0.002	0.01	30,000	30	0.002	0.005
2001-003002	**0.1**	R0.03	0.2	30,000	90	0.002	0.01	30,000	60	0.002	0.01	30,000	30	0.002	0.005
2002-002005	**0.2**	R0.02	0.5	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-005005	**0.2**	R0.05	0.5	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2003-002005	**0.3**	R0.02	0.5	30,000	185	0.003	0.045	30,000	160	0.003	0.045	30,000	120	0.003	0.02
2003-005005	**0.3**	R0.05	0.5	30,000	240	0.005	0.045	30,000	225	0.005	0.045	30,000	210	0.004	0.02
2003-010005	**0.3**	R0.1	0.5	30,000	370	0.005	0.045	30,000	340	0.005	0.045	30,000	310	0.004	0.02
2004-002005	**0.4**	R0.02	0.5	30,000	230	0.005	0.065	30,000	200	0.005	0.065	30,000	160	0.004	0.02
2004-005005	**0.4**	R0.05	0.5	30,000	340	0.01	0.065	30,000	300	0.01	0.065	30,000	220	0.005	0.02
2004-010005	**0.4**	R0.1	0.5	30,000	520	0.01	0.065	30,000	450	0.01	0.065	30,000	320	0.005	0.02
2005-002010	**0.5**	R0.02	1	30,000	280	0.005	0.09	30,000	240	0.005	0.09	30,000	200	0.005	0.03
2005-005010	**0.5**	R0.05	1	30,000	440	0.01	0.09	30,000	380	0.01	0.09	30,000	280	0.01	0.03
2005-010010	**0.5**	R0.1	1	30,000	700	0.02	0.09	30,000	600	0.02	0.09	30,000	410	0.01	0.03
2006-005010	**0.6**	R0.05	1	30,000	500	0.01	0.11	30,000	430	0.01	0.11	30,000	340	0.01	0.035
2006-010010	**0.6**	R0.1	1	30,000	800	0.02	0.11	30,000	675	0.02	0.11	30,000	492	0.01	0.035
2008-005010	**0.8**	R0.05	1	30,000	600	0.01	0.16	30,000	510	0.01	0.16	30,000	450	0.01	0.04
2008-010010	**0.8**	R0.1	1	30,000	920	0.02	0.16	30,000	790	0.02	0.16	30,000	560	0.01	0.04
2010-002020	**1**	R0.02	2	30,000	500	0.005	0.2	30,000	430	0.005	0.2	30,000	400	0.005	0.05
2010-005020	**1**	R0.05	2	30,000	700	0.01	0.2	30,000	600	0.01	0.2	30,000	500	0.01	0.05
2010-010020	**1**	R0.1	2	30,000	1,000	0.02	0.2	30,000	850	0.02	0.2	30,000	600	0.01	0.05

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Recommend oil mist to avoid tool damage.



Comparison of VCBN-LRF (ϕ3 shank) and CBN-LRF (ϕ4 shank)


Air vent milling example ϕ1 × CR0.05 × EL2

<Milling condition>


Work material : VANADIS23 (64 HRC)
Coolant : Oil Mist
Milling shape : Flat surface 10 mm × 10 mm
Cycle time : About 70 min / 10 surfaces

n : 30,000 min^{-1}
Vf : 500 mm/min
a_p : 0.005 mm
a_e : 0.05 mm
Allowance : 0.005 mm

<Finished work>

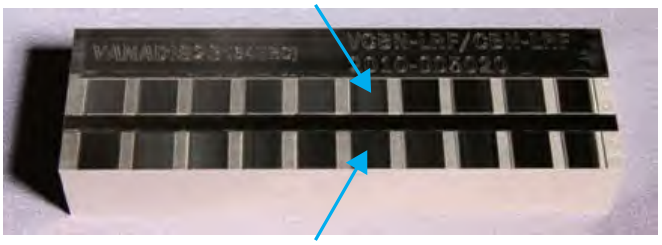

<Surface roughness>

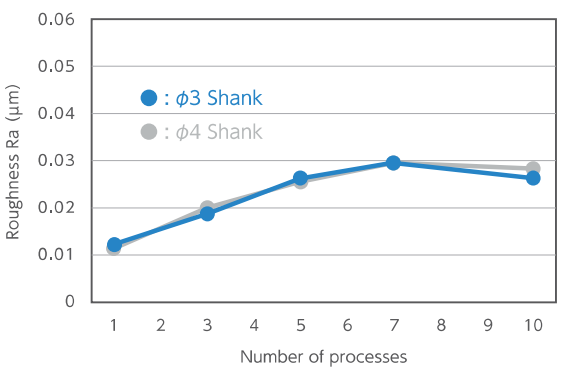

<Tool condition after milling>

ϕ3 Shank





ϕ4 Shank





VCES2000 UTCOAT 2 Flutes Short Shank Square End Mills

V Series UTCOAT Square

NEW


Super MG

UT COAT

30°

Shank Dia 0/-0.003

Flatland

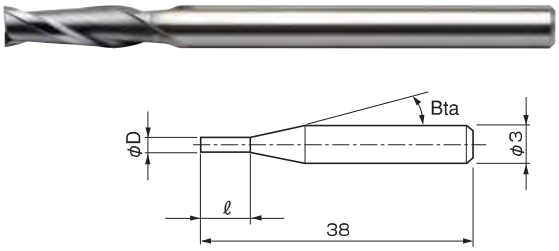

The shank taper angle shown is not an exact value.

Multi-purpose Standard type

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	HARDENED STEELS ~55HRC	HARDENED STEELS ~60HRC	HARDENED STEELS ~65HRC	HARDENED STEELS ~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
●	●	●	●	○				○			●			○	○		

Total 35 models

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Suggested Retail Price ¥
VCES 2001-0015	0.1	0.15	16°	—
VCES 2001-0020	0.1	0.2	16°	—
VCES 2002-0040	0.2	0.4	16°	—
VCES 2002-0050	0.2	0.5	16°	—
VCES 2002-0060	0.2	0.6	16°	—
VCES 2003-0045	0.3	0.45	16°	—
VCES 2003-0060	0.3	0.6	16°	—
VCES 2003-0075	0.3	0.75	16°	—
VCES 2003-0090	0.3	0.9	16°	—
VCES 2004-0060	0.4	0.6	16°	—
VCES 2004-0080	0.4	0.8	16°	—
VCES 2004-0100	0.4	1	16°	—
VCES 2004-0120	0.4	1.2	16°	—
VCES 2005-0100	0.5	1	16°	—
VCES 2005-0125	0.5	1.25	16°	—
VCES 2005-0150	0.5	1.5	16°	—
VCES 2005-0200	0.5	2	16°	—
VCES 2006-0150	0.6	1.5	16°	—
VCES 2006-0180	0.6	1.8	16°	—
VCES 2006-0240	0.6	2.4	16°	—
VCES 2008-0120	0.8	1.2	16°	—
VCES 2008-0200	0.8	2	16°	—
VCES 2008-0240	0.8	2.4	16°	—
VCES 2008-0320	0.8	3.2	16°	—
VCES 2010-0200	1	2	16°	—
VCES 2010-0250	1	2.5	16°	—
VCES 2010-0300	1	3	16°	—
VCES 2010-0400	1	4	16°	—
VCES 2015-0300	1.5	3	16°	—
VCES 2015-0400	1.5	4	16°	—
VCES 2020-0400	2	4	16°	—
VCES 2020-0600	2	6	16°	—
VCES 2025-0750	2.5	7.5	16°	—
VCES 2030-0450	3	4.5	—	—
VCES 2030-0900	3	9	—	—

The comparison example of VCES(ϕ3 shank) & C-CES(ϕ4 shank) ϕ2 × L6


VCES2000 Side milling example

<Milling condition>


Work material : S50C
Coolant : Water soluble
Milling method : Side milling L 70 × H 5 mm
Cycle time : 30 min (Roughing + Finishing)

n : 11,000 min^{-1}
V_f : Roughing 130 mm/min
Finishing 65 mm/min
a_p : 5.0 mm
a_e : Roughing 0.1 mm
Finishing 0.01 mm


<Side milling image>

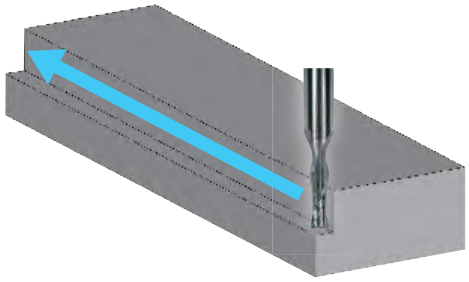

Tool damage after the roughing process

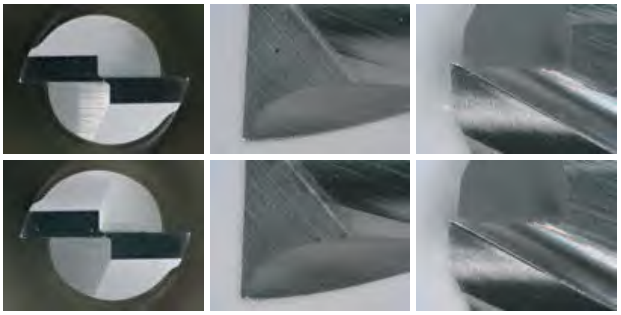


Wall deflection after the finishing process

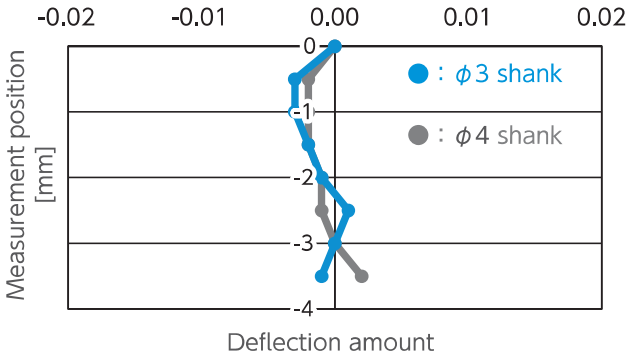

VCES2000 Slotting example

<Slotting, Dimensional measurement image>

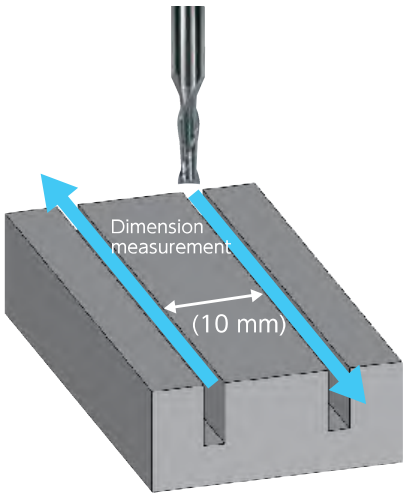


※ Dimensional measurement point:
Center of the slots, at a depth of 3 mm

<Milling condition>


Work material : S50C
Coolant : Water soluble
Milling shape : Slotting
L 45 × D 6 mm
Cycle time : 20 min

n : 11,000 min^{-1}
V_f : 130 mm/min
a_p : 0.25 mm

<Tool overhang image>

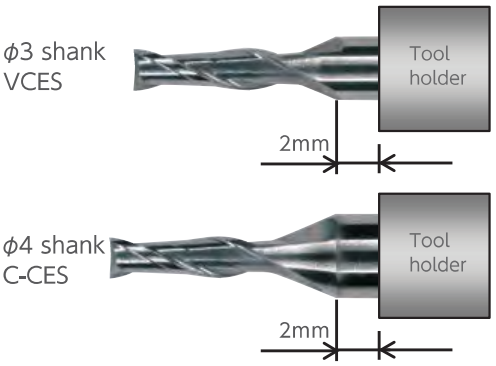

Dimensional error of the slots

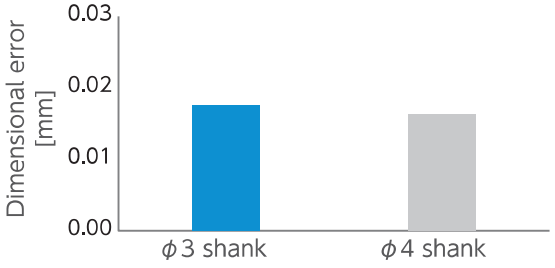

Equivalent results were obtained despite the shank diameter gap.

Milling Condition for VCES2000

Slotting


WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)			ALLOY STEELS SK / SCM / SUS (225~325HB)			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)			HARDENED STEELS SKD / SKT (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2001	**0.1**	0.15	30,000	30	0.01	30,000	30	0.01	30,000	15	0.01	30,000	10	0.002
2001	**0.1**	0.2	30,000	30	0.01	30,000	30	0.01	30,000	15	0.01	30,000	10	0.002
2002	**0.2**	0.4	30,000	85	0.02	30,000	85	0.02	30,000	30	0.02	30,000	25	0.004
2002	**0.2**	0.5	30,000	85	0.014	30,000	85	0.014	30,000	30	0.014	30,000	25	0.004
2002	**0.2**	0.6	30,000	85	0.01	30,000	85	0.01	30,000	30	0.01	30,000	25	0.002
2003	**0.3**	0.45	30,000	110	0.03	30,000	110	0.03	30,000	55	0.03	22,000	25	0.006
2003	**0.3**	0.6	30,000	110	0.03	30,000	110	0.03	30,000	55	0.03	22,000	25	0.006
2003	**0.3**	0.75	30,000	110	0.021	30,000	110	0.021	30,000	55	0.021	22,000	25	0.006
2003	**0.3**	0.9	30,000	110	0.015	30,000	110	0.015	30,000	55	0.015	22,000	25	0.003
2004	**0.4**	0.6	30,000	120	0.04	30,000	120	0.04	27,000	60	0.04	17,000	25	0.008
2004	**0.4**	0.8	30,000	120	0.04	30,000	120	0.04	27,000	60	0.04	17,000	25	0.008
2004	**0.4**	1	30,000	120	0.028	30,000	120	0.028	27,000	60	0.028	17,000	25	0.008
2004	**0.4**	1.2	30,000	120	0.02	30,000	120	0.02	27,000	60	0.02	17,000	25	0.004
2005	**0.5**	1	30,000	120	0.05	29,000	120	0.05	21,500	60	0.05	13,000	25	0.01
2005	**0.5**	1.25	30,000	120	0.035	29,000	120	0.035	21,500	60	0.035	13,000	25	0.01
2005	**0.5**	1.5	30,000	120	0.025	29,000	120	0.025	21,500	60	0.025	13,000	25	0.005
2005	**0.5**	2	30,000	120	0.01	29,000	120	0.01	21,500	60	0.01	13,000	25	0.005
2006	**0.6**	1.5	30,000	120	0.042	24,000	120	0.042	18,000	60	0.042	11,000	25	0.012
2006	**0.6**	1.8	30,000	120	0.03	24,000	120	0.03	18,000	60	0.03	11,000	25	0.006
2006	**0.6**	2.4	30,000	120	0.012	24,000	120	0.012	18,000	60	0.012	11,000	25	0.006
2008	**0.8**	1.2	24,000	120	0.08	19,000	120	0.08	13,800	60	0.08	8,800	30	0.016
2008	**0.8**	2	24,000	120	0.056	19,000	120	0.056	13,800	60	0.056	8,800	30	0.016
2008	**0.8**	2.4	24,000	120	0.04	19,000	120	0.04	13,800	60	0.04	8,800	30	0.008
2008	**0.8**	3.2	24,000	120	0.016	19,000	120	0.016	13,800	60	0.016	8,800	30	0.008
2010	**1**	2	20,000	125	0.25	15,000	120	0.25	11,000	65	0.25	7,100	30	0.05
2010	**1**	2.5	20,000	125	0.2	15,000	120	0.2	11,000	65	0.2	7,100	30	0.03
2010	**1**	3	20,000	125	0.125	15,000	120	0.125	11,000	65	0.125	7,100	30	0.02
2010	**1**	4	20,000	125	0.075	15,000	120	0.075	11,000	65	0.075	7,100	30	0.01
2015	**1.5**	3	13,500	130	0.375	10,000	120	0.375	8,000	70	0.375	5,100	35	0.075
2015	**1.5**	4	13,500	130	0.1875	10,000	120	0.1875	8,000	70	0.1875	5,100	35	0.03
2020	**2**	4	11,000	130	0.5	8,500	120	0.5	6,400	70	0.5	4,000	40	0.1
2020	**2**	6	11,000	130	0.25	8,500	120	0.25	6,400	70	0.25	4,000	40	0.04
2025	**2.5**	7.5	8,800	195	0.3125	7,000	135	0.3125	5,000	70	0.3125	3,200	40	0.05
2030	**3**	4.5	7,400	195	1.5	6,400	145	1.5	4,500	80	1.5	2,800	45	0.15
2030	**3**	9	7,400	195	0.9	6,400	145	0.9	4,500	80	0.9	2,800	45	0.06

Milling Condition for VCES2000

Side Milling

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001	**0.1**	0.15	30,000	30	0.15	0.01	30,000	30	0.15	0.01	30,000	15	0.15	0.01	30,000	10	0.1	0.005
2001	**0.1**	0.2	30,000	30	0.15	0.01	30,000	30	0.15	0.01	30,000	15	0.15	0.01	30,000	10	0.1	0.005
2002	**0.2**	0.4	30,000	85	0.3	0.02	30,000	85	0.3	0.02	30,000	30	0.3	0.02	30,000	25	0.2	0.01
2002	**0.2**	0.5	30,000	85	0.4	0.014	30,000	85	0.4	0.014	30,000	30	0.4	0.014	30,000	25	0.3	0.006
2002	**0.2**	0.6	30,000	85	0.5	0.01	30,000	85	0.5	0.01	30,000	30	0.5	0.01	30,000	25	0.4	0.004
2003	**0.3**	0.45	30,000	110	0.45	0.03	30,000	110	0.45	0.03	30,000	55	0.45	0.03	22,000	25	0.3	0.015
2003	**0.3**	0.6	30,000	110	0.45	0.03	30,000	110	0.45	0.03	30,000	55	0.45	0.03	22,000	25	0.3	0.015
2003	**0.3**	0.75	30,000	110	0.6	0.021	30,000	110	0.6	0.021	30,000	55	0.6	0.021	22,000	25	0.45	0.009
2003	**0.3**	0.9	30,000	110	0.75	0.015	30,000	110	0.75	0.015	30,000	55	0.75	0.015	22,000	25	0.6	0.006
2004	**0.4**	0.6	30,000	120	0.6	0.04	30,000	120	0.6	0.04	27,000	60	0.6	0.04	17,000	25	0.4	0.02
2004	**0.4**	0.8	30,000	120	0.6	0.04	30,000	120	0.6	0.04	27,000	60	0.6	0.04	17,000	25	0.4	0.02
2004	**0.4**	1	30,000	120	0.8	0.028	30,000	120	0.8	0.028	27,000	60	0.8	0.028	17,000	25	0.6	0.012
2004	**0.4**	1.2	30,000	120	1	0.02	30,000	120	1	0.02	27,000	60	1	0.02	17,000	25	0.8	0.008
2005	**0.5**	1	30,000	120	0.75	0.05	29,000	120	0.75	0.05	21,500	60	0.75	0.05	13,000	25	0.5	0.025
2005	**0.5**	1.25	30,000	120	1	0.035	29,000	120	1	0.035	21,500	60	1	0.035	13,000	25	0.75	0.015
2005	**0.5**	1.5	30,000	120	1.25	0.025	29,000	120	1.25	0.025	21,500	60	1.25	0.025	13,000	25	1	0.01
2005	**0.5**	2	30,000	120	1.75	0.01	29,000	120	1.75	0.01	21,500	60	1.75	0.01	13,000	25	1.5	0.005
2006	**0.6**	1.5	30,000	120	1.2	0.042	24,000	120	1.2	0.042	18,000	60	1.2	0.042	11,000	25	0.9	0.018
2006	**0.6**	1.8	30,000	120	1.5	0.03	24,000	120	1.5	0.03	18,000	60	1.5	0.03	11,000	25	1.2	0.012
2006	**0.6**	2.4	30,000	120	2.1	0.012	24,000	120	2.1	0.012	18,000	60	2.1	0.012	11,000	25	1.8	0.006
2008	**0.8**	1.2	24,000	120	1.2	0.08	19,000	120	1.2	0.08	13,800	60	1.2	0.08	8,800	30	0.8	0.04
2008	**0.8**	2	24,000	120	1.6	0.056	19,000	120	1.6	0.056	13,800	60	1.6	0.056	8,800	30	1.2	0.024
2008	**0.8**	2.4	24,000	120	2	0.04	19,000	120	2	0.04	13,800	60	2	0.04	8,800	30	1.6	0.016
2008	**0.8**	3.2	24,000	120	2.8	0.016	19,000	120	2.8	0.016	13,800	60	2.8	0.016	8,800	30	2.4	0.008
2010	**1**	2	20,000	125	1.5	0.1	15,000	120	1.5	0.1	11,000	65	1.5	0.1	7,100	30	1	0.05
2010	**1**	2.5	20,000	125	2	0.07	15,000	120	2	0.07	11,000	65	2	0.07	7,100	30	1.5	0.03
2010	**1**	3	20,000	125	2.5	0.05	15,000	120	2.5	0.05	11,000	65	2.5	0.05	7,100	30	2	0.02
2010	**1**	4	20,000	125	3.5	0.02	15,000	120	3.5	0.02	11,000	65	3.5	0.02	7,100	30	3	0.01
2015	**1.5**	3	13,500	130	2.25	0.15	10,000	120	2.25	0.15	8,000	70	2.25	0.15	5,100	35	1.5	0.075
2015	**1.5**	4	13,500	130	3.75	0.075	10,000	120	3.75	0.075	8,000	70	3.75	0.075	5,100	35	3	0.03
2020	**2**	4	11,000	130	3	0.2	8,500	120	3	0.2	6,400	70	3	0.2	4,000	40	2	0.1
2020	**2**	6	11,000	130	5	0.1	8,500	120	5	0.1	6,400	70	5	0.1	4,000	40	4	0.04
2025	**2.5**	7.5	8,800	195	6.25	0.125	7,000	135	6.25	0.125	5,000	70	6.25	0.125	3,200	40	5	0.05
2030	**3**	4.5	7,400	195	4.5	0.3	6,400	145	4.5	0.3	4,500	80	4.5	0.3	2,800	45	3	0.15
2030	**3**	9	7,400	195	7.5	0.15	6,400	145	7.5	0.15	4,500	80	7.5	0.15	2,800	45	6	0.06

Note:
- Recommend water soluble or oil coolant.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.



VCES4000 UTCOAT 4 Flutes Short Shank Square End Mills

V Series UTCOAT Square

NEW

Super MG


UT COAT

30°

Shank Dia 0/-0.003

Flatland



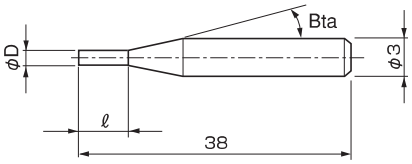

The shank taper angle shown is not an exact value.

Multi-purpose Standard type

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	HARDENED STEELS ~55HRC	HARDENED STEELS ~60HRC	HARDENED STEELS ~65HRC	HARDENED STEELS ~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
●	●	●	●	○				○			●			○	○		

Total 10 models

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Suggested Retail Price ¥
VCES 4010-0250	1	2.5	16°	—
VCES 4010-0400	1	4	16°	—
VCES 4015-0600	1.5	6	16°	—
VCES 4020-0500	2	5	16°	—
VCES 4020-0600	2	6	16°	—
VCES 4020-0800	2	8	16°	—
VCES 4025-0625	2.5	6.25	16°	—
VCES 4025-1000	2.5	10	16°	—
VCES 4030-0800	3	8	—	—
VCES 4030-1200	3	12	—	—


Milling Condition for VCES4000

Side Milling

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010	**1**	2.5	20,000	240	2	0.07	15,000	215	2	0.07	11,000	85	2	0.07	7,100	40	1.5	0.03
4010	**1**	4	20,000	240	3.5	0.02	15,000	215	3.5	0.02	11,000	85	3.5	0.02	7,100	40	3	0.01
4015	**1.5**	6	13,500	245	5.25	0.03	10,000	215	5.25	0.03	8,000	90	5.25	0.03	5,100	50	4.5	0.015
4020	**2**	5	11,000	245	4	0.14	8,500	215	4	0.14	6,400	90	4	0.14	4,000	55	3	0.06
4020	**2**	6	11,000	245	5	0.1	8,500	215	5	0.1	6,400	90	5	0.1	4,000	55	4	0.04
4020	**2**	8	11,000	245	7	0.04	8,500	215	7	0.04	6,400	90	7	0.04	4,000	55	6	0.02
4025	**2.5**	6.25	8,800	370	5	0.175	7,000	245	5	0.175	5,000	90	5	0.175	3,200	55	3.75	0.075
4025	**2.5**	10	8,800	370	8.75	0.05	7,000	245	8.75	0.05	5,000	90	8.75	0.05	3,200	55	7.5	0.025
4030	**3**	8	7,400	370	7.5	0.15	6,400	260	7.5	0.15	4,500	105	7.5	0.15	2,800	65	6	0.06
4030	**3**	12	7,400	370	10.5	0.06	6,400	260	10.5	0.06	4,500	105	10.5	0.06	2,800	65	9	0.03

Note:
- Recommend water soluble or oil coolant.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

Side Milling





VHLS

V Series HARDMAX Long Neck Square

HARDMAX
2 Flutes Short Shank Long Neck Square End Mills

Super MG | HARD MAX | 30° | Shank Dia 0/-0.003 | Flatland



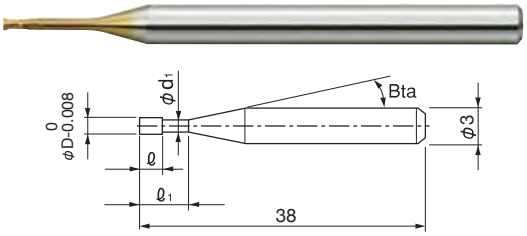

The shank taper angle shown is not an exact value.

For hard materials
Negative tip design

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
○	○	●	●	●	○			○			○			○	○		

Total 30 models

Unit (mm)

Model Number	Outside Diameter ϕD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter ϕd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30°	1°	1°30′	2°	3°	Suggested Retail Price ¥
VHLS 2001-003	0.1	0.3	0.1	0.093	11°	0.35	0.37	0.39	0.42	0.48	—
VHLS 2002-005	0.2	0.5	0.3	0.18	16°	0.68	0.72	0.76	0.80	0.87	—
VHLS 2002-010	0.2	1	0.3	0.18	16°	1.21	1.27	1.32	1.37	1.48	—
VHLS 2003-010	0.3	1	0.4	0.28	16°	1.25	1.32	1.39	1.45	1.56	—
VHLS 2003-015	0.3	1.5	0.4	0.28	16°	1.77	1.86	1.94	2.02	2.17	—
VHLS 2003-020	0.3	2	0.4	0.28	16°	2.30	2.41	2.50	2.59	2.78	—
VHLS 2004-015	0.4	1.5	0.6	0.38	16°	1.85	1.97	2.07	2.17	2.34	—
VHLS 2004-020	0.4	2	0.6	0.38	16°	2.38	2.52	2.64	2.75	2.96	—
VHLS 2004-030	0.4	3	0.6	0.38	16°	3.44	3.61	3.75	3.88	4.18	—
VHLS 2004-040	0.4	4	0.6	0.38	16°	4.49	4.69	4.85	5.02	5.40	—
VHLS 2005-015	0.5	1.5	0.7	0.49	16°	1.92	2.06	2.19	2.30	2.51	—
VHLS 2005-020	0.5	2	0.7	0.49	16°	2.46	2.62	2.76	2.89	3.13	—
VHLS 2005-025	0.5	2.5	0.7	0.49	16°	2.99	3.18	3.33	3.47	3.74	—
VHLS 2005-030	0.5	3	0.7	0.49	16°	3.52	3.73	3.89	4.04	4.35	—
VHLS 2005-040	0.5	4	0.7	0.49	16°	4.58	4.82	5.01	5.18	5.57	—
VHLS 2005-060	0.5	6	0.7	0.49	16°	6.69	6.97	7.21	7.46	8.02	—
VHLS 2006-020	0.6	2	0.9	0.59	16°	2.52	2.71	2.88	3.03	3.30	—
VHLS 2006-030	0.6	3	0.9	0.59	16°	3.60	3.83	4.02	4.20	4.52	—
VHLS 2006-040	0.6	4	0.9	0.59	16°	4.67	4.93	5.15	5.34	5.75	—
VHLS 2006-060	0.6	6	0.9	0.59	16°	6.78	7.10	7.36	7.62	8.19	—

HARDMAX 2 Flutes Short Shank Long Neck Square End Mills

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles					Suggested Retail Price ¥
						30′	1°	1°30′	2°	3°	
VHLS 2008-030	0.8	3	1.2	0.79	16°	3.60	3.83	4.02	4.20	4.52	—
VHLS 2008-040	0.8	4	1.2	0.79	16°	4.67	4.93	5.15	5.34	5.75	—
VHLS 2008-060	0.8	6	1.2	0.79	16°	6.78	7.10	7.36	7.62	8.19	—
VHLS 2010-030	1	3	1.5	0.96	16°	3.71	3.92	4.10	4.26	4.59	—
VHLS 2010-040	1	4	1.5	0.96	16°	4.77	5.01	5.22	5.40	5.81	—
VHLS 2010-050	1	5	1.5	0.96	16°	5.82	6.09	6.32	6.54	7.03	—
VHLS 2010-060	1	6	1.5	0.96	16°	6.87	7.17	7.42	7.68	8.26	—
VHLS 2015-040	1.5	4	2.3	1.46	16°	4.17	4.31	4.46	4.61	4.96	—
VHLS 2015-060	1.5	6	2.3	1.46	16°	6.24	6.44	6.66	6.89	7.41	—
VHLS 2020-060	2	6	3	1.93	16°	6.29	6.49	6.71	6.95	7.47	—

VHLS Milling Conditions


WORK MATERIAL			COPPER OFC / TPC				CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	**0.1**	0.3	50,000	170	0.018	0.035	50,000	170	0.005	0.035	50,000	160	0.005	0.035
2002-005	**0.2**	0.5	50,000	340	0.027	0.13	50,000	340	0.009	0.13	50,000	310	0.008	0.13
2002-010	**0.2**	1	50,000	290	0.018	0.035	50,000	290	0.007	0.035	50,000	260	0.006	0.035
2003-010	**0.3**	1	50,000	560	0.045	0.101	50,000	560	0.015	0.101	50,000	500	0.013	0.101
2003-015	**0.3**	1.5	50,000	460	0.041	0.05	50,000	460	0.013	0.05	50,000	410	0.011	0.05
2003-020	**0.3**	2	41,500	350	0.032	0.023	41,500	350	0.01	0.023	41,500	320	0.009	0.023
2004-015	**0.4**	1.5	50,000	660	0.054	0.095	50,000	660	0.016	0.095	50,000	640	0.015	0.095
2004-020	**0.4**	2	50,000	610	0.045	0.052	50,000	610	0.014	0.052	50,000	580	0.013	0.052
2004-030	**0.4**	3	44,500	510	0.027	0.018	44,500	510	0.009	0.018	43,600	450	0.008	0.018
2004-040	**0.4**	4	41,000	440	0.018	0.008	41,000	440	0.006	0.008	38,000	360	0.005	0.008
2005-015	**0.5**	1.5	50,000	1,020	0.09	0.139	50,000	1,020	0.029	0.139	50,000	870	0.027	0.139
2005-020	**0.5**	2	50,000	900	0.081	0.098	50,000	900	0.025	0.098	50,000	760	0.023	0.098
2005-025	**0.5**	2.5	50,000	780	0.072	0.057	50,000	780	0.021	0.057	47,000	650	0.019	0.057
2005-030	**0.5**	3	44,200	660	0.05	0.037	44,200	660	0.016	0.037	39,900	530	0.015	0.037
2005-040	**0.5**	4	40,600	580	0.041	0.016	40,600	580	0.013	0.016	36,100	460	0.012	0.016
2005-060	**0.5**	6	33,400	420	0.023	0.005	33,400	420	0.007	0.005	28,500	320	0.006	0.005
2006-020	**0.6**	2	50,000	1,240	0.117	0.18	50,000	1,240	0.038	0.18	50,000	930	0.034	0.18
2006-030	**0.6**	3	50,000	990	0.09	0.075	50,000	990	0.03	0.075	44,000	740	0.026	0.075
2006-040	**0.6**	4	41,300	740	0.063	0.03	41,300	740	0.021	0.03	34,700	550	0.018	0.03
2006-060	**0.6**	6	32,100	520	0.036	0.01	32,100	520	0.012	0.01	27,000	390	0.01	0.01
2008-030	**0.8**	3	41,200	1,050	0.171	0.15	41,200	1,050	0.053	0.15	34,500	790	0.049	0.15
2008-040	**0.8**	4	37,100	930	0.14	0.08	37,100	930	0.044	0.08	31,100	700	0.04	0.08
2008-060	**0.8**	6	28,800	680	0.077	0.024	28,800	680	0.025	0.024	24,200	510	0.022	0.024
2010-030	**1**	3	37,900	1,340	0.257	0.263	37,900	1,340	0.067	0.263	31,500	990	0.072	0.263
2010-040	**1**	4	34,100	1,170	0.212	0.195	34,100	1,170	0.067	0.195	28,400	870	0.06	0.195
2010-050	**1**	5	30,300	1,000	0.167	0.127	30,300	1,000	0.053	0.127	25,300	750	0.048	0.127
2010-060	**1**	6	26,500	850	0.122	0.058	26,500	850	0.039	0.058	22,100	630	0.035	0.058
2015-040	**1.5**	4	26,600	1,340	0.378	0.462	26,600	1,340	0.12	0.462	22,100	1,000	0.109	0.462
2015-060	**1.5**	6	22,800	1,120	0.297	0.293	22,800	1,120	0.094	0.293	19,000	840	0.085	0.293
2020-060	**2**	6	20,300	1,350	0.338	0.926	20,300	1,350	0.107	0.926	17,400	1,030	0.097	0.926

VHLS Milling Conditions

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HR)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~60HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	**0.1**	0.3	50,000	140	0.004	0.035	50,000	90	0.002	0.035	30,000	10	0.002	0.08
2002-005	**0.2**	0.5	50,000	270	0.006	0.13	44,800	180	0.004	0.13	15,000	10	0.002	0.13
2002-010	**0.2**	1	50,000	230	0.004	0.035	40,800	160	0.002	0.035	15,000	10	0.002	0.035
2003-010	**0.3**	1	50,000	440	0.01	0.101	50,000	330	0.007	0.101	14,600	14	0.004	0.101
2003-015	**0.3**	1.5	50,000	360	0.009	0.05	42,700	260	0.006	0.05	14,600	13	0.004	0.05
2003-020	**0.3**	2	41,500	280	0.007	0.023	33,200	190	0.005	0.023	14,600	12	0.003	0.023
2004-015	**0.4**	1.5	48,100	470	0.012	0.095	38,500	320	0.008	0.095	14,300	17	0.004	0.095
2004-020	**0.4**	2	44,600	430	0.01	0.052	35,700	290	0.007	0.052	14,300	17	0.004	0.052
2004-030	**0.4**	3	37,500	340	0.006	0.018	30,000	230	0.005	0.018	14,300	16	0.003	0.018
2004-040	**0.4**	4	33,100	280	0.004	0.008	26,500	190	0.003	0.008	14,300	15	0.002	0.008
2005-015	**0.5**	1.5	46,500	610	0.02	0.139	37,300	410	0.015	0.139	14,000	20	0.008	0.139
2005-020	**0.5**	2	40,600	510	0.018	0.098	32,500	350	0.013	0.098	14,000	20	0.007	0.098
2005-025	**0.5**	2.5	34,700	410	0.016	0.057	27,700	290	0.011	0.057	14,000	20	0.006	0.057
2005-030	**0.5**	3	32,200	370	0.011	0.037	25,700	260	0.009	0.037	14,000	19	0.005	0.037
2005-040	**0.5**	4	29,700	330	0.009	0.016	23,700	230	0.007	0.016	14,000	18	0.004	0.016
2005-060	**0.5**	6	24,700	250	0.005	0.005	19,700	170	0.003	0.005	14,000	16	0.002	0.005
2006-020	**0.6**	2	39,100	600	0.026	0.18	31,300	410	0.019	0.18	12,000	23	0.01	0.18
2006-030	**0.6**	3	33,500	500	0.02	0.075	26,800	340	0.015	0.075	12,000	22	0.008	0.075
2006-040	**0.6**	4	27,900	390	0.014	0.03	22,300	270	0.01	0.03	12,000	21	0.005	0.03
2006-060	**0.6**	6	23,000	290	0.008	0.01	18,400	200	0.006	0.01	12,000	19	0.003	0.01
2008-030	**0.8**	3	26,200	530	0.038	0.15	21,000	370	0.027	0.15	8,000	21	0.016	0.15
2008-040	**0.8**	4	24,100	480	0.031	0.08	19,300	330	0.022	0.08	8,000	20	0.013	0.08
2008-060	**0.8**	6	19,800	370	0.017	0.024	15,800	250	0.012	0.024	8,000	18	0.007	0.024
2010-030	**1**	3	23,400	650	0.057	0.263	18,700	440	0.039	0.263	6,500	15	0.016	0.263
2010-040	**1**	4	21,500	580	0.047	0.195	17,200	400	0.033	0.195	6,500	15	0.015	0.195
2010-050	**1**	5	19,600	510	0.037	0.127	15,700	360	0.027	0.127	6,500	15	0.014	0.127
2010-060	**1**	6	17,600	440	0.027	0.058	14,100	310	0.02	0.058	6,500	14	0.012	0.058
2015-040	**1.5**	4	16,300	640	0.084	0.462	13,000	440	0.06	0.462	9,600	95	0.036	0.462
2015-060	**1.5**	6	14,400	550	0.066	0.293	11,500	380	0.047	0.293	9,600	60	0.028	0.293
2020-060	**2**	6	12,500	650	0.075	0.926	10,000	450	0.054	0.926	9,600	211	0.032	0.926

Note:
- Recommend using a non-contact measuring device to avoid damaging the precision tip point.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Every coolant offers stable milling.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.

Side Milling





VDLCLS DLCCOAT
2 Flutes Short Shank Long Neck Square End Mills

V Series DLCCOAT Long Neck Square

NEW

Super MG | DLC | 35° | Shank Dia 0/-0.003 | Flatland



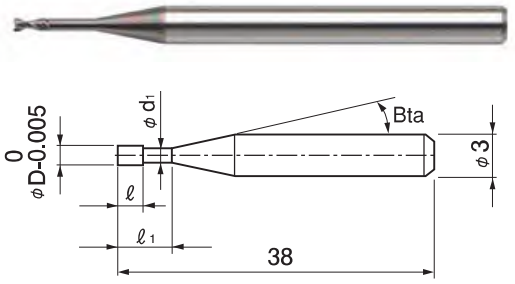

The shank taper angle shown is not an exact value.

Label Sample



#001 φD0.998

Diameter measurements are printed on the label to support High Precision milling.

DLC coating
For copper electrode milling

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
									●		★						

Total 20 models

Unit (mm)


Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°	Suggested Retail Price ¥
VDLCLS 2002-005	0.2	0.5	0.3	0.18	11°	0.64	0.67	0.71	0.75	0.85	—
VDLCLS 2002-010	0.2	1	0.3	0.18	11°	1.16	1.22	1.29	1.36	1.54	—
VDLCLS 2003-010	0.3	1	0.45	0.28	11°	1.16	1.22	1.29	1.36	1.54	—
VDLCLS 2003-015	0.3	1.5	0.45	0.28	11°	1.67	1.76	1.85	1.96	2.20	—
VDLCLS 2004-010	0.4	1	0.6	0.38	11°	1.16	1.22	1.29	1.36	1.54	—
VDLCLS 2004-020	0.4	2	0.6	0.38	11°	2.20	2.31	2.43	2.57	2.89	—
VDLCLS 2004-030	0.4	3	0.6	0.38	11°	3.24	3.41	3.59	3.79	4.26	—
VDLCLS 2005-020	0.5	2	0.75	0.48	11°	2.20	2.31	2.43	2.57	2.89	—
VDLCLS 2005-030	0.5	3	0.75	0.48	11°	3.24	3.41	3.59	3.79	4.26	—
VDLCLS 2005-040	0.5	4	0.75	0.48	11°	4.29	4.50	4.74	5.00	5.63	—
VDLCLS 2006-020	0.6	2	0.9	0.58	11°	2.20	2.31	2.43	2.57	2.89	—
VDLCLS 2006-030	0.6	3	0.9	0.58	11°	3.24	3.41	3.59	3.79	4.26	—
VDLCLS 2006-040	0.6	4	0.9	0.58	11°	4.29	4.50	4.74	5.00	5.63	—
VDLCLS 2008-040	0.8	4	1.2	0.79	11°	4.27	4.48	4.72	4.98	5.60	—
VDLCLS 2008-060	0.8	6	1.2	0.79	11°	6.37	6.68	7.03	7.42	8.34	—
VDLCLS 2010-040	1	4	1.5	0.98	11°	4.31	4.52	4.76	5.02	5.65	—
VDLCLS 2010-060	1	6	1.5	0.98	11°	6.40	6.72	7.07	7.46	8.39	—
VDLCLS 2010-080	1	8	1.5	0.98	11°	8.49	8.92	9.38	9.90	11.13	—
VDLCLS 2015-060	1.5	6	2.25	1.46	11°	6.35	6.67	7.02	7.41	8.33	—
VDLCLS 2020-080	2	8	3	1.97	11°	8.42	8.84	9.30	9.81	No Interference	—

Microchip shape milling example (C1100) ϕ1
Comparison of VDLCLS (2 flutes) and a 2 flute end mill for steels


< Milling condition >
Coolant : Oil mist
Milling shape : 25 × 25 × depth 2.5 mm

Process	n (min^{-1})	Vf (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle time
Roughing	24,000	1,200	0.5	0.05	0.02	14 min 8 sec
Finishing	24,000	1,200	0.02	0.02	0	29 min 22 sec
					Total	43 min 30 sec


< Work >




< Work surface burr >
Comparison position for surface burr




VDLCLS (2 flutes)
ϕ1 × EL4




End mill for steels (2 flutes)
ϕ1 × L2.5





< Tool after milling >



< Surface roughness >
Measurement position for roughness



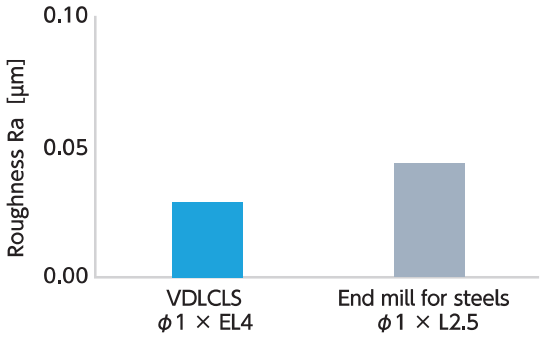



VDLCLS
Milling Video

DLC Coating and the dedicated tool geometry for copper offers the suppression of burrs and allows for a very smooth surface.

Microchip shape milling example (A5052) ϕ1

Comparison of VDLC-AZS (3 flutes) and a 2 flute end mill for steels


< Milling condition >

Coolant : Oil mist

Milling shape : 25 × 25 × depth 2.5 mm

Process	n (min^{-1})	Vf (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle time
Roughing	30,000	1,100	0.5	0.3	0.02	4 min 33 sec
Finishing	30,000	1,100	0.02	0.03	0	24 min 35 sec
					Total	29 min 8 sec

< Work >



< Work surface burr >

Comparison position for surface burr




VDLC-AZS (3 flutes) ϕ1 × EL3




End mill for steels (2 flutes) ϕ1 × L2.5



< Tool after milling >






< Surface roughness >

Measurement position for roughness



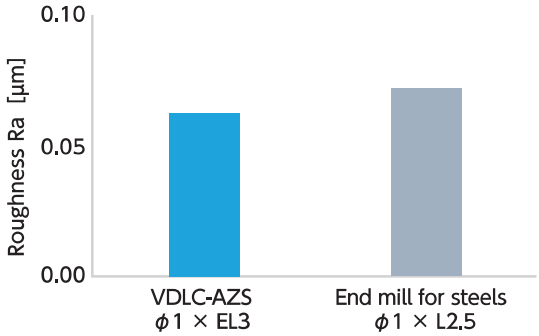

DLC Coating and the dedicated tool geometry for aluminum alloy offers the suppression of burrs and allows for a very smooth surface.

< Surface at the corner >

Comparison position for corner surface



VDLC-AZS (3 flutes) ϕ1 × EL3



End mill for steels (2 flutes) ϕ1 × L2.5



VDLC-AZS Milling Video


Small relief face are effective in suppressing chattering at the corners.

Milling Condition for VDLCLS


WORK MATERIAL			COPPER / ALUMINUM ALLOYS							TUNGSTEN COPPER						
			Side Milling				Slotting			Side Milling				Slotting		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2002-005	**0.2**	0.5	40,000	400	0.2	0.01	40,000	200	0.02	36,000	360	0.1	0.01	36,000	180	0.02
2002-010	**0.2**	1	40,000	300	0.2	0.01	40,000	150	0.02	36,000	270	0.1	0.01	36,000	135	0.02
2003-010	**0.3**	1	40,000	600	0.3	0.015	40,000	300	0.03	36,000	540	0.15	0.015	36,000	270	0.03
2003-015	**0.3**	1.5	40,000	590	0.3	0.015	40,000	295	0.03	36,000	530	0.15	0.015	36,000	265	0.03
2004-010	**0.4**	1	40,000	800	0.4	0.02	40,000	400	0.04	36,000	720	0.2	0.02	36,000	360	0.04
2004-020	**0.4**	2	40,000	600	0.4	0.02	40,000	300	0.04	36,000	540	0.2	0.02	36,000	270	0.04
2004-030	**0.4**	3	32,000	400	0.4	0.016	32,000	200	0.04	28,800	360	0.2	0.016	28,800	180	0.04
2005-020	**0.5**	2	40,000	1,000	0.5	0.025	40,000	500	0.05	36,000	900	0.25	0.025	36,000	450	0.05
2005-030	**0.5**	3	32,000	750	0.5	0.02	32,000	375	0.05	28,800	680	0.25	0.02	28,800	340	0.05
2005-040	**0.5**	4	32,000	560	0.5	0.02	32,000	280	0.05	28,800	500	0.25	0.02	28,800	250	0.05
2006-020	**0.6**	2	38,000	1,140	0.6	0.03	38,000	570	0.06	34,200	1,030	0.3	0.03	34,200	515	0.06
2006-030	**0.6**	3	38,000	1,000	0.6	0.03	38,000	500	0.06	34,200	900	0.3	0.03	34,200	450	0.06
2006-040	**0.6**	4	30,400	700	0.6	0.024	30,400	350	0.06	27,500	630	0.3	0.024	27,500	315	0.06
2008-040	**0.8**	4	30,000	1,000	0.8	0.04	30,000	500	0.08	27,000	900	0.4	0.04	27,000	450	0.08
2008-060	**0.8**	6	24,000	790	0.8	0.032	24,000	395	0.08	21,600	710	0.4	0.032	21,600	355	0.08
2010-040	**1**	4	24,000	1,200	1	0.05	24,000	600	0.1	21,600	1,080	0.5	0.05	21,600	540	0.1
2010-060	**1**	6	19,200	900	1	0.04	19,200	450	0.1	17,300	810	0.5	0.04	17,300	405	0.1
2010-080	**1**	8	19,200	680	1	0.04	19,200	340	0.1	17,300	610	0.5	0.04	17,300	305	0.1
2015-060	**1.5**	6	20,000	1,500	1.5	0.075	20,000	750	0.15	18,000	1,350	0.75	0.075	18,000	675	0.15
2020-080	**2**	8	18,000	1,800	2	0.1	18,000	900	0.2	16,200	1,620	1	0.1	16,200	810	0.2

Note :
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering occurs.
- Recommend wet coolant for Copper and Tungsten-Copper.

Slotting



Side Milling



D : Outside Diameter (mm)

VDLC-AZS

DLCCOAT
3 Flutes Short Shank Long Neck Square End Mills

V Series DLCCOAT Long Neck Square

NEW


Super MG

DLC

45°

Shank Dia 0/-0.003

Flatland

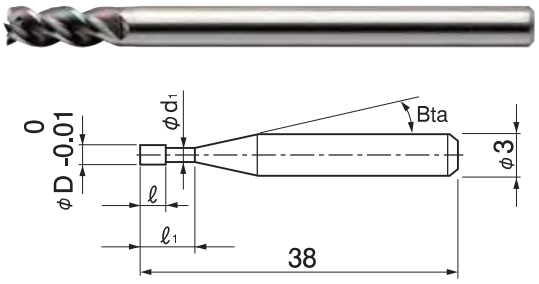


The shank taper angle shown is not an exact value.

■ Micro Flatland Design




Excellent sharpness + Chipping protection design

■ Smooth Flute Design



Outstanding chip evacuation by seamless flute.

■ 3 Flute Design



Highly efficient 3 flutes. Significant productivity improvement.

DLC coating For aluminum milling

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
									★		○	○					

Total 7 models

Unit (mm)


Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Suggested Retail Price ¥
VDLC-AZS 3010-030	1	3	2	0.97	16°	—
VDLC-AZS 3010-050	1	5	2	0.97	16°	—
VDLC-AZS 3015-045	1.5	4.5	3	1.45	16°	—
VDLC-AZS 3020-060	2	6	4	1.95	16°	—
VDLC-AZS 3020-100	2	10	4	1.95	16°	—
VDLC-AZS 3025-075	2.5	7.5	5	2.42	16°	—
VDLC-AZS 3030-090	3	9	6	2.92	—	—

Milling Condition for VDLC-AZS

WORK MATERIAL			A5052								
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3010-030	**1**	3	30,000	150	0.75	900	0.75	1,100	0.75	0.3
3010-050	**1**	5	22,500	100	0.75	600	0.75	800	0.75	0.3
3015-045	**1.5**	4.5	30,000	180	1.125	1,350	1.125	1,630	1.125	0.45
3020-060	**2**	6	30,000	225	1.5	1,800	1.5	2,150	1.5	0.6
3020-100	**2**	10	22,500	150	1.5	1,300	1.5	1,500	1.5	0.6
3025-075	**2.5**	7.5	25,000	225	1.875	1,900	1.875	2,300	1.875	0.75
3030-090	**3**	9	21,600	225	2.25	2,000	2.25	2,400	2.25	0.9
Milling Amount (mm)				a_p=0.75D		a_p=0.75D		a_p=0.75D a_e=0.3D		


WORK MATERIAL			A7075								
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3010-030	**1**	3	30,000	150	0.75	540	0.75	860	0.75	0.3
3010-050	**1**	5	22,500	100	0.75	400	0.75	600	0.75	0.3
3015-045	**1.5**	4.5	30,000	180	1.125	820	1.125	1,230	1.125	0.45
3020-060	**2**	6	30,000	225	1.5	1,100	1.5	1,600	1.5	0.6
3020-100	**2**	10	22,500	150	1.5	800	1.5	1,100	1.5	0.6
3025-075	**2.5**	7.5	23,400	220	1.875	1,070	1.875	1,550	1.875	0.75
3030-090	**3**	9	20,200	225	2.25	1,100	2.25	1,600	2.25	0.9
Milling Amount (mm)				a_p=0.75D		a_p=0.75D		a_p=0.75D a_e=0.3D		

Slotting



D : Outside Diameter (mm)

Side Milling



Note:
- Recommend using a non-contact measuring device to avoid damaging the sharp bottom corner.
- Decrease both spindle speed and feed rate proportionally in case of chattering.
- These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Spindle rigidity should be considered when setting milling parameters, especially for Z-Axis drilling.
- When slotting, using Z-Axis drilling, the milling parameters should promote good chip evacuation.
- Reduce the milling amount when chips clog on the tool during Z-Axis drilling.
- Set axial depth (ap) to 1/3 (ap=0.25D) in the area closest to a vertical wall with more than 2D work depth.
- These are milling parameters under the work material is firmly fixed. Decrease spindle speed and feed rate according to the condition.
- Recommend wet coolant.

VHGLRS HMGCOAT


4 Flutes Short Shank Long Neck Radius End Mills for Hard Materials


V Series HMGCOAT Long Neck Radius

NEW

Super MG | HMG COAT | 30° | Shank Dia 0/-0.003 | R | R ±0.003 | Back Taper Geometry | Variable Pitch





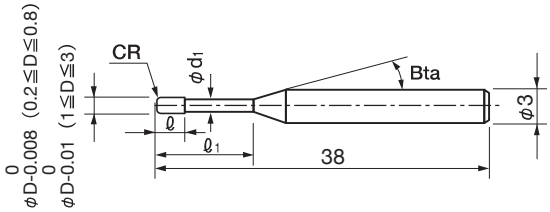

The shank taper angle shown is not an exact value.

For hard materials (~70HRC)
Super Negative tip design

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
		○	●	●	●	★	★										

Total 30 models


Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°	Suggested Retail Price ¥
VHGLRS 4002-002-005	0.2	R0.02	0.5	0.12	0.19	16°	0.61	0.65	0.68	0.71	0.76	—
VHGLRS 4002-005-005	0.2	R0.05	0.5	0.12	0.19	16°	0.61	0.64	0.67	0.70	0.76	—
VHGLRS 4003-002-005	0.3	R0.02	0.5	0.18	0.28	16°	0.63	0.66	0.69	0.72	0.78	—
VHGLRS 4003-005-005	0.3	R0.05	0.5	0.18	0.28	16°	0.63	0.66	0.69	0.72	0.77	—
VHGLRS 4004-002-010	0.4	R0.02	1	0.24	0.38	16°	1.16	1.20	1.25	1.29	1.39	—
VHGLRS 4004-005-010	0.4	R0.05	1	0.24	0.38	16°	1.16	1.20	1.24	1.29	1.38	—
VHGLRS 4004-01-010	0.4	R0.1	1	0.24	0.38	16°	1.15	1.20	1.24	1.28	1.37	—
VHGLRS 4005-005-010	0.5	R0.05	1	0.3	0.48	16°	1.16	1.20	1.24	1.29	1.38	—
VHGLRS 4005-01-010	0.5	R0.1	1	0.3	0.48	16°	1.15	1.20	1.24	1.28	1.37	—
VHGLRS 4006-005-010	0.6	R0.05	1	0.36	0.58	16°	1.15	1.20	1.24	1.28	1.38	—
VHGLRS 4006-005-020	0.6	R0.05	2	0.36	0.58	16°	2.19	2.26	2.34	2.42	2.60	—
VHGLRS 4006-01-010	0.6	R0.1	1	0.36	0.58	16°	1.15	1.19	1.23	1.28	1.37	—
VHGLRS 4006-01-020	0.6	R0.1	2	0.36	0.58	16°	2.19	2.26	2.33	2.41	2.59	—
VHGLRS 4008-005-020	0.8	R0.05	2	0.48	0.77	16°	2.57	2.75	2.90	3.05	3.31	—
VHGLRS 4008-01-020	0.8	R0.1	2	0.48	0.77	16°	2.56	2.74	2.90	3.04	3.30	—
VHGLRS 4008-02-020	0.8	R0.2	2	0.48	0.77	16°	2.55	2.72	2.88	3.02	3.28	—
VHGLRS 4010-005-020	1	R0.05	2	0.8	0.96	16°	2.63	2.80	2.95	3.09	3.34	—
VHGLRS 4010-005-040	1	R0.05	4	0.8	0.96	16°	4.75	4.99	5.20	5.39	5.79	—
VHGLRS 4010-01-020	1	R0.1	2	0.8	0.96	16°	2.63	2.79	2.94	3.08	3.33	—
VHGLRS 4010-01-040	1	R0.1	4	0.8	0.96	16°	4.75	4.99	5.20	5.38	5.78	—
VHGLRS 4010-02-020	1	R0.2	2	0.8	0.96	16°	2.62	2.78	2.92	3.06	3.31	—
VHGLRS 4010-02-040	1	R0.2	4	0.8	0.96	16°	4.74	4.98	5.18	5.37	5.76	—
VHGLRS 4015-01-040	1.5	R0.1	4	1.2	1.46	16°	4.16	4.30	4.44	4.59	4.93	—
VHGLRS 4015-02-040	1.5	R0.2	4	1.2	1.46	16°	4.16	4.29	4.43	4.58	4.91	—
VHGLRS 4015-05-040	1.5	R0.5	4	1.2	1.46	16°	4.15	4.27	4.40	4.54	4.84	—
VHGLRS 4020-01-040	2	R0.1	4	1.6	1.93	16°	4.22	4.35	4.50	4.65	4.99	—
VHGLRS 4020-02-040	2	R0.2	4	1.6	1.93	16°	4.21	4.35	4.49	4.64	4.97	—
VHGLRS 4030-01-060	3	R0.1	6	2.4	2.83	—	No Interference	No Interference	No Interference	No Interference	No Interference	—
VHGLRS 4030-02-060	3	R0.2	6	2.4	2.83	—	No Interference	No Interference	No Interference	No Interference	No Interference	—
VHGLRS 4030-05-060	3	R0.5	6	2.4	2.83	—	No Interference	No Interference	No Interference	No Interference	No Interference	—

Milling Condition for VHGLRS

WORK MATERIAL				PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
4002-002-005	**0.2**	**R0.02**	0.5	27,000	500	0.004	0.05	27,000	260	0.003	0.02	27,000	280	0.003	0.01	27,000	250	0.003	0.01
4002-005-005	**0.2**	**R0.05**	0.5	27,000	590	0.004	0.05	27,000	260	0.003	0.02	27,000	280	0.003	0.01	27,000	250	0.003	0.01
4003-002-005	**0.3**	**R0.02**	0.5	25,500	600	0.008	0.09	25,500	460	0.003	0.04	25,500	480	0.003	0.03	25,000	440	0.003	0.03
4003-005-005	**0.3**	**R0.05**	0.5	25,500	700	0.008	0.09	25,500	460	0.003	0.04	25,500	480	0.004	0.03	25,000	440	0.004	0.03
4004-002-010	**0.4**	**R0.02**	1	23,000	720	0.01	0.13	18,300	700	0.004	0.07	20,500	720	0.003	0.05	20,000	650	0.003	0.05
4004-005-010	**0.4**	**R0.05**	1	23,000	840	0.015	0.13	18,300	700	0.004	0.07	20,500	720	0.004	0.05	20,000	650	0.004	0.05
4004-01-010	**0.4**	**R0.1**	1	23,000	840	0.015	0.13	18,300	700	0.006	0.07	20,500	720	0.007	0.05	20,000	650	0.007	0.05
4005-005-010	**0.5**	**R0.05**	1	22,500	1,080	0.017	0.17	17,900	880	0.009	0.09	20,000	900	0.007	0.07	19,500	820	0.007	0.07
4005-01-010	**0.5**	**R0.1**	1	22,500	1,080	0.017	0.17	17,900	880	0.009	0.09	20,000	900	0.007	0.07	19,500	820	0.007	0.07
4006-005-010	**0.6**	**R0.05**	1	22,000	1,070	0.021	0.2	17,450	720	0.015	0.12	19,500	740	0.007	0.1	19,000	670	0.007	0.1
4006-005-020	**0.6**	**R0.05**	2	21,500	1,050	0.021	0.2	17,000	710	0.015	0.12	19,000	730	0.007	0.1	18,500	660	0.007	0.1
4006-01-010	**0.6**	**R0.1**	1	22,000	1,070	0.021	0.2	17,450	720	0.015	0.12	19,500	740	0.007	0.1	19,000	670	0.007	0.1
4006-01-020	**0.6**	**R0.1**	2	21,500	1,050	0.021	0.2	17,000	710	0.015	0.12	19,000	730	0.007	0.1	18,500	660	0.007	0.1
4008-005-020	**0.8**	**R0.05**	2	20,500	1,330	0.028	0.26	15,700	830	0.02	0.16	17,500	850	0.01	0.15	15,500	770	0.01	0.15
4008-01-020	**0.8**	**R0.1**	2	20,500	1,330	0.028	0.26	15,700	830	0.02	0.16	17,500	850	0.01	0.15	15,500	770	0.01	0.15
4008-02-020	**0.8**	**R0.2**	2	20,500	1,330	0.028	0.26	15,700	830	0.02	0.16	17,500	850	0.015	0.15	15,500	770	0.015	0.15
4010-005-020	**1**	**R0.05**	2	15,300	1,200	0.01	0.068	10,300	710	0.005	0.006	8,900	800	0.004	0.004	8,600	780	0.004	0.004
4010-005-040	**1**	**R0.05**	4	12,000	1,070	0.008	0.061	8,500	640	0.004	0.005	8,100	730	0.004	0.003	7,900	710	0.004	0.003
4010-01-020	**1**	**R0.1**	2	15,300	1,200	0.04	0.27	10,300	710	0.03	0.27	8,900	800	0.02	0.27	8,600	780	0.02	0.26
4010-01-040	**1**	**R0.1**	4	12,000	1,070	0.03	0.24	8,500	640	0.02	0.24	8,100	730	0.01	0.23	7,900	710	0.01	0.22
4010-02-020	**1**	**R0.2**	2	15,300	1,200	0.04	0.27	10,300	710	0.03	0.27	8,900	800	0.02	0.27	8,600	780	0.02	0.26
4010-02-040	**1**	**R0.2**	4	12,000	1,070	0.03	0.24	8,500	640	0.02	0.24	8,100	730	0.01	0.23	7,900	710	0.01	0.22
4015-01-040	**1.5**	**R0.1**	4	13,200	1,280	0.04	0.5	8,600	740	0.02	0.62	8,500	840	0.02	0.39	8,300	820	0.02	0.38
4015-02-040	**1.5**	**R0.2**	4	13,200	1,280	0.04	0.5	8,600	740	0.02	0.62	8,500	840	0.02	0.39	8,300	820	0.02	0.38
4015-05-040	**1.5**	**R0.5**	4	13,200	1,280	0.04	0.5	8,600	740	0.02	0.62	8,500	840	0.02	0.39	8,300	820	0.02	0.38
4020-01-040	**2**	**R0.1**	4	14,300	1,460	0.033	0.405	8,600	860	0.013	0.18	8,500	930	0.013	0.134	8,300	900	0.013	0.13
4020-02-040	**2**	**R0.2**	4	14,300	1,460	0.07	0.81	8,600	860	0.03	0.9	8,500	930	0.03	0.54	8,300	900	0.03	0.52
4030-01-060	**3**	**R0.1**	6	13,300	2,500	0.038	0.36	8,600	1,110	0.02	0.277	8,400	1,080	0.021	0.206	8,200	1,050	0.02	0.2
4030-02-060	**3**	**R0.2**	6	13,300	2,500	0.08	0.72	8,600	1,110	0.04	1.38	8,400	1,080	0.04	0.82	8,200	1,050	0.04	0.8
4030-05-060	**3**	**R0.5**	6	13,300	2,500	0.08	0.72	8,600	1,110	0.04	1.38	8,400	1,080	0.04	0.82	8,200	1,050	0.04	0.8

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.




Comparison of VHGLRS (ϕ3 shank) and HGLRS (ϕ6 shank)

Half pocket shape Milling example

<Milling condition>
- Work material: HAP10 (63HRC)
- Tool used: 2pcs (1pc each for roughing and finishing)
- Tool size: ϕ3 x CR0.1 x EL6

Milling shape image



Process	Coolant	n (min⁻¹)	Vf (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle time
Roughing	Air blow	8,400	1,080	0.02	0.2	0.01	36 min 13 sec
Finishing	Oil mist	8,400	1,080	0.02	0.01	0	13 min 13 sec

Tool condition after the roughing process


ϕ3 shank




ϕ6 shank



Surface roughness (Ra)

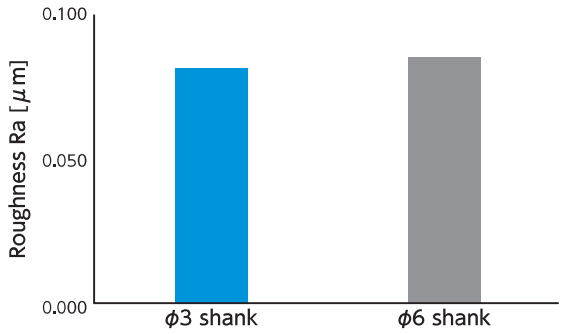


Wall deflection after the finishing process

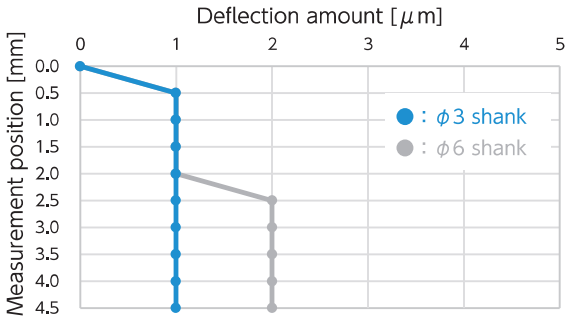

Residual island Milling example

<Milling condition>
- Work material: HAP10 (63HRC)
- Tool used: 2pcs (1pc each for roughing and finishing)
- Tool size: ϕ3 x CR0.1 x EL6
- Milling place: Bottom and peripheral surface (roughing) Residual island surface (finishing)

Milling shape image



Process	Coolant	n (min⁻¹)	Vf (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle time
Roughing	Air blow	8,400	1,080	0.02	0.2	0.2	43 min 54 sec
Finishing	Oil mist	8,400	1,080	0.02	0.2	0	3 min 4 sec

Tool condition after the roughing process


ϕ3 shank



ϕ6 shank



Dimensional accuracy

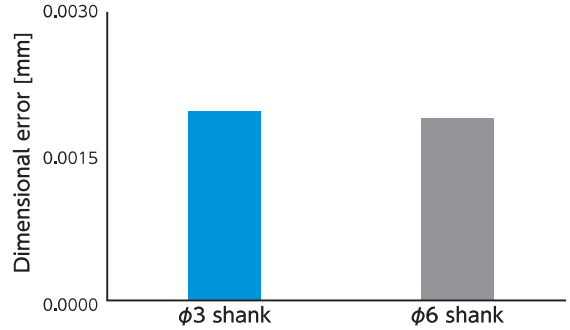


Comparison of VHGLRS (ϕ3 shank) and HGLRS (ϕ6 shank)

Pocket shape Milling example


<Milling condition>
- Work material: HAP10 (63HRC)
- Tool used: 2pcs (1pc each for roughing and finishing)
- Tool size: ϕ3 x CR0.1 x EL6

Milling shape image



Process	Coolant	n (min⁻¹)	Vf (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle time
Roughing	Air blow	8,400	1,080	0.02	0.2	0.01	7 min 39 sec
Finishing	Oil mist	8,400	1,080	0.01	0.2	0	2 min 45 sec

Flat milling surface roughness (Ra)

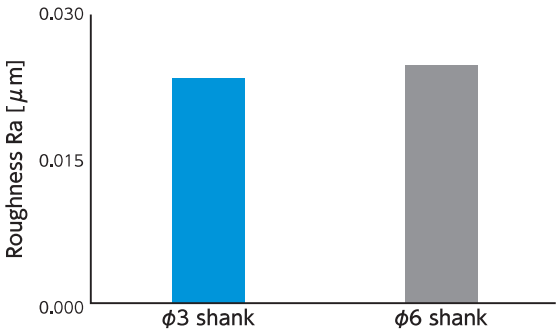

Reflection on the milling surface



ϕ3 shank ϕ6 shank

Even when flat surface finishing, the milling surface quality is equivalent to that of a ϕ 6 shank HGLRS.

VHLRS

V Series HARDMAX Long Neck Radius

HARDMAX
2 Flutes Short Shank Long Neck Radius End Mills

Super MG


HARD MAX


30°

R

R ±0.005

Shank Dia 0/-0.003



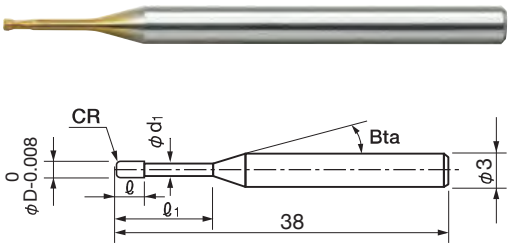

The shank taper angle shown is not an exact value.

For hard materials
Negative tip design

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	HARDENED STEELS ~55HRC	HARDENED STEELS ~60HRC	HARDENED STEELS ~65HRC	HARDENED STEELS ~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
○	○	●	●	●	●	○		○			●			○	○		

Total 24 models

Unit (mm)


Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°	Suggested Retail Price ¥
VHLRS 2002-005-010	0.2	R0.05	1	0.2	0.18	16°	1.21	1.26	1.32	1.37	1.47	—
VHLRS 2003-005-010	0.3	R0.05	1	0.3	0.28	16°	1.25	1.32	1.38	1.44	1.55	—
VHLRS 2004-005-020	0.4	R0.05	2	0.4	0.38	16°	2.38	2.52	2.63	2.74	2.94	—
VHLRS 2004-01-020	0.4	R0.1	2	0.4	0.38	16°	2.38	2.51	2.63	2.73	2.93	—
VHLRS 2005-005-020	0.5	R0.05	2	0.5	0.49	16°	2.45	2.62	2.76	2.88	3.12	—
VHLRS 2005-01-020	0.5	R0.1	2	0.5	0.49	16°	2.45	2.61	2.75	2.88	3.11	—
VHLRS 2006-005-020	0.6	R0.05	2	0.6	0.59	16°	2.52	2.71	2.87	3.02	3.29	—
VHLRS 2006-005-030	0.6	R0.05	3	0.6	0.59	16°	3.59	3.82	4.02	4.19	4.51	—
VHLRS 2006-005-040	0.6	R0.05	4	0.6	0.59	16°	4.66	4.93	5.14	5.34	5.74	—
VHLRS 2006-01-020	0.6	R0.1	2	0.6	0.59	16°	2.51	2.70	2.86	3.01	3.28	—
VHLRS 2006-01-030	0.6	R0.1	3	0.6	0.59	16°	3.59	3.82	4.01	4.18	4.50	—
VHLRS 2006-01-040	0.6	R0.1	4	0.6	0.59	16°	4.66	4.92	5.14	5.33	5.72	—
VHLRS 2008-005-040	0.8	R0.05	4	0.8	0.79	16°	4.66	4.93	5.14	5.34	5.74	—
VHLRS 2008-01-040	0.8	R0.1	4	0.8	0.79	16°	4.66	4.92	5.14	5.33	5.72	—
VHLRS 2008-02-040	0.8	R0.2	4	0.8	0.79	16°	4.65	4.91	5.13	5.32	5.70	—
VHLRS 2010-01-020	1	R0.1	2	1	0.96	16°	2.64	2.80	2.95	3.09	3.34	—
VHLRS 2010-01-040	1	R0.1	4	1	0.96	16°	4.76	5.00	5.20	5.39	5.79	—
VHLRS 2010-01-060	1	R0.1	6	1	0.96	16°	6.87	7.16	7.41	7.67	8.24	—
VHLRS 2010-02-020	1	R0.2	2	1	0.96	16°	2.63	2.79	2.94	3.07	3.32	—
VHLRS 2010-02-040	1	R0.2	4	1	0.96	16°	4.76	4.99	5.19	5.38	5.77	—
VHLRS 2010-02-060	1	R0.2	6	1	0.96	16°	6.86	7.15	7.40	7.65	8.21	—
VHLRS 2015-02-060	1.5	R0.2	6	1.5	1.46	16°	6.23	6.43	6.64	6.86	7.36	—
VHLRS 2020-01-060	2	R0.1	6	2	1.93	16°	6.28	6.49	6.70	6.93	7.45	—
VHLRS 2020-02-060	2	R0.2	6	2	1.93	16°	6.28	6.48	6.69	6.92	7.43	—

VHLRS Milling Conditions

WORK MATERIAL			COPPER OFC / TPC				CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002-005-010	**0.2**	1	55,000	200	0.027	0.02	55,000	200	0.009	0.02	55,000	200	0.009	0.02
2003-005-010	**0.3**	1	60,000	500	0.03	0.02	60,000	500	0.011	0.02	60,000	500	0.011	0.02
2004-005-020	**0.4**	2	40,400	540	0.042	0.054	40,400	450	0.017	0.045	40,400	450	0.017	0.045
2004-01-020	**0.4**	2	40,400	540	0.042	0.054	40,400	450	0.017	0.045	40,400	450	0.017	0.045
2005-005-020	**0.5**	2	39,900	1,000	0.075	0.108	39,900	830	0.044	0.117	39,900	830	0.044	0.117
2005-01-020	**0.5**	2	39,900	1,000	0.075	0.108	39,900	830	0.044	0.117	39,900	830	0.044	0.117
2006-005-020	**0.6**	2	28,600	610	0.114	0.162	28,600	510	0.015	0.219	28,600	510	0.015	0.219
2006-005-030	**0.6**	3	23,800	480	0.09	0.135	23,800	400	0.012	0.108	23,800	400	0.012	0.108
2006-005-040	**0.6**	4	20,400	400	0.063	0.108	20,400	330	0.008	0.104	20,400	330	0.008	0.104
2006-01-020	**0.6**	2	28,600	610	0.114	0.162	28,600	510	0.015	0.219	28,600	510	0.015	0.219
2006-01-030	**0.6**	3	23,800	480	0.09	0.135	23,800	400	0.012	0.108	23,800	400	0.012	0.108
2006-01-040	**0.6**	4	20,400	400	0.063	0.108	20,400	330	0.008	0.104	20,400	330	0.008	0.104
2008-005-040	**0.8**	4	17,500	540	0.132	0.198	17,500	450	0.021	0.117	17,500	450	0.021	0.117
2008-01-040	**0.8**	4	17,500	540	0.132	0.198	17,500	450	0.021	0.117	17,500	450	0.021	0.117
2008-02-040	**0.8**	4	17,500	540	0.132	0.198	17,500	450	0.021	0.117	17,500	450	0.021	0.117
2010-01-020	**1**	2	17,600	1,100	0.21	0.45	17,600	920	0.053	0.27	17,600	920	0.053	0.27
2010-01-040	**1**	4	13,800	980	0.201	0.405	13,800	820	0.045	0.27	13,800	820	0.045	0.27
2010-01-060	**1**	6	11,300	790	0.117	0.387	11,300	650	0.032	0.216	11,300	650	0.032	0.216
2010-02-020	**1**	2	17,600	1,100	0.21	0.45	17,600	920	0.053	0.27	17,600	920	0.053	0.27
2010-02-040	**1**	4	13,800	980	0.201	0.405	13,800	820	0.045	0.27	13,800	820	0.045	0.27
2010-02-060	**1**	6	11,300	790	0.117	0.387	11,300	650	0.032	0.216	11,300	650	0.032	0.216
2015-02-060	**1.5**	6	10,600	1,240	0.282	0.63	10,600	1,030	0.062	0.405	10,600	1,030	0.062	0.405
2020-01-060	**2**	6	12,800	1,220	0.321	0.855	12,800	1,020	0.065	0.81	12,800	1,020	0.065	0.81
2020-02-060	**2**	6	12,800	1,220	0.321	0.855	12,800	1,020	0.065	0.81	12,800	1,020	0.065	0.81

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002-005-010	**0.2**	1	55,000	200	0.006	0.02	35,000	150	0.004	0.02	15,000	25	0.002	0.015
2003-005-010	**0.3**	1	60,000	500	0.007	0.02	35,000	350	0.005	0.02	22,000	35	0.004	0.015
2004-005-020	**0.4**	2	40,400	450	0.011	0.045	32,300	330	0.009	0.045	19,200	35	0.004	0.045
2004-01-020	**0.4**	2	40,400	450	0.011	0.045	32,300	330	0.009	0.045	19,200	35	0.004	0.045
2005-005-020	**0.5**	2	39,900	830	0.029	0.117	32,500	630	0.026	0.117	20,100	68	0.011	0.117
2005-01-020	**0.5**	2	39,900	830	0.029	0.117	32,500	630	0.026	0.117	20,100	68	0.011	0.117
2006-005-020	**0.6**	2	28,600	510	0.01	0.219	23,700	390	0.01	0.219	15,200	43	0.004	0.219
2006-005-030	**0.6**	3	23,800	400	0.008	0.108	19,700	300	0.007	0.108	12,600	33	0.003	0.108
2006-005-040	**0.6**	4	20,400	330	0.005	0.104	16,800	250	0.005	0.104	10,800	28	0.002	0.104
2006-01-020	**0.6**	2	28,600	510	0.01	0.219	23,700	390	0.01	0.219	15,200	43	0.004	0.219
2006-01-030	**0.6**	3	23,800	400	0.008	0.108	19,700	300	0.007	0.108	12,600	33	0.003	0.108
2006-01-040	**0.6**	4	20,400	330	0.005	0.104	16,800	250	0.005	0.104	10,800	28	0.002	0.104
2008-005-040	**0.8**	4	17,500	450	0.014	0.117	15,000	360	0.015	0.117	10,200	41	0.007	0.117
2008-01-040	**0.8**	4	17,500	450	0.014	0.117	15,000	360	0.015	0.117	10,200	41	0.007	0.117
2008-02-040	**0.8**	4	17,500	450	0.014	0.117	15,000	360	0.015	0.117	10,200	41	0.007	0.117
2010-01-020	**1**	2	17,600	920	0.035	0.27	15,300	750	0.04	0.27	10,900	89	0.02	0.27
2010-01-040	**1**	4	13,800	820	0.03	0.27	12,000	670	0.035	0.27	8,500	80	0.017	0.27
2010-01-060	**1**	6	11,300	650	0.021	0.216	9,800	540	0.024	0.216	7,000	64	0.012	0.216
2010-02-020	**1**	2	17,600	920	0.035	0.27	15,300	750	0.04	0.27	10,900	89	0.02	0.27
2010-02-040	**1**	4	13,800	820	0.03	0.27	12,000	670	0.035	0.27	8,500	80	0.017	0.27
2010-02-060	**1**	6	11,300	650	0.021	0.216	9,800	540	0.024	0.216	7,000	64	0.012	0.216
2015-02-060	**1.5**	6	10,600	1,030	0.041	0.405	9,700	900	0.055	0.405	7,400	117	0.03	0.405
2020-01-060	**2**	6	12,800	1,020	0.043	0.81	12,000	930	0.06	0.81	9,700	133	0.036	0.81
2020-02-060	**2**	6	12,800	1,020	0.043	0.81	12,000	930	0.06	0.81	9,700	133	0.036	0.81

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Every coolant offers stable milling.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.




VHGB HMGCOAT
2 Flutes Short Shank Ball End Mills for Hard Materials

V Series HMGCOAT Ball

NEW

Super MG | HMG COAT | Shank Dia 0/-0.003



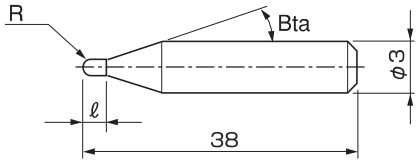

The shank taper angle shown is not an exact value.

Unit (mm)

Radius of Ball Nose R	Radius Accuracy	Diameter Tolerance	Helix Angle
R0.05 ~ R0.075	± 0.002	0/-0.008	30°
R0.1 ~ R1	± 0.003		
R1.5		0/-0.01	

For hard materials (~70HRC)
Super Negative tip design

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
		○	●	●	●	★	★										

Total 16 models


Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Suggested Retail Price ¥
VHGB 2001-0010	R0.05	0.1	16°	—
VHGB 20015-0015	R0.075	0.15	16°	—
VHGB 2002-0030	R0.1	0.3	16°	—
VHGB 2003-0030	R0.15	0.3	16°	—
VHGB 2003-0045	R0.15	0.45	16°	—
VHGB 2004-0040	R0.2	0.4	16°	—
VHGB 2004-0060	R0.2	0.6	16°	—
VHGB 2005-0050	R0.25	0.5	16°	—
VHGB 2005-0075	R0.25	0.75	16°	—
VHGB 2006-0060	R0.3	0.6	16°	—
VHGB 2006-0090	R0.3	0.9	16°	—
VHGB 2008-0120	R0.4	1.2	16°	—
VHGB 2010-0150	R0.5	1.5	16°	—
VHGB 2015-0225	R0.75	2.25	16°	—
VHGB 2020-0300	R1	3	16°	—
VHGB 2030-0450	R1.5	4.5	—	—


VHGB Milling Conditions

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
2001-0010	R0.05	0.1	48,000	200	0.005	0.01	48,000	200	0.005	0.01	48,000	150	0.003	0.006	40,000	120	0.002	0.004
20015-0015	R0.075	0.15	48,000	230	0.007	0.014	48,000	230	0.007	0.014	48,000	170	0.005	0.01	40,000	135	0.003	0.006
2002-0030	R0.1	0.3	44,000	250	0.01	0.03	42,000	250	0.01	0.03	40,000	200	0.008	0.024	36,000	150	0.006	0.018
2003-0030	R0.15	0.3	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2003-0045	R0.15	0.45	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2004-0040	R0.2	0.4	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-0060	R0.2	0.6	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2005-0050	R0.25	0.5	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2005-0075	R0.25	0.75	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2006-0060	R0.3	0.6	40,000	1,400	0.045	0.15	36,000	1,200	0.025	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2006-0090	R0.3	0.9	40,000	1,400	0.045	0.15	36,000	1,200	0.025	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2008-0120	R0.4	1.2	35,000	1,600	0.06	0.21	30,000	1,600	0.04	0.17	26,000	1,350	0.04	0.15	20,000	700	0.02	0.12
2010-0150	R0.5	1.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2015-0225	R0.75	2.25	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2020-0300	R1	3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	14,700	2,160	0.1	0.35	11,040	1,080	0.08	0.35
2030-0450	R1.5	4.5	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	11,040	2,280	0.15	0.55	8,280	1,140	0.12	0.55


Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.



Comparison of ϕ3 shank (VHGB) and ϕ4 shank (HGB) R1 × L3

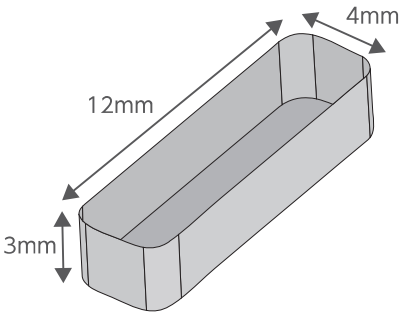


Relief wear width comparison (30 min)

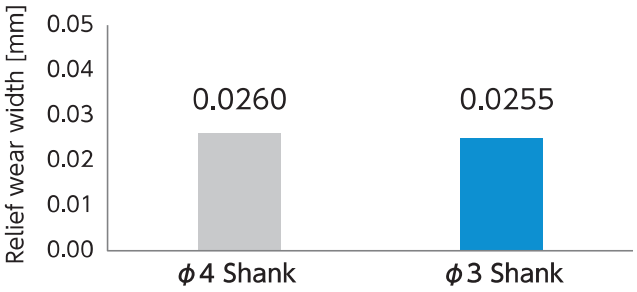

<Milling condition>
- Work material : HAP72 (67 HRC)
- Coolant : Air Blow
- n : 11,000 min^{-1}
- Vf : 1,080 mm/min
- a_p : 0.08 mm
- a_e : 0.35 mm
- Cycle time : 30 min


HGB


VHGB


VHWB HMWCOAT
2 Flutes Short Shank Ball End Mills

V Series HMWCOAT Ball

NEW

Super MG | HMW COAT | Shank Dia 0/-0.003



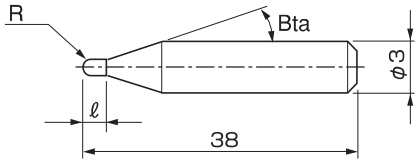

The shank taper angle shown is not an exact value.

Unit (mm)

Radius of Ball Nose R	Radius Accuracy	Diameter Tolerance	Helix Angle
R0.05 ~ R0.075	± 0.002	0/-0.006	0°
R0.1 ~ R1	± 0.003		30°
R1.5		0/-0.009	

For hard materials
Negative tip design

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~ 50HRC	HARDENED STEELS ~ 55HRC	HARDENED STEELS ~ 60HRC	HARDENED STEELS ~ 65HRC	HARDENED STEELS ~ 70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
○	○	●	★	★	★	●	●	○			○			○	○		

Total 20 models


Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Suggested Retail Price ¥
VHWB 2001-0010	R0.05	0.1	11°	—
VHWB 20015-0015	R0.075	0.15	11°	—
VHWB 2002-0030	R0.1	0.3	16°	—
VHWB 2003-0030	R0.15	0.3	16°	—
VHWB 2003-0045	R0.15	0.45	16°	—
VHWB 2004-0040	R0.2	0.4	16°	—
VHWB 2004-0060	R0.2	0.6	16°	—
VHWB 2005-0050	R0.25	0.5	16°	—
VHWB 2005-0075	R0.25	0.75	16°	—
VHWB 2006-0060	R0.3	0.6	16°	—
VHWB 2006-0090	R0.3	0.9	16°	—
VHWB 2008-0080	R0.4	0.8	16°	—
VHWB 2008-0120	R0.4	1.2	16°	—
VHWB 2010-0100	R0.5	1	16°	—
VHWB 2010-0150	R0.5	1.5	16°	—
VHWB 2010-0250	R0.5	2.5	16°	—
VHWB 2015-0150	R0.75	1.5	16°	—
VHWB 2015-0225	R0.75	2.25	16°	—
VHWB 2020-0300	R1	3	16°	—
VHWB 2030-0450	R1.5	4.5	—	—


VHWB Milling Conditions

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
2001-0010	R0.05	0.1	48,000	55	0.002	0.002	48,000	45	0.002	0.002	48,000	45	0.002	0.002	36,000	22	0.002	0.002
20015-0015	R0.075	0.15	48,000	90	0.004	0.004	48,000	70	0.004	0.004	48,000	70	0.004	0.004	36,000	35	0.004	0.004
2002-0030	R0.1	0.3	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
2003-0030	R0.15	0.3	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2003-0045	R0.15	0.45	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2004-0040	R0.2	0.4	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2004-0060	R0.2	0.6	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2005-0050	R0.25	0.5	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2005-0075	R0.25	0.75	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2006-0060	R0.3	0.6	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
2006-0090	R0.3	0.9	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
2008-0080	R0.4	0.8	35,000	1,600	0.06	0.21	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
2008-0120	R0.4	1.2	35,000	1,600	0.06	0.21	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
2010-0100	R0.5	1	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-0150	R0.5	1.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-0250	R0.5	2.5	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2015-0150	R0.75	1.5	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-0225	R0.75	2.25	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2020-0300	R1	3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
2030-0450	R1.5	4.5	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55


Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.




Comparison of ϕ3 shank (VHWB) and ϕ4 shank (HMWCOAT) R1 × L3

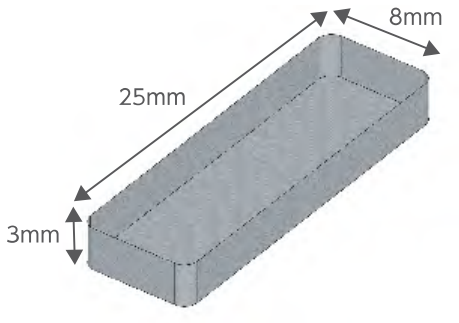


Relief wear width comparison (30 min)

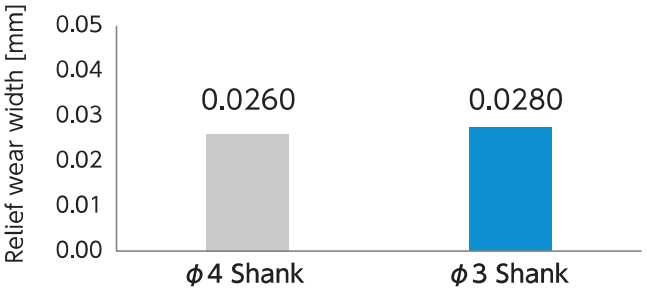

<Milling condition>
- Work material : SKD11 (59 HRC)
- Coolant : Air Blow
- n : 14,000 min^{-1}
- Vf : 2,100 mm/min
- a_p : 0.15 mm
- a_e : 0.5 mm
- Cycle time : 30 min


HMWCOAT


VHWB


VHGLB HMGCOAT
2 Flutes Short Shank Long Neck Ball End Mills

V Series HMGCOAT Long Neck Ball


Super MG | HMG COAT | Shank Dia 0/-0.003

30° Back Taper Geometry

Except for R0.05~R0.4

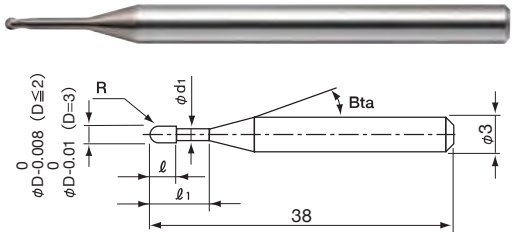

The shank taper angle shown is not an exact value.



For hard materials (~70HRC)
Super Negative tip design

Unit (mm)

Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy
R0.05 ~ R0.075	0/-0.008	± 0.002
R0.1 ~ R1		± 0.003
R1.5	0/-0.01	

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
		○	●	●	●	★	★										

Total 31 models


Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°	Suggested Retail Price ¥
VHGLB 2001-003	R0.05	0.3	0.08	0.093	16°	0.34	0.36	0.38	0.40	0.44	—
VHGLB 20015-003	R0.075	0.3	0.12	0.14	16°	0.36	0.38	0.40	0.41	0.45	—
VHGLB 2002-005	R0.1	0.5	0.16	0.18	16°	0.63	0.66	0.68	0.71	0.76	—
VHGLB 2002-010	R0.1	1	0.16	0.18	16°	1.15	1.20	1.24	1.28	1.37	—
VHGLB 2003-010	R0.15	1	0.24	0.28	16°	1.15	1.19	1.23	1.27	1.36	—
VHGLB 2003-015	R0.15	1.5	0.24	0.28	16°	1.67	1.73	1.78	1.84	1.97	—
VHGLB 2004-010	R0.2	1	0.32	0.38	16°	1.15	1.19	1.23	1.27	1.35	—
VHGLB 2004-020	R0.2	2	0.32	0.38	16°	2.19	2.25	2.33	2.40	2.57	—
VHGLB 2004-030	R0.2	3	0.32	0.38	16°	3.22	3.32	3.43	3.54	3.79	—
VHGLB 2005-015	R0.25	1.5	0.4	0.48	16°	1.67	1.72	1.77	1.83	1.95	—
VHGLB 2005-020	R0.25	2	0.4	0.48	16°	2.19	2.25	2.32	2.40	2.56	—
VHGLB 2005-025	R0.25	2.5	0.4	0.48	16°	2.71	2.79	2.87	2.97	3.18	—
VHGLB 2006-010	R0.3	1	0.48	0.58	16°	1.15	1.19	1.22	1.26	1.33	—
VHGLB 2006-015	R0.3	1.5	0.48	0.58	16°	1.67	1.72	1.77	1.82	1.94	—
VHGLB 2006-020	R0.3	2	0.48	0.58	16°	2.19	2.25	2.32	2.39	2.55	—
VHGLB 2006-030	R0.3	3	0.48	0.58	16°	3.22	3.32	3.42	3.53	3.78	—
VHGLB 2006-040	R0.3	4	0.48	0.58	16°	4.25	4.38	4.52	4.67	5.00	—
VHGLB 2008-020	R0.4	2	0.64	0.78	16°	2.18	2.25	2.31	2.38	2.53	—
VHGLB 2008-040	R0.4	4	0.64	0.78	16°	4.25	4.37	4.51	4.66	4.98	—
VHGLB 2010-020	R0.5	2	0.8	0.97	16°	2.20	2.26	2.32	2.38	2.53	—
VHGLB 2010-025	R0.5	2.5	0.8	0.97	16°	2.72	2.79	2.87	2.95	3.14	—
VHGLB 2010-030	R0.5	3	0.8	0.97	16°	3.23	3.32	3.42	3.52	3.75	—
VHGLB 2010-040	R0.5	4	0.8	0.97	16°	4.26	4.39	4.52	4.66	4.98	—
VHGLB 2010-060	R0.5	6	0.8	0.97	16°	6.33	6.52	6.72	6.94	7.43	—
VHGLB 2015-030	R0.75	3	1.2	1.46	16°	3.11	3.19	3.28	3.37	3.57	—
VHGLB 2015-040	R0.75	4	1.2	1.46	16°	4.15	4.26	4.38	4.51	4.79	—
VHGLB 2015-060	R0.75	6	1.2	1.46	16°	6.21	6.39	6.58	6.78	7.24	—
VHGLB 2020-030	R1	3	1.6	1.96	16°	3.11	3.18	3.25	3.33	3.52	—
VHGLB 2020-040	R1	4	1.6	1.96	16°	4.14	4.24	4.35	4.47	4.74	—
VHGLB 2020-060	R1	6	1.6	1.96	16°	6.20	6.37	6.55	6.75	7.19	—
VHGLB 2030-060	R1.5	6	2.4	2.93	—	No Interference	No Interference	No Interference	No Interference	No Interference	—

VHGLB Milling Conditions

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	R0.05	0.3	48,000	200	0.005	0.01	48,000	200	0.005	0.01	48,000	150	0.003	0.006	40,000	120	0.002	0.004
20015-003	R0.075	0.3	48,000	230	0.007	0.014	48,000	230	0.007	0.014	48,000	170	0.005	0.01	40,000	135	0.003	0.006
2002-005	R0.1	0.5	44,000	250	0.01	0.03	42,000	250	0.01	0.03	40,000	200	0.008	0.024	36,000	150	0.006	0.018
2002-010	R0.1	1	44,000	250	0.01	0.03	42,000	250	0.01	0.03	40,000	200	0.008	0.024	36,000	150	0.006	0.018
2003-010	R0.15	1	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2003-015	R0.15	1.5	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2004-010	R0.2	1	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-020	R0.2	2	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-030	R0.2	3	35,200	330	0.008	0.024	33,600	310	0.008	0.024	32,000	280	0.008	0.022	28,000	200	0.006	0.016
2005-015	R0.25	1.5	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2005-020	R0.25	2	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2005-025	R0.25	2.5	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2006-010	R0.3	1	40,000	1,400	0.045	0.15	36,000	1,500	0.03	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2006-015	R0.3	1.5	40,000	1,400	0.03	0.13	36,000	1,300	0.03	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2006-020	R0.3	2	40,000	1,400	0.03	0.13	36,000	1,300	0.03	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2006-030	R0.3	3	40,000	1,200	0.025	0.1	36,000	1,100	0.025	0.1	32,000	900	0.02	0.1	25,000	500	0.02	0.1
2006-040	R0.3	4	40,000	1,000	0.02	0.08	32,000	800	0.02	0.08	32,000	700	0.015	0.07	25,000	400	0.01	0.075
2008-020	R0.4	2	35,000	1,600	0.06	0.21	30,000	1,600	0.04	0.17	26,000	1,350	0.04	0.15	20,000	700	0.02	0.12
2008-040	R0.4	4	35,000	1,600	0.06	0.21	30,000	1,600	0.04	0.17	26,000	1,350	0.04	0.15	20,000	700	0.02	0.12
2010-020	R0.5	2	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-025	R0.5	2.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-030	R0.5	3	30,000	1,750	0.1	0.3	24,000	2,000	0.1	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2010-040	R0.5	4	30,000	1,750	0.1	0.3	24,000	2,000	0.1	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2010-060	R0.5	6	30,000	1,150	0.06	0.23	21,500	1,250	0.03	0.17	19,700	1,050	0.025	0.15	14,500	525	0.025	0.15
2015-030	R0.75	3	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-040	R0.75	4	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-060	R0.75	6	30,000	2,450	0.15	0.45	17,000	2,000	0.07	0.31	15,000	1,750	0.04	0.24	11,250	875	0.04	0.24
2020-030	R1	3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	14,700	2,100	0.15	0.35	12,250	1,800	0.08	0.35
2020-040	R1	4	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	14,700	2,100	0.15	0.35	12,250	1,800	0.08	0.35
2020-060	R1	6	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	14,700	2,100	0.15	0.3	12,250	1,800	0.06	0.3
2030-060	R1.5	6	21,000	3,000	0.4	1	13,250	2,500	0.24	0.55	11,040	2,280	0.24	0.55	9,200	1,900	0.12	0.55

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when the tool is chattering and heats up to a red color.
- Every coolant offers stable milling.



VHSLB HARDMAX 2 Flutes Short Shank Long Neck Ball End Mills

V Series HARDMAX Long Neck Ball


Super MG

HARD MAX


Shank Dia 0/-0.003

Back Taper Geometry

Except for R0.05~R0.4

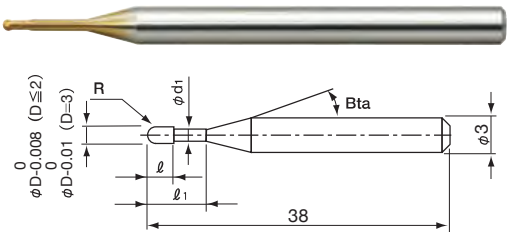

The shank taper angle shown is not an exact value.



Unit (mm)

Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy	Helix Angle
R0.05	0/-0.008	± 0.002	0°
R0.1 ~ R0.75		± 0.003	
R1		± 0.004	30°
R1.5	0/-0.01	± 0.005	

For hard materials
Negative tip design

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
○	○	●	●	●	●	○		○			○			○	○		

Total 53 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°	Suggested Retail Price ¥
VHSLB 2001-003	R0.05	0.3	0.08	0.093	11°	0.34	0.37	0.39	0.41	0.46	—
VHSLB 2002-003	R0.1	0.3	0.16	0.18	16°	0.43	0.45	0.46	0.48	0.52	—
VHSLB 2002-005	R0.1	0.5	0.16	0.18	16°	0.64	0.66	0.69	0.71	0.76	—
VHSLB 2002-0075	R0.1	0.75	0.16	0.18	16°	0.90	0.93	0.97	1.00	1.07	—
VHSLB 2002-010	R0.1	1	0.16	0.18	16°	1.16	1.20	1.24	1.28	1.38	—
VHSLB 2003-005	R0.15	0.5	0.24	0.28	16°	0.63	0.66	0.68	0.71	0.75	—
VHSLB 2003-0075	R0.15	0.75	0.24	0.28	16°	0.90	0.93	0.96	0.99	1.06	—
VHSLB 2003-010	R0.15	1	0.24	0.28	16°	1.16	1.20	1.24	1.28	1.37	—
VHSLB 2003-015	R0.15	1.5	0.24	0.28	16°	1.67	1.73	1.78	1.84	1.97	—
VHSLB 2003-020	R0.15	2	0.24	0.28	16°	2.19	2.26	2.33	2.41	2.59	—
VHSLB 2003-030	R0.15	3	0.24	0.28	16°	3.22	3.33	3.43	3.55	3.81	—
VHSLB 2004-005	R0.2	0.5	0.32	0.38	16°	0.63	0.65	0.68	0.70	0.74	—
VHSLB 2004-010	R0.2	1	0.32	0.38	16°	1.15	1.19	1.23	1.27	1.35	—
VHSLB 2004-015	R0.2	1.5	0.32	0.38	16°	1.67	1.73	1.78	1.84	1.96	—
VHSLB 2004-020	R0.2	2	0.32	0.38	16°	2.19	2.26	2.33	2.41	2.57	—
VHSLB 2004-030	R0.2	3	0.32	0.38	16°	3.22	3.32	3.43	3.54	3.80	—
VHSLB 2004-040	R0.2	4	0.32	0.38	16°	4.25	4.39	4.53	4.68	5.02	—
VHSLB 2005-010	R0.25	1	0.4	0.48	16°	1.15	1.19	1.23	1.26	1.34	—
VHSLB 2005-015	R0.25	1.5	0.4	0.48	16°	1.67	1.72	1.77	1.83	1.95	—
VHSLB 2005-020	R0.25	2	0.4	0.48	16°	2.19	2.25	2.32	2.40	2.56	—
VHSLB 2005-025	R0.25	2.5	0.4	0.48	16°	2.71	2.79	2.87	2.97	3.18	—
VHSLB 2005-030	R0.25	3	0.4	0.48	16°	3.22	3.32	3.42	3.54	3.79	—
VHSLB 2005-040	R0.25	4	0.4	0.48	16°	4.25	4.38	4.53	4.68	5.01	—

HARDMAX 2 Flutes Short Shank Long Neck Ball End Mills

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter ϕd1	Shank Taper Angle Bta	Effective Length by Inclined Angles					Suggested Retail Price ¥
						30′	1°	1°30′	2°	3°	
VHSLB 2006-010	R0.3	1	0.48	0.58	16°	1.15	1.19	1.22	1.26	1.33	—
VHSLB 2006-015	R0.3	1.5	0.48	0.58	16°	1.67	1.72	1.77	1.82	1.94	—
VHSLB 2006-020	R0.3	2	0.48	0.58	16°	2.19	2.25	2.32	2.39	2.55	—
VHSLB 2006-025	R0.3	2.5	0.48	0.58	16°	2.70	2.78	2.87	2.96	3.16	—
VHSLB 2006-030	R0.3	3	0.48	0.58	16°	3.22	3.32	3.42	3.53	3.78	—
VHSLB 2006-040	R0.3	4	0.48	0.58	16°	4.25	4.38	4.52	4.67	5.00	—
VHSLB 2006-050	R0.3	5	0.48	0.58	16°	5.28	5.45	5.62	5.81	6.22	—
VHSLB 2006-060	R0.3	6	0.48	0.58	16°	6.31	6.51	6.72	6.95	7.45	—
VHSLB 2008-020	R0.4	2	0.64	0.78	16°	2.18	2.25	2.31	2.38	2.53	—
VHSLB 2008-030	R0.4	3	0.64	0.78	16°	3.22	3.31	3.41	3.52	3.75	—
VHSLB 2008-040	R0.4	4	0.64	0.78	16°	4.25	4.37	4.51	4.66	4.98	—
VHSLB 2008-050	R0.4	5	0.64	0.78	16°	5.28	5.44	5.61	5.79	6.20	—
VHSLB 2008-060	R0.4	6	0.64	0.78	16°	6.31	6.50	6.71	6.93	7.43	—
VHSLB 2010-020	R0.5	2	0.8	0.97	16°	2.20	2.26	2.32	2.39	2.54	—
VHSLB 2010-025	R0.5	2.5	0.8	0.97	16°	2.72	2.79	2.87	2.96	3.15	—
VHSLB 2010-030	R0.5	3	0.8	0.97	16°	3.24	3.33	3.42	3.53	3.76	—
VHSLB 2010-040	R0.5	4	0.8	0.97	16°	4.27	4.39	4.52	4.67	4.98	—
VHSLB 2010-050	R0.5	5	0.8	0.97	16°	5.30	5.46	5.62	5.80	6.21	—
VHSLB 2010-060	R0.5	6	0.8	0.97	16°	6.33	6.52	6.72	6.94	7.43	—
VHSLB 2010-080	R0.5	8	0.8	0.97	16°	8.39	8.65	8.93	9.22	9.88	—
VHSLB 2015-030	R0.75	3	1.2	1.46	16°	3.12	3.20	3.28	3.37	3.58	—
VHSLB 2015-040	R0.75	4	1.2	1.46	16°	4.15	4.26	4.38	4.51	4.80	—
VHSLB 2015-060	R0.75	6	1.2	1.46	16°	6.21	6.39	6.58	6.79	7.25	—
VHSLB 2015-080	R0.75	8	1.2	1.46	16°	8.28	8.52	8.78	9.07	9.69	—
VHSLB 2020-030	R1	3	1.6	1.96	16°	3.11	3.18	3.26	3.34	3.52	—
VHSLB 2020-040	R1	4	1.6	1.96	16°	4.14	4.24	4.36	4.48	4.74	—
VHSLB 2020-060	R1	6	1.6	1.96	16°	6.20	6.37	6.56	6.75	7.19	—
VHSLB 2020-080	R1	8	1.6	1.96	16°	8.27	8.50	8.76	9.03	9.64	—
VHSLB 2030-060	R1.5	6	2.4	2.93	—	No Interference	No Interference	No Interference	No Interference	No Interference	—
VHSLB 2030-080	R1.5	8	2.4	2.93	—	No Interference	No Interference	No Interference	No Interference	No Interference	—

VHSLB Milling Conditions

WORK MATERIAL			COPPER OFC / TPC				CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	**R0.05**	0.3	54,000	85	0.004	0.004	54,000	85	0.004	0.004	54,000	85	0.004	0.004	48,000	55	0.002	0.002
2002-003	**R0.1**	0.3	54,000	430	0.01	0.01	60,000	350	0.008	0.016	60,000	350	0.008	0.016	60,000	200	0.003	0.005
2002-005	**R0.1**	0.5	54,000	430	0.01	0.01	60,000	350	0.008	0.016	60,000	350	0.008	0.016	60,000	200	0.003	0.005
2002-0075	**R0.1**	0.75	54,000	380	0.008	0.008	60,000	320	0.007	0.015	60,000	320	0.007	0.015	60,000	200	0.003	0.005
2002-010	**R0.1**	1	54,000	380	0.008	0.008	60,000	250	0.005	0.015	60,000	250	0.005	0.015	60,000	200	0.003	0.005
2003-005	**R0.15**	0.5	54,000	720	0.015	0.015	43,000	500	0.012	0.024	43,000	500	0.012	0.024	60,000	350	0.006	0.008
2003-0075	**R0.15**	0.75	54,000	720	0.015	0.015	43,000	500	0.012	0.024	43,000	500	0.012	0.024	60,000	350	0.006	0.008
2003-010	**R0.15**	1	54,000	640	0.014	0.015	43,000	450	0.008	0.024	43,000	450	0.008	0.024	60,000	350	0.006	0.008
2003-015	**R0.15**	1.5	54,000	640	0.014	0.015	43,000	400	0.007	0.021	43,000	400	0.007	0.021	60,000	350	0.006	0.008
2003-020	**R0.15**	2	49,000	530	0.011	0.011	40,000	300	0.006	0.018	40,000	300	0.006	0.018	60,000	210	0.004	0.007
2003-030	**R0.15**	3	43,000	460	0.009	0.01	38,000	200	0.004	0.012	38,000	200	0.004	0.012	42,500	140	0.002	0.004
2004-005	**R0.2**	0.5	54,000	870	0.023	0.036	35,000	1,200	0.02	0.04	35,000	1,200	0.02	0.04	50,000	500	0.01	0.02
2004-010	**R0.2**	1	54,000	870	0.023	0.036	35,000	1,200	0.02	0.04	35,000	1,200	0.02	0.04	50,000	500	0.01	0.02
2004-015	**R0.2**	1.5	54,000	790	0.022	0.036	35,000	900	0.016	0.033	35,000	900	0.016	0.033	50,000	500	0.01	0.02
2004-020	**R0.2**	2	54,000	790	0.022	0.036	35,000	600	0.011	0.033	35,000	600	0.011	0.033	50,000	500	0.01	0.02
2004-030	**R0.2**	3	50,000	660	0.017	0.018	35,000	400	0.008	0.024	35,000	400	0.008	0.024	40,000	250	0.005	0.008
2004-040	**R0.2**	4	50,000	640	0.012	0.018	35,000	300	0.005	0.015	35,000	300	0.005	0.015	32,000	180	0.003	0.005
2005-010	**R0.25**	1	57,000	1,380	0.029	0.054	34,000	1,300	0.03	0.06	34,000	1,300	0.03	0.06	44,000	650	0.015	0.04
2005-015	**R0.25**	1.5	57,000	1,380	0.029	0.054	34,000	1,000	0.025	0.05	34,000	1,000	0.025	0.05	44,000	650	0.015	0.04
2005-020	**R0.25**	2	57,000	1,250	0.028	0.054	34,000	800	0.023	0.046	34,000	800	0.023	0.046	44,000	650	0.015	0.04
2005-025	**R0.25**	2.5	57,000	1,250	0.028	0.054	34,000	700	0.015	0.045	34,000	700	0.015	0.045	44,000	650	0.015	0.04
2005-030	**R0.25**	3	55,000	1,010	0.021	0.036	32,000	550	0.012	0.036	32,000	550	0.012	0.036	40,000	500	0.01	0.02
2005-040	**R0.25**	4	55,000	1,010	0.021	0.036	31,000	450	0.01	0.03	31,000	450	0.01	0.03	32,700	180	0.005	0.015
2006-010	**R0.3**	1	57,000	1,670	0.035	0.144	33,000	1,500	0.04	0.08	33,000	1,500	0.04	0.08	40,000	1,400	0.045	0.15
2006-015	**R0.3**	1.5	57,000	1,670	0.035	0.144	33,000	1,500	0.04	0.08	33,000	1,500	0.04	0.08	40,000	1,100	0.03	0.13
2006-020	**R0.3**	2	57,000	1,540	0.034	0.144	33,000	1,400	0.036	0.072	33,000	1,400	0.036	0.072	40,000	1,100	0.03	0.13
2006-025	**R0.3**	2.5	57,000	1,540	0.034	0.144	33,000	1,200	0.033	0.066	33,000	1,200	0.033	0.066	40,000	800	0.02	0.1
2006-030	**R0.3**	3	57,000	1,540	0.034	0.144	33,000	900	0.025	0.066	33,000	900	0.025	0.066	40,000	800	0.02	0.1
2006-040	**R0.3**	4	54,000	1,130	0.026	0.108	31,000	700	0.02	0.06	31,000	700	0.02	0.06	40,000	500	0.015	0.09
2006-050	**R0.3**	5	46,000	960	0.019	0.072	29,000	440	0.015	0.045	29,000	440	0.015	0.045	32,000	400	0.01	0.075
2006-060	**R0.3**	6	46,000	960	0.019	0.072	24,000	380	0.012	0.036	24,000	380	0.012	0.036	24,000	300	0.007	0.06
2008-020	**R0.4**	2	55,000	2,060	0.063	0.18	30,000	1,800	0.06	0.12	30,000	1,800	0.06	0.12	35,000	1,600	0.06	0.21
2008-030	**R0.4**	3	55,000	1,860	0.063	0.18	30,000	1,600	0.05	0.1	30,000	1,600	0.05	0.1	35,000	1,400	0.05	0.19
2008-040	**R0.4**	4	55,000	1,860	0.063	0.18	30,000	1,300	0.04	0.1	30,000	1,300	0.04	0.1	35,000	1,200	0.04	0.17
2008-050	**R0.4**	5	47,000	1,410	0.038	0.108	30,000	1,100	0.035	0.1	30,000	1,100	0.035	0.1	31,500	900	0.03	0.15
2008-060	**R0.4**	6	47,000	1,410	0.038	0.108	27,000	900	0.025	0.075	27,000	900	0.025	0.075	28,000	600	0.02	0.12

VHSLB Milling Conditions

WORK MATERIAL			HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	**R0.05**	0.3	48,000	45	0.002	0.002	48,000	45	0.002	0.002	36,000	22	0.002	0.002
2002-003	**R0.1**	0.3	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
2002-005	**R0.1**	0.5	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
2002-0075	**R0.1**	0.75	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
2002-010	**R0.1**	1	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
2003-005	**R0.15**	0.5	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2003-0075	**R0.15**	0.75	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2003-010	**R0.15**	1	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2003-015	**R0.15**	1.5	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2003-020	**R0.15**	2	45,000	190	0.003	0.005	43,500	110	0.002	0.004	32,500	55	0.002	0.004
2003-030	**R0.15**	3	32,000	80	0.002	0.004	32,000	65	0.001	0.002	24,000	30	0.001	0.002
2004-005	**R0.2**	0.5	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2004-010	**R0.2**	1	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2004-015	**R0.2**	1.5	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2004-020	**R0.2**	2	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2004-030	**R0.2**	3	31,900	210	0.004	0.008	30,500	160	0.003	0.005	22,800	80	0.003	0.005
2004-040	**R0.2**	4	25,500	150	0.002	0.004	24,300	120	0.002	0.004	18,200	60	0.002	0.004
2005-010	**R0.25**	1	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2005-015	**R0.25**	1.5	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2005-020	**R0.25**	2	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2005-025	**R0.25**	2.5	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2005-030	**R0.25**	3	31,000	400	0.007	0.01	28,550	230	0.005	0.008	21,400	115	0.005	0.008
2005-040	**R0.25**	4	27,150	150	0.003	0.008	25,650	100	0.002	0.005	19,900	50	0.002	0.005
2006-010	**R0.3**	1	30,000	1,500	0.03	0.13	26,500	1,000	0.015	0.09	20,000	500	0.015	0.09
2006-015	**R0.3**	1.5	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
2006-020	**R0.3**	2	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
2006-025	**R0.3**	2.5	30,000	800	0.015	0.09	26,500	520	0.008	0.065	20,000	260	0.008	0.065
2006-030	**R0.3**	3	30,000	800	0.015	0.09	26,500	520	0.008	0.065	20,000	260	0.008	0.065
2006-040	**R0.3**	4	30,000	500	0.01	0.075	26,500	340	0.006	0.05	20,000	170	0.006	0.05
2006-050	**R0.3**	5	25,000	390	0.007	0.05	23,000	260	0.005	0.04	18,000	130	0.005	0.04
2006-060	**R0.3**	6	21,000	320	0.005	0.04	19,500	210	0.004	0.03	15,000	105	0.004	0.03
2008-020	**R0.4**	2	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
2008-030	**R0.4**	3	27,000	1,400	0.03	0.15	23,500	900	0.015	0.1	17,500	450	0.015	0.1
2008-040	**R0.4**	4	27,000	1,200	0.025	0.135	23,500	600	0.012	0.095	17,500	300	0.012	0.095
2008-050	**R0.4**	5	25,000	900	0.02	0.12	22,000	500	0.01	0.085	16,500	250	0.01	0.085
2008-060	**R0.4**	6	23,000	600	0.012	0.095	20,500	400	0.006	0.065	15,500	200	0.006	0.065

VHSLB Milling Conditions

WORK MATERIAL			COPPER OFC / TPC				CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2010-020	**R0.5**	2	46,000	2,000	0.072	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.08	0.16	30,000	1,750	0.2	0.4
2010-025	**R0.5**	2.5	46,000	2,000	0.072	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.08	0.16	30,000	1,750	0.2	0.4
2010-030	**R0.5**	3	46,000	2,000	0.072	0.36	24,000	1,600	0.07	0.14	24,000	1,600	0.07	0.14	30,000	1,750	0.1	0.3
2010-040	**R0.5**	4	46,000	2,000	0.071	0.36	24,000	1,500	0.065	0.13	24,000	1,500	0.065	0.13	30,000	1,750	0.1	0.3
2010-050	**R0.5**	5	46,000	2,000	0.071	0.36	24,000	1,400	0.06	0.12	24,000	1,400	0.06	0.12	30,000	1,750	0.1	0.3
2010-060	**R0.5**	6	39,000	1,500	0.071	0.18	18,000	1,200	0.04	0.12	18,000	1,200	0.04	0.12	30,000	1,150	0.06	0.23
2010-080	**R0.5**	8	39,000	1,500	0.043	0.18	16,500	900	0.027	0.081	16,500	900	0.027	0.081	24,000	800	0.025	0.155
2015-030	**R0.75**	3	30,000	2,200	0.171	0.324	30,000	1,600	0.12	0.24	30,000	1,600	0.12	0.24	30,000	2,450	0.25	0.55
2015-040	**R0.75**	4	30,000	2,200	0.171	0.324	30,000	1,500	0.11	0.22	30,000	1,500	0.11	0.22	30,000	2,450	0.25	0.55
2015-060	**R0.75**	6	30,000	1,980	0.147	0.324	23,000	1,300	0.1	0.2	23,000	1,300	0.1	0.2	30,000	2,450	0.15	0.45
2015-080	**R0.75**	8	26,000	1,500	0.106	0.27	18,000	1,100	0.08	0.16	18,000	1,100	0.08	0.16	23,500	1,300	0.1	0.37
2020-030	**R1**	3	22,000	2,140	0.232	0.54	30,000	2,000	0.21	0.42	30,000	2,000	0.21	0.42	28,000	2,900	0.3	0.7
2020-040	**R1**	4	22,000	2,140	0.232	0.54	30,000	2,000	0.21	0.42	30,000	2,000	0.21	0.42	28,000	2,900	0.3	0.7
2020-060	**R1**	6	22,000	2,140	0.232	0.54	30,000	2,000	0.21	0.42	30,000	2,000	0.21	0.42	28,000	2,900	0.2	0.6
2020-080	**R1**	8	22,000	1,920	0.185	0.36	30,000	2,000	0.18	0.36	30,000	2,000	0.18	0.36	28,000	2,900	0.2	0.6
2030-060	**R1.5**	6	15,000	2,890	0.278	0.54	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	21,000	3,000	0.4	1
2030-080	**R1.5**	8	15,000	2,890	0.278	0.54	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	21,000	3,000	0.4	1


Long Neck Ball End Mills R0.5 × Effective Length 6
Comparison example of ϕ3 mm and ϕ4 mm shank diameters

Comparison of tool wearing and dimensional accuracy


<Milling condition>


Work material : SKD11(60 HRC)
Coolant : Air blow
Tool holder : Collet holder
Milling shape : Pocket (8 mm × 8 mm × depth 3 mm)
Cycle time : about 35 min


n : 21,500 min^{-1}
V_f : 1,250 mm/min
a_p : 0.03 mm
a_e : 0.17 mm

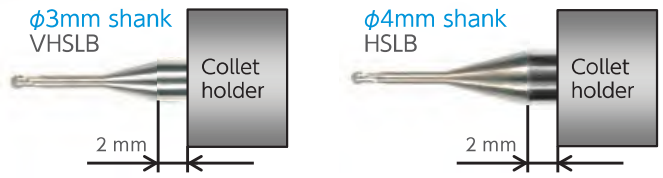

<Tool damage>

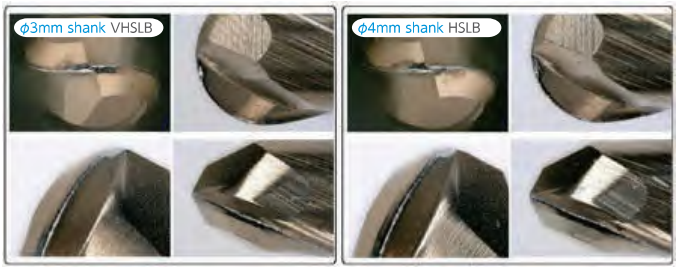

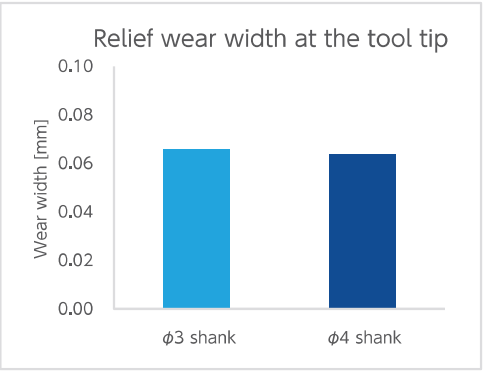

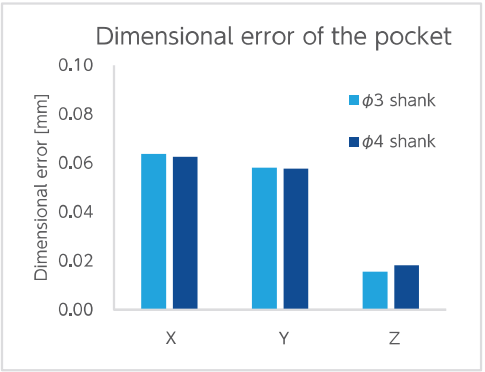


If the overhang is shortened, the performance equivalent to that of a ϕ4mm shank can be obtained.

VHSLB Milling Conditions

WORK MATERIAL			HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2010-020	**R0.5**	2	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-025	**R0.5**	2.5	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-030	**R0.5**	3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2010-040	**R0.5**	4	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2010-050	**R0.5**	5	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2010-060	**R0.5**	6	21,500	1,250	0.03	0.17	19,700	1,050	0.025	0.15	14,500	525	0.025	0.15
2010-080	**R0.5**	8	18,500	580	0.015	0.12	18,400	480	0.015	0.12	13,800	240	0.015	0.12
2015-030	**R0.75**	3	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-040	**R0.75**	4	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-060	**R0.75**	6	17,000	2,000	0.07	0.31	15,000	1,750	0.04	0.24	11,250	875	0.04	0.24
2015-080	**R0.75**	8	15,000	1,250	0.045	0.25	14,000	1,050	0.03	0.21	10,500	525	0.03	0.21
2020-030	**R1**	3	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
2020-040	**R1**	4	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
2020-060	**R1**	6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
2020-080	**R1**	8	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
2030-060	**R1.5**	6	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
2030-080	**R1.5**	8	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when the tool is chattering and heats up to a red color.
- Every coolant offers stable milling.
- Recommend wet coolant for Copper.




Comparison of roughness and reflection of the aspherical surface (Finishing process)

The upper surface of the square prism was processed aspherically, and the surface roughness and reflection were compared. We obtained the same results as the ϕ4mm shank in terms of surface roughness and reflection.


<Milling condition>
Work material : HAP10(64HRC)
Coolant : Air blow
Tool holder : Hydraulic chuck
(Overhang : 2 mm of the shank part)
Milling shape : Aspherical surface (5 mm × 5 mm) R25
Cycle time : about 26 min

n : 29,600 min^{-1}
V_f : 500 mm/min
a_p : 0.015 mm
a_e : 0.006 mm

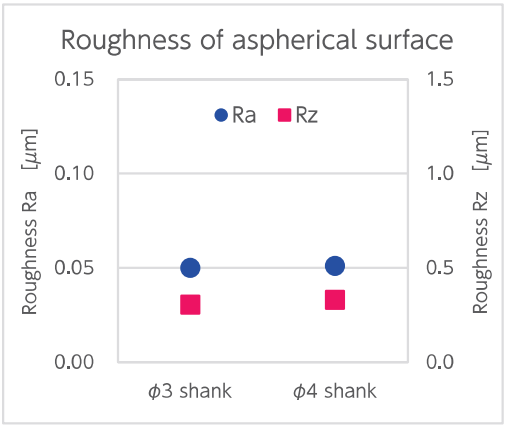


<Aspherical surface photos>

ϕ3mm shank VHSLB

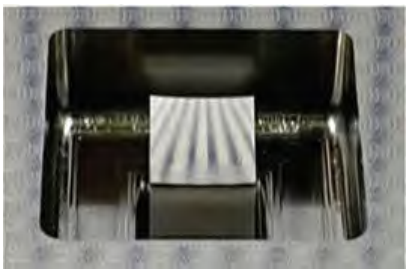

ϕ4mm shank HSLB

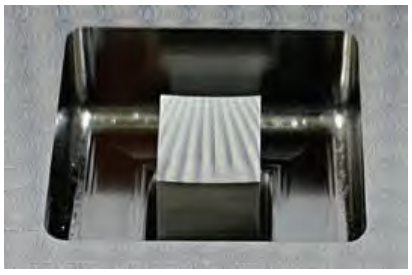




Image of the time of shooting

* These photos were taken as shown in the image on the right so that the blue line printed on the paper would reflected.

VCWLB UTWCOAT
2 Flutes Short Shank Long Neck Ball End Mills

V Series UTWCOAT Long Neck Ball

NEW


Super MG


UTW COAT

Shank Dia 0/-0.003

Back Taper Geometry

Except for R0.05-R0.15



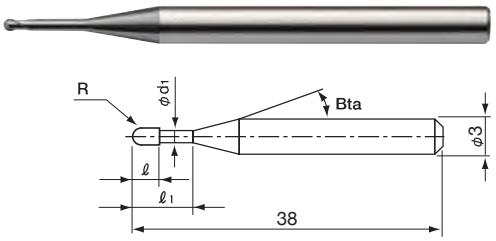

The shank taper angle shown is not an exact value.

Unit (mm)

Radius of Ball Nose R	Radius Accuracy	Diameter Tolerance	Helix Angle
R0.05 ~ R0.075	± 0.002	0/-0.006	0°
R0.1 ~ R1	± 0.003		30°
R1.5	± 0.004	0/-0.009	

Best performance at materials up to 40HRC
Improved mirror surface finish

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
★	★	★	●					○	●		●			○	○		

Total 30 models

Unit (mm)


Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30°	1°	1°30′	2°	3°	Suggested Retail Price ¥
VCWLB 2001-003	R0.05	0.3	0.08	0.094	11°	0.34	0.37	0.39	0.41	0.46	—
VCWLB 20015-003	R0.075	0.3	0.12	0.14	11°	0.38	0.39	0.41	0.44	0.49	—
VCWLB 2002-005	R0.1	0.5	0.16	0.18	11°	0.64	0.67	0.70	0.74	0.82	—
VCWLB 2002-010	R0.1	1	0.16	0.18	11°	1.16	1.22	1.28	1.35	1.51	—
VCWLB 2003-010	R0.15	1	0.24	0.28	11°	1.16	1.21	1.27	1.34	1.49	—
VCWLB 2003-020	R0.15	2	0.24	0.28	11°	2.20	2.31	2.42	2.55	2.85	—
VCWLB 2003-030	R0.15	3	0.24	0.28	11°	3.25	3.41	3.58	3.77	4.22	—
VCWLB 2004-010	R0.2	1	0.32	0.38	11°	1.16	1.21	1.26	1.33	1.47	—
VCWLB 2004-020	R0.2	2	0.32	0.38	11°	2.20	2.30	2.41	2.54	2.84	—
VCWLB 2004-030	R0.2	3	0.32	0.38	11°	3.25	3.40	3.57	3.76	4.21	—
VCWLB 2004-040	R0.2	4	0.32	0.38	11°	4.29	4.50	4.73	4.98	5.57	—
VCWLB 2005-020	R0.25	2	0.4	0.48	11°	2.20	2.30	2.41	2.53	2.82	—
VCWLB 2005-030	R0.25	3	0.4	0.48	11°	3.25	3.40	3.56	3.75	4.19	—
VCWLB 2005-040	R0.25	4	0.4	0.48	11°	4.29	4.49	4.72	4.97	5.56	—
VCWLB 2006-020	R0.3	2	0.48	0.58	11°	2.20	2.29	2.40	2.52	2.80	—
VCWLB 2006-030	R0.3	3	0.48	0.58	11°	3.24	3.39	3.56	3.74	4.17	—
VCWLB 2006-040	R0.3	4	0.48	0.58	11°	4.29	4.49	4.71	4.96	5.54	—
VCWLB 2006-060	R0.3	6	0.48	0.58	11°	6.38	6.69	7.02	7.39	8.28	—
VCWLB 2008-020	R0.4	2	0.64	0.78	11°	2.19	2.28	2.38	2.50	2.76	—
VCWLB 2008-040	R0.4	4	0.64	0.78	11°	4.29	4.48	4.70	4.93	5.50	—
VCWLB 2008-060	R0.4	6	0.64	0.78	11°	6.38	6.68	7.01	7.37	8.24	—

UTWCOAT 2 Flutes Short Shank Long Neck Ball End Mills

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter ϕd1	Shank Taper Angle Bta	Effective Length by Inclined Angles					Suggested Retail Price ¥
						30′	1°	1°30′	2°	3°	
VCWLB 2010-030	R0.5	3	0.8	0.97	11°	3.26	3.40	3.56	3.73	4.14	—
VCWLB 2010-040	R0.5	4	0.8	0.97	11°	4.31	4.50	4.71	4.95	5.51	—
VCWLB 2010-050	R0.5	5	0.8	0.97	11°	5.36	5.60	5.87	6.17	6.87	—
VCWLB 2010-060	R0.5	6	0.8	0.97	11°	6.40	6.70	7.02	7.39	8.24	—
VCWLB 2015-040	R0.75	4	1.2	1.45	11°	4.25	4.43	4.62	4.84	5.35	—
VCWLB 2015-060	R0.75	6	1.2	1.45	11°	6.35	6.63	6.93	7.28	8.09	—
VCWLB 2020-040	R1	4	1.6	1.96	11°	4.24	4.40	4.58	4.78	5.26	—
VCWLB 2020-060	R1	6	1.6	1.96	11°	6.33	6.60	6.89	7.22	8.00	—
VCWLB 2030-060	R1.5	6	2.4	2.93	—	No Interference	No Interference	No Interference	No Interference	No Interference	—


Comparison of ϕ3 shank (VCWLB) and ϕ4 shank (CWLB) R0.5 × EL6

Roughing Tool wear comparison

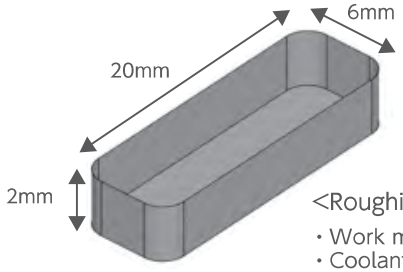


<Roughing condition>
- Work material : PXA30 (30 HRC)
- Coolant : Water soluble
- n : 30,000 min-1
- Vf : 1,100 mm/min
- a_p : 0.06 mm
- a_e : 0.12 mm
- Cycle time : 60 min

Tools after 60min milling

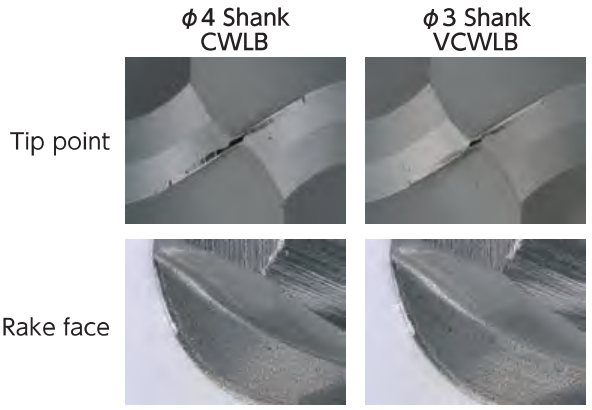


Finishing Tool wear / Milling surface comparison

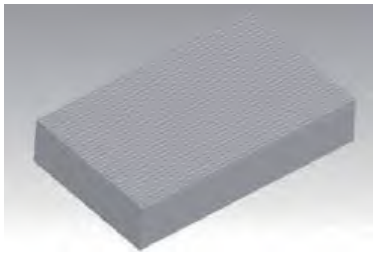


Work Size
40 × 20 × 0.06mm

<Finishing condition>
- Work material : PXA30 (30 HRC)
- Coolant : Water soluble
- n : 30,000 min-1
- Vf : 900 mm/min
- a_p : 0.03 mm
- a_e : 0.03 mm
- Cycle time : 60 min

Tools after 60min milling

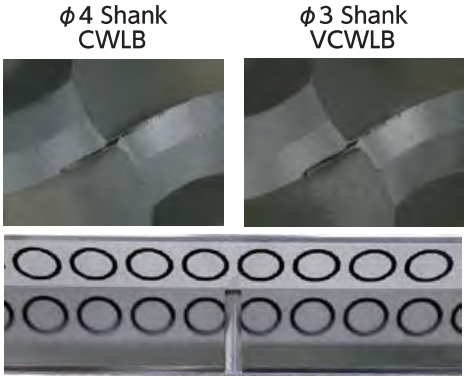

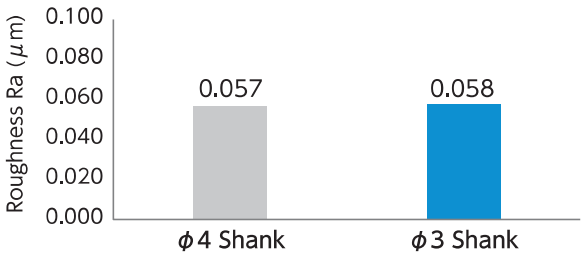


VCWLB Milling Conditions

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
2001-003	**R0.05**	0.3	54,000	85	0.004	0.004	54,000	85	0.004	0.004	48,000	55	0.002	0.002
20015-003	**R0.075**	0.3	54,000	160	0.007	0.009	54,000	160	0.007	0.009	48,000	90	0.004	0.004
2002-005	**R0.1**	0.5	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024
2002-010	**R0.1**	1	60,000	250	0.006	0.018	60,000	250	0.005	0.015	60,000	250	0.006	0.018
2003-010	**R0.15**	1	43,000	450	0.01	0.03	43,000	450	0.008	0.024	54,000	400	0.01	0.03
2003-020	**R0.15**	2	40,000	300	0.006	0.018	40,000	300	0.006	0.018	50,000	300	0.007	0.021
2003-030	**R0.15**	3	38,000	200	0.004	0.012	38,000	200	0.004	0.012	42,000	200	0.004	0.012
2004-010	**R0.2**	1	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075
2004-020	**R0.2**	2	35,000	600	0.015	0.045	35,000	600	0.011	0.033	50,000	500	0.015	0.045
2004-030	**R0.2**	3	35,000	400	0.01	0.03	35,000	400	0.008	0.024	42,000	400	0.01	0.03
2004-040	**R0.2**	4	35,000	300	0.005	0.015	35,000	300	0.005	0.015	35,000	300	0.005	0.015
2005-020	**R0.25**	2	34,000	800	0.025	0.075	34,000	800	0.023	0.046	45,000	700	0.022	0.066
2005-030	**R0.25**	3	32,000	550	0.016	0.048	32,000	550	0.012	0.036	41,000	550	0.014	0.042
2005-040	**R0.25**	4	31,000	450	0.012	0.036	31,000	450	0.01	0.03	35,000	450	0.01	0.03
2006-020	**R0.3**	2	33,000	1,400	0.045	0.135	33,000	1,400	0.036	0.072	40,000	1,200	0.045	0.09
2006-030	**R0.3**	3	33,000	900	0.035	0.105	33,000	900	0.025	0.066	40,000	800	0.03	0.075
2006-040	**R0.3**	4	31,000	700	0.027	0.081	31,000	700	0.02	0.06	35,000	560	0.022	0.066
2006-060	**R0.3**	6	24,000	380	0.012	0.036	24,000	380	0.012	0.036	24,000	380	0.01	0.03
2008-020	**R0.4**	2	30,000	2,200	0.1	0.3	30,000	1,800	0.06	0.12	35,000	1,800	0.07	0.14
2008-040	**R0.4**	4	30,000	1,400	0.07	0.21	30,000	1,300	0.04	0.1	35,000	1,300	0.05	0.12
2008-060	**R0.4**	6	27,000	900	0.04	0.12	27,000	900	0.025	0.075	27,000	800	0.03	0.09
2010-030	**R0.5**	3	30,000	1,800	0.11	0.33	24,000	1,600	0.07	0.14	30,000	1,500	0.08	0.16
2010-040	**R0.5**	4	30,000	1,700	0.09	0.27	24,000	1,500	0.065	0.13	30,000	1,300	0.075	0.15
2010-050	**R0.5**	5	30,000	1,600	0.08	0.24	24,000	1,400	0.06	0.12	30,000	1,200	0.07	0.14
2010-060	**R0.5**	6	30,000	1,400	0.06	0.18	18,000	1,200	0.04	0.12	30,000	1,100	0.06	0.12
2015-040	**R0.75**	4	30,000	1,800	0.14	0.42	30,000	1,500	0.11	0.22	30,000	1,600	0.11	0.22
2015-060	**R0.75**	6	30,000	1,800	0.12	0.36	23,000	1,300	0.1	0.2	30,000	1,400	0.1	0.2
2020-040	**R1**	4	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6
2020-060	**R1**	6	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6
2030-060	**R1.5**	6	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9

VCWLB Milling Conditions

WORK MATERIAL			HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
2001-003	R0.05	0.3	48,000	55	0.002	0.002
20015-003	R0.075	0.3	48,000	90	0.004	0.004
2002-005	R0.1	0.5	60,000	300	0.006	0.018
2002-010	R0.1	1	60,000	220	0.005	0.015
2003-010	R0.15	1	43,000	400	0.007	0.021
2003-020	R0.15	2	40,000	300	0.005	0.015
2003-030	R0.15	3	38,000	200	0.004	0.008
2004-010	R0.2	1	35,000	650	0.015	0.045
2004-020	R0.2	2	35,000	400	0.01	0.03
2004-030	R0.2	3	35,000	330	0.007	0.021
2004-040	R0.2	4	35,000	250	0.005	0.015
2005-020	R0.25	2	32,000	700	0.016	0.048
2005-030	R0.25	3	31,000	500	0.012	0.036
2005-040	R0.25	4	30,000	390	0.01	0.03
2006-020	R0.3	2	30,000	1,200	0.036	0.054
2006-030	R0.3	3	30,000	900	0.026	0.052
2006-040	R0.3	4	28,000	600	0.018	0.054
2006-060	R0.3	6	24,000	380	0.008	0.024
2008-020	R0.4	2	25,000	1,700	0.07	0.1
2008-040	R0.4	4	25,000	1,200	0.045	0.09
2008-060	R0.4	6	23,000	800	0.023	0.069
2010-030	R0.5	3	21,500	1,400	0.08	0.12
2010-040	R0.5	4	21,500	1,300	0.075	0.1
2010-050	R0.5	5	21,500	1,200	0.06	0.09
2010-060	R0.5	6	21,500	1,100	0.05	0.1
2015-040	R0.75	4	18,000	1,400	0.11	0.17
2015-060	R0.75	6	15,000	1,200	0.1	0.16
2020-040	R1	4	16,000	1,300	0.17	0.5
2020-060	R1	6	14,000	1,100	0.15	0.4
2030-060	R1.5	6	14,000	1,400	0.25	0.76



Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.

VCSELB UTCOAT
2 Flutes Short Shank Long Neck Ball End Mills

V Series UTCOAT Long Neck Ball


Super MG

UT COAT


Shank Dia 0/-0.003

Back Taper Geometry

Except for R0.05 ~ R0.15

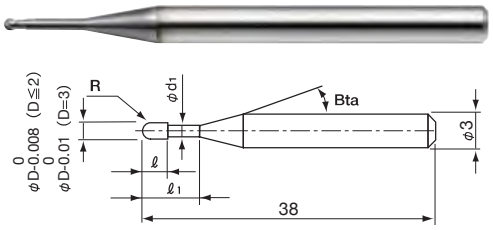

The shank taper angle shown is not an exact value.



From raw materials to 55HRC
Standard type

Unit (mm)

Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy	Helix Angle
R0.05 ~ R0.075	0/-0.008	± 0.002	0°
R0.1 ~ R0.75		± 0.003	30°
R1		± 0.004	
R1.5	0/-0.01	± 0.005	

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
●	●	●	●	●				○	●		●			○	○		

Total 30 models


Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30°	1°	1°30′	2°	3°	Suggested Retail Price ¥
VCSELB 2001-003	R0.05	0.3	0.08	0.094	11°	0.34	0.36	0.38	0.41	0.46	—
VCSELB 20015-003	R0.075	0.3	0.12	0.14	11°	0.37	0.39	0.41	0.43	0.48	—
VCSELB 2002-005	R0.1	0.5	0.16	0.18	11°	0.64	0.67	0.70	0.73	0.82	—
VCSELB 2002-010	R0.1	1	0.16	0.18	11°	1.16	1.21	1.28	1.34	1.50	—
VCSELB 2003-010	R0.15	1	0.24	0.28	11°	1.16	1.21	1.27	1.33	1.49	—
VCSELB 2003-020	R0.15	2	0.24	0.28	11°	2.20	2.30	2.42	2.55	2.85	—
VCSELB 2003-030	R0.15	3	0.24	0.28	11°	3.25	3.40	3.58	3.77	4.22	—
VCSELB 2004-010	R0.2	1	0.32	0.38	11°	1.16	1.21	1.26	1.32	1.47	—
VCSELB 2004-020	R0.2	2	0.32	0.38	11°	2.20	2.30	2.41	2.54	2.83	—
VCSELB 2004-030	R0.2	3	0.32	0.38	11°	3.24	3.40	3.57	3.76	4.20	—
VCSELB 2004-040	R0.2	4	0.32	0.38	11°	4.29	4.50	4.72	4.97	5.57	—
VCSELB 2005-020	R0.25	2	0.4	0.48	11°	2.19	2.29	2.40	2.52	2.81	—
VCSELB 2005-030	R0.25	3	0.4	0.48	11°	3.24	3.39	3.56	3.74	4.18	—
VCSELB 2005-040	R0.25	4	0.4	0.48	11°	4.29	4.49	4.71	4.96	5.55	—
VCSELB 2006-020	R0.3	2	0.48	0.58	11°	2.19	2.29	2.39	2.51	2.79	—
VCSELB 2006-030	R0.3	3	0.48	0.58	11°	3.24	3.39	3.55	3.73	4.16	—
VCSELB 2006-040	R0.3	4	0.48	0.58	11°	4.28	4.48	4.70	4.95	5.53	—
VCSELB 2006-060	R0.3	6	0.48	0.58	11°	6.38	6.68	7.02	7.39	8.27	—
VCSELB 2008-020	R0.4	2	0.64	0.78	11°	2.19	2.28	2.38	2.49	2.76	—
VCSELB 2008-040	R0.4	4	0.64	0.78	11°	4.28	4.47	4.69	4.93	5.50	—
VCSELB 2008-060	R0.4	6	0.64	0.78	11°	6.37	6.67	7.00	7.37	8.23	—
VCSELB 2010-030	R0.5	3	0.8	0.97	11°	3.26	3.40	3.55	3.73	4.13	—
VCSELB 2010-040	R0.5	4	0.8	0.97	11°	4.31	4.50	4.71	4.94	5.50	—
VCSELB 2010-050	R0.5	5	0.8	0.97	11°	5.35	5.60	5.87	6.16	6.87	—
VCSELB 2010-060	R0.5	6	0.8	0.97	11°	6.40	6.70	7.02	7.38	8.24	—
VCSELB 2015-040	R0.75	4	1.2	1.46	11°	4.25	4.42	4.62	4.84	5.35	—
VCSELB 2015-060	R0.75	6	1.2	1.46	11°	6.34	6.62	6.93	7.27	8.09	—
VCSELB 2020-040	R1	4	1.6	1.96	11°	4.24	4.40	4.58	4.78	5.26	—
VCSELB 2020-060	R1	6	1.6	1.96	11°	6.33	6.60	6.89	7.22	8.00	—
VCSELB 2030-060	R1.5	6	2.4	2.93	—	No Interference	No Interference	No Interference	No Interference	No Interference	—

VCSELB Milling Conditions

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	**R0.05**	0.3	54,000	85	0.004	0.004	54,000	85	0.004	0.004	48,000	55	0.002	0.002	48,000	55	0.002	0.002
20015-003	**R0.075**	0.3	54,000	160	0.007	0.009	54,000	160	0.007	0.009	48,000	90	0.004	0.004	48,000	90	0.004	0.004
2002-005	**R0.1**	0.5	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
2002-010	**R0.1**	1	60,000	250	0.006	0.018	60,000	250	0.005	0.015	60,000	250	0.006	0.018	60,000	220	0.005	0.015
2003-010	**R0.15**	1	43,000	450	0.01	0.03	43,000	450	0.008	0.024	54,000	400	0.01	0.03	43,000	400	0.007	0.021
2003-020	**R0.15**	2	40,000	300	0.006	0.018	40,000	300	0.006	0.018	50,000	300	0.007	0.021	40,000	300	0.005	0.015
2003-030	**R0.15**	3	38,000	200	0.004	0.012	38,000	200	0.004	0.012	42,000	200	0.004	0.012	38,000	200	0.004	0.008
2004-010	**R0.2**	1	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2004-020	**R0.2**	2	35,000	600	0.015	0.045	35,000	600	0.011	0.033	50,000	500	0.015	0.045	35,000	400	0.01	0.03
2004-030	**R0.2**	3	35,000	400	0.01	0.03	35,000	400	0.008	0.024	42,000	400	0.01	0.03	35,000	330	0.007	0.021
2004-040	**R0.2**	4	35,000	300	0.005	0.015	35,000	300	0.005	0.015	35,000	300	0.005	0.015	35,000	250	0.005	0.015
2005-020	**R0.25**	2	34,000	800	0.025	0.075	34,000	800	0.023	0.046	45,000	700	0.022	0.066	32,000	700	0.016	0.048
2005-030	**R0.25**	3	32,000	550	0.016	0.048	32,000	550	0.012	0.036	41,000	550	0.014	0.042	31,000	500	0.012	0.036
2005-040	**R0.25**	4	31,000	450	0.012	0.036	31,000	450	0.01	0.03	35,000	450	0.01	0.03	30,000	390	0.01	0.03
2006-020	**R0.3**	2	33,000	1,400	0.045	0.135	33,000	1,400	0.036	0.072	40,000	1,200	0.045	0.09	30,000	1,200	0.036	0.054
2006-030	**R0.3**	3	33,000	900	0.035	0.105	33,000	900	0.025	0.066	40,000	800	0.03	0.075	30,000	900	0.026	0.052
2006-040	**R0.3**	4	31,000	700	0.027	0.081	31,000	700	0.02	0.06	35,000	560	0.022	0.066	28,000	600	0.018	0.054
2006-060	**R0.3**	6	24,000	380	0.012	0.036	24,000	380	0.012	0.036	24,000	380	0.01	0.03	24,000	380	0.008	0.024
2008-020	**R0.4**	2	30,000	2,200	0.1	0.3	30,000	1,800	0.06	0.12	35,000	1,800	0.07	0.14	25,000	1,700	0.07	0.1
2008-040	**R0.4**	4	30,000	1,400	0.07	0.21	30,000	1,300	0.04	0.1	35,000	1,300	0.05	0.12	25,000	1,200	0.045	0.09
2008-060	**R0.4**	6	27,000	900	0.04	0.12	27,000	900	0.025	0.075	27,000	800	0.03	0.09	23,000	800	0.023	0.069
2010-030	**R0.5**	3	30,000	1,800	0.11	0.33	24,000	1,600	0.07	0.14	30,000	1,500	0.08	0.16	21,500	1,400	0.08	0.12
2010-040	**R0.5**	4	30,000	1,700	0.09	0.27	24,000	1,500	0.065	0.13	30,000	1,300	0.075	0.15	21,500	1,300	0.075	0.1
2010-050	**R0.5**	5	30,000	1,600	0.08	0.24	24,000	1,400	0.06	0.12	30,000	1,200	0.07	0.14	21,500	1,200	0.06	0.09
2010-060	**R0.5**	6	30,000	1,400	0.06	0.18	18,000	1,200	0.04	0.12	30,000	1,100	0.06	0.12	21,500	1,100	0.05	0.1
2015-040	**R0.75**	4	30,000	1,800	0.14	0.42	30,000	1,500	0.11	0.22	30,000	1,600	0.11	0.22	18,000	1,400	0.11	0.17
2015-060	**R0.75**	6	30,000	1,800	0.12	0.36	23,000	1,300	0.1	0.2	30,000	1,400	0.1	0.2	15,000	1,200	0.1	0.16
2020-040	**R1**	4	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
2020-060	**R1**	6	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	14,000	1,100	0.15	0.4
2030-060	**R1.5**	6	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when the tool is chattering and heats up to a red color.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.



VDLCLB DLCCOAT 2 Flutes Short Shank Long Neck Ball End Mills

V Series DLCCOAT Long Neck Ball

Super MG

DLC


30°


R ±0.002
R0.05~R0.2

R ±0.003
R0.25~R1

Shank Dia 0/-0.003

Back Taper Geometry
Except for R0.05~R0.15



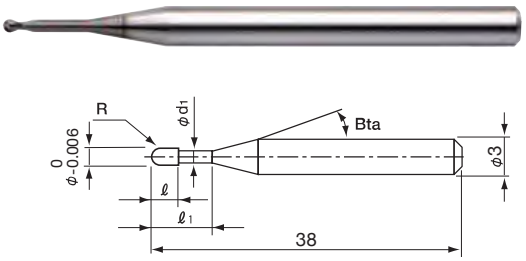

The shank taper angle shown is not an exact value.

Label Sample



#001 φD0.997 R+0.001/−0.001

Diameter and Ball R accuracy measurements are printed on the label to support High Precision milling.

DLC coating For copper electrode milling

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

CARBON STEELS S45C S55C	ALLOY STEELS SK / SCM SUS	PREHARDENED STEELS NAK HPM	HARDENED STEELS ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	CAST IRON	ALUMINUM ALLOYS	GRAPHITE	COPPER	PLASTICS	GLASS FILLED PLASTICS	TITANIUM ALLOYS	HEAT RESISTANT ALLOYS	CEMENTED CARBIDE	HARD BRITTLE (NON-METALLIC) MATERIALS
									●		★						

Total 32 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Effective Length by Inclined Angles 30°	1°	1°30′	2°	3°	Suggested Retail Price ¥
VDLCLB 2001-003	R0.05	0.3	0.08	0.092	11°	0.35	0.37	0.39	0.41	0.46	—
VDLCLB 2001-005	R0.05	0.5	0.08	0.092	11°	0.56	0.59	0.62	0.66	0.74	—
VDLCLB 2002-005	R0.1	0.5	0.16	0.18	11°	0.64	0.67	0.70	0.74	0.83	—
VDLCLB 2002-010	R0.1	1	0.16	0.18	11°	1.17	1.22	1.28	1.35	1.51	—
VDLCLB 2002-015	R0.1	1.5	0.16	0.18	11°	1.68	1.77	1.86	1.95	2.19	—
VDLCLB 2003-010	R0.15	1	0.24	0.28	11°	1.16	1.22	1.27	1.34	1.49	—
VDLCLB 2003-020	R0.15	2	0.24	0.28	11°	2.21	2.31	2.43	2.55	2.86	—
VDLCLB 2004-010	R0.2	1	0.32	0.38	11°	1.16	1.21	1.27	1.33	1.48	—
VDLCLB 2004-020	R0.2	2	0.32	0.38	11°	2.20	2.31	2.42	2.54	2.84	—
VDLCLB 2004-030	R0.2	3	0.32	0.38	11°	3.25	3.40	3.57	3.76	4.21	—
VDLCLB 2004-040	R0.2	4	0.32	0.38	11°	4.30	4.50	4.73	4.98	5.58	—
VDLCLB 2005-020	R0.25	2	0.4	0.48	11°	2.20	2.30	2.41	2.53	2.82	—
VDLCLB 2005-030	R0.25	3	0.4	0.48	11°	3.25	3.40	3.57	3.75	4.19	—
VDLCLB 2005-040	R0.25	4	0.4	0.48	11°	4.29	4.50	4.72	4.97	5.56	—
VDLCLB 2006-020	R0.3	2	0.48	0.58	11°	2.20	2.30	2.40	2.52	2.80	—
VDLCLB 2006-030	R0.3	3	0.48	0.58	11°	3.25	3.39	3.56	3.74	4.17	—
VDLCLB 2006-040	R0.3	4	0.48	0.58	11°	4.29	4.49	4.71	4.96	5.54	—
VDLCLB 2006-050	R0.3	5	0.48	0.58	11°	5.34	5.59	5.87	6.18	6.91	—
VDLCLB 2006-060	R0.3	6	0.48	0.58	11°	6.39	6.69	7.03	7.40	8.28	—
VDLCLB 2008-030	R0.4	3	0.64	0.78	11°	3.24	3.38	3.54	3.72	4.14	—
VDLCLB 2008-040	R0.4	4	0.64	0.78	11°	4.29	4.48	4.70	4.94	5.51	—
VDLCLB 2008-060	R0.4	6	0.64	0.78	11°	6.38	6.68	7.01	7.38	8.24	—
VDLCLB 2010-020	R0.5	2	0.8	0.97	11°	2.22	2.31	2.41	2.52	2.77	—
VDLCLB 2010-030	R0.5	3	0.8	0.97	11°	3.27	3.41	3.56	3.73	4.14	—
VDLCLB 2010-040	R0.5	4	0.8	0.97	11°	4.32	4.51	4.72	4.95	5.51	—
VDLCLB 2010-060	R0.5	6	0.8	0.97	11°	6.41	6.70	7.03	7.39	8.25	—
VDLCLB 2010-080	R0.5	8	0.8	0.97	11°	8.50	8.90	9.34	9.83	10.99	—
VDLCLB 2015-040	R0.75	4	1.2	1.45	11°	4.26	4.43	4.63	4.85	5.36	—
VDLCLB 2015-060	R0.75	6	1.2	1.45	11°	6.35	6.63	6.94	7.28	8.10	—
VDLCLB 2020-040	R1	4	1.6	1.95	11°	4.25	4.41	4.59	4.79	5.27	—
VDLCLB 2020-060	R1	6	1.6	1.95	11°	6.34	6.61	6.90	7.23	8.01	—
VDLCLB 2020-080	R1	8	1.6	1.95	11°	8.43	8.80	9.21	9.67	No Interference	—


Milling Example of Copper Electrode Model (Tough Pitch Copper C1100)
R1 × Effective length 8mm
Comparison of ϕ3 shank (VDLCLB) and ϕ4 shank (DLCLB)

Comparison of tool wearing


<Milling condition>
Work material : Tough Pitch Copper C1100
Coolant : Oil mist
Milling shape : 20 mm × 20 mm × height 8 mm


<Tool>*1
VDLCLB 2020-080 (ϕ3 shank)
DLCLB 2020-080 (ϕ4 shank)
*1 1 for roughing to semi-finishing, 1 for finishing
total 2 pcs.
*2 Both models are set so that the overhang of shank is 2 mm.

VDLCLB
Milling Video




Milling shape

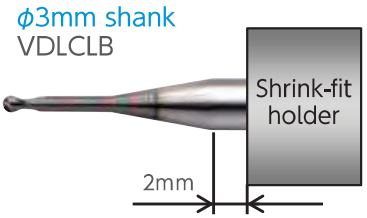

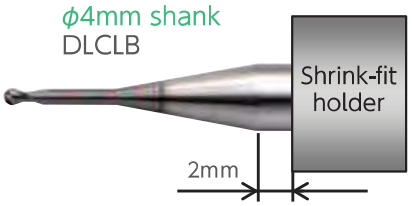


No.	Milling Process	Spindle speed (min^{-1})	Feed rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle time/ 1 pc
1	Roughing	18,700	1,800	0.4	0.8	0.08	14 min 6 sec
2	Semi-finishing	18,700	1,800	0.05	0.05	0.03	1 h 17 min 24 sec
3	Finishing	18,700/ 30,000 (Bottom)	900	0.03	0.03	0	1 h 17 min 0 sec
						Total	2 h 48 min 30 sec

VDLCLB(ϕ3 shank)
Finished work

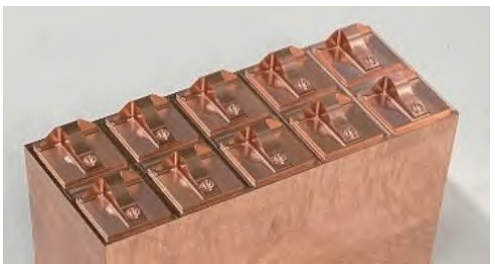


DLCLB(ϕ4 shank)
Finished work



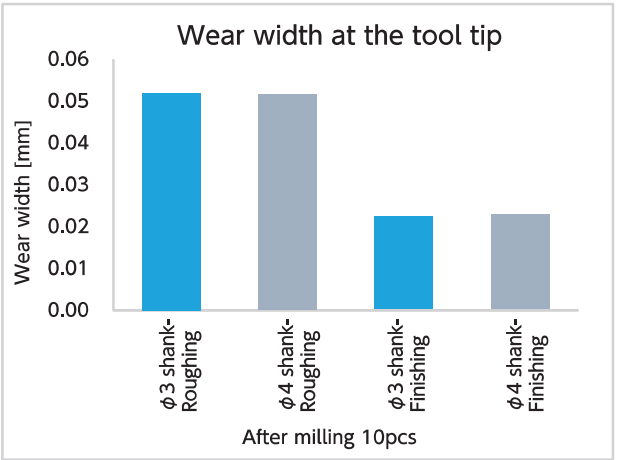

【Tool after milling 10pcs】

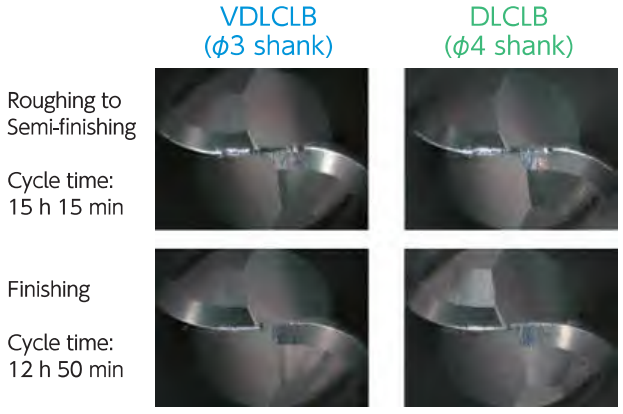



No difference of tool wearing with regard to the shank diameter gap.

Comparison of dimensional accuracy and roughness

Measuring for dimensional accuracy of vertical wall and roughness of concave surface.



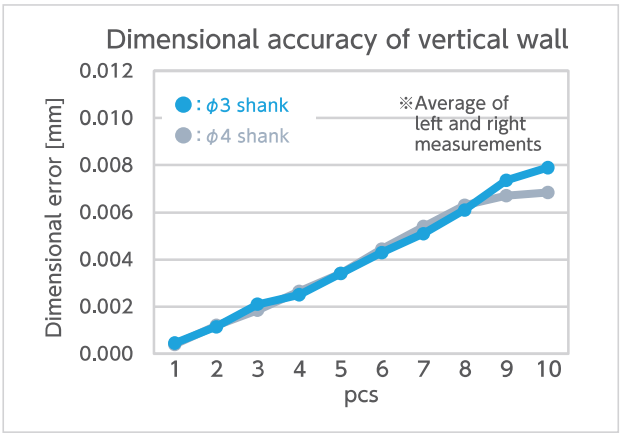

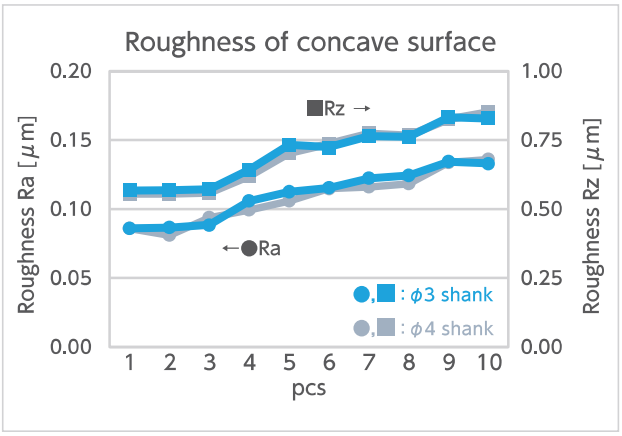


Both the dimensional accuracy and roughness gave very similar results, with no difference with regard to the shank diameter gap.

VDLCLB Milling Conditions

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				TUNGSTEN COPPER			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	**R0.05**	0.3	43,600	220	0.01	0.01	32,700	160	0.008	0.008
2001-005	**R0.05**	0.5	43,600	160	0.007	0.007	32,700	110	0.005	0.005
2002-005	**R0.1**	0.5	43,600	550	0.025	0.05	32,700	380	0.02	0.04
2002-010	**R0.1**	1	43,600	440	0.02	0.04	32,700	270	0.015	0.03
2002-015	**R0.1**	1.5	32,900	250	0.015	0.03	24,700	120	0.008	0.02
2003-010	**R0.15**	1	43,600	760	0.03	0.07	32,700	550	0.03	0.07
2003-020	**R0.15**	2	39,200	390	0.02	0.03	29,400	200	0.01	0.02
2004-010	**R0.2**	1	43,600	1,090	0.05	0.1	32,700	760	0.04	0.08
2004-020	**R0.2**	2	43,600	650	0.035	0.06	32,700	380	0.02	0.05
2004-030	**R0.2**	3	35,000	470	0.02	0.04	29,200	230	0.01	0.03
2004-040	**R0.2**	4	27,300	270	0.008	0.015	19,600	110	0.005	0.01
2005-020	**R0.25**	2	43,600	870	0.08	0.15	32,700	550	0.08	0.15
2005-030	**R0.25**	3	38,200	650	0.06	0.1	29,500	390	0.06	0.08
2005-040	**R0.25**	4	32,700	440	0.04	0.08	24,000	220	0.025	0.05
2006-020	**R0.3**	2	43,600	1,750	0.12	0.2	32,700	1,310	0.12	0.2
2006-030	**R0.3**	3	43,600	1,090	0.1	0.14	32,700	760	0.08	0.1
2006-040	**R0.3**	4	32,700	760	0.07	0.1	27,300	440	0.04	0.06
2006-050	**R0.3**	5	29,500	650	0.05	0.08	24,000	330	0.02	0.04
2006-060	**R0.3**	6	27,300	550	0.04	0.06	21,800	220	0.01	0.03
2008-030	**R0.4**	3	43,600	2,180	0.15	0.3	32,700	1,530	0.15	0.3
2008-040	**R0.4**	4	38,200	1,750	0.12	0.2	29,500	1,090	0.1	0.16
2008-060	**R0.4**	6	32,700	1,090	0.08	0.15	21,800	550	0.05	0.1
2010-020	**R0.5**	2	39,100	2,740	0.25	0.4	30,000	2,050	0.25	0.4
2010-030	**R0.5**	3	39,100	2,740	0.25	0.4	30,000	1,960	0.25	0.4
2010-040	**R0.5**	4	39,100	2,350	0.2	0.4	29,500	1,560	0.2	0.4
2010-060	**R0.5**	6	34,500	1,840	0.14	0.3	26,200	1,150	0.1	0.25
2010-080	**R0.5**	8	27,300	1,090	0.12	0.2	19,600	550	0.06	0.1
2015-040	**R0.75**	4	25,500	2,270	0.3	0.6	21,300	1,700	0.3	0.6
2015-060	**R0.75**	6	25,500	2,040	0.3	0.6	21,300	1,530	0.3	0.6
2020-040	**R1**	4	18,700	2,490	0.45	0.8	14,000	1,500	0.45	0.8
2020-060	**R1**	6	18,700	2,080	0.45	0.8	14,000	1,250	0.45	0.8
2020-080	**R1**	8	18,700	1,800	0.4	0.8	13,500	1,200	0.4	0.8

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering occurs.
- Recommend wet coolant for Copper, Aluminum alloys and Tungsten-Copper.




For Cemented Carbide and Hard Brittle Materials

UDC Series

ULTRA DIAMOND COAT




Choose Union Tool for your cemented carbide milling needs.

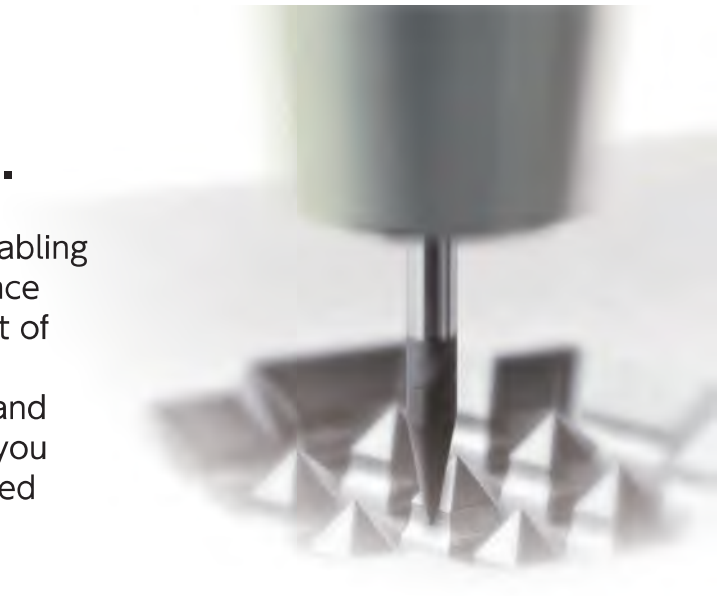

Union Tool developed the UDC series, enabling the direct milling of cemented carbide. Since then, we have pioneered the development of diverse products that contribute to highly efficient and accurate milling. Please test and see for yourself the speed and finish that you would not expect from machining cemented carbide.

Optimized diamond coating for cemented carbide

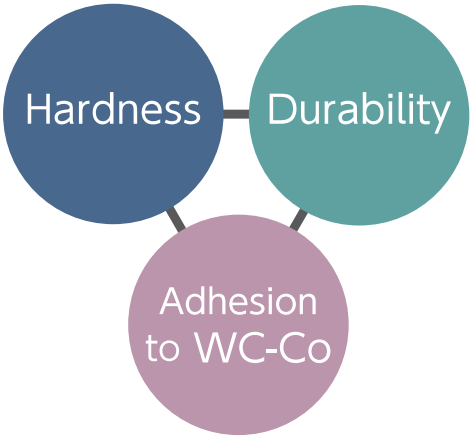

We developed our special high-performance diamond film for milling cemented carbide and hard brittle materials. Hardness and durability have been dramatically increased, and further improvement has been made in wear resistance.
The adhesion to cemented carbide materials has also been improved.


Direct “milling” of cemented carbide



UDCB chip evacuation



Inside view of a curled chip (surface side)



Outside view (tool/rake side)

By using a deep cut into the Cemented Carbide, UDC series creates a “fan shaped” chip, Just like cutting steel.

Various lineup available

Please select the best tool for your application.


UDC
ULTRA DIAMOND COAT

	For highly efficient roughing and semi-finishing	For better surface finish	For tough materials (87 HRA or lower hardness)	For cost saving purposes
	H series	F series	New! S series	
Ball	UDCBH	UDCBF	UDCSB	UDCB
Long Neck Ball	UDCLBH	UDCLBF	UDCSLB	UDCLB
Long Neck Radius	UDCLRSH	UDCLRSF		UDCLRS

UDCRRS
※Multi-flute radius model for roughing

For drilling	For threading
UDCMX	UDCT

Choose by application

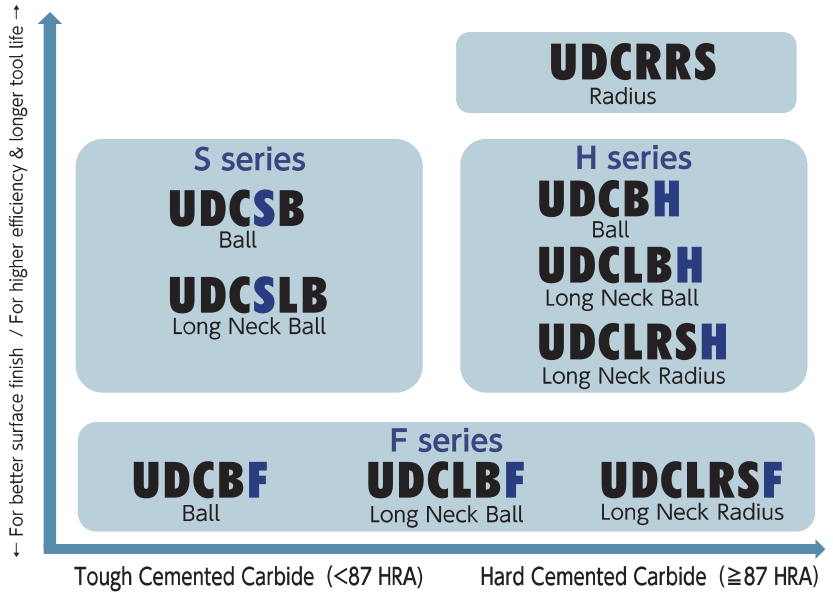

High efficiency milling with third generation UDC

UDC-H Series

The best match for roughing and semi-finishing of cemented carbide.

Features of H series

Edge treatment designed for rigidity → Unbelievable milling quality

High Speed → Mill at surprisingly high feed rate

High Removal Volume → Highly improved removal volume



Attain both high efficiency and long tool life!

The key points …

Tool damage minimized **by edge treatment designed for rigidity** × **Improved diamond coating** with enhanced wear resistance

More series and sizes now available!

The Long Neck Radius UDCLRSH series has been newly added to the H series.
The lineup of existing series has also increased.

UDC-H Series Lineup

Ball UDCBH	Long neck ball UDCLBH	Long neck radius UDCLRSH
		
R0.1～R3	R0.2～R3	ϕ0.5～ϕ2


Comparison of efficiency and material removal volume
UDCBH / UDCBF R1 × L1.4

Cemented Carbide
VM-40 (90 HRA)

Compared to UDCBF, **UDCBH** has····

7.5 times the efficiency

Over **4** times the removal volume

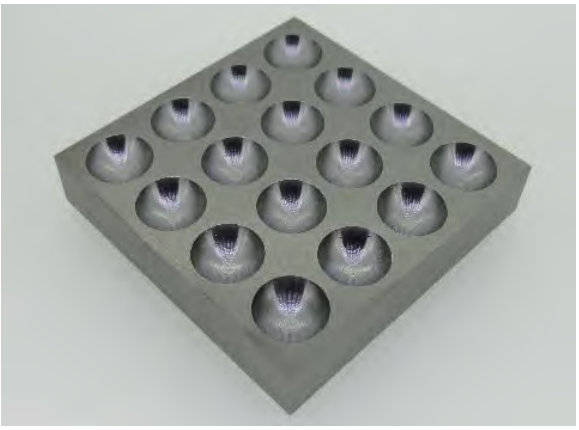

Lens shaped milling

Work Size : 50 × 50 × 10 mm
Pocket Size: Top ϕ10 × Depth 3.5 mm
Material Removal Volume
: 160 mm^3 / Pocket
Coolant : Air Blow


UDCBH
Milling example


Tool	UDCBH Ball	UDCBF Ball
Milling Conditions		
Spindle Speed	30,000 min^{-1}	20,000 min^{-1}
Feed Rate	1,500 mm/min	200 mm/min
Axial Depth	0.1 mm	
Radial Depth	0.3 mm	
Milling Results		
1 side 16 pockets	1 tool, Milling time 76 min	4 tools, Milling time 7 h 28 min
Tool after milling 4 pockets		
Tool after milling 16 pockets	 Still functional	–

※UDCBH shows maximum tool performance under high-speed conditions.
Tool life may shorten when used at the same feed rate as before.

Hexalobular Comparison of efficiency and material removal volume with UDCBH / UDCBF R0.5 x L0.7

Cemented Carbide
VM-40 (90 HRA)

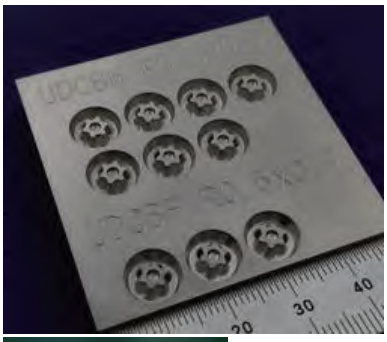



Model Size : ϕ9 x 2.2 mm 91 mm^3 / pc
Coolant : Air Blow

Less than 1/3 of the cycle time
More than twice the tool life of UDCBF






Tool damage at the time of machining 3 pieces

Tool	UDCBF		UDCBH	
Model	Hexalobular	Character engraving	Hexalobular	Character engraving
Cycle Time / pc	38 min 21 sec	1 min 56 sec	11 min 50 sec	38 sec
Number of processed pieces / pc	3 pcs	–	7 pcs	–
Material Removal Volume	273 mm^3	–	637 mm^3	–
Spindle Speed	30,000 min^{-1}	15,000 min^{-1}	30,000 min^{-1}	15,000 min^{-1}
Feed Rate	300 mm/min	150 mm/min	900 mm/min	450 mm/min
Feed Rate 2	30 mm/min	30 mm/min	300 mm/min	300 mm/min
a_p	0.05 mm	0.05 mm	0.05 mm	0.05 mm
a_e	0.25 mm	–	0.25 mm	–

Efficiency 3.2 times
Tool life 2.3 times

Comparison of efficiency and material removal volume in roughing with UDCB / UDCBF / UDCBH

Cemented Carbide
VM-40 (90 HRA)

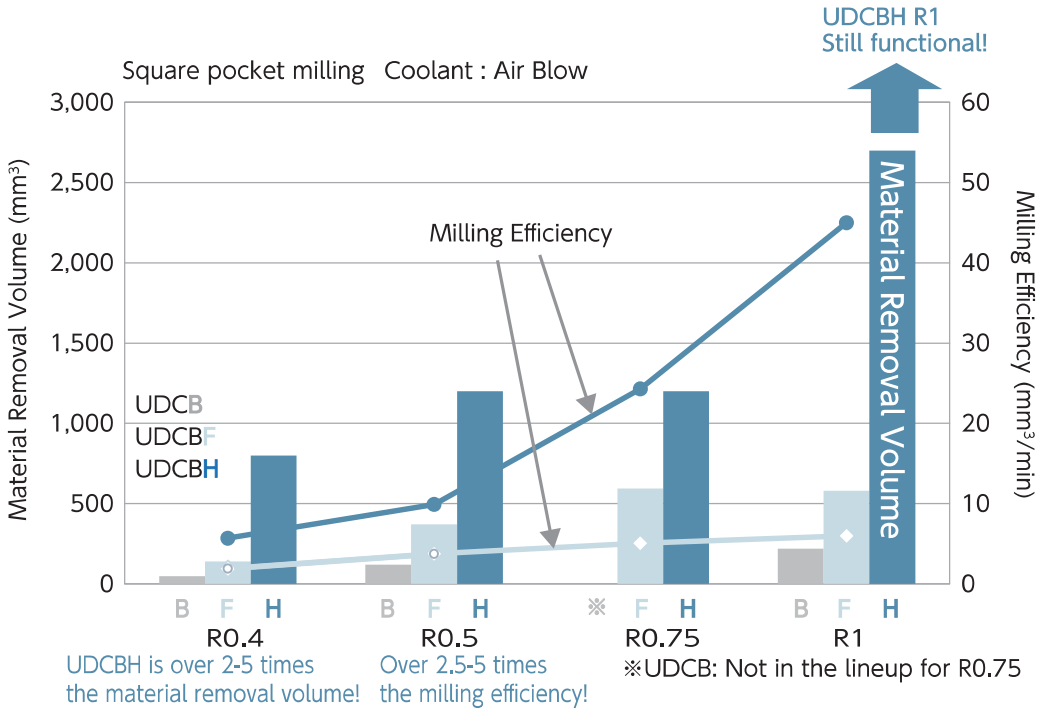


Connector shaped milling with UDCLBH R1 x EL4

Cemented Carbide VM-40 (90 HRA)



Model Size : 26 x 16 x 4 mm
Pocket Volume : 1,304 mm^3
Coolant : Air Blow

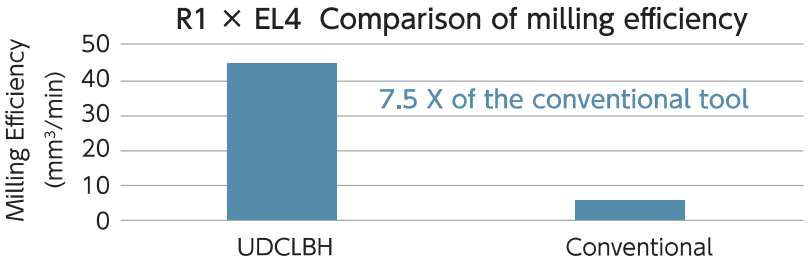

Milling Efficiency = Feed Rate × a_p × a_e

Tool after milling





Less tool damage even with highly efficient milling!

No	Process	Tool No.	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m:s)
1	Roughing	T1	UDCLBH 2020-0400 (R1 x EL4)	30,000	1,500	0.1	0.3	0.03	0:24:52
2	Corner Removal 1	T2	UDCLBH 2010-0400 (R0.5 x EL4)	30,000	400	0.05	0.11	0.03	0:33:12
3	Corner Removal 2	T3	UDCLRSF 2010-005040 (ϕ1 x CR0.05 x EL4)	30,000	190	0.02	0.6	0.03	0:15:23
4	Top surface/ Semi-finishing			30,000	190	—	0.6	0.01	0:03:11
5	Wall surface / Semi-finishing	T2	UDCLBH 2010-0400 (R0.5 x EL4)	30,000	400	0.05	0.22	0.01	0:38:22
6	Corner & Bottom surface/ Semi-finishing	T3	UDCLRSF 2010-005040 (ϕ1 x CR0.05 x EL4)	30,000	190	0.006	0.3	0.01	0:48:30
7	Top surface / Finishing	T4	UDCLRSF 2010-005040 (ϕ1 x CR0.05 x EL4)	30,000	190	—	0.6	0	0:03:15
8	Wall surface / Finishing			30,000	375	0.25	—	0	0:08:17
9	Corner & Bottom surface/ Finishing			30,000	190	0.014	0.3	0	0:46:09

Total 4pcs are used. Total 3:41:11

The sharpest cutting edge in the UDC series!

UDC-F Series

The best choice for high quality milling surface

Features of F series

UDC Coating — Optimized coating for milling cemented carbide

Special treatment for a sharp edge — Minimized edge chipping and the level of the gap


Chip pocket designed on the tool tip — Excellent surface finish



Comparison of edge chipping on work piece
UDCBH / UDCBF R0.4 × L0.56

Cemented Carbide
VM-40 (90 HRA)

Flat surface milling





	UDCBH Ball	UDCBF Ball
Spindle Speed	30,000 min^{-1}	
Feed Rate	750 mm/min	250 mm/min
Axial Depth	0.02 mm	
Radial Depth	0.02 mm	
Coolant	Air Blow	


Improve efficiency and lower costs

by using the right tool to meet your edge chipping requirements

Indexable insert mold milling
UDCBF R0.5 × L0.7


Cemented Carbide
VM-40 (90 HRA)

Excellent surface roughness

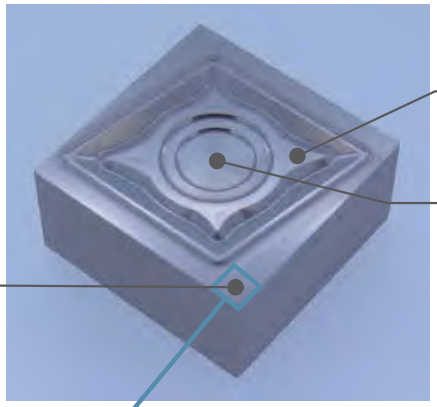

Work Size : 20 × 20 × 10 mm

Minimized edge chipping

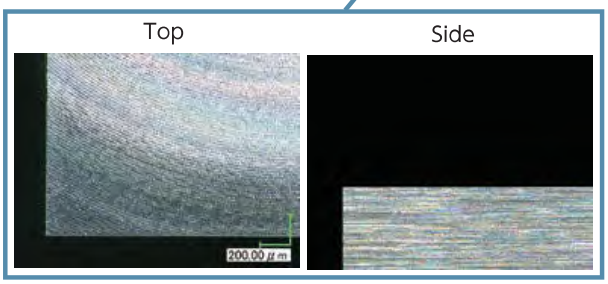


	Roughing	Finishing
Spindle Speed	30,000 min^{-1}	
Feed Rate	300 mm/min	
Axial Depth	0.05 mm	0.028 mm
Radial Depth	0.25 mm	0.02 mm
Coolant	Air Blow	
Cycle time	43 min	2 h 17 min
Material removal volume	86.3 mm^3	12.0 mm^3

※ One end mill each for roughing and finishing processes. Total 2 tools are used.

Curve slotting
UDCLRS / UDCLRSF ϕ2 × CR0.1 × EL2

Cemented Carbide
VM-40 (90 HRA)

	UDCLRS Long Neck Radius	UDCLRSF Long Neck Radius
Work Material		
Rake Face	 After 4 slots	 After 5 slots
Relief	 After 4 slots Corner Radius damage	 After 5 slots More tool life left

Work Size 20 × 20 × 10 mm
Slot Size W 2 × D 1.99 mm


	UDCLRS Long Neck Radius	UDCLRSF Long Neck Radius
Spindle Speed	20,000 min^{-1}	
Feed Rate	375 mm/min	190 mm/min
Axial Depth	0.02 mm	0.06 mm
Coolant	Air Blow	
Cycle time (Per slot)	9 min 4 sec	5 min 36 sec
Material removal volume	352 mm^3	440 mm^3

Connector mold
UDCLBH / UDCLBF / UDCLRSF

Cemented Carbide
VF-20 (92.5 HRA)



Work Size
48 × 34 × 10 mm

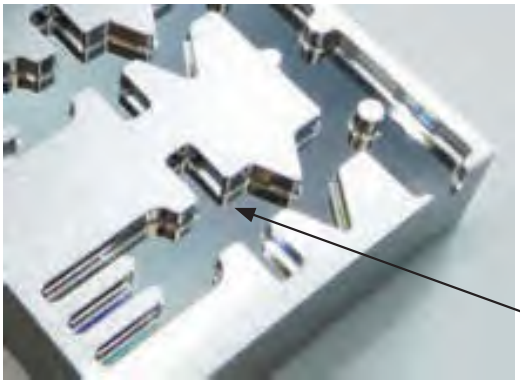

Surface roughness : Ra 0.005 μm
Dimensional accuracy : ± 0.002 mm

Coolant : Oil coolant

Actual cycle time : 26 h (roughing 10 h , semi-finishing 4 h, finishing 12 h)

Number of tools used : 7pcs (roughing 4pcs, semi-finishing to finishing 3pcs)

Dimensional accuracy : ± 0.002 mm

Tools used

【 Roughing to semi-finishing 】

For higher efficiency & longer tool life - UDC-H series

UDCLBH Long Neck Ball



【 Finishing 】

For better surface finish - UDC-F series

UDCLBF Long Neck Ball



UDCLRSF Long Neck Radius

UDCLRSF is used for flat mirror surface finishing




Milling Process	Tool		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m)	Milling part
Roughing	UDCLBH Long Neck Ball	R1 × EL3	51,000	600	0.07	0.21	0.04	2:48	Entire surface (excluding fine grooves)
					–	0.053	0.005	0:08	Bottom surface
Roughing		R0.5 × EL2	51,000	400	0.021	–	0.02	1:19	Fine groove part
				600	0.021	0.06	0.02	4:26	Entire surface (excluding bottom surface)
Semi-finishing		R0.3 × EL2	51,000	400	0.014	0.035	0.01	6:32	Entire surface (excluding bottom surface)
Finishing	UDCLBF Long Neck Ball	R0.3 × EL2	51,000	600	0.035	0.01	0	0:23	Chamfer, wall surface, corner R
Finishing	UDCLRSF Long Neck Radius	ϕ0.8 x CR0.1 x EL2.4	51,000	400	0.0005 Cusp Height	0.05	0	4:28	Wall surface
Finishing		ϕ0.8 x CR0.1 x EL2.4	24,800	175	0	0.05	0	1:52	Bottom surface

UDC-H series is used for roughing to achieve high efficiency and long tool life.
UDC-F series is used for finishing to achieve excellent surface finish.
Ra 0.005 μm mirror surface finish is achievable.

Fuel cell separator mold
UDCBH / UDCBF / UDCLRSF

Cemented Carbide
VM-40 (90 HRA)

Top surface roughness : Ra 0.011 μm

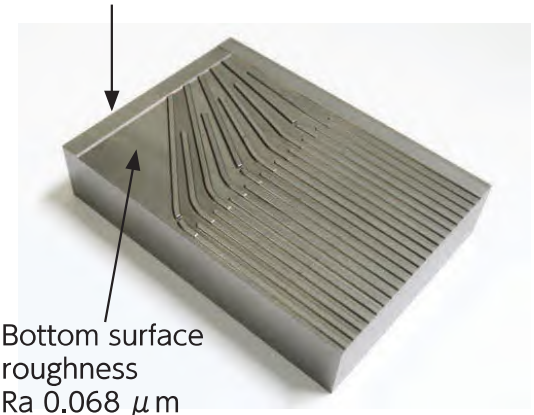

Bottom surface roughness
Ra 0.068 μm

Work Size
70 × 50 × 15 mm

Coolant : Air Blow

Actual cycle time : 36 h 23 min

Roughing to semi-roughing

For higher efficiency & longer tool life
UDC-H series



UDCBH

Semi-finishing
Inclined / Corner finishing


For better surface finish
UDC-F series



UDCBF

Flat surface finishing

For better surface finish
UDC-F series



UDCLRSF

Roughing to semi-roughing

Milling Process	Tool		Tools used	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m)
Roughing 1	UDCBH Ball	R1	1	30,000	1,500	0.1	0.3	0.03	1:12
Roughing 2				30,000	1,500	0.1	0.3		
Roughing 3	UDCBH Ball	R0.5	1	30,000	900	0.05	0.22		0:41
Semi-roughing 1	UDCBH Ball	R0.5	1	30,000	900	0.05	0.2	0.015	1:22
Semi-roughing 2				30,000	900	–	0.08		

Semi-finishing 3:15

Semi-finishing 1	UDCBH Ball	R0.5	1	30,000	900	0.05	0.05	0.005	2:04
Semi-finishing 2	UDCBF Ball	R0.3	2	30,000	400	0.02	0.05		5:25
Semi-finishing 3		R0.2	1	30,000	300	0.02	0.01		3:03

Finishing 10:32

Top surface finishing	UDCLRSF Long Neck Radius	φ0.5 × CR0.05 × EL0.5	2	30,000	285	0.005	0.005	0	4:32
Inclined surface finishing	UDCBF Ball	R0.15	3	30,000	250	0.005	0.005		12:16
Bottom surface finishing	UDCLRSF Long Neck Radius	φ0.5 × CR0.05 × EL0.5	3	30,000	285	0.005	0.02		5:03
Rest machining	UDCBF Ball	R0.15	1	30,000	250	0.01	0.03		1:25

23:16

UDC-H series is used for roughing to achieve high efficiency and long tool life.
UDC-F series is used for finishing to achieve excellent surface finish.

Now, high-toughness carbide can also be milled with UDC!

UDC-S Series

Long tool life when milling 87 HRA or lower hardness cemented carbide.


Features of S series

Angled flute design
Reduce the damage during milling due to the angled flute design.


UDC Coat : Outstanding adhesion to the tool
Outstanding adhesion to the tool allows milling of tough materials.

High material removal volume
Highly improved material removal volume when milling 87 HRA or lower hardness of cemented carbide material.



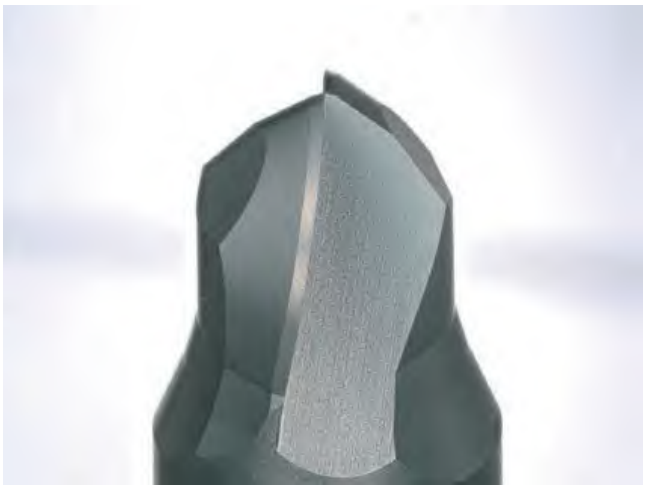

Angled flute design for UDCSB / UDCSLB

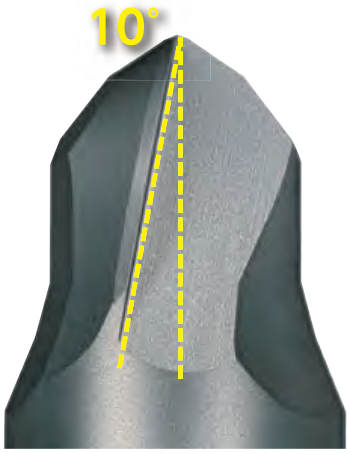


Reduce cutting force and damage due to the angled flute design.

UDC-S is the solution.

- Reduce the number of tools for direct milling.
- Reduce purchasing and machining costs for electrode materials.
- Reduce polishing process and time.
- Improve the life of the cemented carbide mold.

High-toughness carbide material milling
Material removal volume exceeds that of the conventional tool!

Material removal volume when milling VU-70 (83 HRA)

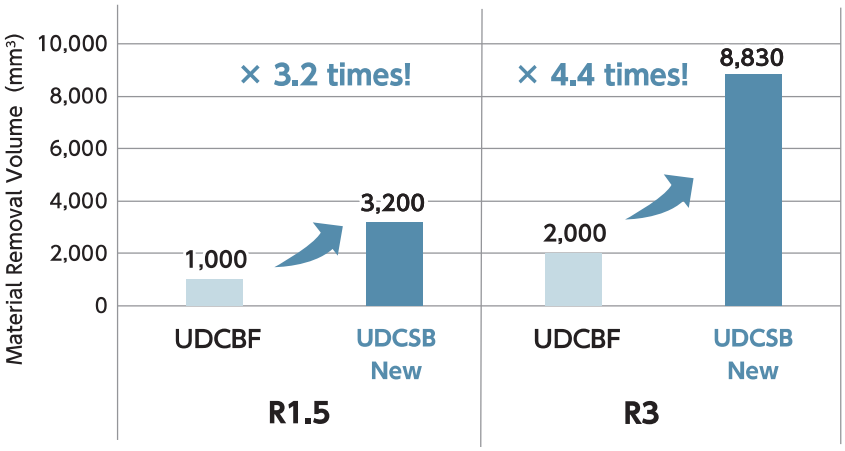

Material removal volume has been greatly improved due to the milling conditions optimized for the new tool geometry.

■ New milling conditions

- ✓ Shallower *a*p and deeper *a*e than conventional conditions.
- ✓ Feed rate 2 reduces cutting load when approach and *connection moves.
  *Changing from one engagement point to the next.
- ✓ Air blow to ensure chip removal.
- ✓ Chucking to avoid the circumference of the shank with coating, preventing run-out and tool sticking.

Roughing
UDCSB / UDCSLB



Finishing
UDCBF / UDCLBF



※UDCBF/UDCLBF are recommended for final finishing.

Milling example of bevel gear mold
UDCSLB / UDCLBF R3 × EL10

Cemented Carbide
VU-70 (83 HRA)



Work Material : Cemented carbide VU-70 (83 HRA)
Work Size : 50 × 50 × t20 mm
Model Size : 40.9 × d9 mm
Material Removal Volume : 8,258 mm³
Coolant : Air blow

Process	Tool		Tools used	Spindle Speed (min⁻¹)	Feed Rate (mm/min)	Feed Rate 2 (mm/min)	*a*p Axial Depth (mm)	*a*e Radial Depth (mm)	Allowance (mm)	Cycle Time (h:m)
Roughing	UDCSLB Long Neck Ball	R3 × EL10	2	6,600	280	80	0.2	0.65	0.05	3:16:06
Semi-finishing	UDCLBF Long Neck Ball	R3 × EL10	1	5,500		140	0.001 (Cusp Height)		0.02	0:42:42
Finishing			1				0.0005 (Cusp Height)		0	2:09:21
		Total	4 pcs						Total	6:08:09

Multi-flute Radius for roughing

UDCRRS

For roughing large a_p area

Designed for high efficiency milling

6 Flutes, 10 Flutes with a 40° helix angle help to reduce cutting load allowing for deep milling on axial depth.


ϕ2~ϕ4
6 Flutes



ϕ6
10 Flutes




Milling amount compared with 2 Flutes (ϕ2 × EL 6)

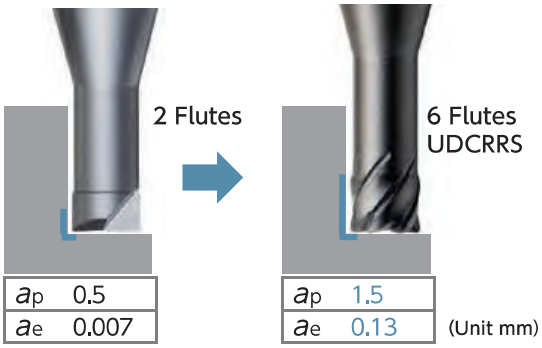

Compared to a tool with 2 flutes, the a_p is 3 times and the a_e is 18 times higher. This shows a significant efficiency improvement.

Cutting material removal volume for each size

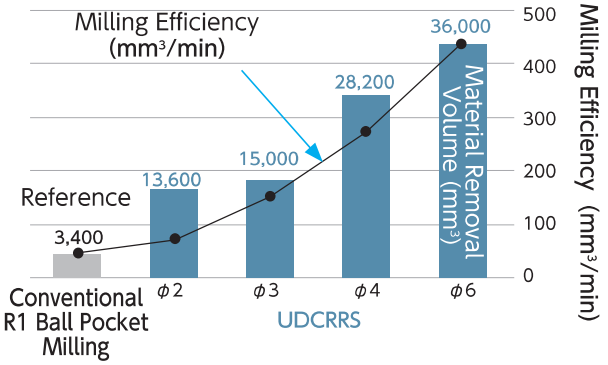


Milling efficiency and material removal volume exceeds the conventional tool.


Punching die milling
UDCRRS ϕ4 × CR0.2 × EL10

Cemented Carbide
VM-40 (90 HRA)

Spindle Speed	15,000 min^{-1}
Feed Rate	375 mm/min
Axial Depth	3 mm
Radial Depth	0.25 mm
Coolant	Air Blow
Cycle Time	93 min

Depth 9 mm
a_p 3 mm × 3 times





Tool after milling




Milling volume 15,953 mm^3 with a single tool in 93 min.
Tool damage is limited and continuous cutting is possible.

UDC milling examples


Part shaped milling
UDCLBH / UDCLBF

Cemented Carbide
VM-40 (90 HRA)



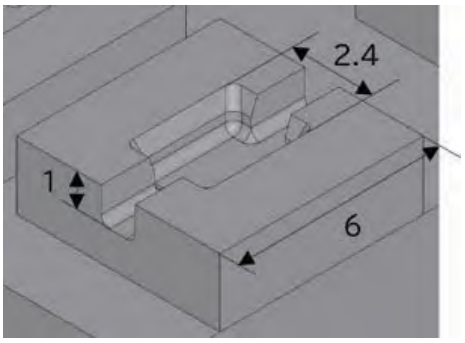

UDCLBH R0.2　After milling

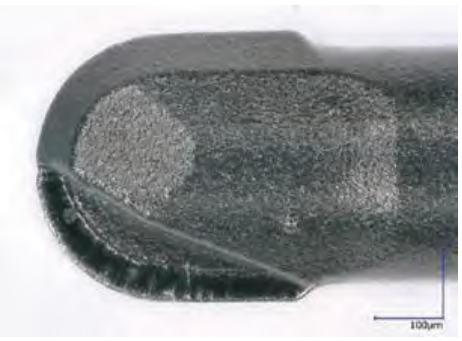

Block size : 6 × 6 × h2 mm


Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Allowance (mm)	Cycle Time (h:m)
Roughing	**UDCLBH** (Long Neck Ball) R0.3 × EL1	30,000	600	0.03	0.14	0.02	1:04
Semi-finishing	**UDCLBH** (Long Neck Ball) R0.2 × EL1	30,000	300	0.015	0.04	0.005	0:47
Finishing	**UDCLBF** (Long Neck Ball) R0.2 × EL1	30,000	100	0.028	0.028	0	1:42
						Total	5:14

※ For 6 blocks


Drilling and Threading

Cemented Carbide
VM-40 (90 HRA)

Drills and thread mills are also available.

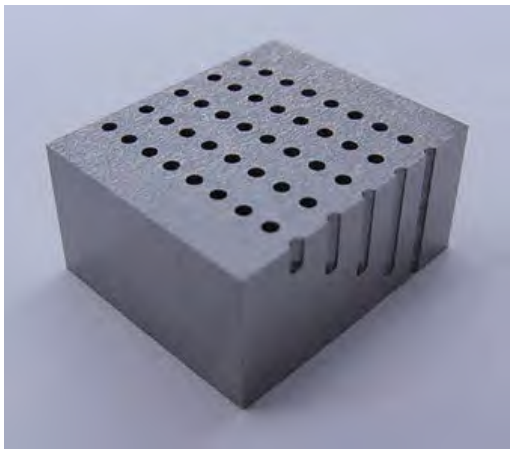

Tool : **UDCMX 2100-100** (φ1 × 10)
Work : VM-40 (90 HRA)

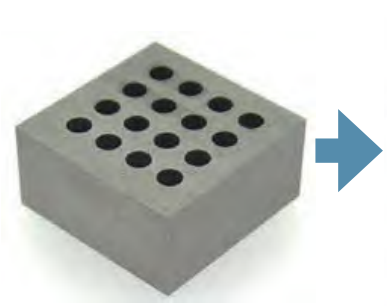



Tool : **UDCMX** (φ2.5 × 10)
UDCT (M3 × L6 P0.5)
Work : VM-40 (90 HRA)



JPN　ENG

Scan here for other milling examples.

Wider application range with UDC

Not just for cemented carbide

UDC series is also suited for ceramics (hard brittle materials).


Examples of ceramics (hard brittle materials)

Alumina Al_2O_3 | Zirconia ZrO_2 | Aluminum Nitride AlN

Electronic component assembly jig shaped milling — Alumina / Zirconia
UDCBH / UDCLBF / UDCLRSF / UDCMX


Work material : Alumina Al_2O_3 (99.5%), Zirconia ZrO_2 (94%)
Coolant : Water soluble (Wet type is recommended for both materials.)
Work Size : 30 × 20 × 10 mm

Alumina

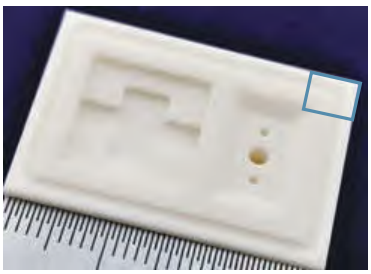



Zirconia

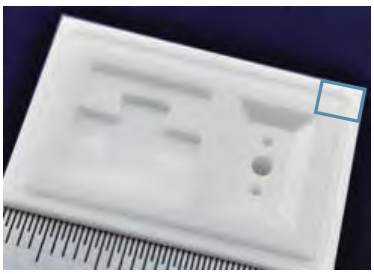




Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Allowance (mm)	Cycle Time (h:m:s)
Slotting & inclined pocket roughing	UDCBH (Ball) R0.5 × L0.7	30,000	300	0.05	0.25	0.01/0.03	0:36:29
Slot finishing						0	0:19:17
2-stage pocket roughing	UDCLBF (Long Neck Ball) R0.5 × EL2	30,000	300	0.028	0.028	0.03	0:52:42
Corner removal	UDCLRSF (Long Neck Radius) ϕ0.8 × CR0.05 × EL2.4	30,000	175	0.023	0.5	0.03	0:18:26
Semi-finishing				0.02	0.25	0.01	0:51:09
Finishing				0.014	0.25	0	1:12:32
Drilling	UDCMX (Drill) ϕ2 × FL10	2,400	5	0.15	—	—	0:03:15
Drilling	UDCMX (Drill) ϕ1 × FL10	5,000	7.5	0.05	—	—	0:10:44
						Total	4:24:34

Available not only for cemented carbide molds but also for a wide range of work materials.


High-capacity pocket + Drilling
UDCBF / UDCMX

Alumina


Work material : Alumina Al_2O_3 (99.5%)
Coolant : Water soluble

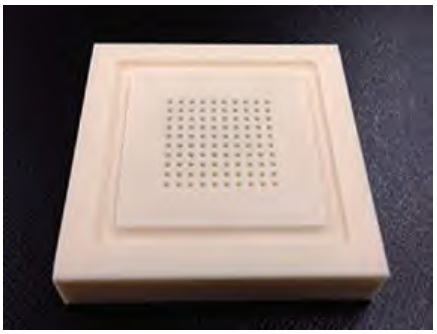

Enlarged peripheral pocket

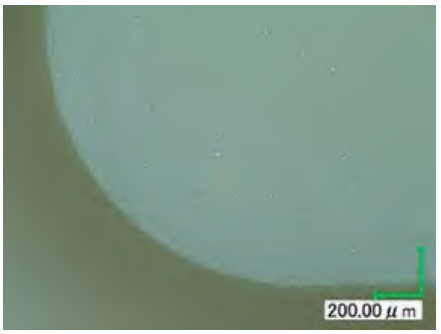

Enlarged 100th hole

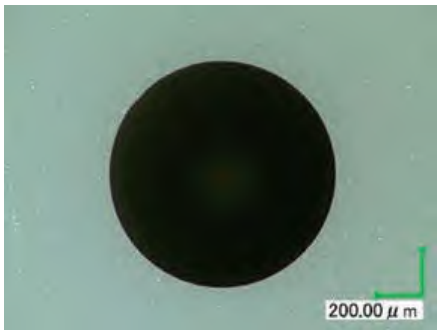

Minimized edge chipping!

Milled parts	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Peck amount (mm)	Cycle Time (h:m)	M.R.V. (mm^3)
Peripheral pocket	UDCBF (Ball) R1 × L1.4	20,000	200	0.1	0.3	—	1:14	600
9 mm Blind holes	UDCMX (Drill) ϕ1 × FL10	5,000	8	—	—	0.05	8:46	695


POINT! Recommend water soluble coolant for milling ceramics.

Milling condition

Tool : UDCLBF (Long Neck Ball) R0.5 × EL10
Work material : Alumina Al_2O_3 (99.5%)
Coolant : 3 types (below)

Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)
10,000	100	0.018	0.03


Removal volume (Tool life)

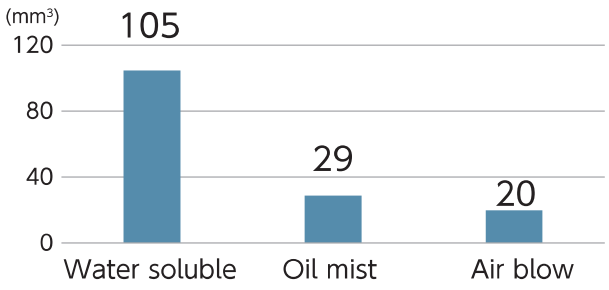


Tool damage after 18 mm^3 milling



Water soluble



Oil mist



Air blow


Minimized wear and longer tool life with water soluble coolant.

How to use UDC

Characteristics of cemented carbide

Characteristics (= Processability) differ by the type of cemented carbide.

Relationship between particle size and hardness.

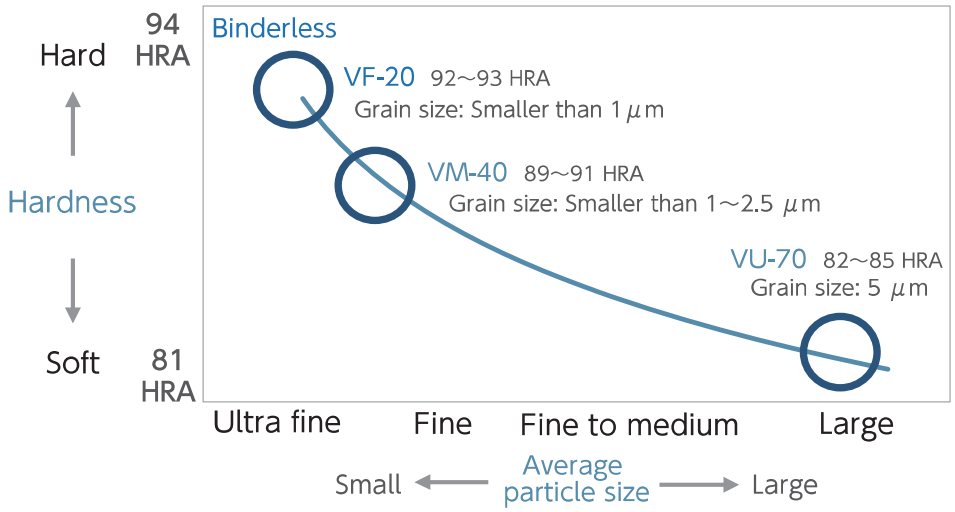

Removal volume and cemented carbide

We recommend that you select a material with workability while considering the required performance (Ex. Mold life).

Milling condition

Tool : UDCB (Ball) R0.5 × L0.7
Work material : Cemented carbide (below)
Coolant : Oil mist

Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)
30,000	300	0.1	0.05

WC	Symbol	Density (g/cm^3)	Hardness (HRA)	Anti breaking force (MPa)	Compressive strength (MPa)	Co amount* (%)	Particle size (μm)	Removal volume (①=100%)
①	VF-20	14.1	92.5~93.0	4,500 ~ 5,000	–	12	0.5	100%
②	VM-40	14.7	90	3,240	4,700	8.8	2 ~ 3	59%
③	VM-40	14.3	89	3,400	–	13.6	–	34%
④	VM-50	14.2	87.5	3,160	4,070	15.1	–	50%
⑤	VU-70	13.1	83	2,660	2,800	28.9	–	17%

*in-house measurement The ratio varies depending on the series and tool shapes.

Coolant

We recommend air blow for milling cemented carbide.

Milling condition

Tool : UDCB (Ball)
R0.5 × L0.7
Work material : Cemented carbide VM-40
Coolant : 3 types (below)

Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)
30,000	300	0.1	0.05

Tool damage after 30 mm^3 milling

Water soluble




Oil mist



Air blow



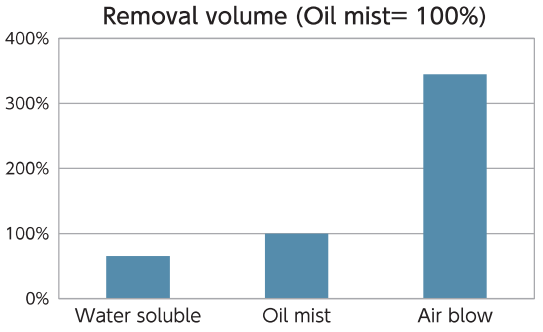


Setting feed rate of Approach and Connection links


Feed Rate2 in the milling conditions are for Approach and Connection links where the cutting load is high.

Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate 2 (mm/min)
30,000	200	20
30,000	250	25
30,000	450	45

◆ Approach
When tool contact the work




◆ Connection links
Movement when tool across the passed area

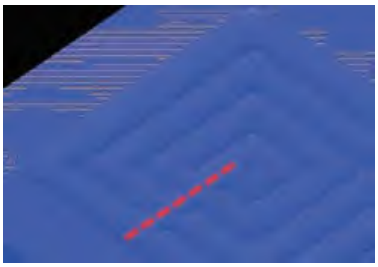


Inclined or helical approach is recommended,
but tool damage may vary depending on the operation.

Inclined approach



Helical approach



Scan here for more information on how to use UDC

JPN ENG

UDCBH

Additional 8 models



2 Flute Ball End Mills for High Efficiency and Long Life, Ideal for Cemented Carbide and Hard Brittle Materials

R0.1～R3

MG | UDC | 0° | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	Hardened Steels ~55HRC	Hardened Steels ~60HRC	Hardened Steels ~65HRC	Hardened Steels ~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○			★	● ※

※ Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

H Series


For high efficiency roughing and semi-finishing

Label Sample



#001 φD1.997 R+0.001/-0.001

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

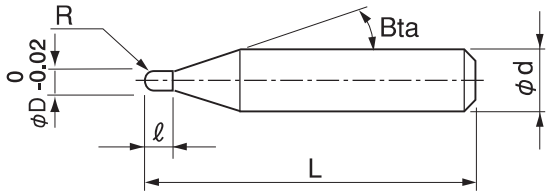

The shank taper angle shown is not an exact value.

Total 14 models

Unit (mm)


	Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
※	UDCBH 2002-0014	R0.1	0.14	16°	50	4	—
※	UDCBH 2003-0021	R0.15	0.21	16°	50	4	—
※	UDCBH 2004-0028	R0.2	0.28	16°	50	4	—
※	UDCBH 2005-0035	R0.25	0.35	16°	50	4	—
	UDCBH 2006-0042	R0.3	0.42	16°	50	4	—
	UDCBH 2007-0049	R0.35	0.49	16°	50	4	—
	UDCBH 2008-0056	R0.4	0.56	16°	50	4	—
	UDCBH 2010-0070	R0.5	0.7	16°	50	4	—
	UDCBH 2015-0105	R0.75	1.05	16°	50	4	—
	UDCBH 2020-0140	R1	1.4	16°	50	4	—
※	UDCBH 2030-0210	R1.5	2.1	16°	60	6	—
※	UDCBH 2040-0280	R2	2.8	16°	60	6	—
※	UDCBH 2050-0350	R2.5	3.5	16°	60	6	—
※	UDCBH 2060-0420	R3	4.2	—	60	6	—

※ Additional models

Milling Conditions for UDCBH

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA)					CEMENTED CARBIDE (<87 HRA)					HARD BRITTLE MATERIALS				
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002-0014	**R0.1**	0.14	30,000	200	20	0.008	0.008	30,000	200	20	0.008	0.008	30,000	100	10	0.01	0.01
2003-0021	**R0.15**	0.21	30,000	250	25	0.012	0.024	30,000	250	25	0.024	0.012	30,000	125	13	0.015	0.03
2004-0028	**R0.2**	0.28	30,000	450	45	0.02	0.08	30,000	600	60	0.08	0.02	30,000	150	15	0.02	0.08
2005-0035	**R0.25**	0.35	30,000	525	53	0.025	0.11	30,000	700	70	0.11	0.025	30,000	175	18	0.025	0.11
2006-0042	**R0.3**	0.42	30,000	600	200	0.03	0.14	30,000	900	300	0.17	0.03	30,000	200	20	0.03	0.14
2007-0049	**R0.35**	0.49	30,000	690	230	0.035	0.17	30,000	1,050	350	0.18	0.035	30,000	225	23	0.035	0.17
2008-0056	**R0.4**	0.56	30,000	750	250	0.04	0.19	30,000	1,250	420	0.19	0.04	30,000	250	25	0.04	0.19
2010-0070	**R0.5**	0.7	30,000	900	300	0.05	0.22	25,000	1,300	430	0.2	0.05	30,000	300	30	0.05	0.25
2015-0105	**R0.75**	1.05	30,000	1,200	400	0.075	0.27	19,000	1,450	480	0.23	0.07	24,000	400	45	0.075	0.27
2020-0140	**R1**	1.4	30,000	1,500	500	0.1	0.3	16,500	1,600	530	0.25	0.1	18,000	600	200	0.1	0.3
2030-0210	**R1.5**	2.1	25,000	1,250	416	0.1	0.5	Equivalent to UDCBF conditions					Equivalent to UDCBF conditions				
2040-0280	**R2**	2.8	21,000	1,050	350	0.1	0.6										
2050-0350	**R2.5**	3.5	19,000	950	316	0.1	0.7										
2060-0420	**R3**	4.2	18,000	900	300	0.1	0.75										

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.



UDCBF



2 Flute Ball End Mills for Superior Surface Finish, Ideal for Cemented Carbide and Hard Brittle Materials

R0.1～R3

MG | UDC | 0° | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○			★	● ※

※ Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

F Series


For excellent surface quality

Label Sample



#001 φD0.797 R+0.003/0.000

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

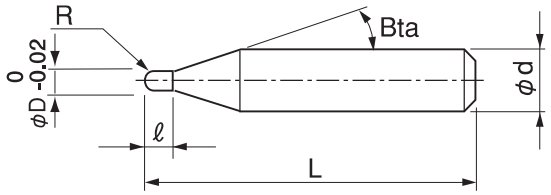

The shank taper angle shown is not an exact value.

Total 17 models


Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UDCBF 2002-0014	R0.1	0.14	16°	50	4	—
UDCBF 2003-0021	R0.15	0.21	16°	50	4	—
UDCBF 2004-0028	R0.2	0.28	16°	50	4	—
UDCBF 2005-0035	R0.25	0.35	16°	50	4	—
UDCBF 2006-0042	R0.3	0.42	16°	50	4	—
UDCBF 2007-0049	R0.35	0.49	16°	50	4	—
UDCBF 2008-0056	R0.4	0.56	16°	50	4	—
UDCBF 2009-0063	R0.45	0.63	16°	50	4	—
UDCBF 2010-0070	R0.5	0.7	16°	50	4	—
UDCBF 2012-0084	R0.6	0.84	16°	50	4	—
UDCBF 2015-0105	R0.75	1.05	16°	50	4	—
UDCBF 2020-0140	R1	1.4	16°	50	4	—
UDCBF 2025-0175	R1.25	1.75	16°	50	4	—
UDCBF 2030-0210	R1.5	2.1	16°	60	6	—
UDCBF 2040-0280	R2	2.8	16°	60	6	—
UDCBF 2050-0350	R2.5	3.5	16°	60	6	—
UDCBF 2060-0420	R3	4.2	—	60	6	—

Milling Conditions for UDCBF

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS					CEMENTED CARBIDE (<87 HRA)				
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002-0014	**R0.1**	0.14	30,000	100	10	0.01	0.01	30,000	100	10	0.01	0.01
2003-0021	**R0.15**	0.21	30,000	125	13	0.015	0.03	30,000	125	13	0.015	0.03
2004-0028	**R0.2**	0.28	30,000	150	15	0.02	0.08	30,000	150	15	0.02	0.08
2005-0035	**R0.25**	0.35	30,000	175	18	0.025	0.11	30,000	175	18	0.025	0.11
2006-0042	**R0.3**	0.42	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14
2007-0049	**R0.35**	0.49	30,000	225	23	0.035	0.17	30,000	225	23	0.035	0.17
2008-0056	**R0.4**	0.56	30,000	250	25	0.04	0.19	30,000	250	25	0.04	0.19
2009-0063	**R0.45**	0.63	30,000	275	28	0.045	0.22	30,000	275	28	0.045	0.22
2010-0070	**R0.5**	0.7	30,000	300	30	0.05	0.25	30,000	300	150	0.35	0.075
2012-0084	**R0.6**	0.84	27,500	275	36	0.06	0.26	25,000	250	125	0.42	0.09
2015-0105	**R0.75**	1.05	25,000	250	45	0.075	0.27	19,000	190	95	0.525	0.12
2020-0140	**R1**	1.4	20,000	200	60	0.1	0.3	12,500	125	60	0.7	0.15
2025-0175	**R1.25**	1.75	20,000	200	60	0.12	0.3	10,000	100	50	0.8	0.18
2030-0210	**R1.5**	2.1	20,000	200	100	0.15	0.3	9,000	280	140	0.38	0.15
2040-0280	**R2**	2.8	18,000	180	90	0.175	0.32	7,200	280	140	0.5	0.2
2050-0350	**R2.5**	3.5	16,000	160	80	0.225	0.31	6,000	330	170	0.6	0.25
2060-0420	**R3**	4.2	15,000	150	75	0.3	0.3	5,500	280	140	0.65	0.28

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.



UDCSB NEW



Released April 2025

2 Flute Ball End Mills Ideal for High Toughness Cemented Carbide

R1.5～R3

MG UDC 10° R ±0.01 Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○ ※1			★ ※2	● ※3

※ 1 DCB / DCLB series are highly recommended for Glass Filled Plastic milling.
※ 2 For High-toughness Cemented Carbide.
※ 3 UDCB / UDCBF / UDCBH are recommended for Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia, etc.), Glasses and etc.


S Series

Label Sample



#001 φD5.991 R+0.001/-0.001

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

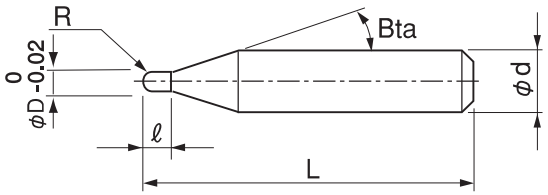

The shank taper angle shown is not an exact value.

Total 4 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UDCSB 2030-0210	**R1.5**	2.1	16°	60	6	—
UDCSB 2040-0280	**R2**	2.8	16°	60	6	—
UDCSB 2050-0350	**R2.5**	3.5	16°	60	6	—
UDCSB 2060-0420	**R3**	4.2	—	60	6	—

Milling Conditions for UDCSB

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS					CEMENTED CARBIDE (<87 HRA)				
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030-0210	**R1.5**	2.1	The following series are recommended. UDCBH series: Roughing, Semi-finishing UDCBF series: Finishing					9,000	280	140	0.2	0.28
2040-0280	**R2**	2.8						8,200	280	120	0.2	0.4
2050-0350	**R2.5**	3.5						7,400	280	100	0.2	0.53
2060-0420	**R3**	4.2						6,600	280	80	0.2	0.65

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.

UDCB



2 Flute Ball End Mills for Cemented Carbide and Hard Brittle Materials

R0.1～R3

MG UDC 0° R ±0.01 Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○ ※1			★	● ※2

※ 1 DCB / DCLB series are highly recommended for Glass Filled Plastic milling.
※ 2 Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia, etc.), Glasses and etc.

Entry Series


For low-cost milling

Label Sample



#001 φD1.983 R0.00/-0.005

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

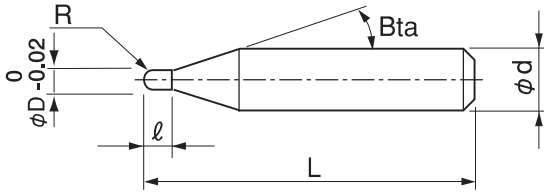

The shank taper angle shown is not an exact value.

Total 14 models


Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UDCB 2002-0014	R0.1	0.14	16°	50	4	—
UDCB 2003-0021	R0.15	0.21	16°	50	4	—
UDCB 2004-0028	R0.2	0.28	16°	50	4	—
UDCB 2005-0035	R0.25	0.35	16°	50	4	—
UDCB 2006-0042	R0.3	0.42	16°	50	4	—
UDCB 2007-0049	R0.35	0.49	16°	50	4	—
UDCB 2008-0056	R0.4	0.56	16°	50	4	—
UDCB 2009-0063	R0.45	0.63	16°	50	4	—
UDCB 2010-0070	R0.5	0.7	16°	50	4	—
UDCB 2020-0140	R1	1.4	16°	50	4	—
UDCB 2030-0210	R1.5	2.1	16°	60	6	—
UDCB 2040-0280	R2	2.8	16°	60	6	—
UDCB 2050-0350	R2.5	3.5	16°	60	6	—
UDCB 2060-0420	R3	4.2	—	60	6	—

Milling Conditions for UDCB

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA)					CEMENTED CARBIDE (<87 HRA)					HARD BRITTLE MATERIALS				
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002-0014	**R0.1**	0.14	30,000	100	10	0.01	0.01	30,000	100	10	0.01	0.01	30,000	100	10	0.01	0.01
2003-0021	**R0.15**	0.21	30,000	125	13	0.015	0.03	30,000	125	13	0.015	0.03	30,000	125	13	0.015	0.03
2004-0028	**R0.2**	0.28	30,000	150	15	0.02	0.08	30,000	150	15	0.02	0.08	30,000	150	15	0.02	0.08
2005-0035	**R0.25**	0.35	30,000	175	18	0.025	0.11	30,000	175	18	0.025	0.11	30,000	175	18	0.025	0.11
2006-0042	**R0.3**	0.42	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14
2007-0049	**R0.35**	0.49	30,000	225	23	0.035	0.17	30,000	225	23	0.035	0.17	30,000	225	23	0.035	0.17
2008-0056	**R0.4**	0.56	30,000	250	25	0.04	0.19	30,000	250	25	0.04	0.19	30,000	250	25	0.04	0.19
2009-0063	**R0.45**	0.63	30,000	275	28	0.045	0.22	30,000	275	28	0.045	0.22	30,000	275	28	0.045	0.22
2010-0070	**R0.5**	0.7	30,000	300	30	0.05	0.25	20,000	400	200	0.35	0.075	30,000	300	30	0.05	0.25
2020-0140	**R1**	1.4	30,000	300	100	0.1	0.3	16,500	420	210	0.25	0.1	24,000	240	100	0.1	0.3
2030-0210	**R1.5**	2.1	27,500	275	140	0.125	0.33	11,000	280	140	0.38	0.15	24,000	240	120	0.125	0.33
2040-0280	**R2**	2.8	24,000	240	120	0.15	0.35	8,250	300	150	0.5	0.2	24,000	240	120	0.15	0.35
2050-0350	**R2.5**	3.5	22,000	220	110	0.175	0.37	6,600	330	160	0.6	0.25	22,000	220	110	0.175	0.37
2060-0420	**R3**	4.2	20,000	200	100	0.2	0.4	5,500	280	140	0.65	0.28	20,000	200	100	0.2	0.4

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.



UDCLBH

Additional 9 models



2 Flute Long Neck Ball End Mills for High Efficiency and Long Life, Ideal for Cemented Carbide and Hard Brittle Materials

R0.2～R3

MG | UDC | 0° | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○			★	● ※

※ Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

H Series


For high efficiency roughing and semi-finishing

Label Sample




#001 φD1.989 R0.001/-0.002

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

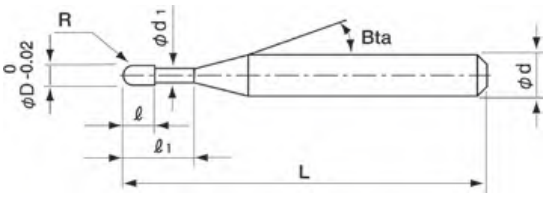

The shank taper angle shown is not an exact value.



Total 31 models

Unit (mm)

	Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
※	UDCLBH 2004-0050	R0.2	0.5	0.28	0.375	16°	50	4	—	0.51	0.52	0.54	0.55	0.58
※	UDCLBH 2004-0100		1				50	4	—	1.03	1.06	1.09	1.12	1.19
	UDCLBH 2006-0100	R0.3	1	0.42	0.575	16°	50	4	—	1.03	1.05	1.08	1.10	1.17
	UDCLBH 2006-0150		1.5				50	4	—	1.54	1.58	1.63	1.67	1.78
	UDCLBH 2006-0200		2				50	4	—	2.06	2.12	2.18	2.24	2.39
	UDCLBH 2006-0300		3				50	4	—	3.09	3.18	3.28	3.38	3.61
	UDCLBH 2007-0100	R0.35	1	0.49	0.675	16°	50	4	—	1.02	1.05	1.07	1.10	1.16
	UDCLBH 2008-0200	R0.4	2	0.56	0.775	16°	50	4	—	2.05	2.11	2.17	2.23	2.37
	UDCLBH 2008-0300		3				50	4	—	3.09	3.17	3.27	3.37	3.59
	UDCLBH 2008-0400		4				50	4	—	4.12	4.24	4.37	4.51	4.82
	UDCLBH 2010-0150	R0.5	1.5	0.7	0.975	16°	50	4	—	1.54	1.57	1.61	1.65	1.73
	UDCLBH 2010-0200		2				50	4	—	2.05	2.10	2.16	2.22	2.35
	UDCLBH 2010-0250		2.5				50	4	—	2.57	2.63	2.71	2.78	2.96
	UDCLBH 2010-0300		3				50	4	—	3.08	3.17	3.26	3.35	3.57
	UDCLBH 2010-0400		4				50	4	—	4.11	4.23	4.36	4.49	4.79
	UDCLBH 2010-0500		5				50	4	—	5.15	5.30	5.46	5.63	6.02

※ Additional models

2 Flute Long Neck Ball End Mills for High Efficiency and Long Life, Ideal for Cemented Carbide and Hard Brittle Materials


	Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
	UDCLBH 2015-0200	R0.75	2	1.05	1.455	16°	50	4	—	2.08	2.12	2.17	2.22	2.33
	UDCLBH 2015-0400		4				50	4	—	4.14	4.25	4.37	4.50	4.78
	UDCLBH 2015-0600		6				50	4	—	6.21	6.38	6.57	6.78	7.23
	UDCLBH 2020-0300	R1	3	1.4	1.915	16°	50	4	—	3.18	3.25	3.32	3.41	3.59
	UDCLBH 2020-0400		4				50	4	—	4.21	4.31	4.42	4.54	4.81
	UDCLBH 2020-0600		6				50	4	—	6.27	6.44	6.62	6.82	7.26
	UDCLBH 2020-0800		8				50	4	—	8.33	8.57	8.83	9.10	9.71
	UDCLBH 2020-1000		10				50	4	—	10.39	10.70	11.03	11.38	12.15
※	UDCLBH 2030-0600	R1.5	6	2.1	2.9	16°	60	6	—	6.28	6.44	6.60	6.78	7.18
※	UDCLBH 2030-0800		8				60	6	—	8.34	8.57	8.80	9.06	9.63
※	UDCLBH 2040-0800	R2	8	2.8	3.9	16°	60	6	—	8.33	8.53	8.76	8.99	9.52
※	UDCLBH 2040-1000		10				60	6	—	10.39	10.66	10.96	11.27	11.97
※	UDCLBH 2050-1000	R2.5	10	3.5	4.8	16°	60	6	—	10.55	10.82	11.10	11.40	12.07
※	UDCLBH 2060-1000	R3	10	4.2	5.7	—	60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
※	UDCLBH 2060-1500		15				60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

※ Additional models

Milling Conditions for UDCLBH

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA)					CEMENTED CARBIDE (<87 HRA)					HARD BRITTLE MATERIALS				
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2004-0050	R0.2	0.5	30,000	450	45	0.02	0.08	30,000	600	60	0.08	0.02	30,000	150	15	0.02	0.08
2004-0100		1	30,000	300	30	0.015	0.07	30,000	300	30	0.07	0.015	30,000	100	10	0.015	0.07
2006-0100	R0.3	1	30,000	600	200	0.03	0.14	30,000	450	150	0.17	0.03	30,000	200	20	0.03	0.14
2006-0150		1.5	30,000	600	200	0.03	0.14	30,000	300	100	0.14	0.025	30,000	200	20	0.03	0.14
2006-0200		2	30,000	300	100	0.022	0.11	30,000	220	70	0.11	0.02	30,000	150	15	0.02	0.11
2006-0300		3	30,000	75	10	0.01	0.08	30,000	75	10	0.08	0.01	30,000	75	10	0.01	0.08
2007-0100	R0.35	1	30,000	690	230	0.035	0.17	30,000	525	260	0.18	0.035	30,000	225	23	0.035	0.17
2008-0200	R0.4	2	30,000	750	250	0.04	0.19	27,000	480	240	0.19	0.04	30,000	250	25	0.04	0.19
2008-0300		3	30,000	350	100	0.037	0.17	25,500	300	100	0.17	0.035	30,000	230	23	0.037	0.17
2008-0400		4	26,000	210	70	0.035	0.16	24,000	210	21	0.16	0.035	30,000	210	21	0.035	0.16
2010-0150	R0.5	1.5	30,000	900	300	0.05	0.22	25,000	650	325	0.2	0.05	30,000	300	30	0.05	0.25
2010-0200		2	30,000	900	300	0.05	0.22	24,000	580	290	0.2	0.05	30,000	300	30	0.05	0.25
2010-0250		2.5	30,000	800	300	0.05	0.22	23,500	520	260	0.2	0.05	30,000	300	30	0.05	0.25
2010-0300		3	30,000	600	200	0.05	0.22	23,000	450	220	0.2	0.05	30,000	300	30	0.05	0.25
2010-0400		4	30,000	400	100	0.05	0.22	21,000	320	160	0.2	0.05	30,000	300	30	0.05	0.25
2010-0500		5	27,000	270	100	0.045	0.2	20,000	250	125	0.2	0.05	27,000	270	30	0.045	0.2
2015-0200	R0.75	2	30,000	1,200	400	0.075	0.27	19,000	750	375	0.23	0.07	24,000	400	45	0.075	0.27
2015-0400		4	30,000	900	250	0.075	0.27	18,000	580	290	0.23	0.07	24,000	350	40	0.075	0.27
2015-0600		6	25,000	500	100	0.075	0.27	17,000	400	200	0.23	0.07	24,000	320	36	0.075	0.27
2020-0300	R1	3	30,000	1,500	500	0.1	0.3	16,500	800	400	0.25	0.1	18,000	600	200	0.1	0.3
2020-0400		4	30,000	1,500	500	0.1	0.3	15,750	750	375	0.25	0.1	18,000	500	160	0.1	0.3
2020-0600		6	20,000	850	280	0.1	0.3	15,000	620	310	0.25	0.1	18,000	400	130	0.1	0.3
2020-0800		8	13,000	400	130	0.1	0.3	14,000	520	260	0.25	0.1	18,000	350	120	0.1	0.3
2020-1000		10	10,000	200	60	0.1	0.3	13,000	420	210	0.25	0.1	18,000	300	100	0.1	0.3
2030-0600	R1.5	6	24,000	1,200	400	0.1	0.3	Equivalent to UDCLBF conditions					Equivalent to UDCLBF conditions				
2030-0800		8	24,000	1,200	400	0.1	0.3										
2040-0800	R2	8	18,000	900	300	0.125	0.325										
2040-1000		10	18,000	900	300	0.125	0.325										
2050-1000	R2.5	10	12,000	600	200	0.175	0.37										
2060-1000	R3	10	9,000	500	166	0.2	0.4										
2060-1500		15	9,000	500	166	0.2	0.4										

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.




Connector shaped milling
UDCLBH R1 × EL4

Cemented Carbide
VM-40 (90 HRA)



Work Size : 26 × 16 × 4 mm
Pocket Volume : 1,304 mm^3
Coolant : Air Blow


R1 × EL4 Comparison of milling efficiency

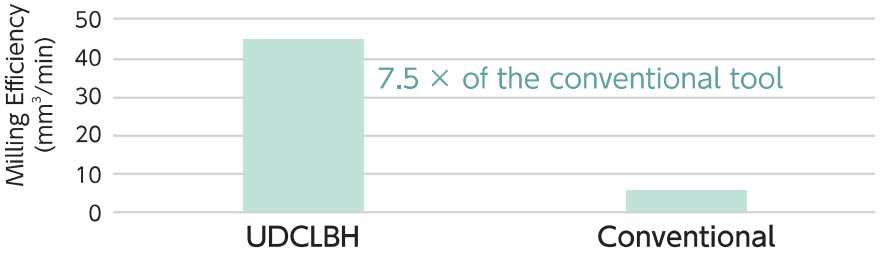

Milling Efficiency
= Feed Rate × a_p × a_e

Tool after milling T1





Less tool damage even with highly efficient milling!

No.	Process	Tool no	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Allowance (mm)	Cycle Time (h:m:s)
1	Roughing	T1	UDCLBH 2020-0400 (R1 × EL4)	30,000	1,500	0.1	0.3	0.03	0:24:52
2	Corner Removal 1	T2	UDCLBH 2010-0400 (R0.5 × EL4)	30,000	400	0.05	0.11	0.03	0:33:12
3	Corner Removal 2	T3	UDCLRSF 2010-005040 (φ1 × CR0.05 × EL4)	30,000	190	0.02	0.6	0.03	0:15:23
4	Top surface/ Semi-finishing			30,000	190	—	0.6	0.01	0:03:11
5	Wall surface / Semi-finishing	T2	UDCLBH 2010-0400 (R0.5 × EL4)	30,000	400	0.05	0.22	0.01	0:38:22
6	Corner & Bottom surface/ Semi-finishing	T3	UDCLRSF 2010-005040 (φ1 × CR0.05 × EL4)	30,000	190	0.006	0.3	0.01	0:48:30
7	Top surface / Finishing	T4	UDCLRSF 2010-005040 (φ1 × CR0.05 × EL4)	30,000	190	—	0.6	0	0:03:15
8	Wall surface / Finishing			30,000	375	0.25	—	0	0:08:17
9	Corner & Bottom surface/ Finishing			30,000	190	0.014	0.3	0	0:46:09

Total 4pcs are used.

Total 3:41:11

UDCLBF



2 Flute Long Neck Ball End Mills for Superior Surface Finish, Ideal for Cemented Carbide and Hard Brittle Materials

R0.1～R3

MG | UDC | 0° | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○			★	● ※

※ Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

F Series


For excellent surface quality

Label Sample




#001 φD0.389 R0.000/-0.004

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

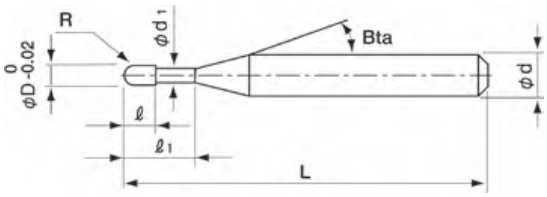

The shank taper angle shown is not an exact value.



Total 61 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
UDCLBF 2002-0030	R0.1	0.3	0.14	0.18	16°	50	4	—	0.30	0.31	0.32	0.32	0.34
UDCLBF 2002-0050		0.5				50	4	—	0.51	0.52	0.54	0.55	0.59
UDCLBF 2002-0075		0.75				50	4	—	0.77	0.79	0.81	0.84	0.89
UDCLBF 2002-0100		1				50	4	—	1.02	1.05	1.09	1.12	1.20
UDCLBF 2003-0050	R0.15	0.5	0.21	0.28	16°	50	4	—	0.51	0.52	0.53	0.55	0.58
UDCLBF 2003-0075		0.75				50	4	—	0.76	0.78	0.81	0.83	0.88
UDCLBF 2003-0100		1				50	4	—	1.02	1.05	1.08	1.11	1.19
UDCLBF 2004-0050	R0.2	0.5	0.28	0.36	16°	50	4	—	0.54	0.55	0.56	0.58	0.61
UDCLBF 2004-0100		1				50	4	—	1.06	1.08	1.12	1.15	1.22
UDCLBF 2004-0150		1.5				50	4	—	1.57	1.62	1.67	1.72	1.83
UDCLBF 2004-0200		2				50	4	—	2.09	2.15	2.22	2.29	2.44
UDCLBF 2004-0250		2.5				50	4	—	2.60	2.68	2.77	2.86	3.06
UDCLBF 2006-0100	R0.3	1	0.42	0.56	16°	50	4	—	1.05	1.08	1.11	1.13	1.20
UDCLBF 2006-0150		1.5				50	4	—	1.57	1.61	1.66	1.70	1.81
UDCLBF 2006-0200		2				50	4	—	2.08	2.14	2.21	2.27	2.42
UDCLBF 2006-0300		3				50	4	—	3.12	3.21	3.31	3.41	3.65
UDCLBF 2006-0400		4				50	4	—	4.15	4.27	4.41	4.55	4.87
UDCLBF 2006-0500		5				50	4	—	5.18	5.34	5.51	5.69	6.09
UDCLBF 2006-0600		6				50	4	—	6.21	6.40	6.61	6.83	7.32

2 Flute Long Neck Ball End Mills for Superior Surface Finish, Ideal for Cemented Carbide and Hard Brittle Materials

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
UDCLBF 2008-0200	R0.4	2	0.56	0.76	16°	50	4	—	2.08	2.14	2.20	2.26	2.40
UDCLBF 2008-0300		3				50	4	—	3.11	3.20	3.30	3.40	3.62
UDCLBF 2008-0400		4				50	4	—	4.14	4.27	4.40	4.54	4.85
UDCLBF 2008-0500		5				50	4	—	5.18	5.33	5.50	5.67	6.07
UDCLBF 2008-0600		6				50	4	—	6.21	6.40	6.60	6.81	7.29
UDCLBF 2008-0800		8				50	4	—	8.27	8.53	8.80	9.09	9.74
UDCLBF 2010-0150	R0.5	1.5	0.7	0.96	16°	50	4	—	1.56	1.60	1.64	1.68	1.77
UDCLBF 2010-0200		2				50	4	—	2.08	2.13	2.19	2.25	2.38
UDCLBF 2010-0250		2.5				50	4	—	2.59	2.66	2.74	2.81	2.99
UDCLBF 2010-0300		3				50	4	—	3.11	3.20	3.29	3.38	3.60
UDCLBF 2010-0400		4				50	4	—	4.14	4.26	4.39	4.52	4.83
UDCLBF 2010-0600		6				50	4	—	6.20	6.39	6.59	6.80	7.27
UDCLBF 2010-0800		8				50	4	—	8.27	8.52	8.79	9.08	9.72
UDCLBF 2010-1000		10				50	4	—	10.33	10.65	10.99	11.35	12.17
UDCLBF 2015-0200	R0.75	2	1.05	1.44	16°	50	4	—	2.11	2.15	2.20	2.25	2.37
UDCLBF 2015-0400		4				50	4	—	4.17	4.28	4.40	4.53	4.81
UDCLBF 2015-0600		6				50	4	—	6.23	6.41	6.60	6.81	7.26
UDCLBF 2015-0800		8				50	4	—	8.29	8.54	8.80	9.08	9.71
UDCLBF 2015-1000		10				50	4	—	10.36	10.67	11.00	11.36	12.16
UDCLBF 2015-1200		12				50	4	—	12.42	12.80	13.20	13.64	14.60
UDCLBF 2020-0300	R1	3	1.4	1.9	16°	50	4	—	3.20	3.27	3.35	3.43	3.62
UDCLBF 2020-0400		4				50	4	—	4.23	4.34	4.45	4.57	4.84
UDCLBF 2020-0600		6				50	4	—	6.30	6.47	6.65	6.85	7.29
UDCLBF 2020-0800		8				50	4	—	8.36	8.60	8.85	9.13	9.74
UDCLBF 2020-1000		10				50	4	—	10.42	10.73	11.06	11.41	12.19
UDCLBF 2020-1200		12				50	4	—	12.48	12.86	13.26	13.68	14.63
UDCLBF 2020-1400		14				50	4	—	14.55	14.99	15.46	15.96	17.08
UDCLBF 2020-1600		16				50	4	—	16.61	17.12	17.66	18.24	19.53
UDCLBF 2020-1800		18				60	4	—	18.67	19.25	19.86	20.52	No Interference
UDCLBF 2020-2000		20				60	4	—	20.74	21.38	22.06	22.79	No Interference
UDCLBF 2030-0600	R1.5	6	2.1	2.9	16°	60	6	—	6.28	6.44	6.60	6.78	7.18
UDCLBF 2030-0800		8				60	6	—	8.34	8.57	8.80	9.06	9.63
UDCLBF 2030-1000		10				60	6	—	10.41	10.70	11.01	11.34	12.08
UDCLBF 2030-1200		12				60	6	—	12.47	12.83	13.21	13.61	14.52
UDCLBF 2030-1400		14				60	6	—	14.53	14.96	15.41	15.89	16.97
UDCLBF 2040-0800	R2	8	2.8	3.9	16°	60	6	—	8.33	8.53	8.76	8.99	9.52
UDCLBF 2040-1000		10				60	6	—	10.39	10.66	10.96	11.27	11.97
UDCLBF 2040-1500		15				60	6	—	15.55	15.99	16.46	16.96	18.09
UDCLBF 2050-1000	R2.5	10	3.5	4.8	16°	60	6	—	10.55	10.82	11.10	11.40	12.07
UDCLBF 2050-1500		15				60	6	—	15.71	16.14	16.60	17.09	No Interference
UDCLBF 2060-1000	R3	10	4.2	5.7	—	60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
UDCLBF 2060-1500		15				60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference


Milling Conditions for UDCLBF

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS					CEMENTED CARBIDE (<87 HRA)				
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002-0030	**R0.1**	0.3	30,000	100	10	0.01	0.01	30,000	100	10	0.01	0.01
2002-0050		0.5	30,000	30	10	0.005	0.008	30,000	30	10	0.005	0.008
2002-0075		0.75	30,000	30	10	0.005	0.006	30,000	30	10	0.005	0.006
2002-0100		1	30,000	25	10	0.005	0.005	30,000	25	10	0.005	0.005
2003-0050	**R0.15**	0.5	30,000	100	10	0.01	0.03	30,000	100	10	0.01	0.03
2003-0075		0.75	30,000	80	10	0.01	0.02	30,000	80	10	0.01	0.02
2003-0100		1	30,000	60	10	0.01	0.02	30,000	60	10	0.01	0.02
2004-0050	**R0.2**	0.5	30,000	150	15	0.02	0.08	30,000	150	15	0.02	0.08
2004-0100		1	30,000	100	10	0.015	0.07	30,000	100	10	0.015	0.07
2004-0150		1.5	30,000	60	10	0.01	0.06	30,000	60	10	0.01	0.06
2004-0200		2	30,000	30	10	0.008	0.05	30,000	30	10	0.008	0.05
2004-0250		2.5	30,000	15	10	0.006	0.03	30,000	15	10	0.006	0.03
2006-0100	**R0.3**	1	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14
2006-0150		1.5	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14
2006-0200		2	30,000	150	15	0.022	0.11	30,000	150	15	0.022	0.11
2006-0300		3	30,000	75	10	0.01	0.08	30,000	75	10	0.01	0.08
2006-0400		4	30,000	75	10	0.01	0.08	30,000	75	10	0.01	0.08
2006-0500		5	30,000	75	10	0.01	0.06	30,000	75	10	0.01	0.06
2006-0600		6	30,000	75	10	0.01	0.03	30,000	75	10	0.01	0.03
2008-0200	**R0.4**	2	30,000	250	25	0.04	0.19	30,000	250	25	0.04	0.19
2008-0300		3	30,000	230	23	0.037	0.17	30,000	230	23	0.037	0.17
2008-0400		4	30,000	210	21	0.035	0.16	30,000	210	21	0.035	0.16
2008-0500		5	25,000	170	20	0.03	0.12	25,000	170	20	0.03	0.12
2008-0600		6	20,000	130	20	0.025	0.08	20,000	130	20	0.025	0.08
2008-0800		8	15,000	100	20	0.015	0.03	15,000	100	20	0.015	0.03
2010-0150	**R0.5**	1.5	30,000	300	30	0.05	0.25	30,000	300	150	0.35	0.075
2010-0200		2	30,000	300	30	0.05	0.25	30,000	300	150	0.35	0.075
2010-0250		2.5	30,000	300	30	0.05	0.25	30,000	300	150	0.35	0.075
2010-0300		3	30,000	300	30	0.05	0.25	25,000	250	125	0.35	0.075
2010-0400		4	30,000	300	30	0.05	0.25	25,000	250	125	0.2	0.1
2010-0600		6	25,000	250	25	0.04	0.15	25,000	250	125	0.1	0.1
2010-0800		8	20,000	200	25	0.025	0.07	20,000	200	100	0.03	0.08
2010-1000		10	10,000	100	20	0.018	0.03	20,000	200	100	0.02	0.04
2015-0200	**R0.75**	2	25,000	250	45	0.075	0.27	18,000	180	90	0.52	0.12
2015-0400		4	25,000	250	45	0.075	0.27	18,000	180	90	0.52	0.12
2015-0600		6	25,000	250	45	0.075	0.27	18,000	180	90	0.4	0.12
2015-0800		8	20,000	160	30	0.075	0.27	18,000	180	90	0.2	0.2
2015-1000		10	20,000	130	30	0.05	0.15	18,000	180	90	0.075	0.25
2015-1200		12	16,000	100	30	0.03	0.08	13,500	135	70	0.05	0.16

Milling Conditions for UDCLBF

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS					CEMENTED CARBIDE (<87 HRA)				
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2020-0300	**R1**	3	20,000	200	60	0.1	0.3	12,500	125	60	0.7	0.15
2020-0400		4	20,000	200	60	0.1	0.3	12,500	125	60	0.7	0.15
2020-0600		6	20,000	200	60	0.1	0.3	12,500	125	60	0.7	0.15
2020-0800		8	20,000	200	60	0.1	0.3	12,500	125	60	0.4	0.2
2020-1000		10	20,000	200	60	0.1	0.3	12,500	125	60	0.25	0.25
2020-1200		12	20,000	200	60	0.09	0.25	12,500	125	60	0.1	0.3
2020-1400		14	20,000	200	60	0.07	0.15	12,500	125	60	0.1	0.3
2020-1600		16	13,000	130	36	0.04	0.08	12,500	125	60	0.1	0.3
2020-1800		18	10,000	100	30	0.025	0.05	10,000	100	50	0.04	0.1
2020-2000		20	10,000	100	30	0.02	0.035	10,000	100	50	0.02	0.07
2030-0600	**R1.5**	6	20,000	200	100	0.15	0.3	9,000	280	140	0.38	0.15
2030-0800		8	20,000	200	100	0.15	0.3	9,000	280	140	0.38	0.15
2030-1000		10	20,000	200	100	0.15	0.3	9,000	280	140	0.38	0.15
2030-1200		12	20,000	200	100	0.15	0.3	9,000	280	140	0.38	0.15
2030-1400		14	20,000	200	100	0.15	0.3	9,000	280	140	0.38	0.15
2040-0800	**R2**	8	18,000	180	90	0.175	0.32	7,200	280	140	0.5	0.2
2040-1000		10	18,000	180	90	0.175	0.32	7,200	280	140	0.5	0.2
2040-1500		15	18,000	180	90	0.175	0.32	7,200	280	140	0.5	0.2
2050-1000	**R2.5**	10	16,000	160	80	0.225	0.31	6,000	330	170	0.6	0.25
2050-1500		15	16,000	160	80	0.225	0.31	6,000	330	170	0.6	0.25
2060-1000	**R3**	10	15,000	150	75	0.3	0.3	5,500	280	140	0.65	0.28
2060-1500		15	15,000	150	75	0.3	0.3	5,500	280	140	0.65	0.28

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.



UDCSLB NEW



Released April 2025

2 Flute Long Neck Ball End Mills Ideal for High Toughness Cemented Carbide

R1.5～R3

MG UDC 10° R ±0.01 Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○ ※1			★ ※2	● ※3

※ 1 DCB / DCLB series are highly recommended for Glass Filled Plastic milling.
※ 2 For High-toughness Cemented Carbide.
※ 3 UDCLB / UDCLBF / UDCLBH are recommended for Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia, etc.), Glasses and etc.


S Series

Label Sample




#001 φD5.992 R0.000/-0.002

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

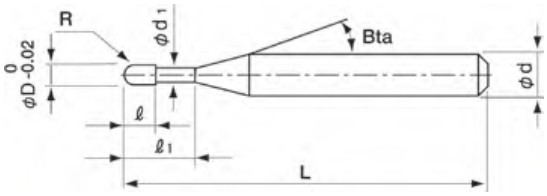

The shank taper angle shown is not an exact value.



Total 12 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
UDCSLB 2030-0600	R1.5	6	2.1	2.9	16°	60	6	—	6.28	6.44	6.60	6.78	7.18
UDCSLB 2030-0800		8				60	6	—	8.34	8.57	8.80	9.06	9.63
UDCSLB 2030-1000		10				60	6	—	10.41	10.70	11.01	11.34	12.08
UDCSLB 2030-1200		12				60	6	—	12.47	12.83	13.21	13.61	14.52
UDCSLB 2030-1400		14				60	6	—	14.53	14.96	15.41	15.89	16.97
UDCSLB 2040-0800	R2	8	2.8	3.9	16°	60	6	—	8.33	8.53	8.76	8.99	9.52
UDCSLB 2040-1000		10				60	6	—	10.39	10.66	10.96	11.27	11.97
UDCSLB 2040-1500		15				60	6	—	15.55	15.99	16.46	16.96	18.09
UDCSLB 2050-1000	R2.5	10	3.5	4.8	16°	60	6	—	10.55	10.82	11.10	11.40	12.07
UDCSLB 2050-1500		15				60	6	—	15.71	16.14	16.60	17.09	No Interference
UDCSLB 2060-1000	R3	10	4.2	5.7	—	60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
UDCSLB 2060-1500		15				60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for UDCSLB

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS					CEMENTED CARBIDE (<87 HRA)				
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030-0600	**R1.5**	6	The following series are recommended. UDCLBH series: Roughing, Semi-finishing UDCLBF series: Finishing					9,000	280	140	0.2	0.28
2030-0800		8						9,000	280	140	0.2	0.28
2030-1000		10						8,100	250	125	0.2	0.25
2030-1200		12						8,100	250	125	0.2	0.25
2030-1400		14						8,100	250	125	0.2	0.25
2040-0800	**R2**	8						8,200	280	120	0.2	0.4
2040-1000		10						8,200	280	120	0.2	0.4
2040-1500		15						7,400	250	110	0.2	0.36
2050-1000	**R2.5**	10						7,400	280	100	0.2	0.53
2050-1500		15						7,400	280	100	0.2	0.53
2060-1000	**R3**	10						6,600	280	80	0.2	0.65
2060-1500		15						6,600	280	80	0.2	0.65

Note (Common to UDCSB and UDCSLB):
- Avoid contact with the coated area of the shank. This will prevent tip vibration and tool jamming in the collet holder.
- Use an inclined or helical approach (Recommended inclination angle: <5 degree).
- Air blow offers longer tool life when milling Cemented Carbide.
- Recommend water soluble coolant for Hard Brittle (Non-Metallic) Materials.
- Protective gear, such as safety glasses and face guards are required when milling.
- Chips / dust generated while milling can have adverse affects on the machine parts if they are not properly evacuated. Take steps to assure proper evacuation.

UDCLB



2 Flute Long Neck Ball End Mills for Cemented Carbide and Hard Brittle Materials

R0.1～R3

MG UDC 0° R ±0.01 Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○ ※1			★	● ※2

※ 1 DCB / DCLB series are highly recommended for Glass Filled Plastic milling.
※ 2 Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia, etc.), Glasses and etc.

Entry Series


For low-cost milling

Label Sample




#001 φD1.985 R+0.001/-0.002

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

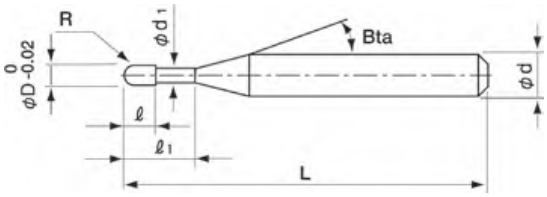

The shank taper angle shown is not an exact value.



Total 37 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
UDCLB 2002-0030	R0.1	0.3	0.14	0.18	16°	50	4	—	0.30	0.31	0.32	0.32	0.34
UDCLB 2002-0050		0.5				50	4	—	0.51	0.52	0.54	0.55	0.59
UDCLB 2002-0075		0.75				50	4	—	0.77	0.79	0.81	0.84	0.89
UDCLB 2002-0100		1				50	4	—	1.02	1.05	1.09	1.12	1.20
UDCLB 2004-0050	R0.2	0.5	0.28	0.36	16°	50	4	—	0.54	0.55	0.56	0.58	0.61
UDCLB 2004-0100		1				50	4	—	1.06	1.08	1.12	1.15	1.22
UDCLB 2004-0150		1.5				50	4	—	1.57	1.62	1.67	1.72	1.83
UDCLB 2004-0200		2				50	4	—	2.09	2.15	2.22	2.29	2.44
UDCLB 2006-0100	R0.3	1	0.42	0.56	16°	50	4	—	1.05	1.08	1.11	1.13	1.20
UDCLB 2006-0150		1.5				50	4	—	1.57	1.61	1.66	1.70	1.81
UDCLB 2006-0200		2				50	4	—	2.08	2.14	2.21	2.27	2.42
UDCLB 2006-0300		3				50	4	—	3.12	3.21	3.31	3.41	3.65
UDCLB 2008-0200	R0.4	2	0.56	0.76	16°	50	4	—	2.08	2.14	2.20	2.26	2.40
UDCLB 2008-0300		3				50	4	—	3.11	3.20	3.30	3.40	3.62
UDCLB 2008-0400		4				50	4	—	4.14	4.27	4.40	4.54	4.85


2 Flute Long Neck Ball End Mills for Cemented Carbide and Hard Brittle Materials

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
UDCLB 2010-0200	R0.5	2	0.7	0.96	16°	50	4	—	2.08	2.13	2.19	2.25	2.38
UDCLB 2010-0250		2.5				50	4	—	2.59	2.66	2.74	2.81	2.99
UDCLB 2010-0300		3				50	4	—	3.11	3.20	3.29	3.38	3.60
UDCLB 2010-0400		4				50	4	—	4.14	4.26	4.39	4.52	4.83
UDCLB 2010-0500		5				50	4	—	5.17	5.32	5.49	5.66	6.05
UDCLB 2020-0300	R1	3	1.4	1.9	16°	50	4	—	3.20	3.27	3.35	3.43	3.62
UDCLB 2020-0400		4				50	4	—	4.23	4.34	4.45	4.57	4.84
UDCLB 2020-0600		6				50	4	—	6.30	6.47	6.65	6.85	7.29
UDCLB 2020-0800		8				50	4	—	8.36	8.60	8.85	9.13	9.74
UDCLB 2020-1000		10				50	4	—	10.42	10.73	11.06	11.41	12.19
UDCLB 2030-0600	R1.5	6	2.1	2.9	16°	60	6	—	6.28	6.44	6.60	6.78	7.18
UDCLB 2030-0800		8				60	6	—	8.34	8.57	8.80	9.06	9.63
UDCLB 2030-1000		10				60	6	—	10.41	10.70	11.01	11.34	12.08
UDCLB 2030-1200		12				60	6	—	12.47	12.83	13.21	13.61	14.52
UDCLB 2030-1400		14				60	6	—	14.53	14.96	15.41	15.89	16.97
UDCLB 2040-0800	R2	8	2.8	3.9	16°	60	6	—	8.33	8.53	8.76	8.99	9.52
UDCLB 2040-1000		10				60	6	—	10.39	10.66	10.96	11.27	11.97
UDCLB 2040-1500		15				60	6	—	15.55	15.99	16.46	16.96	18.09
UDCLB 2050-1000	R2.5	10	3.5	4.8	16°	60	6	—	10.55	10.82	11.10	11.40	12.07
UDCLB 2050-1500		15				60	6	—	15.71	16.14	16.60	17.09	No Interference
UDCLB 2060-1000	R3	10	4.2	5.7	—	60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
UDCLB 2060-1500		15				60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for UDCLB

WORK MATERIAL			CEMENTED CARBIDE (≧87 HRA)					CEMENTED CARBIDE (<87 HRA)					HARD BRITTLE MATERIALS				
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002-0030	R0.1	0.3	30,000	100	10	0.01	0.01	30,000	100	10	0.01	0.01	30,000	100	10	0.01	0.01
2002-0050		0.5	30,000	30	10	0.005	0.008	30,000	30	10	0.005	0.008	30,000	30	10	0.005	0.008
2002-0075		0.75	30,000	30	10	0.005	0.006	30,000	30	10	0.005	0.006	30,000	30	10	0.005	0.006
2002-0100		1	30,000	25	10	0.005	0.005	30,000	25	10	0.005	0.005	30,000	25	10	0.005	0.005
2004-0050	R0.2	0.5	30,000	150	15	0.02	0.08	30,000	150	15	0.02	0.08	30,000	150	15	0.02	0.08
2004-0100		1	30,000	100	10	0.015	0.07	30,000	100	10	0.015	0.07	30,000	100	10	0.015	0.07
2004-0150		1.5	30,000	60	10	0.01	0.06	30,000	60	10	0.01	0.06	30,000	60	10	0.01	0.06
2004-0200		2	30,000	30	10	0.008	0.05	30,000	30	10	0.008	0.05	30,000	30	10	0.008	0.05
2006-0100	R0.3	1	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14
2006-0150		1.5	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14	30,000	200	20	0.03	0.14
2006-0200		2	30,000	150	15	0.022	0.11	30,000	150	15	0.022	0.11	30,000	150	15	0.022	0.11
2006-0300		3	30,000	75	10	0.01	0.08	30,000	75	10	0.01	0.08	30,000	75	10	0.01	0.08
2008-0200	R0.4	2	30,000	250	25	0.04	0.19	30,000	250	25	0.04	0.19	30,000	250	25	0.04	0.19
2008-0300		3	30,000	230	23	0.037	0.17	30,000	230	23	0.037	0.17	30,000	230	23	0.037	0.17
2008-0400		4	30,000	210	21	0.035	0.16	30,000	210	21	0.035	0.16	30,000	210	21	0.035	0.16
2010-0200	R0.5	2	30,000	300	30	0.05	0.25	20,000	400	200	0.35	0.075	30,000	300	30	0.05	0.25
2010-0250		2.5	30,000	300	30	0.05	0.25	20,000	400	200	0.35	0.075	30,000	300	30	0.05	0.25
2010-0300		3	30,000	300	30	0.05	0.25	20,000	400	200	0.35	0.075	30,000	300	30	0.05	0.25
2010-0400		4	30,000	300	30	0.05	0.25	20,000	400	200	0.3	0.07	30,000	300	30	0.05	0.25
2010-0500		5	30,000	300	30	0.05	0.25	20,000	400	200	0.3	0.07	30,000	300	30	0.05	0.25
2020-0300	R1	3	30,000	300	100	0.1	0.3	16,500	420	210	0.25	0.1	24,000	240	100	0.1	0.3
2020-0400		4	30,000	300	100	0.1	0.3	16,500	420	210	0.25	0.1	24,000	240	100	0.1	0.3
2020-0600		6	30,000	300	100	0.1	0.3	16,500	420	210	0.25	0.1	24,000	240	100	0.1	0.3
2020-0800		8	30,000	300	100	0.1	0.3	16,500	420	210	0.25	0.1	24,000	240	100	0.1	0.3
2020-1000		10	30,000	300	100	0.1	0.3	16,500	420	210	0.25	0.1	24,000	240	100	0.1	0.3
2030-0600	R1.5	6	27,500	275	140	0.125	0.33	11,000	280	140	0.38	0.15	24,000	240	120	0.125	0.33
2030-0800		8	27,500	275	140	0.125	0.33	11,000	280	140	0.38	0.15	24,000	240	120	0.125	0.33
2030-1000		10	27,500	275	140	0.125	0.33	11,000	280	140	0.3	0.15	24,000	240	120	0.125	0.33
2030-1200		12	27,500	220	110	0.125	0.33	11,000	280	140	0.3	0.15	24,000	200	100	0.125	0.33
2030-1400		14	27,500	220	110	0.125	0.33	11,000	280	140	0.3	0.15	24,000	200	100	0.125	0.33
2040-0800	R2	8	24,000	240	120	0.15	0.35	8,250	300	150	0.5	0.2	24,000	240	120	0.15	0.35
2040-1000		10	24,000	240	120	0.15	0.35	8,250	300	150	0.5	0.2	24,000	240	120	0.15	0.35
2040-1500		15	24,000	240	120	0.15	0.35	8,250	300	150	0.5	0.2	24,000	240	120	0.15	0.35
2050-1000	R2.5	10	22,000	220	110	0.175	0.37	6,600	330	160	0.6	0.25	22,000	220	110	0.175	0.37
2050-1500		15	22,000	220	110	0.175	0.37	6,600	330	160	0.6	0.25	22,000	220	110	0.175	0.37
2060-1000	R3	10	20,000	200	100	0.2	0.4	5,500	280	140	0.65	0.28	20,000	200	100	0.2	0.4
2060-1500		15	20,000	200	100	0.2	0.4	5,500	280	140	0.65	0.28	20,000	200	100	0.2	0.4

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.



Hexalobular milling
UDCLB R0.5 × EL2


Cemented Carbide
VF-20 (92.5 HRA)




Work Size : ϕ9 × Depth 3.5 mm

《Milling condition》

Tool	UDCLB 2010-0200 (R0.5 × EL2)
Spindle Speed	n=30,000 min^{-1}
Feed Rate	Vf=300 mm/min
Milling Amount	a_p=0.05 mm
	a_e=0.30 mm (Bottom Surface a_e=0.05 mm)
Coolant	Air Blow
Cycle Time	64.5 min
Material Removal Volume	164.6 mm^3 2.57 mm^3/min



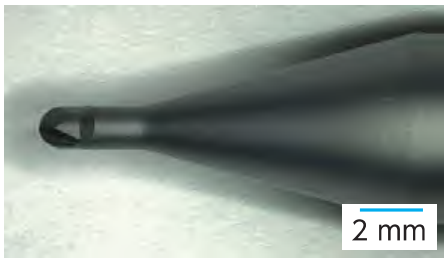

UDCLB Hexalobular Milling Video

Hexalobular milling
UDCLB R0.5

Cemented Carbide
VF-20 (92.5 HRA)




Work Size :
ϕ9 × Depth 6 mm




《Milling condition》

Tool	UDCLB 2010-0200 (R0.5 × EL2)
	UDCLB 2010-0500 (R0.5 × EL5)
Feed Rate	n=30,000 min^{-1}
Milling Amount	Vf=300 mm/min ①R0.5 × 2 Roughing (~Depth 3.5 mm) a_p=0.05 mm a_e=0.3 mm ②R0.5 × 5 Roughing (~Depth 6 mm) a_p=0.05 mm a_e=0.25 mm ③R0.5 × 5 Finishing a_p=0.03 mm a_e=0.005 mm
Coolant	Air Blow
Cycle Time	156 min
Material Removal Volume	274.4 mm^3

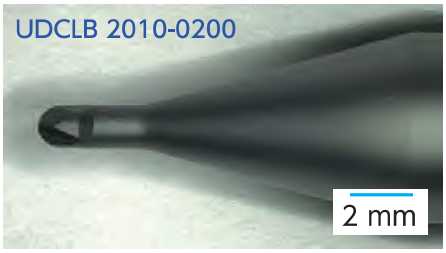

・Tool #1 milled depth 3.5 mm.

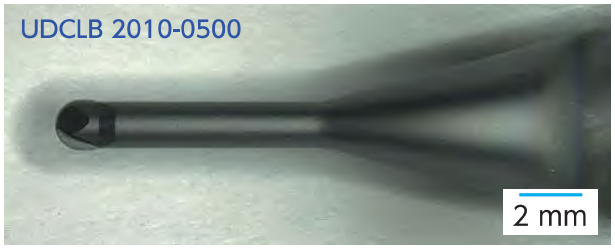

・Tool #2 milled 131.9 mm^3 in 76.5 minutes.

UPDLB



1 Flute Binderless PCD Long Neck Ball End Mills for Finishing Cemented Carbide and Hard Brittle Materials

R0.1～R1

Binderless PCD | 0° | R ±0.005 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
																★	●

Features


Binderless PCD
Provides excellent machined surface quality due to the sharp cutting edge and optimized edge treatment.
Maintains excellent dimensional accuracy for a long time due to the high contour accuracy of the cutting edge and the excellent wear resistance of diamonds.

Label Sample



#001 φD1.002 R0.504/0.502

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

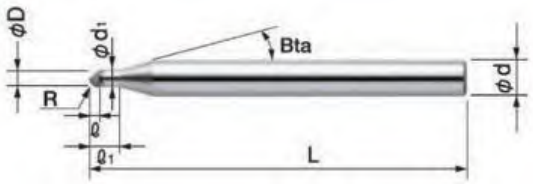

Be sure to confirm the interference between the inclined work piece and the shank part by actual measurement.

Total 5 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
UPDLB 1002-004	R0.1	0.4	0.1	0.18	16°	40	4	—
UPDLB 1004-008	R0.2	0.8	0.2	0.38	16°	40	4	—
UPDLB 1006-010	R0.3	1	0.3	0.58	16°	40	4	—
UPDLB 1010-020	R0.5	2	0.5	0.95	16°	40	4	—
UPDLB 1020-030	R1	3	1	1.95	16°	40	4	—

Milling Conditions for UPDLB


For finishing of bottom surface

WORK MATERIAL			CEMENTED CARBIDE			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
1002-004	**R0.1**	0.4	40,000	100	0.001	0.001
1004-008	**R0.2**	0.8	40,000	150	0.001	0.001
1006-010	**R0.3**	1	40,000	200	0.001	0.001
1010-020	**R0.5**	2	40,000	400	0.001	0.003
1020-030	**R1**	3	40,000	600	0.001	0.005

For profile milling

WORK MATERIAL			CEMENTED CARBIDE			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
1002-004	**R0.1**	0.4	40,000	100	0.001	0.001
1004-008	**R0.2**	0.8	40,000	150	0.002	0.001
1006-010	**R0.3**	1	40,000	200	0.003	0.001
1010-020	**R0.5**	2	40,000	400	0.005	0.003
1020-030	**R1**	3	40,000	600	0.01	0.005

Note:
- Use a machine with high accuracy for stable cutting.
- Non-water soluble coolant recommended. Supply as a mist or external coolant. Take fire prevention precautions to avoid fire hazards caused by sparks igniting during machinig or tool breakage.
- Shorten overhang as much as possible.
- Adjust cutting conditions as necessary as machine spec and other conditions may vary.
- These cutting parameters show reference value. Adjust the cutting conditions to the desired machined surface finish.



UPDLB Milling Example for Finishing UDCBF / UPDLB R0.5

Cemented Carbide
VF-20 (92.5 HRA)



Milling Area : 10.2 × 10.2 × Depth 1.4 mm
Work Size : 20 × 20 × 10 mm

After Finishing





Milling Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Allowance (mm)	Coolant	Cycle Time
Roughing	UDCBF 2010-0070 (R0.5 × L0.7)	30,000	300	0.05	0.25	0.005	Air Blow	30 min
Semi-finishing		30,000	300	0.001 (Cusp Height)	0.06321	0.005		12 min
Finishing	UPDLB 1010-020 (R0.5 × EL2)	40,000	400	0.0035	0.00495	0	Oil Mist	1h 30 min

UDCLRSH NEW



Released October 2023

2 Flute Long Neck Radius End Mills for High Efficiency and Long Life, Ideal for Cemented Carbide and Hard Brittle Materials

φ0.5～φ2

MG | UDC | 0° | R | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○			★	● ※

※ 1 Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

H Series


For high efficiency roughing and semi-finishing

Label Sample

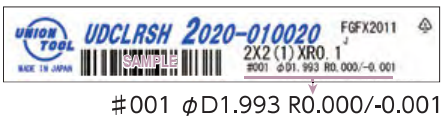


#001 φD1.993 R0.000/-0.001

Diameter and Corner R accuracy measurements are printed on the label to support High Precision milling.

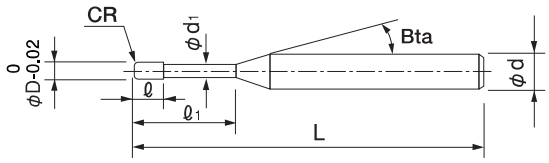

The shank taper angle shown is not an exact value.



Total 38 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
UDCLRSH 2005-003005	0.5	R0.03	0.5	0.25	0.46	16°	50	4	—	0.55	0.56	0.58	0.60	0.64
UDCLRSH 2005-003010			1				50	4	—	1.06	1.10	1.13	1.17	1.25
UDCLRSH 2005-003015			1.5				50	4	—	1.58	1.63	1.68	1.74	1.87
UDCLRSH 2005-005005		R0.05	0.5				50	4	—	0.55	0.56	0.58	0.60	0.64
UDCLRSH 2005-005010			1				50	4	—	1.06	1.09	1.13	1.17	1.25
UDCLRSH 2005-005015			1.5				50	4	—	1.58	1.63	1.68	1.74	1.86
UDCLRSH 2008-003010	0.8	R0.03	1	0.4	0.76	16°	50	4	—	1.06	1.10	1.13	1.17	1.25
UDCLRSH 2008-003020			2				50	4	—	2.09	2.16	2.23	2.31	2.48
UDCLRSH 2008-005010		R0.05	1				50	4	—	1.06	1.09	1.13	1.17	1.25
UDCLRSH 2008-005020			2				50	4	—	2.09	2.16	2.23	2.31	2.47
UDCLRSH 2008-010010		R0.1	1				50	4	—	1.06	1.09	1.12	1.16	1.24
UDCLRSH 2008-010020			2				50	4	—	2.09	2.16	2.22	2.30	2.46
UDCLRSH 2010-003010	1	R0.03	1	0.5	0.96	16°	50	4	—	1.06	1.10	1.13	1.17	1.25
UDCLRSH 2010-003020			2				50	4	—	2.09	2.16	2.23	2.31	2.48
UDCLRSH 2010-003040			4				50	4	—	4.16	4.29	4.43	4.59	4.93
UDCLRSH 2010-005010		R0.05	1				50	4	—	1.06	1.09	1.13	1.17	1.25
UDCLRSH 2010-005020			2				50	4	—	2.09	2.16	2.23	2.31	2.47
UDCLRSH 2010-005040			4				50	4	—	4.15	4.29	4.43	4.58	4.92
UDCLRSH 2010-010010		R0.1	1				50	4	—	1.06	1.09	1.12	1.16	1.24
UDCLRSH 2010-010020			2				50	4	—	2.09	2.16	2.22	2.30	2.46
UDCLRSH 2010-010040			4				50	4	—	4.15	4.28	4.43	4.58	4.91

2 Flute Long Neck Radius End Mills for High Efficiency and Long Life, Ideal for Cemented Carbide and Hard Brittle Materials


Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
UDCLRSH 2015-005015	1.5	R0.05	1.5	0.75	1.44	16°	50	4	—	1.61	1.66	1.72	1.78	1.90
UDCLRSH 2015-005030			3				50	4	—	3.16	3.26	3.37	3.48	3.74
UDCLRSH 2015-010015		R0.1	1.5				50	4	—	1.61	1.66	1.71	1.77	1.89
UDCLRSH 2015-010030			3				50	4	—	3.16	3.26	3.36	3.48	3.73
UDCLRSH 2015-010040			4				50	4	—	4.19	4.32	4.46	4.62	4.95
UDCLRSH 2020-003020	2	R0.03	2	1	1.9	16°	50	4	—	2.20	2.27	2.35	2.43	2.61
UDCLRSH 2020-003040			4				50	4	—	4.26	4.40	4.55	4.70	5.05
UDCLRSH 2020-005020		R0.05	2				50	4	—	2.20	2.27	2.34	2.42	2.60
UDCLRSH 2020-005040			4				50	4	—	4.26	4.40	4.55	4.70	5.05
UDCLRSH 2020-005060			6				50	4	—	6.33	6.53	6.75	6.98	7.50
UDCLRSH 2020-005080			8				50	4	—	8.39	8.66	8.95	9.26	9.94
UDCLRSH 2020-005100			10				50	4	—	10.45	10.79	11.15	11.53	12.39
UDCLRSH 2020-010020		R0.1	2				50	4	—	2.20	2.27	2.34	2.42	2.59
UDCLRSH 2020-010040			4				50	4	—	4.26	4.40	4.54	4.69	5.04
UDCLRSH 2020-010060			6				50	4	—	6.32	6.53	6.74	6.97	7.49
UDCLRSH 2020-010080			8				50	4	—	8.39	8.66	8.94	9.25	9.93
UDCLRSH 2020-010100			10				50	4	—	10.45	10.79	11.14	11.53	12.38

Comparison of material removal volume
UDCLRSF / UDCLRSH φ0.5 × CR0.03 × EL0.5

Cemented Carbide
VM-40 (90 HRA)

Tool	UDCLRSF	UDCLRSH
Spindle Speed	20,000 min^{-1}	
Feed Rate	190 mm/min	380 mm/min
Axial Depth	0.02 mm	
Radial Depth	0.4 mm	
Tool life expectancy	2 h	3 h

Milling method: Flat milling
Coolant: Air blow

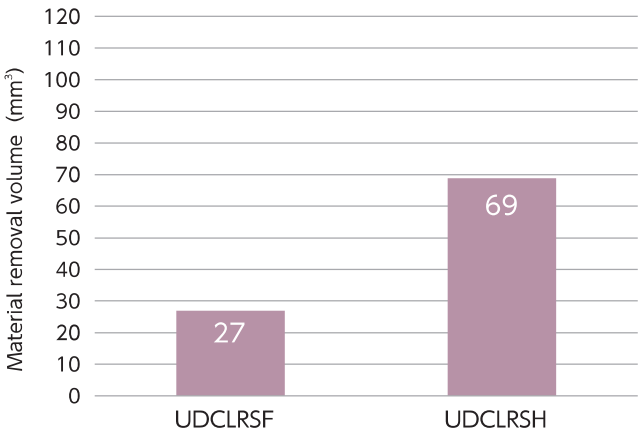

Milling efficiency and material removal volume exceeds the conventional tool.


Milling Conditions for UDCLRSH

WORK MATERIAL				CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS													
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Z-Level Milling				Flat Milling			Side Milling			Slotting	
					Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)
2005-003005	**0.5**	R0.03	0.5	30,000	380	180	0.02	0.4	380	0.02	0.4	360	0.25	0.01	380	0.02
2005-003010			1	30,000	380	180	0.02	0.4	380	0.02	0.4	360	0.125	0.01	380	0.02
2005-003015			1.5	30,000	300	140	0.015	0.3	300	0.015	0.3	290	0.125	0.007	300	0.015
2005-005005		R0.05	0.5	30,000	380	250	0.02	0.4	380	0.02	0.4	360	0.25	0.01	380	0.02
2005-005010			1	30,000	380	250	0.02	0.4	380	0.02	0.4	360	0.125	0.01	380	0.02
2005-005015			1.5	30,000	300	140	0.015	0.3	300	0.015	0.3	290	0.125	0.007	300	0.015
2008-003010	**0.8**	R0.03	1	30,000	380	180	0.02	0.6	380	0.02	0.6	600	0.4	0.016	380	0.02
2008-003020			2	30,000	380	180	0.02	0.6	380	0.02	0.6	600	0.2	0.01	380	0.02
2008-005010		R0.05	1	30,000	380	300	0.025	0.6	380	0.025	0.6	600	0.4	0.016	380	0.025
2008-005020			2	30,000	380	300	0.025	0.6	380	0.025	0.6	600	0.2	0.01	380	0.025
2008-010010		R0.1	1	30,000	380	300	0.03	0.6	380	0.03	0.6	600	0.4	0.016	380	0.03
2008-010020			2	30,000	380	300	0.03	0.6	380	0.03	0.6	600	0.2	0.01	380	0.03
2010-003010	**1**	R0.03	1	30,000	380	180	0.02	0.8	380	0.02	0.8	750	0.5	0.02	380	0.02
2010-003020			2	30,000	380	180	0.02	0.8	380	0.02	0.8	750	0.25	0.01	380	0.02
2010-003040			4	30,000	230	110	0.016	0.6	230	0.016	0.6	450	0.25	0.005	230	0.016
2010-005010		R0.05	1	30,000	380	370	0.025	0.8	380	0.025	0.8	750	0.5	0.02	380	0.025
2010-005020			2	30,000	380	370	0.025	0.8	380	0.025	0.8	750	0.25	0.01	380	0.025
2010-005040			4	30,000	230	220	0.02	0.6	230	0.02	0.6	450	0.25	0.005	230	0.02
2010-010010		R0.1	1	30,000	380	370	0.03	0.8	380	0.03	0.8	750	0.5	0.02	380	0.03
2010-010020			2	30,000	380	370	0.03	0.8	380	0.03	0.8	750	0.25	0.01	380	0.03
2010-010040			4	30,000	230	220	0.025	0.6	230	0.025	0.6	450	0.25	0.005	230	0.025
2015-005015	**1.5**	R0.05	1.5	25,000	380	250	0.04	1.3	380	0.04	1.3	750	0.75	0.02	380	0.04
2015-005030			3	25,000	380	250	0.04	1.3	380	0.04	1.3	750	0.375	0.01	380	0.04
2015-010015		R0.1	1.5	25,000	380	300	0.045	1.3	380	0.045	1.3	750	0.75	0.02	380	0.045
2015-010030			3	25,000	380	300	0.045	1.3	380	0.045	1.3	750	0.375	0.01	380	0.045
2015-010040			4	25,000	350	280	0.043	1.2	350	0.043	1.2	680	0.375	0.008	350	0.043
2020-003020	**2**	R0.03	2	20,000	380	180	0.04	1.8	380	0.04	1.8	750	1	0.02	380	0.04
2020-003040			4	20,000	380	180	0.04	1.8	380	0.04	1.8	750	0.5	0.01	380	0.04
2020-005020		R0.05	2	20,000	380	180	0.05	1.8	380	0.05	1.8	750	1	0.02	380	0.05
2020-005040			4	20,000	380	180	0.05	1.8	380	0.05	1.8	750	0.5	0.01	380	0.05
2020-005060			6	20,000	300	140	0.045	1.7	300	0.045	1.7	600	0.5	0.007	300	0.045
2020-005080			8	20,000	230	110	0.04	1.5	230	0.04	1.5	450	0.5	0.005	230	0.04
2020-005100			10	20,000	190	90	0.028	1.3	190	0.028	1.3	300	0.5	0.005	190	0.028
2020-010020		R0.1	2	20,000	380	250	0.06	1.8	380	0.06	1.8	750	1	0.02	380	0.06
2020-010040			4	20,000	380	250	0.06	1.8	380	0.06	1.8	750	0.5	0.01	380	0.06
2020-010060			6	20,000	300	200	0.055	1.7	300	0.055	1.7	600	0.5	0.007	300	0.055
2020-010080			8	20,000	230	150	0.045	1.5	230	0.045	1.5	450	0.5	0.005	230	0.045
2020-010100			10	20,000	190	125	0.033	1.3	190	0.033	1.3	300	0.5	0.005	190	0.033


Milling Conditions for UDCLRSH

WORK MATERIAL				CEMENTED CARBIDE (<87 HRA)													
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Z-Level Milling				Flat Milling			Side Milling			Slotting	
					Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)
2005-003005	0.5	R0.03	0.5	16,000	750	240	0.02	0.4	750	0.02	0.4	800	0.25	0.008	750	0.02
2005-003010			1	16,000	750	240	0.02	0.4	750	0.02	0.4	400	0.125	0.008	750	0.02
2005-003015			1.5	16,000	490	150	0.014	0.3	490	0.014	0.3	300	0.125	0.007	490	0.014
2005-005005		R0.05	0.5	16,000	750	240	0.025	0.4	750	0.025	0.4	800	0.25	0.008	750	0.025
2005-005010			1	16,000	750	240	0.025	0.4	750	0.025	0.4	400	0.125	0.008	750	0.025
2005-005015			1.5	16,000	490	150	0.017	0.3	490	0.017	0.3	300	0.125	0.007	490	0.017
2008-003010	0.8	R0.03	1	13,000	585	200	0.02	0.6	585	0.02	0.6	1,200	0.4	0.012	585	0.02
2008-003020			2	13,000	585	200	0.02	0.6	585	0.02	0.6	600	0.2	0.012	585	0.02
2008-005010		R0.05	1	13,000	585	200	0.025	0.6	585	0.025	0.6	1,200	0.4	0.012	585	0.025
2008-005020			2	13,000	585	200	0.025	0.6	585	0.025	0.6	600	0.2	0.012	585	0.025
2008-010010		R0.1	1	13,000	585	200	0.03	0.6	585	0.03	0.6	1,200	0.4	0.012	585	0.03
2008-010020			2	13,000	585	200	0.03	0.6	585	0.03	0.6	600	0.2	0.012	585	0.03
2010-003010	1	R0.03	1	12,000	540	180	0.02	0.8	540	0.02	0.8	1,440	0.5	0.015	540	0.02
2010-003020			2	12,000	540	180	0.02	0.8	540	0.02	0.8	720	0.25	0.015	540	0.02
2010-003040			4	10,000	360	120	0.012	0.7	360	0.012	0.7	600	0.25	0.01	360	0.012
2010-005010		R0.05	1	12,000	540	180	0.025	0.8	540	0.025	0.8	1,440	0.5	0.015	540	0.025
2010-005020			2	12,000	540	180	0.025	0.8	540	0.025	0.8	720	0.25	0.015	540	0.025
2010-005040			4	10,000	360	120	0.015	0.7	360	0.015	0.7	600	0.25	0.01	360	0.015
2010-010010		R0.1	1	12,000	540	180	0.03	0.8	540	0.03	0.8	1,440	0.5	0.015	540	0.03
2010-010020			2	12,000	540	180	0.03	0.8	540	0.03	0.8	720	0.25	0.015	540	0.03
2010-010040			4	10,000	360	120	0.02	0.7	360	0.02	0.7	600	0.25	0.01	360	0.02
2015-005015	1.5	R0.05	1.5	11,000	495	170	0.04	1.3	495	0.04	1.3	1,440	0.75	0.015	495	0.04
2015-005030			3	11,000	495	170	0.04	1.3	495	0.04	1.3	720	0.375	0.015	495	0.04
2015-010015		R0.1	1.5	11,000	495	170	0.045	1.3	495	0.045	1.3	1,440	0.75	0.015	495	0.045
2015-010030			3	11,000	495	170	0.045	1.3	495	0.045	1.3	720	0.375	0.015	495	0.045
2015-010040			4	11,000	460	150	0.045	1.1	460	0.045	1.1	720	0.375	0.014	460	0.045
2020-003020	2	R0.03	2	10,000	450	150	0.04	1.8	450	0.04	1.8	1,440	1	0.015	450	0.04
2020-003040			4	10,000	450	150	0.04	1.8	450	0.04	1.8	1,440	1	0.015	450	0.04
2020-005020		R0.05	2	10,000	450	150	0.05	1.8	450	0.05	1.8	1,440	1	0.015	450	0.05
2020-005040			4	10,000	450	150	0.05	1.8	450	0.05	1.8	1,440	1	0.015	450	0.05
2020-005060			6	10,000	390	130	0.045	1.6	390	0.045	1.6	1,440	0.5	0.013	390	0.045
2020-005080			8	10,000	360	120	0.028	1.6	360	0.028	1.6	1,440	0.5	0.011	360	0.028
2020-005100			10	10,000	300	100	0.02	1.6	300	0.02	1.6	1,440	0.5	0.009	300	0.02
2020-010020		R0.1	2	10,000	450	150	0.06	1.8	450	0.06	1.8	1,440	1	0.015	450	0.06
2020-010040			4	10,000	450	150	0.06	1.8	450	0.06	1.8	1,440	1	0.015	450	0.06
2020-010060			6	10,000	390	130	0.054	1.6	390	0.054	1.6	1,440	0.5	0.013	390	0.054
2020-010080			8	10,000	360	120	0.034	1.6	360	0.034	1.6	1,440	0.5	0.011	360	0.034
2020-010100			10	10,000	300	100	0.023	1.6	300	0.023	1.6	1,440	0.5	0.009	300	0.023

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.



Z-Level / Side / Flat Milling



Slotting

D : Outside Diameter (mm)

UDCLRSF



2 Flute Long Neck Radius End Mills for Superior Surface Finish, Ideal for Cemented Carbide and Hard Brittle Materials

φ0.25～φ2

MG | UDC | 0° | R | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○			★	● ※

※ Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

F Series


For excellent surface quality

Label Sample




#001 φD1.990 R+0.001/-0.001

Diameter and Corner R accuracy measurements are printed on the label to support High Precision milling.

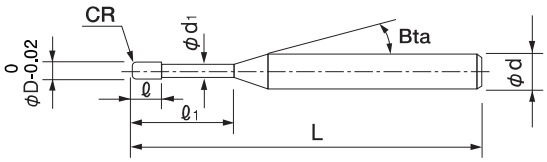

The shank taper angle shown is not an exact value.



Total 58 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
UDCLRSF 20025-003X5	0.25	R0.03	0.5	0.125	0.23	16°	50	4	—	0.51	0.53	0.54	0.56	0.60
UDCLRSF 20025-003X8			0.8				50	4	—	0.82	0.84	0.87	0.90	0.97
UDCLRSF 20025-005X5		R0.05	0.5				50	4	—	0.51	0.52	0.54	0.56	0.60
UDCLRSF 20025-005X8			0.8				50	4	—	0.82	0.84	0.87	0.90	0.96
UDCLRSF 2003-003006	0.3	R0.03	0.6	0.15	0.28	16°	50	4	—	0.61	0.63	0.65	0.67	0.72
UDCLRSF 2003-003009			0.9				50	4	—	0.92	0.95	0.98	1.02	1.09
UDCLRSF 2003-005006		R0.05	0.6				50	4	—	0.61	0.63	0.65	0.67	0.72
UDCLRSF 2003-005009			0.9				50	4	—	0.92	0.95	0.98	1.01	1.09
UDCLRSF 2005-003005	0.5	R0.03	0.5	0.25	0.46	16°	50	4	—	0.55	0.56	0.58	0.60	0.64
UDCLRSF 2005-003010			1				50	4	—	1.06	1.10	1.13	1.17	1.25
UDCLRSF 2005-003015			1.5				50	4	—	1.58	1.63	1.68	1.74	1.87
UDCLRSF 2005-005005		R0.05	0.5				50	4	—	0.55	0.56	0.58	0.60	0.64
UDCLRSF 2005-005010			1				50	4	—	1.06	1.09	1.13	1.17	1.25
UDCLRSF 2005-005015			1.5				50	4	—	1.58	1.63	1.68	1.74	1.86

2 Flute Long Neck Radius End Mills for Superior Surface Finish, Ideal for Cemented Carbide and Hard Brittle Materials

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
UDCLRSF 2008-003008	0.8	R0.03	0.8	0.4	0.76	16°	50	4	—	0.86	0.88	0.91	0.94	1.01
UDCLRSF 2008-003016			1.6				50	4	—	1.68	1.73	1.79	1.85	1.99
UDCLRSF 2008-003024			2.4				50	4	—	2.51	2.59	2.67	2.76	2.97
UDCLRSF 2008-005008		R0.05	0.8				50	4	—	0.85	0.88	0.91	0.94	1.01
UDCLRSF 2008-005016			1.6				50	4	—	1.68	1.73	1.79	1.85	1.98
UDCLRSF 2008-005024			2.4				50	4	—	2.50	2.58	2.67	2.76	2.96
UDCLRSF 2008-010008		R0.1	0.8				50	4	—	0.85	0.88	0.90	0.93	0.99
UDCLRSF 2008-010016			1.6				50	4	—	1.68	1.73	1.78	1.84	1.97
UDCLRSF 2008-010024			2.4				50	4	—	2.50	2.58	2.66	2.75	2.95
UDCLRSF 2010-003010	1	R0.03	1	0.5	0.96	16°	50	4	—	1.06	1.10	1.13	1.17	1.25
UDCLRSF 2010-003020			2				50	4	—	2.09	2.16	2.23	2.31	2.48
UDCLRSF 2010-003040			4				50	4	—	4.16	4.29	4.43	4.59	4.93
UDCLRSF 2010-003060			6				50	4	—	6.22	6.42	6.63	6.86	7.37
UDCLRSF 2010-005010		R0.05	1				50	4	—	1.06	1.09	1.13	1.17	1.25
UDCLRSF 2010-005020			2				50	4	—	2.09	2.16	2.23	2.31	2.47
UDCLRSF 2010-005040			4				50	4	—	4.15	4.29	4.43	4.58	4.92
UDCLRSF 2010-005060			6				50	4	—	6.22	6.42	6.63	6.86	7.37
UDCLRSF 2010-010010		R0.1	1				50	4	—	1.06	1.09	1.12	1.16	1.24
UDCLRSF 2010-010020			2				50	4	—	2.09	2.16	2.22	2.30	2.46
UDCLRSF 2010-010040			4				50	4	—	4.15	4.28	4.43	4.58	4.91
UDCLRSF 2010-010060			6				50	4	—	6.22	6.41	6.63	6.85	7.36
UDCLRSF 2015-003015	1.5	R0.03	1.5	0.75	1.44	16°	50	4	—	1.61	1.66	1.72	1.78	1.91
UDCLRSF 2015-003030			3				50	4	—	3.16	3.26	3.37	3.49	3.74
UDCLRSF 2015-005015		R0.05	1.5				50	4	—	1.61	1.66	1.72	1.78	1.90
UDCLRSF 2015-005030			3				50	4	—	3.16	3.26	3.37	3.48	3.74
UDCLRSF 2015-010015		R0.1	1.5				50	4	—	1.61	1.66	1.71	1.77	1.89
UDCLRSF 2015-010030			3				50	4	—	3.16	3.26	3.36	3.48	3.73
UDCLRSF 2015-010040			4				50	4	—	4.19	4.32	4.46	4.62	4.95
UDCLRSF 2015-010060			6				50	4	—	6.25	6.45	6.66	6.89	7.40
UDCLRSF 2020-003020	2	R0.03	2	1	1.9	16°	50	4	—	2.20	2.27	2.35	2.43	2.61
UDCLRSF 2020-003040			4				50	4	—	4.26	4.40	4.55	4.70	5.05
UDCLRSF 2020-003060			6				50	4	—	6.33	6.53	6.75	6.98	7.50
UDCLRSF 2020-003080			8				50	4	—	8.39	8.66	8.95	9.26	9.95
UDCLRSF 2020-003100			10				50	4	—	10.45	10.79	11.15	11.54	12.40
UDCLRSF 2020-005020		R0.05	2				50	4	—	2.20	2.27	2.34	2.42	2.60
UDCLRSF 2020-005040			4				50	4	—	4.26	4.40	4.55	4.70	5.05
UDCLRSF 2020-005060			6				50	4	—	6.33	6.53	6.75	6.98	7.50
UDCLRSF 2020-005080			8				50	4	—	8.39	8.66	8.95	9.26	9.94
UDCLRSF 2020-005100			10				50	4	—	10.45	10.79	11.15	11.53	12.39
UDCLRSF 2020-010020		R0.1	2				50	4	—	2.20	2.27	2.34	2.42	2.59
UDCLRSF 2020-010040			4				50	4	—	4.26	4.40	4.54	4.69	5.04
UDCLRSF 2020-010060			6				50	4	—	6.32	6.53	6.74	6.97	7.49
UDCLRSF 2020-010080			8				50	4	—	8.39	8.66	8.94	9.25	9.93
UDCLRSF 2020-010100			10				50	4	—	10.45	10.79	11.14	11.53	12.38

Milling Conditions for UDCLRSF

WORK MATERIAL				CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS												
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Z-Level Milling				Flat Milling			Side Milling			Slotting	
					Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)
20025-003X5	**0.25**	R0.03	0.5	30,000	220	50	0.014	0.2	220	0.014	0.2	100	0.063	0.006	110	0.014
20025-003X8			0.8	30,000	170	50	0.014	0.2	170	0.014	0.2	80	0.032	0.006	90	0.014
20025-005X5		R0.05	0.5	30,000	220	50	0.018	0.2	220	0.018	0.2	100	0.063	0.006	110	0.018
20025-005X8			0.8	30,000	170	50	0.018	0.2	170	0.018	0.2	80	0.032	0.006	90	0.018
2003-003006	**0.3**	R0.03	0.6	30,000	220	50	0.015	0.2	220	0.015	0.2	110	0.075	0.006	110	0.015
2003-003009			0.9	30,000	175	50	0.015	0.2	175	0.015	0.2	90	0.038	0.006	90	0.015
2003-005006		R0.05	0.6	30,000	220	50	0.02	0.2	220	0.02	0.2	110	0.075	0.006	110	0.02
2003-005009			0.9	30,000	175	50	0.02	0.2	175	0.015	0.2	90	0.038	0.006	90	0.02
2005-003005	**0.5**	R0.03	0.5	30,000	190	90	0.02	0.4	190	0.02	0.4	180	0.25	0.01	190	0.02
2005-003010			1	30,000	190	90	0.02	0.4	190	0.02	0.4	180	0.125	0.01	190	0.02
2005-003015			1.5	30,000	140	65	0.015	0.3	140	0.015	0.3	130	0.125	0.007	140	0.015
2005-005005		R0.05	0.5	30,000	190	125	0.02	0.4	190	0.02	0.4	180	0.25	0.01	190	0.02
2005-005010			1	30,000	190	125	0.02	0.4	190	0.02	0.4	180	0.125	0.01	190	0.02
2005-005015			1.5	30,000	140	65	0.015	0.3	140	0.015	0.3	130	0.125	0.007	140	0.015
2008-003008	**0.8**	R0.03	0.8	30,000	190	90	0.02	0.6	190	0.02	0.6	300	0.4	0.016	190	0.02
2008-003016			1.6	30,000	190	90	0.02	0.6	190	0.02	0.6	300	0.2	0.01	190	0.02
2008-003024			2.4	30,000	175	80	0.018	0.5	175	0.018	0.5	275	0.2	0.007	175	0.018
2008-005008		R0.05	0.8	30,000	190	150	0.025	0.6	190	0.025	0.6	300	0.4	0.016	190	0.025
2008-005016			1.6	30,000	190	150	0.025	0.6	190	0.025	0.6	300	0.2	0.01	190	0.025
2008-005024			2.4	30,000	175	80	0.023	0.5	175	0.023	0.5	275	0.2	0.007	175	0.023
2008-010008		R0.1	0.8	30,000	190	150	0.03	0.6	190	0.03	0.6	300	0.4	0.016	190	0.03
2008-010016			1.6	30,000	190	150	0.03	0.6	190	0.03	0.6	300	0.2	0.01	190	0.03
2008-010024			2.4	30,000	175	80	0.028	0.5	175	0.028	0.5	275	0.2	0.007	175	0.028
2010-003010	**1**	R0.03	1	30,000	190	90	0.02	0.8	190	0.02	0.8	375	0.5	0.02	190	0.02
2010-003020			2	30,000	190	90	0.02	0.8	190	0.02	0.8	375	0.25	0.01	190	0.02
2010-003040			4	30,000	190	90	0.016	0.6	190	0.016	0.6	375	0.25	0.005	190	0.016
2010-003060			6	25,000	155	75	0.01	0.5	155	0.01	0.5	300	0.25	0.005	155	0.01
2010-005010		R0.05	1	30,000	190	185	0.025	0.8	190	0.025	0.8	375	0.5	0.02	190	0.025
2010-005020			2	30,000	190	185	0.025	0.8	190	0.025	0.8	375	0.25	0.01	190	0.025
2010-005040			4	30,000	190	185	0.02	0.6	190	0.02	0.6	375	0.25	0.005	190	0.02
2010-005060			6	25,000	155	150	0.012	0.5	155	0.012	0.5	300	0.25	0.005	155	0.012
2010-010010		R0.1	1	30,000	190	185	0.03	0.8	190	0.03	0.8	375	0.5	0.02	190	0.03
2010-010020			2	30,000	190	185	0.03	0.8	190	0.03	0.8	375	0.25	0.01	190	0.03
2010-010040			4	30,000	190	185	0.025	0.6	190	0.025	0.6	375	0.25	0.005	190	0.025
2010-010060			6	25,000	155	150	0.015	0.5	155	0.015	0.5	300	0.25	0.005	155	0.015

Milling Conditions for UDCLRSF

WORK MATERIAL				CEMENTED CARBIDE (<87 HRA)													
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Z-Level Milling				Flat Milling			Side Milling			Slotting	
					Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)
20025-003X5	0.25	R0.03	0.5	24,000	300	50	0.014	0.2	300	0.014	0.2	200	0.063	0.003	300	0.014
20025-003X8			0.8	24,000	230	50	0.01	0.2	230	0.01	0.2	150	0.032	0.003	230	0.01
20025-005X5		R0.05	0.5	24,000	300	50	0.018	0.2	300	0.018	0.2	200	0.063	0.003	300	0.018
20025-005X8			0.8	24,000	230	50	0.012	0.2	230	0.012	0.2	150	0.032	0.003	230	0.012
2003-003006	0.3	R0.03	0.6	21,000	300	50	0.015	0.2	300	0.015	0.2	200	0.075	0.003	300	0.015
2003-003009			0.9	21,000	240	50	0.012	0.2	240	0.012	0.2	160	0.038	0.003	240	0.012
2003-005006		R0.05	0.6	21,000	300	50	0.02	0.2	300	0.02	0.2	200	0.075	0.003	300	0.02
2003-005009			0.9	21,000	240	50	0.014	0.2	240	0.014	0.2	160	0.038	0.003	240	0.014
2005-003005	0.5	R0.03	0.5	16,000	500	160	0.02	0.4	500	0.02	0.4	800	0.25	0.005	500	0.02
2005-003010			1	16,000	500	160	0.02	0.4	500	0.02	0.4	400	0.125	0.005	500	0.02
2005-003015			1.5	16,000	375	120	0.014	0.3	375	0.014	0.3	300	0.125	0.005	375	0.014
2005-005005		R0.05	0.5	16,000	500	160	0.025	0.4	500	0.025	0.4	800	0.25	0.005	500	0.025
2005-005010			1	16,000	500	160	0.025	0.4	500	0.025	0.4	400	0.125	0.005	500	0.025
2005-005015			1.5	16,000	375	120	0.017	0.3	375	0.017	0.3	300	0.125	0.005	375	0.017
2008-003008	0.8	R0.03	0.8	13,000	390	130	0.02	0.6	390	0.02	0.6	1,200	0.4	0.008	390	0.02
2008-003016			1.6	13,000	390	130	0.02	0.6	390	0.02	0.6	600	0.2	0.008	390	0.02
2008-003024			2.4	13,000	350	120	0.014	0.5	350	0.014	0.5	540	0.2	0.006	350	0.014
2008-005008		R0.05	0.8	13,000	390	130	0.025	0.6	390	0.025	0.6	1,200	0.4	0.008	390	0.025
2008-005016			1.6	13,000	390	130	0.025	0.6	390	0.025	0.6	600	0.2	0.008	390	0.025
2008-005024			2.4	13,000	350	120	0.017	0.5	350	0.017	0.5	540	0.2	0.006	350	0.017
2008-010008		R0.1	0.8	13,000	390	130	0.03	0.6	390	0.03	0.6	1,200	0.4	0.008	390	0.03
2008-010016			1.6	13,000	390	130	0.03	0.6	390	0.03	0.6	600	0.2	0.008	390	0.03
2008-010024			2.4	13,000	350	120	0.02	0.5	350	0.02	0.5	540	0.2	0.006	350	0.02
2010-003010	1	R0.03	1	12,000	360	120	0.02	0.8	360	0.02	0.8	1,440	0.5	0.01	360	0.02
2010-003020			2	12,000	360	120	0.02	0.8	360	0.02	0.8	720	0.25	0.01	360	0.02
2010-003040			4	10,000	300	100	0.012	0.7	300	0.012	0.7	600	0.25	0.008	300	0.012
2010-003060			6	10,000	300	100	0.008	0.7	300	0.008	0.7	600	0.25	0.006	300	0.008
2010-005010		R0.05	1	12,000	360	120	0.025	0.8	360	0.025	0.8	1,440	0.5	0.01	360	0.025
2010-005020			2	12,000	360	120	0.025	0.8	360	0.025	0.8	720	0.25	0.01	360	0.025
2010-005040			4	10,000	300	100	0.015	0.7	300	0.015	0.7	600	0.25	0.008	300	0.015
2010-005060			6	10,000	300	100	0.01	0.7	300	0.01	0.7	600	0.25	0.006	300	0.01
2010-010010		R0.1	1	12,000	360	120	0.03	0.8	360	0.03	0.8	1,440	0.5	0.01	360	0.03
2010-010020			2	12,000	360	120	0.03	0.8	360	0.03	0.8	720	0.25	0.01	360	0.03
2010-010040			4	10,000	300	100	0.02	0.7	300	0.02	0.7	600	0.25	0.008	300	0.02
2010-010060			6	10,000	300	100	0.012	0.7	300	0.012	0.7	600	0.25	0.006	300	0.012


Milling Conditions for UDCLRSF

WORK MATERIAL				CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS													
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Z-Level Milling				Flat Milling			Side Milling			Slotting	
					Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)
2015-003015	1.5	R0.03	1.5	25,000	190	90	0.03	1.3	190	0.03	1.3	375	0.75	0.02	190	0.03
2015-003030			3	25,000	190	90	0.03	1.3	190	0.03	1.3	375	0.375	0.01	190	0.03
2015-005015		R0.05	1.5	25,000	190	125	0.04	1.3	190	0.04	1.3	375	0.75	0.02	190	0.04
2015-005030			3	25,000	190	125	0.04	1.3	190	0.04	1.3	375	0.375	0.01	190	0.04
2015-010015		R0.1	1.5	25,000	190	150	0.045	1.3	190	0.045	1.3	375	0.75	0.02	190	0.045
2015-010030			3	25,000	190	150	0.045	1.3	190	0.045	1.3	375	0.375	0.01	190	0.045
2015-010040			4	25,000	190	150	0.043	1.2	190	0.043	1.2	350	0.375	0.008	190	0.043
2015-010060			6	25,000	190	150	0.04	1	190	0.04	1	350	0.375	0.005	190	0.04
2020-003020	2	R0.03	2	20,000	190	90	0.04	1.8	190	0.04	1.8	375	1	0.02	190	0.04
2020-003040			4	20,000	190	90	0.04	1.8	190	0.04	1.8	375	0.5	0.01	190	0.04
2020-003060			6	20,000	190	90	0.037	1.7	190	0.037	1.7	325	0.5	0.007	190	0.037
2020-003080			8	20,000	190	90	0.03	1.5	190	0.03	1.5	325	0.5	0.005	190	0.03
2020-003100			10	20,000	190	90	0.025	1.3	190	0.025	1.3	300	0.5	0.005	190	0.025
2020-005020		R0.05	2	20,000	190	90	0.05	1.8	190	0.05	1.8	375	1	0.02	190	0.05
2020-005040			4	20,000	190	90	0.05	1.8	190	0.05	1.8	375	0.5	0.01	190	0.05
2020-005060			6	20,000	190	90	0.045	1.7	190	0.045	1.7	325	0.5	0.007	190	0.045
2020-005080			8	20,000	190	90	0.04	1.5	190	0.04	1.5	325	0.5	0.005	190	0.04
2020-005100			10	20,000	190	90	0.028	1.3	190	0.028	1.3	300	0.5	0.005	190	0.028
2020-010020		R0.1	2	20,000	190	125	0.06	1.8	190	0.06	1.8	375	1	0.02	190	0.06
2020-010040			4	20,000	190	125	0.06	1.8	190	0.06	1.8	375	0.5	0.01	190	0.06
2020-010060			6	20,000	190	125	0.055	1.7	190	0.055	1.7	325	0.5	0.007	190	0.055
2020-010080			8	20,000	190	125	0.045	1.5	190	0.045	1.5	325	0.5	0.005	190	0.045
2020-010100			10	20,000	190	125	0.033	1.3	190	0.033	1.3	300	0.5	0.005	190	0.033


Milling Conditions for UDCLRSF

WORK MATERIAL				CEMENTED CARBIDE (<87 HRA)													
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Z-Level Milling				Flat Milling			Side Milling			Slotting	
					Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)
2015-003015	1.5	R0.03	1.5	11,000	330	110	0.03	1.3	330	0.03	1.3	1,440	0.75	0.01	330	0.03
2015-003030			3	11,000	330	110	0.03	1.3	330	0.03	1.3	720	0.375	0.01	330	0.03
2015-005015		R0.05	1.5	11,000	330	110	0.04	1.3	330	0.04	1.3	1,440	0.75	0.01	330	0.04
2015-005030			3	11,000	330	110	0.04	1.3	330	0.04	1.3	720	0.375	0.01	330	0.04
2015-010015		R0.1	1.5	11,000	330	110	0.045	1.3	330	0.045	1.3	1,440	0.75	0.01	330	0.045
2015-010030			3	11,000	330	110	0.045	1.3	330	0.045	1.3	720	0.375	0.01	330	0.045
2015-010040			4	11,000	330	110	0.045	1.1	330	0.045	1.1	720	0.375	0.01	330	0.045
2015-010060			6	11,000	330	110	0.03	1.1	330	0.03	1.1	720	0.375	0.009	330	0.03
2020-003020	2	R0.03	2	10,000	300	100	0.04	1.8	300	0.04	1.8	1,440	1	0.01	300	0.04
2020-003040			4	10,000	300	100	0.04	1.8	300	0.04	1.8	1,440	1	0.01	300	0.04
2020-003060			6	10,000	300	100	0.036	1.6	300	0.036	1.6	1,440	0.5	0.01	300	0.036
2020-003080			8	10,000	300	100	0.023	1.6	300	0.023	1.6	1,440	0.5	0.009	300	0.023
2020-003100			10	10,000	300	100	0.018	1.6	300	0.018	1.6	1,440	0.5	0.009	300	0.018
2020-005020		R0.05	2	10,000	300	100	0.05	1.8	300	0.05	1.8	1,440	1	0.01	300	0.05
2020-005040			4	10,000	300	100	0.05	1.8	300	0.05	1.8	1,440	1	0.01	300	0.05
2020-005060			6	10,000	300	100	0.045	1.6	300	0.045	1.6	1,440	0.5	0.01	300	0.045
2020-005080			8	10,000	300	100	0.028	1.6	300	0.028	1.6	1,440	0.5	0.009	300	0.028
2020-005100			10	10,000	300	100	0.02	1.6	300	0.02	1.6	1,440	0.5	0.009	300	0.02
2020-010020		R0.1	2	10,000	300	100	0.06	1.8	300	0.06	1.8	1,440	1	0.01	300	0.06
2020-010040			4	10,000	300	100	0.06	1.8	300	0.06	1.8	1,440	1	0.01	300	0.06
2020-010060			6	10,000	300	100	0.054	1.6	300	0.054	1.6	1,440	0.5	0.01	300	0.054
2020-010080			8	10,000	300	100	0.034	1.6	300	0.034	1.6	1,440	0.5	0.009	300	0.034
2020-010100			10	10,000	300	100	0.023	1.6	300	0.023	1.6	1,440	0.5	0.009	300	0.023

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.



D : Outside Diameter (mm)
Slotting



Z-Level / Side / Flat Milling

UDCLRS



2 Flute Long Neck Radius End Mills for Cemented Carbide and Hard Brittle Materials

φ0.3～φ2

MG | UDC | 0° | R | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○ ※1			★	● ※2

※ 1 UDCLRSF is recommended for Glass Filled Plastic milling.
※ 2 Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia, etc.), Glasses and etc.

Entry Series


For low-cost milling

Label Sample




#001 φD1.998 R+0.001/-0.001

Diameter and Corner R accuracy measurements are printed on the label to support High Precision milling.

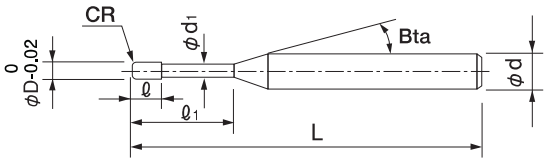

The shank taper angle shown is not an exact value.



Total 30 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
UDCLRS 2003-003-006	0.3	R0.03	0.6	0.15	0.28	16°	50	4	—	0.61	0.63	0.65	0.67	0.72
UDCLRS 2003-005-006		R0.05	0.6				50	4	—	0.61	0.63	0.65	0.67	0.72
UDCLRS 2005-003-005	0.5	R0.03	0.5	0.25	0.46	16°	50	4	—	0.55	0.56	0.58	0.60	0.64
UDCLRS 2005-003-010			1				50	4	—	1.06	1.10	1.13	1.17	1.25
UDCLRS 2005-005-005		R0.05	0.5				50	4	—	0.55	0.56	0.58	0.60	0.64
UDCLRS 2005-005-010			1				50	4	—	1.06	1.09	1.13	1.17	1.25
UDCLRS 2008-003-008	0.8	R0.03	0.8	0.4	0.76	16°	50	4	—	0.86	0.88	0.91	0.94	1.01
UDCLRS 2008-003-016			1.6				50	4	—	1.68	1.73	1.79	1.85	1.99
UDCLRS 2008-005-008		R0.05	0.8				50	4	—	0.85	0.88	0.91	0.94	1.01
UDCLRS 2008-005-016			1.6				50	4	—	1.68	1.73	1.79	1.85	1.98
UDCLRS 2008-010-008		R0.1	0.8				50	4	—	0.85	0.88	0.90	0.93	0.99
UDCLRS 2008-010-016			1.6				50	4	—	1.68	1.73	1.78	1.84	1.97
UDCLRS 2010-003-010	1	R0.03	1	0.5	0.96	16°	50	4	—	1.06	1.10	1.13	1.17	1.25
UDCLRS 2010-003-020			2				50	4	—	2.09	2.16	2.23	2.31	2.48
UDCLRS 2010-005-010		R0.05	1				50	4	—	1.06	1.09	1.13	1.17	1.25
UDCLRS 2010-005-020			2				50	4	—	2.09	2.16	2.23	2.31	2.47
UDCLRS 2010-010-010		R0.1	1				50	4	—	1.06	1.09	1.12	1.16	1.24
UDCLRS 2010-010-020			2				50	4	—	2.09	2.16	2.22	2.30	2.46

2 Flute Long Neck Radius End Mills for Cemented Carbide and Hard Brittle Materials

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
UDCLRS 2015-003-015	1.5	R0.03	1.5	0.75	1.44	16°	50	4	—	1.61	1.66	1.72	1.78	1.91
UDCLRS 2015-003-030			3				50	4	—	3.16	3.26	3.37	3.49	3.74
UDCLRS 2015-005-015		R0.05	1.5				50	4	—	1.61	1.66	1.72	1.78	1.90
UDCLRS 2015-005-030			3				50	4	—	3.16	3.26	3.37	3.48	3.74
UDCLRS 2015-010-015		R0.1	1.5				50	4	—	1.61	1.66	1.71	1.77	1.89
UDCLRS 2015-010-030			3				50	4	—	3.16	3.26	3.36	3.48	3.73
UDCLRS 2020-003-020	2	R0.03	2	1	1.9	16°	50	4	—	2.20	2.27	2.35	2.43	2.61
UDCLRS 2020-003-040			4				50	4	—	4.26	4.40	4.55	4.70	5.05
UDCLRS 2020-005-020		R0.05	2				50	4	—	2.20	2.27	2.34	2.42	2.60
UDCLRS 2020-005-040			4				50	4	—	4.26	4.40	4.55	4.70	5.05
UDCLRS 2020-010-020		R0.1	2				50	4	—	2.20	2.27	2.34	2.42	2.59
UDCLRS 2020-010-040			4				50	4	—	4.26	4.40	4.54	4.69	5.04


Milling Conditions for UDCLRS

WORK MATERIAL				CEMENTED CARBIDE (≧87 HRA) / HARD BRITTLE MATERIALS													
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Z-Level Milling				Flat Milling			Side Milling			Slotting	
					Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)
2003-003-006	**0.3**	R0.03	0.6	30,000	220	50	0.01	0.2	220	0.01	0.2	110	0.05	0.001	110	0.01
2003-005-006		R0.05	0.6	30,000	220	50	0.01	0.2	220	0.01	0.2	110	0.05	0.001	110	0.01
2005-003-005	**0.5**	R0.03	0.5	30,000	185	90	0.01	0.4	185	0.01	0.4	375	0.25	0.005	375	0.01
2005-003-010			1	30,000	185	90	0.01	0.4	185	0.01	0.4	180	0.125	0.005	375	0.01
2005-005-005		R0.05	0.5	30,000	375	125	0.01	0.4	375	0.01	0.4	375	0.25	0.005	375	0.01
2005-005-010			1	30,000	375	125	0.01	0.4	375	0.01	0.4	180	0.125	0.005	375	0.01
2008-003-008	**0.8**	R0.03	0.8	30,000	185	90	0.01	0.6	185	0.01	0.6	600	0.4	0.008	375	0.01
2008-003-016			1.6	30,000	185	90	0.01	0.6	185	0.01	0.6	300	0.2	0.008	375	0.01
2008-005-008		R0.05	0.8	30,000	375	150	0.01	0.6	375	0.01	0.6	600	0.4	0.008	375	0.01
2008-005-016			1.6	30,000	375	150	0.01	0.6	375	0.01	0.6	300	0.2	0.008	375	0.01
2008-010-008		R0.1	0.8	30,000	375	150	0.01	0.6	375	0.01	0.6	600	0.4	0.008	375	0.01
2008-010-016			1.6	30,000	375	150	0.01	0.6	375	0.01	0.6	300	0.2	0.008	375	0.01
2010-003-010	**1**	R0.03	1	30,000	185	90	0.01	0.8	185	0.01	0.8	750	0.5	0.01	375	0.01
2010-003-020			2	30,000	185	90	0.01	0.8	185	0.01	0.8	375	0.25	0.01	375	0.01
2010-005-010		R0.05	1	30,000	375	185	0.01	0.8	375	0.01	0.8	750	0.5	0.01	375	0.01
2010-005-020			2	30,000	375	185	0.01	0.8	375	0.01	0.8	375	0.25	0.01	375	0.01
2010-010-010		R0.1	1	30,000	375	185	0.01	0.8	375	0.01	0.8	750	0.5	0.01	375	0.01
2010-010-020			2	30,000	375	185	0.01	0.8	375	0.01	0.8	375	0.25	0.01	375	0.01
2015-003-015	**1.5**	R0.03	1.5	25,000	185	90	0.01	1.3	185	0.01	1.3	750	0.75	0.01	375	0.015
2015-003-030			3	25,000	185	90	0.01	1.3	185	0.01	1.3	375	0.375	0.01	375	0.015
2015-005-015		R0.05	1.5	25,000	375	125	0.015	1.3	375	0.015	1.3	750	0.75	0.01	375	0.015
2015-005-030			3	25,000	375	125	0.015	1.3	375	0.015	1.3	375	0.375	0.01	375	0.015
2015-010-015		R0.1	1.5	25,000	375	150	0.015	1.3	375	0.015	1.3	750	0.75	0.01	375	0.015
2015-010-030			3	25,000	375	150	0.015	1.3	375	0.015	1.3	375	0.375	0.01	375	0.015
2020-003-020	**2**	R0.03	2	20,000	185	90	0.01	1.8	185	0.01	1.8	750	1	0.01	375	0.02
2020-003-040			4	20,000	185	90	0.01	1.8	185	0.01	1.8	375	0.5	0.01	375	0.02
2020-005-020		R0.05	2	20,000	375	90	0.02	1.8	375	0.02	1.8	750	1	0.01	375	0.02
2020-005-040			4	20,000	375	90	0.02	1.8	375	0.02	1.8	375	0.5	0.01	375	0.02
2020-010-020		R0.1	2	20,000	375	125	0.02	1.8	375	0.02	1.8	750	1	0.01	375	0.02
2020-010-040			4	20,000	375	125	0.02	1.8	375	0.02	1.8	375	0.5	0.01	375	0.02


Milling Conditions for UDCLRS

WORK MATERIAL				CEMENTED CARBIDE (<87 HRA)													
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Z-Level Milling				Flat Milling			Side Milling			Slotting	
					Feed Rate (mm/min)	※Feed Rate2 (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)
2003-003-006	0.3	R0.03	0.6	21,000	220	50	0.01	0.2	220	0.01	0.2	200	0.075	0.003	200	0.01
2003-005-006		R0.05	0.6	21,000	220	50	0.01	0.2	220	0.01	0.2	200	0.075	0.003	200	0.01
2005-003-005	0.5	R0.03	0.5	20,000	275	135	0.02	0.4	275	0.02	0.4	800	0.25	0.005	550	0.02
2005-003-010			1	20,000	275	135	0.02	0.4	275	0.02	0.4	400	0.125	0.005	550	0.02
2005-005-005		R0.05	0.5	20,000	550	180	0.02	0.4	550	0.02	0.4	800	0.25	0.005	550	0.02
2005-005-010			1	20,000	550	180	0.02	0.4	550	0.02	0.4	400	0.125	0.005	550	0.02
2008-003-008	0.8	R0.03	0.8	19,000	290	145	0.02	0.6	290	0.02	0.6	1,200	0.4	0.008	580	0.025
2008-003-016			1.6	19,000	290	145	0.02	0.6	290	0.02	0.6	600	0.2	0.008	580	0.025
2008-005-008		R0.05	0.8	19,000	580	190	0.025	0.6	580	0.025	0.6	1,200	0.4	0.008	580	0.025
2008-005-016			1.6	19,000	580	190	0.025	0.6	580	0.025	0.6	600	0.2	0.008	580	0.025
2008-010-008		R0.1	0.8	19,000	580	190	0.025	0.6	580	0.025	0.6	1,200	0.4	0.008	580	0.025
2008-010-016			1.6	19,000	580	190	0.025	0.6	580	0.025	0.6	600	0.2	0.008	580	0.025
2010-003-010	1	R0.03	1	18,250	300	150	0.02	0.8	300	0.02	0.8	1,440	0.5	0.01	600	0.025
2010-003-020			2	18,250	300	150	0.02	0.8	300	0.02	0.8	720	0.25	0.01	600	0.025
2010-005-010		R0.05	1	18,250	600	200	0.025	0.8	600	0.025	0.8	1,440	0.5	0.01	600	0.025
2010-005-020			2	18,250	600	200	0.025	0.8	600	0.025	0.8	720	0.25	0.01	600	0.025
2010-010-010		R0.1	1	18,250	600	200	0.025	0.8	600	0.025	0.8	1,440	0.5	0.01	600	0.025
2010-010-020			2	18,250	600	200	0.025	0.8	600	0.025	0.8	720	0.25	0.01	600	0.025
2015-003-015	1.5	R0.03	1.5	16,500	325	160	0.02	1.3	325	0.02	1.3	1,440	0.75	0.01	650	0.035
2015-003-030			3	16,500	325	160	0.02	1.3	325	0.02	1.3	720	0.375	0.01	650	0.035
2015-005-015		R0.05	1.5	16,500	650	210	0.035	1.3	650	0.035	1.3	1,440	0.75	0.01	650	0.035
2015-005-030			3	16,500	650	210	0.035	1.3	650	0.035	1.3	720	0.375	0.01	650	0.035
2015-010-015		R0.1	1.5	16,500	650	210	0.035	1.3	650	0.035	1.3	1,440	0.75	0.01	650	0.035
2015-010-030			3	16,500	650	210	0.035	1.3	650	0.035	1.3	720	0.375	0.01	650	0.035
2020-003-020	2	R0.03	2	15,000	360	180	0.02	1.8	360	0.02	1.8	1,440	1	0.01	720	0.05
2020-003-040			4	15,000	360	180	0.02	1.8	360	0.02	1.8	1,440	1	0.01	720	0.05
2020-005-020		R0.05	2	15,000	720	240	0.05	1.8	720	0.05	1.8	1,440	1	0.01	720	0.05
2020-005-040			4	15,000	720	240	0.05	1.8	720	0.05	1.8	1,440	1	0.01	720	0.05
2020-010-020		R0.1	2	15,000	720	240	0.05	1.8	720	0.05	1.8	1,440	1	0.01	720	0.05
2020-010-040			4	15,000	720	240	0.05	1.8	720	0.05	1.8	1,440	1	0.01	720	0.05

Feed Rate2: Feed rate of approach and *connection moves.
*Changing from one engagement point to the next.



D : Outside Diameter (mm)
Slotting



Z-Level / Side / Flat Milling

UDCRRS

Additional 14 models



6 Flute / 10 Flute Long Neck Radius End Mills for Roughing Cemented Carbide and Hard Brittle Materials

φ1～φ6

MG | UDC | 40° | R | R ±0.01 | Shank Dia 0/-0.005


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○			★	● ※


※ Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

Multi-flute Radius

Deep milling on axial depth

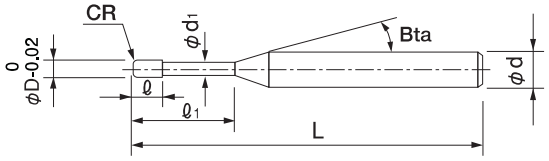

The shank taper angle shown is not an exact value.



High Efficiency

6 Flutes, 10 Flutes with a 40° helix angle help to reduce cutting load allowing for deep milling on axial depth.


φ1～φ4 6 Flutes



φ6 10 Flutes




Milling amount compared with 2 Flutes (φ2 X EL 6)

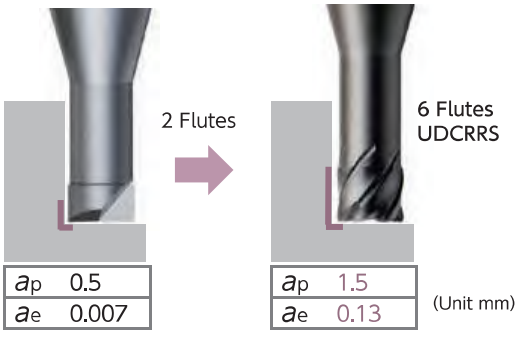

Compared to a tool with 2 flutes, the a_p is 3 times and the a_e is 18 times higher.
This shows a significant efficiency improvement.

Cutting material removal volume for each size

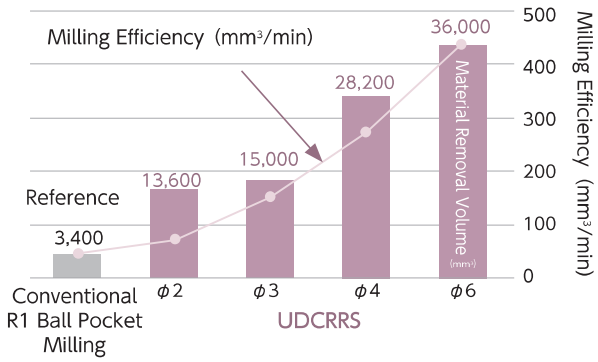

Milling efficiency and material removal volume exceeds the conventional tool.

Total 18 models

Unit (mm)

	Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Number of Flutes	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
※	UDCRRS 6010-005-025	1	R0.05	2.5	0.8	0.9	16°	50	4	6	—	2.72	2.80	2.89	2.99	3.21
※	UDCRRS 6010-010-025		R0.1					50	4		—	2.71	2.80	2.89	2.99	3.20
※	UDCRRS 6010-020-025		R0.2					50	4		—	2.71	2.79	2.88	2.97	3.18
※	UDCRRS 6015-005-035	1.5	R0.05	3.5	1.2	1.34	16°	50	4	6	—	3.86	3.98	4.11	4.25	4.57
※	UDCRRS 6015-010-035		R0.1					50	4		—	3.85	3.98	4.11	4.24	4.55
※	UDCRRS 6015-020-035		R0.2					50	4		—	3.85	3.97	4.10	4.23	4.53
※	UDCRRS 6020-010-050	2	R0.1	5	1.6	1.77	16°	50	4	6	—	5.53	5.70	5.89	6.09	6.54
	UDCRRS 6020-020-050		R0.2					50	4		—	5.52	5.70	5.88	6.08	6.52
※	UDCRRS 6020-030-050		R0.3					50	4		—	5.52	5.69	5.87	6.06	6.50
※	UDCRRS 6030-010-075	3	R0.1	7.5	2.4	2.77	16°	60	6	6	—	8.10	8.36	8.64	8.94	9.60
	UDCRRS 6030-020-075		R0.2					60	6		—	8.10	8.36	8.63	8.92	9.58
※	UDCRRS 6030-030-075		R0.3					60	6		—	8.10	8.35	8.62	8.91	9.56
	UDCRRS 6040-020-100	4	R0.2	10	3.2	3.77	16°	60	6	6	—	10.68	11.02	11.38	11.77	12.64
※	UDCRRS 6040-030-100		R0.3					60	6		—	10.68	11.01	11.37	11.76	12.61
※	UDCRRS 6040-050-100		R0.5					60	6		—	10.67	11.00	11.35	11.73	12.57
	UDCRRS 10060-020150	6	R0.2	15	4.8	5.77	16°	60	6	10	—	No Interference	No Interference	No Interference	No Interference	No Interference
※	UDCRRS 10060-030150		R0.3					60	6		—	No Interference	No Interference	No Interference	No Interference	No Interference
※	UDCRRS 10060-050150		R0.5					60	6		—	No Interference	No Interference	No Interference	No Interference	No Interference

※ Additional model


Comparison of material removal volume by coolant


UDCRRS φ2 × CR0.2 × EL5

Cemented Carbide VM-40 (90 HRA)

Alumina Al_2O_3

Spindle Speed	20,000 min^{-1}
Feed Rate	375 mm/min
Axial Depth	1.5 mm
Radial Depth	0.13 mm
Coolant	Air Blow Water soluble

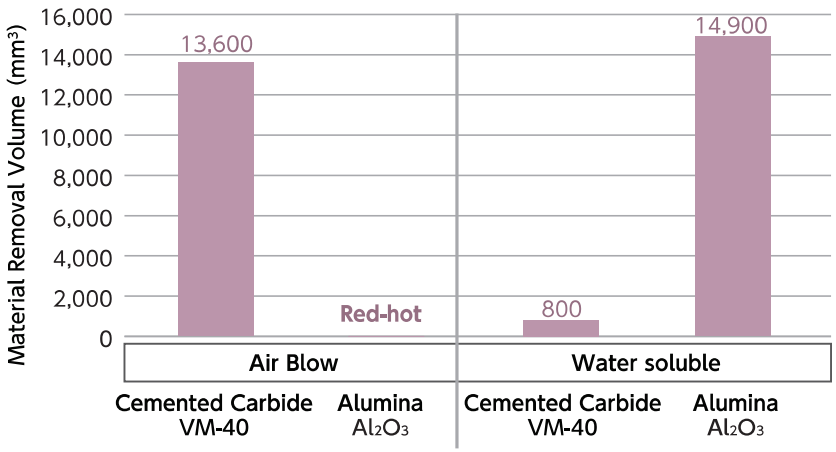

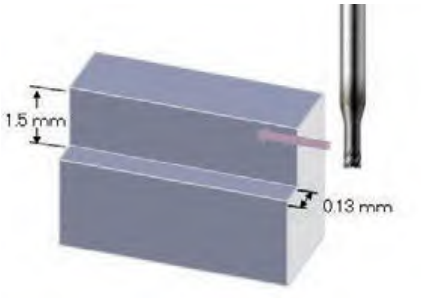


Recommend air blow for cemented carbide, and water soluble for ceramics.

Milling Conditions for UDCRRS

WORK MATERIAL				CEMENTED CARBIDE (≧87HRA) / HARD BRITTLE MATERIALS							
				Flat milling				Side milling			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
6010-005-025	1	R0.05	2.5	30,000	375	0.05	0.4	30,000	280	0.75	0.025
6010-010-025		R0.1			375	0.05	0.4		280	0.75	0.025
6010-020-025		R0.2			375	0.05	0.4		280	0.75	0.025
6015-005-035	1.5	R0.05	3.5	23,400	375	0.05	0.6	23,400	330	1.125	0.05
6015-010-035		R0.1			375	0.05	0.6		330	1.125	0.05
6015-020-035		R0.2			375	0.05	0.6		330	1.125	0.05
6020-010-050	2	R0.1	5	20,000	375	0.1	0.8	20,000	375	1.5	0.05
6020-020-050		R0.2			375	0.1	0.8		375	1.5	0.13
6020-030-050		R0.3			375	0.1	0.8		375	1.5	0.13
6030-010-075	3	R0.1	7.5	17,500	375	0.1	1.2	17,500	375	2.2	0.19
6030-020-075		R0.2			375	0.1	1.2		375	2.2	0.19
6030-030-075		R0.3			375	0.1	1.2		375	2.2	0.19
6040-020-100	4	R0.2	10	15,000	375	0.1	1.6	15,000	375	3	0.25
6040-030-100		R0.3			375	0.12	1.6		375	3	0.25
6040-050-100		R0.5			375	0.2	1.6		375	3	0.25
10060-020150	6	R0.2	15	10,000	375	0.2	1	10,000	375	4	0.3
10060-030150		R0.3			460	0.2	1		375	4	0.3
10060-050150		R0.5			560	0.2	1		375	4	0.3

WORK MATERIAL				CEMENTED CARBIDE (<87HRA)							
				Flat milling				Side milling			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
6010-005-025	1	R0.05	2.5	20,000	375	0.05	0.4	20,000	1,270	0.75	0.01
6010-010-025		R0.1			375	0.05	0.4		1,270	0.75	0.01
6010-020-025		R0.2			375	0.05	0.4		1,270	0.75	0.01
6015-005-035	1.5	R0.05	3.5	13,400	375	0.05	0.6	13,400	1,355	1.125	0.02
6015-010-035		R0.1			375	0.05	0.6		1,355	1.125	0.02
6015-020-035		R0.2			375	0.05	0.6		1,355	1.125	0.02
6020-010-050	2	R0.1	5	10,000	375	0.1	0.8	10,000	1,440	1.5	0.02
6020-020-050		R0.2			375	0.1	0.8		1,440	1.5	0.02
6020-030-050		R0.3			375	0.1	0.8		1,440	1.5	0.02
6030-010-075	3	R0.1	7.5	6,700	375	0.1	1.2	6,700	1,610	2.2	0.02
6030-020-075		R0.2			375	0.1	1.2		1,610	2.2	0.02
6030-030-075		R0.3			375	0.1	1.2		1,610	2.2	0.02
6040-020-100	4	R0.2	10	5,000	375	0.1	1.6	5,000	1,780	3	0.02
6040-030-100		R0.3			375	0.12	1.6		1,780	3	0.02
6040-050-100		R0.5			375	0.2	1.6		1,780	3	0.02
10060-020150	6	R0.2	15	3,300	375	0.2	1	3,300	2,000	4	0.02
10060-030150		R0.3			460	0.2	1		3,500	4	0.02
10060-050150		R0.5			560	0.2	1		5,000	4	0.02

Roughing with UDCRRS  Finishing with UDC 2 Flutes 




*UDCRRS is designed for roughing, use other UDC 2 flutes when finishing.

Note:
- Avoid contact with the coated area of the shank. This will prevent tip vibration and tool jamming in the collet holder.
- Use an inclined or helical approach (Recommended inclination angle: <5 degree).
- Air blow offers longer tool life when milling Cemented Carbide.
- Recommend water soluble coolant for Hard Brittle (Non-Metallic) Materials.
- Protective gear, such as safety glasses and face guards are required when milling.
- Chips / dust generated while milling can have adverse affects on the machine parts if they are not properly evacuated. Take steps to assure proper evacuation.

The best way to use UDCRRS for high efficiency and long tool life


point1 Circular arc milling

Circular arc milling is recommended so the returning point is not an acute angle.
This reduces cutting load on the peripheral cutting edge.

No adjustments   Recommended:
Circular arc milling

point2 Chip evacuation

Air blow coolant is recommended. Recommended spraying from multiple directions at high pressure as much as possible.




Milling example of punching die
UDCRRS ϕ4 × CR0.2 × EL10

Cemented Carbide
VM-40 (90 HRA)

Spindle Speed	15,000 min^{-1}
Feed Rate	375 mm/min
Axial Depth	3 mm
Radial Depth	0.25 mm
Coolant	Air Blow
Cycle Time	93 min

Depth 9 mm
a_p 3 mm × 3 times





Tool after milling



Milling volume 15,953 mm^3 with a single tool in 93 min.
Tool damage is limited and continuous cutting is possible.

UPDLRS



1 Flute Binderless PCD Long Neck Radius End Mills for Finishing Cemented Carbide and Hard Brittle Materials

φ0.2～φ2

Binderless PCD | 0° | R | R ±0.005 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
																★	●

Features


Provides excellent machined surface quality due to the sharp cutting edge and optimized edge treatment. Maintains excellent dimensional accuracy for a long time due to the high contour accuracy of the cutting edge and the excellent wear resistance of diamonds.

Label Sample



#001 φD0.499 R0.049/0.048

Diameter and Corner R accuracy measurements are printed on the label to support High Precision milling.

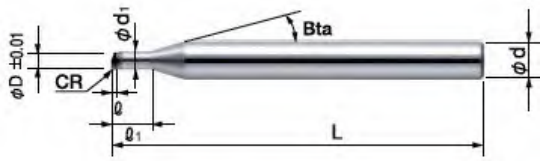

Be sure to confirm the interference between the inclined work piece and the shank part by actual measurement.


Total 12 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UPDLRS 1002-002-006	0.2	R0.02	0.6	0.1	0.175	16°	40	4	—
UPDLRS 1002-005-006		R0.05					40	4	—
UPDLRS 1003-002-010	0.3	R0.02	1	0.15	0.27	16°	40	4	—
UPDLRS 1003-005-010		R0.05					40	4	—
UPDLRS 1005-005-015	0.5	R0.05	1.5	0.25	0.47	16°	40	4	—
UPDLRS 1005-010-015		R0.1					40	4	—
UPDLRS 1010-005-030	1	R0.05	3	0.55	0.95	16°	40	4	—
UPDLRS 1010-010-030		R0.1					40	4	—
UPDLRS 1010-020-030		R0.2					40	4	—
UPDLRS 1020-005-040	2	R0.05	4	0.55	1.95	16°	40	4	—
UPDLRS 1020-010-040		R0.1					40	4	—
UPDLRS 1020-020-040		R0.2					40	4	—

Milling Conditions for UPDLRS


WORK MATERIAL			CEMENTED CARBIDE			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
1002-002-006	0.2	0.6	40,000	100	0.001	0.001
1002-005-006			40,000	100	0.001	0.001
1003-002-010	0.3	1	40,000	150	0.002	0.001
1003-005-010			40,000	150	0.002	0.001
1005-005-015	0.5	1.5	40,000	200	0.003	0.001
1005-010-015			40,000	200	0.003	0.001
1010-005-030	1	3	40,000	400	0.005	0.003
1010-010-030			40,000	400	0.005	0.003
1010-020-030			40,000	400	0.005	0.003
1020-005-040	2	4	40,000	600	0.01	0.005
1020-010-040			40,000	600	0.01	0.005
1020-020-040			40,000	600	0.01	0.005



Note:
- Use a machine with high accuracy for stable cutting.
- Non-water soluble coolant recommended. Supply as a mist or external coolant. Take fire prevention precautions to avoid fire hazards caused by sparks igniting during machinig or tool breakage.
- Shorten overhang as much as possible.
- Adjust cutting conditions as necessary as machine spec and other conditions may vary.
- These cutting parameters show reference value. Adjust the cutting conditions to the desired machined surface finish.

Milling Example for Finishing UDCLRSF / UPDLRS ϕ2

Cemented Carbide VF-20 (92.5 HRA)

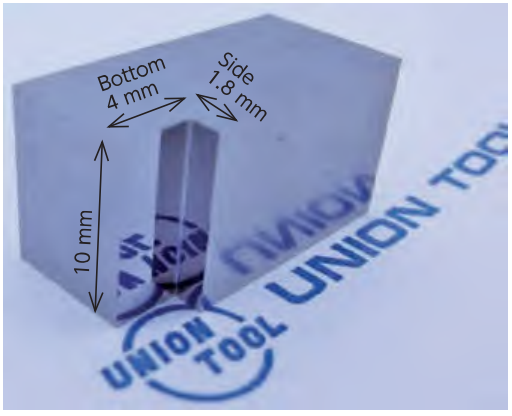

Milling Area : 4 × 10 × Depth1.8 mm
Work Size : 10 × 10 × 20 mm

After Finishing





Milling Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Coolant	Cycle Time
Roughing	UDCLRSF 2020-005020 (ϕ2 × CR0.05 × EL2)	20,000	400	0.9 × 2 Times	0.01	0.005	Air Blow	54 min
Finishing (Bottom)	UPDLRS 1020-005-040 (ϕ2 × CR0.05 × EL4)	40,000	600	0.01	0.005	0		45 min
Finishing (Side)		40,000	400	0.002	0.01	0		52 min

UDCMX



2 Flute Drills for Cemented Carbide and Hard Brittle Materials

φ0.3～φ7

MG | UDC | 30° | X Thinning | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													●			★	● ※

※ Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

Drilling

Offers high quality at a low cost.

Label Sample




#001 φD5.999

Measured diameter is printed on the label.

Enlarged tip drawing



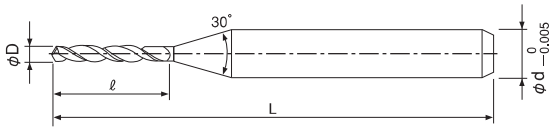

Point Angle : 130°
Diameter Tolerance : 0/-0.02 (D ≦ 3.5)
0/-0.025 (D ≧ 4)

※ Under-cut type

Total 35 models

Unit (mm)


Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Cemented Carbide Spindle Speed (min⁻¹)	Cemented Carbide Feed Rate (mm/min)	Cemented Carbide Peck Amount (mm)
UDCMX 2030-030	0.3	3	38	3	—	28,750	5	0.05
UDCMX 2040-040	0.4	4	38	3	—	20,000	5	0.05
UDCMX 2050-050	0.5	5	38	3	—	15,000	5	0.05
UDCMX 2060-060	0.6	6	38	3	—	11,500	5	0.05
UDCMX 2070-070	0.7	7	38	3	—	9,000	5	0.05
UDCMX 2080-080	0.8	8	38	3	—	7,300	7.5	0.05
UDCMX 2090-090	0.9	9	38	3	—	6,000	7.5	0.05
UDCMX 2100-100	1	10	38	3	—	5,000	7.5	0.05
UDCMX 2110-100	1.1	10	38	3	—	4,500	7.2	0.06
UDCMX 2120-100	1.2	10	38	3	—	4,100	6.8	0.07
UDCMX 2130-100	1.3	10	38	3	—	3,750	6.5	0.08
UDCMX 2140-100	1.4	10	38	3	—	3,450	6.2	0.09
UDCMX 2150-100	1.5	10	38	3	—	3,200	6	0.1
UDCMX 2160-100	1.6	10	38	3	—	3,000	6	0.1
UDCMX 2170-100	1.7	10	38	3	—	2,850	5.8	0.1
UDCMX 2180-100	1.8	10	38	3	—	2,700	5.5	0.1
UDCMX 2190-100	1.9	10	38	3	—	2,550	5.3	0.1
UDCMX 2200-100	2	10	38	3	—	2,400	5	0.15

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Cemented Carbide		
						Spindle Speed (min^{-1})	Feed Rate (mm/min)	Peck Amount (mm)
UDCMX 2210-100	2.1	10	38	3	—	2,300	5	0.15
UDCMX 2220-100	2.2	10	38	3	—	2,225	5	0.15
UDCMX 2230-100	2.3	10	38	3	—	2,150	5	0.15
UDCMX 2240-100	2.4	10	38	3	—	2,075	5	0.15
UDCMX 2250-100	2.5	10	38	3	—	2,000	5	0.2
UDCMX 2300-100	3	10	38	3	—	1,100	3.7	0.25
UDCMX 2330-120	3.3	12	50	4	—	1,000	3.4	0.3
UDCMX 2350-120	3.5	12	50	4	—	910	3.3	0.35
UDCMX 2400-160	4	16	60	6	—	4,000	6.9	Single-Shot
UDCMX 2420-160	4.2	16	60	6	—	4,000	7.3	Single-Shot
UDCMX 2450-200	4.5	20	60	6	—	4,000	7.8	Single-Shot
UDCMX 2500-200	5	20	60	6	—	4,000	8.7	Single-Shot
UDCMX 2550-250	5.5	25	80	6	—	4,000	9.6	Single-Shot
UDCMX 2600-250	6	25	80	6	—	4,000	10.5	Single-Shot
UDCMX 2650-250	6.5	25	80	8	—	4,000	11.5	Single-Shot
UDCMX 2680-250	6.8	25	80	8	—	4,000	12	Single-Shot
UDCMX 2700-250	7	25	80	8	—	4,000	12.4	Single-Shot

Note: (UDCMX)
・Recommend shallower drilling than flute length to promote good chip evacuation.

One-shot Drilling with UDCMX φ0.4 x 4 mm


Cemented Carbide VM-40 (90 HRA)

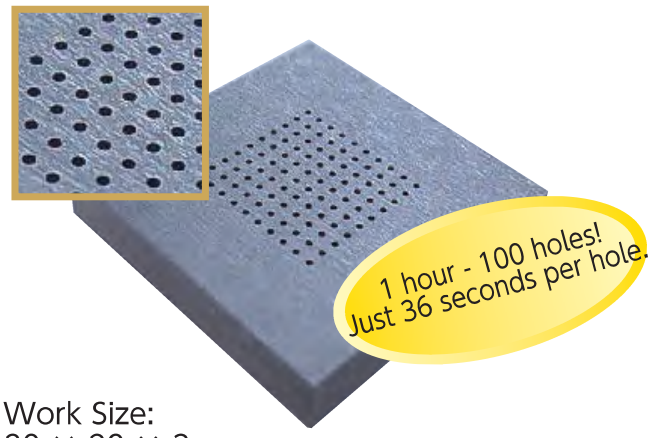

Work Size:
20 × 20 × 3 mm

Tool	UDCMX 2040-040
Spindle Speed	20,000 min^{-1}
Feed Rate	5 mm/min
Peck Amount	One-shot
Coolant	Air Blow (Nozzle)
Hole Specification	Blind Hole (Depth 2.8 mm × 100 holes)
Hole Pitch	1 mm
Cycle Time	36 sec per hole

Hole Quality after drilling 100 holes

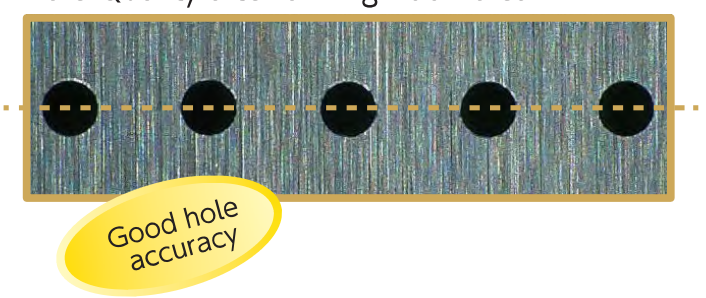



UDCMX Drilling Video

UDCT



2 Flute Thread Mills for Cemented Carbide and Hard Brittle Materials

M2～M8

MG UDC Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
													○			★	● ※

※ Hard Brittle (Non-Metallic) Materials: Ceramics (Alumina, Zirconia,etc.), Glasses and etc.

Threading


For thread milling

Label Sample



#001 φD3.109

Measured diameter is printed on the label.

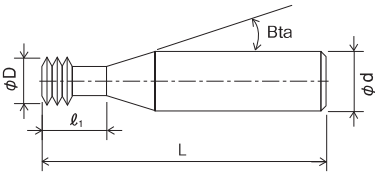

The shank taper angle shown is not an exact value.

Total 10 models

Unit (mm)

Model Number	Thread Diameter M	Pitch P	Tool Diameter φD	Number of Flutes	Effective Length ℓ1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UDCT M2-0.4-4	M2	0.4	1.5	2	4	16°	50	4	—
UDCT M2.5-0.45-5	M2.5	0.45	1.9	2	5	16°	50	4	—
UDCT M3-0.5-6	M3	0.5	2.4	2	6	16°	50	4	—
UDCT M4-0.7-8	M4	0.7	3.1	2	8	16°	50	4	—
UDCT M5-0.8-10	M5	0.8	3.9	2	10	16°	60	6	—
UDCT M5-0.8-15					15		60	6	—
UDCT M6-1-12	M6	1	4.6	2	12	16°	60	6	—
UDCT M6-1-18					18		60	6	—
UDCT M8-1.25-16	M8	1.25	5.9	2	16	16°	60	6	—
UDCT M8-1.25-24					24		60	6	—

Milling Conditions for UDCT

WORK MATERIAL					CEMENTED CARBIDE		
Model Number	Thread Diameter M	Pitch P	Tool Diameter φD	Effective Length ℓ1	Recommended Diameter of Hole Before Theading (mm)	Spindle Speed (mm^{-1})	Feed Rate (mm / min)
M2-0.4-4	**M2**	0.4	1.5	4	φ1.6	20,000	3
M2.5-0.45-5	**M2.5**	0.45	1.9	5	φ2.1	20,000	3
M3-0.5-6	**M3**	0.5	2.4	6	φ2.5	20,000	3
M4-0.7-8	**M4**	0.7	3.1	8	φ3.3	10,050	30
M5-0.8-10	**M5**	0.8	3.9	10	φ4.2	8,000	30
M5-0.8-15				15			
M6-1-12	**M6**	1	4.6	12	φ5	6,800	30
M6-1-18				18			
M8-1.25-16	**M8**	1.25	5.9	16	φ6.8	3,500	20
M8-1.25-24				24			

Note: (UDCT)
- Use a machine equipped with helical interpolating functions.
- The radial cutting depth is recommended to cut all at once. Do not cut several times.
- Adjust turning radius amount to meet required internal thread precision.

Note: (All UDC series except for UPDLB&UPDLRS)
- Avoid contact with the coated area of the shank. This will prevent tip vibration and tool jamming in the collet holder.
- Use an inclined or helical approach (Recommended inclination angle: <5 degree).
- Air blow offers longer tool life when milling Cemented Carbide.
- Recommend water soluble coolant for Hard Brittle (Non-Metallic) Materials.
- Protective gear, such as safety glasses and face guards are required when milling.
- Chips / dust generated while milling can have adverse affects on the machine parts if they are not properly evacuated. Take steps to assure proper evacuation.



Drilling with UDCMX φ6.8 x Slot Length 25 mm >> Thread milling with UDCT M8


Cemented Carbide VM-40 (90 HRA)



Work size :
50 x 50 x 25 mm

Milling Method	Drilling (one-shot)	Thread milling
Tool	UDCMX φ6.8 × Slot Length 25 mm	UDCT M8-1.25-24
Spindle Speed	4,000 mm^{-1}	3,500 mm^{-1}
Feed Rate	12 mm/min	20 mm/min
Overhang Length	35 mm	30 mm
Coolant	Air Blow (Nozzle)	
Hole Specification	Blind hole Depth 20 mm x 25 holes	Depth 17.5 mm x 1 hole
Cycle Time	1 min 56 sec per hole	5 min 36 sec per hole






- UDCMX φ6.8 : Drilled 25 holes with a single tool.
- More tool life left after drilling the 25th hole.
- Total material removal amount is about 17,000 mm^3 when the cycle time is less than 1 hour.

CBN Series

CBN End Mills UNIMAX Series

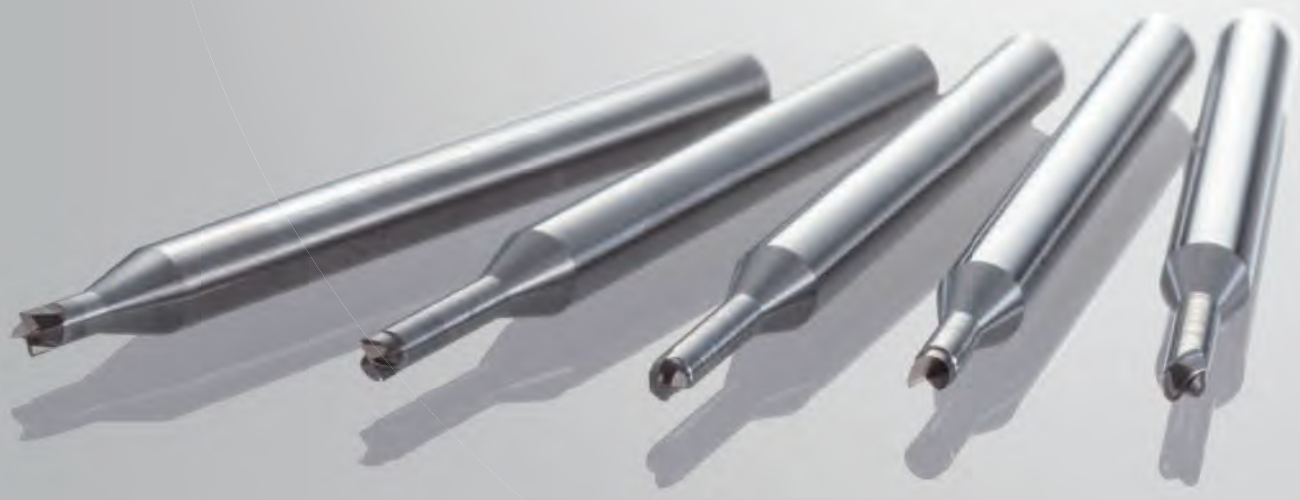

The 2 features of UNIMAX CBN series

Various lineup of tools

2 types each for Ball and Radius.
SF series offers shiny milling surfaces.

	Long Neck Ball				Long Neck Radius		
Type	Super mirror surface	Super surface finish	Long tool life	Long tool life	Super surface finish	Long tool life	
Series	CBN-PLB	CBN-LBSF	CBN-LBF 2000	CBN-LBF 4000	CBN-RSF	CBN-LRF 2000	CBN-LRF 4000
Flutes	2 Flutes	2 Flutes	2 Flutes	4 Flutes	1 Flute	2 Flutes	4 Flutes
Helix angle	Non helix angle	Helix angle 20°	Non helix angle	Helix angle 30°	Non helix angle	Non helix angle	Non helix angle
Tip geometry							
Page	γ-3	γ-5	γ-9	γ-15	γ-19	γ-23	γ-33

High precision milling

Industry-leading high precision.
The tool measurements are printed on the label to support High Precision milling.

	Long Neck Ball				Long Neck Radius		
Type	Super mirror surface	Super surface finish	Long tool life	Long tool life	Super surface finish	Long tool life	
Series	CBN-PLB	CBN-LBSF	CBN-LBF 2000	CBN-LBF 4000	CBN-RSF	CBN-LRF 2000	CBN-LRF 4000
R/CR Tolerance	R ±0.002	R ±0.002	R ±0.003 R ±0.005 R0.05～R1.5 R2	R ±0.003	R ±0.002 R ±0.003 CR≦0.02 CR≧0.05	R ±0.002 R ±0.003 CR≦0.03 CR≧0.05	R ±0.002
Label sample	R tolerance	R tolerance	R tolerance / Diameter tolerance	R tolerance / Diameter tolerance	CR tolerance / Diameter tolerance	CR tolerance / Diameter tolerance	CR tolerance / Diameter tolerance

For super surface finish　The features of CBN series

CBN-LBSF, CBN-RSF for super surface finish.
SF series offers shiny milling surfaces.

The power of **SF**

Ball　Milling surface comparison of Ball type



ELMAX (60HRC)
Size : φ5 × Depth 2.5 mm

Tool Size	R0.5 × EL1.5
Spindle Speed	30,000 min^{-1}
Feed Rate	750 mm/min
Cusp Height	0.0001 mm
Coolant	Oil Mist

CBN-LBSF For super surface finish



Tool center line



A cutting edge is set at the tip of the tool (zero peripheral speed).
Improved finishing surface by the burnishing effect on relief.

CBN-LBF For long tool life



Tool center line



Non helix angle design ensures high rigidity.


Radius　Tool features of Radius type


CBN-RSF For super surface finish



1 flute design enables an even milling amount and prevents chip biting caused by runout.
The tool relief rubs against the milling surface to create a burnished finish.



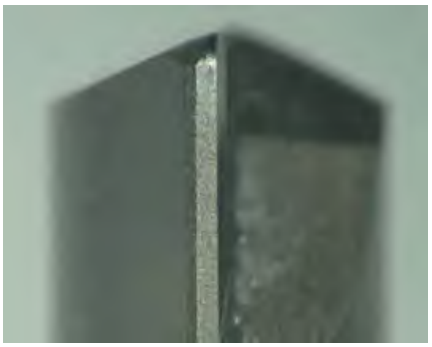

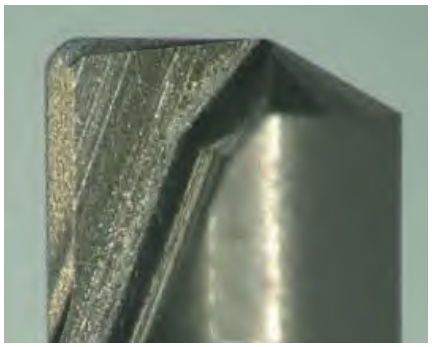

CBN-PLB

Additional 2 models



CBN 2 Flute Long Neck Ball End Mills for Mirror Surface Finish

R0.2～R1

CBN | 0° | R ±0.002 | Shank Dia 0/-0.004

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	●	●										

Label Sample




#001 R0.5 R+0.001/−0.001

Ball Radius accuracy measurments are printed on the label to support High Precision milling.

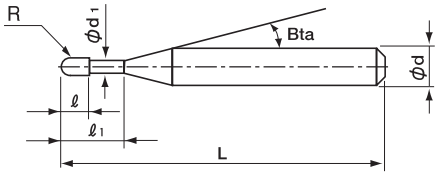


The shank taper angle shown is not an exact value.



Features

1. CBN material featuring very high wear resistance.
2. Burnishing effect enables super mirror milling!
3. The groove design that allows coolant to reach the cutting edge.
   Chip evacuation effect offers long tool life.
   Prevention of chip biting offers uniform milling surfaces.



CBN-PLB Introduction

Total 5 models

Unit (mm)


Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
CBN-PLB 2004-010	R0.2	1	0.24	0.38	15°	50	4	—	1.03	1.06	1.09	1.13	1.21
CBN-PLB 2006-015	R0.3	1.5	0.36	0.58	15°	50	4	—	1.53	1.57	1.62	1.68	1.79
CBN-PLB 2010-025	R0.5	2.5	0.6	0.98	15°	50	4	—	2.57	2.64	2.72	2.81	3.00
※ CBN-PLB 2015-038	R0.75	3.8	0.9	1.46	15°	50	4	—	3.94	4.06	4.18	4.31	4.61
※ CBN-PLB 2020-050	R1	5	1.2	1.97	15°	50	4	—	5.16	5.30	5.46	5.63	6.01

※ Additional model


Milling Conditions for CBN-PLB

WORK MATERIAL			HEAT-TREATED STEELS / HARDENED STEELS STAVAX / ELMAX / HAP10 / HAP72 (~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2004-010	**R0.2**	**1**	30,000	150	0.001	0.001
2006-015	**R0.3**	**1.5**	30,000	300	0.002	0.002
2010-025	**R0.5**	**2.5**	30,000	375	0.003	0.003
2015-038	**R0.75**	**3.8**	16,000	375	0.004	0.004
2020-050	**R1**	**5**	12,000	375	0.005	0.005

Tool shape



The length of cut that is 1.2 times the ball radius enables finishing on vertical surfaces.




Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Recommend oil mist to avoid tool damage.

Inclined surface milling
2 Flutes CBN-PLB R0.5 × EL2.5

ELMAX (60HRC)


Process	Finishing
Coolant	Oil Mist
Milling Method	Contour milling
Spindle Speed	30,000 min^{-1}
Feed Rate	375 mm/min
Allowance	0.003 mm
Cycle Time	1 pocket 1 h 30 min

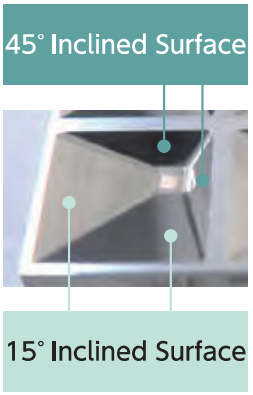




Surface roughness
15° Ra 0.014 μm
45° Ra 0.018 μm

Milling time and transition of Ra (Unit: μm)

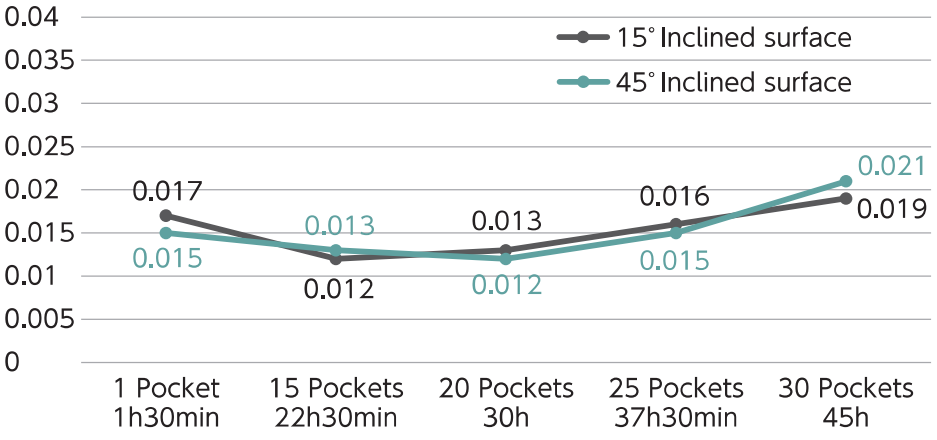

Only subtle difference in surface roughness after 45 hours.

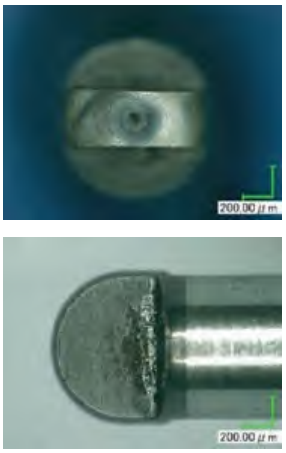

Tool after 45h of milling

CBN-LBSF



CBN 2 Flute Long Neck Ball End Mills for Super Finishing

R0.05～R1

CBN | 20° | R ±0.002 | Shank Dia 0/-0.004 | Back Taper Geometry

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	●	●										

Label Sample




#001 R1 R+0.001/0.000

Ball Radius accuracy measurments are printed on the label to support High Precision milling.

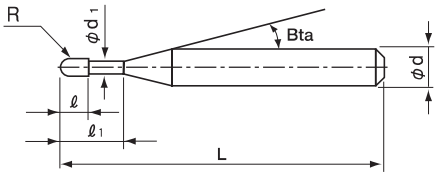

The shank taper angle shown is not an exact value.




Features

For higher precision and better surface finish
Ball radius accuracy ± 0.002mm based on Nominal Radius.








A cutting edge is set at the tip of the tool (zero peripheral speed).
Less tool damage and improved finishing surface.

Inclined surface milling CBN-LBF & CBN-LBSF comparison
2 Flutes R0.3 × EL1.5 ELMAX (60.5HRC)


Pocket Size : 9 × 9 × Depth 1.5 mm

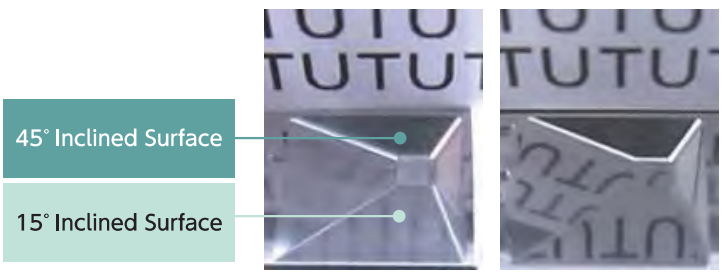

CBN-LBF For long tool life

CBN-LBSF For super surface finish

Surface Roughness after milling

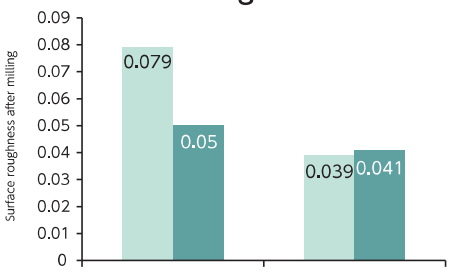

Milling method	Spindle Speed	Feed Rate	Allowance	Cusp height	Coolant	Cycle Time
Contour spiral milling	30,000 min^{-1}	550 mm/min	0.005 mm	0.0001 mm	Oil mist	21.5 min

Lens application
2 Flutes　CBN-LBSF　R0.3 × EL1・R1 × EL3

HAP10 (64HRC)



Work Size : 100 × 100 × 20 mm
Coolant : Oil mist, Oil coolant



Shiny surface

Surface Roughness after milling

Measurement point	Ra (μm)
Front point of Y axis	0.0272
Center point of Y axis	0.0172
Back point of Y axis	0.0304


CBN-LBSF
Milling video

No.	Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m)
1	Roughing	HGB R2	9,480	2,400	0.18	0.75	0.08	1:01
2	Lens part/Semi-roughing		9,480	2,400	0.18	0.375	0.05	0:06
3	Periphery/Semi-roughing	HGB R1	14,700	2,160	0.1	0.35	0.05	0:07
4	Periphery/Semi-finishing1		14,700	2,160	0.1	0.1	0.02	0:03
5	Lens part/Semi-finishing1		14,700	2,160	0.03	0.1	0.02	0:36
6	Periphery/Semi-finishing2	HGB R0.5	21,000	1,750	0.04	0.04	0.005	0:15
7	Lens part/Semi-finishing2	HGB R1	14,700	2,160	0.015	0.05	0.005	1:13
8	Periphery/Finishing	CBN-LBSF　R0.3 × EL1	30,000	600	0.01	0.01	0	2:56
9	Lens part/Finishing	CBN-LBSF　R1 × EL3	24,000	750	0.005	0.018	0	4:52

Total　11:09


CBN-LBF/CBN-LBSF　Surface roughness comparison
2 Flutes　R0.5 × EL1.5

STAVAX (52HRC)

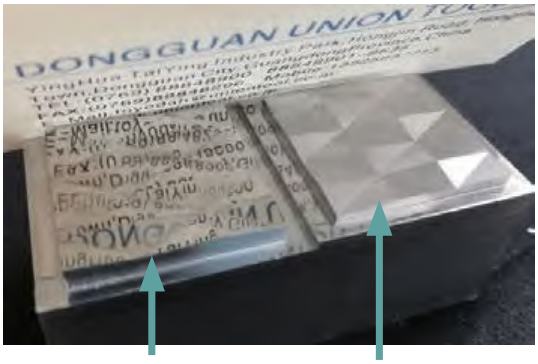

CBN-LBSF
For super surface finish
Ra 0.033 μm

CBN-LBF
For long tool life
Ra 0.159 μm

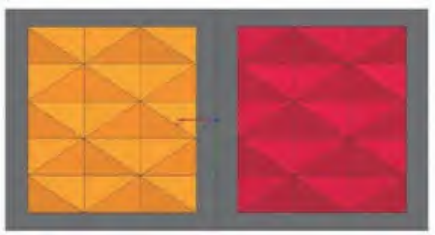

Size : 55 × 25 × 23 mm
Coolant : Oil mist

Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (h:m)
36,000	600	0.003	0.008	2:17

CBN-LBSF is recommended for excellent milling surface. The surface finish is of such high quality that the letters reflect perfectly in it.

Total 36 models


Shank taper angle Bta is only for reference

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CBN-LBSF 2001-003	R0.05	0.3	0.07	0.09	15°	50	4	—	0.30	0.30	0.30	0.30	0.33
CBN-LBSF 2001-005		0.5				50	4	—	0.50	0.50	0.51	0.53	0.57
CBN-LBSF 20015-0045	R0.075	0.45	0.1	0.14	15°	50	4	—	0.45	0.45	0.46	0.48	0.51
CBN-LBSF 20015-0075		0.75				50	4	—	0.75	0.76	0.78	0.81	0.88
CBN-LBSF 2002-003	R0.1	0.3	0.13	0.19	15°	50	4	—	0.30	0.30	0.30	0.30	0.32
CBN-LBSF 2002-006		0.6				50	4	—	0.60	0.60	0.62	0.64	0.69
CBN-LBSF 2003-005	R0.15	0.5	0.22	0.28	15°	50	4	—	0.51	0.53	0.54	0.56	0.60
CBN-LBSF 2003-0075		0.75				50	4	—	0.77	0.79	0.82	0.85	0.91
CBN-LBSF 2003-009		0.9				50	4	—	0.91	0.94	0.97	1.01	1.08
CBN-LBSF 2004-0075	R0.2	0.75	0.32	0.38	15°	50	4	—	0.77	0.79	0.81	0.84	0.90
CBN-LBSF 2004-010		1				50	4	—	1.03	1.06	1.09	1.13	1.21
CBN-LBSF 2004-012		1.2				50	4	—	1.22	1.26	1.30	1.35	1.44
CBN-LBSF 2005-010	R0.25	1	0.4	0.48	15°	50	4	—	1.01	1.04	1.07	1.11	1.18
CBN-LBSF 2005-015		1.5				50	4	—	1.53	1.58	1.63	1.68	1.80
CBN-LBSF 2006-010	R0.3	1	0.48	0.58	15°	50	4	—	1.01	1.04	1.07	1.10	1.17
CBN-LBSF 2006-015		1.5				50	4	—	1.53	1.57	1.62	1.68	1.79
CBN-LBSF 2006-020		2				50	4	—	2.05	2.11	2.18	2.25	2.41
CBN-LBSF 2008-020	R0.4	2	0.6	0.78	15°	50	4	—	2.04	2.10	2.17	2.24	2.39
CBN-LBSF 2008-040		4				50	4	—	4.11	4.24	4.38	4.54	4.88
CBN-LBSF 2010-015	R0.5	1.5	0.7	0.98	15°	50	4	—	1.53	1.57	1.61	1.66	1.76
CBN-LBSF 2010-020		2				50	4	—	2.05	2.11	2.17	2.23	2.38
CBN-LBSF 2010-025		2.5				50	4	—	2.57	2.64	2.72	2.81	3.00
CBN-LBSF 2010-030		3				50	4	—	3.09	3.18	3.28	3.38	3.62
CBN-LBSF 2010-040		4				50	4	—	4.12	4.25	4.38	4.53	4.87
CBN-LBSF 2010-060		6				50	4	—	6.19	6.39	6.60	6.83	7.35
CBN-LBSF 2015-025	R0.75	2.5	0.9	1.46	15°	50	4	—	2.60	2.67	2.74	2.81	2.99
CBN-LBSF 2015-030		3				50	4	—	3.12	3.20	3.29	3.39	3.61
CBN-LBSF 2015-038		3.8				50	4	—	3.94	4.06	4.18	4.31	4.61
CBN-LBSF 2015-060		6				50	4	—	6.22	6.41	6.62	6.84	7.34
CBN-LBSF 2015-080		8				50	4	—	8.28	8.55	8.83	9.14	9.83
CBN-LBSF 2020-030	R1	3	1.2	1.97	15°	50	4	—	3.09	3.16	3.24	3.33	3.53
CBN-LBSF 2020-040		4				50	4	—	4.12	4.23	4.35	4.48	4.77
CBN-LBSF 2020-050		5				50	4	—	5.16	5.30	5.46	5.63	6.01
CBN-LBSF 2020-060		6				50	4	—	6.19	6.37	6.57	6.78	7.26
CBN-LBSF 2020-080		8				50	4	—	8.26	8.51	8.79	9.08	9.74
CBN-LBSF 2020-100		10				50	4	—	10.32	10.65	11.00	11.38	12.23

Milling Conditions for CBN-LBSF

WORK MATERIAL			HEAT-TREATED STEELS / HARDENED STEELS STAVAX / ELMAX / HAP10 / HAP72 (~68HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	R0.05	0.3	30,000	70	0.003 MAX	0.006 MAX
2001-005		0.5	30,000	70	0.002 MAX	0.006 MAX
20015-0045	R0.075	0.45	30,000	150	0.004 MAX	0.008 MAX
20015-0075		0.75	30,000	125	0.004 MAX	0.008 MAX
2002-003	R0.1	0.3	30,000	240	0.005 MAX	0.01 MAX
2002-006		0.6	30,000	200	0.005 MAX	0.01 MAX
2003-005	R0.15	0.5	30,000	300	0.005 MAX	0.01 MAX
2003-0075		0.75	30,000	250	0.005 MAX	0.01 MAX
2003-009		0.9	30,000	250	0.005 MAX	0.01 MAX
2004-0075	R0.2	0.75	30,000	360	0.005 MAX	0.01 MAX
2004-010		1	30,000	300	0.005 MAX	0.01 MAX
2004-012		1.2	30,000	300	0.005 MAX	0.01 MAX
2005-010	R0.25	1	30,000	420	0.005 MAX	0.01 MAX
2005-015		1.5	30,000	350	0.005 MAX	0.01 MAX
2006-010	R0.3	1	30,000	500	0.01 MAX	0.015 MAX
2006-015		1.5	30,000	500	0.01 MAX	0.015 MAX
2006-020		2	30,000	350	0.01 MAX	0.015 MAX
2008-020	R0.4	2	30,000	620	0.01 MAX	0.015 MAX
2008-040		4	30,000	420	0.01 MAX	0.015 MAX
2010-015	R0.5	1.5	30,000	750	0.01 MAX	0.02 MAX
2010-020		2	30,000	750	0.01 MAX	0.02 MAX
2010-025		2.5	30,000	750	0.01 MAX	0.02 MAX
2010-030		3	30,000	500	0.01 MAX	0.02 MAX
2010-040		4	30,000	500	0.01 MAX	0.02 MAX
2010-060		6	30,000	330	0.01 MAX	0.02 MAX
2015-025	R0.75	2.5	20,000	750	0.01 MAX	0.02 MAX
2015-030		3	20,000	750	0.01 MAX	0.02 MAX
2015-038		3.8	20,000	750	0.01 MAX	0.02 MAX
2015-060		6	20,000	500	0.01 MAX	0.02 MAX
2015-080		8	20,000	500	0.01 MAX	0.02 MAX
2020-030	R1	3	15,000	750	0.01 MAX	0.025 MAX
2020-040		4	15,000	750	0.01 MAX	0.025 MAX
2020-050		5	15,000	750	0.01 MAX	0.025 MAX
2020-060		6	15,000	500	0.01 MAX	0.025 MAX
2020-080		8	15,000	500	0.01 MAX	0.025 MAX
2020-100		10	15,000	500	0.01 MAX	0.025 MAX



Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Recommend oil mist to avoid tool damage.

CBN-LBF2000



CBN 2 Flute Long Neck Ball End Mills for Finishing and Long Tool Life

R0.05～R2

CBN | 0° | R ±0.003 (R0.05～R1.5) | R ±0.005 (R2) | Shank Dia 0/-0.004 | Back Taper Geometry

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	●	●										

Label Sample




＃001 φD0.600 R+0.003/0.000

Diameter and Ball Radius accuracy measurments are printed on the label to support High Precision milling.



The shank taper angle shown is not an exact value.



Features

For long tool life
Various lineup from R0.05 to R2.




Non helix angle design ensures high rigidity.

Reflector mold finishing
2 Flutes CBN-LBF R0.15 × EL0.9

SKD11 (60HRC)




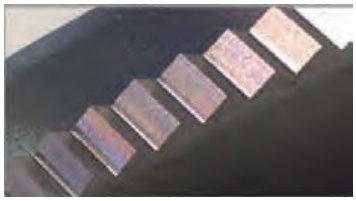

No.	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (h:m:s)
1	HSB R1.5	15,000	800	0.06	0.06	0:25:37
2	HSB R0.5	20,000	500	0.025	0.025	1:11:53
3	HSB R0.25	25,000	350	0.02	0.02	0:34:29
4	HSB R0.15	30,000	300	0.015	0.015	0:30:55
5	CBN-LBF R0.15 × EL0.9	30,000	300	0.008	0.008	3:48:13
					Total	6:31:07

Convex shaped finishing
2 Flutes CBN-LBF/CBN-LBSF R0.3 × EL1.5

STAVAX (52HRC)

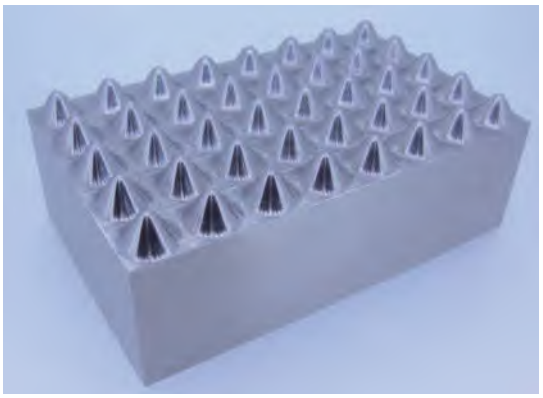


Work Size : 80 × 50 × 30 mm
Coolant : Oil mist

Process	Finishing
Milling Method	Contour spiral milling
Spindle Speed	30,000 min^{-1}
Feed Rate	800 mm/min
Cusp Height	0.0001 mm
a_e	0.015 mm
Cycle Time	9:48 h:m

Work piece dimensional error after milling


(μm)

For long tool life **CBN-LBF**

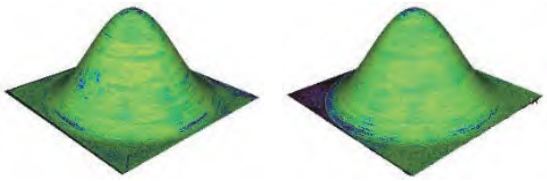


The 1st ridge The 40th ridge

For super surface finish **CBN-LBSF**

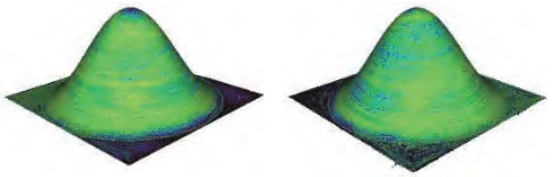


The 1st ridge The 40th ridge



Both types are able to mill for a long time while maintaining accuracy.
Milling time 1 ridge : 12 min 30 sec, 40 ridges : 8 h 20 min

Milling surface comparison

For long tool life **CBN-LBF**

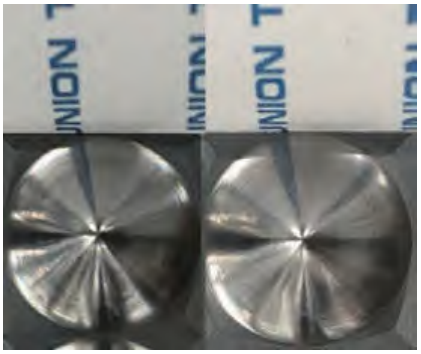

The 1st ridge The 40th ridge

CBN-LBF for high efficiency milling and long tool life.

For super surface finish **CBN-LBSF**




The 1st ridge The 40th ridge

CBN-LBSF offers shiny milling surfaces.

Reflector mold finishing
2 Flutes CBN-LBF R0.4 × EL2

STAVAX (52HRC)

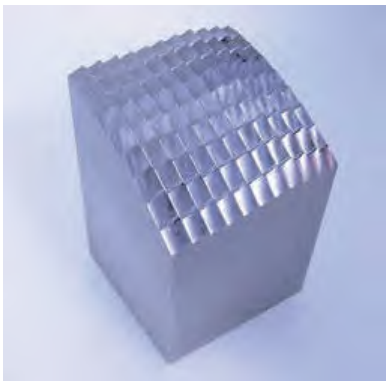

CBN-LBF
Milling video of reflector mold for finishing

No	Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (h:m:s)
1	Roughing	HRRS ϕ6 × CR1 × EL18	3,500	2,500	0.2	2	0:18:00
2	Semi-roughing	HRRS ϕ6 × CR1 × EL18	9,000	2,500	0.05	0.1	0:13:35
3	Semi-roughing	HRRS ϕ2 × CR0.3 × EL6	3,500	1,000	0.04	1	0:33:55
4	Semi-finishing	HSB R1.5	12,000	2,500	0.02	0.07	0:12:24
5	Semi-finishing	HSB R0.75	7,000	1,000	0.04	0.07	0:20:50
6	Semi-finishing	HSB R0.75	7,000	700	0.05	0.05	0:18:08
7	Semi-finishing	HSB R0.5	8,000	500	0.02	0.03	0:23:24
8	Semi-finishing	HSB R0.5	15,000	1,200	0.02	0.03	1:30:33
9	Finishing	CBN-LBF R0.4 × EL2	26,000	800	0.01	0.004	10:12:54
						Total	14:03:43

Total 64 models

*Shank taper angle Bta is only for reference.

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CBN-LBF 2001-003	R0.05	0.3	0.08	0.09	15°	50	4	—	0.30	0.30	0.30	0.30	0.33
CBN-LBF 2001-005		0.5				50	4	—	0.50	0.50	0.51	0.53	0.57
CBN-LBF 20015-0045	R0.075	0.45	0.15	0.14	15°	50	4	—	0.45	0.45	0.46	0.48	0.51
CBN-LBF 20015-0075		0.75				50	4	—	0.75	0.76	0.78	0.81	0.88
CBN-LBF 2002-003	R0.1	0.3	0.16	0.19	15°	50	4	—	0.30	0.30	0.30	0.30	0.32
CBN-LBF 2002-006		0.6				50	4	—	0.60	0.60	0.62	0.64	0.69
CBN-LBF 2002-010		1				50	4	—	1.00	1.03	1.06	1.10	1.19
CBN-LBF 2003-005	R0.15	0.5	0.24	0.28	15°	50	4	—	0.51	0.53	0.54	0.56	0.60
CBN-LBF 2003-0075		0.75				50	4	—	0.77	0.79	0.82	0.85	0.91
CBN-LBF 2003-009		0.9				50	4	—	0.91	0.94	0.96	1.00	1.06
CBN-LBF 2003-015		1.5				50	4	—	1.53	1.58	1.63	1.68	1.80
CBN-LBF 2004-005	R0.2	0.5	0.32	0.38	15°	50	4	—	0.51	0.52	0.54	0.55	0.58
CBN-LBF 2004-0075		0.75				50	4	—	0.77	0.79	0.81	0.84	0.90
CBN-LBF 2004-010		1				50	4	—	1.03	1.06	1.09	1.13	1.21
CBN-LBF 2004-012		1.2				50	4	—	1.22	1.25	1.29	1.33	1.42
CBN-LBF 2004-020		2				50	4	—	2.04	2.10	2.17	2.24	2.40
CBN-LBF 2004-030		3				50	4	—	3.07	3.17	3.27	3.38	3.62
CBN-LBF 2005-010	R0.25	1	0.4	0.48	15°	50	4	—	1.02	1.05	1.08	1.12	1.19
CBN-LBF 2005-015		1.5				50	4	—	1.53	1.57	1.62	1.66	1.78
CBN-LBF 2005-025		2.5				50	4	—	2.56	2.63	2.72	2.80	3.00
CBN-LBF 2005-035		3.5				50	4	—	3.59	3.70	3.82	3.94	4.22

Next Page ➡

CBN 2 Flute Long Neck Ball End Mills for Finishing and Long Tool Life

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CBN-LBF 2006-010	R0.3	1	0.48	0.58	15°	50	4	—	1.02	1.05	1.08	1.11	1.18
CBN-LBF 2006-015		1.5				50	4	—	1.52	1.57	1.61	1.66	1.76
CBN-LBF 2006-030		3				50	4	—	3.07	3.16	3.26	3.37	3.60
CBN-LBF 2006-040		4				50	4	—	4.10	4.23	4.36	4.50	4.82
CBN-LBF 2006-050		5				50	4	—	5.13	5.29	5.46	5.64	6.05
CBN-LBF 2006-060		6				50	4	—	6.17	6.36	6.56	6.78	7.27
CBN-LBF 2008-020	R0.4	2	0.6	0.78	15°	50	4	—	2.04	2.09	2.15	2.21	2.35
CBN-LBF 2008-040		4				50	4	—	4.10	4.22	4.35	4.49	4.80
CBN-LBF 2008-060		6				50	4	—	6.16	6.35	6.55	6.77	7.25
CBN-LBF 2010-015	R0.5	1.5	0.7	0.98	15°	50	4	—	1.53	1.57	1.61	1.66	1.76
CBN-LBF 2010-020		2				50	4	—	2.05	2.11	2.17	2.23	2.38
CBN-LBF 2010-025		2.5				50	4	—	2.56	2.63	2.70	2.78	2.96
CBN-LBF 2010-040		4				50	4	—	4.11	4.23	4.35	4.49	4.79
CBN-LBF 2010-050		5				50	4	—	5.14	5.29	5.45	5.63	6.02
CBN-LBF 2010-060		6				50	4	—	6.17	6.36	6.55	6.77	7.24
CBN-LBF 2010-080		8				50	4	—	8.23	8.49	8.76	9.04	9.69
CBN-LBF 2010-100		10				50	4	—	10.30	10.62	10.96	11.32	12.13
CBN-LBF 2012-024	R0.6	2.4	0.8	1.18	15°	50	4	—	2.46	2.53	2.60	2.68	2.85
CBN-LBF 2012-030		3				50	4	—	3.08	3.17	3.27	3.37	3.60
CBN-LBF 2012-060		6				50	4	—	6.18	6.38	6.59	6.82	7.33
CBN-LBF 2015-030	R0.75	3	0.9	1.46	15°	50	4	—	3.12	3.20	3.29	3.39	3.61
CBN-LBF 2015-040		4				50	4	—	4.15	4.27	4.40	4.54	4.85
CBN-LBF 2015-060		6				50	4	—	6.22	6.41	6.62	6.84	7.34
CBN-LBF 2015-080		8				50	4	—	8.28	8.55	8.83	9.14	9.83
CBN-LBF 2015-100		10				50	4	—	10.35	10.69	11.05	11.44	12.31
CBN-LBF 2015-120		12				50	4	—	12.42	12.83	13.27	13.74	14.80
CBN-LBF 2015-150		15				50	4	—	15.52	16.04	16.59	17.19	18.53
CBN-LBF 2020-040	R1	4	1.2	1.97	15°	50	4	—	4.12	4.23	4.35	4.48	4.77
CBN-LBF 2020-050		5				50	4	—	5.16	5.30	5.46	5.63	6.01
CBN-LBF 2020-060		6				50	4	—	6.19	6.37	6.57	6.78	7.26
CBN-LBF 2020-080		8				50	4	—	8.26	8.51	8.79	9.08	9.74
CBN-LBF 2020-100		10				50	4	—	10.32	10.65	11.00	11.38	12.23
CBN-LBF 2020-120		12				50	4	—	12.39	12.79	13.22	13.68	14.72
CBN-LBF 2020-140		14				50	4	—	14.46	14.93	15.44	15.98	17.20
CBN-LBF 2020-160		16				50	4	—	16.53	17.07	17.65	18.28	19.69
CBN-LBF 2020-180		18				50	4	—	18.59	19.21	19.87	20.58	No Interference
CBN-LBF 2020-200		20				50	4	—	20.66	21.35	22.09	22.88	No Interference
CBN-LBF 2030-040	R1.5	4	1.8	2.94	15°	50	6	—	4.16	4.26	4.36	4.47	4.72
CBN-LBF 2030-060		6				50	6	—	6.23	6.40	6.58	6.77	7.21
CBN-LBF 2030-080		8				50	6	—	8.30	8.54	8.79	9.07	9.70
CBN-LBF 2040-060	R2	6	2.4	3.95	15°	50	6	—	6.21	6.36	6.52	6.70	7.09
CBN-LBF 2040-080		8				50	6	—	8.28	8.50	8.74	9.00	9.57
CBN-LBF 2040-100		10				50	6	—	10.35	10.64	10.96	11.30	12.06


Milling Conditions for CBN-LBF (2 Flutes)

WORK MATERIAL			HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	R0.05	0.3	30,000	200	0.005	0.005	30,000	150	0.003	0.005	30,000	100	0.002	0.005
2001-005		0.5	30,000	150	0.003	0.005	30,000	120	0.003	0.005	30,000	90	0.002	0.005
20015-0045	R0.075	0.45	30,000	350	0.005	0.005	30,000	270	0.004	0.005	30,000	200	0.003	0.005
20015-0075		0.75	30,000	220	0.004	0.005	30,000	160	0.004	0.005	30,000	100	0.003	0.005
2002-003	R0.1	0.3	30,000	660	0.005	0.005	30,000	550	0.005	0.005	30,000	440	0.005	0.005
2002-006		0.6	30,000	500	0.005	0.005	30,000	400	0.005	0.005	30,000	300	0.005	0.005
2002-010		1	30,000	290	0.005	0.005	30,000	200	0.005	0.005	30,000	120	0.005	0.005
2003-005	R0.15	0.5	30,000	1,000	0.005	0.005	30,000	950	0.005	0.005	30,000	620	0.005	0.005
2003-0075		0.75	30,000	850	0.005	0.005	30,000	800	0.005	0.005	30,000	500	0.005	0.005
2003-009		0.9	30,000	760	0.005	0.005	30,000	600	0.005	0.005	30,000	430	0.005	0.005
2003-015		1.5	30,000	460	0.005	0.005	30,000	320	0.005	0.005	30,000	190	0.005	0.005
2004-005	R0.2	0.5	30,000	1,580	0.005	0.01	30,000	1,330	0.005	0.01	30,000	860	0.005	0.005
2004-0075		0.75	30,000	1,390	0.005	0.01	30,000	1,140	0.005	0.01	30,000	800	0.005	0.005
2004-010		1	30,000	1,200	0.005	0.01	30,000	950	0.005	0.01	30,000	730	0.005	0.005
2004-012		1.2	30,000	1,050	0.005	0.01	30,000	800	0.005	0.01	30,000	620	0.005	0.005
2004-020		2	30,000	600	0.005	0.01	30,000	450	0.005	0.01	30,000	330	0.005	0.005
2004-030		3	20,000	400	0.005	0.005	20,000	300	0.005	0.005	20,000	190	0.003	0.003
2005-010	R0.25	1	30,000	1,600	0.01	0.01	30,000	1,300	0.01	0.01	30,000	920	0.005	0.01
2005-015		1.5	30,000	1,300	0.01	0.01	30,000	1,000	0.01	0.01	30,000	760	0.005	0.01
2005-025		2.5	30,000	800	0.01	0.01	30,000	700	0.01	0.01	30,000	480	0.005	0.01
2005-035		3.5	22,000	550	0.01	0.01	22,000	500	0.005	0.01	22,000	330	0.005	0.005
2006-010	R0.3	1	30,000	2,400	0.02	0.03	30,000	1,900	0.02	0.03	30,000	1,080	0.01	0.02
2006-015		1.5	30,000	2,000	0.02	0.03	30,000	1,500	0.02	0.03	30,000	1,000	0.01	0.02
2006-030		3	26,000	1,100	0.02	0.02	26,000	900	0.02	0.02	26,000	760	0.01	0.01
2006-040		4	22,000	750	0.01	0.02	22,000	650	0.01	0.02	22,000	570	0.005	0.01
2006-050		5	18,000	550	0.01	0.01	18,000	450	0.01	0.01	18,000	410	0.005	0.005
2006-060		6	12,000	350	0.005	0.01	12,000	290	0.005	0.005	12,000	260	0.003	0.003
2008-020	R0.4	2	30,000	2,500	0.02	0.03	30,000	2,100	0.02	0.03	30,000	1,700	0.01	0.02
2008-040		4	25,000	1,500	0.02	0.02	25,000	1,350	0.02	0.02	25,000	1,200	0.01	0.01
2008-060		6	18,000	1,000	0.01	0.02	18,000	800	0.01	0.02	18,000	750	0.005	0.01
2010-015	R0.5	1.5	30,000	3,700	0.04	0.05	30,000	3,400	0.03	0.04	30,000	2,300	0.025	0.03
2010-020		2	30,000	3,500	0.04	0.04	30,000	3,200	0.03	0.04	30,000	2,200	0.02	0.03
2010-025		2.5	30,000	3,300	0.04	0.04	30,000	3,000	0.03	0.04	30,000	2,100	0.02	0.03
2010-040		4	27,000	2,700	0.03	0.04	27,000	2,300	0.03	0.03	27,000	1,800	0.02	0.02
2010-050		5	23,000	2,200	0.03	0.03	23,000	1,800	0.03	0.03	23,000	1,450	0.02	0.02
2010-060		6	20,000	1,900	0.02	0.03	20,000	1,500	0.02	0.03	20,000	1,200	0.01	0.02
2010-080		8	14,000	1,300	0.01	0.02	14,000	1,000	0.01	0.02	14,000	800	0.01	0.01
2010-100		10	9,000	800	0.01	0.02	9,000	600	0.01	0.01	9,000	490	0.005	0.005

Milling Conditions for CBN-LBF (2 Flutes)

WORK MATERIAL			HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2012-024	**R0.6**	2.4	30,000	3,000	0.05	0.05	29,500	2,550	0.035	0.04	29,000	2,100	0.02	0.03
2012-030		3	30,000	2,750	0.05	0.05	29,000	2,350	0.035	0.035	28,000	2,000	0.02	0.025
2012-060		6	23,500	2,000	0.03	0.03	23,500	1,650	0.025	0.025	23,500	1,300	0.02	0.02
2015-030	**R0.75**	3	30,000	3,000	0.07	0.07	28,500	2,550	0.045	0.05	27,000	2,100	0.02	0.03
2015-040		4	28,500	2,750	0.06	0.06	27,250	2,300	0.04	0.04	26,000	1,900	0.02	0.025
2015-060		6	26,000	2,200	0.04	0.045	25,500	1,900	0.03	0.03	25,000	1,650	0.02	0.02
2015-080		8	24,000	2,000	0.025	0.03	24,000	1,700	0.02	0.025	24,000	1,400	0.015	0.02
2015-100		10	16,000	1,300	0.02	0.02	16,000	1,100	0.015	0.018	16,000	900	0.01	0.015
2015-120		12	12,000	1,000	0.016	0.018	12,000	880	0.012	0.016	12,000	730	0.008	0.012
2015-150		15	6,000	600	0.01	0.015	6,000	550	0.008	0.012	6,000	490	0.005	0.008
2020-040	**R1**	4	30,000	3,000	0.1	0.1	27,000	2,550	0.06	0.065	24,000	2,100	0.02	0.03
2020-050		5	28,000	2,750	0.08	0.08	26,000	2,300	0.05	0.05	24,000	1,900	0.02	0.025
2020-060		6	27,000	2,500	0.05	0.06	25,500	2,050	0.035	0.04	24,000	1,650	0.015	0.025
2020-080		8	25,000	2,200	0.035	0.045	24,500	1,800	0.025	0.03	24,000	1,400	0.015	0.02
2020-100		10	24,000	2,000	0.02	0.03	24,000	1,600	0.015	0.025	24,000	1,200	0.01	0.02
2020-120		12	19,500	1,600	0.017	0.025	19,500	1,300	0.013	0.021	19,500	1,000	0.009	0.017
2020-140		14	15,000	1,250	0.015	0.02	15,000	1,050	0.012	0.018	15,000	850	0.008	0.015
2020-160		16	11,500	990	0.013	0.017	11,500	860	0.011	0.015	11,500	730	0.007	0.013
2020-180		18	8,000	740	0.012	0.013	8,000	670	0.009	0.013	8,000	610	0.006	0.012
2020-200		20	4,500	490	0.01	0.01	4,500	490	0.008	0.01	4,500	490	0.005	0.01
2030-040	**R1.5**	4	20,000	2,500	0.1	0.15	18,000	2,200	0.06	0.09	16,000	1,900	0.04	0.06
2030-060		6	20,000	2,500	0.1	0.15	18,000	2,200	0.06	0.09	16,000	1,900	0.04	0.06
2030-080		8	18,000	2,200	0.08	0.12	17,000	2,000	0.05	0.075	16,000	1,650	0.04	0.05
2040-060	**R2**	6	17,000	2,500	0.12	0.18	15,000	2,200	0.08	0.12	13,000	1,900	0.05	0.08
2040-080		8	17,000	2,500	0.12	0.18	15,000	2,200	0.08	0.12	13,000	1,900	0.05	0.08
2040-100		10	16,000	2,200	0.1	0.15	14,000	2,000	0.06	0.09	13,000	1,650	0.05	0.08

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Recommend oil mist to avoid tool damage.



CBN-LBF4000 NEW



Released November 2024

CBN 4 Flute Long Neck Ball End Mills for Finishing, High Efficiency and Long Tool Life

R0.5～R1

CBN | 30° | R ±0.003 | Shank Dia 0/-0.004 | Back Taper Geometry

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	●	●										

Label Sample




#001 φD1.999 R+0.002/-0.001

Diameter and Ball Radius accuracy measurments are printed on the label to support High Precision milling.

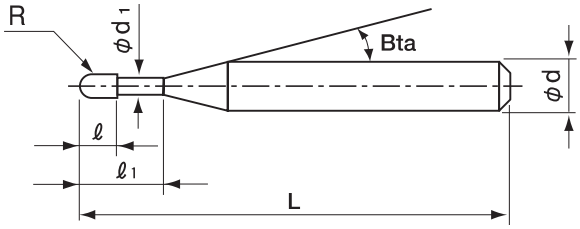

The shank taper angle shown is not an exact value.



Total 19 models


Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
CBN-LBF 4010-015	R0.5	1.5	0.7	0.98	15°	50	4	—	1.53	1.57	1.61	1.66	1.76
CBN-LBF 4010-020		2				50	4	—	2.05	2.11	2.17	2.23	2.38
CBN-LBF 4010-025		2.5				50	4	—	2.57	2.64	2.72	2.81	3.00
CBN-LBF 4010-040		4				50	4	—	4.12	4.25	4.38	4.53	4.87
CBN-LBF 4010-050		5				50	4	—	5.15	5.32	5.49	5.68	6.11
CBN-LBF 4010-060		6				50	4	—	6.19	6.39	6.60	6.83	7.35
CBN-LBF 4010-080		8				50	4	—	8.25	8.53	8.82	9.13	9.84
CBN-LBF 4015-030	R0.75	3	0.9	1.46	15°	50	4	—	3.12	3.20	3.29	3.39	3.61
CBN-LBF 4015-040		4				50	4	—	4.15	4.27	4.40	4.54	4.85
CBN-LBF 4015-060		6				50	4	—	6.22	6.41	6.62	6.84	7.34
CBN-LBF 4015-080		8				50	4	—	8.28	8.55	8.83	9.14	9.83
CBN-LBF 4015-100		10				50	4	—	10.35	10.69	11.05	11.44	12.31
CBN-LBF 4020-040	R1	4	1.2	1.97	15°	50	4	—	4.12	4.23	4.35	4.48	4.77
CBN-LBF 4020-050		5				50	4	—	5.16	5.30	5.46	5.63	6.01
CBN-LBF 4020-060		6				50	4	—	6.19	6.37	6.57	6.78	7.26
CBN-LBF 4020-080		8				50	4	—	8.26	8.51	8.79	9.08	9.74
CBN-LBF 4020-100		10				50	4	—	10.32	10.65	11.00	11.38	12.23
CBN-LBF 4020-120		12				50	4	—	12.39	12.79	13.22	13.68	14.72
CBN-LBF 4020-140		14				50	4	—	14.46	14.93	15.44	15.98	17.20

Milling Conditions for CBN-LBF (4 Flutes)

WORK MATERIAL			HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-015		1.5	30,000	4,000	0.04	0.07	30,000	4,000	0.03	0.055	30,000	3,450	0.025	0.04
4010-020		2	30,000	4,000	0.04	0.055	30,000	4,000	0.03	0.055	30,000	3,300	0.02	0.04
4010-025		2.5	30,000	4,000	0.04	0.055	30,000	4,000	0.03	0.055	30,000	3,150	0.02	0.04
4010-040	**R0.5**	4	27,000	4,000	0.03	0.055	27,000	3,450	0.03	0.04	27,000	2,700	0.02	0.03
4010-050		5	23,000	3,300	0.03	0.04	23,000	2,700	0.03	0.04	23,000	2,200	0.02	0.03
4010-060		6	20,000	2,850	0.02	0.04	20,000	2,250	0.02	0.04	20,000	1,800	0.01	0.03
4010-080		8	14,000	1,950	0.01	0.03	14,000	1,500	0.01	0.03	14,000	1,200	0.01	0.015
4015-030		3	30,000	4,000	0.07	0.1	28,500	3,850	0.045	0.07	27,000	3,150	0.02	0.04
4015-040		4	28,500	4,000	0.06	0.085	27,250	3,450	0.04	0.055	26,000	2,850	0.02	0.035
4015-060	**R0.75**	6	26,000	3,300	0.04	0.065	25,500	2,850	0.03	0.04	25,000	2,500	0.02	0.03
4015-080		8	24,000	3,000	0.025	0.04	24,000	2,550	0.02	0.035	24,000	2,100	0.015	0.03
4015-100		10	16,000	1,950	0.02	0.03	16,000	1,650	0.015	0.025	16,000	1,350	0.01	0.02
4020-040		4	30,000	4,000	0.1	0.14	27,000	3,850	0.06	0.09	24,000	3,150	0.02	0.04
4020-050		5	28,000	4,000	0.08	0.11	26,000	3,450	0.05	0.07	24,000	2,850	0.02	0.035
4020-060		6	27,000	3,750	0.05	0.085	25,500	3,100	0.035	0.055	24,000	2,500	0.015	0.035
4020-080	**R1**	8	25,000	3,300	0.035	0.065	24,500	2,700	0.025	0.04	24,000	2,100	0.015	0.03
4020-100		10	24,000	3,000	0.02	0.04	24,000	2,400	0.015	0.035	24,000	1,800	0.01	0.03
4020-120		12	19,500	2,400	0.017	0.035	19,500	1,950	0.013	0.03	19,500	1,500	0.009	0.025
4020-140		14	15,000	1,900	0.015	0.03	15,000	1,600	0.012	0.025	15,000	1,300	0.008	0.02

Note:
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
・Recommend oil mist to avoid tool damage.



Wide chip pocket

Higher efficiency and longer tool life due to the multi-flute design and optimized tool geometry.
Wide chip pocket improves chip evacuation.



HAP10 (64HRC) 98m milling distance Wear of ball cutting edge

4 Flutes





2 Flutes



Tip groove effect

Our unique tip design offers a smooth surface quality even when milling with the tip of the tool.




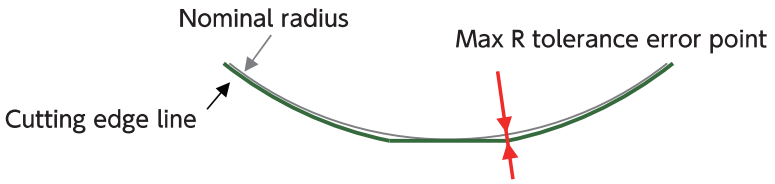


Radius accuracy +0.003mm or below even at the largest radius tolerance error point

Bottom finishing 4 flutes & 2 flutes Surface roughness comparison HAP10 (64HRC)

R1 × EL4

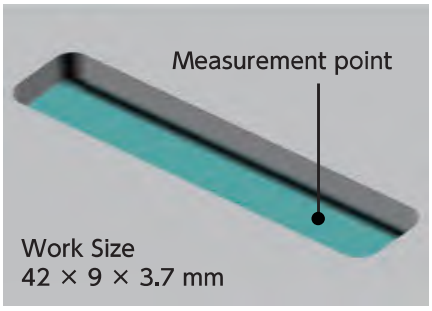

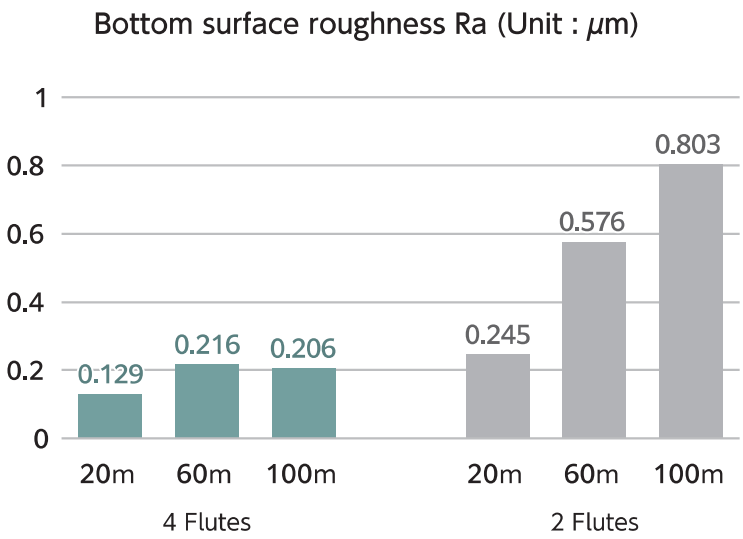

Spindle Speed	24,000 min^{-1}
Feed Rate	4 Flutes : 2,500 mm/min
	2 Flutes : 1,250 mm/min
Allowance	0.02 mm
Cusp height	0.0001 mm
Coolant	Oil mist


Excellent surface quality due to the tip groove design


Seamless curved cutting edge

Best performance from the ball tip due to the curved cutting edge geometry.
Reduces the damage on the cutting edge compared to straight flute,
which improves finishing dimensional accuracy.



Seamless 30° curved cutting edge
from the tip to the peripheral cutting edge

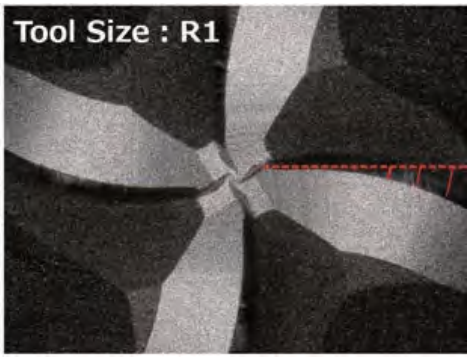


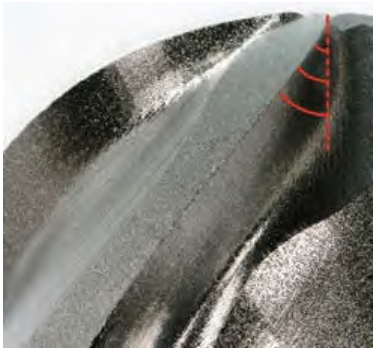


The curved cutting geometry starts from the tip area.


Pocket finishing 4 flutes (helix) & 2 flutes (straight) Dimensional error comparison
R1 × EL4

HAP10 (64HRC)

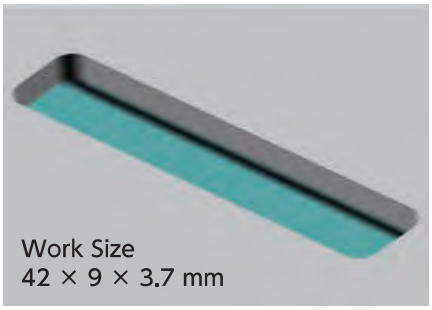

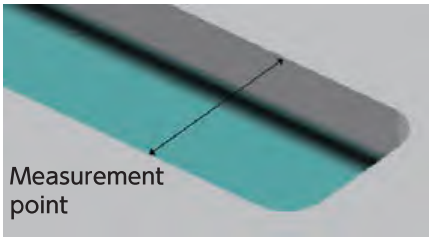

Pocket dimensional error (Unit : mm)

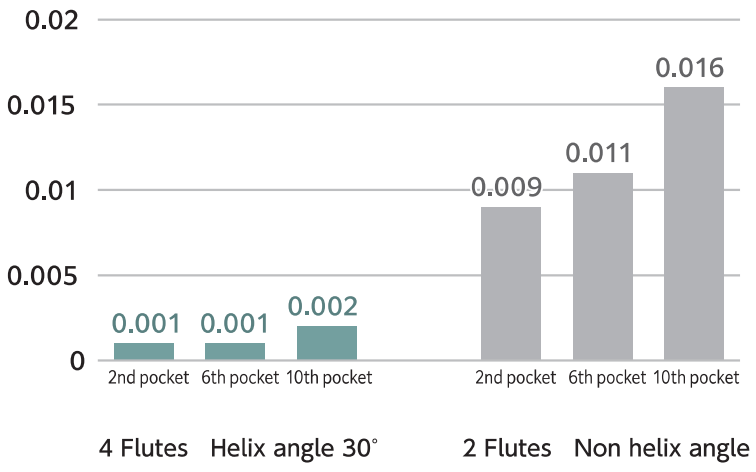

Spindle Speed	24,000 min^{-1}
Feed Rate	4 Flutes : 2,500 mm/min
	2 Flutes : 1,250 mm/min
Allowance	0.02 mm
Cusp height	0.0001 mm
Coolant	Oil mist

Pocket surface finishing x 10 surfaces
Milling time per surface 2 flutes = 20 min,
4 flutes = 12 min

Curved cutting edge reduces cutting resistance,
which enables higher precision milling.

CBN-RSF



CBN 1 Flute Long Neck Radius End Mills for Super Finishing


φ0.2～φ2

CBN | 0° | R | R ±0.002 (CR≦0.02) | R ±0.003 (CR≧0.05) | Shank Dia 0/-0.004 | Back Taper Geometry

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
					●	●											

Label Sample




#001 φD0.998 R+0.001/0.000

Diameter and Corner R accuracy measurements are printed on the label to support High Precision milling.

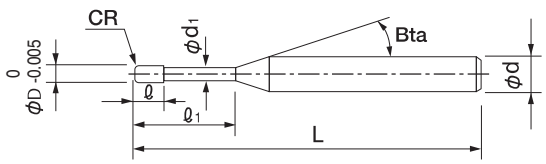


The shank taper angle shown is not an exact value.



Features

The tool relief rubs against the milling surface to create a burnished finish.
1 flute design minimizes runout to ensure consistent cutting depth and prevents chip biting.



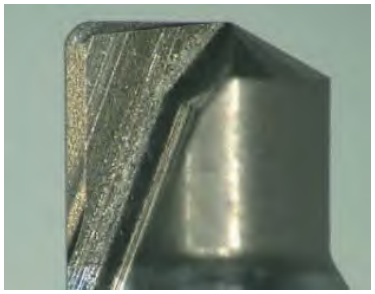

The cutting edge at the tip point provides a burnishing effect. (ELMAX 60HRC)

The unique design on the tool relief offers a shiny surface finish.

1 Flute CBN-RSF



2 Flutes




Inclined pocket milling
1 Flute CBN-RSF φ2 × CR0.1 × EL4

ELMAX (60HRC)



CBN-LRF (Conventional) CBN-RSF

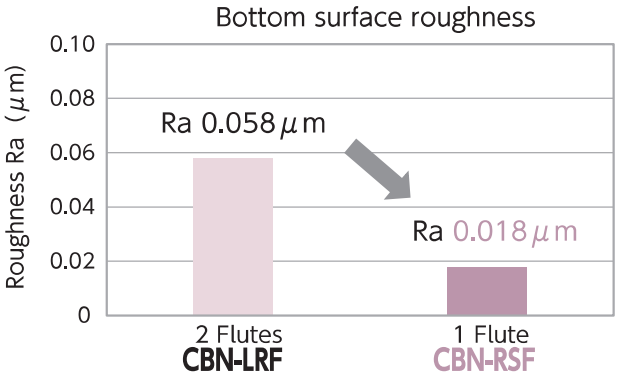


Process	Finishing
Milling Method	Contour Milling
Spindle Speed	30,000 min^{-1}
Feed Rate	375 mm/min
Finishing Allowance	0.01 mm/min
Cusp Height at Inclined Surface	0.00003 mm
Cycle Time	61 min

Improved quality for milling on the bottom, inclined and vertical surfaces as compared to conventional CBN-LRF series.


Milled Size : 9 × 13 × Depth 1 mm
Coolant : Oil Mist

Pocket milling
1 Flute CBN-RSF φ2 × CR0.1 × EL4

ELMAX (60HRC)

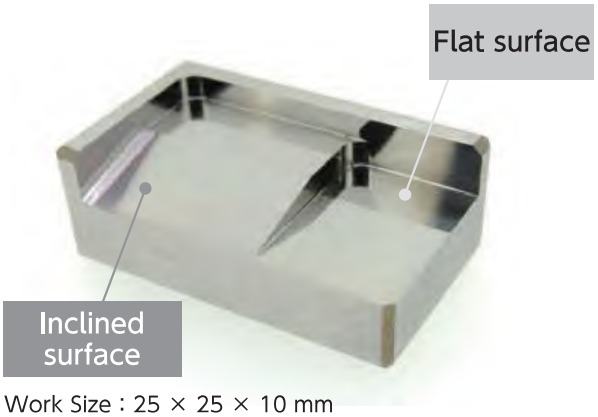

Work Size : 25 × 25 × 10 mm
Coolant : Oil Mist

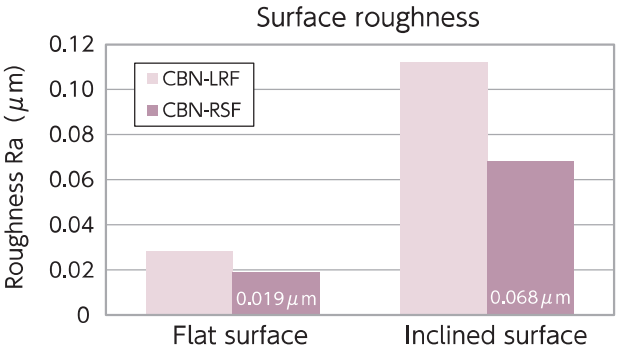

1 flute CBN-RSF gives excellent surface roughness


No.	Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m:s)
1	Roughing	HGLB R1 × EL4	14,000	2,100	0.15	0.5	0.05	0:10:17
2	Semi-finishing	HLRS φ2 × CR0.1 × EL4	11,500	860	0.031	0.36	0.05	1:11:50
					0.02	0.36	0.02	
					0.005	0.1	0.01	
3	Finishing	CBN-RSF φ2 × CR0.1 × EL4	30,000	375	0.01	0.1	0	2:25:01
							Total	3:47:08

Total 42 models　　*Shank taper angle Bta is only for reference.　　Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
CBN-RSF 1002-002003	0.2	R0.02	0.3	0.08	0.19	15°	50	4	—	0.30	0.30	0.30	0.31	0.34
CBN-RSF 1002-002005			0.5				50	4	—	0.50	0.50	0.52	0.54	0.59
CBN-RSF 1002-005003		R0.05	0.3				50	4	—	0.30	0.30	0.30	0.31	0.33
CBN-RSF 1002-005005			0.5				50	4	—	0.50	0.50	0.52	0.54	0.58
CBN-RSF 1003-002005	0.3	R0.02	0.5	0.13	0.28	15°	50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-RSF 1003-002010			1				50	4	—	1.03	1.07	1.11	1.15	1.25
CBN-RSF 1003-005005		R0.05	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-RSF 1003-005010			1				50	4	—	1.03	1.07	1.10	1.15	1.24
CBN-RSF 1004-002005	0.4	R0.02	0.5	0.24	0.38	15°	50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-RSF 1004-002015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.86
CBN-RSF 1004-005005		R0.05	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-RSF 1004-005015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.85
CBN-RSF 1005-002005	0.5	R0.02	0.5	0.3	0.48	15°	50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-RSF 1005-002015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.86
CBN-RSF 1005-005005		R0.05	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-RSF 1005-005015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.85
CBN-RSF 1006-002010	0.6	R0.02	1	0.3	0.58	15°	50	4	—	1.03	1.07	1.11	1.15	1.25
CBN-RSF 1006-002015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.86
CBN-RSF 1006-005010		R0.05	1				50	4	—	1.03	1.07	1.10	1.15	1.24
CBN-RSF 1006-005015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.85
CBN-RSF 1008-002010	0.8	R0.02	1	0.56	0.78	15°	50	4	—	1.03	1.07	1.11	1.15	1.25
CBN-RSF 1008-002020			2				50	4	—	2.05	2.13	2.20	2.29	2.48
CBN-RSF 1008-005010		R0.05	1				50	4	—	1.03	1.07	1.10	1.15	1.24
CBN-RSF 1008-005020			2				50	4	—	2.05	2.12	2.20	2.28	2.47
CBN-RSF 1010-002010	1	R0.02	1	0.7	0.98	15°	50	4	—	1.03	1.07	1.11	1.15	1.25
CBN-RSF 1010-002020			2				50	4	—	2.07	2.14	2.22	2.30	2.49
CBN-RSF 1010-002030			3				50	4	—	3.10	3.21	3.33	3.45	3.73
CBN-RSF 1010-005010		R0.05	1				50	4	—	1.03	1.07	1.11	1.15	1.24
CBN-RSF 1010-005020			2				50	4	—	2.06	2.14	2.21	2.30	2.48
CBN-RSF 1010-005030			3				50	4	—	3.10	3.21	3.32	3.45	3.73
CBN-RSF 1010-010010		R0.1	1				50	4	—	1.03	1.06	1.10	1.14	1.23
CBN-RSF 1010-010020			2				50	4	—	2.06	2.13	2.21	2.29	2.47
CBN-RSF 1010-010030			3				50	4	—	3.10	3.20	3.32	3.44	3.72
CBN-RSF 1015-002030	1.5	R0.02	3	1	1.46	15°	50	4	—	3.14	3.25	3.37	3.49	3.78
CBN-RSF 1015-005030		R0.05	3				50	4	—	3.14	3.25	3.36	3.49	3.77
CBN-RSF 1015-010030		R0.1	3				50	4	—	3.14	3.24	3.36	3.48	3.76
CBN-RSF 1020-002040	2	R0.02	4	1.2	1.97	15°	50	4	—	4.15	4.30	4.45	4.62	5.00
CBN-RSF 1020-002060			6				50	4	—	6.22	6.44	6.67	6.92	7.49
CBN-RSF 1020-005040		R0.05	4				50	4	—	4.15	4.30	4.45	4.62	4.99
CBN-RSF 1020-005060			6				50	4	—	6.22	6.44	6.67	6.92	7.48
CBN-RSF 1020-010040		R0.1	4				50	4	—	4.15	4.29	4.45	4.61	4.98
CBN-RSF 1020-010060			6				50	4	—	6.22	6.43	6.66	6.91	7.47

Milling Conditions for CBN-RSF

WORK MATERIAL				HARDENED STEELS ELMAX (58~62HRC)				HARDENED STEELS HAP10 (62~65HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
1002-002003	**0.2**	R0.02	0.3	60,000	80 MAX	0.003	0.01	60,000	20 MAX	0.003	0.005
1002-002005			0.5	60,000	80 MAX	0.003	0.01	60,000	20 MAX	0.003	0.005
1002-005003		R0.05	0.3	60,000	80 MAX	0.003	0.01	60,000	20 MAX	0.003	0.005
1002-005005			0.5	60,000	80 MAX	0.003	0.01	60,000	20 MAX	0.003	0.005
1003-002005	**0.3**	R0.02	0.5	40,000	80 MAX	0.004	0.015	40,000	20 MAX	0.004	0.005
1003-002010			1	40,000	80 MAX	0.004	0.015	40,000	20 MAX	0.004	0.005
1003-005005		R0.05	0.5	40,000	80 MAX	0.004	0.015	40,000	20 MAX	0.004	0.005
1003-005010			1	40,000	80 MAX	0.004	0.015	40,000	20 MAX	0.004	0.005
1004-002005	**0.4**	R0.02	0.5	30,000	80 MAX	0.005	0.02	30,000	20 MAX	0.005	0.006
1004-002015			1.5	30,000	80 MAX	0.005	0.02	30,000	20 MAX	0.005	0.006
1004-005005		R0.05	0.5	30,000	100 MAX	0.005	0.02	30,000	60 MAX	0.005	0.02
1004-005015			1.5	30,000	100 MAX	0.005	0.02	30,000	60 MAX	0.005	0.02
1005-002005	**0.5**	R0.02	0.5	30,000	90 MAX	0.005	0.025	30,000	25 MAX	0.005	0.008
1005-002015			1.5	30,000	90 MAX	0.005	0.025	30,000	25 MAX	0.005	0.008
1005-005005		R0.05	0.5	30,000	100 MAX	0.01	0.025	30,000	60 MAX	0.01	0.025
1005-005015			1.5	30,000	100 MAX	0.01	0.025	30,000	60 MAX	0.01	0.025
1006-002010	**0.6**	R0.02	1	30,000	100 MAX	0.005	0.03	30,000	30 MAX	0.005	0.01
1006-002015			1.5	30,000	100 MAX	0.005	0.03	30,000	30 MAX	0.005	0.01
1006-005010		R0.05	1	30,000	110 MAX	0.01	0.03	30,000	65 MAX	0.01	0.03
1006-005015			1.5	30,000	110 MAX	0.01	0.03	30,000	65 MAX	0.01	0.03
1008-002010	**0.8**	R0.02	1	30,000	125 MAX	0.005	0.04	30,000	40 MAX	0.005	0.012
1008-002020			2	30,000	125 MAX	0.005	0.04	30,000	40 MAX	0.005	0.012
1008-005010		R0.05	1	30,000	140 MAX	0.01	0.04	30,000	85 MAX	0.01	0.04
1008-005020			2	30,000	140 MAX	0.01	0.04	30,000	85 MAX	0.01	0.04
1010-002010	**1**	R0.02	1	30,000	150 MAX	0.005	0.05	30,000	50 MAX	0.005	0.015
1010-002020			2	30,000	150 MAX	0.005	0.05	30,000	50 MAX	0.005	0.015
1010-002030			3	30,000	150 MAX	0.005	0.05	30,000	50 MAX	0.005	0.015
1010-005010		R0.05	1	30,000	165 MAX	0.01	0.05	30,000	100 MAX	0.01	0.04
1010-005020			2	30,000	165 MAX	0.01	0.05	30,000	100 MAX	0.01	0.04
1010-005030			3	30,000	165 MAX	0.01	0.05	30,000	100 MAX	0.01	0.04
1010-010010		R0.1	1	30,000	185 MAX	0.01	0.05	30,000	150 MAX	0.01	0.05
1010-010020			2	30,000	185 MAX	0.01	0.05	30,000	150 MAX	0.01	0.05
1010-010030			3	30,000	185 MAX	0.01	0.05	30,000	150 MAX	0.01	0.05
1015-002030	**1.5**	R0.02	3	30,000	225 MAX	0.005	0.075	30,000	75 MAX	0.005	0.025
1015-005030		R0.05	3	30,000	250 MAX	0.01	0.075	30,000	150 MAX	0.01	0.05
1015-010030		R0.1	3	30,000	280 MAX	0.01	0.075	30,000	225 MAX	0.01	0.075
1020-002040	**2**	R0.02	4	30,000	300 MAX	0.005	0.1	30,000	100 MAX	0.005	0.03
1020-002060			6	30,000	300 MAX	0.005	0.1	30,000	100 MAX	0.005	0.03
1020-005040		R0.05	4	30,000	330 MAX	0.01	0.1	30,000	200 MAX	0.01	0.07
1020-005060			6	30,000	330 MAX	0.01	0.1	30,000	200 MAX	0.01	0.07
1020-010040		R0.1	4	30,000	375 MAX	0.01	0.1	30,000	300 MAX	0.01	0.1
1020-010060			6	30,000	375 MAX	0.01	0.1	30,000	300 MAX	0.01	0.1



Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Recommend oil mist to avoid tool damage.

CBN-LRF2000



CBN 2 Flute Long Neck Radius End Mills for Finishing and Long Tool Life


φ0.1～φ3

CBN | 0° | R | R ±0.002 (CR≦0.03) | R ±0.003 (CR≧0.05) | Shank Dia 0/-0.004 | Back Taper Geometry

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	●	●										

Label Sample




#001 φD0.997 R+0.001/0.000

Diameter and Corner R accuracy measurements are printed on the label to support High Precision milling.

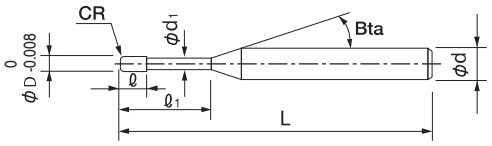

The shank taper angle shown is not an exact value.



Features

Various lineup from φ0.1 to φ3






CBN-LRF2000/4000 Common features


Feature 1 High rigidity cutting edge

Super negative rake angle from the cutting edge at the tip point to peripheral cutting edge. Less damage when milling hard materials.




Feature 2 Sharp cutting edge

The cutting edge is outstandingly sharp even with the super negative rake angle.

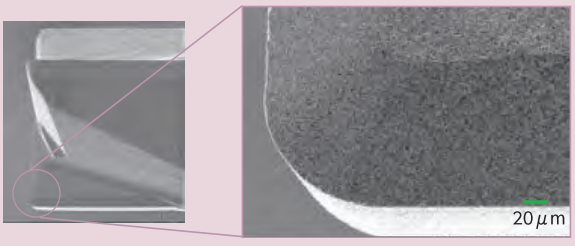

Fuel cell separator mold
2 Flutes CBN-LRF φ1 × CR0.1 × EL1

SKH51 (63HRC)

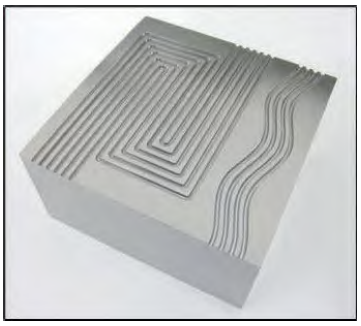

Size : 80 × 80 × 40 mm

After finishing of crank shape (Milling time 10h 23min)



After finishing of wave shape (Milling time 2h 58min)




CBN-LRF 2000



Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Allowance (mm)	a_p (mm)	a_e (mm)	Coolant	Cycle Time (h:m:s)
Roughing	HLRS φ1 × CR0.3 × EL2	10,900	710	–	0.03	0.27	Air Blow	2:43:45
Semi-finishing	HLRS φ1 × CR0.2 × EL2	10,900	710	0.015	0.03	0.1		3:07:09
Finishing	**CBN-LRF** φ1 × CR0.1 × EL1	30,000	525	0.005	0.01	0.1	Oil Mist	13:21:57
							Total	19:12:51

CBN Flat surface finishing
2 Flutes CBN-LRF φ2 × CR0.1 × EL1

STAVAX (52HRC)

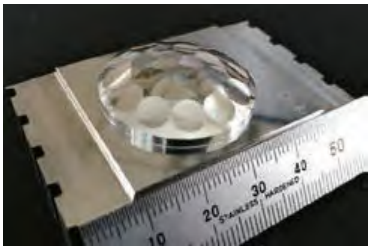

Size : 60 × 35 × 20 mm



Flat surface milling

Surface roughness Ra 0.03 μ m

CBN-LRF 2000







Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (h:m:s)
Roughing	HRRS φ6 × CR1	6,000	4,000	0.3	2.7	0:03:00
Semi-finishing	HRRS φ6 × CR1	15,000	7,000	0.03	0.03	0:04:00
Semi-finishing	HSB R1.5	30,000	1,200	0.05	0.05	0:13:00
Semi-finishing	HSB R1	30,000	1,000	0.01	0.01	1:20:00
Finishing	CBN-LBSF R1	30,000	1,000	0.003	0.003	4:30:00
Semi-finishing	HLRS φ2 × CR0.1 × EL4	20,000	2,000	0.04	0.2	0:05:00
Semi-finishing	**CBN-LRF** φ2 × CR0.1 × EL4	20,000	1,200	0.02	0.15	0:13:00
Finishing	**CBN-LRF** φ2 × CR0.1 × EL4	25,000	1,000	0.01	0.1	0:38:00
Finishing	HSB R0.1	10,000	50	0.01	–	0:07:00
					Total	7:13:00

Pocket milling
2 Flutes　CBN-LRF　ϕ2 × CR0.02 × EL4

HAP10 (65HRC)

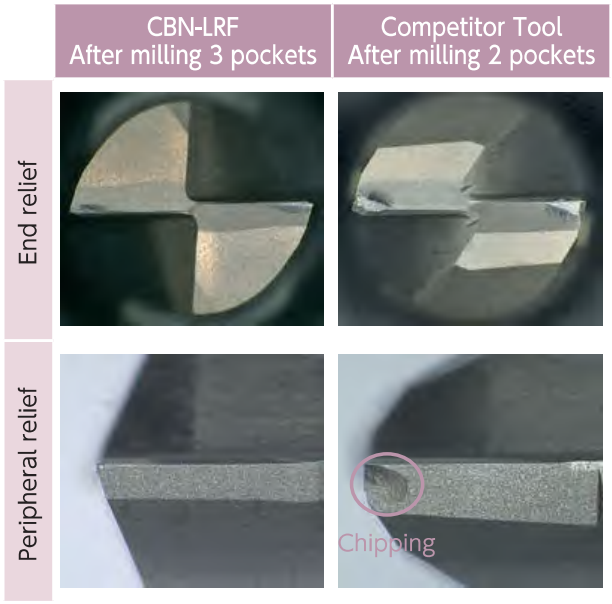

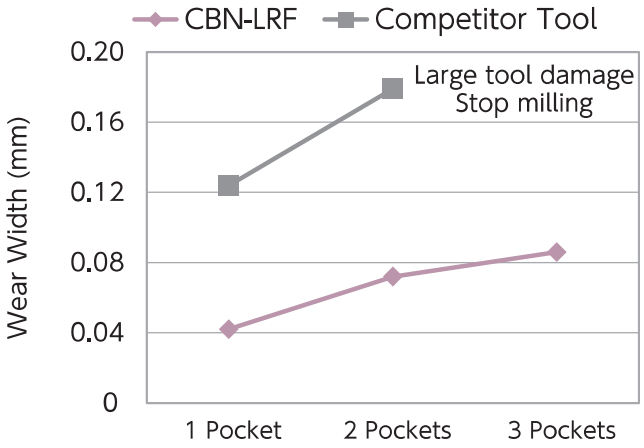


Less tool damage on 65HRC high speed steel!

Pocket Size : 15 × 15 × 0.3 mm
Coolant : Oil Mist

Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time
CBN-LRF ϕ2 × CR0.02 × EL4	16,000	530	0.005	0.4	59 min / pocket


LED mold
2 Flutes　CBN-LRF　ϕ0.4 × CR0.02 × EL1

ELMAX (62HRC)

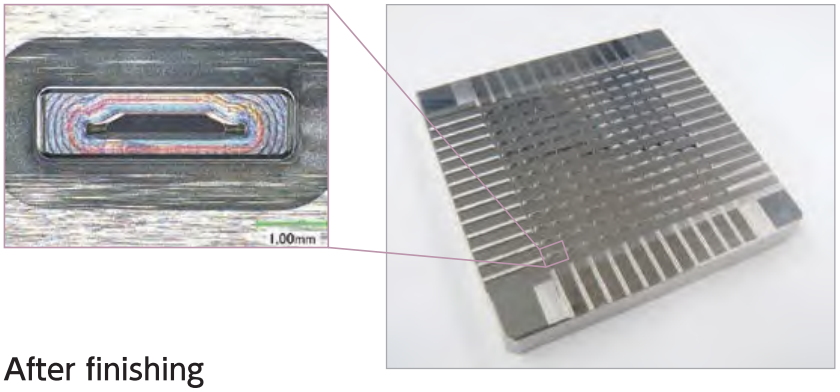

Work Size : 80 × 80 × 10 mm
Coolant : Oil Mist

After finishing

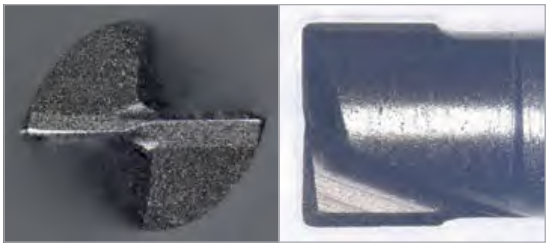

Less tool damage after 10 hours' milling!

Tool	Process	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time
CBN-LRF ϕ0.4 × CR0.02 × EL1	Finishing	38,000	600	0.01	0.01	10 h

Total 143 models　　*Shank taper angle Bta is only for reference.　　Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
CBN-LRF 2001-002002	0.1	R0.02	0.2	0.04	0.09	15°	50	4	—	0.20	0.20	0.20	0.20	0.21
CBN-LRF 2001-002003			0.3				50	4	—	0.30	0.30	0.30	0.30	0.33
CBN-LRF 2001-002005			0.5				50	4	—	0.50	0.50	0.51	0.53	0.58
CBN-LRF 2001-003002		R0.03	0.2				50	4	—	0.20	0.20	0.20	0.20	0.21
CBN-LRF 2001-003003			0.3				50	4	—	0.30	0.30	0.30	0.30	0.33
CBN-LRF 2001-003005			0.5				50	4	—	0.50	0.50	0.51	0.53	0.58
CBN-LRF 20015-002X2	0.15	R0.02	0.2	0.06	0.14	15°	50	4	—	0.20	0.20	0.20	0.20	0.21
CBN-LRF 20015-002X3			0.3				50	4	—	0.30	0.30	0.30	0.30	0.33
CBN-LRF 20015-002X5			0.5				50	4	—	0.50	0.50	0.51	0.53	0.58
CBN-LRF 20015-003X2		R0.03	0.2				50	4	—	0.20	0.20	0.20	0.20	0.21
CBN-LRF 20015-003X3			0.3				50	4	—	0.30	0.30	0.30	0.30	0.33
CBN-LRF 20015-003X5			0.5				50	4	—	0.50	0.50	0.51	0.53	0.58
CBN-LRF 2002-002005	0.2	R0.02	0.5	0.08	0.19	15°	50	4	—	0.50	0.50	0.51	0.53	0.58
CBN-LRF 2002-002X75			0.75				50	4	—	0.75	0.76	0.79	0.82	0.89
CBN-LRF 2002-002010			1				50	4	—	1.00	1.03	1.07	1.11	1.20
CBN-LRF 2002-003005		R0.03	0.5				50	4	—	0.50	0.50	0.51	0.53	0.58
CBN-LRF 2002-003X75			0.75				50	4	—	0.75	0.76	0.79	0.82	0.89
CBN-LRF 2002-003010			1				50	4	—	1.00	1.03	1.07	1.11	1.20
CBN-LRF 2002-005005		R0.05	0.5				50	4	—	0.50	0.50	0.51	0.53	0.57
CBN-LRF 2002-005X75			0.75				50	4	—	0.75	0.76	0.79	0.82	0.88
CBN-LRF 2002-005010			1				50	4	—	1.00	1.03	1.06	1.10	1.19
CBN-LRF 20025-005X5	0.25	R0.05	0.5	0.1	0.24	15°	50	4	—	0.50	0.50	0.51	0.53	0.57
CBN-LRF 20025-X5X75			0.75				50	4	—	0.75	0.76	0.79	0.82	0.88
CBN-LRF 20025-X5010			1				50	4	—	1.00	1.03	1.06	1.10	1.19
CBN-LRF 2003-001010	0.3	R0.01	1	0.13	0.28	15°	50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2003-002005		R0.02	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 2003-002X75			0.75				50	4	—	0.77	0.79	0.82	0.86	0.93
CBN-LRF 2003-002010			1				50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2003-002015			1.5				50	4	—	1.54	1.60	1.65	1.72	1.86
CBN-LRF 2003-002020			2				50	4	—	2.05	2.12	2.20	2.28	2.47
CBN-LRF 2003-003005		R0.03	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 2003-003X75			0.75				50	4	—	0.77	0.79	0.82	0.85	0.93
CBN-LRF 2003-003010			1				50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2003-003015			1.5				50	4	—	1.54	1.60	1.65	1.72	1.86
CBN-LRF 2003-003020			2				50	4	—	2.05	2.12	2.20	2.28	2.47
CBN-LRF 2003-005005		R0.05	0.5				50	4	—	0.51	0.52	0.54	0.56	0.61
CBN-LRF 2003-005X75			0.75				50	4	—	0.76	0.79	0.82	0.85	0.92
CBN-LRF 2003-005010			1				50	4	—	1.02	1.06	1.10	1.14	1.23
CBN-LRF 2003-005015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.85
CBN-LRF 2003-005020			2				50	4	—	2.05	2.12	2.20	2.28	2.46

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
CBN-LRF 2004-002005	0.4	R0.02	0.5	0.24	0.38	15°	50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 2004-002010			1				50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2004-002015			1.5				50	4	—	1.53	1.59	1.64	1.71	1.85
CBN-LRF 2004-002020			2				50	4	—	2.05	2.12	2.20	2.28	2.47
CBN-LRF 2004-003005		R0.03	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 2004-003010			1				50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2004-003015			1.5				50	4	—	1.53	1.59	1.64	1.71	1.85
CBN-LRF 2004-005005		R0.05	0.5				50	4	—	0.51	0.52	0.54	0.56	0.61
CBN-LRF 2004-005010			1				50	4	—	1.02	1.06	1.10	1.14	1.23
CBN-LRF 2004-005015			1.5				50	4	—	1.53	1.58	1.64	1.70	1.84
CBN-LRF 2004-005020			2				50	4	—	2.05	2.12	2.20	2.28	2.46
CBN-LRF 2004-005040			4				50	4	—	4.11	4.26	4.41	4.58	4.95
CBN-LRF 2004-010005		R0.1	0.5				50	4	—	0.50	0.52	0.54	0.56	0.60
CBN-LRF 2004-010010			1				50	4	—	1.02	1.06	1.09	1.13	1.22
CBN-LRF 2004-010015			1.5				50	4	—	1.53	1.58	1.64	1.70	1.83
CBN-LRF 2005-001010	0.5	R0.01	1	0.3	0.48	15°	50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2005-002005		R0.02	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 2005-002010			1				50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2005-002015			1.5				50	4	—	1.53	1.59	1.64	1.71	1.85
CBN-LRF 2005-002020			2				50	4	—	2.05	2.12	2.20	2.28	2.47
CBN-LRF 2005-003005		R0.03	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 2005-003010			1				50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2005-003015			1.5				50	4	—	1.53	1.59	1.64	1.71	1.85
CBN-LRF 2005-003020			2				50	4	—	2.05	2.12	2.20	2.28	2.47
CBN-LRF 2005-005005		R0.05	0.5				50	4	—	0.51	0.52	0.54	0.56	0.61
CBN-LRF 2005-005010			1				50	4	—	1.02	1.06	1.10	1.14	1.23
CBN-LRF 2005-005015			1.5				50	4	—	1.53	1.58	1.64	1.70	1.84
CBN-LRF 2005-005020			2				50	4	—	2.05	2.12	2.20	2.28	2.46
CBN-LRF 2005-010005		R0.1	0.5				50	4	—	0.50	0.52	0.54	0.56	0.60
CBN-LRF 2005-010010			1				50	4	—	1.02	1.06	1.09	1.13	1.22
CBN-LRF 2005-010015			1.5				50	4	—	1.53	1.58	1.64	1.70	1.83
CBN-LRF 2005-010020			2				50	4	—	2.05	2.12	2.19	2.27	2.45
CBN-LRF 2006-002005	0.6	R0.02	0.5	0.3	0.58	15°	50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 2006-002010			1				50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2006-002015			1.5				50	4	—	1.53	1.59	1.64	1.71	1.85
CBN-LRF 2006-005005		R0.05	0.5				50	4	—	0.51	0.52	0.54	0.56	0.61
CBN-LRF 2006-005010			1				50	4	—	1.02	1.06	1.10	1.14	1.23
CBN-LRF 2006-005015			1.5				50	4	—	1.53	1.58	1.64	1.70	1.84
CBN-LRF 2006-005030			3				50	4	—	3.08	3.19	3.30	3.43	3.71
CBN-LRF 2006-010005		R0.1	0.5				50	4	—	0.50	0.52	0.54	0.56	0.60
CBN-LRF 2006-010010			1				50	4	—	1.02	1.06	1.09	1.13	1.22
CBN-LRF 2006-010015			1.5				50	4	—	1.53	1.58	1.64	1.70	1.83
CBN-LRF 2008-002010	0.8	R0.02	1	0.56	0.78	15°	50	4	—	1.02	1.06	1.10	1.14	1.24
CBN-LRF 2008-002015			1.5				50	4	—	1.53	1.59	1.64	1.71	1.85
CBN-LRF 2008-002020			2				50	4	—	2.05	2.12	2.20	2.28	2.47
CBN-LRF 2008-002050			5				50	4	—	5.15	5.33	5.52	5.73	6.20
CBN-LRF 2008-005010		R0.05	1				50	4	—	1.02	1.06	1.10	1.14	1.23
CBN-LRF 2008-005015			1.5				50	4	—	1.53	1.58	1.64	1.70	1.84
CBN-LRF 2008-005020			2				50	4	—	2.05	2.12	2.20	2.28	2.46
CBN-LRF 2008-005050			5				50	4	—	5.15	5.33	5.52	5.73	6.19
CBN-LRF 2008-010010		R0.1	1				50	4	—	1.02	1.06	1.09	1.13	1.22
CBN-LRF 2008-010015			1.5				50	4	—	1.53	1.58	1.64	1.70	1.83
CBN-LRF 2008-010020			2				50	4	—	2.05	2.12	2.19	2.27	2.45
CBN-LRF 2008-010050			5				50	4	—	5.15	5.32	5.52	5.72	6.18

φ3mm Shank V Series
UDC·PCD Series
CBN Series
Square
Square
Long Neck Square
Radius
Radius
Long Neck Radius
Taper Neck Radius
Ball
Ball
Long Neck Ball
Taper Neck Ball
Taper
Barrel
Spiral V Cutter
Drill
Technical Data

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
CBN-LRF 2010-002010	1	R0.02	1	0.7	0.98	15°	50	4	—	1.03	1.06	1.10	1.15	1.24
CBN-LRF 2010-002020			2				50	4	—	2.06	2.13	2.21	2.30	2.48
CBN-LRF 2010-002030			3				50	4	—	3.09	3.20	3.32	3.45	3.73
CBN-LRF 2010-002050			5				50	4	—	5.16	5.34	5.54	5.74	6.21
CBN-LRF 2010-005010		R0.05	1				50	4	—	1.03	1.06	1.10	1.14	1.23
CBN-LRF 2010-005020			2				50	4	—	2.06	2.13	2.21	2.29	2.48
CBN-LRF 2010-005030			3				50	4	—	3.09	3.20	3.32	3.44	3.72
CBN-LRF 2010-005050			5				50	4	—	5.16	5.34	5.53	5.74	6.21
CBN-LRF 2010-010010		R0.1	1				50	4	—	1.02	1.06	1.09	1.13	1.22
CBN-LRF 2010-010020			2				50	4	—	2.06	2.13	2.20	2.28	2.47
CBN-LRF 2010-010030			3				50	4	—	3.09	3.20	3.31	3.43	3.71
CBN-LRF 2010-010050			5				50	4	—	5.16	5.34	5.53	5.73	6.20
CBN-LRF 2010-020010		R0.2	1				50	4	—	1.02	1.05	1.08	1.12	1.20
CBN-LRF 2010-020020			2				50	4	—	2.05	2.12	2.19	2.27	2.44
CBN-LRF 2015-002030	1.5	R0.02	3	1	1.46	15°	50	4	—	3.13	3.24	3.36	3.49	3.77
CBN-LRF 2015-002040			4				50	4	—	4.17	4.31	4.47	4.64	5.02
CBN-LRF 2015-002060			6				50	4	—	6.23	6.45	6.69	6.94	7.50
CBN-LRF 2015-005030		R0.05	3				50	4	—	3.13	3.24	3.36	3.48	3.77
CBN-LRF 2015-005040			4				50	4	—	4.16	4.31	4.47	4.63	5.01
CBN-LRF 2015-005060			6				50	4	—	6.23	6.45	6.68	6.93	7.50
CBN-LRF 2015-010030		R0.1	3				50	4	—	3.13	3.24	3.35	3.48	3.76
CBN-LRF 2015-010040			4				50	4	—	4.16	4.31	4.46	4.63	5.00
CBN-LRF 2015-010060			6				50	4	—	6.23	6.45	6.68	6.93	7.48
CBN-LRF 2015-030045		R0.3	4.5				50	4	—	4.67	4.83	4.99	5.17	5.57
CBN-LRF 2020-002040	2	R0.02	4	1.2	1.97	15°	50	4	—	4.15	4.29	4.45	4.62	4.99
CBN-LRF 2020-002060			6				50	4	—	6.21	6.43	6.67	6.92	7.48
CBN-LRF 2020-002080			8				50	4	—	8.28	8.57	8.88	9.22	9.97
CBN-LRF 2020-002100			10				50	4	—	10.35	10.71	11.10	11.52	12.45
CBN-LRF 2020-003030		R0.03	3				50	4	—	3.11	3.22	3.34	3.47	3.75
CBN-LRF 2020-005040		R0.05	4				50	4	—	4.15	4.29	4.45	4.61	4.99
CBN-LRF 2020-005060			6				50	4	—	6.21	6.43	6.66	6.91	7.47
CBN-LRF 2020-005080			8				50	4	—	8.28	8.57	8.88	9.21	9.96
CBN-LRF 2020-005100			10				50	4	—	10.35	10.71	11.10	11.51	12.45
CBN-LRF 2020-010040		R0.1	4				50	4	—	4.14	4.29	4.44	4.60	4.98
CBN-LRF 2020-010060			6				50	4	—	6.21	6.43	6.66	6.90	7.46
CBN-LRF 2020-010080			8				50	4	—	8.28	8.57	8.87	9.20	9.95
CBN-LRF 2020-010100			10				50	4	—	10.35	10.70	11.09	11.50	12.43
CBN-LRF 2020-020040		R0.2	4				50	4	—	4.14	4.28	4.43	4.59	4.95
CBN-LRF 2020-020060			6				50	4	—	6.21	6.42	6.65	6.89	7.44
CBN-LRF 2020-020080			8				50	4	—	8.28	8.56	8.86	9.19	9.92
CBN-LRF 2020-020100			10				50	4	—	10.34	10.70	11.08	11.49	12.41
CBN-LRF 2020-050040		R0.5	4				50	4	—	4.13	4.26	4.40	4.55	4.88
CBN-LRF 2020-050060			6				50	4	—	6.20	6.40	6.61	6.85	7.37
CBN-LRF 2020-050080			8				50	4	—	8.27	8.54	8.83	9.15	9.85
CBN-LRF 2020-050100			10				50	4	—	10.33	10.68	11.05	11.45	12.34
CBN-LRF 2030-005060	3	R0.05	6	0.7	2.94	15°	50	6	—	6.27	6.49	6.72	6.98	7.54
CBN-LRF 2030-010060		R0.1	6				50	6	—	6.27	6.49	6.72	6.97	7.53
CBN-LRF 2030-020060		R0.2	6				50	6	—	6.27	6.48	6.71	6.95	7.51
CBN-LRF 2030-050060		R0.5	6				50	6	—	6.26	6.46	6.68	6.91	7.44

Milling Conditions for CBN-LRF (2 Flutes)

WORK MATERIAL				HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-002002	0.1	R0.02	0.2	30,000	90	0.002	0.01	30,000	60	0.002	0.01	30,000	30	0.002	0.005
2001-002003			0.3	30,000	90	0.002	0.01	30,000	60	0.002	0.01	30,000	30	0.002	0.005
2001-002005			0.5	30,000	90	0.002	0.01	30,000	60	0.002	0.01	30,000	30	0.002	0.005
2001-003002		R0.03	0.2	30,000	90	0.002	0.01	30,000	60	0.002	0.01	30,000	30	0.002	0.005
2001-003003			0.3	30,000	90	0.002	0.01	30,000	60	0.002	0.01	30,000	30	0.002	0.005
2001-003005			0.5	30,000	90	0.002	0.01	30,000	60	0.002	0.01	30,000	30	0.002	0.005
20015-002X2	0.15	R0.02	0.2	30,000	120	0.003	0.015	30,000	90	0.003	0.015	30,000	60	0.002	0.01
20015-002X3			0.3	30,000	120	0.003	0.015	30,000	90	0.003	0.015	30,000	60	0.002	0.01
20015-002X5			0.5	30,000	120	0.003	0.015	30,000	90	0.003	0.015	30,000	60	0.002	0.01
20015-003X2		R0.03	0.2	30,000	120	0.003	0.015	30,000	90	0.003	0.015	30,000	60	0.002	0.01
20015-003X3			0.3	30,000	120	0.003	0.015	30,000	90	0.003	0.015	30,000	60	0.002	0.01
20015-003X5			0.5	30,000	120	0.003	0.015	30,000	90	0.003	0.015	30,000	60	0.002	0.01
2002-002005	0.2	R0.02	0.5	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-002X75			0.75	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-002010			1	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-003005		R0.03	0.5	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-003X75			0.75	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-003010			1	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-005005		R0.05	0.5	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-005X75			0.75	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
2002-005010			1	30,000	140	0.003	0.02	30,000	120	0.003	0.02	30,000	80	0.003	0.01
20025-005X5	0.25	R0.05	0.5	30,000	190	0.004	0.03	30,000	170	0.004	0.03	30,000	140	0.003	0.015
20025-X5X75			0.75	30,000	190	0.004	0.03	30,000	170	0.004	0.03	30,000	140	0.003	0.015
20025-X5010			1	30,000	190	0.004	0.03	30,000	170	0.004	0.03	30,000	140	0.003	0.015
2003-001010	0.3	R0.01	1	30,000	185	0.003	0.045	30,000	160	0.003	0.045	30,000	120	0.003	0.02
2003-002005		R0.02	0.5	30,000	185	0.003	0.045	30,000	160	0.003	0.045	30,000	120	0.003	0.02
2003-002X75			0.75	30,000	185	0.003	0.045	30,000	160	0.003	0.045	30,000	120	0.003	0.02
2003-002010			1	30,000	185	0.003	0.045	30,000	160	0.003	0.045	30,000	120	0.003	0.02
2003-002015			1.5	30,000	185	0.003	0.045	30,000	160	0.003	0.045	30,000	120	0.003	0.02
2003-002020			2	30,000	130	0.003	0.022	30,000	110	0.003	0.022	30,000	80	0.003	0.01
2003-003005		R0.03	0.5	30,000	200	0.004	0.045	30,000	175	0.004	0.045	30,000	150	0.003	0.02
2003-003X75			0.75	30,000	200	0.004	0.045	30,000	175	0.004	0.045	30,000	150	0.003	0.02
2003-003010			1	30,000	200	0.004	0.045	30,000	175	0.004	0.045	30,000	150	0.003	0.02
2003-003015			1.5	30,000	200	0.004	0.045	30,000	175	0.004	0.045	30,000	150	0.003	0.02
2003-003020			2	30,000	140	0.004	0.022	30,000	120	0.004	0.022	30,000	110	0.003	0.01
2003-005005		R0.05	0.5	30,000	240	0.005	0.045	30,000	225	0.005	0.045	30,000	210	0.004	0.02
2003-005X75			0.75	30,000	240	0.005	0.045	30,000	225	0.005	0.045	30,000	210	0.004	0.02
2003-005010			1	30,000	240	0.005	0.045	30,000	225	0.005	0.045	30,000	210	0.004	0.02
2003-005015			1.5	30,000	240	0.005	0.045	30,000	225	0.005	0.045	30,000	210	0.004	0.02
2003-005020			2	30,000	170	0.005	0.022	30,000	160	0.005	0.022	30,000	150	0.004	0.01

Milling Conditions for CBN-LRF (2 Flutes)

WORK MATERIAL				HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2004-002005	0.4	R0.02	0.5	30,000	230	0.005	0.065	30,000	200	0.005	0.065	30,000	160	0.004	0.02
2004-002010			1	30,000	230	0.005	0.065	30,000	200	0.005	0.065	30,000	160	0.004	0.02
2004-002015			1.5	30,000	230	0.005	0.065	30,000	200	0.005	0.065	30,000	160	0.004	0.02
2004-002020			2	30,000	230	0.005	0.065	30,000	200	0.005	0.065	30,000	160	0.004	0.02
2004-003005		R0.03	0.5	30,000	270	0.006	0.065	30,000	230	0.006	0.065	30,000	180	0.004	0.02
2004-003010			1	30,000	270	0.006	0.065	30,000	230	0.006	0.065	30,000	180	0.004	0.02
2004-003015			1.5	30,000	270	0.006	0.065	30,000	230	0.006	0.065	30,000	180	0.004	0.02
2004-005005		R0.05	0.5	30,000	340	0.01	0.065	30,000	300	0.01	0.065	30,000	220	0.005	0.02
2004-005010			1	30,000	340	0.01	0.065	30,000	300	0.01	0.065	30,000	220	0.005	0.02
2004-005015			1.5	30,000	340	0.01	0.065	30,000	300	0.01	0.065	30,000	220	0.005	0.02
2004-005020			2	30,000	340	0.01	0.065	30,000	300	0.01	0.065	30,000	220	0.005	0.02
2004-005040			4	30,000	170	0.01	0.032	30,000	150	0.01	0.032	30,000	110	0.005	0.01
2004-010005		R0.1	0.5	30,000	520	0.01	0.065	30,000	450	0.01	0.065	30,000	320	0.005	0.02
2004-010010			1	30,000	520	0.01	0.065	30,000	450	0.01	0.065	30,000	320	0.005	0.02
2004-010015			1.5	30,000	520	0.01	0.065	30,000	450	0.01	0.065	30,000	320	0.005	0.02
2005-001010	0.5	R0.01	1	30,000	280	0.003	0.09	30,000	240	0.003	0.09	30,000	200	0.003	0.03
2005-002005		R0.02	0.5	30,000	280	0.005	0.09	30,000	240	0.005	0.09	30,000	200	0.005	0.03
2005-002010			1	30,000	280	0.005	0.09	30,000	240	0.005	0.09	30,000	200	0.005	0.03
2005-002015			1.5	30,000	280	0.005	0.09	30,000	240	0.005	0.09	30,000	200	0.005	0.03
2005-002020			2	30,000	280	0.005	0.09	30,000	240	0.005	0.09	30,000	200	0.005	0.03
2005-003005		R0.03	0.5	30,000	330	0.006	0.09	30,000	280	0.006	0.09	30,000	230	0.005	0.03
2005-003010			1	30,000	330	0.006	0.09	30,000	280	0.006	0.09	30,000	230	0.005	0.03
2005-003015			1.5	30,000	330	0.006	0.09	30,000	280	0.006	0.09	30,000	230	0.005	0.03
2005-003020			2	30,000	330	0.006	0.09	30,000	280	0.006	0.09	30,000	230	0.005	0.03
2005-005005		R0.05	0.5	30,000	440	0.01	0.09	30,000	380	0.01	0.09	30,000	280	0.01	0.03
2005-005010			1	30,000	440	0.01	0.09	30,000	380	0.01	0.09	30,000	280	0.01	0.03
2005-005015			1.5	30,000	440	0.01	0.09	30,000	380	0.01	0.09	30,000	280	0.01	0.03
2005-005020			2	30,000	440	0.01	0.09	30,000	380	0.01	0.09	30,000	280	0.01	0.03
2005-010005		R0.1	0.5	30,000	700	0.02	0.09	30,000	600	0.02	0.09	30,000	410	0.01	0.03
2005-010010			1	30,000	700	0.02	0.09	30,000	600	0.02	0.09	30,000	410	0.01	0.03
2005-010015			1.5	30,000	700	0.02	0.09	30,000	600	0.02	0.09	30,000	410	0.01	0.03
2005-010020			2	30,000	700	0.02	0.09	30,000	600	0.02	0.09	30,000	410	0.01	0.03
2006-002005	0.6	R0.02	0.5	30,000	320	0.005	0.11	30,000	270	0.005	0.11	30,000	240	0.005	0.035
2006-002010			1	30,000	320	0.005	0.11	30,000	270	0.005	0.11	30,000	240	0.005	0.035
2006-002015			1.5	30,000	320	0.005	0.11	30,000	270	0.005	0.11	30,000	240	0.005	0.035
2006-005005		R0.05	0.5	30,000	500	0.01	0.11	30,000	430	0.01	0.11	30,000	340	0.01	0.035
2006-005010			1	30,000	500	0.01	0.11	30,000	430	0.01	0.11	30,000	340	0.01	0.035
2006-005015			1.5	30,000	500	0.01	0.11	30,000	430	0.01	0.11	30,000	340	0.01	0.035
2006-005030			3	30,000	500	0.01	0.11	30,000	430	0.01	0.11	30,000	340	0.01	0.035
2006-010005		R0.1	0.5	30,000	800	0.02	0.11	30,000	675	0.02	0.11	30,000	492	0.01	0.035
2006-010010			1	30,000	800	0.02	0.11	30,000	675	0.02	0.11	30,000	492	0.01	0.035
2006-010015			1.5	30,000	800	0.02	0.11	30,000	675	0.02	0.11	30,000	492	0.01	0.035


Milling Conditions for CBN-LRF (2 Flutes)

WORK MATERIAL				HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2008-002010	0.8	R0.02	1	30,000	410	0.005	0.16	30,000	350	0.005	0.16	30,000	320	0.005	0.04
2008-002015			1.5	30,000	410	0.005	0.16	30,000	350	0.005	0.16	30,000	320	0.005	0.04
2008-002020			2	30,000	410	0.005	0.16	30,000	350	0.005	0.16	30,000	320	0.005	0.04
2008-002050			5	30,000	290	0.005	0.08	30,000	250	0.005	0.08	30,000	220	0.005	0.02
2008-005010		R0.05	1	30,000	600	0.01	0.16	30,000	510	0.01	0.16	30,000	450	0.01	0.04
2008-005015			1.5	30,000	600	0.01	0.16	30,000	510	0.01	0.16	30,000	450	0.01	0.04
2008-005020			2	30,000	600	0.01	0.16	30,000	510	0.01	0.16	30,000	450	0.01	0.04
2008-005050			5	30,000	420	0.01	0.08	30,000	360	0.01	0.08	30,000	320	0.01	0.02
2008-010010		R0.1	1	30,000	920	0.02	0.16	30,000	790	0.02	0.16	30,000	560	0.01	0.04
2008-010015			1.5	30,000	920	0.02	0.16	30,000	790	0.02	0.16	30,000	560	0.01	0.04
2008-010020			2	30,000	920	0.02	0.16	30,000	790	0.02	0.16	30,000	560	0.01	0.04
2008-010050			5	30,000	640	0.02	0.08	30,000	550	0.02	0.08	30,000	390	0.01	0.02
2010-002010	1	R0.02	1	30,000	500	0.005	0.2	30,000	430	0.005	0.2	30,000	400	0.005	0.05
2010-002020			2	30,000	500	0.005	0.2	30,000	430	0.005	0.2	30,000	400	0.005	0.05
2010-002030			3	30,000	500	0.005	0.2	30,000	430	0.005	0.2	30,000	400	0.005	0.05
2010-002050			5	30,000	500	0.005	0.2	30,000	430	0.005	0.2	30,000	400	0.005	0.05
2010-005010		R0.05	1	30,000	700	0.01	0.2	30,000	600	0.01	0.2	30,000	500	0.01	0.05
2010-005020			2	30,000	700	0.01	0.2	30,000	600	0.01	0.2	30,000	500	0.01	0.05
2010-005030			3	30,000	700	0.01	0.2	30,000	600	0.01	0.2	30,000	500	0.01	0.05
2010-005050			5	30,000	700	0.01	0.2	30,000	600	0.01	0.2	30,000	500	0.01	0.05
2010-010010		R0.1	1	30,000	1,000	0.02	0.2	30,000	850	0.02	0.2	30,000	600	0.01	0.05
2010-010020			2	30,000	1,000	0.02	0.2	30,000	850	0.02	0.2	30,000	600	0.01	0.05
2010-010030			3	30,000	1,000	0.02	0.2	30,000	850	0.02	0.2	30,000	600	0.01	0.05
2010-010050			5	30,000	1,000	0.02	0.2	30,000	850	0.02	0.2	30,000	600	0.01	0.05
2010-020010		R0.2	1	30,000	1,600	0.04	0.2	30,000	1,350	0.04	0.2	30,000	850	0.01	0.05
2010-020020			2	30,000	1,600	0.04	0.2	30,000	1,350	0.04	0.2	30,000	850	0.01	0.05
2015-002030	1.5	R0.02	3	27,000	800	0.005	0.3	27,000	680	0.005	0.3	20,000	470	0.005	0.23
2015-002040			4	27,000	800	0.005	0.3	27,000	680	0.005	0.3	20,000	470	0.005	0.23
2015-002060			6	27,000	800	0.005	0.3	27,000	680	0.005	0.3	20,000	470	0.005	0.23
2015-005030		R0.05	3	27,000	1,200	0.01	0.3	27,000	1,000	0.01	0.3	20,000	520	0.01	0.23
2015-005040			4	27,000	1,200	0.01	0.3	27,000	1,000	0.01	0.3	20,000	520	0.01	0.23
2015-005060			6	27,000	1,200	0.01	0.3	27,000	1,000	0.01	0.3	20,000	520	0.01	0.23
2015-010030		R0.1	3	27,000	1,500	0.02	0.3	27,000	1,300	0.02	0.3	20,000	600	0.01	0.23
2015-010040			4	27,000	1,500	0.02	0.3	27,000	1,300	0.02	0.3	20,000	600	0.01	0.23
2015-010060			6	27,000	1,500	0.02	0.3	27,000	1,300	0.02	0.3	20,000	600	0.01	0.23
2015-030045		R0.3	4.5	27,000	1,800	0.06	0.3	27,000	1,500	0.06	0.3	25,000	930	0.01	0.23

Milling Conditions for CBN-LRF (2 Flutes)

WORK MATERIAL				HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~68HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2020-002040	2	R0.02	4	24,000	1,000	0.005	0.4	24,000	850	0.005	0.4	16,000	530	0.005	0.4
2020-002060			6	24,000	1,000	0.005	0.4	24,000	850	0.005	0.4	16,000	530	0.005	0.4
2020-002080			8	24,000	1,000	0.005	0.4	24,000	850	0.005	0.4	16,000	530	0.005	0.4
2020-002100			10	24,000	1,000	0.005	0.4	24,000	850	0.005	0.4	16,000	530	0.005	0.4
2020-003030		R0.03	3	24,000	1,000	0.006	0.4	24,000	850	0.006	0.4	16,000	550	0.005	0.4
2020-005040		R0.05	4	24,000	1,500	0.01	0.4	24,000	1,300	0.01	0.4	16,500	600	0.01	0.4
2020-005060			6	24,000	1,500	0.01	0.4	24,000	1,300	0.01	0.4	16,500	600	0.01	0.4
2020-005080			8	24,000	1,500	0.01	0.4	24,000	1,300	0.01	0.4	16,500	600	0.01	0.35
2020-005100			10	24,000	1,500	0.01	0.4	24,000	1,300	0.01	0.4	16,500	600	0.01	0.3
2020-010040		R0.1	4	24,000	2,000	0.02	0.4	24,000	1,700	0.02	0.4	17,000	700	0.01	0.4
2020-010060			6	24,000	2,000	0.02	0.4	24,000	1,700	0.02	0.4	17,000	700	0.01	0.4
2020-010080			8	24,000	2,000	0.02	0.4	24,000	1,700	0.02	0.4	17,000	700	0.01	0.35
2020-010100			10	24,000	2,000	0.02	0.4	24,000	1,700	0.02	0.4	17,000	700	0.01	0.3
2020-020040		R0.2	4	24,000	2,000	0.04	0.4	24,000	1,700	0.04	0.4	17,700	770	0.01	0.4
2020-020060			6	24,000	2,000	0.04	0.4	24,000	1,700	0.04	0.4	17,700	770	0.01	0.4
2020-020080			8	24,000	2,000	0.03	0.4	24,000	1,700	0.03	0.4	17,700	770	0.01	0.35
2020-020100			10	24,000	2,000	0.025	0.4	24,000	1,700	0.025	0.4	17,700	770	0.01	0.3
2020-050040		R0.5	4	24,000	2,000	0.1	0.4	24,000	1,700	0.1	0.4	20,000	1,000	0.01	0.4
2020-050060			6	24,000	2,000	0.1	0.4	24,000	1,700	0.1	0.4	20,000	1,000	0.01	0.4
2020-050080			8	24,000	2,000	0.075	0.4	24,000	1,700	0.075	0.4	20,000	1,000	0.01	0.35
2020-050100			10	24,000	2,000	0.05	0.4	24,000	1,700	0.05	0.4	20,000	1,000	0.01	0.3
2030-005060	3	R0.05	6	20,000	1,500	0.02	0.6	20,000	1,300	0.02	0.6	13,500	600	0.015	0.6
2030-010060		R0.1	6	20,000	2,000	0.04	0.6	20,000	1,700	0.04	0.6	14,000	700	0.02	0.6
2030-020060		R0.2	6	20,000	2,000	0.06	0.6	20,000	1,700	0.06	0.6	14,500	770	0.02	0.6
2030-050060		R0.5	6	20,000	2,000	0.12	0.6	20,000	1,700	0.12	0.6	16,500	1,000	0.02	0.6

Note:
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
・Recommend oil mist to avoid tool damage.



CBN-LRF4000

Additional 9 models



CBN 4 Flute Long Neck Radius End Mills for Finishing, High Efficiency and Long Tool Life

φ0.1～φ3

CBN | 0° | R | R ±0.002 | Shank Dia 0/-0.004 | Back Taper Geometry

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	●	●										

Label Sample




#001 φD1.999 R+0.001/0.000

Diameter and Corner R accuracy measurements are printed on the label to support High Precision milling.

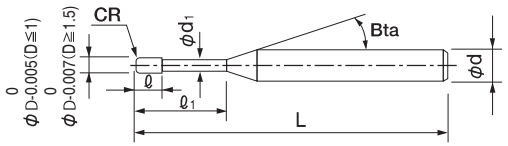

The shank taper angle shown is not an exact value.



Features

4 flute shape withstands high efficiency milling.
Milling time can be significantly reduced compared to 2 flute.






CBN-LRF4000 Introduction

CBN-LRF2000/4000 Common features


Feature 1 High rigidity cutting edge

Super negative rake angle from the cutting edge at the tip point to peripheral cutting edge.
Less damage when milling hard materials.



Feature 2 Sharp cutting edge




The cutting edge is outstandingly sharp even with the super negative rake angle.

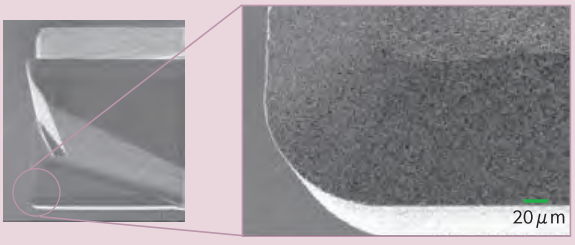

Pocket milling
2 Flutes / 4 Flutes CBN-LRF φ2 × CR0.1 × EL6

STAVAX (52HRC)


Tool	Flutes	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Feed per tooth (mm/t)	Cycle Time
CBN-LRF φ2 × CR0.1 × EL6	4	28,000	3,300	0.05	0.7	0.029	45 min / 1 pocket
CBN-LRF φ2 × CR0.1 × EL6	2	28,000	3,300	0.05	0.7	0.059	45 min / 1 pocket
CBN-LRF φ2 × CR0.1 × EL6	2	28,000	1,650	0.05	0.7	0.029	85 min / 1 pocket

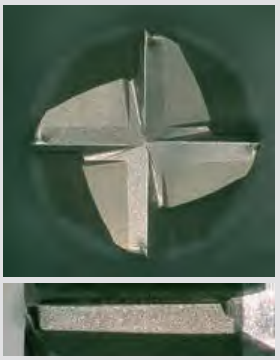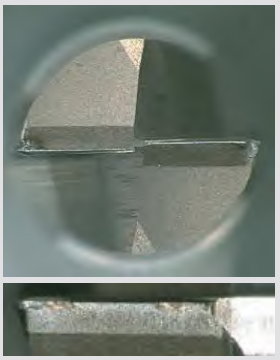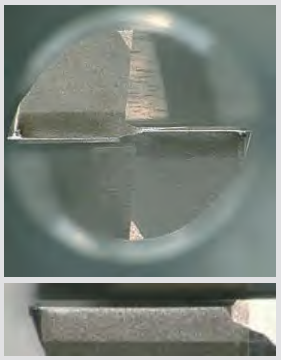Tool	4 Flutes	2 Flutes	2 Flutes
Feed rate (mm/min)	3,300	3,300	1,650
Cycle time	135 min	135 min	255 min
Tool photo			
Milling results	Mill under higher efficiency conditions than 2 flute. Greatly shortens milling time.	Large damage under the same milling conditions as 4 flute.	When the feed per tooth is the same, the damage is small, but the milling time is about twice as long.


Pocket Size: 50 × 40 × 2 mm Coolant: Oil mist

Surface roughness by different milling conditions
4 Flutes CBN-LRF φ0.3 × CR0.05 × EL0.5

STAVAX (52HRC)

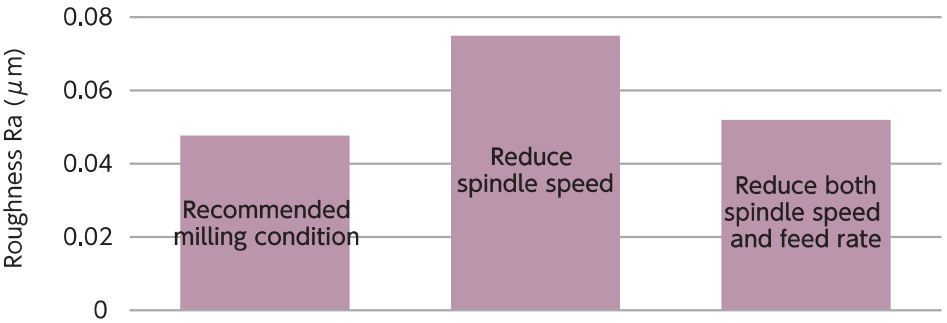

Spindle speed (min^{-1})	60,000	30,000	30,000
Feed rate (mm/min)	950	950	475
Cycle Time	26 min / Pocket	26 min / Pocket	50 min / Pocket



Pocket Size
10 × 4 × 0.2 mm
Coolant: Oil mist
a_p : 0.005 mm
a_e : 0.08 mm

Achieves high-speed milling that exceeds conventional CBN end mills even for small diameters.

φ0.3 can be used in a machining center equipped with a 30,000 min^{-1} spindle. Recommended to reduce both spindle speed and feed rate proportionally.

Total 71 models　　*Shank taper angle Bta is only for reference.　　Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
CBN-LRF 4001-002002	0.1	R0.02	0.2	0.04	0.09	15°	50	4	—	0.22	0.23	0.25	0.26	0.28
CBN-LRF 4001-002003			0.3				50	4	—	0.33	0.34	0.36	0.37	0.40
CBN-LRF 4001-002005			0.5				50	4	—	0.54	0.56	0.58	0.60	0.65
CBN-LRF 40015-002X2	0.15	R0.02	0.2	0.06	0.14	15°	50	4	—	0.22	0.23	0.25	0.26	0.28
CBN-LRF 40015-002X3			0.3				50	4	—	0.33	0.34	0.36	0.37	0.40
CBN-LRF 40015-002X5			0.5				50	4	—	0.54	0.56	0.58	0.60	0.65
CBN-LRF 4002-002005	0.2	R0.02	0.5	0.08	0.19	15°	50	4	—	0.54	0.56	0.58	0.60	0.65
CBN-LRF 4002-002X75			0.75				50	4	—	0.80	0.82	0.86	0.89	0.96
CBN-LRF 4002-002010			1				50	4	—	1.05	1.09	1.13	1.18	1.27
CBN-LRF 4002-005005		R0.05	0.5				50	4	—	0.53	0.55	0.57	0.60	0.65
CBN-LRF 4002-005X75			0.75				50	4	—	0.79	0.82	0.85	0.88	0.96
CBN-LRF 4002-005010			1				50	4	—	1.05	1.09	1.13	1.17	1.27
CBN-LRF 4003-002X75	0.3	R0.02	0.75	0.13	0.28	15°	50	4	—	0.83	0.86	0.89	0.92	1.00
CBN-LRF 4003-002010			1				50	4	—	1.08	1.12	1.17	1.21	1.31
CBN-LRF 4003-005005		R0.05	0.5				50	4	—	0.57	0.59	0.61	0.63	0.68
CBN-LRF 4004-002015	0.4	R0.02	1.5	0.24	0.38	15°	50	4	—	1.54	1.59	1.65	1.71	1.86
CBN-LRF 4004-003005		R0.03	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 4004-005005		R0.05	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 4004-005015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.85
CBN-LRF 4004-010005		R0.1	0.5				50	4	—	0.51	0.53	0.54	0.56	0.61
CBN-LRF 4004-010010			1				50	4	—	1.03	1.06	1.10	1.14	1.23
CBN-LRF 4005-002010	0.5	R0.02	1	0.3	0.48	15°	50	4	—	1.03	1.07	1.11	1.15	1.25
CBN-LRF 4005-005005		R0.05	0.5				50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 4005-005010			1				50	4	—	1.03	1.07	1.10	1.15	1.24
CBN-LRF 4005-005015			1.5				50	4	—	1.54	1.59	1.65	1.71	1.85
CBN-LRF 4005-010005		R0.1	0.5				50	4	—	0.51	0.53	0.54	0.56	0.61
CBN-LRF 4005-010015			1.5				50	4	—	1.53	1.59	1.64	1.70	1.84
CBN-LRF 4005-015005		R0.15	0.5				50	4	—	0.51	0.52	0.54	0.56	0.59
CBN-LRF 4005-015015			1.5				50	4	—	1.53	1.58	1.64	1.69	1.83
CBN-LRF 4006-005005	0.6	R0.05	0.5	0.3	0.58	15°	50	4	—	0.51	0.53	0.55	0.57	0.62
CBN-LRF 4006-010005		R0.1	0.5				50	4	—	0.51	0.53	0.54	0.56	0.61
CBN-LRF 4006-010010			1				50	4	—	1.03	1.06	1.10	1.14	1.23
CBN-LRF 4008-005010	0.8	R0.05	1	0.56	0.78	15°	50	4	—	1.03	1.07	1.10	1.15	1.24
CBN-LRF 4008-010010		R0.1	1				50	4	—	1.03	1.06	1.10	1.14	1.23
CBN-LRF 4008-010020			2				50	4	—	2.05	2.12	2.20	2.28	2.46
CBN-LRF 4008-010050			5				50	4	—	5.15	5.33	5.52	5.73	6.19
CBN-LRF 4008-020010		R0.2	1				50	4	—	1.02	1.05	1.09	1.12	1.20

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
CBN-LRF 4010-002010	1	R0.02	1	0.7	0.98	15°	50	4	—	1.03	1.07	1.11	1.15	1.25
CBN-LRF 4010-002030			3				50	4	—	3.10	3.21	3.33	3.45	3.73
CBN-LRF 4010-005010		R0.05	1				50	4	—	1.03	1.07	1.11	1.15	1.24
CBN-LRF 4010-005020			2				50	4	—	2.06	2.14	2.21	2.30	2.48
CBN-LRF 4010-010010		R0.1	1				50	4	—	1.03	1.06	1.10	1.14	1.23
CBN-LRF 4010-010020			2				50	4	—	2.06	2.13	2.21	2.29	2.47
CBN-LRF 4010-010030			3				50	4	—	3.10	3.20	3.32	3.44	3.72
CBN-LRF 4010-020020		R0.2	2				50	4	—	2.06	2.13	2.20	2.28	2.45
CBN-LRF 4015-002030	1.5	R0.02	3	1	1.46	15°	50	4	—	3.13	3.24	3.36	3.49	3.78
CBN-LRF 4015-010030		R0.1	3				50	4	—	3.13	3.24	3.35	3.48	3.76
CBN-LRF 4015-030030		R0.3	3				50	4	—	3.12	3.23	3.33	3.45	3.71
CBN-LRF 4015-050030		R0.5	3				50	4	—	3.12	3.21	3.31	3.42	3.66
CBN-LRF 4020-002040	2	R0.02	4	1.2	1.97	15°	50	4	—	4.15	4.29	4.45	4.62	5.00
CBN-LRF 4020-002060			6				50	4	—	6.22	6.43	6.67	6.92	7.48
CBN-LRF 4020-002100			10				50	4	—	10.35	10.71	11.10	11.52	12.46
CBN-LRF 4020-005060		R0.05	6				50	4	—	6.21	6.43	6.66	6.91	7.48
CBN-LRF 4020-005100			10				50	4	—	10.35	10.71	11.10	11.51	12.45
CBN-LRF 4020-010040		R0.1	4				50	4	—	4.15	4.29	4.44	4.61	4.98
CBN-LRF 4020-010060			6				50	4	—	6.21	6.43	6.66	6.91	7.46
CBN-LRF 4020-010100			10				50	4	—	10.35	10.71	11.09	11.51	12.44
CBN-LRF 4020-020040		R0.2	4				50	4	—	4.14	4.28	4.43	4.59	4.95
CBN-LRF 4020-020060			6				50	4	—	6.21	6.42	6.65	6.89	7.44
CBN-LRF 4020-020100			10				50	4	—	10.34	10.70	11.08	11.49	12.41
CBN-LRF 4020-050060		R0.5	6				50	4	—	6.20	6.40	6.62	6.85	7.37
CBN-LRF 4020-050100			10				50	4	—	10.33	10.68	11.05	11.45	12.34
※ CBN-LRF 4030-005060	3	R0.05	6	0.7	2.94	15°	50	6	—	6.27	6.49	6.73	6.98	7.55
※ CBN-LRF 4030-005100			10				50	6	—	10.41	10.77	11.16	11.58	12.52
※ CBN-LRF 4030-005150			15				50	6	—	15.58	16.12	16.70	17.33	18.73
※ CBN-LRF 4030-010060		R0.1	6				50	6	—	6.27	6.49	6.72	6.97	7.53
※ CBN-LRF 4030-010100			10				50	6	—	10.41	10.77	11.15	11.57	12.51
※ CBN-LRF 4030-010150			15				50	6	—	15.57	16.12	16.70	17.32	18.72
※ CBN-LRF 4030-020060		R0.2	6				50	6	—	6.27	6.48	6.71	6.96	7.51
※ CBN-LRF 4030-020100			10				50	6	—	10.40	10.76	11.14	11.56	12.48
※ CBN-LRF 4030-020150			15				50	6	—	15.57	16.11	16.68	17.31	18.70

※ Additional model


Milling Conditions for CBN-LRF (4 Flutes)

WORK MATERIAL				HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~70HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4001-002002	**0.1**	R0.02	0.2	60,000	360	0.002	0.02	55,000	280	0.002	0.015	50,000	200	0.002	0.01
4001-002003			0.3	60,000	360	0.002	0.02	55,000	280	0.002	0.015	50,000	200	0.002	0.01
4001-002005			0.5	60,000	360	0.002	0.02	55,000	280	0.002	0.015	50,000	200	0.002	0.01
40015-002X2	**0.15**	R0.02	0.2	60,000	480	0.003	0.03	55,000	340	0.003	0.025	50,000	250	0.002	0.015
40015-002X3			0.3	60,000	480	0.003	0.03	55,000	340	0.003	0.025	50,000	250	0.002	0.015
40015-002X5			0.5	60,000	480	0.003	0.03	55,000	340	0.003	0.025	50,000	250	0.002	0.015
4002-002005	**0.2**	R0.02	0.5	60,000	560	0.003	0.04	55,000	430	0.003	0.03	50,000	300	0.003	0.02
4002-002X75			0.75	60,000	560	0.003	0.04	55,000	430	0.003	0.03	50,000	300	0.003	0.02
4002-002010			1	60,000	560	0.003	0.04	55,000	430	0.003	0.03	50,000	300	0.003	0.02
4002-005005		R0.05	0.5	60,000	700	0.003	0.04	55,000	550	0.003	0.03	50,000	410	0.003	0.02
4002-005X75			0.75	60,000	700	0.003	0.04	55,000	550	0.003	0.03	50,000	410	0.003	0.02
4002-005010			1	60,000	700	0.003	0.04	55,000	550	0.003	0.03	50,000	410	0.003	0.02
4003-002X75	**0.3**	R0.02	0.75	60,000	750	0.003	0.08	55,000	580	0.003	0.06	50,000	400	0.003	0.03
4003-002010			1	60,000	750	0.003	0.08	55,000	580	0.003	0.06	50,000	400	0.003	0.03
4003-005005		R0.05	0.5	60,000	950	0.005	0.08	55,000	750	0.005	0.06	50,000	550	0.004	0.03
4004-002015	**0.4**	R0.02	1.5	55,000	850	0.005	0.1	53,000	700	0.005	0.08	50,000	550	0.004	0.05
4004-003005		R0.03	0.5	55,000	1,000	0.006	0.1	53,000	800	0.006	0.08	50,000	600	0.004	0.05
4004-005005		R0.05	0.5	55,000	1,200	0.01	0.1	53,000	1,000	0.01	0.08	50,000	730	0.007	0.05
4004-005015			1.5	55,000	1,200	0.01	0.1	53,000	1,000	0.01	0.08	50,000	730	0.007	0.05
4004-010005		R0.1	0.5	55,000	1,500	0.01	0.1	53,000	1,300	0.01	0.08	50,000	1,000	0.008	0.05
4004-010010			1	55,000	1,500	0.01	0.1	53,000	1,300	0.01	0.08	50,000	1,000	0.008	0.05
4005-002010	**0.5**	R0.02	1	50,000	950	0.005	0.15	50,000	900	0.005	0.12	50,000	700	0.005	0.08
4005-005005		R0.05	0.5	50,000	1,500	0.01	0.15	50,000	1,300	0.01	0.12	50,000	1,000	0.01	0.08
4005-005010			1	50,000	1,500	0.01	0.15	50,000	1,300	0.01	0.12	50,000	1,000	0.01	0.08
4005-005015			1.5	50,000	1,500	0.01	0.15	50,000	1,300	0.01	0.12	50,000	1,000	0.01	0.08
4005-010005		R0.1	0.5	50,000	1,900	0.02	0.15	50,000	1,700	0.02	0.12	50,000	1,400	0.01	0.08
4005-010015			1.5	50,000	1,900	0.02	0.15	50,000	1,700	0.02	0.12	50,000	1,400	0.01	0.08
4005-015005		R0.15	0.5	50,000	2,200	0.03	0.15	50,000	2,000	0.03	0.12	50,000	1,800	0.01	0.08
4005-015015			1.5	50,000	2,200	0.03	0.15	50,000	2,000	0.03	0.12	50,000	1,800	0.01	0.08
4006-005005	**0.6**	R0.05	0.5	50,000	1,700	0.01	0.2	50,000	1,500	0.01	0.15	50,000	1,200	0.01	0.1
4006-010005		R0.1	0.5	50,000	2,300	0.02	0.2	50,000	2,000	0.02	0.15	50,000	1,700	0.012	0.1
4006-010010			1	50,000	2,300	0.02	0.2	50,000	2,000	0.02	0.15	50,000	1,700	0.012	0.1
4008-005010	**0.8**	R0.05	1	45,000	1,800	0.01	0.28	44,000	1,600	0.01	0.21	42,000	1,300	0.01	0.13
4008-010010		R0.1	1	45,000	2,400	0.02	0.28	44,000	2,000	0.02	0.21	42,000	1,600	0.015	0.13
4008-010020			2	45,000	2,400	0.02	0.28	44,000	2,000	0.02	0.21	42,000	1,600	0.015	0.13
4008-010050			5	45,000	1,700	0.02	0.14	44,000	1,400	0.02	0.11	42,000	1,100	0.015	0.07
4008-020010		R0.2	1	45,000	2,400	0.04	0.28	44,000	2,100	0.04	0.21	42,000	1,800	0.015	0.13

Milling Conditions for CBN-LRF (4 Flutes)

WORK MATERIAL				HEAT-TREATED STEELS / HARDENED STEELS STAVAX (~52HRC)				HARDENED STEELS SKD11 (~62HRC)				HARDENED STEELS HAP10 / HAP72 (~70HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-002010	1	R0.02	1	40,000	1,300	0.006	0.35	37,000	1,100	0.006	0.3	34,000	900	0.005	0.2
4010-002030			3	40,000	1,300	0.006	0.35	37,000	1,100	0.006	0.3	34,000	900	0.005	0.2
4010-005010		R0.05	1	40,000	1,900	0.015	0.35	37,000	1,600	0.015	0.3	34,000	1,200	0.01	0.2
4010-005020			2	40,000	1,900	0.015	0.35	37,000	1,600	0.015	0.3	34,000	1,200	0.01	0.2
4010-010010		R0.1	1	40,000	2,600	0.03	0.35	37,000	2,000	0.03	0.3	34,000	1,400	0.015	0.2
4010-010020			2	40,000	2,600	0.03	0.35	37,000	2,000	0.03	0.3	34,000	1,400	0.015	0.2
4010-010030			3	40,000	2,600	0.03	0.35	37,000	2,000	0.03	0.3	34,000	1,400	0.015	0.2
4010-020020		R0.2	2	40,000	2,600	0.05	0.35	37,000	2,200	0.05	0.3	34,000	1,800	0.015	0.2
4015-002030	1.5	R0.02	3	30,000	1,500	0.01	0.55	27,000	1,300	0.01	0.5	23,000	1,100	0.005	0.3
4015-010030		R0.1	3	30,000	3,000	0.05	0.55	27,000	2,200	0.05	0.5	23,000	1,400	0.02	0.3
4015-030030		R0.3	3	30,000	3,000	0.07	0.55	27,000	2,400	0.07	0.5	23,000	1,700	0.02	0.3
4015-050030		R0.5	3	30,000	3,000	0.1	0.45	27,000	2,500	0.1	0.4	23,000	2,000	0.02	0.3
4020-002040	2	R0.02	4	28,000	1,700	0.01	0.7	23,000	1,500	0.01	0.6	18,000	1,200	0.005	0.4
4020-002060			6	28,000	1,700	0.01	0.7	23,000	1,500	0.01	0.6	18,000	1,200	0.005	0.4
4020-002100			10	28,000	1,700	0.01	0.7	23,000	1,500	0.01	0.6	18,000	1,200	0.005	0.4
4020-005060		R0.05	6	28,000	2,500	0.025	0.7	23,000	1,900	0.025	0.6	18,000	1,300	0.015	0.4
4020-005100			10	28,000	2,500	0.025	0.7	23,000	1,900	0.025	0.6	18,000	1,300	0.015	0.4
4020-010040		R0.1	4	28,000	3,300	0.05	0.7	23,000	2,400	0.05	0.6	18,000	1,500	0.03	0.4
4020-010060			6	28,000	3,300	0.05	0.7	23,000	2,400	0.05	0.6	18,000	1,500	0.03	0.4
4020-010100			10	28,000	3,300	0.05	0.7	23,000	2,400	0.05	0.6	18,000	1,500	0.03	0.4
4020-020040		R0.2	4	28,000	3,300	0.07	0.7	23,000	2,500	0.07	0.6	18,000	1,600	0.03	0.4
4020-020060			6	28,000	3,300	0.07	0.7	23,000	2,500	0.07	0.6	18,000	1,600	0.03	0.4
4020-020100			10	28,000	3,300	0.07	0.7	23,000	2,500	0.07	0.6	18,000	1,600	0.03	0.4
4020-050060		R0.5	6	28,000	3,300	0.1	0.7	23,000	2,600	0.1	0.6	18,000	1,800	0.03	0.4
4020-050100			10	28,000	3,300	0.1	0.7	23,000	2,600	0.1	0.6	18,000	1,800	0.03	0.4
4030-005060	3	R0.05	6	23,000	3,000	0.025	1.1	18,000	2,200	0.025	0.9	13,000	1,300	0.015	0.6
4030-005100			10	23,000	3,000	0.025	1.1	18,000	2,200	0.025	0.9	13,000	1,300	0.015	0.6
4030-005150			15	23,000	2,100	0.02	1.1	18,000	1,700	0.02	0.9	13,000	1,200	0.01	0.6
4030-010060		R0.1	6	23,000	3,700	0.05	1.1	19,000	2,600	0.05	0.9	15,000	1,500	0.03	0.6
4030-010100			10	23,000	3,700	0.05	1.1	19,000	2,600	0.05	0.9	15,000	1,500	0.03	0.6
4030-010150			15	23,000	2,600	0.03	1.1	19,000	1,900	0.03	0.9	15,000	1,200	0.02	0.6
4030-020060		R0.2	6	23,000	3,700	0.07	1.1	20,000	2,700	0.07	0.9	16,000	1,600	0.03	0.6
4030-020100			10	23,000	3,700	0.07	1.1	20,000	2,700	0.07	0.9	16,000	1,600	0.03	0.6
4030-020150			15	23,000	2,600	0.03	1.1	20,000	1,900	0.03	0.9	16,000	1,200	0.02	0.6

Note:
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
・Recommend oil mist to avoid tool damage.



CSS



UTCOAT 2 Flute Square End Mills

φ0.1～φ12


Super MG | UT COAT | 30°*1 | 40°*2 | Flatland | Shank Dia 0/-0.005

*1 Helix angle 30° : φD < 0.6, 1 ≦ φD (length of cut 2.5D ～ 3D)
*2 Helix angle 40° : 0.6 ≦ φD < 1, 1 ≦ φD (length of cut 1D ～ 2D)

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	○		●			○	○		

Unique Cross Section design

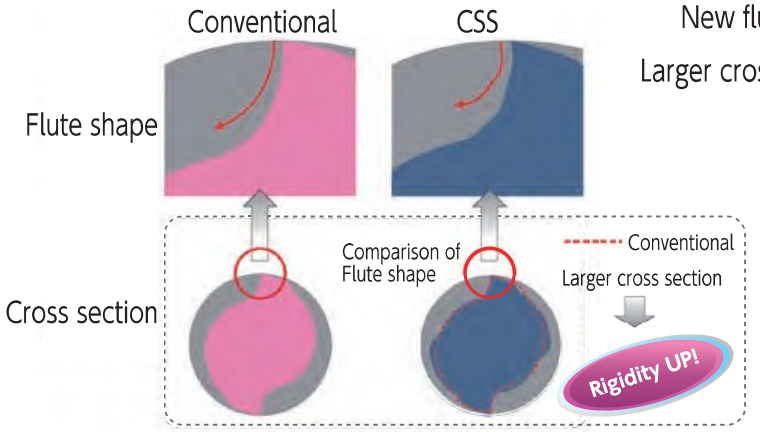

New flute shape ⇨ Higher rigidity and better chip evacuation

Larger cross section ⇨ More resistance to breakage and wear

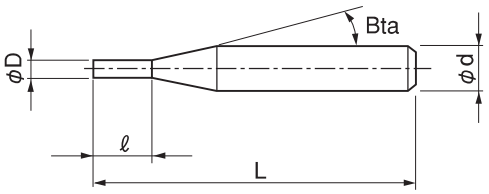

The shank taper angle shown is not an exact value.

Total 112 models

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CSS 2001-0010	0.1	0.1	16°	45	4	—
CSS 2001-0015		0.15		45	4	—
CSS 2001-0020		0.2		45	4	—
CSS 2001-0025		0.25		45	4	—
CSS 2001-0030		0.3		45	4	—
CSS 2002-0020	0.2	0.2	16°	45	4	—
CSS 2002-0030		0.3		45	4	—
CSS 2002-0040-3		0.4		38	3	—
CSS 2002-0040-4				45	4	—
CSS 2002-0050		0.5		45	4	—
CSS 2002-0060		0.6		45	4	—
CSS 2003-0030	0.3	0.3	16°	45	4	—
CSS 2003-0045		0.45		45	4	—
CSS 2003-0060-3		0.6		38	3	—
CSS 2003-0060-4				45	4	—
CSS 2003-0075		0.75		45	4	—
CSS 2003-0090		0.9		45	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CSS 2004-0040	0.4	0.4	16°	45	4	—
CSS 2004-0060		0.6		45	4	—
CSS 2004-0080-3		0.8		38	3	—
CSS 2004-0080-4				45	4	—
CSS 2004-0100		1		45	4	—
CSS 2004-0120		1.2		45	4	—
CSS 2005-0050	0.5	0.5	16°	45	4	—
CSS 2005-0075		0.75		45	4	—
CSS 2005-0080		0.8		38	3	—
CSS 2005-0100		1		45	4	—
CSS 2005-0125		1.25		45	4	—
CSS 2005-0150		1.5		45	4	—
CSS 2006-0060	0.6	0.6	16°	45	4	—
CSS 2006-0090		0.9		45	4	—
CSS 2006-0100		1		38	3	—
CSS 2006-0120		1.2		45	4	—
CSS 2006-0150		1.5		45	4	—
CSS 2006-0180		1.8		45	4	—
CSS 2007-0070	0.7	0.7	16°	45	4	—
CSS 2007-0100		1		38	3	—
CSS 2007-0140		1.4		45	4	—
CSS 2007-0175		1.75		45	4	—
CSS 2007-0210		2.1		45	4	—
CSS 2008-0080	0.8	0.8	16°	45	4	—
CSS 2008-0120-3		1.2		38	3	—
CSS 2008-0120-4				45	4	—
CSS 2008-0160		1.6		45	4	—
CSS 2008-0200		2		45	4	—
CSS 2008-0240		2.4		45	4	—
CSS 2009-0090	0.9	0.9	16°	45	4	—
CSS 2009-0120		1.2		38	3	—
CSS 2009-0180		1.8		45	4	—
CSS 2009-0225		2.25		45	4	—
CSS 2009-0270		2.7		45	4	—
CSS 2010-0100	1	1	16°	45	4	—
CSS 2010-0150		1.5		45	4	—
CSS 2010-0200		2		45	4	—
CSS 2010-0250		2.5		45	4	—
CSS 2010-0300		3		45	4	—
CSS 2015-0150	1.5	1.5	16°	45	4	—
CSS 2015-0225		2.25		45	4	—
CSS 2015-0300		3		45	4	—
CSS 2015-0375		3.75		45	4	—
CSS 2015-0450		4.5		45	4	—
CSS 2020-0200	2	2	16°	45	4	—
CSS 2020-0300		3		45	4	—
CSS 2020-0400		4		45	4	—
CSS 2020-0500		5		45	4	—
CSS 2020-0600		6		45	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CSS 2025-0250	2.5	2.5	16°	50	4	—
CSS 2025-0375		3.75		50	4	—
CSS 2025-0500		5		50	4	—
CSS 2025-0625		6.25		50	4	—
CSS 2025-0750		7.5		50	4	—
CSS 2030-0300	3	3	16°	50	6	—
CSS 2030-0450		4.5		50	6	—
CSS 2030-0600		6		50	6	—
CSS 2030-0750		7.5		50	6	—
CSS 2030-0900		9		50	6	—
CSS 2040-0400	4	4	16°	50	6	—
CSS 2040-0600		6		50	6	—
CSS 2040-0800		8		50	6	—
CSS 2040-1000		10		50	6	—
CSS 2040-1200		12		50	6	—
CSS 2050-0500	5	5	16°	50	6	—
CSS 2050-0750		7.5		50	6	—
CSS 2050-1000		10		50	6	—
CSS 2050-1250		12.5		60	6	—
CSS 2050-1500		15		60	6	—
CSS 2060-0600	6	6	—	50	6	—
CSS 2060-0900		9		50	6	—
CSS 2060-1200		12		50	6	—
CSS 2060-1500		15		60	6	—
CSS 2060-1800		18		60	6	—
CSS 2070-1750	7	17.5	16°	70	8	—
CSS 2070-2100		21		80	8	—
CSS 2080-0800	8	8	—	70	8	—
CSS 2080-1200		12		70	8	—
CSS 2080-1600		16		70	8	—
CSS 2080-2000		20		70	8	—
CSS 2080-2400		24		80	8	—
CSS 2090-2250	9	22.5	16°	80	10	—
CSS 2090-2700		27		80	10	—
CSS 2100-1000	10	10	—	70	10	—
CSS 2100-1500		15		70	10	—
CSS 2100-2000		20		70	10	—
CSS 2100-2500		25		80	10	—
CSS 2100-3000		30		80	10	—
CSS 2110-2750	11	27.5	16°	80	12	—
CSS 2110-3300		33		80	12	—
CSS 2120-1200	12	12	—	80	12	—
CSS 2120-1800		18		80	12	—
CSS 2120-2400		24		80	12	—
CSS 2120-3000		30		80	12	—
CSS 2120-3600		36		90	12	—

Milling Conditions for CSS

Slotting

◆ 1D flute length type L/D=1

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 * Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p		Slotting	a_p
2001-0010	0.1	0.1	30,000	30	0.01	30,000	30	0.01	30,000	30	0.01
2002-0020	0.2	0.2	30,000	85	0.02	30,000	85	0.02	30,000	60	0.02
2003-0030	0.3	0.3	30,000	110	0.03	30,000	110	0.03	30,000	110	0.03
2004-0040	0.4	0.4	30,000	120	0.04	30,000	120	0.04	30,000	120	0.04
2005-0050	0.5	0.5	27,000	120	0.05	24,000	105	0.05	24,000	120	0.05
2006-0060	0.6	0.6	24,000	120	0.09	20,000	90	0.09	20,000	120	0.09
2007-0070	0.7	0.7	22,500	115	0.105	17,800	90	0.105	17,800	120	0.105
2008-0080	0.8	0.8	21,000	110	0.12	16,700	90	0.12	16,700	120	0.12
2009-0090	0.9	0.9	19,500	105	0.135	15,600	85	0.135	15,600	120	0.135
2010-0100	1	1	18,000	100	1	14,500	75	1	14,500	125	1
2015-0150	1.5	1.5	16,000	275	1.5	13,000	200	1.5	13,000	135	1.5
2020-0200	2	2	12,000	275	2	10,000	200	2	10,000	135	2
2025-0250	2.5	2.5	10,200	375	2.5	8,400	260	2.5	8,400	140	2.5
2030-0300	3	3	8,500	475	3	6,800	325	3	6,800	150	3
2040-0400	4	4	7,200	475	4	5,700	325	4	5,700	175	4
2050-0500	5	5	6,000	500	5	4,800	350	5	4,800	200	5
2060-0600	6	6	5,000	500	6	4,000	350	6	4,000	200	6
2080-0800	8	8	3,500	475	8	2,700	350	8	2,400	150	8
2100-1000	10	10	2,300	450	10	1,900	325	10	1,400	100	10
2120-1200	12	12	1,850	425	12	1,550	300	12	1,250	90	12

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p
2001-0010	0.1	0.1	30,000	15	0.01	24,000	10	0.004
2002-0020	0.2	0.2	30,000	30	0.02	23,000	25	0.008
2003-0030	0.3	0.3	30,000	55	0.03	20,000	25	0.012
2004-0040	0.4	0.4	30,000	60	0.04	16,800	25	0.016
2005-0050	0.5	0.5	24,000	60	0.05	14,400	30	0.025
2006-0060	0.6	0.6	20,000	60	0.09	12,000	35	0.03
2007-0070	0.7	0.7	17,800	60	0.105	10,000	35	0.035
2008-0080	0.8	0.8	16,700	60	0.12	8,500	35	0.04
2009-0090	0.9	0.9	15,600	60	0.135	7,300	35	0.045
2010-0100	1	1	14,500	60	1	6,550	35	0.2
2015-0150	1.5	1.5	12,000	160	1.5	4,400	35	0.3
2020-0200	2	2	9,000	160	2	3,300	35	0.4
2025-0250	2.5	2.5	7,900	210	2.5	2,750	35	0.5
2030-0300	3	3	6,800	260	3	2,200	35	0.6
2040-0400	4	4	5,100	260	4	1,650	40	0.8
2050-0500	5	5	4,050	260	5	1,300	40	1
2060-0600	6	6	3,300	260	6	1,100	40	1.2
2080-0800	8	8	2,300	235	8	800	40	1.6
2100-1000	10	10	1,500	225	10	690	40	2
2120-1200	12	12	1,200	210	12	550	40	2.4

Milling Conditions for CSS

◆ 1.5D flute length type　1 < L/D ≦ 1.5

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 *Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p		Slotting	a_p
2001-0015	**0.1**	0.15	30,000	30	0.01	30,000	30	0.01	30,000	30	0.01
2002-0030	**0.2**	0.3	30,000	85	0.02	30,000	85	0.02	30,000	60	0.02
2003-0045	**0.3**	0.45	30,000	110	0.03	30,000	110	0.03	30,000	110	0.03
2004-0060	**0.4**	0.6	30,000	120	0.04	30,000	120	0.04	30,000	120	0.04
2005-0075	**0.5**	0.75	27,000	120	0.05	24,000	105	0.05	24,000	120	0.05
2006-0090	**0.6**	0.9	24,000	120	0.09	20,000	90	0.09	20,000	120	0.09
2007-0100	**0.7**	1	22,500	115	0.105	17,800	90	0.105	17,800	120	0.105
2008-0120	**0.8**	1.2	21,000	110	0.12	16,700	90	0.12	16,700	120	0.12
2009-0120	**0.9**	1.2	19,500	105	0.135	15,600	85	0.135	15,600	120	0.135
2010-0150	**1**	1.5	18,000	100	1	14,500	75	1	14,500	125	1
2015-0225	**1.5**	2.25	16,000	275	1.5	13,000	200	1.5	13,000	135	1.5
2020-0300	**2**	3	12,000	275	2	10,000	200	2	10,000	135	2
2025-0375	**2.5**	3.75	10,200	375	2.5	8,400	260	2.5	8,400	140	2.5
2030-0450	**3**	4.5	8,500	475	3	6,800	325	3	6,800	150	3
2040-0600	**4**	6	7,200	475	4	5,700	325	4	5,700	175	4
2050-0750	**5**	7.5	6,000	500	5	4,800	350	5	4,800	200	5
2060-0900	**6**	9	5,000	500	6	4,000	350	6	4,000	200	6
2080-1200	**8**	12	3,500	475	8	2,700	350	8	2,400	150	8
2100-1500	**10**	15	2,300	450	10	1,900	325	10	1,400	100	10
2120-1800	**12**	18	1,850	425	12	1,550	300	12	1,250	90	12

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p
2001-0015	**0.1**	0.15	30,000	15	0.01	24,000	10	0.004
2002-0030	**0.2**	0.3	30,000	30	0.02	23,000	25	0.008
2003-0045	**0.3**	0.45	30,000	55	0.03	20,000	25	0.012
2004-0060	**0.4**	0.6	30,000	60	0.04	16,800	25	0.016
2005-0075	**0.5**	0.75	24,000	60	0.05	14,400	30	0.025
2006-0090	**0.6**	0.9	20,000	60	0.09	12,000	35	0.03
2007-0100	**0.7**	1	17,800	60	0.105	10,000	35	0.035
2008-0120	**0.8**	1.2	16,700	60	0.12	8,500	35	0.04
2009-0120	**0.9**	1.2	15,600	60	0.135	7,300	35	0.045
2010-0150	**1**	1.5	14,500	60	1	6,550	35	0.2
2015-0225	**1.5**	2.25	12,000	160	1.5	4,400	35	0.3
2020-0300	**2**	3	9,000	160	2	3,300	35	0.4
2025-0375	**2.5**	3.75	7,900	210	2.5	2,750	35	0.5
2030-0450	**3**	4.5	6,800	260	3	2,200	35	0.6
2040-0600	**4**	6	5,100	260	4	1,650	40	0.8
2050-0750	**5**	7.5	4,050	260	5	1,300	40	1
2060-0900	**6**	9	3,300	260	6	1,100	40	1.2
2080-1200	**8**	12	2,300	235	8	800	40	1.6
2100-1500	**10**	15	1,500	225	10	690	40	2
2120-1800	**12**	18	1,200	210	12	550	40	2.4

Milling Conditions for CSS

◆ 2D flute length type 1.5 < L/D ≦ 2

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 * Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p		Slotting	a_p
2001-0020	0.1	0.2	30,000	30	0.01	30,000	30	0.01	30,000	30	0.01
2002-0040	0.2	0.4	30,000	85	0.02	30,000	85	0.02	30,000	60	0.02
2003-0060	0.3	0.6	30,000	110	0.03	30,000	110	0.03	30,000	110	0.03
2004-0080	0.4	0.8	30,000	120	0.04	30,000	120	0.04	30,000	120	0.04
2005-0080	0.5	0.8	27,000	120	0.05	24,000	105	0.05	24,000	120	0.05
2005-0100	0.5	1	27,000	120	0.05	24,000	105	0.05	24,000	120	0.05
2006-0100	0.6	1	24,000	120	0.09	20,000	90	0.09	20,000	120	0.09
2006-0120	0.6	1.2	24,000	120	0.09	20,000	90	0.09	20,000	120	0.09
2007-0140	0.7	1.4	22,500	115	0.105	17,800	90	0.105	17,800	120	0.105
2008-0160	0.8	1.6	21,000	110	0.12	16,700	90	0.12	16,700	120	0.12
2009-0180	0.9	1.8	19,500	105	0.135	15,600	85	0.135	15,600	120	0.135
2010-0200	1	2	18,000	100	0.8	14,500	75	0.8	14,500	125	0.8
2015-0300	1.5	3	16,000	275	1.2	13,000	200	1.2	13,000	135	1.2
2020-0400	2	4	12,000	275	1.6	10,000	200	1.6	10,000	135	1.6
2025-0500	2.5	5	10,200	375	2	8,400	260	2	8,400	140	2
2030-0600	3	6	8,500	475	2.4	6,800	325	2.4	6,800	150	2.4
2040-0800	4	8	7,200	475	3.2	5,700	325	3.2	5,700	175	3.2
2050-1000	5	10	6,000	500	4	4,800	350	4	4,800	200	4
2060-1200	6	12	5,000	500	4.8	4,000	350	4.8	4,000	200	4.8
2080-1600	8	16	3,500	475	6.4	2,700	350	6.4	2,400	150	6.4
2100-2000	10	20	2,300	450	8	1,900	325	8	1,400	100	8
2120-2400	12	24	1,850	425	9.6	1,550	300	9.6	1,250	90	9.6

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p
2001-0020	0.1	0.2	30,000	15	0.01	24,000	10	0.003
2002-0040	0.2	0.4	30,000	30	0.02	23,000	25	0.008
2003-0060	0.3	0.6	30,000	55	0.03	20,000	25	0.012
2004-0080	0.4	0.8	30,000	60	0.04	16,800	25	0.016
2005-0080	0.5	0.8	24,000	60	0.05	14,400	30	0.025
2005-0100	0.5	1	24,000	60	0.05	14,400	30	0.025
2006-0100	0.6	1	20,000	60	0.09	12,000	35	0.03
2006-0120	0.6	1.2	20,000	60	0.09	12,000	35	0.03
2007-0140	0.7	1.4	17,800	60	0.105	10,000	35	0.035
2008-0160	0.8	1.6	16,700	60	0.12	8,500	35	0.04
2009-0180	0.9	1.8	15,600	60	0.135	7,300	35	0.045
2010-0200	1	2	14,500	60	0.8	6,550	35	0.15
2015-0300	1.5	3	12,000	160	1.2	4,400	35	0.225
2020-0400	2	4	9,000	160	1.6	3,300	35	0.3
2025-0500	2.5	5	7,900	210	2	2,750	35	0.37
2030-0600	3	6	6,800	260	2.4	2,200	35	0.45
2040-0800	4	8	5,100	260	3.2	1,650	40	0.6
2050-1000	5	10	4,050	260	4	1,300	40	0.75
2060-1200	6	12	3,300	260	4.8	1,100	40	0.9
2080-1600	8	16	2,300	235	3.2	800	40	1.2
2100-2000	10	20	1,500	225	4	690	40	1.5
2120-2400	12	24	1,200	210	4.8	550	40	1.8

Milling Conditions for CSS

◆ 2.5D flute length type　2 < L/D ≦ 2.5

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 * Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p		Slotting	a_p
2001-0025	**0.1**	0.25	30,000	30	0.007	30,000	30	0.007	30,000	30	0.007
2002-0050	**0.2**	0.5	30,000	85	0.014	30,000	85	0.014	30,000	60	0.014
2003-0075	**0.3**	0.75	30,000	110	0.021	30,000	110	0.021	30,000	110	0.021
2004-0100	**0.4**	1	30,000	120	0.028	30,000	120	0.028	30,000	120	0.028
2005-0125	**0.5**	1.25	27,000	120	0.035	24,000	105	0.035	24,000	120	0.035
2006-0150	**0.6**	1.5	24,000	120	0.06	20,000	90	0.06	20,000	120	0.06
2007-0175	**0.7**	1.75	22,500	115	0.07	17,800	90	0.07	17,800	120	0.07
2008-0200	**0.8**	2	21,000	110	0.08	16,700	90	0.08	16,700	120	0.08
2009-0225	**0.9**	2.25	19,500	105	0.09	15,600	85	0.09	15,600	120	0.09
2010-0250	**1**	2.5	20,000	130	0.5	15,000	60	0.5	11,000	120	0.25
2015-0375	**1.5**	3.75	12,800	170	0.75	10,000	100	0.75	7,000	120	0.375
2020-0500	**2**	5	9,300	210	1	7,500	140	1	5,000	120	0.5
2025-0625	**2.5**	6.25	7,600	235	1.25	6,250	160	1.25	4,100	120	0.62
2030-0750	**3**	7.5	5,900	260	1.5	5,000	180	1.5	3,200	120	0.75
2040-1000	**4**	10	4,200	300	2	3,750	220	2	2,250	120	1
2050-1250	**5**	12.5	3,200	340	2.5	3,000	260	2.5	1,700	120	1.25
2060-1500	**6**	15	2,500	380	3	2,500	300	3	1,350	120	1.5
2070-1750	**7**	17.5	2,270	345	3.5	2,270	270	3.5	1,150	105	1.75
2080-2000	**8**	20	2,100	320	4	2,100	250	4	1,000	90	2
2090-2250	**9**	22.5	1,935	300	4.5	1,935	220	4.5	895	80	2.25
2100-2500	**10**	25	1,800	280	5	1,800	200	5	810	75	2.5
2110-2750	**11**	27.5	1,635	265	5.5	1,635	180	5.5	735	70	2.75
2120-3000	**12**	30	1,500	250	6	1,500	160	6	670	65	3

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p
2001-0025	**0.1**	0.25	30,000	15	0.007	24,000	10	0.002
2002-0050	**0.2**	0.5	30,000	30	0.014	23,000	25	0.004
2003-0075	**0.3**	0.75	30,000	55	0.021	20,000	25	0.006
2004-0100	**0.4**	1	30,000	60	0.028	16,800	25	0.008
2005-0125	**0.5**	1.25	24,000	60	0.035	14,400	30	0.015
2006-0150	**0.6**	1.5	20,000	60	0.06	12,000	35	0.018
2007-0175	**0.7**	1.75	17,800	60	0.07	10,000	35	0.021
2008-0200	**0.8**	2	16,700	60	0.08	8,500	35	0.024
2009-0225	**0.9**	2.25	15,600	60	0.09	7,300	35	0.027
2010-0250	**1**	2.5	11,000	60	0.25	5,500	20	0.05
2015-0375	**1.5**	3.75	7,500	90	0.375	3,750	25	0.075
2020-0500	**2**	5	5,700	120	0.5	2,850	30	0.1
2025-0625	**2.5**	6.25	4,800	135	0.62	2,400	30	0.12
2030-0750	**3**	7.5	3,900	150	0.75	1,950	35	0.15
2040-1000	**4**	10	2,900	180	1	1,450	40	0.2
2050-1250	**5**	12.5	2,400	210	1.25	1,200	45	0.25
2060-1500	**6**	15	2,000	240	1.5	1,000	55	0.3
2070-1750	**7**	17.5	1,630	230	1.5	815	55	0.3
2080-2000	**8**	20	1,350	220	1.5	675	55	0.3
2090-2250	**9**	22.5	1,135	210	1.5	565	55	0.3
2100-2500	**10**	25	960	200	1.5	480	55	0.3
2110-2750	**11**	27.5	845	180	1.5	425	55	0.3
2120-3000	**12**	30	750	160	1.5	375	55	0.3

Milling Conditions for CSS

◆ 3D flute length type L/D=3

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 * Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p		Slotting	a_p
2001-0030	**0.1**	0.3	30,000	30	0.005	30,000	30	0.005	30,000	30	0.005
2002-0060	**0.2**	0.6	30,000	85	0.01	30,000	85	0.01	30,000	60	0.01
2003-0090	**0.3**	0.9	30,000	110	0.015	30,000	110	0.015	30,000	110	0.015
2004-0120	**0.4**	1.2	30,000	120	0.02	30,000	120	0.02	30,000	120	0.02
2005-0150	**0.5**	1.5	27,000	120	0.025	24,000	105	0.025	24,000	120	0.025
2006-0180	**0.6**	1.8	24,000	120	0.05	20,000	90	0.05	20,000	120	0.05
2007-0210	**0.7**	2.1	22,500	115	0.056	17,800	90	0.056	17,800	120	0.056
2008-0240	**0.8**	2.4	21,000	110	0.064	16,700	90	0.064	16,700	120	0.064
2009-0270	**0.9**	2.7	19,500	105	0.072	15,600	85	0.072	15,600	120	0.072
2010-0300	**1**	3	20,000	130	0.5	15,000	60	0.5	11,000	120	0.25
2015-0450	**1.5**	4.5	12,800	170	0.75	10,000	100	0.75	7,000	120	0.375
2020-0600	**2**	6	9,300	210	1	7,500	140	1	5,000	120	0.5
2025-0750	**2.5**	7.5	7,600	235	1.25	6,250	160	1.25	4,100	120	0.62
2030-0900	**3**	9	5,900	260	1.5	5,000	180	1.5	3,200	120	0.75
2040-1200	**4**	12	4,200	300	2	3,750	220	2	2,250	120	1
2050-1500	**5**	15	3,200	340	2.5	3,000	260	2.5	1,700	120	1.25
2060-1800	**6**	18	2,500	380	3	2,500	300	3	1,350	120	1.5
2070-2100	**7**	21	2,270	345	3.5	2,270	270	3.5	1,150	105	1.75
2080-2400	**8**	24	2,100	320	4	2,100	250	4	1,000	90	2
2090-2700	**9**	27	1,935	300	4.5	1,935	220	4.5	895	80	2.25
2100-3000	**10**	30	1,800	280	5	1,800	200	5	810	75	2.5
2110-3300	**11**	33	1,635	265	5.5	1,635	180	5.5	735	70	2.75
2120-3600	**12**	36	1,500	250	6	1,500	160	6	670	65	3

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)
				Slotting	a_p		Slotting	a_p
2001-0030	**0.1**	0.3	30,000	15	0.005	24,000	10	0.001
2002-0060	**0.2**	0.6	30,000	30	0.01	23,000	25	0.002
2003-0090	**0.3**	0.9	30,000	55	0.015	20,000	25	0.003
2004-0120	**0.4**	1.2	30,000	60	0.02	16,800	25	0.004
2005-0150	**0.5**	1.5	24,000	60	0.025	14,400	30	0.013
2006-0180	**0.6**	1.8	20,000	60	0.05	12,000	35	0.015
2007-0210	**0.7**	2.1	17,800	60	0.056	10,000	35	0.018
2008-0240	**0.8**	2.4	16,700	60	0.064	8,500	35	0.02
2009-0270	**0.9**	2.7	15,600	60	0.072	7,300	35	0.023
2010-0300	**1**	3	11,000	60	0.25	5,500	15	0.05
2015-0450	**1.5**	4.5	7,500	90	0.375	3,750	20	0.075
2020-0600	**2**	6	5,700	120	0.5	2,850	25	0.1
2025-0750	**2.5**	7.5	4,800	135	0.62	2,400	30	0.12
2030-0900	**3**	9	3,900	150	0.75	1,950	35	0.15
2040-1200	**4**	12	2,900	180	1	1,450	40	0.2
2050-1500	**5**	15	2,400	210	1.25	1,200	45	0.25
2060-1800	**6**	18	2,000	240	1.5	1,000	55	0.3
2070-2100	**7**	21	1,630	230	1.5	815	55	0.3
2080-2400	**8**	24	1,350	220	1.5	675	55	0.3
2090-2700	**9**	27	1,135	210	1.5	565	55	0.3
2100-3000	**10**	30	960	200	1.5	480	55	0.3
2110-3300	**11**	33	845	180	1.5	425	55	0.3
2120-3600	**12**	36	750	160	1.5	375	55	0.3

Milling Conditions for CSS

Side Milling

◆ 1D flute length type L/D=1

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 * Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0010	**0.1**	0.1	30,000	70	0.1	0.007	30,000	55	0.1	0.006	30,000	60	0.1	0.005
2002-0020	**0.2**	0.2	30,000	180	0.2	0.014	30,000	140	0.2	0.012	30,000	120	0.2	0.01
2003-0030	**0.3**	0.3	30,000	280	0.3	0.021	30,000	210	0.3	0.018	30,000	180	0.3	0.015
2004-0040	**0.4**	0.4	30,000	380	0.4	0.028	30,000	260	0.4	0.024	30,000	225	0.4	0.02
2005-0050	**0.5**	0.5	27,000	490	0.5	0.035	24,000	360	0.5	0.03	24,000	315	0.5	0.025
2006-0060	**0.6**	0.6	24,000	600	0.6	0.042	20,000	450	0.6	0.036	20,000	400	0.6	0.03
2007-0070	**0.7**	0.7	22,500	600	0.7	0.049	17,800	450	0.7	0.042	17,800	400	0.7	0.035
2008-0080	**0.8**	0.8	21,000	600	0.8	0.056	16,700	450	0.8	0.048	16,700	400	0.8	0.04
2009-0090	**0.9**	0.9	19,500	600	0.9	0.063	15,600	450	0.9	0.054	15,600	400	0.9	0.045
2010-0100	**1**	1	18,000	600	1	0.075	14,500	450	1	0.075	14,500	500	1	0.05
2015-0150	**1.5**	1.5	16,000	900	1.5	0.113	13,000	600	1.5	0.113	13,000	750	1.5	0.075
2020-0200	**2**	2	12,000	900	2	0.15	10,000	600	2	0.15	10,000	750	2	0.1
2025-0250	**2.5**	2.5	10,200	900	2.5	0.19	8,400	600	2.5	0.19	8,400	750	2.5	0.13
2030-0300	**3**	3	8,500	900	3	0.225	6,800	600	3	0.225	6,800	750	3	0.15
2040-0400	**4**	4	7,200	675	4	0.6	5,700	500	4	0.6	5,700	575	4	0.4
2050-0500	**5**	5	6,000	750	5	0.75	4,800	550	5	0.75	4,800	650	5	0.5
2060-0600	**6**	6	5,000	800	6	0.9	4,000	600	6	0.9	4,000	650	6	0.6
2080-0800	**8**	8	3,500	700	8	1.2	2,700	525	8	1.2	2,400	600	8	0.8
2100-1000	**10**	10	2,300	600	10	1.5	1,900	450	10	1.5	1,400	500	10	1
2120-1200	**12**	12	1,850	550	12	1.8	1,550	400	12	1.8	1,250	450	12	1.2

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0010	**0.1**	0.1	30,000	40	0.1	0.005	24,000	25	0.1	0.004
2002-0020	**0.2**	0.2	30,000	80	0.2	0.01	23,000	35	0.2	0.008
2003-0030	**0.3**	0.3	30,000	120	0.3	0.015	20,000	45	0.3	0.012
2004-0040	**0.4**	0.4	30,000	150	0.4	0.02	16,800	55	0.4	0.016
2005-0050	**0.5**	0.5	24,000	210	0.5	0.025	14,400	65	0.5	0.02
2006-0060	**0.6**	0.6	20,000	265	0.6	0.03	12,000	80	0.6	0.024
2007-0070	**0.7**	0.7	17,800	265	0.7	0.035	10,000	80	0.7	0.028
2008-0080	**0.8**	0.8	16,700	265	0.8	0.04	8,500	80	0.8	0.032
2009-0090	**0.9**	0.9	15,600	265	0.9	0.045	7,300	80	0.9	0.036
2010-0100	**1**	1	14,500	300	1	0.05	6,550	80	1	0.045
2015-0150	**1.5**	1.5	12,000	450	1.5	0.075	4,400	100	1.5	0.068
2020-0200	**2**	2	9,000	450	2	0.1	3,300	115	2	0.09
2025-0250	**2.5**	2.5	7,900	450	2.5	0.13	2,750	120	2.5	0.11
2030-0300	**3**	3	6,800	450	3	0.15	2,200	130	3	0.135
2040-0400	**4**	4	5,100	350	4	0.4	1,650	150	4	0.18
2050-0500	**5**	5	4,050	425	5	0.5	1,300	160	5	0.225
2060-0600	**6**	6	3,300	500	6	0.6	1,100	180	6	0.27
2080-0800	**8**	8	2,300	450	8	0.8	800	130	8	0.36
2100-1000	**10**	10	1,500	450	10	1	690	110	10	0.45
2120-1200	**12**	12	1,200	400	12	1.2	550	110	12	0.54

Milling Conditions for CSS

◆ 1.5D flute length type 1 < L/D ≦ 1.5

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 * Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0015	0.1	0.15	30,000	70	0.15	0.007	30,000	55	0.15	0.006	30,000	60	0.15	0.005
2002-0030	0.2	0.3	30,000	180	0.3	0.014	30,000	140	0.3	0.012	30,000	120	0.3	0.01
2003-0045	0.3	0.45	30,000	280	0.45	0.021	30,000	210	0.45	0.018	30,000	180	0.45	0.015
2004-0060	0.4	0.6	30,000	380	0.6	0.028	30,000	260	0.6	0.024	30,000	225	0.6	0.02
2005-0075	0.5	0.75	27,000	490	0.75	0.035	24,000	360	0.75	0.03	24,000	315	0.75	0.025
2006-0090	0.6	0.9	24,000	600	0.9	0.042	20,000	450	0.9	0.036	20,000	400	0.9	0.03
2007-0100	0.7	1	22,500	600	1	0.049	17,800	450	1	0.042	17,800	400	1	0.035
2008-0120	0.8	1.2	21,000	600	1.2	0.056	16,700	450	1.2	0.048	16,700	400	1.2	0.04
2009-0120	0.9	1.2	19,500	600	1.2	0.063	15,600	450	1.2	0.054	15,600	400	1.2	0.045
2010-0150	1	1.5	18,000	600	1.5	0.075	14,500	450	1.5	0.075	14,500	500	1.5	0.05
2015-0225	1.5	2.25	16,000	900	2.25	0.113	13,000	600	2.25	0.113	13,000	750	2.25	0.075
2020-0300	2	3	12,000	900	3	0.15	10,000	600	3	0.15	10,000	750	3	0.1
2025-0375	2.5	3.75	10,200	900	3.75	0.19	8,400	600	3.75	0.19	8,400	750	3.75	0.13
2030-0450	3	4.5	8,500	900	4.5	0.225	6,800	600	4.5	0.225	6,800	750	4.5	0.15
2040-0600	4	6	7,200	675	6	0.6	5,700	500	6	0.6	5,700	575	6	0.4
2050-0750	5	7.5	6,000	750	7.5	0.75	4,800	550	7.5	0.75	4,800	650	7.5	0.5
2060-0900	6	9	5,000	800	9	0.9	4,000	600	9	0.9	4,000	650	9	0.6
2080-1200	8	12	3,500	700	12	1.2	2,700	525	12	1.2	2,400	600	12	0.8
2100-1500	10	15	2,300	600	15	1.5	1,900	450	15	1.5	1,400	500	15	1
2120-1800	12	18	1,850	550	18	1.8	1,550	400	18	1.8	1,250	450	18	1.2

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0015	0.1	0.15	30,000	40	0.15	0.005	24,000	25	0.15	0.004
2002-0030	0.2	0.3	30,000	80	0.3	0.01	23,000	35	0.3	0.008
2003-0045	0.3	0.45	30,000	120	0.45	0.015	20,000	45	0.45	0.012
2004-0060	0.4	0.6	30,000	150	0.6	0.02	16,800	55	0.6	0.016
2005-0075	0.5	0.75	24,000	210	0.75	0.025	14,400	65	0.75	0.02
2006-0090	0.6	0.9	20,000	265	0.9	0.03	12,000	80	0.9	0.024
2007-0100	0.7	1	17,800	265	1	0.035	10,000	80	1	0.028
2008-0120	0.8	1.2	16,700	265	1.2	0.04	8,500	80	1.2	0.032
2009-0120	0.9	1.2	15,600	265	1.2	0.045	7,300	80	1.2	0.036
2010-0150	1	1.5	14,500	300	1.5	0.05	6,550	80	1	0.045
2015-0225	1.5	2.25	12,000	450	2.25	0.075	4,400	100	1.5	0.068
2020-0300	2	3	9,000	450	3	0.1	3,300	115	2	0.09
2025-0375	2.5	3.75	7,900	450	3.75	0.13	2,750	120	2.5	0.11
2030-0450	3	4.5	6,800	450	4.5	0.15	2,200	130	3	0.135
2040-0600	4	6	5,100	350	6	0.4	1,650	150	4	0.18
2050-0750	5	7.5	4,050	425	7.5	0.5	1,300	160	5	0.225
2060-0900	6	9	3,300	500	9	0.6	1,100	180	6	0.27
2080-1200	8	12	2,300	450	12	0.8	800	130	12	0.36
2100-1500	10	15	1,500	450	15	1	690	110	15	0.45
2120-1800	12	18	1,200	400	18	1.2	550	110	18	0.54

Milling Conditions for CSS

◆ 2D flute length type 1.5 < L/D ≦ 2

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 * Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0020	0.1	0.2	30,000	50	0.15	0.006	30,000	50	0.15	0.006	30,000	45	0.15	0.005
2002-0040	0.2	0.4	30,000	150	0.3	0.012	30,000	140	0.3	0.012	30,000	105	0.3	0.01
2003-0060	0.3	0.6	30,000	230	0.45	0.018	30,000	185	0.45	0.018	30,000	165	0.45	0.015
2004-0080	0.4	0.8	30,000	315	0.6	0.024	30,000	240	0.6	0.02	30,000	225	0.6	0.016
2005-0080	0.5	0.8	27,000	490	0.75	0.03	24,000	360	0.75	0.025	24,000	315	0.75	0.02
2005-0100	0.5	1	27,000	400	0.75	0.03	24,000	300	0.75	0.025	24,000	260	0.75	0.02
2006-0100	0.6	1	24,000	600	1	0.036	20,000	450	1	0.03	20,000	400	1	0.024
2006-0120	0.6	1.2	24,000	500	1.2	0.036	20,000	360	1.2	0.03	20,000	315	1.2	0.024
2007-0140	0.7	1.4	22,500	500	1.4	0.042	17,800	360	1.4	0.035	17,800	315	1.4	0.028
2008-0160	0.8	1.6	21,000	500	1.6	0.048	16,700	360	1.6	0.04	16,700	315	1.6	0.032
2009-0180	0.9	1.8	19,500	500	1.8	0.054	15,600	360	1.8	0.045	15,600	315	1.8	0.036
2010-0200	1	2	18,000	600	1.5	0.09	14,500	450	1.5	0.09	14,500	500	1.5	0.06
2015-0300	1.5	3	16,000	900	2.25	0.135	13,000	600	2.25	0.135	13,000	750	2.25	0.09
2020-0400	2	4	12,000	900	3	0.18	10,000	600	3	0.18	10,000	750	3	0.12
2025-0500	2.5	5	10,200	900	3.75	0.23	8,400	600	3.75	0.23	8,400	750	3.75	0.15
2030-0600	3	6	8,500	900	4.5	0.27	6,800	600	4.5	0.27	6,800	750	4.5	0.18
2040-0800	4	8	7,200	675	6	0.6	5,700	500	6	0.6	5,700	575	6	0.4
2050-1000	5	10	6,000	750	7.5	0.75	4,800	550	7.5	0.75	4,800	650	7.5	0.5
2060-1200	6	12	5,000	800	9	0.9	4,000	600	9	0.9	4,000	650	9	0.6
2080-1600	8	16	3,500	700	12	1.2	2,700	525	12	1.2	2,400	600	12	0.8
2100-2000	10	20	2,300	600	15	1.5	1,900	450	15	1.5	1,400	500	15	1
2120-2400	12	24	1,850	550	18	1.8	1,550	400	18	1.8	1,250	450	18	1.2

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0020	0.1	0.2	30,000	30	0.15	0.005	24,000	10	0.2	0.003
2002-0040	0.2	0.4	30,000	70	0.3	0.01	23,000	30	0.4	0.006
2003-0060	0.3	0.6	30,000	110	0.45	0.015	20,000	40	0.6	0.009
2004-0080	0.4	0.8	30,000	150	0.6	0.016	16,800	50	0.8	0.012
2005-0080	0.5	0.8	24,000	210	0.75	0.02	14,400	65	0.8	0.015
2005-0100	0.5	1	24,000	175	0.75	0.02	14,400	50	1	0.015
2006-0100	0.6	1	20,000	265	1	0.024	12,000	80	1	0.018
2006-0120	0.6	1.2	20,000	210	1.2	0.024	12,000	60	1.2	0.018
2007-0140	0.7	1.4	17,800	210	1.4	0.028	10,000	60	1.4	0.021
2008-0160	0.8	1.6	16,700	210	1.6	0.032	8,500	60	1.6	0.024
2009-0180	0.9	1.8	15,600	210	1.8	0.036	7,300	60	1.8	0.027
2010-0200	1	2	14,500	300	1.5	0.06	6,550	80	1.5	0.045
2015-0300	1.5	3	12,000	450	2.25	0.09	4,400	100	2.25	0.068
2020-0400	2	4	9,000	450	3	0.12	3,300	115	3	0.09
2025-0500	2.5	5	7,900	450	3.75	0.15	2,750	120	3.75	0.11
2030-0600	3	6	6,800	450	4.5	0.18	2,200	130	4.5	0.135
2040-0800	4	8	5,100	350	6	0.4	1,650	150	6	0.18
2050-1000	5	10	4,050	425	7.5	0.5	1,300	160	7.5	0.225
2060-1200	6	12	3,300	500	9	0.6	1,100	180	9	0.27
2080-1600	8	16	2,300	450	12	0.8	800	130	12	0.36
2100-2000	10	20	1,500	450	15	1	690	110	15	0.45
2120-2400	12	24	1,200	400	18	1.2	550	110	18	0.54

Milling Conditions for CSS

◆ 2.5D flute length type　2 < L/D ≦ 2.5

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 * Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0025	0.1	0.25	30,000	40	0.2	0.005	30,000	40	0.2	0.005	30,000	25	0.2	0.004
2002-0050	0.2	0.5	30,000	150	0.4	0.008	30,000	120	0.4	0.01	30,000	65	0.4	0.008
2003-0075	0.3	0.75	30,000	230	0.6	0.012	30,000	160	0.6	0.015	30,000	100	0.6	0.012
2004-0100	0.4	1	30,000	315	0.8	0.016	30,000	220	0.8	0.016	30,000	140	0.8	0.012
2005-0125	0.5	1.25	27,000	400	1	0.02	24,000	260	1	0.02	24,000	155	1	0.015
2006-0150	0.6	1.5	24,000	500	1.5	0.024	20,000	360	1.5	0.024	20,000	210	1.5	0.018
2007-0175	0.7	1.75	22,500	500	1.75	0.028	17,800	360	1.75	0.028	17,800	210	1.75	0.021
2008-0200	0.8	2	21,000	500	2	0.032	16,700	360	2	0.032	16,700	210	2	0.024
2009-0225	0.9	2.25	19,500	500	2.25	0.036	15,600	360	2.25	0.036	15,600	210	2.25	0.027
2010-0250	1	2.5	20,000	700	2.5	0.05	15,000	500	2.5	0.05	11,000	200	2.5	0.05
2015-0375	1.5	3.75	12,800	710	3.75	0.075	10,000	500	3.75	0.075	7,000	210	3.75	0.075
2020-0500	2	5	9,300	720	5	0.1	7,500	510	5	0.1	5,000	230	5	0.1
2025-0625	2.5	6.25	7,600	725	6.25	0.13	6,250	515	6.25	0.13	4,100	250	6.25	0.13
2030-0750	3	7.5	5,900	730	7.5	0.15	5,000	520	7.5	0.15	3,200	275	7.5	0.15
2040-1000	4	10	4,200	740	10	0.4	3,750	520	10	0.4	2,250	300	10	0.2
2050-1250	5	12.5	3,200	750	12.5	0.5	3,000	530	12.5	0.5	1,700	330	12.5	0.25
2060-1500	6	15	2,500	750	15	0.6	2,500	530	15	0.6	1,350	350	15	0.3
2070-1750	7	17.5	2,270	700	17.5	0.7	2,270	495	17.5	0.7	1,150	350	17.5	0.35
2080-2000	8	20	2,100	660	20	0.8	2,100	470	20	0.8	1,000	350	20	0.4
2090-2250	9	22.5	1,935	615	22.5	0.9	1,935	440	22.5	0.9	895	350	22.5	0.45
2100-2500	10	25	1,800	580	25	1	1,800	410	25	1	810	350	25	0.5
2110-2750	11	27.5	1,635	545	27.5	1.1	1,635	375	27.5	1.1	735	335	27.5	0.55
2120-3000	12	30	1,500	520	30	1.2	1,500	350	30	1.2	670	320	30	0.6

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0025	0.1	0.25	30,000	25	0.2	0.004	24,000	10	0.25	0.002
2002-0050	0.2	0.5	30,000	65	0.4	0.008	23,000	25	0.5	0.004
2003-0075	0.3	0.75	30,000	100	0.6	0.012	20,000	35	0.75	0.006
2004-0100	0.4	1	30,000	140	0.8	0.012	16,800	45	1	0.008
2005-0125	0.5	1.25	24,000	155	1	0.015	14,400	50	1.25	0.01
2006-0150	0.6	1.5	20,000	210	1.5	0.018	12,000	60	1.5	0.012
2007-0175	0.7	1.75	17,800	210	1.75	0.021	10,000	60	1.75	0.014
2008-0200	0.8	2	16,700	210	2	0.024	8,500	60	2	0.016
2009-0225	0.9	2.25	15,600	210	2.25	0.027	7,300	60	2.25	0.018
2010-0250	1	2.5	11,000	200	2.5	0.05	5,500	60	2.5	0.05
2015-0375	1.5	3.75	7,500	210	3.75	0.075	3,750	65	3.75	0.075
2020-0500	2	5	5,700	230	5	0.1	2,850	70	5	0.1
2025-0625	2.5	6.25	4,800	240	6.25	0.13	2,400	70	6.25	0.13
2030-0750	3	7.5	3,900	250	7.5	0.15	1,950	75	7.5	0.15
2040-1000	4	10	2,900	270	10	0.3	1,450	80	10	0.3
2050-1250	5	12.5	2,400	290	12.5	0.375	1,200	90	12.5	0.375
2060-1500	6	15	2,000	300	15	0.45	1,000	100	15	0.45
2070-1750	7	17.5	1,630	285	17.5	0.525	815	85	17.5	0.525
2080-2000	8	20	1,350	270	20	0.6	675	70	20	0.6
2090-2250	9	22.5	1,135	255	22.5	0.675	565	60	22.5	0.675
2100-2500	10	25	960	240	25	0.75	480	50	25	0.75
2110-2750	11	27.5	845	220	27.5	0.825	425	45	27.5	0.825
2120-3000	12	30	750	200	30	0.9	375	40	30	0.9

Milling Conditions for CSS


◆ 3D flute length type L/D=3

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 * Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0030	0.1	0.3	30,000	30	0.25	0.005	30,000	30	0.25	0.005	30,000	20	0.25	0.004
2002-0060	0.2	0.6	30,000	110	0.5	0.008	30,000	85	0.5	0.01	30,000	50	0.5	0.008
2003-0090	0.3	0.9	30,000	180	0.75	0.012	30,000	135	0.75	0.015	30,000	80	0.75	0.012
2004-0120	0.4	1.2	30,000	250	1	0.016	30,000	170	1	0.016	30,000	100	1	0.012
2005-0150	0.5	1.5	27,000	320	1.25	0.02	24,000	200	1.25	0.02	24,000	125	1.25	0.015
2006-0180	0.6	1.8	24,000	400	1.8	0.024	20,000	280	1.8	0.024	20,000	170	1.8	0.018
2007-0210	0.7	2.1	22,500	400	2.1	0.028	17,800	280	2.1	0.028	17,800	170	2.1	0.021
2008-0240	0.8	2.4	21,000	400	2.4	0.032	16,700	280	2.4	0.032	16,700	170	2.4	0.024
2009-0270	0.9	2.7	19,500	400	2.7	0.036	15,600	280	2.7	0.036	15,600	170	2.7	0.027
2010-0300	1	3	20,000	700	3	0.05	15,000	500	3	0.05	11,000	200	3	0.05
2015-0450	1.5	4.5	12,800	710	4.5	0.075	10,000	500	4.5	0.075	7,000	210	4.5	0.075
2020-0600	2	6	9,300	720	6	0.1	7,500	510	6	0.1	5,000	230	6	0.1
2025-0750	2.5	7.5	7,600	725	7.5	0.13	6,250	515	7.5	0.13	4,100	250	7.5	0.13
2030-0900	3	9	5,900	730	9	0.15	5,000	520	9	0.15	3,200	275	9	0.15
2040-1200	4	12	4,200	740	12	0.4	3,750	520	12	0.4	2,250	300	12	0.2
2050-1500	5	15	3,200	750	15	0.5	3,000	530	15	0.5	1,700	330	15	0.25
2060-1800	6	18	2,500	750	18	0.6	2,500	530	18	0.6	1,350	350	18	0.3
2070-2100	7	21	2,270	700	21	0.7	2,270	495	21	0.7	1,150	350	21	0.35
2080-2400	8	24	2,100	660	24	0.8	2,100	470	24	0.8	1,000	350	24	0.4
2090-2700	9	27	1,935	615	27	0.9	1,935	440	27	0.9	895	350	27	0.45
2100-3000	10	30	1,800	580	30	1	1,800	410	30	1	810	350	30	0.5
2110-3300	11	33	1,635	545	33	1.1	1,635	375	33	1.1	735	335	33	0.55
2120-3600	12	36	1,500	520	36	1.2	1,500	350	36	1.2	670	320	36	0.6


WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Milling Amount (mm)	
				Side Milling	a_p	a_e		Side Milling	a_p	a_e
2001-0030	0.1	0.3	30,000	20	0.25	0.004	24,000	10	0.3	0.002
2002-0060	0.2	0.6	30,000	50	0.5	0.008	23,000	20	0.6	0.004
2003-0090	0.3	0.9	30,000	80	0.75	0.012	20,000	35	0.9	0.003
2004-0120	0.4	1.2	30,000	100	1	0.012	16,800	40	1.2	0.004
2005-0150	0.5	1.5	24,000	125	1.25	0.015	14,400	50	1.5	0.005
2006-0180	0.6	1.8	20,000	170	1.8	0.018	12,000	60	1.8	0.006
2007-0210	0.7	2.1	17,800	170	2.1	0.021	10,000	60	2.1	0.007
2008-0240	0.8	2.4	16,700	170	2.4	0.024	8,500	60	2.4	0.008
2009-0270	0.9	2.7	15,600	170	2.7	0.027	7,300	60	2.7	0.009
2010-0300	1	3	11,000	200	3	0.05	5,500	60	3	0.05
2015-0450	1.5	4.5	7,500	210	4.5	0.075	3,750	65	4.5	0.075
2020-0600	2	6	5,700	230	6	0.1	2,850	70	6	0.1
2025-0750	2.5	7.5	4,800	240	7.5	0.13	2,400	70	7.5	0.13
2030-0900	3	9	3,900	250	9	0.15	1,950	75	9	0.15
2040-1200	4	12	2,900	270	12	0.3	1,450	80	12	0.3
2050-1500	5	15	2,400	290	15	0.375	1,200	90	15	0.375
2060-1800	6	18	2,000	300	18	0.45	1,000	100	18	0.45
2070-2100	7	21	1,630	285	21	0.525	815	85	21	0.525
2080-2400	8	24	1,350	270	24	0.6	675	70	24	0.6
2090-2700	9	27	1,135	255	27	0.675	565	60	27	0.675
2100-3000	10	30	960	240	30	0.75	480	50	30	0.75
2110-3300	11	33	845	220	33	0.825	425	45	33	0.825
2120-3600	12	36	750	200	36	0.9	375	40	36	0.9

Milling Conditions for CSS

Note:
・Decrease both spindle speed and feed rate proportionally in case of chattering.
・These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
・Reduce the milling amount and feed rate in accordance with required milling precision.
・Recommend water soluble or oil coolant.
・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

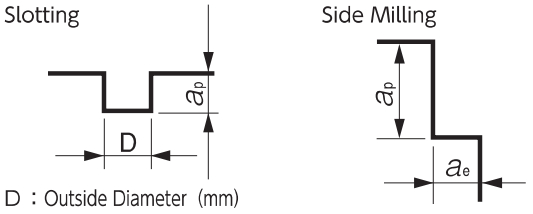

Unique Cross Section design

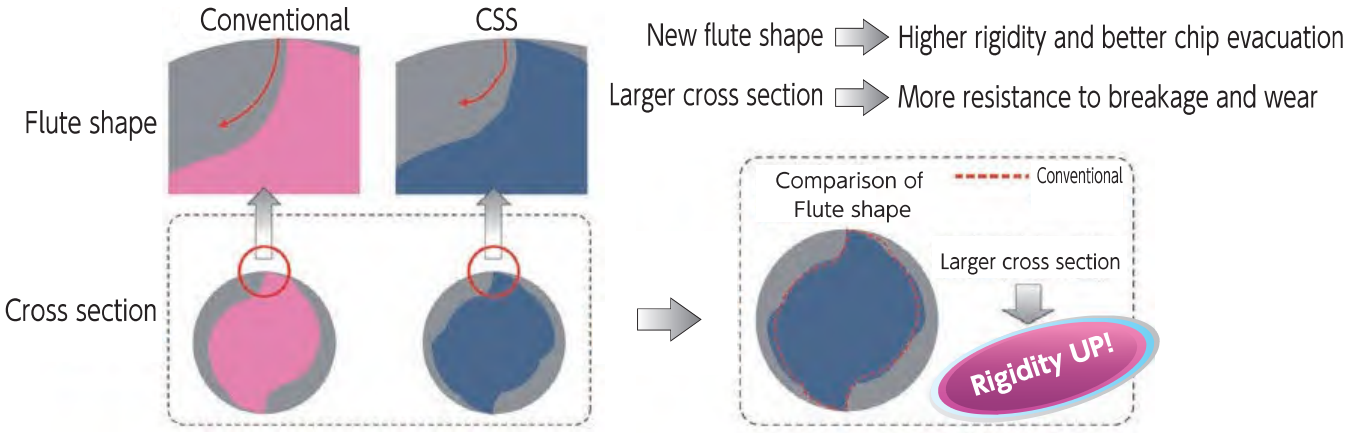

Milling Example: Slotting Comparison STAVAX (53HRC)

Tool	ϕ6 × L12 mm
Spindle Speed	1,100 min^{-1}
Feed Rate	40 mm/min
a_p	1.8 mm
Coolant	Air Blow (Through Spindle)
Cycle Time	28 min



C-CES2000



UTCOAT 2 Flute Square End Mills

φ0.1～φ20


Super MG | UT COAT | 30° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○			●			○	○		

Features

Broad application range from Copper and Carbon Steels up to Hardened Steels (55HRC).
Excellent performance/quality to price ratio.
Refer to page A-47 for 4 flute C-CES.

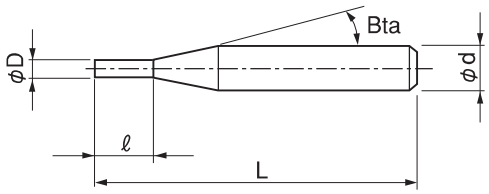

The shank taper angle shown is not an exact value.

Total 207 models

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CES 2001-0015	0.1	0.15	16°	45	4	—
C-CES 2001-0020		0.2		45	4	—
C-CES 2001-0030		0.3		45	4	—
C-CES 2002-0030	0.2	0.3	16°	45	4	—
C-CES 2002		0.4		38	3	—
C-CES 2002-0040		0.4		45	4	—
C-CES 2002-0050		0.5		45	4	—
C-CES 2002-0060		0.6		45	4	—
C-CES 2002-0080		0.8		45	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CES 2003-0045	0.3	0.45	16°	45	4	—
C-CES 2003		0.6		38	3	—
C-CES 2003-0060		0.6		45	4	—
C-CES 2003-0075		0.75		45	4	—
C-CES 2003-0090		0.9		45	4	—
C-CES 2003-0120		1.2		45	4	—
C-CES 2004-0060	0.4	0.6	16°	45	4	—
C-CES 2004		0.8		38	3	—
C-CES 2004-0080		0.8		45	4	—
C-CES 2004-0100		1		45	4	—
C-CES 2004-0120		1.2		45	4	—
C-CES 2004-0160		1.6		45	4	—
C-CES 2005-0075	0.5	0.75	16°	45	4	—
C-CES 2005		0.8		38	3	—
C-CES 2005-0100		1		45	4	—
C-CES 2005-0125		1.25		45	4	—
C-CES 2005-0150		1.5		45	4	—
C-CES 2005-0200		2		45	4	—
C-CES 2006-0090	0.6	0.9	16°	45	4	—
C-CES 2006		1		38	3	—
C-CES 2006-0120		1.2		45	4	—
C-CES 2006-0150		1.5		45	4	—
C-CES 2006-0180		1.8		45	4	—
C-CES 2006-0240		2.4		45	4	—
C-CES 2007	0.7	1	16°	38	3	—
C-CES 2007-0140		1.4		45	4	—
C-CES 2007-0175		1.75		45	4	—
C-CES 2007-0210		2.1		45	4	—
C-CES 2007-0280		2.8		45	4	—
C-CES 2008	0.8	1.2	16°	38	3	—
C-CES 2008-0120		1.2		45	4	—
C-CES 2008-0160		1.6		45	4	—
C-CES 2008-0200		2		45	4	—
C-CES 2008-0240		2.4		45	4	—
C-CES 2008-0320		3.2		45	4	—
C-CES 2009	0.9	1.2	16°	38	3	—
C-CES 2009-0180		1.8		45	4	—
C-CES 2009-0225		2.25		45	4	—
C-CES 2009-0270		2.7		45	4	—
C-CES 2009-0360		3.6		45	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-CES 2010-0150	1	1.5	16°	45	4	—
C-CES 2010-0200		2		45	4	—
C-CES 2010		2.5		45	4	—
C-CES 2010-0300		3		45	4	—
C-CES 2010-0400		4		45	4	—
C-CES 2011	1.1	2.5	16°	45	4	—
C-CES 2012-0180	1.2	1.8	16°	45	4	—
C-CES 2012-0240		2.4		45	4	—
C-CES 2012-0300		3		45	4	—
C-CES 2012-0360		3.6		45	4	—
C-CES 2012		4		45	4	—
C-CES 2012-0480		4.8		45	4	—
C-CES 2013	1.3	4	16°	45	4	—
C-CES 2014	1.4	4	16°	45	4	—
C-CES 2015-0225	1.5	2.25	16°	45	4	—
C-CES 2015-0300		3		45	4	—
C-CES 2015-0375		3.75		45	4	—
C-CES 2015		4		45	4	—
C-CES 2015-0450		4.5		45	4	—
C-CES 2015-0600		6		45	4	—
C-CES 2016	1.6	5	16°	45	4	—
C-CES 2017	1.7	5	16°	45	4	—
C-CES 2018-0270	1.8	2.7	16°	45	4	—
C-CES 2018-0360		3.6		45	4	—
C-CES 2018-0450		4.5		45	4	—
C-CES 2018		5		45	4	—
C-CES 2018-0540		5.4		45	4	—
C-CES 2018-0720		7.2		45	4	—
C-CES 2019	1.9	5	16°	45	4	—
C-CES 2020-0300	2	3	16°	45	4	—
C-CES 2020-0400		4		45	4	—
C-CES 2020-0500		5		45	4	—
C-CES 2020		6		45	4	—
C-CES 2020-0800		8		45	4	—
C-CES 2021	2.1	6	16°	45	4	—
C-CES 2022	2.2	6	16°	45	4	—
C-CES 2023	2.3	6	16°	45	4	—
C-CES 2024	2.4	8	16°	45	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-CES 2025-0375	2.5	3.75	16°	45	4	—
C-CES 2025-0500		5		45	4	—
C-CES 2025-0625		6.25		45	4	—
C-CES 2025-0750		7.5		45	4	—
C-CES 2025		8		45	4	—
C-CES 2025-1000		10		50	4	—
C-CES 2026	2.6	8	16°	45	6	—
C-CES 2027	2.7	8	16°	45	6	—
C-CES 2028	2.8	8	16°	45	6	—
C-CES 2029	2.9	8	16°	45	6	—
C-CES 2030-0450	3	4.5	16°	45	6	—
C-CES 2030-0600		6		45	6	—
C-CES 2030-0750		7.5		45	6	—
C-CES 2030		8		45	6	—
C-CES 2030-0900		9		45	6	—
C-CES 2030-1200		12		50	6	—
C-CES 2031	3.1	10	16°	45	6	—
C-CES 2032	3.2	10	16°	45	6	—
C-CES 2033	3.3	10	16°	45	6	—
C-CES 2034	3.4	10	16°	45	6	—
C-CES 2035	3.5	10	16°	45	6	—
C-CES 2036	3.6	10	16°	45	6	—
C-CES 2037	3.7	10	16°	45	6	—
C-CES 2038	3.8	11	16°	45	6	—
C-CES 2039	3.9	11	16°	45	6	—
C-CES 2040-0600	4	6	16°	50	6	—
C-CES 2040-0800		8		50	6	—
C-CES 2040-1000		10		50	6	—
C-CES 2040		11		45	6	—
C-CES 2040-1200		12		50	6	—
C-CES 2040-1600		16		60	6	—
C-CES 2041	4.1	11	16°	45	6	—
C-CES 2042	4.2	11	16°	45	6	—
C-CES 2043	4.3	11	16°	45	6	—
C-CES 2044	4.4	11	16°	45	6	—
C-CES 2045	4.5	11	16°	45	6	—
C-CES 2046	4.6	11	16°	45	6	—
C-CES 2047	4.7	11	16°	45	6	—
C-CES 2048	4.8	13	16°	50	6	—
C-CES 2049	4.9	13	16°	50	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-CES 2050-0750	5	7.5	16°	50	6	—
C-CES 2050-1000		10		50	6	—
C-CES 2050-1250		12.5		50	6	—
C-CES 2050		13		50	6	—
C-CES 2050-1500		15		50	6	—
C-CES 2050-2000		20		60	6	—
C-CES 2051	5.1	13	16°	50	6	—
C-CES 2052	5.2	13	16°	50	6	—
C-CES 2053	5.3	13	16°	50	6	—
C-CES 2054	5.4	13	16°	50	6	—
C-CES 2055	5.5	13	16°	50	6	—
C-CES 2056	5.6	13	16°	50	6	—
C-CES 2057	5.7	13	16°	50	6	—
C-CES 2058	5.8	13	16°	50	6	—
C-CES 2059	5.9	13	16°	50	6	—
C-CES 2060-0900	6	9	—	50	6	—
C-CES 2060-1200		12		50	6	—
C-CES 2060		13		50	6	—
C-CES 2060-1500		15		50	6	—
C-CES 2060-1800		18		50	6	—
C-CES 2060-2400		24		60	6	—
C-CES 2061	6.1	16	16°	60	8	—
C-CES 2062	6.2	16	16°	60	8	—
C-CES 2063	6.3	16	16°	60	8	—
C-CES 2064	6.4	16	16°	60	8	—
C-CES 2065	6.5	16	16°	60	8	—
C-CES 2066	6.6	16	16°	60	8	—
C-CES 2067	6.7	16	16°	60	8	—
C-CES 2068	6.8	16	16°	60	8	—
C-CES 2069	6.9	16	16°	60	8	—
C-CES 2070	7	16	16°	60	8	—
C-CES 2071	7.1	16	16°	60	8	—
C-CES 2072	7.2	16	16°	60	8	—
C-CES 2073	7.3	16	16°	60	8	—
C-CES 2074	7.4	16	16°	60	8	—
C-CES 2075	7.5	16	16°	60	8	—
C-CES 2076	7.6	19	16°	60	8	—
C-CES 2077	7.7	19	16°	60	8	—
C-CES 2078	7.8	19	16°	60	8	—
C-CES 2079	7.9	19	16°	60	8	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-CES 2080-1600	8	16	—	60	8	—
C-CES 2080		19		60	8	—
C-CES 2080-2000		20		60	8	—
C-CES 2080-2400		24		80	8	—
C-CES 2080-3200		32		80	8	—
C-CES 2081	8.1	19	16°	70	10	—
C-CES 2082	8.2	19	16°	70	10	—
C-CES 2083	8.3	19	16°	70	10	—
C-CES 2084	8.4	19	16°	70	10	—
C-CES 2085	8.5	19	16°	70	10	—
C-CES 2086	8.6	19	16°	70	10	—
C-CES 2087	8.7	19	16°	70	10	—
C-CES 2088	8.8	19	16°	70	10	—
C-CES 2089	8.9	19	16°	70	10	—
C-CES 2090	9	19	16°	70	10	—
C-CES 2091	9.1	19	16°	70	10	—
C-CES 2092	9.2	19	16°	70	10	—
C-CES 2093	9.3	19	16°	70	10	—
C-CES 2094	9.4	19	16°	70	10	—
C-CES 2095	9.5	19	16°	70	10	—
C-CES 2096	9.6	22	16°	70	10	—
C-CES 2097	9.7	22	16°	70	10	—
C-CES 2098	9.8	22	16°	70	10	—
C-CES 2099	9.9	22	16°	70	10	—
C-CES 2100-2000	10	20	—	70	10	—
C-CES 2100		22		70	10	—
C-CES 2100-2500		25		70	10	—
C-CES 2100-3000		30		80	10	—
C-CES 2100-4000		40		90	10	—
C-CES 2105	10.5	22	16°	75	12	—
C-CES 2110	11	22	16°	75	12	—
C-CES 2115	11.5	22	16°	75	12	—
C-CES 2120-2400	12	24	—	75	12	—
C-CES 2120		26		75	12	—
C-CES 2120-3000		30		75	12	—
C-CES 2120-3600		36		90	12	—
C-CES 2120-4800		48		100	12	—
C-CES 2160	16	32	—	110	16	—
C-CES 2180	18	32	16°	110	20	—
C-CES 2200	20	38	—	110	20	—

Milling Conditions for C-CES (2 Flutes)

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)					ALLOY STEELS SK / SCM / SUS (225~325HB)				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
2001	0.1	0.15	30,000	30	0.01	0.15	0.01	30,000	30	0.01	0.15	0.01
		0.2	30,000	30	0.01	0.15	0.01	30,000	30	0.01	0.15	0.01
		0.3	30,000	30	0.005	0.25	0.005	30,000	30	0.005	0.25	0.005
2002	0.2	0.3	30,000	85	0.02	0.3	0.02	30,000	85	0.02	0.3	0.02
		0.4	30,000	85	0.02	0.3	0.02	30,000	85	0.02	0.3	0.02
		0.5	30,000	85	0.014	0.4	0.014	30,000	85	0.014	0.4	0.014
		0.6	30,000	85	0.01	0.5	0.01	30,000	85	0.01	0.5	0.01
		0.8	30,000	85	0.004	0.7	0.004	30,000	85	0.004	0.7	0.004
2003	0.3	0.45	30,000	110	0.03	0.45	0.03	30,000	110	0.03	0.45	0.03
		0.6	30,000	110	0.03	0.45	0.03	30,000	110	0.03	0.45	0.03
		0.75	30,000	110	0.021	0.6	0.021	30,000	110	0.021	0.6	0.021
		0.9	30,000	110	0.015	0.75	0.015	30,000	110	0.015	0.75	0.015
		1.2	30,000	110	0.006	1.05	0.006	30,000	110	0.006	1.05	0.006
2004	0.4	0.6	30,000	120	0.04	0.6	0.04	30,000	120	0.04	0.6	0.04
		0.8	30,000	120	0.04	0.6	0.04	30,000	120	0.04	0.6	0.04
		1	30,000	120	0.028	0.8	0.028	30,000	120	0.028	0.8	0.028
		1.2	30,000	120	0.02	1	0.02	30,000	120	0.02	1	0.02
		1.6	30,000	120	0.008	1.4	0.008	30,000	120	0.008	1.4	0.008
2005	0.5	0.75	30,000	120	0.05	0.75	0.05	29,000	120	0.05	0.75	0.05
		0.8	30,000	120	0.05	0.75	0.05	29,000	120	0.05	0.75	0.05
		1	30,000	120	0.05	0.75	0.05	29,000	120	0.05	0.75	0.05
		1.25	30,000	120	0.035	1	0.035	29,000	120	0.035	1	0.035
		1.5	30,000	120	0.025	1.25	0.025	29,000	120	0.025	1.25	0.025
		2	30,000	120	0.01	1.75	0.01	29,000	120	0.01	1.75	0.01
2006	0.6	0.9	30,000	120	0.06	0.9	0.06	24,000	120	0.06	0.9	0.06
		1	30,000	120	0.06	0.9	0.06	24,000	120	0.06	0.9	0.06
		1.2	30,000	120	0.06	0.9	0.06	24,000	120	0.06	0.9	0.06
		1.5	30,000	120	0.042	1.2	0.042	24,000	120	0.042	1.2	0.042
		1.8	30,000	120	0.03	1.5	0.03	24,000	120	0.03	1.5	0.03
		2.4	30,000	120	0.012	2.1	0.012	24,000	120	0.012	2.1	0.012
2007	0.7	1	27,500	120	0.07	1.05	0.07	21,000	120	0.07	1.05	0.07
		1.4	27,500	120	0.07	1.05	0.07	21,000	120	0.07	1.05	0.07
		1.75	27,500	120	0.049	1.4	0.049	21,000	120	0.049	1.4	0.049
		2.1	27,500	120	0.035	1.75	0.035	21,000	120	0.035	1.75	0.035
		2.8	27,500	120	0.014	2.45	0.014	21,000	120	0.014	2.45	0.014
2008	0.8	1.2	24,000	120	0.08	1.2	0.08	19,000	120	0.08	1.2	0.08
		1.6	24,000	120	0.08	1.2	0.08	19,000	120	0.08	1.2	0.08
		2	24,000	120	0.056	1.6	0.056	19,000	120	0.056	1.6	0.056
		2.4	24,000	120	0.04	2	0.04	19,000	120	0.04	2	0.04
		3.2	24,000	120	0.016	2.8	0.016	19,000	120	0.016	2.8	0.016
2009	0.9	1.2	21,500	125	0.09	1.35	0.09	16,500	120	0.09	1.35	0.09
		1.8	21,500	125	0.09	1.35	0.09	16,500	120	0.09	1.35	0.09
		2.25	21,500	125	0.063	1.8	0.063	16,500	120	0.063	1.8	0.063
		2.7	21,500	125	0.045	2.25	0.045	16,500	120	0.045	2.25	0.045
		3.6	21,500	125	0.018	3.15	0.018	16,500	120	0.018	3.15	0.018
2010	1	1.5	20,000	125	0.25	1.5	0.1	15,000	120	0.25	1.5	0.1
		2	20,000	125	0.25	1.5	0.1	15,000	120	0.25	1.5	0.1
		2.5	20,000	125	0.2	2	0.07	15,000	120	0.2	2	0.07
		3	20,000	125	0.125	2.5	0.05	15,000	120	0.125	2.5	0.05
		4	20,000	125	0.075	3.5	0.02	15,000	120	0.075	3.5	0.02
2012	1.2	1.8	16,700	130	0.3	1.8	0.12	12,500	120	0.3	1.8	0.12
		2.4	16,700	130	0.3	1.8	0.12	12,500	120	0.3	1.8	0.12
		3	16,700	130	0.24	2.4	0.084	12,500	120	0.24	2.4	0.084
		3.6	16,700	130	0.15	3	0.06	12,500	120	0.15	3	0.06
		4	16,700	130	0.09	4	0.024	12,500	120	0.09	4	0.024
		4.8	16,700	130	0.09	4.2	0.024	12,500	120	0.09	4.2	0.024

Milling Conditions for C-CES (2 Flutes)

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)					HARDENED STEELS SKD / SKT (45~55HRC)				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
2001	0.1	0.15	30,000	15	0.01	0.15	0.01	30,000	10	0.002	0.1	0.005
		0.2	30,000	15	0.01	0.15	0.01	30,000	10	0.002	0.1	0.005
		0.3	30,000	15	0.005	0.25	0.005	30,000	10	0.001	0.2	0.002
2002	0.2	0.3	30,000	30	0.02	0.3	0.02	30,000	25	0.004	0.2	0.01
		0.4	30,000	30	0.02	0.3	0.02	30,000	25	0.004	0.2	0.01
		0.5	30,000	30	0.014	0.4	0.014	30,000	25	0.004	0.3	0.006
		0.6	30,000	30	0.01	0.5	0.01	30,000	25	0.002	0.4	0.004
		0.8	30,000	30	0.004	0.7	0.004	30,000	25	0.002	0.6	0.002
2003	0.3	0.45	30,000	55	0.03	0.45	0.03	22,000	25	0.006	0.3	0.015
		0.6	30,000	55	0.03	0.45	0.03	22,000	25	0.006	0.3	0.015
		0.75	30,000	55	0.021	0.6	0.021	22,000	25	0.006	0.45	0.009
		0.9	30,000	55	0.015	0.75	0.015	22,000	25	0.003	0.6	0.006
		1.2	30,000	55	0.006	1.05	0.006	22,000	25	0.003	0.9	0.003
2004	0.4	0.6	27,000	60	0.04	0.6	0.04	17,000	25	0.008	0.4	0.02
		0.8	27,000	60	0.04	0.6	0.04	17,000	25	0.008	0.4	0.02
		1	27,000	60	0.028	0.8	0.028	17,000	25	0.008	0.6	0.012
		1.2	27,000	60	0.02	1	0.02	17,000	25	0.004	0.8	0.008
		1.6	27,000	60	0.008	1.4	0.008	17,000	25	0.004	1.2	0.004
2005	0.5	0.75	21,500	60	0.05	0.75	0.05	13,000	25	0.01	0.5	0.025
		0.8	21,500	60	0.05	0.75	0.05	13,000	25	0.01	0.5	0.025
		1	21,500	60	0.05	0.75	0.05	13,000	25	0.01	0.5	0.025
		1.25	21,500	60	0.035	1	0.035	13,000	25	0.01	0.75	0.015
		1.5	21,500	60	0.025	1.25	0.025	13,000	25	0.005	1	0.01
		2	21,500	60	0.01	1.75	0.01	13,000	25	0.005	1.5	0.005
2006	0.6	0.9	18,000	60	0.06	0.9	0.06	11,000	25	0.012	0.6	0.03
		1	18,000	60	0.06	0.9	0.06	11,000	25	0.012	0.6	0.03
		1.2	18,000	60	0.06	0.9	0.06	11,000	25	0.012	0.6	0.03
		1.5	18,000	60	0.042	1.2	0.042	11,000	25	0.012	0.9	0.018
		1.8	18,000	60	0.03	1.5	0.03	11,000	25	0.006	1.2	0.012
		2.4	18,000	60	0.012	2.1	0.012	11,000	25	0.006	1.8	0.006
2007	0.7	1	15,500	60	0.07	1.05	0.07	10,000	25	0.014	0.7	0.035
		1.4	15,500	60	0.07	1.05	0.07	10,000	25	0.014	0.7	0.035
		1.75	15,500	60	0.049	1.4	0.049	10,000	25	0.014	1.05	0.021
		2.1	15,500	60	0.035	1.75	0.035	10,000	25	0.007	1.4	0.014
		2.8	15,500	60	0.014	2.45	0.014	10,000	25	0.007	2.1	0.007
2008	0.8	1.2	13,800	60	0.08	1.2	0.08	8,800	30	0.016	0.8	0.04
		1.6	13,800	60	0.08	1.2	0.08	8,800	30	0.016	0.8	0.04
		2	13,800	60	0.056	1.6	0.056	8,800	30	0.016	1.2	0.024
		2.4	13,800	60	0.04	2	0.04	8,800	30	0.008	1.6	0.016
		3.2	13,800	60	0.016	2.8	0.016	8,800	30	0.008	2.4	0.008
2009	0.9	1.2	12,000	65	0.09	1.35	0.09	7,800	30	0.018	0.9	0.045
		1.8	12,000	65	0.09	1.35	0.09	7,800	30	0.018	0.9	0.045
		2.25	12,000	65	0.063	1.8	0.063	7,800	30	0.018	1.35	0.027
		2.7	12,000	65	0.045	2.25	0.045	7,800	30	0.009	1.8	0.018
		3.6	12,000	65	0.018	3.15	0.018	7,800	30	0.009	2.7	0.009
2010	1	1.5	11,000	65	0.25	1.5	0.1	7,100	30	0.05	1	0.05
		2	11,000	65	0.25	1.5	0.1	7,100	30	0.05	1	0.05
		2.5	11,000	65	0.2	2	0.07	7,100	30	0.03	1.5	0.03
		3	11,000	65	0.125	2.5	0.05	7,100	30	0.02	2	0.02
		4	11,000	65	0.075	3.5	0.02	7,100	30	0.01	3	0.01
2012	1.2	1.8	9,400	65	0.3	1.8	0.12	6,000	30	0.06	1.2	0.06
		2.4	9,400	65	0.3	1.8	0.12	6,000	30	0.06	1.2	0.06
		3	9,400	65	0.24	2.4	0.084	6,000	30	0.036	1.8	0.036
		3.6	9,400	65	0.15	3	0.06	6,000	30	0.024	2.4	0.024
		4	9,400	65	0.09	4	0.024	6,000	30	0.012	3.6	0.012
		4.8	9,400	65	0.09	4.2	0.024	6,000	30	0.012	3.6	0.012

Milling Conditions for C-CES (2 Flutes)

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)					ALLOY STEELS SK / SCM / SUS (225~325HB)				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
2015	1.5	2.25	13,500	130	0.375	2.25	0.15	10,000	120	0.375	2.25	0.15
		3	13,500	130	0.375	2.25	0.15	10,000	120	0.375	2.25	0.15
		3.75	13,500	130	0.3	3	0.105	10,000	120	0.3	3	0.105
		4	13,500	130	0.1875	3.75	0.075	10,000	120	0.1875	3.75	0.075
		4.5	13,500	130	0.1875	3.75	0.075	10,000	120	0.1875	3.75	0.075
		6	13,500	130	0.1125	5.25	0.03	10,000	120	0.1125	5.25	0.03
2018	1.8	2.7	11,500	130	0.45	2.7	0.18	8,800	120	0.45	2.7	0.18
		3.6	11,500	130	0.45	2.7	0.18	8,800	120	0.45	2.7	0.18
		4.5	11,500	130	0.36	3.6	0.126	8,800	120	0.36	3.6	0.126
		5	11,500	130	0.225	4.5	0.09	8,800	120	0.225	4.5	0.09
		5.4	11,500	130	0.225	4.5	0.09	8,800	120	0.225	4.5	0.09
		7.2	11,500	130	0.135	6.3	0.036	8,800	120	0.135	6.3	0.036
2020	2	3	11,000	130	0.5	3	0.2	8,500	120	0.5	3	0.2
		4	11,000	130	0.5	3	0.2	8,500	120	0.5	3	0.2
		5	11,000	130	0.4	4	0.14	8,500	120	0.4	4	0.14
		6	11,000	130	0.25	5	0.1	8,500	120	0.25	5	0.1
		8	11,000	130	0.15	7	0.04	8,500	120	0.15	7	0.04
2025	2.5	3.75	8,800	195	0.625	3.75	0.25	7,000	135	0.625	3.75	0.25
		5	8,800	195	0.625	3.75	0.25	7,000	135	0.625	3.75	0.25
		6.25	8,800	195	0.5	5	0.175	7,000	135	0.5	5	0.175
		7.5	8,800	195	0.3125	6.25	0.125	7,000	135	0.3125	6.25	0.125
		8	8,800	195	0.1875	8	0.05	7,000	135	0.1875	8	0.05
		10	8,800	195	0.1875	8.75	0.05	7,000	135	0.1875	8.75	0.05
2030	3	4.5	7,400	195	1.5	4.5	0.3	6,400	145	1.5	4.5	0.3
		6	7,400	195	1.5	4.5	0.3	6,400	145	1.5	4.5	0.3
		7.5	7,400	195	1.2	6	0.21	6,400	145	1.2	6	0.21
		8	7,400	195	0.9	7.5	0.15	6,400	145	0.9	7.5	0.15
		9	7,400	195	0.9	7.5	0.15	6,400	145	0.9	7.5	0.15
		12	7,400	195	0.45	10.5	0.06	6,400	145	0.45	10.5	0.06
2040	4	6	5,900	230	2	6	0.4	5,000	190	2	6	0.4
		8	5,900	230	2	6	0.4	5,000	190	2	6	0.4
		10	5,900	230	1.6	8	0.28	5,000	190	1.6	8	0.28
		11	5,900	230	1.2	10	0.2	5,000	190	1.2	10	0.2
		12	5,900	230	1.2	10	0.2	5,000	190	1.2	10	0.2
		16	5,900	230	0.6	14	0.08	5,000	190	0.6	14	0.08
2050	5	7.5	5,300	310	2.5	7.5	0.5	4,200	230	2.5	7.5	0.5
		10	5,300	310	2.5	7.5	0.5	4,200	230	2.5	7.5	0.5
		12.5	5,300	310	2	10	0.35	4,200	230	2	10	0.35
		13	5,300	310	1.5	12.5	0.25	4,200	230	1.5	12.5	0.25
		15	5,300	310	1.5	12.5	0.25	4,200	230	1.5	12.5	0.25
		20	5,300	310	0.75	17.5	0.1	4,200	230	0.75	17.5	0.1
2060	6	9	4,400	305	3	9	0.6	3,500	230	3	9	0.6
		12	4,400	305	3	9	0.6	3,500	230	3	9	0.6
		13	4,400	305	2.4	12	0.42	3,500	230	2.4	12	0.42
		15	4,400	305	2.4	15	0.42	3,500	230	2.4	12	0.42
		18	4,400	305	1.8	15	0.3	3,500	230	1.8	15	0.3
		24	4,400	305	0.9	21	0.12	3,500	230	0.9	21	0.12
2080	8	16	3,300	290	4	12	0.8	2,600	230	4	12	0.8
		19	3,300	290	3.2	16	0.56	2,600	230	3.2	16	0.56
		20	3,300	290	3.2	16	0.56	2,600	230	3.2	16	0.56
		24	3,300	290	2.4	20	0.4	2,600	230	2.4	20	0.4
		32	3,300	290	1.2	28	0.16	2,600	230	1.2	28	0.16
2100	10	20	2,600	275	5	15	1	2,100	225	5	15	1
		22	2,600	275	4	20	0.7	2,100	225	4	20	0.7
		25	2,600	275	4	20	0.7	2,100	225	4	20	0.7
		30	2,600	275	3	25	0.5	2,100	225	3	25	0.5
		40	2,600	275	1.5	35	0.2	2,100	225	1.5	35	0.2
2120	12	24	2,200	275	6	18	1.2	1,750	225	6	18	1.2
		26	2,200	275	4.8	24	0.84	1,750	225	4.8	24	0.84
		30	2,200	275	4.8	24	0.84	1,750	225	4.8	24	0.84
		36	2,200	275	3.6	30	0.6	1,750	225	3.6	30	0.6
		48	2,200	275	1.8	42	0.24	1,750	225	1.8	42	0.24

Milling Conditions for C-CES (2 Flutes)

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)					HARDENED STEELS SKD / SKT (45~55HRC)				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
2015	1.5	2.25	8,000	70	0.375	2.25	0.15	5,100	35	0.075	1.5	0.075
		3	8,000	70	0.375	2.25	0.15	5,100	35	0.075	1.5	0.075
		3.75	8,000	70	0.3	3	0.105	5,100	35	0.045	2.25	0.045
		4	8,000	70	0.1875	3.75	0.075	5,100	35	0.03	3	0.03
		4.5	8,000	70	0.1875	3.75	0.075	5,100	35	0.03	3	0.03
		6	8,000	70	0.1125	5.25	0.03	5,100	35	0.015	4.5	0.015
2018	1.8	2.7	7,000	70	0.45	2.7	0.18	4,400	35	0.09	1.8	0.09
		3.6	7,000	70	0.45	2.7	0.18	4,400	35	0.09	1.8	0.09
		4.5	7,000	70	0.36	3.6	0.126	4,400	35	0.054	2.7	0.054
		5	7,000	70	0.225	4.5	0.09	4,400	35	0.036	3.6	0.036
		5.4	7,000	70	0.225	4.5	0.09	4,400	35	0.036	3.6	0.036
		7.2	7,000	70	0.135	6.3	0.036	4,400	35	0.018	5.4	0.018
2020	2	3	6,400	70	0.5	3	0.2	4,000	40	0.1	2	0.1
		4	6,400	70	0.5	3	0.2	4,000	40	0.1	2	0.1
		5	6,400	70	0.4	4	0.14	4,000	40	0.06	3	0.06
		6	6,400	70	0.25	5	0.1	4,000	40	0.04	4	0.04
		8	6,400	70	0.15	7	0.04	4,000	40	0.02	6	0.02
2025	2.5	3.75	5,000	70	0.625	3.75	0.25	3,200	40	0.125	2.5	0.125
		5	5,000	70	0.625	3.75	0.25	3,200	40	0.125	2.5	0.125
		6.25	5,000	70	0.5	5	0.175	3,200	40	0.075	3.75	0.075
		7.5	5,000	70	0.3125	6.25	0.125	3,200	40	0.05	5	0.05
		8	5,000	70	0.1875	8	0.05	3,200	40	0.025	7.5	0.025
		10	5,000	70	0.1875	8.75	0.05	3,200	40	0.025	7.5	0.025
2030	3	4.5	4,500	80	1.5	4.5	0.3	2,800	45	0.15	3	0.15
		6	4,500	80	1.5	4.5	0.3	2,800	45	0.15	3	0.15
		7.5	4,500	80	1.2	6	0.21	2,800	45	0.09	4.5	0.09
		8	4,500	80	0.9	7.5	0.15	2,800	45	0.06	6	0.06
		9	4,500	80	0.9	7.5	0.15	2,800	45	0.06	6	0.06
		12	4,500	80	0.45	10.5	0.06	2,800	45	0.03	9	0.03
2040	4	6	3,500	90	2	6	0.4	2,150	50	0.2	4	0.2
		8	3,500	90	2	6	0.4	2,150	50	0.2	4	0.2
		10	3,500	90	1.6	8	0.28	2,150	50	0.12	6	0.12
		11	3,500	90	1.2	10	0.2	2,150	50	0.08	8	0.08
		12	3,500	90	1.2	10	0.2	2,150	50	0.08	8	0.08
		16	3,500	90	0.6	14	0.08	2,150	50	0.04	12	0.04
2050	5	7.5	2,950	90	2.5	7.5	0.5	1,850	55	0.25	5	0.25
		10	2,950	90	2.5	7.5	0.5	1,850	55	0.25	5	0.25
		12.5	2,950	90	2	10	0.35	1,850	55	0.15	7.5	0.15
		13	2,950	90	1.5	12.5	0.25	1,850	55	0.1	10	0.1
		15	2,950	90	1.5	12.5	0.25	1,850	55	0.1	10	0.1
		20	2,950	90	0.75	17.5	0.1	1,850	55	0.05	15	0.05
2060	6	9	2,450	100	3	9	0.6	1,500	55	0.3	6	0.3
		12	2,450	100	3	9	0.6	1,500	55	0.3	6	0.3
		13	2,450	100	2.4	12	0.42	1,500	55	0.18	9	0.18
		15	2,450	100	2.4	12	0.42	1,500	55	0.18	9	0.18
		18	2,450	100	1.8	15	0.3	1,500	55	0.12	12	0.12
		24	2,450	100	0.9	21	0.12	1,500	55	0.06	18	0.06
2080	8	16	1,850	95	4	12	0.8	1,200	50	0.4	8	0.4
		19	1,850	95	3.2	16	0.56	1,200	50	0.24	12	0.24
		20	1,850	95	3.2	16	0.56	1,200	50	0.24	12	0.24
		24	1,850	95	2.4	20	0.4	1,200	50	0.16	16	0.16
		32	1,850	95	1.2	28	0.16	1,200	50	0.08	24	0.08
2100	10	20	1,450	95	5	15	1	950	50	0.5	10	0.5
		22	1,450	95	4	20	0.7	950	50	0.3	15	0.3
		25	1,450	95	4	20	0.7	950	50	0.3	15	0.3
		30	1,450	95	3	25	0.5	950	50	0.2	20	0.2
		40	1,450	95	1.5	35	0.2	950	50	0.1	30	0.1
2120	12	24	1,200	90	6	18	1.2	800	45	0.6	12	0.6
		26	1,200	90	4.8	24	0.84	800	45	0.36	18	0.36
		30	1,200	90	4.8	24	0.84	800	45	0.36	18	0.36
		36	1,200	90	3.6	30	0.6	800	45	0.24	24	0.24
		48	1,200	90	1.8	42	0.24	800	45	0.12	36	0.12

Milling Conditions for C-CES (2 Flutes)

◆High speed milling

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)					ALLOY STEELS SK / SCM / SUS (225~325HB)				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
2030	**3**	4.5	30,000	790	1.5	4.5	0.3	26,500	600	1.5	4.5	0.3
		6	30,000	790	1.5	4.5	0.3	26,500	600	1.5	4.5	0.3
		7.5	30,000	790	1.2	6	0.21	26,500	600	1.2	6	0.21
		8	30,000	790	0.9	7.5	0.15	26,500	600	0.9	7.5	0.15
		9	30,000	790	0.9	7.5	0.15	26,500	600	0.9	7.5	0.15
		12	30,000	790	0.45	10.5	0.06	26,500	600	0.45	10.5	0.06
2040	**4**	6	23,800	930	2	6	0.4	19,800	750	2	6	0.4
		8	23,800	930	2	6	0.4	19,800	750	2	6	0.4
		10	23,800	930	1.6	8	0.28	19,800	750	1.6	8	0.28
		11	23,800	930	1.2	10	0.2	19,800	750	1.2	10	0.2
		12	23,800	930	1.2	10	0.2	19,800	750	1.2	10	0.2
		16	23,800	930	0.6	14	0.08	19,800	750	0.6	14	0.08
2050	**5**	7.5	19,000	1,110	2.5	7.5	0.5	15,800	865	2.5	7.5	0.5
		10	19,000	1,110	2.5	7.5	0.5	15,800	865	2.5	7.5	0.5
		12.5	19,000	1,110	2	10	0.35	15,800	865	2	10	0.35
		13	19,000	1,110	1.5	12.5	0.25	15,800	865	1.5	12.5	0.25
		15	19,000	1,110	1.5	12.5	0.25	15,800	865	1.5	12.5	0.25
		20	19,000	1,110	0.75	17.5	0.1	15,800	865	0.75	17.5	0.1
2060	**6**	9	15,900	1,110	3	9	0.6	13,200	865	3	9	0.6
		12	15,900	1,110	3	9	0.6	13,200	865	3	9	0.6
		13	15,900	1,110	2.4	12	0.42	13,200	865	2.4	12	0.42
		15	15,900	1,110	2.4	12	0.42	13,200	865	2.4	12	0.42
		18	15,900	1,110	1.8	15	0.3	13,200	865	1.8	15	0.3
		24	15,900	1,110	0.9	21	0.12	13,200	865	0.9	21	0.12
2080	**8**	16	11,900	1,045	4	12	0.8	9,900	875	4	12	0.8
		19	11,900	1,045	3.2	16	0.56	9,900	875	3.2	16	0.56
		20	11,900	1,045	3.2	16	0.56	9,900	875	3.2	16	0.56
		24	11,900	1,045	2.4	20	0.4	9,900	875	2.4	20	0.4
		32	11,900	1,045	1.2	28	0.16	9,900	875	1.2	28	0.16
2100	**10**	20	9,500	1,005	5	15	1	7,900	845	5	15	1
		22	9,500	1,005	4	20	0.7	7,900	845	4	20	0.7
		25	9,500	1,005	4	20	0.7	7,900	845	4	20	0.7
		30	9,500	1,005	3	25	0.5	7,900	845	3	25	0.5
2120	**12**	24	7,900	1,000	6	18	1.2	6,600	850	6	18	1.2
		26	7,900	1,000	4.8	24	0.84	6,600	850	4.8	24	0.84
		30	7,900	1,000	4.8	24	0.84	6,600	850	4.8	24	0.84
		36	7,900	1,000	3.6	30	0.6	6,600	850	3.6	30	0.6
		48	7,900	1,000	1.8	42	0.24	6,600	850	1.8	42	0.24

Milling Conditions for C-CES (2 Flutes)

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)					HARDENED STEELS SKD / SKT (45~55HRC)				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
2030	3	4.5	21,200	375	1.5	4.5	0.3	15,800	255	0.15	3	0.15
		6	21,200	375	1.5	4.5	0.3	15,800	255	0.15	3	0.15
		7.5	21,200	375	1.2	6	0.21	15,800	255	0.09	4.5	0.09
		8	21,200	375	0.9	7.5	0.15	15,800	255	0.06	6	0.06
		9	21,200	375	0.9	7.5	0.15	15,800	255	0.06	6	0.06
		12	21,200	375	0.45	10.5	0.06	15,800	255	0.03	9	0.03
2040	4	6	15,800	405	2	6	0.4	11,900	275	0.2	4	0.2
		8	15,800	405	2	6	0.4	11,900	275	0.2	4	0.2
		10	15,800	405	1.6	8	0.28	11,900	275	0.12	6	0.12
		11	15,800	405	1.2	10	0.2	11,900	275	0.08	8	0.08
		12	15,800	405	1.2	10	0.2	11,900	275	0.08	8	0.08
		16	15,800	405	0.6	14	0.08	11,900	275	0.04	12	0.04
2050	5	7.5	12,700	385	2.5	7.5	0.5	9,500	280	0.25	5	0.25
		10	12,700	385	2.5	7.5	0.5	9,500	280	0.25	5	0.25
		12.5	12,700	385	2	10	0.35	9,500	280	0.15	7.5	0.15
		13	12,700	385	1.5	12.5	0.25	9,500	280	0.1	10	0.1
		15	12,700	385	1.5	12.5	0.25	9,500	280	0.1	10	0.1
		20	12,700	385	0.75	17.5	0.1	9,500	280	0.05	15	0.05
2060	6	9	10,600	435	3	9	0.6	7,900	290	0.3	6	0.3
		12	10,600	435	3	9	0.6	7,900	290	0.3	6	0.3
		13	10,600	435	2.4	12	0.42	7,900	290	0.18	9	0.18
		15	10,600	435	2.4	12	0.42	7,900	290	0.18	9	0.18
		18	10,600	435	1.8	15	0.3	7,900	290	0.12	12	0.12
		24	10,600	435	0.9	21	0.12	7,900	290	0.06	18	0.06
2080	8	16	7,900	405	4	12	0.8	5,900	245	0.4	8	0.4
		19	7,900	405	3.2	16	0.56	5,900	245	0.24	12	0.24
		20	7,900	405	3.2	16	0.56	5,900	245	0.24	12	0.24
		24	7,900	405	2.4	20	0.4	5,900	245	0.16	16	0.16
		32	7,900	405	1.2	28	0.16	5,900	245	0.08	24	0.08
2100	10	20	6,300	415	5	15	1	4,700	245	0.5	10	0.5
		22	6,300	415	4	20	0.7	4,700	245	0.3	15	0.3
		25	6,300	415	4	20	0.7	4,700	245	0.3	15	0.3
		30	6,300	415	3	25	0.5	4,700	245	0.2	20	0.2
2120	12	24	5,300	400	6	18	1.2	3,900	219	0.6	12	0.6
		26	5,300	400	4.8	24	0.84	3,900	219	0.36	18	0.36
		30	5,300	400	4.8	24	0.84	3,900	219	0.36	18	0.36
		36	5,300	400	3.6	30	0.6	3,900	219	0.24	24	0.24
		48	5,300	400	1.8	42	0.24	3,900	219	0.12	36	0.12

Milling Conditions for C-CES (2 Flutes)


Milling amount for slotting (mm)

D＜φ1

Work Material \ Length of Cut	2D or below	2.5D or below	3D or below	4D or below
45HRC or below	a_p=0.1D	a_p=0.07D	a_p=0.05D	a_p=0.02D
45HRC or above	a_p=0.02D	a_p=0.02D	a_p=0.01D	a_p=0.01D

φ1≦D＜φ3

Work Material \ Length of Cut	2D or below	2.5D or below	3D or below	4D or below
45HRC or below	a_p=0.25D	a_p=0.2D	a_p=0.125D	a_p=0.075D
45HRC or above	a_p=0.05D	a_p=0.03D	a_p=0.02D	a_p=0.01D




φ3≦D

Work Material \ Length of Cut	2D or below	2.5D or below	3D or below	4D or below
45HRC or below	a_p=0.5D	a_p=0.4D	a_p=0.3D	a_p=0.15D
45HRC or above	a_p=0.05D	a_p=0.03D	a_p=0.02D	a_p=0.01D

Milling amount for side milling (mm)

Work Material \ Length of Cut	2D or below	2.5D or below	3D or below	4D or below
45HRC or below	a_p=1.5D a_e=0.1D	a_p=2D a_e=0.07D	a_p=2.5D a_e=0.05D	a_p=3.5D a_e=0.02D
45HRC or above	a_p=1D a_e=0.05D	a_p=1.5D a_e=0.03D	a_p=2D a_e=0.02D	a_p=3D a_e=0.01D



D : Outside Diameter (mm)

Ex.) 2D or below : Flute Length = Diameter × 2 or below

Note:

・Recommend water soluble or oil coolant.

・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

C-CES2000S



UTCOAT 2 Flute Square End Mills

φ0.2～φ12


Super MG | UT COAT | 30° | Sharp Corner | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○			●			○	○		

Features

2 flute C-CES with a sharp corner design.
Broad application range from Copper and Carbon Steels up to Hardened Steels (55HRC).
Excellent performance/quality to price ratio.
Refer to page A-53 for 4 flute C-CES-S.

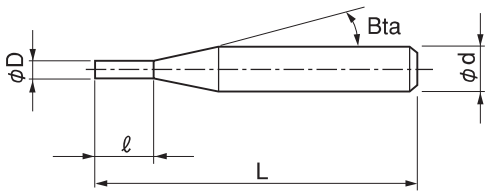

The shank taper angle shown is not an exact value.

Total 35 models

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CES 2002-0030S	0.2	0.3	16°	45	4	—
C-CES 2002-0060S		0.6		45	4	—
C-CES 2003-0045S	0.3	0.45	16°	45	4	—
C-CES 2003-0090S		0.9		45	4	—
C-CES 2004-0060S	0.4	0.6	16°	45	4	—
C-CES 2004-0120S		1.2		45	4	—
C-CES 2005-0075S	0.5	0.75	16°	45	4	—
C-CES 2005-0150S		1.5		45	4	—
C-CES 2006-0090S	0.6	0.9	16°	45	4	—
C-CES 2007-0105S	0.7	1.05	16°	45	4	—
C-CES 2008-0120S	0.8	1.2	16°	45	4	—
C-CES 2008-0240S		2.4		45	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CES 2009-0135S	0.9	1.35	16°	45	4	—
C-CES 2010-0150S	1	1.5	16°	45	4	—
C-CES 2010-0300S		3		45	4	—
C-CES 2012-0180S	1.2	1.8	16°	45	4	—
C-CES 2012-0360S		3.6		45	4	—
C-CES 2015-0225S	1.5	2.25	16°	45	4	—
C-CES 2015-0450S		4.5		45	4	—
C-CES 2018-0270S	1.8	2.7	16°	45	4	—
C-CES 2018-0540S		5.4		45	4	—
C-CES 2020-0300S	2	3	16°	45	4	—
C-CES 2020-0600S		6		45	4	—
C-CES 2025-0375S	2.5	3.75	16°	45	4	—
C-CES 2030-0450S	3	4.5	16°	45	6	—
C-CES 2030-0900S		9		45	6	—
C-CES 2040-0600S	4	6	16°	50	6	—
C-CES 2040-1200S		12		50	6	—
C-CES 2050-0750S	5	7.5	16°	50	6	—
C-CES 2050-1500S		15		50	6	—
C-CES 2060-0900S	6	9	—	50	6	—
C-CES 2060-1800S		18		50	6	—
C-CES 2080-2400S	8	24	—	80	8	—
C-CES 2100-3000S	10	30	—	80	10	—
C-CES 2120-3600S	12	36	—	90	12	—

Milling Conditions for C-CES-S (2 Flutes)

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)					ALLOY STEELS SK / SCM / SUS (225~325HB)				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
2002	**0.2**	0.3	27,000	60	0.02	0.3	0.02	27,000	60	0.02	0.3	0.02
		0.6	27,000	60	0.01	0.5	0.01	27,000	60	0.01	0.5	0.01
2003	**0.3**	0.45	27,000	77	0.03	0.45	0.03	27,000	77	0.03	0.45	0.03
		0.9	27,000	77	0.015	0.75	0.015	27,000	77	0.015	0.75	0.015
2004	**0.4**	0.6	27,000	84	0.04	0.6	0.04	27,000	84	0.04	0.6	0.04
		1.2	27,000	84	0.02	1	0.02	27,000	84	0.02	1	0.02
2005	**0.5**	0.75	27,000	84	0.05	0.75	0.05	26,100	84	0.05	0.75	0.05
		1.5	27,000	84	0.025	1.25	0.025	26,100	84	0.025	1.25	0.025
2006	**0.6**	0.9	27,000	84	0.06	0.9	0.06	21,600	84	0.06	0.9	0.06
2007	**0.7**	1.05	24,750	84	0.07	1.05	0.07	18,900	84	0.07	1.05	0.07
2008	**0.8**	1.2	21,600	84	0.08	1.2	0.08	17,100	84	0.08	1.2	0.08
		2.4	21,600	84	0.04	2	0.04	17,100	84	0.04	2	0.04
2009	**0.9**	1.35	19,350	88	0.09	1.35	0.09	14,850	84	0.09	1.35	0.09
2010	**1**	1.5	18,000	88	0.25	1.5	0.1	13,500	84	0.25	1.5	0.1
		3	18,000	88	0.125	2.5	0.05	13,500	84	0.125	2.5	0.05
2012	**1.2**	1.8	15,030	91	0.3	1.8	0.12	11,250	84	0.3	1.8	0.12
		3.6	15,030	91	0.15	3	0.06	11,250	84	0.15	3	0.06
2015	**1.5**	2.25	12,150	91	0.375	2.25	0.15	9,000	84	0.375	2.25	0.15
		4.5	12,150	91	0.1875	3.75	0.075	9,000	84	0.1875	3.75	0.075
2018	**1.8**	2.7	10,350	91	0.45	2.7	0.18	7,920	84	0.45	2.7	0.18
		5.4	10,350	91	0.225	4.5	0.09	7,920	84	0.225	4.5	0.09
2020	**2**	3	9,900	91	0.5	3	0.2	7,650	84	0.5	3	0.2
		6	9,900	91	0.25	5	0.1	7,650	84	0.25	5	0.1
2025	**2.5**	3.75	7,920	137	0.625	3.75	0.25	6,300	95	0.625	3.75	0.25
2030	**3**	4.5	6,660	137	1.5	4.5	0.3	5,760	102	1.5	4.5	0.3
		9	6,660	137	0.9	7.5	0.15	5,760	102	0.9	7.5	0.15
2040	**4**	6	5,310	161	2	6	0.4	4,500	133	2	6	0.4
		12	5,310	161	1.2	10	0.2	4,500	133	1.2	10	0.2
2050	**5**	7.5	4,770	217	2.5	7.5	0.5	3,780	161	2.5	7.5	0.5
		15	4,770	217	1.5	12.5	0.25	3,780	161	1.5	12.5	0.25
2060	**6**	9	3,960	214	3	9	0.6	3,150	161	3	9	0.6
		18	3,960	214	1.8	15	0.3	3,150	161	1.8	15	0.3
2080	**8**	24	2,970	203	2.4	20	0.4	2,340	161	2.4	20	0.4
2100	**10**	30	2,340	193	3	25	0.5	1,890	158	3	25	0.5
2120	**12**	36	1,980	193	3.6	30	0.6	1,575	158	3.6	30	0.6

Milling Conditions for C-CES-S (2 Flutes)


WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)					HARDENED STEELS SKD / SKT (45~55HRC)				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
2002	0.2	0.3	24,000	21	0.02	0.3	0.02	24,000	18	0.004	0.2	0.01
		0.6	24,000	21	0.01	0.5	0.01	24,000	18	0.002	0.4	0.004
2003	0.3	0.45	24,000	39	0.03	0.45	0.03	17,600	18	0.006	0.3	0.015
		0.9	24,000	39	0.015	0.75	0.015	17,600	18	0.003	0.6	0.006
2004	0.4	0.6	21,600	42	0.04	0.6	0.04	13,600	18	0.008	0.4	0.02
		1.2	21,600	42	0.02	1	0.02	13,600	18	0.004	0.8	0.008
2005	0.5	0.75	17,200	42	0.05	0.75	0.05	10,400	18	0.01	0.5	0.025
		1.5	17,200	42	0.025	1.25	0.025	10,400	18	0.005	1	0.01
2006	0.6	0.9	14,400	42	0.06	0.9	0.06	8,800	18	0.012	0.6	0.03
2007	0.7	1.05	12,400	42	0.07	1.05	0.07	8,000	18	0.014	0.7	0.035
2008	0.8	1.2	11,040	42	0.08	1.2	0.08	7,040	21	0.016	0.8	0.04
		2.4	11,040	42	0.04	2	0.04	7,040	21	0.008	1.6	0.016
2009	0.9	1.35	9,600	46	0.09	1.35	0.09	6,240	21	0.018	0.9	0.045
2010	1	1.5	8,800	46	0.25	1.5	0.1	5,680	21	0.05	1	0.05
		3	8,800	46	0.125	2.5	0.05	5,680	21	0.02	2	0.02
2012	1.2	1.8	7,520	46	0.3	1.8	0.12	4,800	21	0.06	1.2	0.06
		3.6	7,520	46	0.15	3	0.06	4,800	21	0.024	2.4	0.024
2015	1.5	2.25	6,400	49	0.375	2.25	0.15	4,080	25	0.075	1.5	0.075
		4.5	6,400	49	0.1875	3.75	0.075	4,080	25	0.03	3	0.03
2018	1.8	2.7	5,600	49	0.45	2.7	0.18	3,520	25	0.09	1.8	0.09
		5.4	5,600	49	0.225	4.5	0.09	3,520	25	0.036	3.6	0.036
2020	2	3	5,120	49	0.5	3	0.2	3,200	28	0.1	2	0.1
		6	5,120	49	0.25	5	0.1	3,200	28	0.04	4	0.04
2025	2.5	3.75	4,000	49	0.625	3.75	0.25	2,560	28	0.125	2.5	0.125
2030	3	4.5	3,600	56	1.5	4.5	0.3	2,240	32	0.15	3	0.15
		9	3,600	56	0.9	7.5	0.15	2,240	32	0.06	6	0.06
2040	4	6	2,800	63	2	6	0.4	1,720	35	0.2	4	0.2
		12	2,800	63	1.2	10	0.2	1,720	35	0.08	8	0.08
2050	5	7.5	2,360	63	2.5	7.5	0.5	1,480	39	0.25	5	0.25
		15	2,360	63	1.5	12.5	0.25	1,480	39	0.1	10	0.1
2060	6	9	1,960	70	3	9	0.6	1,200	39	0.3	6	0.3
		18	1,960	70	1.8	15	0.3	1,200	39	0.12	12	0.12
2080	8	24	1,480	67	2.4	20	0.4	960	35	0.16	16	0.16
2100	10	30	1,160	67	3	25	0.5	760	35	0.2	20	0.2
2120	12	36	960	63	3.6	30	0.6	640	32	0.24	24	0.24

Milling Conditions for C-CES-S (2 Flutes)

Milling amount for slotting (mm)

D＜φ1

Work Material \ Length of Cut	2D or below	3D or below
45HRC or below	a_p=0.1D	a_p=0.05D
45HRC or above	a_p=0.02D	a_p=0.01D



φ1≦D＜φ3


Work Material \ Length of Cut	2D or below	3D or below
45HRC or below	a_p=0.25D	a_p=0.125D
45HRC or above	a_p=0.05D	a_p=0.02D

φ3≦D

Work Material \ Length of Cut	2D or below	3D or below
45HRC or below	a_p=0.5D	a_p=0.3D
45HRC or above	a_p=0.05D	a_p=0.02D

Milling amount for side milling (mm)

Work Material \ Length of Cut	2D or below	3D or below
45HRC or below	a_p=1.5D a_e=0.1D	a_p=2.5D a_e=0.05D
45HRC or above	a_p=1D a_e=0.05D	a_p=2D a_e=0.02D



D : Outside Diameter (mm)

Ex.) 2D or below : Flute Length = Diameter × 2 or below

Note:

・Recommend water soluble or oil coolant.

・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

DCES2000



Diamond Coated 2 Flute Square End Mills for Graphite Electrode Milling

φ0.2～φ6


MG | DIA | 30° | Sharp Corner | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○	★	○	○	●				○

Features

Diamond coated 2 Flute Square End Mills for Graphite Electrodes.
New Diamond coating, with a highly adhesive base layer, offers excellent wear resistance and longer tool life.
Refer to page A-93 for 4 flute DCES.

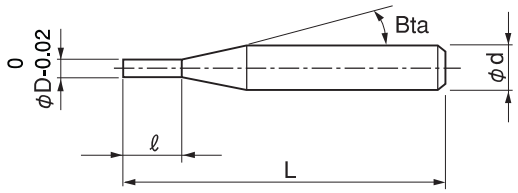

The shank taper angle shown is not an exact value.

Total 8 models


Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DCES 2002-0060	0.2	0.6	16°	45	4	—
DCES 2005-0150	0.5	1.5	16°	45	4	—
DCES 2010-0300	1	3	16°	45	4	—
DCES 2015-0450	1.5	4.5	16°	45	4	—
DCES 2020-0600	2	6	16°	45	4	—
DCES 2030-0900	3	9	16°	45	6	—
DCES 2040-1200	4	12	16°	50	6	—
DCES 2060-1800	6	18	—	60	6	—

Milling Conditions for DCES (2 Flutes)


WORK MATERIAL			GRAPHITE				
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm / min)	Side Milling		Slotting
					a_p Axial Depth (mm)	a_e Radial Depth (mm)	a_p Axial Depth (mm)
2002-0060	**0.2**	0.6	30,000	1,000	0.6	0.01	0.006
2005-0150	**0.5**	1.5	30,000	1,100	1.5	0.025	0.02
2010-0300	**1**	3	28,000	1,300	3	0.05	0.05
2015-0450	**1.5**	4.5	25,000	1,500	4.5	0.075	0.12
2020-0600	**2**	6	24,000	1,800	6	0.1	0.15
2030-0900	**3**	9	25,000	2,600	9	0.15	0.3
2040-1200	**4**	12	19,000	2,000	12	0.24	0.6
2060-1800	**6**	18	13,000	1,500	18	0.36	1.2

Slotting



D : Outside Diameter (mm)

Side Milling



Note:
・Use a milling machine dedicated for Graphite.
・Recommend air blow for Graphite.

Other series for Graphite milling

Square / Long Neck Square

(★ Highly Recommended ● Recommended ○ Suggested)

Number of Flutes, Tool Type	Model Number	Appearance	Coating	Size	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Hard Brittle (Non-Metallic) Materials	Page
2 flutes Square	DCES 2000		DIA	φ0.2～φ6	○	★	○	○	●	○	A-35
4 flutes Square	DCES 4000		DIA	φ3～φ10	○	★	○	○	●	○	A-93
2 flutes Long Neck Square	DCLS		DIA	φ0.4～φ6	○	★	○	○	●	○	B-25

Long Neck Radius

4 flutes Long Neck Radius	DCLRS		DIA	φ1～φ6	○	★	○	○	●	○	D-99

Ball / Long Neck Ball / Taper Neck Ball

2 flutes Ball	DCB		DIA	R0.5～R6	○	★	○	○	●	○	F-31
2 flutes Long Neck Ball	DCLB		DIA	R0.2～R3	○	★	○	○	●	○	G-73
2 flutes Taper Neck Ball	DCTNB		DIA	R0.5～R1	○	★	○	○	●	○	H-21

DLCES2000 NEW



Released November 2025

DLCCOAT 2 Flute Square End Mills for Copper Electrode Milling

φ0.5～φ6


Super MG | DLC | 20° | Sharp Corner | Shank Dia 0/-0.004

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○		★	○					


Features

Long tool life for copper milling by DLC coating.
Sharp cutting edge reduces burrs.
Refer to page A-95 for 4 flute DLCES.

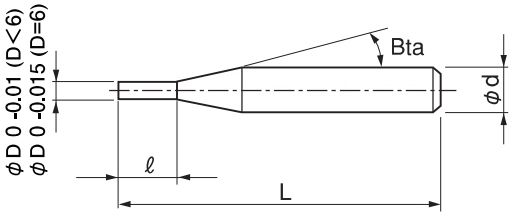


The shank taper angle shown is not an exact value.

Diamond-like hardness (around 4,000 – 6,000HV)

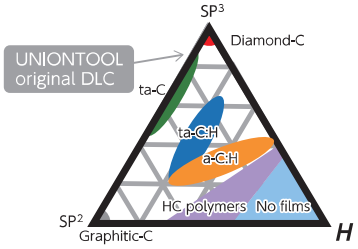

Rake and relief angle are designed for copper milling.
Sharp cutting edge reduces burrs on milling surface.

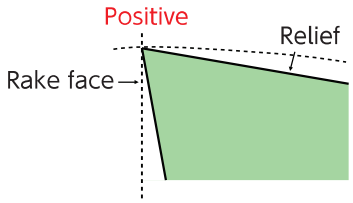

Total 11 models

Unit (mm)


Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLCES 2005-0150	0.5	1.5	11°	40	4	—
DLCES 2010-0300	1	3	11°	45	4	—
DLCES 2010-0400		4		50	4	—
DLCES 2015-0450	1.5	4.5	11°	45	4	—
DLCES 2015-0600		6		50	4	—
DLCES 2020-0600	2	6	11°	45	4	—
DLCES 2020-0800		8		50	4	—
DLCES 2030-0900	3	9	11°	50	6	—
DLCES 2040-1200	4	12	11°	50	6	—
DLCES 2050-1500	5	15	11°	55	6	—
DLCES 2060-1800	6	18	—	60	6	—

Milling Conditions for DLCES (2 Flutes)


WORK MATERIAL			COPPER / ALUMINUM ALLOYS							TUNGSTEN COPPER						
			Side Milling				Slotting			Side Milling				Slotting		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2005-0150	**0.5**	1.5	32,000	120	0.75	0.01	32,000	100	0.025	28,800	110	0.375	0.01	28,800	90	0.012
2010-0300	**1**	3	18,000	180	1.5	0.02	16,000	150	0.05	16,200	160	0.75	0.02	14,400	140	0.025
2010-0400		4	10,800	110	2.5	0.01	8,000	75	0.05	9,700	100	1.25	0.01	7,200	70	0.025
2015-0450	**1.5**	4.5	17,500	250	2.25	0.15	11,000	150	0.15	15,800	230	1.125	0.15	9,900	140	0.075
2015-0600		6	10,500	150	3.75	0.075	8,000	130	0.15	9,500	140	1.875	0.075	7,200	120	0.075
2020-0600	**2**	6	17,000	340	3	0.2	7,500	150	0.2	15,300	310	1.5	0.2	6,800	140	0.1
2020-0800		8	10,200	200	5	0.1	4,500	120	0.2	9,200	180	2.5	0.1	4,100	110	0.1
2030-0900	**3**	9	16,000	630	4.5	0.3	5,000	170	0.3	14,400	570	2.25	0.3	4,500	150	0.15
2040-1200	**4**	12	12,000	650	6	0.4	5,000	200	0.4	10,800	590	3	0.4	4,500	180	0.2
2050-1500	**5**	15	10,000	750	7.5	0.5	5,000	250	0.5	9,000	680	3.75	0.5	4,500	230	0.25
2060-1800	**6**	18	8,000	800	9	0.6	4,500	250	0.6	7,200	720	4.5	0.6	4,100	230	0.3

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering occurs.
- Recommend wet coolant for Copper and Tungsten-Copper.

Side Milling



Slotting




D : Outside Diameter (mm)

Copper Milling Example Comparison with conventional tool for steels
ϕ6 × L18


Tough Pitch Copper C1100


Spindle Speed	8,000 min^{-1}
Feed Rate	400 mm/min
a_p	18 mm
a_e	0.02 mm
Coolant	Oil mist
Cycle Time	216 min

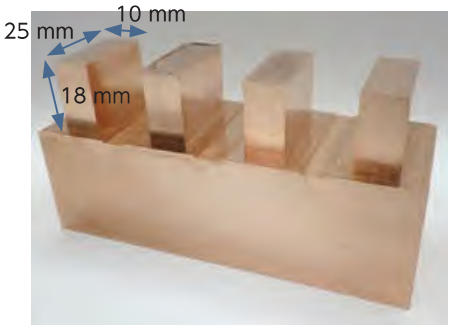

DLCES










Conventional tool







Dimensional error when side milling
Width target : 25 mm Measurement position: Top surface

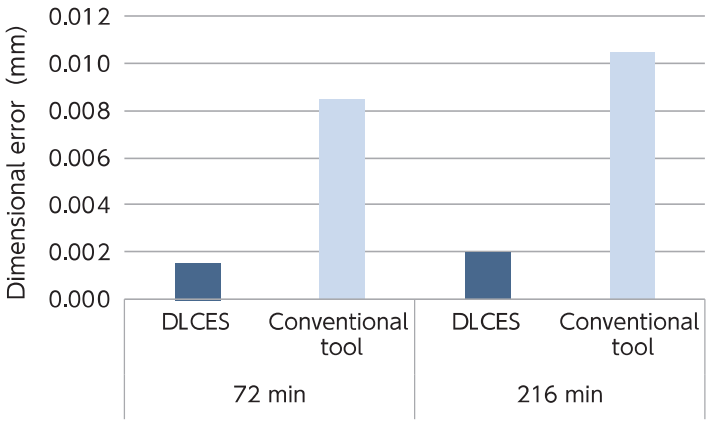

DLCES shows better results in copper milling compared to the conventional tool for steels.

CPS



NON-COAT 2 Flute Square End Mills for Plastic Milling

φ0.3～φ12


MG | 30° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○		●	★					

Features

Medium length of cut design for Plastic milling.
Original flute design offers excellent surface finish.
Length of cut = outside diameter x3 (Note: outside diameter x1.5~2 is partially included).
Provides excellent milling surface for long overhang milling on Plastics.

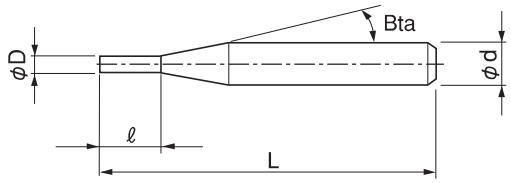

The shank taper angle shown is not an exact value.

Total 23 models

Unit (mm)


	Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
	CPS 2003	0.3	0.9	16°	45	4	—
	CPS 2004	0.4	1.2	16°	45	4	—
	CPS 2005	0.5	1.5	16°	45	4	—
	CPS 2006	0.6	1.8	16°	45	4	—
	CPS 2007	0.7	2.1	16°	45	4	—
	CPS 2008	0.8	2.4	16°	45	4	—
	CPS 2009	0.9	2.7	16°	45	4	—
	CPS 2010	1	3	16°	50	4	—
	CPS 2012	1.2	3.6	16°	50	4	—
	CPS 2015	1.5	4.5	16°	50	4	—
	CPS 2020	2	6	16°	55	4	—
	CPS 2025	2.5	7.5	16°	55	4	—
	CPS 2030	3	9	16°	60	6	—
◎	CPS 2030SS		4.5	—	60	3	—
◎	CPS 2030SSL		6		100	3	—
	CPS 2040	4	12	16°	60	6	—
◎	CPS 2040SS		6	—	60	4	—
◎	CPS 2040SSL		8		100	4	—
	CPS 2050	5	15	16°	60	6	—
◎	CPS 2060	6	18	—	60	6	—
◎	CPS 2080	8	24	—	80	8	—
◎	CPS 2100	10	30	—	80	10	—
◎	CPS 2120	12	36	—	90	12	—

◎ Straight shank type

Milling Conditions for CPS

WORK MATERIAL			ABS / MC NYLON			ACRYLIC / POLYACETAL			POLYCARBONATE			GLASS FIBER REINFORCED POLYCARBONATE		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2003	**0.3**	0.9	20,000	320	0.3	16,000	160	0.3	16,000	130	0.2	16,000	260	0.2
2004	**0.4**	1.2	20,000	400	0.4	16,000	160	0.4	16,000	130	0.2	16,000	260	0.3
2005	**0.5**	1.5	20,000	480	0.5	16,000	160	0.5	16,000	130	0.3	16,000	320	0.4
2006	**0.6**	1.8	20,000	600	0.6	16,000	200	0.5	16,000	130	0.3	16,000	390	0.5
2007	**0.7**	2.1	20,000	720	0.7	16,000	260	0.6	16,000	160	0.4	16,000	390	0.6
2008	**0.8**	2.4	20,000	800	0.8	16,000	320	0.7	16,000	160	0.4	15,200	430	0.6
2009	**0.9**	2.7	20,000	880	0.9	14,200	340	0.8	14,200	170	0.5	14,200	460	0.7
2010	**1**	3	20,000	1,000	1	14,100	430	0.9	14,100	290	0.5	14,100	510	0.8
2012	**1.2**	3.6	20,000	1,080	1.2	14,100	480	1.1	14,100	340	0.6	14,100	650	1
2015	**1.5**	4.5	20,000	1,160	1.5	12,800	460	1.4	12,800	390	0.8	13,200	740	1.2
2020	**2**	6	20,000	1,200	2	12,800	510	1.6	12,500	430	0.6	13,100	740	1.4
2025	**2.5**	7.5	20,000	1,200	2.5	12,800	570	2	10,200	450	0.8	12,700	760	1.8
2030	**3**	9	20,000	1,200	3	12,800	640	2.4	9,600	430	0.9	10,700	810	2.1
2030SS	**3**	4.5	20,000	1,200	3	12,800	640	2.4	9,600	430	0.9	10,700	810	2.1
2030SSL	**3**	6	20,000	1,200	3	12,800	640	2.4	9,600	430	0.9	10,700	810	2.1
2040	**4**	12	14,900	1,200	4	12,000	600	3.2	8,000	400	1.2	8,000	770	2.8
2040SS	**4**	6	14,900	1,200	4	12,000	600	3.2	8,000	400	1.2	8,000	770	2.8
2040SSL	**4**	8	14,900	1,200	4	12,000	600	3.2	8,000	400	1.2	8,000	770	2.8
2050	**5**	15	12,000	960	5	9,600	480	4	6,400	320	1.5	6,400	620	3.5
2060	**6**	18	10,000	800	6	8,000	400	4.8	5,400	270	1.8	5,400	510	4.2
2080	**8**	24	7,500	600	8	6,000	300	6.4	4,000	200	2.4	4,000	390	5.6
2100	**10**	30	6,000	480	10	4,800	240	8	3,200	160	3	3,200	310	7
2120	**12**	36	5,000	400	12	4,000	200	9.6	2,700	140	3.6	2,700	260	8.4

Milling Amount for Slotting (mm)



D : Outside Diameter (mm)


CPS finishing conditions for side milling

Refer to the slotting parameters for spindle speed and feed rate.
Set the milling amount as below during side milling finishing.

Milling Amount for Side Finishing (mm)

a_e : 0.01 ~ 0.015D (Min 0.01 mm)

D : Outside Diameter (mm)



a_p = 2D
Length of cut or below

Note:

- Control the radial depth (a_e) by approximately 0.01-0.015 times of the outside diameter or set to 0.01 mm the minimum during side milling finishing.
- Increase the feed rate per tooth to reduce burr on surface of softer materials.
- Chattering may occur when using a spindle with low rigidity or when milling unstable work piece. Reduce the milling amount in this case.
- Recommend to reduce the milling amount when using a machine with low spindle speed. Not recommend to reduce the feed rate.
- Adjust the milling parameters based on the overhang length.
- Recommend water soluble coolant for Aluminum Alloys and Copper.
- Recommend air blow for Plastics.
- Remove chips from the work piece to keep the milling surface quality.
- If chips clog on the tool, stop the operation and remove them accordingly.
- Straight shank type (2030SS, 2030SSL, 2040SS, 2040SSL, etc.) has smaller outside diameter than shank diameter. Prevent the shank making contact with the work piece.

CAS



NON-COAT 2 Flute Square End Mills for Aluminum Milling

φ0.5～φ12


MG | 45° | Sharp Corner | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									★		○						

Features

Designed especially for Aluminum milling.
45° helix angle design offers excellent cutting performance and outstanding chip evacuation.

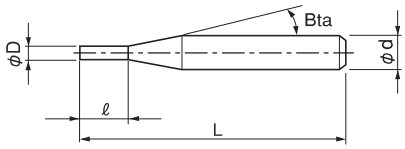

The shank taper angle shown is not an exact value.

Total 19 models

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CAS 2005-0075	0.5	0.75	16°	45	4	—
CAS 2010-0150	1	1.5	16°	45	4	—
CAS 2015-0225	1.5	2.25	16°	45	4	—
CAS 2020-0300	2	3	16°	45	4	—
CAS 2025-0375	2.5	3.75	16°	50	6	—
CAS 2030-0450	3	4.5	16°	50	6	—
CAS 2030-0900		9		50	6	—
CAS 2040-0600	4	6	16°	50	6	—
CAS 2040-1200		12		50	6	—
CAS 2050-0750	5	7.5	16°	50	6	—
CAS 2050-1500		15		50	6	—
CAS 2060-0900	6	9	—	50	6	—
CAS 2060-1500		15		50	6	—
CAS 2080-1200	8	12	—	80	8	—
CAS 2080-2000		20		80	8	—
CAS 2100-1500	10	15	—	80	10	—
CAS 2100-2500		25		80	10	—
CAS 2120-1800	12	18	—	90	12	—
CAS 2120-3000		30		90	12	—

Milling Conditions for CAS

◆Slotting


WORK MATERIAL		ALUMINUM ALLOYS etc. A5052 etc.		
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2005-0075	0.5	25,000	250	0.75
2010-0150	1	25,000	500	1.5
2015-0225	1.5	25,000	750	2.25
2020-0300	2	22,000	880	3
2025-0375	2.5	19,000	950	3.75
2030-0450	3	16,000	1,600	1.5
2040-0600	4	12,000	1,200	2
2050-0750	5	9,600	1,920	2.5
2060-0900	6	8,000	1,600	3
2080-1200	8	6,000	1,200	4
2100-1500	10	12,000	2,400	5
2120-1800	12	10,000	2,000	6
Milling Amount (mm)		D≦2.5 a_p=1.5D D≧3 a_p=0.5D		

◆High speed milling

WORK MATERIAL		ALUMINUM ALLOYS etc. A5052 etc.			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030-0450	3	20,000	4,000	4.5	0.6
2040-0600	4	18,200	3,640	6	0.8
2050-0750	5	17,000	3,400	7.5	1
2060-0900	6	16,000	3,200	9	1.2
2080-1200	8	14,400	2,880	12	1.6
2100-1500	10	13,200	2,640	15	2
2120-1800	12	12,000	2,400	18	2.4
Milling Amount (mm)		a_p=1.5D a_e=0.2D			

◆Side milling

WORK MATERIAL			ALUMINUM ALLOYS etc. A5052 etc.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2005-0075	0.5	0.75	25,000	1,000	0.75	0.15
2010-0150	1	1.5	25,000	1,250	1.5	0.3
2015-0225	1.5	2.25	25,000	1,500	2.25	0.45
2020-0300	2	3	22,000	1,760	3	0.6
2025-0375	2.5	3.75	19,000	1,900	3.75	0.75
2030-0450	3	4.5	16,000	3,200	4.5	0.6
2030-0900		9			4.5	0.6
2040-0600	4	6	12,000	2,400	6	0.8
2040-1200		12			6	0.8
2050-0750	5	7.5	9,600	1,920	7.5	1
2050-1500		15			7.5	1
2060-0900	6	9	8,000	1,600	9	1.2
2060-1500		15			9	1.2
2080-1200	8	12	6,000	1,200	12	1.6
2080-2000		20			12	1.6
2100-1500	10	15	4,800	960	15	2
2100-2500		25			15	2
2120-1800	12	18	4,000	800	18	2.4
2120-3000		30			18	2.4
Milling Amount (mm)			D≦2.5 a_p=1.5D a_e=0.3D D≧3 a_p=1.5D a_e=0.2D			

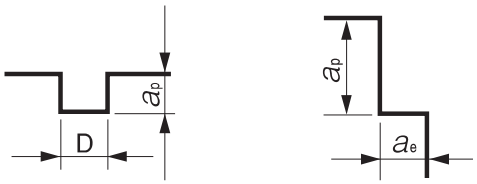

D : Outside Diameter (mm)

Note:
- Recommend using a non-contact measuring device to avoid damaging the sharp corner.
- Recommend side milling for finishing.
- Recommend water soluble coolant.

DLC-ALES NEW



Released December 2024


DLCCOAT 3 Flute Square End Mills with Chip Breaker for Aluminum Milling

φ1～φ12

Super MG | DLC | 45° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									★		○	○					

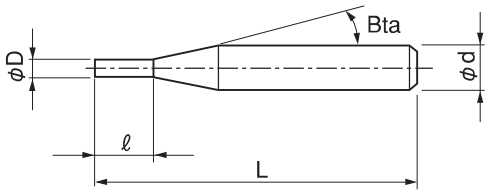

The shank taper angle shown is not an exact value.

Diameter Tolerance

Outside diameter (φD)	Tolerance
φ1～φ5	0 -0.015
φ6～φ12	0 -0.005

Total 18 models

Unit (mm)


Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLC-ALES 3010-0300	1	3	16°	60	4	—
DLC-ALES 3010-0500		5		60	4	—
DLC-ALES 3020-0600	2	6	16°	60	4	—
DLC-ALES 3020-1000		10		60	4	—
DLC-ALES 3030-0900	3	9	16°	60	6	—
DLC-ALES 3030-1500		15		60	6	—
DLC-ALES 3040-1200	4	12	16°	60	6	—
DLC-ALES 3040-2000		20		60	6	—
DLC-ALES 3050-1500	5	15	16°	60	6	—
DLC-ALES 3050-2500		25		70	6	—
DLC-ALES 3060-1800	6	18	—	60	6	—
DLC-ALES 3060-3000		30		80	6	—
DLC-ALES 3080-2400	8	24	—	70	8	—
DLC-ALES 3080-4000		40		90	8	—
DLC-ALES 3100-3000	10	30	—	80	10	—
DLC-ALES 3100-5000		50		100	10	—
DLC-ALES 3120-3600	12	36	—	100	12	—
DLC-ALES 3120-6000		60		110	12	—

Milling Conditions for DLC-ALES


WORK MATERIAL			ALUMINUM ALLOYS A5052/A7075							
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
3010-0300	**1**	3	26,000	150	1	500	1	420	3	0.1
3010-0500		5	26,000	—	—	—	—	210	5	0.1
3020-0600	**2**	6	26,000	225	2	650	2	700	6	0.2
3020-1000		10	26,000	—	—	—	—	350	10	0.2
3030-0900	**3**	9	26,000	225	3	800	3	1,200	9	0.3
3030-1500		15	26,000	—	—	—	—	600	15	0.3
3040-1200	**4**	12	26,000	300	4	1,000	4	1,500	12	0.4
3040-2000		20	23,500	—	—	—	—	1,100	20	0.4
3050-1500	**5**	15	23,000	300	5	1,000	5	1,600	15	0.5
3050-2500		25	18,000	—	—	—	—	1,100	25	0.5
3060-1800	**6**	18	19,500	300	6	900	6	1,800	18	0.6
3060-3000		30	14,500	—	—	—	—	1,200	30	0.6
3080-2400	**8**	24	14,500	300	8	950	8	1,900	24	0.8
3080-4000		40	11,000	—	—	—	—	1,300	40	0.8
3100-3000	**10**	30	11,500	250	10	1,000	10	2,000	30	1
3100-5000		50	9,000	—	—	—	—	1,200	50	1
3120-3600	**12**	36	9,700	200	12	1,000	12	2,000	36	1.2
3120-6000		60	7,500	—	—	—	—	1,200	60	1.2
Milling Amount (mm)			a_p : 1D					L/D=3 a_p : 3D a_e : 0.1D L/D=5 a_p : 5D a_e : 0.1D		

Note:
- Recommend using a non-contact measuring device to avoid damaging the sharp bottom corner.
- Decrease both spindle speed and feed rate proportionally in case of chattering.
- These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Spindle rigidity should be considered when setting milling parameters, especially for Z-Axis drilling.
- When slotting, using Z-Axis drilling, the milling parameters should promote good chip evacuation.
- Reduce the milling amount when chips clog on the tool during Z-Axis drilling.
- These are milling parameters under the work material is firmly fixed. Decrease spindle speed and feed rate according to the condition.
- Recommend water soluble coolant.


Side Milling



Slotting



D : Outside Diameter (mm)

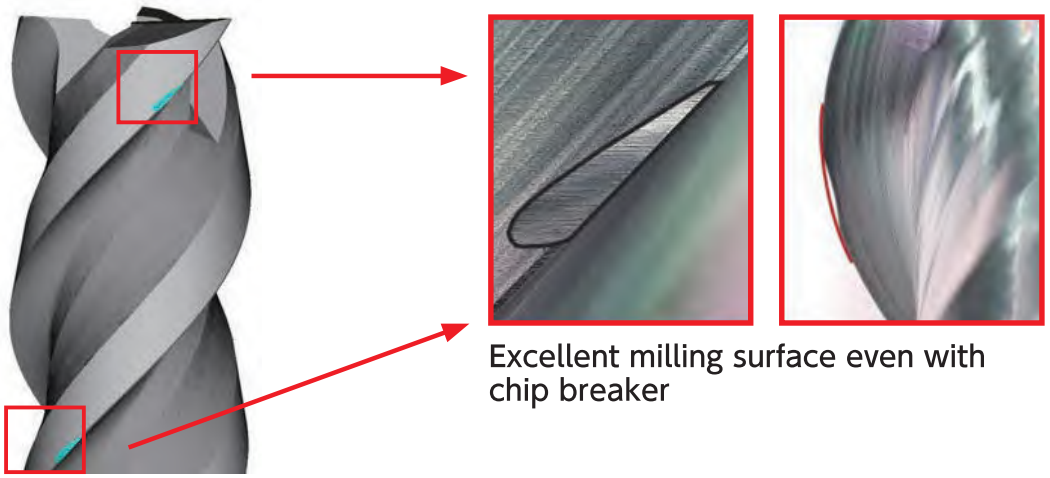

Excellent milling surface even with chip breaker

Breaks up chips + Uniform milling surface


3 flute end mills for aluminum milling

DLC-ALES



Chip Breaker Effect

Our unique chip breaker design offers excellent chip evacuation.

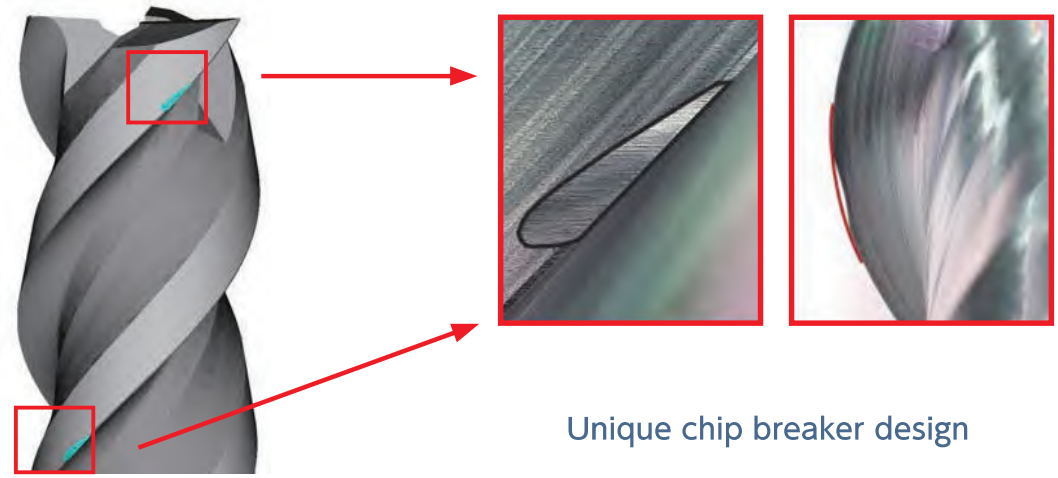

Unique chip breaker design

Chip accumulation comparison when milling with ϕ10 for 40 m A7075

DLC-ALES

3 flute DLC coated end mills with chip breaker



About 3 pails of short chips

General 3 flute end mills for aluminum milling



About 6 pails of long chips

Chip accumulation is reduced by about half. Contributes to reduction of chip disposal.

Also suitable for drilling due to 3XD flute length and the tip geometry.






Uniform milling surface


Offers a uniform milling surface even with chip breaker.

There is always only one chip breaker on the rotation trajectory at any flute edge range position.

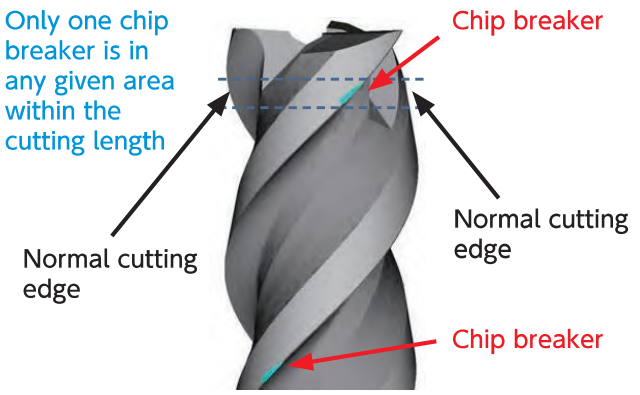

The other two cutting edges mill the residual material resulting from the chip breaker to offer a uniform milling surface.

Small relief surface






A7075

The surface milled with ϕ10 × L50
Refer to the bottom of this page for milling conditions.


Improved rigidity and chip evacuation



ϕ10 × L50 (L/D 5) Comparison of deflection amount — A7075



Spindle Speed	9,000 min^{-1}
Feed Rate	1,200 mm/min
a_p	50 mm
a_e	0.1 & 0.5 mm
Coolant	Water Soluble (Through Spindle)

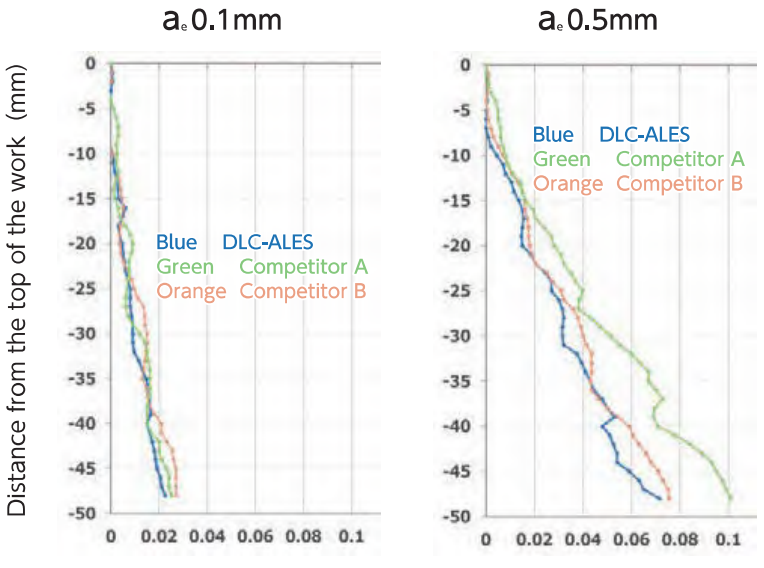

C-CES4000



UTCOAT 4 Flute Square End Mills

φ1～φ20


Super MG | UT COAT | 30° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○			●			○	○		

Features

Broad application range from Copper and Carbon Steels up to Hardened Steels (55HRC).
Excellent performance/quality to price ratio.
Refer to page A-15 for 2 flute C-CES.

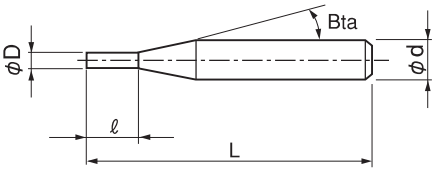

The shank taper angle shown is not an exact value.

Total 56 models

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CES 4010	1	2.5	16°	45	4	—
C-CES 4010-0300		3		45	4	—
C-CES 4010-0400		4		45	4	—
C-CES 4015	1.5	3.75	16°	45	4	—
C-CES 4015-0450		4.5		45	4	—
C-CES 4015-0600		6		45	4	—
C-CES 4020	2	5	16°	45	4	—
C-CES 4020-0600		6		45	4	—
C-CES 4020-0800		8		45	4	—
C-CES 4025	2.5	6.25	16°	45	4	—
C-CES 4025-0750		7.5		50	4	—
C-CES 4025-1000		10		50	4	—
C-CES 4030-0750	3	7.5	16°	45	6	—
C-CES 4030		8		45	6	—
C-CES 4030-0900		9		50	6	—
C-CES 4030-1200		12		50	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CES 4035	3.5	10	16°	45	6	—
C-CES 4040	4	11	16°	45	6	—
C-CES 4040-1200		12		60	6	—
C-CES 4040-1600		16		60	6	—
C-CES 4045	4.5	11	16°	45	6	—
C-CES 4050-1250	5	12.5	16°	50	6	—
C-CES 4050		13		50	6	—
C-CES 4050-1500		15		60	6	—
C-CES 4050-2000		20		60	6	—
C-CES 4055	5.5	13	16°	50	6	—
C-CES 4060	6	13	—	50	6	—
C-CES 4060-1500		15		50	6	—
C-CES 4060-1800		18		60	6	—
C-CES 4060-2400		24		60	6	—
C-CES 4065	6.5	16	16°	60	8	—
C-CES 4070	7	16	16°	60	8	—
C-CES 4075	7.5	16	16°	60	8	—
C-CES 4080	8	19	—	60	8	—
C-CES 4080-2000		20		60	8	—
C-CES 4080-2400		24		80	8	—
C-CES 4080-3200		32		80	8	—
C-CES 4085	8.5	19	16°	70	10	—
C-CES 4090	9	19	16°	70	10	—
C-CES 4095	9.5	19	16°	70	10	—
C-CES 4100	10	22	—	70	10	—
C-CES 4100-2500		25		70	10	—
C-CES 4100-3000		30		90	10	—
C-CES 4100-4000		40		90	10	—
C-CES 4105	10.5	22	16°	75	12	—
C-CES 4110	11	22	16°	75	12	—
C-CES 4115	11.5	22	16°	75	12	—
C-CES 4120	12	26	—	75	12	—
C-CES 4120-3000		30		75	12	—
C-CES 4120-3600		36		90	12	—
C-CES 4120-4800		48		100	12	—
C-CES 4120-5000		50		100	12	—
C-CES 4140	14	26	—	80	12	—
C-CES 4160	16	32	—	110	16	—
C-CES 4180	18	32	16°	110	20	—
C-CES 4200	20	38	—	110	20	—

Milling Conditions for C-CES (4 Flutes)

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)			
			Side Milling				Side Milling			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010	**1**	2.5	20,000	240	2	0.07	15,000	215	2	0.07
		3			2.5	0.05			2.5	0.05
		4			3.5	0.02			3.5	0.02
4015	**1.5**	3.75	13,500	245	3	0.105	10,000	215	3	0.105
		4.5			3.75	0.075			3.75	0.075
		6			5.25	0.03			5.25	0.03
4020	**2**	5	11,000	245	4	0.14	8,500	215	4	0.14
		6			5	0.1			5	0.1
		8			7	0.04			7	0.04
4025	**2.5**	6.25	8,800	370	5	0.175	7,000	245	5	0.175
		7.5			6.25	0.125			6.25	0.125
		10			8.75	0.05			8.75	0.05
4030	**3**	7.5	7,400	370	6	0.21	6,400	260	6	0.21
		8			7.5	0.15			7.5	0.15
		9			7.5	0.15			7.5	0.15
		12			10.5	0.06			10.5	0.06
4040	**4**	11	5,900	435	10	0.2	5,000	340	10	0.2
		12			10	0.2			10	0.2
		16			14	0.08			14	0.08
4050	**5**	12.5	5,300	590	10	0.35	4,200	415	10	0.35
		13			12.5	0.25			12.5	0.25
		15			12.5	0.25			12.5	0.25
		20			17.5	0.1			17.5	0.1
4060	**6**	13	4,400	580	12	0.42	3,500	415	12	0.42
		15			12	0.42			12	0.42
		18			15	0.3			15	0.3
		24			21	0.12			21	0.12
4080	**8**	19	3,300	550	16	0.56	2,600	415	16	0.56
		20			16	0.56			16	0.56
		24			20	0.4			20	0.4
		32			28	0.16			28	0.16
4100	**10**	22	2,600	525	20	0.7	2,100	405	20	0.7
		25			20	0.7			20	0.7
		30			25	0.5			25	0.5
		40			35	0.2			35	0.2
4120	**12**	26	2,200	525	24	0.84	1,750	405	24	0.84
		30			24	0.84			24	0.84
		36			30	0.6			30	0.6
		48			42	0.24			42	0.24
		50			42	0.24			42	0.24

Milling Conditions for C-CES (4 Flutes)

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)			
			Side Milling				Side Milling			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010	**1**	2.5	11,000	85	2	0.07	7,100	40	1.5	0.03
		3			2.5	0.05			2	0.02
		4			3.5	0.02			3	0.01
4015	**1.5**	3.75	8,000	90	3	0.105	5,100	50	2.25	0.045
		4.5			3.75	0.075			3	0.03
		6			5.25	0.03			4.5	0.015
4020	**2**	5	6,400	90	4	0.14	4,000	55	3	0.06
		6			5	0.1			4	0.04
		8			7	0.04			6	0.02
4025	**2.5**	6.25	5,000	90	5	0.175	3,200	55	3.75	0.075
		7.5			6.25	0.125			5	0.05
		10			8.75	0.05			7.5	0.025
4030	**3**	7.5	4,500	105	6	0.21	2,800	65	4.5	0.09
		8			7.5	0.15			6	0.06
		9			7.5	0.15			6	0.06
		12			10.5	0.06			9	0.03
4040	**4**	11	3,500	120	10	0.2	2,150	70	8	0.08
		12			10	0.2			8	0.08
		16			14	0.08			12	0.04
4050	**5**	12.5	2,950	120	10	0.35	1,850	75	7.5	0.15
		13			12.5	0.25			10	0.1
		15			12.5	0.25			10	0.1
		20			17.5	0.1			15	0.05
4060	**6**	13	2,450	130	12	0.42	1,500	70	9	0.18
		15			12	0.42			9	0.18
		18			15	0.3			12	0.12
		24			21	0.12			18	0.06
4080	**8**	19	1,850	125	16	0.56	1,200	70	12	0.24
		20			16	0.56			12	0.24
		24			20	0.4			16	0.16
		32			28	0.16			24	0.08
4100	**10**	22	1,450	125	20	0.7	950	65	15	0.3
		25			20	0.7			15	0.3
		30			25	0.5			20	0.2
		40			35	0.2			30	0.1
4120	**12**	26	1,200	120	24	0.84	800	60	18	0.36
		30			24	0.84			18	0.36
		36			30	0.6			24	0.24
		48			42	0.24			36	0.12
		50			42	0.24			36	0.12

Milling Conditions for C-CES (4 Flutes)

◆High speed milling


WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)			
			Side Milling				Side Milling			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4030	**3**	7.5	30,000	1,500	6	0.21	26,500	1,075	6	0.21
		8			7.5	0.15			7.5	0.15
		9			7.5	0.15			7.5	0.15
		12			10.5	0.06			10.5	0.06
4040	**4**	11	23,800	1,755	10	0.2	19,800	1,345	10	0.2
		12			10	0.2			10	0.2
		16			14	0.08			14	0.08
4050	**5**	12.5	19,000	2,115	10	0.35	15,800	1,560	10	0.35
		13			12.5	0.25			12.5	0.25
		15			12.5	0.25			12.5	0.25
		20			17.5	0.1			17.5	0.1
4060	**6**	13	15,900	2,095	12	0.42	13,200	1,565	12	0.42
		15			12	0.42			12	0.42
		18			15	0.3			15	0.3
		24			21	0.12			21	0.12
4080	**8**	19	11,900	1,985	16	0.56	9,900	1,580	16	0.56
		20			16	0.56			16	0.56
		24			20	0.4			20	0.4
		32			28	0.16			28	0.16
4100	**10**	22	9,500	1,920	20	0.7	7,900	1,525	20	0.7
		25			20	0.7			20	0.7
		30			25	0.5			25	0.5
		40			35	0.2			35	0.2
4120	**12**	26	7,900	1,885	24	0.84	6,600	1,525	24	0.84
		30			24	0.84			24	0.84
		36			30	0.6			30	0.6
		48			42	0.24			42	0.24
		50			42	0.24			42	0.24

Milling Conditions for C-CES (4 Flutes)

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)			
			Side Milling				Side Milling			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4030	**3**	7.5	21,200	495	6	0.21	15,800	365	4.5	0.09
		8			7.5	0.15			6	0.06
		9			7.5	0.15			6	0.06
		12			10.5	0.06			9	0.03
4040	**4**	11	15,800	540	10	0.2	11,900	385	8	0.08
		12			10	0.2			8	0.08
		16			14	0.08			12	0.04
4050	**5**	12.5	12,700	515	10	0.35	9,500	385	7.5	0.15
		13			12.5	0.25			10	0.1
		15			12.5	0.25			10	0.1
		20			17.5	0.1			15	0.05
4060	**6**	13	10,600	560	12	0.42	7,900	370	9	0.18
		15			12	0.42			9	0.18
		18			15	0.3			12	0.12
		24			21	0.12			18	0.06
4080	**8**	19	7,900	535	16	0.56	5,900	345	12	0.24
		20			16	0.56			12	0.24
		24			20	0.4			16	0.16
		32			28	0.16			24	0.08
4100	**10**	22	6,300	545	20	0.7	4,700	320	15	0.3
		25			20	0.7			15	0.3
		30			25	0.5			20	0.2
		40			35	0.2			30	0.1
4120	**12**	26	5,300	530	24	0.84	3,900	295	18	0.36
		30			24	0.84			18	0.36
		36			30	0.6			24	0.24
		48			42	0.24			36	0.12
		50			42	0.24			36	0.12

Milling amount (mm)

Work Material \ Length of Cut	2.5D or below	3D or below	4D or above
45HRC or below	a_p=2D a_e=0.07D	a_p=2.5D a_e=0.05D	a_p=3.5D a_e=0.02D
45HRC or above	a_p=1.5D a_e=0.03D	a_p=2D a_e=0.02D	a_p=3D a_e=0.01D



D : Outside Diameter (mm)

Ex.) 2D or below : Flute Length = Diameter × 2 or below

Note:
・Recommend water soluble or oil coolant.
・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

C-CES4000S



UTCOAT 4 Flute Square End Mills

φ1～φ12


Super MG | UT COAT | 30° | Sharp Corner | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○			●			○	○		

Features

4 flute C-CES with a sharp corner design.
Broad application range from Copper and Carbon Steels up to Hardened Steels (55HRC).
Excellent performance / quality to price ratio.
Refer to page A-29 for 2 flute C-CES-S.

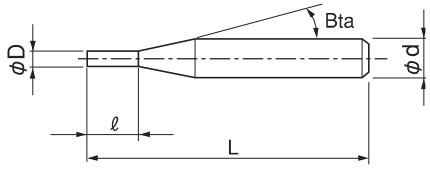

The shank taper angle shown is not an exact value.

Total 11 models

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CES 4010S	1	2.5	16°	45	4	—
C-CES 4015S	1.5	3.75	16°	45	4	—
C-CES 4020S	2	6	16°	45	4	—
C-CES 4025S	2.5	6.25	16°	45	4	—
C-CES 4030S	3	8	16°	45	6	—
C-CES 4040S	4	11	16°	45	6	—
C-CES 4050S	5	13	16°	50	6	—
C-CES 4060S	6	13	—	50	6	—
C-CES 4080S	8	19	—	60	8	—
C-CES 4100S	10	22	—	70	10	—
C-CES 4120S	12	26	—	75	12	—

Milling Conditions for C-CES-S (4 Flutes)


WORK MATERIAL		CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)			
		Side Milling				Side Milling			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010S	**1**	20,000	170	2	0.07	13,700	150	2	0.07
4015S	**1.5**	13,400	190	3	0.105	9,100	160	3	0.105
4020S	**2**	11,600	200	4	0.14	5,600	170	4	0.14
4025S	**2.5**	9,300	300	5	0.175	4,200	190	5	0.175
4030S	**3**	8,800	340	6	0.21	6,700	210	6	0.21
4040S	**4**	6,600	370	8	0.28	5,000	270	8	0.28
4050S	**5**	5,300	450	10	0.35	4,000	320	10	0.35
4060S	**6**	4,400	450	12	0.42	3,300	320	12	0.42
4080S	**8**	3,300	420	16	0.56	2,500	300	16	0.56
4100S	**10**	2,650	410	20	0.7	2,000	300	20	0.7
4120S	**12**	2,200	400	24	0.84	1,700	300	24	0.84

WORK MATERIAL		PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)			
		Side Milling				Side Milling			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010S	**1**	7,300	55	2	0.07	1,600	15	1.5	0.03
4015S	**1.5**	4,900	60	3	0.105	1,100	15	2.25	0.045
4020S	**2**	5,300	65	4	0.14	2,400	30	3	0.06
4025S	**2.5**	4,200	70	5	0.175	1,900	35	3.75	0.075
4030S	**3**	4,600	90	6	0.21	2,700	50	4.5	0.09
4040S	**4**	3,400	100	8	0.28	2,000	55	6	0.12
4050S	**5**	2,700	110	10	0.35	1,600	60	7.5	0.15
4060S	**6**	2,300	110	12	0.42	1,300	60	9	0.18
4080S	**8**	1,700	100	16	0.56	1,000	50	12	0.24
4100S	**10**	1,400	100	20	0.7	800	50	15	0.3
4120S	**12**	1,150	90	24	0.84	700	45	18	0.36

Milling Amount for side milling (mm)

45HRC or below	a_p=2D a_e=0.07D
45HRC or above	a_p=1.5D a_e=0.03D

D : Outside Diameter (mm)



Note:
・Recommend water soluble or oil coolant.
・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

CEHS NEW



Released April 2024


UTCOAT 4 Flute High Efficiency Square End Mills

φ1～φ12

Super MG | UT COAT | 40° | Flatland | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	○						○			○			○	○		

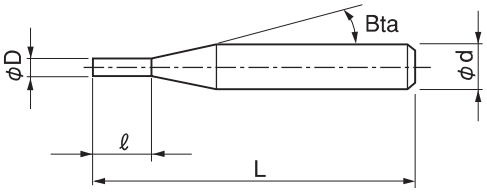

The shank taper angle shown is not an exact value.

Outside Diameter	Diameter Tolerance	Shank Diameter Tolerance
φ1～φ6	0/-0.015	0/-0.004 (h4)
φ7～φ12	0/-0.02	0/-0.005


Achieve the ultimate milling speed.
4 flute square end mills to pioneer a new frontier in milling efficiency.

Variable Pitch

Variable division design is very suitable for bottom surface milling.



$\alpha_1 \neq \alpha_2$




The large pocket design of the main flute (red line) promotes better chip evacuation when compared to a conventional design.


Excellent chip evacuation

Both chip evacuation and tool rigidity are made possible by the redesigned chip pocket.


Typical chip pocket shape



CEHS



Small relief surface

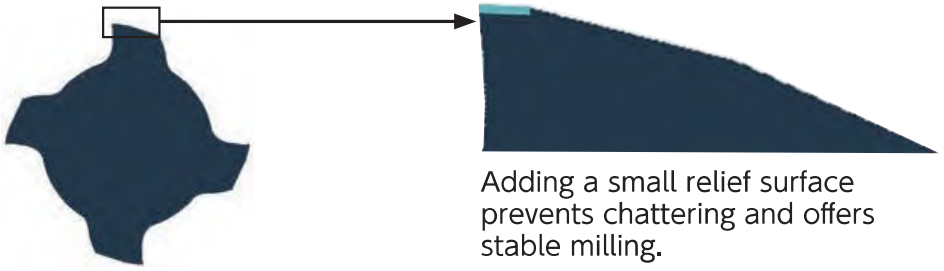


Adding a small relief surface prevents chattering and offers stable milling.


Comparison with conventional tool　Milling example for slotting
CEHS　ϕ6 × L13　　SCM440

① Comparison of milling surface and cutting chips
Offers stable milling even with long overhang milling. CEHS provides excellent bottom surface finish, while conventional tools result in an uneven milling pattern.




Work overhang : 130 mm

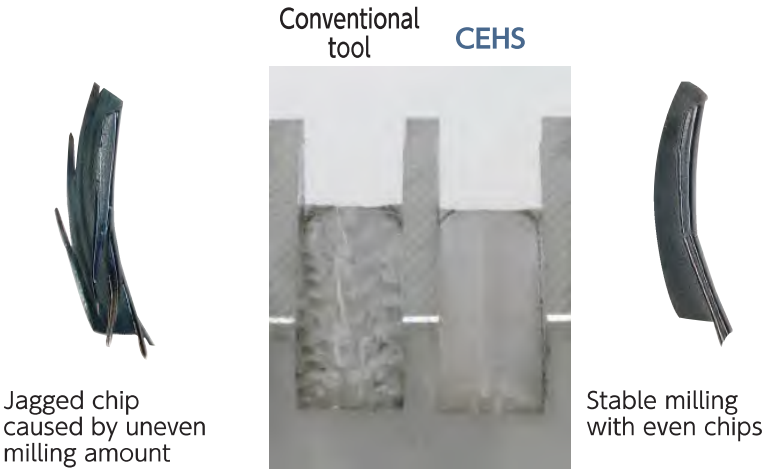

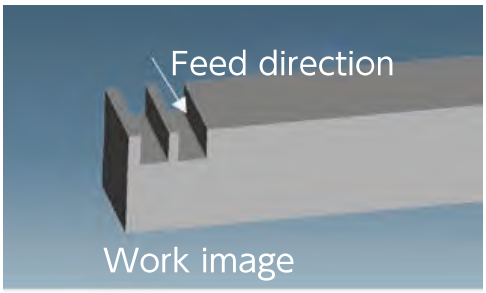

Work Size : 20 × 20 × 300 mm

② ϕ6 × L13　Comparison of milling efficiency

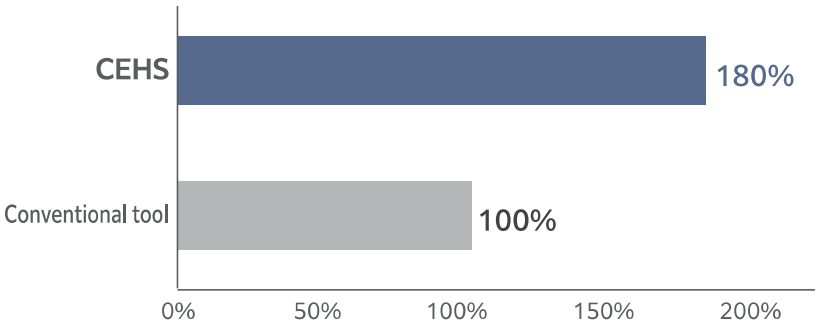

Spindle Speed	5,000 min^{-1}
Feed Rate	900 mm/min
Feed per tooth	0.045 mm/t
a_p	6 mm
Coolant	Water Soluble

The groove design for chip evacuation and the small relief surface offer more stable and efficient milling.

Total 41 models

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CEHS 4010-0150	1	1.5	16°	50	4	—
CEHS 4010-0220		2.2		50	4	—
CEHS 4010-0300		3		50	4	—
CEHS 4015-0350	1.5	3.5	16°	50	4	—
CEHS 4020-0300	2	3	16°	50	4	—
CEHS 4020-0450		4.5		50	4	—
CEHS 4020-0600		6		50	4	—
CEHS 4025-0550	2.5	5.5	16°	50	4	—
CEHS 4030-0450	3	4.5	16°	60	6	—
CEHS 4030-0650		6.5		60	6	—
CEHS 4030-0900		9		60	6	—
CEHS 4035-0800	3.5	8	16°	60	6	—
CEHS 4040-0600	4	6	16°	60	6	—
CEHS 4040-0900		9		60	6	—
CEHS 4040-1200		12		60	6	—
CEHS 4045-1000	4.5	10	16°	60	6	—
CEHS 4050-0750	5	7.5	16°	60	6	—
CEHS 4050-1100		11		60	6	—
CEHS 4050-1500		15		60	6	—
CEHS 4055-1250	5.5	12.5	16°	60	6	—
CEHS 4060-0900	6	9	—	60	6	—
CEHS 4060-1300		13		60	6	—
CEHS 4060-1800		18		60	6	—
CEHS 4070-1050	7	10.5	16°	70	8	—
CEHS 4070-1600		16		70	8	—
CEHS 4070-2100		21		70	8	—
CEHS 4080-1200	8	12	—	70	8	—
CEHS 4080-1900		19		70	8	—
CEHS 4080-2400		24		70	8	—
CEHS 4090-1350	9	13.5	16°	80	10	—
CEHS 4090-1900		19		80	10	—
CEHS 4090-2700		27		80	10	—

Next Page ➡

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CEHS 4100-1500	10	15	—	80	10	—
CEHS 4100-2200		22		80	10	—
CEHS 4100-3000		30		80	10	—
CEHS 4110-1650	11	16.5	16°	100	12	—
CEHS 4110-2400		24		100	12	—
CEHS 4110-3300		33		100	12	—
CEHS 4120-1800	12	18	—	100	12	—
CEHS 4120-2600		26		100	12	—
CEHS 4120-3600		36		100	12	—

CEHS ϕ6 Overhang slotting Milling video SCM440



CEHS
Milling Video


Milling Conditions for CEHS

Side Milling

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 * Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
4010-0150		1.5	20,000	760	1.5	0.3	20,000	460	1.5	0.3	20,000	270	1.5	0.15
4010-0220	**1**	2.2	20,000	760	2.2	0.3	20,000	460	2.2	0.3	20,000	270	2.2	0.15
4010-0300		3	20,000	760	3	0.1	20,000	460	3	0.1	20,000	270	3	0.05
4015-0350	**1.5**	3.5	15,000	830	3.5	0.45	15,000	570	3.5	0.45	15,000	340	3.5	0.225
4020-0300		3	12,200	910	3	0.6	12,200	690	3	0.6	12,200	410	3	0.3
4020-0450	**2**	4.5	12,200	910	4.5	0.6	12,200	690	4.5	0.6	12,200	410	4.5	0.3
4020-0600		6	12,200	910	6	0.2	12,200	690	6	0.2	12,200	410	6	0.1
4025-0550	**2.5**	5.5	10,500	920	5.5	0.75	10,500	800	5.5	0.75	10,500	480	5.5	0.375
4030-0450		4.5	9,400	930	4.5	0.9	9,400	900	4.5	0.9	9,400	540	4.5	0.45
4030-0650	**3**	6.5	9,400	930	6.5	0.9	9,400	900	6.5	0.9	9,400	540	6.5	0.45
4030-0900		9	9,400	930	9	0.6	9,400	900	9	0.6	9,400	540	9	0.3
4035-0800	**3.5**	8	8,300	950	8	1.05	8,300	950	8	1.05	8,300	570	8	0.525
4040-0600		6	7,400	1,010	6	1.2	7,400	1,000	6	1.2	7,400	600	6	0.6
4040-0900	**4**	9	7,400	1,010	9	1.2	7,400	1,000	9	1.2	7,400	600	9	0.6
4040-1200		12	7,400	1,010	12	0.8	7,400	1,000	12	0.8	7,400	600	12	0.4
4045-1000	**4.5**	10	6,700	1,080	10	1.35	6,700	1,050	10	1.35	6,700	630	10	0.675
4050-0750		7.5	6,000	1,140	7.5	1.5	6,000	1,100	7.5	1.5	6,000	660	7.5	0.75
4050-1100	**5**	11	6,000	1,140	11	1.5	6,000	1,100	11	1.5	6,000	660	11	0.75
4050-1500		15	6,000	1,140	15	1	6,000	1,100	15	1	6,000	660	15	0.5
4055-1250	**5.5**	12.5	5,400	1,160	12.5	1.65	5,400	1,150	12.5	1.65	5,400	690	12.5	0.825
4060-0900		9	5,000	1,240	9	1.8	5,000	1,100	9	1.8	5,000	660	9	0.9
4060-1300	**6**	13	5,000	1,240	13	1.8	5,000	1,100	13	1.8	5,000	660	13	0.9
4060-1800		18	5,000	1,240	18	1.2	5,000	1,100	18	1.2	5,000	660	18	0.6
4070-1050		10.5	4,600	1,160	10.5	2.1	4,600	1,030	10.5	2.1	4,600	610	10.5	1.05
4070-1600	**7**	16	4,600	1,160	16	2.1	4,600	1,030	16	2.1	4,600	610	16	1.05
4070-2100		21	4,600	1,160	21	1.4	4,600	1,030	21	1.4	4,600	610	21	0.7
4080-1200		12	4,100	1,030	12	2.4	4,100	1,000	12	2.4	4,100	600	12	1.2
4080-1900	**8**	19	4,100	1,030	19	2.4	4,100	1,000	19	2.4	4,100	600	19	1.2
4080-2400		24	4,100	1,030	24	1.6	4,100	950	24	1.6	4,100	570	24	0.8
4090-1350		13.5	3,500	980	13.5	2.7	3,500	980	13.5	2.7	3,500	580	13.5	1.35
4090-1900	**9**	19	3,500	980	19	2.7	3,500	980	19	2.7	3,500	580	19	1.35
4090-2700		27	3,500	980	27	1.8	3,500	880	27	1.8	3,500	520	27	0.9
4100-1500		15	3,000	940	15	3	3,000	940	15	3	3,000	560	15	1.5
4100-2200	**10**	22	3,000	940	22	3	3,000	940	22	3	3,000	560	22	1.5
4100-3000		30	3,000	940	30	2	3,000	800	30	2	3,000	480	30	1
4110-1650		16.5	2,700	910	16.5	3.3	2,700	910	16.5	3.3	2,700	540	16.5	1.65
4110-2400	**11**	24	2,700	910	24	3.3	2,700	910	24	3.3	2,700	540	24	1.65
4110-3300		33	2,700	910	33	2.2	2,700	730	33	2.2	2,700	430	33	1.1
4120-1800		18	2,400	850	18	3.6	2,400	850	18	3.6	2,400	510	18	1.8
4120-2600	**12**	26	2,400	850	26	3.6	2,400	850	26	3.6	2,400	510	26	1.8
4120-3600		36	2,400	850	36	2.4	2,400	650	36	2.4	2,400	390	36	1.2

Milling Conditions for CEHS

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
4010-0150		1.5	20,000	460	1.5	0.2	12,900	300	1.5	0.05
4010-0220	**1**	2.2	20,000	460	2.2	0.2	12,900	300	2.2	0.04
4010-0300		3	20,000	460	3	0.1	12,900	180	3	0.015
4015-0350	**1.5**	3.5	15,000	570	3.5	0.3	10,500	450	3.5	0.06
4020-0300		3	12,200	690	3	0.4	8,500	650	3	0.1
4020-0450	**2**	4.5	12,200	690	4.5	0.4	8,500	600	4.5	0.08
4020-0600		6	12,200	690	6	0.2	8,500	480	6	0.03
4025-0550	**2.5**	5.5	10,500	800	5.5	0.5	7,400	750	5.5	0.1
4030-0450		4.5	9,400	900	4.5	0.6	6,600	900	4.5	0.3
4030-0650	**3**	6.5	9,400	900	6.5	0.6	6,600	900	6.5	0.225
4030-0900		9	9,400	900	9	0.3	6,600	770	9	0.15
4035-0800	**3.5**	8	8,300	950	8	0.7	5,800	950	8	0.263
4040-0600		6	7,400	1,000	6	0.8	5,200	1,000	6	0.4
4040-0900	**4**	9	7,400	1,000	9	0.8	5,200	1,000	9	0.3
4040-1200		12	7,400	900	12	0.4	5,200	810	12	0.2
4045-1000	**4.5**	10	6,700	1,050	10	0.9	4,700	1,050	10	0.338
4050-0750		7.5	6,000	1,100	7.5	1	4,200	1,100	7.5	0.5
4050-1100	**5**	11	6,000	1,100	11	1	4,200	1,100	11	0.375
4050-1500		15	6,000	900	15	0.5	4,200	850	15	0.25
4055-1250	**5.5**	12.5	5,400	1,100	12.5	1.1	3,800	1,100	12.5	0.413
4060-0900		9	5,000	1,100	9	1.2	3,500	1,100	9	0.6
4060-1300	**6**	13	5,000	1,100	13	1.2	3,500	1,100	13	0.45
4060-1800		18	5,000	900	18	0.6	3,500	900	18	0.3
4070-1050		10.5	4,600	1,050	10.5	1.4	3,200	1,030	10.5	0.7
4070-1600	**7**	16	4,600	1,050	16	1.4	3,200	1,030	16	0.525
4070-2100		21	4,600	900	21	0.7	3,200	880	21	0.35
4080-1200		12	4,100	1,000	12	1.6	2,900	1,000	12	0.8
4080-1900	**8**	19	4,100	1,000	19	1.6	2,900	1,000	19	0.6
4080-2400		24	4,100	900	24	0.8	2,900	850	24	0.4
4090-1350		13.5	3,500	980	13.5	1.8	2,500	980	13.5	0.9
4090-1900	**9**	19	3,500	980	19	1.8	2,500	980	19	0.675
4090-2700		27	3,500	850	27	0.9	2,500	830	27	0.45
4100-1500		15	3,000	940	15	2	2,100	940	15	1
4100-2200	**10**	22	3,000	940	22	2	2,100	940	22	0.75
4100-3000		30	3,000	800	30	1	2,100	800	30	0.5
4110-1650		16.5	2,700	910	16.5	2.2	1,900	910	16.5	1.1
4110-2400	**11**	24	2,700	910	24	2.2	1,900	910	24	0.825
4110-3300		33	2,700	730	33	1.1	1,900	730	33	0.55
4120-1800		18	2,400	850	18	2.4	1,700	850	18	1.2
4120-2600	**12**	26	2,400	850	26	2.4	1,700	850	26	0.9
4120-3600		36	2,400	650	36	1.2	1,700	650	36	0.6




Milling Conditions for CEHS

Slotting

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 * Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)
4010-0150	**1**	1.5	20,000	460	1	20,000	360	1	20,000	320	0.5
4010-0220		2.2	20,000	460	1	20,000	360	1	20,000	320	0.5
4010-0300		3	20,000	360	1	20,000	260	1	20,000	230	0.5
4015-0350	**1.5**	3.5	15,000	570	1.5	15,000	500	1.5	15,000	450	0.75
4020-0300	**2**	3	12,200	660	2	12,200	580	2	12,200	520	1
4020-0450		4.5	12,200	660	2	12,200	580	2	12,200	520	1
4020-0600		6	12,200	510	2	12,200	420	2	12,200	370	1
4025-0550	**2.5**	5.5	10,500	860	2.5	10,500	650	2.5	10,500	580	1.25
4030-0450	**3**	4.5	9,400	1,010	3	9,400	720	3	9,400	640	1.5
4030-0650		6.5	9,400	1,010	3	9,400	720	3	9,400	640	1.5
4030-0900		9	9,400	740	3	9,400	520	3	9,400	460	1.5
4035-0800	**3.5**	8	8,300	1,060	3.5	8,300	760	3.5	8,300	680	1.75
4040-0600	**4**	6	7,400	1,110	4	7,400	810	4	7,400	720	2
4040-0900		9	7,400	1,110	4	7,400	810	4	7,400	720	2
4040-1200		12	7,400	860	4	7,400	590	4	7,400	530	2
4045-1000	**4.5**	10	6,700	1,110	4.5	6,700	850	4.5	6,700	760	2.25
4050-0750	**5**	7.5	6,000	1,110	5	6,000	900	5	6,000	810	2.5
4050-1100		11	6,000	1,110	5	6,000	900	5	6,000	810	2.5
4050-1500		15	6,000	910	5	6,000	650	5	6,000	580	2.5
4055-1250	**5.5**	12.5	5,400	1,110	5.5	5,400	900	5.5	5,400	810	2.75
4060-0900	**6**	9	5,000	1,110	6	5,000	900	6	5,000	810	3
4060-1300		13	5,000	1,110	6	5,000	900	6	5,000	810	3
4060-1800		18	5,000	910	6	5,000	650	6	5,000	580	3
4070-1050	**7**	10.5	4,600	1,040	7	4,600	810	7	4,600	720	3.5
4070-1600		16	4,600	1,040	7	4,600	810	7	4,600	720	3.5
4070-2100		21	4,600	880	7	4,600	670	7	4,600	600	3.5
4080-1200	**8**	12	4,100	960	8	4,100	770	8	4,100	690	4
4080-1900		19	4,100	960	8	4,100	770	8	4,100	690	4
4080-2400		24	4,100	830	8	4,100	690	8	4,100	620	4
4090-1350	**9**	13.5	3,500	960	9	3,500	730	9	3,500	650	4.5
4090-1900		19	3,500	960	9	3,500	730	9	3,500	650	4.5
4090-2700		27	3,500	780	9	3,500	710	9	3,500	630	4.5
4100-1500	**10**	15	3,000	910	10	3,000	730	10	3,000	650	5
4100-2200		22	3,000	910	10	3,000	730	10	3,000	650	5
4100-3000		30	3,000	730	10	3,000	730	10	3,000	650	5
4110-1650	**11**	16.5	2,700	910	11	2,700	680	11	2,700	610	5.5
4110-2400		24	2,700	910	11	2,700	680	11	2,700	610	5.5
4110-3300		33	2,700	680	11	2,700	680	11	2,700	610	5.5
4120-1800	**12**	18	2,400	860	12	2,400	670	12	2,400	600	6
4120-2600		26	2,400	860	12	2,400	670	12	2,400	600	6
4120-3600		36	2,400	670	12	2,400	670	12	2,400	600	6
Milling Amount (mm)			a_p:1D			a_p:1D			a_p:0.5D		

Milling Conditions for CEHS

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)
4010-0150	**1**	1.5	20,000	360	1	12,900	50	0.3※1
4010-0220		2.2	20,000	360	1	12,900	50	0.3※1
4010-0300		3	20,000	210	1	12,900	50	0.3※1
4015-0350	**1.5**	3.5	15,000	500	1.5	10,500	110	0.45※1
4020-0300	**2**	3	12,200	580	2	8,500	200	0.6※1
4020-0450		4.5	12,200	580	2	8,500	180	0.6※1
4020-0600		6	12,200	350	2	8,500	90	0.6※1
4025-0550	**2.5**	5.5	10,500	650	2.5	7,400	240	0.75※1
4030-0450	**3**	4.5	9,400	720	3	6,600	360	3
4030-0650		6.5	9,400	720	3	6,600	300	3
4030-0900		9	9,400	430	3	6,600	130	3
4035-0800	**3.5**	8	8,300	760	3.5	5,800	300	3.5
4040-0600	**4**	6	7,400	800	4	5,200	360	4
4040-0900		9	7,400	800	4	5,200	300	4
4040-1200		12	7,400	480	4	5,200	150	4
4045-1000	**4.5**	10	6,700	800	4.5	4,700	300	4.5
4050-0750	**5**	7.5	6,000	800	5	4,200	360	5
4050-1100		11	6,000	800	5	4,200	300	5
4050-1500		15	6,000	540	5	4,200	150	5
4055-1250	**5.5**	12.5	5,400	800	5.5	3,800	300	5.5
4060-0900	**6**	9	5,000	800	6	3,500	360	6
4060-1300		13	5,000	800	6	3,500	300	6
4060-1800		18	5,000	540	6	3,500	150	6
4070-1050	**7**	10.5	4,600	800	7	3,200	360	7
4070-1600		16	4,600	800	7	3,200	310	7
4070-2100		21	4,600	550	7	3,200	160	7
4080-1200	**8**	12	4,100	770	8	2,900	360	8
4080-1900		19	4,100	770	8	2,900	330	8
4080-2400		24	4,100	570	8	2,900	160	8
4090-1350	**9**	13.5	3,500	730	9	2,500	360	9
4090-1900		19	3,500	730	9	2,500	350	9
4090-2700		27	3,500	590	9	2,500	170	9
4100-1500	**10**	15	3,000	730	10	2,100	370	10
4100-2200		22	3,000	730	10	2,100	370	10
4100-3000		30	3,000	600	10	2,100	180	10
4110-1650	**11**	16.5	2,700	680	11	1,900	340	11
4110-2400		24	2,700	680	11	1,900	340	11
4110-3300		33	2,700	560	11	1,900	170	11
4120-1800	**12**	18	2,400	670	12	1,700	340	12
4120-2600		26	2,400	670	12	1,700	340	12
4120-3600		36	2,400	550	12	1,700	170	12
Milling Amount (mm)			a_p:1D			a_p:1D ※1a_p:0.3D		



D:Outside Diameter (mm)

Note:
- Decrease both spindle speed and feed rate proportionally in case of chattering.
- These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Recommend water soluble or oil coolant.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

CZS




UTCOAT 4 Flute High Efficiency Square End Mills for both Drilling & Slotting

φ1～φ20

Super MG | UT COAT | 40° | Flatland | Shank Dia 0/-0.005 | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																	
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○	○		●			○	○		

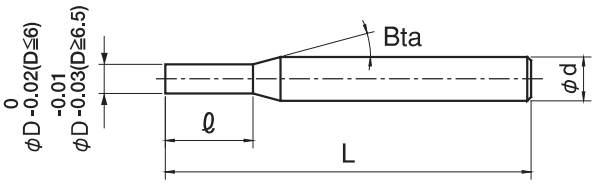


The shank taper angle shown is not an exact value.

Drilling and Milling in a Single Tool! ½ Cycle Time!




Drilling and Milling in a Single Tool

The unique design of the bottom edge offers the drilling process with 4 flutes

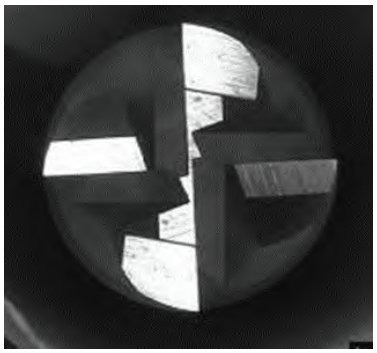



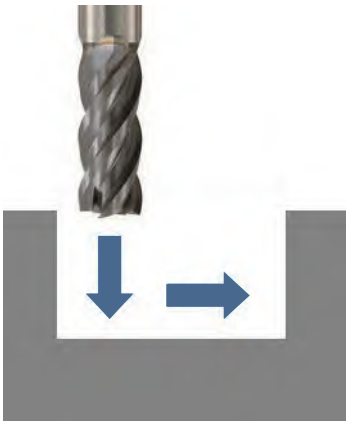

Total 89 models

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CZS 4010-0150	1	1.5	16°	50	4	—
CZS 4010-0250		2.5		50	4	—
CZS 4011-0250	1.1	2.5	16°	50	4	—
CZS 4012-0250	1.2	2.5	16°	50	4	—
CZS 4013-0300	1.3	3	16°	50	4	—
CZS 4014-0300	1.4	3	16°	50	4	—
CZS 4015-0225	1.5	2.25	16°	50	4	—
CZS 4015-0400		4		50	4	—
CZS 4016-0400	1.6	4	16°	50	4	—
CZS 4017-0400	1.7	4	16°	50	4	—
CZS 4018-0400	1.8	4	16°	50	4	—
CZS 4019-0400	1.9	4	16°	50	4	—
CZS 4020-0300	2	3	16°	50	4	—
CZS 4020-0600		6		50	4	—
CZS 4021-0600	2.1	6	16°	50	4	—
CZS 4022-0600	2.2	6	16°	50	4	—
CZS 4023-0600	2.3	6	16°	50	4	—
CZS 4024-0600	2.4	6	16°	50	4	—
CZS 4025-0375	2.5	3.75	16°	50	4	—
CZS 4025-0800		8		50	4	—
CZS 4026-0800	2.6	8	16°	50	4	—
CZS 4027-0800	2.7	8	16°	50	4	—
CZS 4028-0800	2.8	8	16°	50	4	—
CZS 4029-0800	2.9	8	16°	50	4	—
CZS 4030-0450	3	4.5	16°	60	6	—
CZS 4030-0800		8		60	6	—
CZS 4031-0800	3.1	8	16°	60	6	—
CZS 4032-0800	3.2	8	16°	60	6	—
CZS 4033-0800	3.3	8	16°	60	6	—
CZS 4034-0800	3.4	8	16°	60	6	—
CZS 4035-1000	3.5	10	16°	60	6	—
CZS 4036-1000	3.6	10	16°	60	6	—
CZS 4037-1000	3.7	10	16°	60	6	—
CZS 4038-1000	3.8	10	16°	60	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CZS 4039-1000	3.9	10	16°	60	6	—
CZS 4040-0600	4	6	16°	60	6	—
CZS 4040-1100		11		60	6	—
CZS 4041-1100	4.1	11	16°	60	6	—
CZS 4042-1100	4.2	11	16°	60	6	—
CZS 4043-1100	4.3	11	16°	60	6	—
CZS 4044-1100	4.4	11	16°	60	6	—
CZS 4045-1100	4.5	11	16°	60	6	—
CZS 4046-1100	4.6	11	16°	60	6	—
CZS 4047-1100	4.7	11	16°	60	6	—
CZS 4048-1100	4.8	11	16°	60	6	—
CZS 4049-1100	4.9	11	16°	60	6	—
CZS 4050-0750	5	7.5	16°	60	6	—
CZS 4050-1300		13		60	6	—
CZS 4051-1300	5.1	13	16°	60	6	—
CZS 4052-1300	5.2	13	16°	60	6	—
CZS 4053-1300	5.3	13	16°	60	6	—
CZS 4054-1300	5.4	13	16°	60	6	—
CZS 4055-1300	5.5	13	16°	60	6	—
CZS 4056-1300	5.6	13	16°	60	6	—
CZS 4057-1300	5.7	13	16°	60	6	—
CZS 4058-1300	5.8	13	16°	60	6	—
CZS 4059-1300	5.9	13	16°	60	6	—
CZS 4060-0900	6	9	—	60	6	—
CZS 4060-1300		13		60	6	—
CZS 4060-1800		18		60	6	—
CZS 4065-1600	6.5	16	16°	70	8	—
CZS 4070-1050	7	10.5	16°	70	8	—
CZS 4070-1600		16		70	8	—
CZS 4070-2100		21		70	8	—
CZS 4075-1600	7.5	16	16°	70	8	—
CZS 4080-1200	8	12	—	70	8	—
CZS 4080-1900		19		70	8	—
CZS 4080-2400		24		70	8	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CZS 4085-1900	8.5	19	16°	80	10	—
CZS 4090-1350	9	13.5	16°	80	10	—
CZS 4090-1900		19		80	10	—
CZS 4090-2700		27		80	10	—
CZS 4095-1900	9.5	19	16°	80	10	—
CZS 4100-1500	10	15	—	80	10	—
CZS 4100-2200		22		80	10	—
CZS 4100-3000		30		80	10	—
CZS 4105-2200	10.5	22	16°	100	12	—
CZS 4110-1650	11	16.5	16°	100	12	—
CZS 4110-2200		22		100	12	—
CZS 4110-3300		33		100	12	—
CZS 4115-2200	11.5	22	16°	100	12	—
CZS 4120-1800	12	18	—	100	12	—
CZS 4120-2600		26		100	12	—
CZS 4120-3600		36		100	12	—
CZS 4130-2600	13	26	—	110	12	—
CZS 4160-2400	16	24	—	110	16	—
CZS 4160-3200		32		110	16	—
CZS 4200-3000	20	30	—	125	20	—
CZS 4200-4000		40		125	20	—

CZS Series
S50C
Milling Video

Milling Conditions for CZS

◆1.5D flute length type

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)							
				Vertical		Slotting		Side Milling		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0150	**1**	1.5	18,000	150	1	200	1	1,200	1.5	0.1※
4015-0225	**1.5**	2.25	16,000	200	1.5	550	1.5	1,800	2.25	0.15※
4020-0300	**2**	3	12,000	200	2	550	2	1,800	3	0.2※
4025-0375	**2.5**	3.75	10,000	300	2.5	950	2.5	2,400	3.75	0.25※
4030-0450	**3**	4.5	8,500	300	3	950	3	2,400	4.5	0.3※
4040-0600	**4**	6	7,200	300	4	950	4	1,350	6	0.8
4050-0750	**5**	7.5	6,000	300	5	1,000	5	1,500	7.5	1
4060-0900	**6**	9	5,000	300	6	1,000	6	1,600	9	1.2
4070-1050	**7**	10.5	4,200	300	7	1,000	7	1,500	10.5	1.4
4080-1200	**8**	12	3,500	300	8	950	8	1,400	12	1.6
4090-1350	**9**	13.5	2,900	300	9	950	9	1,300	13.5	1.8
4100-1500	**10**	15	2,300	300	10	900	10	1,200	15	2
4110-1650	**11**	16.5	2,050	280	11	900	11	1,150	16.5	2.2
4120-1800	**12**	18	1,850	260	12	850	12	1,100	18	2.4
4160-2400	**16**	24	1,380	150	Step Amount: 1.6 Max depth 10※	830	8※	550	24	3.2
4200-3000	**20**	30	1,000	150	Step Amount: 2 Max depth 10※	830	10※	500	30	4
Milling Amount (mm)				※ Depth: 1D Depth: 0.1D (Max 10 mm)		a_p:1D ※ a_p:0.5D		a_p:Length of Cut a_e:0.2D ※ a_e:0.1D		

WORK MATERIAL			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)							
				Vertical		Slotting		Side Milling		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0150	**1**	1.5	14,500	50	1	150	1	900	1.5	0.1※
4015-0225	**1.5**	2.25	13,000	80	1.5	400	1.5	1,200	2.25	0.15※
4020-0300	**2**	3	10,000	80	2	400	2	1,200	3	0.2※
4025-0375	**2.5**	3.75	8,000	100	2.5	650	2.5	1,800	3.75	0.25※
4030-0450	**3**	4.5	6,800	100	3	650	3	1,800	4.5	0.3※
4040-0600	**4**	6	5,700	110	4	650	4	1,000	6	0.8
4050-0750	**5**	7.5	4,800	110	5	700	5	1,100	7.5	1
4060-0900	**6**	9	4,000	120	6	700	6	1,200	9	1.2
4070-1050	**7**	10.5	3,400	110	6※1	700	7	1,150	10.5	1.4
4080-1200	**8**	12	2,700	110	6※1	700	8	1,050	12	1.6
4090-1350	**9**	13.5	2,300	100	6※1	700	9	1,000	13.5	1.8
4100-1500	**10**	15	1,900	100	6※1	650	10	900	15	2
4110-1650	**11**	16.5	1,700	90	6※1	650	11	850	16.5	2.2
4120-1800	**12**	18	1,550	80	6※1	600	12	800	18	2.4
4160-2400	**16**	24	1,100	150	Step Amount: 1.6 Max 10 depth※2	400	8※	440	24	3.2
4200-3000	**20**	30	880	150	Step Amount: 2 Max 10 depth※2	400	10※	440	30	4
Milling Amount (mm)				※1 Depth: 1D Max 6 mm ※2 0.1D depth (Max 10 mm)		a_p:1D ※ a_p:0.5D		a_p:Length of Cut a_e:0.2D ※ a_e:0.1D		

Milling Conditions for CZS

WORK MATERIAL			STRUCTURAL STEELS SS400 Recommend water soluble or oil coolant. (Use cutting oils for vertical milling.)							
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0150	**1**	1.5	18,000	100	0.25※1	400	0.25※1	1,200	1.5	0.1※
4015-0225	**1.5**	2.25	16,000	100	0.375※1	600	0.375※1	1,800	2.25	0.15※
4020-0300	**2**	3	12,000	200	0.5※1	600	0.5※1	1,800	3	0.2※
4025-0375	**2.5**	3.75	10,000	300	1.25	950	2.5	2,400	3.75	0.25※
4030-0450	**3**	4.5	8,500	300	1.5	950	3	2,400	4.5	0.3※
4040-0600	**4**	6	7,200	300	2	950	4	1,350	6	0.8
4050-0750	**5**	7.5	6,000	300	2.5	1,000	5	1,500	7.5	1
4060-0900	**6**	9	5,000	300	3	1,000	6	1,600	9	1.2
4070-1050	**7**	10.5	4,200	300	3.5	900	7	1,500	10.5	1.4
4080-1200	**8**	12	3,500	250	4	850	8	1,400	12	1.6
4090-1350	**9**	13.5	2,900	250	4.5	800	9	1,300	13.5	1.8
4100-1500	**10**	15	2,300	200	5	750	10	1,200	15	2
4110-1650	**11**	16.5	2,050	200	5.5	750	11	1,150	16.5	2.2
4120-1800	**12**	18	1,850	180	6	700	12	1,100	18	2.4
4160-2400	**16**	24	1,380	150	Step Amount: 1.6 Max 10 depth※2	830	8※2	550	24	3.2
4200-3000	**20**	30	1,000	150	Step Amount: 2 Max 10 depth※2	830	10※2	500	30	4
Milling Amount (mm)				Depth: 0.5D ※1 Depth: 0.25D ※2 Depth: 0.1D (Max 10 mm)		a_p:1D ※1 a_p:0.25D ※2 a_p:0.5D		a_p:Length of Cut a_e:0.2D ※ a_e:0.1D		

WORK MATERIAL			STAINLESS STEELS SUS304 Use water soluble or oil coolant.							
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0150	**1**	1.5	14,500	150	0.25	250	1	1,000	1.5	0.05※
4015-0225	**1.5**	2.25	13,000	150	0.375	270	1.5	1,500	2.25	0.075※
4020-0300	**2**	3	10,000	100	0.5	270	2	1,500	3	0.1※
4025-0375	**2.5**	3.75	8,000	100	0.625	300	2.5	2,000	3.75	0.125※
4030-0450	**3**	4.5	6,800	80	0.75	300	3	2,000	4.5	0.15※
4040-0600	**4**	6	5,700	90	1	350	4	1,150	6	0.4
4050-0750	**5**	7.5	4,800	100	1.25	400	5	1,300	7.5	0.5
4060-0900	**6**	9	4,000	100	1.5	400	6	1,300	9	0.6
4070-1050	**7**	10.5	3,200	100	1.75	350	7	1,300	10.5	0.7
4080-1200	**8**	12	2,400	90	2※	300	8	1,200	12	0.8
4090-1350	**9**	13.5	1,800	90	2※	250	9	1,100	13.5	0.9
4100-1500	**10**	15	1,400	80	2※	200	10	1,000	15	1
4110-1650	**11**	16.5	1,250	80	2※	200	11	900	16.5	1.1
4120-1800	**12**	18	1,250	70	2※	180	12	900	18	1.2
4160-2400	**16**	24	1,250	70	2※	450	6.4※	440	24	1.6
4200-3000	**20**	30	1,000	70	2※	450	8※	440	30	2
Milling Amount (mm)				Depth: 0.25D ※ Max 2 mm depth		a_p:1D ※ a_p:0.4D		a_p:Length of Cut a_e:0.1D ※ a_e:0.05D		

Milling Conditions for CZS

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30～45HRC)								
				Vertical		Slotting		Side Milling		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0150	**1**	1.5	14,500	100	0.5	120	1	600	1.5	0.05※
4015-0225	**1.5**	2.25	12,000	150	0.75	320	1.5	900	2.25	0.075※
4020-0300	**2**	3	9,000	150	1	320	2	900	3	0.1※
4025-0375	**2.5**	3.75	7,500	200	1.25	520	2.5	1,200	3.75	0.125※
4030-0450	**3**	4.5	6,800	200	1.5	520	3	1,200	4.5	0.15※
4040-0600	**4**	6	5,100	220	2	520	4	700	6	0.4
4050-0750	**5**	7.5	4,050	240	2.5	520	5	850	7.5	0.5
4060-0900	**6**	9	3,300	240	3	520	6	1,000	9	0.6
4070-1050	**7**	10.5	2,900	240	3※	500	6※1	1,000	10.5	0.7
4080-1200	**8**	12	2,300	220	3※	470	6※1	900	12	0.8
4090-1350	**9**	13.5	1,900	220	3※	470	6※1	900	13.5	0.9
4100-1500	**10**	15	1,500	200	3※	450	6※1	900	15	1
4110-1650	**11**	16.5	1,350	200	3※	450	6※1	850	16.5	1.1
4120-1800	**12**	18	1,200	180	3※	420	6※1	800	18	1.2
4160-2400	**16**	24	1,110	150	3※	400	4～ 8※2	440	24	0.8※
4200-3000	**20**	30	880	150	3※	400	5～10※2	440	30	1※
Milling Amount (mm)				※ Depth: 0.5D Max 3 mm depth		a_p:1D ※1 a_p:Max 6 mm ※2 a_p:0.25～0.5D		※ a_p:Length of Cut a_e:0.1D a_e:0.05D		

WORK MATERIAL			HARDENED STEELS SKD / SKT / STAVAX (45～55HRC)								
				Vertical		Slotting		Side Milling		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0150	**1**	1.5	12,900	80	0.25	50	0.25※1	300	1.5	0.05※
4015-0225	**1.5**	2.25	10,000	150	0.375	100	0.375※1	650	2.25	0.075※
4020-0300	**2**	3	8,200	150	0.5	150	0.5※1	650	3	0.1※
4025-0375	**2.5**	3.75	7,000	250	0.625	300	2.5	1,000	3.75	0.125※
4030-0450	**3**	4.5	6,120	250	0.75	300	3	1,000	4.5	0.15※
4040-0600	**4**	6	5,000	220	1	320	4	600	6	0.4
4050-0750	**5**	7.5	4,300	180	1.25	340	5	800	7.5	0.5
4060-0900	**6**	9	3,600	160	1.5	360	6	1,000	9	0.6
4070-1050	**7**	10.5	2,800	160	1.5※	320	7	1,000	10.5	0.7
4080-1200	**8**	12	2,100	150	1.5※	280	8	1,000	12	0.8
4090-1350	**9**	13.5	1,600	130	1.5※	240	9	950	13.5	0.9
4100-1500	**10**	15	1,250	120	1.5※	200	10	750	15	1
4110-1650	**11**	16.5	1,150	110	1.5※	190	11	720	16.5	1.1
4120-1800	**12**	18	1,050	110	1.5※	180	12	700	18	1.2
4160-2400	**16**	24	800	50	1.5※	300	1.6※2	320	24	0.8※
4200-3000	**20**	30	630	50	1.5※	300	2※2	320	30	1※
Milling Amount (mm)				※ Depth: 0.25D Max 1.5 mm		a_p:1D ※1 a_p:0.25D ※2 a_p:0.1D		※ a_p:Length of Cut a_e:0.1D a_e:0.05D		

Milling Conditions for CZS

◆Standard flute length type

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)							
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0250	**1**	2.5	18,000	100	1	200	0.5※	1,200	1.5	0.1※
4020-0600	**2**	6	12,000	150	2	400	1※	1,800	3	0.2※
4030-0800	**3**	8	8,500	250	3	600	3	2,400	4.5	0.3※
4040-1100	**4**	11	7,200	270	4	650	4	1,350	6	0.8
4050-1300	**5**	13	6,000	300	5	700	5	1,500	7.5	1
4060-1300	**6**	13	5,000	300	6	700	6	1,600	9	1.2
4070-1600	**7**	16	4,200	300	7	700	7	1,500	10.5	1.4
4080-1900	**8**	19	3,500	300	8	700	8	1,400	12	1.6
4090-1900	**9**	19	2,900	300	9	700	9	1,300	13.5	1.8
4100-2200	**10**	22	2,300	300	10	700	10	1,200	15	2
4110-2200	**11**	22	2,050	280	11	670	11	1,150	16.5	2.2
4120-2600	**12**	26	1,850	260	12	650	12	1,100	18	2.4
4130-2600	**13**	26	1,400	80	13	300	13	700	19.5	1.3※
4160-3200	**16**	32	1,380	150	Step Amount: 1.6 Max 10 depth※	830	8※	550	24	3.2
4200-4000	**20**	40	1,000	150	Step Amount: 2 Max 10 depth※	830	10※	500	30	4
Milling Amount (mm)				※ Depth: 1D Depth: 0.1D (Max 10 mm)		※ a_p:1D a_p:0.5D		※ a_p:1.5D a_e:0.2D a_e:0.1D		

WORK MATERIAL			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)							
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0250	**1**	2.5	14,500	50	1	150	0.5※	900	1.5	0.1※
4020-0600	**2**	6	10,000	80	2	300	1※	1,200	3	0.2※
4030-0800	**3**	8	6,800	100	3	400	3	1,800	4.5	0.3※
4040-1100	**4**	11	5,700	110	4	450	4	1,000	6	0.8
4050-1300	**5**	13	4,800	110	5	500	5	1,100	7.5	1
4060-1300	**6**	13	4,000	120	6	500	6	1,200	9	1.2
4070-1600	**7**	16	3,400	110	6※1	500	7	1,150	10.5	1.4
4080-1900	**8**	19	2,700	110	6※1	500	8	1,050	12	1.6
4090-1900	**9**	19	2,300	100	6※1	500	9	1,000	13.5	1.8
4100-2200	**10**	22	1,900	100	6※1	500	10	900	15	2
4110-2200	**11**	22	1,700	90	6※1	450	11	850	16.5	2.2
4120-2600	**12**	26	1,550	80	6※1	450	12	800	18	2.4
4130-2600	**13**	26	1,100	25	6※1	180	13	550	19.5	1.3※
4160-3200	**16**	32	1,100	150	Step Amount: 1.6 Max 10 depth※2	300	8※	440	24	3.2
4200-4000	**20**	40	880	150	Step Amount: 2 Max 10 depth※2	300	10※	440	30	4
Milling Amount (mm)				※1 Depth: 1D Max 6 mm ※2 Depth: 0.1D (Max 10 mm)		※ a_p:1D a_p:0.5D		※ a_p:1.5D a_e:0.2D a_e:0.1D		

Milling Conditions for CZS

WORK MATERIAL			STRUCTURAL STEELS SS400 Recommend water soluble or oil coolant. (Use cutting oils for vertical milling.)							
				Vertical		Slotting		Side Milling		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0250	**1**	2.5	18,000	100	0.25※1	400	0.25※1	1,200	1.5	0.1※
4020-0600	**2**	6	12,000	200	0.5※1	600	0.5※1	1,800	3	0.2※
4030-0800	**3**	8	8,500	300	1.5	600	3	2,400	4.5	0.3※
4040-1100	**4**	11	7,200	300	2	650	4	1,350	6	0.8
4050-1300	**5**	13	6,000	300	2.5	700	5	1,500	7.5	1
4060-1300	**6**	13	5,000	300	3	700	6	1,600	9	1.2
4070-1600	**7**	16	4,200	270	3.5	700	7	1,500	10.5	1.4
4080-1900	**8**	19	3,500	250	4	700	8	1,400	12	1.6
4090-1900	**9**	19	2,900	220	4.5	700	9	1,300	13.5	1.8
4100-2200	**10**	22	2,300	200	5	700	10	1,200	15	2
4110-2200	**11**	22	2,050	190	5.5	680	11	1,150	16.5	2.2
4120-2600	**12**	26	1,850	180	6	650	12	1,100	18	2.4
4130-2600	**13**	26	1,100	55	6.5	180	13	550	19.5	1.3※
4160-3200	**16**	32	1,380	150	Step Amount: 1.6 Max 10 depth※2	830	8※2	550	24	3.2
4200-4000	**20**	40	1,000	150	Step Amount: 2 Max 10 depth※2	830	10※2	500	30	4
Milling Amount (mm)				Depth: 0.5D ※1 Depth: 0.25D ※2 Depth: 0.1D (Max 10 mm)		a_p:1D ※1 a_p:0.25D ※2 a_p:0.5D		a_p:1.5D a_e:0.2D ※ a_e:0.1D		

WORK MATERIAL			STAINLESS STEELS SUS304 Use water soluble or oil coolant.							
				Vertical		Slotting		Side Milling		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0250	**1**	2.5	14,500	150	0.25	250	0.5	1,000	1.5	0.05※
4020-0600	**2**	6	10,000	100	0.5	270	1	1,500	3	0.1※
4030-0800	**3**	8	6,800	80	0.75	300	1.5	2,000	4.5	0.15※
4040-1100	**4**	11	5,700	90	1	350	2	1,150	6	0.4
4050-1300	**5**	13	4,800	100	1.25	400	2.5	1,300	7.5	0.5
4060-1300	**6**	13	4,000	100	1.5	400	3	1,300	9	0.6
4070-1600	**7**	16	3,200	100	1.75	350	3.5	1,300	10.5	0.7
4080-1900	**8**	19	2,400	90	2※1	300	4	1,200	12	0.8
4090-1900	**9**	19	1,800	90	2※1	250	4.5	1,100	13.5	0.9
4100-2200	**10**	22	1,400	80	2※1	200	5	1,000	15	1
4110-2200	**11**	22	1,250	80	2※1	200	5.5	900	16.5	1.1
4120-2600	**12**	26	1,250	70	2※1	180	6	900	18	1.2
4130-2600	**13**	26	1,050	20	1.5※2	120	6.5	900	19.5	0.65※
4160-3200	**16**	32	1,250	70	2※1	450	1.6※	440	24	1.6
4200-4000	**20**	40	1,000	70	2※1	450	2※	440	30	2
Milling Amount (mm)				Depth: 0.25D ※1 Max 2 mm depth ※2 Max 1.5 mm depth		a_p:0.5D ※ a_p:0.1D		a_p:1.5D a_e:0.1D ※ a_e:0.05D		

Milling Conditions for CZS

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)								
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0250	**1**	2.5	12,900	80	0.5	140	1	270	1.5	0.2
4020-0600	**2**	6	9,350	110	1	230	2	400	3	0.4
4030-0800	**3**	8	6,120	120	1.5	270	3	450	4.5	0.6
4040-1100	**4**	11	5,250	130	2	320	4	500	6	0.8
4050-1300	**5**	13	4,460	150	2.5	360	5	540	7.5	1
4060-1300	**6**	13	3,600	160	3	360	6	540	9	1.2
4070-1600	**7**	16	2,850	140	2※	340	7	540	10.5	1.4
4080-1900	**8**	19	2,320	90	2※	320	8	480	12	1.6
4090-1900	**9**	19	1,700	80	2※	250	9	410	13.5	1.8
4100-2200	**10**	22	1,250	60	2※	180	10	340	15	2
4110-2200	**11**	22	1,100	55	2※	170	11	320	16.5	2.2
4120-2600	**12**	26	1,050	50	2※	160	12	320	18	2.4
4130-2600	**13**	26	1,000	N/A	N/A	100	6.5※	300	19.5	1.3※
4160-3200	**16**	32	960	40	2※	350	8※	380	24	1.6※
4200-4000	**20**	40	770	40	2※	350	10※	380	30	2※
Milling Amount (mm)				Depth: 0.5D ※ Max 2 mm depth		a_p:1D ※ a_p:0.5D		a_p:1.5D a_e:0.2D ※ a_e:0.1D		

WORK MATERIAL			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)								
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0250	**1**	2.5	12,900	80	0.25	50	0.25※1	300	1.5	0.05※
4020-0600	**2**	6	8,200	150	0.5	150	0.5※1	650	3	0.1※
4030-0800	**3**	8	6,120	250	0.75	300	1.5	1,000	4.5	0.15※
4040-1100	**4**	11	5,000	220	1	320	2	500	6	0.4
4050-1300	**5**	13	4,300	180	1.25	340	2.5	520	7.5	0.5
4060-1300	**6**	13	3,600	160	1.5	360	3	540	9	0.6
4070-1600	**7**	16	2,800	160	1.5※1	320	3.5	520	10.5	0.7
4080-1900	**8**	19	2,100	150	1.5※1	280	4	500	12	0.8
4090-1900	**9**	19	1,600	130	1.5※1	240	4.5	470	13.5	0.9
4100-2200	**10**	22	1,250	120	1.5※1	200	5	450	15	1
4110-2200	**11**	22	1,150	110	1.5※1	190	5.5	440	16.5	1.1
4120-2600	**12**	26	1,050	110	1.5※1	180	6	420	18	1.2
4130-2600	**13**	26	900	N/A	N/A	N/A	N/A	370	19.5	0.65※
4160-3200	**16**	32	800	50	Step Amount: 1.6 Max 10 depth※2	300	1.6※2	320	24	0.8※
4200-4000	**20**	40	630	50	Step Amount: 2 Max 10 depth※2	300	2※2	320	30	1※
Milling Amount (mm)				Depth: 0.25D ※1 Max 1.5 mm ※2 Depth: 0.1D (Max 10 mm)		a_p:0.5D ※1 a_p:0.25D ※2 a_p:0.1D		a_p:1.5D a_e:0.1D ※ a_e:0.05D		

Milling Conditions for CZS

◆3D flute length type

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)								
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-1800	**6**	18	5,000	200	6	500	6	1,600	18	0.6
4070-2100	**7**	21	4,100	200	7	450	7	1,450	21	0.7
4080-2400	**8**	24	3,200	150	8	400	8	1,300	24	0.8
4090-2700	**9**	27	2,400	140	9	350	9	1,150	27	0.9
4100-3000	**10**	30	1,850	120	10	320	10	1,000	30	1
4110-3300	**11**	33	1,650	100	11	300	11	900	33	1.1
4120-3600	**12**	36	1,500	90	12	300	12	800	36	1.2
Milling Amount (mm)				Depth: 1D		a_p:1D		a_p:Length of Cut a_e:0.1D		

WORK MATERIAL			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)								
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-1800	**6**	18	4,000	60	6	350	6	1,200	18	0.6
4070-2100	**7**	21	3,400	60	6	330	7	1,150	21	0.7
4080-2400	**8**	24	2,700	50	6	300	8	1,050	24	0.8
4090-2700	**9**	27	2,050	50	6	270	9	1,000	27	0.9
4100-3000	**10**	30	1,500	40	6	240	10	900	30	1
4110-3300	**11**	33	1,350	40	6	220	11	850	33	1.1
4120-3600	**12**	36	1,200	30	6	200	12	750	36	1.2
Milling Amount (mm)				Max 6 mm depth		a_p:1D		a_p:Length of Cut a_e:0.1D		

WORK MATERIAL			STRUCTURAL STEELS SS400 Recommend water soluble or oil coolant. (Use cutting oils for vertical milling.)								
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-1800	**6**	18	4,000	120	3	300	6	1,300	18	0.6
4070-2100	**7**	21	3,400	110	3.5	280	7	1,200	21	0.7
4080-2400	**8**	24	2,700	90	4	250	8	1,150	24	0.8
4090-2700	**9**	27	2,100	80	4.5	230	9	1,050	27	0.9
4100-3000	**10**	30	1,500	70	5	200	10	1,000	30	1
4110-3300	**11**	33	1,350	65	5.5	190	11	950	33	1.1
4120-3600	**12**	36	1,200	60	6	190	12	900	36	1.2
Milling Amount (mm)				Depth: 0.5D		a_p:1D		a_p:Length of Cut a_e:0.1D		

Milling Conditions for CZS


WORK MATERIAL			STAINLESS STEELS SUS304 Use water soluble or oil coolant.								
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-1800	**6**	18	2,800	40	1.5	200	3	900	18	0.3
4070-2100	**7**	21	2,450	40	1.5	190	3.5	950	21	0.35
4080-2400	**8**	24	2,100	40	1.5	180	4	950	24	0.4
4090-2700	**9**	27	1,700	30	1.5	170	4.5	1,000	27	0.45
4100-3000	**10**	30	1,400	30	1.5	150	5	1,000	30	0.5
4110-3300	**11**	33	1,250	30	1.5	140	5.5	1,000	33	0.55
4120-3600	**12**	36	1,150	25	1.5	130	6	950	36	0.6
Milling Amount (mm)				Max 1.5 mm depth		a_p:0.5D		a_p:Length of Cut a_e:0.05D		

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)								
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-1800	**6**	18	3,000	—	—	160	6	600	18	0.3
4070-2100	**7**	21	2,500	—	—	160	6	700	21	0.35
4080-2400	**8**	24	2,150	—	—	150	6	750	24	0.4
4090-2700	**9**	27	1,850	—	—	150	6	800	27	0.45
4100-3000	**10**	30	1,500	—	—	140	6	900	30	0.5
4110-3300	**11**	33	1,350	—	—	130	6	850	33	0.55
4120-3600	**12**	36	1,200	—	—	120	6	800	36	0.6
Milling Amount (mm)				N/A		a_p:Max 6 mm		a_p:Length of Cut a_e:0.05D		


WORK MATERIAL			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)								
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-1800	**6**	18	3,600	—	—	—	—	540	18	0.3
4070-2100	**7**	21	2,900	—	—	—	—	520	21	0.35
4080-2400	**8**	24	2,300	—	—	—	—	500	24	0.4
4090-2700	**9**	27	1,700	—	—	—	—	470	27	0.45
4100-3000	**10**	30	1,250	—	—	—	—	450	30	0.5
4110-3300	**11**	33	1,100	—	—	—	—	420	33	0.55
4120-3600	**12**	36	1,000	—	—	—	—	400	36	0.6
Milling Amount (mm)				N/A		N/A		a_p:Length of Cut a_e:0.05D		

Milling Conditions for CZS

Slotting



Side Milling



D：Outside Diameter (mm)

Note:

- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Spindle rigidity should be considered when setting milling parameters, especially for Z-Axis drilling.
- When slotting, using Z-Axis drilling, the milling parameters should promote good chip evacuation.
- Reduce the milling amount when chips clog on the tool during Z-Axis drilling.
- The milling parameter of outside diameter 16 and 20 is calculated based on BT50 spindle type. Decrease 50% milling amount for BT40 spindle type.
- Recommend water soluble or oil coolant.
- Recommend water soluble coolant (through spindle type) for Stainless Steels and Aluminum Alloys.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

Pocket Milling Example
CZS φ8 × L12

SCM420H



Pocket Size : 9 × 15 × Depth 4 mm

Spindle Speed	2,700 min^{-1}
Z-Drilling Feed Rate	220 mm/min
X-Y Milling Feed Rate	500 mm/min
Number of holes	864 holes
Coolant	Water Soluble


Z-drilling Depth 1 mm × 4 times Dwell 0.1 sec

Drilling and Milling → 144 min

CZS → 72 min

1/2 Cycle Time!

After milling 864 holes (32 pieces)

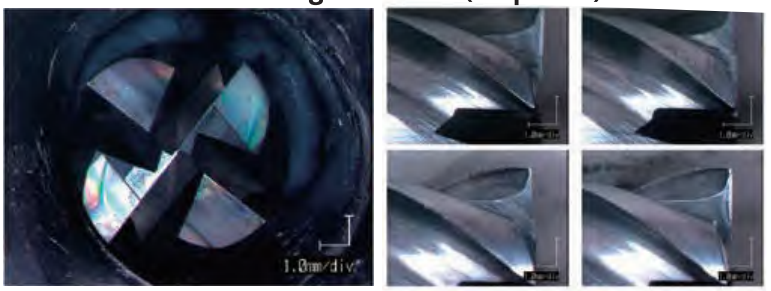

Less cycle time! More tool life left after milling 864 holes!

Comparison with Conventional Model
CZS φ6.5 × L16

S45C

CZS



Conventional 4 Flute Square





Spindle Speed	2,200 min^{-1}
Z-Drilling Feed Rate	100 mm/min
Slotting Feed Rate	400 mm/min
a_p	3 mm
Overhang Length	25 mm
Coolant	Air Blow (Through Spindle)
Milled Size	Slitting 6.5 × 24.5 × 3 mm Spot Facing 6.5 × 3 mm

Variable Pitch Prevents Chattering!

CXES

Additional 11 models



UTCOAT 4 Flute High Efficiency Square End Mills with Variable Pitch and Helix


φ1～φ16

Super MG | UT COAT | 37°~40° | Flatland | Shank Dia 0/-0.005 | Variable Pitch | Variable Helix


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○	○		●			○	○		

Shape A

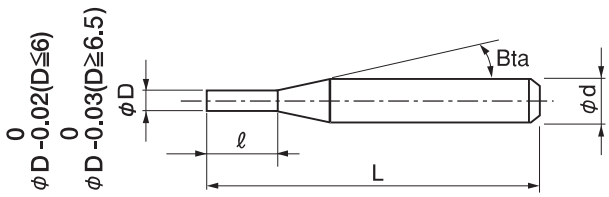

Shape B

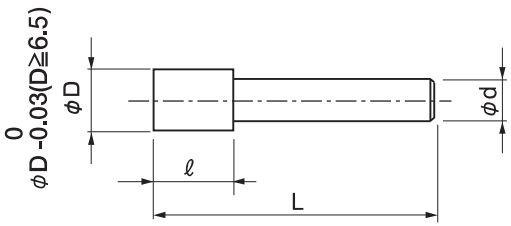

The shank taper angle shown is not an exact value.

Minimized vibration and chattering

Variable Division & Helix design minimizes vibration and chattering.

Variable Division



$\alpha_1 \neq \alpha_2$

Variable Helix




$\beta_1 \neq \beta_2$

Excellent chip evacuation


Both chip evacuation and tool rigidity are offered by the implementation of a redesigned chip pocket.

Chip pocket shape

Conventional tool



CXES



Total 66 models

Unit (mm)

	Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shape	Suggested Retail Price ¥
※	CXES 4010-0150	1	1.5	16°	50	4	A	—
	CXES 4010-0250		2.5		50	4		—
	CXES 4010-0300		3		60	4		—
	CXES 4010-0400		4		60	4		—
	CXES 4010-0500		5		60	4		—
※	CXES 4015-0225	1.5	2.25	16°	50	4	A	—
	CXES 4015-0375		3.75		50	4		—
	CXES 4015-0600		6		50	4		—
※	CXES 4020-0300	2	3	16°	50	4	A	—
	CXES 4020-0500		5		50	4		—
	CXES 4020-0600		6		60	4		—
	CXES 4020-0800		8		60	4		—
	CXES 4020-1000		10		60	4		—
※	CXES 4025-0375	2.5	3.75	16°	50	4	A	—
	CXES 4025-0625		6.25		50	4		—
	CXES 4025-1000		10		50	4		—
※	CXES 4030-0450	3	4.5	16°	50	6	A	—
	CXES 4030-0750		7.5		50	6		—
	CXES 4030-0900		9		60	6		—
	CXES 4030-1200		12		60	6		—
	CXES 4030-1500		15		60	6		—
	CXES 4035-0900	3.5	9	16°	60	6	A	—
※	CXES 4040-0600	4	6	16°	50	6	A	—
	CXES 4040-1000		10		50	6		—
	CXES 4040-1200		12		60	6		—
	CXES 4040-1600		16		60	6		—
	CXES 4040-2000		20		60	6		—
	CXES 4045-1150	4.5	11.5	16°	60	6	A	—
※	CXES 4050-0750	5	7.5	16°	50	6	A	—
	CXES 4050-1250		12.5		50	6		—
	CXES 4050-1500		15		60	6		—
	CXES 4050-2000		20		60	6		—
	CXES 4050-2500		25		70	6		—
	CXES 4055-1400	5.5	14	16°	60	6	A	—

※ Additional models

Next Page ➡

Unit (mm)

	Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Shape	Suggested Retail Price ¥
※	CXES 4060-0900	6	9	—	50	6	A	—
	CXES 4060-1500		15		50	6		—
	CXES 4060-1800		18		60	6		—
	CXES 4060-2400		24		70	6		—
	CXES 4060-3000		30		80	6		—
	CXES 4065-1650	6.5	16.5	16°	60	8	A	—
	CXES 4070-1050	7	10.5	—	100	6	B	—
	CXES 4070-1750		17.5	16°	70	8	A	—
	CXES 4075-1900	7.5	19	16°	60	8	A	—
※	CXES 4080-1200	8	12	—	60	8	A	—
	CXES 4080-2000		20		60	8		—
	CXES 4080-2400		24		70	8		—
	CXES 4080-3200		32		80	8		—
	CXES 4080-4000		40		90	8		—
	CXES 4085-2150	8.5	21.5	16°	70	10	A	—
	CXES 4090-1350	9	13.5	—	140	8	B	—
	CXES 4090-2250		22.5	16°	80	10	A	—
	CXES 4095-2400	9.5	24	16°	70	10	A	—
※	CXES 4100-1500	10	15	—	70	10	A	—
	CXES 4100-2500		25		70	10		—
	CXES 4100-3000		30		80	10		—
	CXES 4100-4000		40		90	10		—
	CXES 4100-5000		50		100	10		—
	CXES 4110-1650	11	16.5	—	150	10	B	—
	CXES 4110-2750		27.5	16°	100	12	A	—
※	CXES 4120-1800	12	18	—	90	12	A	—
	CXES 4120-3000		30		90	12		—
	CXES 4120-3600		36		100	12		—
	CXES 4120-4800		48		110	12		—
	CXES 4120-6000		60		120	12		—
	CXES 4130-1950	13	19.5	—	160	12	B	—
	CXES 4160-4000	16	40	—	110	16	A	—

※ Additional models

Milling Example CXES φ10 × L25 S55C

Roughing and finishing with a single tool

	Roughing		Finishing	
Tool	Conventional 4 Flutes	CXES φ10 × L25	CXES φ10 × L25	
Milling Part	Side		Bottom	Side
Spindle Speed	2,600 min^{-1}	2,500 min^{-1}	1,600 min^{-1}	
Feed Rate	525 mm/min	1,500 mm/min	380 mm/min	1,000 mm/min
a_p	20 mm	20 mm	0.1 mm	20 mm
a_e	0.7 mm	1.2 mm	4 mm	0.1 mm
Coolant	Oil		Oil	
Milling Distance	—	11.5 m	1.5 m	0.7 m
Efficiency※	1	4.8	—	

※ Efficiency : Feed rate × a_p × a_e

4.8 times milling efficiency compared to conventional 4 flutes when roughing





size : 105 × 92 × 20 mm





Finishing surface
Both bottom and side surfaces are burr and chatter free.


Milling Example CXES φ6 × L15 SUS304

	Roughing	Finishing
Spindle Speed	4,500 min^{-1}	4,500 min^{-1}
Feed Rate	810 mm/min	400 mm/min
a_p	15 mm	15 mm
a_e	0.6 mm	2.5 mm (Stand wall finishing allowance 0.1mm)
Overhang Length	20 mm	20 mm
Coolant	Water soluble	
Cycle Time	1:11:29	0:18:43

Milling Video

Tool wear after roughing process

End profile



Peripheral edge







Finishing surface
Both bottom and side surfaces are burr and chatter free.

Milling Conditions for CXES


Side Milling

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0150	1	1.5	18,000	620	1.5	0.2	18,000	460	1.5	0.2	14,500	320	1.5	0.1
4010-0250		2.5	18,000	620	2.5	0.2	18,000	460	2.5	0.2	14,500	320	2.5	0.1
4010-0300		3	18,000	620	3	0.03	18,000	460	3	0.03	14,300	310	3	0.015
4010-0400		4	18,000	620	4	0.02	18,000	460	4	0.02	13,900	290	4	0.01
4010-0500		5	18,000	620	5	0.02	18,000	460	5	0.02	13,900	290	5	0.01
4015-0225	1.5	2.25	13,500	770	2.25	0.3	13,500	570	2.25	0.3	13,300	340	2.25	0.15
4015-0375		3.75	13,500	770	3.75	0.3	13,500	570	3.75	0.3	13,300	340	3.75	0.15
4015-0600		6	13,500	770	6	0.03	13,500	570	6	0.03	12,700	310	6	0.015
4020-0300	2	3	11,000	930	3	0.4	11,000	690	3	0.4	12,200	360	3	0.2
4020-0500		5	11,000	930	5	0.4	11,000	690	5	0.4	12,200	360	5	0.2
4020-0600		6	11,000	930	6	0.06	11,000	690	6	0.06	12,000	340	6	0.03
4020-0800		8	11,000	930	8	0.04	11,000	690	8	0.04	11,600	300	8	0.02
4020-1000		10	11,000	930	10	0.04	11,000	690	10	0.04	11,600	300	10	0.02
4025-0375	2.5	3.75	9,500	1,060	3.75	0.5	9,500	800	3.75	0.5	11,000	490	3.75	0.25
4025-0625		6.25	9,500	1,060	6.25	0.5	9,500	800	6.25	0.5	11,000	490	6.25	0.25
4025-1000		10	9,500	1,060	10	0.05	9,500	800	10	0.05	10,400	430	10	0.025
4030-0450	3	4.5	8,500	1,200	4.5	0.6	8,500	900	4.5	0.6	10,000	640	4.5	0.3
4030-0750		7.5	8,500	1,200	7.5	0.6	8,500	900	7.5	0.6	10,000	640	7.5	0.3
4030-0900		9	8,500	1,200	9	0.3	8,500	900	9	0.3	9,100	580	9	0.15
4030-1200		12	8,500	1,200	12	0.06	8,500	900	12	0.06	7,300	460	12	0.03
4030-1500		15	8,500	1,200	15	0.06	8,500	900	15	0.06	7,300	460	15	0.03
4035-0900	3.5	9	7,800	1,250	9	0.7	7,500	950	9	0.7	8,600	680	9	0.35
4040-0600	4	6	7,200	1,350	6	0.8	6,700	1,000	6	0.8	7,500	730	6	0.4
4040-1000		10	7,200	1,350	10	0.8	6,700	1,000	10	0.8	7,500	730	10	0.4
4040-1200		12	7,200	1,350	12	0.4	6,700	1,000	12	0.4	6,600	640	12	0.2
4040-1600		16	7,200	1,350	16	0.08	6,700	1,000	16	0.08	4,800	460	16	0.08
4040-2000		20	7,200	1,350	20	0.08	6,700	1,000	20	0.08	4,800	460	20	0.08
4045-1150	4.5	11.5	6,550	1,400	11.5	0.9	6,000	1,050	11.5	0.9	6,300	770	11.5	0.45
4050-0750	5	7.5	6,000	1,500	7.5	1	5,400	1,100	7.5	1	5,400	810	7.5	0.5
4050-1250		12.5	6,000	1,500	12.5	1	5,400	1,100	12.5	1	5,400	810	12.5	0.5
4050-1500		15	6,000	1,500	15	0.5	5,400	1,100	15	0.5	4,600	690	15	0.25
4050-2000		20	6,000	1,500	20	0.1	5,400	1,100	20	0.1	3,700	450	20	0.1
4050-2500		25	6,000	1,500	25	0.1	5,400	1,100	25	0.1	3,700	450	25	0.1
4055-1400	5.5	14	5,450	1,550	14	1.1	4,900	1,150	14	1.1	4,900	810	14	0.55

Milling Conditions for CXES

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-0150	1	1.5	12,900	320	1.5	0.2	12,900	180	1.5	0.05
4010-0250		2.5	12,900	320	2.5	0.2	12,900	180	2.5	0.05
4010-0300		3	12,800	320	3	0.03	12,900	180	3	0.015
4010-0400		4	12,600	320	4	0.02	12,900	180	4	0.01
4010-0500		5	12,600	320	5	0.01	12,900	180	5	0.005
4015-0225	1.5	2.25	10,500	390	2.25	0.3	9,300	280	2.25	0.075
4015-0375		3.75	10,500	390	3.75	0.3	9,300	280	3.75	0.075
4015-0600		6	10,200	390	6	0.03	9,300	280	6	0.015
4020-0300	2	3	9,350	450	3	0.4	7,600	390	3	0.1
4020-0500		5	9,350	450	5	0.4	7,600	390	5	0.1
4020-0600		6	9,250	450	6	0.06	7,600	390	6	0.03
4020-0800		8	9,050	450	8	0.04	7,600	390	8	0.02
4020-1000		10	9,050	450	10	0.01	7,600	390	10	0.01
4025-0375	2.5	3.75	8,300	540	3.75	0.5	6,500	510	3.75	0.125
4025-0625		6.25	8,300	540	6.25	0.5	6,500	510	6.25	0.125
4025-1000		10	8,000	540	10	0.05	6,500	510	10	0.025
4030-0450	3	4.5	7,400	630	4.5	0.6	5,900	500	4.5	0.3
4030-0750		7.5	7,400	630	7.5	0.6	5,900	500	7.5	0.3
4030-0900		9	7,050	630	9	0.3	5,900	500	9	0.15
4030-1200		12	6,350	630	12	0.06	5,900	500	12	0.03
4030-1500		15	6,350	630	15	0.03	5,900	500	15	0.015
4035-0900	3.5	9	6,500	640	9	0.7	5,200	510	9	0.35
4040-0600	4	6	5,900	650	6	0.8	4,700	520	6	0.4
4040-1000		10	5,900	650	10	0.8	4,700	520	10	0.4
4040-1200		12	5,500	650	12	0.4	4,700	520	12	0.2
4040-1600		16	4,700	580	16	0.08	4,700	520	16	0.04
4040-2000		20	4,700	580	20	0.04	4,700	520	20	0.02
4045-1150	4.5	11.5	5,300	660	11.5	0.9	4,250	520	11.5	0.45
4050-0750	5	7.5	4,800	680	7.5	1	3,850	530	7.5	0.5
4050-1250		12.5	4,800	680	12.5	1	3,850	530	12.5	0.5
4050-1500		15	4,400	680	15	0.5	3,850	530	15	0.25
4050-2000		20	3,600	580	20	0.1	3,850	530	20	0.05
4050-2500		25	3,600	580	25	0.05	3,850	530	25	0.025
4055-1400	5.5	14	4,350	680	14	1.1	3,500	530	14	0.55

Side Milling



Milling Conditions for CXES


Side Milling

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-0900	**6**	9	5,000	1,600	9	1.2	4,500	1,200	9	1.2	4,500	810	9	0.6
4060-1500		15	5,000	1,600	15	1.2	4,500	1,200	15	1.2	4,500	810	15	0.6
4060-1800		18	5,000	1,600	18	0.6	4,500	1,200	18	0.6	3,700	660	18	0.3
4060-2400		24	5,000	1,400	24	0.12	4,500	1,050	24	0.12	2,900	360	24	0.12
4060-3000		30	5,000	1,400	30	0.12	4,500	1,050	30	0.12	2,900	360	30	0.12
4065-1650	**6.5**	16.5	4,400	1,500	16.5	1.3	3,950	1,150	16.5	1.3	3,950	780	16.5	0.65
4070-1050	**7**	10.5	3,900	1,450	10.5	0.7	3,550	1,120	10.5	0.7	3,550	760	10.5	0.35
4070-1750		17.5	3,900	1,450	17.5	1.4	3,550	1,120	17.5	1.4	3,550	760	17.5	0.7
4075-1900	**7.5**	19	3,500	1,400	19	1.5	3,250	1,100	19	1.5	3,250	750	19	0.75
4080-1200	**8**	12	3,000	1,300	12	1.6	2,900	1,050	12	1.6	2,900	720	12	0.8
4080-2000		20	3,000	1,300	20	1.6	2,900	1,050	20	1.6	2,900	720	20	0.8
4080-2400		24	2,800	1,230	24	0.8	2,600	1,050	24	0.8	2,600	600	24	0.4
4080-3200		32	2,400	1,090	32	0.16	2,000	800	32	0.16	2,100	360	32	0.16
4080-4000		40	2,400	1,090	40	0.16	2,000	800	40	0.16	2,100	360	40	0.16
4085-2150	**8.5**	21.5	2,550	1,200	21.5	1.7	2,450	1,000	21.5	1.7	2,450	680	21.5	0.85
4090-1350	**9**	13.5	2,250	1,150	13.5	0.9	2,150	980	13.5	0.9	2,150	650	13.5	0.45
4090-2250		22.5	2,250	1,150	22.5	1.8	2,150	980	22.5	1.8	2,150	650	22.5	0.9
4095-2400	**9.5**	24	1,950	1,050	24	1.9	1,900	950	24	1.9	1,900	620	24	0.95
4100-1500	**10**	15	1,600	1,000	15	2	1,500	900	15	2	1,500	580	15	1
4100-2500		25	1,600	1,000	25	2	1,500	900	25	2	1,500	580	25	1
4100-3000		30	1,500	900	30	1	1,500	850	30	1	1,500	580	30	0.5
4100-4000		40	1,300	800	40	0.2	1,500	750	40	0.2	1,500	580	40	0.2
4100-5000		50	1,300	800	50	0.2	1,500	750	50	0.2	1,500	580	50	0.2
4110-1650	**11**	16.5	1,400	900	16.5	1.1	1,350	830	16.5	1.1	1,350	560	16.5	0.55
4110-2750		27.5	1,400	900	27.5	2.2	1,350	830	27.5	2.2	1,350	560	27.5	1.1
4120-1800	**12**	18	1,200	800	18	2.4	1,200	750	18	2.4	1,200	540	18	1.2
4120-3000		30	1,200	800	30	2.4	1,200	750	30	2.4	1,200	540	30	1.2
4120-3600		36	1,150	750	36	1.2	1,150	720	36	1.2	1,150	540	36	0.6
4120-4800		48	1,050	700	48	0.24	1,050	660	48	0.24	1,050	500	48	0.24
4120-6000		60	1,050	700	60	0.24	1,050	660	60	0.24	1,050	500	60	0.24
4130-1950	**13**	19.5	1,100	650	19.5	1.3	1,100	600	19.5	1.3	1,000	460	19.5	0.65
4160-4000	**16**	40	1,000	500	40	3.2	1,000	440	40	3.2	720	340	40	1.6

Milling Conditions for CXES

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-0900	6	9	4,000	680	9	1.2	3,200	540	9	0.6
4060-1500		15	4,000	680	15	1.2	3,200	540	15	0.6
4060-1800		18	3,600	680	18	0.6	3,200	540	18	0.3
4060-2400		24	2,800	560	24	0.12	3,200	540	24	0.06
4060-3000		30	2,800	560	30	0.06	3,200	540	30	0.03
4065-1650	6.5	16.5	3,500	660	16.5	1.3	2,850	530	16.5	0.65
4070-1050	7	10.5	3,150	640	10.5	0.7	2,550	520	10.5	0.35
4070-1750		17.5	3,150	640	17.5	1.4	2,550	520	17.5	0.7
4075-1900	7.5	19	2,850	620	19	1.5	2,250	510	19	0.75
4080-1200	8	12	2,500	600	12	1.6	2,000	500	12	0.8
4080-2000		20	2,500	600	20	1.6	2,000	500	20	0.8
4080-2400		24	2,350	600	24	0.8	2,150	500	24	0.4
4080-3200		32	2,050	530	32	0.16	2,150	400	32	0.08
4080-4000		40	2,050	530	40	0.08	2,150	400	40	0.04
4085-2150	8.5	21.5	2,150	550	21.5	1.7	1,700	490	21.5	0.85
4090-1350	9	13.5	1,950	520	13.5	0.9	1,500	480	13.5	0.45
4090-2250		22.5	1,950	520	22.5	1.8	1,500	480	22.5	0.9
4095-2400	9.5	24	1,750	480	24	1.9	1,350	470	24	0.95
4100-1500	10	15	1,500	430	15	2	1,200	450	15	1
4100-2500		25	1,500	430	25	2	1,200	450	25	1
4100-3000		30	1,500	430	30	1	1,200	450	30	0.5
4100-4000		40	1,500	430	40	0.2	1,200	450	40	0.1
4100-5000		50	1,500	430	50	0.1	1,200	450	50	0.05
4110-1650	11	16.5	1,250	380	16.5	1.1	1,060	430	16.5	0.55
4110-2750		27.5	1,250	380	27.5	2.2	1,060	430	27.5	1.1
4120-1800	12	18	1,000	320	18	2.4	960	420	18	1.2
4120-3000		30	1,000	320	30	2.4	960	420	30	1.2
4120-3600		36	1,000	320	36	1.2	930	400	36	0.6
4120-4800		48	1,000	320	48	0.24	870	360	48	0.12
4120-6000		60	1,000	320	60	0.12	870	360	60	0.06
4130-1950	13	19.5	1,000	260	19.5	1.3	890	350	19.5	0.65
4160-4000	16	40	1,000	220	40	3.2	720	280	40	1.6

Side Milling



Milling Conditions for CXES


Slotting

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4010-0150		1.5	18,000	200	1	18,000	200	1	14,500	220	1
4010-0250		2.5	18,000	200	1	18,000	200	1	14,500	220	0.5※1
4010-0300	**1**	3	18,000	190	0.5※	18,000	190	0.5※	14,300	210	0.25※2
4010-0400		4	18,000	170	0.5※	18,000	170	0.5※	12,500	190	0.25※2
4010-0500		5	18,000	170	0.5※	18,000	170	0.5※	12,500	190	0.25※2
4015-0225		2.25	13,500	320	1.5	13,500	280	1.5	13,300	240	1.5
4015-0375	**1.5**	3.75	13,500	320	1.5	13,500	280	1.5	13,300	240	0.75※1
4015-0600		6	13,500	290	0.75※	13,500	250	0.75※	12,700	210	0.375※2
4020-0300		3	11,000	460	2	11,000	320	2	12,200	260	2
4020-0500		5	11,000	460	2	11,000	320	2	12,200	260	1※1
4020-0600	**2**	6	11,000	440	1※	11,000	310	1※	12,000	240	0.5※2
4020-0800		8	11,000	400	1※	11,000	290	1※	11,600	200	0.5※2
4020-1000		10	11,000	400	1※	11,000	290	1※	11,600	200	0.5※2
4025-0375		3.75	9,500	540	2.5	9,500	360	2.5	11,000	310	2.5
4025-0625	**2.5**	6.25	9,500	540	2.5	9,500	360	2.5	11,000	310	1.25※1
4025-1000		10	9,500	480	1.25※	9,500	330	1.25※	10,400	250	0.625※2
4030-0450		4.5	8,500	600	3	8,500	400	3	10,000	360	3
4030-0750		7.5	8,500	600	3	8,500	400	3	10,000	360	1.5※1
4030-0900	**3**	9	8,500	550	3	8,500	360	3	9,100	310	1.5※1
4030-1200		12	8,500	450	1.5※	8,500	280	1.5※	7,300	210	0.75※2
4030-1500		15	8,500	450	1.5※	8,500	280	1.5※	7,300	210	0.75※2
4035-0900	**3.5**	9	7,800	620	3.5	7,500	420	3.5	8,600	380	1.75※1
4040-0600		6	7,200	650	4	6,700	450	4	7,500	400	4
4040-1000		10	7,200	650	4	6,700	450	4	7,500	400	2※1
4040-1200	**4**	12	7,200	580	4	6,700	400	4	6,600	320	2※1
4040-1600		16	7,200	440	2※	6,700	300	2※	4,800	200	1※2
4040-2000		20	7,200	440	2※	6,700	300	2※	4,800	200	1※2
4045-1150	**4.5**	11.5	6,550	670	4.5	6,000	470	4.5	6,300	430	2.25※1
4050-0750		7.5	6,000	700	5	5,400	500	5	5,400	460	5
4050-1250		12.5	6,000	700	5	5,400	500	5	5,400	460	2.5※1
4050-1500	**5**	15	6,000	600	5	5,400	430	5	4,600	350	2.5※1
4050-2000		20	6,000	400	2.5※	5,400	290	2.5※	3,000	170	1.25※2
4050-2500		25	6,000	400	2.5※	5,400	290	2.5※	3,000	170	1.25※2
4055-1400	**5.5**	14	5,450	700	5.5	4,900	500	5.5	4,900	460	2.75※1
4060-0900		9	5,000	700	6	4,500	500	6	4,500	460	6
4060-1500		15	5,000	700	6	4,500	500	6	4,500	460	3※1
4060-1800	**6**	18	5,000	560	6	4,500	410	6	3,700	320	3※1
4060-2400		24	5,000	280	3※	4,500	230	3※	2,100	150	1.5※2
4060-3000		30	5,000	280	3※	4,500	230	3※	2,100	150	1.5※2
Milling Amount (mm)			a_p=1D ※a_p=0.5D			a_p=1D ※a_p=0.5D			a_p=1D ※1 a_p=0.5D ※2 a_p=0.25D		

Milling Conditions for CXES

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4010-0150	1	1.5	12,900	130	1	12,900	50	0.3※
4010-0250		2.5	12,900	130	1	12,900	50	0.3※
4010-0300		3	12,800	120	0.5※2	N/A	N/A	N/A
4010-0400		4	12,100	100	0.5※2	N/A	N/A	N/A
4010-0500		5	N/A	N/A	N/A	N/A	N/A	N/A
4015-0225	1.5	2.25	10,500	180	1.5	10,500	100	0.45※
4015-0375		3.75	10,500	180	1.5	10,500	100	0.45※
4015-0600		6	10,200	150	0.75※2	N/A	N/A	N/A
4020-0300	2	3	9,350	220	2	9,350	150	0.6※
4020-0500		5	9,350	220	2	9,350	150	0.6※
4020-0600		6	9,300	200	1※2	N/A	N/A	N/A
4020-0800		8	8,600	160	1※2	N/A	N/A	N/A
4020-1000		10	N/A	N/A	N/A	N/A	N/A	N/A
4025-0375	2.5	3.75	8,300	270	2.5	8,300	240	0.75※
4025-0625		6.25	8,300	270	2.5	8,300	240	0.75※
4025-1000		10	8,000	210	1.25※2	N/A	N/A	N/A
4030-0450	3	4.5	7,400	320	3	7,400	360	1.5
4030-0750		7.5	7,400	320	3	7,400	360	1.5
4030-0900		9	7,050	270	3	N/A	N/A	N/A
4030-1200		12	6,350	170	1.5※2	N/A	N/A	N/A
4030-1500		15	N/A	N/A	N/A	N/A	N/A	N/A
4035-0900	3.5	9	6,500	350	3.5	6,500	370	1.75
4040-0600	4	6	5,900	390	4	5,900	380	2
4040-1000		10	5,900	390	4	5,900	380	2
4040-1200		12	5,500	300	4	N/A	N/A	N/A
4040-1600		16	4,700	160	2※2	N/A	N/A	N/A
4040-2000		20	N/A	N/A	N/A	N/A	N/A	N/A
4045-1150	4.5	11.5	5,300	410	4.5	5,300	390	2.25
4050-0750	5	7.5	4,800	440	5	4,800	410	2.5
4050-1250		12.5	4,800	440	5	4,800	410	2.5
4050-1500		15	4,400	320	5	N/A	N/A	N/A
4050-2000		20	3,600	160	2.5※2	N/A	N/A	N/A
4050-2500		25	N/A	N/A	N/A	N/A	N/A	N/A
4055-1400	5.5	14	4,350	440	5.5	4,350	420	2.75
4060-0900	6	9	4,000	520	6	4,000	440	3
4060-1500		15	4,000	440	6	4,000	440	3
4060-1800		18	3,600	290	6	N/A	N/A	N/A
4060-2400		24	2,800	140	3※2	N/A	N/A	N/A
4060-3000		30	N/A	N/A	N/A	N/A	N/A	N/A
Milling Amount (mm)			a_p=1D ※1 a_p=0.8D ※2 a_p=0.5D ※3 a_p=Max 6 mm			a_p=0.5D ※a_p=0.3D		

Slotting



D : Outside Diameter (mm)

Milling Conditions for CXES

Slotting


WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4065-1650	**6.5**	16.5	4,400	650	6.5	3,950	450	6.5	3,950	420	3.25※1
4070-1050	**7**	10.5	3,900	300	7	3,550	200	7	3,550	200	3.5※1
4070-1750		17.5	3,900	600	7	3,550	400	7	3,550	390	3.5※1
4075-1900	**7.5**	19	3,500	550	7.5	3,250	380	7.5	3,250	380	3.75※1
4080-1200	**8**	12	3,000	500	8	2,900	360	8	2,900	360	8
4080-2000		20	3,000	500	8	2,900	360	8	2,900	360	4※1
4080-2400		24	2,800	330	8	2,600	260	8	2,600	240	4※1
4080-3200		32	2,400	230	4※	2,000	180	4※	2,000	130	2※2
4080-4000		40	2,400	230	4※	2,000	180	4※	2,000	130	2※2
4085-2150	**8.5**	21.5	2,550	450	8.5	2,450	330	8.5	2,450	310	4.25※1
4090-1350	**9**	13.5	2,250	210	9	2,150	160	9	2,150	140	4.5※1
4090-2250		22.5	2,250	420	9	2,150	300	9	2,150	260	4.5※1
4095-2400	**9.5**	24	1,950	400	9.5	1,900	300	9.5	1,900	250	4.75※1
4100-1500	**10**	15	1,600	380	10	1,500	270	10	1,500	220	10
4100-2500		25	1,600	380	10	1,500	270	10	1,500	220	5※1
4100-3000		30	1,500	250	10	1,500	180	10	1,500	190	5※1
4100-4000		40	1,300	180	5※	1,500	150	5※	1,500	130	2.5※2
4100-5000		50	1,300	180	5※	1,500	150	5※	1,500	130	2.5※2
4110-1650	**11**	16.5	1,400	170	11	1,350	120	11	1,350	100	5.5※1
4110-2750		27.5	1,400	340	11	1,350	240	11	1,350	200	5.5※1
4120-1800	**12**	18	1,200	300	12	1,200	210	12	1,200	180	12
4120-3000		30	1,200	300	12	1,200	210	12	1,200	180	6※1
4120-3600		36	1,150	200	12	1,150	140	12	1,150	150	6※1
4120-4800		48	1,050	160	6※	1,050	120	6※	1,050	100	3※2
4120-6000		60	1,050	160	6※	1,050	120	6※	1,050	100	3※2
4130-1950	**13**	19.5	1,100	190	13	1,100	90	13	1,000	80	6.5※1
4160-4000	**16**	40	1,000	400	8※	1,000	280	8※	720	240	4※2
Milling Amount (mm)			a_p=1D ※a_p=0.5D			a_p=1D ※a_p=0.5D			a_p=1D ※1 a_p=0.5D ※2 a_p=0.25D		

Milling Conditions for CXES

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4065-1650	**6.5**	16.5	3,500	420	6.5	3,500	400	3.25
4070-1050	**7**	10.5	3,150	190	7	3,150	190	3.5
4070-1750		17.5	3,150	410	7	3,150	380	3.5
4075-1900	**7.5**	19	2,850	400	7.5	2,850	370	3.75
4080-1200	**8**	12	2,500	520	6※3	2,500	340	4
4080-2000		20	2,500	390	8	2,500	340	4
4080-2400		24	2,350	200	8	N/A	N/A	N/A
4080-3200		32	2,050	110	4※2	N/A	N/A	N/A
4080-4000		40	N/A	N/A	N/A	N/A	N/A	N/A
4085-2150	**8.5**	21.5	2,150	330	8.5	2,150	300	4.25
4090-1350	**9**	13.5	1,950	150	9	1,950	140	4.5
4090-2250		22.5	1,950	300	9	1,950	270	4.5
4095-2400	**9.5**	24	1,750	270	9.5	1,750	270	4.75
4100-1500	**10**	15	1,500	450	6※3	1,500	240	5
4100-2500		25	1,500	220	10	1,500	240	5
4100-3000		30	1,500	180	8※1	N/A	N/A	N/A
4100-4000		40	1,200	90	5※2	N/A	N/A	N/A
4100-5000		50	N/A	N/A	N/A	N/A	N/A	N/A
4110-1650	**11**	16.5	1,250	100	11	1,350	110	5.5
4110-2750		27.5	1,250	200	11	1,350	230	5.5
4120-1800	**12**	18	1,000	420	6※3	1,200	220	6
4120-3000		30	1,000	180	12	1,200	220	6
4120-3600		36	1,000	140	9.6※1	N/A	N/A	N/A
4120-4800		48	800	70	6※2	N/A	N/A	N/A
4120-6000		60	N/A	N/A	N/A	N/A	N/A	N/A
4130-1950	**13**	19.5	1,000	80	13	1,100	90	6.5
4160-4000	**16**	40	1,000	240	8※2	1,000	220	4.8※
Milling Amount (mm)			a_p=1D ※1 a_p=0.8D ※2 a_p=0.5D ※3 a_p=Max 6 mm			a_p=0.5D ※a_p=0.3D		

Note:
- Decrease both spindle speed and feed rate proportionally in case of chattering.
- These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Every coolant offers stable milling.
- Recommend water soluble or oil coolant for Stainless Steels and Copper.

Slotting



D: Outside Diameter (mm)

CESUS



UTSCOAT 4 Flute High Efficiency Square End Mills for Stainless Steels

φ6～φ12


Super MG | UTS COAT | 40°~42° | Flatland | Shank Dia 0/-0.005 | Variable Pitch | Variable Helix

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	★	○						○			○			○	○		

Features

4 Flute Highly Efficient Square End Mills for stainless steels.
Variable pitch & variable helix designed for milling stainless steels offers higher efficiency milling.
New coating 'UTSCOAT' with excellent adhesion offers high resistance to breakage.

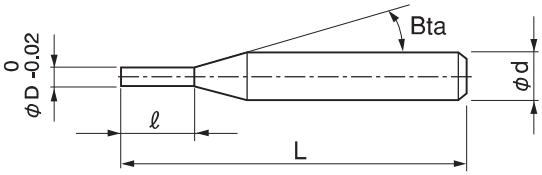


The shank taper angle shown is not an exact value.

Design features


Variable pitch & variable helix designed for milling stainless steels.

Variable pitch



$\alpha_1 \neq \alpha_2$

Variable helix

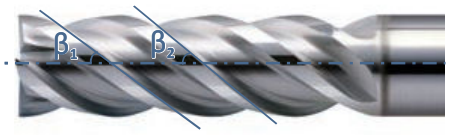


$\beta_1 \neq \beta_2$

Minimizes chattering

Stable milling under highly efficient conditions

Features of UTSCOAT

Improve the resistance to adhesion by adding a highly lubricant layer onto the high hardness and high toughness UTCOAT.

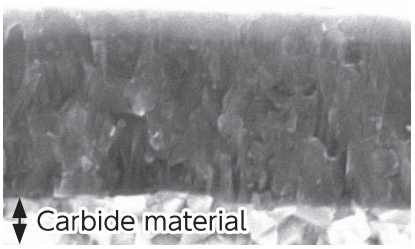

★ Ultra lubricant layer
◆ Ultra hard layer
◆ High toughness and adhesion layer

Reduce adhesion

High resistance to breakage with high lubricity

Total 21 models

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CESUS 4060-0900	6	9	—	60	6	—
CESUS 4060-1300		13		60	6	—
CESUS 4060-1800		18		60	6	—
CESUS 4070-1050	7	10.5	16°	70	8	—
CESUS 4070-1600		16		70	8	—
CESUS 4070-2100		21		70	8	—
CESUS 4080-1200	8	12	—	70	8	—
CESUS 4080-1900		19		70	8	—
CESUS 4080-2400		24		70	8	—
CESUS 4090-1350	9	13.5	16°	80	10	—
CESUS 4090-1900		19		80	10	—
CESUS 4090-2700		27		80	10	—
CESUS 4100-1500	10	15	—	80	10	—
CESUS 4100-2200		22		80	10	—
CESUS 4100-3000		30		80	10	—
CESUS 4110-1650	11	16.5	16°	100	12	—
CESUS 4110-2200		22		100	12	—
CESUS 4110-3300		33		100	12	—
CESUS 4120-1800	12	18	—	100	12	—
CESUS 4120-2600		26		100	12	—
CESUS 4120-3600		36		100	12	—

Milling Conditions for CESUS

Side Milling


WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-0900	**6**	9	6,000	1,600	9	1.2	6,000	1,100	9	1.2	6,000	1,100	9	1.2
4060-1300		13	6,000	1,600	13	1.2	6,000	1,100	13	1.2	6,000	1,100	13	1.2
4060-1800		18	6,000	1,170	18	1.2	4,800	800	18	1.2	4,800	800	18	1.2
4070-1050	**7**	10.5	5,000	1,450	10.5	1.4	5,000	1,025	10.5	1.4	5,000	1,025	10.5	1.4
4070-1600		16	5,000	1,450	16	1.4	5,000	1,025	16	1.4	5,000	1,025	16	1.4
4070-2100		21	5,000	1,060	21	1.4	4,000	750	21	1.4	4,000	750	21	1.4
4080-1200	**8**	12	4,300	1,300	12	1.6	4,300	950	12	1.6	4,300	950	12	1.6
4080-1900		19	4,300	1,300	19	1.6	4,300	950	19	1.6	4,300	950	19	1.6
4080-2400		24	4,300	950	24	1.6	3,440	695	24	1.6	3,440	695	24	1.6
4090-1350	**9**	13.5	3,700	1,150	13.5	1.8	3,700	875	13.5	1.8	3,700	875	13.5	1.8
4090-1900		19	3,700	1,150	19	1.8	3,700	875	19	1.8	3,700	875	19	1.8
4090-2700		27	3,700	840	27	1.8	2,960	640	27	1.8	2,960	640	27	1.8
4100-1500	**10**	15	3,200	1,000	15	2	3,200	800	15	2	3,200	800	15	2
4100-2200		22	3,200	1,000	22	2	3,200	800	22	2	3,200	800	22	2
4100-3000		30	3,200	730	30	2	2,650	580	30	2	2,650	580	30	2
4110-1650	**11**	16.5	2,900	900	16.5	2.2	2,900	725	16.5	2.2	2,900	725	16.5	2.2
4110-2200		22	2,900	900	22	2.2	2,900	725	22	2.2	2,900	725	22	2.2
4110-3300		33	2,900	650	33	2.2	2,400	530	33	2.2	2,400	530	33	2.2
4120-1800	**12**	18	2,650	800	18	2.4	2,650	650	18	2.4	2,650	650	18	2.4
4120-2600		26	2,650	800	26	2.4	2,650	650	26	2.4	2,650	650	26	2.4
4120-3600		36	2,650	580	36	2.4	2,200	475	36	2.4	2,200	475	36	2.4
Milling Amount (mm)			a_p:All Flute a_e:0.2D				a_p:All Flute a_e:0.2D				a_p:All Flute a_e:0.2D			

Slotting


WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4060-0900	**6**	9	6,000	700	6	6,000	700	6	6,000	700	6
4060-1300		13	6,000	700	6	6,000	700	6	6,000	700	6
4060-1800		18	6,000	560	6	4,200	350	6	4,200	350	6
4070-1050	**7**	10.5	5,000	625	7	5,000	625	7	5,000	625	7
4070-1600		16	5,000	625	7	5,000	625	7	5,000	625	7
4070-2100		21	5,000	500	7	3,500	300	7	3,500	300	7
4080-1200	**8**	12	4,300	550	8	4,300	550	8	4,000	500	8
4080-1900		19	4,300	550	8	4,300	550	8	4,000	500	8
4080-2400		24	4,300	440	8	3,000	275	8	3,000	275	8
4090-1350	**9**	13.5	3,500	475	9	3,500	475	9	3,150	430	9
4090-1900		19	3,500	475	9	3,500	475	9	3,150	430	9
4090-2700		27	3,500	380	9	2,450	240	9	2,450	240	9
4100-1500	**10**	15	2,900	400	10	2,900	400	10	2,900	400	10
4100-2200		22	2,900	400	10	2,900	400	10	2,900	400	10
4100-3000		30	2,900	320	10	2,000	200	10	2,000	200	10
4110-1650	**11**	16.5	2,650	340	11	2,650	340	11	2,380	300	11
4110-2200		22	2,650	340	11	2,650	340	11	2,380	300	11
4110-3300		33	2,650	270	11	1,820	170	11	1,820	170	11
4120-1800	**12**	18	2,420	300	12	2,420	300	12	2,420	300	12
4120-2600		26	2,420	300	12	2,420	300	12	2,420	300	12
4120-3600		36	2,420	240	12	1,650	150	12	1,650	150	12
Milling Amount (mm)			a_p:1D			a_p:1D			a_p:1D		

Note:
- Decrease both spindle speed and feed rate proportionally in case of chattering.
- These milling parameters are calculated based on the shortest overhang length.
  Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Every coolant offers stable milling.
- Recommend water soluble or oil coolant for Stainless Steels.

Side Milling



Slotting




D : Outside Diameter (mm)


Milling Example for Slotting CESUS ϕ10 × L22 SUS304


Tool	CESUS 4100-2200
Spindle Speed	3,200 min^{-1}
Feed Rate	900 mm/min※
a_p	10 mm
Coolant	Water Soluble
Milling Distance	100 mm

*Milled by higher efficiency conditions than catalogue conditions to evaluate the tool performance.

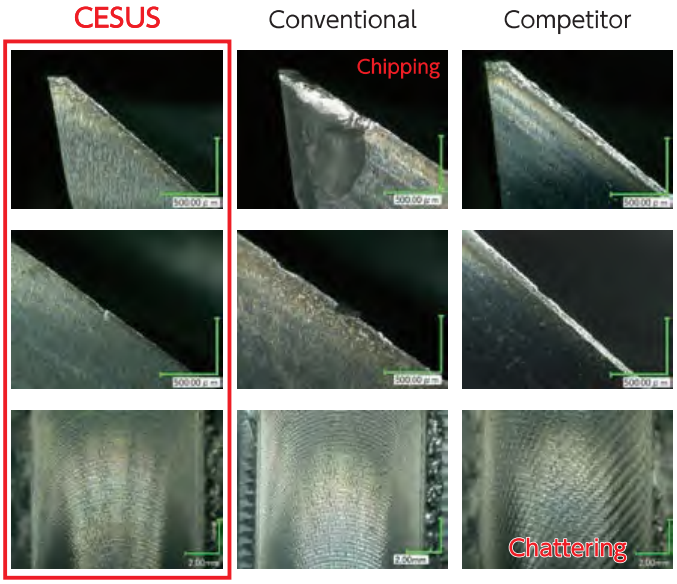

Milling image

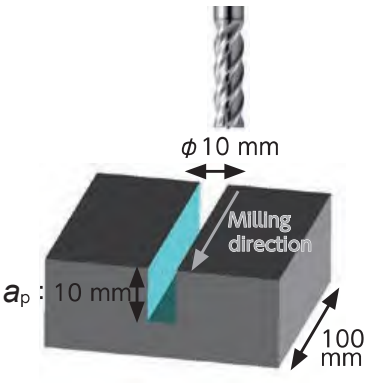

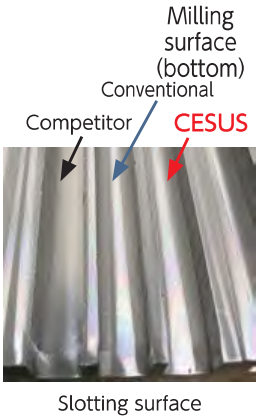


CESUS offers stable milling with less chattering under highly efficient conditions.

Milling Example for Side Milling CESUS ϕ10 × L22 SUS304

Tool	CESUS 4100-2200
Spindle Speed	2,560 min^{-1}
Feed Rate	580 mm/min
a_p	10 mm
a_e	2 mm
Coolant	Water Soluble
Milling Distance	64.8 m
Cycle Time	120 min



Milling image

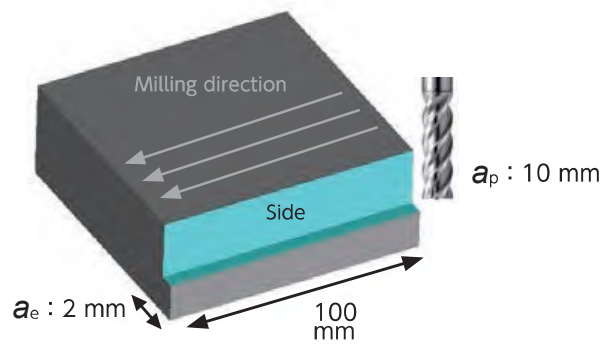

CESUS offers longer tool life with less wear and damage after 120 min of milling! Great surface finish without chattering!

DCES4000



Diamond Coated 4 Flute Square End Mills for Graphite Electrode Milling

φ3～φ10


MG | DIA | 30° | Sharp Corner | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○	★	○	○	●				○

Features

Diamond coated 4 flute square end mills for Graphite Electrodes.
New diamond coating with a highly adhesive base layer offers excellent wear resistance and longer tool life.
Refer to page A-35 for 2 flute DCES.

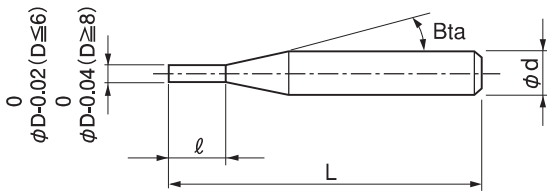

The shank taper angle shown is not an exact value.

Total 11 models


Unit (mm)

Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DCES 4030-0900	3	9	16°	50	6	—
DCES 4030-1200		12		50	6	—
DCES 4040-1200	4	12	16°	50	6	—
DCES 4040-1600		16		60	6	—
DCES 4060-1800	6	18	—	60	6	—
DCES 4060-1800L		18		100	6	—
DCES 4060-2400		24		60	6	—
DCES 4080-2400	8	24	—	80	8	—
DCES 4080-3200		32		80	8	—
DCES 4100-3000	10	30	—	90	10	—
DCES 4100-4000		40		90	10	—

Milling Conditions for DCES (4 Flutes)


WORK MATERIAL		GRAPHITE				
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm / min)	Side Milling		Slotting
				a_p Axial Depth (mm)	a_e Radial Depth (mm)	a_p Axial Depth (mm)
4030	**3**	25,000	3,000	6	0.15	0.75
4040	**4**	19,000	2,350	9	0.2	1
4060	**6**	13,000	1,800	12	0.48	1.5
4080	**8**	9,500	1,400	16	0.64	2
4100	**10**	7,500	1,200	20	0.8	2.5

Slotting



D : Outside Diameter (mm)

Side Milling



Note:
・Use a milling machine dedicated for Graphite.
・Recommend air blow for Graphite.

Other series for Graphite milling

Square / Long Neck Square

(★ Highly Recommended ● Recommended ○ Suggested)

Number of Flutes, Tool Type	Model Number	Appearance	Coating	Size	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Hard Brittle (Non-Metallic) Materials	Page
2 flutes Square	DCES 2000		DIA	φ0.2～φ6	○	★	○	○	●	○	A-35
4 flutes Square	DCES 4000		DIA	φ3～φ10	○	★	○	○	●	○	A-93
2 flutes Long Neck Square	DCLS		DIA	φ0.4～φ6	○	★	○	○	●	○	B-25

Long Neck Radius

4 flutes Long Neck Radius	DCLRS		DIA	φ1～φ6	○	★	○	○	●	○	D-99

Ball / Long Neck Ball / Taper Neck Ball

2 flutes Ball	DCB		DIA	R0.5～R6	○	★	○	○	●	○	F-31
2 flutes Long Neck Ball	DCLB		DIA	R0.2～R3	○	★	○	○	●	○	G-73
2 flutes Taper Neck Ball	DCTNB		DIA	R0.5～R1	○	★	○	○	●	○	H-21

DLCES4000 NEW



Released November 2025

DLCCOAT 4 Flute Square End Mills for Copper Electrode Milling

φ3～φ10


Super MG | DLC | 25° | Sharp Corner | Shank Dia 0/-0.004

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○		★	○					


Features

Long tool life for copper milling by DLC coating.
Sharp cutting edge reduces burrs.
Refer to page A-37 for 2 flute DLCES.

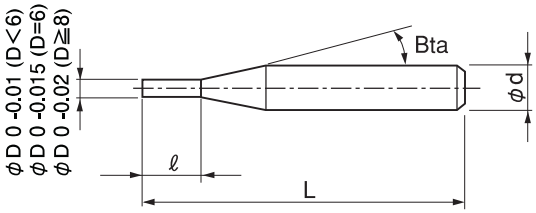


The shank taper angle shown is not an exact value.

Diamond-like hardness (around 4,000 – 6,000HV)

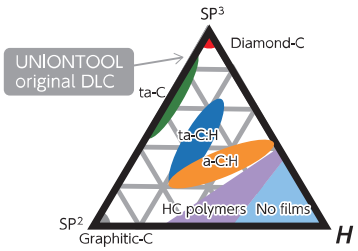

Rake and relief angle are designed for copper milling.
Sharp cutting edge reduces burrs on milling surface.

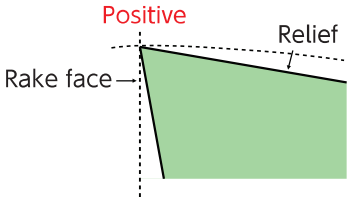

Total 7 models

Unit (mm)


Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLCES 4030-0900	3	9	11°	50	6	—
DLCES 4030-1200		12		55	6	—
DLCES 4040-1200	4	12	11°	50	6	—
DLCES 4060-1800	6	18	—	60	6	—
DLCES 4060-2400		24		65	6	—
DLCES 4080-2400	8	24	—	80	8	—
DLCES 4100-3000	10	30	—	100	10	—

Milling Conditions for DLCES (4 Flutes)

WORK MATERIAL			COPPER / ALUMINUM ALLOYS Side Milling				TUNGSTEN COPPER Side Milling			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4030-0900	**3**	9	10,000	780	4.5	0.3	9,000	700	2.25	0.3
4030-1200		12	6,000	470	7.5	0.15	5,400	420	3.75	0.15
4040-1200	**4**	12	8,000	850	6	0.4	7,200	770	3	0.4
4060-1800	**6**	18	5,500	980	9	0.6	5,000	880	4.5	0.6
4060-2400		24	3,300	590	15	0.3	3,000	530	7.5	0.3
4080-2400	**8**	24	4,200	910	12	0.8	3,800	820	6	0.8
4100-3000	**10**	30	3,500	910	15	1	3,200	820	7.5	1

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering occurs.
- Recommend wet coolant for Copper and Tungsten-Copper.

Side Milling




Copper Milling Example Comparison with conventional tool for steels
ϕ6 × L18


Tough Pitch Copper C1100

Spindle Speed	5,500 min^{-1}
Feed Rate	440 mm/min
a_p	18 mm
a_e	0.02 mm
Coolant	Oil mist
Cycle Time	132 min

DLCES








Conventional tool








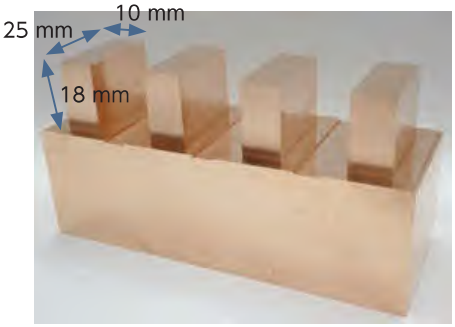

Dimensional error when side milling
Width target : 25 mm Measurement position: Top surface

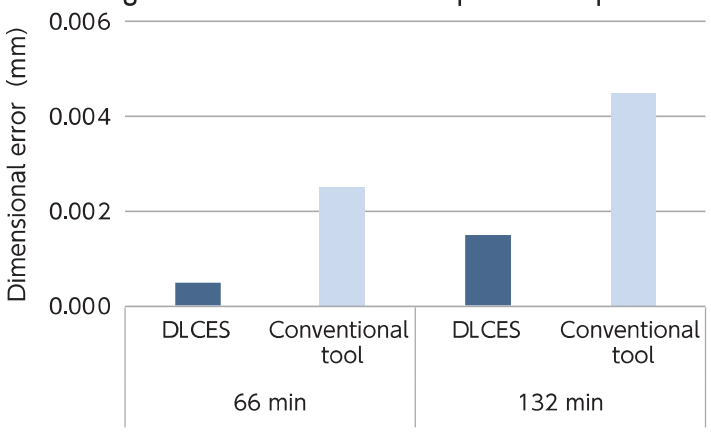

DLCES shows better results in copper milling compared to the conventional tool for steels.

HGS NEW



Released July 2025


HMGCOAT 6 Flute Square End Mills for Hard Materials

φ1～φ12

Super MG | HMG COAT | 35° | Flatland | Shank Dia 0/-0.004

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
			○	●	★	★	○										

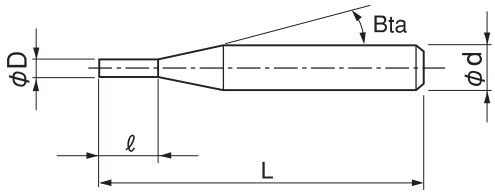

The shank taper angle shown is not an exact value.

Feature 1
Multi flutes & High accuracy

6 flute design is applied to all sizes.
Diameter tolerances have been significantly tightened compared to the conventional models.



Conventional

Outside Diameter	Diameter Tolerance	Number of Flutes
φ1≦D≦φ3	0/-0.02	3 Flutes
φ4≦D≦φ5		4 Flutes
D=φ6		6 Flutes
φ8≦D≦φ12	0/-0.03	


HGS

Outside Diameter	Diameter Tolerance	Number of Flutes
φ1≦D≦φ6	0/-0.01	6 Flutes
φ8≦D≦φ12	0/-0.015	


※Diameter tolerance for L/D=5D D=φ6 : -0.005/-0.02
φ8≦D≦φ12 : -0.005/-0.02

Feature 2
Near right angle corner milling

Micro flatland design enables near right angle corner milling.

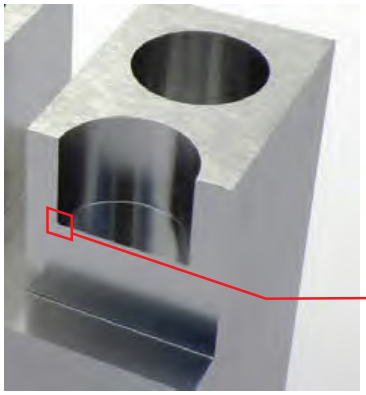

Trochoidal semicircular milling
HGSφ6 × L18

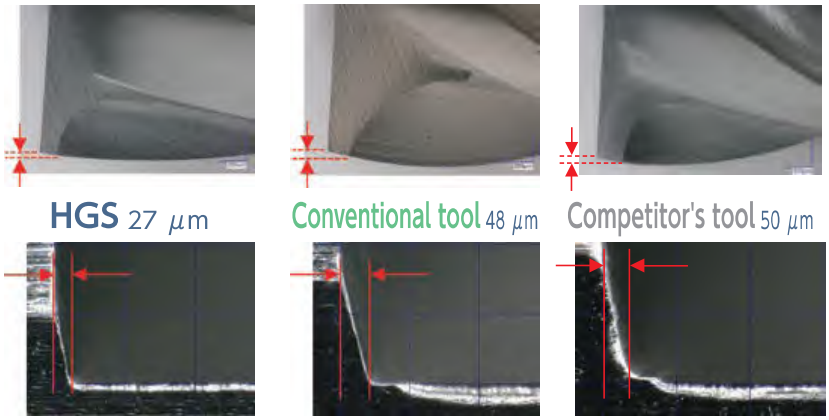

Work material : HAP10 (64HRC)
Refer to page A-98 for milling conditions.


Most effective for hard materials over 60HRC　6 Flute All Flute Square End Mills

HGS



Milling example
HGS　φ6 × L18　　**HAP10　(64 HRC)**

Helical milling
φ12 × Depth 9 mm
Cycle time : 46 min
■Roughing
n=2,100　Vf=90
Inclined angle 0.25°
Allowance 0.02
■Finishing
n=2,100 Vf=90
a_e=0.02
Inclined angle 0.25°

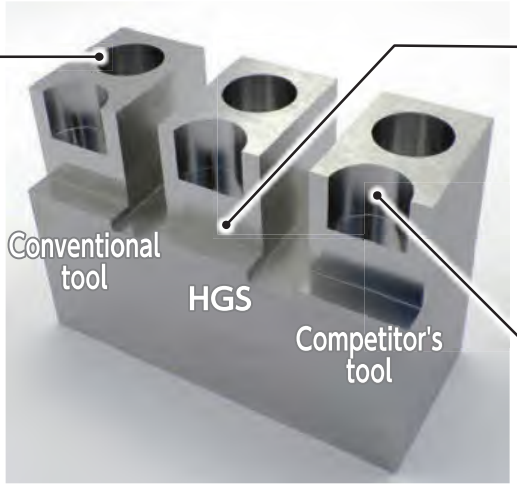

Vertical wall milling
18 mm × 5 mm × Depth 18 mm
Cycle time : 49 min
n=2,100　Vf=150
a_p=18　a_e=0.02


Trochoidal semicircular milling
R6 × Depth 9 mm
Cycle time : 11 min
■Roughing
n=4,200　Vf=600
a_p=9　a_e=0.12
Allowance 0.02
■Finishing
n=2,100　Vf=150
a_p=9　a_e=0.02

Feature 3
High rigidity

Increased core diameter makes rigidity higher which improves deflection accuracy.

The new flute and peripheral design provides a chip outlet and prevents chips from being stuck inside the flute.

Conventional tool　　HGS

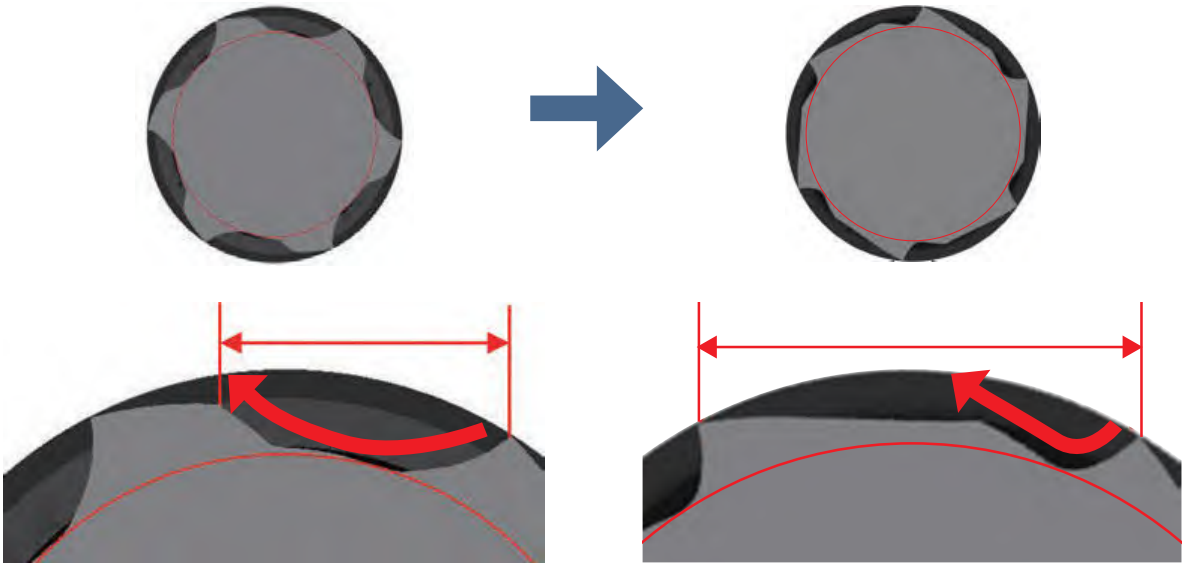

Feature 4
Prevention of deflection and waviness

High rigidity prevents deflection.
Helix angle 35° prevents surface waviness.

Conventional helix 45°




HGS helix 35°




Vertical wall milling

HGS ϕ6 × L18

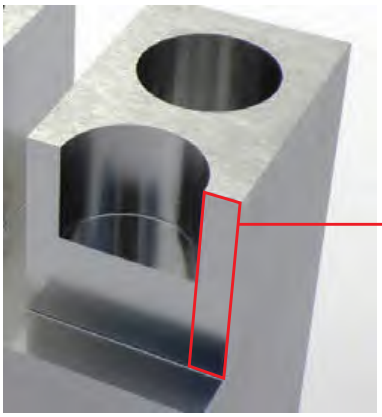

Surface deflection amount

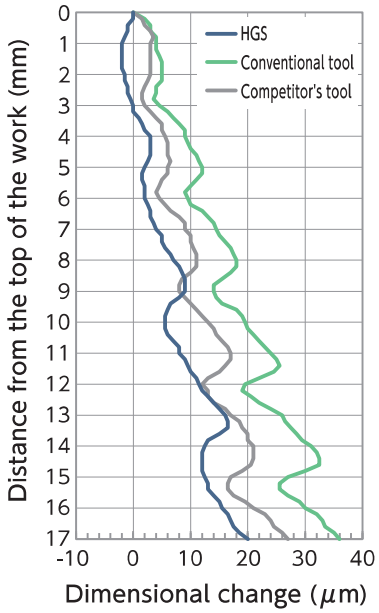



HGS

Ra0.068



Conventional tool

Ra0.073




Competitor's tool

Ra0.082

Helical milling

HGSϕ6 × L18

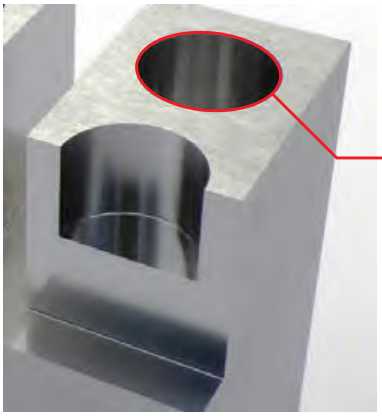


Prevention of deflection enables milling of dimensions close to the target value in hard materials.


HGS



Conventional tool



Competitor's tool



- Targeted hole diameterϕ12 (helical milling withϕ6 end mills)
- Helical milling after measuring the actual outside diameter and applying the appropriate tool offset.

Total 27 models

Unit (mm)

Model Number	Outside Diameter ϕD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
HGS 6010-0200	1	2	16°	45	4	—
HGS 6010-0300		3		45	4	—
HGS 6015-0300	1.5	3	16°	45	4	—
HGS 6015-0450		4.5		45	4	—
HGS 6020-0400	2	4	16°	45	4	—
HGS 6020-0600		6		45	4	—
HGS 6030-0600	3	6	16°	50	6	—
HGS 6030-0900		9		60	6	—
HGS 6030-1500		15		60	6	—
HGS 6040-0800	4	8	16°	50	6	—
HGS 6040-1200		12		60	6	—
HGS 6040-2000		20		70	6	—
HGS 6050-1000	5	10	16°	50	6	—
HGS 6050-1500		15		60	6	—
HGS 6050-2500		25		70	6	—
HGS 6060-1200	6	12	—	50	6	—
HGS 6060-1800		18		60	6	—
HGS 6060-3000		30		70	6	—
HGS 6080-1600	8	16	—	60	8	—
HGS 6080-2400		24		70	8	—
HGS 6080-4000		40		90	8	—
HGS 6100-2000	10	20	—	70	10	—
HGS 6100-3000		30		80	10	—
HGS 6100-5000		50		100	10	—
HGS 6120-2400	12	24	—	75	12	—
HGS 6120-3600		36		100	12	—
HGS 6120-6000		60		120	12	—

Milling Conditions for HGS

Roughing


WORK MATERIAL			HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)
6010-0200	**1**	2	7,200	930	1.5	0.01	7,000	620	1.5	0.01	6,200	530	1.5	0.005
6010-0300		3	6,600	780	1.5	0.01	6,400	520	1.5	0.01	5,600	440	1.5	0.005
6015-0300	**1.5**	3	7,000	960	2.25	0.03	6,800	640	2.25	0.03	6,000	540	2.25	0.015
6015-0450		4.5	6,300	800	2.25	0.03	6,200	530	2.25	0.03	5,500	450	2.25	0.015
6020-0400	**2**	4	6,800	980	3	0.04	6,600	650	3	0.04	5,800	550	3	0.04
6020-0600		6	6,100	810	3	0.04	6,000	540	3	0.04	5,300	460	3	0.04
6030-0600	**3**	6	6,200	990	4.5	0.06	6,100	660	4.5	0.06	5,400	560	4.5	0.06
6030-0900		9	5,600	830	4.5	0.06	5,500	550	4.5	0.06	4,800	470	4.5	0.06
6030-1500		15	2,900	420	4.5	0.03	2,800	280	4.5	0.03	2,400	80	4.5	0.03
6040-0800	**4**	8	5,700	1,020	6	0.08	5,600	680	6	0.08	4,900	580	6	0.08
6040-1200		12	5,200	860	6	0.08	5,100	570	6	0.08	4,500	480	6	0.08
6040-2000		20	2,700	430	6	0.04	2,600	290	6	0.04	2,300	80	6	0.04
6050-1000	**5**	10	5,200	1,050	7.5	0.1	5,100	700	7.5	0.1	4,500	600	7.5	0.1
6050-1500		15	4,700	870	7.5	0.1	4,600	580	7.5	0.1	4,100	490	7.5	0.1
6050-2500		25	2,400	440	7.5	0.05	2,300	290	7.5	0.05	2,100	80	7.5	0.05
6060-1200	**6**	12	4,700	1,080	9	0.12	4,600	720	9	0.12	4,100	610	9	0.12
6060-1800		18	4,300	900	9	0.12	4,200	600	9	0.12	3,700	510	9	0.12
6060-3000		30	2,200	450	9	0.06	2,100	300	9	0.06	1,900	80	9	0.06
6080-1600	**8**	16	4,100	920	12	0.16	4,000	880	12	0.16	3,500	750	12	0.16
6080-2400		24	3,700	770	12	0.16	3,600	730	12	0.16	3,200	620	12	0.16
6080-4000		40	1,800	390	12	0.08	1,800	370	12	0.08	530	50	12	0.08
6100-2000	**10**	20	3,600	1,090	15	0.2	3,500	1,040	15	0.2	3,100	880	15	0.2
6100-3000		30	3,300	910	15	0.2	3,200	870	15	0.2	2,800	740	15	0.2
6100-5000		50	1,600	460	15	0.1	1,600	440	15	0.1	470	60	15	0.1
6120-2400	**12**	24	3,400	1,260	18	0.24	3,300	1,200	18	0.24	2,900	1,020	18	0.24
6120-3600		36	3,100	1,050	18	0.24	3,000	1,000	18	0.24	2,600	850	18	0.24
6120-6000		60	1,500	530	18	0.12	1,500	500	18	0.12	430	60	18	0.12

Milling Conditions for HGS

Finishing

WORK MATERIAL			HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)
6010-0200	**1**	2	3,600	350	2	0.01	3,500	230	2	0.01	3,100	200	2	0.005
6010-0300		3	3,300	200	3	0.01	3,200	130	3	0.01	2,800	110	3	0.005
6015-0300	**1.5**	3	3,500	360	3	0.01	3,400	240	3	0.01	3,000	200	3	0.005
6015-0450		4.5	3,150	200	4.5	0.01	3,100	130	4.5	0.01	2,750	110	4.5	0.005
6020-0400	**2**	4	3,400	370	4	0.01	3,300	240	4	0.01	2,900	210	4	0.01
6020-0600		6	3,050	200	6	0.01	3,000	140	6	0.01	2,650	120	6	0.01
6030-0600	**3**	6	3,100	370	6	0.015	3,050	250	6	0.015	2,700	210	6	0.015
6030-0900		9	2,800	210	9	0.015	2,750	140	9	0.015	2,400	120	9	0.015
6030-1500		15	930	80	15	0.015	920	40	15	0.015	800	40	15	0.015
6040-0800	**4**	8	2,850	380	8	0.015	2,800	260	8	0.015	2,450	220	8	0.015
6040-1200		12	2,600	220	12	0.015	2,550	140	12	0.015	2,250	120	12	0.015
6040-2000		20	870	80	20	0.015	850	40	20	0.015	750	40	20	0.015
6050-1000	**5**	10	2,600	390	10	0.015	2,550	260	10	0.015	2,250	230	10	0.015
6050-1500		15	2,350	220	15	0.015	2,300	150	15	0.015	2,050	120	15	0.015
6050-2500		25	780	80	25	0.015	770	40	25	0.015	680	40	25	0.015
6060-1200	**6**	12	2,350	410	12	0.02	2,300	270	12	0.02	2,050	230	12	0.02
6060-1800		18	2,150	230	18	0.02	2,100	150	18	0.02	1,850	130	18	0.02
6060-3000		30	720	80	30	0.02	700	40	30	0.02	620	40	30	0.02
6080-1600	**8**	16	2,050	350	16	0.02	2,000	330	16	0.02	1,750	280	16	0.02
6080-2400		24	1,850	190	24	0.02	1,800	180	24	0.02	1,600	160	24	0.02
6080-4000		40	620	100	40	0.02	600	50	40	0.02	530	50	40	0.02
6100-2000	**10**	20	1,800	410	20	0.02	1,750	390	20	0.02	1,550	330	20	0.02
6100-3000		30	1,650	230	30	0.02	1,600	220	30	0.02	1,400	190	30	0.02
6100-5000		50	550	100	50	0.02	530	50	50	0.02	470	50	50	0.02
6120-2400	**12**	24	1,700	470	24	0.02	1,650	450	24	0.02	1,450	380	24	0.02
6120-3600		36	1,550	260	36	0.02	1,500	250	36	0.02	1,300	210	36	0.02
6120-6000		60	520	100	60	0.02	500	50	60	0.02	430	50	60	0.02

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.



HMS



HARDMAX 3-6 Flute Square End Mills

φ1～φ12


Super MG | HARD MAX | 45° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	●											

Features

Offering outstanding tool life by selecting appropriate 3, 4 or 6 flutes on each tool diameter.
Highly efficient milling on hard materials up to 65HRC with HARDMAX COAT.

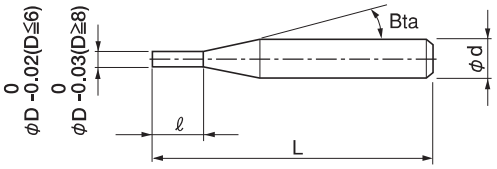

The shank taper angle shown is not an exact value.

Total 27 models

Unit (mm)


Model Number	Outside Diameter φD	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Number of Flutes	Suggested Retail Price ¥
HMS 3010-0250	1	2.5	16°	45	4	3	—
HMS 3010-0350		3.5		45	4		—
HMS 3015-0400	1.5	4	16°	45	4	3	—
HMS 3015-0600		6		45	4		—
HMS 3020-0400	2	4	16°	45	4	3	—
HMS 3020-0700		7		45	4		—
HMS 3030-0600	3	6	16°	50	6	3	—
HMS 3030-1000		10		60	6		—
HMS 3030-1500		15		60	6		—
HMS 4040-0800	4	8	16°	50	6	4	—
HMS 4040-1200		12		60	6		—
HMS 4040-2000		20		70	6		—
HMS 4050-1000	5	10	16°	50	6	4	—
HMS 4050-1500		15		60	6		—
HMS 4050-2500		25		70	6		—
HMS 6060-1300	6	13	—	50	6	6	—
HMS 6060-1800		18		60	6		—
HMS 6060-2600		26		70	6		—
HMS 6080-1900	8	19	—	60	8	6	—
HMS 6080-2400		24		70	8		—
HMS 6080-3600		36		90	8		—
HMS 6100-2200	10	22	—	70	10	6	—
HMS 6100-3000		30		80	10		—
HMS 6100-4600		46		100	10		—
HMS 6120-2600	12	26	—	75	12	6	—
HMS 6120-3600		36		100	12		—
HMS 6120-5600		56		120	12		—

Chip color : Selection example of optimal milling conditions from the viewpoint of cutting heat

SKH51 (63HRC)



・Work size : 50 × 50 × 30 mm
・Coolant : Air blow (Through spindle)

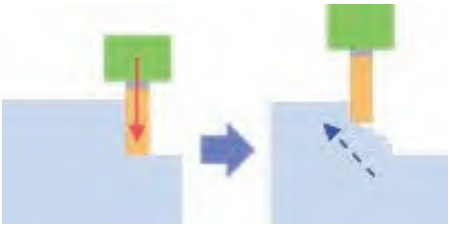

Climb up milling by Square end mills

What is climb up milling?

A milling method that makes effective use of the length of cut to make a large Z-cut in the first shot, and then runs up step by step.

1. Check the chip color under 6 types of conditions

	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Feed per tooth (mm/t)	Chip color	Result	Efficiency (mm^3/min)
Condition 1	4,000	1,350	10	0.15	0.056	Dark Blue	×	2,025
Condition 2	3,000	1,000	10	0.15	0.056	Red Gold	✓	1,500
Condition 3	2,000	675	10	0.15	0.056	Gold	✓	1,013
Condition 4	2,000	675	20	0.2	0.056	Red Gold	✓	2,700
Condition 5	2,000	1,000	20	0.2	0.083	Red Gold	✓	4,000
Condition 6	2,000	1,000	20	0.4	0.083	Dark Blue	×	8,000

2. Relationship between chip color and cutting heat



3. Optimal cutting condition

Condition 5 is judged to be the optimum condition based on the chip color and processing efficiency.
No damage or chipping of tools after 1 hour roughing process.

Tool after 1 hour roughing process



Milling Conditions for HMS

◆Short length of cut

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS (40~50HRC)					HARDENED STEELS (50~60HRC)					HARDENED STEELS (60HRC~)				
Model Number	Number of Flutes	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
3010-0250	3	1	9,500	140	0.05	1	0.05	6,400	95	0.05	1	0.05	6,400	90	0.05	1	0.05
3015-0400		1.5	6,400	100	0.075	1.5	0.075	4,200	60	0.075	1.5	0.075	4,200	60	0.075	1.5	0.075
3020-0400		2	4,700	80	0.1	2	0.1	3,200	75	0.1	2	0.1	3,200	70	0.1	2	0.1
3030-0600		3	3,200	85	0.15	3	0.15	2,100	80	0.15	3	0.15	2,100	80	0.15	3	0.15
4040-0800	4	4	2,400	90	0.2	4	0.2	1,600	85	0.2	4	0.2	1,600	80	0.2	4	0.2
4050-1000		5	1,900	90	0.25	5	0.25	1,300	85	0.25	5	0.25	1,300	80	0.25	5	0.25
6060-1300	6	6	1,600	170	0.3	6	0.3	1,100	120	0.3	6	0.3	1,100	110	0.3	6	0.3
6080-1900		8	1,200	170	0.4	8	0.4	800	120	0.4	8	0.4	800	110	0.4	8	0.4
6100-2200		10	950	170	0.5	15	0.5	640	100	0.5	15	0.5	640	80	0.5	15	0.5
6120-2600		12	800	170	0.5	18	0.5	530	90	0.5	18	0.5	530	70	0.5	18	0.5
Milling Amount (mm)		Slotting	$a_p \leqq 0.05D$ (max 0.5 mm)														
		Side Milling	$D \leqq \phi 8$ $a_p = 1D$ $D \geqq \phi 10$ $a_p = 1.5D$ $a_e \leqq 0.05D$ (max 0.5 mm)														

◆High speed milling for short length of cut

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS (40~50HRC)				HARDENED STEELS (50~60HRC)				HARDENED STEELS (60HRC~)			
Model Number	Number of Flutes	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Side Milling	
					a_p (mm)	a_e (mm)			a_p (mm)	a_e (mm)			a_p (mm)	a_e (mm)
3010-0250	3	1	22,500	630	1.5	0.03	20,000	540	1.5	0.02	15,000	450	0.5	0.01
3015-0400		1.5	18,000	720	2.25	0.045	16,000	630	2.25	0.03	11,500	540	0.75	0.015
3020-0400		2	14,300	850	3	0.06	13,000	750	3	0.04	8,500	630	1	0.02
3030-0600		3	13,100	1,120	4.5	0.09	11,200	950	4.5	0.06	6,700	760	1.5	0.03
4040-0800	4	4	11,300	1,300	6	0.12	9,900	1,170	6	0.08	2,850	630	8	0.08
4050-1000		5	10,100	1,530	7.5	0.15	8,900	1,350	7.5	0.1	2,400	700	10	0.1
6060-1300	6	6	8,900	1,950	9	0.18	8,000	1,800	9	0.12	2,150	830	12	0.12
6080-1900		8	7,700	2,350	12	0.24	6,900	2,200	12	0.16	2,100	900	16	0.16
6100-2200		10	6,700	3,100	15	0.3	6,000	2,700	15	0.2	2,000	1,000	20	0.2
6120-2600		12	5,800	3,000	18	0.36	5,300	2,500	18	0.24	1,950	1,070	24	0.24
Milling Amount (mm)		Side Milling	$a_p = 1.5D$ $a_e = 0.03D$ (max 0.5 mm)				$a_p = 1.5D$ $a_e = 0.02D$				$D \leqq \phi 3$ $a_p = 0.5D$ $a_e = 0.01D$ $D \geqq \phi 4$ $a_p = 2D$ $a_e = 0.02D$			

Milling Conditions for HMS


◆Medium length of cut

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS (40~50HRC)					HARDENED STEELS (50~60HRC)					HARDENED STEELS (60HRC~)				
Model Number	Number of Flutes	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Slotting	Side Milling	
					a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)			a_p (mm)	a_p (mm)	a_e (mm)
3030-1000	3	3	3,200	43~85	0.09	6	0.09	2,100	40~80	0.09	6	0.09	2,100	40~80	0.09	6	0.09
4040-1200	4	4	2,400	45~90	0.12	8	0.12	1,600	43~85	0.12	8	0.12	1,600	40~80	0.12	8	0.12
4050-1500		5	1,900	45~90	0.15	10	0.15	1,300	43~85	0.15	10	0.15	1,300	40~80	0.15	10	0.15
6060-1800	6	6	1,600	85~170	0.18	12	0.18	1,100	60~120	0.18	12	0.18	1,100	55~110	0.18	12	0.18
6080-2400		8	1,200	85~170	0.24	16	0.24	800	60~120	0.24	16	0.24	800	55~110	0.24	16	0.24
6100-3000		10	950	85~170	0.3	25	0.3	640	50~100	0.3	25	0.3	640	40~80	0.3	25	0.3
6120-3600		12	800	85~170	0.3	30	0.3	530	45~90	0.3	30	0.3	530	35~70	0.3	30	0.3
Milling Amount (mm)		Slotting	$a_p \leqq 0.03D$ (max 0.3 mm)														
		Side Milling	$D \leqq \phi 8$ $a_p = 2D$ $D \geqq \phi 10$ $a_p = 2.5D$ $a_e \leqq 0.03D$ (max 0.3 mm)														


◆Long length of cut

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS (40~50HRC)				HARDENED STEELS (50~60HRC)				HARDENED STEELS (60HRC~)			
Model Number	Number of Flutes	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Side Milling		Spindle Speed (min^{-1})	Feed Rate (mm/min)	Side Milling	
					a_p (mm)	a_e (mm)			a_p (mm)	a_e (mm)			a_p (mm)	a_e (mm)
3010-0350	3	1	9,500	140~210	3	0.02	6,400	95~143	3	0.02	6,400	95~133	3	0.02
3015-0600		1.5	6,300	100~150	4.5	0.03	4,200	80~120	4.5	0.03	4,200	80~112	4.5	0.03
3020-0700		2	4,700	80~120	6	0.04	3,200	75~113	6	0.04	3,200	75~113	6	0.04
3030-1500		3	3,200	85~128	9	0.06	2,100	80~120	9	0.06	2,100	80~120	9	0.06
4040-2000	4	4	2,400	90~135	12	0.08	1,600	85~128	12	0.08	1,600	83~125	12	0.08
4050-2500		5	1,900	90~135	15	0.1	1,300	85~128	15	0.1	1,300	83~125	15	0.1
6060-2600	6	6	1,600	170~255	18	0.12	1,100	120~180	18	0.12	1,100	112~168	18	0.12
6080-3600		8	1,200	170~255	24	0.16	800	120~180	24	0.16	800	110~166	24	0.16
6100-4600		10	950	170~255	30	0.2	640	100~150	30	0.2	640	88~132	30	0.2
6120-5600		12	800	170~255	36	0.24	530	90~135	36	0.24	530	76~114	36	0.24
Milling Amount (mm)		Side Milling	$a_p = 3D$ $a_e \leqq 0.02D$											

Slotting



Side Milling



D : Outside Diameter (mm)

Note:
・Recommend down cut processing.
・Reduce cutting amount, feed rate, and apply zero-cut in accordance with required surface quality.
・Recommend air blow or oil mist.

HLS2000



HARDMAX 2 Flute Long Neck Square End Mills

ϕ0.1～ϕ6


Super MG | HARD MAX | 30° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	Hardened Steels ~55HRC	Hardened Steels ~60HRC	Hardened Steels ~65HRC	Hardened Steels ~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	○			○			○			○	○		


Features

HARDMAX coating and optimized tool design control tool chipping.
Longer tool life with deep rib milling on hard materials.
High Accuracy: Diameter Tolerance: 0/-0.01 (D≦0.15), 0/-0.015 (D≧0.2)
Refer to page B-51 for 4 flute HLS.

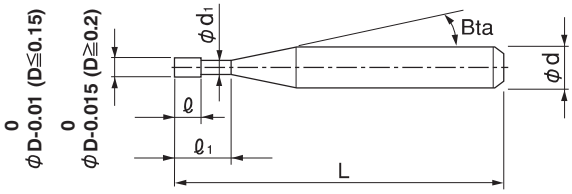

The shank taper angle shown is not an exact value.



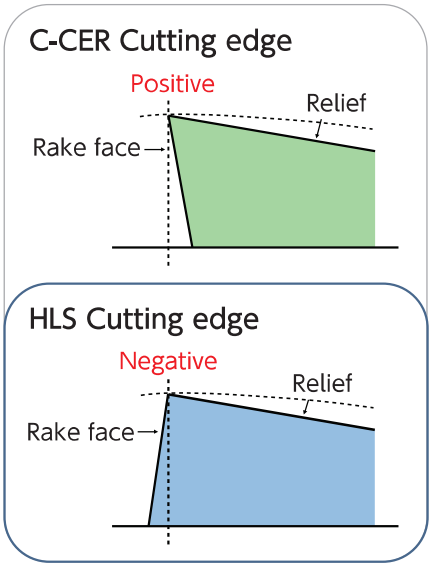

Total 189 models

Unit (mm)

Model Number	Outside Diameter ϕD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter ϕd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30'	1°	1° 30'	2°	3°
HLS 2001-003	0.1	0.3	0.1	0.088	11°	45	4	—	0.33	0.36	0.38	0.40	0.45
HLS 2001-005		0.5				45	4	—	0.54	0.58	0.61	0.64	0.69
HLS 2001-0075		0.75				45	4	—	0.80	0.85	0.90	0.95	1.07
HLS 2001-010		1				45	4	—	1.07	1.12	1.18	1.25	1.41
HLS 20015-005	0.15	0.5	0.15	0.128	11°	45	4	—	0.58	0.61	0.63	0.66	0.71
HLS 20015-0075		0.75				45	4	—	0.84	0.88	0.91	0.94	1.02
HLS 20015-010		1				45	4	—	1.10	1.14	1.18	1.23	1.32
HLS 2002-005	0.2	0.5	0.3	0.18	16°	45	4	—	0.65	0.70	0.74	0.78	0.85
HLS 2002-010		1				45	4	—	1.18	1.25	1.31	1.36	1.45
HLS 2002-015		1.5				45	4	—	1.67	1.76	1.84	1.90	2.01
HLS 2002-020		2				45	4	—	2.23	2.33	2.41	2.49	2.68
HLS 2002-030		3				45	4	—	3.27	3.39	3.51	3.63	3.91

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
HLS 2003-010	0.3	1	0.4	0.28	16°	45	4	—	1.22	1.30	1.37	1.43	1.55
HLS 2003-015		1.5				45	4	—	1.71	1.82	1.91	1.98	2.12
HLS 2003-020		2				45	4	—	2.24	2.36	2.46	2.55	2.70
HLS 2003-025		2.5				45	4	—	2.77	2.91	3.02	3.11	3.27
HLS 2003-030		3				45	4	—	3.30	3.45	3.56	3.66	3.83
HLS 2003-040		4				45	4	—	4.35	4.51	4.64	4.75	4.94
HLS 2003-060		6				45	4	—	6.43	6.63	6.78	6.91	7.12
HLS 2003-090		9				45	4	—	9.53	9.76	9.94	10.09	10.32
HLS 2004-015	0.4	1.5	0.6	0.38	16°	45	4	—	1.77	1.91	2.03	2.13	2.31
HLS 2004-020		2				45	4	—	2.31	2.47	2.60	2.71	2.91
HLS 2004-025		2.5				45	4	—	2.85	3.02	3.16	3.28	3.49
HLS 2004-030		3				45	4	—	3.38	3.57	3.72	3.85	4.07
HLS 2004-035		3.5				45	4	—	3.91	4.11	4.27	4.41	4.64
HLS 2004-040		4				45	4	—	4.44	4.65	4.82	4.96	5.21
HLS 2004-050		5				45	4	—	5.49	5.73	5.91	6.06	6.33
HLS 2004-080		8				45	4	—	8.63	8.91	9.13	9.31	9.62
HLS 2004-120		12				45	4	—	12.77	13.10	13.36	13.57	13.91
HLS 2005-015	0.5	1.5	0.7	0.48	16°	45	4	—	1.83	1.99	2.13	2.25	2.48
HLS 2005-020		2				45	4	—	2.37	2.56	2.71	2.85	3.09
HLS 2005-025		2.5				45	4	—	2.92	3.12	3.29	3.43	3.69
HLS 2005-030		3				45	4	—	3.45	3.68	3.85	4.01	4.28
HLS 2005-040		4				45	4	—	4.52	4.77	4.97	5.14	5.44
HLS 2005-050		5				45	4	—	5.58	5.86	6.08	6.26	6.58
HLS 2005-060		6				45	4	—	6.64	6.94	7.17	7.37	7.71
HLS 2005-080		8				45	4	—	8.74	9.07	9.33	9.56	9.93
HLS 2005-100		10				50	4	—	10.82	11.19	11.48	11.72	12.12
HLS 2005-150		15				50	4	—	16.00	16.44	16.78	17.05	17.50
HLS 2006-020	0.6	2	0.9	0.58	16°	45	4	—	2.39	2.62	2.80	2.96	3.24
HLS 2006-030		3				45	4	—	3.49	3.75	3.96	4.14	4.32
HLS 2006-040		4				45	4	—	4.57	4.86	5.09	5.29	5.69
HLS 2006-050		5				45	4	—	5.64	5.96	6.21	6.43	6.92
HLS 2006-060		6				45	4	—	6.70	7.05	7.32	7.57	8.14
HLS 2006-070		7				45	4	—	7.76	8.13	8.42	8.71	9.36
HLS 2006-080		8				45	4	—	8.81	9.20	9.52	9.85	10.59
HLS 2006-100		10				45	4	—	10.91	11.34	11.72	12.13	13.04
HLS 2006-120		12				50	4	—	13.00	13.47	13.92	14.40	15.48
HLS 2006-180		18				50	4	—	19.23	19.85	20.52	21.24	22.82

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
HLS 2007-020	0.7	2	1	0.68	16°	45	4	—	2.39	2.62	2.80	2.96	3.24
HLS 2007-040		4				45	4	—	4.57	4.86	5.09	5.29	5.69
HLS 2007-060		6				45	4	—	6.70	7.05	7.32	7.57	8.14
HLS 2007-080		8				45	4	—	8.81	9.20	9.52	9.85	10.59
HLS 2007-100		10				50	4	—	10.91	11.34	11.72	12.13	13.04
HLS 2008-030	0.8	3	1.2	0.78	16°	45	4	—	3.49	3.75	3.96	4.14	4.32
HLS 2008-040		4				45	4	—	4.57	4.86	5.09	5.29	5.69
HLS 2008-050		5				45	4	—	5.64	5.96	6.21	6.43	6.92
HLS 2008-060		6				45	4	—	6.70	7.05	7.32	7.57	8.14
HLS 2008-080		8				45	4	—	8.81	9.20	9.52	9.85	10.59
HLS 2008-100		10				50	4	—	10.91	11.34	11.72	12.13	13.04
HLS 2008-120		12				50	4	—	13.00	13.47	13.92	14.40	15.48
HLS 2008-160		16				50	4	—	17.16	17.73	18.32	18.96	20.38
HLS 2008-240		24				60	4	—	25.42	26.24	27.13	28.07	30.17
HLS 2009-040	0.9	4	1.3	0.88	16°	45	4	—	4.57	4.86	5.09	5.29	5.69
HLS 2009-060		6				45	4	—	6.70	7.05	7.32	7.57	8.14
HLS 2009-080		8				45	4	—	8.81	9.20	9.52	9.85	10.59
HLS 2009-100		10				45	4	—	10.91	11.34	11.72	12.13	13.04
HLS 2009-150		15				50	4	—	16.12	16.66	17.22	17.82	19.15
HLS 2010-030	1	3	1.5	0.95	16°	45	4	—	3.62	3.85	4.04	4.21	4.54
HLS 2010-040		4				45	4	—	4.69	4.95	5.16	5.36	5.76
HLS 2010-050		5				45	4	—	5.75	6.04	6.27	6.49	6.98
HLS 2010-060		6				45	4	—	6.80	7.12	7.38	7.63	8.21
HLS 2010-070		7				45	4	—	7.85	8.19	8.48	8.77	9.43
HLS 2010-080		8				45	4	—	8.90	9.26	9.58	9.91	10.65
HLS 2010-090		9				45	4	—	9.95	10.33	10.68	11.05	11.88
HLS 2010-100		10				45	4	—	10.99	11.39	11.78	12.19	13.10
HLS 2010-120		12				45	4	—	13.07	13.52	13.98	14.47	15.55
HLS 2010-140		14				45	4	—	15.15	15.65	16.18	16.74	18.00
HLS 2010-160		16				50	4	—	17.22	17.78	18.38	19.02	20.44
HLS 2010-180		18				55	4	—	19.29	19.92	20.59	21.30	22.90
HLS 2010-200		20				55	4	—	21.35	22.04	22.78	23.57	25.34
HLS 2010-250		25				70	4	—	26.51	27.37	28.29	29.27	No Interference
HLS 2010-300		30				70	4	—	31.66	32.69	33.79	34.96	No Interference

φ3mm Shank V Series
UDC·PCD Series
CBN Series
Square
Square
Long Neck Square
Radius
Radius
Long Neck Radius
Taper Neck Radius
Ball
Ball
Long Neck Ball
Taper Neck Ball
Taper
Barrel
Spiral V Cutter
Drill
Technical Data

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
HLS 2012-040	1.2	4	1.8	1.14	16°	45	4	—	4.13	4.27	4.41	4.57	4.91
HLS 2012-060		6				45	4	—	6.19	6.40	6.61	6.84	7.36
HLS 2012-080		8				45	4	—	8.26	8.52	8.81	9.12	9.80
HLS 2012-100		10				45	4	—	10.32	10.65	11.01	11.40	12.25
HLS 2012-120		12				45	4	—	12.38	12.78	13.21	13.67	14.70
HLS 2012-160		16				50	4	—	16.51	17.04	17.62	18.23	19.59
HLS 2012-200		20				60	4	—	20.63	21.30	22.02	22.78	24.49
HLS 2014-060	1.4	6	2.1	1.34	16°	45	4	—	6.19	6.40	6.61	6.84	7.36
HLS 2014-080		8				45	4	—	8.26	8.52	8.81	9.12	9.80
HLS 2014-100		10				45	4	—	10.32	10.65	11.01	11.40	12.25
HLS 2014-120		12				45	4	—	12.38	12.78	13.21	13.67	14.70
HLS 2014-140		14				45	4	—	14.44	14.91	15.42	15.95	17.15
HLS 2014-160		16				50	4	—	16.51	17.04	17.62	18.23	19.59
HLS 2014-220		22				55	4	—	22.69	23.43	24.22	25.06	No Interference
HLS 2015-040	1.5	4	2.3	1.44	16°	45	4	—	4.13	4.27	4.41	4.57	4.91
HLS 2015-060		6				45	4	—	6.19	6.40	6.61	6.84	7.36
HLS 2015-080		8				45	4	—	8.26	8.52	8.81	9.12	9.80
HLS 2015-100		10				45	4	—	10.32	10.65	11.01	11.40	12.25
HLS 2015-120		12				45	4	—	12.38	12.78	13.21	13.67	14.70
HLS 2015-140		14				50	4	—	14.44	14.91	15.42	15.95	17.15
HLS 2015-160		16				50	4	—	16.51	17.04	17.62	18.23	19.59
HLS 2015-180		18				55	4	—	18.57	19.17	19.82	20.51	22.04
HLS 2015-200		20				55	4	—	20.63	21.30	22.02	22.78	No Interference
HLS 2015-250		25				70	4	—	25.79	26.63	27.52	28.48	No Interference
HLS 2015-300		30				70	4	—	30.95	31.95	33.02	34.17	No Interference
HLS 2015-350		35				70	4	—	36.10	37.27	38.53	No Interference	No Interference
HLS 2015-400		40				80	4	—	41.26	42.60	44.03	No Interference	No Interference
HLS 2015-450		45				80	4	—	46.42	47.92	No Interference	No Interference	No Interference
HLS 2016-060	1.6	6	2.4	1.51	16°	45	4	—	6.23	6.43	6.65	6.88	7.40
HLS 2016-080		8				45	4	—	8.29	8.56	8.85	9.16	9.85
HLS 2016-100		10				45	4	—	10.35	10.69	11.05	11.43	12.29
HLS 2016-120		12				45	4	—	12.42	12.82	13.25	13.71	14.74
HLS 2016-140		14				50	4	—	14.48	14.95	15.45	15.99	17.19
HLS 2016-160		16				50	4	—	16.54	17.08	17.65	18.27	19.63
HLS 2016-180		18				55	4	—	18.60	19.21	19.85	20.54	22.08
HLS 2016-200		20				55	4	—	20.67	21.34	22.05	22.82	No Interference
HLS 2016-260		26				60	4	—	26.85	27.73	28.66	29.65	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
HLS 2018-060	1.8	6	2.7	1.71	16°	45	4	—	6.23	6.43	6.65	6.88	7.40
HLS 2018-080		8				45	4	—	8.29	8.56	8.85	9.16	9.85
HLS 2018-100		10				45	4	—	10.35	10.69	11.05	11.43	12.29
HLS 2018-120		12				45	4	—	12.42	12.82	13.25	13.71	14.74
HLS 2018-140		14				50	4	—	14.48	14.95	15.45	15.99	17.19
HLS 2018-160		16				50	4	—	16.54	17.08	17.65	18.27	19.63
HLS 2018-180		18				55	4	—	18.60	19.21	19.85	20.54	No Interference
HLS 2018-200		20				55	4	—	20.67	21.34	22.05	22.82	No Interference
HLS 2018-250		25				60	4	—	25.82	26.66	27.56	28.52	No Interference
HLS 2020-060	2	6	3	1.91	16°	45	4	—	6.23	6.43	6.65	6.88	7.40
HLS 2020-080		8				45	4	—	8.29	8.56	8.85	9.16	9.85
HLS 2020-100		10				45	4	—	10.35	10.69	11.05	11.44	12.29
HLS 2020-120		12				45	4	—	12.42	12.82	13.25	13.71	14.74
HLS 2020-140		14				50	4	—	14.48	14.95	15.45	15.99	17.19
HLS 2020-160		16				50	4	—	16.54	17.08	17.65	18.27	No Interference
HLS 2020-180		18				55	4	—	18.61	19.21	19.86	20.55	No Interference
HLS 2020-200		20				55	4	—	20.67	21.34	22.05	22.82	No Interference
HLS 2020-250		25				60	4	—	25.83	26.66	27.56	28.52	No Interference
HLS 2020-300		30				70	4	—	30.98	31.99	33.06	No Interference	No Interference
HLS 2020-350		35				80	4	—	36.14	37.31	38.56	No Interference	No Interference
HLS 2020-400		40				90	4	—	41.30	42.64	No Interference	No Interference	No Interference
HLS 2020-500		50				100	4	—	51.61	53.28	No Interference	No Interference	No Interference
HLS 2020-600		60				110	4	—	61.92	No Interference	No Interference	No Interference	No Interference
HLS 2025-080	2.5	8	3.7	2.41	16°	45	4	—	8.29	8.56	8.85	9.16	9.85
HLS 2025-100		10				45	4	—	10.35	10.69	11.05	11.44	12.29
HLS 2025-120		12				45	4	—	12.42	12.82	13.25	13.71	No Interference
HLS 2025-140		14				50	4	—	14.48	14.95	15.45	15.99	No Interference
HLS 2025-160		16				50	4	—	16.54	17.08	17.65	18.27	No Interference
HLS 2025-180		18				55	4	—	18.61	19.21	19.86	20.55	No Interference
HLS 2025-200		20				55	4	—	20.67	21.34	22.06	No Interference	No Interference
HLS 2025-250		25				60	4	—	25.83	26.66	27.56	No Interference	No Interference
HLS 2025-300		30				70	4	—	30.98	31.99	No Interference	No Interference	No Interference
HLS 2025-400		40				90	4	—	41.30	42.64	No Interference	No Interference	No Interference
HLS 2025-500		50				100	4	—	51.61	No Interference	No Interference	No Interference	No Interference

φ3mm Shank V Series
UDC·PCD Series
CBN Series
Square
Square
Long Neck Square
Radius
Radius
Long Neck Radius
Taper Neck Radius
Ball
Ball
Long Neck Ball
Taper Neck Ball
Taper
Barrel
Spiral V Cutter
Drill
Technical Data

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
HLS 2030-080	3	8	4.5	2.92	16°	45	6	—	8.29	8.56	8.85	9.16	9.84
HLS 2030-100		10				45	6	—	10.35	10.69	11.05	11.43	12.29
HLS 2030-120		12				50	6	—	12.41	12.82	13.25	13.71	14.74
HLS 2030-140		14				50	6	—	14.48	14.95	15.45	15.99	17.18
HLS 2030-160		16				60	6	—	16.54	17.08	17.65	18.26	19.63
HLS 2030-180		18				60	6	—	18.60	19.21	19.85	20.54	22.08
HLS 2030-200		20				60	6	—	20.66	21.34	22.05	22.82	24.53
HLS 2030-250		25				70	6	—	25.82	26.66	27.56	28.51	No Interference
HLS 2030-300		30				80	6	—	30.98	31.98	33.06	34.21	No Interference
HLS 2030-350		35				80	6	—	36.14	37.31	38.56	39.90	No Interference
HLS 2030-400		40				90	6	—	41.29	42.63	44.06	No Interference	No Interference
HLS 2030-500		50				100	6	—	51.61	53.28	55.07	No Interference	No Interference
HLS 2040-120	4	12	6	3.82	16°	50	6	—	12.59	13.00	13.44	13.91	14.95
HLS 2040-160		16				60	6	—	16.72	17.26	17.84	18.46	No Interference
HLS 2040-200		20				60	6	—	20.84	21.52	22.24	23.02	No Interference
HLS 2040-250		25				70	6	—	26.00	26.85	27.75	28.71	No Interference
HLS 2040-300		30				70	6	—	31.16	32.17	33.25	No Interference	No Interference
HLS 2040-350		35				80	6	—	36.32	37.49	38.75	No Interference	No Interference
HLS 2040-400		40				90	6	—	41.47	42.82	No Interference	No Interference	No Interference
HLS 2040-450		45				90	6	—	46.63	48.14	No Interference	No Interference	No Interference
HLS 2040-500		50				100	6	—	51.79	53.47	No Interference	No Interference	No Interference
HLS 2040-600		60				110	6	—	62.10	No Interference	No Interference	No Interference	No Interference
HLS 2050-160	5	16	7.5	4.82	16°	60	6	—	16.72	17.26	17.84	No Interference	No Interference
HLS 2050-200		20				60	6	—	20.84	21.52	No Interference	No Interference	No Interference
HLS 2050-250		25				60	6	—	26.00	26.85	No Interference	No Interference	No Interference
HLS 2050-300		30				80	6	—	31.16	No Interference	No Interference	No Interference	No Interference
HLS 2050-350		35				80	6	—	36.32	No Interference	No Interference	No Interference	No Interference
HLS 2050-400		40				80	6	—	41.47	No Interference	No Interference	No Interference	No Interference
HLS 2050-500		50				110	6	—	51.79	No Interference	No Interference	No Interference	No Interference
HLS 2050-600		60				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HLS 2060-200	6	20	9	5.82	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HLS 2060-300		30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HLS 2060-400		40				100	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HLS 2060-500		50				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HLS 2060-600		60				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for HLS (2 Flutes)

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001	0.1	0.3	50,000	170	0.005	0.035	50,000	160	0.005	0.035	50,000	140	0.004	0.035
		0.5	50,000	150	0.005	0.03	50,000	130	0.004	0.03	50,000	120	0.003	0.03
		0.75	48,200	130	0.003	0.01	48,200	120	0.002	0.01	48,200	100	0.002	0.01
		1	43,500	100	0.003	0.005	43,500	90	0.002	0.005	43,500	80	0.002	0.005
20015	0.15	0.5	50,000	260	0.007	0.07	50,000	240	0.006	0.07	50,000	210	0.005	0.07
		0.75	50,000	220	0.007	0.032	50,000	200	0.006	0.032	50,000	180	0.005	0.032
		1	48,200	190	0.006	0.015	48,200	180	0.005	0.015	48,200	150	0.004	0.015
2002	0.2	0.5	50,000	340	0.009	0.13	50,000	310	0.008	0.13	50,000	270	0.006	0.13
		1	50,000	290	0.007	0.035	50,000	260	0.006	0.035	50,000	230	0.004	0.035
		1.5	48,200	250	0.004	0.012	48,200	230	0.003	0.012	48,200	200	0.002	0.012
		2	43,500	190	0.002	0.003	43,500	170	0.002	0.003	43,500	150	0.002	0.003
		3	41,300	160	0.001	0.002	41,300	145	0.001	0.002	41,300	130	0.001	0.002
2003	0.3	1	50,000	560	0.015	0.101	50,000	500	0.013	0.101	50,000	440	0.01	0.101
		1.5	50,000	460	0.013	0.05	50,000	410	0.011	0.05	50,000	360	0.009	0.05
		2	41,500	350	0.01	0.023	41,500	320	0.009	0.023	41,500	280	0.007	0.023
		2.5	36,700	300	0.005	0.012	36,700	270	0.006	0.012	36,700	240	0.005	0.012
		3	31,900	240	0.004	0.008	31,900	220	0.003	0.008	31,900	190	0.002	0.008
		4	26,200	170	0.002	0.003	26,200	160	0.002	0.003	26,200	140	0.001	0.003
		6	20,400	100	0.001	0.001	20,400	90	0.001	0.001	20,400	80	0.001	0.001
		9	15,700	30	0.001	0.001	15,700	30	0.001	0.001	15,700	30	0.001	0.001
2004	0.4	1.5	50,000	660	0.016	0.095	50,000	640	0.015	0.095	48,100	470	0.012	0.095
		2	50,000	610	0.014	0.052	50,000	580	0.013	0.052	44,600	430	0.01	0.052
		2.5	47,300	560	0.012	0.026	48,300	520	0.011	0.026	41,100	390	0.008	0.026
		3	44,500	510	0.009	0.018	43,600	450	0.008	0.018	37,500	340	0.006	0.018
		3.5	42,800	480	0.008	0.01	40,800	410	0.009	0.01	35,300	310	0.005	0.01
		4	41,000	440	0.006	0.008	38,000	360	0.005	0.008	33,100	280	0.004	0.008
		5	38,500	380	0.004	0.004	34,200	300	0.004	0.004	30,100	240	0.003	0.004
		8	33,700	260	0.002	0.001	27,300	190	0.002	0.001	24,600	150	0.002	0.001
		12	30,000	140	0.001	0.001	22,500	100	0.001	0.001	20,700	80	0.001	0.001
2005	0.5	1.5	50,000	1,020	0.029	0.139	50,000	870	0.027	0.139	46,500	610	0.02	0.139
		2	50,000	900	0.025	0.098	50,000	760	0.023	0.098	40,600	510	0.018	0.098
		2.5	50,000	780	0.021	0.057	47,000	650	0.019	0.057	34,700	410	0.016	0.057
		3	44,200	660	0.016	0.037	39,900	530	0.015	0.037	32,200	370	0.011	0.037
		4	40,600	580	0.013	0.016	36,100	460	0.012	0.016	29,700	330	0.009	0.016
		5	37,000	500	0.01	0.008	32,300	390	0.009	0.008	27,200	290	0.007	0.008
		6	33,400	420	0.007	0.005	28,500	320	0.006	0.005	24,700	250	0.005	0.005
		8	29,100	320	0.003	0.002	24,100	240	0.003	0.002	21,600	190	0.003	0.002
		10	26,100	250	0.002	0.001	21,200	180	0.002	0.001	19,600	150	0.002	0.001
		15	21,500	120	0.001	0.001	16,700	80	0.001	0.001	16,300	70	0.001	0.001
2006	0.6	2	50,000	1,240	0.038	0.18	50,000	930	0.034	0.18	39,100	600	0.026	0.18
		3	50,000	990	0.03	0.075	44,000	740	0.026	0.075	33,500	500	0.02	0.075
		4	41,300	740	0.021	0.03	34,700	550	0.018	0.03	27,900	390	0.014	0.03
		5	36,700	630	0.017	0.017	30,900	470	0.014	0.017	25,500	340	0.011	0.017
		6	32,100	520	0.012	0.01	27,000	390	0.01	0.01	23,000	290	0.008	0.01
		7	29,500	460	0.01	0.005	24,800	350	0.008	0.005	21,500	260	0.006	0.005
		8	26,800	390	0.007	0.004	22,600	300	0.006	0.004	20,000	230	0.005	0.004
		10	23,400	300	0.004	0.002	19,700	230	0.004	0.002	17,900	180	0.003	0.002
		12	20,900	240	0.003	0.001	17,600	180	0.002	0.001	16,400	150	0.002	0.001
		18	16,200	100	0.001	0.001	13,700	80	0.001	0.001	13,500	70	0.001	0.001

Milling Conditions for HLS (2 Flutes)

WORK MATERIAL			HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~60HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001	0.1	0.3	50,000	90	0.002	0.035	30,000	10	0.002	0.08
		0.5	—	—	—	—	—	—	—	—
		0.75	—	—	—	—	—	—	—	—
		1	—	—	—	—	—	—	—	—
20015	0.15	0.5	44,800	140	0.004	0.07	22,500	10	0.002	0.11
		0.75	40,800	120	0.004	0.032	—	—	—	—
		1	38,500	110	0.003	0.015	—	—	—	—
2002	0.2	0.5	44,800	180	0.004	0.13	15,000	10	0.002	0.13
		1	40,800	160	0.002	0.035	15,000	10	0.002	0.035
		1.5	38,500	140	0.001	0.012	—	—	—	—
		2	34,500	100	0.001	0.003	—	—	—	—
		3	32,600	80	0.001	0.002	—	—	—	—
2003	0.3	1	50,000	330	0.007	0.101	14,600	14	0.004	0.101
		1.5	42,700	260	0.006	0.05	14,600	13	0.004	0.05
		2	33,200	190	0.005	0.023	14,600	12	0.003	0.023
		2.5	29,400	160	0.004	0.012	14,600	11	0.002	0.012
		3	25,500	130	0.002	0.008	14,600	10	0.001	0.008
		4	20,900	100	0.001	0.003	14,600	9	0.001	0.003
		6	16,300	60	0.001	0.001	—	—	—	—
		9	12,500	20	0.001	0.001	—	—	—	—
2004	0.4	1.5	38,500	320	0.008	0.095	14,300	17	0.004	0.095
		2	35,700	290	0.007	0.052	14,300	17	0.004	0.052
		2.5	32,900	260	0.006	0.026	14,300	17	0.004	0.026
		3	30,000	230	0.005	0.018	14,300	16	0.003	0.018
		3.5	28,300	210	0.004	0.01	14,300	16	0.003	0.01
		4	26,500	190	0.003	0.008	14,300	15	0.002	0.008
		5	24,100	160	0.002	0.004	14,300	14	0.001	0.004
		8	19,700	100	0.001	0.001	14,300	11	0.001	0.001
		12	16,500	60	0.001	0.001	—	—	—	—
2005	0.5	1.5	37,300	410	0.015	0.139	14,000	20	0.008	0.139
		2	32,500	350	0.013	0.098	14,000	20	0.007	0.098
		2.5	27,700	290	0.011	0.057	14,000	20	0.006	0.057
		3	25,700	260	0.009	0.037	14,000	19	0.005	0.037
		4	23,700	230	0.007	0.016	14,000	18	0.004	0.016
		5	21,700	200	0.005	0.008	14,000	17	0.003	0.008
		6	19,700	170	0.003	0.005	14,000	16	0.002	0.005
		8	17,300	130	0.002	0.002	14,000	14	0.001	0.002
		10	15,600	100	0.001	0.001	14,000	12	0.001	0.001
		15	13,000	50	0.001	0.001	—	—	—	—
2006	0.6	2	31,300	410	0.019	0.18	12,000	23	0.01	0.18
		3	26,800	340	0.015	0.075	12,000	22	0.008	0.075
		4	22,300	270	0.01	0.03	12,000	21	0.005	0.03
		5	20,400	240	0.008	0.017	12,000	20	0.004	0.017
		6	18,400	200	0.006	0.01	12,000	19	0.003	0.01
		7	17,200	180	0.005	0.005	12,000	18	0.003	0.005
		8	16,000	160	0.003	0.004	12,000	17	0.002	0.004
		10	14,300	130	0.002	0.002	12,000	15	0.001	0.002
		12	13,100	100	0.001	0.001	12,000	13	0.001	0.001
		18	10,800	50	0.001	0.001	—	—	—	—

Milling Conditions for HLS (2 Flutes)

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2007	0.7	2	50,000	1,380	0.05	0.165	50,000	1,040	0.045	0.165	36,100	660	0.035	0.165
		4	38,900	840	0.029	0.047	32,700	630	0.026	0.047	25,800	440	0.02	0.047
		6	30,200	600	0.017	0.014	25,400	450	0.015	0.014	21,200	330	0.012	0.014
		8	25,300	460	0.01	0.006	21,300	350	0.009	0.006	18,400	260	0.007	0.006
		10	22,000	360	0.006	0.004	18,500	270	0.005	0.004	16,500	220	0.005	0.004
2008	0.8	3	41,200	1,050	0.053	0.15	34,500	790	0.049	0.15	26,200	530	0.038	0.15
		4	37,100	930	0.044	0.08	31,100	700	0.04	0.08	24,100	480	0.031	0.08
		5	33,000	810	0.035	0.052	27,700	610	0.031	0.052	22,000	430	0.024	0.052
		6	28,800	680	0.025	0.024	24,200	510	0.022	0.024	19,800	370	0.017	0.024
		8	24,100	520	0.015	0.01	20,300	390	0.013	0.01	17,200	300	0.01	0.01
		10	21,000	420	0.009	0.005	17,700	320	0.008	0.005	15,500	240	0.007	0.005
		12	18,700	340	0.006	0.003	15,800	260	0.006	0.003	14,100	200	0.004	0.003
		16	15,600	230	0.003	0.001	13,200	180	0.003	0.001	12,300	150	0.002	0.001
		24	12,100	100	0.002	0.001	10,300	80	0.002	0.001	10,100	70	0.001	0.001
2009	0.9	4	35,600	1,100	0.054	0.128	29,500	820	0.049	0.128	22,500	550	0.038	0.128
		6	27,600	790	0.032	0.038	23,000	590	0.029	0.038	18,500	420	0.022	0.038
		8	23,000	600	0.02	0.016	19,300	450	0.018	0.016	16,100	330	0.014	0.016
		10	20,000	470	0.013	0.008	16,800	360	0.012	0.008	14,500	270	0.009	0.008
		15	15,500	270	0.006	0.002	13,100	200	0.005	0.002	11,900	160	0.004	0.002
2010	1	3	37,900	1,340	0.067	0.263	31,500	990	0.072	0.263	23,400	650	0.057	0.263
		4	34,100	1,170	0.067	0.195	28,400	870	0.06	0.195	21,500	580	0.047	0.195
		5	30,300	1,000	0.053	0.127	25,300	750	0.048	0.127	19,600	510	0.037	0.127
		6	26,500	850	0.039	0.058	22,100	630	0.035	0.058	17,600	440	0.027	0.058
		7	24,300	760	0.032	0.041	20,400	560	0.029	0.041	16,500	400	0.022	0.041
		8	22,100	660	0.024	0.024	18,600	490	0.022	0.024	15,300	360	0.017	0.024
		9	20,700	600	0.02	0.019	17,400	450	0.018	0.019	14,600	330	0.014	0.019
		10	19,200	530	0.016	0.013	16,200	400	0.014	0.013	13,800	300	0.011	0.013
		12	17,200	440	0.011	0.007	14,500	330	0.01	0.007	12,600	250	0.008	0.007
		14	15,600	360	0.008	0.005	13,200	270	0.007	0.005	11,700	210	0.006	0.005
		16	14,300	300	0.006	0.003	12,100	230	0.006	0.003	11,000	180	0.005	0.003
		18	13,400	250	0.005	0.002	11,350	190	0.004	0.002	10,400	150	0.004	0.002
		20	12,500	200	0.004	0.002	10,600	160	0.003	0.002	9,800	130	0.003	0.002
		25	10,800	120	0.003	0.001	9,200	100	0.002	0.001	8,800	80	0.002	0.001
		30	9,700	80	0.002	0.001	8,200	60	0.002	0.001	8,100	50	0.002	0.001
2012	1.2	4	28,900	1,180	0.085	0.23	24,100	870	0.077	0.23	18,300	580	0.059	0.23
		6	24,800	970	0.062	0.12	20,700	720	0.056	0.12	16,100	490	0.043	0.12
		8	20,700	760	0.039	0.051	17,300	570	0.035	0.051	13,900	400	0.027	0.051
		10	18,000	620	0.026	0.026	15,100	470	0.023	0.026	12,400	340	0.018	0.026
		12	16,100	520	0.018	0.015	13,500	390	0.016	0.015	11,400	290	0.013	0.015
		16	13,400	380	0.01	0.006	11,300	290	0.009	0.006	9,800	220	0.007	0.006
		20	11,700	280	0.007	0.003	9,900	210	0.006	0.003	8,800	170	0.005	0.003
2014	1.4	6	23,300	1,070	0.086	0.222	19,400	800	0.078	0.222	14,800	540	0.061	0.222
		8	19,500	850	0.059	0.094	16,300	640	0.053	0.094	12,900	440	0.041	0.094
		10	16,900	710	0.041	0.048	14,200	530	0.037	0.048	11,500	380	0.029	0.048
		12	15,100	600	0.03	0.028	12,700	450	0.027	0.028	10,500	330	0.021	0.028
		14	13,700	510	0.022	0.018	11,500	390	0.02	0.018	9,700	290	0.016	0.018
		16	12,600	450	0.017	0.012	10,600	340	0.015	0.012	9,100	250	0.012	0.012
		22	10,300	300	0.009	0.004	8,700	230	0.008	0.004	7,800	180	0.006	0.004

Milling Conditions for HLS (2 Flutes)

WORK MATERIAL			HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~60HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2007	0.7	2	28,800	430	0.025	0.165	10,000	24	0.015	0.165
		4	20,600	290	0.014	0.047	10,000	22	0.009	0.047
		6	16,900	230	0.008	0.014	10,000	20	0.005	0.014
		8	14,700	190	0.005	0.006	10,000	18	0.003	0.006
		10	13,200	160	0.003	0.004	10,000	13	0.002	0.004
2008	0.8	3	21,000	370	0.027	0.15	8,000	21	0.016	0.15
		4	19,300	330	0.022	0.08	8,000	20	0.013	0.08
		5	17,600	290	0.017	0.052	8,000	19	0.01	0.052
		6	15,800	250	0.012	0.024	8,000	18	0.007	0.024
		8	13,800	200	0.007	0.01	8,000	16	0.004	0.01
		10	12,400	170	0.005	0.005	8,000	14	0.003	0.005
		12	11,300	140	0.003	0.003	8,000	12	0.002	0.003
		16	9,800	100	0.002	0.001	—	—	—	—
		24	8,100	50	0.001	0.001	—	—	—	—
2009	0.9	4	18,000	380	0.027	0.128	7,200	20	0.014	0.128
		6	14,800	290	0.016	0.038	7,200	18	0.009	0.038
		8	12,900	230	0.01	0.016	7,200	16	0.006	0.016
		10	11,600	190	0.006	0.008	7,200	14	0.003	0.008
		15	9,500	120	0.003	0.002	—	—	—	0.002
2010	1	3	18,700	440	0.039	0.263	6,500	15	0.016	0.263
		4	17,200	400	0.033	0.195	6,500	15	0.015	0.195
		5	15,700	360	0.027	0.127	6,500	15	0.014	0.127
		6	14,100	310	0.02	0.058	6,500	14	0.012	0.058
		7	13,200	280	0.016	0.041	6,500	14	0.009	0.041
		8	12,300	250	0.012	0.024	6,500	13	0.006	0.024
		9	11,700	230	0.01	0.019	6,500	13	0.005	0.019
		10	11,000	210	0.008	0.013	6,500	12	0.004	0.013
		12	10,100	170	0.006	0.007	6,500	11	0.003	0.007
		14	9,400	150	0.004	0.005	6,500	10	0.002	0.005
		16	8,800	130	0.003	0.003	—	—	—	—
		18	8,350	110	0.002	0.002	—	—	—	—
		20	7,900	90	0.002	0.002	—	—	—	—
		25	7,100	60	0.001	0.001	—	—	—	—
		30	6,500	40	0.001	0.001	—	—	—	—
2012	1.2	4	14,500	400	0.042	0.23	9,600	34	0.026	0.23
		6	12,800	340	0.031	0.12	9,600	22	0.019	0.12
		8	11,100	280	0.02	0.051	9,600	10	0.012	0.051
		10	9,900	230	0.013	0.026	—	—	—	—
		12	9,100	200	0.009	0.015	—	—	—	—
		16	7,900	150	0.005	0.006	—	—	—	—
		20	7,000	120	0.003	0.003	—	—	—	—
2014	1.4	6	11,900	370	0.043	0.222	9,600	44	0.026	0.222
		8	10,300	310	0.029	0.094	9,600	18	0.017	0.094
		10	9,200	260	0.021	0.048	—	—	—	—
		12	8,400	230	0.015	0.028	—	—	—	—
		14	7,800	200	0.011	0.018	—	—	—	—
		16	7,300	180	0.009	0.012	—	—	—	—
		22	6,200	120	0.005	0.004	—	—	—	—

Milling Conditions for HLS (2 Flutes)

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2015	1.5	4	26,600	1,340	0.12	0.462	22,100	1,000	0.109	0.462	16,300	640	0.084	0.462
		6	22,800	1,120	0.094	0.293	19,000	840	0.085	0.293	14,400	550	0.066	0.293
		8	19,000	900	0.068	0.124	15,900	670	0.061	0.124	12,500	460	0.048	0.124
		10	16,600	750	0.05	0.063	13,800	560	0.045	0.063	11,200	390	0.035	0.063
		12	14,800	630	0.038	0.037	12,400	470	0.034	0.037	10,200	340	0.026	0.037
		14	13,400	550	0.029	0.023	11,200	410	0.026	0.023	9,500	300	0.02	0.023
		16	12,300	480	0.022	0.015	10,300	360	0.02	0.015	8,900	270	0.016	0.015
		18	11,500	420	0.018	0.011	9,600	310	0.016	0.011	8,400	240	0.012	0.011
		20	10,700	370	0.014	0.008	9,000	280	0.013	0.008	7,900	220	0.01	0.008
		25	9,300	270	0.009	0.004	7,800	200	0.008	0.004	7,100	160	0.006	0.004
		30	8,300	200	0.007	0.002	7,000	150	0.006	0.002	6,500	120	0.005	0.002
		35	7,600	140	0.004	0.001	6,400	110	0.004	0.001	6,000	90	0.003	0.001
		40	7,000	90	0.003	0.001	5,800	70	0.003	0.001	5,600	60	0.002	0.001
		45	6,500	60	0.003	0.001	5,400	50	0.002	0.001	5,300	40	0.002	0.001
2016	1.6	6	22,200	1,170	0.108	0.379	18,500	870	0.097	0.379	13,800	570	0.076	0.379
		8	18,500	940	0.079	0.16	15,500	700	0.071	0.16	12,000	480	0.055	0.16
		10	16,100	780	0.058	0.082	13,500	580	0.053	0.082	10,800	410	0.041	0.082
		12	14,400	670	0.044	0.047	12,000	500	0.04	0.047	9,800	360	0.031	0.047
		14	13,000	580	0.034	0.03	10,900	430	0.031	0.03	9,100	320	0.024	0.03
		16	12,000	510	0.027	0.02	10,000	380	0.024	0.02	8,500	280	0.019	0.02
		18	11,100	450	0.022	0.014	9,300	340	0.019	0.014	8,000	260	0.015	0.014
		20	10,400	400	0.018	0.01	8,700	300	0.016	0.01	7,600	230	0.012	0.01
		26	8,800	280	0.011	0.005	7,400	210	0.01	0.005	6,700	170	0.008	0.005
2018	1.8	6	21,000	1,270	0.102	0.608	17,800	950	0.092	0.608	12,800	600	0.071	0.608
		8	17,700	1,020	0.083	0.256	14,900	760	0.075	0.256	11,100	500	0.058	0.256
		10	15,400	860	0.068	0.131	12,900	640	0.061	0.131	9,900	430	0.048	0.131
		12	13,800	740	0.055	0.076	11,500	550	0.05	0.076	9,100	380	0.039	0.076
		14	12,500	640	0.045	0.048	10,500	480	0.041	0.048	8,400	340	0.032	0.048
		16	11,500	570	0.037	0.032	9,600	420	0.033	0.032	7,800	300	0.026	0.032
		18	10,700	500	0.03	0.023	8,900	380	0.027	0.023	7,400	280	0.021	0.023
		20	10,000	450	0.025	0.016	8,400	340	0.022	0.016	7,000	250	0.017	0.016
		25	8,700	350	0.015	0.008	7,300	260	0.014	0.008	6,300	200	0.011	0.008
2020	2	6	20,300	1,350	0.107	0.926	17,400	1,030	0.097	0.926	12,500	650	0.075	0.926
		8	17,000	1,090	0.089	0.391	14,500	830	0.081	0.391	10,800	540	0.063	0.391
		10	14,800	920	0.075	0.2	12,600	700	0.067	0.2	9,700	470	0.052	0.2
		12	13,200	790	0.062	0.116	11,200	600	0.056	0.116	8,900	420	0.044	0.116
		14	12,000	700	0.052	0.073	10,200	530	0.047	0.073	8,200	370	0.036	0.073
		16	11,100	620	0.044	0.049	9,400	470	0.039	0.049	7,700	340	0.03	0.049
		18	10,300	550	0.036	0.034	8,700	420	0.033	0.034	7,200	310	0.026	0.034
		20	9,600	500	0.031	0.025	8,100	380	0.027	0.025	6,900	280	0.021	0.025
		25	8,400	390	0.02	0.013	7,100	290	0.018	0.013	6,200	230	0.014	0.013
		30	7,500	310	0.013	0.007	6,300	230	0.012	0.007	5,600	180	0.009	0.007
		35	6,800	250	0.008	0.005	5,700	190	0.008	0.005	5,200	150	0.006	0.005
		40	6,300	200	0.006	0.003	5,200	150	0.005	0.003	4,900	120	0.004	0.003
		50	5,400	110	0.004	0.002	4,500	90	0.002	0.002	4,400	70	0.002	0.002
		60	4,900	50	0.003	0.002	4,000	40	0.002	0.002	4,000	30	0.002	0.002

Milling Conditions for HLS (2 Flutes)

WORK MATERIAL			HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~60HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2015	1.5	4	13,000	440	0.06	0.462	9,600	95	0.036	0.462
		6	11,500	380	0.047	0.293	9,600	60	0.028	0.293
		8	10,000	320	0.034	0.124	9,600	25	0.02	0.124
		10	8,900	270	0.025	0.063	9,600	13	0.015	0.063
		12	8,200	240	0.019	0.037	—	—	—	—
		14	7,600	210	0.014	0.023	—	—	—	—
		16	7,100	190	0.011	0.015	—	—	—	—
		18	6,700	170	0.009	0.011	—	—	—	—
		20	6,300	150	0.007	0.008	—	—	—	—
		25	5,700	110	0.005	0.004	—	—	—	—
		30	5,200	90	0.003	0.002	—	—	—	—
		35	4,800	60	0.002	0.001	—	—	—	—
		40	4,500	40	0.002	0.001	—	—	—	—
		45	4,300	30	0.001	0.001	—	—	—	—
2016	1.6	6	11,100	400	0.054	0.379	9,600	73	0.032	0.379
		8	9,600	330	0.039	0.16	9,600	31	0.023	0.16
		10	8,600	280	0.029	0.082	9,600	15	0.017	0.082
		12	7,900	250	0.022	0.047	—	—	—	—
		14	7,300	220	0.017	0.03	—	—	—	—
		16	6,800	200	0.013	0.02	—	—	—	—
		18	6,400	180	0.011	0.014	—	—	—	—
		20	6,100	160	0.009	0.01	—	—	—	—
		26	5,300	120	0.005	0.005	—	—	—	—
2018	1.8	6	10,200	410	0.051	0.608	9,600	137	0.031	0.608
		8	8,900	350	0.042	0.256	9,600	58	0.025	0.256
		10	7,900	300	0.034	0.131	9,600	29	0.02	0.131
		12	7,200	260	0.028	0.076	9,600	17	0.017	0.076
		14	6,700	230	0.023	0.048	9,600	10	0.014	0.048
		16	6,300	210	0.019	0.032	—	—	—	—
		18	5,900	190	0.015	0.023	—	—	—	—
		20	5,600	170	0.012	0.016	—	—	—	—
		25	5,000	140	0.008	0.008	—	—	—	—
2020	2	6	10,000	450	0.054	0.926	9,600	211	0.032	0.926
		8	8,700	380	0.045	0.391	9,600	89	0.027	0.391
		10	7,800	330	0.037	0.2	9,600	45	0.022	0.2
		12	7,100	290	0.031	0.116	9,600	28	0.019	0.116
		14	6,600	260	0.026	0.073	9,600	16	0.016	0.073
		16	6,100	230	0.022	0.049	9,600	11	0.013	0.049
		18	5,800	210	0.018	0.034	—	—	—	—
		20	5,500	190	0.015	0.025	—	—	—	—
		25	4,900	160	0.01	0.013	—	—	—	—
		30	4,500	130	0.006	0.007	—	—	—	—
		35	4,200	100	0.004	0.005	—	—	—	—
		40	3,900	80	0.003	0.003	—	—	—	—
		50	3,500	50	0.001	0.002	—	—	—	—
		60	3,200	30	0.001	0.002	—	—	—	—


Milling Conditions for HLS (2 Flutes)

WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2025	2.5	8	15,000	1,340	0.129	0.954	12,800	1,020	0.116	0.954	9,600	670	0.09	0.954
		10	13,100	1,140	0.113	0.488	11,100	860	0.102	0.488	8,600	590	0.079	0.488
		12	11,800	1,000	0.099	0.283	10,000	750	0.089	0.283	7,900	520	0.07	0.283
		14	10,700	880	0.087	0.178	9,100	660	0.078	0.178	7,300	470	0.061	0.178
		16	9,900	790	0.075	0.119	8,400	590	0.067	0.119	6,800	430	0.052	0.119
		18	9,200	710	0.064	0.084	7,800	540	0.058	0.084	6,500	390	0.045	0.084
		20	8,700	650	0.055	0.061	7,300	490	0.05	0.061	6,100	360	0.039	0.061
		25	7,600	520	0.036	0.031	6,400	390	0.032	0.031	5,500	300	0.025	0.031
		30	6,800	430	0.023	0.018	5,700	320	0.02	0.018	5,000	250	0.016	0.018
		40	5,700	290	0.008	0.008	4,800	220	0.007	0.008	4,400	170	0.006	0.008
		50	5,000	190	0.004	0.004	4,200	140	0.004	0.004	3,900	120	0.003	0.004
2030	3	8	13,200	1,470	0.172	1.978	10,900	1,080	0.155	1.978	8,000	700	0.12	1.978
		10	11,600	1,270	0.153	1.013	9,600	930	0.138	1.013	7,200	620	0.107	1.013
		12	10,500	1,110	0.136	0.586	8,700	830	0.122	0.586	6,700	560	0.095	0.586
		14	9,600	1,000	0.12	0.369	8,000	740	0.108	0.369	6,200	510	0.084	0.369
		16	8,900	900	0.107	0.247	7,400	670	0.096	0.247	5,900	470	0.075	0.247
		18	8,300	820	0.094	0.174	7,000	610	0.085	0.174	5,600	430	0.066	0.174
		20	7,800	750	0.083	0.127	6,600	560	0.075	0.127	5,300	400	0.058	0.127
		25	6,900	620	0.06	0.065	5,800	460	0.054	0.065	4,800	340	0.042	0.065
		30	6,200	520	0.043	0.038	5,200	390	0.039	0.038	4,500	290	0.03	0.038
		35	5,700	440	0.031	0.024	4,800	330	0.027	0.024	4,200	250	0.021	0.024
		40	5,300	370	0.021	0.016	4,500	280	0.019	0.016	3,900	220	0.015	0.016
		50	4,700	270	0.01	0.008	3,900	200	0.009	0.008	3,600	160	0.007	0.008
2040	4	12	8,500	1,280	0.187	1.852	7,100	950	0.168	1.852	5,100	600	0.131	1.852
		16	7,200	1,050	0.155	0.781	6,000	770	0.139	0.781	4,400	510	0.108	0.781
		20	6,300	880	0.128	0.4	5,200	650	0.115	0.4	4,000	440	0.09	0.4
		25	5,600	750	0.101	0.205	4,600	540	0.091	0.205	3,600	380	0.071	0.205
		30	5,000	630	0.08	0.119	4,100	460	0.072	0.119	3,300	330	0.056	0.119
		35	4,600	540	0.063	0.075	3,800	400	0.057	0.075	3,100	290	0.044	0.075
		40	4,200	470	0.049	0.05	3,500	350	0.044	0.05	2,900	250	0.035	0.05
		45	3,900	410	0.039	0.035	3,300	300	0.035	0.035	2,700	230	0.027	0.035
		50	3,700	360	0.031	0.026	3,100	270	0.027	0.026	2,600	200	0.021	0.026
		60	3,300	280	0.019	0.015	2,800	210	0.017	0.015	2,400	160	0.013	0.015
2050	5	16	6,000	1,140	0.212	1.907	5,100	860	0.191	1.907	3,500	520	0.148	1.907
		20	5,300	980	0.202	0.977	4,400	730	0.182	0.977	3,100	440	0.142	0.977
		25	4,600	820	0.182	0.5	3,800	600	0.164	0.5	2,800	390	0.128	0.5
		30	4,200	710	0.157	0.289	3,400	510	0.141	0.289	2,500	340	0.11	0.289
		35	3,800	620	0.128	0.182	3,100	450	0.115	0.182	2,300	300	0.09	0.182
		40	3,500	540	0.099	0.122	2,800	390	0.089	0.122	2,200	270	0.07	0.122
		50	3,100	430	0.052	0.063	2,400	300	0.047	0.063	1,900	210	0.036	0.063
		60	2,800	350	0.035	0.035	2,100	240	0.033	0.035	1,800	170	0.031	0.035
2060	6	20	4,200	960	0.211	2.025	3,800	780	0.19	2.025	2,600	470	0.147	2.025
		30	3,400	730	0.182	0.6	2,800	540	0.164	0.6	2,000	340	0.128	0.6
		40	3,000	600	0.138	0.253	2,300	410	0.124	0.253	1,700	260	0.096	0.253
		50	2,600	480	0.09	0.13	1,900	310	0.081	0.13	1,500	220	0.063	0.13
		60	2,400	410	0.052	0.075	1,700	260	0.047	0.075	1,300	170	0.036	0.075


Milling Conditions for HLS (2 Flutes)

WORK MATERIAL			HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~60HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2025	2.5	8	7,700	460	0.064	0.954	9,600	227	0.038	0.954
		10	6,900	400	0.057	0.488	9,600	116	0.034	0.488
		12	6,300	360	0.05	0.283	9,600	67	0.03	0.283
		14	5,800	320	0.043	0.178	9,600	42	0.026	0.178
		16	5,500	290	0.037	0.119	9,600	28	0.022	0.119
		18	5,200	270	0.032	0.084	9,600	20	0.019	0.084
		20	4,900	250	0.028	0.061	9,600	14	0.017	0.061
		25	4,400	210	0.018	0.031	—	—	—	—
		30	4,000	170	0.011	0.018	—	—	—	—
		40	3,500	120	0.004	0.008	—	—	—	—
		50	3,100	80	0.002	0.004	—	—	—	—
2030	3	8	6,400	480	0.086	1.978	8,000	435	0.052	1.978
		10	5,800	430	0.076	1.013	8,000	222	0.046	1.013
		12	5,300	380	0.068	0.586	8,000	128	0.041	0.586
		14	5,000	350	0.06	0.369	8,000	81	0.036	0.369
		16	4,700	320	0.053	0.247	8,000	54	0.032	0.247
		18	4,500	300	0.047	0.174	8,000	38	0.028	0.174
		20	4,300	280	0.042	0.127	8,000	27	0.025	0.127
		25	3,900	230	0.03	0.065	8,000	14	0.018	0.065
		30	3,600	200	0.022	0.038	8,000	10	0.013	0.038
		35	3,300	170	0.015	0.024	—	—	—	—
		40	3,100	150	0.011	0.016	—	—	—	—
		50	2,800	110	0.005	0.008	—	—	—	—
2040	4	12	4,100	410	0.093	1.852	6,000	388	0.056	1.852
		16	3,600	350	0.077	0.781	6,000	164	0.046	0.781
		20	3,200	300	0.064	0.4	6,000	84	0.038	0.4
		25	2,900	260	0.051	0.205	6,000	43	0.031	0.205
		30	2,600	230	0.04	0.119	6,000	24	0.024	0.119
		35	2,500	200	0.031	0.075	6,000	15	0.019	0.075
		40	2,300	180	0.025	0.05	6,000	10	0.015	0.05
		45	2,200	160	0.019	0.035	—	—	—	—
		50	2,100	140	0.015	0.026	—	—	—	—
		60	1,900	110	0.009	0.015	—	—	—	—
2050	5	16	2,800	360	0.106	1.907	4,800	457	0.064	1.907
		20	2,500	310	0.101	0.977	4,800	234	0.061	0.977
		25	2,200	270	0.091	0.5	4,800	120	0.055	0.5
		30	2,000	230	0.078	0.289	4,800	69	0.047	0.289
		35	1,900	210	0.064	0.182	4,800	43	0.038	0.182
		40	1,700	180	0.05	0.122	4,800	29	0.03	0.122
		50	1,500	150	0.026	0.063	4,800	15	0.016	0.063
		60	1,400	120	0.011	0.035	4,800	10	0.007	0.035
2060	6	20	2,100	330	0.105	2.025	4,000	607	0.063	2.025
		30	1,600	240	0.091	0.6	4,000	180	0.055	0.6
		40	1,300	170	0.069	0.253	4,000	75	0.041	0.253
		50	1,200	160	0.045	0.13	4,000	38	0.027	0.13
		60	1,000	120	0.026	0.075	4,000	22	0.016	0.075

Side Milling



Slotting



D:Outside Diameter (mm)

Note:
- Recommend using a non-contact measuring device to avoid damaging the precision tip point.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Every coolant offers stable milling.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.

C-CER



UTCOAT 2 Flute Long Neck Square End Mills

φ0.1～φ6


Super MG | UT COAT | 30° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○			●			○	○		


Features

Long neck square end mill with a positive rake angle.
Best suited for Raw materials, Copper, SUS and materials 55HRC and below.

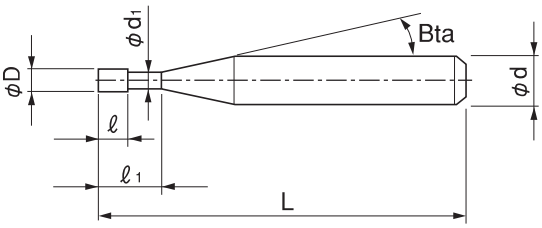

The shank taper angle shown is not an exact value.



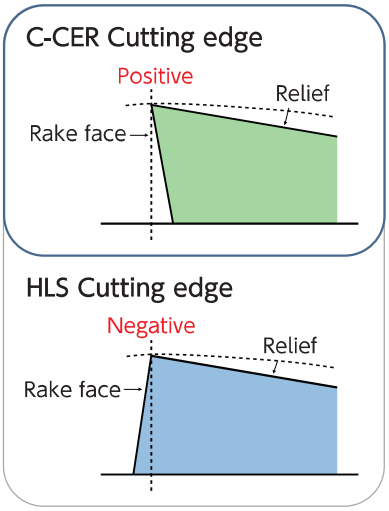

Total 148 models

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30'	1°	1° 30'	2°	3°
C-CER 2001-0.3	0.1	0.3	0.1	0.088	11°	45	4	—	0.32	0.35	0.38	0.40	0.47
C-CER 2001-0.5		0.5				45	4	—	0.54	0.58	0.61	0.65	0.75
C-CER 2001-0.75		0.75				45	4	—	0.80	0.85	0.91	0.97	1.11
C-CER 2001-1		1				45	4	—	1.07	1.13	1.20	1.28	1.47
C-CER 20015-0.5	0.15	0.5	0.15	0.128	11°	45	4	—	0.57	0.61	0.65	0.69	0.79
C-CER 20015-0.75		0.75				45	4	—	0.84	0.88	0.94	1.00	1.15
C-CER 20015-1		1				45	4	—	1.10	1.16	1.23	1.31	1.51
C-CER 2002-0.5	0.2	0.5	0.3	0.18	16°	45	4	—	0.65	0.70	0.74	0.78	0.85
C-CER 2002-1		1				45	4	—	1.18	1.25	1.31	1.36	1.45
C-CER 2002-1.5		1.5				45	4	—	1.67	1.76	1.84	1.90	2.01
C-CER 2002-2		2				45	4	—	2.20	2.30	2.39	2.48	2.69
C-CER 2002-3		3				45	4	—	3.25	3.37	3.50	3.63	3.93
C-CER 2003-1	0.3	1	0.4	0.28	16°	45	4	—	1.22	1.30	1.37	1.43	1.55
C-CER 2003-1.5		1.5				45	4	—	1.71	1.82	1.90	1.98	2.15
C-CER 2003-2		2				45	4	—	2.24	2.36	2.46	2.55	2.70
C-CER 2003-3		3				45	4	—	3.30	3.45	3.56	3.66	3.83

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
C-CER 2004-2	0.4	2	0.6	0.38	16°	45	4	—	2.31	2.47	2.60	2.71	2.91
C-CER 2004-3		3				45	4	—	3.38	3.57	3.72	3.85	4.07
C-CER 2004-4		4				45	4	—	4.44	4.65	4.82	4.96	5.21
C-CER 2004-5		5				45	4	—	5.49	5.73	5.91	6.06	6.33
C-CER 2005-2	0.5	2	0.7	0.48	16°	45	4	—	2.37	2.56	2.71	2.85	3.09
C-CER 2005-4		4				45	4	—	4.52	4.77	4.97	5.14	5.44
C-CER 2005-6		6				45	4	—	6.64	6.94	7.17	7.37	7.71
C-CER 2005-8		8				45	4	—	8.74	9.07	9.33	9.56	9.93
C-CER 2006-2	0.6	2	0.9	0.58	16°	45	4	—	2.35	2.59	2.78	2.94	3.23
C-CER 2006-4		4				45	4	—	4.54	4.84	5.08	5.28	5.68
C-CER 2006-6		6				45	4	—	6.68	7.03	7.30	7.56	8.13
C-CER 2006-8		8				45	4	—	8.80	9.19	9.51	9.84	10.58
C-CER 2006-10		10				45	4	—	10.90	11.33	11.71	12.11	13.02
C-CER 2007-2	0.7	2	1	0.68	16°	45	4	—	2.35	2.59	2.78	2.94	3.23
C-CER 2007-3		3				45	4	—	3.46	3.73	3.94	4.13	4.46
C-CER 2007-4		4				45	4	—	4.54	4.84	5.08	5.28	5.68
C-CER 2007-6		6				45	4	—	6.68	7.03	7.30	7.56	8.13
C-CER 2007-8		8				45	4	—	8.80	9.19	9.51	9.84	10.58
C-CER 2007-10		10				50	4	—	10.90	11.33	11.71	12.11	13.02
C-CER 2008-4	0.8	4	1.2	0.78	16°	45	4	—	4.54	4.84	5.08	5.28	5.68
C-CER 2008-6		6				45	4	—	6.68	7.03	7.30	7.56	8.13
C-CER 2008-8		8				45	4	—	8.80	9.19	9.51	9.84	10.58
C-CER 2008-10		10				50	4	—	10.90	11.33	11.71	12.11	13.02
C-CER 2008-12		12				50	4	—	12.99	13.45	13.91	14.39	15.47
C-CER 2009-4	0.9	4	1.3	0.88	16°	45	4	—	4.54	4.84	5.08	5.28	5.68
C-CER 2009-6		6				45	4	—	6.68	7.03	7.30	7.56	8.13
C-CER 2009-8		8				45	4	—	8.80	9.19	9.51	9.84	10.58
C-CER 2009-10		10				45	4	—	10.90	11.33	11.71	12.11	13.02
C-CER 2009-15		15				50	4	—	16.11	16.65	17.21	17.81	19.14
C-CER 2010-4	1	4	1.5	0.95	16°	45	4	—	4.66	4.93	5.15	5.34	5.74
C-CER 2010-6		6				45	4	—	6.78	7.10	7.36	7.62	8.19
C-CER 2010-8		8				45	4	—	8.88	9.25	9.56	9.90	10.64
C-CER 2010-10		10				45	4	—	10.97	11.38	11.76	12.17	13.09
C-CER 2010-12		12				45	4	—	13.06	13.51	13.97	14.45	15.53
C-CER 2010-16		16				50	4	—	17.20	17.77	18.37	19.01	20.43
C-CER 2010-20		20				55	4	—	21.34	22.03	22.77	23.56	25.32
C-CER 2012-6	1.2	6	1.8	1.14	11°	45	4	—	6.29	6.61	6.95	7.34	8.25
C-CER 2012-8		8				45	4	—	8.39	8.80	9.26	9.78	10.99
C-CER 2012-10		10				45	4	—	10.48	11.00	11.58	12.21	13.72
C-CER 2012-12		12				45	4	—	12.58	13.20	13.89	14.65	16.46
C-CER 2012-16		16				50	4	—	16.76	17.59	18.51	19.53	21.94
C-CER 2014-6	1.4	6	2.1	1.34	11°	45	4	—	6.29	6.61	6.95	7.34	8.25
C-CER 2014-8		8				45	4	—	8.39	8.80	9.26	9.78	10.99
C-CER 2014-10		10				45	4	—	10.48	11.00	11.58	12.21	13.72
C-CER 2014-12		12				45	4	—	12.58	13.20	13.89	14.65	16.46
C-CER 2014-14		14				45	4	—	14.67	15.40	16.20	17.09	19.20
C-CER 2014-16		16				50	4	—	16.76	17.59	18.51	19.53	21.94
C-CER 2014-22		22				55	4	—	23.05	24.19	25.44	26.84	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
C-CER 2015-6	1.5	6	2.3	1.44	11°	45	4	—	6.29	6.61	6.95	7.34	8.25
C-CER 2015-8		8				45	4	—	8.39	8.80	9.26	9.78	10.99
C-CER 2015-10		10				45	4	—	10.48	11.00	11.58	12.21	13.72
C-CER 2015-12		12				45	4	—	12.58	13.20	13.89	14.65	16.46
C-CER 2015-14		14				50	4	—	14.67	15.40	16.20	17.09	19.20
C-CER 2015-16		16				50	4	—	16.76	17.59	18.51	19.53	21.94
C-CER 2015-18		18				55	4	—	18.86	19.79	20.82	21.97	No Interference
C-CER 2015-20		20				55	4	—	20.95	21.99	23.13	24.40	No Interference
C-CER 2016-6	1.6	6	2.4	1.51	11°	45	4	—	6.35	6.66	7.01	7.40	8.32
C-CER 2016-8		8				45	4	—	8.44	8.86	9.32	9.84	11.06
C-CER 2016-10		10				45	4	—	10.54	11.06	11.64	12.28	13.79
C-CER 2016-12		12				45	4	—	12.63	13.26	13.95	14.71	16.53
C-CER 2016-14		14				50	4	—	14.72	15.45	16.26	17.15	19.27
C-CER 2016-16		16				50	4	—	16.82	17.65	18.57	19.59	22.01
C-CER 2016-18		18				55	4	—	18.91	19.85	20.88	22.03	No Interference
C-CER 2016-20		20				55	4	—	21.01	22.05	23.19	24.47	No Interference
C-CER 2016-26		26				60	4	—	27.29	28.64	30.13	31.78	No Interference
C-CER 2018-6	1.8	6	2.7	1.71	11°	45	4	—	6.35	6.66	7.01	7.40	8.32
C-CER 2018-8		8				45	4	—	8.44	8.86	9.32	9.84	11.06
C-CER 2018-10		10				45	4	—	10.54	11.06	11.64	12.28	13.79
C-CER 2018-12		12				45	4	—	12.63	13.26	13.95	14.71	16.53
C-CER 2018-14		14				50	4	—	14.72	15.45	16.26	17.15	19.27
C-CER 2018-16		16				50	4	—	16.82	17.65	18.57	19.59	No Interference
C-CER 2018-18		18				55	4	—	18.91	19.85	20.88	22.03	No Interference
C-CER 2018-20		20				55	4	—	21.01	22.05	23.19	24.47	No Interference
C-CER 2018-25		25				60	4	—	26.24	27.54	28.97	30.56	No Interference
C-CER 2020-6	2	6	3	1.91	11°	45	4	—	6.35	6.66	7.01	7.40	8.32
C-CER 2020-8		8				45	4	—	8.44	8.86	9.32	9.84	11.06
C-CER 2020-10		10				45	4	—	10.54	11.06	11.64	12.28	13.79
C-CER 2020-12		12				45	4	—	12.63	13.26	13.95	14.71	16.53
C-CER 2020-14		14				50	4	—	14.72	15.45	16.26	17.15	19.27
C-CER 2020-16		16				50	4	—	16.82	17.65	18.57	19.59	No Interference
C-CER 2020-18		18				55	4	—	18.91	19.85	20.88	22.03	No Interference
C-CER 2020-20		20				55	4	—	21.01	22.05	23.19	24.47	No Interference
C-CER 2020-25		25				60	4	—	26.24	27.54	28.97	No Interference	No Interference
C-CER 2020-30		30				70	4	—	31.48	33.03	34.75	No Interference	No Interference
C-CER 2025-8	2.5	8	3.7	2.41	11°	45	4	—	8.44	8.86	9.32	9.84	11.06
C-CER 2025-10		10				45	4	—	10.54	11.06	11.64	12.28	13.79
C-CER 2025-12		12				45	4	—	12.63	13.26	13.95	14.71	No Interference
C-CER 2025-14		14				50	4	—	14.72	15.45	16.26	17.15	No Interference
C-CER 2025-16		16				50	4	—	16.82	17.65	18.57	19.59	No Interference
C-CER 2025-18		18				55	4	—	18.91	19.85	20.88	No Interference	No Interference
C-CER 2025-20		20				55	4	—	21.01	22.05	23.19	No Interference	No Interference
C-CER 2025-25		25				60	4	—	26.24	27.54	28.97	No Interference	No Interference
C-CER 2025-30		30				70	4	—	31.48	33.03	No Interference	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
C-CER 2030-8	3	8	4.5	2.92	11°	45	6	—	8.44	8.86	9.32	9.83	11.05
C-CER 2030-10		10				45	6	—	10.53	11.05	11.63	12.27	13.79
C-CER 2030-12		12				50	6	—	12.62	13.25	13.94	14.71	16.53
C-CER 2030-14		14				50	6	—	14.72	15.45	16.25	17.15	19.26
C-CER 2030-16		16				60	6	—	16.81	17.65	18.56	19.58	22.00
C-CER 2030-18		18				60	6	—	18.91	19.84	20.88	22.02	24.74
C-CER 2030-20		20				60	6	—	21.00	22.04	23.19	24.46	27.48
C-CER 2030-25		25				70	6	—	26.24	27.53	28.97	30.55	No Interference
C-CER 2030-30		30				80	6	—	31.47	33.03	34.74	36.65	No Interference
C-CER 2030-35		35				80	6	—	36.71	38.52	40.52	42.74	No Interference
C-CER 2030-40		40				90	6	—	41.94	44.01	46.30	No Interference	No Interference
C-CER 2035-12	3.5	12	5	3.37	11°	50	6	—	12.76	13.39	14.09	14.86	16.70
C-CER 2035-15		15				60	6	—	15.90	16.69	17.56	18.52	20.81
C-CER 2035-16		16				60	6	—	16.95	17.79	18.71	19.74	22.18
C-CER 2035-20		20				60	6	—	21.14	22.18	23.34	24.62	No Interference
C-CER 2035-25		25				70	6	—	26.37	27.67	29.11	30.71	No Interference
C-CER 2035-30		30				70	6	—	31.61	33.17	34.89	No Interference	No Interference
C-CER 2035-35		35				80	6	—	36.84	38.66	40.67	No Interference	No Interference
C-CER 2040-12	4	12	6	3.82	11°	50	6	—	12.89	13.53	14.24	15.02	16.88
C-CER 2040-16		16				60	6	—	17.08	17.93	18.86	19.90	No Interference
C-CER 2040-20		20				60	6	—	21.27	22.32	23.48	24.77	No Interference
C-CER 2040-25		25				70	6	—	26.51	27.82	29.26	No Interference	No Interference
C-CER 2040-30		30				70	6	—	31.74	33.31	35.04	No Interference	No Interference
C-CER 2040-35		35				80	6	—	36.98	38.80	No Interference	No Interference	No Interference
C-CER 2040-40		40				90	6	—	42.21	44.30	No Interference	No Interference	No Interference
C-CER 2040-45		45				90	6	—	47.45	49.79	No Interference	No Interference	No Interference
C-CER 2040-50		50				100	6	—	52.68	55.28	No Interference	No Interference	No Interference
C-CER 2050-16	5	16	7.5	4.82	11°	60	6	—	17.08	17.93	18.86	No Interference	No Interference
C-CER 2050-20		20				60	6	—	21.27	22.32	No Interference	No Interference	No Interference
C-CER 2050-25		25				60	6	—	26.51	27.82	No Interference	No Interference	No Interference
C-CER 2050-30		30				80	6	—	31.74	No Interference	No Interference	No Interference	No Interference
C-CER 2050-35		35				80	6	—	36.98	No Interference	No Interference	No Interference	No Interference
C-CER 2050-40		40				80	6	—	42.21	No Interference	No Interference	No Interference	No Interference
C-CER 2050-50		50				110	6	—	52.68	No Interference	No Interference	No Interference	No Interference
C-CER 2060-20	6	20	9	5.82	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
C-CER 2060-30		30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
C-CER 2060-40		40				100	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
C-CER 2060-50		50				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
C-CER 2060-60		60				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for C-CER

WORK MATERIAL			COPPER OFC / TPC			CARBON STEELS S45C / S50C (~225HB)			ALLOY STEELS SK / SCM / SUS (225~325HB)			PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			HARDENED STEELS SKD / SKT (45~50HRC)		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2001	0.1	0.3	30,000	30	0.003~0.006	30,000	30	0.003~0.005	30,000	15	0.002~0.005	30,000	16	0.001~0.004	—	—	—
		0.5	28,000	28	0.002~0.006	28,000	28	0.002~0.005	28,000	14	0.002~0.004	28,000	14	0.001~0.003	—	—	—
		0.75	25,500	26	0.002~0.005	25,500	26	0.002~0.004	25,500	13	0.002~0.003	25,500	12	0.001~0.002	—	—	—
		1	23,000	5	0.002~0.004	23,000	5	0.001~0.002	23,000	5	0.001~0.002	23,000	5	0.001	—	—	—
20015	0.15	0.5	30,000	90	0.004~0.008	30,000	90	0.004~0.007	30,000	80	0.003~0.006	30,000	70	0.003~0.005	30,000	50	0.003~0.004
		0.75	28,700	90	0.003~0.008	28,700	90	0.003~0.007	28,700	80	0.002~0.006	28,700	70	0.002~0.005	28,700	50	0.002~0.004
		1	27,300	80	0.002~0.006	27,300	80	0.002~0.006	27,300	70	0.001~0.005	27,300	60	0.001~0.004	27,300	40	0.001~0.003
2002	0.2	0.5	43,000	130	0.005~0.011	43,000	130	0.005~0.009	41,000	110	0.004~0.008	39,000	90	0.003~0.006	39,000	40	0.002~0.004
		1	34,000	100	0.005~0.01	34,000	100	0.005~0.008	32,000	80	0.004~0.007	30,000	70	0.003~0.006	30,000	30	0.002~0.004
		1.5	27,000	80	0.002~0.005	27,000	80	0.002~0.004	24,000	60	0.002~0.003	23,000	50	0.001~0.003	23,000	20	0.001~0.002
		2	21,900	20	0.002~0.004	21,900	20	0.001~0.002	21,900	15	0.001~0.002	21,900	10	0.001~0.002	21,900	10	0.001
		3	16,500	10	0.001~0.003	16,500	10	0.001~0.002	16,500	8	0.001~0.002	16,500	5	0.001~0.002	16,500	5	0.001
2003	0.3	1	49,000	520	0.007~0.016	49,000	440	0.007~0.013	49,000	390	0.007~0.011	49,000	350	0.005~0.009	38,000	230	0.003~0.006
		1.5	43,000	425	0.005~0.012	43,000	360	0.005~0.01	43,000	320	0.005~0.008	43,000	285	0.004~0.007	37,500	210	0.002~0.004
		2	37,000	330	0.003~0.007	37,000	280	0.003~0.006	37,000	250	0.003~0.005	37,000	220	0.002~0.004	37,000	190	0.001~0.003
		3	31,000	280	0.002~0.004	31,000	240	0.002~0.003	31,000	210	0.001~0.003	31,000	190	0.001~0.002	31,000	160	0.001~0.002
2004	0.4	2	47,000	720	0.01 ~0.02	47,000	600	0.01 ~0.017	47,000	560	0.009~0.015	42,000	410	0.007~0.012	30,000	250	0.005~0.008
		3	47,000	630	0.005~0.01	47,000	530	0.005~0.008	47,000	470	0.004~0.007	40,000	350	0.003~0.006	30,000	220	0.002~0.004
		4	39,000	520	0.002~0.005	39,000	440	0.002~0.004	37,000	370	0.002~0.004	31,000	270	0.002~0.003	30,000	220	0.001~0.002
		5	38,000	440	0.002~0.005	38,000	370	0.002~0.004	32,000	280	0.002~0.003	29,000	220	0.001~0.003	28,000	180	0.001~0.002
2005	0.5	2	47,000	900	0.014~0.028	47,000	750	0.014~0.023	43,000	610	0.012~0.021	38,000	460	0.009~0.016	25,000	260	0.004~0.007
		4	43,000	750	0.008~0.017	43,000	630	0.008~0.014	40,000	520	0.007~0.013	28,000	320	0.006~0.01	24,000	230	0.002~0.004
		6	31,000	460	0.004~0.008	31,000	390	0.004~0.007	26,000	290	0.003~0.006	24,000	230	0.002~0.004	23,000	190	0.002~0.003
		8	25,000	360	0.002~0.004	25,000	300	0.002~0.003	21,000	220	0.001~0.003	19,000	180	0.001~0.002	18,000	140	0.001~0.002
2006	0.6	2	46,000	1,050	0.018~0.036	46,000	880	0.018~0.03	40,000	670	0.016~0.027	32,000	470	0.012~0.021	21,000	270	0.009~0.015
		4	41,000	790	0.01 ~0.02	41,000	660	0.01 ~0.017	34,000	520	0.009~0.016	27,000	360	0.007~0.012	20,000	230	0.005~0.008
		6	31,000	600	0.005~0.011	31,000	500	0.005~0.009	26,000	370	0.005~0.008	21,000	260	0.003~0.006	20,000	210	0.002~0.004
		8	23,000	360	0.002~0.005	23,000	300	0.002~0.004	19,000	220	0.002~0.003	18,000	180	0.001~0.002	16,000	140	0.001~0.002
		10	21,000	330	0.002~0.005	21,000	280	0.002~0.004	17,000	200	0.002~0.003	16,000	160	0.001~0.002	15,000	130	0.001~0.002

Milling Conditions for C-CER

WORK MATERIAL			COPPER OFC / TPC			CARBON STEELS S45C / S50C (~225HB)			ALLOY STEELS SK / SCM / SUS (225~325HB)			PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			HARDENED STEELS SKD / SKT (45~50HRC)		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2007	0.7	2	40,000	1,050	0.026~0.053	40,000	880	0.026~0.044	34,000	670	0.023~0.039	27,000	480	0.018~0.03	18,000	270	0.013~0.022
		3	40,000	1,050	0.022~0.044	40,000	880	0.022~0.037	34,000	670	0.02 ~0.033	27,000	470	0.015~0.026	18,000	270	0.011~0.018
		4	35,000	810	0.012~0.024	35,000	680	0.012~0.02	29,000	510	0.01 ~0.018	23,000	350	0.008~0.014	17,000	230	0.006~0.01
		6	27,000	620	0.006~0.013	27,000	520	0.006~0.011	22,000	380	0.005~0.009	18,000	270	0.004~0.007	17,000	220	0.003~0.005
		8	22,000	460	0.005~0.011	22,000	390	0.005~0.009	18,000	290	0.005~0.008	17,000	240	0.003~0.006	16,000	190	0.002~0.004
		10	20,000	360	0.002~0.005	20,000	300	0.002~0.004	16,000	220	0.002~0.004	15,000	180	0.001~0.003	14,000	140	0.001~0.002
2008	0.8	4	35,000	1,050	0.027~0.054	35,000	880	0.027~0.045	30,000	670	0.024~0.04	24,000	470	0.019~0.031	16,000	270	0.013~0.022
		6	31,000	820	0.013~0.028	31,000	690	0.013~0.023	25,000	510	0.012~0.02	20,000	350	0.009~0.016	15,000	220	0.006~0.011
		8	23,000	630	0.007~0.014	23,000	530	0.007~0.012	19,000	390	0.006~0.011	15,000	270	0.005~0.008	15,000	220	0.003~0.006
		10	19,000	450	0.006~0.012	19,000	380	0.006~0.01	16,000	280	0.005~0.009	15,000	230	0.004~0.007	14,000	180	0.003~0.005
		12	17,000	360	0.003~0.006	17,000	300	0.003~0.005	14,000	220	0.002~0.004	13,000	180	0.002~0.003	12,000	140	0.001~0.002
2009	0.9	4	31,000	1,090	0.028~0.058	31,000	910	0.028~0.048	26,000	690	0.026~0.043	21,000	480	0.02 ~0.033	14,000	270	0.014~0.024
		6	27,000	840	0.014~0.029	27,000	700	0.014~0.024	22,000	510	0.013~0.022	18,000	360	0.01 ~0.017	13,000	230	0.007~0.012
		8	21,000	640	0.008~0.016	21,000	540	0.008~0.013	17,000	400	0.007~0.012	14,000	280	0.005~0.009	13,000	230	0.004~0.006
		10	17,000	460	0.006~0.013	17,000	390	0.006~0.011	14,000	290	0.006~0.01	13,000	230	0.004~0.007	12,000	190	0.003~0.005
		15	11,000	320	0.003~0.006	11,000	270	0.003~0.005	13,000	200	0.003~0.005	12,000	160	0.002~0.003	11,000	130	0.001~0.002
2010	1	4	28,000	1,120	0.03 ~0.06	28,000	940	0.03 ~0.05	23,000	710	0.027~0.045	19,000	490	0.021~0.035	12,700	280	0.015~0.025
		6	24,000	850	0.015~0.03	24,000	710	0.015~0.025	20,000	520	0.013~0.023	16,000	360	0.01 ~0.017	12,000	230	0.007~0.012
		8	24,000	850	0.015~0.03	24,000	710	0.015~0.025	20,000	520	0.013~0.023	16,000	360	0.01 ~0.017	12,000	230	0.007~0.012
		10	19,000	640	0.008~0.017	19,000	540	0.008~0.014	15,000	400	0.007~0.012	12,000	280	0.005~0.009	12,000	230	0.004~0.007
		12	15,000	460	0.007~0.014	15,000	390	0.007~0.012	13,000	290	0.006~0.01	12,000	230	0.005~0.008	11,400	190	0.003~0.006
		16	12,000	360	0.003~0.007	12,000	300	0.003~0.006	10,500	220	0.003~0.005	9,700	180	0.002~0.004	9,100	140	0.001~0.003
		20	10,000	320	0.003~0.007	10,000	270	0.003~0.006	8,400	200	0.003~0.005	7,700	160	0.002~0.004	7,300	130	0.001~0.003
2012	1.2	6	23,000	1,050	0.036~0.072	23,000	880	0.036~0.06	20,000	670	0.032~0.054	16,000	470	0.025~0.042	10,000	260	0.018~0.03
		8	20,000	820	0.018~0.036	20,000	690	0.018~0.03	16,000	500	0.016~0.027	13,000	350	0.012~0.021	10,000	220	0.009~0.015
		10	15,000	630	0.01 ~0.019	15,000	530	0.01 ~0.016	13,000	390	0.009~0.015	10,600	270	0.007~0.011	10,000	220	0.005~0.008
		12	15,000	630	0.01 ~0.019	15,000	530	0.01 ~0.016	13,000	390	0.009~0.015	10,600	270	0.007~0.011	10,000	220	0.005~0.008
		16	11,000	320	0.004~0.008	11,000	270	0.004~0.007	9,000	200	0.003~0.006	9,000	160	0.003~0.005	8,400	130	0.002~0.003

Milling Conditions for C-CER

WORK MATERIAL			COPPER OFC / TPC			CARBON STEELS S45C / S50C (~225HB)			ALLOY STEELS SK / SCM / SUS (225~325HB)			PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			HARDENED STEELS SKD / SKT (45~50HRC)		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2014	1.4	6	20,000	1,000	0.042~0.084	20,000	840	0.042~0.07	17,000	640	0.038~0.063	13,000	440	0.029~0.049	9,000	250	0.021~0.035
		8	17,000	790	0.021~0.042	17,000	660	0.021~0.035	14,000	480	0.019~0.032	11,500	330	0.015~0.025	8,600	210	0.01 ~0.017
		10	17,000	790	0.021~0.042	17,000	660	0.021~0.035	14,000	480	0.019~0.032	11,500	330	0.015~0.025	8,600	210	0.01 ~0.017
		12	13,000	620	0.011~0.023	13,000	520	0.011~0.019	11,000	380	0.01 ~0.017	9,000	270	0.008~0.013	8,600	220	0.005~0.009
		14	13,000	620	0.011~0.023	13,000	520	0.011~0.019	11,000	380	0.01 ~0.017	9,000	270	0.008~0.013	8,600	220	0.005~0.009
		16	11,000	430	0.01 ~0.02	11,000	360	0.01 ~0.017	9,000	270	0.009~0.015	8,000	220	0.007~0.011	8,100	180	0.005~0.008
		22	10,000	310	0.005~0.01	10,000	260	0.005~0.008	8,000	190	0.004~0.007	7,000	150	0.003~0.005	7,200	120	0.002~0.004
2015	1.5	6	18,000	1,030	0.045~0.09	18,000	860	0.045~0.075	15,000	650	0.04 ~0.068	12,000	460	0.031~0.052	8,400	260	0.022~0.037
		8	16,000	810	0.023~0.046	16,000	680	0.023~0.038	13,000	500	0.02 ~0.034	10,000	340	0.016~0.026	8,000	220	0.011~0.019
		10	16,000	810	0.023~0.046	16,000	680	0.023~0.038	13,000	500	0.02 ~0.034	10,000	340	0.016~0.026	8,000	220	0.011~0.019
		12	16,000	810	0.023~0.046	16,000	680	0.023~0.038	13,000	500	0.02 ~0.034	10,000	340	0.016~0.026	8,000	220	0.011~0.019
		14	12,700	620	0.012~0.025	12,700	520	0.012~0.021	10,600	390	0.011~0.018	8,400	270	0.008~0.014	8,000	220	0.006~0.01
		16	10,300	450	0.01 ~0.022	10,300	380	0.01 ~0.018	8,600	280	0.009~0.016	8,000	230	0.007~0.012	7,600	180	0.005~0.009
		18	10,300	450	0.01 ~0.022	10,300	380	0.01 ~0.018	8,600	280	0.009~0.016	8,000	230	0.007~0.012	7,600	180	0.005~0.009
		20	9,000	320	0.005~0.011	9,000	270	0.005~0.009	7,000	200	0.004~0.008	7,200	160	0.003~0.006	6,700	130	0.002~0.004
2016	1.6	6	17,000	1,050	0.048~0.096	17,000	880	0.048~0.08	14,000	670	0.043~0.072	11,900	470	0.033~0.056	7,900	260	0.024~0.04
		8	17,000	1,050	0.048~0.096	17,000	880	0.048~0.08	14,000	670	0.043~0.072	11,900	470	0.033~0.056	7,900	260	0.024~0.04
		10	15,000	820	0.024~0.048	15,000	690	0.024~0.04	12,700	500	0.022~0.036	10,100	350	0.017~0.028	7,500	220	0.012~0.02
		12	15,000	820	0.024~0.048	15,000	690	0.024~0.04	12,700	500	0.022~0.036	10,100	350	0.017~0.028	7,500	220	0.012~0.02
		14	11,900	630	0.013~0.026	11,900	530	0.013~0.022	9,900	390	0.012~0.02	7,900	270	0.009~0.015	7,500	220	0.006~0.011
		16	11,900	630	0.013~0.026	11,900	530	0.013~0.022	9,900	390	0.012~0.02	7,900	270	0.009~0.015	7,500	220	0.006~0.011
		18	9,700	460	0.011~0.023	9,700	390	0.011~0.019	8,100	290	0.01 ~0.017	7,500	230	0.008~0.013	7,100	190	0.005~0.009
		20	9,000	450	0.011~0.023	9,000	380	0.011~0.019	8,100	280	0.01 ~0.017	7,500	230	0.008~0.013	7,100	180	0.005~0.009
		26	8,000	280	0.005~0.011	8,000	240	0.005~0.009	7,300	180	0.005~0.008	6,700	140	0.004~0.006	6,300	120	0.002~0.004
2018	1.8	6	15,000	1,030	0.051~0.102	15,000	860	0.051~0.085	13,200	650	0.045~0.076	10,600	460	0.035~0.059	7,000	260	0.025~0.042
		8	15,000	1,030	0.051~0.102	15,000	860	0.051~0.085	13,200	650	0.045~0.076	10,600	460	0.035~0.059	7,000	260	0.025~0.042
		10	13,700	810	0.027~0.055	13,700	680	0.027~0.046	11,400	500	0.024~0.041	9,000	340	0.019~0.032	6,700	220	0.013~0.023
		12	13,700	810	0.027~0.055	13,700	680	0.027~0.046	11,400	500	0.024~0.041	9,000	340	0.019~0.032	6,700	220	0.013~0.023
		14	13,700	810	0.027~0.055	13,700	680	0.027~0.046	11,400	500	0.024~0.041	9,000	340	0.019~0.032	6,700	220	0.013~0.023
		16	10,600	620	0.015~0.03	10,600	520	0.015~0.025	8,800	380	0.013~0.022	7,000	270	0.01 ~0.017	6,700	220	0.007~0.012
		18	10,600	620	0.015~0.03	10,600	520	0.015~0.025	8,800	380	0.013~0.022	7,000	270	0.01 ~0.017	6,700	220	0.007~0.012
		20	8,600	450	0.012~0.024	8,600	380	0.012~0.02	7,200	280	0.01 ~0.018	6,700	230	0.008~0.014	6,300	180	0.006~0.01
		25	7,700	310	0.006~0.012	7,700	260	0.006~0.01	6,500	200	0.005~0.009	6,000	160	0.004~0.007	5,600	130	0.003~0.005


Milling Conditions for C-CER

WORK MATERIAL			COPPER OFC / TPC			CARBON STEELS S45C / S50C (~225HB)			ALLOY STEELS SK / SCM / SUS (225~325HB)			PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			HARDENED STEELS SKD / SKT (45~50HRC)		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2020	2	6	14,000	1,080	0.058~0.118	14,000	900	0.058~0.098	12,000	680	0.052~0.088	9,600	480	0.041~0.068	6,400	270	0.029~0.049
		8	14,000	1,020	0.052~0.106	14,000	850	0.052~0.088	12,000	650	0.047~0.079	9,600	450	0.037~0.061	6,400	260	0.026~0.044
		10	14,000	1,020	0.052~0.106	14,000	850	0.052~0.088	12,000	650	0.047~0.079	9,600	450	0.037~0.061	6,400	260	0.026~0.044
		12	12,300	790	0.026~0.053	12,300	660	0.026~0.044	10,400	500	0.024~0.04	8,100	340	0.018~0.031	6,000	220	0.013~0.022
		14	12,300	790	0.026~0.053	12,300	660	0.026~0.044	10,400	500	0.024~0.04	8,100	340	0.018~0.031	6,000	220	0.013~0.022
		16	12,300	790	0.026~0.053	12,300	660	0.026~0.044	10,400	500	0.024~0.04	8,100	340	0.018~0.031	6,000	220	0.013~0.022
		18	9,500	610	0.014~0.029	9,500	510	0.014~0.024	7,900	380	0.013~0.022	6,300	270	0.01 ~0.017	6,000	220	0.007~0.012
		20	9,500	610	0.014~0.029	9,500	510	0.014~0.024	7,900	380	0.013~0.022	6,300	270	0.01 ~0.017	6,000	220	0.007~0.012
		25	7,700	430	0.012~0.025	7,700	360	0.012~0.021	6,400	270	0.011~0.018	6,000	220	0.008~0.014	5,700	180	0.006~0.01
		30	7,000	310	0.006~0.012	7,000	260	0.006~0.01	5,800	190	0.005~0.009	5,400	150	0.004~0.007	5,000	120	0.003~0.005
2025	2.5	8	10,800	1,390	0.066~0.132	10,800	1,160	0.066~0.11	9,100	880	0.059~0.099	7,600	640	0.046~0.077	5,100	360	0.033~0.055
		10	10,800	1,390	0.066~0.132	10,800	1,160	0.066~0.11	9,100	880	0.059~0.099	7,600	640	0.046~0.077	5,100	360	0.033~0.055
		12	10,800	1,390	0.066~0.132	10,800	1,160	0.066~0.11	9,100	880	0.059~0.099	7,600	640	0.046~0.077	5,100	360	0.033~0.055
		14	9,500	1,090	0.033~0.067	9,500	910	0.033~0.056	8,000	680	0.03 ~0.05	6,500	490	0.023~0.039	4,800	310	0.016~0.028
		16	9,500	1,090	0.033~0.067	9,500	910	0.033~0.056	8,000	680	0.03 ~0.05	6,500	490	0.023~0.039	4,800	310	0.016~0.028
		18	9,500	1,090	0.033~0.067	9,500	910	0.033~0.056	8,000	680	0.03 ~0.05	6,500	490	0.023~0.039	4,800	310	0.016~0.028
		20	9,500	1,090	0.033~0.067	9,500	910	0.033~0.056	8,000	680	0.03 ~0.05	6,500	490	0.023~0.039	4,800	310	0.016~0.028
		25	7,600	820	0.018~0.036	7,600	690	0.018~0.03	6,300	510	0.016~0.027	5,000	360	0.012~0.021	4,800	290	0.009~0.015
		30	6,200	480	0.014~0.029	6,200	400	0.014~0.024	5,200	300	0.013~0.022	4,800	240	0.01 ~0.017	4,500	200	0.007~0.012
2030	3	8	8,700	1,580	0.088~0.176	8,700	1,320	0.088~0.147	7,300	990	0.079~0.132	5,900	700	0.055~0.092	4,200	420	0.044~0.073
		10	8,700	1,500	0.079~0.158	8,700	1,250	0.079~0.132	7,300	940	0.071~0.119	5,900	660	0.055~0.092	4,200	400	0.039~0.066
		12	8,700	1,500	0.079~0.158	8,700	1,250	0.079~0.132	7,300	940	0.071~0.119	5,900	660	0.055~0.092	4,200	400	0.039~0.066
		14	8,700	1,500	0.079~0.158	8,700	1,250	0.079~0.132	7,300	940	0.071~0.119	5,900	660	0.055~0.092	4,200	400	0.039~0.066
		16	7,600	1,160	0.04 ~0.08	7,600	970	0.04 ~0.067	6,300	720	0.036~0.06	5,000	500	0.028~0.047	3,900	340	0.02 ~0.033
		18	7,600	1,160	0.04 ~0.08	7,600	970	0.04 ~0.067	6,300	720	0.036~0.06	5,000	500	0.028~0.047	3,900	340	0.02 ~0.033
		20	7,600	1,160	0.04 ~0.08	7,600	970	0.04 ~0.067	6,300	720	0.036~0.06	5,000	500	0.028~0.047	3,900	340	0.02 ~0.033
		25	6,300	970	0.022~0.043	6,300	810	0.022~0.036	5,300	600	0.019~0.033	4,200	420	0.015~0.025	3,900	340	0.011~0.018
		30	6,300	970	0.022~0.043	6,300	810	0.022~0.036	5,300	600	0.019~0.033	4,200	420	0.015~0.025	3,900	340	0.011~0.018
		35	5,100	490	0.017~0.035	5,100	410	0.017~0.029	4,300	300	0.016~0.026	4,000	240	0.012~0.02	3,800	200	0.008~0.014
		40	4,600	310	0.007~0.014	4,600	260	0.007~0.012	3,900	200	0.006~0.01	3,600	160	0.005~0.008	3,300	130	0.003~0.006

Milling Conditions for C-CER

WORK MATERIAL			COPPER OFC / TPC			CARBON STEELS S45C / S50C (~225HB)			ALLOY STEELS SK / SCM / SUS (225~325HB)			PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			HARDENED STEELS SKD / SKT (45~50HRC)		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2035	3.5	12	7,100	1,280	0.092~0.185	7,100	1,070	0.092~0.154	6,000	790	0.083~0.138	4,800	560	0.064~0.108	3,300	330	0.046~0.077
		15	7,100	1,280	0.092~0.185	7,100	1,070	0.092~0.154	6,000	790	0.083~0.138	4,800	560	0.064~0.108	3,300	330	0.046~0.077
		16	7,100	1,280	0.092~0.185	7,100	1,070	0.092~0.154	6,000	790	0.083~0.138	4,800	560	0.064~0.108	3,300	330	0.046~0.077
		20	6,200	990	0.043~0.086	6,200	830	0.043~0.072	5,100	610	0.039~0.065	4,000	420	0.03 ~0.05	3,100	280	0.021~0.036
		25	6,200	990	0.043~0.086	6,200	830	0.043~0.072	5,100	610	0.039~0.065	4,000	420	0.03 ~0.05	3,100	280	0.021~0.036
		30	5,000	800	0.025~0.05	5,000	670	0.025~0.042	4,200	500	0.023~0.038	3,300	340	0.018~0.03	3,100	280	0.012~0.021
		35	5,000	800	0.025~0.05	5,000	670	0.025~0.042	4,200	500	0.023~0.038	3,300	340	0.018~0.03	3,100	280	0.012~0.021
2040	4	12	6,000	1,170	0.1 ~0.202	6,000	980	0.1 ~0.168	5,000	720	0.09 ~0.151	3,900	500	0.07 ~0.117	2,700	290	0.05 ~0.084
		16	6,000	1,110	0.09 ~0.181	6,000	930	0.09 ~0.151	5,000	690	0.081~0.136	3,900	480	0.063~0.105	2,700	280	0.045~0.075
		20	6,000	1,110	0.09 ~0.181	6,000	930	0.09 ~0.151	5,000	690	0.081~0.136	3,900	480	0.063~0.105	2,700	280	0.045~0.075
		25	5,200	860	0.046~0.091	5,200	720	0.046~0.076	4,200	520	0.041~0.069	3,300	350	0.032~0.053	2,500	230	0.023~0.038
		30	5,200	860	0.046~0.091	5,200	720	0.046~0.076	4,200	520	0.041~0.069	3,300	350	0.032~0.053	2,500	230	0.023~0.038
		35	4,200	660	0.025~0.05	4,200	550	0.025~0.042	3,500	400	0.022~0.037	2,700	270	0.017~0.029	2,500	220	0.012~0.021
		40	4,200	660	0.025~0.05	4,200	550	0.025~0.042	3,500	400	0.022~0.037	2,700	270	0.017~0.029	2,500	220	0.012~0.021
		45	3,400	430	0.018~0.037	3,400	360	0.018~0.031	2,800	270	0.016~0.028	2,500	210	0.013~0.021	2,300	160	0.009~0.015
		50	3,400	380	0.018~0.037	3,400	320	0.018~0.031	2,800	240	0.016~0.028	2,500	190	0.013~0.021	2,300	140	0.009~0.015
2050	5	16	4,400	870	0.113~0.227	4,400	730	0.113~0.189	3,600	530	0.102~0.17	2,800	360	0.079~0.132	1,700	190	0.056~0.094
		20	4,400	870	0.113~0.227	4,400	730	0.113~0.189	3,600	530	0.102~0.17	2,800	360	0.079~0.132	1,700	190	0.056~0.094
		25	4,400	870	0.113~0.227	4,400	730	0.113~0.189	3,600	530	0.102~0.17	2,800	360	0.079~0.132	1,700	190	0.056~0.094
		30	3,800	630	0.057~0.115	3,800	530	0.057~0.096	3,000	380	0.051~0.086	2,200	240	0.04 ~0.067	1,600	150	0.028~0.048
		35	3,800	630	0.057~0.115	3,800	530	0.057~0.096	3,000	380	0.051~0.086	2,200	240	0.04 ~0.067	1,600	150	0.028~0.048
		40	3,800	630	0.057~0.115	3,800	530	0.057~0.096	3,000	380	0.051~0.086	2,200	240	0.022~0.036	1,600	150	0.028~0.048
		50	2,900	460	0.031~0.062	2,900	390	0.031~0.052	2,400	280	0.028~0.047	1,700	180	0.022~0.036	1,600	140	0.015~0.026
2060	6	20	3,300	670	0.113~0.227	3,300	560	0.113~0.189	2,700	400	0.102~0.17	2,000	260	0.079~0.132	1,100	130	0.056~0.094
		30	3,300	670	0.113~0.227	3,300	560	0.113~0.189	2,700	400	0.102~0.17	2,000	260	0.079~0.132	1,100	130	0.056~0.094
		40	2,800	480	0.057~0.115	2,800	400	0.057~0.096	2,200	270	0.051~0.086	1,500	170	0.04 ~0.067	1,000	100	0.028~0.048
		50	2,100	330	0.031~0.062	2,100	280	0.031~0.052	1,600	200	0.028~0.047	1,100	120	0.022~0.036	1,000	90	0.015~0.026
		60	2,100	330	0.031~0.062	2,100	280	0.031~0.052	1,600	200	0.028~0.047	1,100	120	0.022~0.036	1,000	90	0.015~0.026

Slotting



D : Outside Diameter (mm)

Note:
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
・Recommend water soluble or oil coolant.
・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

DCLS



Diamond Coated 2 Flute Long Neck Square End Mills for Graphite Milling

φ0.4～φ6


MG | DIA | 30° | Sharp Corner | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○	★	○	○	●				○

Features

2 Flute Diamond coated Long Neck Square End Mills for milling Graphite Electrodes.
New diamond coating, with a highly adhesive base layer,
offers excellent wear resistance and long tool life.

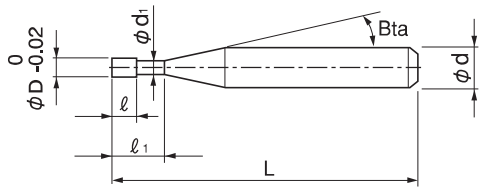

The shank taper angle shown is not an exact value.



Total 45 models

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30'	1°	1° 30'	2°	3°
DCLS 2004-020	0.4	2	0.8	0.37	16°	45	4	—	2.26	2.43	2.57	2.68	2.89
DCLS 2004-040		4				45	4	—	4.40	4.63	4.80	4.97	5.34
DCLS 2004-060		6				45	4	—	6.51	6.77	7.00	7.24	7.79
DCLS 2005-020	0.5	2	1	0.47	16°	45	4	—	2.32	2.52	2.68	2.82	3.07
DCLS 2005-040		4				45	4	—	4.48	4.74	4.95	5.13	5.51
DCLS 2005-060		6				45	4	—	6.60	6.91	7.15	7.40	7.96
DCLS 2006-020	0.6	2	1.2	0.57	16°	45	4	—	2.36	2.60	2.78	2.95	3.23
DCLS 2006-040		4				45	4	—	4.55	4.85	5.08	5.29	5.68
DCLS 2006-060		6				45	4	—	6.69	7.04	7.31	7.56	8.13
DCLS 2006-080		8				45	4	—	8.80	9.19	9.51	9.84	10.58
DCLS 2006-100		10				45	4	—	10.90	11.33	11.71	12.12	13.03

Next Page ➡

Diamond Coated 2 Flute Long Neck Square End Mills for Graphite Milling


Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
DCLS 2007-040	0.7	4	1.4	0.67	16°	45	4	—	4.55	4.85	5.08	5.29	5.68
DCLS 2007-060		6				45	4	—	6.69	7.04	7.31	7.56	8.13
DCLS 2007-080		8				45	4	—	8.80	9.19	9.51	9.84	10.58
DCLS 2007-100		10				45	4	—	10.90	11.33	11.71	12.12	13.03
DCLS 2008-040	0.8	4	1.6	0.77	16°	45	4	—	4.55	4.85	5.08	5.29	5.68
DCLS 2008-060		6				45	4	—	6.69	7.04	7.31	7.56	8.13
DCLS 2008-080		8				45	4	—	8.80	9.19	9.51	9.84	10.58
DCLS 2008-100		10				45	4	—	10.90	11.33	11.71	12.12	13.03
DCLS 2010-040	1	4	2	0.96	16°	45	4	—	4.57	4.86	5.09	5.30	5.70
DCLS 2010-060		6				45	4	—	6.70	7.05	7.32	7.57	8.14
DCLS 2010-080		8				45	4	—	8.82	9.20	9.52	9.85	10.59
DCLS 2010-100		10				45	4	—	10.91	11.34	11.72	12.13	13.04
DCLS 2010-160		16				50	4	—	17.16	17.73	18.32	18.96	20.38
DCLS 2010-210		21				55	4	—	22.33	23.05	23.82	24.65	26.50
DCLS 2015-060	1.5	6	3	1.44	16°	45	4	—	6.17	6.37	6.58	6.81	7.33
DCLS 2015-100		10				45	4	—	10.29	10.63	10.98	11.37	12.22
DCLS 2015-160		16				50	4	—	16.48	17.02	17.59	18.20	19.56
DCLS 2015-210		21				55	4	—	21.64	22.34	23.09	23.89	No Interference
DCLS 2020-060	2	6	4	1.9	16°	50	4	—	6.22	6.42	6.64	6.87	7.39
DCLS 2020-100		10				50	4	—	10.35	10.68	11.04	11.43	12.28
DCLS 2020-160		16				50	4	—	16.53	17.07	17.65	18.26	No Interference
DCLS 2020-210		21				55	4	—	21.69	22.40	23.15	23.95	No Interference
DCLS 2020-260		26				55	4	—	26.85	27.72	28.65	No Interference	No Interference
DCLS 2030-160	3	16	6	2.9	16°	70	6	—	16.53	17.07	17.65	18.26	19.63
DCLS 2030-210		21				70	6	—	21.69	22.40	23.15	23.95	25.74
DCLS 2030-260		26				70	6	—	26.85	27.72	28.65	29.65	No Interference
DCLS 2030-320		32				80	6	—	33.04	34.11	35.25	36.48	No Interference
DCLS 2040-210	4	21	8	3.91	16°	70	6	—	21.68	22.39	23.14	23.94	No Interference
DCLS 2040-260		26				70	6	—	26.84	27.71	28.64	No Interference	No Interference
DCLS 2040-320		32				70	6	—	33.03	34.10	35.24	No Interference	No Interference
DCLS 2040-420		42				80	6	—	43.34	44.75	No Interference	No Interference	No Interference
DCLS 2060-320	6	32	12	5.71	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLS 2060-420		42				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLS 2060-630		63				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference


Milling Conditions for DCLS

WORK MATERIAL			GRAPHITE				
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Side Milling		Slotting
					a_p Axial Depth (mm)	a_e Radial Depth (mm)	a_p Axial Depth (mm)
2004-020	**0.4**	2	34,000	410	0.4	0.02	0.02
2004-040		4	34,000	240	0.4	0.02	0.02
2004-060		6	34,000	180	0.4	0.02	0.02
2005-020	**0.5**	2	34,000	540	0.5	0.025	0.025
2005-040		4	34,000	350	0.5	0.025	0.025
2005-060		6	34,000	240	0.5	0.025	0.025
2006-020	**0.6**	2	34,000	660	0.6	0.03	0.03
2006-040		4	34,000	520	0.6	0.03	0.03
2006-060		6	34,000	320	0.6	0.03	0.03
2006-080		8	25,000	220	0.6	0.03	0.03
2006-100		10	24,000	120	0.6	0.03	0.03
2007-040	**0.7**	4	34,000	600	0.7	0.035	0.035
2007-060		6	34,000	380	0.7	0.035	0.035
2007-080		8	25,000	260	0.7	0.035	0.035
2007-100		10	24,000	140	0.7	0.035	0.035
2008-040	**0.8**	4	34,000	690	0.8	0.04	0.04
2008-060		6	34,000	440	0.8	0.04	0.04
2008-080		8	25,000	300	0.8	0.04	0.04
2008-100		10	24,000	170	0.8	0.04	0.04
2010-040	**1**	4	34,000	1,170	1	0.05	0.1
2010-060		6	26,000	850	1	0.05	0.1
2010-080		8	22,000	660	1	0.05	0.1
2010-100		10	22,100	530	1	0.05	0.1
2010-160		16	14,300	300	1	0.05	0.1
2010-210		21	12,500	200	1	0.05	0.1
2015-060	**1.5**	6	22,000	1,620	1.5	0.075	0.15
2015-100		10	17,000	1,050	1.5	0.075	0.15
2015-160		16	15,000	600	1.5	0.075	0.15
2015-210		21	10,000	370	1.5	0.075	0.15
2020-060	**2**	6	25,500	2,175	2	0.1	0.2
2020-100		10	21,000	1,680	2	0.1	0.2
2020-160		16	19,500	1,230	2	0.1	0.2
2020-210		21	16,500	750	2	0.1	0.2
2020-260		26	12,000	590	2	0.1	0.2
2030-160	**3**	16	22,000	2,200	3	0.15	0.3
2030-210		21	20,000	1,800	3	0.15	0.3
2030-260		26	18,000	1,450	3	0.15	0.3
2030-320		32	15,000	1,040	3	0.15	0.3
2040-210	**4**	21	14,000	1,760	4	0.2	0.4
2040-260		26	13,500	1,450	4	0.2	0.4
2040-320		32	13,000	1,160	4	0.2	0.4
2040-420		42	11,000	900	4	0.2	0.4
2060-320	**6**	32	12,000	1,500	6	0.6	1.2
2060-420		42	10,800	1,160	6	0.6	1.2
2060-630		63	7,400	620	6	0.6	1.2

Slotting



Side Milling



D:Outside Diameter (mm)

Note:
・Use a milling machine dedicated for Graphite.
・Recommend air blow for Graphite.

Other series for Graphite milling

Square / Long Neck Square

(★ Highly Recommended ● Recommended ○ Suggested)

Number of Flutes, Tool Type	Model Number	Appearance	Coating	Size	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Hard Brittle (Non-Metallic) Materials	Page
2 flutes Square	DCES 2000		DIA	φ0.2～φ6	○	★	○	○	●	○	A-35
4 flutes Square	DCES 4000		DIA	φ3～φ10	○	★	○	○	●	○	A-93
2 flutes Long Neck Square	DCLS		DIA	φ0.4～φ6	○	★	○	○	●	○	B-25

Long Neck Radius

4 flutes Long Neck Radius	DCLRS		DIA	φ1～φ6	○	★	○	○	●	○	D-99

Ball / Long Neck Ball / Taper Neck Ball

2 flutes Ball	DCB		DIA	R0.5～R6	○	★	○	○	●	○	F-31
2 flutes Long Neck Ball	DCLB		DIA	R0.2～R3	○	★	○	○	●	○	G-73
2 flutes Taper Neck Ball	DCTNB		DIA	R0.5～R1	○	★	○	○	●	○	H-21

DLCLS NEW



Released April 2023

DLCCOAT 2 Flute Long Neck Square End Mills for Copper Electrode Milling

φ0.1～φ3


Super MG | DLC | 35° | Flatland | Shank Dia 0/-0.004

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									●		★						

Unit (mm)

Outside Diameter	φ0.1 ～φ3
Diameter Tolerance	0/-0.005

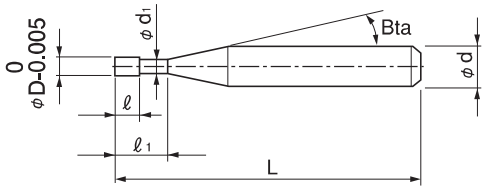

The shank taper angle shown is not an exact value.



Label Sample




#001 φD0.998




Diameter measurements are printed on the label to support High Precision milling.

Copper Milling Example Comparison with conventional tool for Steels

DLCLS φ3 × EL12・φ1 × EL10 Tough Pitch Copper C1100

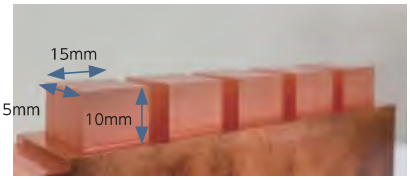

Coolant Oil Mist
Work Size 15 × 15 × h 10 mm

	1 / 5pcs (1 h 11 min)		5 / 5pcs (4 h 47 min)		
DLCLS φ1 × EL10	 Ra 0.437 μm	 No burr	 Ra 0.465 μm	 Maximum burr height 0.015 mm	 Minimum wear
Conventional tool φ1 × EL10	 Ra 0.809 μm	 Maximum burr height 0.027 mm	 Ra 0.575 μm	 Maximum burr height 0.072 mm	 Little wear

Process	Tool	Spindle Speed (min⁻¹)	Feed Rate (mm / min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Allowance (mm)	Cycle Time 5 work pieces (h:m:s)
Roughing	DLCLS φ3 × EL12	16,000	2,400	3	0.15	0.08	0:21:44
Semi-finishing		16,000	2,400	0.4	0.02	0.03	1:44:10
Finishing	DLCLS φ1 × EL10	19,200	540	0.2	0.01	0	4:47:32

Total 6:53:26

DLCLS reduces burrs compared to the conventional tool for Steels, improving milling surface and tool life.

Total 35 models


Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
DLCLS 2001-003	0.1	0.3	0.15	0.096	11°	45	4	—	0.30	0.30	0.32	0.34	0.39
DLCLS 2001-005		0.5				45	4	—	0.50	0.52	0.55	0.58	0.66
DLCLS 2002-005	0.2	0.5	0.3	0.19	11°	45	4	—	0.64	0.67	0.71	0.75	0.85
DLCLS 2002-010		1				45	4	—	1.16	1.22	1.29	1.36	1.54
DLCLS 2002-015		1.5				45	4	—	1.67	1.76	1.85	1.96	2.20
DLCLS 2003-010	0.3	1	0.45	0.29	11°	45	4	—	1.16	1.22	1.29	1.36	1.54
DLCLS 2003-015		1.5				45	4	—	1.67	1.76	1.85	1.96	2.20
DLCLS 2003-020		2				45	4	—	2.20	2.31	2.43	2.57	2.89
DLCLS 2004-010	0.4	1	0.6	0.39	11°	45	4	—	1.16	1.22	1.29	1.36	1.54
DLCLS 2004-020		2				45	4	—	2.20	2.31	2.43	2.57	2.89
DLCLS 2004-030		3				45	4	—	3.24	3.41	3.59	3.79	4.26
DLCLS 2005-020	0.5	2	0.75	0.49	11°	45	4	—	2.20	2.31	2.43	2.57	2.89
DLCLS 2005-030		3				45	4	—	3.24	3.41	3.59	3.79	4.26
DLCLS 2005-040		4				45	4	—	4.29	4.50	4.74	5.00	5.63
DLCLS 2005-060		6				45	4	—	6.38	6.70	7.05	7.44	8.37
DLCLS 2006-020	0.6	2	0.9	0.59	11°	45	4	—	2.20	2.31	2.43	2.57	2.89
DLCLS 2006-030		3				45	4	—	3.24	3.41	3.59	3.79	4.26
DLCLS 2006-040		4				45	4	—	4.29	4.50	4.74	5.00	5.63
DLCLS 2006-060		6				45	4	—	6.38	6.70	7.05	7.44	8.37
DLCLS 2008-030	0.8	3	1.2	0.79	11°	45	4	—	3.22	3.39	3.56	3.76	4.23
DLCLS 2008-040		4				45	4	—	4.27	4.48	4.72	4.98	5.60
DLCLS 2008-060		6				45	4	—	6.37	6.68	7.03	7.42	8.34
DLCLS 2010-030	1	3	1.5	0.98	11°	45	4	—	3.26	3.42	3.60	3.80	4.28
DLCLS 2010-040		4				45	4	—	4.31	4.52	4.76	5.02	5.65
DLCLS 2010-060		6				45	4	—	6.40	6.72	7.07	7.46	8.39
DLCLS 2010-080		8				45	4	—	8.49	8.92	9.38	9.90	11.13
DLCLS 2010-100		10				45	4	—	10.59	11.11	11.69	12.34	13.86
DLCLS 2015-060	1.5	6	2.25	1.47	11°	45	4	—	6.35	6.67	7.02	7.41	8.33
DLCLS 2015-100		10				45	4	—	10.54	11.06	11.64	12.28	13.80
DLCLS 2020-080	2	8	3	1.98	11°	50	4	—	8.42	8.84	9.30	9.81	11.03
DLCLS 2020-120		12				50	4	—	12.61	13.23	13.92	14.69	16.50
DLCLS 2020-160		16				50	4	—	16.80	17.63	18.55	19.56	No Interference
DLCLS 2030-120	3	12	4.5	2.96	11°	60	6	—	12.69	13.32	14.01	No Interference	No Interference
DLCLS 2030-160		16				60	6	—	16.88	17.71	18.64	No Interference	No Interference
DLCLS 2030-200		20				60	6	—	21.07	22.11	No Interference	No Interference	No Interference


Milling Conditions for DLCLS

WORK MATERIAL			COPPER / ALUMINUM ALLOYS							TUNGSTEN COPPER						
			Side Milling				Slotting			Side Milling				Slotting		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2001-003	**0.1**	0.3	40,000	200	0.1	0.005	40,000	100	0.01	36,000	180	0.05	0.005	36,000	90	0.01
2001-005		0.5	40,000	180	0.1	0.005	40,000	90	0.01	36,000	160	0.05	0.005	36,000	80	0.01
2002-005	**0.2**	0.5	40,000	400	0.2	0.01	40,000	200	0.02	36,000	360	0.1	0.01	36,000	180	0.02
2002-010		1	40,000	300	0.2	0.01	40,000	150	0.02	36,000	270	0.1	0.01	36,000	135	0.02
2002-015		1.5	32,000	200	0.2	0.008	32,000	100	0.02	28,800	180	0.1	0.008	28,800	90	0.02
2003-010	**0.3**	1	40,000	600	0.3	0.015	40,000	300	0.03	36,000	540	0.15	0.015	36,000	270	0.03
2003-015		1.5	40,000	590	0.3	0.015	40,000	295	0.03	36,000	530	0.15	0.015	36,000	265	0.03
2003-020		2	32,000	440	0.3	0.012	32,000	220	0.03	28,800	400	0.15	0.012	28,800	200	0.03
2004-010	**0.4**	1	40,000	800	0.4	0.02	40,000	400	0.04	36,000	720	0.2	0.02	36,000	360	0.04
2004-020		2	40,000	600	0.4	0.02	40,000	300	0.04	36,000	540	0.2	0.02	36,000	270	0.04
2004-030		3	32,000	400	0.4	0.016	32,000	200	0.04	28,800	360	0.2	0.016	28,800	180	0.04
2005-020	**0.5**	2	40,000	1,000	0.5	0.025	40,000	500	0.05	36,000	900	0.25	0.025	36,000	450	0.05
2005-030		3	32,000	750	0.5	0.02	32,000	375	0.05	28,800	680	0.25	0.02	28,800	340	0.05
2005-040		4	32,000	560	0.5	0.02	32,000	280	0.05	28,800	500	0.25	0.02	28,800	250	0.05
2005-060		6	25,600	380	0.5	0.015	25,600	190	0.05	23,000	340	0.25	0.015	23,000	170	0.05
2006-020	**0.6**	2	38,000	1,140	0.6	0.03	38,000	570	0.06	34,200	1,030	0.3	0.03	34,200	515	0.06
2006-030		3	38,000	1,000	0.6	0.03	38,000	500	0.06	34,200	900	0.3	0.03	34,200	450	0.06
2006-040		4	30,400	700	0.6	0.024	30,400	350	0.06	27,500	630	0.3	0.024	27,500	315	0.06
2006-060		6	30,400	560	0.6	0.024	30,400	280	0.06	27,500	500	0.3	0.024	27,500	250	0.06
2008-030	**0.8**	3	30,000	1,200	0.8	0.04	30,000	600	0.08	27,000	1,080	0.4	0.04	27,000	540	0.08
2008-040		4	30,000	1,000	0.8	0.04	30,000	500	0.08	27,000	900	0.4	0.04	27,000	450	0.08
2008-060		6	24,000	790	0.8	0.032	24,000	395	0.08	21,600	710	0.4	0.032	21,600	355	0.08
2010-030	**1**	3	24,000	1,200	1	0.05	24,000	600	0.1	21,600	1,080	0.5	0.05	21,600	540	0.1
2010-040		4	24,000	1,200	1	0.05	24,000	600	0.1	21,600	1,080	0.5	0.05	21,600	540	0.1
2010-060		6	19,200	900	1	0.04	19,200	450	0.1	17,300	810	0.5	0.04	17,300	405	0.1
2010-080		8	19,200	680	1	0.04	19,200	340	0.1	17,300	610	0.5	0.04	17,300	305	0.1
2010-100		10	19,200	540	1	0.04	19,200	270	0.1	17,300	490	0.5	0.04	17,300	245	0.1
2015-060	**1.5**	6	20,000	1,500	1.5	0.075	20,000	750	0.15	18,000	1,350	0.75	0.075	18,000	675	0.15
2015-100		10	16,000	900	1.5	0.06	16,000	450	0.15	14,400	810	0.75	0.06	14,400	405	0.15
2020-080	**2**	8	18,000	1,800	2	0.1	18,000	900	0.2	16,200	1,620	1	0.1	16,200	810	0.2
2020-120		12	14,400	1,350	2	0.08	14,400	675	0.2	13,000	1,220	1	0.08	13,000	610	0.2
2020-160		16	14,400	1,000	2	0.08	14,400	500	0.2	13,000	910	1	0.08	13,000	455	0.2
2030-120	**3**	12	16,000	2,400	3	0.15	16,000	1,200	0.3	14,400	2,160	1.5	0.15	14,400	1,080	0.3
2030-160		16	16,000	1,940	3	0.12	16,000	970	0.3	14,400	1,750	1.5	0.12	14,400	875	0.3
2030-200		20	12,800	1,450	3	0.12	12,800	725	0.3	11,500	1,310	1.5	0.12	11,500	655	0.3

Slotting



Side Milling



D:Outside Diameter (mm)

Note :
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering occurs.
- Recommend wet coolant for Copper and Tungsten-Copper.

CPR



NON-COAT 2 Flute Long Neck Square End Mills for Plastic Milling

φ0.5～φ6

MG | 30° | Sharp Corner | Flatland | Shank Dia 0/-0.005


(φ0.5～φ2.5)(φ3 or above)

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○		●	★					

Features

Long Neck Square End Mills for milling Plastics.
Designed especially for deep rib milling using an under cut design.

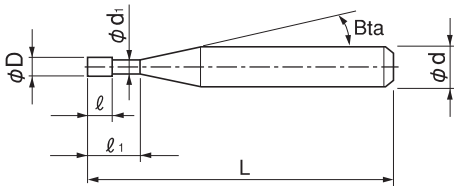

The shank taper angle shown is not an exact value.

Total 64 models

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CPR 2005-2	0.5	2	1	0.45	11°	38	3	—
CPR 2005-4		4				38	3	—
CPR 2005-6		6				38	3	—
CPR 2006-4	0.6	4	1.2	0.55	11°	38	3	—
CPR 2006-6		6				38	3	—
CPR 2007-4	0.7	4	1.4	0.65	11°	38	3	—
CPR 2007-6		6				38	3	—
CPR 2008-6	0.8	6	1.6	0.75	11°	45	4	—
CPR 2008-8		8				45	4	—
CPR 2009-6	0.9	6	1.8	0.85	11°	45	4	—
CPR 2009-10		10				45	4	—
CPR 2010-6	1	6	2	0.9	11°	45	4	—
CPR 2010-8		8				45	4	—
CPR 2010-10		10				45	4	—
CPR 2010-12		12				45	4	—
CPR 2010-16		16				50	4	—
CPR 2010-21		21				55	4	—
CPR 2012-6	1.2	6	2.4	1.1	11°	45	4	—
CPR 2012-8		8				45	4	—
CPR 2012-10		10				45	4	—
CPR 2012-12		12				50	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CPR 2014-6	1.4	6	2.8	1.3	11°	45	4	—
CPR 2014-10		10				45	4	—
CPR 2014-16		16				50	4	—
CPR 2015-6	1.5	6	3	1.4	11°	45	4	—
CPR 2015-10		10				45	4	—
CPR 2015-14		14				50	4	—
CPR 2015-16		16				50	4	—
CPR 2015-21		21				55	4	—
CPR 2016-6	1.6	6	3.2	1.5	11°	50	4	—
CPR 2020-8	2	8	4	1.9	11°	50	4	—
CPR 2020-10		10				50	4	—
CPR 2020-12		12				50	4	—
CPR 2020-14		14				50	4	—
CPR 2020-16		16				50	4	—
CPR 2020-18		18				55	4	—
CPR 2020-21		21				55	4	—
CPR 2020-26		26				55	4	—
CPR 2020-32		32				70	4	—
CPR 2025-12	2.5	12	5	2.3	11°	55	4	—
CPR 2025-21		21				55	4	—
CPR 2030-8	3	8	6	2.8	11°	70	6	—
CPR 2030-12		12				70	6	—
CPR 2030-16		16				70	6	—
CPR 2030-21		21				70	6	—
CPR 2030-26		26				70	6	—
CPR 2030-32		32				80	6	—
CPR 2030-42		42				90	6	—
CPR 2040-12	4	12	8	3.8	11°	70	6	—
CPR 2040-16		16				70	6	—
CPR 2040-18		18				70	6	—
CPR 2040-21		21				70	6	—
CPR 2040-24		24				70	6	—
CPR 2040-32		32				70	6	—
CPR 2040-36		36				70	6	—
CPR 2040-42		42				80	6	—
CPR 2040-52		52				100	6	—
CPR 2050-16	5	16	10	4.8	11°	80	6	—
CPR 2050-22		22				80	6	—
CPR 2050-32		32				80	6	—
CPR 2060-12	6	No Under Cut	12	No Under Cut	—	80	6	—
CPR 2060-42		42		5.8		80	6	—
CPR 2060-52		52				120	6	—
CPR 2060-63		63				120	6	—

Milling Conditions for CPR

WORK MATERIAL			ABS / MC NYLON			ACRYLIC / POLYACETAL			POLYCARBONATE			GLASS FIBER REINFORCED POLYCARBONATE		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2005-2	**0.5**	2	6,000	300	0.2	15,000	300	0.2	9,000	300	0.2	9,000	450	0.2
2005-4		4	6,000	300	0.2	15,000	300	0.2	9,000	300	0.2	9,000	450	0.2
2005-6		6	6,000	300	0.2	15,000	300	0.2	9,000	300	0.2	9,000	450	0.2
2006-4	**0.6**	4	6,000	340	0.2	14,400	300	0.2	8,800	540	0.2	8,800	810	0.2
2006-6		6	6,000	340	0.2	14,400	300	0.2	8,800	540	0.2	8,800	810	0.2
2007-4	**0.7**	4	6,000	380	0.2	13,800	300	0.2	8,600	780	0.2	8,600	1,170	0.2
2007-6		6	6,000	380	0.2	13,800	300	0.2	8,600	780	0.2	8,600	1,170	0.2
2008-6	**0.8**	6	6,000	420	0.2	13,200	300	0.2	8,400	1,000	0.2	8,400	1,500	0.2
2008-8		8	6,000	420	0.2	12,900	280	0.2	8,200	960	0.2	8,200	1,440	0.2
2009-6	**0.9**	6	6,000	460	0.2	12,600	300	0.2	8,200	1,300	0.2	8,200	1,950	0.2
2009-10		10	6,000	460	0.2	11,800	260	0.2	7,800	1,000	0.2	7,800	1,500	0.2
2010-6	**1**	6	6,000	500	0.3	12,000	300	0.3	8,000	1,500	0.3	8,000	2,250	0.3
2010-8		8	6,000	500	0.3	11,500	270	0.3	7,700	1,400	0.3	7,700	2,100	0.3
2010-10		10	6,000	500	0.3	11,000	240	0.3	7,500	1,200	0.3	7,500	1,800	0.3
2010-12		12	6,000	500	0.3	10,400	220	0.3	7,200	1,100	0.3	7,200	1,650	0.3
2010-16		16	6,000	500	0.3	9,300	160	0.3	6,700	830	0.3	6,700	1,245	0.3
2010-21		21	6,000	500	0.3	8,000	90	0.3	6,000	500	0.3	6,000	750	0.3
2012-6	**1.2**	6	6,000	610	0.4	11,700	330	0.4	8,000	1,500	0.4	8,000	2,250	0.4
2012-8		8	6,000	610	0.4	11,200	300	0.4	7,700	1,400	0.4	7,700	2,100	0.4
2012-10		10	6,000	600	0.4	10,700	280	0.4	7,500	1,300	0.4	7,500	1,950	0.4
2012-12		12	6,000	600	0.4	10,200	250	0.4	7,200	1,200	0.4	7,200	1,800	0.4
2014-6	**1.4**	6	6,000	720	0.4	11,340	360	0.4	8,000	1,600	0.4	8,000	2,400	0.4
2014-10		10	6,000	700	0.4	10,700	310	0.4	7,700	1,400	0.4	7,700	2,100	0.4
2014-16		16	6,000	680	0.4	9,800	230	0.4	7,200	1,000	0.4	7,200	1,500	0.4
2015-6	**1.5**	6	6,100	780	0.5	11,200	380	0.5	8,000	1,600	0.5	8,000	1,700	0.5
2015-10		10	6,000	760	0.5	10,200	330	0.5	7,500	1,400	0.5	7,500	1,600	0.5
2015-14		14	6,000	730	0.5	9,600	270	0.5	7,000	1,100	0.5	7,000	1,400	0.5
2015-16		16	6,000	730	0.5	8,800	250	0.5	6,700	1,000	0.5	6,700	1,400	0.5
2015-21		21	5,900	700	0.5	7,600	180	0.5	6,100	750	0.5	6,100	1,200	0.5
2016-6	**1.6**	6	6,100	830	0.8	11,000	390	0.8	8,000	1,600	0.8	8,000	1,700	0.8
2020-8	**2**	8	6,100	1,000	1	10,100	440	1	7,900	1,700	1	7,900	1,800	1
2020-10		10	6,000	980	1	9,800	420	1	7,700	1,600	1	7,700	1,800	1
2020-12		12	6,000	970	1	9,500	400	1	7,500	1,600	1	7,500	1,700	1
2020-14		14	5,900	950	1	9,100	380	1	7,300	1,500	1	7,300	1,700	1
2020-16		16	5,900	930	1	8,800	360	1	7,100	1,400	1	7,100	1,600	1
2020-18		18	5,800	920	1	8,500	340	1	6,900	1,300	1	6,900	1,600	1
2020-21		21	5,700	890	1	8,000	300	1	6,500	1,200	1	6,500	1,500	1
2020-26		26	5,600	850	1	7,200	250	1	6,000	1,100	1	6,000	1,400	1
2020-32		32	5,400	800	1	6,200	190	1	5,400	850	1	5,400	1,300	1
2025-12	**2.5**	12	6,000	1,300	1.2	8,600	480	1.2	7,400	1,600	1.2	7,400	1,900	1.2
2025-21		21	5,700	1,100	1	6,800	350	1	6,200	1,300	1	6,200	1,600	1


Milling Conditions for CPR

WORK MATERIAL			ABS / MC NYLON			ACRYLIC / POLYACETAL			POLYCARBONATE			GLASS FIBER REINFORCED POLYCARBONATE		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2030-8	3	8	6,200	1,600	1.5	8,700	610	1.5	8,000	1,900	1.5	8,000	2,200	1.5
2030-12		12	6,000	1,500	1.5	8,000	560	1.5	7,500	1,800	1.5	7,500	2,100	1.5
2030-16		16	5,800	1,400	1.5	7,300	510	1.5	7,000	1,700	1.5	7,000	2,000	1.5
2030-21		21	5,600	1,300	1.5	6,400	440	1.5	6,300	1,500	1.5	6,300	1,800	1.5
2030-26		26	5,400	1,200	1.5	5,500	370	1.5	5,600	1,400	1.5	5,600	1,700	1.5
2030-32		32	5,200	1,100	1.5	4,500	290	1.5	4,800	1,200	1.5	4,800	1,400	1.5
2030-42		42	4,800	960	1.5	2,700	160	1.5	3,500	840	1.5	3,500	1,000	1.5
2040-12	4	12	5,000	1,400	2	7,000	520	2	5,800	1,500	2	5,800	1,800	2
2040-16		16	4,900	1,400	2	6,500	480	2	5,500	1,400	2	5,500	1,700	2
2040-18		18	4,800	1,400	2	6,300	470	2	5,400	1,400	2	5,400	1,700	2
2040-21		21	4,800	1,400	2	6,000	440	2	5,100	1,300	2	5,100	1,600	2
2040-24		24	4,700	1,300	2	5,600	410	2	4,900	1,300	2	4,900	1,600	2
2040-32		32	4,500	1,300	2	4,700	340	2	4,400	1,100	2	4,400	1,500	2
2040-36		36	4,300	1,300	2	4,200	300	2	4,100	1,100	2	4,100	1,400	2
2040-42		42	4,200	1,300	2	3,600	250	2	3,600	960	2	3,600	1,200	2
2040-52		52	3,900	1,200	2	2,400	160	2	2,900	780	2	2,900	1,000	2
2050-16	5	16	3,400	1,200	2.5	5,800	470	2.5	4,000	1,200	2.5	4,000	1,400	2.5
2050-22		22	3,300	1,100	2.5	5,100	390	2.5	3,600	1,100	2.5	3,600	1,300	2.5
2050-32		32	3,200	1,100	2.5	3,900	260	2.5	2,900	910	2.5	2,900	1,100	2.5
2060-12	6	12	3,000	1,200	3	5,000	450	3	2,500	1,000	3	2,500	1,500	3
2060-42		42	2,400	960	3	2,600	240	3	1,900	760	3	1,900	1,140	3
2060-52		52	2,200	890	3	1,900	170	3	1,700	670	3	1,700	1,005	3
2060-63		63	2,000	800	3	1,000	90	3	1,500	600	3	1,500	900	3

Milling Amount for Slotting (mm)

$a_p \leqq 0.5D$

D : Outside Diameter (mm)



CPR Finishing Conditions for Side Milling


Refer to the slotting parameters for speeds and feeds.

Set the milling amount as below during side milling finishing.

Milling Amount for Side Finishing (mm)

a_e : 0.01 ~ 0.015D (Min 0.01 mm)

D : Outside Diameter (mm)



Note:

- Control the radial depth (ae) by approximately 0.01-0.015 times of the outside diameter or set to 0.01 mm the minimum during side milling finishing.
- Increase the feed rate per tooth to reduce burr on surface of softer materials.
- Chattering may occur when using a spindle with low rigidity or when milling unstable work piece. Reduce the milling amount in this case.
- Recommend to reduce the milling amount when using a machine with low spindle speed. Not recommend to reduce the feed rate.
- Recommend water soluble coolant for Copper and Aluminum Alloys.
- Recommend air blow for Plastics.
- Remove chips from the work piece to keep the milling surface quality.
- If chips clog on the tool, stop the operation and remove them accordingly.

CPRL



NON-COAT 2 Flute Long Neck Square End Mills for Plastic Milling

φ0.5～φ4


MG | 30° | Sharp Corner (φ0.5～φ2) | Flatland (φ3 or above) | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○		●	★					

Features

Long Neck & Long Shank Square End Mills for milling Plastics.
High performance for deep rib cut milling.
Excellent cutting performance for milling Plastics.

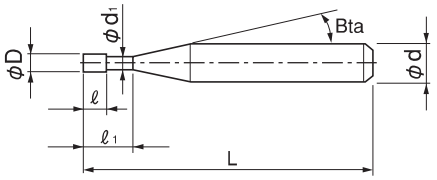

The shank taper angle shown is not an exact value.

Total 36 models

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CPRL 2005-4	0.5	4	1	0.45	11°	80	4	—
CPRL 2005-6		6				80	4	—
CPRL 2005-8		8				80	4	—
CPRL 2005-10		10				80	4	—
CPRL 2010-6	1	6	2	0.9	11°	80	4	—
CPRL 2010-8		8				80	4	—
CPRL 2010-10		10				80	4	—
CPRL 2010-12		12				80	4	—
CPRL 2010-14		14				80	4	—
CPRL 2010-16		16				80	4	—
CPRL 2010-18		18				80	4	—
CPRL 2010-21		21				80	4	—
CPRL 2015-6	1.5	6	3	1.4	11°	80	4	—
CPRL 2015-8		8				80	4	—
CPRL 2015-10		10				80	4	—
CPRL 2015-14		14				80	4	—
CPRL 2015-16		16				80	4	—
CPRL 2015-21		21				80	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CPRL 2020-8	2	8	4	1.9	11°	80	4	—
CPRL 2020-10		10				80	4	—
CPRL 2020-12		12				80	4	—
CPRL 2020-14		14				80	4	—
CPRL 2020-16		16				80	4	—
CPRL 2020-18		18				80	4	—
CPRL 2020-21		21				80	4	—
CPRL 2020-26		26				80	4	—
CPRL 2020-32		32				80	4	—
CPRL 2020-40		40				100	4	—
CPRL 2030-12	3	12	6	2.8	11°	100	6	—
CPRL 2030-16		16				100	6	—
CPRL 2030-21		21				100	6	—
CPRL 2030-26		26				100	6	—
CPRL 2030-32		32				100	6	—
CPRL 2040-18	4	18	8	3.8	11°	100	6	—
CPRL 2040-24		24				100	6	—
CPRL 2040-32		32				100	6	—

CPRL Series Acrylic Milling Video

Other series for Plastics milling

(★ Highly Recommended ● Recommended ○ Suggested)


Number of Flutes, Tool Type	Model Number	Appearance	Coating	Size	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Hard Brittle (Non-Mettalic) Materials	Page
2 flutes Square	CPS		Non-coat	φ0.3~φ12	○		●	★			A-39
2 flutes Long Neck Square	CPR		Non-coat	φ0.5~φ6	○		●	★			B-33
2 flutes Long Neck Long Shank Square	CPRL		Non-coat	φ0.5~φ4	○		●	★			B-37
2 flutes Long Neck Ball	CPRB		Non-coat	R0.2~R3	○		●	★			G-87

※ Diamond coating series is recommended for Glass Filled Plastics and others abrasive plastics.

Milling Conditions for CPRL

WORK MATERIAL			ABS / MC NYLON				ACRYLIC / POLYACETAL				POLYCARBONATE				GLASS FIBER REINFORCED POLYCARBONATE			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2005-4	0.5	4	6,000	300	0.2	0.5	15,000	300	0.2	0.5	9,000	300	0.2	0.5	9,000	90	0.2	0.5
2005-6		6	6,000	300	0.2	0.5	15,000	300	0.2	0.5	9,000	300	0.2	0.5	9,000	90	0.2	0.5
2005-8		8	6,000	300	0.2	0.5	15,000	300	0.2	0.5	9,000	300	0.2	0.5	9,000	90	0.2	0.5
2005-10		10	6,000	300	0.2	0.5	15,000	300	0.2	0.5	9,000	300	0.2	0.5	9,000	90	0.2	0.5
2010-6	1	6	6,000	500	0.3	1	12,000	300	0.3	1	8,000	1,500	0.3	1	8,000	1,500	0.3	1
2010-8		8	6,000	500	0.3	1	11,500	270	0.3	1	7,700	1,400	0.3	1	7,700	1,400	0.3	1
2010-10		10	6,000	500	0.3	1	11,000	240	0.3	1	7,500	1,200	0.3	1	7,500	1,400	0.3	1
2010-12		12	6,000	500	0.3	1	10,400	220	0.3	1	7,200	1,100	0.3	1	7,200	1,300	0.3	1
2010-14		14	6,000	500	0.3	1	9,900	190	0.3	1	6,900	970	0.3	1	6,900	1,200	0.3	1
2010-16		16	6,000	500	0.3	1	9,300	160	0.3	1	6,700	830	0.3	1	6,700	1,200	0.3	1
2010-18		18	6,000	500	0.3	1	8,800	130	0.3	1	6,400	700	0.3	1	6,400	1,100	0.3	1
2010-21		21	6,000	500	0.3	1	8,000	90	0.3	1	6,000	500	0.3	1	6,000	1,000	0.3	1
2015-6	1.5	6	6,100	780	0.5	1.5	11,200	380	0.5	1.5	8,000	1,600	0.5	1.5	8,000	1,700	0.5	1.5
2015-8		8	6,100	770	0.5	1.5	10,700	350	0.5	1.5	7,700	1,500	0.5	1.5	7,700	1,600	0.5	1.5
2015-10		10	6,000	760	0.5	1.5	10,200	330	0.5	1.5	7,500	1,400	0.5	1.5	7,500	1,600	0.5	1.5
2015-14		14	6,000	730	0.5	1.5	9,600	270	0.5	1.5	7,000	1,100	0.5	1.5	7,000	1,400	0.5	1.5
2015-16		16	6,000	730	0.5	1.5	8,800	250	0.5	1.5	6,700	1,000	0.5	1.5	6,700	1,400	0.5	1.5
2015-21		21	5,900	700	0.5	1.5	7,600	180	0.5	1.5	6,100	750	0.5	1.5	6,100	1,200	0.5	1.5
2020-8	2	8	6,100	1,000	1	2	10,100	440	1	2	7,900	1,700	1	2	7,900	1,800	1	2
2020-10		10	6,000	980	1	2	9,800	420	1	2	7,700	1,600	1	2	7,700	1,800	1	2
2020-12		12	6,000	970	1	2	9,500	400	1	2	7,500	1,600	1	2	7,500	1,700	1	2
2020-14		14	5,900	950	1	2	9,100	380	1	2	7,300	1,500	1	2	7,300	1,700	1	2
2020-16		16	5,900	930	1	2	8,800	360	1	2	7,100	1,400	1	2	7,100	1,600	1	2
2020-18		18	5,800	920	1	2	8,500	340	1	2	6,900	1,300	1	2	6,900	1,600	1	2
2020-21		21	5,700	890	1	2	8,000	300	1	2	6,500	1,200	1	2	6,500	1,500	1	2
2020-26		26	5,600	850	1	2	7,200	250	1	2	6,000	1,100	1	2	6,000	1,400	1	2
2020-32		32	5,400	800	1	2	6,200	190	1	2	5,400	850	1	2	5,400	1,300	1	2
2020-40		40	5,200	730	1	2	4,900	110	1	2	4,600	570	1	2	4,600	1,100	1	2
2030-12	3	12	6,000	1,500	1.5	3	8,000	560	1.5	3	7,500	1,800	1.5	3	7,500	2,100	1.5	3
2030-16		16	5,800	1,400	1.5	3	7,300	510	1.5	3	7,000	1,700	1.5	3	7,000	2,000	1.5	3
2030-21		21	5,600	1,300	1.5	3	6,400	440	1.5	3	6,300	1,500	1.5	3	6,300	1,800	1.5	3
2030-26		26	5,400	1,200	1.5	3	5,500	370	1.5	3	5,600	1,400	1.5	3	5,600	1,700	1.5	3
2030-32		32	5,200	1,100	1.5	3	4,500	290	1.5	3	4,800	1,200	1.5	3	4,800	1,400	1.5	3
2040-18	4	18	4,800	1,400	2	4	6,300	470	2	4	5,400	1,400	2	4	5,400	1,700	2	4
2040-24		24	4,700	1,300	2	4	5,600	410	2	4	4,900	1,300	2	4	4,900	1,600	2	4
2040-32		32	4,500	1,300	2	4	4,700	340	2	4	4,400	1,100	2	4	4,400	1,500	2	4


Milling Amount for Slotting (mm)
$a_p \leqq 0.5D$
D : Outside Diameter (mm)



CPRL Finishing Conditions for Side Milling

Refer to the slotting parameters for speeds and feeds.
Set the milling amount as below during side milling finishing.

Milling Amount for Side Finishing (mm)
a_e : 0.01 ~ 0.015D (Min 0.01 mm)
D : Outside Diameter (mm)



Milling Conditions for CPRL


Note:
- Control the radial depth (a_e) by approximately 0.01-0.015 times of the outside diameter or set to 0.01 mm the minimum during side milling finishing.
- Increase the feed per tooth to reduce burr on surface of softer materials.
- Chattering may occur when using a spindle with low rigidity or when milling unstable work piece. Reduce the milling amount in this case.
- Recommend to reduce the milling amount when using a machine with low spindle speed. Not recommend to reduce the feed rate.
- Recommend water soluble coolant for Copper and Aluminum Alloys.
- Recommend air blow for Plastics.
- Remove chips from the work piece to keep the milling surface quality.
- If chips clog on the tool, stop the operation and remove them accordingly.

CPR ϕ1 × EL6 Slotting Example — MC Nylon


	Spindle speed (min^{-1})	Feed rate (mm/min)	a_p (mm)	Feed per tooth (mm/t)	
Condition 1	6,000	400	0.3	0.033	
Condition 2	6,000	500	0.3	0.042	Best result
Condition 3	6,000	600	0.3	0.05	



Condition 1 Vf : 400



Condition 2 Vf : 500




Condition 3 Vf : 600



CPR ϕ1 × EL6 Slotting Example — Polycarbonate

	Spindle speed (min^{-1})	Feed rate (mm/min)	a_p (mm)	Feed per tooth (mm/t)	
Condition 1	8,000	100	0.3	0.006	
Condition 2	8,000	500	0.3	0.031	
Condition 3	8,000	1,000	0.3	0.063	
Condition 4	8,000	1,500	0.3	0.094	Best result
Condition 5	8,000	2,000	0.3	0.125	

Condition 1 Vf : 100




Condition 2 Vf : 500




Condition 3 Vf : 1000



Condition 4 Vf : 1500



Condition 5 Vf : 2000



Workpiece quality is easily affected by minor differences in milling conditions. Testing several conditions is crucial for milling plastics.

AZS



NON-COAT 3 Flute Long Neck Square End Mills for Aluminum Milling

φ1～φ12


Super MG | 45° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									★		○	○					

Features

Capable of vertical milling into a flat surface.
Achieves shorter processing time by removing pre-drilling or ramping cycle.
45° helix angle offers excellent chip evacuation.
The flute shape is specifically designed for reducing burrs on Aluminum Alloys.
The micro flatland design greatly helps control of chipping.

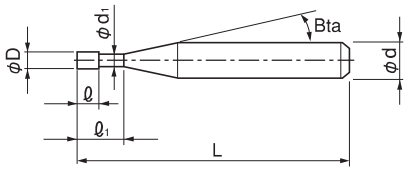


The shank taper angle shown is not an exact value.

Diameter Tolerance


Outside Diameter (φD)	Tolerance
φ1～φ6、φ7、φ9、φ11	0 -0.015
φ8、φ10、φ12	0 -0.005

■ Micro Flatland Design

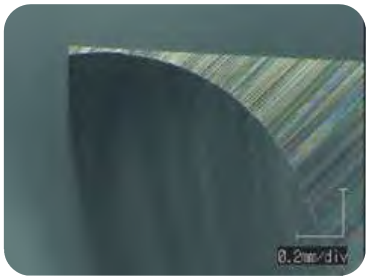


Excellent sharpness + Chipping protection design

■ Smooth Flute Design

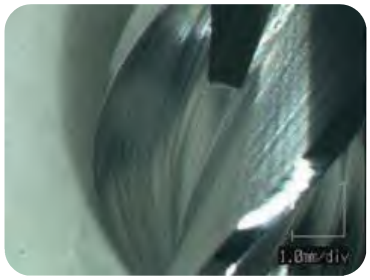

Outstanding chip evacuation by seamless flute.

■ 3 Flute Design

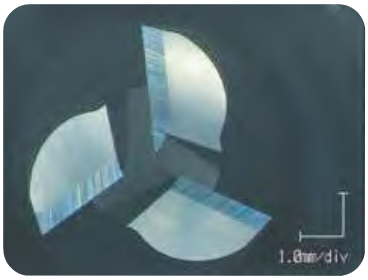

Highly efficient 3 flutes. Significant productivity improvement.


Total 28 models

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
AZS 3010-030	1	3	2	0.95	16°	60	4	—
AZS 3010-050		5				60	4	—
AZS 3015-045	1.5	4.5	3	1.43	16°	60	4	—
AZS 3020-060	2	6	4	1.93	16°	60	4	—
AZS 3020-100		10				60	4	—
AZS 3025-075	2.5	7.5	5	2.4	16°	60	4	—
AZS 3030-090	3	9	6	2.9	16°	70	6	—
AZS 3030-150		15				70	6	—
AZS 3035-105	3.5	10.5	7	3.4	16°	70	6	—
AZS 3040-120	4	12	8	3.9	16°	70	6	—
AZS 3040-200		20				70	6	—
AZS 3045-135	4.5	13.5	9	4.4	16°	70	6	—
AZS 3050-150	5	15	10	4.9	16°	70	6	—
AZS 3050-250		25				70	6	—
AZS 3060-180	6	18	12	5.8	—	70	6	—
AZS 3060-300		30				70	6	—
AZS 3070-210	7	21	14	6.82	16°	80	8	—
AZS 3070-350		35				80	8	—
AZS 3080-240	8	24	16	7.82	—	80	8	—
AZS 3080-400		40				80	8	—
AZS 3090-270	9	27	18	8.82	16°	90	10	—
AZS 3090-450		45				90	10	—
AZS 3100-300	10	30	20	9.82	—	90	10	—
AZS 3100-500		50				90	10	—
AZS 3110-330	11	33	22	10.82	16°	110	12	—
AZS 3110-550		55				110	12	—
AZS 3120-360	12	36	24	11.82	—	110	12	—
AZS 3120-600		60				110	12	—

Roughing Example A5052

Model Number	Milling Process	Spindle Speed	Z Feed Rate	XY Feed Rate	a_p	a_e	Cycle Time
AZS 3100-300 (ϕ10 × EL 30)	Drilling ①	6,480 min^{-1}	180 mm/min	—	10 mm	—	6 min 35 sec
	Roughing		—	1,500 mm/min	10 mm	5 mm	
	Drilling ②		180 mm/min	—	20 mm	—	
	Roughing		—	1,500 mm/min	20 mm	5 mm	
AZS 3030-090 (ϕ3 × EL 9)	Drilling + Slotting	14,000 min^{-1}	145 mm/min	1,450 mm/min	3 mm	—	30 sec

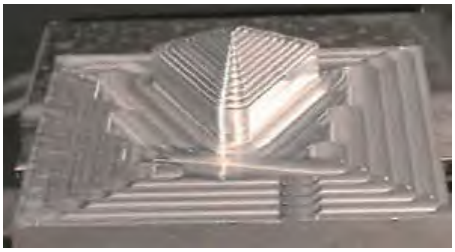

Coolant : Water Soluble

No micro burr!



Pocket Milling Example A7075

Tool	AZS 3060-180 (ϕ6 × EL18)	
Milling Process	Roughing	Finishing
Spindle Speed	17,600 min^{-1}	17,600 min^{-1}
Feed Rate	3,000 mm/min	2,000 mm/min
a_p	6 mm	6 mm
a_e	4.8 mm	0.3 mm

AZS series
A7075
Milling Video



Bottom



Pocket size : 50 x 50 x 18 mm
Coolant : Oil Mist

Milling from roughing to finishing with 1 pc.

Slotting　Comparison of burrs under different conditions　A5052



・Coolant　Water soluble
・Overhang　20 mm



Tool used
AZS ϕ5 × L10 × EL15

◆ Feed per tooth fixed at 0.05 mm/t. Comparison of burrs at different spindle speeds and feed rates.

	Spindle speed (min^{-1})	Feed rate (mm/min)	Velocity (m/min)	a_p (mm)	Feed per tooth (mm/t)	Milling condition details	Slot wall Down cut side
Condition 1	13,000	2,000	200	3.75 (0.75D)	0.05	Spindle speed and feed rate = Catalogue milling conditions	 Best result
Condition 2	11,700	1,750	180			Spindle speed and feed rate = 10% lower than catalogue milling conditions	
Condition 3	10,000	1,500	160			Spindle speed and feed rate = 25% lower than catalogue milling conditions	 Some burrs
Condition 4	7,700	1,150	120			Spindle speed and feed rate = 40% lower than catalogue milling conditions	
Condition 5	3,200	480	50			Spindle speed and feed rate = 75% lower than catalogue milling conditions	 Most burrs

No burrs under condition 1, catalogue milling conditions.
As the spindle speed was lowered, burrs began to appear, and the most burrs occurred at the velocity of 50 m/min in condition 5.
At the same feed per tooth, burrs were more likely to occur if the velocity was reduced too much.

◆ Spindle speed fixed at 10,000min^{-1}. Comparison of burrs at different feed rates.

	Spindle speed (min^{-1})	Feed rate (mm/min)	Velocity (m/min)	a_p (mm)	Feed per tooth (mm/t)	Milling condition details	Slot wall Down cut side
Condition 6	10,000	2,000	160	3.75 (0.75D)	0.07	Spindle speed 10,000min^{-1} Feed per tooth +30%	
Condition 7		2,400			0.08	Spindle speed 10,000min^{-1} Feed per tooth +60%	

At a fixed spindle speed of 10,000 min^{-1}, burrs slightly increased compared to condition 3 when the feed rate was raised, but there was no significant difference.

DLC-AZS



DLCCOAT 3 Flute Long Neck Square End Mills for Aluminum Milling

φ1～φ12

Super MG | DLC | 45° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									★		○	○					

Features

Capable of vertical milling directly into a plane surface.
Achieves shorter processing time by removing pre-drilling or ramping cycle.
DLC COAT offers excellent resistance to wear and welding.
45° helix angle offers excellent chip evacuation.
The flute shape is specifically designed for reducing burrs on Aluminum Alloys.
The micro flatland design greatly helps control of chipping.

Diameter Tolerance

Outside Diameter (φD)	Tolerance
φ1～φ6、φ7、φ9、φ11	0 -0.015
φ8、φ10、φ12	0 -0.005

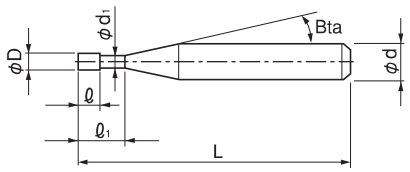

The shank taper angle shown is not an exact value.

Total 28 models

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLC-AZS 3010-030	1	3	2	0.95	16°	60	4	—
DLC-AZS 3010-050		5				60	4	—
DLC-AZS 3015-045	1.5	4.5	3	1.43	16°	60	4	—
DLC-AZS 3020-060	2	6	4	1.93	16°	60	4	—
DLC-AZS 3020-100		10				60	4	—
DLC-AZS 3025-075	2.5	7.5	5	2.4	16°	60	4	—
DLC-AZS 3030-090	3	9	6	2.9	16°	70	6	—
DLC-AZS 3030-150		15				70	6	—

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLC-AZS 3035-105	3.5	10.5	7	3.4	16°	70	6	—
DLC-AZS 3040-120	4	12	8	3.9	16°	70	6	—
DLC-AZS 3040-200		20				70	6	—
DLC-AZS 3045-135	4.5	13.5	9	4.4	16°	70	6	—
DLC-AZS 3050-150	5	15	10	4.9	16°	70	6	—
DLC-AZS 3050-250		25				70	6	—
DLC-AZS 3060-180	6	18	12	5.8	—	70	6	—
DLC-AZS 3060-300		30				70	6	—
DLC-AZS 3070-210	7	21	14	6.82	16°	80	8	—
DLC-AZS 3070-350		35				80	8	—
DLC-AZS 3080-240	8	24	16	7.82	—	80	8	—
DLC-AZS 3080-400		40				80	8	—
DLC-AZS 3090-270	9	27	18	8.82	16°	90	10	—
DLC-AZS 3090-450		45				90	10	—
DLC-AZS 3100-300	10	30	20	9.82	—	90	10	—
DLC-AZS 3100-500		50				90	10	—
DLC-AZS 3110-330	11	33	22	10.82	16°	110	12	—
DLC-AZS 3110-550		55				110	12	—
DLC-AZS 3120-360	12	36	24	11.82	—	110	12	—
DLC-AZS 3120-600		60				110	12	—

Milling Conditions for AZS / DLC-AZS

◆ High speed & highly efficient milling conditions

WORK MATERIAL			A5052							
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
3010-030	**1**	3	30,000	150	0.75	900	0.75	1,100	0.75	0.3
3010-050		5	22,500	100	0.75	600	0.75	800	0.75	0.3
3015-045	**1.5**	4.5	30,000	180	1.125	1,350	1.125	1,630	1.125	0.45
3020-060	**2**	6	30,000	225	1.5	1,800	1.5	2,150	1.5	0.6
3020-100		10	22,500	150	1.5	1,300	1.5	1,500	1.5	0.6
3025-075	**2.5**	7.5	25,000	225	1.875	1,900	1.875	2,300	1.875	0.75
3030-090	**3**	9	21,600	225	2.25	2,000	2.25	2,400	2.25	0.9
3030-150		15	16,200	150	2.25	1,400	2.25	1,700	2.25	0.9
3035-105	**3.5**	10.5	18,500	270	2.625	2,000	2.625	2,400	2.625	1.05
3040-120	**4**	12	16,200	300	3	2,000	3	2,400	3	1.2
3040-200		20	12,200	200	3	1,400	3	1,700	3	1.2
3045-135	**4.5**	13.5	14,400	300	3.375	2,000	3.375	2,400	3.375	1.35
3050-150	**5**	15	12,960	300	3.75	2,000	3.75	2,400	3.75	1.5
3050-250		25	9,700	200	3.75	1,400	3.75	1,700	3.75	1.5
3060-180	**6**	18	10,800	300	4.5	2,000	4.5	2,400	4.5	1.8
3060-300		30	8,100	200	4.5	1,400	4.5	1,700	4.5	1.8
3070-210	**7**	21	9,300	300	5.25	2,000	5.25	2,400	5.25	2.1
3070-350		35	6,900	200	5.25	1,400	5.25	1,700	5.25	2.1
3080-240	**8**	24	11,400	300	6	2,200	6	2,600	6	2.4
3080-400		40	8,600	200	6	1,500	6	1,800	6	2.4
3090-270	**9**	27	7,200	275	6.75	2,000	6.75	2,400	6.75	2.7
3090-450		45	5,400	180	6.75	1,400	6.75	1,700	6.75	2.7
3100-300	**10**	30	9,100	250	7.5	2,200	7.5	2,600	7.5	3
3100-500		50	6,800	160	7.5	1,500	7.5	1,800	7.5	3
3110-330	**11**	33	5,900	225	8.25	2,000	8.25	2,400	8.25	3.3
3110-550		55	4,400	145	8.25	1,400	8.25	1,700	8.25	3.3
3120-360	**12**	36	7,600	200	9	2,200	9	2,600	9	3.6
3120-600		60	5,700	130	9	1,500	9	1,800	9	3.6
Milling Amount (mm)				a_p=0.75D		a_p=0.75D		a_p=0.75D	a_e=0.3D	

Milling Conditions for AZS / DLC-AZS

WORK MATERIAL			A7075							
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
3010-030	**1**	3	30,000	150	0.75	540	0.75	860	0.75	0.3
3010-050		5	22,500	100	0.75	400	0.75	600	0.75	0.3
3015-045	**1.5**	4.5	30,000	180	1.125	820	1.125	1,230	1.125	0.45
3020-060	**2**	6	30,000	225	1.5	1,100	1.5	1,600	1.5	0.6
3020-100		10	22,500	150	1.5	800	1.5	1,100	1.5	0.6
3025-075	**2.5**	7.5	23,400	220	1.875	1,070	1.875	1,550	1.875	0.75
3030-090	**3**	9	20,200	225	2.25	1,100	2.25	1,600	2.25	0.9
3030-150		15	15,200	150	2.25	800	2.25	1,100	2.25	0.9
3035-105	**3.5**	10.5	17,300	270	2.625	1,100	2.625	1,600	2.625	1.05
3040-120	**4**	12	15,200	300	3	1,100	3	1,600	3	1.2
3040-200		20	11,400	200	3	800	3	1,100	3	1.2
3045-135	**4.5**	13.5	13,500	300	3.375	1,100	3.375	1,600	3.375	1.35
3050-150	**5**	15	12,200	300	3.75	1,100	3.75	1,600	3.75	1.5
3050-250		25	9,200	200	3.75	800	3.75	1,100	3.75	1.5
3060-180	**6**	18	10,100	300	4.5	1,100	4.5	1,600	4.5	1.8
3060-300		30	7,600	200	4.5	800	4.5	1,100	4.5	1.8
3070-210	**7**	21	8,700	250	5.25	1,100	5.25	1,600	5.25	2.1
3070-350		35	6,500	160	5.25	800	5.25	1,100	5.25	2.1
3080-240	**8**	24	12,000	250	6	1,800	6	2,400	6	2.4
3080-400		40	9,000	160	6	1,300	6	1,700	6	2.4
3090-270	**9**	27	6,700	250	6.75	1,100	6.75	1,600	6.75	2.7
3090-450		45	5,100	160	6.75	800	6.75	1,100	6.75	2.7
3100-300	**10**	30	9,600	250	7.5	1,800	7.5	2,400	7.5	3
3100-500		50	7,200	160	7.5	1,300	7.5	1,700	7.5	3
3110-330	**11**	33	5,500	250	8.25	1,100	8.25	1,600	8.25	3.3
3110-550		55	4,100	160	8.25	800	8.25	1,100	8.25	3.3
3120-360	**12**	36	8,000	250	9	1,800	9	2,400	9	3.6
3120-600		60	6,000	160	9	1,300	9	1,700	9	3.6
Milling Amount (mm)				a_p=0.75D		a_p=0.75D		a_p=0.75D	a_e=0.3D	

Milling Conditions for AZS / DLC-AZS


◆ Low speed & highly efficient milling conditions (Assumed maximum spindle speed: 10,000 min^{-1} or below)

WORK MATERIAL			A5052							
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
3010-030	**1**	3	10,000	50	0.3	400	0.3	900	1	0.15
3015-045	**1.5**	4.5	10,000	80	0.45	600	0.45	1,250	1.5	0.225
3020-060	**2**	6	10,000	100	0.6	800	0.6	1,600	2	0.3
3025-075	**2.5**	7.5	10,000	130	0.75	1,000	0.75	2,050	2.5	0.375
3030-090	**3**	9	10,000	150	0.9	1,200	0.9	2,500	3	0.45
3035-105	**3.5**	10.5	10,000	180	1.05	1,400	1.05	2,600	3.5	0.525
3040-120	**4**	12	10,000	200	1.2	1,600	1.2	2,700	4	0.6
3045-135	**4.5**	13.5	10,000	230	1.35	1,800	1.35	3,050	4.5	0.675
3050-150	**5**	15	10,000	250	1.5	2,000	1.5	3,400	5	0.75
3060-180	**6**	18	10,000	300	1.8	2,400	1.8	4,000	6	0.9
3070-210	**7**	21	8,600	300	2.1	2,400	2.1	4,000	7	1.05
3080-240	**8**	24	8,100	300	2.4	3,000	2.4	4,800	8	1.2
3090-270	**9**	27	6,700	275	2.7	2,400	2.7	4,000	9	1.35
3100-300	**10**	30	6,480	250	3	3,000	3	4,800	10	1.5
3110-330	**11**	33	5,500	225	3.3	2,400	3.3	4,000	11	1.65
3120-360	**12**	36	5,400	200	3.6	3,000	3.6	4,800	12	1.8
Milling Amount (mm)				a_p=0.3D		a_p=0.3D		a_p=1.0D a_e=0.15D		

Milling Conditions for AZS / DLC-AZS

WORK MATERIAL			A7075							
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Vertical		Slotting		Side Milling		
				Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
3010-030	**1**	3	10,000	50	0.3	400	0.3	750	1	0.15
3015-045	**1.5**	4.5	10,000	80	0.45	600	0.45	1,130	1.5	0.225
3020-060	**2**	6	10,000	100	0.6	800	0.6	1,500	2	0.3
3025-075	**2.5**	7.5	10,000	130	0.75	1,000	0.75	1,880	2.5	0.375
3030-090	**3**	9	10,000	150	0.9	1,200	0.9	2,250	3	0.45
3035-105	**3.5**	10.5	10,000	180	1.05	1,400	1.05	2,380	3.5	0.525
3040-120	**4**	12	10,000	200	1.2	1,600	1.2	2,500	4	0.6
3045-135	**4.5**	13.5	10,000	230	1.35	1,800	1.35	2,750	4.5	0.675
3050-150	**5**	15	9,600	250	1.5	2,000	1.5	3,000	5	0.75
3060-180	**6**	18	8,000	250	1.8	2,000	1.8	3,000	6	0.9
3070-210	**7**	21	6,900	200	2.1	2,000	2.1	3,000	7	1.05
3080-240	**8**	24	10,000	200	2.4	2,400	2.4	4,100	8	1.2
3090-270	**9**	27	5,300	200	2.7	2,000	2.7	3,000	9	1.35
3100-300	**10**	30	8,100	200	3	2,400	3	4,200	10	1.5
3110-330	**11**	33	4,400	200	3.3	2,000	3.3	3,000	11	1.65
3120-360	**12**	36	6,800	200	3.6	2,400	3.6	4,200	12	1.8
Milling Amount (mm)				a_p=0.3D		a_p=0.3D		a_p=1.0D a_e=0.15D		

Note:
- Recommend using a non-contact measuring device to avoid damaging the sharp bottom corner.
- Decrease both spindle speed and feed rate proportionally in case of chattering.
- These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Spindle rigidity should be considered when setting milling parameters, especially for Z-Axis drilling.
- When slotting, using Z-Axis drilling, the milling parameters should promote good chip evacuation.
- Reduce the milling amount when chips clog on the tool during Z-Axis drilling.
- Set axial depth (a_p) to 1/3 (a_p=0.25D) in the area closest to a vertical wall with more than 2D work depth.
- These are milling parameters under the work material is firmly fixed. Decrease spindle speed and feed rate according to the condition.
- Recommend water soluble coolant.

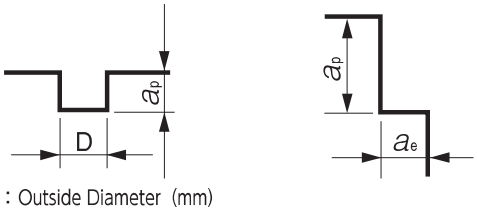

D : Outside Diameter (mm)

HLS4000



HARDMAX 4 Flute Long Neck Square End Mills

φ1～φ6

Super MG | HARD MAX | 30° | Flatland | Shank Dia 0/-0.005 | Back Taper Geometry | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	Hardened Steels ~55HRC	Hardened Steels ~60HRC	Hardened Steels ~65HRC	Hardened Steels ~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	○			○			○			○	○		

Features

Feature1 : Variable pitch


θ1＞θ2 : The unequal division reduces chattering and tip damage.

θ1+θ2=180° : Easy to measure diameter.




Feature2 : Back taper geometry


Back taper geometry reduces cutting resistance.



Feature3 : HARDMAX coating with high level of heat resistance, durability and lubrication.
Feature4 : Improved new 4 flute design offers improved chip evacuation and achieves high feed and milling precision.

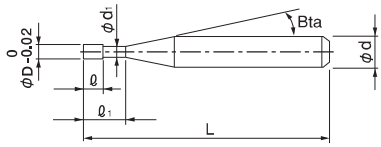

The shank taper angle shown is not an exact value.



Refer to page B-1 for 2 flute HLS.

Total 84 models

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30'	1°	1° 30'	2°	3°
HLS 4010-040	1	4	1	0.95	16°	50	4	—	4.66	4.93	5.15	5.34	5.74
HLS 4010-060		6				50	4	—	6.78	7.10	7.36	7.62	8.19
HLS 4010-080		8				50	4	—	8.88	9.25	9.56	9.90	10.64
HLS 4010-100		10				50	4	—	10.97	11.38	11.76	12.17	13.09
HLS 4010-120		12				50	4	—	13.06	13.51	13.97	14.45	15.53
HLS 4010-160		16				60	4	—	17.20	17.77	18.37	19.01	20.43
HLS 4012-060	1.2	6	1.2	1.14	16°	50	4	—	6.18	6.38	6.60	6.83	7.34
HLS 4012-080		8				50	4	—	8.24	8.51	8.80	9.11	9.79
HLS 4012-100		10				50	4	—	10.31	10.64	11.00	11.38	12.24
HLS 4012-120		12				50	4	—	12.37	12.77	13.20	13.66	14.68
HLS 4012-160		16				60	4	—	16.49	17.03	17.60	18.22	19.58

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
HLS 4014-060	1.4	6	1.4	1.34	16°	50	4	—	6.18	6.38	6.60	6.83	7.34
HLS 4014-080		8				50	4	—	8.24	8.51	8.80	9.11	9.79
HLS 4014-100		10				50	4	—	10.31	10.64	11.00	11.38	12.24
HLS 4014-120		12				50	4	—	12.37	12.77	13.20	13.66	14.68
HLS 4014-140		14				60	4	—	14.43	14.90	15.40	15.94	17.13
HLS 4014-160		16				60	4	—	16.49	17.03	17.60	18.22	19.58
HLS 4014-220		22				60	4	—	22.68	23.42	24.21	25.05	No Interference
HLS 4015-060	1.5	6	1.5	1.44	16°	50	4	—	6.18	6.38	6.60	6.83	7.34
HLS 4015-080		8				50	4	—	8.24	8.51	8.80	9.11	9.79
HLS 4015-100		10				50	4	—	10.31	10.64	11.00	11.38	12.24
HLS 4015-120		12				50	4	—	12.37	12.77	13.20	13.66	14.68
HLS 4015-140		14				60	4	—	14.43	14.90	15.40	15.94	17.13
HLS 4015-160		16				60	4	—	16.49	17.03	17.60	18.22	19.58
HLS 4015-180		18				60	4	—	18.56	19.16	19.80	20.49	22.03
HLS 4015-200		20				60	4	—	20.62	21.29	22.00	22.77	No Interference
HLS 4016-060	1.6	6	1.6	1.51	16°	50	4	—	6.22	6.42	6.64	6.87	7.39
HLS 4016-080		8				50	4	—	8.28	8.55	8.84	9.15	9.83
HLS 4016-100		10				50	4	—	10.34	10.68	11.04	11.42	12.28
HLS 4016-120		12				50	4	—	12.40	12.81	13.24	13.70	14.73
HLS 4016-140		14				60	4	—	14.47	14.94	15.44	15.98	17.17
HLS 4016-160		16				60	4	—	16.53	17.07	17.64	18.26	19.62
HLS 4016-180		18				60	4	—	18.59	19.20	19.84	20.53	22.07
HLS 4016-200		20				60	4	—	20.66	21.33	22.04	22.81	No Interference
HLS 4016-260		26				60	4	—	26.84	27.72	28.65	29.64	No Interference
HLS 4018-060	1.8	6	1.8	1.71	16°	50	4	—	6.22	6.42	6.64	6.87	7.39
HLS 4018-080		8				50	4	—	8.28	8.55	8.84	9.15	9.83
HLS 4018-100		10				50	4	—	10.34	10.68	11.04	11.42	12.28
HLS 4018-120		12				50	4	—	12.40	12.81	13.24	13.70	14.73
HLS 4018-140		14				60	4	—	14.47	14.94	15.44	15.98	17.17
HLS 4018-160		16				60	4	—	16.53	17.07	17.64	18.26	19.62
HLS 4018-180		18				60	4	—	18.59	19.20	19.84	20.53	No Interference
HLS 4018-200		20				60	4	—	20.66	21.33	22.04	22.81	No Interference
HLS 4018-250		25				70	4	—	25.81	26.65	27.55	28.50	No Interference
HLS 4020-060	2	6	2	1.91	16°	50	4	—	6.22	6.42	6.64	6.87	7.39
HLS 4020-080		8				50	4	—	8.28	8.55	8.84	9.15	9.83
HLS 4020-100		10				50	4	—	10.34	10.68	11.04	11.42	12.28
HLS 4020-120		12				50	4	—	12.40	12.81	13.24	13.70	14.73
HLS 4020-140		14				60	4	—	14.47	14.94	15.44	15.98	17.17
HLS 4020-160		16				60	4	—	16.53	17.07	17.64	18.26	No Interference
HLS 4020-180		18				60	4	—	18.59	19.20	19.84	20.53	No Interference
HLS 4020-200		20				60	4	—	20.66	21.33	22.04	22.81	No Interference
HLS 4020-250		25				70	4	—	25.81	26.65	27.55	28.50	No Interference
HLS 4020-300		30				70	4	—	30.97	31.97	33.05	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1° 30'	2°	3°
HLS 4025-080	2.5	8	2.5	2.41	16°	50	4	—	8.28	8.55	8.84	9.15	9.83
HLS 4025-120		12				50	4	—	12.40	12.81	13.24	13.70	No Interference
HLS 4025-160		16				60	4	—	16.53	17.07	17.64	18.26	No Interference
HLS 4025-200		20				60	4	—	20.66	21.33	22.04	No Interference	No Interference
HLS 4025-250		25				70	4	—	25.81	26.65	27.55	No Interference	No Interference
HLS 4025-300		30				70	4	—	30.97	31.97	No Interference	No Interference	No Interference
HLS 4030-080	3	8	3	2.92	16°	50	6	—	8.28	8.55	8.84	9.15	9.83
HLS 4030-120		12				50	6	—	12.40	12.81	13.24	13.70	14.73
HLS 4030-160		16				60	6	—	16.53	17.07	17.64	18.26	19.62
HLS 4030-200		20				60	6	—	20.66	21.33	22.04	22.81	24.52
HLS 4030-250		25				70	6	—	25.81	26.65	27.55	28.50	No Interference
HLS 4030-300		30				70	6	—	30.97	31.97	33.05	34.20	No Interference
HLS 4030-400		40				80	6	—	41.28	42.62	44.05	No Interference	No Interference
HLS 4040-120	4	12	4	3.82	16°	50	6	—	12.58	12.99	13.43	13.90	14.94
HLS 4040-160		16				60	6	—	16.71	17.25	17.83	18.45	No Interference
HLS 4040-200		20				60	6	—	20.84	21.51	22.24	23.01	No Interference
HLS 4040-250		25				70	6	—	25.99	26.84	27.74	28.70	No Interference
HLS 4040-300		30				70	6	—	31.15	32.16	33.24	No Interference	No Interference
HLS 4040-350		35				80	6	—	36.31	37.48	No Interference	No Interference	No Interference
HLS 4040-400		40				90	6	—	41.46	42.81	No Interference	No Interference	No Interference
HLS 4040-450		45				90	6	—	46.62	48.13	No Interference	No Interference	No Interference
HLS 4040-500		50				100	6	—	51.78	53.46	No Interference	No Interference	No Interference
HLS 4050-160	5	16	5	4.82	16°	60	6	—	16.78	17.25	18.02	No Interference	No Interference
HLS 4050-250		25				70	6	—	25.99	26.84	No Interference	No Interference	No Interference
HLS 4050-350		35				80	6	—	36.31	No Interference	No Interference	No Interference	No Interference
HLS 4050-500		50				110	6	—	51.78	No Interference	No Interference	No Interference	No Interference
HLS 4060-200	6	20	6	5.82	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HLS 4060-300		30				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HLS 4060-400		40				100	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HLS 4060-500		50				110	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Circle Pocket Milling Example


SKD11 (60HRC)

Tool: HLS φ1.5 × EL10 mm

Spindle Speed	7,000 min^{-1}
Feed Rate	230 mm/min
a_p	0.025 mm
a_e	1.2 mm
Coolant	Air blow (Nozzle)
Overhang Length	18 mm
Pocket Size	φ7 × 2 mm
Cycle Time	17 min



SKD11 (60HRC)

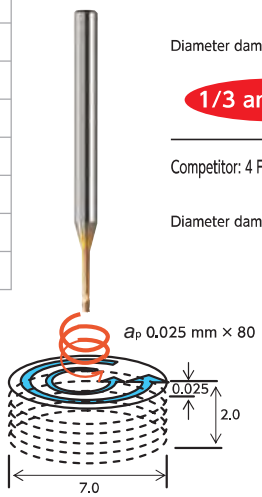

HLS 4 Flutes φ1.5 × 10

Diameter damage: 0.091 mm

1/3 and under!





Competitor: 4 Flutes φ1.5 × 10

Diameter damage: 0.296 mm





Milling Conditions for HLS (4 Flutes)


WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)				HARDENED STEELS SKD / SKH (55~60HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010	1	4	24,700	1,180	0.04	0.351	21,000	950	0.036	0.332	21,500	660	0.028	0.312	17,200	470	0.02	0.293	10,100	240	0.01	0.195
		6	22,800	1,060	0.024	0.104	19,400	840	0.021	0.099	16,400	590	0.016	0.093	13,100	420	0.012	0.087	9,400	210	0.007	0.058
		8	20,900	950	0.021	0.043	17,800	740	0.018	0.041	14,600	500	0.014	0.038	11,700	360	0.01	0.036	8,700	190	0.006	0.024
		10	19,100	840	0.018	0.023	16,200	630	0.015	0.022	13,000	450	0.013	0.021	10,400	320	0.009	0.02	8,100	160	0.005	0.013
		12	17,300	730	0.015	0.013	14,700	530	0.013	0.012	11,300	380	0.011	0.011	9,000	270	0.008	0.011	7,400	130	0.004	0.007
		16	13,500	500	0.009	0.005	11,500	320	0.008	0.005	11,000	220	0.007	0.005	8,800	160	0.005	0.005	6,000	80	0.003	0.003
4012	1.2	6	21,400	1,290	0.04	0.216	18,200	1,020	0.034	0.204	15,400	710	0.027	0.192	12,300	510	0.019	0.18	8,900	260	0.011	0.12
		8	19,700	1,160	0.035	0.092	16,700	890	0.03	0.087	13,800	620	0.024	0.082	11,000	440	0.017	0.077	8,200	230	0.01	0.051
		10	17,900	1,020	0.03	0.047	15,200	770	0.026	0.044	12,100	530	0.021	0.042	9,700	380	0.015	0.039	7,600	200	0.009	0.026
		12	16,200	880	0.025	0.027	13,800	640	0.021	0.026	10,500	450	0.018	0.024	8,400	320	0.013	0.023	6,900	160	0.007	0.015
		16	12,600	610	0.015	0.011	10,700	330	0.013	0.01	9,900	270	0.007	0.01	7,900	190	0.005	0.009	5,600	100	0.005	0.006
4014	1.4	6	20,200	1,440	0.068	0.4	17,200	1,140	0.058	0.377	14,500	800	0.046	0.355	11,600	570	0.033	0.333	8,400	290	0.019	0.222
		8	19,000	1,290	0.06	0.169	16,200	900	0.051	0.16	13,000	690	0.041	0.15	10,400	490	0.029	0.141	7,800	260	0.017	0.094
		10	17,000	1,140	0.051	0.086	14,500	860	0.043	0.082	11,500	600	0.036	0.077	9,200	430	0.026	0.072	7,100	220	0.014	0.048
		12	15,300	990	0.043	0.05	13,000	710	0.036	0.048	10,000	500	0.03	0.045	8,000	360	0.022	0.042	6,500	180	0.012	0.028
		14	13,700	840	0.034	0.032	11,600	570	0.029	0.031	9,800	410	0.025	0.029	7,800	290	0.018	0.027	5,900	140	0.01	0.018
		16	11,900	680	0.026	0.022	10,100	350	0.022	0.02	9,100	310	0.02	0.019	7,300	220	0.014	0.018	5,300	110	0.008	0.012
		22	9,000	340	0.013	0.009	6,000	230	0.011	0.009	7,800	170	0.01	0.008	6,200	120	0.007	0.008	3,500	50	0.001	0.005
4015	1.5	6	19,800	1,520	0.08	0.527	16,800	1,200	0.068	0.498	14,300	840	0.054	0.469	11,400	600	0.039	0.44	8,200	310	0.022	0.293
		8	18,200	1,360	0.07	0.223	15,500	930	0.06	0.211	12,800	730	0.048	0.198	10,200	520	0.034	0.186	7,600	270	0.02	0.124
		10	16,600	1,200	0.06	0.113	14,100	900	0.051	0.107	11,300	630	0.042	0.101	9,000	450	0.03	0.095	7,000	230	0.017	0.063
		12	15,000	1,040	0.05	0.067	12,800	720	0.043	0.063	9,800	530	0.036	0.059	7,800	380	0.026	0.056	6,400	190	0.014	0.037
		14	13,400	880	0.04	0.041	11,400	600	0.034	0.039	9,500	420	0.03	0.037	7,600	300	0.021	0.035	5,800	150	0.012	0.023
		16	11,700	720	0.03	0.027	9,900	370	0.026	0.026	8,900	320	0.024	0.024	7,100	230	0.017	0.023	5,200	120	0.009	0.015
		18	10,100	560	0.02	0.02	9,600	310	0.017	0.019	8,400	240	0.017	0.018	6,700	170	0.012	0.017	4,600	80	0.007	0.011
		20	8,500	400	0.01	0.014	9,000	280	0.011	0.014	7,900	210	0.011	0.013	6,300	150	0.008	0.012	4,000	40	0.004	0.008
4016	1.6	6	19,200	1,670	0.08	0.682	15,100	1,320	0.068	0.644	13,900	920	0.054	0.606	11,100	660	0.039	0.569	8,000	340	0.022	0.379
		8	17,000	1,500	0.07	0.288	15,000	950	0.06	0.272	12,400	800	0.048	0.256	9,900	570	0.034	0.24	7,400	300	0.02	0.16
		10	16,100	1,320	0.06	0.148	12,700	930	0.051	0.139	10,900	700	0.042	0.131	8,700	500	0.03	0.123	6,800	250	0.017	0.082
		12	14,500	1,140	0.05	0.085	11,500	750	0.043	0.08	9,500	590	0.036	0.075	7,600	420	0.026	0.071	6,200	210	0.014	0.047
		14	13,000	970	0.04	0.054	10,300	660	0.034	0.051	9,100	460	0.03	0.048	7,300	330	0.021	0.045	5,600	170	0.012	0.03
		16	11,400	790	0.03	0.036	9,500	380	0.02	0.034	8,500	350	0.024	0.032	6,800	250	0.017	0.03	5,000	130	0.009	0.02
		18	9,800	620	0.02	0.025	9,300	340	0.017	0.024	8,000	250	0.017	0.022	6,400	180	0.012	0.021	4,500	80	0.007	0.014
		20	8,200	440	0.011	0.018	8,700	300	0.011	0.017	7,600	220	0.011	0.016	6,100	160	0.008	0.015	3,900	40	0.004	0.01
		26	8,000	300	0.007	0.009	7,400	210	0.006	0.009	6,600	170	0.006	0.008	5,300	120	0.004	0.008	2,400	20	0.002	0.005
4018	1.8	6	18,500	1,820	0.08	1.094	14,900	1,440	0.068	1.034	13,300	1,010	0.054	0.973	10,600	720	0.039	0.912	7,600	370	0.022	0.608
		8	16,900	1,630	0.07	0.461	14,600	980	0.06	0.435	11,900	870	0.048	0.41	9,500	620	0.034	0.384	7,100	320	0.02	0.256
		10	15,400	1,440	0.06	0.236	12,500	950	0.051	0.223	10,500	760	0.042	0.21	8,400	540	0.03	0.197	6,500	280	0.017	0.131
		12	13,900	1,250	0.05	0.137	11,000	770	0.043	0.129	9,100	640	0.036	0.122	7,300	460	0.026	0.114	6,000	230	0.014	0.076
		14	12,400	1,060	0.04	0.086	9,500	720	0.034	0.082	8,400	500	0.03	0.077	6,700	360	0.021	0.072	5,400	180	0.012	0.048
		16	10,900	860	0.03	0.058	9,000	450	0.026	0.054	7,900	390	0.024	0.051	6,300	280	0.017	0.048	4,800	140	0.009	0.032
		18	9,400	670	0.02	0.041	8,700	380	0.017	0.039	7,400	270	0.017	0.037	5,900	190	0.012	0.035	4,300	100	0.007	0.023
		20	7,900	480	0.015	0.029	8,400	340	0.013	0.027	7,000	240	0.011	0.026	5,600	170	0.008	0.024	3,700	50	0.004	0.016
		25	7,800	350	0.01	0.014	7,300	260	0.008	0.014	6,300	200	0.007	0.013	5,000	140	0.005	0.012	2,400	20	0.002	0.008

Milling Conditions for HLS (4 Flutes)


WORK MATERIAL			CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)				HARDENED STEELS SKD / SKH (55~60HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020	2	6	17,900	1,980	0.08	1.667	14,500	1,560	0.068	1.574	12,900	1,090	0.054	1.482	10,300	780	0.039	1.389	7,400	400	0.022	0.926
		8	16,400	1,770	0.07	0.704	14,200	1,000	0.06	0.665	11,500	950	0.048	0.626	9,200	680	0.034	0.587	6,800	350	0.02	0.391
		10	14,900	1,560	0.06	0.36	12,000	980	0.051	0.34	10,100	830	0.042	0.32	8,100	590	0.03	0.3	6,300	300	0.017	0.2
		12	13,500	1,350	0.05	0.209	10,500	790	0.043	0.197	8,800	690	0.036	0.186	7,000	490	0.026	0.174	5,800	250	0.014	0.116
		14	12,000	1,140	0.04	0.131	9,400	780	0.034	0.124	8,300	550	0.03	0.117	6,600	390	0.021	0.11	5,200	200	0.012	0.073
		16	10,600	940	0.03	0.088	9,000	500	0.026	0.083	7,600	420	0.024	0.078	6,100	300	0.017	0.074	4,700	160	0.009	0.049
		18	9,100	730	0.022	0.061	8,700	420	0.02	0.058	7,300	290	0.017	0.054	5,800	210	0.012	0.051	4,100	100	0.007	0.034
		20	7,700	520	0.018	0.045	8,100	380	0.016	0.043	6,900	270	0.013	0.04	5,500	190	0.009	0.038	3,600	50	0.004	0.025
		25	7,500	390	0.012	0.023	7,100	290	0.011	0.022	6,100	220	0.008	0.021	4,900	160	0.006	0.02	2,400	20	0.002	0.013
		30	7,000	310	0.008	0.013	6,300	230	0.007	0.012	5,600	180	0.006	0.011	4,500	130	0.004	0.011	2,400	10	0.001	0.007
4025	2.5	8	Recommend 2 flute HLS or C-CER.				12,800	1,020	0.081	1.622	9,600	980	0.055	1.526	7,700	700	0.039	1.431	6,200	370	0.023	0.954
		12					10,000	810	0.056	0.481	7,900	700	0.042	0.453	6,300	500	0.03	0.425	5,600	350	0.018	0.283
		16					8,400	590	0.04	0.202	6,900	450	0.031	0.19	5,500	320	0.022	0.179	4,400	320	0.013	0.119
		20					7,300	490	0.03	0.104	6,500	420	0.024	0.098	5,200	300	0.017	0.092	3,500	290	0.01	0.061
		25					6,400	390	0.019	0.053	6,000	380	0.015	0.05	4,800	270	0.011	0.047	2,400	250	0.005	0.031
		30					5,700	320	0.012	0.031	4,400	350	0.01	0.029	3,500	250	0.007	0.027	2,300	220	0.003	0.018
4030	3	8					10,900	1,080	0.093	2.361	7,400	1,010	0.073	2.222	5,900	720	0.052	2.084	5,900	440	0.031	1.389
		12					8,700	830	0.073	0.996	7,000	730	0.057	0.938	5,600	520	0.041	0.879	5,000	400	0.024	0.586
		16					7,400	670	0.058	0.42	6,600	520	0.045	0.395	5,300	370	0.032	0.371	4,000	370	0.019	0.247
		20					6,600	560	0.045	0.216	6,100	490	0.035	0.203	4,900	350	0.025	0.191	3,400	340	0.015	0.127
		25					5,800	460	0.032	0.111	5,600	450	0.025	0.14	4,500	320	0.018	0.098	2,400	290	0.011	0.065
		30					5,200	390	0.023	0.065	4,300	410	0.02	0.061	3,400	290	0.014	0.057	2,300	250	0.009	0.038
		40					4,500	280	0.012	0.027	4,100	320	0.014	0.026	3,300	230	0.01	0.024	2,000	170	0.006	0.016
4040	4	12					7,100	950	0.101	3.148	5,100	740	0.101	2.963	4,100	530	0.072	2.778	4,100	460	0.043	1.852
		16					6,000	770	0.084	1.328	4,900	600	0.092	1.25	3,900	430	0.066	1.172	3,700	420	0.04	0.781
		20					5,200	650	0.069	0.68	4,500	560	0.084	0.64	3,600	400	0.06	0.6	3,300	380	0.036	0.4
		25					4,600	540	0.055	0.349	4,100	520	0.076	0.328	3,300	370	0.054	0.308	2,400	340	0.032	0.205
		30					4,100	460	0.043	0.202	3,800	460	0.059	0.19	3,000	330	0.042	0.179	2,300	290	0.027	0.119
		35					3,800	400	0.034	0.128	3,400	420	0.05	0.12	2,700	300	0.036	0.113	2,200	240	0.023	0.075
		40					3,500	350	0.027	0.085	3,000	380	0.042	0.08	2,400	270	0.03	0.075	1,900	190	0.018	0.05
		45					3,300	300	0.021	0.06	2,600	320	0.025	0.056	2,100	230	0.018	0.053	1,800	140	0.014	0.035
		50					3,100	270	0.016	0.044	2,300	280	0.017	0.042	1,800	200	0.012	0.039	1,700	100	0.009	0.026
4050	5	16					5,100	860	0.128	3.242	4,100	670	0.108	3.051	3,300	480	0.077	2.861	3,300	480	0.048	1.907
		25					3,800	600	0.102	0.85	3,600	570	0.088	0.8	2,900	410	0.063	0.75	2,400	380	0.037	0.5
		35					3,100	450	0.077	0.309	2,900	480	0.059	0.291	2,300	340	0.042	0.273	2,000	270	0.026	0.182
		50					2,400	300	0.034	0.107	2,000	320	0.022	0.101	1,600	230	0.016	0.095	1,500	110	0.01	0.063
4060	6	20					3,800	780	0.17	3.443	3,300	700	0.139	3.24	2,600	500	0.099	3.038	3,300	610	0.06	2.025
		30					2,800	540	0.128	1.02	2,800	590	0.101	0.96	2,200	420	0.072	0.9	2,200	360	0.045	0.6
		40					2,300	410	0.085	0.43	2,100	460	0.063	0.405	1,700	330	0.045	0.38	1,700	240	0.03	0.253
		50					1,900	310	0.049	0.221	1,600	350	0.038	0.208	1,300	250	0.027	0.195	1,300	120	0.015	0.13

Milling Conditions for HLS (4 Flutes)

Slotting



Side Milling



D : Outside Diameter (mm)

Note:
- Recommend using a non-contact measuring device to avoid damaging the precision tip point.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Every coolant offers stable milling.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.

CXS



UTCOAT 4 Flute High Efficiency Long Neck Square End Mills with Variable Pitch and Helix

φ1～φ12


Super MG | UT COAT | 37°~40° | Flatland | Shank Dia 0/-0.005 | Variable Pitch | Variable Helix

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○			●			○	○		

Features

Variable Pitch & Helix design minimizes vibration and chattering.
Selected high toughness and chip resistant carbide material.
Optimized flute design offers outstanding high efficiency milling and fine finishing.
Low friction coating resulting in excellent chip evacuation and resistance to wear.

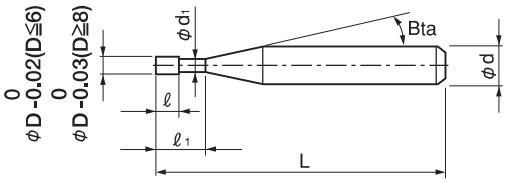

The shank taper angle shown is not an exact value.

Total 33 models

Unit (mm)

Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30'	1°	1°30'	2°	3°
CXS 4010-030	1	3	1.5	0.96	16°	50	4	—	3.25	3.35	3.47	3.59	3.86
CXS 4010-050		5				70	4	—	5.31	5.48	5.67	5.87	6.31
CXS 4010-060		6				70	4	—	6.34	6.55	6.77	7.00	7.53
CXS 4015-045	1.5	4.5	2.25	1.46	16°	50	4	—	4.66	4.81	4.97	5.15	5.53
CXS 4015-070		7				70	4	—	7.23	7.47	7.72	7.99	8.59
CXS 4015-085		8.5				70	4	—	8.78	9.07	9.37	9.70	10.43
CXS 4020-060	2	6	3	1.94	16°	50	4	—	6.24	6.44	6.66	6.89	7.41
CXS 4020-090		9				70	4	—	9.33	9.64	9.96	10.31	11.08
CXS 4020-110		11				70	4	—	11.40	11.77	12.16	12.59	13.53
CXS 4025-075	2.5	7.5	3.75	2.44	16°	50	4	—	7.79	8.04	8.31	8.60	9.25
CXS 4025-110		11				70	4	—	11.40	11.77	12.16	12.59	13.53
CXS 4025-135		13.5				70	4	—	13.97	14.43	14.91	15.43	No Interference

Next Page ➡

Unit (mm)


Model Number	Outside Diameter φD	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30'	1°	1°30'	2°	3°
CXS 4030-090	3	9	4.5	2.95	16°	50	6	—	9.34	9.64	9.97	10.31	11.09
CXS 4030-130		13				70	6	—	13.46	13.90	14.37	14.87	15.98
CXS 4030-160		16				70	6	—	16.56	17.10	17.67	18.28	19.65
CXS 4040-120	4	12	6	3.86	16°	50	6	—	12.61	13.02	13.46	13.92	14.97
CXS 4040-170		17				70	6	—	17.76	18.34	18.96	19.62	No Interference
CXS 4040-210		21				70	6	—	21.89	22.60	23.36	24.17	No Interference
CXS 4050-150	5	15	7.5	4.86	16°	50	6	—	15.70	16.21	16.76	No Interference	No Interference
CXS 4050-210		21				70	6	—	21.89	22.60	No Interference	No Interference	No Interference
CXS 4050-260		26				70	6	—	27.05	27.93	No Interference	No Interference	No Interference
CXS 4060-180	6	18	9	5.86	—	50	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4060-260		26				70	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4060-320		32				70	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4080-240	8	24	12	7.82	—	60	8	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4080-340		34				90	8	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4080-420		42				90	8	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4100-300	10	30	15	9.82	—	70	10	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4100-420		42				100	10	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4100-520		52				100	10	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4120-360	12	36	18	11.82	—	90	12	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4120-520		52				110	12	—	No Interference	No Interference	No Interference	No Interference	No Interference
CXS 4120-620		62				110	12	—	No Interference	No Interference	No Interference	No Interference	No Interference

4 Flutes Square Variable Pitch and Helix 3 series

Features	Model Number	Appearance	Coating	Size	Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels ~50 HRC	~55 HRC	~60 HRC	~65 HRC	~70 HRC	Aluminum Alloys	Titanium Alloys	Page
High Efficiency	CXES All flute		UT COAT	φ1~φ16	●	●	●	●	○				○	○	A-77
High Efficiency	CXS Long Neck		UT COAT	φ1~φ12	●	●	●	●	○					○	B-57
High Efficiency for SUS	CESUS All flute		UTS COAT	φ6~φ12	●	★	○							○	A-89


(★ Highly Recommended ● Recommended ○ Suggested)

Variable pitch



$\alpha_1 \neq \alpha_2$

Variable helix



$\beta_1 \neq \beta_2$

Minimizes chattering

Stable milling under highly efficient conditions

Milling Conditions for CXS


Side Milling

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-030	**1**	3	18,000	780	1	0.3	18,000	600	1	0.3	14,500	400	1	0.3
4010-050		5	18,000	780	1	0.23	15,330	520	1	0.23	12,570	350	1	0.23
4010-060		6	18,000	780	1	0.2	14,000	480	1	0.2	11,600	320	1	0.2
4015-045	**1.5**	4.5	13,500	970	1.5	0.45	13,500	750	1.5	0.45	13,300	420	1.5	0.45
4015-070		7	13,500	970	1.5	0.36	11,810	660	1.5	0.36	11,610	360	1.5	0.36
4015-085		8.5	13,500	970	1.5	0.3	10,800	600	1.5	0.3	10,600	330	1.5	0.3
4020-060	**2**	6	11,000	1,170	2	0.6	11,000	900	2	0.6	12,200	450	2	0.6
4020-090		9	11,000	1,170	2	0.48	9,680	790	2	0.48	10,730	400	2	0.48
4020-110		11	11,000	1,170	2	0.4	8,800	720	2	0.4	9,750	360	2	0.4
4025-075	**2.5**	7.5	9,500	1,180	2.5	0.75	9,500	900	2.5	0.75	11,000	550	2.5	0.75
4025-110		11	9,500	1,180	2.5	0.6	8,390	800	2.5	0.6	9,720	490	2.5	0.6
4025-135		13.5	9,500	1,180	2.5	0.5	7,600	720	2.5	0.5	8,800	440	2.5	0.5
4030-090	**3**	9	8,500	1,200	3	0.9	8,500	900	3	0.9	10,000	640	3	0.9
4030-130		13	8,500	1,200	3	0.73	7,530	800	3	0.73	8,860	570	3	0.73
4030-160		16	8,500	1,200	3	0.6	6,800	720	3	0.6	8,000	510	3	0.6
4040-120	**4**	12	7,200	1,350	4	1.2	6,700	1,000	4	1.2	7,500	730	4	1.2
4040-170		17	7,200	1,350	4	0.98	5,920	890	4	0.98	6,670	650	4	0.98
4040-210		21	7,200	1,350	4	0.8	5,300	800	4	0.8	6,000	580	4	0.8
4050-150	**5**	15	6,000	1,500	5	1.5	5,400	1,100	5	1.5	5,400	810	5	1.5
4050-210		21	6,000	1,500	5	1.23	4,800	980	5	1.23	4,800	720	5	1.23
4050-260		26	6,000	1,500	5	1	4,300	880	5	1	4,300	640	5	1
4060-180	**6**	18	5,000	1,600	6	1.8	4,500	1,200	6	1.8	4,500	810	6	1.8
4060-260		26	5,000	1,600	6	1.46	3,990	1,060	6	1.46	3,990	710	6	1.46
4060-320		32	5,000	1,600	6	1.2	3,600	960	6	1.2	3,600	640	6	1.2
4080-240	**8**	24	3,000	1,300	8	2.4	2,900	1,050	8	2.4	2,900	720	8	2.4
4080-340		34	3,000	1,300	8	1.96	2,570	930	8	1.96	2,570	640	8	1.96
4080-420		42	3,000	1,300	8	1.6	2,300	840	8	1.6	2,300	570	8	1.6
4100-300	**10**	30	1,600	1,000	10	3	1,500	900	10	3	1,500	580	10	3
4100-420		42	1,600	1,000	10	2.45	1,340	800	10	2.45	1,340	510	10	2.45
4100-520		52	1,600	1,000	10	2	1,200	720	10	2	1,200	460	10	2
4120-360	**12**	36	1,200	800	12	3.6	1,200	750	12	3.6	1,200	540	12	3.6
4120-520		52	1,200	800	12	2.86	1,050	660	12	2.86	1,050	470	12	2.86
4120-620		62	1,200	800	12	2.4	950	600	12	2.4	950	430	12	2.4

Milling Conditions for CXS

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-030	1	3	12,900	400	1	0.3	12,900	180	1	0.15
4010-050		5	11,170	350	1	0.23	12,900	180	1	0.12
4010-060		6	10,300	320	1	0.2	12,900	180	1	0.1
4015-045	1.5	4.5	10,500	500	1.5	0.45	9,500	280	1.5	0.225
4015-070		7	9,190	440	1.5	0.36	9,500	280	1.5	0.18
4015-085		8.5	8,400	400	1.5	0.3	9,500	280	1.5	0.15
4020-060	2	6	9,350	560	2	0.6	8,200	390	2	0.3
4020-090		9	8,210	490	2	0.48	8,200	390	2	0.24
4020-110		11	7,450	440	2	0.4	8,200	390	2	0.2
4025-075	2.5	7.5	8,300	610	2.5	0.75	7,800	510	2.5	0.375
4025-110		11	7,340	530	2.5	0.6	7,800	510	2.5	0.3
4025-135		13.5	6,650	480	2.5	0.5	7,800	510	2.5	0.25
4030-090	3	9	7,400	630	3	0.9	7,400	630	3	0.45
4030-130		13	6,540	560	3	0.73	7,400	630	3	0.36
4030-160		16	5,900	500	3	0.6	7,400	630	3	0.3
4040-120	4	12	5,900	650	4	1.2	5,900	650	4	0.6
4040-170		17	5,230	580	4	0.98	5,900	650	4	0.49
4040-210		21	4,700	520	4	0.8	5,900	650	4	0.4
4050-150	5	15	4,800	680	5	1.5	4,800	670	5	0.75
4050-210		21	4,250	600	5	1.23	4,800	670	5	0.61
4050-260		26	3,800	540	5	1	4,800	670	5	0.5
4060-180	6	18	4,000	680	6	1.8	4,000	680	6	0.9
4060-260		26	3,540	600	6	1.46	4,000	680	6	0.73
4060-320		32	3,200	540	6	1.2	4,000	680	6	0.6
4080-240	8	24	2,500	600	8	2.4	2,500	630	8	1.2
4080-340		34	2,220	530	8	1.96	2,500	630	8	0.98
4080-420		42	2,000	480	8	1.6	2,500	630	8	0.8
4100-300	10	30	1,500	430	10	3	1,500	570	10	1.5
4100-420		42	1,340	380	10	2.45	1,500	570	10	1.23
4100-520		52	1,200	340	10	2	1,500	570	10	1
4120-360	12	36	1,000	320	12	3.6	1,200	530	12	1.8
4120-520		52	880	280	12	2.86	1,200	500	12	1.43
4120-620		62	800	250	12	2.4	1,200	480	12	1.2

Side Milling



Milling Conditions for CXS

Slotting


WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4010-030	**1**	3	18,000	300	1	18,000	300	1	14,500	280	0.5
4010-050		5	18,000	300	0.67	15,330	260	0.67	12,570	240	0.37
4010-060		6	18,000	300	0.5	14,000	240	0.5	11,600	220	0.3
4015-045	**1.5**	4.5	13,500	450	1.5	13,500	400	1.5	13,300	300	0.75
4015-070		7	13,500	450	1.03	11,810	350	1.03	11,610	260	0.56
4015-085		8.5	13,500	450	0.75	10,800	320	0.75	10,600	240	0.45
4020-060	**2**	6	11,000	600	2	11,000	400	2	12,200	320	1
4020-090		9	11,000	600	1.4	9,680	350	1.4	10,730	280	0.76
4020-110		11	11,000	600	1	8,800	320	1	9,750	250	0.6
4025-075	**2.5**	7.5	9,500	600	2.5	9,500	400	2.5	11,000	340	1.25
4025-110		11	9,500	600	1.77	8,390	350	1.77	9,720	300	0.96
4025-135		13.5	9,500	600	1.25	7,600	320	1.25	8,800	270	0.75
4030-090	**3**	9	8,500	600	3	8,500	400	3	10,000	360	1.5
4030-130		13	8,500	600	2.57	7,530	350	2.14	8,860	310	1.16
4030-160		16	8,500	600	2.25	6,800	320	1.5	8,000	280	0.9
4040-120	**4**	12	7,200	650	4	6,700	450	4	7,500	400	2
4040-170		17	7,200	650	3.44	5,920	400	2.89	6,670	360	1.56
4040-210		21	7,200	650	3	5,300	360	2	6,000	320	1.2
4050-150	**5**	15	6,000	700	5	5,400	500	5	5,400	460	2.5
4050-210		21	6,000	700	4.32	4,800	450	3.64	4,800	410	1.95
4050-260		26	6,000	700	3.75	4,300	400	2.5	4,300	360	1.5
4060-180	**6**	18	5,000	700	6	4,500	500	6	4,500	460	3
4060-260		26	5,000	700	5.14	3,990	440	4.29	3,990	400	2.31
4060-320		32	5,000	700	4.5	3,600	400	3	3,600	360	1.8
4080-240	**8**	24	3,000	500	8	2,900	360	8	2,900	360	4
4080-340		34	3,000	500	6.89	2,570	320	5.78	2,570	320	3.11
4080-420		42	3,000	500	6	2,300	280	4	2,300	280	2.4
4100-300	**10**	30	1,600	380	10	1,500	270	10	1,500	220	5
4100-420		42	1,600	380	8.64	1,340	240	7.27	1,340	190	3.91
4100-520		52	1,600	380	7.5	1,200	210	5	1,200	170	3
4120-360	**12**	36	1,200	300	12	1,200	210	12	1,200	180	6
4120-520		52	1,200	300	10.15	1,050	180	8.31	1,050	160	4.52
4120-620		62	1,200	300	9	950	160	6	950	140	3.6

Milling Conditions for CXS

WORK MATERIAL			PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4010-030	**1**	3	12,900	170	1	12,900	60	0.25
4010-050		5	11,170	140	0.67	N/A	N/A	N/A
4010-060		6	10,300	130	0.5	N/A	N/A	N/A
4015-045	**1.5**	4.5	10,500	230	1.5	9,500	120	0.375
4015-070		7	9,190	200	1.03	N/A	N/A	N/A
4015-085		8.5	8,400	180	0.75	N/A	N/A	N/A
4020-060	**2**	6	9,350	280	2	8,200	180	0.5
4020-090		9	8,210	240	1.4	N/A	N/A	N/A
4020-110		11	7,450	220	1	N/A	N/A	N/A
4025-075	**2.5**	7.5	8,300	300	2.5	7,800	270	0.625
4025-110		11	7,340	270	1.77	N/A	N/A	N/A
4025-135		13.5	6,650	240	1.25	N/A	N/A	N/A
4030-090	**3**	9	7,400	320	3	7,400	360	1.5
4030-130		13	6,540	280	2.14	N/A	N/A	N/A
4030-160		16	5,900	250	1.5	N/A	N/A	N/A
4040-120	**4**	12	5,900	390	4	5,900	380	2
4040-170		17	5,230	350	2.89	N/A	N/A	N/A
4040-210		21	4,700	310	2	N/A	N/A	N/A
4050-150	**5**	15	4,800	440	5	4,800	410	2.5
4050-210		21	4,250	390	3.64	N/A	N/A	N/A
4050-260		26	3,800	350	2.5	N/A	N/A	N/A
4060-180	**6**	18	4,000	440	6	4,000	440	3
4060-260		26	3,540	390	4.29	N/A	N/A	N/A
4060-320		32	3,200	350	3	N/A	N/A	N/A
4080-240	**8**	24	2,500	390	8	2,500	340	4
4080-340		34	2,220	350	5.78	N/A	N/A	N/A
4080-420		42	2,000	310	4	N/A	N/A	N/A
4100-300	**10**	30	1,500	220	10	1,500	240	5
4100-420		42	1,340	190	7.27	N/A	N/A	N/A
4100-520		52	1,200	170	5	N/A	N/A	N/A
4120-360	**12**	36	1,000	180	12	1,200	220	6
4120-520		52	880	160	8.31	N/A	N/A	N/A
4120-620		62	800	140	6	N/A	N/A	N/A

Contact our sales when milling hardened steels with L/D=5 or longer effective length tools.


Slotting



D : Outside Diameter (mm)


Note:
- Decrease both spindle speed and feed rate proportionally in case of chattering.
- These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Every coolant offers stable milling.
- Recommend water soluble or oil coolant for Stainless Steels and Copper.

Cutting Load Comparison　CXS φ8　SKD61 (50HRC)

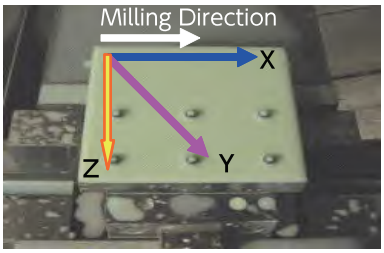


◆Milling Conditions

Spindle Speed	4,200 min^{-1}
Feed Rate	770 mm/min
a_p	8 mm
a_e	0.3 mm
Coolant	Water Soluble

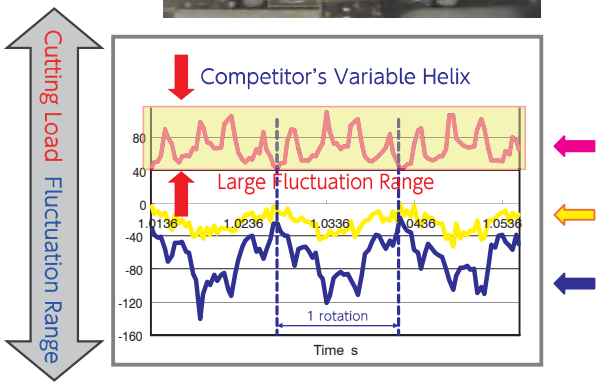

Tool damage and surface quality will be influenced by the cutting load fluctuation range.

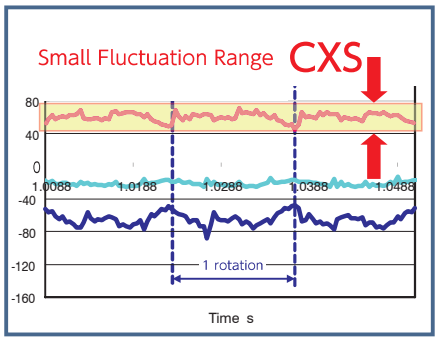

CXS has a small fluctuation range and the tool is hard to chatter.

High Efficiency Milling Example　CXS φ8　SUS304



No tool damage on peripheral flute.




◆Milling Conditions

Spindle Speed	5,000 min^{-1}
Feed Rate	600 mm/min
a_p	8 mm
a_e	3 mm
Coolant	Water Soluble
Milling Distance	5.4 m

※Using company B's milling condition



Milling Example by Different Work Materials ① CXS ϕ8 SKD61 (50HRC)

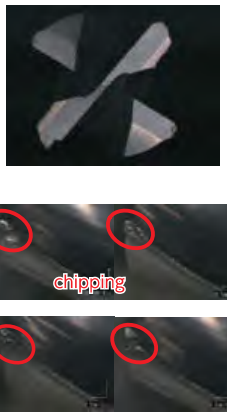CXS	Competitor A: Variable Helix	Competitor B: Variable Helix
		
		
		
Milling Distance 77 m	Milling Distance 44 m	Milling Distance 22 m

Designed for a heavy roughing cut, even up to 50HRC


◆Milling Conditions

Spindle Speed	4,200 min^{-1}
Feed Rate	770 mm/min
a_p	8 mm
a_e	1 mm
Coolant	Water Soluble

※Using company B's milling condition



Milling Example by Different Work Materials ② CXS ϕ8 SUS304

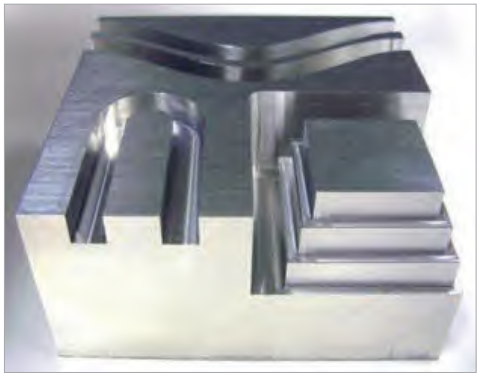

Size : 100 × 100 × 50 mm

◆Milling Conditions

Milling Method	Side Milling, Slotting (One Direction)
Spindle Speed	2,900 min^{-1}
Feed Rate	360 mm/min (Slotting) 720 mm/min (Side Milling)
a_p	8 mm (1D)
a_e	2.4 mm
Coolant	Water Soluble
Cycle Time	5 min

High efficiency milling of difficult-to-cut material (SUS304).

◆Tool after Milling

Flatland	Tool Tip Relief Surface	8 mm from Tip Point (a_p : 8 mm)
		

Excellent tool life for high efficiency milling and finishing process.

CXS Series SUS304 Milling Video

C-CRS



UTCOAT 2 Flute Radius End Mills

φ1～φ12


Super MG | UT COAT | 30° | R | R ±0.02 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○			●			○	○		

Features

Various range of Corner Radius.
Broad application range from Copper and Carbon Steels up to Hardened Steels (55HRC).

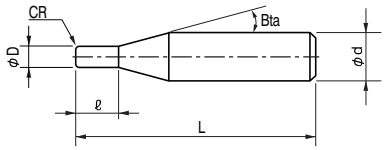

The shank taper angle shown is not an exact value.

Total 46 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CRS 2010-02	1	R0.2	2	16°	45	4	—
C-CRS 2010-03		R0.3			45	4	—
C-CRS 2015-02	1.5	R0.2	3	16°	45	4	—
C-CRS 2015-03		R0.3			45	4	—
C-CRS 2015-05		R0.5			45	4	—
C-CRS 2020-02	2	R0.2	4	16°	45	4	—
C-CRS 2020-03		R0.3			45	4	—
C-CRS 2020-05		R0.5			45	4	—
C-CRS 2025-02	2.5	R0.2	5	16°	45	4	—
C-CRS 2025-03		R0.3			45	4	—
C-CRS 2025-05		R0.5			45	4	—
C-CRS 2030-02	3	R0.2	10	16°	45	6	—
C-CRS 2030-03		R0.3			45	6	—
C-CRS 2030-05		R0.5			45	6	—
C-CRS 2030-10		R1			45	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CRS 2040-02	4	R0.2	12	16°	45	6	—
C-CRS 2040-03		R0.3			45	6	—
C-CRS 2040-05		R0.5			45	6	—
C-CRS 2040-10		R1			45	6	—
C-CRS 2050-02	5	R0.2	15	16°	50	6	—
C-CRS 2050-03		R0.3			50	6	—
C-CRS 2050-05		R0.5			50	6	—
C-CRS 2050-10		R1			50	6	—
C-CRS 2060-02	6	R0.2	15	—	50	6	—
C-CRS 2060-03		R0.3			50	6	—
C-CRS 2060-05		R0.5			50	6	—
C-CRS 2060-10		R1			50	6	—
C-CRS 2060-15		R1.5			50	6	—
C-CRS 2060-20		R2			50	6	—
C-CRS 2080-05	8	R0.5	20	—	60	8	—
C-CRS 2080-10		R1			60	8	—
C-CRS 2080-15		R1.5			60	8	—
C-CRS 2080-20		R2			60	8	—
C-CRS 2080-25		R2.5			60	8	—
C-CRS 2100-05	10	R0.5	25	—	70	10	—
C-CRS 2100-10		R1			70	10	—
C-CRS 2100-15		R1.5			70	10	—
C-CRS 2100-20		R2			70	10	—
C-CRS 2100-25		R2.5			70	10	—
C-CRS 2100-30		R3			70	10	—
C-CRS 2120-05	12	R0.5	25	—	75	12	—
C-CRS 2120-10		R1			75	12	—
C-CRS 2120-15		R1.5			75	12	—
C-CRS 2120-20		R2			75	12	—
C-CRS 2120-25		R2.5			75	12	—
C-CRS 2120-30		R3			75	12	—

Milling Conditions for C-CRS

WORK MATERIAL		CARBON STEELS S45C / S50C (~225HB)			ALLOY STEELS SK / SCM / SUS (225~325HB)		
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2010	**1**	16,000	340	0.25	12,700	120	0.25
2020	**2**	8,000	200	0.5	6,400	120	0.5
2025	**2.5**	6,300	200	0.63	5,100	120	0.63
2030	**3**	5,000	200	1.5	4,200	120	1.5
2040	**4**	4,000	240	2	3,200	150	2
2050	**5**	3,200	240	2.5	2,550	150	2.5
2060	**6**	2,650	240	3	2,120	150	3
2080	**8**	2,000	240	4	1,600	150	4
2100	**10**	1,600	240	5	1,270	150	5
2120	**12**	1,330	240	6	1,060	150	6

WORK MATERIAL		PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			HARDENED STEELS SKD / SKT (45~50HRC)		
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2010	**1**	9,550	65	0.25	5,580	22	0.05
2020	**2**	4,800	55	0.5	2,790	31	0.1
2025	**2.5**	3,800	55	0.63	2,250	31	0.13
2030	**3**	3,180	55	1.5	2,120	33	0.15
2040	**4**	2,390	65	2	1,590	39	0.2
2050	**5**	1,910	65	2.5	1,270	39	0.25
2060	**6**	1,590	65	3	1,060	39	0.3
2080	**8**	1,190	70	4	800	39	0.4
2100	**10**	950	70	5	640	39	0.5
2120	**12**	800	70	6	530	39	0.6

Milling Amount for Slotting (mm)

45HRC or below


D＜φ3　a_p=0.25D

D≧φ3　a_p=0.5D

45HRC or above

a_p=0.05D

D : Outside Diameter (mm)



Note:
・Recommend water soluble or oil coolant.
・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

CNRS



UTCOAT 4 Flute Radius End Mills

φ6～φ12


Super MG | UT COAT | 45° | R | R ±0.01 (φ6) | R ±0.015 (φ8～φ12) | Shank Dia 0/-0.005 | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	○		●			★	★		

Features

4 flute high efficiency corner radius designed for Titanium Alloys and Heat Resistant Alloys.
UTCOAT is recommended for heat-resistant hard materials to achieve longer tool life.
Variable pitch, high helix and positive rake angle offer stable milling.
Reduced cutting force when using a helical approach or inclined angles.

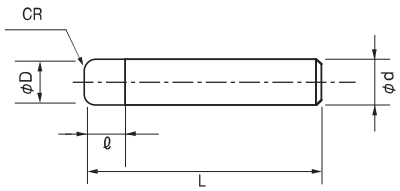

Total 12 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Length of Cut ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CNRS 4060-05-16	6	R0.5	16	90	6	—
CNRS 4060-10-16		R1		90	6	—
CNRS 4080-05-16	8	R0.5	16	100	8	—
CNRS 4080-10-16		R1		100	8	—
CNRS 4100-05-26	10	R0.5	26	110	10	—
CNRS 4100-10-26		R1		110	10	—
CNRS 4100-15-26		R1.5		110	10	—
CNRS 4100-20-26		R2		110	10	—
CNRS 4120-05-26	12	R0.5	26	120	12	—
CNRS 4120-10-26		R1		120	12	—
CNRS 4120-15-26		R1.5		120	12	—
CNRS 4120-20-26		R2		120	12	—

Milling Conditions for CNRS

◆Side Milling

WORK MATERIAL			CARBON STEELS S45C / S50C				ALLOY STEELS SK / SCM				STAINLESS STEELS SUS			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-05-16	6	R0.5	5,180	1,330	9.6	0.9	4,920	1,330	7.2	0.6	3,520	740	4.8	0.3
4060-10-16		R1	5,180	1,330	9.6	0.9	5,180	1,330	7.2	0.6	3,700	740	4.8	0.3
4080-05-16	8	R0.5	3,920	1,260	12.8	1.2	3,720	1,260	9.6	0.8	2,660	700	6.4	0.4
4080-10-16		R1	3,920	1,260	12.8	1.2	3,920	1,260	9.6	0.8	2,800	700	6.4	0.4
4100-05-26	10	R0.5	2,770	1,225	16	1.5	2,630	1,220	12	1	1,880	680	8	0.5
4100-10-26		R1	2,770	1,225	16	1.5	2,770	1,220	12	1	1,980	680	8	0.5
4100-15-26		R1.5	2,770	1,225	16	1.5	2,930	1,220	12	1	2,090	680	8	0.5
4100-20-26		R2	2,770	1,225	16	1.5	3,080	1,220	12	1	2,200	680	8	0.5
4120-05-26	12	R0.5	2,330	1,170	19.2	1.8	2,210	1,170	14.4	1.2	1,580	650	9.6	0.6
4120-10-26		R1	2,330	1,170	19.2	1.8	2,330	1,170	14.4	1.2	1,670	650	9.6	0.6
4120-15-26		R1.5	2,330	1,170	19.2	1.8	2,470	1,170	14.4	1.2	1,760	650	9.6	0.6
4120-20-26		R2	2,330	1,170	19.2	1.8	2,590	1,170	14.4	1.2	1,850	650	9.6	0.6


WORK MATERIAL			TITANIUM / TITANIUM ALLOYS Ti-6Al-4V				HEAT RESISTANT ALLOYS Inconel718			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4060-05-16	6	R0.5	3,520	740	4.8	0.3	1,710	300	4.8	0.3
4060-10-16		R1	3,700	740	4.8	0.3	1,800	300	4.8	0.3
4080-05-16	8	R0.5	2,660	700	6.4	0.4	1,570	280	6.4	0.4
4080-10-16		R1	2,800	700	6.4	0.4	1,650	280	6.4	0.4
4100-05-26	10	R0.5	1,880	680	8	0.5	1,110	250	8	0.5
4100-10-26		R1	1,980	680	8	0.5	1,170	250	8	0.5
4100-15-26		R1.5	2,090	680	8	0.5	1,240	250	8	0.5
4100-20-26		R2	2,200	680	8	0.5	1,300	250	8	0.5
4120-05-26	12	R0.5	1,580	650	9.6	0.6	940	220	9.6	0.6
4120-10-26		R1	1,670	650	9.6	0.6	990	220	9.6	0.6
4120-15-26		R1.5	1,760	650	9.6	0.6	1,050	220	9.6	0.6
4120-20-26		R2	1,850	650	9.6	0.6	1,100	220	9.6	0.6

Please adjust milling parameters referring to the following table.

D : ϕ 6 ~ ϕ 12

Overhang Lengh	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
~D×4	×1	×1	×1	×1
~D×5	×0.7	×0.7	×0.7	×0.8
~D×6	×0.5	×0.5	×0.6	×0.7

Side Milling



Milling Conditions for CNRS

◆Slotting

WORK MATERIAL			CARBON STEELS S45C / S50C			ALLOY STEELS SK / SCM			STAINLESS STEELS SUS		
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4060-05-16	6	R0.5	2,035	250	6	1,930	360	3	1,760	330	1.5
4060-10-16		R1	2,035	250	6	2,040	360	3	1,850	330	1.5
4080-05-16	8	R0.5	1,550	210	8	1,470	300	4	1,340	270	2
4080-10-16		R1	1,550	210	8	1,550	300	4	1,410	270	2
4100-05-26	10	R0.5	1,260	210	10	1,200	300	5	1,090	270	2.5
4100-10-26		R1	1,260	210	10	1,260	300	5	1,150	270	2.5
4100-15-26		R1.5	1,260	210	10	1,330	300	5	1,210	270	2.5
4100-20-26		R2	1,260	210	10	1,400	300	5	1,270	270	2.5
4120-05-26	12	R0.5	1,020	200	12	970	290	6	880	260	3
4120-10-26		R1	1,020	200	12	1,020	290	6	930	260	3
4120-15-26		R1.5	1,020	200	12	1,080	290	6	980	260	3
4120-20-26		R2	1,020	200	12	1,140	290	6	1,030	260	3

WORK MATERIAL			TITANIUM / TITANIUM ALLOYS Ti-6Al-4V			HEAT RESISTANT ALLOYS Inconel718		
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4060-05-16	6	R0.5	1,600	300	0.6	810	100	0.6
4060-10-16		R1	1,680	300	0.6	850	100	0.6
4080-05-16	8	R0.5	1,220	250	0.8	620	90	0.8
4080-10-16		R1	1,280	250	0.8	650	90	0.8
4100-05-26	10	R0.5	990	250	1	460	80	1
4100-10-26		R1	1,040	250	1	490	80	1
4100-15-26		R1.5	1,100	250	1	520	80	1
4100-20-26		R2	1,160	250	1	540	80	1
4120-05-26	12	R0.5	800	240	1.2	380	70	1.2
4120-10-26		R1	840	240	1.2	410	70	1.2
4120-15-26		R1.5	890	240	1.2	430	70	1.2
4120-20-26		R2	940	240	1.2	450	70	1.2


Please adjust milling parameters referring to the following table.

D : ϕ 6 ~ ϕ 12

Overhang Length	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
~D×4	×1	×1	×1	×1
~D×5	×0.7	×0.7	×0.7	×0.8
~D×6	×0.5	×0.5	×0.6	×0.7

Note:
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
・Recommend water soluble or oil coolant.

Slotting




D : Outside Diameter (mm)

Pocket Milling Example: CNRS ϕ10 × CR2 — Ti6Al-4V (30HRC)




Stable milling on hard-to-cut materials

Spindle Speed	Feed Rate	a_p	a_e	Overhang Length	Cycle Time	Coolant	Pocket Size
1,820 min^{-1} V_c= 57 m/min	700 mm/min fz= 0.096 mm/t	0.5 mm	5 mm	45 mm (4.5D)	30 min	Water Soluble (Through Spindle)	70 × 44 × 13 mm



CNRS

Continuous cutting is possible after 60 min (2 pockets) milling.







Competitor's Tool


Corner radius is broken after 30 min (one pocket) milling.





Slotting Example: CNRS ϕ8 × CR1 — Inconel718 (40HRC)

Milling Process	Roughing		Finishing
Milling Method	Slotting	Side Milling	
Spindle Speed	576 min^{-1} (V_c=14.5 m/min)	1,650 min^{-1} (V_c=41.5 m/min)	
Feed Rate	72 mm/min (fz=0.03 mm/t)	280 mm/min (fz=0.04 mm/t)	200 mm/min (fz=0.03 mm/t)
a_p	0.8 mm	6.4 mm	0.1 mm
a_e	—	0.4 mm	0.1 mm
Overhang Length	30 mm (3.75D)		
Coolant	Water Soluble (Nozzle)		
Cycle Time	105 min		10 min

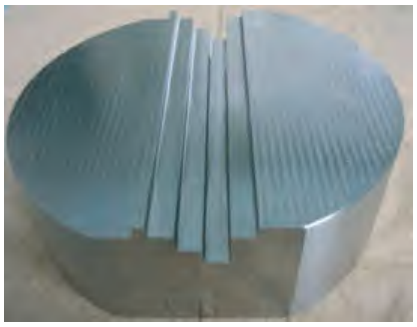

Reduces burrs in step milling process.
Offers excellent surface finish with unique cutting edge.

CXERS



UTCOAT 4 Flute High Efficiency Radius End Mills with Variable Pitch and Helix

φ1～φ12


Super MG | UT COAT | 37°~40° | R | R ±0.005 (φ1～φ3) | R ±0.01 (φ4～φ6) | R ±0.015 (φ8～φ12) | Shank Dia 0/-0.005 | Variable Pitch | Variable Helix

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○			●			○	○		

Features

Variable Pitch & Variable Helix design minimizes vibration and chattering.
Selected carbide material with high toughness & high chip resistance.
Excellent wear-resistance for the wide range of milling applications, from highly efficient milling to finishing.
Low friction coating resulting in excellent chip evacuation and resistance to wear.
Decreasing cutting resistance and offering stable milling by the original corner R design.

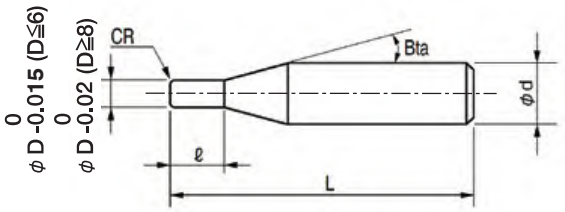

The shank taper angle shown is not an exact value.

Total 56 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CXERS 4010-01-025	1	R0.1	2.5	16°	50	4	—
CXERS 4010-02-025		R0.2			50	4	—
CXERS 4010-03-025		R0.3			50	4	—
CXERS 4015-01-0375	1.5	R0.1	3.75	16°	50	4	—
CXERS 4015-02-0375		R0.2			50	4	—
CXERS 4015-03-0375		R0.3			50	4	—
CXERS 4020-01-050	2	R0.1	5	16°	50	4	—
CXERS 4020-02-050		R0.2			50	4	—
CXERS 4020-03-050		R0.3			50	4	—
CXERS 4020-05-050		R0.5			50	4	—
CXERS 4025-03-0625	2.5	R0.3	6.25	16°	50	4	—
CXERS 4025-05-0625		R0.5			50	4	—
CXERS 4030-02-075	3	R0.2	7.5	16°	60	6	—
CXERS 4030-03-075		R0.3			60	6	—
CXERS 4030-05-075		R0.5			60	6	—

Next Page ➡

Unit (mm)


Model Number	Outside Diameter ϕD	Corner Radius CR	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CXERS 4040-02-100	4	R0.2	10	16°	60	6	—
CXERS 4040-03-100		R0.3			60	6	—
CXERS 4040-04-100		R0.4			60	6	—
CXERS 4040-05-100		R0.5			60	6	—
CXERS 4040-10-100		R1			60	6	—
CXERS 4050-02-125	5	R0.2	12.5	16°	60	6	—
CXERS 4050-03-125		R0.3			60	6	—
CXERS 4050-04-125		R0.4			60	6	—
CXERS 4050-05-125		R0.5			60	6	—
CXERS 4050-10-125		R1			60	6	—
CXERS 4060-02-150	6	R0.2	15	—	60	6	—
CXERS 4060-03-150		R0.3			60	6	—
CXERS 4060-04-150		R0.4			60	6	—
CXERS 4060-05-150		R0.5			60	6	—
CXERS 4060-10-150		R1			60	6	—
CXERS 4060-12-150		R1.2			60	6	—
CXERS 4080-02-200	8	R0.2	20	—	70	8	—
CXERS 4080-03-200		R0.3			70	8	—
CXERS 4080-04-200		R0.4			70	8	—
CXERS 4080-05-200		R0.5			70	8	—
CXERS 4080-10-200		R1			70	8	—
CXERS 4080-12-200		R1.2			70	8	—
CXERS 4080-15-200		R1.5			70	8	—
CXERS 4080-20-200		R2			70	8	—
CXERS 4100-02-250	10	R0.2	25	—	80	10	—
CXERS 4100-03-250		R0.3			80	10	—
CXERS 4100-04-250		R0.4			80	10	—
CXERS 4100-05-250		R0.5			80	10	—
CXERS 4100-10-250		R1			80	10	—
CXERS 4100-12-250		R1.2			80	10	—
CXERS 4100-15-250		R1.5			80	10	—
CXERS 4100-20-250		R2			80	10	—
CXERS 4120-02-300	12	R0.2	30	—	100	12	—
CXERS 4120-03-300		R0.3			100	12	—
CXERS 4120-04-300		R0.4			100	12	—
CXERS 4120-05-300		R0.5			100	12	—
CXERS 4120-10-300		R1			100	12	—
CXERS 4120-12-300		R1.2			100	12	—
CXERS 4120-15-300		R1.5			100	12	—
CXERS 4120-20-300		R2			100	12	—
CXERS 4120-30-300		R3			100	12	—

Milling Conditions for CXERS

◆Side Milling

WORK MATERIAL		CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				STAINLESS STEELS SUS304 ※Use water soluble or oil coolant.			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010	**1**	21,600	490	2.5	0.1	21,600	360	2.5	0.1	17,400	250	2.5	0.1
4015	**1.5**	16,200	610	3.75	0.15	16,200	450	3.75	0.15	15,960	270	3.75	0.15
4020	**2**	13,200	740	5	0.2	13,200	550	5	0.2	14,640	280	5	0.2
4025	**2.5**	11,400	840	6.25	0.25	11,400	640	6.25	0.25	13,200	390	6.25	0.25
4030	**3**	10,200	960	7.5	0.3	10,200	720	7.5	0.3	12,000	510	7.5	0.3
4040	**4**	8,640	1,350	10	0.8	8,040	1,000	10	0.8	9,000	730	10	0.4
4050	**5**	7,200	1,500	12.5	1	6,480	1,100	12.5	1	6,480	810	12.5	0.5
4060	**6**	6,000	1,600	15	1.2	5,400	1,200	15	1.2	5,400	810	15	0.6
4080	**8**	3,600	1,300	20	1.6	3,480	1,050	20	1.6	3,480	720	20	0.8
4100	**10**	1,920	1,000	25	2	1,800	900	25	2	1,800	580	25	1
4120	**12**	1,440	800	30	2.4	1,440	750	30	2.4	1,440	540	30	1.2
Milling Amount (mm)		a_p : All Flute a_e : 0.1D(ϕD<4) a_e : 0.2D(ϕD≧4)				a_p : All Flute a_e : 0.1D(ϕD<4) a_e : 0.2D(ϕD≧4)				a_p : All Flute a_e : 0.1D			

Side Milling



Milling Conditions for CXERS


WORK MATERIAL		PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010	**1**	15,480	250	2.5	0.1	12,900	180	2.5	0.05
4015	**1.5**	12,600	310	3.75	0.15	9,300	280	3.75	0.075
4020	**2**	11,220	360	5	0.2	7,600	390	5	0.1
4025	**2.5**	9,960	430	6.25	0.25	6,500	510	6.25	0.125
4030	**3**	8,880	500	7.5	0.3	5,900	500	7.5	0.3
4040	**4**	7,080	650	10	0.8	4,700	520	10	0.4
4050	**5**	5,760	680	12.5	1	3,850	530	12.5	0.5
4060	**6**	4,800	680	15	1.2	3,200	540	15	0.6
4080	**8**	3,000	600	20	1.6	2,000	500	20	0.8
4100	**10**	1,800	430	25	2	1,200	450	25	1
4120	**12**	1,200	320	30	2.4	960	420	30	1.2
Milling Amount (mm)		a_p : All Flute a_e : 0.1D(ϕD<4) a_e : 0.2D(ϕD≧4)				a_p : All Flute a_e : 0.1D			

Milling Conditions for CXERS

◆Slotting

WORK MATERIAL		CARBON STEELS S45C / S50C Annealed Materials (~225HB)			ALLOY STEELS SK / SCM Annealed Materials (225~325HB)			STAINLESS STEELS SUS304 ※Use water soluble or oil coolant.		
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4010	**1**	21,600	160	1	21,600	160	1	17,400	170	0.5
4015	**1.5**	16,200	250	1.5	16,200	220	1.5	15,960	190	0.75
4020	**2**	13,200	360	2	13,200	250	2	14,640	200	1
4025	**2.5**	11,400	430	2.5	11,400	280	2.5	13,200	240	1.25
4030	**3**	10,200	480	3	10,200	320	3	12,000	280	1.5
4040	**4**	8,640	650	4	8,040	450	4	9,000	400	2
4050	**5**	7,200	700	5	6,480	500	5	6,480	460	2.5
4060	**6**	6,000	700	6	5,400	500	6	5,400	460	3
4080	**8**	3,600	500	8	3,480	360	8	3,480	340	4
4100	**10**	1,920	380	10	1,800	270	10	1,800	220	5
4120	**12**	1,440	300	12	1,440	210	12	1,440	180	6
Milling Amount (mm)		a_p:1D			a_p:1D			a_p:0.5D		

Slotting



D:Outside Diameter (mm)

Note:
- Decrease both spindle speed and feed rate proportionally in case of chattering.
- These milling parameters are calculated based on the shortest overhang length. Longer overhangs may require an adjustment to the milling parameters.
- Reduce the milling amount and feed rate in accordance with required milling precision.
- Every coolant offers stable milling.
- Recommend water soluble or oil coolant for Stainless Steels and Copper.

Milling Conditions for CXERS

WORK MATERIAL		PREHARDENED STEELS HPM / NAK (30~45HRC)			HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)		
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
4010	**1**	15,480	100	1	12,900	50	0.3
4015	**1.5**	12,600	140	1.5	10,500	100	0.45
4020	**2**	11,220	170	2	9,350	150	0.6
4025	**2.5**	9,960	210	2.5	8,300	240	0.75
4030	**3**	8,880	250	3	7,400	360	1.5
4040	**4**	7,080	390	4	5,900	380	2
4050	**5**	5,760	440	5	4,800	410	2.5
4060	**6**	4,800	440	6	4,000	440	3
4080	**8**	3,000	340	8	2,500	340	4
4100	**10**	1,800	220	10	1,500	240	5
4120	**12**	1,200	180	12	1,200	220	6
Milling Amount (mm)		a_p : 1D			a_p : 0.5D		

CXRS



UTCOAT 5 Flute Radius End Mills

φ3～φ12


Super MG | UT COAT | 42°~45° | R | R ±0.01 (φ3～φ6) | R ±0.015 (φ8～φ12) | Shank Dia 0/-0.005 | Variable Pitch | Variable Helix

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																	
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	○		●			○	○		


Features

Recommended on a wide range of materials – Carbon Steels and Hardened steels up to 55 HRC.
Variable pitch & helix design and positive rake angle offer highly efficient side milling.
Seamless corner radius design greatly reduces cutting force.

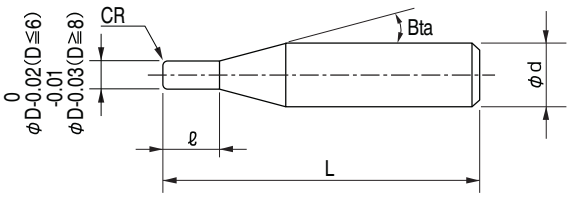

The shank taper angle shown is not an exact value.

Variable Pitch

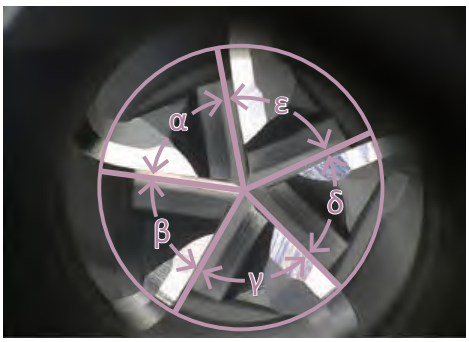

α≠β≠γ≠δ≠ε

Corner Radius Design



Variable Helix



$\beta_1 \neq \beta_2$

Total 30 models

Unit (mm)


Model Number	Outside Diameter φD	Corner Radius CR	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CXRS 5030-05-0600	3	R0.5	6	16°	50	6	—
CXRS 5030-05-0900			9		50	6	—
CXRS 5040-05-0800	4	R0.5	8	16°	60	6	—
CXRS 5040-05-1200			12		60	6	—
CXRS 5040-10-0800		R1	8		60	6	—
CXRS 5040-10-1200			12		60	6	—
CXRS 5060-05-1200	6	R0.5	12	—	70	6	—
CXRS 5060-05-1800			18		70	6	—
CXRS 5060-10-1200		R1	12		70	6	—
CXRS 5060-10-1800			18		70	6	—
CXRS 5080-05-1600	8	R0.5	16	—	70	8	—
CXRS 5080-05-2400			24		70	8	—
CXRS 5080-10-1600		R1	16		70	8	—
CXRS 5080-10-2400			24		70	8	—
CXRS 5100-05-2000	10	R0.5	20	—	80	10	—
CXRS 5100-05-3000			30		80	10	—
CXRS 5100-10-2000		R1	20		80	10	—
CXRS 5100-10-3000			30		80	10	—
CXRS 5100-15-2000		R1.5	20		80	10	—
CXRS 5100-15-3000			30		80	10	—
CXRS 5100-20-2000		R2	20		80	10	—
CXRS 5100-20-3000			30		80	10	—
CXRS 5120-05-2400	12	R0.5	24	—	80	12	—
CXRS 5120-05-3600			36		100	12	—
CXRS 5120-10-2400		R1	24		80	12	—
CXRS 5120-10-3600			36		100	12	—
CXRS 5120-15-2400		R1.5	24		80	12	—
CXRS 5120-15-3600			36		100	12	—
CXRS 5120-20-2400		R2	24		80	12	—
CXRS 5120-20-3600			36		100	12	—

Milling Conditions for CXRS

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
5030	3	6	20,000	10,000	6	0.3	20,000	10,000	6	0.3	20,000	10,000	6	0.09	20,000	12,000	6	0.06
		9	20,000	6,000	8	0.24	20,000	6,000	8	0.24	20,000	6,400	8	0.09	20,000	12,000	8	0.05
5040	4	8	18,200	9,100	8	0.4	18,200	9,100	8	0.4	19,800	9,900	8	0.12	15,000	11,500	8	0.08
		12	18,200	5,460	10.8	0.32	18,200	5,460	10.8	0.32	15,900	4,770	10.8	0.12	15,000	11,500	10.8	0.05
5060	6	12	12,200	6,100	12	0.6	12,200	6,100	12	0.6	13,200	6,500	12	0.21	10,000	7,600	12	0.15
		18	12,200	5,100	16	0.48	12,200	5,100	16	0.48	12,000	5,000	16	0.18	10,000	7,600	16	0.1
5080	8	16	9,100	4,550	16	0.8	9,100	4,550	16	0.8	9,900	4,950	16	0.4	7,600	5,600	16	0.2
		24	9,100	4,550	21	0.64	9,100	4,550	21	0.64	9,000	4,500	21	0.32	7,600	5,600	21	0.15
5100	10	20	7,300	3,650	20	1	7,300	3,650	20	1	8,000	4,600	20	0.5	6,000	4,500	20	0.25
		30	7,300	3,650	27	0.8	7,300	3,650	27	0.8	7,300	3,650	27	0.4	6,000	4,500	27	0.22
5120	12	24	6,100	3,050	24	1.2	6,100	3,050	24	1.2	6,600	3,960	24	0.6	5,000	3,800	24	0.3
		36	6,100	3,050	32	0.96	6,100	3,050	32	0.96	6,100	3,050	32	0.48	5,000	3,800	32	0.25


Note:
- Please be sure to use water soluble coolant.
- These milling parameters are for reference only.
- For best result, fine parameter adjustments may be required, depending on the milling shape / application / machine used and so on.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- WARNING: Because of high material removal rate, you must pay attention to cutting chips and coolant management.

Side Milling




5 Flutes v.s. 4 Flutes　Comparison of Cutting Chips　　STAVAX (53HRC)

Size : 140 x 200 mm
Coolant : Oil Mist
Milling Method : Side Milling
Spindle Speed : 4,000 min^{-1}
Feed Rate : 2,500 mm/min
a_p : 20 mm
a_e : 0.5 mm




◆ 5 Flute Radius　ϕ10 × CR0.5 × L20



After 40 min

After 80 min

Rake Face　Relief Face　Peripheral Cutting Edge

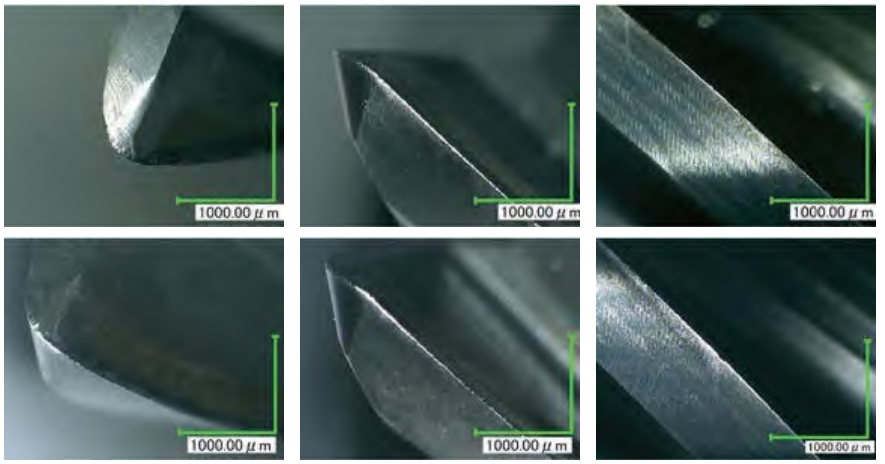

◆ 4 Flute Radius　ϕ10 × CR1 × L26



After 40 min

Rake Face　Relief Face　Peripheral Cutting Edge



◆ Comparison of Cutting Chips

5 Flutes
Uniform cutting chips



4 Flutes
Irregular size cutting chips



5 flutes, variable pitch and variable helix design protect the tool from chattering and chipping under high-speed condition.

HMERS



HARDMAX 4 Flute / 6 Flute Radius End Mills

φ3～φ12


Super MG | HARD MAX | 45° | R | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	●											

Features

Radius End Mills for Hard Materials.
4 and 6 Flutes have been applied to suitable sizes to offer outstandingly long tool life.
HARDMAX coat enables highly efficient milling for 65HRC High Speed Steels.
Various Corner Radius sizes available.

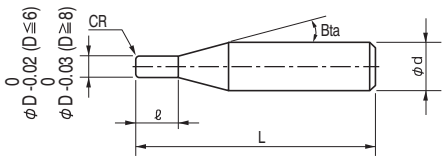

The shank taper angle shown is not an exact value.

A lineup of 4 flutes and 6 flutes that considers high efficiency and chip evacuation performance according to the tool diameter.

φ3～φ5　4 flutes



φ6～φ12　6 flutes



Next Page ➡

Total 37 models

Unit (mm)


Model Number	Outside Diameter φD	Corner Radius CR	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Number of Flutes	Suggested Retail Price ¥
HMERS 4030-01-075	3	R0.1	7.5	16°	60	6	4	—
HMERS 4030-02-075		R0.2			60	6		—
HMERS 4030-03-075		R0.3			60	6		—
HMERS 4030-05-075		R0.5			60	6		—
HMERS 4040-01-100	4	R0.1	10	16°	60	6	4	—
HMERS 4040-02-100		R0.2			60	6		—
HMERS 4040-03-100		R0.3			60	6		—
HMERS 4040-05-100		R0.5			60	6		—
HMERS 4040-10-100		R1			60	6		—
HMERS 4050-01-125	5	R0.1	12.5	16°	60	6	4	—
HMERS 4050-02-125		R0.2			60	6		—
HMERS 4050-03-125		R0.3			60	6		—
HMERS 4050-05-125		R0.5			60	6		—
HMERS 4050-10-125		R1			60	6		—
HMERS 6060-01-130	6	R0.1	13	—	60	6	6	—
HMERS 6060-02-130		R0.2			60	6		—
HMERS 6060-03-130		R0.3			60	6		—
HMERS 6060-05-130		R0.5			60	6		—
HMERS 6060-10-130		R1			60	6		—
HMERS 6060-15-130		R1.5			60	6		—
HMERS 6080-02-190	8	R0.2	19	—	70	8	6	—
HMERS 6080-03-190		R0.3			70	8		—
HMERS 6080-05-190		R0.5			70	8		—
HMERS 6080-10-190		R1			70	8		—
HMERS 6080-20-190		R2			70	8		—
HMERS 6100-02-220	10	R0.2	22	—	80	10	6	—
HMERS 6100-03-220		R0.3			80	10		—
HMERS 6100-05-220		R0.5			80	10		—
HMERS 6100-10-220		R1			80	10		—
HMERS 6100-15-220		R1.5			80	10		—
HMERS 6100-20-220		R2			80	10		—
HMERS 6120-02-260	12	R0.2	26	—	100	12	6	—
HMERS 6120-03-260		R0.3			100	12		—
HMERS 6120-05-260		R0.5			100	12		—
HMERS 6120-10-260		R1			100	12		—
HMERS 6120-15-260		R1.5			100	12		—
HMERS 6120-20-260		R2			100	12		—

Milling Conditions for HMERS

WORK MATERIAL				PREHARDENED STEELS HARDENED STEELS (40~50HRC)				HARDENED STEELS (50~60HRC)				HARDENED STEELS (60HRC~)			
Model Number	Number of Flutes	Outside Diameter (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4030	**4**	3	7.5	13,100	1,680	6	0.06	4,200	720	6	0.06	8,600	465	6	0.06
4040	**4**	4	10	11,300	1,950	8	0.08	3,150	540	8	0.08	6,450	350	8	0.08
4050	**4**	5	12.5	10,100	2,300	10	0.1	2,520	430	10	0.1	5,160	280	10	0.1
6060	**6**	6	13	8,900	2,930	12	0.12	4,300	1,200	9	0.12	4,300	1,200	9	0.12
6080	**6**	8	19	4,000	2,400	12	0.24	3,220	1,450	12	0.08	3,220	1,450	12	0.08
6100	**6**	10	22	3,200	2,000	15	0.3	2,580	1,160	15	0.1	2,580	1,160	15	0.1
6120	**6**	12	26	2,670	1,600	18	0.36	2,150	970	18	0.12	2,150	970	18	0.12

Note:
- Recommend down cut processing.
- Reduce cutting amount, feed rate, and apply zero-cut in accordance with required surface quality.
- Recommend air blow or oil mist.

Side Milling




Side Milling Example
HMERS ϕ3 × CR0.5 × L7.5 / ϕ10 × CR2 × L22

SKH51 (63 HRC)

Tools after Milling


4030-05-075 6100-20-220

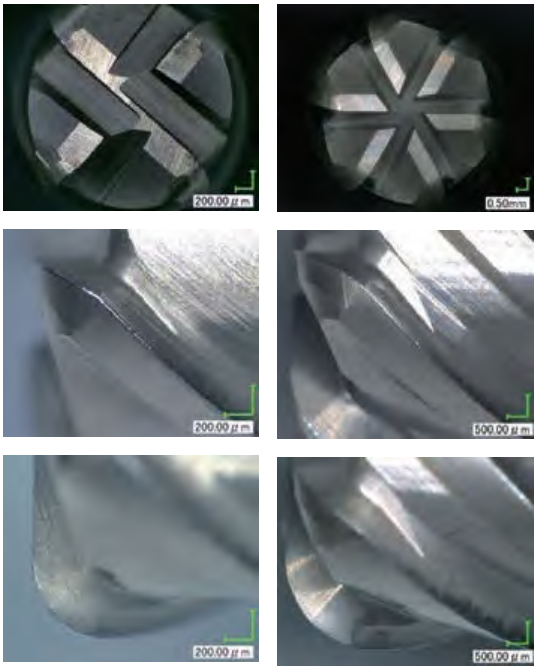

No chipping when milling Hard Materials.
More tool life left.

Tool	HMERS 4030-05-075 (ϕ 3 × CR0.5)	HMERS 6100-20-220 (ϕ 10 × CR2)
Spindle Speed	8,600 min^{-1}	2,580 min^{-1}
Feed Rate	465 mm/min	1,160 mm/min
a_p	6 mm	15 mm
a_e	0.06 mm	0.1 mm
Milling Distance	12.7 m	28 m
Coolant	Air Blow (Through Spindle)	


Milling Image




Side Milling (Down-cut)

HMERS φ10 × CR1 × L22　Milling example　　SKD11 (59HRC)

1. Deflection amount and surface roughness

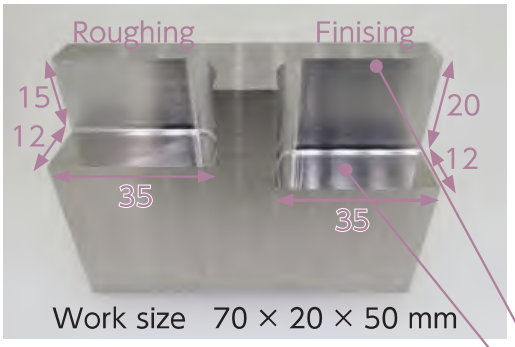

Deflection amount
(Right side finishing)



Wall surface　Ra 0.21 μm
Bottom surface　Ra 0.04 μm

Coolant: Air blow (Through spindle)
Milling direction: Down cut


Tool
HMERS φ10 × CR1 × L22




	Process	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m:s)
Roughing	Roughing	2,580	1,160	15	0.10	0	0:05:22
Right side of work	Roughing	2,580	1,160	20	0.05	0.05	0:10:38
	Semi-Roughing		580	20	0.04	0.01	0:25:11
	Finishing				0.01	0	1:40:43
						Right side total	2:16:32

2. Corner Radius measurement

R1

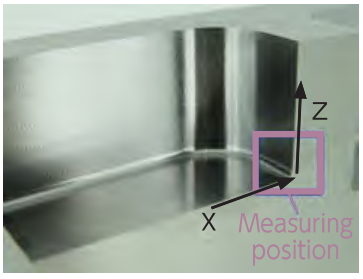



Radius accuracy (mm)
Roughing　-0.003/0.006
Finishing　0/0.007

High-precision machining is possible even with the bottom R.

HLRS2000/HLRS2000E



HARDMAX 2 Flute Long Neck Radius End Mills

φ0.2～φ6

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	●	○		○			●			○	○		

Total 353 models


Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 2002-005-005E	○	0.2	R0.05	0.5	0.2	0.17	16°	50	4	—
HLRS 2002-005-010E	○			1				50	4	—
HLRS 2002-005-015E	○			1.5				50	4	—
HLRS 2002-005-020E	○			2				50	4	—
HLRS 2003-005-010E	○	0.3	R0.05	1	0.3	0.27	16°	50	4	—
HLRS 2003-005-015E	○			1.5				50	4	—
HLRS 2003-005-020E	○			2				50	4	—
HLRS 2003-005-025E	○			2.5				50	4	—
HLRS 2003-005-030E	○			3				50	4	—
HLRS 2004-005-010E	○	0.4	R0.05	1	0.4	0.38	16°	50	4	—
HLRS 2004-005-015E	○			1.5				50	4	—
HLRS 2004-005-020E	○			2				50	4	—
HLRS 2004-005-030E	○			3				50	4	—
HLRS 2004-005-040E	○			4				50	4	—
HLRS 2004-01-010			R0.1	1				50	4	—
HLRS 2004-01-015				1.5				50	4	—
HLRS 2004-01-020				2				50	4	—
HLRS 2004-01-030				3				50	4	—
HLRS 2004-01-040				4				50	4	—
HLRS 2005-005-010		0.5	R0.05	1	0.5	0.48	16°	50	4	—
HLRS 2005-005-020				2				50	4	—
HLRS 2005-005-030				3				50	4	—
HLRS 2005-005-040				4				50	4	—
HLRS 2005-005-050				5				50	4	—
HLRS 2005-01-010			R0.1	1				50	4	—
HLRS 2005-01-020				2				50	4	—
HLRS 2005-01-030				3				50	4	—
HLRS 2005-01-040				4				50	4	—
HLRS 2005-01-050				5				50	4	—
HLRS 2005-01-060				6				50	4	—


Next Page ➡

Features

Long Neck Radius design for high efficiency and high quality milling.
Recommended for various applications from Copper and Raw Materials to Hard Materials.
Both dry and wet coolant offer stable and long tool life.
Refer to page D-61 for 4 flute HLRS.



The shank taper angle shown is not an exact value.



	Diameter Tolerance	Corner Radius Tolerance
Standard Tolerance Type	0/-0.015	Nominal Radius ± 0.005
Excellent Tolerance Type	0/-0.01	Nominal Radius ± 0.005

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
					30′	1°	1°30′	2°	3°
HLRS 2002-005-005E	○	0.2	R0.05	0.5	0.67	0.71	0.75	0.78	0.85
HLRS 2002-005-010E	○			1	1.20	1.26	1.31	1.36	1.45
HLRS 2002-005-015E	○			1.5	1.72	1.80	1.87	1.92	2.03
HLRS 2002-005-020E	○			2	2.25	2.34	2.41	2.48	2.59
HLRS 2003-005-010E	○	0.3	R0.05	1	1.24	1.31	1.38	1.44	1.55
HLRS 2003-005-015E	○			1.5	1.72	1.83	1.91	1.99	2.12
HLRS 2003-005-020E	○			2	2.26	2.37	2.47	2.55	2.70
HLRS 2003-005-025E	○			2.5	2.78	2.91	3.02	3.11	3.27
HLRS 2003-005-030E	○			3	3.31	3.45	3.57	3.66	3.83
HLRS 2004-005-010E	○	0.4	R0.05	1	1.31	1.40	1.49	1.57	1.72
HLRS 2004-005-015E	○			1.5	1.79	1.92	2.03	2.13	2.31
HLRS 2004-005-020E	○			2	2.33	2.48	2.60	2.71	2.90
HLRS 2004-005-030E	○			3	3.40	3.58	3.72	3.85	4.07
HLRS 2004-005-040E	○			4	4.45	4.66	4.82	4.97	5.21
HLRS 2004-01-010			R0.1	1	1.28	1.38	1.46	1.55	1.69
HLRS 2004-01-015				1.5	1.76	1.90	2.01	2.11	2.28
HLRS 2004-01-020				2	2.30	2.46	2.58	2.69	2.89
HLRS 2004-01-030				3	3.38	3.56	3.71	3.83	4.06
HLRS 2004-01-040				4	4.44	4.64	4.81	4.95	5.20
HLRS 2005-005-010		0.5	R0.05	1	1.34	1.46	1.57	1.67	1.86
HLRS 2005-005-020				2	2.37	2.55	2.71	2.84	3.08
HLRS 2005-005-030				3	3.45	3.67	3.85	4.00	4.27
HLRS 2005-005-040				4	4.52	4.77	4.97	5.14	5.44
HLRS 2005-005-050				5	5.58	5.85	6.07	6.26	6.58
HLRS 2005-01-010			R0.1	1	1.34	1.45	1.56	1.66	1.85
HLRS 2005-01-020				2	2.37	2.55	2.70	2.83	3.07
HLRS 2005-01-030				3	3.45	3.67	3.84	4.00	4.26
HLRS 2005-01-040				4	4.52	4.76	4.96	5.13	5.43
HLRS 2005-01-050				5	5.58	5.85	6.07	6.25	6.57
HLRS 2005-01-060				6	6.63	6.93	7.16	7.36	7.70

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 2006-005-020		0.6	R0.05	2	0.6	0.58	16°	50	4	—
HLRS 2006-005-030				3				50	4	—
HLRS 2006-005-040				4				50	4	—
HLRS 2006-005-060				6				50	4	—
HLRS 2006-005-080				8				50	4	—
HLRS 2006-01-020			R0.1	2				50	4	—
HLRS 2006-01-020E	○			2				50	4	—
HLRS 2006-01-030				3				50	4	—
HLRS 2006-01-030E	○			3				50	4	—
HLRS 2006-01-040				4				50	4	—
HLRS 2006-01-040E	○			4				50	4	—
HLRS 2006-01-060				6				50	4	—
HLRS 2006-01-080				8				50	4	—
HLRS 2006-02-020			R0.2	2				50	4	—
HLRS 2006-02-030				3				50	4	—
HLRS 2006-02-040				4				50	4	—
HLRS 2006-02-060				6				50	4	—
HLRS 2006-02-080				8				50	4	—
HLRS 2007-01-040		0.7	R0.1	4	0.7	0.68	16°	50	4	—
HLRS 2007-01-060				6				50	4	—
HLRS 2007-02-040			R0.2	4				50	4	—
HLRS 2007-02-060				6				50	4	—
HLRS 2008-005-040		0.8	R0.05	4	0.8	0.78	16°	50	4	—
HLRS 2008-005-060				6				50	4	—
HLRS 2008-005-080				8				50	4	—
HLRS 2008-01-040			R0.1	4				50	4	—
HLRS 2008-01-060				6				50	4	—
HLRS 2008-01-080				8				50	4	—
HLRS 2008-02-040			R0.2	4				50	4	—
HLRS 2008-02-060				6				50	4	—
HLRS 2008-02-080				8				50	4	—
HLRS 2010-005-020		1	R0.05	2	1	0.95	16°	50	4	—
HLRS 2010-005-030				3				50	4	—
HLRS 2010-005-040				4				50	4	—
HLRS 2010-005-050				5				50	4	—
HLRS 2010-005-060				6				50	4	—
HLRS 2010-005-080				8				50	4	—
HLRS 2010-005-100				10				50	4	—
HLRS 2010-005-120				12				55	4	—
HLRS 2010-005-160				16				60	4	—
HLRS 2010-005-200				20				60	4	—
HLRS 2010-01-020			R0.1	2				50	4	—
HLRS 2010-01-020E	○			2				50	4	—
HLRS 2010-01-030				3				50	4	—
HLRS 2010-01-040				4				50	4	—
HLRS 2010-01-040E	○			4				50	4	—
HLRS 2010-01-050				5				50	4	—
HLRS 2010-01-060				6				50	4	—
HLRS 2010-01-060E	○			6				50	4	—

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
					30′	1°	1°30′	2°	3°
HLRS 2006-005-020		0.6	R0.05	2	2.38	2.61	2.79	2.95	3.22
HLRS 2006-005-030				3	3.48	3.74	3.95	4.13	4.30
HLRS 2006-005-040				4	4.56	4.85	5.08	5.28	5.67
HLRS 2006-005-060				6	6.68	7.03	7.30	7.55	8.12
HLRS 2006-005-080				8	8.79	9.18	9.50	9.83	10.56
HLRS 2006-01-020			R0.1	2	2.37	2.60	2.78	2.93	3.20
HLRS 2006-01-020E	○			2	2.37	2.60	2.78	2.93	3.20
HLRS 2006-01-030				3	3.47	3.73	3.94	4.11	4.28
HLRS 2006-01-030E	○			3	3.47	3.73	3.94	4.11	4.28
HLRS 2006-01-040				4	4.55	4.84	5.07	5.26	5.65
HLRS 2006-01-040E	○			4	4.55	4.84	5.07	5.26	5.65
HLRS 2006-01-060				6	6.68	7.03	7.30	7.54	8.10
HLRS 2006-01-080				8	8.79	9.18	9.50	9.82	10.55
HLRS 2006-02-020			R0.2	2	2.34	2.56	2.74	2.90	3.18
HLRS 2006-02-030				3	3.44	3.70	3.91	4.09	4.41
HLRS 2006-02-040				4	4.53	4.82	5.05	5.23	5.61
HLRS 2006-02-060				6	6.66	7.01	7.28	7.51	8.06
HLRS 2006-02-080				8	8.79	9.17	9.48	9.81	10.53
HLRS 2007-01-040		0.7	R0.1	4	4.55	4.84	5.07	5.26	5.65
HLRS 2007-01-060				6	6.68	7.03	7.30	7.54	8.10
HLRS 2007-02-040			R0.2	4	4.53	4.82	5.05	5.23	5.61
HLRS 2007-02-060				6	6.66	7.01	7.28	7.51	8.06
HLRS 2008-005-040		0.8	R0.05	4	4.56	4.85	5.08	5.28	5.67
HLRS 2008-005-060				6	6.68	7.03	7.30	7.55	8.12
HLRS 2008-005-080				8	8.79	9.18	9.50	9.83	10.56
HLRS 2008-01-040			R0.1	4	4.55	4.84	5.07	5.26	5.65
HLRS 2008-01-060				6	6.68	7.03	7.30	7.54	8.10
HLRS 2008-01-080				8	8.79	9.18	9.50	9.82	10.55
HLRS 2008-02-040			R0.2	4	4.53	4.82	5.05	5.23	5.61
HLRS 2008-02-060				6	6.66	7.01	7.28	7.51	8.06
HLRS 2008-02-080				8	8.79	9.17	9.48	9.81	10.53
HLRS 2010-005-020		1	R0.05	2	2.51	2.86	2.70	3.01	3.28
HLRS 2010-005-030				3	3.59	3.82	4.01	4.18	4.51
HLRS 2010-005-040				4	4.72	4.92	5.14	5.33	5.73
HLRS 2010-005-050				5	5.72	6.01	6.25	6.47	6.95
HLRS 2010-005-060				6	6.77	7.09	7.35	7.61	8.18
HLRS 2010-005-080				8	8.87	9.24	9.55	9.88	10.62
HLRS 2010-005-100				10	10.97	11.37	11.75	12.16	13.07
HLRS 2010-005-120				12	13.05	13.50	13.96	14.44	15.52
HLRS 2010-005-160				16	17.20	17.76	18.36	18.99	20.41
HLRS 2010-005-200				20	21.33	22.02	22.76	23.55	25.31
HLRS 2010-01-020			R0.1	2	2.53	2.71	2.88	3.01	3.27
HLRS 2010-01-020E	○			2	2.53	2.71	2.88	3.01	3.27
HLRS 2010-01-030				3	3.58	3.81	4.00	4.18	4.49
HLRS 2010-01-040				4	4.67	4.93	5.14	5.33	5.72
HLRS 2010-01-040E	○			4	4.67	4.93	5.14	5.33	5.72
HLRS 2010-01-050				5	5.71	6.00	6.24	6.46	6.94
HLRS 2010-01-060				6	6.78	7.10	7.36	7.60	8.17
HLRS 2010-01-060E	○			6	6.78	7.10	7.36	7.60	8.17

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 2010-01-080		1	R0.1	8	1	0.95	16°	50	4	—
HLRS 2010-01-100				10				50	4	—
HLRS 2010-01-120				12				55	4	—
HLRS 2010-01-160				16				60	4	—
HLRS 2010-01-200				20				60	4	—
HLRS 2010-02-020			R0.2	2				50	4	—
HLRS 2010-02-020E	○			2				50	4	—
HLRS 2010-02-030				3				50	4	—
HLRS 2010-02-040				4				50	4	—
HLRS 2010-02-040E	○			4				50	4	—
HLRS 2010-02-050				5				50	4	—
HLRS 2010-02-060				6				50	4	—
HLRS 2010-02-060E	○			6				50	4	—
HLRS 2010-02-080				8				50	4	—
HLRS 2010-02-100				10				50	4	—
HLRS 2010-02-120				12				55	4	—
HLRS 2010-02-160				16				60	4	—
HLRS 2010-02-200				20				60	4	—
HLRS 2010-03-020			R0.3	2				50	4	—
HLRS 2010-03-020E	○			2				50	4	—
HLRS 2010-03-030				3				50	4	—
HLRS 2010-03-040				4				50	4	—
HLRS 2010-03-040E	○			4				50	4	—
HLRS 2010-03-050				5				50	4	—
HLRS 2010-03-060				6				50	4	—
HLRS 2010-03-060E	○			6				50	4	—
HLRS 2010-03-080				8				50	4	—
HLRS 2010-03-100				10				50	4	—
HLRS 2010-03-120				12				55	4	—
HLRS 2010-03-160				16				60	4	—
HLRS 2010-03-200				20				60	4	—
HLRS 2012-02-060		1.2	R0.2	6	1.2	1.14	16°	50	4	—
HLRS 2012-02-120				12				55	4	—
HLRS 2012-02-200				20				60	4	—
HLRS 2012-03-060			R0.3	6				50	4	—
HLRS 2012-03-120				12				55	4	—
HLRS 2012-03-200				20				60	4	—
HLRS 2015-005-040		1.5	R0.05	4	1.5	1.45	16°	50	4	—
HLRS 2015-005-060				6				50	4	—
HLRS 2015-005-080				8				50	4	—
HLRS 2015-005-100				10				50	4	—
HLRS 2015-01-040			R0.1	4				50	4	—
HLRS 2015-01-060				6				50	4	—
HLRS 2015-01-080				8				50	4	—
HLRS 2015-01-100				10				50	4	—
HLRS 2015-01-120				12				55	4	—
HLRS 2015-01-160				16				55	4	—
HLRS 2015-01-200				20				60	4	—

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
					30′	1°	1°30′	2°	3°
HLRS 2010-01-080		1	R0.1	8	8.88	9.24	9.56	9.88	10.61
HLRS 2010-01-100				10	10.97	11.37	11.76	12.16	13.06
HLRS 2010-01-120				12	13.05	13.50	13.96	14.44	15.51
HLRS 2010-01-160				16	17.20	17.76	18.36	18.99	20.40
HLRS 2010-01-200				20	21.33	22.02	22.76	23.54	25.30
HLRS 2010-02-020			R0.2	2	2.51	2.69	2.86	2.98	3.23
HLRS 2010-02-020E	○			2	2.51	2.69	2.86	2.98	3.23
HLRS 2010-02-030				3	3.58	3.80	3.99	4.16	4.47
HLRS 2010-02-040				4	4.65	4.91	5.12	5.30	5.68
HLRS 2010-02-040E	○			4	4.65	4.91	5.12	5.30	5.68
HLRS 2010-02-050				5	5.71	6.00	6.23	6.45	6.92
HLRS 2010-02-060				6	6.76	7.08	7.34	7.57	8.13
HLRS 2010-02-060E	○			6	6.76	7.08	7.34	7.57	8.13
HLRS 2010-02-080				8	8.86	9.22	9.54	9.85	10.57
HLRS 2010-02-100				10	10.95	11.35	11.74	12.13	13.02
HLRS 2010-02-120				12	13.03	13.48	13.94	14.41	15.47
HLRS 2010-02-160				16	17.18	17.74	18.34	18.96	20.36
HLRS 2010-02-200				20	21.31	22.00	22.74	23.51	25.26
HLRS 2010-03-020			R0.3	2	2.49	2.67	2.84	2.95	3.19
HLRS 2010-03-020E	○			2	2.49	2.67	2.84	2.95	3.19
HLRS 2010-03-030				3	3.57	3.79	3.98	4.14	4.45
HLRS 2010-03-040				4	4.63	4.89	5.10	5.27	5.64
HLRS 2010-03-040E	○			4	4.63	4.89	5.10	5.27	5.64
HLRS 2010-03-050				5	5.70	5.99	6.22	6.43	6.90
HLRS 2010-03-060				6	6.74	7.06	7.32	7.54	8.09
HLRS 2010-03-060E	○			6	6.74	7.06	7.32	7.54	8.09
HLRS 2010-03-080				8	8.84	9.20	9.52	9.82	10.53
HLRS 2010-03-100				10	10.93	11.33	11.72	12.10	12.98
HLRS 2010-03-120				12	13.01	13.46	13.92	14.38	15.43
HLRS 2010-03-160				16	17.16	17.72	18.32	18.93	20.32
HLRS 2010-03-200				20	21.29	21.98	22.72	23.48	25.22
HLRS 2012-02-060		1.2	R0.2	6	6.18	6.38	6.59	6.82	7.33
HLRS 2012-02-120				12	12.37	12.77	13.19	13.65	14.67
HLRS 2012-02-200				20	20.62	21.29	22.00	22.76	24.46
HLRS 2012-03-060			R0.3	6	6.18	6.38	6.59	6.81	7.31
HLRS 2012-03-120				12	12.37	12.77	13.19	13.64	14.66
HLRS 2012-03-200				20	20.62	21.28	21.99	22.75	24.45
HLRS 2015-005-040		1.5	R0.05	4	4.12	4.26	4.40	4.55	4.89
HLRS 2015-005-060				6	6.18	6.39	6.60	6.83	7.34
HLRS 2015-005-080				8	8.25	8.52	8.80	9.11	9.79
HLRS 2015-005-100				10	10.31	10.64	11.00	11.38	12.24
HLRS 2015-01-040			R0.1	4	4.12	4.25	4.40	4.55	4.89
HLRS 2015-01-060				6	6.18	6.38	6.60	6.83	7.34
HLRS 2015-01-080				8	8.24	8.51	8.80	9.10	9.78
HLRS 2015-01-100				10	10.31	10.64	11.00	11.38	12.23
HLRS 2015-01-120				12	12.37	12.77	13.20	13.66	14.68
HLRS 2015-01-160				16	16.50	17.03	17.60	18.21	19.57
HLRS 2015-01-200				20	20.62	21.29	22.00	22.77	No Interference

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 2015-02-040		1.5	R0.2	4	1.5	1.45	16°	50	4	—
HLRS 2015-02-060				6				50	4	—
HLRS 2015-02-080				8				50	4	—
HLRS 2015-02-100				10				50	4	—
HLRS 2015-02-120				12				55	4	—
HLRS 2015-02-160				16				55	4	—
HLRS 2015-02-200				20				60	4	—
HLRS 2015-03-040			R0.3	4				50	4	—
HLRS 2015-03-060				6				50	4	—
HLRS 2015-03-080				8				50	4	—
HLRS 2015-03-100				10				50	4	—
HLRS 2015-03-120				12				55	4	—
HLRS 2015-03-160				16				55	4	—
HLRS 2015-03-200				20				60	4	—
HLRS 2015-05-040			R0.5	4				50	4	—
HLRS 2015-05-060				6				50	4	—
HLRS 2015-05-080				8				50	4	—
HLRS 2015-05-100				10				50	4	—
HLRS 2015-05-120				12				55	4	—
HLRS 2015-05-160				16				55	4	—
HLRS 2015-05-200				20				60	4	—
HLRS 2020-005-040		2	R0.05	4	2	1.92	16°	50	4	—
HLRS 2020-005-060				6				50	4	—
HLRS 2020-005-080				8				50	4	—
HLRS 2020-005-100				10				50	4	—
HLRS 2020-01-040			R0.1	4				50	4	—
HLRS 2020-01-040E	○			4				50	4	—
HLRS 2020-01-060				6				50	4	—
HLRS 2020-01-060E	○			6				50	4	—
HLRS 2020-01-080				8				50	4	—
HLRS 2020-01-080E	○			8				50	4	—
HLRS 2020-01-100				10				50	4	—
HLRS 2020-01-100E	○			10				50	4	—
HLRS 2020-01-120				12				55	4	—
HLRS 2020-01-120E	○			12				55	4	—
HLRS 2020-01-160				16				60	4	—
HLRS 2020-01-200				20				60	4	—
HLRS 2020-01-260				26				70	4	—
HLRS 2020-01-300				30				70	4	—
HLRS 2020-02-040			R0.2	4				50	4	—
HLRS 2020-02-040E	○			4				50	4	—
HLRS 2020-02-060				6				50	4	—
HLRS 2020-02-060E	○			6				50	4	—
HLRS 2020-02-080				8				50	4	—
HLRS 2020-02-080E	○			8				50	4	—
HLRS 2020-02-100				10				50	4	—
HLRS 2020-02-100E	○			10				50	4	—

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
					30′	1°	1°30′	2°	3°
HLRS 2015-02-040		1.5	R0.2	4	4.12	4.25	4.39	4.54	4.88
HLRS 2015-02-060				6	6.18	6.38	6.59	6.82	7.33
HLRS 2015-02-080				8	8.24	8.51	8.79	9.10	9.77
HLRS 2015-02-100				10	10.31	10.64	10.99	11.37	12.22
HLRS 2015-02-120				12	12.37	12.77	13.19	13.65	14.67
HLRS 2015-02-160				16	16.49	17.03	17.60	18.21	19.56
HLRS 2015-02-200				20	20.62	21.29	22.00	22.76	No Interference
HLRS 2015-03-040			R0.3	4	4.12	4.25	4.39	4.54	4.87
HLRS 2015-03-060				6	6.18	6.38	6.59	6.81	7.31
HLRS 2015-03-080				8	8.24	8.51	8.79	9.09	9.76
HLRS 2015-03-100				10	10.30	10.64	10.99	11.37	12.21
HLRS 2015-03-120				12	12.37	12.77	13.19	13.64	14.66
HLRS 2015-03-160				16	16.49	17.02	17.59	18.20	19.55
HLRS 2015-03-200				20	20.62	21.28	21.99	22.75	No Interference
HLRS 2015-05-040			R0.5	4	4.11	4.24	4.38	4.52	4.85
HLRS 2015-05-060				6	6.18	6.37	6.58	6.80	7.29
HLRS 2015-05-080				8	8.24	8.50	8.78	9.08	9.74
HLRS 2015-05-100				10	10.30	10.63	10.98	11.35	12.19
HLRS 2015-05-120				12	12.36	12.76	13.18	13.63	14.64
HLRS 2015-05-160				16	16.49	17.02	17.58	18.19	19.53
HLRS 2015-05-200				20	20.62	21.28	21.98	22.74	24.42
HLRS 2020-005-040		2	R0.05	4	4.16	4.29	4.44	4.59	4.94
HLRS 2020-005-060				6	6.22	6.42	6.64	6.87	7.38
HLRS 2020-005-080				8	8.28	8.55	8.84	9.15	9.83
HLRS 2020-005-100				10	10.35	10.68	11.04	11.42	12.28
HLRS 2020-01-040			R0.1	4	4.16	4.29	4.43	4.59	4.93
HLRS 2020-01-040E	○			4	4.16	4.29	4.43	4.59	4.93
HLRS 2020-01-060				6	6.22	6.42	6.64	6.87	7.38
HLRS 2020-01-060E	○			6	6.22	6.42	6.64	6.87	7.38
HLRS 2020-01-080				8	8.28	8.55	8.84	9.14	9.83
HLRS 2020-01-080E	○			8	8.28	8.55	8.84	9.14	9.83
HLRS 2020-01-100				10	10.34	10.68	11.04	11.42	12.27
HLRS 2020-01-100E	○			10	10.34	10.68	11.04	11.42	12.27
HLRS 2020-01-120				12	12.41	12.81	13.24	13.70	14.72
HLRS 2020-01-120E	○			12	12.41	12.81	13.24	13.70	14.72
HLRS 2020-01-160				16	16.53	17.07	17.64	18.25	No Interference
HLRS 2020-01-200				20	20.66	21.33	22.04	22.81	No Interference
HLRS 2020-01-260				26	26.85	27.72	28.65	No Interference	No Interference
HLRS 2020-01-300				30	30.97	31.98	33.05	No Interference	No Interference
HLRS 2020-02-040			R0.2	4	4.15	4.29	4.43	4.58	4.92
HLRS 2020-02-040E	○			4	4.15	4.29	4.43	4.58	4.92
HLRS 2020-02-060				6	6.22	6.42	6.63	6.86	7.37
HLRS 2020-02-060E	○			6	6.22	6.42	6.63	6.86	7.37
HLRS 2020-02-080				8	8.28	8.55	8.83	9.14	9.82
HLRS 2020-02-080E	○			8	8.28	8.55	8.83	9.14	9.82
HLRS 2020-02-100				10	10.34	10.68	11.03	11.41	12.26
HLRS 2020-02-100E	○			10	10.34	10.68	11.03	11.41	12.26

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 2020-02-120		2	R0.2	12	2	1.92	16°	55	4	—
HLRS 2020-02-120E	○			12				55	4	—
HLRS 2020-02-160				16				60	4	—
HLRS 2020-02-200				20				60	4	—
HLRS 2020-02-260				26				70	4	—
HLRS 2020-02-300				30				70	4	—
HLRS 2020-03-040			R0.3	4				50	4	—
HLRS 2020-03-040E	○			4				50	4	—
HLRS 2020-03-060				6				50	4	—
HLRS 2020-03-060E	○			6				50	4	—
HLRS 2020-03-080				8				50	4	—
HLRS 2020-03-080E	○			8				50	4	—
HLRS 2020-03-100				10				50	4	—
HLRS 2020-03-100E	○			10				50	4	—
HLRS 2020-03-120				12				55	4	—
HLRS 2020-03-120E	○			12				55	4	—
HLRS 2020-03-160				16				60	4	—
HLRS 2020-03-200				20				60	4	—
HLRS 2020-03-260				26				70	4	—
HLRS 2020-03-300				30				70	4	—
HLRS 2020-05-040			R0.5	4				50	4	—
HLRS 2020-05-040E	○			4				50	4	—
HLRS 2020-05-060				6				50	4	—
HLRS 2020-05-060E	○			6				50	4	—
HLRS 2020-05-080				8				50	4	—
HLRS 2020-05-080E	○			8				50	4	—
HLRS 2020-05-100				10				50	4	—
HLRS 2020-05-100E	○			10				50	4	—
HLRS 2020-05-120				12				55	4	—
HLRS 2020-05-120E	○			12				55	4	—
HLRS 2020-05-160				16				60	4	—
HLRS 2020-05-200				20				60	4	—
HLRS 2020-05-260				26				70	4	—
HLRS 2020-05-300				30				70	4	—
HLRS 2025-01-100		2.5	R0.1	10	2.5	2.42	16°	50	4	—
HLRS 2025-01-200				20				60	4	—
HLRS 2025-01-300				30				70	4	—
HLRS 2025-02-100			R0.2	10				50	4	—
HLRS 2025-02-200				20				60	4	—
HLRS 2025-02-300				30				70	4	—
HLRS 2025-03-100			R0.3	10				50	4	—
HLRS 2025-03-200				20				60	4	—
HLRS 2025-03-300				30				70	4	—
HLRS 2025-05-100			R0.5	10				50	4	—
HLRS 2025-05-200				20				60	4	—
HLRS 2025-05-300				30				70	4	—

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
					30′	1°	1°30′	2°	3°
HLRS 2020-02-120		2	R0.2	12	12.40	12.81	13.23	13.69	14.71
HLRS 2020-02-120E	○			12	12.40	12.81	13.23	13.69	14.71
HLRS 2020-02-160				16	16.53	17.06	17.64	18.25	No Interference
HLRS 2020-02-200				20	20.66	21.32	22.04	22.80	No Interference
HLRS 2020-02-260				26	26.84	27.71	28.64	No Interference	No Interference
HLRS 2020-02-300				30	30.97	31.97	33.04	No Interference	No Interference
HLRS 2020-03-040			R0.3	4	4.15	4.28	4.42	4.57	4.91
HLRS 2020-03-040E	○			4	4.15	4.28	4.42	4.57	4.91
HLRS 2020-03-060				6	6.21	6.41	6.63	6.85	7.36
HLRS 2020-03-060E	○			6	6.21	6.41	6.63	6.85	7.36
HLRS 2020-03-080				8	8.28	8.54	8.83	9.13	9.80
HLRS 2020-03-080E	○			8	8.28	8.54	8.83	9.13	9.80
HLRS 2020-03-100				10	10.34	10.67	11.03	11.41	12.25
HLRS 2020-03-100E	○			10	10.34	10.67	11.03	11.41	12.25
HLRS 2020-03-120				12	12.40	12.80	13.23	13.68	14.70
HLRS 2020-03-120E	○			12	12.40	12.80	13.23	13.68	14.70
HLRS 2020-03-160				16	16.53	17.06	17.63	18.24	19.59
HLRS 2020-03-200				20	20.65	21.32	22.03	22.79	No Interference
HLRS 2020-03-260				26	26.84	27.71	28.64	No Interference	No Interference
HLRS 2020-03-300				30	30.97	31.97	33.04	No Interference	No Interference
HLRS 2020-05-040			R0.5	4	4.15	4.28	4.41	4.56	4.89
HLRS 2020-05-040E	○			4	4.15	4.28	4.41	4.56	4.89
HLRS 2020-05-060				6	6.21	6.41	6.62	6.84	7.34
HLRS 2020-05-060E	○			6	6.21	6.41	6.62	6.84	7.34
HLRS 2020-05-080				8	8.27	8.54	8.82	9.12	9.78
HLRS 2020-05-080E	○			8	8.27	8.54	8.82	9.12	9.78
HLRS 2020-05-100				10	10.34	10.67	11.02	11.39	12.23
HLRS 2020-05-100E	○			10	10.34	10.67	11.02	11.39	12.23
HLRS 2020-05-120				12	12.40	12.80	13.22	13.67	14.68
HLRS 2020-05-120E	○			12	12.40	12.80	13.22	13.67	14.68
HLRS 2020-05-160				16	16.53	17.06	17.62	18.23	19.57
HLRS 2020-05-200				20	20.65	21.31	22.02	22.78	No Interference
HLRS 2020-05-260				26	26.84	27.70	28.63	No Interference	No Interference
HLRS 2020-05-300				30	30.97	31.96	33.03	No Interference	No Interference
HLRS 2025-01-100		2.5	R0.1	10	10.34	10.68	11.04	11.42	12.27
HLRS 2025-01-200				20	20.66	21.33	22.04	No Interference	No Interference
HLRS 2025-01-300				30	30.97	31.98	No Interference	No Interference	No Interference
HLRS 2025-02-100			R0.2	10	10.34	10.68	11.03	11.41	12.26
HLRS 2025-02-200				20	20.66	21.32	22.04	No Interference	No Interference
HLRS 2025-02-300				30	30.97	31.97	No Interference	No Interference	No Interference
HLRS 2025-03-100			R0.3	10	10.34	10.67	11.03	11.41	12.25
HLRS 2025-03-200				20	20.65	21.32	22.03	No Interference	No Interference
HLRS 2025-03-300				30	30.97	31.97	No Interference	No Interference	No Interference
HLRS 2025-05-100			R0.5	10	10.34	10.67	11.02	11.39	12.23
HLRS 2025-05-200				20	20.65	21.31	22.02	No Interference	No Interference
HLRS 2025-05-300				30	30.97	31.96	No Interference	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 2030-01-060		3	R0.1	6	3	2.92	16°	55	6	—
HLRS 2030-01-060E	○			6				55	6	—
HLRS 2030-01-120				12				55	6	—
HLRS 2030-01-160				16				60	6	—
HLRS 2030-01-160E	○			16				60	6	—
HLRS 2030-01-180				18				60	6	—
HLRS 2030-01-200				20				60	6	—
HLRS 2030-01-260				26				70	6	—
HLRS 2030-01-300				30				70	6	—
HLRS 2030-01-360				36				80	6	—
HLRS 2030-02-060			R0.2	6				55	6	—
HLRS 2030-02-060E	○			6				55	6	—
HLRS 2030-02-120				12				55	6	—
HLRS 2030-02-160				16				60	6	—
HLRS 2030-02-160E	○			16				60	6	—
HLRS 2030-02-180				18				60	6	—
HLRS 2030-02-200				20				60	6	—
HLRS 2030-02-260				26				70	6	—
HLRS 2030-02-300				30				70	6	—
HLRS 2030-02-360				36				80	6	—
HLRS 2030-03-060			R0.3	6				55	6	—
HLRS 2030-03-060E	○			6				55	6	—
HLRS 2030-03-120				12				55	6	—
HLRS 2030-03-160				16				60	6	—
HLRS 2030-03-160E	○			16				60	6	—
HLRS 2030-03-180				18				60	6	—
HLRS 2030-03-200				20				60	6	—
HLRS 2030-03-260				26				70	6	—
HLRS 2030-03-300				30				70	6	—
HLRS 2030-03-360				36				80	6	—
HLRS 2030-05-060			R0.5	6				55	6	—
HLRS 2030-05-060E	○			6				55	6	—
HLRS 2030-05-120				12				55	6	—
HLRS 2030-05-160				16				60	6	—
HLRS 2030-05-160E	○			16				60	6	—
HLRS 2030-05-180				18				60	6	—
HLRS 2030-05-200				20				60	6	—
HLRS 2030-05-260				26				70	6	—
HLRS 2030-05-300				30				70	6	—
HLRS 2030-05-360				36				80	6	—

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
					30′	1°	1°30′	2°	3°
HLRS 2030-01-060		3	R0.1	6	6.21	6.42	6.63	6.86	7.37
HLRS 2030-01-060E	○			6	6.21	6.42	6.63	6.86	7.37
HLRS 2030-01-120				12	12.40	12.81	13.23	13.69	14.72
HLRS 2030-01-160				16	16.53	17.06	17.64	18.25	19.61
HLRS 2030-01-160E	○			16	16.53	17.06	17.64	18.25	19.61
HLRS 2030-01-180				18	18.59	19.19	19.84	20.53	22.06
HLRS 2030-01-200				20	20.65	21.32	22.04	22.80	24.51
HLRS 2030-01-260				26	26.84	27.71	28.64	29.64	No Interference
HLRS 2030-01-300				30	30.97	31.97	33.04	34.19	No Interference
HLRS 2030-01-360				36	37.16	38.36	39.65	41.02	No Interference
HLRS 2030-02-060			R0.2	6	6.21	6.41	6.63	6.85	7.36
HLRS 2030-02-060E	○			6	6.21	6.41	6.63	6.85	7.36
HLRS 2030-02-120				12	12.40	12.80	13.23	13.69	14.71
HLRS 2030-02-160				16	16.53	17.06	17.63	18.24	19.60
HLRS 2030-02-160E	○			16	16.53	17.06	17.63	18.24	19.60
HLRS 2030-02-180				18	18.59	19.19	19.83	20.52	22.05
HLRS 2030-02-200				20	20.65	21.32	22.03	22.80	24.49
HLRS 2030-02-260				26	26.84	27.71	28.64	29.63	No Interference
HLRS 2030-02-300				30	30.97	31.97	33.04	34.18	No Interference
HLRS 2030-02-360				36	37.15	38.36	39.64	41.02	No Interference
HLRS 2030-03-060			R0.3	6	6.21	6.41	6.62	6.85	7.35
HLRS 2030-03-060E	○			6	6.21	6.41	6.62	6.85	7.35
HLRS 2030-03-120				12	12.40	12.80	13.22	13.68	14.70
HLRS 2030-03-160				16	16.53	17.06	17.63	18.23	19.59
HLRS 2030-03-160E	○			16	16.53	17.06	17.63	18.23	19.59
HLRS 2030-03-180				18	18.59	19.19	19.83	20.51	22.04
HLRS 2030-03-200				20	20.65	21.32	22.03	22.79	24.48
HLRS 2030-03-260				26	26.84	27.71	28.63	29.62	No Interference
HLRS 2030-03-300				30	30.96	31.97	33.03	34.18	No Interference
HLRS 2030-03-360				36	37.15	38.35	39.64	41.01	No Interference
HLRS 2030-05-060			R0.5	6	6.21	6.40	6.61	6.83	7.33
HLRS 2030-05-060E	○			6	6.21	6.40	6.61	6.83	7.33
HLRS 2030-05-120				12	12.40	12.79	13.21	13.67	14.67
HLRS 2030-05-160				16	16.52	17.05	17.62	18.22	19.57
HLRS 2030-05-160E	○			16	16.52	17.05	17.62	18.22	19.57
HLRS 2030-05-180				18	18.58	19.18	19.82	20.50	22.02
HLRS 2030-05-200				20	20.65	21.31	22.02	22.78	24.46
HLRS 2030-05-260				26	26.84	27.70	28.62	29.61	No Interference
HLRS 2030-05-300				30	30.96	31.96	33.02	34.16	No Interference
HLRS 2030-05-360				36	37.15	38.35	39.63	41.00	No Interference

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 2030-10-060		3	R1	6	3	2.92	16°	55	6	—
HLRS 2030-10-060E	○			6				55	6	—
HLRS 2030-10-120				12				55	6	—
HLRS 2030-10-160				16				60	6	—
HLRS 2030-10-160E	○			16				60	6	—
HLRS 2030-10-180				18				60	6	—
HLRS 2030-10-200				20				60	6	—
HLRS 2030-10-260				26				70	6	—
HLRS 2030-10-300				30				70	6	—
HLRS 2030-10-360				36				80	6	—
HLRS 2040-01-080		4	R0.1	8	4	3.82	16°	65	6	—
HLRS 2040-01-080E	○			8				65	6	—
HLRS 2040-01-120				12				65	6	—
HLRS 2040-01-160				16				65	6	—
HLRS 2040-01-200				20				65	6	—
HLRS 2040-01-200E	○			20				65	6	—
HLRS 2040-01-240				24				70	6	—
HLRS 2040-01-320				32				80	6	—
HLRS 2040-01-480				48				100	6	—
HLRS 2040-02-080			R0.2	8				65	6	—
HLRS 2040-02-080E	○			8				65	6	—
HLRS 2040-02-120				12				65	6	—
HLRS 2040-02-160				16				65	6	—
HLRS 2040-02-200				20				65	6	—
HLRS 2040-02-200E	○			20				65	6	—
HLRS 2040-02-240				24				70	6	—
HLRS 2040-02-320				32				80	6	—
HLRS 2040-02-480				48				100	6	—
HLRS 2040-03-080			R0.3	8				65	6	—
HLRS 2040-03-080E	○			8				65	6	—
HLRS 2040-03-120				12				65	6	—
HLRS 2040-03-160				16				65	6	—
HLRS 2040-03-200				20				65	6	—
HLRS 2040-03-200E	○			20				65	6	—
HLRS 2040-03-240				24				70	6	—
HLRS 2040-03-320				32				80	6	—
HLRS 2040-03-480				48				100	6	—
HLRS 2040-05-080			R0.5	8				65	6	—
HLRS 2040-05-080E	○			8				65	6	—
HLRS 2040-05-120				12				65	6	—
HLRS 2040-05-160				16				65	6	—
HLRS 2040-05-200				20				65	6	—
HLRS 2040-05-200E	○			20				65	6	—
HLRS 2040-05-240				24				70	6	—
HLRS 2040-05-320				32				80	6	—
HLRS 2040-05-480				48				100	6	—

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
					30′	1°	1°30′	2°	3°
HLRS 2030-10-060		3	R1	6	6.20	6.39	6.59	6.80	7.28
HLRS 2030-10-060E	○			6	6.20	6.39	6.59	6.80	7.28
HLRS 2030-10-120				12	12.39	12.78	13.19	13.63	14.62
HLRS 2030-10-160				16	16.51	17.04	17.59	18.19	19.52
HLRS 2030-10-160E	○			16	16.51	17.04	17.59	18.19	19.52
HLRS 2030-10-180				18	18.58	19.17	19.79	20.47	21.96
HLRS 2030-10-200				20	20.64	21.29	21.99	22.74	24.41
HLRS 2030-10-260				26	26.83	27.68	28.60	29.57	No Interference
HLRS 2030-10-300				30	30.95	31.94	33.00	34.13	No Interference
HLRS 2030-10-360				36	37.14	38.33	39.60	40.96	No Interference
HLRS 2040-01-080		4	R0.1	8	8.45	8.73	9.02	9.33	10.03
HLRS 2040-01-080E	○			8	8.45	8.73	9.02	9.33	10.03
HLRS 2040-01-120				12	12.58	12.99	13.42	13.89	14.92
HLRS 2040-01-160				16	16.70	17.25	17.82	18.44	No Interference
HLRS 2040-01-200				20	20.83	21.50	22.23	23.00	No Interference
HLRS 2040-01-200E	○			20	20.83	21.50	22.23	23.00	No Interference
HLRS 2040-01-240				24	24.95	25.76	26.63	27.55	No Interference
HLRS 2040-01-320				32	33.21	34.28	35.43	No Interference	No Interference
HLRS 2040-01-480				48	49.71	51.32	No Interference	No Interference	No Interference
HLRS 2040-02-080			R0.2	8	8.45	8.72	9.01	9.33	10.02
HLRS 2040-02-080E	○			8	8.45	8.72	9.01	9.33	10.02
HLRS 2040-02-120				12	12.58	12.98	13.42	13.88	14.91
HLRS 2040-02-160				16	16.70	17.24	17.82	18.44	No Interference
HLRS 2040-02-200				20	20.83	21.50	22.22	22.99	No Interference
HLRS 2040-02-200E	○			20	20.83	21.50	22.22	22.99	No Interference
HLRS 2040-02-240				24	24.95	25.76	26.62	27.54	No Interference
HLRS 2040-02-320				32	33.20	34.28	35.43	No Interference	No Interference
HLRS 2040-02-480				48	49.71	51.32	No Interference	No Interference	No Interference
HLRS 2040-03-080			R0.3	8	8.45	8.72	9.01	9.32	10.01
HLRS 2040-03-080E	○			8	8.45	8.72	9.01	9.32	10.01
HLRS 2040-03-120				12	12.58	12.98	13.41	13.87	14.69
HLRS 2040-03-160				16	16.70	17.24	17.81	18.43	No Interference
HLRS 2040-03-200				20	20.83	21.50	22.22	22.98	No Interference
HLRS 2040-03-200E	○			20	20.83	21.50	22.22	22.98	No Interference
HLRS 2040-03-240				24	24.95	25.76	26.62	27.54	No Interference
HLRS 2040-03-320				32	33.20	34.28	35.42	No Interference	No Interference
HLRS 2040-03-480				48	49.71	51.31	No Interference	No Interference	No Interference
HLRS 2040-05-080			R0.5	8	8.45	8.71	9.00	9.31	9.99
HLRS 2040-05-080E	○			8	8.45	8.71	9.00	9.31	9.99
HLRS 2040-05-120				12	12.57	12.97	13.40	13.86	14.88
HLRS 2040-05-160				16	16.70	17.23	17.80	18.42	No Interference
HLRS 2040-05-200				20	20.82	21.49	22.21	22.97	No Interference
HLRS 2040-05-200E	○			20	20.82	21.49	22.21	22.97	No Interference
HLRS 2040-05-240				24	24.95	25.75	26.61	27.52	No Interference
HLRS 2040-05-320				32	33.20	34.27	35.41	No Interference	No Interference
HLRS 2040-05-480				48	49.70	51.31	No Interference	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 2040-10-080		4	R1	8	4	3.82	16°	65	6	—
HLRS 2040-10-080E	○			8				65	6	—
HLRS 2040-10-120				12				65	6	—
HLRS 2040-10-160				16				65	6	—
HLRS 2040-10-200				20				65	6	—
HLRS 2040-10-200E	○			20				65	6	—
HLRS 2040-10-240				24				70	6	—
HLRS 2040-10-320				32				80	6	—
HLRS 2040-10-480				48				100	6	—
HLRS 2050-02-200		5	R0.2	20	5	4.82	16°	70	6	—
HLRS 2050-02-400				40				90	6	—
HLRS 2050-03-200			R0.3	20				70	6	—
HLRS 2050-03-400				40				90	6	—
HLRS 2050-05-200			R0.5	20				70	6	—
HLRS 2050-05-400				40				90	6	—
HLRS 2050-10-200			R1	20				70	6	—
HLRS 2050-10-400				40				90	6	—
HLRS 2060-01-120		6	R0.1	12	6	5.82	–	65	6	—
HLRS 2060-01-120E	○			12				65	6	—
HLRS 2060-01-200				20				70	6	—
HLRS 2060-01-300				30				100	6	—
HLRS 2060-01-300E	○			30				100	6	—
HLRS 2060-01-600				60				120	6	—
HLRS 2060-02-120			R0.2	12				65	6	—
HLRS 2060-02-120E	○			12				65	6	—
HLRS 2060-02-200				20				70	6	—
HLRS 2060-02-300				30				100	6	—
HLRS 2060-02-300E	○			30				100	6	—
HLRS 2060-02-600				60				120	6	—
HLRS 2060-03-120			R0.3	12				65	6	—
HLRS 2060-03-120E	○			12				65	6	—
HLRS 2060-03-200				20				70	6	—
HLRS 2060-03-300				30				100	6	—
HLRS 2060-03-300E	○			30				100	6	—
HLRS 2060-03-600				60				120	6	—
HLRS 2060-05-120			R0.5	12				65	6	—
HLRS 2060-05-120E	○			12				65	6	—
HLRS 2060-05-200				20				70	6	—
HLRS 2060-05-300				30				100	6	—
HLRS 2060-05-300E	○			30				100	6	—
HLRS 2060-05-600				60				120	6	—
HLRS 2060-10-120			R1	12				65	6	—
HLRS 2060-10-120E	○			12				65	6	—
HLRS 2060-10-200				20				70	6	—
HLRS 2060-10-300				30				100	6	—
HLRS 2060-10-300E	○			30				100	6	—
HLRS 2060-10-600				60				120	6	—

Next Page ➡

Unit (mm)

Model Number	Excellent	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
					30′	1°	1°30′	2°	3°
HLRS 2040-10-080		4	R1	8	8.44	8.70	8.98	9.27	9.93
HLRS 2040-10-080E	○			8	8.44	8.70	8.98	9.27	9.93
HLRS 2040-10-120				12	12.56	12.96	13.38	13.83	14.83
HLRS 2040-10-160				16	16.69	17.22	17.78	18.38	19.72
HLRS 2040-10-200				20	20.82	21.48	22.18	22.94	No Interference
HLRS 2040-10-200E	○			20	20.82	21.48	22.18	22.94	No Interference
HLRS 2040-10-240				24	24.94	25.74	26.58	27.49	No Interference
HLRS 2040-10-320				32	33.19	34.25	35.39	No Interference	No Interference
HLRS 2040-10-480				48	49.69	51.29	No Interference	No Interference	No Interference
HLRS 2050-02-200		5	R0.2	20	20.83	21.50	No Interference	No Interference	No Interference
HLRS 2050-02-400				40	41.46	No Interference	No Interference	No Interference	No Interference
HLRS 2050-03-200			R0.3	20	20.83	21.50	No Interference	No Interference	No Interference
HLRS 2050-03-400				40	41.45	No Interference	No Interference	No Interference	No Interference
HLRS 2050-05-200			R0.5	20	20.82	21.49	No Interference	No Interference	No Interference
HLRS 2050-05-400				40	41.45	No Interference	No Interference	No Interference	No Interference
HLRS 2050-10-200			R1	20	20.82	21.48	No Interference	No Interference	No Interference
HLRS 2050-10-400				40	41.44	No Interference	No Interference	No Interference	No Interference
HLRS 2060-01-120		6	R0.1	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-01-120E	○			12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-01-200				20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-01-300				30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-01-300E	○			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-01-600				60	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-02-120			R0.2	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-02-120E	○			12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-02-200				20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-02-300				30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-02-300E	○			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-02-600				60	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-03-120			R0.3	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-03-120E	○			12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-03-200				20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-03-300				30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-03-300E	○			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-03-600				60	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-05-120			R0.5	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-05-120E	○			12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-05-200				20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-05-300				30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-05-300E	○			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-05-600				60	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-10-120			R1	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-10-120E	○			12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-10-200				20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-10-300				30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-10-300E	○			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 2060-10-600				60	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for HLRS (2 Flutes)

WORK MATERIAL			COPPER OFC / TPC				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002	0.2	0.5	55,000	230	0.027	0.02	55,000	230	0.006	0.02	44,800	236	0.005	0.02	19,000	30	0.002	0.015
		1	55,000	200	0.027	0.02	55,000	200	0.006	0.02	35,000	150	0.004	0.02	15,000	25	0.0015	0.015
		1.5	55,000	180	0.017	0.01	55,000	180	0.005	0.01	27,000	100	0.003	0.01	12,000	20	0.001	0.007
		2	55,000	170	0.007	0.005	55,000	170	0.003	0.005	20,000	60	0.002	0.005	10,500	15	0.001	0.003
2003	0.3	1	60,000	500	0.03	0.02	60,000	500	0.007	0.02	35,000	350	0.005	0.02	22,000	35	0.004	0.015
		1.5	60,000	470	0.03	0.02	60,000	470	0.007	0.02	35,000	310	0.005	0.018	22,000	33	0.004	0.015
		2	60,000	400	0.03	0.02	60,000	400	0.007	0.02	33,200	250	0.005	0.015	20,000	32	0.004	0.015
		2.5	57,000	330	0.03	0.017	57,000	330	0.007	0.017	30,000	180	0.003	0.012	18,000	30	0.002	0.012
		3	52,000	220	0.03	0.015	52,000	220	0.006	0.015	25,000	80	0.003	0.01	15,000	20	0.002	0.01
2004	0.4	1	50,900	610	0.048	0.063	50,900	510	0.013	0.072	40,700	370	0.011	0.072	24,200	40	0.004	0.072
		1.5	45,200	580	0.045	0.063	45,200	480	0.012	0.054	36,200	360	0.01	0.054	21,500	38	0.004	0.054
		2	40,400	540	0.042	0.054	40,400	450	0.011	0.045	32,300	330	0.009	0.045	19,200	35	0.004	0.045
		3	33,900	460	0.027	0.054	33,900	390	0.008	0.027	27,100	280	0.007	0.027	16,100	30	0.003	0.027
		4	30,000	220	0.01	0.045	30,000	340	0.006	0.014	24,000	250	0.005	0.014	14,300	27	0.002	0.014
2005	0.5	1	49,200	1,370	0.081	0.117	49,200	1,140	0.034	0.122	40,000	860	0.03	0.122	24,800	94	0.013	0.122
		2	39,900	1,000	0.075	0.108	39,900	830	0.029	0.117	32,500	630	0.026	0.117	20,100	68	0.011	0.117
		3	31,900	770	0.057	0.09	31,900	640	0.023	0.113	26,000	480	0.02	0.113	16,100	52	0.008	0.113
		4	29,100	660	0.039	0.072	29,100	550	0.016	0.108	23,700	410	0.014	0.108	14,600	45	0.006	0.108
		5	26,400	570	0.027	0.045	26,400	470	0.011	0.099	21,500	360	0.01	0.099	13,300	39	0.004	0.099
		6	24,200	480	0.021	0.018	24,200	400	0.007	0.09	19,700	300	0.006	0.09	12,200	33	0.003	0.09
2006	0.6	2	28,600	610	0.114	0.162	28,600	510	0.01	0.219	23,700	390	0.01	0.219	15,200	43	0.004	0.219
		3	23,800	480	0.09	0.135	23,800	400	0.008	0.108	19,700	300	0.007	0.108	12,600	33	0.003	0.108
		4	20,400	400	0.063	0.108	20,400	330	0.005	0.104	16,800	250	0.005	0.104	10,800	28	0.002	0.104
		6	16,800	300	0.036	0.045	16,800	250	0.003	0.099	13,900	190	0.003	0.099	8,900	21	0.001	0.099
		8	14,600	240	0.021	0.027	14,600	200	0.002	0.072	12,100	150	0.002	0.072	7,700	16	0.001	0.072
2007	0.7	4	18,400	480	0.087	0.162	18,400	400	0.008	0.117	15,500	310	0.008	0.117	10,200	35	0.004	0.117
		6	15,400	360	0.051	0.108	15,400	300	0.005	0.108	13,000	230	0.005	0.108	8,600	26	0.002	0.108
2008	0.8	4	17,500	540	0.132	0.198	17,500	450	0.014	0.117	15,000	360	0.015	0.117	10,200	41	0.007	0.117
		6	14,600	410	0.075	0.144	14,600	340	0.008	0.108	12,500	270	0.008	0.108	8,500	30	0.004	0.108
		8	12,800	310	0.03	0.1	12,800	270	0.005	0.09	11,000	185	0.004	0.09	7,600	20	0.002	0.09
2010	1	2	17,600	1,100	0.21	0.45	17,600	920	0.035	0.27	15,300	750	0.04	0.27	10,900	89	0.02	0.27
		3	15,500	1,050	0.205	0.425	15,500	870	0.031	0.27	13,200	720	0.037	0.27	9,400	86	0.018	0.27
		4	13,800	980	0.201	0.405	13,800	820	0.03	0.27	12,000	670	0.035	0.27	8,500	80	0.017	0.27
		5	12,500	900	0.16	0.4	12,500	720	0.025	0.24	11,000	600	0.03	0.24	7,800	72	0.015	0.24
		6	11,300	790	0.117	0.387	11,300	650	0.021	0.216	9,800	540	0.024	0.216	7,000	64	0.012	0.216
		8	9,800	590	0.072	0.36	9,800	490	0.016	0.189	8,500	400	0.018	0.189	6,100	48	0.009	0.189
		10	8,800	390	0.048	0.315	8,800	320	0.011	0.126	7,600	270	0.013	0.126	5,400	32	0.006	0.126
		12	8,100	260	0.033	0.27	8,100	210	0.008	0.072	7,000	180	0.009	0.072	5,000	21	0.004	0.072
		16	7,000	230	0.018	0.225	7,000	190	0.004	0.027	6,100	160	0.005	0.027	4,300	19	0.002	0.027
		20	6,300	160	0.015	0.18	6,300	130	0.003	0.018	5,500	110	0.003	0.018	3,900	13	0.001	0.018


Milling Conditions for HLRS (2 Flutes)

WORK MATERIAL			COPPER OFC / TPC				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2012	1.2	6	9,400	700	0.186	0.468	9,400	580	0.018	0.09	8,400	490	0.022	0.09	6,200	60	0.011	0.09
		12	6,800	440	0.054	0.405	6,800	370	0.007	0.072	6,100	310	0.008	0.072	4,500	38	0.004	0.072
		20	5,400	250	0.021	0.24	5,400	210	0.003	0.018	4,800	180	0.003	0.018	3,500	22	0.002	0.018
2015	1.5	4	13,200	1,310	0.3	0.675	13,200	1,090	0.045	0.45	12,000	950	0.06	0.45	9,200	124	0.033	0.45
		6	10,600	1,240	0.282	0.63	10,600	1,030	0.041	0.405	9,700	900	0.055	0.405	7,400	117	0.03	0.405
		8	9,300	1,050	0.204	0.612	9,300	870	0.034	0.315	8,500	760	0.045	0.315	6,500	99	0.025	0.315
		10	8,500	900	0.15	0.567	8,500	750	0.032	0.288	7,800	650	0.042	0.288	6,000	85	0.023	0.288
		12	7,800	800	0.114	0.54	7,800	670	0.029	0.27	7,100	580	0.038	0.27	5,400	76	0.021	0.27
		16	6,800	620	0.066	0.45	6,800	510	0.015	0.18	6,200	450	0.02	0.18	4,700	58	0.011	0.18
		20	6,000	490	0.042	0.36	6,000	410	0.005	0.108	5,500	360	0.006	0.108	4,200	46	0.003	0.108
2020	2	4	15,300	1,500	0.33	0.9	15,300	1,250	0.046	0.9	14,300	1,130	0.065	0.9	11,500	162	0.039	0.9
		6	12,800	1,220	0.321	0.855	12,800	1,020	0.043	0.81	12,000	930	0.06	0.81	9,700	133	0.036	0.81
		8	11,200	1,120	0.267	0.81	11,200	930	0.039	0.72	10,400	850	0.055	0.72	8,400	121	0.033	0.72
		10	10,000	1,050	0.225	0.765	10,000	870	0.033	0.585	9,300	790	0.047	0.585	7,600	113	0.028	0.585
		12	9,100	980	0.186	0.72	9,100	820	0.031	0.45	8,500	740	0.044	0.45	6,900	107	0.026	0.45
		16	7,800	830	0.132	0.702	7,800	690	0.028	0.315	7,300	630	0.039	0.315	5,900	90	0.023	0.315
		20	7,000	770	0.093	0.666	7,000	640	0.017	0.198	6,600	580	0.024	0.198	5,300	84	0.014	0.198
		26	6,200	700	0.06	0.54	6,200	580	0.006	0.144	5,800	530	0.008	0.144	4,600	75	0.005	0.144
		30	6,000	670	0.05	0.45	6,000	550	0.005	0.135	5,500	500	0.005	0.135	4,400	70	0.002	0.135
2025	2.5	10	10,500	1,220	0.339	0.855	10,500	1,020	0.052	0.54	10,000	960	0.075	0.54	8,400	154	0.048	0.54
		20	7,800	720	0.165	0.756	7,800	600	0.024	0.225	7,500	560	0.035	0.225	6,300	91	0.022	0.225
		30	6,300	540	0.069	0.63	6,300	450	0.011	0.18	6,000	420	0.016	0.18	5,000	67	0.01	0.18
2030	3	6	14,000	2,700	0.5	0.9	14,000	1,510	0.15	0.72	13,300	1,140	0.15	0.72	12,000	270	0.1	0.72
		12	10,500	1,600	0.39	0.85	10,500	1,150	0.105	0.67	10,000	890	0.105	0.67	9,000	200	0.075	0.67
		16	9,200	1,160	0.321	0.81	9,200	960	0.081	0.63	8,800	730	0.081	0.63	7,900	173	0.054	0.63
		18	8,800	1,100	0.29	0.79	8,800	900	0.078	0.6	8,300	700	0.078	0.6	7,500	160	0.048	0.6
		20	8,400	1,050	0.26	0.78	8,400	880	0.073	0.58	7,900	680	0.073	0.58	7,100	150	0.044	0.58
		26	7,500	980	0.18	0.72	7,500	820	0.065	0.495	7,100	620	0.065	0.495	6,400	146	0.043	0.495
		30	7,000	870	0.14	0.69	7,000	720	0.05	0.38	6,500	560	0.05	0.38	6,000	118	0.029	0.36
		36	6,400	710	0.09	0.63	6,400	590	0.022	0.18	6,100	440	0.022	0.18	5,500	105	0.014	0.18
2040	4	8	10,200	1,340	0.42	1.62	10,200	1,110	0.095	1.35	8,500	970	0.14	1.35	7,300	223	0.101	1.35
		12	8,900	1,300	0.41	1.56	8,900	1,080	0.083	1.15	7,600	950	0.12	1.15	6,400	215	0.085	1.15
		16	7,900	1,250	0.4	1.5	7,900	1,030	0.065	1	6,600	910	0.1	1	5,600	205	0.065	1
		20	6,900	1,190	0.384	1.44	6,900	990	0.054	0.9	5,800	860	0.08	0.9	4,900	198	0.058	0.9
		24	6,200	1,100	0.31	1.38	6,200	900	0.043	0.8	5,200	770	0.065	0.8	4,500	175	0.043	0.8
		32	5,500	860	0.189	1.26	5,500	720	0.027	0.648	4,600	630	0.04	0.648	3,900	144	0.029	0.648
		48	4,600	430	0.093	1.08	4,600	360	0.007	0.315	3,900	310	0.01	0.315	3,300	72	0.007	0.315

Milling Conditions for HLRS (2 Flutes)

WORK MATERIAL			COPPER OFC / TPC				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2050	**5**	20	6,700	1,780	0.606	1.98	6,700	1,480	0.092	1.17	4,800	990	0.13	1.17	4,000	297	0.096	1.17
		40	4,600	850	0.297	1.53	4,600	710	0.046	0.9	3,300	470	0.065	0.9	2,800	143	0.048	0.9
2060	**6**	12	8,000	1,800	0.6	2.25	8,000	1,620	0.5	1.35	4,700	1,360	0.2	1.35	4,000	540	0.15	1.35
		20	5,800	1,350	0.58	2.12	5,800	1,180	0.46	1.31	3,500	1,000	0.18	1.31	3,000	380	0.14	1.31
		30	4,500	1,060	0.546	1.98	4,500	880	0.396	1.26	2,600	740	0.158	1.26	2,200	294	0.119	1.26
		60	2,800	530	0.156	1.62	2,800	440	0.113	0.99	1,600	370	0.045	0.99	1,400	147	0.034	0.99

Side Milling



Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Every coolant offers stable milling.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.

CLRS

NEW



Released November 2025


UTCOAT 2 Flute Long Neck Radius End Mills

φ0.2～φ6


Super MG | UT COAT | 30° | R

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	○				○	●		●			○	○		

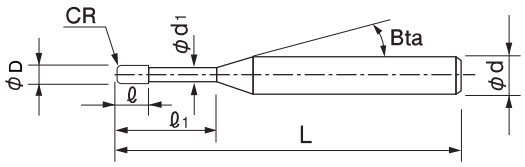

The shank taper angle shown is not an exact value.



Feature 1 High precision

Even higher precision milling!

Conventional HLRS standard type Unit (mm)

Outside Diameter	Diameter Tolerance	Radius Accuracy	Shank Diameter Tolerance
0.2 ≦ D ≦ 6	0/-0.015	± 0.005	0/-0.005

CLRS Unit (mm)

Outside Diameter	Diameter Tolerance	Radius Accuracy	Shank Diameter Tolerance
0.2 ≦ D ≦ 0.8	0/-0.008	± 0.003	0/-0.004 (h4 tolerance)
1 ≦ D ≦ 6	0/-0.01		

Feature 2 Negative flat surface


Improved mirror surface finish for flat milling

Conventional tool



CLRS



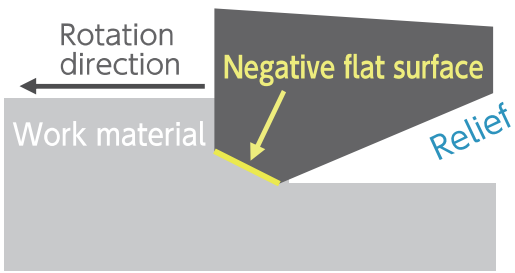


Key points Tip geometry Negative flat surface

Conventional tool





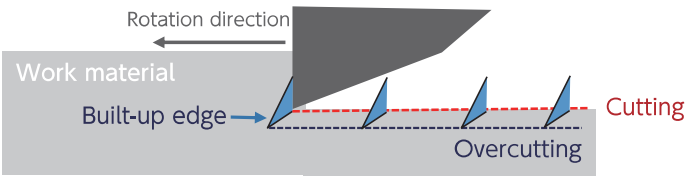


CLRS

Negative relief angle on cutting edge





Flat tip outline



Remove cutting marks caused by the built-up edge by rubbing them with a negative flat surface.

※ An inclined angle of 3° is recommended when approaching.
※ Some materials such as SUS and titanium alloys cannot be polished.



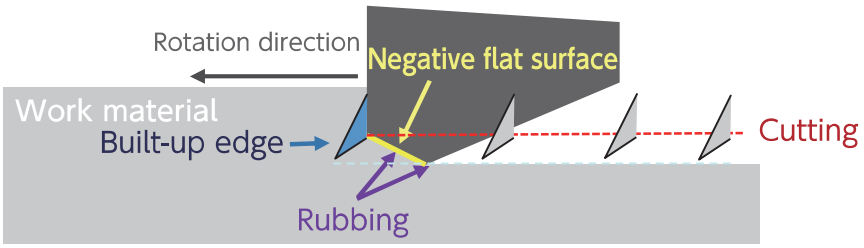

Flat finishing comparison
$\phi 6 \times CR0.1 \times EL12$

PXA30 (30HRC)






Spindle Speed	5,250 min^{-1}
Feed Rate	3,600 mm/min
a_p	0.02 mm
a_e	0.15 mm
Cycle Time	7 min 50 s


Coolant Water Soluble

Average Roughness (Ra) Comparison

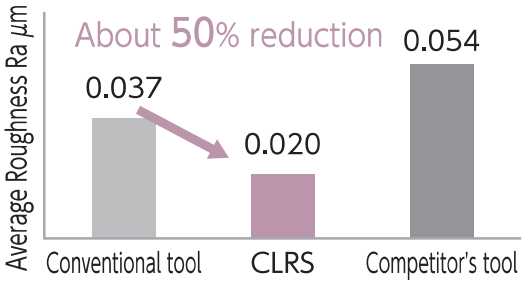


Copper milling example　Comparison with conventional tools for steels
ϕ3 × CR0.2 × EL12

Tough Pitch Copper C1100

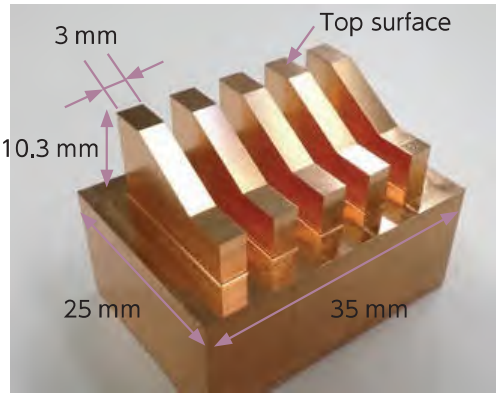

Coolant　Water Soluble

Top surface

CLRS	Conventional tools for steels
	
Ra **0.015** μm	Ra **0.070** μm

Process	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (min)
Roughing	10,500	1,600 Groove 800	0.39	0.85	0.08	21
Semi-finishing	10,500	1,600	0.03	0.15	0.03	60
Finishing	10,500	1,600	0	0.15	0.03	90


Total 171 min

CLRS has a smaller surface roughness than conventional tools for steels. Small burrs on the work surface and good edges.


Feature 3
Long tool life with UTCOAT


UT COAT

High lubricity and toughness.
Improved surface roughness of low to medium hardness materials and longer tool life.

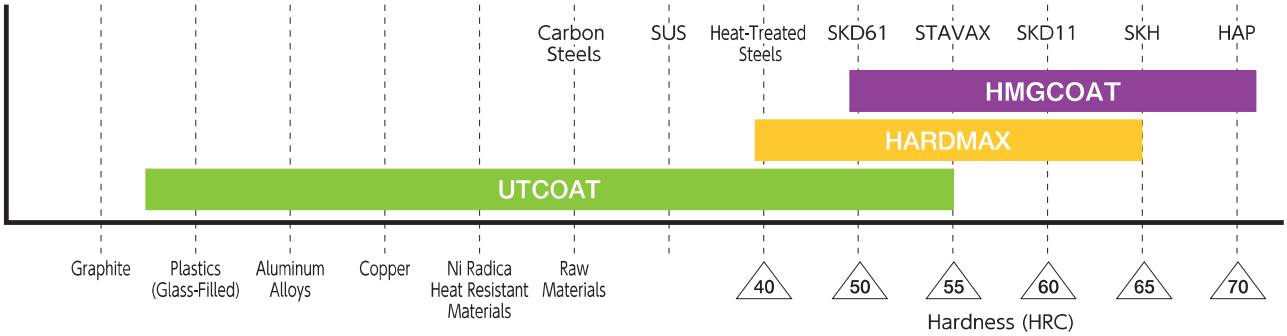


Friction coefficient of coating film

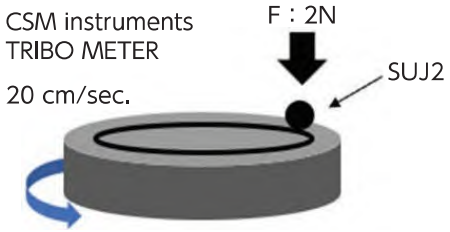

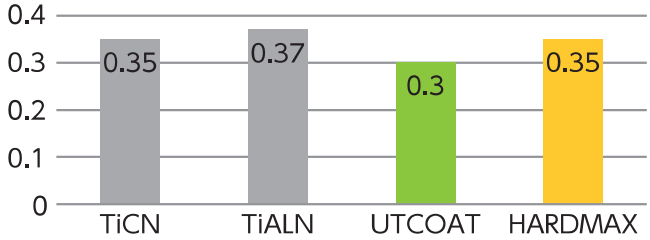

Roughing Tool wear comparison (Flat milling)
ϕ3 × CR0.2 × EL12

S50C




Work Size 200 × 105 mm
Coolant Water Soluble

Spindle Speed	15,000 min^{-1}
Feed Rate	1,600 mm/min
a_p	0.2 mm
a_e	0.8 mm
Cycle Time	26 min

CLRS Relief wear width 0.058 mm




Conventional tool Relief wear width 0.077 mm

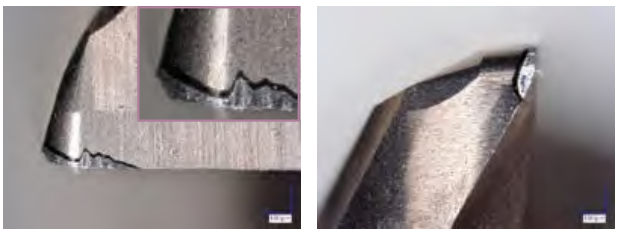

Roughing Tool wear comparison (Pocket milling)
ϕ6 × CR0.1


PXA30 (30HRC)



Work Size 80 × 80 × 2 mm
Coolant Water Soluble

Spindle Speed	4,500 min^{-1}
Feed Rate	880 mm/min
a_p	0.4 mm
a_e	1.26 mm
Overhang Length	32 mm
Cycle Time	27.5 min


CLRS Relief wear width 0.02 mm

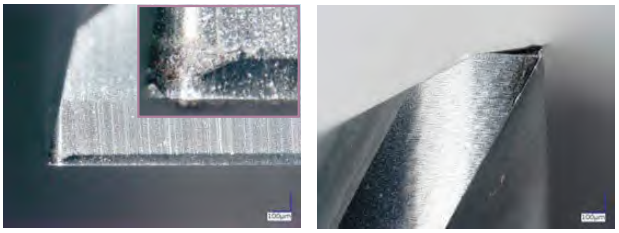

Conventional tool Relief wear width 0.03 mm



Competitor's tool Relief wear width 0.1 mm

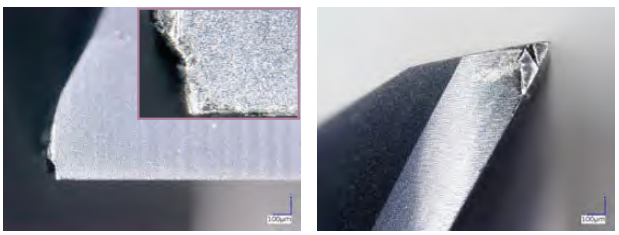


Longer tool life with UTCOAT which is suitable for low to medium hardness materials.

Roughing Stainless steel Tool wear comparison (Side milling) SUS304

$\phi 6 \times$ CR0.1

Spindle Speed	5,200 min^{-1}
Feed Rate	1,000 mm/min
a_p	3 mm
a_e	0.3 mm
Overhang Length	23 mm
Cycle Time	90 min

Coolant Water Soluble

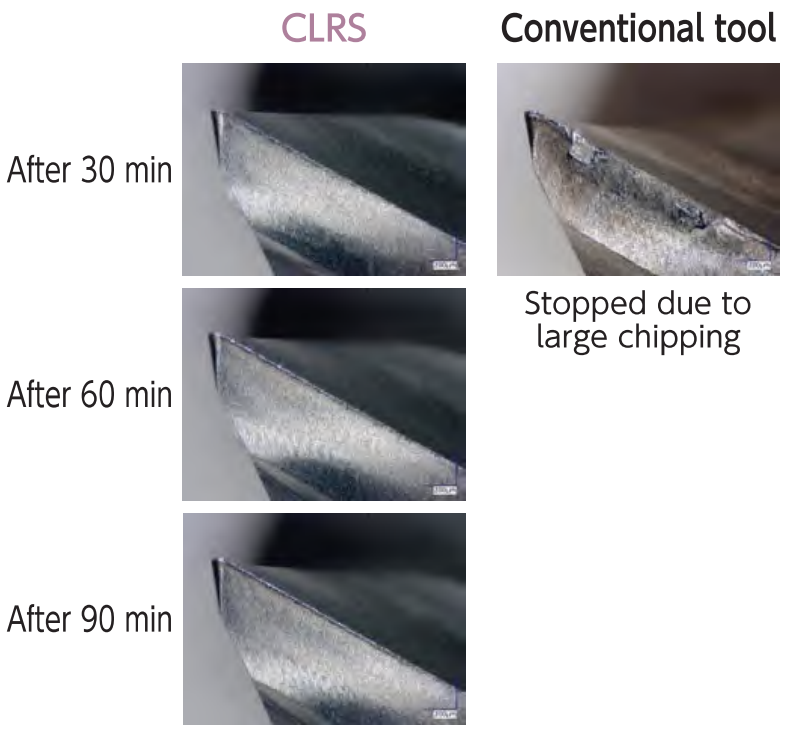

CLRS lasts more than three times longer than conventional tools and can be used continuously.


Finishing Stainless steel Tool life comparison SUS304


$\phi 4 \times$ CR0.1 $\times$ EL12


Spindle Speed	4,000 min^{-1}
Feed Rate	500 mm/min
a_p	2 mm
a_e	0.1 mm
Cycle Time	72 h


Coolant Water Soluble

Milling surface photo

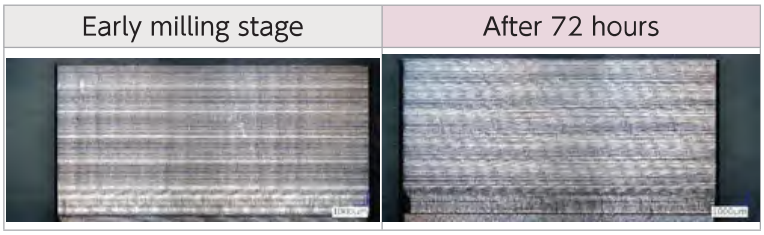

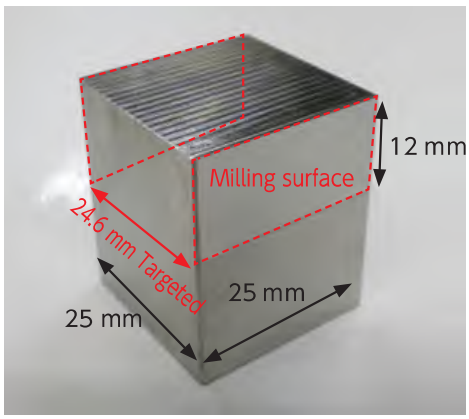

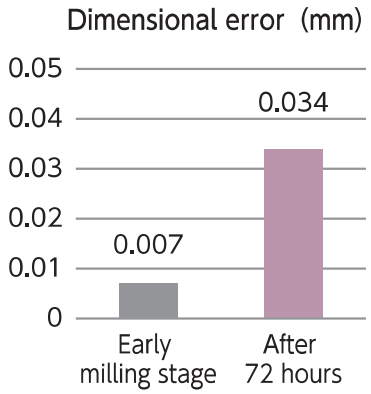

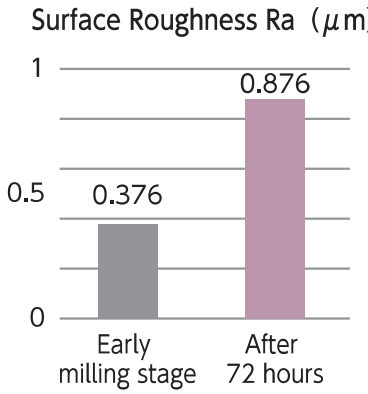

After milling 72 hours, there are no noticeable burrs or roughness on the surface and can be used continuously.

Total 187 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
CLRS 2002-002-005	0.2	R0.02	0.5	0.2	0.19	11°	50	4	—	0.63	0.67	0.70	0.74	0.84
CLRS 2002-002-010			1				50	4	—	1.16	1.22	1.28	1.35	1.52
CLRS 2002-002-015			1.5				50	4	—	1.67	1.75	1.84	1.95	2.19
CLRS 2002-005-005		R0.05	0.5				50	4	—	0.63	0.66	0.70	0.74	0.83
CLRS 2002-005-010			1				50	4	—	1.16	1.21	1.28	1.35	1.51
CLRS 2002-005-015			1.5				50	4	—	1.67	1.75	1.84	1.94	2.18
CLRS 2003-002-010	0.3	R0.02	1	0.3	0.29	11°	50	4	—	1.16	1.22	1.28	1.35	1.52
CLRS 2003-002-020			2				50	4	—	2.19	2.30	2.42	2.56	2.87
CLRS 2003-005-010		R0.05	1				50	4	—	1.16	1.21	1.28	1.35	1.51
CLRS 2003-005-020			2				50	4	—	2.19	2.30	2.42	2.55	2.86
CLRS 2004-002-010	0.4	R0.02	1	0.4	0.39	11°	50	4	—	1.16	1.22	1.28	1.36	1.53
CLRS 2004-002-020			2				50	4	—	2.19	2.30	2.42	2.56	2.88
CLRS 2004-002-030			3				50	4	—	3.24	3.40	3.58	3.78	4.25
CLRS 2004-005-010		R0.05	1				50	4	—	1.16	1.22	1.28	1.35	1.52
CLRS 2004-005-020			2				50	4	—	2.19	2.30	2.42	2.55	2.87
CLRS 2004-005-030			3				50	4	—	3.24	3.40	3.58	3.77	4.24
CLRS 2004-01-010		R0.1	1				50	4	—	1.16	1.21	1.27	1.34	1.50
CLRS 2004-01-020			2				50	4	—	2.19	2.29	2.41	2.54	2.85
CLRS 2004-01-030			3				50	4	—	3.24	3.39	3.57	3.76	4.22
CLRS 2005-005-010	0.5	R0.05	1	0.5	0.49	11°	50	4	—	1.16	1.22	1.28	1.35	1.52
CLRS 2005-005-020			2				50	4	—	2.19	2.30	2.42	2.55	2.87
CLRS 2005-005-030			3				50	4	—	3.24	3.40	3.58	3.77	4.24
CLRS 2005-005-050			5				50	4	—	5.33	5.60	5.89	6.21	6.97
CLRS 2005-01-010		R0.1	1				50	4	—	1.16	1.21	1.27	1.34	1.50
CLRS 2005-01-020			2				50	4	—	2.19	2.29	2.41	2.54	2.85
CLRS 2005-01-030			3				50	4	—	3.24	3.39	3.57	3.76	4.22
CLRS 2005-01-050			5				50	4	—	5.33	5.59	5.88	6.20	6.96
CLRS 2006-005-020	0.6	R0.05	2	0.6	0.59	11°	50	4	—	2.19	2.30	2.42	2.55	2.87
CLRS 2006-005-040			4				50	4	—	4.29	4.50	4.73	4.99	5.61
CLRS 2006-005-060			6				50	4	—	6.38	6.69	7.04	7.43	8.34
CLRS 2006-01-020		R0.1	2				50	4	—	2.19	2.29	2.41	2.54	2.85
CLRS 2006-01-040			4				50	4	—	4.28	4.49	4.72	4.98	5.59
CLRS 2006-01-060			6				50	4	—	6.38	6.69	7.03	7.42	8.33
CLRS 2008-005-020	0.8	R0.05	2	0.8	0.79	11°	50	4	—	2.19	2.30	2.42	2.55	2.87
CLRS 2008-005-040			4				50	4	—	4.29	4.50	4.73	4.99	5.61
CLRS 2008-005-060			6				50	4	—	6.38	6.69	7.04	7.43	8.34
CLRS 2008-005-080			8				50	4	—	8.47	8.89	9.35	9.87	11.08
CLRS 2008-01-020		R0.1	2				50	4	—	2.19	2.29	2.41	2.54	2.85
CLRS 2008-01-040			4				50	4	—	4.28	4.49	4.72	4.98	5.59
CLRS 2008-01-060			6				50	4	—	6.38	6.69	7.03	7.42	8.33
CLRS 2008-01-080			8				50	4	—	8.47	8.89	9.35	9.86	11.06
CLRS 2008-02-020		R0.2	2				50	4	—	2.18	2.29	2.40	2.52	2.81
CLRS 2008-02-040			4				50	4	—	4.28	4.48	4.71	4.96	5.55
CLRS 2008-02-060			6				50	4	—	6.37	6.68	7.02	7.40	8.29
CLRS 2008-02-080			8				50	4	—	8.47	8.88	9.33	9.83	11.03

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length byInclined Angles				
										30′	1°	1°30′	2°	3°
CLRS 2010-005-020	1	R0.05	2	1	0.98	11°	50	4	—	2.20	2.31	2.43	2.56	2.88
CLRS 2010-005-040			4				50	4	—	4.30	4.51	4.74	5.00	5.62
CLRS 2010-005-060			6				50	4	—	6.39	6.71	7.05	7.44	8.36
CLRS 2010-005-080			8				50	4	—	8.48	8.90	9.37	9.88	11.10
CLRS 2010-005-100			10				50	4	—	10.58	11.10	11.68	12.32	13.83
CLRS 2010-01-020		R0.1	2				50	4	—	2.20	2.31	2.42	2.55	2.86
CLRS 2010-01-040			4				50	4	—	4.29	4.50	4.74	4.99	5.60
CLRS 2010-01-060			6				50	4	—	6.39	6.70	7.05	7.43	8.34
CLRS 2010-01-080			8				50	4	—	8.48	8.90	9.36	9.87	11.08
CLRS 2010-01-100			10				50	4	—	10.58	11.10	11.67	12.31	13.82
CLRS 2010-02-020		R0.2	2				50	4	—	2.20	2.30	2.41	2.53	2.83
CLRS 2010-02-040			4				50	4	—	4.29	4.49	4.72	4.97	5.57
CLRS 2010-02-060			6				50	4	—	6.38	6.69	7.03	7.41	8.30
CLRS 2010-02-080			8				50	4	—	8.48	8.89	9.34	9.85	11.04
CLRS 2010-02-100			10				50	4	—	10.57	11.09	11.65	12.28	13.78
CLRS 2015-005-040	1.5	R0.05	4	1.5	1.47	11°	50	4	—	4.25	4.46	4.69	4.95	5.56
CLRS 2015-005-060			6				50	4	—	6.34	6.66	7.00	7.39	8.30
CLRS 2015-005-080			8				50	4	—	8.44	8.85	9.31	9.82	11.04
CLRS 2015-01-040		R0.1	4				50	4	—	4.25	4.45	4.68	4.94	5.54
CLRS 2015-01-060			6				50	4	—	6.34	6.65	6.99	7.38	8.28
CLRS 2015-01-080			8				50	4	—	8.43	8.85	9.31	9.81	11.02
CLRS 2015-01-120			12				50	4	—	12.62	13.24	13.93	14.69	16.49
CLRS 2015-02-040		R0.2	4				50	4	—	4.24	4.44	4.67	4.92	5.50
CLRS 2015-02-060			6				50	4	—	6.34	6.64	6.98	7.35	8.24
CLRS 2015-02-080			8				50	4	—	8.43	8.84	9.29	9.79	10.98
CLRS 2015-02-120			12				50	4	—	12.62	13.23	13.91	14.67	16.46
CLRS 2015-03-040		R0.3	4				50	4	—	4.24	4.43	4.65	4.89	5.47
CLRS 2015-03-060			6				50	4	—	6.33	6.63	6.96	7.33	8.21
CLRS 2015-03-080			8				50	4	—	8.43	8.83	9.28	9.77	10.95
CLRS 2015-03-120			12				50	4	—	12.61	13.22	13.90	14.65	16.42
CLRS 2015-05-040		R0.5	4				50	4	—	4.23	4.42	4.62	4.85	5.40
CLRS 2015-05-060			6				50	4	—	6.32	6.61	6.93	7.29	8.14
CLRS 2015-05-080			8				50	4	—	8.42	8.81	9.24	9.73	10.87
CLRS 2015-05-120			12				50	4	—	12.60	13.20	13.87	14.60	16.35

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
										30′	1°	1°30′	2°	3°
CLRS 2020-005-040	2	R0.05	4	2	1.98	11°	50	4	—	4.22	4.43	4.66	4.92	5.52
CLRS 2020-005-060			6				50	4	—	6.32	6.63	6.97	7.35	8.26
CLRS 2020-005-080			8				50	4	—	8.41	8.83	9.28	9.79	11.00
CLRS 2020-005-100			10				50	4	—	10.50	11.02	11.60	12.23	13.74
CLRS 2020-01-040		R0.1	4				50	4	—	4.22	4.43	4.65	4.91	5.51
CLRS 2020-01-060			6				50	4	—	6.31	6.62	6.96	7.34	8.24
CLRS 2020-01-080			8				50	4	—	8.41	8.82	9.28	9.78	10.98
CLRS 2020-01-100			10				50	4	—	10.50	11.02	11.59	12.22	13.72
CLRS 2020-01-120			12				50	4	—	12.60	13.22	13.90	14.66	16.46
CLRS 2020-01-160			16				60	4	—	16.78	17.61	18.52	19.53	No Interference
CLRS 2020-02-040		R0.2	4				50	4	—	4.22	4.42	4.64	4.88	5.47
CLRS 2020-02-060			6				50	4	—	6.31	6.61	6.95	7.32	8.21
CLRS 2020-02-080			8				50	4	—	8.40	8.81	9.26	9.76	10.95
CLRS 2020-02-100			10				50	4	—	10.50	11.01	11.57	12.20	13.68
CLRS 2020-02-120			12				50	4	—	12.59	13.21	13.88	14.64	16.42
CLRS 2020-02-160			16				60	4	—	16.78	17.60	18.51	19.51	No Interference
CLRS 2020-03-040		R0.3	4				50	4	—	4.21	4.41	4.62	4.86	5.43
CLRS 2020-03-060			6				50	4	—	6.30	6.60	6.93	7.30	8.17
CLRS 2020-03-080			8				50	4	—	8.40	8.80	9.25	9.74	10.91
CLRS 2020-03-100			10				50	4	—	10.49	11.00	11.56	12.18	13.65
CLRS 2020-03-120			12				50	4	—	12.59	13.20	13.87	14.61	16.39
CLRS 2020-03-160			16				60	4	—	16.77	17.59	18.49	19.49	No Interference
CLRS 2020-05-040		R0.5	4				50	4	—	4.20	4.39	4.59	4.82	5.36
CLRS 2020-05-060			6				50	4	—	6.30	6.58	6.90	7.26	8.10
CLRS 2020-05-080			8				50	4	—	8.39	8.78	9.21	9.70	10.84
CLRS 2020-05-100			10				50	4	—	10.48	10.98	11.53	12.13	13.58
CLRS 2020-05-120			12				50	4	—	12.58	13.18	13.84	14.57	16.31
CLRS 2020-05-160			16				60	4	—	16.77	17.57	18.46	19.45	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length byInclined Angles				
										30′	1°	1°30′	2°	3°
CLRS 2030-01-060	3	R0.1	6	3	2.95	11°	50	6	—	6.39	6.71	7.05	7.44	8.35
CLRS 2030-01-100			10				50	6	—	10.58	11.10	11.68	12.31	13.83
CLRS 2030-01-120			12				60	6	—	12.68	13.30	13.99	14.75	16.56
CLRS 2030-01-160			16				60	6	—	16.86	17.69	18.61	19.63	22.04
CLRS 2030-01-200			20				60	6	—	21.05	22.09	23.23	24.50	27.52
CLRS 2030-01-250			25				70	6	—	26.29	27.58	29.01	30.60	No Interference
CLRS 2030-02-060		R0.2	6				50	6	—	6.39	6.70	7.04	7.42	8.31
CLRS 2030-02-100			10				50	6	—	10.58	11.09	11.66	12.29	13.79
CLRS 2030-02-120			12				60	6	—	12.67	13.29	13.97	14.73	16.53
CLRS 2030-02-160			16				60	6	—	16.86	17.68	18.60	19.61	22.00
CLRS 2030-02-200			20				60	6	—	21.05	22.08	23.22	24.48	27.48
CLRS 2030-02-250			25				70	6	—	26.28	27.57	29.00	30.58	No Interference
CLRS 2030-03-060		R0.3	6				50	6	—	6.39	6.69	7.02	7.40	8.28
CLRS 2030-03-100			10				50	6	—	10.57	11.08	11.65	12.27	13.75
CLRS 2030-03-120			12				60	6	—	12.67	13.28	13.96	14.71	16.49
CLRS 2030-03-160			16				60	6	—	16.86	17.68	18.58	19.59	21.97
CLRS 2030-03-200			20				60	6	—	21.04	22.07	23.20	24.46	27.45
CLRS 2030-03-250			25				70	6	—	26.28	27.56	28.98	30.56	No Interference
CLRS 2030-05-060		R0.5	6				50	6	—	6.38	6.67	6.99	7.35	8.21
CLRS 2030-05-100			10				50	6	—	10.56	11.06	11.62	12.23	13.68
CLRS 2030-05-120			12				60	6	—	12.66	13.26	13.93	14.67	16.42
CLRS 2030-05-160			16				60	6	—	16.85	17.66	18.55	19.54	21.90
CLRS 2030-05-200			20				60	6	—	21.03	22.05	23.17	24.42	27.37
CLRS 2030-05-250			25				70	6	—	26.27	27.54	28.95	30.51	No Interference
CLRS 2030-10-060		R1	6				50	6	—	6.35	6.62	6.92	7.24	8.03
CLRS 2030-10-100			10				50	6	—	10.54	11.01	11.54	12.12	13.50
CLRS 2030-10-120			12				60	6	—	12.63	13.21	13.85	14.56	16.24
CLRS 2030-10-160			16				60	6	—	16.82	17.61	18.47	19.43	21.72
CLRS 2030-10-200			20				60	6	—	21.01	22.00	23.10	24.31	27.19
CLRS 2030-10-250			25				70	6	—	26.25	27.49	28.87	30.41	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length byInclined Angles				
										30′	1°	1°30′	2°	3°
CLRS 2040-01-080	4	R0.1	8	4	3.96	11°	60	6	—	8.48	8.90	9.36	9.87	11.08
CLRS 2040-01-120			12				60	6	—	12.67	13.29	13.98	14.74	16.55
CLRS 2040-01-160			16				60	6	—	16.86	17.69	18.60	19.62	No Interference
CLRS 2040-01-200			20				70	6	—	21.04	22.08	23.22	24.49	No Interference
CLRS 2040-01-250			25				70	6	—	26.28	27.57	29.00	No Interference	No Interference
CLRS 2040-01-300			30				80	6	—	31.51	33.07	34.78	No Interference	No Interference
CLRS 2040-02-080		R0.2	8				60	6	—	8.48	8.89	9.34	9.85	11.04
CLRS 2040-02-120			12				60	6	—	12.66	13.28	13.96	14.72	16.52
CLRS 2040-02-160			16				60	6	—	16.85	17.68	18.59	19.60	No Interference
CLRS 2040-02-200			20				70	6	—	21.04	22.07	23.21	24.47	No Interference
CLRS 2040-02-250			25				70	6	—	26.28	27.56	28.99	No Interference	No Interference
CLRS 2040-02-300			30				80	6	—	31.51	33.06	34.77	No Interference	No Interference
CLRS 2040-03-080		R0.3	8				60	6	—	8.47	8.88	9.33	9.82	11.01
CLRS 2040-03-120			12				60	6	—	12.66	13.27	13.95	14.70	16.48
CLRS 2040-03-160			16				60	6	—	16.85	17.67	18.57	19.58	No Interference
CLRS 2040-03-200			20				70	6	—	21.04	22.06	23.19	24.45	No Interference
CLRS 2040-03-250			25				70	6	—	26.27	27.55	28.97	No Interference	No Interference
CLRS 2040-03-300			30				80	6	—	31.51	33.05	34.75	No Interference	No Interference
CLRS 2040-05-080		R0.5	8				60	6	—	8.46	8.86	9.30	9.78	10.93
CLRS 2040-05-120			12				60	6	—	12.65	13.25	13.92	14.66	16.41
CLRS 2040-05-160			16				60	6	—	16.84	17.65	18.54	19.53	No Interference
CLRS 2040-05-200			20				70	6	—	21.03	22.04	23.16	24.41	No Interference
CLRS 2040-05-250			25				70	6	—	26.26	27.53	28.94	No Interference	No Interference
CLRS 2040-05-300			30				80	6	—	31.50	33.03	34.72	No Interference	No Interference
CLRS 2040-10-080		R1	8				60	6	—	8.44	8.81	9.22	9.67	10.75
CLRS 2040-10-120			12				60	6	—	12.63	13.20	13.84	14.55	16.23
CLRS 2040-10-160			16				60	6	—	16.81	17.60	18.46	19.43	No Interference
CLRS 2040-10-200			20				70	6	—	21.00	21.99	23.09	24.30	No Interference
CLRS 2040-10-250			25				70	6	—	26.24	27.49	28.86	No Interference	No Interference
CLRS 2040-10-300			30				80	6	—	31.47	32.98	34.64	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length byInclined Angles				
										30′	1°	1°30′	2°	3°
CLRS 2060-01-150	6	R0.1	15	6	5.86	—	60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-01-200			20				70	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-01-300			30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-01-400			40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-02-150		R0.2	15				60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-02-200			20				70	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-02-300			30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-02-400			40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-03-150		R0.3	15				60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-03-200			20				70	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-03-300			30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-03-400			40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-05-150		R0.5	15				60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-05-200			20				70	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-05-300			30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-05-400			40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-10-150		R1	15				60	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-10-200			20				70	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-10-300			30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CLRS 2060-10-400			40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for CLRS (2 Flutes)

Z-Level Milling

WORK MATERIAL			COPPER / ALUMINUM ALLOYS C1100 / A5052 /A7075				CARBON STEELS / ALLOY STEELS / PREHARDENED STEELS / TITANIUM ALLOYS S50C / SCM / SUS / PXA30 / NAK / Ti-6Al-4V (~40HRC)				HARDENED STEELS STAVAX / SKD61 (~55HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002	0.2	0.5	40,000	230	0.027	0.02	40,000	240	0.006	0.02	40,000	240	0.005	0.02
		1	40,000	200	0.027	0.02	40,000	200	0.006	0.02	35,000	150	0.004	0.02
		1.5	40,000	180	0.017	0.01	40,000	180	0.005	0.01	27,000	100	0.003	0.01
2003	0.3	1	40,000	500	0.03	0.02	40,000	500	0.007	0.02	35,000	350	0.005	0.02
		2	40,000	400	0.03	0.02	40,000	400	0.007	0.02	33,200	250	0.005	0.015
2004	0.4	1	40,000	610	0.048	0.063	40,000	510	0.013	0.072	40,000	370	0.011	0.072
		2	40,000	580	0.042	0.054	40,000	450	0.011	0.045	32,300	290	0.009	0.045
		3	33,900	460	0.027	0.054	33,900	390	0.008	0.027	27,100	280	0.007	0.027
2005	0.5	1	40,000	1,370	0.081	0.117	40,000	1,140	0.034	0.122	40,000	860	0.03	0.122
		2	39,900	1,000	0.075	0.108	39,900	830	0.029	0.117	32,500	630	0.026	0.117
		3	31,900	770	0.057	0.09	31,900	640	0.023	0.113	26,000	480	0.02	0.113
		5	26,400	570	0.027	0.045	26,400	470	0.011	0.099	21,500	360	0.01	0.099
2006	0.6	2	28,600	610	0.114	0.162	28,600	510	0.01	0.219	23,700	390	0.01	0.219
		4	20,400	400	0.063	0.108	20,400	330	0.005	0.104	16,800	250	0.005	0.104
		6	16,800	300	0.036	0.045	16,800	250	0.003	0.099	13,900	190	0.003	0.099
2008	0.8	2	22,000	600	0.14	0.22	22,000	500	0.016	0.117	19,000	400	0.017	0.12
		4	17,500	540	0.132	0.198	17,500	450	0.014	0.117	15,000	360	0.015	0.117
		6	14,600	410	0.075	0.144	14,600	340	0.008	0.117	12,500	270	0.008	0.108
		8	12,800	310	0.03	0.1	12,800	270	0.008	0.117	11,000	185	0.004	0.09
2010	1	2	17,600	1,100	0.21	0.45	17,600	920	0.035	0.27	15,300	750	0.04	0.27
		4	13,800	980	0.201	0.405	13,800	820	0.03	0.27	12,000	670	0.035	0.27
		6	11,300	790	0.117	0.387	11,300	650	0.021	0.216	9,800	540	0.024	0.216
		8	9,800	590	0.072	0.36	9,800	490	0.016	0.189	8,500	400	0.018	0.189
		10	8,800	390	0.048	0.315	8,800	320	0.011	0.126	7,600	270	0.013	0.126
2015	1.5	4	13,200	1,310	0.3	0.675	13,200	1,090	0.06	0.45	12,000	950	0.06	0.45
		6	10,600	1,240	0.282	0.63	10,600	1,030	0.055	0.405	9,700	900	0.055	0.405
		8	9,300	1,050	0.204	0.612	9,300	870	0.045	0.315	8,500	760	0.045	0.315
		12	7,800	800	0.114	0.54	7,800	670	0.038	0.27	7,100	580	0.038	0.27
2020	2	4	15,300	1,500	0.33	0.9	15,300	1,250	0.065	0.9	14,300	1,130	0.065	0.9
		6	12,800	1,220	0.321	0.855	12,800	1,020	0.06	0.81	12,000	930	0.06	0.81
		8	11,200	1,120	0.267	0.81	11,200	930	0.055	0.72	10,400	850	0.055	0.72
		10	10,000	1,050	0.225	0.765	10,000	870	0.047	0.585	9,300	790	0.047	0.585
		12	9,100	980	0.186	0.72	9,100	820	0.044	0.45	8,500	740	0.044	0.45
		16	7,800	830	0.132	0.702	7,800	690	0.039	0.315	7,300	630	0.039	0.315
2030	3	6	14,000	2,700	0.5	0.9	14,000	1,510	0.15	0.72	13,300	1,140	0.15	0.72
		10	11,800	1,700	0.4	0.88	11,800	1,200	0.135	0.77	11,500	930	0.125	0.69
		12	10,500	1,600	0.39	0.85	10,500	1,150	0.105	0.67	10,000	890	0.105	0.67
		16	9,200	1,160	0.321	0.81	9,200	960	0.081	0.63	8,800	730	0.081	0.63
		20	8,400	1,050	0.26	0.78	8,400	880	0.073	0.58	7,900	680	0.073	0.58
		25	7,500	980	0.18	0.72	7,500	820	0.065	0.495	7,100	620	0.065	0.495
2040	4	8	10,200	1,340	0.42	1.62	10,200	1,110	0.095	1.35	8,500	970	0.095	1.35
		12	8,900	1,300	0.41	1.56	8,900	1,080	0.083	1.15	7,600	950	0.083	1.15
		16	7,900	1,250	0.4	1.5	7,900	1,030	0.065	1	6,600	910	0.065	1
		20	6,900	1,190	0.384	1.44	6,900	990	0.054	0.9	5,800	860	0.054	0.9
		25	6,200	1,100	0.31	1.38	6,200	900	0.043	0.8	5,200	770	0.043	0.8
		30	5,500	860	0.189	1.26	5,500	720	0.027	0.648	4,600	630	0.027	0.648
2060	6	15	6,900	1,570	0.59	2.18	6,900	1,400	0.48	1.33	4,100	1,180	0.19	1.35
		20	5,800	1,350	0.58	2.12	5,800	1,180	0.46	1.31	3,500	1,000	0.18	1.31
		30	4,500	1,060	0.546	1.98	4,500	880	0.396	1.26	2,600	740	0.158	1.26
		40	3,900	880	0.416	1.86	3,900	730	0.301	1.17	2,200	610	0.12	1.17

Milling Conditions for CLRS (2 Flutes)

Side Milling


WORK MATERIAL			COPPER / ALUMINUM ALLOYS C1100 / A5052 /A7075				CARBON STEELS / STAINLESS STEELS S50C / SUS				ALLOY STEELS / PREHARDENED STEELS / HARDENED STEELS SCM / PXA30 / NAK / STAVAX (30~55HRC)				TITANIUM ALLOYS Ti-6A l-4V			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002	0.2	0.5	40,000	170	0.1	0.01	40,000	170	0.1	0.01	40,000	120	0.1	0.01	40,000	85	0.1	0.01
		1	40,000	170	0.1	0.005	40,000	170	0.1	0.005	40,000	120	0.1	0.005	40,000	85	0.1	0.005
		1.5	40,000	130	0.1	0.003	40,000	130	0.1	0.003	40,000	60	0.1	0.003	40,000	25	0.1	0.003
2003	0.3	1	40,000	290	0.15	0.015	40,000	290	0.15	0.015	40,000	260	0.15	0.015	40,000	230	0.15	0.015
		2	40,000	220	0.15	0.005	40,000	220	0.15	0.005	40,000	120	0.15	0.005	40,000	60	0.15	0.005
2004	0.4	1	40,000	400	0.2	0.02	40,000	400	0.2	0.02	40,000	400	0.2	0.02	40,000	400	0.2	0.02
		2	40,000	340	0.2	0.013	40,000	340	0.2	0.013	40,000	230	0.2	0.013	40,000	170	0.2	0.013
		3	40,000	270	0.2	0.006	40,000	270	0.2	0.006	40,000	130	0.2	0.006	40,000	50	0.2	0.006
2005	0.5	1	40,000	520	0.25	0.025	40,000	520	0.25	0.025	40,000	400	0.25	0.025	40,000	520	0.25	0.025
		2	40,000	520	0.25	0.015	40,000	520	0.25	0.015	40,000	370	0.25	0.015	40,000	310	0.25	0.015
		3	40,000	390	0.25	0.008	40,000	390	0.25	0.008	40,000	230	0.25	0.008	40,000	130	0.25	0.008
		5	40,000	250	0.25	0.008	40,000	250	0.25	0.008	40,000	120	0.25	0.008	40,000	60	0.25	0.008
2006	0.6	2	40,000	570	0.3	0.03	40,000	570	0.3	0.03	33,000	400	0.3	0.03	40,000	470	0.3	0.03
		4	40,000	440	0.3	0.01	40,000	440	0.3	0.01	33,000	190	0.3	0.01	40,000	120	0.3	0.01
		6	40,000	300	0.3	0.01	40,000	300	0.3	0.01	33,000	120	0.3	0.01	40,000	75	0.3	0.01
2008	0.8	2	40,000	800	0.4	0.04	40,000	800	0.4	0.04	25,000	400	0.4	0.04	40,000	800	0.4	0.04
		4	40,000	680	0.4	0.025	40,000	670	0.4	0.025	25,000	290	0.4	0.025	40,000	340	0.4	0.025
		6	40,000	540	0.4	0.013	40,000	540	0.4	0.013	25,000	160	0.4	0.013	40,000	100	0.4	0.013
		8	40,000	400	0.4	0.013	40,000	400	0.4	0.013	25,000	120	0.4	0.013	40,000	90	0.4	0.013
2010	1	2	30,000	800	0.5	0.05	30,000	800	0.5	0.05	20,000	400	0.5	0.05	30,000	800	0.5	0.05
		4	30,000	680	0.5	0.03	30,000	680	0.5	0.03	20,000	370	0.5	0.03	30,000	470	0.5	0.03
		6	30,000	590	0.5	0.015	30,000	590	0.5	0.015	20,000	230	0.5	0.015	30,000	200	0.5	0.015
		8	30,000	480	0.5	0.015	30,000	480	0.5	0.015	20,000	150	0.5	0.015	30,000	80	0.5	0.015
		10	30,000	380	0.5	0.015	30,000	400	0.5	0.015	20,000	100	0.5	0.015	30,000	100	0.5	0.015
2015	1.5	4	30,000	1,120	0.75	0.075	21,000	790	0.75	0.075	14,000	510	0.75	0.075	21,000	760	0.75	0.075
		6	30,000	1,020	0.75	0.05	21,000	720	0.75	0.05	14,000	390	0.75	0.05	21,000	490	0.75	0.05
		8	30,000	920	0.75	0.05	21,000	650	0.75	0.05	14,000	280	0.75	0.05	21,000	290	0.75	0.05
		12	30,000	720	0.75	0.025	21,000	510	0.75	0.025	14,000	150	0.75	0.025	21,000	80	0.75	0.025
2020	2	4	30,000	1,580	1	0.1	15,750	800	1	0.1	11,000	620	1	0.1	15,750	800	1	0.1
		6	30,000	1,480	1	0.1	15,750	780	1	0.1	11,000	500	1	0.1	15,750	690	1	0.1
		8	30,000	1,370	1	0.06	15,750	720	1	0.06	11,000	410	1	0.06	15,750	490	1	0.06
		10	30,000	1,270	1	0.06	15,750	670	1	0.06	11,000	320	1	0.06	15,750	340	1	0.06
		12	30,000	1,180	1	0.03	15,750	620	1	0.03	11,000	250	1	0.03	15,750	210	1	0.03
		16	30,000	970	1	0.03	15,750	510	1	0.03	11,000	160	1	0.03	15,750	80	1	0.03
2030	3	6	21,000	1,600	1.5	0.15	10,500	800	1.5	0.15	8,100	690	1.5	0.15	10,500	800	1.5	0.15
		10	21,000	1,520	1.5	0.15	10,500	760	1.5	0.15	8,100	520	1.5	0.15	10,500	620	1.5	0.15
		12	21,000	1,440	1.5	0.1	10,500	720	1.5	0.1	8,100	450	1.5	0.1	10,500	490	1.5	0.1
		16	21,000	1,300	1.5	0.1	10,500	650	1.5	0.1	8,100	330	1.5	0.1	10,500	290	1.5	0.1
		20	21,000	1,160	1.5	0.05	10,500	580	1.5	0.05	8,100	230	1.5	0.05	10,500	150	1.5	0.05
		25	21,000	980	1.5	0.05	10,500	490	1.5	0.05	8,100	160	1.5	0.05	10,500	75	1.5	0.05
2040	4	8	15,600	1,600	2	0.2	7,800	800	2	0.2	6,700	770	2	0.2	7,800	800	2	0.2
		12	15,600	1,560	2	0.2	7,800	780	2	0.2	6,700	620	2	0.2	7,800	690	2	0.2
		16	15,600	1,440	2	0.13	7,800	720	2	0.13	6,700	500	2	0.13	7,800	490	2	0.13
		20	15,600	1,340	2	0.13	7,800	670	2	0.13	6,700	390	2	0.13	7,800	340	2	0.13
		25	15,600	1,200	2	0.06	7,800	600	2	0.06	6,700	290	2	0.06	7,800	190	2	0.06
		30	15,600	1,080	2	0.06	7,800	540	2	0.06	6,700	220	2	0.06	7,800	100	2	0.06
2060	6	15	10,500	1,600	3	0.3	5,250	800	3	0.3	5,250	800	3	0.3	5,250	800	3	0.3
		20	10,500	1,500	3	0.3	5,250	760	3	0.3	5,250	700	3	0.3	5,250	620	3	0.3
		30	10,500	1,400	3	0.2	5,250	680	3	0.2	5,250	480	3	0.2	5,250	350	3	0.2
		40	10,500	1,200	3	0.15	5,250	600	3	0.15	5,250	300	3	0.15	5,250	150	3	0.15

Milling Conditions for CLRS (2 Flutes)

Flat Finishing

WORK MATERIAL			COPPER / ALUMINUM ALLOYS / CARBON STEELS / ALLOY STEELS / PREHARDENED STEELS C1100 / A5052 / A7075 / S50C / SCM / PXA30 / NAK (~40HRC)				HARDENED STEELS STAVAX / SKD61 (~55HRC)				STAINLESS STEELS SUS				TITANIUM ALLOYS Ti-6A l-4V			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002	0.2	0.5	40,000	400	0.004	0.01	40,000	200	0.004	0.01	40,000	400	0.004	0.01	40,000	400	0.004	0.02
		1	40,000	300	0.004	0.01	40,000	150	0.002	0.01	40,000	300	0.004	0.01	40,000	300	0.004	0.02
		1.5	40,000	150	0.003	0.01	40,000	80	0.002	0.007	40,000	150	0.003	0.01	40,000	150	0.004	0.02
2003	0.3	1	40,000	500	0.005	0.015	40,000	250	0.003	0.015	40,000	500	0.005	0.015	40,000	600	0.005	0.03
		2	40,000	300	0.005	0.015	40,000	100	0.003	0.015	40,000	300	0.005	0.015	40,000	300	0.005	0.03
2004	0.4	1	40,000	850	0.006	0.02	40,000	425	0.006	0.02	40,000	850	0.006	0.02	40,000	850	0.006	0.05
		2	40,000	700	0.006	0.02	40,000	350	0.006	0.02	40,000	700	0.006	0.02	40,000	700	0.006	0.05
		3	40,000	400	0.006	0.02	40,000	170	0.006	0.02	40,000	400	0.006	0.02	40,000	400	0.006	0.05
2005	0.5	1	40,000	1,000	0.007	0.025	40,000	500	0.007	0.025	40,000	1,000	0.007	0.025	40,000	1,000	0.007	0.07
		2	40,000	1,000	0.007	0.025	40,000	500	0.007	0.025	40,000	1,000	0.007	0.025	40,000	1,000	0.007	0.07
		3	40,000	500	0.007	0.025	40,000	250	0.007	0.025	40,000	500	0.007	0.025	40,000	500	0.007	0.07
		5	40,000	250	0.007	0.025	40,000	125	0.007	0.025	40,000	250	0.007	0.025	40,000	250	0.007	0.07
2006	0.6	2	40,000	1,250	0.008	0.03	40,000	625	0.008	0.03	40,000	1,250	0.008	0.03	40,000	1,250	0.008	0.09
		4	40,000	600	0.008	0.03	40,000	300	0.005	0.03	40,000	600	0.008	0.03	40,000	600	0.008	0.09
		6	40,000	250	0.008	0.03	40,000	150	0.005	0.03	40,000	250	0.008	0.03	40,000	300	0.008	0.09
2008	0.8	2	37,500	1,600	0.01	0.04	37,500	800	0.01	0.04	37,500	1,600	0.01	0.04	37,500	1,600	0.01	0.14
		4	37,500	1,200	0.01	0.04	37,500	600	0.01	0.04	37,500	1,200	0.01	0.04	37,500	1,200	0.01	0.14
		6	37,500	650	0.01	0.04	37,500	250	0.01	0.04	37,500	650	0.01	0.04	37,500	800	0.01	0.14
		8	37,500	400	0.01	0.04	37,500	130	0.007	0.03	37,500	400	0.01	0.04	37,500	400	0.01	0.14
2010	1	2	30,000	1,600	0.015	0.05	30,000	1,600	0.015	0.05	30,000	1,600	0.015	0.05	30,000	1,600	0.015	0.2
		4	30,000	1,600	0.015	0.05	30,000	1,600	0.015	0.05	30,000	1,600	0.015	0.05	30,000	1,600	0.015	0.2
		6	30,000	1,200	0.015	0.05	30,000	1,200	0.015	0.05	30,000	1,200	0.015	0.05	30,000	1,200	0.015	0.2
		8	30,000	800	0.015	0.05	30,000	800	0.015	0.05	30,000	800	0.015	0.05	30,000	800	0.015	0.2
		10	30,000	400	0.015	0.05	30,000	300	0.01	0.05	30,000	400	0.015	0.05	30,000	400	0.015	0.2
2015	1.5	4	20,000	1,600	0.02	0.075	20,000	1,600	0.02	0.075	19,000	1,600	0.02	0.075	20,000	1,600	0.02	0.3
		6	20,000	1,600	0.02	0.075	20,000	1,600	0.02	0.075	19,000	1,600	0.02	0.075	20,000	1,600	0.02	0.3
		8	20,000	1,200	0.02	0.075	20,000	1,200	0.02	0.075	19,000	1,200	0.02	0.075	20,000	1,200	0.02	0.3
		12	20,000	800	0.02	0.075	20,000	800	0.02	0.075	19,000	800	0.02	0.075	20,000	800	0.02	0.3
2020	2	4	15,000	1,600	0.025	0.1	15,000	1,600	0.025	0.1	13,500	1,600	0.025	0.1	15,000	1,600	0.025	0.4
		6	15,000	1,600	0.025	0.1	15,000	1,600	0.025	0.1	13,500	1,600	0.025	0.1	15,000	1,600	0.025	0.4
		8	15,000	1,600	0.025	0.1	15,000	1,600	0.025	0.1	13,500	1,600	0.025	0.1	15,000	1,600	0.025	0.4
		10	15,000	1,400	0.025	0.1	15,000	1,400	0.025	0.1	13,500	1,400	0.025	0.1	15,000	1,400	0.025	0.4
		12	15,000	1,200	0.025	0.1	15,000	1,200	0.025	0.1	13,500	1,200	0.025	0.1	15,000	1,200	0.025	0.4
		16	15,000	800	0.025	0.1	15,000	800	0.025	0.1	13,500	800	0.025	0.1	15,000	800	0.025	0.4
2030	3	6	10,500	1,600	0.03	0.15	10,500	1,600	0.03	0.15	8,100	1,600	0.03	0.15	10,500	1,600	0.03	0.6
		10	10,500	1,600	0.03	0.15	10,500	1,600	0.03	0.15	8,100	1,600	0.03	0.15	10,500	1,600	0.03	0.6
		12	10,500	1,600	0.03	0.15	10,500	1,600	0.03	0.15	8,100	1,600	0.03	0.15	10,500	1,600	0.03	0.6
		16	10,500	1,200	0.03	0.15	10,500	1,200	0.03	0.15	8,100	1,200	0.03	0.15	10,500	1,200	0.03	0.6
		20	10,500	800	0.03	0.15	10,500	800	0.03	0.15	8,100	800	0.03	0.15	10,500	800	0.03	0.6
		25	10,500	400	0.03	0.15	10,500	400	0.03	0.15	8,100	400	0.03	0.15	10,500	400	0.03	0.6
2040	4	8	7,900	1,600	0.03	0.15	7,900	1,600	0.03	0.15	5,400	1,600	0.03	0.15	7,900	1,600	0.03	0.6
		12	7,900	1,600	0.03	0.15	7,900	1,600	0.03	0.15	5,400	1,600	0.03	0.15	7,900	1,600	0.03	0.6
		16	7,900	1,600	0.03	0.15	7,900	1,600	0.03	0.15	5,400	1,600	0.03	0.15	7,900	1,600	0.03	0.6
		20	7,900	1,200	0.03	0.15	7,900	1,200	0.03	0.15	5,400	1,200	0.03	0.15	7,900	1,200	0.03	0.6
		25	7,900	800	0.03	0.15	7,900	800	0.03	0.15	5,400	800	0.03	0.15	7,900	800	0.03	0.6
		30	7,900	400	0.03	0.15	7,900	400	0.03	0.15	5,400	400	0.03	0.15	7,900	400	0.03	0.6
2060	6	15	5,250	1,600	0.03	0.15	5,250	1,600	0.03	0.15	2,625	1,600	0.03	0.15	5,250	1,600	0.03	0.6
		20	5,250	1,600	0.03	0.15	5,250	1,600	0.03	0.15	2,625	1,600	0.03	0.15	5,250	1,600	0.03	0.6
		30	5,250	800	0.03	0.15	5,250	800	0.03	0.15	2,625	800	0.03	0.15	5,250	800	0.03	0.6
		40	5,250	400	0.03	0.15	5,250	400	0.03	0.15	2,625	400	0.03	0.15	5,250	400	0.03	0.6

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Every coolant offers stable milling.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.



DLCLRS NEW



Released April 2023

DLCCOAT 2 Flute Long Neck Radius End Mills for Copper Electrode Milling

φ0.2～φ3

Super MG | DLC | 35° | R | R ±0.005 | Shank Dia 0/-0.004

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									●		★						

Total 48 models


Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLCLRS 2002-005-010	0.2	R0.05	1	0.2	0.19	11°	45	4	—
DLCLRS 2002-005-015			1.5				45	4	—
DLCLRS 2003-005-010	0.3	R0.05	1	0.3	0.29	11°	45	4	—
DLCLRS 2003-005-020			2				45	4	—
DLCLRS 2004-005-020	0.4	R0.05	2	0.4	0.39	11°	45	4	—
DLCLRS 2004-005-030			3				45	4	—
DLCLRS 2004-01-020		R0.1	2				45	4	—
DLCLRS 2004-01-030			3				45	4	—
DLCLRS 2005-005-020	0.5	R0.05	2	0.5	0.49	11°	45	4	—
DLCLRS 2005-005-030			3				45	4	—
DLCLRS 2005-005-040			4				45	4	—
DLCLRS 2005-01-020		R0.1	2				45	4	—
DLCLRS 2005-01-030			3				45	4	—
DLCLRS 2005-01-040			4				45	4	—
DLCLRS 2006-005-020	0.6	R0.05	2	0.6	0.59	11°	45	4	—
DLCLRS 2006-005-030			3				45	4	—
DLCLRS 2006-005-040			4				45	4	—
DLCLRS 2006-005-060			6				45	4	—
DLCLRS 2006-01-020		R0.1	2				45	4	—
DLCLRS 2006-01-030			3				45	4	—
DLCLRS 2006-01-040			4				45	4	—
DLCLRS 2006-01-060			6				45	4	—


Next Page ➡

Unit (mm)

Outside Diameter	φ0.2 ~ φ3
Diameter Tolerance	0/-0.005
CR Tolerance	± 0.005

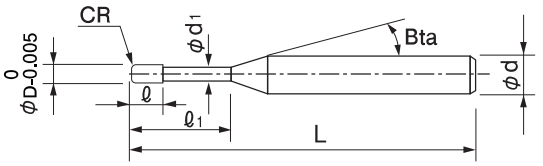

The shank taper angle shown is not an exact value.



Label Sample



#001 φD0.998 R+0.001/-0.001

Diameter measurements are printed on the label to support High Precision milling.

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length byInclined Angles				
				30′	1°	1°30′	2°	3°
DLCLRS 2002-005-010	0.2	R0.05	1	1.19	1.25	1.31	1.38	1.55
DLCLRS 2002-005-015			1.5	1.70	1.78	1.87	1.98	2.22
DLCLRS 2003-005-010	0.3	R0.05	1	1.19	1.25	1.31	1.38	1.55
DLCLRS 2003-005-020			2	2.22	2.33	2.45	2.59	2.91
DLCLRS 2004-005-020	0.4	R0.05	2	2.22	2.33	2.45	2.59	2.91
DLCLRS 2004-005-030			3	3.27	3.43	3.61	3.81	4.28
DLCLRS 2004-01-020		R0.1	2	2.22	2.33	2.44	2.58	2.89
DLCLRS 2004-01-030			3	3.27	3.42	3.60	3.80	4.26
DLCLRS 2005-005-020	0.5	R0.05	2	2.22	2.33	2.45	2.59	2.91
DLCLRS 2005-005-030			3	3.27	3.43	3.61	3.81	4.28
DLCLRS 2005-005-040			4	4.31	4.53	4.76	5.02	5.64
DLCLRS 2005-01-020		R0.1	2	2.22	2.33	2.44	2.58	2.89
DLCLRS 2005-01-030			3	3.27	3.42	3.60	3.80	4.26
DLCLRS 2005-01-040			4	4.31	4.52	4.76	5.01	5.63
DLCLRS 2006-005-020	0.6	R0.05	2	2.22	2.33	2.45	2.59	2.91
DLCLRS 2006-005-030			3	3.27	3.43	3.61	3.81	4.28
DLCLRS 2006-005-040			4	4.31	4.53	4.76	5.02	5.64
DLCLRS 2006-005-060			6	6.41	6.73	7.07	7.46	8.38
DLCLRS 2006-01-020		R0.1	2	2.22	2.33	2.44	2.58	2.89
DLCLRS 2006-01-030			3	3.27	3.42	3.60	3.80	4.26
DLCLRS 2006-01-040			4	4.31	4.52	4.76	5.01	5.63
DLCLRS 2006-01-060			6	6.41	6.72	7.07	7.45	8.36

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLCLRS 2008-005-040	0.8	R0.05	4	0.8	0.79	11°	45	4	—
DLCLRS 2008-005-060			6				45	4	—
DLCLRS 2008-01-040		R0.1	4				45	4	—
DLCLRS 2008-01-060			6				45	4	—
DLCLRS 2008-02-040		R0.2	4				45	4	—
DLCLRS 2008-02-060			6				45	4	—
DLCLRS 2010-01-020	1	R0.1	2	1	0.98	11°	45	4	—
DLCLRS 2010-01-040			4				45	4	—
DLCLRS 2010-01-060			6				45	4	—
DLCLRS 2010-02-020		R0.2	2				45	4	—
DLCLRS 2010-02-040			4				45	4	—
DLCLRS 2010-02-060			6				45	4	—
DLCLRS 2015-02-060	1.5	R0.2	6	1.5	1.47	11°	45	4	—
DLCLRS 2015-02-100			10				45	4	—
DLCLRS 2020-01-080	2	R0.1	8	2	1.98	11°	50	4	—
DLCLRS 2020-01-120			12				50	4	—
DLCLRS 2020-01-160			16				50	4	—
DLCLRS 2020-02-080		R0.2	8				50	4	—
DLCLRS 2020-02-120			12				50	4	—
DLCLRS 2020-02-160			16				50	4	—
DLCLRS 2030-02-120	3	R0.2	12	3	2.96	11°	60	6	—
DLCLRS 2030-02-200			20				60	6	—
DLCLRS 2030-03-120		R0.3	12				60	6	—
DLCLRS 2030-03-200			20				60	6	—
DLCLRS 2030-05-120		R0.5	12				60	6	—
DLCLRS 2030-05-200			20				60	6	—

Next Page ➡

Unit (mm)


Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length byInclined Angles				
				30′	1°	1°30′	2°	3°
DLCLRS 2008-005-040	0.8	R0.05	4	4.30	4.51	4.74	5.00	5.62
DLCLRS 2008-005-060			6	6.39	6.71	7.05	7.44	8.36
DLCLRS 2008-01-040		R0.1	4	4.29	4.50	4.74	4.99	5.60
DLCLRS 2008-01-060			6	6.39	6.70	7.05	7.43	8.34
DLCLRS 2008-02-040		R0.2	4	4.29	4.49	4.72	4.97	5.57
DLCLRS 2008-02-060			6	6.38	6.69	7.03	7.41	8.30
DLCLRS 2010-01-020	1	R0.1	2	2.26	2.37	2.49	2.63	2.94
DLCLRS 2010-01-040			4	4.36	4.57	4.80	5.06	5.68
DLCLRS 2010-01-060			6	6.45	6.77	7.11	7.50	8.42
DLCLRS 2010-02-020		R0.2	2	2.26	2.36	2.48	2.60	2.91
DLCLRS 2010-02-040			4	4.35	4.56	4.79	5.04	5.65
DLCLRS 2010-02-060			6	6.45	6.76	7.10	7.48	8.39
DLCLRS 2015-02-060	1.5	R0.2	6	6.40	6.71	7.05	7.43	8.32
DLCLRS 2015-02-100			10	10.59	11.10	11.67	12.30	13.80
DLCLRS 2020-01-080	2	R0.1	8	8.47	8.89	9.34	9.85	11.06
DLCLRS 2020-01-120			12	12.66	13.28	13.97	14.73	16.54
DLCLRS 2020-01-160			16	16.85	17.67	18.59	19.61	No Interference
DLCLRS 2020-02-080		R0.2	8	8.47	8.88	9.33	9.83	11.03
DLCLRS 2020-02-120			12	12.65	13.27	13.95	14.71	16.50
DLCLRS 2020-02-160			16	16.84	17.67	18.57	19.58	No Interference
DLCLRS 2030-02-120	3	R0.2	12	12.73	13.36	14.04	14.80	No Interference
DLCLRS 2030-02-200			20	21.11	22.14	No Interference	No Interference	No Interference
DLCLRS 2030-03-120		R0.3	12	12.73	13.35	14.03	14.78	No Interference
DLCLRS 2030-03-200			20	21.11	22.13	No Interference	No Interference	No Interference
DLCLRS 2030-05-120		R0.5	12	12.72	13.33	14.00	14.74	No Interference
DLCLRS 2030-05-200			20	21.10	22.12	No Interference	No Interference	No Interference

Milling Conditions for DLCLRS

WORK MATERIAL				COPPER / ALUMINUM ALLOYS				TUNGSTEN COPPER			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2002-005-010	0.2	R0.05	1	40,000	300	0.015	0.1	36,000	270	0.014	0.09
2002-005-015			1.5	32,000	150	0.01	0.1	28,800	140	0.009	0.09
2003-005-010	0.3	R0.05	1	40,000	600	0.03	0.15	36,000	540	0.027	0.14
2003-005-020			2	32,000	450	0.015	0.15	28,800	410	0.014	0.14
2004-005-020	0.4	R0.05	2	40,000	600	0.015	0.2	36,000	540	0.014	0.18
2004-005-030			3	32,000	400	0.01	0.2	28,800	360	0.009	0.18
2004-01-020		R0.1	2	40,000	600	0.03	0.2	36,000	540	0.027	0.18
2004-01-030			3	32,000	400	0.02	0.2	28,800	360	0.018	0.18
2005-005-020	0.5	R0.05	2	40,000	1,000	0.03	0.25	36,000	900	0.027	0.23
2005-005-030			3	32,000	1,000	0.02	0.25	28,800	900	0.018	0.23
2005-005-040			4	32,000	750	0.015	0.25	28,800	680	0.014	0.23
2005-01-020		R0.1	2	40,000	1,000	0.06	0.25	36,000	900	0.054	0.23
2005-01-030			3	32,000	1,000	0.04	0.25	28,800	900	0.036	0.23
2005-01-040			4	32,000	750	0.03	0.25	28,800	680	0.027	0.23
2006-005-020	0.6	R0.05	2	36,000	1,080	0.03	0.3	32,400	970	0.027	0.27
2006-005-030			3	36,000	1,080	0.03	0.3	32,400	970	0.027	0.27
2006-005-040			4	28,800	810	0.015	0.3	25,900	730	0.014	0.27
2006-005-060			6	28,800	540	0.01	0.3	25,900	490	0.009	0.27
2006-01-020		R0.1	2	36,000	1,080	0.06	0.3	32,400	970	0.054	0.27
2006-01-030			3	36,000	1,080	0.06	0.3	32,400	970	0.054	0.27
2006-01-040			4	28,800	810	0.03	0.3	28,800	730	0.027	0.27
2006-01-060			6	28,800	540	0.02	0.3	25,920	490	0.018	0.27
2008-005-040	0.8	R0.05	4	30,000	1,440	0.03	0.4	27,000	1,300	0.027	0.36
2008-005-060			6	24,000	1,440	0.02	0.4	21,600	1,300	0.018	0.36
2008-01-040		R0.1	4	30,000	1,440	0.06	0.4	27,000	1,300	0.054	0.36
2008-01-060			6	24,000	1,440	0.04	0.4	21,600	1,300	0.036	0.36
2008-02-040		R0.2	4	30,000	1,440	0.12	0.4	27,000	1,300	0.108	0.36
2008-02-060			6	24,000	1,440	0.08	0.4	21,600	1,300	0.072	0.36
2010-01-020	1	R0.1	2	25,000	1,500	0.06	0.5	22,500	1,350	0.054	0.45
2010-01-040			4	25,000	1,500	0.045	0.5	22,500	1,350	0.041	0.45
2010-01-060			6	20,000	1,120	0.03	0.5	18,000	1,010	0.027	0.45
2010-02-020		R0.2	2	25,000	1,500	0.12	0.5	22,500	1,350	0.108	0.45
2010-02-040			4	25,000	1,500	0.09	0.5	22,500	1,350	0.081	0.45
2010-02-060			6	20,000	1,120	0.06	0.5	18,000	1,010	0.054	0.45
2015-02-060	1.5	R0.2	6	20,000	1,800	0.12	0.75	18,000	1,620	0.108	0.68
2015-02-100			10	16,000	1,350	0.06	0.75	14,400	1,220	0.054	0.68
2020-01-080	2	R0.1	8	16,000	2,100	0.038	1	14,400	1,890	0.034	0.9
2020-01-120			12	12,800	1,400	0.025	1	11,500	1,260	0.023	0.9
2020-01-160			16	12,800	1,120	0.02	1	11,500	1,010	0.018	0.9
2020-02-080		R0.2	8	16,000	2,100	0.075	1	14,400	1,890	0.068	0.9
2020-02-120			12	12,800	1,400	0.05	1	11,500	1,260	0.045	0.9
2020-02-160			16	12,800	1,120	0.04	1	11,500	1,010	0.036	0.9

Milling Conditions for DLCLRS

WORK MATERIAL				COPPER / ALUMINUM ALLOYS				TUNGSTEN COPPER			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030-02-120	3	R0.2	12	14,000	2,940	0.12	1.5	12,600	2,650	0.108	1.35
2030-02-200			20	11,200	2,940	0.072	1.5	10,100	2,650	0.065	1.35
2030-03-120		R0.3	12	14,000	2,940	0.18	1.5	12,600	2,650	0.162	1.35
2030-03-200			20	11,200	2,940	0.108	1.5	10,100	2,650	0.097	1.35
2030-05-120		R0.5	12	14,000	2,940	0.3	1.5	12,600	2,650	0.27	1.35
2030-05-200			20	11,200	2,940	0.18	1.5	10,100	2,650	0.162	1.35







Note:
・Decrease the feed rate more than 50% from the milling parameters when slot milling.
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering occurs.
・Recommend wet coolant for Copper and Tungsten-Copper.

Copper Milling Example Comparison with conventional tool for Steels

DLCLRS　ϕ3 × CR0.5 × EL12

Tough Pitch Copper C1100

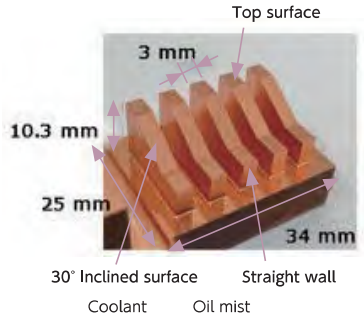

Top surface		30° Inclined surface		Straight wall	
DLCLRS	Conventional	DLCLRS	Conventional	DLCLRS	Conventional
					
Ra **0.014** μm	Ra **0.021** μm	Ra **0.103** μm	Ra **0.125** μm	Ra **0.109** μm	Ra **0.090** μm

Better surface roughness compared to the conventional tool. Less burrs and a clean edge.

Process	Spindle Speed (min^{-1})	Feed Rate (mm / min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Allowance (mm)	Cycle Time 5 work pieces (h:m:s)
Roughing	14,000	2,940 Groove 1,470	0.3	1	0.08	0:16:29
Semi-finishing	14,000	2,940	0.05	0.05	0.03	0:45:48
Finishing	14,000	540	0.015	0.03	0	2:48:28

Total 3:50:45

HGLRS

Additional 46 models




HMGCOAT 4 Flute Long Neck Radius End Mills for Hard Materials

φ0.2～φ6


Super MG | HMG COAT | 30° | R | R ±0.003 | Shank Dia 0/-0.004 | Back Taper Geometry | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	★	★										

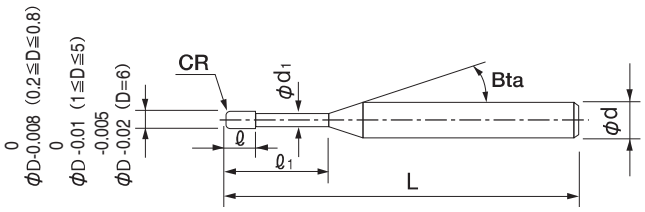


The shank taper angle shown is not an exact value.



Feature 1
Long tool life

Super negative rake angle allows the tool to withstand cutting resistance. Best suited for 60-70 HRC.



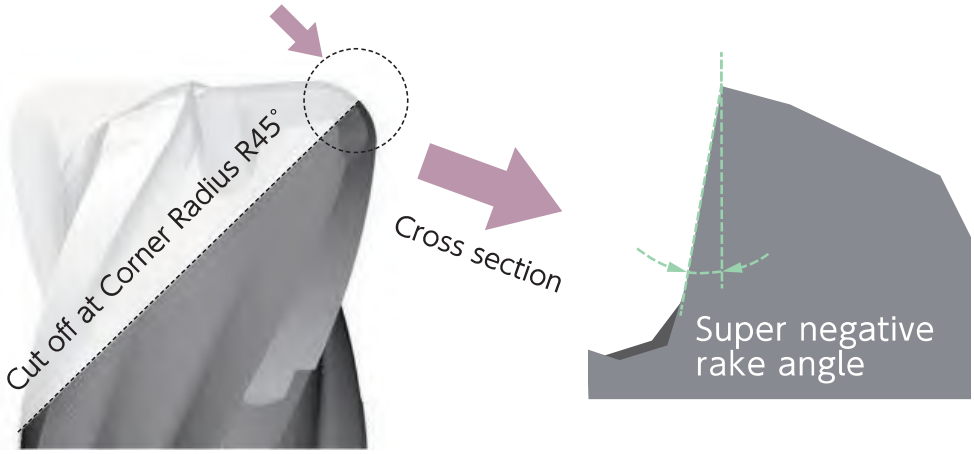

Feature 2
Milling accuracy

Improved milling accuracy and surface quality as a result of the strong back taper geometry.

◆ High Precision Diameter Tolerance / Radius Accuracy / Shank Diameter Tolerance

HLRS Tolerance — Unit (mm)

Outside Diameter	Diameter Tolerance	Radius Accuracy	Shank Diameter Tolerance
0.2 ≦ D ≦ 0.6	0/-0.01	± 0.005	0/-0.005
0.8 ≦ D ≦ 5	0/-0.015		
D=6	-0.005/-0.02		


HGLRS Tolerance — Unit (mm)

Outside Diameter	Diameter Tolerance	Radius Accuracy	Shank Diameter Tolerance
0.2 ≦ D ≦ 0.8	0/-0.008	± 0.003	0/-0.004 (h4)
1 ≦ D ≦ 5	0/-0.01		
D=6	-0.005/-0.02		


Dimensional accuracy comparison
HGLRS ϕ3 × CR0.3 × EL16 — HAP72 (69 HRC)

Smaller dimensional change and better milling accuracy with HGLRS


Deflection of the wall after milling (mm)

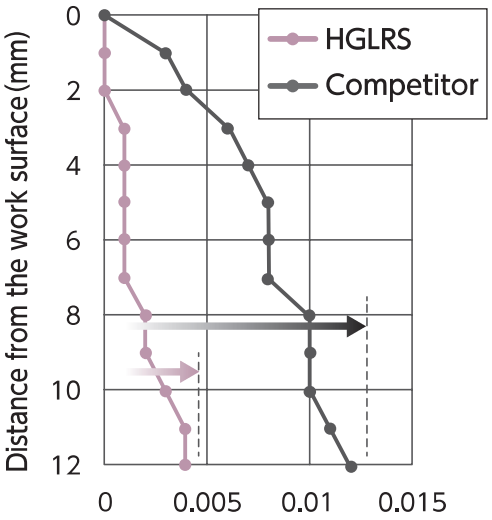


Surface condition after milling

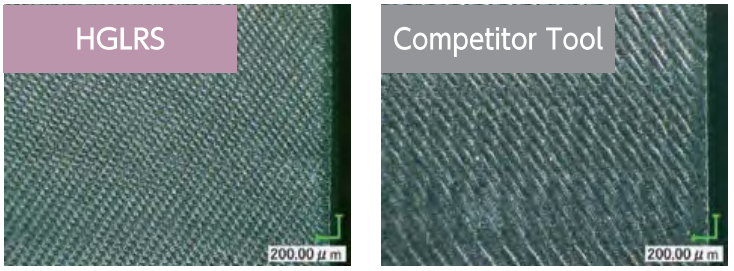

Surface roughness after milling

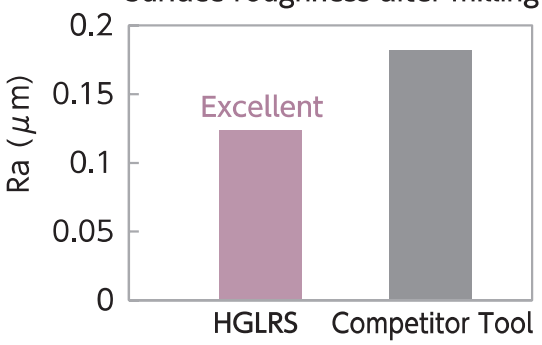

Spindle Speed	7,000 min^{-1}
Feed Rate	1,800 mm/min
Axial Depth	0.03 mm
Radial Depth	0.02 mm
Coolant	Air Blow
Cycle Time	15 min

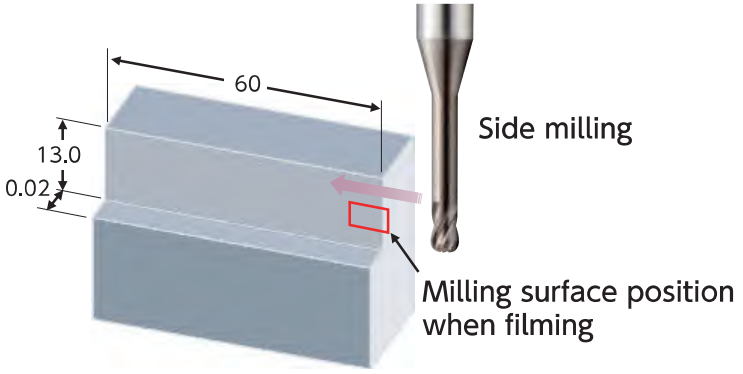


Wear width comparison
HGLRS ϕ3 × CR0.3 × EL16


HAP72 (69 HRC)

High efficiency milling and long tool life achieved even on new generation super hard materials.





Spindle Speed	7,000 min^{-1}
Feed Rate	900 mm/min
Axial Depth	0.03 mm
Radial Depth	0.6 mm
Coolant	Air Blow
Milling Shape	Square Pocket (10 × 10 × 5 mm)
Cycle Time	68 min

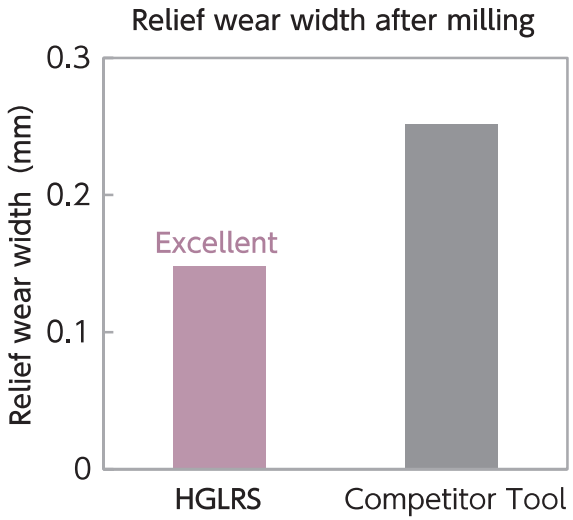


Slotting, Side milling, Flat milling
HGLRS ϕ2 × CR0.2 × EL10

HAP72 (68 HRC)


Side finishing

■ Waved finishing
n=7,200 Vf=780
a_p=0.02 a_e=0.2



■ Half pocket finishing
n=7,200 Vf=780
a_p=0.02 a_e=0.2










Work size
80 x 40 x 30 mm

Flat finishing

■ n=7,200 Vf=780
a_p=0.02 a_e=0.2






Coolant Oil mist


Slotting

■ n=7,200 Vf=390
a_p=0.04

Slot width 2 mm



■ n=7,200 Vf=390
a_p=0.02

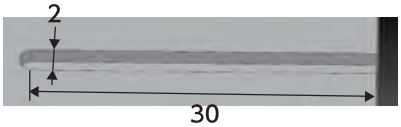

ϕ0.2 milling example
ϕ0.2 × CR0.02 × EL0.5








HAP72 (69 HRC)

Both HGLRS ϕ0.2 and ϕ0.6 have better wear resistance than HLRS and competitor's tool.



Spindle Speed (min^{-1})	Feed Rate (mm / min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Cycle Time (min)
27,000	250	0.003	0.01	30

Work Size 2 × 1 × 0.042 mm Coolant Oil Mist

HGLRS				
HLRS				
Competitor's tool				





ϕ0.6 milling example
ϕ0.6 × CR0.05 × EL2

HAP72 (69 HRC)



Spindle Speed (min^{-1})	Feed Rate (mm / min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Cycle Time (min)
18,500	660	0.007	0.1	48

Work Size 17 × 6 × 0.07 mm Coolant Oil Mist

HGLRS				
HLRS				
Competitor's tool				

Total 230 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HGLRS 4002-002-005	0.2	R0.02	0.5	0.12	0.185	16°	50	4	—
HGLRS 4002-002-010			1				50	4	—
HGLRS 4002-002-020			2				50	4	—
HGLRS 4002-005-005		R0.05	0.5				50	4	—
HGLRS 4002-005-010			1				50	4	—
HGLRS 4002-005-020			2				50	4	—
HGLRS 4003-002-005	0.3	R0.02	0.5	0.18	0.285	16°	50	4	—
HGLRS 4003-002-010			1				50	4	—
HGLRS 4003-002-015			1.5				50	4	—
HGLRS 4003-002-020			2				50	4	—
HGLRS 4003-005-005		R0.05	0.5				50	4	—
HGLRS 4003-005-010			1				50	4	—
HGLRS 4003-005-020			2				50	4	—
HGLRS 4004-002-010	0.4	R0.02	1	0.24	0.385	16°	50	4	—
HGLRS 4004-002-020			2				50	4	—
HGLRS 4004-005-010		R0.05	1				50	4	—
HGLRS 4004-005-020			2				50	4	—
HGLRS 4004-01-010		R0.1	1				50	4	—
HGLRS 4004-01-020			2				50	4	—
HGLRS 4005-002-010	0.5	R0.02	1	0.3	0.485	16°	50	4	—
HGLRS 4005-002-020			2				50	4	—
HGLRS 4005-002-030			3				50	4	—
HGLRS 4005-005-010		R0.05	1				50	4	—
HGLRS 4005-005-020			2				50	4	—
HGLRS 4005-005-030			3				50	4	—
HGLRS 4005-01-010		R0.1	1				50	4	—
HGLRS 4005-01-020			2				50	4	—
HGLRS 4005-01-030			3				50	4	—
HGLRS 4006-005-020	0.6	R0.05	2	0.36	0.585	16°	50	4	—
HGLRS 4006-005-040			4				50	4	—
HGLRS 4006-01-020		R0.1	2				50	4	—
HGLRS 4006-01-040			4				50	4	—
HGLRS 4008-005-020	0.8	R0.05	2	0.48	0.78	16°	50	4	—
HGLRS 4008-005-040			4				50	4	—
HGLRS 4008-005-060			6				50	4	—
HGLRS 4008-01-020		R0.1	2				50	4	—
HGLRS 4008-01-040			4				50	4	—
HGLRS 4008-01-060			6				50	4	—
HGLRS 4008-02-020		R0.2	2				50	4	—
HGLRS 4008-02-040			4				50	4	—
HGLRS 4008-02-060			6				50	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HGLRS 4002-002-005	0.2	R0.02	0.5	0.61	0.64	0.67	0.70	0.76
HGLRS 4002-002-010			1	1.13	1.18	1.23	1.28	1.38
HGLRS 4002-002-020			2	2.17	2.25	2.34	2.43	2.63
HGLRS 4002-005-005		R0.05	0.5	0.60	0.64	0.67	0.70	0.75
HGLRS 4002-005-010			1	1.13	1.18	1.22	1.27	1.37
HGLRS 4002-005-020			2	2.17	2.25	2.33	2.42	2.62
HGLRS 4003-002-005	0.3	R0.02	0.5	0.63	0.66	0.69	0.72	0.78
HGLRS 4003-002-010			1	1.15	1.20	1.24	1.29	1.40
HGLRS 4003-002-015			1.5	1.66	1.72	1.79	1.85	2.01
HGLRS 4003-002-020			2	2.18	2.26	2.34	2.43	2.63
HGLRS 4003-005-005		R0.05	0.5	0.63	0.66	0.68	0.71	0.77
HGLRS 4003-005-010			1	1.15	1.20	1.24	1.29	1.39
HGLRS 4003-005-020			2	2.18	2.26	2.34	2.43	2.62
HGLRS 4004-002-010	0.4	R0.02	1	1.15	1.20	1.24	1.29	1.40
HGLRS 4004-002-020			2	2.18	2.26	2.34	2.43	2.63
HGLRS 4004-005-010		R0.05	1	1.15	1.20	1.24	1.29	1.39
HGLRS 4004-005-020			2	2.18	2.26	2.34	2.43	2.62
HGLRS 4004-01-010		R0.1	1	1.15	1.19	1.23	1.28	1.38
HGLRS 4004-01-020			2	2.18	2.25	2.33	2.42	2.61
HGLRS 4005-002-010	0.5	R0.02	1	1.15	1.20	1.24	1.29	1.40
HGLRS 4005-002-020			2	2.18	2.26	2.34	2.43	2.63
HGLRS 4005-002-030			3	3.21	3.33	3.45	3.58	3.87
HGLRS 4005-005-010		R0.05	1	1.15	1.20	1.24	1.29	1.39
HGLRS 4005-005-020			2	2.18	2.26	2.34	2.43	2.62
HGLRS 4005-005-030			3	3.21	3.33	3.45	3.58	3.87
HGLRS 4005-01-010		R0.1	1	1.15	1.19	1.23	1.28	1.38
HGLRS 4005-01-020			2	2.18	2.25	2.33	2.42	2.61
HGLRS 4005-01-030			3	3.21	3.32	3.44	3.57	3.85
HGLRS 4006-005-020	0.6	R0.05	2	2.18	2.26	2.34	2.43	2.62
HGLRS 4006-005-040			4	4.25	4.40	4.55	4.72	5.11
HGLRS 4006-01-020		R0.1	2	2.18	2.25	2.33	2.42	2.61
HGLRS 4006-01-040			4	4.25	4.39	4.55	4.72	5.10
HGLRS 4008-005-020	0.8	R0.05	2	2.54	2.72	2.89	3.03	3.30
HGLRS 4008-005-040			4	4.68	4.94	5.16	5.35	5.79
HGLRS 4008-005-060			6	6.80	7.11	7.37	7.65	8.27
HGLRS 4008-01-020		R0.1	2	2.54	2.72	2.88	3.02	3.29
HGLRS 4008-01-040			4	4.68	4.93	5.15	5.34	5.77
HGLRS 4008-01-060			6	6.79	7.11	7.37	7.64	8.26
HGLRS 4008-02-020		R0.2	2	2.53	2.70	2.86	3.00	3.26
HGLRS 4008-02-040			4	4.67	4.92	5.14	5.33	5.75
HGLRS 4008-02-060			6	6.78	7.10	7.36	7.63	8.24

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HGLRS 4010-002-020	1	R0.02	2	0.8	0.98	16°	50	4	—
HGLRS 4010-002-030			3				50	4	—
HGLRS 4010-002-040			4				50	4	—
HGLRS 4010-002-050			5				50	4	—
HGLRS 4010-005-020		R0.05	2				50	4	—
HGLRS 4010-005-030			3				50	4	—
HGLRS 4010-005-040			4				50	4	—
HGLRS 4010-005-050			5				50	4	—
※ HGLRS 4010-005-060			6				50	4	—
※ HGLRS 4010-005-080			8				50	4	—
※ HGLRS 4010-005-100			10				50	4	—
HGLRS 4010-01-020		R0.1	2				50	4	—
HGLRS 4010-01-030			3				50	4	—
HGLRS 4010-01-040			4				50	4	—
HGLRS 4010-01-050			5				50	4	—
※ HGLRS 4010-01-060			6				50	4	—
※ HGLRS 4010-01-080			8				50	4	—
※ HGLRS 4010-01-100			10				50	4	—
HGLRS 4010-02-020		R0.2	2				50	4	—
HGLRS 4010-02-030			3				50	4	—
HGLRS 4010-02-040			4				50	4	—
HGLRS 4010-02-050			5				50	4	—
※ HGLRS 4010-02-060			6				50	4	—
※ HGLRS 4010-02-080			8				50	4	—
※ HGLRS 4010-02-100			10				50	4	—
HGLRS 4015-005-030	1.5	R0.05	3	1.2	1.48	16°	50	4	—
HGLRS 4015-005-040			4				50	4	—
HGLRS 4015-005-060			6				50	4	—
HGLRS 4015-005-080			8				50	4	—
※ HGLRS 4015-005-100			10				50	4	—
HGLRS 4015-01-030		R0.1	3				50	4	—
HGLRS 4015-01-040			4				50	4	—
HGLRS 4015-01-060			6				50	4	—
HGLRS 4015-01-080			8				50	4	—
※ HGLRS 4015-01-100			10				50	4	—
※ HGLRS 4015-01-120			12				50	4	—
HGLRS 4015-02-030		R0.2	3				50	4	—
HGLRS 4015-02-040			4				50	4	—
HGLRS 4015-02-060			6				50	4	—
HGLRS 4015-02-080			8				50	4	—
※ HGLRS 4015-02-100			10				50	4	—
※ HGLRS 4015-02-120			12				50	4	—

※ Additional model

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HGLRS 4010-002-020	1	R0.02	2	2.58	2.76	2.92	3.06	3.33
HGLRS 4010-002-030			3	3.65	3.87	4.06	4.23	4.57
HGLRS 4010-002-040			4	4.71	4.97	5.18	5.38	5.81
HGLRS 4010-002-050			5	5.77	6.05	6.29	6.53	7.06
HGLRS 4010-005-020		R0.05	2	2.58	2.76	2.91	3.06	3.32
HGLRS 4010-005-030			3	3.65	3.87	4.05	4.22	4.56
HGLRS 4010-005-040			4	4.71	4.96	5.18	5.37	5.81
HGLRS 4010-005-050			5	5.77	6.05	6.29	6.52	7.05
HGLRS 4010-005-060			6	6.82	7.13	7.39	7.64	8.21
HGLRS 4010-005-080			8	8.92	9.27	9.59	9.92	10.66
HGLRS 4010-005-100			10	11.01	11.41	11.79	12.20	13.11
HGLRS 4010-01-020		R0.1	2	2.58	2.75	2.90	3.05	3.31
HGLRS 4010-01-030			3	3.65	3.86	4.05	4.21	4.55
HGLRS 4010-01-040			4	4.71	4.96	5.17	5.36	5.80
HGLRS 4010-01-050			5	5.77	6.05	6.28	6.51	7.04
HGLRS 4010-01-060			6	6.82	7.13	7.38	7.64	8.20
HGLRS 4010-01-080			8	8.92	9.27	9.58	9.91	10.65
HGLRS 4010-01-100			10	11.00	11.40	11.78	12.19	13.10
HGLRS 4010-02-020		R0.2	2	2.57	2.74	2.89	3.03	3.29
HGLRS 4010-02-030			3	3.64	3.85	4.03	4.20	4.53
HGLRS 4010-02-040			4	4.70	4.95	5.16	5.35	5.77
HGLRS 4010-02-050			5	5.76	6.04	6.27	6.50	7.02
HGLRS 4010-02-060			6	6.81	7.12	7.37	7.62	8.18
HGLRS 4010-02-080			8	8.91	9.26	9.57	9.90	10.63
HGLRS 4010-02-100			10	11.00	11.40	11.77	12.18	13.07
HGLRS 4015-005-030	1.5	R0.05	3	3.12	3.23	3.35	3.48	3.76
HGLRS 4015-005-040			4	4.16	4.30	4.46	4.63	5.00
HGLRS 4015-005-060			6	6.22	6.44	6.67	6.92	7.49
HGLRS 4015-005-080			8	8.29	8.58	8.89	9.22	9.97
HGLRS 4015-005-100			10	10.33	10.67	11.02	11.41	12.26
HGLRS 4015-01-030		R0.1	3	3.12	3.23	3.34	3.47	3.75
HGLRS 4015-01-040			4	4.16	4.30	4.45	4.62	4.99
HGLRS 4015-01-060			6	6.22	6.44	6.67	6.92	7.48
HGLRS 4015-01-080			8	8.29	8.58	8.89	9.22	9.96
HGLRS 4015-01-100			10	10.33	10.66	11.02	11.40	12.25
HGLRS 4015-01-120			12	12.39	12.79	13.22	13.68	14.69
HGLRS 4015-02-030		R0.2	3	3.12	3.22	3.33	3.45	3.72
HGLRS 4015-02-040			4	4.15	4.29	4.44	4.60	4.97
HGLRS 4015-02-060			6	6.22	6.43	6.66	6.90	7.45
HGLRS 4015-02-080			8	8.29	8.57	8.87	9.20	9.94
HGLRS 4015-02-100			10	10.33	10.66	11.01	11.39	12.23
HGLRS 4015-02-120			12	12.39	12.79	13.21	13.66	14.67

Next Page ➡

Unit (mm)

	Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
	HGLRS 4015-03-030	1.5	R0.3	3	1.2	1.48	16°	50	4	—
	HGLRS 4015-03-040			4				50	4	—
	HGLRS 4015-03-060			6				50	4	—
	HGLRS 4015-03-080			8				50	4	—
※	HGLRS 4015-03-100			10				50	4	—
※	HGLRS 4015-03-120			12				50	4	—
	HGLRS 4015-05-040		R0.5	4				50	4	—
	HGLRS 4015-05-060			6				50	4	—
	HGLRS 4015-05-080			8				50	4	—
※	HGLRS 4015-05-100			10				50	4	—
※	HGLRS 4015-05-120			12				50	4	—
	HGLRS 4020-002-040	2	R0.02	4	1.6	1.96	16°	50	4	—
	HGLRS 4020-002-060			6				50	4	—
	HGLRS 4020-002-080			8				50	4	—
	HGLRS 4020-002-100			10				50	4	—
	HGLRS 4020-005-040		R0.05	4				50	4	—
	HGLRS 4020-005-060			6				50	4	—
	HGLRS 4020-005-080			8				50	4	—
	HGLRS 4020-005-100			10				50	4	—
	HGLRS 4020-01-040		R0.1	4				50	4	—
	HGLRS 4020-01-060			6				50	4	—
	HGLRS 4020-01-080			8				50	4	—
	HGLRS 4020-01-100			10				50	4	—
※	HGLRS 4020-01-120			12				50	4	—
※	HGLRS 4020-01-160			16				60	4	—
※	HGLRS 4020-01-200			20				60	4	—
	HGLRS 4020-02-040		R0.2	4				50	4	—
	HGLRS 4020-02-060			6				50	4	—
	HGLRS 4020-02-080			8				50	4	—
	HGLRS 4020-02-100			10				50	4	—
※	HGLRS 4020-02-120			12				50	4	—
※	HGLRS 4020-02-160			16				60	4	—
※	HGLRS 4020-02-200			20				60	4	—
	HGLRS 4020-03-040		R0.3	4				50	4	—
	HGLRS 4020-03-060			6				50	4	—
	HGLRS 4020-03-080			8				50	4	—
	HGLRS 4020-03-100			10				50	4	—
※	HGLRS 4020-03-120			12				50	4	—
※	HGLRS 4020-03-160			16				60	4	—
※	HGLRS 4020-03-200			20				60	4	—

※ Additional model

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HGLRS 4015-03-030	1.5	R0.3	3	3.12	3.22	3.32	3.44	3.70
HGLRS 4015-03-040			4	4.15	4.28	4.43	4.59	4.94
HGLRS 4015-03-060			6	6.22	6.42	6.65	6.89	7.43
HGLRS 4015-03-080			8	8.28	8.56	8.86	9.19	9.91
HGLRS 4015-03-100			10	10.32	10.65	11.00	11.37	12.20
HGLRS 4015-03-120			12	12.39	12.78	13.20	13.65	14.65
HGLRS 4015-05-040		R0.5	4	4.14	4.27	4.41	4.56	4.89
HGLRS 4015-05-060			6	6.21	6.41	6.63	6.86	7.38
HGLRS 4015-05-080			8	8.28	8.55	8.84	9.16	9.87
HGLRS 4015-05-100			10	10.32	10.64	10.98	11.34	12.16
HGLRS 4015-05-120			12	12.38	12.77	13.18	13.62	14.61
HGLRS 4020-002-040	2	R0.02	4	4.20	4.34	4.50	4.67	5.05
HGLRS 4020-002-060			6	6.26	6.48	6.72	6.97	7.54
HGLRS 4020-002-080			8	8.33	8.62	8.94	9.27	10.03
HGLRS 4020-002-100			10	10.40	10.76	11.15	11.57	12.51
HGLRS 4020-005-040		R0.05	4	4.20	4.34	4.50	4.67	5.05
HGLRS 4020-005-060			6	6.26	6.48	6.72	6.97	7.53
HGLRS 4020-005-080			8	8.33	8.62	8.93	9.27	10.02
HGLRS 4020-005-100			10	10.40	10.76	11.15	11.57	12.51
HGLRS 4020-01-040		R0.1	4	4.19	4.34	4.49	4.66	5.04
HGLRS 4020-01-060			6	6.26	6.48	6.71	6.96	7.52
HGLRS 4020-01-080			8	8.33	8.62	8.93	9.26	10.01
HGLRS 4020-01-100			10	10.40	10.76	11.14	11.56	12.49
HGLRS 4020-01-120			12	12.43	12.83	13.26	13.72	14.74
HGLRS 4020-01-160			16	16.55	17.09	17.66	18.27	No Interference
HGLRS 4020-01-200			20	20.68	21.35	22.06	22.83	No Interference
HGLRS 4020-02-040		R0.2	4	4.19	4.33	4.48	4.65	5.01
HGLRS 4020-02-060			6	6.26	6.47	6.70	6.95	7.50
HGLRS 4020-02-080			8	8.33	8.61	8.92	9.25	9.98
HGLRS 4020-02-100			10	10.39	10.75	11.13	11.54	12.47
HGLRS 4020-02-120			12	12.43	12.82	13.25	13.70	14.72
HGLRS 4020-02-160			16	16.55	17.08	17.65	18.26	19.61
HGLRS 4020-02-200			20	20.68	21.34	22.05	22.81	No Interference
HGLRS 4020-03-040		R0.3	4	4.19	4.32	4.47	4.63	4.99
HGLRS 4020-03-060			6	6.25	6.46	6.69	6.93	7.47
HGLRS 4020-03-080			8	8.32	8.60	8.91	9.23	9.96
HGLRS 4020-03-100			10	10.39	10.74	11.12	11.53	12.45
HGLRS 4020-03-120			12	12.42	12.82	13.24	13.69	14.69
HGLRS 4020-03-160			16	16.55	17.08	17.64	18.24	19.59
HGLRS 4020-03-200			20	20.67	21.34	22.04	22.80	No Interference

Next Page ➡

Unit (mm)

	Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
	HGLRS 4020-05-040	2	R0.5	4	1.6	1.96	16°	50	4	—
	HGLRS 4020-05-060			6				50	4	—
	HGLRS 4020-05-080			8				50	4	—
	HGLRS 4020-05-100			10				50	4	—
※	HGLRS 4020-05-120			12				50	4	—
※	HGLRS 4020-05-160			16				60	4	—
※	HGLRS 4020-05-200			20				60	4	—
	HGLRS 4030-005-040	3	R0.05	4	2.4	2.87	16°	50	6	—
	HGLRS 4030-005-060			6				50	6	—
	HGLRS 4030-005-080			8				50	6	—
	HGLRS 4030-005-100			10				50	6	—
	HGLRS 4030-005-120			12				50	6	—
	HGLRS 4030-005-160			16				60	6	—
※	HGLRS 4030-005-200			20				60	6	—
	HGLRS 4030-01-040		R0.1	4				50	6	—
	HGLRS 4030-01-060			6				50	6	—
	HGLRS 4030-01-080			8				50	6	—
	HGLRS 4030-01-100			10				50	6	—
	HGLRS 4030-01-120			12				50	6	—
	HGLRS 4030-01-160			16				60	6	—
※	HGLRS 4030-01-200			20				60	6	—
	HGLRS 4030-02-040		R0.2	4				50	6	—
	HGLRS 4030-02-060			6				50	6	—
	HGLRS 4030-02-080			8				50	6	—
	HGLRS 4030-02-100			10				50	6	—
	HGLRS 4030-02-120			12				50	6	—
	HGLRS 4030-02-160			16				60	6	—
※	HGLRS 4030-02-200			20				60	6	—
	HGLRS 4030-03-040		R0.3	4				50	6	—
	HGLRS 4030-03-060			6				50	6	—
	HGLRS 4030-03-080			8				50	6	—
	HGLRS 4030-03-100			10				50	6	—
	HGLRS 4030-03-120			12				50	6	—
	HGLRS 4030-03-160			16				60	6	—
※	HGLRS 4030-03-200			20				60	6	—
	HGLRS 4030-05-040		R0.5	4				50	6	—
	HGLRS 4030-05-060			6				50	6	—
	HGLRS 4030-05-080			8				50	6	—
	HGLRS 4030-05-100			10				50	6	—
	HGLRS 4030-05-120			12				50	6	—
	HGLRS 4030-05-160			16				60	6	—
※	HGLRS 4030-05-200			20				60	6	—

※ Additional model

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HGLRS 4020-05-040	2	R0.5	4	4.18	4.31	4.45	4.60	4.94
HGLRS 4020-05-060			6	6.25	6.45	6.67	6.90	7.43
HGLRS 4020-05-080			8	8.32	8.59	8.88	9.20	9.91
HGLRS 4020-05-100			10	10.38	10.73	11.10	11.50	12.40
HGLRS 4020-05-120			12	12.42	12.80	13.22	13.66	14.65
HGLRS 4020-05-160			16	16.54	17.06	17.62	18.22	19.54
HGLRS 4020-05-200			20	20.67	21.32	22.02	22.77	No Interference
HGLRS 4030-005-040	3	R0.05	4	4.39	4.54	4.70	4.88	5.28
HGLRS 4030-005-060			6	6.45	6.68	6.92	7.18	7.76
HGLRS 4030-005-080			8	8.52	8.82	9.14	9.48	10.25
HGLRS 4030-005-100			10	10.59	10.96	11.35	11.78	12.74
HGLRS 4030-005-120			12	12.66	13.10	13.57	14.08	15.22
HGLRS 4030-005-160			16	16.79	17.38	18.00	18.68	20.19
HGLRS 4030-005-200			20	20.86	21.54	22.26	23.03	24.75
HGLRS 4030-01-040		R0.1	4	4.38	4.54	4.70	4.87	5.27
HGLRS 4030-01-060			6	6.45	6.68	6.92	7.17	7.75
HGLRS 4030-01-080			8	8.52	8.81	9.13	9.47	10.24
HGLRS 4030-01-100			10	10.59	10.95	11.35	11.77	12.72
HGLRS 4030-01-120			12	12.65	13.09	13.56	14.07	15.21
HGLRS 4030-01-160			16	16.79	17.37	18.00	18.67	20.18
HGLRS 4030-01-200			20	20.86	21.53	22.25	23.02	24.74
HGLRS 4030-02-040		R0.2	4	4.38	4.53	4.69	4.86	5.24
HGLRS 4030-02-060			6	6.45	6.67	6.90	7.16	7.73
HGLRS 4030-02-080			8	8.52	8.81	9.12	9.46	10.21
HGLRS 4030-02-100			10	10.58	10.95	11.34	11.76	12.70
HGLRS 4030-02-120			12	12.65	13.09	13.55	14.06	15.19
HGLRS 4030-02-160			16	16.79	17.37	17.99	18.66	20.16
HGLRS 4030-02-200			20	20.85	21.53	22.24	23.01	24.72
HGLRS 4030-03-040		R0.3	4	4.38	4.52	4.68	4.84	5.22
HGLRS 4030-03-060			6	6.45	6.66	6.89	7.14	7.70
HGLRS 4030-03-080			8	8.51	8.80	9.11	9.44	10.19
HGLRS 4030-03-100			10	10.58	10.94	11.33	11.74	12.68
HGLRS 4030-03-120			12	12.65	13.08	13.54	14.04	15.16
HGLRS 4030-03-160			16	16.78	17.36	17.98	18.64	20.14
HGLRS 4030-03-200			20	20.85	21.52	22.23	23.00	24.69
HGLRS 4030-05-040		R0.5	4	4.37	4.51	4.66	4.81	5.17
HGLRS 4030-05-060			6	6.44	6.65	6.87	7.11	7.66
HGLRS 4030-05-080			8	8.51	8.79	9.09	9.41	10.14
HGLRS 4030-05-100			10	10.57	10.93	11.31	11.71	12.63
HGLRS 4030-05-120			12	12.64	13.07	13.52	14.01	15.12
HGLRS 4030-05-160			16	16.78	17.34	17.96	18.61	20.09
HGLRS 4030-05-200			20	20.84	21.51	22.21	22.97	24.65

Next Page ➡

Unit (mm)

	Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
	HGLRS 4030-10-060	3	R1	6	2.4	2.87	16°	50	6	—
	HGLRS 4030-10-080			8				50	6	—
	HGLRS 4030-10-100			10				50	6	—
	HGLRS 4030-10-120			12				50	6	—
	HGLRS 4030-10-160			16				60	6	—
※	HGLRS 4030-10-200			20				60	6	—
	HGLRS 4040-005-080	4	R0.05	8	3.2	3.77	16°	60	6	—
	HGLRS 4040-005-120			12				60	6	—
	HGLRS 4040-005-160			16				60	6	—
	HGLRS 4040-005-200			20				70	6	—
	HGLRS 4040-01-080		R0.1	8				60	6	—
	HGLRS 4040-01-120			12				60	6	—
	HGLRS 4040-01-160			16				60	6	—
	HGLRS 4040-01-200			20				70	6	—
※	HGLRS 4040-01-240			24				70	6	—
※	HGLRS 4040-01-300			30				70	6	—
	HGLRS 4040-02-080		R0.2	8				60	6	—
	HGLRS 4040-02-120			12				60	6	—
	HGLRS 4040-02-160			16				60	6	—
	HGLRS 4040-02-200			20				70	6	—
※	HGLRS 4040-02-240			24				70	6	—
※	HGLRS 4040-02-300			30				70	6	—
	HGLRS 4040-03-080		R0.3	8				60	6	—
	HGLRS 4040-03-120			12				60	6	—
	HGLRS 4040-03-160			16				60	6	—
	HGLRS 4040-03-200			20				70	6	—
※	HGLRS 4040-03-240			24				70	6	—
※	HGLRS 4040-03-300			30				70	6	—
	HGLRS 4040-05-080		R0.5	8				60	6	—
	HGLRS 4040-05-120			12				60	6	—
	HGLRS 4040-05-160			16				60	6	—
	HGLRS 4040-05-200			20				70	6	—
※	HGLRS 4040-05-240			24				70	6	—
※	HGLRS 4040-05-300			30				70	6	—
	HGLRS 4040-10-080		R1	8				60	6	—
	HGLRS 4040-10-120			12				60	6	—
	HGLRS 4040-10-160			16				60	6	—
	HGLRS 4040-10-200			20				70	6	—
※	HGLRS 4040-10-240			24				70	6	—
※	HGLRS 4040-10-300			30				70	6	—

※ Additional model

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HGLRS 4030-10-060	3	R1	6	6.42	6.61	6.81	7.04	7.53
HGLRS 4030-10-080			8	8.49	8.75	9.03	9.34	10.02
HGLRS 4030-10-100			10	10.55	10.89	11.25	11.64	12.51
HGLRS 4030-10-120			12	12.62	13.03	13.46	13.94	14.99
HGLRS 4030-10-160			16	16.75	17.31	17.90	18.53	19.97
HGLRS 4030-10-200			20	20.83	21.47	22.16	22.90	24.54
HGLRS 4040-005-080	4	R0.05	8	8.71	9.02	9.34	9.69	10.48
HGLRS 4040-005-120			12	12.85	13.29	13.78	14.29	15.45
HGLRS 4040-005-160			16	16.98	17.57	18.21	18.89	No Interference
HGLRS 4040-005-200			20	21.12	21.85	22.64	23.49	No Interference
HGLRS 4040-01-080		R0.1	8	8.71	9.01	9.34	9.68	10.47
HGLRS 4040-01-120			12	12.85	13.29	13.77	14.28	15.44
HGLRS 4040-01-160			16	16.98	17.57	18.20	18.88	No Interference
HGLRS 4040-01-200			20	21.11	21.85	22.64	23.48	No Interference
HGLRS 4040-01-240			24	25.16	25.98	26.84	27.77	No Interference
HGLRS 4040-01-300			30	31.35	32.36	33.45	No Interference	No Interference
HGLRS 4040-02-080		R0.2	8	8.71	9.01	9.33	9.67	10.44
HGLRS 4040-02-120			12	12.84	13.28	13.76	14.27	15.42
HGLRS 4040-02-160			16	16.98	17.56	18.19	18.87	No Interference
HGLRS 4040-02-200			20	21.11	21.84	22.63	23.47	No Interference
HGLRS 4040-02-240			24	25.16	25.97	26.83	27.76	No Interference
HGLRS 4040-02-300			30	31.35	32.36	33.44	No Interference	No Interference
HGLRS 4040-03-080		R0.3	8	8.70	9.00	9.32	9.66	10.42
HGLRS 4040-03-120			12	12.84	13.28	13.75	14.25	15.39
HGLRS 4040-03-160			16	16.97	17.56	18.18	18.85	No Interference
HGLRS 4040-03-200			20	21.11	21.83	22.61	23.45	No Interference
HGLRS 4040-03-240			24	25.15	25.96	26.82	27.75	No Interference
HGLRS 4040-03-300			30	31.34	32.35	33.43	No Interference	No Interference
HGLRS 4040-05-080		R0.5	8	8.70	8.98	9.29	9.63	10.37
HGLRS 4040-05-120			12	12.83	13.26	13.73	14.23	15.35
HGLRS 4040-05-160			16	16.97	17.54	18.16	18.82	No Interference
HGLRS 4040-05-200			20	21.10	21.82	22.59	23.42	No Interference
HGLRS 4040-05-240			24	25.15	25.95	26.80	27.72	No Interference
HGLRS 4040-05-300			30	31.34	32.34	33.41	No Interference	No Interference
HGLRS 4040-10-080		R1	8	8.68	8.95	9.24	9.55	10.25
HGLRS 4040-10-120			12	12.81	13.23	13.67	14.15	15.22
HGLRS 4040-10-160			16	16.95	17.50	18.10	18.75	20.19
HGLRS 4040-10-200			20	21.08	21.78	22.54	23.35	No Interference
HGLRS 4040-10-240			24	25.13	25.91	26.75	27.65	No Interference
HGLRS 4040-10-300			30	31.32	32.30	33.35	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HGLRS 4060-01-120	6	R0.1	12	4.8	5.77	—	60	6	—
HGLRS 4060-01-160			16				60	6	—
HGLRS 4060-01-200			20				70	6	—
HGLRS 4060-01-240			24				70	6	—
HGLRS 4060-01-300			30				100	6	—
HGLRS 4060-02-120		R0.2	12				60	6	—
HGLRS 4060-02-160			16				60	6	—
HGLRS 4060-02-200			20				70	6	—
HGLRS 4060-02-240			24				70	6	—
HGLRS 4060-02-300			30				100	6	—
HGLRS 4060-03-120		R0.3	12				60	6	—
HGLRS 4060-03-160			16				60	6	—
HGLRS 4060-03-200			20				70	6	—
HGLRS 4060-03-240			24				70	6	—
HGLRS 4060-03-300			30				100	6	—
HGLRS 4060-05-120		R0.5	12				60	6	—
HGLRS 4060-05-160			16				60	6	—
HGLRS 4060-05-200			20				70	6	—
HGLRS 4060-05-240			24				70	6	—
HGLRS 4060-05-300			30				100	6	—
HGLRS 4060-10-120		R1	12				60	6	—
HGLRS 4060-10-160			16				60	6	—
HGLRS 4060-10-200			20				70	6	—
HGLRS 4060-10-240			24				70	6	—
HGLRS 4060-10-300			30				100	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HGLRS 4060-01-120	6	R0.1	12	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-01-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-01-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-01-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-01-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-02-120		R0.2	12	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-02-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-02-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-02-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-02-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-03-120		R0.3	12	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-03-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-03-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-03-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-03-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-05-120		R0.5	12	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-05-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-05-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-05-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-05-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-10-120		R1	12	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-10-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-10-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-10-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HGLRS 4060-10-300			30	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for HGLRS

WORK MATERIAL				PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4002	0.2	R0.02	0.5	27,000	500	0.004	0.05	27,000	260	0.003	0.02	27,000	280	0.003	0.01	27,000	250	0.003	0.01
			1	27,000	390	0.004	0.05	27,000	170	0.003	0.02	27,000	210	0.003	0.01	27,000	190	0.003	0.01
			2	27,000	80	0.004	0.05	27,000	25	0.003	0.02	27,000	30	0.003	0.01	27,000	25	0.003	0.01
		R0.05	0.5	27,000	590	0.004	0.05	27,000	260	0.003	0.02	27,000	280	0.003	0.01	27,000	250	0.003	0.01
			1	27,000	450	0.004	0.05	27,000	170	0.003	0.02	27,000	210	0.003	0.01	27,000	190	0.003	0.01
			2	27,000	80	0.004	0.05	27,000	25	0.003	0.02	27,000	30	0.003	0.01	27,000	25	0.003	0.01
4003	0.3	R0.02	0.5	25,500	600	0.008	0.09	25,500	460	0.003	0.04	25,500	480	0.003	0.03	25,000	440	0.003	0.03
			1	25,500	480	0.008	0.09	25,500	440	0.003	0.04	25,500	460	0.003	0.03	25,000	420	0.003	0.03
			1.5	25,500	360	0.008	0.09	25,500	280	0.003	0.04	25,500	300	0.003	0.03	25,000	270	0.003	0.03
			2	25,500	240	0.008	0.09	25,500	200	0.003	0.04	25,500	220	0.003	0.03	25,000	200	0.003	0.03
		R0.05	0.5	25,500	700	0.008	0.09	25,500	460	0.003	0.04	25,500	480	0.004	0.03	25,000	440	0.004	0.03
			1	25,500	560	0.008	0.09	25,500	440	0.003	0.04	25,500	460	0.004	0.03	25,000	420	0.004	0.03
			2	25,500	270	0.008	0.09	25,500	200	0.003	0.04	25,500	220	0.004	0.03	25,000	200	0.004	0.03
4004	0.4	R0.02	1	23,000	720	0.01	0.13	18,300	700	0.004	0.07	20,500	720	0.003	0.05	20,000	650	0.003	0.05
			2	20,500	540	0.01	0.13	16,100	420	0.004	0.07	18,000	440	0.003	0.05	17,500	400	0.003	0.05
		R0.05	1	23,000	840	0.015	0.13	18,300	700	0.004	0.07	20,500	720	0.004	0.05	20,000	650	0.004	0.05
			2	20,500	630	0.015	0.13	16,100	420	0.006	0.07	18,000	440	0.004	0.05	17,500	400	0.004	0.05
		R0.1	1	23,000	840	0.015	0.13	18,300	700	0.006	0.07	20,500	720	0.007	0.05	20,000	650	0.007	0.05
			2	20,500	630	0.015	0.13	16,100	420	0.006	0.07	18,000	440	0.007	0.05	17,500	400	0.007	0.05
4005	0.5	R0.02	1	22,500	920	0.01	0.17	17,900	880	0.006	0.09	20,000	900	0.004	0.07	19,500	820	0.004	0.07
			2	20,000	830	0.01	0.17	15,700	660	0.006	0.09	17,500	680	0.004	0.07	17,000	620	0.004	0.07
			3	18,000	730	0.01	0.17	13,900	530	0.006	0.09	15,500	550	0.004	0.07	15,000	500	0.004	0.07
		R0.05	1	22,500	1,080	0.017	0.17	17,900	880	0.009	0.09	20,000	900	0.007	0.07	19,500	820	0.007	0.07
			2	20,000	970	0.017	0.17	15,700	660	0.009	0.09	17,500	680	0.007	0.07	17,000	620	0.007	0.07
			3	18,000	850	0.017	0.17	13,900	530	0.009	0.09	15,500	550	0.007	0.07	15,000	500	0.007	0.07
		R0.1	1	22,500	1,080	0.017	0.17	17,900	880	0.009	0.09	20,000	900	0.007	0.07	19,500	820	0.007	0.07
			2	20,000	970	0.017	0.17	15,700	660	0.009	0.09	17,500	680	0.007	0.07	17,000	620	0.007	0.07
			3	18,000	850	0.017	0.17	13,900	530	0.009	0.09	15,500	550	0.007	0.07	15,000	500	0.007	0.07
4006	0.6	R0.05	2	21,500	1,050	0.021	0.2	17,000	710	0.015	0.12	19,000	730	0.007	0.1	18,500	660	0.007	0.1
			4	17,000	730	0.021	0.2	13,000	310	0.015	0.12	14,500	330	0.007	0.1	14,000	300	0.007	0.1
		R0.1	2	21,500	1,050	0.021	0.2	17,000	710	0.015	0.12	19,000	730	0.007	0.1	18,500	660	0.007	0.1
			4	17,000	730	0.021	0.2	13,000	310	0.015	0.12	14,500	330	0.007	0.1	14,000	300	0.007	0.1
4008	0.8	R0.05	2	20,500	1,330	0.028	0.26	15,700	830	0.02	0.16	17,500	850	0.01	0.15	15,500	770	0.01	0.15
			4	16,500	1,020	0.028	0.26	12,500	530	0.02	0.16	14,000	550	0.01	0.15	13,500	500	0.01	0.15
			6	14,000	840	0.028	0.26	10,300	420	0.02	0.16	11,500	440	0.01	0.15	11,000	400	0.01	0.15
		R0.1	2	20,500	1,330	0.028	0.26	15,700	830	0.02	0.16	17,500	850	0.01	0.15	15,500	770	0.01	0.15
			4	16,500	1,020	0.028	0.26	12,500	640	0.02	0.16	14,000	660	0.01	0.15	13,500	600	0.01	0.15
			6	14,000	840	0.028	0.26	10,300	420	0.02	0.16	11,500	440	0.01	0.15	11,000	400	0.01	0.15
		R0.2	2	20,500	1,330	0.028	0.26	15,700	830	0.02	0.16	17,500	850	0.015	0.15	15,500	770	0.015	0.15
			4	16,500	1,020	0.028	0.26	12,500	640	0.02	0.16	14,000	660	0.015	0.15	13,500	600	0.015	0.15
			6	14,000	840	0.028	0.26	10,300	420	0.02	0.16	11,500	440	0.015	0.15	11,000	400	0.015	0.15

Milling Conditions for HGLRS

WORK MATERIAL				PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010	1	R0.02	2	15,300	1,200	0.004	0.027	10,300	710	0.003	0.003	8,900	800	0.003	0.003	8,600	780	0.003	0.003
			3	13,200	1,150	0.004	0.027	9,400	680	0.003	0.003	8,500	770	0.003	0.003	8,300	750	0.003	0.003
			4	12,000	1,070	0.003	0.024	8,500	640	0.003	0.003	8,100	730	0.003	0.003	7,900	710	0.003	0.003
			5	11,000	960	0.003	0.023	7,800	570	0.003	0.003	7,700	700	0.003	0.003	7,500	680	0.003	0.003
		R0.05	2	15,300	1,200	0.01	0.068	10,300	710	0.005	0.006	8,900	800	0.004	0.004	8,600	780	0.004	0.004
			3	13,200	1,150	0.009	0.068	9,400	680	0.004	0.005	8,500	770	0.004	0.003	8,300	750	0.004	0.003
			4	12,000	1,070	0.008	0.061	8,500	640	0.004	0.005	8,100	730	0.004	0.003	7,900	710	0.004	0.003
			5	11,000	960	0.007	0.058	7,800	570	0.003	0.004	7,700	700	0.003	0.003	7,500	680	0.003	0.003
			6	9,800	860	0.006	0.055	7,400	550	0.003	0.003	7,300	670	0.003	0.003	7,100	650	0.003	0.003
			8	8,500	720	0.004	0.049	6,600	510	0.003	0.003	6,500	610	0.003	0.003	6,300	590	0.003	0.003
			10	7,600	510	0.003	0.043	5,800	470	0.003	0.003	5,700	550	0.003	0.003	5,500	530	0.003	0.003
		R0.1	2	15,300	1,200	0.019	0.135	10,300	710	0.009	0.067	8,900	800	0.009	0.067	8,600	780	0.009	0.065
			3	13,200	1,150	0.019	0.135	9,400	680	0.009	0.062	8,500	770	0.009	0.062	8,300	750	0.009	0.06
			4	12,000	1,070	0.014	0.12	8,500	640	0.004	0.057	8,100	730	0.004	0.057	7,900	710	0.004	0.055
			5	11,000	960	0.014	0.115	7,800	570	0.004	0.052	7,700	700	0.004	0.052	7,500	680	0.004	0.05
			6	9,800	860	0.008	0.105	7,400	550	0.004	0.047	7,300	670	0.004	0.047	7,100	650	0.004	0.045
			8	8,500	720	0.006	0.08	6,600	510	0.004	0.037	6,500	610	0.004	0.037	6,300	590	0.004	0.035
			10	7,600	510	0.004	0.05	5,800	470	0.004	0.027	5,700	550	0.004	0.027	5,500	530	0.004	0.025
		R0.2	2	15,300	1,200	0.04	0.27	10,300	710	0.03	0.27	8,900	800	0.02	0.27	8,600	780	0.02	0.26
			3	13,200	1,150	0.04	0.27	9,400	680	0.03	0.27	8,500	770	0.02	0.25	8,300	750	0.02	0.24
			4	12,000	1,070	0.03	0.24	8,500	640	0.02	0.24	8,100	730	0.01	0.23	7,900	710	0.01	0.22
			5	11,000	960	0.03	0.23	7,800	570	0.01	0.14	7,700	700	0.01	0.21	7,500	680	0.01	0.2
			6	9,800	860	0.016	0.21	7,400	550	0.01	0.13	7,300	670	0.01	0.19	7,100	650	0.01	0.18
			8	8,500	720	0.012	0.16	6,600	510	0.01	0.1	6,500	610	0.01	0.15	6,300	590	0.01	0.14
			10	7,600	510	0.009	0.1	5,800	470	0.01	0.073	5,700	550	0.01	0.11	5,500	530	0.01	0.1
4015	1.5	R0.05	3	14,800	1,330	0.013	0.135	8,900	760	0.005	0.007	8,800	870	0.005	0.006	8,500	840	0.005	0.006
			4	13,200	1,280	0.011	0.124	8,600	740	0.005	0.007	8,500	840	0.005	0.005	8,300	820	0.005	0.005
			6	10,600	1,210	0.01	0.111	8,100	690	0.004	0.006	8,000	790	0.004	0.005	7,800	770	0.004	0.005
			8	9,300	1,020	0.008	0.087	7,900	690	0.004	0.006	7,700	780	0.004	0.004	7,500	760	0.004	0.004
			10	8,500	870	0.006	0.063	7,700	690	0.004	0.005	7,400	770	0.004	0.003	7,200	750	0.004	0.003
		R0.1	3	14,800	1,330	0.024	0.27	8,900	760	0.009	0.153	8,800	870	0.009	0.102	8,500	840	0.009	0.1
			4	13,200	1,280	0.019	0.25	8,600	740	0.009	0.145	8,500	840	0.009	0.097	8,300	820	0.009	0.095
			6	10,600	1,210	0.019	0.225	8,100	690	0.009	0.13	8,000	790	0.009	0.087	7,800	770	0.009	0.085
			8	9,300	1,020	0.014	0.175	7,600	650	0.009	0.115	7,500	740	0.009	0.077	7,300	720	0.009	0.075
			10	8,500	870	0.014	0.158	7,100	610	0.007	0.089	7,000	690	0.007	0.06	6,800	670	0.007	0.06
			12	7,800	780	0.012	0.149	6,600	570	0.006	0.067	6,500	640	0.006	0.045	6,300	620	0.006	0.045
		R0.2 R0.3 R0.5	3	14,800	1,330	0.05	0.54	8,900	760	0.02	0.66	8,800	870	0.02	0.41	8,500	840	0.02	0.4
			4	13,200	1,280	0.04	0.5	8,600	740	0.02	0.62	8,500	840	0.02	0.39	8,300	820	0.02	0.38
			6	10,600	1,210	0.04	0.45	8,100	690	0.02	0.56	8,000	790	0.02	0.35	7,800	770	0.02	0.34
			8	9,300	1,020	0.03	0.35	7,600	650	0.02	0.52	7,500	740	0.02	0.31	7,300	720	0.02	0.3
			10	8,500	870	0.029	0.316	7,100	610	0.017	0.403	7,000	690	0.017	0.24	6,800	670	0.017	0.24
			12	7,800	780	0.026	0.297	6,600	570	0.014	0.302	6,500	640	0.014	0.18	6,300	620	0.014	0.18


Milling Conditions for HGLRS

WORK MATERIAL				PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020	2	R0.02	4	14,300	1,460	0.01	0.118	8,600	860	0.003	0.003	8,500	930	0.003	0.003	8,300	900	0.003	0.003
			6	12,000	1,200	0.006	0.109	8,300	830	0.003	0.003	8,100	890	0.003	0.003	7,900	860	0.003	0.003
			8	10,400	1,100	0.006	0.1	7,900	790	0.003	0.003	7,800	840	0.003	0.003	7,600	820	0.003	0.003
			10	9,300	1,020	0.005	0.086	7,500	750	0.003	0.003	7,400	800	0.003	0.003	7,200	780	0.003	0.003
		R0.05	4	14,300	1,460	0.016	0.24	8,600	860	0.007	0.01	8,500	930	0.007	0.007	8,300	900	0.007	0.007
			6	12,000	1,200	0.015	0.219	8,300	830	0.006	0.009	8,100	890	0.006	0.007	7,900	860	0.006	0.007
			8	10,400	1,100	0.014	0.197	7,900	790	0.006	0.008	7,800	840	0.006	0.006	7,600	820	0.006	0.006
			10	9,300	1,020	0.012	0.165	7,500	750	0.005	0.008	7,400	800	0.005	0.006	7,200	780	0.005	0.006
		R0.1	4	14,300	1,460	0.033	0.405	8,600	860	0.013	0.18	8,500	930	0.013	0.134	8,300	900	0.013	0.13
			6	12,000	1,200	0.03	0.365	8,300	830	0.012	0.166	8,100	890	0.012	0.124	7,900	860	0.012	0.12
			8	10,400	1,100	0.028	0.324	7,900	790	0.011	0.152	7,800	840	0.011	0.113	7,600	820	0.011	0.11
			10	9,300	1,020	0.024	0.263	7,500	750	0.01	0.138	7,400	800	0.01	0.103	7,200	780	0.01	0.1
			12	8,500	960	0.023	0.203	7,100	710	0.009	0.125	7,000	760	0.009	0.093	6,800	740	0.009	0.09
			16	7,300	700	0.02	0.158	6,300	630	0.007	0.098	6,200	680	0.007	0.073	6,000	660	0.007	0.07
			20	6,600	650	0.013	0.1	5,500	550	0.005	0.071	5,400	600	0.005	0.053	5,200	580	0.005	0.05
		R0.2 R0.3 R0.5	4	14,300	1,460	0.07	0.81	8,600	860	0.03	0.9	8,500	930	0.03	0.54	8,300	900	0.03	0.52
			6	12,000	1,200	0.06	0.73	8,300	830	0.02	0.83	8,100	890	0.02	0.49	7,900	860	0.02	0.48
			8	10,400	1,100	0.06	0.65	7,900	790	0.02	0.76	7,800	840	0.02	0.45	7,600	820	0.02	0.44
			10	9,300	1,020	0.05	0.53	7,500	750	0.02	0.69	7,400	800	0.02	0.41	7,200	780	0.02	0.4
			12	8,500	960	0.045	0.405	7,100	710	0.019	0.623	7,000	760	0.019	0.37	6,800	740	0.019	0.36
			16	7,300	700	0.04	0.315	6,300	630	0.017	0.488	6,200	680	0.017	0.29	6,000	660	0.017	0.28
			20	6,600	650	0.025	0.2	5,500	550	0.015	0.353	5,400	600	0.015	0.21	5,200	580	0.015	0.2
4030	3	R0.05	4	14,000	2,640	0.02	0.18	8,900	1,140	0.011	0.013	8,700	1,110	0.011	0.012	8,400	1,080	0.011	0.012
			6	13,300	2,500	0.019	0.18	8,600	1,110	0.01	0.012	8,400	1,080	0.01	0.011	8,200	1,050	0.01	0.011
			8	11,800	2,200	0.018	0.175	8,400	1,080	0.01	0.012	8,100	1,050	0.01	0.011	7,900	1,020	0.01	0.011
			10	10,500	2,090	0.015	0.175	8,100	1,050	0.009	0.011	7,900	1,020	0.009	0.01	7,700	990	0.009	0.01
			12	10,000	1,950	0.013	0.168	7,900	1,010	0.009	0.01	7,700	990	0.009	0.01	7,500	960	0.009	0.009
			16	8,800	1,600	0.01	0.158	7,400	950	0.008	0.01	7,200	930	0.008	0.009	7,000	900	0.008	0.008
			20	7,900	1,490	0.007	0.148	6,900	890	0.007	0.009	6,700	870	0.007	0.008	6,500	840	0.007	0.007
		R0.1	4	14,000	2,640	0.04	0.36	8,900	1,140	0.021	0.291	8,700	1,110	0.022	0.216	8,400	1,080	0.021	0.21
			6	13,300	2,500	0.038	0.36	8,600	1,110	0.02	0.277	8,400	1,080	0.021	0.206	8,200	1,050	0.02	0.2
			8	11,800	2,200	0.035	0.35	8,400	1,080	0.019	0.263	8,100	1,050	0.02	0.196	7,900	1,020	0.019	0.19
			10	10,500	2,090	0.03	0.35	8,100	1,050	0.018	0.249	7,900	1,020	0.019	0.185	7,700	990	0.018	0.18
			12	10,000	1,950	0.026	0.335	7,900	1,010	0.017	0.235	7,700	990	0.018	0.175	7,500	960	0.017	0.17
			16	8,800	1,600	0.02	0.315	7,400	950	0.015	0.208	7,200	930	0.015	0.155	7,000	900	0.015	0.15
			20	7,900	1,490	0.014	0.295	6,900	890	0.013	0.181	6,700	870	0.013	0.135	6,500	840	0.013	0.13
		R0.2 R0.3 R0.5 R1	4	14,000	2,640	0.08	0.72	8,900	1,140	0.04	1.45	8,700	1,110	0.04	0.87	8,400	1,080	0.04	0.84
			6	13,300	2,500	0.08	0.72	8,600	1,110	0.04	1.38	8,400	1,080	0.04	0.82	8,200	1,050	0.04	0.8
			8	11,800	2,200	0.07	0.7	8,400	1,080	0.04	1.31	8,100	1,050	0.04	0.78	7,900	1,020	0.04	0.76
			10	10,500	2,090	0.06	0.7	8,100	1,050	0.04	1.25	7,900	1,020	0.04	0.74	7,700	990	0.04	0.72
			12	10,000	1,950	0.05	0.67	7,900	1,010	0.03	1.18	7,700	990	0.03	0.7	7,500	960	0.03	0.68
			16	8,800	1,600	0.04	0.63	7,400	950	0.03	1	7,200	930	0.03	0.62	7,000	900	0.03	0.6
			20	7,900	1,490	0.036	0.58	6,900	890	0.03	0.82	6,700	870	0.03	0.54	6,500	840	0.03	0.52

Milling Conditions for HGLRS

WORK MATERIAL				PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4040	4	R0.05	8	8,500	1,420	0.026	0.338	6,200	1,130	0.013	0.016	6,100	1,090	0.013	0.015	5,900	1,060	0.013	0.014
			12	7,600	1,390	0.023	0.288	5,900	1,080	0.012	0.014	5,800	1,040	0.012	0.014	5,600	1,010	0.012	0.013
			16	6,600	1,330	0.018	0.25	5,700	1,030	0.011	0.013	5,600	1,000	0.011	0.013	5,400	970	0.011	0.012
			20	5,800	1,260	0.015	0.225	5,400	980	0.01	0.012	5,300	950	0.01	0.011	5,100	920	0.01	0.011
		R0.1	8	8,500	1,420	0.052	0.675	6,200	1,130	0.026	0.36	6,100	1,090	0.027	0.268	5,900	1,060	0.026	0.26
			12	7,600	1,390	0.046	0.575	5,900	1,080	0.024	0.332	5,800	1,040	0.025	0.247	5,600	1,010	0.024	0.24
			16	6,600	1,330	0.036	0.5	5,700	1,030	0.022	0.304	5,600	1,000	0.023	0.227	5,400	970	0.022	0.22
			20	5,800	1,260	0.03	0.45	5,400	980	0.02	0.277	5,300	950	0.021	0.206	5,100	920	0.02	0.2
			24	5,200	1,120	0.024	0.4	5,100	930	0.018	0.25	5,000	900	0.019	0.185	4,800	870	0.018	0.18
			30	4,800	910	0.015	0.325	4,700	860	0.015	0.21	4,600	830	0.016	0.154	4,400	800	0.015	0.15
		R0.2 R0.3 R0.5 R1	8	8,500	1,420	0.1	1.35	6,200	1,130	0.05	1.8	6,100	1,090	0.05	1.07	5,900	1,060	0.05	1.04
			12	7,600	1,390	0.09	1.15	5,900	1,080	0.05	1.66	5,800	1,040	0.05	0.99	5,600	1,010	0.05	0.96
			16	6,600	1,330	0.07	1	5,700	1,030	0.04	1.52	5,600	1,000	0.04	0.91	5,400	970	0.04	0.88
			20	5,800	1,260	0.06	0.9	5,400	980	0.04	1.38	5,300	950	0.04	0.82	5,100	920	0.04	0.8
			24	5,200	1,120	0.047	0.8	5,100	930	0.035	1.24	5,000	900	0.035	0.73	4,800	870	0.035	0.72
			30	4,800	910	0.03	0.65	4,700	860	0.03	1.03	4,600	830	0.03	0.61	4,400	800	0.03	0.6
4060	6	R0.1	12	4,700	1,360	0.1	0.675	3,900	1,180	0.033	0.676	3,800	1,150	0.033	0.502	3,700	1,120	0.033	0.488
			16	4,000	1,150	0.095	0.665	3,800	1,150	0.031	0.641	3,700	1,110	0.032	0.476	3,600	1,080	0.031	0.463
			20	3,800	1,000	0.09	0.655	3,700	1,120	0.029	0.607	3,600	1,080	0.03	0.451	3,500	1,050	0.029	0.438
			24	3,700	860	0.085	0.645	3,600	1,080	0.028	0.572	3,500	1,050	0.028	0.425	3,400	1,020	0.028	0.413
			30	3,500	740	0.079	0.63	3,400	1,030	0.025	0.52	3,300	1,000	0.026	0.386	3,200	970	0.025	0.375
		R0.2 R0.3 R0.5 R1	12	4,700	1,360	0.2	1.35	3,900	1,180	0.07	3.38	3,800	1,150	0.07	2	3,700	1,120	0.07	1.95
			16	4,000	1,150	0.19	1.33	3,800	1,150	0.06	3.21	3,700	1,110	0.06	1.9	3,600	1,080	0.06	1.85
			20	3,800	1,000	0.18	1.31	3,700	1,120	0.06	3	3,600	1,080	0.06	1.8	3,500	1,050	0.06	1.75
			24	3,700	860	0.17	1.29	3,600	1,080	0.06	2.86	3,500	1,050	0.06	1.7	3,400	1,020	0.06	1.65
			30	3,500	740	0.16	1.26	3,400	1,030	0.05	2.6	3,300	1,000	0.05	1.55	3,200	970	0.05	1.5

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.



HLRS4000



HARDMAX 4 Flute Long Neck Radius End Mills

φ0.2～φ6

Super MG | HARD MAX | 30° | R | ±0.005 | Shank Dia 0/-0.005 | Back Taper Geometry | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	●	○		○			○			○	○		

Total 381 models


Unit (mm)


Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4002-002-003	0.2	R0.02	0.3	0.12	0.185	16°	50	4	—
HLRS 4002-002-005			0.5				50	4	—
HLRS 4002-002-010			1				50	4	—
HLRS 4002-002-015			1.5				50	4	—
HLRS 4002-002-020			2				50	4	—
HLRS 4002-005-003		R0.05	0.3				50	4	—
HLRS 4003-002-003	0.3	R0.02	0.3	0.18	0.28	16°	50	4	—
HLRS 4003-002-005			0.5				50	4	—
HLRS 4003-002-010			1				50	4	—
HLRS 4003-002-015			1.5				50	4	—
HLRS 4003-002-020			2				50	4	—
HLRS 4003-005-003		R0.05	0.3				50	4	—
HLRS 4003-005-005			0.5				50	4	—
HLRS 4004-002-005	0.4	R0.02	0.5	0.24	0.385	16°	50	4	—
HLRS 4004-002-010			1				50	4	—
HLRS 4004-002-020			2				50	4	—
HLRS 4004-005-005		R0.05	0.5				50	4	—
HLRS 4004-005-010			1				50	4	—
HLRS 4004-005-015			1.5				50	4	—
HLRS 4004-005-020			2				50	4	—
HLRS 4004-01-010		R0.1	1				50	4	—
HLRS 4004-01-020			2				50	4	—

Next Page ➡

Features

Long Neck Radius design for high efficiency and high quality milling.
The rigid tool geometry offers longer tool life when milling Hard Materials.
HARDMAX coat is adopted which maintains heat resistance, toughness and lubricity at a high level.
Both dry and wet coolant offer stable and long tool life.
Refer to page D-1 for 2 flute HLRS.



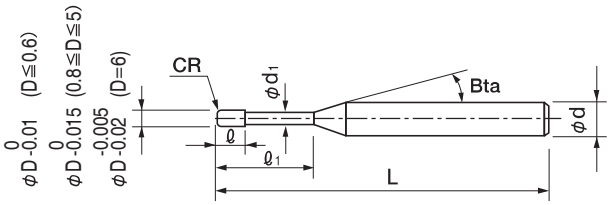

The shank taper angle shown is not an exact value.

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4002-002-003	0.2	R0.02	0.3	0.39	0.41	0.44	0.46	0.51
HLRS 4002-002-005			0.5	0.60	0.63	0.67	0.70	0.75
HLRS 4002-002-010			1	1.13	1.18	1.22	1.27	1.36
HLRS 4002-002-015			1.5	1.65	1.71	1.77	1.84	1.98
HLRS 4002-002-020			2	2.17	2.25	2.32	2.41	2.59
HLRS 4002-005-003		R0.05	0.3	0.39	0.41	0.43	0.46	0.50
HLRS 4003-002-003	0.3	R0.02	0.3	0.41	0.43	0.46	0.48	0.52
HLRS 4003-002-005			0.5	0.62	0.65	0.68	0.71	0.77
HLRS 4003-002-010			1	1.15	1.19	1.24	1.28	1.38
HLRS 4003-002-015			1.5	1.67	1.73	1.79	1.85	1.99
HLRS 4003-002-020			2	2.19	2.26	2.34	2.42	2.60
HLRS 4003-005-003		R0.05	0.3	0.41	0.43	0.45	0.47	0.52
HLRS 4003-005-005			0.5	0.62	0.65	0.68	0.71	0.76
HLRS 4004-002-005	0.4	R0.02	0.5	0.62	0.65	0.68	0.71	0.77
HLRS 4004-002-010			1	1.15	1.19	1.24	1.28	1.38
HLRS 4004-002-020			2	2.17	2.25	2.33	2.41	2.59
HLRS 4004-005-005		R0.05	0.5	0.62	0.65	0.68	0.71	0.76
HLRS 4004-005-010			1	1.14	1.19	1.23	1.28	1.37
HLRS 4004-005-015			1.5	1.65	1.72	1.77	1.84	1.97
HLRS 4004-005-020			2	2.17	2.25	2.32	2.41	2.59
HLRS 4004-01-010		R0.1	1	1.14	1.19	1.23	1.27	1.36
HLRS 4004-01-020			2	2.17	2.25	2.32	2.40	2.57

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4005-002-010	0.5	R0.02	1	0.3	0.485	16°	50	4	—
HLRS 4005-002-020			2				50	4	—
HLRS 4005-005-010		R0.05	1				50	4	—
HLRS 4005-005-020			2				50	4	—
HLRS 4005-01-010		R0.1	1				50	4	—
HLRS 4005-01-020			2				50	4	—
HLRS 4006-005-020	0.6	R0.05	2	0.36	0.585	16°	50	4	—
HLRS 4006-005-040			4				50	4	—
HLRS 4006-01-020		R0.1	2				50	4	—
HLRS 4006-01-040			4				50	4	—
HLRS 4008-002-020	0.8	R0.02	2	0.48	0.78	16°	50	4	—
HLRS 4008-002-030			3				50	4	—
HLRS 4008-002-040			4				50	4	—
HLRS 4008-002-060			6				50	4	—
HLRS 4008-002-080			8				50	4	—
HLRS 4008-005-020		R0.05	2				50	4	—
HLRS 4008-005-030			3				50	4	—
HLRS 4008-005-040			4				50	4	—
HLRS 4008-005-060			6				50	4	—
HLRS 4008-01-020		R0.1	2				50	4	—
HLRS 4008-01-030			3				50	4	—
HLRS 4008-01-040			4				50	4	—
HLRS 4008-01-060			6				50	4	—
HLRS 4008-02-020		R0.2	2				50	4	—
HLRS 4008-02-030			3				50	4	—
HLRS 4008-02-040			4				50	4	—
HLRS 4008-02-060			6				50	4	—
HLRS 4010-002-020	1	R0.02	2	0.8	0.95	16°	50	4	—
HLRS 4010-002-030			3				50	4	—
HLRS 4010-002-040			4				50	4	—
HLRS 4010-002-050			5				50	4	—
HLRS 4010-002-060			6				50	4	—
HLRS 4010-002-080			8				50	4	—
HLRS 4010-002-100			10				50	4	—
HLRS 4010-002-120			12				55	4	—
HLRS 4010-005-020		R0.05	2				50	4	—
HLRS 4010-005-030			3				50	4	—
HLRS 4010-005-040			4				50	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4005-002-010	0.5	R0.02	1	1.15	1.19	1.24	1.28	1.38
HLRS 4005-002-020			2	2.17	2.25	2.33	2.41	2.59
HLRS 4005-005-010		R0.05	1	1.14	1.19	1.23	1.28	1.37
HLRS 4005-005-020			2	2.17	2.25	2.32	2.41	2.59
HLRS 4005-01-010		R0.1	1	1.14	1.19	1.23	1.27	1.36
HLRS 4005-01-020			2	2.17	2.25	2.32	2.40	2.57
HLRS 4006-005-020	0.6	R0.05	2	2.17	2.25	2.32	2.41	2.59
HLRS 4006-005-040			4	4.24	4.38	4.53	4.68	5.03
HLRS 4006-01-020		R0.1	2	2.17	2.25	2.32	2.40	2.57
HLRS 4006-01-040			4	4.24	4.38	4.52	4.68	5.02
HLRS 4008-002-020	0.8	R0.02	2	2.51	2.70	2.87	3.02	3.29
HLRS 4008-002-030			3	3.59	3.82	4.02	4.19	4.51
HLRS 4008-002-040			4	4.66	4.92	5.14	5.34	5.74
HLRS 4008-002-060			6	6.78	7.10	7.36	7.61	8.19
HLRS 4008-002-080			8	8.88	9.25	9.56	9.89	10.63
HLRS 4008-005-020		R0.05	2	2.51	2.70	2.86	3.01	3.28
HLRS 4008-005-030			3	3.59	3.82	4.01	4.19	4.51
HLRS 4008-005-040			4	4.66	4.92	5.14	5.33	5.73
HLRS 4008-005-060			6	6.77	7.09	7.35	7.61	8.18
HLRS 4008-01-020		R0.1	2	2.51	2.69	2.86	3.00	3.27
HLRS 4008-01-030			3	3.58	3.81	4.01	4.18	4.50
HLRS 4008-01-040			4	4.65	4.92	5.13	5.33	5.72
HLRS 4008-01-060			6	6.77	7.09	7.35	7.60	8.17
HLRS 4008-02-020		R0.2	2	2.49	2.68	2.84	2.98	3.25
HLRS 4008-02-030			3	3.57	3.80	3.99	4.16	4.47
HLRS 4008-02-040			4	4.64	4.90	5.12	5.31	5.70
HLRS 4008-02-060			6	6.76	7.08	7.34	7.59	8.14
HLRS 4010-002-020	1	R0.02	2	2.57	2.75	2.90	3.05	3.32
HLRS 4010-002-030			3	3.64	3.86	4.05	4.22	4.54
HLRS 4010-002-040			4	4.70	4.96	5.17	5.36	5.76
HLRS 4010-002-050			5	5.76	6.04	6.28	6.50	6.99
HLRS 4010-002-060			6	6.81	7.12	7.38	7.64	8.21
HLRS 4010-002-080			8	8.91	9.27	9.58	9.92	10.66
HLRS 4010-002-100			10	11.00	11.40	11.78	12.19	13.11
HLRS 4010-002-120			12	13.08	13.53	13.98	14.47	15.55
HLRS 4010-005-020		R0.05	2	2.56	2.74	2.90	3.05	3.31
HLRS 4010-005-030			3	3.63	3.85	4.04	4.21	4.53
HLRS 4010-005-040			4	4.70	4.95	5.17	5.36	5.76

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4010-005-050	1	R0.05	5	0.8	0.95	16°	50	4	—
HLRS 4010-005-060			6				50	4	—
HLRS 4010-005-080			8				50	4	—
HLRS 4010-005-100			10				50	4	—
HLRS 4010-005-120			12				55	4	—
HLRS 4010-01-020		R0.1	2				50	4	—
HLRS 4010-01-030			3				50	4	—
HLRS 4010-01-040			4				50	4	—
HLRS 4010-01-050			5				50	4	—
HLRS 4010-01-060			6				50	4	—
HLRS 4010-01-080			8				50	4	—
HLRS 4010-01-100			10				50	4	—
HLRS 4010-01-120			12				55	4	—
HLRS 4010-02-020		R0.2	2				50	4	—
HLRS 4010-02-030			3				50	4	—
HLRS 4010-02-040			4				50	4	—
HLRS 4010-02-050			5				50	4	—
HLRS 4010-02-060			6				50	4	—
HLRS 4010-02-080			8				50	4	—
HLRS 4010-02-100			10				50	4	—
HLRS 4010-02-120			12				55	4	—
HLRS 4010-03-020		R0.3	2				50	4	—
HLRS 4010-03-030			3				50	4	—
HLRS 4010-03-040			4				50	4	—
HLRS 4010-03-050			5				50	4	—
HLRS 4010-03-060			6				50	4	—
HLRS 4010-03-080			8				50	4	—
HLRS 4010-03-100			10				50	4	—
HLRS 4010-03-120			12				55	4	—
HLRS 4010-03-160			16				60	4	—
HLRS 4012-01-040	1.2	R0.1	4	0.96	1.14	16°	50	4	—
HLRS 4012-01-060			6				50	4	—
HLRS 4012-01-100			10				50	4	—
HLRS 4012-02-040		R0.2	4				50	4	—
HLRS 4012-02-060			6				50	4	—
HLRS 4012-02-100			10				50	4	—
HLRS 4012-03-040		R0.3	4				50	4	—
HLRS 4012-03-060			6				50	4	—
HLRS 4012-03-100			10				50	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4010-005-050	1	R0.05	5	5.76	6.04	6.28	6.50	6.98
HLRS 4010-005-060			6	6.81	7.12	7.38	7.63	8.20
HLRS 4010-005-080			8	8.91	9.27	9.58	9.91	10.65
HLRS 4010-005-100			10	11.00	11.40	11.78	12.19	13.10
HLRS 4010-005-120			12	13.08	13.53	13.98	14.47	15.55
HLRS 4010-01-020		R0.1	2	2.56	2.74	2.89	3.04	3.30
HLRS 4010-01-030			3	3.63	3.85	4.04	4.20	4.52
HLRS 4010-01-040			4	4.70	4.95	5.16	5.35	5.75
HLRS 4010-01-050			5	5.75	6.04	6.27	6.49	6.97
HLRS 4010-01-060			6	6.81	7.12	7.37	7.63	8.19
HLRS 4010-01-080			8	8.91	9.26	9.57	9.90	10.64
HLRS 4010-01-100			10	11.00	11.39	11.77	12.18	13.09
HLRS 4010-01-120			12	13.08	13.52	13.98	14.46	15.54
HLRS 4010-02-020		R0.2	2	2.55	2.72	2.88	3.02	3.28
HLRS 4010-02-030			3	3.62	3.84	4.02	4.19	4.50
HLRS 4010-02-040			4	4.69	4.94	5.15	5.34	5.72
HLRS 4010-02-050			5	5.75	6.03	6.26	6.47	6.95
HLRS 4010-02-060			6	6.80	7.11	7.36	7.61	8.17
HLRS 4010-02-080			8	8.90	9.26	9.56	9.89	10.62
HLRS 4010-02-100			10	10.99	11.39	11.76	12.17	13.07
HLRS 4010-02-120			12	13.07	13.52	13.97	14.45	15.51
HLRS 4010-03-020		R0.3	2	2.54	2.71	2.86	3.00	3.25
HLRS 4010-03-030			3	3.62	3.83	4.01	4.17	4.48
HLRS 4010-03-040			4	4.68	4.93	5.14	5.32	5.70
HLRS 4010-03-050			5	5.74	6.02	6.25	6.46	6.93
HLRS 4010-03-060			6	6.80	7.10	7.35	7.60	8.15
HLRS 4010-03-080			8	8.90	9.25	9.55	9.88	10.60
HLRS 4010-03-100			10	10.99	11.38	11.75	12.15	13.04
HLRS 4010-03-120			12	13.07	13.51	13.96	14.43	15.49
HLRS 4010-03-160			16	17.22	17.77	18.36	18.99	20.39
HLRS 4012-01-040	1.2	R0.1	4	4.13	4.27	4.41	4.56	4.90
HLRS 4012-01-060			6	6.20	6.40	6.61	6.84	7.34
HLRS 4012-01-100			10	10.32	10.66	11.01	11.39	12.24
HLRS 4012-02-040		R0.2	4	4.13	4.26	4.40	4.55	4.87
HLRS 4012-02-060			6	6.19	6.39	6.60	6.82	7.32
HLRS 4012-02-100			10	10.32	10.65	11.00	11.38	12.22
HLRS 4012-03-040		R0.3	4	4.13	4.25	4.39	4.53	4.85
HLRS 4012-03-060			6	6.19	6.38	6.59	6.81	7.30
HLRS 4012-03-100			10	10.32	10.64	10.99	11.36	12.20

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4015-005-030	1.5	R0.05	3	1.2	1.45	16°	50	4	—
HLRS 4015-005-040			4				50	4	—
HLRS 4015-005-060			6				50	4	—
HLRS 4015-005-080			8				50	4	—
HLRS 4015-005-120			12				55	4	—
HLRS 4015-005-160			16				60	4	—
HLRS 4015-01-030		R0.1	3				50	4	—
HLRS 4015-01-040			4				50	4	—
HLRS 4015-01-060			6				50	4	—
HLRS 4015-01-080			8				50	4	—
HLRS 4015-01-100			10				50	4	—
HLRS 4015-01-120			12				55	4	—
HLRS 4015-01-160			16				60	4	—
HLRS 4015-01-180			18				60	4	—
HLRS 4015-02-030		R0.2	3				50	4	—
HLRS 4015-02-040			4				50	4	—
HLRS 4015-02-060			6				50	4	—
HLRS 4015-02-080			8				50	4	—
HLRS 4015-02-100			10				50	4	—
HLRS 4015-02-120			12				55	4	—
HLRS 4015-02-160			16				60	4	—
HLRS 4015-02-180			18				60	4	—
HLRS 4015-03-030		R0.3	3				50	4	—
HLRS 4015-03-040			4				50	4	—
HLRS 4015-03-060			6				50	4	—
HLRS 4015-03-080			8				50	4	—
HLRS 4015-03-100			10				50	4	—
HLRS 4015-03-120			12				55	4	—
HLRS 4015-03-160			16				60	4	—
HLRS 4015-03-180			18				60	4	—
HLRS 4015-05-030		R0.5	3				50	4	—
HLRS 4015-05-040			4				50	4	—
HLRS 4015-05-060			6				50	4	—
HLRS 4015-05-080			8				50	4	—
HLRS 4015-05-100			10				50	4	—
HLRS 4015-05-120			12				55	4	—
HLRS 4015-05-160			16				60	4	—
HLRS 4015-05-180			18				60	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4015-005-030	1.5	R0.05	3	3.10	3.20	3.31	3.43	3.68
HLRS 4015-005-040			4	4.14	4.27	4.41	4.57	4.91
HLRS 4015-005-060			6	6.20	6.40	6.61	6.84	7.35
HLRS 4015-005-080			8	8.26	8.53	8.82	9.12	9.80
HLRS 4015-005-120			12	12.39	12.79	13.22	13.68	14.70
HLRS 4015-005-160			16	16.51	17.05	17.62	18.23	19.59
HLRS 4015-01-030		R0.1	3	3.10	3.20	3.31	3.42	3.67
HLRS 4015-01-040			4	4.13	4.27	4.41	4.56	4.90
HLRS 4015-01-060			6	6.20	6.40	6.61	6.84	7.34
HLRS 4015-01-080			8	8.26	8.53	8.81	9.11	9.79
HLRS 4015-01-100			10	10.32	10.66	11.01	11.39	12.24
HLRS 4015-01-120			12	12.39	12.79	13.21	13.67	14.69
HLRS 4015-01-160			16	16.51	17.04	17.61	18.22	19.58
HLRS 4015-01-180			18	18.57	19.17	19.82	20.50	22.03
HLRS 4015-02-030		R0.2	3	3.10	3.20	3.30	3.41	3.65
HLRS 4015-02-040			4	4.13	4.26	4.40	4.55	4.87
HLRS 4015-02-060			6	6.19	6.39	6.60	6.82	7.32
HLRS 4015-02-080			8	8.26	8.52	8.80	9.10	9.77
HLRS 4015-02-100			10	10.32	10.65	11.00	11.38	12.22
HLRS 4015-02-120			12	12.38	12.78	13.20	13.66	14.66
HLRS 4015-02-160			16	16.51	17.04	17.60	18.21	19.56
HLRS 4015-02-180			18	18.57	19.17	19.81	20.49	22.01
HLRS 4015-03-030		R0.3	3	3.10	3.19	3.29	3.39	3.63
HLRS 4015-03-040			4	4.13	4.25	4.39	4.53	4.85
HLRS 4015-03-060			6	6.19	6.38	6.59	6.81	7.30
HLRS 4015-03-080			8	8.25	8.51	8.79	9.09	9.75
HLRS 4015-03-100			10	10.32	10.64	10.99	11.36	12.20
HLRS 4015-03-120			12	12.38	12.77	13.19	13.64	14.64
HLRS 4015-03-160			16	16.50	17.03	17.59	18.20	19.54
HLRS 4015-03-180			18	18.57	19.16	19.80	20.47	21.98
HLRS 4015-05-030		R0.5	3	3.09	3.17	3.27	3.36	3.58
HLRS 4015-05-040			4	4.12	4.24	4.37	4.50	4.81
HLRS 4015-05-060			6	6.18	6.37	6.57	6.78	7.25
HLRS 4015-05-080			8	8.25	8.50	8.77	9.06	9.70
HLRS 4015-05-100			10	10.31	10.63	10.97	11.34	12.15
HLRS 4015-05-120			12	12.37	12.76	13.17	13.61	14.60
HLRS 4015-05-160			16	16.50	17.02	17.57	18.17	19.49
HLRS 4015-05-180			18	18.56	19.15	19.77	20.44	21.94

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4018-02-080	1.8	R0.2	8	1.44	1.72	16°	50	4	—
HLRS 4018-02-100			10				50	4	—
HLRS 4018-02-120			12				55	4	—
HLRS 4018-02-140			14				55	4	—
HLRS 4018-02-160			16				60	4	—
HLRS 4020-002-040	2	R0.02	4	1.6	1.92	16°	50	4	—
HLRS 4020-002-060			6				50	4	—
HLRS 4020-002-080			8				50	4	—
HLRS 4020-002-100			10				50	4	—
HLRS 4020-002-120			12				55	4	—
HLRS 4020-002-160			16				60	4	—
HLRS 4020-002-200			20				60	4	—
HLRS 4020-005-040		R0.05	4				50	4	—
HLRS 4020-005-060			6				50	4	—
HLRS 4020-005-080			8				50	4	—
HLRS 4020-005-100			10				50	4	—
HLRS 4020-005-120			12				55	4	—
HLRS 4020-005-160			16				60	4	—
HLRS 4020-005-200			20				60	4	—
HLRS 4020-01-040		R0.1	4				50	4	—
HLRS 4020-01-060			6				50	4	—
HLRS 4020-01-080			8				50	4	—
HLRS 4020-01-100			10				50	4	—
HLRS 4020-01-120			12				55	4	—
HLRS 4020-01-160			16				60	4	—
HLRS 4020-01-200			20				60	4	—
HLRS 4020-01-240			24				70	4	—
HLRS 4020-02-040		R0.2	4				50	4	—
HLRS 4020-02-060			6				50	4	—
HLRS 4020-02-080			8				50	4	—
HLRS 4020-02-100			10				50	4	—
HLRS 4020-02-120			12				55	4	—
HLRS 4020-02-160			16				60	4	—
HLRS 4020-02-200			20				60	4	—
HLRS 4020-02-240			24				70	4	—
HLRS 4020-03-040		R0.3	4				50	4	—
HLRS 4020-03-060			6				50	4	—
HLRS 4020-03-080			8				50	4	—
HLRS 4020-03-100			10				50	4	—
HLRS 4020-03-120			12				55	4	—
HLRS 4020-03-160			16				60	4	—
HLRS 4020-03-200			20				60	4	—
HLRS 4020-03-240			24				70	4	—

φ3mm Shank V Series
UDC·PCD Series
CBN Series
Square
Square
Long Neck Square
Radius
Radius
Long Neck Radius
Taper Neck Radius
Ball
Ball
Long Neck Ball
Taper Neck Ball
Taper
Barrel
Spiral V Cutter
Drill
Technical Data

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4018-02-080	1.8	R0.2	8	8.29	8.56	8.84	9.14	9.81
HLRS 4018-02-100			10	10.36	10.69	11.04	11.42	12.26
HLRS 4018-02-120			12	12.42	12.82	13.24	13.69	14.71
HLRS 4018-02-140			14	14.48	14.95	15.44	15.97	17.15
HLRS 4018-02-160			16	16.54	17.08	17.64	18.25	19.60
HLRS 4020-002-040	2	R0.02	4	4.17	4.31	4.45	4.61	4.96
HLRS 4020-002-060			6	6.24	6.44	6.66	6.89	7.40
HLRS 4020-002-080			8	8.30	8.57	8.86	9.16	9.85
HLRS 4020-002-100			10	10.36	10.70	11.06	11.44	12.30
HLRS 4020-002-120			12	12.42	12.83	13.26	13.72	14.75
HLRS 4020-002-160			16	16.55	17.09	17.66	18.27	No Interference
HLRS 4020-002-200			20	20.67	21.35	22.06	22.83	No Interference
HLRS 4020-005-040		R0.05	4	4.17	4.31	4.45	4.61	4.95
HLRS 4020-005-060			6	6.23	6.44	6.65	6.88	7.40
HLRS 4020-005-080			8	8.30	8.57	8.85	9.16	9.84
HLRS 4020-005-100			10	10.36	10.70	11.05	11.44	12.29
HLRS 4020-005-120			12	12.42	12.83	13.26	13.72	14.74
HLRS 4020-005-160			16	16.55	17.08	17.66	18.27	No Interference
HLRS 4020-005-200			20	20.67	21.34	22.06	22.82	No Interference
HLRS 4020-01-040		R0.1	4	4.17	4.30	4.45	4.60	4.94
HLRS 4020-01-060			6	6.23	6.43	6.65	6.88	7.39
HLRS 4020-01-080			8	8.30	8.56	8.85	9.15	9.83
HLRS 4020-01-100			10	10.36	10.69	11.05	11.43	12.28
HLRS 4020-01-120			12	12.42	12.82	13.25	13.71	14.73
HLRS 4020-01-160			16	16.55	17.08	17.65	18.26	No Interference
HLRS 4020-01-200			20	20.67	21.34	22.05	22.82	No Interference
HLRS 4020-01-240			24	24.80	25.60	26.46	27.37	No Interference
HLRS 4020-02-040		R0.2	4	4.17	4.30	4.44	4.59	4.92
HLRS 4020-02-060			6	6.23	6.43	6.64	6.86	7.36
HLRS 4020-02-080			8	8.29	8.56	8.84	9.14	9.81
HLRS 4020-02-100			10	10.36	10.69	11.04	11.42	12.26
HLRS 4020-02-120			12	12.42	12.82	13.24	13.69	14.71
HLRS 4020-02-160			16	16.54	17.08	17.64	18.25	19.60
HLRS 4020-02-200			20	20.67	21.33	22.04	22.80	No Interference
HLRS 4020-02-240			24	24.79	25.59	26.45	27.36	No Interference
HLRS 4020-03-040		R0.3	4	4.16	4.29	4.43	4.57	4.90
HLRS 4020-03-060			6	6.23	6.42	6.63	6.85	7.34
HLRS 4020-03-080			8	8.29	8.55	8.83	9.13	9.79
HLRS 4020-03-100			10	10.35	10.68	11.03	11.40	12.24
HLRS 4020-03-120			12	12.41	12.81	13.23	13.68	14.68
HLRS 4020-03-160			16	16.54	17.07	17.63	18.24	19.58
HLRS 4020-03-200			20	20.67	21.33	22.03	22.79	No Interference
HLRS 4020-03-240			24	24.79	25.59	26.44	27.35	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4020-05-040	2	R0.5	4	1.6	1.92	16°	50	4	—
HLRS 4020-05-060			6				50	4	—
HLRS 4020-05-080			8				50	4	—
HLRS 4020-05-100			10				50	4	—
HLRS 4020-05-120			12				55	4	—
HLRS 4020-05-160			16				60	4	—
HLRS 4020-05-200			20				60	4	—
HLRS 4020-05-240			24				70	4	—
HLRS 4020-05-260			26				70	4	—
HLRS 4020-05-300			30				70	4	—
HLRS 4025-01-060	2.5	R0.1	6	2	2.42	16°	50	4	—
HLRS 4025-01-080			8				50	4	—
HLRS 4025-01-100			10				50	4	—
HLRS 4025-01-160			16				60	4	—
HLRS 4025-01-200			20				60	4	—
HLRS 4025-01-300			30				70	4	—
HLRS 4025-02-060		R0.2	6				50	4	—
HLRS 4025-02-080			8				50	4	—
HLRS 4025-02-100			10				50	4	—
HLRS 4025-02-160			16				60	4	—
HLRS 4025-02-200			20				60	4	—
HLRS 4025-02-300			30				70	4	—
HLRS 4025-03-060		R0.3	6				50	4	—
HLRS 4025-03-080			8				50	4	—
HLRS 4025-03-100			10				50	4	—
HLRS 4025-03-160			16				60	4	—
HLRS 4025-03-200			20				60	4	—
HLRS 4025-03-300			30				70	4	—
HLRS 4025-05-060		R0.5	6				50	4	—
HLRS 4025-05-080			8				50	4	—
HLRS 4025-05-100			10				50	4	—
HLRS 4025-05-160			16				60	4	—
HLRS 4025-05-200			20				60	4	—
HLRS 4025-05-300			30				70	4	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4020-05-040	2	R0.5	4	4.16	4.28	4.40	4.54	4.85
HLRS 4020-05-060			6	6.22	6.41	6.61	6.82	7.30
HLRS 4020-05-080			8	8.28	8.54	8.81	9.10	9.74
HLRS 4020-05-100			10	10.34	10.67	11.01	11.37	12.19
HLRS 4020-05-120			12	12.41	12.79	13.21	13.65	14.64
HLRS 4020-05-160			16	16.53	17.05	17.61	18.21	19.53
HLRS 4020-05-200			20	20.66	21.31	22.01	22.76	No Interference
HLRS 4020-05-240			24	24.78	25.57	26.41	27.32	No Interference
HLRS 4020-05-260			26	26.85	27.70	28.62	29.59	No Interference
HLRS 4020-05-300			30	30.97	31.96	33.02	No Interference	No Interference
HLRS 4025-01-060	2.5	R0.1	6	6.23	6.43	6.65	6.88	7.39
HLRS 4025-01-080			8	8.30	8.56	8.85	9.15	9.83
HLRS 4025-01-100			10	10.36	10.69	11.05	11.43	12.28
HLRS 4025-01-160			16	16.55	17.08	17.65	18.26	No Interference
HLRS 4025-01-200			20	20.67	21.34	22.05	No Interference	No Interference
HLRS 4025-01-300			30	30.99	31.99	No Interference	No Interference	No Interference
HLRS 4025-02-060		R0.2	6	6.23	6.43	6.64	6.86	7.36
HLRS 4025-02-080			8	8.29	8.56	8.84	9.14	9.81
HLRS 4025-02-100			10	10.36	10.69	11.04	11.42	12.26
HLRS 4025-02-160			16	16.54	17.08	17.64	18.25	No Interference
HLRS 4025-02-200			20	20.67	21.33	22.04	No Interference	No Interference
HLRS 4025-02-300			30	30.98	31.98	No Interference	No Interference	No Interference
HLRS 4025-03-060		R0.3	6	6.23	6.42	6.63	6.85	7.34
HLRS 4025-03-080			8	8.29	8.55	8.83	9.13	9.79
HLRS 4025-03-100			10	10.35	10.68	11.03	11.40	12.24
HLRS 4025-03-160			16	16.54	17.07	17.63	18.24	No Interference
HLRS 4025-03-200			20	20.67	21.33	22.03	No Interference	No Interference
HLRS 4025-03-300			30	30.98	31.98	No Interference	No Interference	No Interference
HLRS 4025-05-060		R0.5	6	6.22	6.41	6.61	6.82	7.30
HLRS 4025-05-080			8	8.28	8.54	8.81	9.10	9.74
HLRS 4025-05-100			10	10.34	10.67	11.01	11.37	12.19
HLRS 4025-05-160			16	16.53	17.05	17.61	18.21	No Interference
HLRS 4025-05-200			20	20.66	21.31	22.01	No Interference	No Interference
HLRS 4025-05-300			30	30.97	31.96	No Interference	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4030-005-040	3	R0.05	4	2.4	2.92	16°	55	6	—
HLRS 4030-005-060			6				55	6	—
HLRS 4030-005-080			8				55	6	—
HLRS 4030-005-100			10				55	6	—
HLRS 4030-005-120			12				55	6	—
HLRS 4030-005-160			16				60	6	—
HLRS 4030-005-200			20				60	6	—
HLRS 4030-01-040		R0.1	4				55	6	—
HLRS 4030-01-060			6				55	6	—
HLRS 4030-01-080			8				55	6	—
HLRS 4030-01-100			10				55	6	—
HLRS 4030-01-120			12				55	6	—
HLRS 4030-01-160			16				60	6	—
HLRS 4030-01-180			18				60	6	—
HLRS 4030-01-200			20				60	6	—
HLRS 4030-01-240			24				70	6	—
HLRS 4030-01-260			26				70	6	—
HLRS 4030-01-300			30				70	6	—
HLRS 4030-02-040		R0.2	4				55	6	—
HLRS 4030-02-060			6				55	6	—
HLRS 4030-02-080			8				55	6	—
HLRS 4030-02-100			10				55	6	—
HLRS 4030-02-120			12				55	6	—
HLRS 4030-02-160			16				60	6	—
HLRS 4030-02-180			18				60	6	—
HLRS 4030-02-200			20				60	6	—
HLRS 4030-02-240			24				70	6	—
HLRS 4030-02-260			26				70	6	—
HLRS 4030-02-300			30				70	6	—
HLRS 4030-02-360			36				80	6	—
HLRS 4030-03-040		R0.3	4				55	6	—
HLRS 4030-03-060			6				55	6	—
HLRS 4030-03-080			8				55	6	—
HLRS 4030-03-100			10				55	6	—
HLRS 4030-03-120			12				55	6	—
HLRS 4030-03-140			14				55	6	—
HLRS 4030-03-160			16				60	6	—
HLRS 4030-03-200			20				60	6	—
HLRS 4030-03-240			24				70	6	—
HLRS 4030-03-260			26				70	6	—
HLRS 4030-03-300			30				70	6	—
HLRS 4030-03-360			36				80	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4030-005-040	3	R0.05	4	4.17	4.31	4.45	4.60	4.95
HLRS 4030-005-060			6	6.23	6.43	6.65	6.88	7.40
HLRS 4030-005-080			8	8.30	8.56	8.85	9.16	9.84
HLRS 4030-005-100			10	10.36	10.69	11.05	11.44	12.29
HLRS 4030-005-120			12	12.42	12.82	13.25	13.71	14.74
HLRS 4030-005-160			16	16.55	17.08	17.66	18.27	19.63
HLRS 4030-005-200			20	20.67	21.34	22.06	22.82	24.53
HLRS 4030-01-040		R0.1	4	4.17	4.30	4.44	4.60	4.94
HLRS 4030-01-060			6	6.23	6.43	6.65	6.87	7.38
HLRS 4030-01-080			8	8.29	8.56	8.85	9.15	9.83
HLRS 4030-01-100			10	10.36	10.69	11.05	11.43	12.28
HLRS 4030-01-120			12	12.42	12.82	13.25	13.71	14.73
HLRS 4030-01-160			16	16.54	17.08	17.65	18.26	19.62
HLRS 4030-01-180			18	18.61	19.21	19.85	20.54	22.07
HLRS 4030-01-200			20	20.67	21.34	22.05	22.82	24.52
HLRS 4030-01-240			24	24.80	25.60	26.45	27.37	No Interference
HLRS 4030-01-260			26	26.86	27.73	28.66	29.65	No Interference
HLRS 4030-01-300			30	30.98	31.99	33.06	34.20	No Interference
HLRS 4030-02-040		R0.2	4	4.17	4.30	4.43	4.58	4.92
HLRS 4030-02-060			6	6.23	6.43	6.64	6.86	7.36
HLRS 4030-02-080			8	8.29	8.55	8.84	9.14	9.81
HLRS 4030-02-100			10	10.35	10.68	11.04	11.42	12.26
HLRS 4030-02-120			12	12.42	12.81	13.24	13.69	14.70
HLRS 4030-02-160			16	16.54	17.07	17.64	18.25	19.60
HLRS 4030-02-180			18	18.60	19.20	19.84	20.53	22.05
HLRS 4030-02-200			20	20.67	21.33	22.04	22.80	24.49
HLRS 4030-02-240			24	24.79	25.59	26.44	27.36	No Interference
HLRS 4030-02-260			26	26.86	27.72	28.65	29.63	No Interference
HLRS 4030-02-300			30	30.98	31.98	33.05	34.19	No Interference
HLRS 4030-02-360			36	37.17	38.37	39.65	41.02	No Interference
HLRS 4030-03-040		R0.3	4	4.16	4.29	4.42	4.57	4.89
HLRS 4030-03-060			6	6.22	6.42	6.63	6.85	7.34
HLRS 4030-03-080			8	8.29	8.55	8.83	9.12	9.79
HLRS 4030-03-100			10	10.35	10.68	11.03	11.40	12.24
HLRS 4030-03-120			12	12.41	12.81	13.23	13.68	14.68
HLRS 4030-03-140			14	14.48	14.94	15.43	15.96	17.13
HLRS 4030-03-160			16	16.54	17.07	17.63	18.23	19.58
HLRS 4030-03-200			20	20.66	21.33	22.03	22.79	24.47
HLRS 4030-03-240			24	24.79	25.59	26.43	27.34	No Interference
HLRS 4030-03-260			26	26.85	27.71	28.64	29.62	No Interference
HLRS 4030-03-300			30	30.98	31.97	33.04	34.18	No Interference
HLRS 4030-03-360			36	37.17	38.36	39.64	41.01	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4030-05-040	3	R0.5	4	2.4	2.92	16°	55	6	—
HLRS 4030-05-060			6				55	6	—
HLRS 4030-05-080			8				55	6	—
HLRS 4030-05-100			10				55	6	—
HLRS 4030-05-120			12				55	6	—
HLRS 4030-05-160			16				60	6	—
HLRS 4030-05-200			20				60	6	—
HLRS 4030-05-240			24				70	6	—
HLRS 4030-05-260			26				70	6	—
HLRS 4030-05-300			30				70	6	—
HLRS 4030-05-360			36				80	6	—
HLRS 4030-10-060		R1	6				55	6	—
HLRS 4030-10-080			8				55	6	—
HLRS 4030-10-100			10				55	6	—
HLRS 4030-10-120			12				55	6	—
HLRS 4030-10-160			16				60	6	—
HLRS 4030-10-200			20				60	6	—
HLRS 4030-10-240			24				70	6	—
HLRS 4030-10-260			26				70	6	—
HLRS 4030-10-300			30				70	6	—
HLRS 4030-10-360			36				80	6	—
HLRS 4040-005-080	4	R0.05	8	3.2	3.82	16°	65	6	—
HLRS 4040-005-120			12				65	6	—
HLRS 4040-005-160			16				65	6	—
HLRS 4040-005-200			20				70	6	—
HLRS 4040-005-240			24				70	6	—
HLRS 4040-005-320			32				80	6	—
HLRS 4040-01-080		R0.1	8				65	6	—
HLRS 4040-01-120			12				65	6	—
HLRS 4040-01-160			16				65	6	—
HLRS 4040-01-200			20				70	6	—
HLRS 4040-01-240			24				70	6	—
HLRS 4040-01-320			32				80	6	—
HLRS 4040-01-480			48				100	6	—
HLRS 4040-02-080		R0.2	8				65	6	—
HLRS 4040-02-120			12				65	6	—
HLRS 4040-02-160			16				65	6	—
HLRS 4040-02-200			20				70	6	—
HLRS 4040-02-240			24				70	6	—
HLRS 4040-02-320			32				80	6	—
HLRS 4040-02-480			48				100	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter ϕD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4030-05-040	3	R0.5	4	4.15	4.27	4.40	4.54	4.85
HLRS 4030-05-060			6	6.22	6.40	6.60	6.82	7.30
HLRS 4030-05-080			8	8.28	8.53	8.80	9.10	9.74
HLRS 4030-05-100			10	10.34	10.66	11.01	11.37	12.19
HLRS 4030-05-120			12	12.40	12.79	13.21	13.65	14.64
HLRS 4030-05-160			16	16.53	17.05	17.61	18.20	19.53
HLRS 4030-05-200			20	20.66	21.31	22.01	22.76	24.43
HLRS 4030-05-240			24	24.78	25.57	26.41	27.31	29.32
HLRS 4030-05-260			26	26.84	27.70	28.61	29.59	No Interference
HLRS 4030-05-300			30	30.97	31.96	33.02	34.15	No Interference
HLRS 4030-05-360			36	37.16	38.35	39.62	40.98	No Interference
HLRS 4030-10-060		R1	6	6.20	6.37	6.55	6.75	7.18
HLRS 4030-10-080			8	8.26	8.50	8.75	9.03	9.63
HLRS 4030-10-100			10	10.32	10.63	10.95	11.30	12.08
HLRS 4030-10-120			12	12.39	12.76	13.16	13.58	14.53
HLRS 4030-10-160			16	16.51	17.02	17.56	18.13	19.42
HLRS 4030-10-200			20	20.64	21.28	21.96	22.69	24.32
HLRS 4030-10-240			24	24.76	25.54	26.36	27.24	29.21
HLRS 4030-10-260			26	26.83	27.67	28.56	29.52	No Interference
HLRS 4030-10-300			30	30.95	31.93	32.96	34.08	No Interference
HLRS 4030-10-360			36	37.14	38.31	39.57	40.91	No Interference
HLRS 4040-005-080	4	R0.05	8	8.48	8.75	9.04	9.36	10.06
HLRS 4040-005-120			12	12.60	13.01	13.45	13.91	14.95
HLRS 4040-005-160			16	16.73	17.27	17.85	18.47	No Interference
HLRS 4040-005-200			20	20.85	21.53	22.25	23.02	No Interference
HLRS 4040-005-240			24	24.98	25.79	26.65	27.58	No Interference
HLRS 4040-005-320			32	33.23	34.31	35.46	No Interference	No Interference
HLRS 4040-01-080		R0.1	8	8.47	8.75	9.04	9.35	10.05
HLRS 4040-01-120			12	12.60	13.01	13.44	13.91	14.94
HLRS 4040-01-160			16	16.72	17.27	17.84	18.46	No Interference
HLRS 4040-01-200			20	20.85	21.52	22.24	23.01	No Interference
HLRS 4040-01-240			24	24.98	25.78	26.65	27.57	No Interference
HLRS 4040-01-320			32	33.23	34.30	35.45	No Interference	No Interference
HLRS 4040-01-480			48	49.73	51.34	No Interference	No Interference	No Interference
HLRS 4040-02-080		R0.2	8	8.47	8.74	9.03	9.34	10.02
HLRS 4040-02-120			12	12.60	13.00	13.43	13.89	14.92
HLRS 4040-02-160			16	16.72	17.26	17.83	18.45	No Interference
HLRS 4040-02-200			20	20.85	21.52	22.23	23.00	No Interference
HLRS 4040-02-240			24	24.97	25.78	26.64	27.56	No Interference
HLRS 4040-02-320			32	33.22	34.30	35.44	No Interference	No Interference
HLRS 4040-02-480			48	49.73	51.33	No Interference	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4040-03-080	4	R0.3	8	3.2	3.82	16°	65	6	—
HLRS 4040-03-120			12				65	6	—
HLRS 4040-03-140			14				65	6	—
HLRS 4040-03-160			16				65	6	—
HLRS 4040-03-200			20				70	6	—
HLRS 4040-03-240			24				70	6	—
HLRS 4040-03-320			32				80	6	—
HLRS 4040-03-480			48				100	6	—
HLRS 4040-05-080		R0.5	8				65	6	—
HLRS 4040-05-120			12				65	6	—
HLRS 4040-05-160			16				65	6	—
HLRS 4040-05-200			20				70	6	—
HLRS 4040-05-240			24				70	6	—
HLRS 4040-05-320			32				80	6	—
HLRS 4040-05-400			40				100	6	—
HLRS 4040-05-480			48				100	6	—
HLRS 4040-10-080		R1	8				65	6	—
HLRS 4040-10-120			12				65	6	—
HLRS 4040-10-160			16				65	6	—
HLRS 4040-10-200			20				70	6	—
HLRS 4040-10-240			24				70	6	—
HLRS 4040-10-320			32				80	6	—
HLRS 4040-10-480			48				100	6	—
HLRS 4050-005-160	5	R0.05	16	4	4.82	16°	65	6	—
HLRS 4050-005-200			20				70	6	—
HLRS 4050-005-400			40				100	6	—
HLRS 4050-01-160		R0.1	16				65	6	—
HLRS 4050-01-200			20				70	6	—
HLRS 4050-01-400			40				100	6	—
HLRS 4050-02-160		R0.2	16				65	6	—
HLRS 4050-02-200			20				70	6	—
HLRS 4050-02-400			40				100	6	—
HLRS 4050-03-160		R0.3	16				65	6	—
HLRS 4050-03-200			20				70	6	—
HLRS 4050-03-400			40				100	6	—
HLRS 4050-05-160		R0.5	16				65	6	—
HLRS 4050-05-200			20				70	6	—
HLRS 4050-05-400			40				100	6	—
HLRS 4050-10-160		R1	16				65	6	—
HLRS 4050-10-200			20				70	6	—
HLRS 4050-10-400			40				100	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4040-03-080	4	R0.3	8	8.47	8.73	9.02	9.32	10.00
HLRS 4040-03-120			12	12.59	12.99	13.42	13.88	14.90
HLRS 4040-03-140			14	14.66	15.12	15.62	16.16	17.34
HLRS 4040-03-160			16	16.72	17.25	17.82	18.43	No Interference
HLRS 4040-03-200			20	20.84	21.51	22.22	22.99	No Interference
HLRS 4040-03-240			24	24.97	25.77	26.63	27.54	No Interference
HLRS 4040-03-320			32	33.22	34.29	35.43	No Interference	No Interference
HLRS 4040-03-480			48	49.72	51.33	No Interference	No Interference	No Interference
HLRS 4040-05-080		R0.5	8	8.46	8.72	9.00	9.29	9.96
HLRS 4040-05-120			12	12.58	12.98	13.40	13.85	14.85
HLRS 4040-05-160			16	16.71	17.24	17.80	18.40	19.75
HLRS 4040-05-200			20	20.84	21.50	22.20	22.96	No Interference
HLRS 4040-05-240			24	24.96	25.76	26.60	27.51	No Interference
HLRS 4040-05-320			32	33.21	34.27	35.41	No Interference	No Interference
HLRS 4040-05-400			40	41.46	42.79	No Interference	No Interference	No Interference
HLRS 4040-05-480			48	49.71	51.31	No Interference	No Interference	No Interference
HLRS 4040-10-080		R1	8	8.44	8.69	8.95	9.22	9.84
HLRS 4040-10-120			12	12.57	12.94	13.35	13.78	14.74
HLRS 4040-10-160			16	16.69	17.20	17.75	18.33	19.63
HLRS 4040-10-200			20	20.82	21.46	22.15	22.89	No Interference
HLRS 4040-10-240			24	24.94	25.72	26.55	27.44	No Interference
HLRS 4040-10-320			32	33.20	34.24	35.36	No Interference	No Interference
HLRS 4040-10-480			48	49.70	51.28	No Interference	No Interference	No Interference
HLRS 4050-005-160	5	R0.05	16	16.73	17.27	17.85	No Interference	No Interference
HLRS 4050-005-200			20	20.85	21.53	No Interference	No Interference	No Interference
HLRS 4050-005-400			40	41.48	No Interference	No Interference	No Interference	No Interference
HLRS 4050-01-160		R0.1	16	16.72	17.27	17.84	No Interference	No Interference
HLRS 4050-01-200			20	20.85	21.52	No Interference	No Interference	No Interference
HLRS 4050-01-400			40	41.48	No Interference	No Interference	No Interference	No Interference
HLRS 4050-02-160		R0.2	16	16.72	17.26	17.83	No Interference	No Interference
HLRS 4050-02-200			20	20.85	21.52	No Interference	No Interference	No Interference
HLRS 4050-02-400			40	41.47	No Interference	No Interference	No Interference	No Interference
HLRS 4050-03-160		R0.3	16	16.72	17.25	17.82	No Interference	No Interference
HLRS 4050-03-200			20	20.84	21.51	No Interference	No Interference	No Interference
HLRS 4050-03-400			40	41.47	No Interference	No Interference	No Interference	No Interference
HLRS 4050-05-160		R0.5	16	16.71	17.24	17.80	No Interference	No Interference
HLRS 4050-05-200			20	20.83	21.50	No Interference	No Interference	No Interference
HLRS 4050-05-400			40	41.46	No Interference	No Interference	No Interference	No Interference
HLRS 4050-10-160		R1	16	16.69	17.20	17.74	No Interference	No Interference
HLRS 4050-10-200			20	20.81	21.46	No Interference	No Interference	No Interference
HLRS 4050-10-400			40	41.44	No Interference	No Interference	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HLRS 4060-005-120	6	R0.05	12	4.8	5.82	—	65	6	—
HLRS 4060-005-160			16				65	6	—
HLRS 4060-005-200			20				70	6	—
HLRS 4060-005-240			24				70	6	—
HLRS 4060-005-300			30				100	6	—
HLRS 4060-005-480			48				120	6	—
HLRS 4060-01-120		R0.1	12				65	6	—
HLRS 4060-01-160			16				65	6	—
HLRS 4060-01-180			18				70	6	—
HLRS 4060-01-200			20				70	6	—
HLRS 4060-01-240			24				70	6	—
HLRS 4060-01-300			30				100	6	—
HLRS 4060-01-480			48				120	6	—
HLRS 4060-02-120		R0.2	12				65	6	—
HLRS 4060-02-160			16				65	6	—
HLRS 4060-02-180			18				70	6	—
HLRS 4060-02-200			20				70	6	—
HLRS 4060-02-240			24				70	6	—
HLRS 4060-02-300			30				100	6	—
HLRS 4060-02-480			48				120	6	—
HLRS 4060-03-120		R0.3	12				65	6	—
HLRS 4060-03-160			16				65	6	—
HLRS 4060-03-180			18				70	6	—
HLRS 4060-03-200			20				70	6	—
HLRS 4060-03-240			24				70	6	—
HLRS 4060-03-300			30				100	6	—
HLRS 4060-03-480			48				120	6	—
HLRS 4060-05-120		R0.5	12				65	6	—
HLRS 4060-05-160			16				65	6	—
HLRS 4060-05-180			18				70	6	—
HLRS 4060-05-200			20				70	6	—
HLRS 4060-05-240			24				70	6	—
HLRS 4060-05-300			30				100	6	—
HLRS 4060-05-400			40				100	6	—
HLRS 4060-05-480			48				120	6	—
HLRS 4060-10-120		R1	12				65	6	—
HLRS 4060-10-160			16				65	6	—
HLRS 4060-10-180			18				70	6	—
HLRS 4060-10-200			20				70	6	—
HLRS 4060-10-240			24				70	6	—
HLRS 4060-10-300			30				100	6	—
HLRS 4060-10-400			40				100	6	—
HLRS 4060-10-480			48				120	6	—

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HLRS 4060-005-120	6	R0.05	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-005-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-005-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-005-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-005-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-005-480			48	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-01-120		R0.1	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-01-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-01-180			18	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-01-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-01-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-01-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-01-480			48	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-02-120		R0.2	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-02-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-02-180			18	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-02-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-02-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-02-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-02-480			48	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-03-120		R0.3	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-03-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-03-180			18	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-03-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-03-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-03-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-03-480			48	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-05-120		R0.5	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-05-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-05-180			18	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-05-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-05-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-05-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-05-400			40	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-05-480			48	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-10-120		R1	12	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-10-160			16	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-10-180			18	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-10-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-10-240			24	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-10-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-10-400			40	No Interference	No Interference	No Interference	No Interference	No Interference
HLRS 4060-10-480			48	No Interference	No Interference	No Interference	No Interference	No Interference


Milling Conditions for HLRS (4 Flutes)

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4002	0.2	0.3	27,000	620	0.005	0.05	27,000	500	0.003	0.04	27,000	390	0.003	0.01
		0.5	24,000	500	0.005	0.05	24,000	410	0.003	0.04	24,000	250	0.003	0.01
		1	21,000	380	0.004	0.05	21,000	320	0.002	0.04	21,000	110	0.002	0.009
		1.5	18,000	260	0.004	0.05	18,000	240	0.002	0.03	18,000	80	0.002	0.007
		2	15,000	140	0.004	0.05	15,000	160	0.002	0.03	15,000	60	0.002	0.007
4003	0.3	0.3	24,500	660	0.01	0.075	23,700	530	0.006	0.07	20,000	330	0.003	0.028
		0.5	23,300	600	0.008	0.075	22,500	490	0.006	0.07	18,500	270	0.003	0.028
		1	20,400	460	0.006	0.075	19,500	400	0.005	0.07	17,000	180	0.003	0.028
		1.5	17,500	320	0.004	0.05	16,500	310	0.005	0.07	16,000	140	0.003	0.025
		2	14,600	180	0.004	0.05	13,500	220	0.005	0.07	14,500	100	0.003	0.025
4004	0.4	0.5	25,400	870	0.015	0.12	22,500	750	0.011	0.1	16,200	360	0.003	0.05
		1	22,600	700	0.012	0.12	20,500	600	0.009	0.1	15,000	250	0.003	0.045
		1.5	21,200	610	0.01	0.12	19,500	520	0.008	0.095	14,400	150	0.003	0.043
		2	19,800	530	0.009	0.12	18,500	450	0.007	0.09	13,800	100	0.003	0.04
4005	0.5	1	22,000	800	0.017	0.155	20,000	670	0.012	0.125	13,500	300	0.003	0.065
		2	19,300	610	0.013	0.155	18,000	530	0.01	0.12	12,300	170	0.003	0.06
4006	0.6	2	21,300	900	0.018	0.17	19,000	750	0.015	0.145	11,500	240	0.003	0.083
		4	18,600	690	0.013	0.17	15,500	520	0.013	0.14	10,300	50	0.003	0.07
4008	0.8	2	20,000	1,100	0.025	0.2	18,500	950	0.02	0.2	10,000	280	0.005	0.12
		3	18,800	950	0.021	0.2	16,500	830	0.018	0.2	9,200	200	0.005	0.116
		4	17,500	840	0.018	0.2	15,000	730	0.016	0.2	8,800	120	0.004	0.112
		6	14,600	700	0.015	0.2	12,500	600	0.015	0.2	8,500	60	0.004	0.108
		8	13,100	450	0.008	0.13	11,150	425	0.008	0.125	7,500	50	0.003	0.057
4010	1	2	17,600	1,470	0.056	0.27	15,300	1,200	0.038	0.27	10,900	710	0.03	0.27
		3	15,500	1,390	0.048	0.27	13,200	1,150	0.037	0.27	9,400	680	0.027	0.27
		4	13,800	1,310	0.039	0.27	12,000	1,070	0.031	0.243	8,500	640	0.015	0.243
		5	12,500	1,150	0.03	0.24	11,000	960	0.027	0.232	7,800	570	0.013	0.144
		6	11,300	1,040	0.021	0.216	9,800	860	0.016	0.209	7,000	510	0.01	0.108
		8	9,800	780	0.02	0.189	8,500	720	0.012	0.16	6,100	420	0.008	0.094
		10	8,800	510	0.011	0.126	7,600	510	0.009	0.1	5,400	350	0.006	0.05
		12	8,100	320	0.008	0.1	7,000	400	0.006	0.05	5,000	300	0.006	0.03
		16	7,000	150	0.005	0.06	6,100	330	0.006	0.05	4,300	250	0.005	0.01
4012	1.2	4	13,200	1,360	0.032	0.45	11,900	1,100	0.024	0.3	9,200	1,300	0.02	0.2
		6	11,200	1,160	0.028	0.36	9,600	980	0.022	0.252	7,400	1,200	0.011	0.095
		10	9,000	800	0.017	0.18	7,300	600	0.009	0.15	6,300	800	0.006	0.05
4015	1.5	3	16,400	1,520	0.063	0.569	14,800	1,330	0.052	0.54	11,200	780	0.035	0.315
		4	13,200	1,360	0.054	0.54	13,200	1,280	0.042	0.495	10,100	700	0.033	0.292
		6	11,600	1,280	0.041	0.486	10,600	1,210	0.038	0.445	8,100	460	0.025	0.202
		8	10,200	1,080	0.037	0.378	9,300	1,020	0.031	0.346	7,100	390	0.015	0.157
		10	9,300	930	0.032	0.345	8,500	870	0.029	0.316	6,600	340	0.011	0.172
		12	8,500	830	0.029	0.324	7,800	780	0.026	0.297	5,900	300	0.01	0.162
		16	7,400	670	0.018	0.216	6,800	600	0.014	0.198	5,100	230	0.005	0.108
		18	6,000	550	0.015	0.2	5,800	420	0.01	0.15	4,200	150	0.005	0.08
4018	1.8	8	10,700	1,120	0.047	0.495	9,800	1,060	0.043	0.497	7,700	500	0.02	0.222
		10	9,600	1,010	0.04	0.436	8,900	950	0.038	0.421	7,100	390	0.015	0.203
		12	8,100	850	0.035	0.303	7,500	740	0.032	0.306	5,900	290	0.013	0.159
		14	7,400	770	0.027	0.24	6,900	660	0.024	0.24	5,400	270	0.008	0.13
		16	7,200	730	0.021	0.207	6,700	630	0.019	0.198	5,200	260	0.006	0.113

Milling Conditions for HLRS (4 Flutes)


WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020	2	4	15,300	1,570	0.069	0.72	14,300	1,460	0.065	0.81	11,500	860	0.031	0.36
		6	12,800	1,280	0.064	0.648	12,000	1,200	0.06	0.729	9,700	700	0.028	0.324
		8	11,200	1,160	0.058	0.612	10,400	1,100	0.055	0.648	8,400	600	0.026	0.288
		10	10,000	1,090	0.049	0.526	9,300	1,020	0.047	0.526	7,600	450	0.019	0.234
		12	9,100	1,030	0.046	0.405	8,500	960	0.044	0.405	6,900	420	0.018	0.18
		16	7,800	860	0.042	0.283	7,300	700	0.039	0.315	5,900	270	0.016	0.157
		20	7,000	800	0.025	0.198	6,600	650	0.024	0.198	5,300	290	0.007	0.118
		24	6,500	740	0.02	0.17	5,600	500	0.019	0.14	4,700	270	0.007	0.1
		26	6,000	680	0.013	0.15	5,000	440	0.012	0.12	4,000	220	0.005	0.08
		30	5,500	620	0.01	0.1	4,400	390	0.009	0.09	3,400	180	0.005	0.08
4025	2.5	6	13,000	1,600	0.078	0.7	12,000	1,500	0.074	0.7	9,900	830	0.05	0.476
		8	11,300	1,430	0.075	0.62	10,500	1,240	0.072	0.62	9,100	650	0.05	0.42
		10	10,500	1,400	0.067	0.54	10,000	1,150	0.067	0.54	8,400	510	0.048	0.324
		16	8,900	1,400	0.059	0.36	8,500	790	0.049	0.3	7,200	350	0.03	0.15
		20	7,800	1,200	0.048	0.27	7,500	670	0.031	0.225	6,300	300	0.022	0.09
		30	6,300	600	0.011	0.18	6,000	500	0.014	0.18	5,000	220	0.01	0.054
4030	3	4	15,000	3,070	0.128	0.72	14,000	2,640	0.08	0.72	11,500	980	0.052	0.576
		6	14,000	2,890	0.12	0.72	13,300	2,500	0.075	0.72	10,800	900	0.05	0.576
		8	12,500	2,530	0.105	0.7	11,800	2,200	0.07	0.7	9,900	810	0.047	0.56
		10	11,300	2,160	0.096	0.7	10,500	2,090	0.06	0.7	9,000	730	0.045	0.56
		12	10,500	2,020	0.084	0.67	10,000	1,950	0.052	0.67	8,100	660	0.037	0.502
		14	9,700	1,800	0.072	0.65	9,300	1,700	0.044	0.65	7,500	600	0.032	0.43
		16	9,200	1,680	0.064	0.63	8,800	1,600	0.04	0.63	7,100	570	0.027	0.378
		18	8,600	1,610	0.061	0.605	8,300	1,540	0.038	0.605	6,700	560	0.023	0.348
		20	8,400	1,540	0.058	0.58	7,900	1,490	0.036	0.58	6,300	550	0.022	0.319
		24	7,900	1,490	0.052	0.513	7,500	1,420	0.029	0.513	6,000	510	0.017	0.258
		26	7,500	1,440	0.046	0.446	7,100	1,360	0.023	0.446	5,700	480	0.012	0.198
		30	7,000	1,260	0.04	0.38	6,500	1,230	0.015	0.38	5,400	390	0.007	0.144
		36	6,500	1,100	0.035	0.3	6,100	1,110	0.01	0.18	5,100	300	0.005	0.1
4040	4	8	10,200	1,480	0.133	1.35	8,500	1,420	0.104	1.35	7,300	810	0.091	0.945
		12	8,900	1,440	0.116	1.15	7,600	1,390	0.091	1.15	6,400	780	0.065	0.805
		14	8,500	1,400	0.1	1.08	7,100	1,350	0.078	1.08	6,000	760	0.051	0.76
		16	7,900	1,370	0.091	1	6,600	1,330	0.071	1	5,600	740	0.043	0.7
		20	6,900	1,320	0.076	0.9	5,800	1,260	0.059	0.9	4,900	720	0.032	0.63
		24	6,200	1,200	0.06	0.8	5,200	1,120	0.047	0.8	4,500	630	0.022	0.56
		32	5,500	960	0.037	0.648	4,600	920	0.029	0.648	3,900	600	0.011	0.388
		40	5,000	790	0.025	0.55	4,300	800	0.02	0.482	3,600	560	0.008	0.3
		48	4,600	700	0.012	0.45	3,900	680	0.01	0.315	3,300	500	0.005	0.1
4050	5	16	7,200	1,700	0.15	1.5	5,300	1,200	0.125	1.15	4,200	820	0.063	1.03
		20	6,700	1,500	0.14	1.4	4,800	1,100	0.1	1.1	4,000	740	0.045	1
		40	4,600	880	0.068	1	3,300	700	0.06	0.68	2,800	500	0.025	0.44
4060	6	12	8,000	2,370	0.2	2.43	4,700	1,360	0.2	1.35	4,000	1,080	0.075	1.35
		16	6,700	2,020	0.19	2.394	4,000	1,150	0.19	1.33	3,400	900	0.073	1.33
		18	6,300	1,890	0.185	2.376	3,750	1,060	0.185	1.32	3,200	830	0.071	1.32
		20	5,800	1,730	0.18	2.358	3,500	1,000	0.18	1.31	3,000	760	0.07	1.31
		24	5,200	1,540	0.17	2.322	3,100	860	0.17	1.29	2,700	680	0.068	1.29
		30	4,500	1,290	0.158	2.268	2,600	740	0.158	1.26	2,200	580	0.066	1.26
		40	3,000	800	0.1	1.35	1,700	480	0.1	0.75	1,400	360	0.04	0.55
		48	2,000	510	0.05	0.9	1,200	330	0.04	0.5	1,000	240	0.02	0.3

Side Milling




Note:
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
・Every coolant offers stable milling.
・Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
・Recommend wet coolant for Copper.

Feature 1 : Variable pitch



θ1 > θ2 : The unequal division reduces chattering and tip damage.
θ1 + θ2 = 180° : Easy to measure outside diameter.

Feature 2 : Back taper geometry





The back taper geometry reduces cutting resistance, which enables stable milling on vertical walls.

Milling Example for Deep Milling
HLRS4000 φ2 × CR0.3 × EL16 (L / D = 8)

DAC10 (48HRC)

Tool	HLRS 4020-03-160
Spindle Speed	7,300 min^{-1}
Feed Rate	1,260 mm/min
a_p	0.02 mm
a_e	0.015 mm
Cycle Time	112 min
Coolant	Oil Mist
Work Size	20 × 15 mm

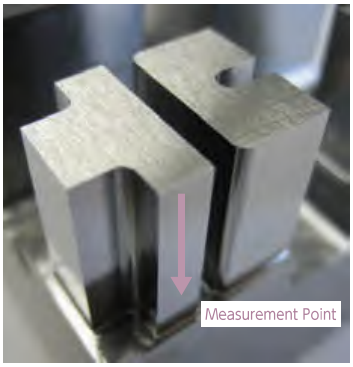

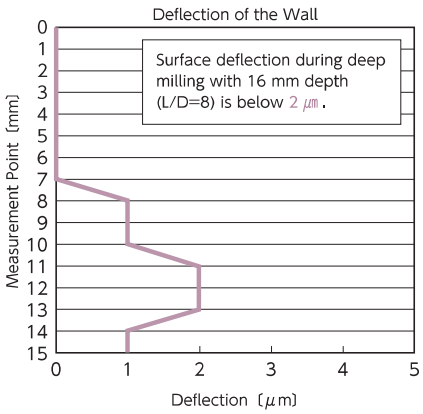

HRRS



HARDMAX 4 Flute Long Neck Radius End Mills

φ2～φ12


Super MG | HARD MAX | 45° | R | R ±0.01 (φ2～φ6) | R ±0.015 (φ8～φ12) | Shank Dia 0/-0.005 | Back Taper Geometry | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		●	●	●	●	○		○									

Features

Special corner radius geometry offers greater milling amount and larger step over than a ball design.
Seamless corner radius reduces cutting resistance and chattering.
Suitable for milling hard materials up to 65HRC.

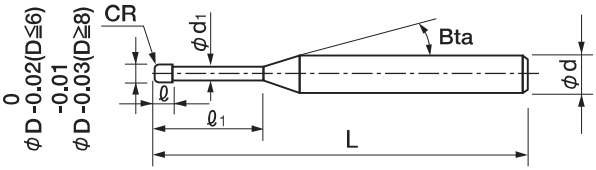

The shank taper angle shown is not an exact value.

Total 49 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HRRS 4020-03-06	2	R0.3	6	2	1.91	16°	70	4	—
HRRS 4020-05-06		R0.5					70	4	—
HRRS 4030-08-09-3	3	R0.8	9	3	2.92	—	70	3	—
HRRS 4030-08-09						16°	70	6	—
HRRS 4040-03-12-6	4	R0.3	12	4	3.82	16°	70	6	—
HRRS 4040-03-20-6			20				70	6	—
HRRS 4040-05-12		R0.5	12	4	3.82	—	70	4	—
HRRS 4040-05-12-6						16°	70	6	—
HRRS 4040-05-20-6			20				70	6	—
HRRS 4040-10-12		R1	12	4	3.82	—	70	4	—
HRRS 4040-10-12-6						16°	70	6	—
HRRS 4040-10-20-6			20				70	6	—

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HRRS 4050-12-15	5	R1.2	15	5	4.82	16°	70	6	—
HRRS 4060-03-18	6	R0.3	18	6	5.82	—	90	6	—
HRRS 4060-03-30			30				90	6	—
HRRS 4060-05-18		R0.5	18				90	6	—
HRRS 4060-05-30			30				90	6	—
HRRS 4060-10-18		R1	18				90	6	—
HRRS 4060-10-30			30				90	6	—
HRRS 4060-15-18		R1.5	18				90	6	—
HRRS 4060-15-30			30				90	6	—
HRRS 4060-20-18		R2	18				90	6	—
HRRS 4080-03-24	8	R0.3	24	8	7.82	—	100	8	—
HRRS 4080-03-40			40				100	8	—
HRRS 4080-05-24		R0.5	24				100	8	—
HRRS 4080-05-40			40				100	8	—
HRRS 4080-10-24		R1	24				100	8	—
HRRS 4080-10-40			40				100	8	—
HRRS 4080-20-24		R2	24				100	8	—
HRRS 4080-20-40			40				100	8	—
HRRS 4080-30-24		R3	24				100	8	—
HRRS 4100-03-30	10	R0.3	30	10	9.82	—	110	10	—
HRRS 4100-03-50			50				110	10	—
HRRS 4100-05-30		R0.5	30				110	10	—
HRRS 4100-05-50			50				110	10	—
HRRS 4100-10-30		R1	30				110	10	—
HRRS 4100-10-50			50				110	10	—
HRRS 4100-20-30		R2	30				110	10	—
HRRS 4100-20-50			50				110	10	—
HRRS 4100-30-30		R3	30				110	10	—
HRRS 4120-03-36	12	R0.3	36	12	11.82	—	120	12	—
HRRS 4120-03-60			60				120	12	—
HRRS 4120-05-36		R0.5	36				120	12	—
HRRS 4120-05-60			60				120	12	—
HRRS 4120-10-36		R1	36				120	12	—
HRRS 4120-10-60			60				120	12	—
HRRS 4120-20-36		R2	36				120	12	—
HRRS 4120-20-60			60				120	12	—
HRRS 4120-40-36		R4	36				120	12	—

Milling Conditions for HRRS / HRRS-S

◆Roughing　Effective length 3D

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS (30～45HRC) (Air Blow / Oil Mist)				HARDENED STEELS (45～55HRC) (Air Blow / Oil Mist)				HARDENED STEELS (55～65HRC) (Air Blow / Oil Mist)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-03-06	2	R0.3	30,000	7,650	0.03	0.41	10,000	2,160	0.08	0.36	8,000	1,170	0.04	0.36
4020-05-06		R0.5	30,000	7,650	0.05	0.72	10,000	2,160	0.14	0.63	8,000	1,170	0.07	0.63
4030-08-09	3	R0.8	25,000	8,100	0.07	1.08	10,000	2,970	0.16	0.95	7,000	1,710	0.09	0.95
4040-03-12-6	4	R0.3	15,000	8,550	0.05	0.66	9,000	3,600	0.08	0.62	6,000	2,160	0.04	0.62
4040-05-12		R0.5	15,000	8,550	0.06	0.82	9,000	3,600	0.1	0.77	6,000	2,160	0.05	0.77
4040-10-12		R1	15,000	8,550	0.11	1.44	9,000	3,600	0.16	1.35	6,000	2,160	0.09	1.35
4050-12-15	5	R1.2	10,000	8,550	0.16	1.8	8,000	4,950	0.18	1.58	6,000	2,160	0.14	1.58
4060-03-18	6	R0.3	9,000	8,550	0.08	0.98	8,000	5,400	0.09	0.87	6,000	2,070	0.08	0.87
4060-05-18		R0.5	9,000	8,550	0.1	1.23	8,000	5,400	0.11	1.08	6,000	2,070	0.11	1.08
4060-10-18		R1	9,000	8,550	0.14	1.57	8,000	5,400	0.14	1.49	6,000	2,070	0.14	1.49
4060-15-18		R1.5	9,000	8,550	0.17	2.16	8,000	5,400	0.18	1.89	6,000	2,070	0.18	1.89
4060-20-18		R2	9,000	8,550	0.17	2.3	8,000	5,400	0.18	2.02	6,000	2,070	0.18	2.02
4080-03-24	8	R0.3	7,000	8,550	0.03	1.2	6,000	5,850	0.04	1.04	4,000	2,070	0.03	1.04
4080-05-24		R0.5	7,000	8,550	0.04	1.5	6,000	5,850	0.05	1.3	4,000	2,070	0.04	1.3
4080-10-24		R1	7,000	8,550	0.05	1.92	6,000	5,850	0.06	1.8	4,000	2,070	0.05	1.8
4080-20-24		R2	7,000	8,550	0.21	2.88	6,000	5,850	0.23	2.52	4,000	2,070	0.18	2.52
4080-30-24		R3	7,000	8,550	0.21	3.09	6,000	5,850	0.23	2.7	4,000	2,070	0.18	2.7
4100-03-30	10	R0.3	6,000	8,550	0.03	1.6	5,000	5,580	0.04	1.3	3,000	2,160	0.03	1.3
4100-05-30		R0.5	6,000	8,550	0.04	2	5,000	5,580	0.05	1.62	3,000	2,160	0.04	1.62
4100-10-30		R1	6,000	8,550	0.06	2.57	5,000	5,580	0.07	2.25	3,000	2,160	0.05	2.25
4100-20-30		R2	6,000	8,550	0.24	3.6	5,000	5,580	0.27	3.15	3,000	2,160	0.18	3.15
4100-30-30		R3	6,000	8,550	0.24	3.86	5,000	5,580	0.27	3.38	3,000	2,160	0.18	3.38
4120-03-36	12	R0.3	5,000	8,550	0.04	1.93	4,000	7,290	0.04	1.56	2,000	2,250	0.03	1.56
4120-05-36		R0.5	5,000	8,550	0.05	2.41	4,000	7,290	0.05	1.94	2,000	2,250	0.04	1.94
4120-10-36		R1	5,000	8,550	0.07	3.09	4,000	7,290	0.07	2.7	2,000	2,250	0.05	2.7
4120-20-36		R2	5,000	8,550	0.27	4.32	4,000	7,290	0.27	3.78	2,000	2,250	0.18	3.78
4120-40-36		R4	5,000	8,550	0.27	4.63	4,000	7,290	0.27	4.05	2,000	2,250	0.18	4.05

When using an effective length of 5D, or the protruding tool experiences an “overhang”, then pay attention to the tool overhang coefficient below while referring to the milling parameter table.

*Effective Length 5D: Effective Length (ℓ_1) ÷ Diameter (ϕD) = 5

D: ϕ2.0～3.0

Overhang Length L / D	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)
～ϕD×6	×1	×1	×1	×1
～ϕD×7	×0.8	×0.8	×0.8	×0.9
～ϕD×8	×0.7	×0.7	×0.7	×0.9
～ϕD×9	×0.7	×0.7	×0.6	×0.8
～ϕD×10	×0.6	×0.6	×0.6	×0.7

D: ϕ4.0～6.0

Overhang Length L / D	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)
～ϕD×4	×1	×1	×1	×1
～ϕD×5	×0.9	×0.9	×0.9	×0.9
～ϕD×6	×0.8	×0.8	×0.8	×0.9
～ϕD×7	×0.7	×0.7	×0.6	×0.8
～ϕD×8	×0.5	×0.5	×0.6	×0.7

D: ϕ8.0～12.0

Overhang Length L / D	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)
～ϕD×4	×1	×1	×1	×1
～ϕD×5	×0.7	×0.7	×0.7	×0.8
～ϕD×6	×0.5	×0.5	×0.6	×0.7

D: Outside Diameter (mm)　L: Overhang Length (mm)


Milling Conditions for HRRS / HRRS-S

◆Finishing (flat / inclined surface) Effective length 3D


WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS (30~45HRC) (Air Blow / Oil Mist)				HARDENED STEELS (45~55HRC) (Air Blow / Oil Mist)				HARDENED STEELS (55~65HRC) (Air Blow / Oil Mist)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-03-06	2	R0.3	30,000	850	0.1	0.03	10,000	355	0.1	0.04	8,000	240	0.05	0.03
4020-05-06		R0.5	30,000	1,100	0.1	0.04	10,000	460	0.1	0.05	8,000	310	0.05	0.04
4030-08-09	3	R0.8	25,000	1,100	0.1	0.04	10,000	650	0.1	0.07	7,000	350	0.05	0.05
4040-03-12-6	4	R0.3	15,000	620	0.08	0.04	9,000	365	0.08	0.04	6,000	205	0.04	0.03
4040-05-12		R0.5	15,000	775	0.1	0.05	9,000	455	0.1	0.05	6,000	255	0.05	0.04
4040-10-12		R1	15,000	1,100	0.1	0.07	9,000	650	0.1	0.07	6,000	360	0.05	0.06
4050-12-15	5	R1.2	10,000	1,100	0.1	0.11	8,000	650	0.1	0.08	6,000	360	0.05	0.06
4060-03-18	6	R0.3	9,000	550	0.16	0.06	8,000	300	0.16	0.04	6,000	170	0.08	0.03
4060-05-18		R0.5	9,000	690	0.2	0.08	8,000	375	0.2	0.05	6,000	215	0.1	0.04
4060-10-18		R1	9,000	975	0.2	0.11	8,000	530	0.2	0.07	6,000	310	0.1	0.05
4060-15-18		R1.5	9,000	1,200	0.2	0.13	8,000	650	0.2	0.08	6,000	380	0.1	0.06
4060-20-18		R2	9,000	1,385	0.2	0.15	8,000	750	0.2	0.09	6,000	435	0.1	0.07
4080-03-24	8	R0.3	7,000	480	0.04	0.07	6,000	260	0.04	0.05	4,000	145	0.04	0.05
4080-05-24		R0.5	7,000	598	0.05	0.09	6,000	322	0.05	0.06	4,000	184	0.05	0.06
4080-10-24		R1	7,000	845	0.05	0.12	6,000	455	0.05	0.08	4,000	265	0.05	0.07
4080-20-24		R2	7,000	1,200	0.2	0.17	6,000	650	0.2	0.11	4,000	380	0.1	0.1
4080-30-24		R3	7,000	1,465	0.2	0.21	6,000	795	0.2	0.13	4,000	465	0.1	0.12
4100-03-30	10	R0.3	6,000	478	0.04	0.08	5,000	258	0.04	0.05	3,000	147	0.04	0.06
4100-05-30		R0.5	6,000	598	0.05	0.1	5,000	322	0.05	0.06	3,000	184	0.05	0.07
4100-10-30		R1	6,000	845	0.05	0.14	5,000	455	0.05	0.09	3,000	265	0.05	0.09
4100-20-30		R2	6,000	1,200	0.2	0.2	5,000	650	0.2	0.13	3,000	380	0.1	0.13
4100-30-30		R3	6,000	1,470	0.2	0.25	5,000	795	0.2	0.16	3,000	465	0.1	0.16
4120-03-36	12	R0.3	5,000	480	0.04	0.1	4,000	260	0.04	0.07	2,000	145	0.04	0.09
4120-05-36		R0.5	5,000	598	0.05	0.12	4,000	322	0.05	0.08	2,000	184	0.05	0.1
4120-10-36		R1	5,000	845	0.05	0.17	4,000	455	0.05	0.11	2,000	265	0.05	0.13
4120-20-36		R2	5,000	1,200	0.2	0.24	4,000	650	0.2	0.16	2,000	380	0.1	0.19
4120-40-36		R4	5,000	1,695	0.2	0.34	4,000	915	0.2	0.23	2,000	535	0.1	0.27

When using an effective length of 5D, or the protruding tool experiences an "overhang", then pay attention to the tool overhang coefficient found on page 384 while referring to the milling parameter table.
*Effective Length 5D: Effective Length (ℓ_1) ÷ Diameter (ϕD) = 5

Roughing Parameter








Finishing Parameter
(Flat / Inclined Surface)

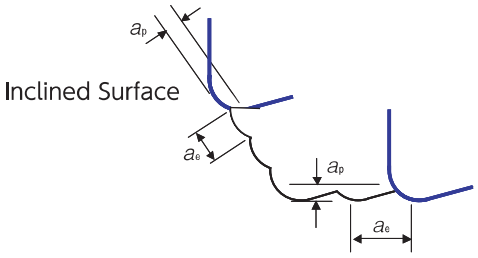

Note:
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
・Decrease the feed rate more than 50% from the milling parameters when slot milling.
・Only adjust the spindle speed when calculate milling conditions based on the overhang length in finishing process.
・Recommend air blow or oil mist.

Flat Milling Example: Milling with HRRSϕ12 x CR4 SKD11 (60HRC)

	Conventional Ball R6	HRRS 4120-40-36
Side		
Top		

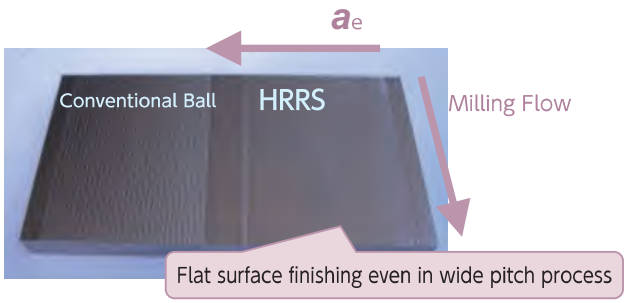

HRRS Surface Roughness
Maximum Surface Roughness (calculated value)
=2.375 μm





Spindle Speed	Feed Rate	a_p	a_e	Milling Distance	Overhang Length
2,000 min^{-1}	535 mm/min	0.1 mm	2 mm	100 mm × 35 Times	55 mm

HRRS Series
NAK80 (40HRC)
Milling Video

HRRS Series
DH31S (52HRC)
Milling Video

HRRS Series
DH31 (52HRC)
Milling Video

Pocket Milling Example: Milling with HRRS ϕ6 × CR1.5 SKD11 (60HRC)

	HRRS	Competitor A: 4 Flutes	Competitor B: 4 Flutes	Competitor B: 3 Flutes
Depth 0.9 mm				
Depth 12.3 mm				Broken
Depth 16.5 mm			Broken	
				



Pocket Milling
Cycle Time: 40 min

Spindle Speed	Z helical Approach	Feed Rate	a_p	a_e	Overhang Length	Cycle Time	Coolant
2,700 min^{-1}	1,350 mm/min	2,000 mm/min	0.3 mm (0.05D)	1.5 mm (0.25D)	20 mm	40 min	Air Blow (Nozzle)

Longer tool life on 60HRC milling.

Short Shank Series

HRRS-S



HARDMAX 4 Flute Long Neck Radius End Mills

φ2～φ12


Super MG | HARD MAX | 45° | R | ±0.01 (φ2～φ6) | ±0.015 (φ8～φ12) | Shank Dia 0/-0.005 | Back Taper Geometry | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		●	●	●	●	○		○									

Features

Shorter overall length and overhang offer higher feed and precision.
Achieves larger step over by seamless corner radius design.
Rated to 65HRC milling. Refer to page D-87, D-88 for milling conditions.

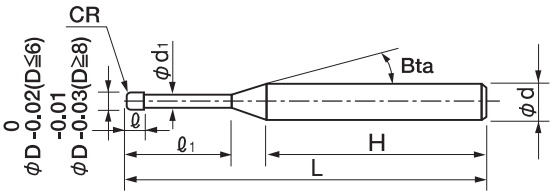



The shank taper angle shown is not an exact value.

Total 26 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
HRRS 4020-03-06S	2	R0.3	6	2	1.91	16°	45	4	33.0	—
HRRS 4020-05-06S		R0.5					45	4	33.0	—
HRRS 4030-08-09-3S	3	R0.8	9	3	2.92	—	50	3	38.5	—
HRRS 4030-08-09S						16°	50	6	32.0	—
HRRS 4040-05-12S	4	R0.5	12	4	3.82	—	50	4	35.0	—
HRRS 4040-05-12-6S						16°	50	6	31.0	—
HRRS 4040-10-12S		R1				—	50	4	35.0	—
HRRS 4040-10-12-6S						16°	50	6	31.0	—
HRRS 4050-12-15S	5	R1.2	15	5	4.82	16°	50	6	30.0	—
HRRS 4060-05-18S	6	R0.5	18	6	5.82	—	50	6	29.0	—
HRRS 4060-10-18S		R1					50	6	29.0	—
HRRS 4060-15-18S		R1.5					50	6	29.0	—
HRRS 4060-20-18S		R2					50	6	29.0	—
HRRS 4080-05-24S	8	R0.5	24	8	7.82	—	60	8	33.0	—
HRRS 4080-10-24S		R1					60	8	33.0	—
HRRS 4080-20-24S		R2					60	8	33.0	—
HRRS 4080-30-24S		R3					60	8	33.0	—
HRRS 4100-03-30S	10	R0.3	30	10	9.82	—	65	10	31.5	—
HRRS 4100-05-30S		R0.5					65	10	31.5	—
HRRS 4100-10-30S		R1					65	10	31.5	—
HRRS 4100-20-30S		R2					65	10	31.5	—
HRRS 4100-30-30S		R3					65	10	31.5	—
HRRS 4120-05-36S	12	R0.5	36	12	11.82	—	75	12	35.5	—
HRRS 4120-10-36S		R1					75	12	35.5	—
HRRS 4120-20-36S		R2					75	12	35.5	—
HRRS 4120-40-36S		R4					75	12	35.5	—

Pocket Milling Example: Milling with HRRS ϕ6 × CR1.5 NAK80 (40HRC)

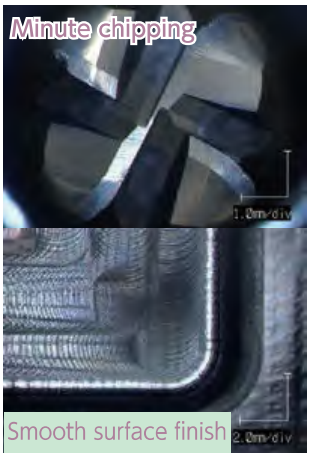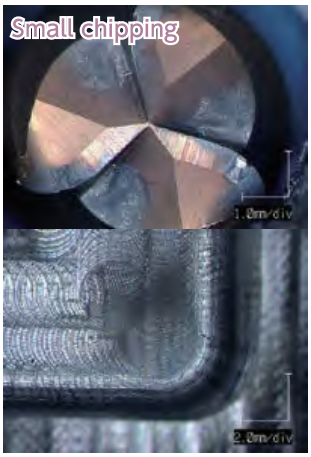HRRS	Competitor A: 4 Flutes	Competitor B: 4 Flutes	Competitor B: 3 Flutes
			
CR1.5, FL6 mm, EFL18 mm	CR1.5, FL6 mm, EFL18 mm	CR1.5, FL12 mm	CR1.5, FL12 mm


Spindle Speed	Feed Rate	a_p	a_e	Overhang Length	Cycle Time	Pocket Size
9,000 min^{-1}	11,000 mm/min	0.3 mm (0.05D)	3 mm (0.5D)	20 mm	20 min	40 × 180 × Depth 15 mm

Excellent chipping resistance and surface quality !

Original corner radius design offers high rigidity and reduces cutting resistance.


After milling SKD11 (60HRC)

HRRS

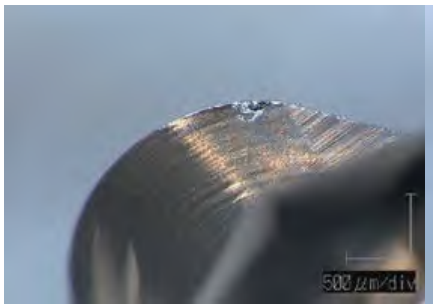


Seamless corner radius with equal rake angle design. Reduces the cutting resistance and offers excellent chip evacuation to protect from the tool damage.

Competitor

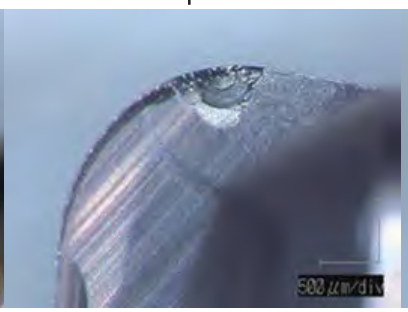

Flat and non-helix gash design. Badly damaged at tip point where cutting chips are trapped by poor chip evacuation.

Competitor

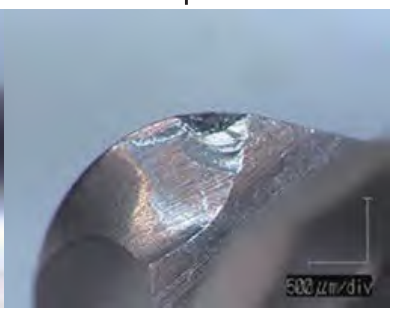

Flat and helical gash design. Huge tool damage at tangent point where the gash shape abruptly changed and cutting chips could not evacuate properly.

Spindle Speed	Feed Rate	a_p	a_e	Overhang Length	Pocket Size
2,700 min^{-1}	2,000 mm/min	0.3 mm	1.5 mm	20 mm	40 × 40 × 0.3 mm

Longer tool life with variable pitch design. Recommended for various coolant.

CRRS



UTCOAT 4 Flute Long Neck Radius End Mills

φ2～φ12


Super MG | UT COAT | 45° | R | R ±0.01 (φ2～φ6) | R ±0.015 (φ8～φ12) | Shank Dia 0/-0.005 | Back Taper Geometry | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	○		●			●	●		

Features

Broad application range from Copper and Raw Materials to Hardened Steels (55HRC). UTCOAT offers long tool life. Variable pitch, high helix and positive rake angle offer stable milling. Reduced cutting resistance when using a helical approach or inclined angles.

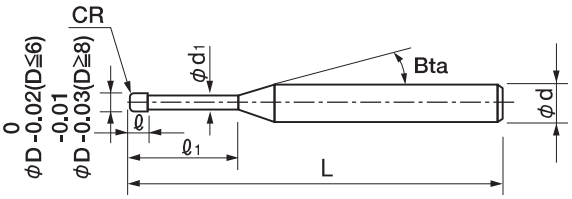

The shank taper angle shown is not an exact value.

Total 24 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CRRS 4020-05-06	2	R0.5	6	2	1.91	16°	70	4	—
CRRS 4030-08-09	3	R0.8	9	3	2.92	16°	70	6	—
CRRS 4040-03-12	4	R0.3	12	4	3.82	16°	60	6	—
CRRS 4040-05-12-4		R0.5				—	70	4	—
CRRS 4040-05-12						16°	60	6	—
CRRS 4040-10-12-4		R1				—	70	4	—
CRRS 4040-10-12						16°	70	6	—
CRRS 4050-12-15	5	R1.2	15	5	4.82	16°	70	6	—
CRRS 4060-03-18	6	R0.3	18	6	5.82	—	90	6	—
CRRS 4060-05-18		R0.5					60	6	—
CRRS 4060-10-18		R1					60	6	—
CRRS 4060-15-18		R1.5					90	6	—
CRRS 4080-03-24	8	R0.3	24	8	7.82	—	100	8	—
CRRS 4080-05-26		R0.5	26				70	8	—
CRRS 4080-10-26		R1					70	8	—
CRRS 4080-20-24		R2	24				100	8	—
CRRS 4100-03-30	10	R0.3	30	10	9.82	—	110	10	—
CRRS 4100-05-30		R0.5					80	10	—
CRRS 4100-10-30		R1					80	10	—
CRRS 4100-20-30		R2					110	10	—
CRRS 4120-03-36	12	R0.3	36	12	11.82	—	120	12	—
CRRS 4120-05-36		R0.5					120	12	—
CRRS 4120-10-36		R1					120	12	—
CRRS 4120-20-36		R2					120	12	—

Milling Conditions for CRRS

◆Roughing

WORK MATERIAL			CARBON STEELS S45C / S55C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB) *Use cutting oils for Stainless Steels.				PREHARDENED STEELS HARDENED STEELS NAK / HPM / SKD / SKT / STAVAX (30~55HRC) *Recommend oil mist.			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-05-06	2	R0.5	30,000	7,200	0.08	0.8	30,000	7,200	0.04	0.66	24,000	7,000	0.02	0.59
4030-08-09	3	R0.8	20,000	8,400	0.09	1.2	20,000	7,200	0.04	1.08	16,000	7,000	0.04	0.88
4040-03-12	4	R0.3	15,000	9,600	0.09	1.6	15,000	7,200	0.05	1.32	12,000	7,000	0.05	1.17
4040-05-12-4		R0.5	15,000	9,600	0.1	1.6	15,000	7,200	0.05	1.35	12,000	7,000	0.05	1.26
4040-05-12			15,000	9,600	0.1	1.6	15,000	7,200	0.05	1.35	12,000	7,000	0.05	1.26
4040-10-12-4		R1	15,000	9,600	0.11	1.6	15,000	7,200	0.05	1.53	12,000	7,000	0.06	1.33
4040-10-12			15,000	9,600	0.11	1.6	15,000	7,200	0.05	1.53	12,000	7,000	0.06	1.33
4050-12-15	5	R1.2	12,000	10,800	0.13	2	12,000	7,200	0.06	1.8	9,600	6,300	0.06	1.54
4060-03-18	6	R0.3	10,000	12,000	0.13	2.4	10,000	7,200	0.07	1.94	8,000	5,250	0.07	1.63
4060-05-18		R0.5	10,000	12,000	0.14	2.4	10,000	7,200	0.07	1.98	8,000	5,250	0.07	1.75
4060-10-18		R1	10,000	12,000	0.15	2.4	10,000	7,200	0.07	2.16	8,000	5,250	0.08	1.75
4060-15-18		R1.5	10,000	12,000	0.17	2.4	10,000	7,200	0.08	2.34	8,000	5,250	0.11	1.75
4080-03-24	8	R0.3	7,500	12,000	0.17	2.86	7,500	7,200	0.08	2.76	6,000	4,100	0.15	1.77
4080-05-26		R0.5	7,500	12,000	0.18	2.64	7,500	7,200	0.08	2.61	6,000	4,100	0.14	1.76
4080-10-26		R1	7,500	12,000	0.18	2.72	7,500	7,200	0.09	2.7	6,000	4,100	0.16	1.76
4080-20-24		R2	7,500	12,000	0.22	2.88	7,500	7,200	0.1	2.79	6,000	4,100	0.18	1.96
4100-03-30	10	R0.3	6,000	12,000	0.2	3.04	5,000	5,400	0.14	2.82	4,800	4,100	0.18	1.89
4100-05-30		R0.5	6,000	12,000	0.22	3.04	5,000	5,400	0.14	2.88	4,800	4,100	0.18	2.03
4100-10-30		R1	6,000	12,000	0.24	3.28	5,000	5,400	0.14	2.97	4,800	4,100	0.19	2.1
4100-20-30		R2	6,000	12,000	0.26	3.44	5,000	5,400	0.14	3.06	4,800	4,100	0.2	2.45
4120-03-36	12	R0.3	5,000	12,000	0.21	3.32	3,000	4,320	0.18	2.9	4,000	4,100	0.19	2.15
4120-05-36		R0.5	5,000	12,000	0.24	3.32	3,000	4,320	0.18	2.96	4,000	4,100	0.19	2.32
4120-10-36		R1	5,000	12,000	0.26	3.59	3,000	4,320	0.18	3.06	4,000	4,100	0.2	2.4
4120-20-36		R2	5,000	12,000	0.28	3.76	3,000	4,320	0.18	3.15	4,000	4,100	0.21	2.8

WORK MATERIAL			TITANIUM / TITANIUM ALLOYS Ti-6Al-4V				HEAT RESISTANT ALLOYS Inconel718			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-05-06	2	R0.5	21,420	4,010	0.03	0.33	5,140	810	0.03	0.33
4030-08-09	3	R0.8	14,280	4,010	0.03	0.54	3,430	810	0.03	0.54
4040-03-12	4	R0.3	10,710	4,010	0.04	0.66	2,570	810	0.04	0.66
4040-05-12-4		R0.5	10,710	4,010	0.04	0.68	2,570	810	0.04	0.68
4040-05-12			10,710	4,010	0.04	0.68	2,570	810	0.04	0.68
4040-10-12-4		R1	10,710	4,010	0.04	0.77	2,570	810	0.04	0.77
4040-10-12			10,710	4,010	0.04	0.77	2,570	810	0.04	0.77
4050-12-15	5	R1.2	8,570	4,010	0.04	0.9	2,060	810	0.04	0.9
4060-03-18	6	R0.3	7,140	4,010	0.05	1	1,740	810	0.05	1
4060-05-18		R0.5	7,140	4,010	0.05	1	1,740	810	0.05	1
4060-10-18		R1	7,140	4,010	0.05	1.08	1,740	810	0.05	1.08
4060-15-18		R1.5	7,140	4,010	0.05	1.08	1,740	810	0.05	1.08
4080-03-24	8	R0.3	5,360	4,000	0.05	1.28	1,580	800	0.05	1.28
4080-05-26		R0.5	5,360	4,000	0.05	1.31	1,580	800	0.05	1.31
4080-10-26		R1	5,360	4,000	0.05	1.35	1,580	800	0.05	1.35
4080-20-24		R2	5,360	4,000	0.05	1.4	1,580	800	0.05	1.4
4100-03-30	10	R0.3	3,570	3,010	0.09	1.41	1,050	550	0.09	1.41
4100-05-30		R0.5	3,570	3,010	0.09	1.44	1,050	550	0.09	1.44
4100-10-30		R1	3,570	3,010	0.09	1.49	1,050	550	0.09	1.49
4100-20-30		R2	3,570	3,010	0.09	1.53	1,050	550	0.09	1.53
4120-03-36	12	R0.3	2,140	2,400	0.12	1.45	640	410	0.12	1.45
4120-05-36		R0.5	2,140	2,400	0.12	1.48	640	410	0.12	1.48
4120-10-36		R1	2,140	2,400	0.12	1.53	640	410	0.12	1.53
4120-20-36		R2	2,140	2,400	0.12	1.58	640	410	0.12	1.58

Milling Conditions for CRRS

◆Finishing (Flat / Inclined surface)

WORK MATERIAL			CARBON STEELS S45C / S55C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB) *Use cutting oils for Stainless Steels.				PREHARDENED STEELS HARDENED STEELS NAK / HPM / SKD / SKT / STAVAX (30~55HRC) *Recommend oil mist.			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-05-06	2	R0.5	30,000	1,720	0.1	0.06	30,000	1,510	0.05	0.05	24,000	1,070	0.05	0.04
4030-08-09	3	R0.8	20,000	1,890	0.1	0.09	20,000	1,660	0.05	0.08	16,000	1,160	0.05	0.07
4040-03-12	4	R0.3	15,000	1,050	0.1	0.07	15,000	910	0.05	0.06	12,000	620	0.05	0.05
4040-05-12-4		R0.5	15,000	1,360	0.1	0.09	15,000	1,180	0.05	0.08	12,000	810	0.05	0.07
4040-05-12			15,000	1,360	0.1	0.09	15,000	1,180	0.05	0.08	12,000	810	0.05	0.07
4040-10-12-4		R1	15,000	1,920	0.1	0.13	15,000	1,670	0.05	0.11	12,000	1,150	0.05	0.1
4040-10-12			15,000	1,920	0.1	0.13	15,000	1,670	0.05	0.11	12,000	1,150	0.05	0.1
4050-12-15	5	R1.2	12,000	1,910	0.1	0.16	12,000	1,630	0.05	0.14	9,600	1,120	0.05	0.12
4060-03-18	6	R0.3	10,000	890	0.2	0.09	10,000	760	0.1	0.08	8,000	510	0.1	0.06
4060-05-18		R0.5	10,000	1,150	0.2	0.12	10,000	990	0.1	0.1	8,000	670	0.1	0.08
4060-10-18		R1	10,000	1,630	0.2	0.16	10,000	1,400	0.1	0.14	8,000	950	0.1	0.12
4060-15-18		R1.5	10,000	2,000	0.2	0.2	10,000	1,720	0.1	0.17	8,000	1,170	0.1	0.15
4080-03-24	8	R0.3	7,500	1,170	0.2	0.11	7,500	1,050	0.1	0.09	6,000	720	0.1	0.08
4080-05-26		R0.5	7,500	990	0.2	0.13	7,500	860	0.1	0.11	6,000	580	0.1	0.1
4080-10-26		R1	7,500	1,410	0.2	0.19	7,500	1,210	0.1	0.16	6,000	830	0.1	0.14
4080-20-24		R2	7,500	1,990	0.2	0.27	7,500	1,720	0.1	0.23	6,000	1,170	0.1	0.2
4100-03-30	10	R0.3	6,000	720	0.2	0.12	5,000	510	0.1	0.1	4,800	400	0.1	0.08
4100-05-30		R0.5	6,000	940	0.2	0.16	5,000	660	0.1	0.13	4,800	520	0.1	0.11
4100-10-30		R1	6,000	1,330	0.2	0.22	5,000	940	0.1	0.19	4,800	740	0.1	0.15
4100-20-30		R2	6,000	1,890	0.2	0.32	5,000	1,340	0.1	0.27	4,800	1,050	0.1	0.22
4120-03-36	12	R0.3	5,000	680	0.2	0.14	3,000	330	0.1	0.1	4,000	360	0.1	0.09
4120-05-36		R0.5	5,000	880	0.2	0.18	3,000	430	0.1	0.14	4,000	480	0.1	0.12
4120-10-36		R1	5,000	1,240	0.2	0.24	3,000	610	0.1	0.2	4,000	680	0.1	0.16
4120-20-36		R2	5,000	1,760	0.2	0.35	3,000	870	0.1	0.29	4,000	960	0.1	0.24


WORK MATERIAL			TITANIUM / TITANIUM ALLOYS Ti-6Al-4V				HEAT RESISTANT ALLOYS Inconel718			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-05-06	2	R0.5	21,420	840	0.04	0.03	5,140	170	0.04	0.03
4030-08-09	3	R0.8	14,280	920	0.04	0.04	3,430	190	0.04	0.04
4040-03-12	4	R0.3	10,710	510	0.04	0.03	2,570	100	0.04	0.03
4040-05-12-4		R0.5	10,710	660	0.04	0.04	2,570	130	0.04	0.04
4040-05-12			10,710	660	0.04	0.04	2,570	130	0.04	0.04
4040-10-12-4		R1	10,710	930	0.04	0.06	2,570	190	0.04	0.06
4040-10-12			10,710	930	0.04	0.06	2,570	190	0.04	0.06
4050-12-15	5	R1.2	8,570	910	0.03	0.07	2,060	180	0.03	0.07
4060-03-18	6	R0.3	7,140	420	0.07	0.04	1,740	90	0.07	0.04
4060-05-18		R0.5	7,140	550	0.07	0.05	1,740	110	0.07	0.05
4060-10-18		R1	7,140	780	0.07	0.07	1,740	160	0.07	0.07
4060-15-18		R1.5	7,140	960	0.06	0.08	1,740	190	0.06	0.08
4080-03-24	8	R0.3	5,360	400	0.06	0.04	1,580	80	0.06	0.04
4080-05-26		R0.5	5,360	480	0.06	0.06	1,580	100	0.06	0.06
4080-10-26		R1	5,360	670	0.06	0.08	1,580	130	0.06	0.08
4080-20-24		R2	5,360	960	0.05	0.12	1,580	190	0.05	0.12
4100-03-30	10	R0.3	3,570	280	0.06	0.05	1,050	50	0.06	0.05
4100-05-30		R0.5	3,570	370	0.06	0.07	1,050	70	0.06	0.07
4100-10-30		R1	3,570	520	0.06	0.1	1,050	100	0.06	0.1
4100-20-30		R2	3,570	750	0.06	0.14	1,050	140	0.06	0.14
4120-03-36	12	R0.3	2,140	240	0.07	0.05	640	40	0.07	0.05
4120-05-36		R0.5	2,140	310	0.07	0.07	640	50	0.07	0.07
4120-10-36		R1	2,140	400	0.07	0.11	640	70	0.07	0.12
4120-20-36		R2	2,140	520	0.07	0.17	640	100	0.07	0.17

Milling Conditions for CRRS


Please adjust milling parameter referring following table.

D:Outside Diameter (mm)
L :Overhang Length (mm)

Roughing Parameter



Finishing Parameter
(Flat / Inclined Surface)

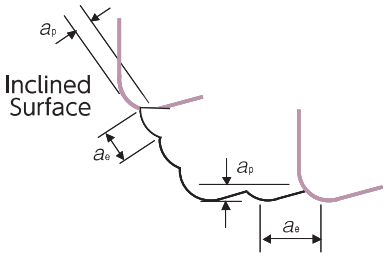

Flat

D: ϕ2.0~3.0

Overhang Length L / D	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
L/D≦6	×1	×1	×1	×1
L/D=7	×0.8	×0.8	×0.8	×0.9
L/D=8	×0.7	×0.7	×0.7	×0.9
L/D=9	×0.7	×0.7	×0.6	×0.8
L/D=10	×0.6	×0.6	×0.6	×0.7

D: ϕ4.0~6.0

Overhang Length L / D	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
L/D≦4	×1	×1	×1	×1
L/D=5	×0.9	×0.8	×0.9	×0.9
L/D=6	×0.8	×0.7	×0.8	×0.9
L/D=7	×0.7	×0.6	×0.6	×0.8
L/D=8	×0.5	×0.4	×0.6	×0.7

D: ϕ8.0~12.0


Overhang Length L / D	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
L/D≦4	×1	×1	×1	×1
L/D=5	×0.7	×0.6	×0.6	×0.8
L/D=6	×0.5	×0.4	×0.5	×0.7

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Only adjust the spindle speed to calculate milling conditions based on the overhang length in finishing process.
- Every coolant offers stable milling.
- Recommend wet coolant for Stainless Steels.

Tools After Milling by Different Work Materials CRRSϕ6 × CR0.5


Spindle Speed	Feed Rate	a_p	a_e	Overhang Length	Cycle Time	Coolant
10,000 min^{-1}	12,000 mm/min	0.14 mm	2.4 mm	24 mm	90 min	Air Blow (Nozzle)

S50C

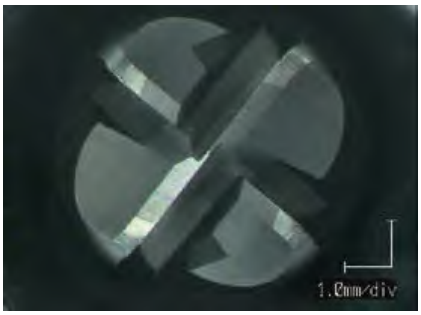


Relief Wear Width

0.070 mm

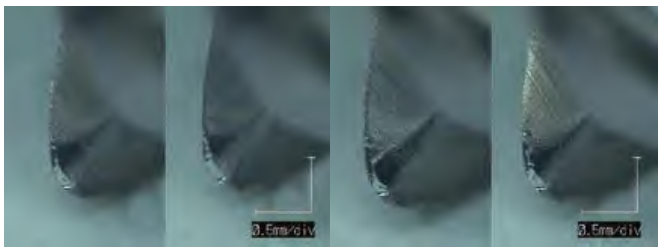


Spindle Speed	Feed Rate	a_p	a_e	Overhang Length	Cycle Time	Coolant
10,000 min^{-1}	7,200 mm/min	0.07 mm	1.98 mm	24 mm	84 min	Water Soluble

SUS304

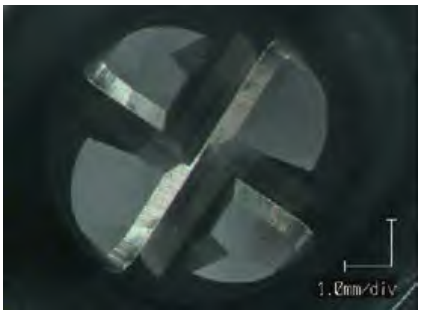


Relief Wear Width

0.032 mm

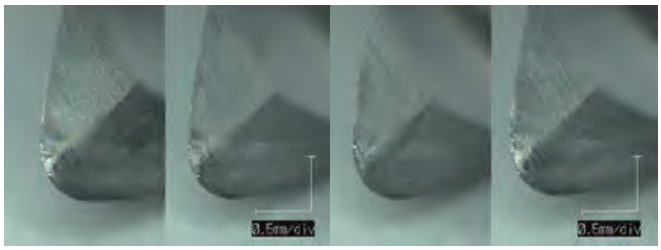


Spindle Speed	Feed Rate	a_p	a_e	Overhang Length	Cycle Time	Coolant
8,000 min^{-1}	5,250 mm/min	0.07 mm	1.75 mm	24 mm	56 min	Oil Mist

STAVAX (52HRC)

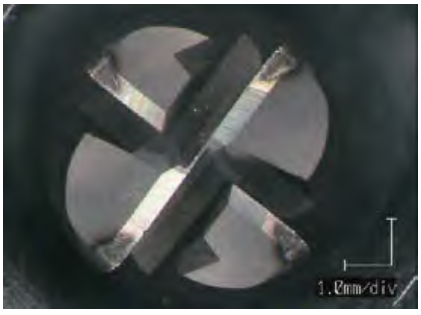

Relief Wear Width

0.087 mm

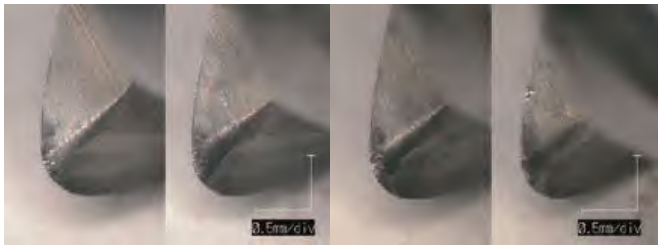

CRRS ϕ6 × CR0.3 Milling Example — Ti-6Al-4V

Spindle Speed	Feed Rate	a_p	a_e	Cycle Time	Coolant
7,150 min^{-1}	4,000 mm/min	0.05 mm	1 mm	67 min	Water Soluble (Through-spindle)

Square pocket size 100 × 25 × 4 mm

No vibration and chattering. No burrs or chattering on workpiece. No tool damage and tool wear within normal range.

End profile



Whole workpiece surface



Workpiece surface (pink close-up)



Workpiece surface (blue close-up)




Rake face (Main flute)



Rake face (Sub flute)



Peripheral relief (Main flute)



Peripheral relief (Sub flute)



CRRS ϕ6 × CR1.5 Milling Example — Inconel718

Spindle Speed	Feed Rate	a_p	a_e	Cycle Time	Coolant
1,740 min^{-1}	820 mm/min	0.06 mm	1.1 mm	63 min	Water Soluble (Through-spindle)

Square pocket size 40 × 30 × 3 mm

No vibration and chattering. No burrs or chattering on workpiece. Chipping on rake face due to wear on the bottom cutting edge. Acceptable given the 60min milling of Inconel.

End profile



Whole workpiece surface




Workpiece surface (pink close-up)



Workpiece surface (blue close-up)




Rake face (Main flute)



Rake face (Sub flute)



Peripheral relief (Main flute)



Peripheral relief (Sub flute)



DCLRS



Diamond Coated 4 Flute Long Neck Radius End Mills for Graphite Milling

φ1～φ6


MG DIA 30° R R ±0.01 Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○	★	○	○	●				○

Features

Diamond coated 4 Flute Long Neck Radius End Mills for Graphite Electrodes.
Original diamond coating offers excellent resistance to wear on Graphite milling.
Long life tool with optimized flute geometry and high adhesion diamond coating.

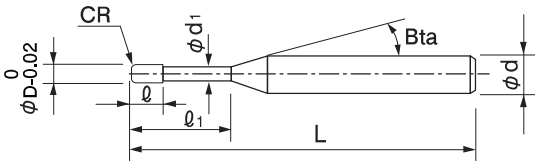

The shank taper angle shown is not an exact value.

Total 39 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DCLRS 4010-002-060	1	R0.02	6	2	0.97	16°	50	4	—
DCLRS 4010-002-100			10				50	4	—
DCLRS 4010-002-200			20				60	4	—
DCLRS 4010-005-060		R0.05	6				50	4	—
DCLRS 4010-005-100			10				50	4	—
DCLRS 4010-005-200			20				60	4	—
DCLRS 4015-002-120	1.5	R0.02	12	3	1.47	16°	55	4	—
DCLRS 4015-002-200			20				60	4	—
DCLRS 4015-002-300			30				80	4	—
DCLRS 4015-005-120		R0.05	12				55	4	—
DCLRS 4015-005-200			20				60	4	—
DCLRS 4015-005-300			30				80	4	—

Next Page ➡


Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DCLRS 4020-005-100	2	R0.05	10	4	1.98	16°	50	4	—
DCLRS 4020-005-200			20				60	4	—
DCLRS 4020-02-100		R0.2	10				50	4	—
DCLRS 4020-02-200			20				60	4	—
DCLRS 4020-02-300			30				80	4	—
DCLRS 4020-05-100		R0.5	10				50	4	—
DCLRS 4020-05-200			20				60	4	—
DCLRS 4020-05-300			30				80	4	—
DCLRS 4030-005-160	3	R0.05	16	6	2.95	16°	60	4	—
DCLRS 4030-005-200			20				60	4	—
DCLRS 4030-005-300			30				80	4	—
DCLRS 4030-02-160		R0.2	16				60	4	—
DCLRS 4030-02-200			20				60	4	—
DCLRS 4030-02-300			30				80	4	—
DCLRS 4030-05-160		R0.5	16				60	4	—
DCLRS 4030-05-200			20				60	4	—
DCLRS 4030-05-300			30				80	4	—
DCLRS 4040-02-200	4	R0.2	20	8	3.93	16°	60	6	—
DCLRS 4040-02-300			30				80	6	—
DCLRS 4040-02-400			40				80	6	—
DCLRS 4040-05-200		R0.5	20				60	6	—
DCLRS 4040-05-300			30				80	6	—
DCLRS 4040-05-400			40				80	6	—
DCLRS 4060-02-300	6	R0.2	30	12	5.93	—	100	6	—
DCLRS 4060-02-600			60				120	6	—
DCLRS 4060-05-300		R0.5	30				100	6	—
DCLRS 4060-05-600			60				120	6	—

Milling Conditions for DCLRS

WORK MATERIAL				GRAPHITE			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-002-060	**1**	R0.02	6	26,000	1,700	0.12	0.7
4010-002-100			10	22,000	1,300	0.12	0.6
4010-002-200			20	13,000	750	0.1	0.5
4010-005-060		R0.05	6	26,000	1,700	0.12	0.6
4010-005-100			10	22,000	1,300	0.12	0.5
4010-005-200			20	13,000	750	0.1	0.4
4015-002-120	**1.5**	R0.02	12	19,000	1,700	0.18	1.1
4015-002-200			20	15,000	1,300	0.14	0.9
4015-002-300			30	10,000	800	0.11	0.7
4015-005-120		R0.05	12	19,000	1,700	0.18	0.95
4015-005-200			20	15,000	1,300	0.14	0.75
4015-005-300			30	10,000	800	0.11	0.6
4020-005-100	**2**	R0.05	10	20,000	2,400	0.3	1.4
4020-005-200			20	16,000	1,800	0.25	1.35
4020-02-100		R0.2	10	20,000	2,400	0.3	1.2
4020-02-200			20	16,000	1,800	0.25	1.15
4020-02-300			30	12,000	1,300	0.2	1.1
4020-05-100		R0.5	10	20,000	2,400	0.3	0.95
4020-05-200			20	16,000	1,800	0.25	0.9
4020-05-300			30	12,000	1,300	0.2	0.85
4030-005-160	**3**	R0.05	16	16,500	3,100	0.4	2.3
4030-005-200			20	16,000	2,900	0.4	2.1
4030-005-300			30	14,000	2,300	0.4	1.9
4030-02-160		R0.2	16	16,500	3,100	0.4	2
4030-02-200			20	16,000	2,900	0.4	1.8
4030-02-300			30	14,000	2,300	0.4	1.6
4030-05-160		R0.5	16	16,500	3,100	0.4	1.7
4030-05-200			20	16,000	2,900	0.4	1.5
4030-05-300			30	14,000	2,300	0.4	1.4
4040-02-200	**4**	R0.2	20	14,000	3,400	0.5	2.7
4040-02-300			30	13,000	3,000	0.5	2.6
4040-02-400			40	12,000	2,600	0.5	2.5
4040-05-200		R0.5	20	14,000	3,400	0.5	2.3
4040-05-300			30	13,000	3,000	0.5	2.2
4040-05-400			40	12,000	2,600	0.5	2.1
4060-02-300	**6**	R0.2	30	13,000	4,300	0.75	4
4060-02-600			60	10,000	2,800	0.75	3.7
4060-05-300		R0.5	30	13,000	4,300	0.75	3.5
4060-05-600			60	10,000	2,800	0.75	3.1

Note:
・Use a milling machine dedicated for Graphite.
・Recommend air blow for Graphite.



Other series for Graphite milling

Square / Long Neck Square

(★ Highly Recommended ● Recommended ○ Suggested)

Number of Flutes, Tool Type	Model Number	Appearance	Coating	Size	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Hard Brittle (Non-Metallic) Materials	Page
2 flutes Square	DCES 2000		DIA	ϕ0.2~ϕ6	○	★	○	○	●	○	A-35
4 flutes Square	DCES 4000		DIA	ϕ3~ϕ10	○	★	○	○	●	○	A-93
2 flutes Long Neck Square	DCLS		DIA	ϕ0.4~ϕ6	○	★	○	○	●	○	B-25

Long Neck Radius

4 flutes Long Neck Radius	DCLRS		DIA	ϕ1~ϕ6	○	★	○	○	●	○	D-99

Ball / Long Neck Ball / Taper Neck Ball

2 flutes Ball	DCB		DIA	R0.5~R6	○	★	○	○	●	○	F-31
2 flutes Long Neck Ball	DCLB		DIA	R0.2~R3	○	★	○	○	●	○	G-73
2 flutes Taper Neck Ball	DCTNB		DIA	R0.5~R1	○	★	○	○	●	○	H-21

CXLRS



UTCOAT 5 Flute Long Neck Radius End Mills

φ3～φ12


Super MG | UT COAT | 42°~45° | R | R ±0.01 (φ3～φ6) | R ±0.015 (φ8～φ12) | Shank Dia 0/-0.005 | Variable Pitch | Variable Helix

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																	
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	○		●			○	○		


Features

Broad application range from Carbon Steels to Hardened Steels (55HRC).
Variable pitch, variable helix and positive rake angle design offers highly efficient side milling.
Seamless Corner Radius design reduces cutting resistance.

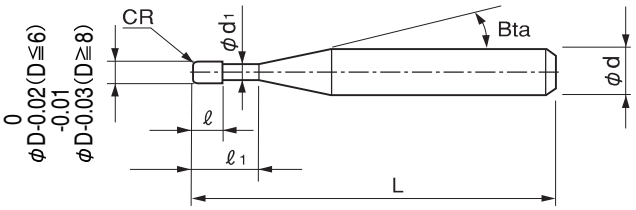

The shank taper angle shown is not an exact value.

Variable Pitch

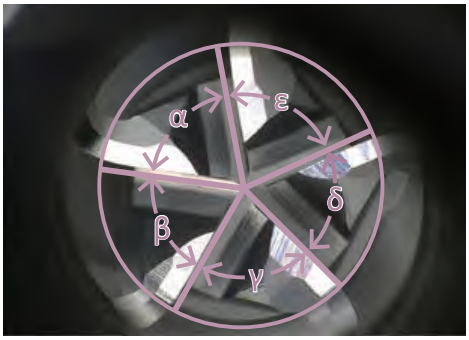

α≠β≠γ≠δ≠ε

Seamless Corner Radius



Variable Helix



$\beta_1 \neq \beta_2$

Total 30 models

Unit (mm)


Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CXLRS 5030-05-09	3	R0.5	9	6	2.95	16°	50	6	—
CXLRS 5030-05-12			12				50	6	—
CXLRS 5040-05-12	4	R0.5	12	8	3.85	16°	60	6	—
CXLRS 5040-05-16			16				60	6	—
CXLRS 5040-10-12		R1	12				60	6	—
CXLRS 5040-10-16			16				60	6	—
CXLRS 5060-05-18	6	R0.5	18	12	5.85	—	70	6	—
CXLRS 5060-05-24			24				70	6	—
CXLRS 5060-10-18		R1	18				70	6	—
CXLRS 5060-10-24			24				70	6	—
CXLRS 5080-05-24	8	R0.5	24	16	7.8	—	70	8	—
CXLRS 5080-05-32			32				70	8	—
CXLRS 5080-10-24		R1	24				70	8	—
CXLRS 5080-10-32			32				70	8	—
CXLRS 5100-05-30	10	R0.5	30	20	9.8	—	80	10	—
CXLRS 5100-05-40			40				80	10	—
CXLRS 5100-10-30		R1	30				80	10	—
CXLRS 5100-10-40			40				80	10	—
CXLRS 5100-15-30		R1.5	30				80	10	—
CXLRS 5100-15-40			40				80	10	—
CXLRS 5100-20-30		R2	30				80	10	—
CXLRS 5100-20-40			40				80	10	—
CXLRS 5120-05-36	12	R0.5	36	24	11.8	—	80	12	—
CXLRS 5120-05-48			48				100	12	—
CXLRS 5120-10-36		R1	36				80	12	—
CXLRS 5120-10-48			48				100	12	—
CXLRS 5120-15-36		R1.5	36				80	12	—
CXLRS 5120-15-48			48				100	12	—
CXLRS 5120-20-36		R2	36				80	12	—
CXLRS 5120-20-48			48				100	12	—

Milling Conditions for CXLRS

WORK MATERIAL			CARBON STEELS S45C / S50C Annealed Materials (~225HB)				ALLOY STEELS SK / SCM Annealed Materials (225~325HB)				PREHARDENED STEELS HPM / NAK (30~45HRC)				HARDENED STEELS SKD / SKT / STAVAX (45~55HRC)			
Model Number	Outside Diameter (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
5030	3	9	20,000	6,000	6	0.24	20,000	6,000	6	0.24	20,000	6,400	6	0.09	20,000	12,000	6	0.05
		12	20,000	6,000	6	0.19	20,000	6,000	6	0.19	20,000	6,400	6	0.07	20,000	12,000	6	0.04
5040	4	12	18,200	5,460	8	0.32	18,200	5,460	8	0.32	15,900	4,770	8	0.12	15,000	11,500	8	0.05
		16	18,200	5,460	8	0.26	18,200	5,460	8	0.26	15,900	4,770	8	0.1	15,000	11,500	8	0.04
5060	6	18	12,200	5,100	12	0.48	12,200	5,100	12	0.48	12,000	5,000	12	0.18	10,000	7,600	12	0.1
		24	12,200	5,100	12	0.38	12,200	5,100	12	0.38	12,000	5,000	12	0.14	10,000	7,600	12	0.08
5080	8	24	9,100	4,550	16	0.64	9,100	4,550	16	0.64	9,000	4,500	16	0.32	7,600	5,600	16	0.15
		32	9,100	4,550	16	0.51	9,100	4,550	16	0.51	9,000	4,500	16	0.26	7,600	5,600	16	0.12
5100	10	30	7,300	3,650	20	0.8	7,300	3,650	20	0.8	7,300	3,650	20	0.4	6,000	4,500	20	0.22
		40	7,300	3,650	20	0.64	7,300	3,650	20	0.64	7,300	3,650	20	0.32	6,000	4,500	20	0.176
5120	12	36	6,100	3,050	24	0.96	6,100	3,050	24	0.96	6,100	3,050	24	0.48	5,000	3,800	24	0.25
		48	6,100	3,050	24	0.77	6,100	3,050	24	0.77	6,100	3,050	24	0.38	5,000	3,800	24	0.2

Note:
- Please be sure to use water soluble coolant.
- These milling parameters are for reference only. For best result, fine parameter adjustments may be required, depending on the milling shape / application / machine and so on.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- WARNING: Because of high material removal rate, you must pay attention to cutting chips and coolant management.

Side Milling



Roughing Example : CXLRS ϕ6 × CR0.5 × EL24 RAMAX (32HRC)



Size : 500 x 500 mm
Coolant : Air Blow
Milling Method : Vortex (Trochoid)



Spindle Speed : 14,000 min^{-1}
Feed Rate : 7,000 mm/min
a_p : 12 mm
a_e : 0.5 mm

CXLRS
Roughing Video

HHRS



HARDMAX 4 Flute / 6 Flute Long Neck Radius End Mills

φ3～φ12

Super MG | HARD MAX | 30° φ3～φ5 | 45° φ6～φ12 | R | R ±0.01 φ3～φ6 | R ±0.015 φ8～φ12 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	○			○			○			○	○		

Features

Long Neck Radius design for milling on Hard Materials.
The cutting edge is designed for offering high rigidity.



Photo of the tip

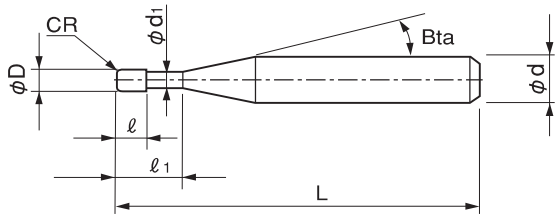

The shank taper angle shown is not an exact value.

Total 23 models

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Number of Flutes	Suggested Retail Price ¥
HHRS 4030-01-100	3	R0.1	10	3	2.95	11°	60	6	4	—
HHRS 4030-02-100		R0.2					60	6		—
HHRS 4030-05-100		R0.5					60	6		—
HHRS 4040-01-120	4	R0.1	12	4	3.95	11°	60	6	4	—
HHRS 4040-02-120		R0.2					60	6		—
HHRS 4040-05-120		R0.5					60	6		—
HHRS 4040-10-120		R1					60	6		—
HHRS 4050-02-160	5	R0.2	16	5	4.95	11°	60	6	4	—
HHRS 4050-05-160		R0.5					60	6		—
HHRS 6060-01-210	6	R0.1	21	6	5.95	—	60	6	6	—
HHRS 6060-02-210		R0.2					60	6		—
HHRS 6060-03-210		R0.3					60	6		—
HHRS 6060-05-210		R0.5					60	6		—
HHRS 6060-10-210		R1					60	6		—


Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Number of Flutes	Suggested Retail Price ¥
HHRS 6080-03-260	8	R0.3	26	8	7.81	—	80	8	6	—
HHRS 6080-05-260		R0.5					80	8		—
HHRS 6080-10-260		R1					80	8		—
HHRS 6100-03-310	10	R0.3	31	10	9.81	—	80	10	6	—
HHRS 6100-05-310		R0.5					80	10		—
HHRS 6100-10-310		R1					80	10		—
HHRS 6120-03-370	12	R0.3	37	12	11.81	—	100	12	6	—
HHRS 6120-05-370		R0.5					100	12		—
HHRS 6120-10-370		R1					100	12		—


Flat Milling Comparison between HHRS & 4 Flute Square End Mills NAK80 (40HRC)

Spindle Speed	Feed Rate	a_p	a_e	Overhang Length	Coolant
6,300 min^{-1}	2,650 mm/min	0.12 mm	1.2 mm	22 mm	Air blow (Nozzle)

Milling Shape

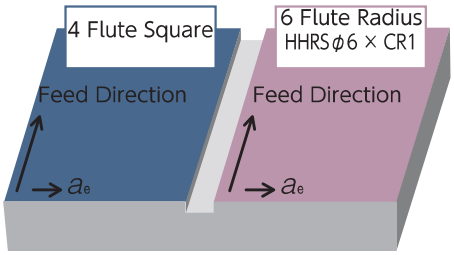


Average Roughness (Ra) Comparison

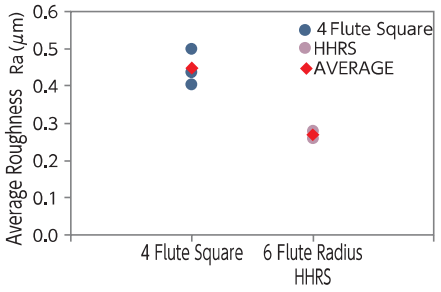

Better Flat surface roughness compared to 4 flute square type.

Maximum Roughness (Rz) Comparison

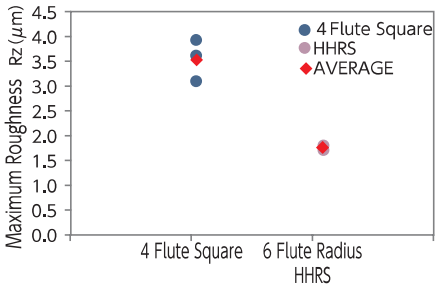

Milling Conditions for HHRS


Side Milling

WORK MATERIAL		CARBON STEELS S45C / S50C				ALLOY STEELS SK / SCM / SUS				PREHARDENED STEELS HARDENED STEELS (30~45HRC)			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
4030	**3**	12,600	1,750	3	0.12	12,600	1,750	3	0.12	12,600	1,750	3	0.12
4040	**4**	9,500	1,750	4	0.16	9,500	1,750	4	0.16	9,500	1,750	4	0.16
4050	**5**	7,600	1,750	5	0.2	7,600	1,750	5	0.2	7,600	1,750	5	0.2
6060	**6**	6,300	2,650	6	0.24	6,300	2,650	6	0.24	6,300	2,650	6	0.24
6080	**8**	4,750	2,650	8	0.32	4,750	2,650	8	0.32	4,750	2,650	8	0.32
6100	**10**	3,800	2,650	10	0.4	3,800	2,650	10	0.4	3,800	2,650	10	0.4
6120	**12**	3,150	2,650	12	0.48	3,150	2,650	12	0.48	3,150	2,650	12	0.48
Milling Amount (mm)		a_p:1D a_e:0.04D				a_p:1D a_e:0.04D				a_p:1D a_e:0.04D			

Flat Milling

WORK MATERIAL		CARBON STEELS S45C / S50C				ALLOY STEELS SK / SCM / SUS				PREHARDENED STEELS HARDENED STEELS (30~45HRC)			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
4030	**3**	12,600	1,750	0.06	0.6	12,600	1,750	0.06	0.6	12,600	1,750	0.06	0.6
4040	**4**	9,500	1,750	0.08	0.8	9,500	1,750	0.08	0.8	9,500	1,750	0.08	0.8
4050	**5**	7,600	1,750	0.1	1	7,600	1,750	0.1	1	7,600	1,750	0.1	1
6060	**6**	6,300	2,650	0.12	1.2	6,300	2,650	0.12	1.2	6,300	2,650	0.12	1.2
6080	**8**	4,750	2,650	0.16	1.6	4,750	2,650	0.16	1.6	4,750	2,650	0.16	1.6
6100	**10**	3,800	2,650	0.2	2	3,800	2,650	0.2	2	3,800	2,650	0.2	2
6120	**12**	3,150	2,650	0.24	2.4	3,150	2,650	0.24	2.4	3,150	2,650	0.24	2.4
Milling Amount (mm)		a_p:0.02D a_e:0.2D				a_p:0.02D a_e:0.2D				a_p:0.02D a_e:0.2D			

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- When milling on a side or bottom surface, set the ap amount taking into consideration the remaining corner area.
- Recommend wet coolant for Stainless Steels.



D : Outside Diameter (mm)

Milling Conditions for HHRS

WORK MATERIAL		HARDENED STEELS (45~55HRC)				HARDENED STEELS (55~65HRC)			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
4030	**3**	9,600	1,300	2.4	0.06	6,400	1,000	1.5	0.015※
4040	**4**	7,200	1,300	3.2	0.08	4,800	1,000	2	0.02※
4050	**5**	5,700	1,300	4	0.1	4,000	1,000	2.5	0.025※
6060	**6**	4,800	2,000	4.8	0.12	3,200	1,600	3	0.06
6080	**8**	3,600	2,000	6.4	0.16	2,400	1,600	4	0.08
6100	**10**	2,850	2,000	8	0.2	2,000	1,600	5	0.1
6120	**12**	2,400	2,000	9.6	0.24	1,600	1,600	6	0.12
Milling Amount (mm)		a_p:0.8D a_e:0.02D				a_p:0.5D a_e:0.01D ※a_e:0.005D			

WORK MATERIAL		HARDENED STEELS (45~55HRC)				HARDENED STEELS (55~65HRC)			
Model Number	Outside Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
4030	**3**	9,600	1,300	0.045	0.6	6,400	1,000	0.03	0.6
4040	**4**	7,200	1,300	0.06	0.8	4,800	1,000	0.04	0.8
4050	**5**	5,700	1,300	0.075	1	4,000	1,000	0.05	1
6060	**6**	4,800	2,000	0.09	1.2	3,200	1,600	0.06	1.2
6080	**8**	3,600	2,000	0.12	1.6	2,400	1,600	0.08	1.6
6100	**10**	2,850	2,000	0.15	2	2,000	1,600	0.1	2
6120	**12**	2,400	2,000	0.18	2.4	1,600	1,600	0.12	2.4
Milling Amount (mm)		a_p:0.015D a_e:0.2D				a_p:0.01D a_e:0.2D			

HGRRS




HMGCOAT 5 Flute / 6 Flute Long Neck Radius End Mills for Hard Materials

φ2～φ12


Super MG | HMG COAT | 45° | R | R ±0.003 (φ2～φ6) | R ±0.005 (φ8～φ12) | Shank Dia 0/-0.004 (φ2～φ6) | Shank Dia 0/-0.005 (φ8～φ12) | Back Taper Geometry | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	★	●	●										

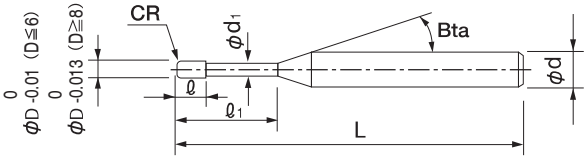


The shank taper angle shown is not an exact value.




High efficiency

Multi-flutes, variable pitch and a short length of cut are some of the features that are very suitable for flat milling.


5 Flutes
φ2～φ4



6 Flutes
φ6～φ12

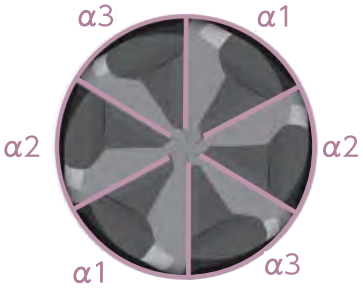

Short length of cut for high rigidity

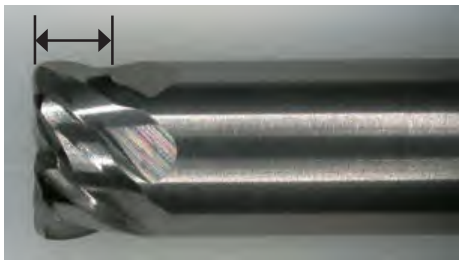

High precision

Outside Diameter	Diameter Tolerance	Radius Accuracy
φ2～6	0/-0.01	± 0.003
φ8～12	0/-0.013	± 0.005

Total 19 models

Unit (mm)


Model Number	Outside Diameter φD	Corner Radius CR	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Number of Flutes	Suggested Retail Price ¥
HGRRS 5020-05-06	2	R0.5	6	1	1.95	16°	50	4	5	—
HGRRS 5030-08-09	3	R0.8	9	1.5	2.95	16°	60	4	5	—
HGRRS 5040-05-12	4	R0.5	12	2	3.95	—	60	4	5	—
HGRRS 5040-05-12-6						16°	60	6		—
HGRRS 5040-10-12		R1				—	60	4		—
HGRRS 5040-10-12-6						16°	60	6		—
HGRRS 6060-03-18	6	R0.3	18	2.5	5.95	—	60	6	6	—
HGRRS 6060-05-18		R0.5					60	6		—
HGRRS 6060-10-18		R1					60	6		—
HGRRS 6060-15-18		R1.5					60	6		—
HGRRS 6080-05-24	8	R0.5	24	3.4	7.87	—	70	8	6	—
HGRRS 6080-10-24		R1					70	8		—
HGRRS 6080-20-24		R2					70	8		—
HGRRS 6100-05-30	10	R0.5	30	4.2	9.87	—	80	10	6	—
HGRRS 6100-10-30		R1					80	10		—
HGRRS 6100-20-30		R2					80	10		—
HGRRS 6120-05-36	12	R0.5	36	5	11.87	—	90	12	6	—
HGRRS 6120-10-36		R1					90	12		—
HGRRS 6120-20-36		R2					90	12		—

Flat surface milling example
HGRRS φ6 × CR0.5 × EL18

SKD11 (60HRC)


Stable milling and wear resistance are achievable even when using high efficiency milling conditions.

Spindle Speed	3,000 min^{-1}
Feed Rate	6,800 mm/min
a_p	0.08 mm
a_e	4.1 mm
Work Size	100 × 200 × 2.4 mm
Cycle Time	30 min



a_e 4.1mm for a tool diameter of φ6.

HGRRS | Conventional | Competitor (Lasted only 10min)

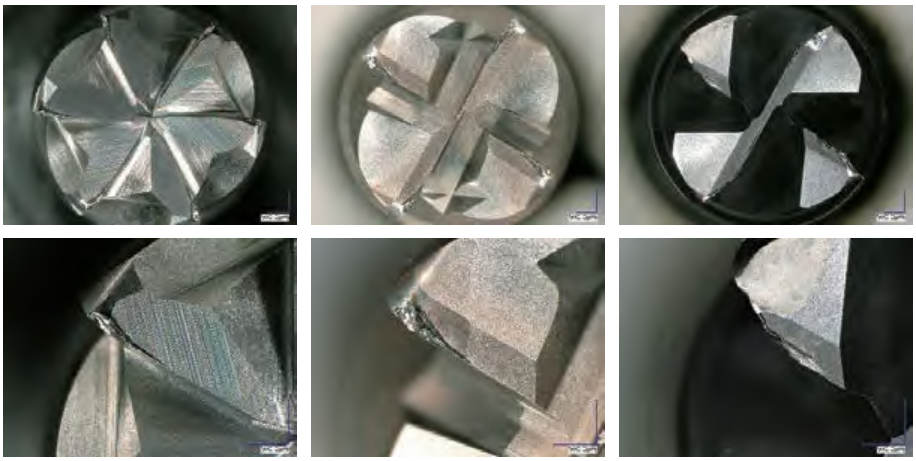

Relief wear width (mm)

HGRRS	Conventional	Competitor
0.163	0.296	Chipping

Small depth of cut with wide pitch milling
ϕ6 × CR0.5 Compared to catalogue conditions

SKD11 (60HRC)


Tool Series	Number of Flutes	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Feed per tooth (mm/t)	a_p (mm)	a_e (mm)	Material Removal Ammount (mm^3/min)
HGRRS 	6 flutes	3,000	6,800	0.378	0.08	4.1	2,230
HRRS 	4 flutes	6,000	2,070	0.086	0.11	1.08	246

High efficiency flat milling is possible due to large a_e

When feed rate cannot be increased
ϕ6 × CR0.5

SKD11 (60HRC)

	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Feed per tooth (mm/t)	a_p (mm)	a_e (mm)	Material Removal Ammount (mm^3/min)
HGRRS Catalogue conditions	3,000	6,800	0.378	0.08	4.1	2,230
Feed rate lowered (Catalogue condition for 4 flutes radius HRRS)	6,000	2,070	0.058	0.11	1.08	246

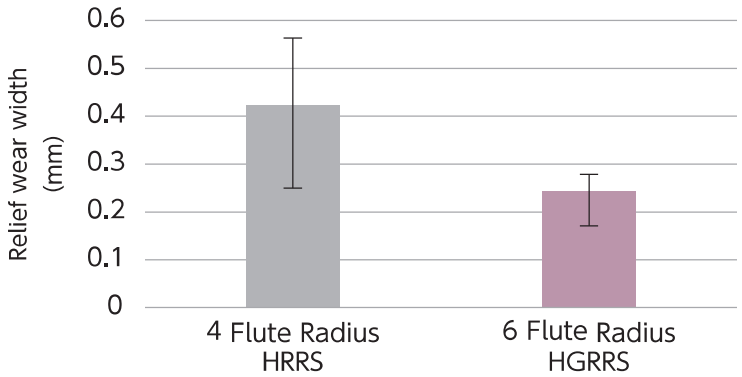


HGRRS has wear resistance even under conditions with low feed rate.

Milling Conditions for HGRRS

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
5020-05-06	**2**	R0.5	10,000	2,700	0.07	0.8	8,000	2,000	0.05	0.8	2,640	2,500	0.05	0.6	2,400	2,270	0.05	0.56
5030-08-09	**3**	R0.8	8,500	4,000	0.1	1.3	5,500	3,000	0.05	1.3	1,980	1,980	0.05	0.9	1,800	1,800	0.05	0.78
5040-05-12	**4**	R0.5	7,500	5,000	0.11	1.8	4,300	4,000	0.06	1.8	1,540	1,650	0.06	1.2	1,400	1,500	0.06	1.1
5040-05-12-6			7,500	5,000	0.11	1.8	4,300	4,000	0.06	1.8	1,540	1,650	0.06	1.2	1,400	1,500	0.06	1.1
5040-10-12		R1	7,500	5,000	0.11	1.8	4,300	4,000	0.06	1.8	1,540	1,650	0.06	1.2	1,400	1,500	0.06	1.1
5040-10-12-6			7,500	5,000	0.11	1.8	4,300	4,000	0.06	1.8	1,540	1,650	0.06	1.2	1,400	1,500	0.06	1.1
6060-03-18	**6**	R0.3	6,000	7,800	0.12	4.1	3,000	6,800	0.08	4.1	1,100	1,760	0.08	1.9	1,000	1,600	0.08	1.7
6060-05-18		R0.5	6,000	7,800	0.12	4.1	3,000	6,800	0.08	4.1	1,100	1,760	0.08	1.9	1,000	1,600	0.08	1.7
6060-10-18		R1	6,000	7,800	0.12	3.6	3,000	6,800	0.08	3.6	1,100	1,760	0.08	1.9	1,000	1,600	0.08	1.7
6060-15-18		R1.5	6,000	7,800	0.12	2.7	3,000	6,800	0.08	2.7	1,100	1,760	0.08	1.9	1,000	1,600	0.08	1.7
6080-05-24	**8**	R0.5	4,800	6,600	0.12	3.6	2,000	6,300	0.08	3.6	830	1,760	0.08	2.2	750	1,600	0.08	2
6080-10-24		R1	4,800	6,600	0.12	3.6	2,000	6,300	0.08	3.6	830	1,760	0.08	2.2	750	1,600	0.08	2
6080-20-24		R2	4,800	6,600	0.2	3.6	2,000	6,300	0.08	3.6	830	1,760	0.08	2.2	750	1,600	0.08	2
6100-05-30	**10**	R0.5	4,300	6,200	0.11	5.4	1,500	5,800	0.08	5.4	620	1,820	0.08	2.5	560	1,650	0.08	2.3
6100-10-30		R1	4,300	6,200	0.11	5.4	1,500	5,800	0.08	5.4	620	1,820	0.08	2.5	560	1,650	0.08	2.3
6100-20-30		R2	4,300	6,200	0.2	5.4	1,500	5,800	0.08	5.4	620	1,820	0.08	2.5	560	1,650	0.08	2.3
6120-05-36	**12**	R0.5	4,000	6,000	0.1	7.38	1,000	5,200	0.08	7.38	360	1,910	0.08	3.3	330	1,740	0.08	3
6120-10-36		R1	4,000	6,000	0.1	7.38	1,000	5,200	0.08	7.38	360	1,910	0.08	3.3	330	1,740	0.08	3
6120-20-36		R2	4,000	6,000	0.2	7.38	1,000	5,200	0.08	7.38	360	1,910	0.08	3.3	330	1,740	0.08	3

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.



HTNRS



HARDMAX 4 Flute Taper Neck Radius End Mills


φ1～φ6

Super MG | HARD MAX | 45° | R | R ±0.01 | Shank Dia 0/-0.005 | Back Taper Geometry | Variable Pitch


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		●	●	●	●	○		○									


Shape A

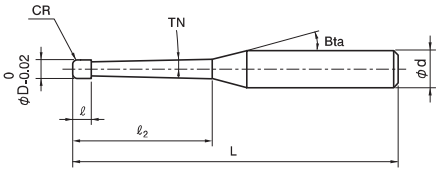

Shape B

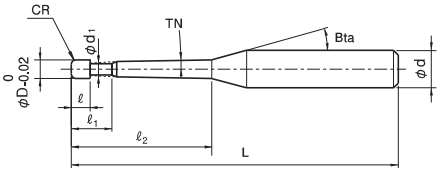

Shape C

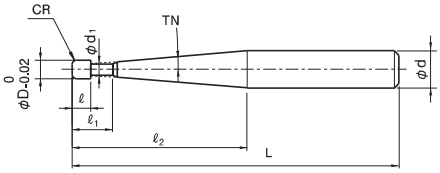

The shank taper angle shown is not an exact value.


Total 111 models

Unit (mm)


Model Number	Outside Diameter φD	Corner Radius CR	Neck Taper Angle TN	Neck Length ℓ2	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd
HTNRS 4010-020608	1	R0.2	0.4°	6	—	1	—	16°	50	4
HTNRS 4010-021008				10					50	4
HTNRS 4010-022008				20					60	4
HTNRS 4010-023008				30					70	4
HTNRS 4010-020618			0.9°	6					50	4
HTNRS 4010-021018				10					50	4
HTNRS 4010-021518				15					50	4
HTNRS 4010-022018				20					60	4
HTNRS 4010-022518				25					60	4
HTNRS 4010-023018				30					70	4
HTNRS 4010-023518				35					80	4
HTNRS 4010-024018				40					80	4
HTNRS 4010-025018				50					90	4
HTNRS 4010-020628			1.4°	6	1.8		0.94		50	4
HTNRS 4010-021028				10					50	4
HTNRS 4010-022028				20					60	4
HTNRS 4010-023028				30					70	4

Features


4 Flute Taper Neck Radius End Mills for milling hard materials.
Corner radius design from the edge to the periphery ensures less cutting resistance, and the variable pitch design minimizes chattering and vibration.
Can achieve stable milling and excellent surface finish on deep milling.
HARDMAX coating offers longer tool life when milling hard materials.
Recommended to use with any type of coolant.

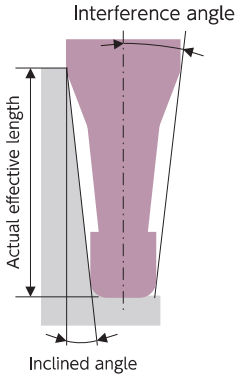

Feature ①
Seamless Corner Radius
High rigidity! Less cutting resistance!

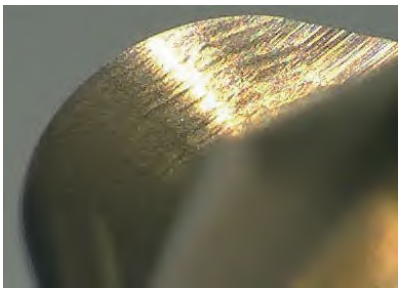

Feature ②
Variable Pitch design
Minimizing vibration and chattering !

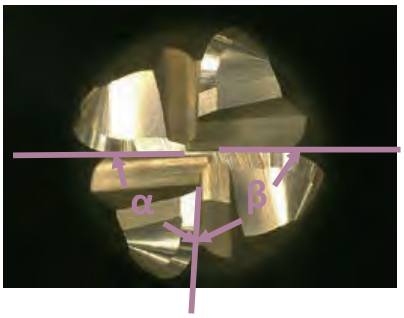

※ Variable Pitch : $\alpha \neq \beta$

Feature ③
A wide choice of Neck Taper Angles available
More efficient with 1.4° • 1.9° • 2.9° !



Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Neck Taper Angle TN	Neck Length ℓ2	Shape	Suggested Retail Price ¥	Interference Angle	Effective Length by Inclined Angles — : Interference				
								30'	1°	1°30'	2°	3°
HTNRS 4010-020608	1	R0.2	0.4°	6	A	—	7.37°	6.56	6.92	7.20	7.45	8.00
HTNRS 4010-021008				10		—	5.54°	10.61	11.12	11.50	11.89	12.77
HTNRS 4010-022008				20		—	3.42°	20.73	21.52	22.24	23.00	24.71
HTNRS 4010-023008				30		—	2.47°	30.83	31.91	32.97	34.11	No Interference
HTNRS 4010-020618			0.9°	6		—	7.49°	—	6.61	6.96	7.23	7.76
HTNRS 4010-021018				10		—	5.65°	—	10.66	11.15	11.53	12.38
HTNRS 4010-021518				15		—	4.33°	—	15.72	16.35	16.92	18.17
HTNRS 4010-022018				20		—	3.50°	—	20.77	21.56	22.30	23.95
HTNRS 4010-022518				25		—	2.94°	—	25.82	26.76	27.68	No Interference
HTNRS 4010-023018				30		—	2.54°	—	30.87	31.96	33.06	No Interference
HTNRS 4010-023518				35		—	2.23°	—	35.92	37.16	38.44	No Interference
HTNRS 4010-024018				40		—	1.99°	—	40.96	42.36	No Interference	No Interference
HTNRS 4010-025018				50		—	1.64°	—	51.02	52.74	No Interference	No Interference
HTNRS 4010-020628			1.4°	6	B	—	7.61°	—	—	6.66	7.00	7.53
HTNRS 4010-021028				10		—	5.77°	—	—	10.71	11.18	12.00
HTNRS 4010-022028				20		—	3.59°	—	—	20.81	21.59	23.20
HTNRS 4010-023028				30		—	2.61°	—	—	30.91	32.01	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Neck Taper Angle TN	Neck Length ℓ2	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd
HTNRS 40125-020618	1.25	R0.2	0.9°	6	—	1.25	—	16°	50	4
HTNRS 40125-021018				10					50	4
HTNRS 40125-021518				15					50	4
HTNRS 40125-022018				20					60	4
HTNRS 40125-023018				30					70	4
HTNRS 40125-024018				40					80	4
HTNRS 40125-025018				50					90	4
HTNRS 4015-030608	1.5	R0.3	0.4°	6	—	1.5	—	16°	50	4
HTNRS 4015-031008				10					50	4
HTNRS 4015-032008				20					60	4
HTNRS 4015-033008				30					70	4
HTNRS 4015-030618			0.9°	6					50	4
HTNRS 4015-031018				10					50	4
HTNRS 4015-031518				15					50	4
HTNRS 4015-032018				20					60	4
HTNRS 4015-032518				25					60	4
HTNRS 4015-033018				30					70	4
HTNRS 4015-034018				40					80	4
HTNRS 4015-035018				50					90	4
HTNRS 4015-030628			1.4°	6	2.7		1.43		50	4
HTNRS 4015-031028				10					50	4
HTNRS 4015-032028				20					60	4
HTNRS 4015-033028				30					70	4
HTNRS 40175-030618	1.75	R0.3	0.9°	6	—	1.75	—	16°	50	4
HTNRS 40175-031018				10					50	4
HTNRS 40175-031518				15					60	4
HTNRS 40175-032018				20					60	4
HTNRS 40175-033018				30					70	4
HTNRS 40175-034018				40					80	4
HTNRS 40175-035018				50					90	4
HTNRS 4020-052008	2	R0.5	0.4°	20	—	2	—	16°	60	4
HTNRS 4020-052608				26					60	4
HTNRS 4020-053008				30					70	4
HTNRS 4020-053608				36					80	4
HTNRS 4020-054008				40					80	4
HTNRS 4020-051018			0.9°	10					60	4
HTNRS 4020-051518				15					60	4
HTNRS 4020-052018				20					60	4
HTNRS 4020-052518				25					60	4
HTNRS 4020-053018				30					70	4
HTNRS 4020-053518				35					80	4
HTNRS 4020-054018				40					80	4
HTNRS 4020-054518				45					90	4
HTNRS 4020-055018				50					90	4
HTNRS 4020-053028			1.4°	30	3.6		1.9		70	4
HTNRS 4020-054028				40					80	4
HTNRS 4020-053038			1.9°	30					70	6
HTNRS 4020-054038				40					80	6
HTNRS 4020-053058			2.9°	30					70	6
HTNRS 4020-054258				42				—	90	6

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Neck Taper Angle TN	Neck Length ℓ2	Shape	Suggested Retail Price ¥	Interference Angle	Effective Length by Inclined Angles — : Interference				
								30'	1°	1°30'	2°	3°
HTNRS 40125-020618	1.25	R0.2	0.9°	6	A	—	7.14°	—	6.63	6.97	7.24	7.77
HTNRS 40125-021018				10		—	5.34°	—	10.68	11.16	11.55	12.40
HTNRS 40125-021518				15		—	4.05°	—	15.74	16.37	16.93	18.18
HTNRS 40125-022018				20		—	3.27°	—	20.79	21.57	22.31	23.96
HTNRS 40125-023018				30		—	2.36°	—	30.89	31.97	33.07	No Interference
HTNRS 40125-024018				40		—	1.84°	—	40.97	42.37	No Interference	No Interference
HTNRS 40125-025018				50		—	1.51°	—	51.03	52.75	No Interference	No Interference
HTNRS 4015-030608	1.5	R0.3	0.4°	6	A	—	6.69°	6.62	6.96	7.23	7.47	8.01
HTNRS 4015-031008				10		—	4.92°	10.66	11.15	11.52	11.91	12.79
HTNRS 4015-032008				20		—	2.96°	20.78	21.55	22.26	23.03	No Interference
HTNRS 4015-033008				30		—	2.12°	30.87	31.94	33.00	34.13	No Interference
HTNRS 4015-030618			0.9°	6		—	6.80°	—	6.69	7.01	7.27	7.79
HTNRS 4015-031018				10		—	5.03°	—	10.73	11.19	11.57	12.42
HTNRS 4015-031518				15		—	3.79°	—	15.79	16.39	16.95	18.20
HTNRS 4015-032018				20		—	3.04°	—	20.84	21.60	22.34	23.99
HTNRS 4015-032518				25		—	2.54°	—	25.88	26.80	27.72	No Interference
HTNRS 4015-033018				30		—	2.18°	—	30.93	32.00	33.10	No Interference
HTNRS 4015-034018				40		—	1.70°	—	41.01	42.40	No Interference	No Interference
HTNRS 4015-035018				50		—	1.39°	—	51.07	No Interference	No Interference	No Interference
HTNRS 4015-030628			1.4°	6	B	—	6.92°	—	—	6.76	7.06	7.58
HTNRS 4015-031028				10		—	5.13°	—	—	10.80	11.23	12.05
HTNRS 4015-032028				20		—	3.12°	—	—	20.89	21.65	23.25
HTNRS 4015-033028				30		—	2.24°	—	—	30.98	32.07	No Interference
HTNRS 40175-030618	1.75	R0.3	0.9°	6	A	—	6.37°	—	6.75	7.06	7.31	7.84
HTNRS 40175-031018				10		—	4.66°	—	10.79	11.23	11.61	12.46
HTNRS 40175-031518				15		—	3.49°	—	15.84	16.43	16.99	18.24
HTNRS 40175-032018				20		—	2.78°	—	20.89	21.63	22.38	No Interference
HTNRS 40175-033018				30		—	1.99°	—	30.98	32.04	No Interference	No Interference
HTNRS 40175-034018				40		—	1.54°	—	41.06	42.44	No Interference	No Interference
HTNRS 40175-035018				50		—	1.26°	—	51.11	No Interference	No Interference	No Interference
HTNRS 4020-052008	2	R0.5	0.4°	20	A	—	2.48°	20.86	21.60	22.30	23.06	No Interference
HTNRS 4020-052608				26		—	1.98°	26.92	27.83	28.75	No Interference	No Interference
HTNRS 4020-053008				30		—	1.75°	30.95	31.98	33.04	No Interference	No Interference
HTNRS 4020-053608				36		—	1.49°	37.00	38.22	No Interference	No Interference	No Interference
HTNRS 4020-054008				40		—	1.35°	41.03	42.37	No Interference	No Interference	No Interference
HTNRS 4020-051018			0.9°	10		—	4.33°	—	10.84	11.25	11.63	12.46
HTNRS 4020-051518				15		—	3.21°	—	15.88	16.45	17.01	18.25
HTNRS 4020-052018				20		—	2.54°	—	20.93	21.66	22.39	No Interference
HTNRS 4020-052518				25		—	2.11°	—	25.97	26.86	27.77	No Interference
HTNRS 4020-053018				30		—	1.80°	—	31.01	32.06	No Interference	No Interference
HTNRS 4020-053518				35		—	1.57°	—	36.05	37.26	No Interference	No Interference
HTNRS 4020-054018				40		—	1.39°	—	41.09	No Interference	No Interference	No Interference
HTNRS 4020-054518				45		—	1.25°	—	46.10	No Interference	No Interference	No Interference
HTNRS 4020-055018				50		—	1.14°	—	51.14	No Interference	No Interference	No Interference
HTNRS 4020-053028			1.4°	30	B	—	1.85°	—	—	31.07	No Interference	No Interference
HTNRS 4020-054028				40		—	1.43°	—	—	No Interference	No Interference	No Interference
HTNRS 4020-053038			1.9°	30		—	3.39°	—	—	—	31.12	33.41
HTNRS 4020-054038				40		—	2.69°	—	—	—	41.19	No Interference
HTNRS 4020-053058			2.9°	30		—	3.58°	—	—	—	—	31.23
HTNRS 4020-054258				42	C	—	2.74°	—	—	—	—	No Interference

Next Page ➡

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Neck Taper Angle TN	Neck Length ℓ2	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd
HTNRS 4030-082008	3	R0.8	0.4°	20	—	3	—	16°	60	6
HTNRS 4030-082608				26					60	6
HTNRS 4030-083008				30					70	6
HTNRS 4030-083608				36					80	6
HTNRS 4030-084008				40					80	6
HTNRS 4030-082018			0.9°	20					60	6
HTNRS 4030-082518				25					60	6
HTNRS 4030-083018				30					70	6
HTNRS 4030-083518				35					80	6
HTNRS 4030-084018				40					80	6
HTNRS 4030-085018				50					90	6
HTNRS 4030-086018				60					100	6
HTNRS 4030-083028			1.4°	30	4.5		2.89		70	6
HTNRS 4030-084028				40					80	6
HTNRS 4030-083038			1.9°	30					70	6
HTNRS 4030-084038				40					80	6
HTNRS 4030-083358			2.9°	33				—	80	6
HTNRS 4040-102508	4	R1	0.4°	25	—	4	—	16°	60	6
HTNRS 4040-103008				30					70	6
HTNRS 4040-103508				35					80	6
HTNRS 4040-104008				40					80	6
HTNRS 4040-104508				45					90	6
HTNRS 4040-105008				50					90	6
HTNRS 4040-102018			0.9°	20					60	6
HTNRS 4040-102518				25					60	6
HTNRS 4040-103018				30					70	6
HTNRS 4040-103518				35					80	6
HTNRS 4040-104018				40					80	6
HTNRS 4040-105018				50					90	6
HTNRS 4040-106018				60					100	6
HTNRS 4040-104928			1.4°	49	6		3.8	—	90	6
HTNRS 4040-106028				60				16°	100	8
HTNRS 4040-103038			1.9°	30					70	8
HTNRS 4040-106738				67				—	120	8
HTNRS 4040-104558			2.9°	45					90	8
HTNRS 4060-152018	6	R1.5	0.9°	20	—	6	—	16°	60	8
HTNRS 4060-153018				30					70	8
HTNRS 4060-154018				40					80	8
HTNRS 4060-155018				50					90	8
HTNRS 4060-156018				60					100	8
HTNRS 4060-155128			1.4°	51	9		5.8	—	90	8
HTNRS 4060-153938			1.9°	39					80	8
HTNRS 4060-156938				69					110	10
HTNRS 4060-154758			2.9°	47					90	10

Unit (mm)

Model Number	Outside Diameter φD	Corner Radius CR	Neck Taper Angle TN	Neck Length ℓ2	Shape	Suggested Retail Price ¥	Interference Angle	Effective Length by Inclined Angles —: Interference				
								30'	1°	1°30'	2°	3°
HTNRS 4030-082008	3	R0.8	0.4°	20	A	—	3.48°	20.88	21.60	22.30	23.05	24.72
HTNRS 4030-082608				26		—	2.82°	26.94	27.84	28.74	29.72	No Interference
HTNRS 4030-083008				30		—	2.51°	30.97	31.99	33.04	34.16	No Interference
HTNRS 4030-083608				36		—	2.14°	37.02	38.22	39.48	40.82	No Interference
HTNRS 4030-084008				40		—	1.96°	41.05	42.38	43.78	No Interference	No Interference
HTNRS 4030-082018			0.9°	20		—	3.56°	—	20.98	21.69	22.41	24.03
HTNRS 4030-082518				25		—	2.99°	—	26.02	26.89	27.79	No Interference
HTNRS 4030-083018				30		—	2.57°	—	31.06	32.09	33.18	No Interference
HTNRS 4030-083518				35		—	2.25°	—	36.10	37.29	38.56	No Interference
HTNRS 4030-084018				40		—	2.01°	—	41.13	42.49	43.94	No Interference
HTNRS 4030-085018				50		—	1.65°	—	51.18	52.87	No Interference	No Interference
HTNRS 4030-086018				60		—	1.40°	—	61.25	No Interference	No Interference	No Interference
HTNRS 4030-083028			1.4°	30	B	—	2.64°	—	—	31.14	32.19	No Interference
HTNRS 4030-084028				40		—	2.06°	—	—	41.21	42.61	No Interference
HTNRS 4030-083038			1.9°	30		—	2.71°	—	—	—	31.21	No Interference
HTNRS 4030-084038				40		—	2.12°	—	—	—	41.28	No Interference
HTNRS 4030-083358			2.9°	33	C	—	2.64°	—	—	—	—	No Interference
HTNRS 4040-102508	4	R1	0.4°	25	A	—	2.12°	25.49	26.28	27.13	28.04	No Interference
HTNRS 4040-103008				30		—	1.80°	30.52	31.48	32.50	No Interference	No Interference
HTNRS 4040-103508				35		—	1.57°	35.55	36.67	37.87	No Interference	No Interference
HTNRS 4040-104008				40		—	1.39°	40.58	41.87	No Interference	No Interference	No Interference
HTNRS 4040-104508				45		—	1.24°	45.61	47.06	No Interference	No Interference	No Interference
HTNRS 4040-105008				50		—	1.13°	50.63	52.24	No Interference	No Interference	No Interference
HTNRS 4040-102018			0.9°	20		—	2.64°	—	20.57	21.23	21.93	No Interference
HTNRS 4040-102518				25		—	2.18°	—	25.60	26.43	27.32	No Interference
HTNRS 4040-103018				30		—	1.85°	—	30.64	31.63	No Interference	No Interference
HTNRS 4040-103518				35		—	1.61°	—	35.67	36.83	No Interference	No Interference
HTNRS 4040-104018				40		—	1.42°	—	40.70	No Interference	No Interference	No Interference
HTNRS 4040-105018				50		—	1.16°	—	50.75	No Interference	No Interference	No Interference
HTNRS 4040-106018				60		—	0.98°	—	No Interference	No Interference	No Interference	No Interference
HTNRS 4040-104928			1.4°	49	C	—	1.21°	—	—	No Interference	No Interference	No Interference
HTNRS 4040-106028				60	B	—	1.88°	—	—	60.94	No Interference	No Interference
HTNRS 4040-103038			1.9°	30		—	3.46°	—	—	—	30.89	33.13
HTNRS 4040-106738				67	C	—	1.75°	—	—	—	No Interference	No Interference
HTNRS 4040-104558			2.9°	45		—	2.62°	—	—	—	—	No Interference
HTNRS 4060-152018	6	R1.5	0.9°	20	A	—	2.69°	—	20.63	21.28	21.97	No Interference
HTNRS 4060-153018				30		—	1.88°	—	30.70	31.68	No Interference	No Interference
HTNRS 4060-154018				40		—	1.44°	—	40.76	No Interference	No Interference	No Interference
HTNRS 4060-155018				50		—	1.17°	—	50.83	No Interference	No Interference	No Interference
HTNRS 4060-156018				60		—	0.98°	—	No Interference	No Interference	No Interference	No Interference
HTNRS 4060-155128			1.4°	51	C	—	1.18°	—	—	No Interference	No Interference	No Interference
HTNRS 4060-153938			1.9°	39		—	1.55°	—	—	—	No Interference	No Interference
HTNRS 4060-156938				69		—	1.71°	—	—	—	No Interference	No Interference
HTNRS 4060-154758			2.9°	47		—	2.53°	—	—	—	—	No Interference

Milling Conditions for HTNRS

WORK MATERIAL					PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Neck Taper Angle TN	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4010-020608				6	20,000	2,600	0.06	0.44	11,600	980	0.029	0.23	8,900	530	0.012	0.09
4010-021008			0.4°	10	19,000	2,450	0.03	0.42	11,000	920	0.015	0.21	8,500	480	0.008	0.07
4010-022008				20	17,000	2,150	0.008	0.37	9,700	800	0.005	0.18	7,600	400	0.004	0.05
4010-023008				30	12,000	1,500	0.003	0.26	7,200	570	0.002	0.12	6,000	310	0.002	0.04
4010-020618				6	20,000	2,600	0.06	0.45	11,600	980	0.029	0.24	8,900	530	0.012	0.1
4010-021018				10	19,000	2,450	0.03	0.43	11,000	920	0.015	0.22	8,500	480	0.008	0.075
4010-021518				15	18,500	2,400	0.02	0.41	10,700	880	0.01	0.21	8,200	450	0.006	0.065
4010-022018				20	18,000	2,300	0.01	0.4	10,400	850	0.006	0.2	8,000	430	0.005	0.05
4010-022518	**1**	R0.2	0.9°	25	17,000	2,150	0.008	0.38	9,900	800	0.005	0.19	7,700	410	0.004	0.05
4010-023018				30	16,000	2,000	0.007	0.35	9,400	750	0.004	0.18	7,400	390	0.004	0.05
4010-023518				35	15,000	1,850	0.006	0.32	8,800	700	0.004	0.16	7,000	370	0.003	0.05
4010-024018				40	14,000	1,750	0.005	0.3	8,300	660	0.003	0.15	6,700	350	0.003	0.05
4010-025018				50	12,000	1,500	0.003	0.28	7,200	570	0.002	0.14	6,000	310	0.002	0.05
4010-020628				6	20,000	2,600	0.06	0.46	11,600	980	0.029	0.25	8,900	530	0.012	0.11
4010-021028			1.4°	10	20,000	2,600	0.04	0.45	11,400	960	0.02	0.24	8,750	510	0.01	0.08
4010-022028				20	19,000	2,400	0.02	0.4	10,900	900	0.01	0.2	8,400	470	0.005	0.06
4010-023028				30	18,000	2,300	0.01	0.4	10,400	850	0.006	0.2	8,000	430	0.005	0.05
40125-020618				6	16,000	2,600	0.075	0.56	9,200	990	0.036	0.3	7,100	540	0.015	0.12
40125-021018				10	16,000	2,600	0.057	0.55	9,200	990	0.027	0.29	7,100	540	0.012	0.1
40125-021518				15	15,500	2,500	0.04	0.53	8,900	950	0.019	0.27	6,900	500	0.01	0.08
40125-022018	**1.25**	R0.2	0.9°	20	15,000	2,400	0.022	0.51	8,700	900	0.011	0.26	6,700	470	0.007	0.07
40125-023018				30	14,400	2,300	0.011	0.47	8,300	860	0.006	0.23	6,400	440	0.005	0.06
40125-024018				40	12,800	2,000	0.008	0.42	7,500	750	0.004	0.21	5,900	390	0.004	0.06
40125-025018				50	11,000	1,700	0.006	0.37	6,500	650	0.003	0.19	5,300	350	0.003	0.06
4015-030608				6	13,500	2,600	0.09	0.67	7,800	990	0.043	0.36	6,000	540	0.018	0.15
4015-031008			0.4°	10	13,500	2,600	0.083	0.66	7,700	980	0.04	0.35	6,000	540	0.017	0.13
4015-032008				20	12,500	2,400	0.028	0.61	7,000	880	0.015	0.31	5,500	460	0.009	0.09
4015-033008				30	12,000	2,300	0.012	0.55	6,900	860	0.007	0.27	5,350	440	0.006	0.07
4015-030618				6	13,500	2,600	0.09	0.67	7,800	990	0.043	0.36	6,000	540	0.018	0.15
4015-031018				10	13,500	2,600	0.083	0.67	7,800	990	0.04	0.36	6,000	540	0.017	0.14
4015-031518				15	13,000	2,500	0.055	0.65	7,500	950	0.029	0.34	5,800	500	0.013	0.12
4015-032018				20	12,500	2,400	0.035	0.63	7,200	900	0.018	0.32	5,600	470	0.01	0.1
4015-032518	**1.5**	R0.3	0.9°	25	12,500	2,400	0.025	0.61	7,000	880	0.013	0.31	5,500	460	0.009	0.08
4015-033018				30	12,000	2,300	0.015	0.6	6,900	860	0.008	0.3	5,350	440	0.007	0.07
4015-034018				40	12,000	2,300	0.012	0.55	6,900	860	0.007	0.27	5,350	440	0.006	0.07
4015-035018				50	10,500	2,000	0.009	0.5	6,100	740	0.005	0.25	4,850	380	0.005	0.07
4015-030628				6	13,500	2,600	0.09	0.67	7,800	990	0.043	0.36	6,000	540	0.018	0.15
4015-031028			1.4°	10	13,500	2,600	0.085	0.67	7,800	990	0.04	0.36	6,000	540	0.017	0.15
4015-032028				20	13,000	2,500	0.05	0.63	7,300	920	0.02	0.33	5,600	480	0.011	0.11
4015-033028				30	12,500	2,400	0.025	0.61	7,000	880	0.013	0.31	5,500	460	0.009	0.08


Milling Conditions for HTNRS

WORK MATERIAL					PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Neck Taper Angle TN	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
40175-030618	1.75	R0.3	0.9°	6	11,500	2,600	0.105	0.78	6,600	990	0.05	0.42	5,100	540	0.021	0.17
40175-031018				10	11,500	2,600	0.105	0.78	6,600	990	0.05	0.42	5,100	540	0.021	0.17
40175-031518				15	11,500	2,600	0.07	0.76	6,500	950	0.037	0.4	5,000	510	0.017	0.14
40175-032018				20	11,000	2,450	0.047	0.74	6,400	920	0.024	0.38	4,900	480	0.013	0.12
40175-033018				30	11,000	2,450	0.027	0.71	6,400	920	0.014	0.36	4,900	480	0.01	0.1
40175-034018				40	10,000	2,200	0.016	0.67	5,800	820	0.009	0.33	4,450	420	0.008	0.08
40175-035018				50	10,000	2,200	0.013	0.62	5,800	820	0.008	0.31	4,450	420	0.007	0.08
4020-052008	2	R0.5	0.4°	20	9,500	2,450	0.06	0.85	5,500	920	0.025	0.43	4,250	480	0.015	0.13
4020-052608				26	9,500	2,450	0.04	0.83	5,500	920	0.021	0.42	4,250	480	0.013	0.12
4020-053008				30	9,000	2,300	0.03	0.79	5,400	880	0.016	0.41	4,100	450	0.012	0.11
4020-053608				36	9,000	2,300	0.02	0.75	5,200	850	0.011	0.39	4,000	430	0.01	0.1
4020-054008				40	9,000	2,300	0.02	0.7	5,200	850	0.01	0.38	4,000	430	0.009	0.1
4020-051018			0.9°	10	10,000	2,600	0.12	0.9	5,800	990	0.057	0.49	4,450	540	0.024	0.2
4020-051518				15	10,000	2,600	0.09	0.88	5,600	950	0.044	0.47	4,350	510	0.02	0.17
4020-052018				20	9,500	2,450	0.06	0.86	5,500	920	0.03	0.45	4,250	480	0.016	0.15
4020-052518				25	9,500	2,450	0.05	0.85	5,500	920	0.025	0.43	4,250	480	0.015	0.13
4020-053018				30	9,500	2,450	0.04	0.83	5,500	920	0.021	0.42	4,250	480	0.013	0.12
4020-053518				35	9,000	2,300	0.03	0.81	5,300	880	0.016	0.41	4,100	450	0.012	0.11
4020-054018				40	9,000	2,300	0.02	0.8	5,200	850	0.012	0.4	4,000	430	0.01	0.1
4020-054518				45	9,000	2,300	0.02	0.75	5,200	850	0.011	0.39	4,000	430	0.01	0.1
4020-055018				50	9,000	2,300	0.017	0.75	5,200	850	0.01	0.38	4,000	430	0.009	0.1
4020-053028			1.4°	30	9,500	2,450	0.05	0.85	5,500	920	0.025	0.43	4,250	480	0.015	0.13
4020-054028				40	9,500	2,450	0.04	0.83	5,500	920	0.02	0.42	4,250	480	0.013	0.12
4020-053038			1.9°	30	9,500	2,450	0.06	0.85	5,500	920	0.03	0.43	4,250	480	0.017	0.14
4020-054038				40	9,500	2,450	0.05	0.85	5,500	920	0.025	0.43	4,250	480	0.015	0.13
4020-053058			2.9°	30	9,500	2,450	0.07	0.85	5,500	920	0.035	0.45	4,250	480	0.017	0.16
4020-054258				42	9,500	2,450	0.06	0.85	5,500	920	0.03	0.45	4,250	480	0.016	0.15
4030-082008	3	R0.8	0.4°	20	6,500	2,500	0.12	1.06	3,900	960	0.05	0.58	3,200	550	0.029	0.25
4030-082608				26	6,300	2,400	0.08	1.04	3,800	940	0.038	0.56	3,100	520	0.025	0.22
4030-083008				30	6,300	2,400	0.064	1.01	3,800	920	0.034	0.55	3,100	510	0.022	0.21
4030-083608				36	6,300	2,400	0.05	1	3,800	920	0.028	0.52	3,100	510	0.02	0.19
4030-084008				40	6,300	2,400	0.04	0.98	3,800	920	0.023	0.51	3,100	510	0.018	0.17
4030-082018			0.9°	20	6,700	2,600	0.13	1.07	4,000	1,000	0.065	0.6	3,300	590	0.034	0.28
4030-082518				25	6,500	2,500	0.1	1.05	3,900	960	0.05	0.58	3,200	550	0.029	0.25
4030-083018				30	6,300	2,400	0.072	1.03	3,800	920	0.038	0.56	3,100	510	0.024	0.22
4030-083518				35	6,300	2,400	0.064	1.01	3,800	920	0.034	0.55	3,100	510	0.022	0.21
4030-084018				40	6,300	2,400	0.056	1	3,800	920	0.03	0.54	3,100	510	0.021	0.2
4030-085018				50	6,300	2,400	0.04	0.98	3,800	920	0.023	0.51	3,100	510	0.018	0.17
4030-086018				60	6,000	2,300	0.024	0.96	3,600	870	0.015	0.49	2,900	470	0.015	0.15
4030-083028			1.4°	30	6,500	2,500	0.09	1.03	3,900	960	0.045	0.57	3,200	550	0.03	0.24
4030-084028				40	6,300	2,400	0.06	1.01	3,800	920	0.035	0.55	3,100	510	0.02	0.21
4030-083038			1.9°	30	6,500	2,500	0.1	1.05	3,900	960	0.05	0.58	3,200	550	0.03	0.25
4030-084038				40	6,300	2,400	0.07	1.03	3,800	920	0.04	0.56	3,100	510	0.025	0.22
4030-083358			2.9°	33	6,700	2,500	0.12	1.07	3,900	1,000	0.06	0.6	3,200	590	0.03	0.28

Milling Conditions for HTNRS

WORK MATERIAL					PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Outside Diameter (mm)	Corner Radius (mm)	Neck Taper Angle TN	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4040-102508	4	R1	0.4°	25	5,000	2,600	0.17	1.42	3,000	1,000	0.085	0.8	2,450	600	0.045	0.38
4040-103008				30	5,000	2,600	0.13	1.39	2,900	960	0.065	0.77	2,400	540	0.038	0.34
4040-103508				35	4,800	2,450	0.09	1.37	2,900	920	0.048	0.75	2,350	480	0.032	0.3
4040-104008				40	4,800	2,450	0.08	1.35	2,900	920	0.043	0.74	2,350	480	0.03	0.28
4040-104508				45	4,800	2,450	0.07	1.33	2,900	920	0.038	0.72	2,350	480	0.028	0.26
4040-105008				50	4,800	2,450	0.06	1.32	2,900	920	0.034	0.7	2,350	480	0.026	0.25
4040-102018			0.9°	20	5,000	2,600	0.19	1.44	3,000	1,000	0.095	0.82	2,450	600	0.048	0.4
4040-102518				25	5,000	2,600	0.17	1.42	3,000	1,000	0.085	0.8	2,450	600	0.045	0.38
4040-103018				30	5,000	2,600	0.15	1.41	3,000	1,000	0.076	0.79	2,450	600	0.042	0.36
4040-103518				35	4,800	2,450	0.12	1.39	2,900	960	0.062	0.77	2,400	540	0.037	0.33
4040-104018				40	4,800	2,450	0.09	1.37	2,900	920	0.048	0.75	2,350	480	0.032	0.3
4040-105018				50	4,800	2,450	0.08	1.35	2,900	920	0.043	0.72	2,350	480	0.029	0.27
4040-106018				60	4,800	2,450	0.06	1.32	2,900	920	0.034	0.7	2,350	480	0.026	0.25
4040-104928			1.4°	49	4,800	2,500	0.1	1.37	2,900	960	0.05	0.74	2,350	540	0.035	0.28
4040-106028				60	4,800	2,500	0.08	1.35	2,900	960	0.04	0.72	2,350	540	0.03	0.27
4040-103038			1.9°	30	5,000	2,600	0.15	1.42	3,000	1,000	0.08	0.8	2,450	600	0.045	0.38
4040-106738				67	4,800	2,500	0.12	1.4	2,900	960	0.05	0.78	2,350	540	0.03	0.35
4040-104558			2.9°	45	5,000	2,600	0.15	1.41	3,000	1,000	0.08	0.79	2,450	600	0.045	0.36
4060-152018	6	R1.5	0.9°	20	3,350	2,600	0.28	2.16	2,000	1,000	0.14	1.24	1,650	600	0.072	0.6
4060-153018				30	3,350	2,600	0.28	2.16	2,000	1,000	0.14	1.24	1,650	600	0.072	0.6
4060-154018				40	3,350	2,600	0.26	2.14	2,000	1,000	0.131	1.21	1,650	600	0.068	0.57
4060-155018				50	3,350	2,600	0.2	2.1	2,000	1,000	0.103	1.17	1,650	600	0.058	0.51
4060-156018				60	3,150	2,400	0.14	2.06	1,900	920	0.075	1.12	1,550	510	0.048	0.45
4060-155128			1.4°	51	3,350	2,600	0.2	2.1	2,000	1,000	0.1	1.17	1,650	600	0.058	0.51
4060-153938			1.9°	39	3,350	2,600	0.26	2.14	2,000	1,000	0.13	1.21	1,650	600	0.068	0.57
4060-156938				69	3,150	2,400	0.14	2.06	1,900	920	0.075	1.12	1,550	510	0.048	0.45
4060-154758			2.9°	47	3,350	2,600	0.26	2.14	2,000	1,000	0.13	1.21	1,650	600	0.068	0.57


Side Milling



Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Every coolant offers stable milling.

Milling Example of Taper Slotting
HTNRS φ2 × CR0.5 × Neck Length 20 • 30 • 40

SKD61 (45HRC)



- Work Size : 50 × 50 × 60 mm
- Inclined Angle : 1°
- Slot Length : 27 mm (L Shape Slot)
  21 mm (Straight Slot)
- Slot Width : 2.6 mm (Bottom)
- Slot Depth : 20, 30, 40 mm
- Coolant : Water Soluble

① Performance compared with straight neck type…Depth 20 mm L shape slotting


Milling Process	Tool	Neck Shape Helix Angle	Tool Size (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	Cycle Time
Roughing	HTNRS 4020-052018	Taper Neck 0.9° 45° Helix Angle	φ2 × CR0.5 × Neck Length 20	9,500	2,450	0.064	20 min 18 sec
Roughing	HLRS 4020-05-200	Straight Neck 30° Helix Angle	φ2 × CR0.5 × Effective Length 20	7,000	800	0.025	1 h 30 min 9 sec


Taper neck is 7 times more efficient in 20 mm depth slotting !

② Depth 40 mm L shape slotting

Milling Process	Tool	Neck Shape Helix Angle	Tool Size (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	Cycle Time
Roughing	HTNRS 4020-052018	Taper Neck 0.9° 45° Helix Angle	φ2 × CR0.5 × Neck Length 20 mm	9,500	2,450	0.064	27 min 8 sec
Roughing	HTNRS 4020-053018		φ2 × CR0.5 × Neck Length 30 mm	9,500	2,450	0.047	15 min 32 sec
Roughing	HTNRS 4020-054018		φ2 × CR0.5 × Neck Length 40 mm	9,000	2,300	0.02	40 min 26 sec
Finishing				4,500	500	0.0001 (Cusp Height)	4 h 28 min 50 sec

Slotting image of depth 40 mm

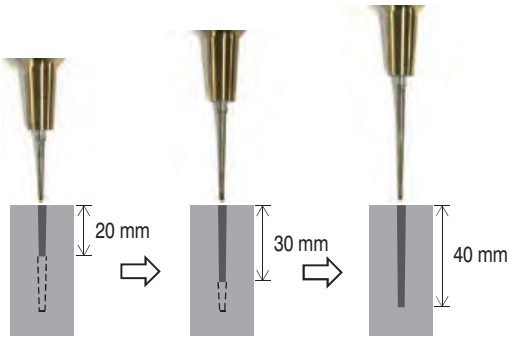

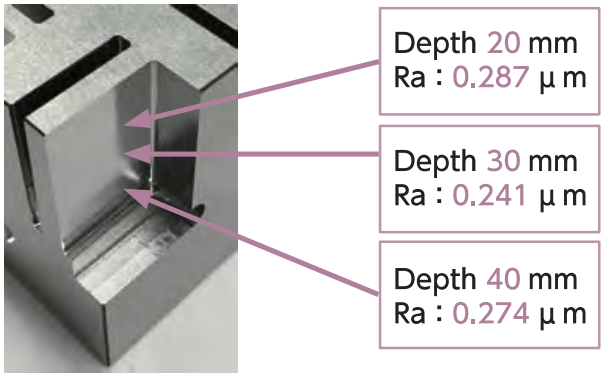

40 mm slot depth roughing process completed in 1h 23 min ! Excellent surface finishing !

HGB



HMGCOAT 2 Flute Ball End Mills for Hard Materials

R0.05～R3


Super MG | HMG COAT | 30° | R ±0.002 (R0.05～R0.075) | R ±0.003 (R0.1～R2) | R ±0.005 (R2.5～R3) | Shank Dia 0/-0.004

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	★	★										

Features

Newly developed "HMGCOAT", carbide grade and tool shape offer higher wear/chipping resistance as compared to conventional tools.
Achieves longer tool life and highly precise milling on hard materials.

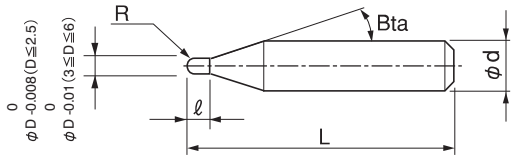

The shank taper angle shown is not an exact value.





High Precision Diameter Tolerance / Radius Accuracy / Shank Diameter Tolerance

Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy	Shank Diameter Tolerance
R0.05 ～ R0.075	0/-0.008	±0.002	0/-0.004 (h4)
R0.1 ～ R1.25		±0.003	
R1.5 ～ R2	0/-0.01		
R2.5 ～ R3		±0.005	

Shank diameter tolerance h4!

Ball series for Steels

(★ Highly Recommended ● Recommended ○ Suggested)

Number of Flutes	Model Number		Features	Ball tip design		Copper	Carbon Steels	Pre hardened Steels	HARDENED STEELS ～50 HRC	～55 HRC	～60 HRC	～65 HRC	～70 HRC	Alloy Steels	Aluminum Alloys	Plastics	Titanium/ Heat Resistant Alloys	Page
2 Flutes	HGB		Best suited for Hard Materials	Super Negative				○	●	●	●	★	★					F-1
	HWB HWB-S		For Hard Materials	Negative		○	○	●	★	★	★	●	●	○			○	F-3
	HBL		Long Shank	Positive		●	○	●	●	●	○			○			○	F-15
	CWB		Multi-purpose Excellent surface quality	Neutral		●	★	★	●					★	●		○	F-17
3 Flutes	CFB		Multi-purpose Excellent surface quality	Positive		●	●	●	●	●				●	●	○	●	F-33
4 Flutes	HFB HFB-S		For Hard Materials	Negative					●	●	●	●	●					F-43 F-44


Total 20 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
HGB 2001-0010	R0.05	0.1	16°	50	4	—
HGB 20015-0015	R0.075	0.15	16°	50	4	—
HGB 2002-0030	R0.1	0.3	16°	50	4	—
HGB 2003-0030	R0.15	0.3	16°	50	4	—
HGB 2003-0045		0.45		50	4	—
HGB 2004-0040	R0.2	0.4	16°	50	4	—
HGB 2004-0060		0.6		50	4	—
HGB 2005-0050	R0.25	0.5	16°	50	4	—
HGB 2005-0075		0.75		50	4	—
HGB 2006-0060	R0.3	0.6	16°	50	4	—
HGB 2006-0090		0.9		50	4	—
HGB 2008-0120	R0.4	1.2	16°	50	4	—
HGB 2010-0150	R0.5	1.5	16°	50	4	—
HGB 2015-0225	R0.75	2.25	16°	50	4	—
HGB 2020-0300	R1	3	16°	50	4	—
HGB 2025-0375	R1.25	3.75	16°	50	4	—
HGB 2030-0450	R1.5	4.5	16°	50	6	—
HGB 2040-0600	R2	6	16°	50	6	—
HGB 2050-0750	R2.5	7.5	16°	50	6	—
HGB 2060-0900	R3	9	—	50	6	—

Milling Conditions for HGB

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-0010	R0.05	0.1	48,000	200	0.005	0.01	48,000	200	0.005	0.01	48,000	150	0.003	0.006	40,000	120	0.002	0.004
20015-0015	R0.075	0.15	48,000	230	0.007	0.014	48,000	230	0.007	0.014	48,000	170	0.005	0.01	40,000	135	0.003	0.006
2002-0030	R0.1	0.3	44,000	250	0.01	0.03	42,000	250	0.01	0.03	40,000	200	0.008	0.024	36,000	150	0.006	0.018
2003-0030	R0.15	0.3	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2003-0045		0.45	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2004-0040	R0.2	0.4	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-0060		0.6	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2005-0050	R0.25	0.5	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2005-0075		0.75	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2006-0060	R0.3	0.6	40,000	1,400	0.045	0.15	36,000	1,200	0.025	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2006-0090		0.9	40,000	1,400	0.045	0.15	36,000	1,200	0.025	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2008-0120	R0.4	1.2	35,000	1,600	0.06	0.21	30,000	1,600	0.04	0.17	26,000	1,350	0.04	0.15	20,000	700	0.02	0.12
2010-0150	R0.5	1.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2015-0225	R0.75	2.25	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2020-0300	R1	3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	14,700	2,160	0.1	0.35	11,040	1,080	0.08	0.35
2025-0375	R1.25	3.75	24,500	2,950	0.35	0.85	12,250	2,150	0.17	0.6	12,840	2,220	0.12	0.45	9,660	1,110	0.1	0.45
2030-0450	R1.5	4.5	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	11,040	2,280	0.15	0.55	8,280	1,140	0.12	0.55
2040-0600	R2	6	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	9,480	2,400	0.18	0.75	7,080	1,200	0.15	0.75
2050-0750	R2.5	7.5	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	8,160	2,520	0.2	0.85	6,120	1,260	0.15	0.85
2060-0900	R3	9	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	6,840	2,640	0.25	1	5,000	1,500	0.2	1



Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- Every coolant offers stable milling.

HWB/HWB-S NEW



Released July 2025

HMWCOAT 2 Flute Ball End Mills / Short Shank Ball End Mills

R0.03～R6

Super MG HMW COAT

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	★	★	★	●	●	○			○			○	○		


◆ Upgrade

Wear resistance and tool accuracy have been improved with HWB/HWB-S and CWB series.

	CSEB				HSB			HGB
Copper	Raw Materials	～30 HRC	～40 HRC	～50 HRC	～55 HRC	～60 HRC	～65 HRC	～70 HRC

	CWB				HWB			HGB
Copper	Raw Materials	～30 HRC	～40 HRC	～50 HRC	～55 HRC	～60 HRC	～65 HRC	～70 HRC





The shank taper angle and shank length shown are not exact values.

◆ Variable rake angle design


With the same tool shape as our long-selling HSB / HSB-S, the transition from HSB / HSB-S is made easy.

Tip point

Negative rake angle design prevents fracture and chipping.

Peripheral cutting edge

Slightly negative rake angle design reduces cutting resistance and prevents chattering.

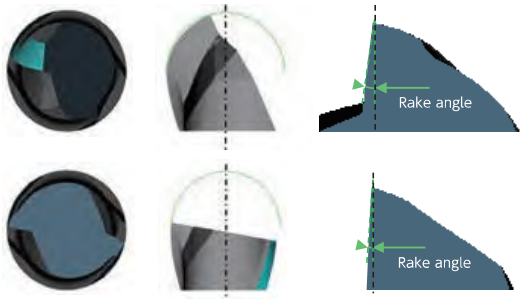

◆ High Precision

Even higher accuracy than before!

Conventional HSB

Radius of Ball Nose	Ball Radius Accuracy	Diameter Tolerance	Shank Diameter Tolerance
R0.03 ～ R0.05	± 0.002	0/-0.01	0/-0.005
R0.1 ～ R3	± 0.005	0/-0.015	
R4 ～ R6	± 0.007	0/-0.02	


HWB

Unit (mm)

Radius of Ball Nose	Ball Radius Accuracy	Diameter Tolerance	Shank Diameter Tolerance	Helix Angle
R0.03 ～ R0.05	± 0.002	0/-0.006	0/-0.004 (h4)	0°
R0.1 ～ R1	± 0.003			30°
R1.5 ～ R3		0/-0.009		
R4 ～ R6	± 0.007	0/-0.01	0/-0.005(h5)	

Roughing – Tool wear comparison
HWB R6 × L22


SKD11 (60HRC)



Work Size
200 × 100 × 3.4 mm

Coolant : Air Blow
(Through Spindle)
Overhang Length : 40 mm

Spindle Speed	3,600 (min^{-1})
Feed Rate	1,400 (mm/min)
Axial Depth	0.42 (mm)
Radial Depth	2.1 (mm)
Cycle Time	60 min

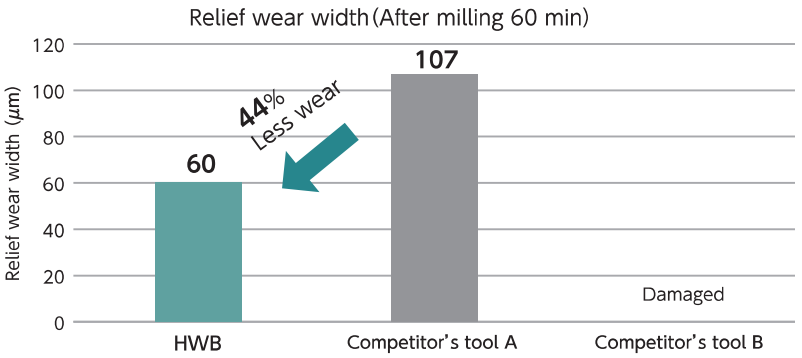



HWB Competitor's tool A Competitor's tool B

Less tool wear compared with competitor's tool for hard materials

Curved surface milling
HWB R1.5 X L4.5

STAVAX (52HRC)





Smooth surface

Work Size
46 × 26 mm

Coolant : Oil Mist

Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Cycle Time
Roughing	HWB R3 X L6	13,000	2,500	0.15	0.8	8 min 25 sec
Semi-finishing		13,000	2,000	0.11	0.25	2 min 44 sec
Semi-finishing	HWB R1.5 X L4.5	30,000	1,500	0.055	0.025	55 min 56 sec
Finishing		30,000	800	0.02	0.01	3 h 35 min 56 sec

Total 56 models

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Shank Length H	Suggested Retail Price ¥
HWB 20006-0006		**R0.03**	0.06	11°	50	4	35.7	—
HWB 20008-0008		**R0.04**	0.08	11°	50	4	35.7	—
HWB 2001-0010		**R0.05**	0.1	11°	50	4	35.8	—
HWB 2002-0020S	○	**R0.1**	0.2	16°	35	4	27.3	—
HWB 2002-0020			0.2		50	4	42.3	—
HWB 2002-0030			0.3		50	4	42.2	—
HWB 2003-0030S	○	**R0.15**	0.3	16°	35	4	27.5	—
HWB 2003-0030			0.3		50	4	42.5	—
HWB 2003-0045			0.45		50	4	42.3	—
HWB 2004-0040S	○	**R0.2**	0.4	16°	35	4	27.6	—
HWB 2004-0040			0.4		50	4	42.6	—
HWB 2004-0060			0.6		50	4	42.4	—
HWB 2005-0050		**R0.25**	0.5	16°	50	4	42.7	—
HWB 2005-0075			0.75		50	4	42.4	—
HWB 2006-0060S	○	**R0.3**	0.6	16°	35	4	27.5	—
HWB 2006-0060			0.6		50	4	42.5	—
HWB 2006-0090			0.9		50	4	42.2	—
HWB 2008-0080		**R0.4**	0.8	16°	50	4	42.7	—
HWB 2008-0120			1.2		50	4	42.3	—
HWB 2010-0100S	○	**R0.5**	1	16°	35	4	27.8	—
HWB 2010-0100			1		50	4	42.8	—
HWB 2010-0150			1.5		50	4	42.3	—
HWB 2010-0250			2.5		50	4	41.3	—
HWB 2012-0180		**R0.6**	1.8	16°	50	4	42.0	—
HWB 2015-0150S	○	**R0.75**	1.5	16°	35	4	27.7	—
HWB 2015-0150			1.5		50	4	42.7	—
HWB 2015-0200			2		50	4	42.2	—
HWB 2015-0225			2.25		50	4	42.0	—
HWB 2015-0400			4		50	4	40.2	—
HWB 2020-0200S	○	**R1**	2	16°	35	4	27.2	—
HWB 2020-0200			2		50	4	42.2	—
HWB 2020-0300			3		50	4	41.2	—
HWB 2020-0600			6		60	4	48.2	—
HWB 2030-0300		**R1.5**	3	16°	50	6	39.0	—
HWB 2030-0450			4.5		70	6	57.5	—
HWB 2030-0800			8		70	6	54.0	—

Next Page ➡

Model Number	Short Shank	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
HWB 2040-0400		**R2**	4	16°	50	6	37.2	—
HWB 2040-0600-4			6	—	70	4	58.3	—
HWB 2040-0600			6	16°	70	6	55.2	—
HWB 2040-0800			8		70	6	53.2	—
HWB 2050-0500		**R2.5**	5	16°	50	6	36.7	—
HWB 2050-0750			7.5		80	6	64.2	—
HWB 2050-0800			8		80	6	63.7	—
HWB 2050-1200			12		80	6	59.7	—
HWB 2060-0600		**R3**	6	—	50	6	35.6	—
HWB 2060-0900			9		80	6	62.6	—
HWB 2060-1200			12		80	6	59.6	—
HWB 2080-0800		**R4**	8	—	60	8	40.6	—
HWB 2080-1200			12		90	8	66.6	—
HWB 2080-1400			14		90	8	64.6	—
HWB 2100-1000		**R5**	10	—	70	10	46.6	—
HWB 2100-1500			15		100	10	71.6	—
HWB 2100-1800			18		100	10	68.6	—
HWB 2120-1200		**R6**	12	—	75	12	48.2	—
HWB 2120-1800			18		110	12	77.2	—
HWB 2120-2200			22		110	12	73.2	—


Milling Conditions for HWB / HWB-S

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
20006	**R0.03**	0.06	30,000	100	0.002 or below	0.02	—	—	—	—	—	—	—	—	—	—	—	—
20008	**R0.04**	0.08	30,000	130	0.003 or below	0.03	—	—	—	—	—	—	—	—	—	—	—	—
2001	**R0.05**	0.1	30,000	200	0.004 or below	0.04	—	—	—	—	—	—	—	—	—	—	—	—
2002	**R0.1**	0.2	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
		0.3	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
2003	**R0.15**	0.3	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		0.45	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2004	**R0.2**	0.4	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		0.6	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2005	**R0.25**	0.5	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		0.75	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2006	**R0.3**	0.6	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
		0.9	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
2008	**R0.4**	0.8	35,000	1,600	0.06	0.21	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
		1.2	35,000	1,600	0.06	0.21	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
2010	**R0.5**	1	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
		1.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
		2.5	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2012	**R0.6**	1.8	30,000	2,000	0.22	0.46	20,500	2,000	0.11	0.34	17,800	1,750	0.05	0.23	13,350	875	0.05	0.23
2015	**R0.75**	1.5	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
		2	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
		2.25	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
		4	30,000	2,450	0.15	0.45	17,000	2,000	0.07	0.31	15,000	1,750	0.04	0.24	11,250	875	0.04	0.24
2020	**R1**	2	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
		3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
		6	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
2030	**R1.5**	3	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
		4.5	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
		8	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
2040	**R2**	4	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
		6	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
		8	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
2050	**R2.5**	5	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	6,800	2,100	0.15	0.85	5,100	1,050	0.15	0.85
		7.5	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	6,800	2,100	0.15	0.85	5,100	1,050	0.15	0.85
		8	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	6,800	2,100	0.15	0.85	5,100	1,050	0.15	0.85
		12	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	6,800	2,100	0.15	0.85	5,100	1,050	0.15	0.85

Milling Conditions for HWB / HWB-S

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2060	**R3**	6	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		9	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		12	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
2080	**R4**	8	9,500	3,000	0.7	2.1	5,200	2,200	0.4	1.7	4,500	1,900	0.25	1.35	3,400	950	0.25	1.35
		12	9,500	3,000	0.7	2.1	5,200	2,200	0.4	1.7	4,500	1,900	0.25	1.35	3,400	950	0.25	1.35
		14	9,500	3,000	0.7	2.1	5,200	2,200	0.4	1.7	4,500	1,900	0.25	1.35	3,400	950	0.25	1.35
2100	**R5**	10	7,500	2,500	0.8	2.5	4,300	2,000	0.5	2.1	3,750	1,750	0.3	1.7	2,800	875	0.3	1.7
		15	7,500	2,500	0.8	2.5	4,300	2,000	0.5	2.1	3,750	1,750	0.3	1.7	2,800	875	0.3	1.7
		18	7,500	2,500	0.8	2.5	4,300	2,000	0.5	2.1	3,750	1,750	0.3	1.7	2,800	875	0.3	1.7
2120	**R6**	12	6,200	2,000	0.9	3	3,600	1,750	0.6	2.6	3,150	1,500	0.35	2	2,350	750	0.35	2
		18	6,200	2,000	0.9	3	3,600	1,750	0.6	2.6	3,150	1,500	0.35	2	2,350	750	0.35	2
		22	6,200	2,000	0.9	3	3,600	1,750	0.6	2.6	3,150	1,500	0.35	2	2,350	750	0.35	2

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.



HSB

HARDMAX 2 Flute Ball End Mills



From April 2026, and once stocks have been depleted, these series will only be manufactured on demand.

R0.03～R6


Super MG | HARD MAX | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	●	○		○			○			○	○		

Features

Offers high efficiency, long tool life and excellent surface finish on hard materials over 40HRC.
HARDMAX coat offers heat resistance, durability and lubricity at a high level.
Every coolant offers stable milling.
Ball tip point is designed with a negative rake angle that minimizes wear and improves the target dimensions.
The low negative rake angle at the peripheral side of the ball offers an excellent surface finish and prevents deflection.

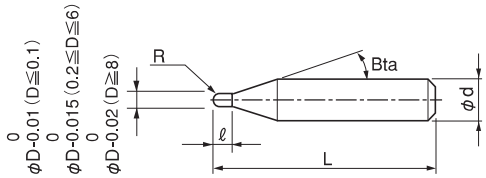


The shank taper angle shown is not an exact value.

Radius of Ball Nose	Diameter Tolerance	Radius Accuracy	Helix Angle	Number of Flutes
R0.03 ～ R0.05	0/-0.01	±0.002	0°	2 Flutes *
R0.1 ～ R3	0/-0.015	±0.005	30°	
R4 ～ R6	0/-0.02	±0.007		

* Only HSB 1001-0020-6 has single flute.
R accuracy: ±0.005, Diameter tolerance: 0/-0.015

ATTENTION

HSB 1001-0020-6 (R0.05) is a taper ball end mill with half included angle 10° (See the right drawing).



Total 71 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HSB 20006-0006	R0.03	0.06	11°	50	4	—
HSB 20008-0008	R0.04	0.08	11°	50	4	—
HSB 1001-0020-6	R0.05	0.2	11°	50	6	—
HSB 2001-0010	R0.05	0.1	11°	50	4	—
HSB 2002-0020-6	R0.1	0.2	16°	50	6	—
HSB 2002-0030		0.3		50	4	—
HSB 2003-0030	R0.15	0.3	16°	50	4	—
HSB 2003-0030-6		0.3		50	6	—
HSB 2003-0045		0.45		50	4	—
HSB 2004-0040	R0.2	0.4	16°	50	4	—
HSB 2004-0040-6		0.4		50	6	—
HSB 2004-0060		0.6		50	4	—
HSB 2005-0050	R0.25	0.5	16°	50	4	—
HSB 2005-0050-6		0.5		50	6	—
HSB 2005-0075		0.75		50	4	—

Next Page ➡

Unit (mm)


Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
HSB 2006-0060	R0.3	0.6	16°	50	4	—
HSB 2006-0060-6		0.6		50	6	—
HSB 2006-0090		0.9		50	4	—
HSB 2007-0100	R0.35	1	16°	50	4	—
HSB 2008-0080	R0.4	0.8	16°	50	4	—
HSB 2008-0080-6		0.8		50	6	—
HSB 2008-0120		1.2		50	4	—
HSB 2009-0130	R0.45	1.3	16°	50	4	—
HSB 2010-0100	R0.5	1	16°	50	4	—
HSB 2010-0100-6		1		50	6	—
HSB 2010-0150		1.5		50	4	—
HSB 2010-0250		2.5		50	4	—
HSB 2011-0160	R0.55	1.6	16°	50	4	—
HSB 2012-0180	R0.6	1.8	16°	50	4	—
HSB 2013-0190	R0.65	1.9	16°	50	4	—
HSB 2014-0210	R0.7	2.1	16°	50	4	—
HSB 2015-0150	R0.75	1.5	16°	50	4	—
HSB 2015-0150-6		1.5		50	6	—
HSB 2015-0200		2		50	4	—
HSB 2015-0225		2.25		50	4	—
HSB 2015-0400		4		50	4	—
HSB 2016-0240	R0.8	2.4	16°	50	4	—
HSB 2017-0250	R0.85	2.5	16°	50	4	—
HSB 2018-0270	R0.9	2.7	16°	50	4	—
HSB 2019-0280	R0.95	2.8	16°	50	4	—
HSB 2020-0200	R1	2	16°	50	4	—
HSB 2020-0200-6		2		60	6	—
HSB 2020-0300		3		50	4	—
HSB 2020-0600		6		60	4	—
HSB 2025-0250	R1.25	2.5	16°	50	4	—
HSB 2025-0250-6		2.5		60	6	—
HSB 2025-0375		3.75		50	4	—
HSB 2025-0600		6		60	4	—
HSB 2030-0300	R1.5	3	16°	50	6	—
HSB 2030-0450		4.5		70	6	—
HSB 2030-0800		8		70	6	—
HSB 2040-0400	R2	4	16°	50	6	—
HSB 2040-0600-4		6	—	70	4	—
HSB 2040-0600		6	16°	70	6	—
HSB 2040-0800		8		70	6	—
HSB 2050-0500	R2.5	5	16°	50	6	—
HSB 2050-0750		7.5		80	6	—
HSB 2050-0800		8		80	6	—
HSB 2050-1200		12		80	6	—
HSB 2060-0600	R3	6	—	50	6	—
HSB 2060-0900		9		80	6	—
HSB 2060-1200		12		80	6	—
HSB 2080-0800	R4	8	—	60	8	—
HSB 2080-1200		12		90	8	—
HSB 2080-1400		14		90	8	—
HSB 2100-1000	R5	10	—	70	10	—
HSB 2100-1500		15		100	10	—
HSB 2100-1800		18		100	10	—
HSB 2120-1200	R6	12	—	75	12	—
HSB 2120-1800		18		110	12	—
HSB 2120-2200		22		110	12	—

Milling Conditions for HSB / HSB-S

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
20006-0006	R0.03	0.06	30,000	100	0.002 or below	0.02	—	—	—	—	—	—	—	—	—	—	—	—
20008-0008	R0.04	0.08	30,000	130	0.003 or below	0.03	—	—	—	—	—	—	—	—	—	—	—	—
1001-0020-6	R0.05	0.2	30,000	30	0.002 or below	0.02	—	—	—	—	—	—	—	—	—	—	—	—
2001-0010		0.1	30,000	200	0.004 or below	0.04	—	—	—	—	—	—	—	—	—	—	—	—
2002-0020 (-6)	R0.1	0.2	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
2002-0030		0.3	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
2003-0030 (-6)	R0.15	0.3	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2003-0045		0.45	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
2004-0040 (-6)	R0.2	0.4	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2004-0060		0.6	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
2005-0050 (-6)	R0.25	0.5	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2005-0075		0.75	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
2006-0060 (-6)	R0.3	0.6	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
2006-0090		0.9	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
2007-0100	R0.35	1	37,000	1,350	0.045	0.17	28,500	1,400	0.03	0.135	25,000	900	0.015	0.1	18,750	450	0.015	0.1
2008-0080 (-6)	R0.4	0.8	35,000	1,600	0.06	0.21	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
2008-0120		1.2	35,000	1,600	0.06	0.21	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
2009-0130	R0.45	1.3	32,500	1,650	0.1	0.28	25,500	1,800	0.055	0.21	22,000	1,300	0.025	0.14	16,500	650	0.025	0.14
2010-0100 (-6)	R0.5	1	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-0150		1.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-0250		2.5	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2011-0160	R0.55	1.6	30,000	1,900	0.21	0.43	22,000	2,000	0.105	0.32	19,000	1,750	0.05	0.22	14,250	875	0.05	0.22
2012-0180	R0.6	1.8	30,000	2,000	0.22	0.46	20,500	2,000	0.11	0.34	17,800	1,750	0.05	0.23	13,350	875	0.05	0.23
2013-0190	R0.65	1.9	30,000	2,150	0.23	0.49	19,000	2,000	0.115	0.36	16,600	1,750	0.05	0.24	12,450	875	0.05	0.24
2014-0210	R0.7	2.1	30,000	2,300	0.24	0.52	18,000	2,000	0.12	0.39	15,700	1,750	0.055	0.27	11,800	875	0.055	0.27
2015-0150 (-6)	R0.75	1.5	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-0200		2	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-0225		2.25	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-0400		4	30,000	2,450	0.15	0.45	17,000	2,000	0.07	0.31	15,000	1,750	0.04	0.24	11,250	875	0.04	0.24
2016-0240	R0.8	2.4	30,000	2,550	0.25	0.58	16,200	2,000	0.13	0.43	14,200	1,750	0.06	0.3	10,650	875	0.06	0.3
2017-0250	R0.85	2.5	30,000	2,600	0.26	0.61	15,500	2,000	0.135	0.46	13,500	1,750	0.065	0.32	10,100	875	0.065	0.32
2018-0270	R0.9	2.7	30,000	2,700	0.28	0.65	15,000	2,000	0.14	0.48	13,000	1,750	0.07	0.34	9,750	875	0.07	0.34
2019-0280	R0.95	2.8	29,000	2,800	0.3	0.69	14,500	2,000	0.145	0.49	12,600	1,750	0.075	0.36	9,450	875	0.075	0.36
2020-0200 (-6)	R1	2	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
2020-0300		3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
2020-0600		6	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
2025-0250 (-6)	R1.25	2.5	24,500	2,950	0.35	0.85	12,250	2,150	0.17	0.6	10,700	1,850	0.1	0.45	8,050	925	0.1	0.45
2025-0375		3.75	24,500	2,950	0.35	0.85	12,250	2,150	0.17	0.6	10,700	1,850	0.1	0.45	8,050	925	0.1	0.45
2025-0600		6	24,500	2,950	0.26	0.75	12,250	2,150	0.125	0.5	10,700	1,850	0.08	0.4	8,050	925	0.08	0.4
2030-0300	R1.5	3	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
2030-0450		4.5	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
2030-0800		8	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
2040-0400	R2	4	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
2040-0600 (-4)		6	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
2040-0800		8	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
2050-0500	R2.5	5	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	6,800	2,100	0.15	0.85	5,100	1,050	0.15	0.85
2050-0750		7.5	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	6,800	2,100	0.15	0.85	5,100	1,050	0.15	0.85
2050-0800		8	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	6,800	2,100	0.15	0.85	5,100	1,050	0.15	0.85
2050-1200		12	15,600	3,500	0.5	1.5	7,800	2,500	0.25	1.05	6,800	2,100	0.15	0.85	5,100	1,050	0.15	0.85

Milling Conditions for HSB / HSB-S

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2060-0600	R3	6	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
2060-0900		9	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
2060-1200		12	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
2080-0800	R4	8	9,500	3,000	0.7	2.1	5,200	2,200	0.4	1.7	4,500	1,900	0.25	1.35	3,400	950	0.25	1.35
2080-1200		12	9,500	3,000	0.7	2.1	5,200	2,200	0.4	1.7	4,500	1,900	0.25	1.35	3,400	950	0.25	1.35
2080-1400		14	9,500	3,000	0.7	2.1	5,200	2,200	0.4	1.7	4,500	1,900	0.25	1.35	3,400	950	0.25	1.35
2100-1000	R5	10	7,500	2,500	0.8	2.5	4,300	2,000	0.5	2.1	3,750	1,750	0.3	1.7	2,800	875	0.3	1.7
2100-1500		15	7,500	2,500	0.8	2.5	4,300	2,000	0.5	2.1	3,750	1,750	0.3	1.7	2,800	875	0.3	1.7
2100-1800		18	7,500	2,500	0.8	2.5	4,300	2,000	0.5	2.1	3,750	1,750	0.3	1.7	2,800	875	0.3	1.7
2120-1200	R6	12	6,200	2,000	0.9	3	3,600	1,750	0.6	2.6	3,150	1,500	0.35	2	2,350	750	0.35	2
2120-1800		18	6,200	2,000	0.9	3	3,600	1,750	0.6	2.6	3,150	1,500	0.35	2	2,350	750	0.35	2
2120-2200		22	6,200	2,000	0.9	3	3,600	1,750	0.6	2.6	3,150	1,500	0.35	2	2,350	750	0.35	2



Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- Reduce the milling parameters when a straight shank tool exceeds 35 mm of overhang length.
- Every coolant offers stable milling.

Constant Velocity Joint DRM2 (62HRC)



Work Size : ϕ100 × 50 mm
Coolant : Oil Mist

6 Flute Square for Hard Materials **HMS**



2 Flute Ball for Hard Materials **HSB**



Milling Process	Tool	Milling Spot	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m:s)
Roughing	HSB R5	Pilot Hole	600	240	1	–	–	4:52
	HMS ϕ10 6 Flute Square	Dimension	4,000	200	16	0.1	–	3:49
				2,500	16	0.2	0.02	2:12
Finishing				200	0.05	7	0	1:24
Roughing	HSB R5	Contour	3,150	800	0.5	2	0.2	24:36
Semi-finishing	HSB R2	Contour	15,000	1,400	0.25	0.7	0.07	15:18
	HSB R1	Contour	18,000	1,800	0.15	0.15	0.02	21:58
Finishing	HSB R1	Dimension	20,000	1,000	0.05	–	0	0:51
	CBN R1	Contour	20,000	1,800	0.07	0.04	0	71:19
								2:26:12

HSB-S

HARDMAX 2 Flute Short Shank Ball End Mills



From April 2026, and once stocks have been depleted, these series will only be manufactured on demand.

R0.1～R2

Super MG | HARD MAX | 30° | R ±0.003 | Shank Dia 0/-0.004

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	●	○		○			○			○	○		

Features

Short Shank Ball End Mills for high accuracy shrink-fit tool holder.
Offers high efficiency, long tool life and excellent surface finish on hard materials over 40HRC.
HARDMAX coat offers heat resistance, durability and lubricity at a high level.
Every coolant offers stable milling.
Ball tip point is designed with a negative rake angle that minimizes wear and improves the target dimensions.
The low negative rake angle at the peripheral side of the ball offers an excellent surface finish and prevents deflection.

Better Tolerance Design! Diameter Tolerance, Ball Radius Accuracy, and Shank Diameter Tolerance

HSB / HSLB Tolerance


Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy	Shank Diameter Tolerance
R0.1 ～ R3	0/-0.015	±0.005	0/-0.005 (h5)

HSB-S / HSLB-S Tolerance

Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy	Shank Diameter Tolerance
R0.1 ～ R1	0/-0.008	±0.003	0/-0.004 (h4)
R1.5 ～ R2	0/-0.01		
R3		±0.005	

Shank diameter tolerance h4!


Short overhang length with short shank length!

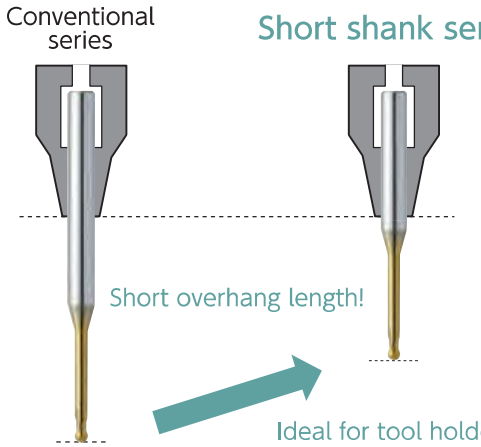


Short overhang length minimizes tool run-out

- High precision milling
- Minimizes vibration and chattering
- Longer tool life

Ideal for tool holders where the maximum insertion is short.

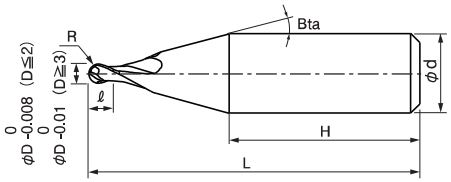

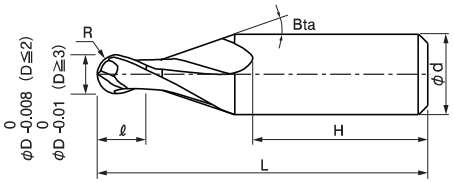

The shank taper angle shown is not an exact value.

Total 10 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
HSB 2002-0020S	R0.1	0.2	16°	35	4	26.0	—
HSB 2003-0030S	R0.15	0.3	16°	35	4	26.0	—
HSB 2004-0040S	R0.2	0.4	16°	35	4	26.0	—
HSB 2006-0060S	R0.3	0.6	16°	35	4	26.0	—
HSB 2008-0080S	R0.4	0.8	16°	35	4	26.5	—
HSB 2010-0100S	R0.5	1	16°	35	4	26.5	—
HSB 2015-0150S	R0.75	1.5	16°	35	4	26.5	—
HSB 2020-0200S	R1	2	16°	35	4	25.5	—
HSB 2030-0300S	R1.5	3	16°	40	6	27.0	—
HSB 2040-0400S	R2	4	16°	40	6	26.0	—

Press Die — DC53 (60HRC)



Work Size : 100 × 120 × 50 mm
Coolant : Oil Mist

Tool used mainly

HSB



HSLB



Milling Process	Tool		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (h:m:s)	Milling Distance (m)
Roughing	HSB 2 Flute Ball	R4	5,200	2,200	0.4	1.7	2:52:35	334
Roughing	HSLB 2 Flute Long Neck Ball	R3 × EL30	6,500	2,500	0.2	0.65	0:28:01	46
Semi-finishing		R2 × EL25	8,000	1,160	0.7 (Ridgeline)	0.35 (Orthogonal)	0:21:38	18
Semi-finishing		R3 × EL30	6,500	2,500	0	0.3	0:21:38	48
Finishing		R3 × EL30	6,500	2,500	0	0.01	2:53:09	274
Finishing	HLRS 4 Flute Long Neck Radius	φ6 × EL30 × CR1	2,200	580	0.1	1	1:03:01	23
Engraving	HSB 2 Flute Ball	R0.3	30,000	1,200	0.05	0	0:02:09	1.6
							8:02:11	748

HBL



HARDMAX 2 Flute Ball End Mills

R1.5～R6


Super MG | HARD MAX | 30° | R ±0.005 (R1.5～R3) | R ±0.007 (R4～R6) | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	○			○			●			○	○		

Features

Long shank ball design for hard materials.
HARDMAX coating for high speed milling for Hard Materials.
Both dry and wet coolant offer stable and long tool life.
Diameter Tolerance: 0/-0.015 (D≦6), 0/-0.02 (D≧8)

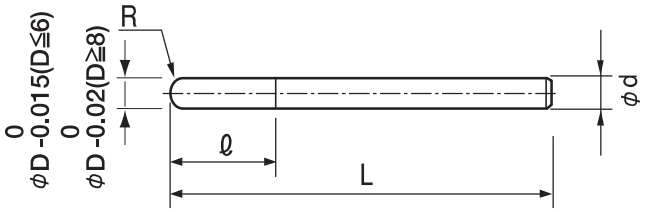

Shank part should not make contact with the work piece.

Total 6 models


Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HBL 2030-0800	R1.5	4.5	80	3	—
HBL 2040-1000	R2	6	100	4	—
HBL 2060-1400	R3	18	140	6	—
HBL 2080-1600	R4	20	160	8	—
HBL 2100-1800	R5	25	180	10	—
HBL 2120-2000	R6	25	200	12	—

Milling Conditions for HBL

WORK MATERIAL		CARBON STEELS S45C / S50C (~225HB)				ALLOY STEELS SK / SCM / SUS (225~325HB)				PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030-0800	**R1.5**	16,000	800	0.12	0.3	13,300	580	0.12	0.3	10,700	420	0.12	0.3
2040-1000	**R2**	12,000	840	0.16	0.4	10,000	560	0.16	0.4	8,000	400	0.16	0.4
2060-1400	**R3**	8,000	960	0.24	0.6	6,700	670	0.24	0.6	5,400	480	0.24	0.6
2080-1600	**R4**	6,000	1,050	0.32	0.8	5,000	700	0.32	0.8	4,000	520	0.32	0.8
2100-1800	**R5**	4,800	1,100	0.4	1	4,000	730	0.4	1	3,200	540	0.4	1
2120-2000	**R6**	4,000	1,130	0.48	1.2	3,400	810	0.48	1.2	2,700	590	0.48	1.2

WORK MATERIAL		HARDENED STEELS SKD61 / SKT (45~50HRC)				HARDENED STEELS SKD61 / 11 (50~60HRC)			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030-0800	**R1.5**	6,400	230	0.12	0.3	4,800	90	0.12	0.3
2040-1000	**R2**	4,800	230	0.16	0.4	3,600	100	0.16	0.4
2060-1400	**R3**	3,200	250	0.24	0.6	2,400	110	0.24	0.6
2080-1600	**R4**	2,400	260	0.32	0.8	1,800	110	0.32	0.8
2100-1800	**R5**	2,000	300	0.4	1	1,500	120	0.4	1
2120-2000	**R6**	1,600	320	0.48	1.2	1,200	140	0.48	1.2



Cutting Amount (mm)
a_p = 0.04D (Max 0.5 mm)
a_e = 0.1D
D : Outside Diameter (mm)

Note:
・Decrease both spindle speed and feed rate proportionally in case of chattering.
・Set spindle speed, feed rate, and radial depth in accordance with the required surface quality.
・Adjust milling parameters according to the operating environment when milling a work piece over 60HRC.
・Recommend air blow or oil mist.
・Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
・Recommend wet coolant for Copper.

CWB NEW

UTWCOAT 2 Flute Ball End Mills



Released July 2025

R0.05～R6

Super MG UTW COAT

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
★	★	★	●					○	●		●			○	○		

◆ Upgrade

Wear resistance and tool accuracy have been improved with HWB/HWB-S and CWB series.

	CSEB				HSB			HGB
Copper	Raw Materials	～30 HRC	～40 HRC	～50 HRC	～55 HRC	～60 HRC	～65 HRC	～70 HRC

	CWB				HWB			HGB
Copper	Raw Materials	～30 HRC	～40 HRC	～50 HRC	～55 HRC	～60 HRC	～65 HRC	～70 HRC



The shank taper angle shown is not an exact value.

◆ Longer tool life and improved mirror surface finish

Longer tool life and improved mirror surface finish on SCM Prehardened Steels compared to conventional tools.

Longer tool life


Improved mirror surface finish

New Coating
UTWCOAT

＋

Tool tip has a micro flatland design reducing milling surface roughness.

※Micro flatland design at the tip does not apply to below R0.1.



◆ High Precision

Even higher accuracy than before!

Conventional CSEB

Radius of Ball Nose	Ball Radius Accuracy	Diameter Tolerance	Shank Diameter Tolerance
R0.05	± 0.002	0/-0.01	0/-0.005
R0.1 ～ R3	± 0.005	0/-0.015	
R3.25 ～ R6	± 0.007	0/-0.02	


CWB

Unit (mm)

Radius of Ball Nose	Ball Radius Accuracy	Diameter Tolerance	Shank Diameter Tolerance	Helix Angle
R0.05	± 0.002	0/-0.006	0/-0.004 (h4)	0°
R0.1 ～ R1.25	± 0.003			30°
R1.5 ～ R2.25	± 0.004	0/-0.009		
R2.5 ～ R3	± 0.005			
R3.25 ～ R6	± 0.007	0/-0.01	0/-0.005(h5)	

Roughing Wear comparison
CWB R6 × L18

PXA30 (30HRC)




Coolant
Water Soluble
(Through Spindle)

Overhang Length : 45 mm

Work Size
200 × 100 × 28 mm

Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Cycle Time
8,000	3,200	1.4	4.3	40 min

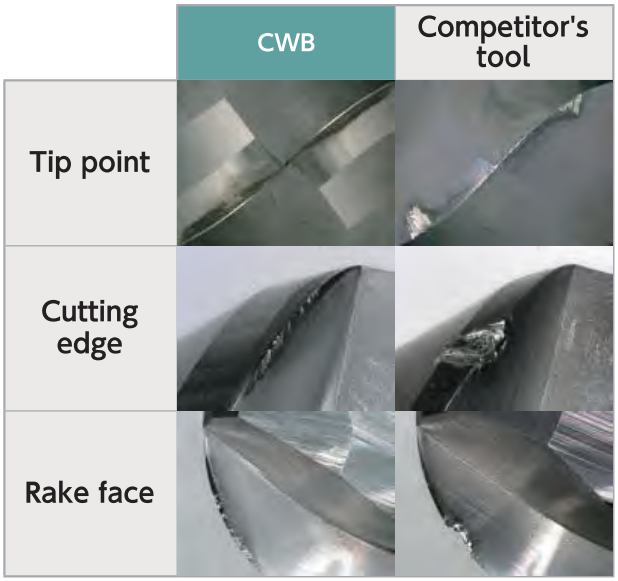


Improved coating performance and the new tool tip design enable higher efficiency milling than the catalog conditions.

Reference: Catalog condition n =8,400 min^{-1} Vf = 3,300 mm/min a_p = 1.2 mm a_e = 3.6 mm

Roughing Wear comparison
CWB R3 × L9

Carbon Steels S50C




Coolant
Water Soluble
(Through Spindle)

Overhang Length : 18 mm

Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Cycle Time
14,000	4,000	0.7	2.3	136 min

Work Size
200 × 100 × 32 mm

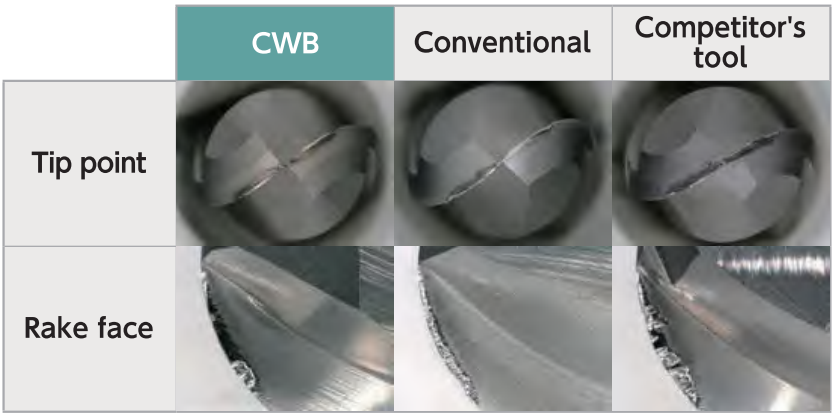


Improved coating performance and the new tool tip design enable higher efficiency milling than the catalog conditions.

Reference: Catalog condition n =16,000 min^{-1} Vf = 3,100 mm/min a_p = 0.6 mm a_e = 1.8 mm

Flat surface finishing　Milling surface comparison
CWB　R6 × L18

PXA30 (30HRC)




Coolant
Water Soluble
(Through Spindle)

Overhang Length : 45 mm

Spindle Speed (min^{-1})	Feed Rate (mm/min)	Axial Depth (mm)	Radial Depth (mm)	Cycle Time
8,000	800	0.1	0.1	10 min

Work Size
50 × 15 mm




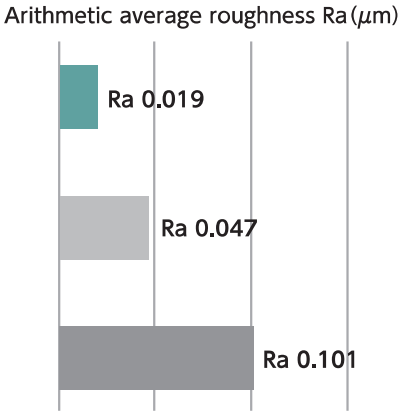

CWB offers better surface roughness and mirror surface finish.

How to achieve an excellent milling surface when finishing flat surface with CWB　Feed per rotation, a_e

By reducing the feed per rotation and a_e to less than the length of the cutting edge on the ball tip flat surface, excellent milling surfaces can be obtained consistently.

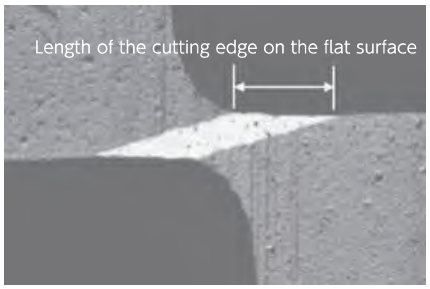

Calculation formula for feed per rotation f

Feed per rotation : f (mm/rev)

$$f = \frac{V_f}{n}$$

V_f = Feed Rate (mm/min)
n = Spindle Speed (min^{-1})

Recommended conditions for feed per rotation f and radial depth a_e

Ball R	Feed per rotation f (mm/rev)	Radial Depth (mm)
0.1 ≦ R < 0.25	0.01	0.01
0.25 ≦ R < 0.5	0.015	0.015
0.5 ≦ R < 1	0.03	0.03
1 ≦ R ≦ 3	0.04	0.04
3<R ≦ 4	0.06	0.06
4<R ≦ 5	0.08	0.08
5<R ≦ 6	0.1	0.1

Total 68 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CWB 2001-0010	R0.05	0.1	11°	50	4	—
CWB 2002-0020	R0.1	0.2	11°	50	4	—
CWB 2002-0030		0.3		50	4	—
CWB 2003-0030	R0.15	0.3	11°	50	4	—
CWB 2003-0045		0.45		50	4	—
CWB 2004-0040	R0.2	0.4	11°	50	4	—
CWB 2004-0060		0.6		50	4	—
CWB 2005-0050	R0.25	0.5	11°	50	4	—
CWB 2005-0075		0.75		50	4	—
CWB 2006-0060	R0.3	0.6	11°	50	4	—
CWB 2006-0090		0.9		50	4	—
CWB 2007-0100	R0.35	1	11°	50	4	—
CWB 2008-0080	R0.4	0.8	11°	50	4	—
CWB 2008-0120		1.2		50	4	—
CWB 2009-0130	R0.45	1.3	11°	50	4	—
CWB 2010-0100	R0.5	1	11°	50	4	—
CWB 2010-0150		1.5		50	4	—
CWB 2010-0250		2.5		50	4	—
CWB 2011-0160	R0.55	1.6	11°	50	4	—
CWB 2012-0180	R0.6	1.8	11°	50	4	—
CWB 2013-0190	R0.65	1.9	11°	50	4	—
CWB 2014-0210	R0.7	2.1	11°	50	4	—
CWB 2015-0150	R0.75	1.5	11°	50	4	—
CWB 2015-0200		2		50	4	—
CWB 2015-0225		2.25		50	4	—
CWB 2015-0400		4		50	4	—
CWB 2016-0240	R0.8	2.4	11°	50	4	—
CWB 2017-0250	R0.85	2.5	11°	50	4	—
CWB 2018-0270	R0.9	2.7	11°	50	4	—
CWB 2019-0280	R0.95	2.8	11°	50	4	—
CWB 2020-0200	R1	2	11°	50	4	—
CWB 2020-0300		3		60	4	—
CWB 2020-0600		6		60	4	—
CWB 2025-0250	R1.25	2.5	11°	50	4	—
CWB 2025-0375		3.75		50	4	—
CWB 2025-0600		6		60	4	—

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CWB 2030-0300	R1.5	3	11°	50	6	—
CWB 2030-0450		4.5		70	6	—
CWB 2030-0800		8		70	6	—
CWB 2035-0520	R1.75	5.2	11°	70	6	—
CWB 2040-0400	R2	4	11°	50	6	—
CWB 2040-0600-4		6	—	70	4	—
CWB 2040-0600		6	11°	70	6	—
CWB 2040-0800		8		70	6	—
CWB 2045-0670	R2.25	6.7	11°	70	6	—
CWB 2050-0500	R2.5	5	11°	50	6	—
CWB 2050-0750		7.5		80	6	—
CWB 2050-0800		8		80	6	—
CWB 2050-1200		12		80	6	—
CWB 2055-0820	R2.75	8.2	11°	80	6	—
CWB 2060-0600	R3	6	—	50	6	—
CWB 2060-0900		9		80	6	—
CWB 2060-1200		12		80	6	—
CWB 2065-0970	R3.25	9.7	11°	90	8	—
CWB 2070-1050	R3.5	10.5	11°	90	8	—
CWB 2075-1120	R3.75	11.2	11°	90	8	—
CWB 2080-0800	R4	8	—	60	8	—
CWB 2080-1200		12		90	8	—
CWB 2080-1400		14		90	8	—
CWB 2085-1270	R4.25	12.7	11°	100	10	—
CWB 2090-1350	R4.5	13.5	11°	100	10	—
CWB 2100-1000	R5	10	—	70	10	—
CWB 2100-1500		15		100	10	—
CWB 2100-1800		18		100	10	—
CWB 2110-1650	R5.5	16.5	11°	110	12	—
CWB 2120-1200	R6	12	—	75	12	—
CWB 2120-1800		18		110	12	—
CWB 2120-2200		22		110	12	—


Milling Conditions for CWB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001	R0.05	0.1	30,000	200	0.004 or below	0.04	30,000	200	0.004 or below	0.04	30,000	200	0.004 or below	0.04	30,000	200	0.004 or below	0.04
2002	R0.1	0.2	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
		0.3	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
2003	R0.15	0.3	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
		0.45	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
2004	R0.2	0.4	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
		0.6	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2005	R0.25	0.5	34,000	1,300	0.035	0.105	34,000	1,300	0.03	0.06	45,000	900	0.03	0.09	32,000	900	0.02	0.06
		0.75	34,000	1,300	0.035	0.105	34,000	1,300	0.03	0.06	45,000	900	0.03	0.09	32,000	900	0.02	0.06
2006	R0.3	0.6	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
		0.9	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
2007	R0.35	1	32,000	1,800	0.07	0.21	32,000	1,600	0.05	0.1	38,000	1,600	0.06	0.12	28,000	1,600	0.05	0.075
2008	R0.4	0.8	30,000	2,200	0.1	0.3	30,000	1,800	0.06	0.12	35,000	1,800	0.07	0.14	25,000	1,700	0.07	0.1
		1.2	30,000	2,200	0.1	0.3	30,000	1,800	0.06	0.12	35,000	1,800	0.07	0.14	25,000	1,700	0.07	0.1
2009	R0.45	1.3	30,000	2,100	0.11	0.33	30,000	1,600	0.07	0.14	33,000	1,700	0.08	0.16	24,000	1,600	0.08	0.12
2010	R0.5	1	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.09	0.18	22,000	1,600	0.09	0.13
		1.5	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,500	0.09	0.18	22,000	1,600	0.09	0.13
		2.5	30,000	1,700	0.09	0.27	24,000	1,400	0.06	0.12	30,000	1,300	0.075	0.15	21,500	1,300	0.075	0.1
2011	R0.55	1.6	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.09	0.18	20,000	1,600	0.09	0.13
2012	R0.6	1.8	30,000	2,000	0.13	0.39	30,000	1,600	0.09	0.18	30,000	1,600	0.1	0.2	18,000	1,600	0.1	0.15
2013	R0.65	1.9	30,000	2,000	0.13	0.39	30,000	1,600	0.09	0.18	30,000	1,700	0.1	0.2	18,000	1,500	0.1	0.15
2014	R0.7	2.1	30,000	2,000	0.14	0.42	30,000	1,500	0.1	0.2	30,000	1,700	0.11	0.2	18,000	1,500	0.11	0.16
2015	R0.75	1.5	30,000	2,000	0.15	0.45	30,000	1,600	0.12	0.24	30,000	1,700	0.12	0.24	18,000	1,500	0.12	0.18
		2	30,000	2,000	0.15	0.45	30,000	1,600	0.12	0.24	30,000	1,700	0.12	0.24	18,000	1,500	0.12	0.18
		2.25	30,000	2,000	0.15	0.45	30,000	1,600	0.12	0.24	30,000	1,700	0.12	0.24	18,000	1,500	0.12	0.18
		4	30,000	1,800	0.12	0.36	23,000	1,200	0.08	0.16	30,000	1,400	0.1	0.2	15,000	1,200	0.09	0.13
2016	R0.8	2.4	30,000	2,000	0.16	0.48	30,000	1,600	0.12	0.24	30,000	1,800	0.12	0.36	18,000	1,400	0.1	0.2
2017	R0.85	2.5	30,000	2,000	0.17	0.51	30,000	1,700	0.14	0.28	30,000	1,800	0.14	0.42	18,000	1,400	0.12	0.24
2018	R0.9	2.7	30,000	2,000	0.18	0.54	30,000	1,800	0.16	0.32	30,000	1,900	0.16	0.48	16,000	1,300	0.14	0.28
2019	R0.95	2.8	30,000	2,000	0.19	0.57	30,000	1,900	0.18	0.36	30,000	1,900	0.18	0.54	16,000	1,300	0.16	0.32
2020	R1	2	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
		3	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
		6	30,000	2,000	0.2	0.6	30,000	2,000	0.14	0.42	30,000	2,000	0.13	0.45	10,800	850	0.1	0.4
2025	R1.25	2.5	27,000	2,300	0.28	0.75	27,000	2,300	0.25	0.5	27,000	2,300	0.25	0.75	13,000	1,100	0.21	0.63
		3.75	27,000	2,300	0.28	0.75	27,000	2,300	0.25	0.5	27,000	2,300	0.25	0.75	13,000	1,100	0.21	0.63
		6	25,000	2,100	0.26	0.67	25,000	2,100	0.23	0.46	24,000	2,000	0.2	0.65	11,000	930	0.14	0.44
2030	R1.5	3	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76
		4.5	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76
		8	22,000	2,300	0.28	0.7	22,000	2,300	0.28	0.7	20,000	2,000	0.2	0.65	10,700	1,000	0.18	0.54
2035	R1.75	5.2	24,000	2,700	0.35	1	24,000	2,700	0.35	1	21,000	2,400	0.35	1	12,000	1,700	0.3	0.9

Milling Conditions for CWB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2040	**R2**	4	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
		6	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
		8	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
2045	**R2.25**	6.7	21,000	3,000	0.45	1.3	21,000	3,000	0.45	1.3	16,000	2,400	0.42	1.2	10,000	1,900	0.38	1.1
2050	**R2.5**	5	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,000	2,400	0.45	1.4	9,000	1,800	0.42	1.2
		7.5	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,000	2,400	0.45	1.4	9,000	1,800	0.42	1.2
		8	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,000	2,400	0.45	1.4	9,000	1,800	0.42	1.2
		12	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,000	2,400	0.45	1.4	9,000	1,800	0.42	1.2
2055	**R2.75**	8.2	17,000	3,000	0.55	1.6	17,000	3,000	0.55	1.6	12,000	2,400	0.5	1.5	8,500	1,800	0.45	1.3
2060	**R3**	6	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
		9	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
		12	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
2065	**R3.25**	9.7	15,000	3,100	0.65	1.95	15,000	3,100	0.65	1.95	10,000	2,200	0.59	1.8	7,000	1,800	0.54	1.6
2070	**R3.5**	10.5	14,000	3,200	0.7	2.1	14,000	3,200	0.7	2.1	9,000	2,100	0.63	1.9	6,500	1,800	0.57	1.7
2075	**R3.75**	11.2	13,000	3,300	0.75	2.25	13,000	3,300	0.75	2.25	8,200	2,000	0.67	2	6,000	1,800	0.6	1.8
2080	**R4**	8	12,000	3,300	0.8	2.4	12,000	3,300	0.8	2.4	7,400	1,900	0.72	2.2	5,700	1,800	0.65	2
		12	12,000	3,300	0.8	2.4	12,000	3,300	0.8	2.4	7,400	1,900	0.72	2.2	5,700	1,800	0.65	2
		14	12,000	3,300	0.8	2.4	12,000	3,300	0.8	2.4	7,400	1,900	0.72	2.2	5,700	1,800	0.65	2
2085	**R4.25**	12.7	12,000	3,300	0.85	2.55	12,000	3,300	0.85	2.55	6,800	1,800	0.75	2.3	5,400	1,700	0.7	2.1
2090	**R4.5**	13.5	11,000	3,400	0.9	2.7	11,000	3,400	0.9	2.7	6,300	1,700	0.8	2.4	5,100	1,600	0.75	2.2
2100	**R5**	10	10,000	3,500	1	3	10,000	3,500	1	3	5,200	1,650	0.9	2.7	4,600	1,500	0.85	2.5
		15	10,000	3,500	1	3	10,000	3,500	1	3	5,200	1,650	0.9	2.7	4,600	1,500	0.85	2.5
		18	10,000	3,500	1	3	10,000	3,500	1	3	5,200	1,650	0.9	2.7	4,600	1,500	0.85	2.5
2110	**R5.5**	16.5	9,000	3,400	1.1	3.3	9,000	3,400	1.1	3.3	4,700	1,500	1	3	4,200	1,350	0.9	2.7
2120	**R6**	12	8,400	3,300	1.2	3.6	8,400	3,300	1.2	3.6	4,300	1,350	1.1	3.2	3,800	1,250	1	3
		18	8,400	3,300	1.2	3.6	8,400	3,300	1.2	3.6	4,300	1,350	1.1	3.2	3,800	1,250	1	3
		22	8,400	3,300	1.2	3.6	8,400	3,300	1.2	3.6	4,300	1,350	1.1	3.2	3,800	1,250	1	3

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed,or when chattering and red-hot occur.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.



CSEB

UTCOAT 2 Flute Ball End Mills



From April 2026, and once stocks have been depleted, these series will only be manufactured on demand.


R0.05～R6

Super MG | UT COAT | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	●		●			○	○		


Features

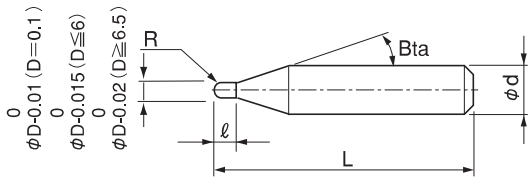

The shank taper angle shown is not an exact value.

ATTENTION

CSEB 1001-0020-6 is a taper ball end mill with half included angle 10° (See the right drawing).




Radius of Ball Nose	Diameter Tolerance	Radius Accuracy	Helix Angle	Number of Flutes
R0.05	0/-0.01	±0.002	0°	2 Flutes *
R0.1 ～ R3	0/-0.015	±0.005	30°	
R3.25 ～ R6	0/-0.02	±0.007		

* Only CSEB 1001-0020-6 has single flute.
R accuracy and diameter tolerance is the same as R0.1.

3 Features of CSEB

Designed to reduce cutting resistance and improve surface quality. Recommended for milling on hardened steels (55HRC) - sticky materials, materials that prone to chatter marks.


Less resistance on curved surface shape

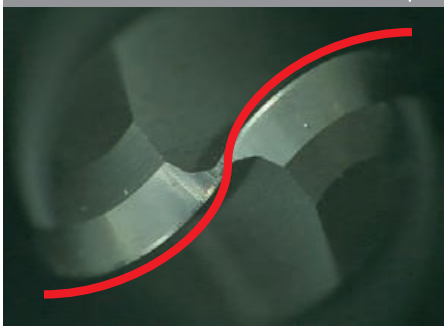

Small relief surface



Tip design with excellent cutting performance

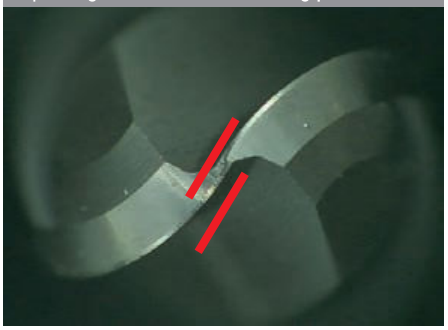

Total 78 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CSEB 1001-0020-6	R0.05	0.2	11°	50	6	—
CSEB 2001-0010	R0.05	0.1	11°	50	4	—
CSEB 2002-0020-6	R0.1	0.2	11°	50	6	—
CSEB 2002-0030		0.3		50	4	—
CSEB 2003-0030	R0.15	0.3	11°	50	4	—
CSEB 2003-0030-6		0.3		50	6	—
CSEB 2003-0045		0.45		50	4	—
CSEB 2004-0040	R0.2	0.4	11°	50	4	—
CSEB 2004-0040-6		0.4		50	6	—
CSEB 2004-0060		0.6		50	4	—
CSEB 2005-0050	R0.25	0.5	11°	50	4	—
CSEB 2005-0050-6		0.5		50	6	—
CSEB 2005-0075		0.75		50	4	—
CSEB 2006-0060	R0.3	0.6	11°	50	4	—
CSEB 2006-0060-6		0.6		50	6	—
CSEB 2006-0090		0.9		50	4	—
CSEB 2007-0100	R0.35	1	11°	50	4	—
CSEB 2008-0080	R0.4	0.8	11°	50	4	—
CSEB 2008-0080-6		0.8		50	6	—
CSEB 2008-0120		1.2		50	4	—
CSEB 2009-0130	R0.45	1.3	11°	50	4	—
CSEB 2010-0100	R0.5	1	11°	50	4	—
CSEB 2010-0100-6		1		50	6	—
CSEB 2010-0150		1.5		50	4	—
CSEB 2010-0250		2.5		50	4	—
CSEB 2011-0160	R0.55	1.6	11°	50	4	—
CSEB 2012-0180	R0.6	1.8	11°	50	4	—
CSEB 2013-0190	R0.65	1.9	11°	50	4	—
CSEB 2014-0210	R0.7	2.1	11°	50	4	—
CSEB 2015-0150	R0.75	1.5	11°	50	4	—
CSEB 2015-0150-6		1.5		50	6	—
CSEB 2015-0200		2		50	4	—
CSEB 2015-0225		2.25		50	4	—
CSEB 2015-0400		4		50	4	—
CSEB 2016-0240	R0.8	2.4	11°	50	4	—
CSEB 2017-0250	R0.85	2.5	11°	50	4	—
CSEB 2018-0270	R0.9	2.7	11°	50	4	—
CSEB 2019-0280	R0.95	2.8	11°	50	4	—
CSEB 2020-0200	R1	2	11°	50	4	—
CSEB 2020-0200-6		2		60	6	—
CSEB 2020-0300		3		60	4	—
CSEB 2020-0600		6		60	4	—
CSEB 2025-0250	R1.25	2.5	11°	50	4	—
CSEB 2025-0250-6		2.5		60	6	—
CSEB 2025-0375		3.75		50	4	—
CSEB 2025-0600		6		60	4	—
CSEB 2030-0300	R1.5	3	11°	50	6	—
CSEB 2030-0450		4.5		70	6	—
CSEB 2030-0800		8		70	6	—
CSEB 2035-0520	R1.75	5.2	11°	70	6	—
CSEB 2040-0400	R2	4	11°	50	6	—
CSEB 2040-0600-4		6	—	70	4	—
CSEB 2040-0600		6	11°	70	6	—
CSEB 2040-0800		8		70	6	—

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CSEB 2045-0670	R2.25	6.7	11°	70	6	—
CSEB 2050-0500	R2.5	5	11°	50	6	—
CSEB 2050-0750		7.5		80	6	—
CSEB 2050-0800		8		80	6	—
CSEB 2050-1200		12		80	6	—
CSEB 2055-0820	R2.75	8.2	11°	80	6	—
CSEB 2060-0600	R3	6	—	50	6	—
CSEB 2060-0900		9		80	6	—
CSEB 2060-1200		12		80	6	—
CSEB 2065-0970	R3.25	9.7	11°	90	8	—
CSEB 2070-1050	R3.5	10.5	11°	90	8	—
CSEB 2075-1120	R3.75	11.2	11°	90	8	—
CSEB 2080-0800	R4	8	—	60	8	—
CSEB 2080-1200		12		90	8	—
CSEB 2080-1400		14		90	8	—
CSEB 2085-1270	R4.25	12.7	11°	100	10	—
CSEB 2090-1350	R4.5	13.5	11°	100	10	—
CSEB 2100-1000	R5	10	—	70	10	—
CSEB 2100-1500		15		100	10	—
CSEB 2100-1800		18		100	10	—
CSEB 2110-1650	R5.5	16.5	11°	110	12	—
CSEB 2120-1200	R6	12	—	75	12	—
CSEB 2120-1800		18		110	12	—
CSEB 2120-2200		22		110	12	—

Copper Milling C1100





Work Size : 100 × 100 × 30 mm
Coolant : Oil Mist

Size R0.05～R6
CSEB



Size R0.05～R3
CSELB




Size ϕ1～ϕ20
C-CES4000



Tool			Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (h:m:s)
C-CES	4 Flute Square	ϕ6 × L13	12,000	3,600	0.35	4	0:52:51
CSELB	2 Flute Long Neck Ball	R1.5 × EL16	16,000	1,200	0.27	0.45	1:04:57
C-CES	4 Flute Square	ϕ6 × L13	16,000	500	0.1	3.5	0:15:54
C-CES	4 Flute Square	ϕ6 × L13	6,000	200 ～ 500	11	0.05	0:03:42
CSEB	2 Flute Ball	R0.5	18,000	1,800	0.3	0.3	2:34:10
C-CES	4 Flute Square	ϕ1.5 × L3.75	15,000	1,200	—	0.03	0:08:14
							4:59:48

Milling example of plastic mold — HPM38 (53HRC)

◆Optimized Ball Tip Effect

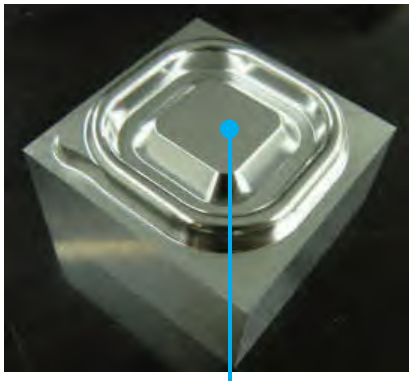

CSEB 2040-0600




CSEB 2020-0300




CSEB 2010-0150



Work Size
50 × 50 × 30 mm

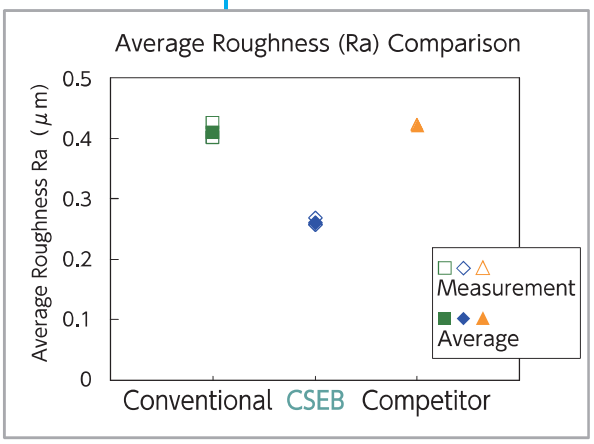

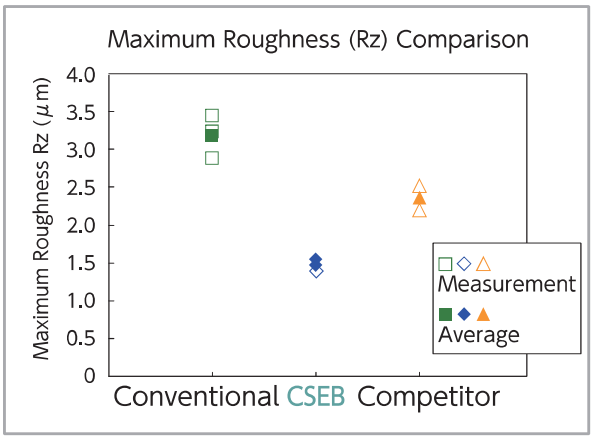

Optimized ball tip offers outstandingly nano-smooth surface on finishing.

No	Milling Process	Tool (Radius of Ball Nose × Length of Cut)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Overhang Length (mm)	Cycle Time (h:m:s)	Coolant
1	Roughing	CSEB 2040-0600 (R2×6)	11,000	2,000	0.34	1	15	0:31:21	Air Blow
2	Semi-finishing	CSEB 2020-0300 (R1×3)	16,000	1,300	0.17	0.5	13	0:03:10	Air Blow
3			16,000	1,300	0.1	0.1	13	0:16:47	Air Blow
4			16,000	1,300	0.01	0.1	13	0:37:00	Oil Mist
5	Finishing	CSEB 2010-0150 (R0.5×1.5)	22,000	1,300	0.04	0.18	12	0:05:06	Oil Mist
6			22,000	700	0.05	0.05	12	0:59:36	Oil Mist
7			22,000	700	0.01	0.05	12	0:30:43	Oil Mist


Milling Conditions for CSEB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
1001-0020-6	R0.05	0.2	30,000	30	0.002 or below	0.02	30,000	30	0.002 or below	0.02	30,000	30	0.002 or below	0.02	30,000	30	0.002 or below	0.02
2001-0010		0.1	30,000	200	0.004 or below	0.04	30,000	200	0.004 or below	0.04	30,000	200	0.004 or below	0.04	30,000	200	0.004 or below	0.04
2002-0020-6	R0.1	0.2	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
2002-0030		0.3	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
2003-0030(-6)	R0.15	0.3	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
2003-0045		0.45	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
2004-0040(-6)	R0.2	0.4	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2004-0060		0.6	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2005-0050(-6)	R0.25	0.5	34,000	1,300	0.035	0.105	34,000	1,300	0.03	0.06	45,000	900	0.03	0.09	32,000	900	0.02	0.06
2005-0075		0.75	34,000	1,300	0.035	0.105	34,000	1,300	0.03	0.06	45,000	900	0.03	0.09	32,000	900	0.02	0.06
2006-0060(-6)	R0.3	0.6	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
2006-0090		0.9	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
2007-0100	R0.35	1	32,000	1,800	0.07	0.21	32,000	1,600	0.05	0.1	38,000	1,600	0.06	0.12	28,000	1,600	0.05	0.075
2008-0080(-6)	R0.4	0.8	30,000	2,200	0.1	0.3	30,000	1,800	0.06	0.12	35,000	1,800	0.07	0.14	25,000	1,700	0.07	0.1
2008-0120		1.2	30,000	2,200	0.1	0.3	30,000	1,800	0.06	0.12	35,000	1,800	0.07	0.14	25,000	1,700	0.07	0.1
2009-0130	R0.45	1.3	30,000	2,100	0.11	0.33	30,000	1,600	0.07	0.14	33,000	1,700	0.08	0.16	24,000	1,600	0.08	0.12
2010-0100(-6)	R0.5	1	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.09	0.18	22,000	1,600	0.09	0.13
2010-0150		1.5	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,500	0.09	0.18	22,000	1,600	0.09	0.13
2010-0250		2.5	30,000	1,700	0.09	0.27	24,000	1,400	0.06	0.12	30,000	1,300	0.075	0.15	21,500	1,300	0.075	0.1
2011-0160	R0.55	1.6	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.09	0.18	20,000	1,600	0.09	0.13
2012-0180	R0.6	1.8	30,000	2,000	0.13	0.39	30,000	1,600	0.09	0.18	30,000	1,600	0.1	0.2	18,000	1,600	0.1	0.15
2013-0190	R0.65	1.9	30,000	2,000	0.13	0.39	30,000	1,600	0.09	0.18	30,000	1,700	0.1	0.2	18,000	1,500	0.1	0.15
2014-0210	R0.7	2.1	30,000	2,000	0.14	0.42	30,000	1,500	0.1	0.2	30,000	1,700	0.11	0.2	18,000	1,500	0.11	0.16
2015-0150(-6)	R0.75	1.5	30,000	2,000	0.15	0.45	30,000	1,600	0.12	0.24	30,000	1,700	0.12	0.24	18,000	1,500	0.12	0.18
2015-0200		2	30,000	2,000	0.15	0.45	30,000	1,600	0.12	0.24	30,000	1,700	0.12	0.24	18,000	1,500	0.12	0.18
2015-0225		2.25	30,000	2,000	0.15	0.45	30,000	1,600	0.12	0.24	30,000	1,700	0.12	0.24	18,000	1,500	0.12	0.18
2015-0400		4	30,000	1,800	0.12	0.36	23,000	1,200	0.08	0.16	30,000	1,400	0.1	0.2	15,000	1,200	0.09	0.13
2016-0240	R0.8	2.4	30,000	2,000	0.16	0.48	30,000	1,600	0.12	0.24	30,000	1,800	0.12	0.36	18,000	1,400	0.1	0.2
2017-0250	R0.85	2.5	30,000	2,000	0.17	0.51	30,000	1,700	0.14	0.28	30,000	1,800	0.14	0.42	18,000	1,400	0.12	0.24
2018-0270	R0.9	2.7	30,000	2,000	0.18	0.54	30,000	1,800	0.16	0.32	30,000	1,900	0.16	0.48	16,000	1,300	0.14	0.28
2019-0280	R0.95	2.8	30,000	2,000	0.19	0.57	30,000	1,900	0.18	0.36	30,000	1,900	0.18	0.54	16,000	1,300	0.16	0.32
2020-0200(-6)	R1	2	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
2020-0300		3	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
2020-0600		6	30,000	2,000	0.2	0.6	30,000	2,000	0.14	0.42	30,000	2,000	0.13	0.45	10,800	850	0.1	0.4

Milling Conditions for CSEB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Length of Cut (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2025-0250(-6)	R1.25	2.5	27,000	2,300	0.28	0.75	27,000	2,300	0.25	0.5	27,000	2,300	0.25	0.75	13,000	1,100	0.21	0.63
2025-0375		3.75	27,000	2,300	0.28	0.75	27,000	2,300	0.25	0.5	27,000	2,300	0.25	0.75	13,000	1,100	0.21	0.63
2025-0600		6	25,000	2,100	0.26	0.67	25,000	2,100	0.23	0.46	24,000	2,000	0.2	0.65	11,000	930	0.14	0.44
2030-0300	R1.5	3	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76
2030-0450		4.5	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76
2030-0800		8	22,000	2,300	0.28	0.7	22,000	2,300	0.28	0.7	20,000	2,000	0.2	0.65	10,700	1,000	0.18	0.54
2035-0520	R1.75	5.2	24,000	2,700	0.35	1	24,000	2,700	0.35	1	21,000	2,400	0.35	1	12,000	1,700	0.3	0.9
2040-0400	R2	4	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
2040-0600(-4)		6	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
2040-0800		8	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
2045-0670	R2.25	6.7	21,000	3,000	0.45	1.3	21,000	3,000	0.45	1.3	16,000	2,400	0.42	1.2	10,000	1,900	0.38	1.1
2050-0500	R2.5	5	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,000	2,400	0.45	1.4	9,000	1,800	0.42	1.2
2050-0750		7.5	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,000	2,400	0.45	1.4	9,000	1,800	0.42	1.2
2050-0800		8	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,000	2,400	0.45	1.4	9,000	1,800	0.42	1.2
2050-1200		12	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,000	2,400	0.45	1.4	9,000	1,800	0.42	1.2
2055-0820	R2.75	8.2	17,000	3,000	0.55	1.6	17,000	3,000	0.55	1.6	12,000	2,400	0.5	1.5	8,500	1,800	0.45	1.3
2060-0600	R3	6	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
2060-0900		9	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
2060-1200		12	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
2065-0970	R3.25	9.7	15,000	3,100	0.65	1.95	15,000	3,100	0.65	1.95	10,000	2,200	0.59	1.8	7,000	1,800	0.54	1.6
2070-1050	R3.5	10.5	14,000	3,200	0.7	2.1	14,000	3,200	0.7	2.1	9,000	2,100	0.63	1.9	6,500	1,800	0.57	1.7
2075-1120	R3.75	11.2	13,000	3,300	0.75	2.25	13,000	3,300	0.75	2.25	8,200	2,000	0.67	2	6,000	1,800	0.6	1.8
2080-0800	R4	8	12,000	3,300	0.8	2.4	12,000	3,300	0.8	2.4	7,400	1,900	0.72	2.2	5,700	1,800	0.65	2
2080-1200		12	12,000	3,300	0.8	2.4	12,000	3,300	0.8	2.4	7,400	1,900	0.72	2.2	5,700	1,800	0.65	2
2080-1400		14	12,000	3,300	0.8	2.4	12,000	3,300	0.8	2.4	7,400	1,900	0.72	2.2	5,700	1,800	0.65	2
2085-1270	R4.25	12.7	12,000	3,300	0.85	2.55	12,000	3,300	0.85	2.55	6,800	1,800	0.75	2.3	5,400	1,700	0.7	2.1
2090-1350	R4.5	13.5	11,000	3,400	0.9	2.7	11,000	3,400	0.9	2.7	6,300	1,700	0.8	2.4	5,100	1,600	0.75	2.2
2100-1000	R5	10	10,000	3,500	1	3	10,000	3,500	1	3	5,200	1,650	0.9	2.7	4,600	1,500	0.85	2.5
2100-1500		15	10,000	3,500	1	3	10,000	3,500	1	3	5,200	1,650	0.9	2.7	4,600	1,500	0.85	2.5
2100-1800		18	10,000	3,500	1	3	10,000	3,500	1	3	5,200	1,650	0.9	2.7	4,600	1,500	0.85	2.5
2110-1650	R5.5	16.5	9,000	3,400	1.1	3.3	9,000	3,400	1.1	3.3	4,700	1,500	1	3	4,200	1,350	0.9	2.7
2120-1200	R6	12	8,400	3,300	1.2	3.6	8,400	3,300	1.2	3.6	4,300	1,350	1.1	3.2	3,800	1,250	1	3
2120-1800		18	8,400	3,300	1.2	3.6	8,400	3,300	1.2	3.6	4,300	1,350	1.1	3.2	3,800	1,250	1	3
2120-2200		22	8,400	3,300	1.2	3.6	8,400	3,300	1.2	3.6	4,300	1,350	1.1	3.2	3,800	1,250	1	3

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.



DCB



Diamond Coated 2 Flute Ball End Mills for Graphite Milling

R0.5～R6


MG DIA 35° R ±0.01 Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○	★	○	○	●				○

Features

Diamond coated 2 flute ball end mills for Graphite Electrode milling.
New diamond coating with a highly adhesive base layer offers excellent wear resistance and longer tool life.

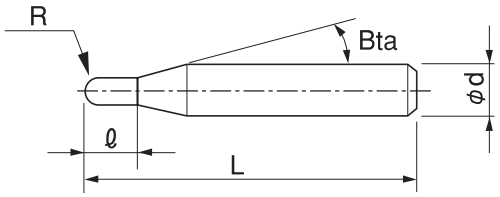

The shank taper angle shown is not an exact value.

Total 9 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
DCB 2010	R0.5	5	16°	60	4	—
DCB 2020	R1	10	16°	70	4	—
DCB 2030	R1.5	15	16°	80	4	—
DCB 2040	R2	20	—	100	4	—
DCB 2050	R2.5	20	—	100	5	—
DCB 2060	R3	30	—	150	6	—
DCB 2080	R4	40	—	150	8	—
DCB 2100	R5	50	—	180	10	—
DCB 2120	R6	55	—	180	12	—

Milling Conditions for DCB


WORK MATERIAL		GRAPHITE			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2010	R0.5	10,000	140	0.1	0.3
2020	R1	10,000	300	0.2	0.6
2030	R1.5	10,000	900	0.3	0.9
2040	R2	10,000	900	0.4	1.2
2050	R2.5	10,000	1,200	0.5	1.5
2060	R3	10,000	1,460	0.6	1.8
2080	R4	7,500	1,350	0.8	2.4
2100	R5	6,000	1,440	1	3
2120	R6	5,000	1,400	1.2	3.6

◆ High speed milling

WORK MATERIAL		GRAPHITE			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2010	R0.5	50,000	700	0.1	0.3
2020	R1	45,000	1,350	0.2	0.6
2030	R1.5	30,000	2,700	0.3	0.9
2040	R2	22,500	2,025	0.4	1.2
2050	R2.5	18,000	2,160	0.5	1.5
2060	R3	15,000	2,190	0.6	1.8
2080	R4	11,500	2,300	0.8	2.4
2100	R5	9,000	2,340	1	3
2120	R6	7,500	2,250	1.2	3.6

Note:
・Use a milling machine dedicated for Graphite.
・Recommend air blow for Graphite.

For 3D milling / Finishing
Milling Amount (mm)



DCB Series
Aluminum:A7075
Milling Video

DCB Series
Graphite:TTK-5(80HS)
Milling Video

CFB




UTCOAT 3 Flute Ball End Mills

R0.3～R6

Super MG | UT COAT | 30° | R ±0.005 (R0.3～R1.5) | R ±0.007 (R2～R3) | R ±0.01 (R4～R6) | Shank Dia 0/-0.005 | Variable Pitch (R2～R6)

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	●		●	○		●	●		

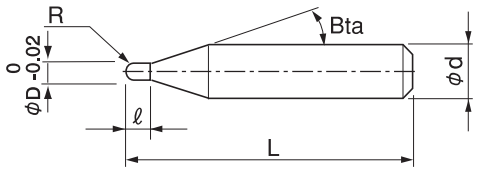

The shank taper angle shown is not an exact value.

Total 14 models


Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CFB 3006-0090	R0.3	0.9	16°	50	4	—
CFB 3008-0120	R0.4	1.2	16°	50	4	—
CFB 3010-0150	R0.5	1.5	16°	50	4	—
CFB 3015-0225	R0.75	2.25	16°	50	4	—
CFB 3020-0300	R1	3	16°	50	4	—
CFB 3030-0450	R1.5	4.5	16°	60	6	—
CFB 3040-0600-4	R2	6	—	70	4	—
CFB 3040-0600			16°	70	6	—
CFB 3050-0750	R2.5	7.5	16°	80	6	—
CFB 3060-0900	R3	9	—	80	6	—
CFB 3080-1200	R4	12	—	90	8	—
CFB 3080-1200LS				120	8	—
CFB 3100-1500	R5	15	—	100	10	—
CFB 3120-1800	R6	18	—	110	12	—

Feature 1 High efficiency


Big pocket improves chip evacuation even with multi-flutes.
Achieves deep milling.

Refer to F-36 for deep milling high efficiency roughing examples.

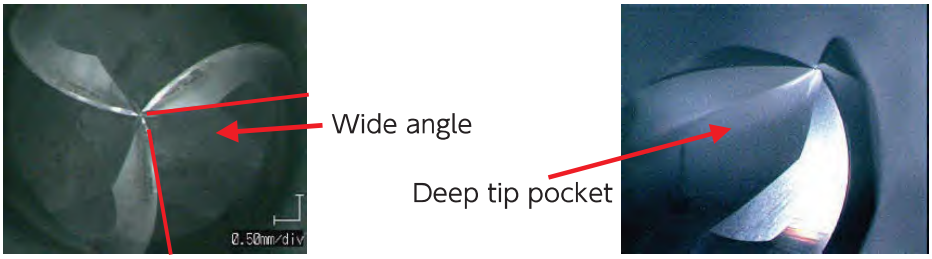

Feature 2
Tip slot effect


Micro 3 groove design at the tip prevents chip biting even at the peripheral speed zero point, providing an excellent surface finish.
Micro 3 groove design is applied to R1 or above.

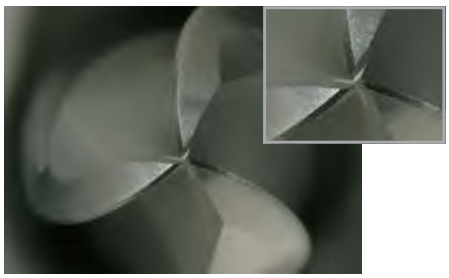

☆ Radius accuracy of the whole ball
- ± 0.005 (R1 ～ R1.5)
- ± 0.007 (R2 ～ R3)
- ± 0.01 (R4 ～ R6)

Comparison with 2 flutes (Ra) PXA30 30HRC

Tool Diameter R3	
Spindle Speed (min^{-1})	14,000
Feed Rate (mm/min)	3,900
a_p (mm)	0.1
a_e (mm)	0.24
Coolant Water soluble (Through Spindle)	

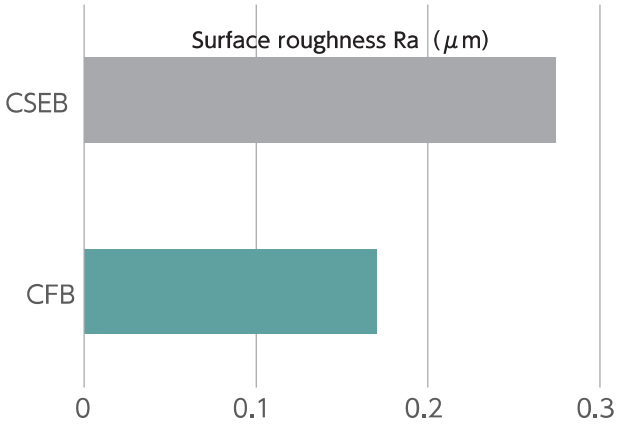





CFB enables highly efficient finishing with a wide pitch of a_e 0.24.
※ The Ra of CSEB and CFB are both the same at a_e 0.12.

Feature 3
Designed for a wide range of materials

Suited for various heat-resistant alloys including Titanium and Inconel due to large pocket, variable pitch and high lubricity coating.
Tip groove design offers clean milling surfaces even for Copper, Aluminum and Acrylic.

Copper, Acrylic	
R3 Ball Finishing	
Spindle Speed (min^{-1})	30,000
Feed Rate (mm/min)	4,000
a_p (mm)	0.12
a_e (mm)	0.12
Coolant: Water soluble	



Copper C1100
55 × 50 × 23 mm
Excellent surface roughness even on Copper that prone to chatter marks.



Acrylic
55 × 50 × 23 mm
Even Acrylic shows this high transparency without polishing.

SUS304



CFB R3



・Coolant: Water soluble ・Pocket size 55 × 50 × 23 mm

Process	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (min)
Roughing	9,000	3,000	0.6	3	9.5
Semi-finishing	9,000	3,000	0.7	0.7	4
Finishing	20,000	2,500	0.12	0.12	20.5
					34

Aluminum Alloys A7075




CFB R3



・Coolant: Water soluble ・Pocket size 55 × 50 × 23 mm

Process	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (min)
Roughing	12,000	6,000	0.6	3	5
Semi-finishing	12,000	6,000	0.7	0.7	2
Finishing	30,000	4,000	0.12	0.12	17
					24

Titanium Alloys Ti-6Al-4V

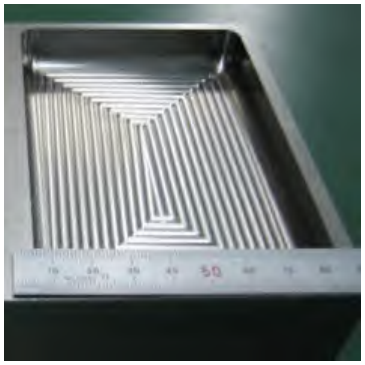

CFB R5



・Coolant: Water soluble ・Pocket size 80 × 120 × 15 mm

Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (min)
3,900	2,000	1	3	25

Dramatically high feed with Titanium Alloys.

3 series of tip groove ball

Raw Materials 40 50 55 60 65 Hardness (HRC)



CFB 3 flute ball, Flute design: Positive
CFLB 3 flute long neck ball

HFB 4 flute ball, Flute design: Negative



3 flute long neck ball CFLB series (G-91) and 4 flute ball HFB series for hard materials (F-43) are also available.



Milling Conditions for CFB

◆Roughing

WORK MATERIAL		COPPER / ALUMINUM ALLOYS C1100 / A5052 / A7075 (~225HB)				ALLOY STEELS / PREHARDENED STEELS S45C / S50C / SKD / NAK (~45HRC)				HARDENED STEELS STAVAX / SKD61 (45~55HRC)			
Coolant		DRY (Unsuitable for Aluminum Alloys) / WET				DRY / WET				DRY			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3006-0090	**R0.3**	30,000	1,000	0.03	0.13	30,000	1,000	0.03	0.13	30,000	700	0.03	0.13
3008-0120	**R0.4**	30,000	1,250	0.04	0.17	30,000	1,250	0.04	0.17	30,000	850	0.04	0.17
3010-0150	**R0.5**	30,000	1,500	0.05	0.21	30,000	1,500	0.05	0.21	30,000	1,000	0.05	0.21
3015-0225	**R0.75**	30,000	2,500	0.075	0.32	30,000	2,500	0.075	0.32	30,000	1,700	0.075	0.32
3020-0300	**R1**	30,000	3,200	0.2	0.6	30,000	3,200	0.2	0.6	30,000	2,500	0.2	0.6
3030-0450	**R1.5**	24,000	4,000	0.3	0.9	24,000	4,000	0.3	0.9	21,600	2,700	0.3	0.9
3040-0600	**R2**	18,000	4,000	0.4	1.2	18,000	4,000	0.4	1.2	16,200	2,700	0.4	1.2
3050-0750	**R2.5**	15,000	4,000	0.5	1.5	15,000	4,000	0.5	1.5	13,500	2,700	0.5	1.5
3060-0900	**R3**	12,000	4,000	0.6	1.8	12,000	4,000	0.6	1.8	10,800	2,700	0.6	1.8
3080-1200 (LS)	**R4**	9,000	4,000	0.8	2.4	9,000	4,000	0.8	2.4	8,100	2,700	0.75	2.1
3100-1500	**R5**	7,200	4,000	1	3	7,200	4,000	1	3	6,500	2,700	0.85	2.5
3120-1800	**R6**	6,000	4,000	1.2	3.6	6,000	4,000	1.2	3.6	5,400	2,700	0.95	3

WORK MATERIAL		TITANIUM ALLOYS / STAINLESS STEELS Ti-6A l-4V / SUS				HEAT RESISTANT ALLOYS Inconel718			
Coolant		DRY (Unsuitable for Aluminum Alloys) / WET				WET			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3006-0090	**R0.3**	20,000	1,000	0.015	0.09	10,000	250	0.015	0.09
3008-0120	**R0.4**	20,000	1,250	0.02	0.12	10,000	310	0.02	0.12
3010-0150	**R0.5**	20,000	1,500	0.025	0.15	10,000	375	0.025	0.15
3015-0225	**R0.75**	20,000	2,500	0.035	0.22	10,000	625	0.035	0.22
3020-0300	**R1**	24,000	4,000	0.1	0.4	12,000	1,000	0.1	0.4
3030-0450	**R1.5**	16,000	4,000	0.15	0.65	8,000	1,000	0.15	0.65
3040-0600	**R2**	12,000	4,000	0.2	0.85	6,000	1,000	0.2	0.85
3050-0750	**R2.5**	10,000	4,000	0.25	1	5,000	1,000	0.25	1
3060-0900	**R3**	8,000	4,000	0.3	1.3	4,000	1,000	0.3	1.3
3080-1200 (LS)	**R4**	6,000	4,000	0.4	1.7	3,000	900	0.35	1.6
3100-1500	**R5**	4,800	4,000	0.5	2.1	2,400	800	0.4	1.9
3120-1800	**R6**	4,000	4,000	0.6	2.6	2,000	800	0.45	2.2

The shank taper type : These are the parameters when clamping the shank with the shortest possible tool overhang.
The straight type : Adjust the parameters according to the overhang length using the ratios provided in the table below.

WORK MATERIAL	COPPER / CARBON STEELS / ALUMINUM ALLOYS S45C, S50C, A5052, A7075 (~225HB)				ALLOY STEELS / PREHARDENED STEELS SKD / NAK (~45HRC)				HARDENED STEELS STAVAX / SKD61 (45~55HRC)			
Overhang Length	Spindle Speed	Feed Rate	a_p Axial Depth	a_e Radial Depth	Spindle Speed	Feed Rate	a_p Axial Depth	a_e Radial Depth	Spindle Speed	Feed Rate	a_p Axial Depth	a_e Radial Depth
~3D	×1	×1~1.5(※)	×1	×1	×1	×1	×1	×1	×1	×1	×1	×1
4D	×0.9	×0.9~1.2(※)	×1	×1	×0.9	×0.9	×1	×1	×0.9	×0.9	×1	×1
5D	×0.75	×0.75	×1	×1	×0.75	×0.75	×0.9	×0.9	×0.75	×0.75	×0.85	×0.9
6D	×0.6	×0.6	×1	×1	×0.6	×0.6	×0.85	×0.9	×0.6	×0.6	×0.8	×0.85
7D	×0.45	×0.4	×0.95	×0.95	×0.45	×0.4	×0.8	×0.85	×0.45	×0.4	×0.7	×0.8
8D	×0.35	×0.3	×0.9	×0.9	×0.35	×0.3	×0.7	×0.8	×0.35	×0.3	×0.6	×0.75

WORK MATERIAL	TITANIUM ALLOYS / STAINLESS STEELS Ti-6A l-4V / SUS				HEAT RESISTANT ALLOYS Inconel718			
Overhang Length	Spindle Speed	Feed Rate	a_p Axial Depth	a_e Radial Depth	Spindle Speed	Feed Rate	a_p Axial Depth	a_e Radial Depth
~3D	×1	×1	×1	×1	×1	×1	×1	×1
4D	×0.9	×0.9	×1	×1	×0.9	×0.9	×1	×1
5D	×0.75	×0.75	×0.95	×0.95	×0.75	×0.75	×0.85	×0.9
6D	×0.6	×0.6	×0.9	×0.9	×0.6	×0.6	×0.8	×0.85
7D	×0.45	×0.4	×0.85	×0.9	×0.45	×0.4	×0.7	×0.8
8D	×0.35	×0.3	×0.85	×0.85	×0.35	×0.3	×0.6	×0.75

(※) For high efficiency milling, set the feed rate higher. For improved surface finish and/or longer tool life, reduce the feed rate.

Milling Conditions for CFB

◆Finishing (overhang length 6D or below)

WORK MATERIAL		COPPER / CARBON STEELS / ALUMINUM ALLOYS S45C / S50C / A5052 / A7075 (~225HB)				ALLOY STEELS / PREHARDENED STEELS SKD / NAK (~45HRC)				HARDENED STEELS STAVAX / SKD61 (45~55HRC)			
Coolant		WET				DRY / OIL MIST / WET				DRY / OIL MIST			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3020-0300	**R1**	53,000	4,000	0.05	0.04	45,000	3,400	0.05	0.04	36,800	2,200	0.05	0.04
3030-0450	**R1.5**	41,200	4,200	0.06	0.06	35,000	3,500	0.06	0.06	28,600	2,300	0.06	0.06
3040-0600	**R2**	29,400	4,400	0.08	0.08	24,000	3,700	0.08	0.08	20,400	2,400	0.08	0.08
3060-0900	**R3**	17,600	4,600	0.1	0.12	14,000	3,900	0.1	0.12	12,300	2,600	0.1	0.12
3080-1200	**R4**	14,600	4,600	0.1	0.16	12,400	3,900	0.1	0.16	10,200	2,600	0.1	0.16
3100-1500	**R5**	11,700	4,700	0.1	0.2	9,900	4,000	0.1	0.2	8,200	2,600	0.1	0.2
3120-1800	**R6**	8,800	4,800	0.1	0.24	7,400	4,000	0.1	0.24	6,200	2,700	0.1	0.24

WORK MATERIAL		TITANIUM ALLOYS / STAINLESS STEELS Ti-6A l-4V / SUS				HEAT RESISTANT ALLOYS Inconel718			
Coolant		WET				WET			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3020-0300	**R1**	44,200	2,700	0.05	0.04	22,100	1,100	0.05	0.04
3030-0450	**R1.5**	34,400	2,800	0.06	0.06	17,200	1,100	0.06	0.06
3040-0600	**R2**	24,600	3,000	0.08	0.08	12,300	1,200	0.08	0.08
3060-0900	**R3**	14,800	3,200	0.1	0.12	7,400	1,300	0.1	0.12
3080-1200	**R4**	12,300	3,200	0.1	0.16	6,200	1,300	0.1	0.16
3100-1500	**R5**	9,900	3,200	0.1	0.2	5,000	1,300	0.1	0.2
3120-1800	**R6**	7,500	3,300	0.1	0.24	3,800	1,400	0.1	0.24

*When finishing with an overhang of over 6 x D, fine adjustments are recommended.


Milling Conditions for CFB

◆Deep and high efficiency roughing (overhang length 3xD or below for straight type)

This parameter is effective in using the machine that has low acceleration and applying complex milling path that repeats accelerating/braking frequently.

WORK MATERIAL		COPPER / CARBON STEELS / ALUMINUM ALLOYS S45C / S50C / A5052 / A7075 (~225HB)				ALLOY STEELS / PREHARDENED STEELS SKD / NAK (~45HRC)			
Coolant		DRY (Unsuitable for Aluminum Alloys) / WET				DRY / WET			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3020-0300	**R1**	30,000	2,500	0.4	0.8	30,000	2,500	0.4	0.8
3030-0450	**R1.5**	20,000	2,500	0.6	1.2	20,000	2,500	0.6	1.2
3040-0600	**R2**	15,000	2,500	0.8	1.6	15,000	2,500	0.8	1.6
3060-0900	**R3**	10,000	2,500	1.2	2.4	10,000	2,500	1.2	2.4
3080-1200	**R4**	7,100	2,350	1.6	3.2	7,100	2,350	1.6	3.2
3100-1500	**R5**	5,400	2,250	2	4	5,400	2,250	2	4
3120-1800	**R6**	4,500	2,250	2.4	4.8	4,500	2,250	2.4	4.8

WORK MATERIAL		HARDENED STEELS STAVAX / SKD61 (45~55HRC)				TITANIUM ALLOYS / STAINLESS STEELS Ti-6A l-4V / SUS			
Coolant		DRY				WET			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3020-0300	**R1**	24,000	1,500	0.4	0.8	19,200	2,000	0.2	0.6
3030-0450	**R1.5**	16,000	1,500	0.6	1.2	12,800	2,000	0.3	0.9
3040-0600	**R2**	12,000	1,500	0.8	1.6	9,600	2,000	0.4	1.2
3060-0900	**R3**	8,000	1,500	1.2	2.4	6,400	2,000	0.6	1.8
3080-1200	**R4**	5,600	1,400	1.5	3	4,800	2,000	0.8	2.4
3100-1500	**R5**	4,300	1,300	1.7	3.5	3,900	2,000	1	3
3120-1800	**R6**	3,550	1,300	1.9	4.2	3,200	2,000	1.2	3.6



Note:

- Fix the work piece firmly, and use a machine that has high rigidity and generates a low level of vibration especially under high efficienct deep milling condition in roughing process.
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- Decrease both spindle speed and feed rate 10% for slope milling.
- Decrease both spindle speed and feed rate to meet required precision and to prevent the shank making contact with the work piece.
- DRY: air blow, WET: water soluble or oil coolant.
- A long overhang may cause tool deflection, leaving uncut material.

CFB Series
SKD61(47HRC)
Milling Video

DLC-CFB



DLCCOAT 3 Flute Ball End Mills for Aluminum Milling

R0.3～R6


Super MG | DLC | 30° | R ±0.005 (R0.3～R1.5) | R ±0.007 (R2～R3) | R ±0.01 (R4～R6) | Shank Dia 0/-0.005 | Variable Pitch (R2～R6)


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									★		○	○					

Features

Achieves dramatically higher feed rates with 3 flutes, shortening roughing time.
DLC coating offers excellent welding and wear resistance.
Offers highly efficient milling even for a slow-moving shape, with deep cut milling.
3 flute variable pitch design reduces chattering.
The 3 grooves at the tip offers chip evacuation and improved surface finish. (Except R0.75 or below)



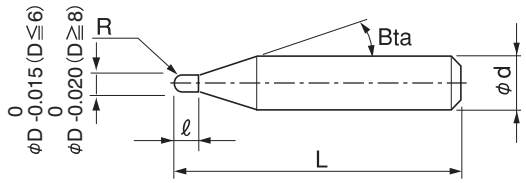

The shank taper angle shown is not an exact value.

Total 14 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLC-CFB 3006-0090	R0.3	0.9	16°	50	4	—
DLC-CFB 3008-0120	R0.4	1.2	16°	50	4	—
DLC-CFB 3010-0150	R0.5	1.5	16°	50	4	—
DLC-CFB 3015-0225	R0.75	2.25	16°	50	4	—
DLC-CFB 3020-0300	R1	3	16°	50	4	—
DLC-CFB 3030-0450	R1.5	4.5	16°	60	6	—
DLC-CFB 3040-0600-4	R2	6	—	70	4	—
DLC-CFB 3040-0600			16°	70	6	—
DLC-CFB 3050-0750	R2.5	7.5	16°	80	6	—
DLC-CFB 3060-0900	R3	9	—	80	6	—
DLC-CFB 3080-1200	R4	12	—	90	8	—
DLC-CFB 3080-1200LS				120	8	—
DLC-CFB 3100-1500	R5	15	—	100	10	—
DLC-CFB 3120-1800	R6	18	—	110	12	—

Milling Conditions for DLC-CFB


◆Roughing

WORK MATERIAL		ALUMINUM ALLOYS A5052 etc.				ALUMINUM ALLOYS A7075 etc.			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3006-0090	**R0.3**	30,000	1,200	0.03	0.13	30,000	1,000	0.03	0.13
3008-0120	**R0.4**	30,000	1,500	0.04	0.17	30,000	1,250	0.04	0.17
3010-0150	**R0.5**	30,000	1,800	0.05	0.21	30,000	1,500	0.05	0.21
3015-0225	**R0.75**	30,000	3,000	0.075	0.32	30,000	2,500	0.075	0.32
3020-0300	**R1**	30,000	3,840	0.2	0.6	30,000	3,200	0.2	0.6
3030-0450	**R1.5**	24,000	4,800	0.3	0.9	24,000	4,000	0.3	0.9
3040-0600(-4)	**R2**	18,000	4,800	0.4	1.2	18,000	4,000	0.4	1.2
3050-0750	**R2.5**	15,000	4,800	0.5	1.5	15,000	4,000	0.5	1.5
3060-0900	**R3**	12,000	4,800	0.6	1.8	12,000	4,000	0.6	1.8
3080-1200(LS)	**R4**	9,000	4,800	0.8	2.4	9,000	4,000	0.8	2.4
3100-1500	**R5**	7,200	4,800	1	3	7,200	4,000	1	3
3120-1800	**R6**	6,000	4,800	1.2	3.6	6,000	4,000	1.2	3.6

The shank taper type : These are the parameters when clamping the shank with the shortest possible tool overhang.
The straight type : Adjust the parameters according to the overhang length using the ratios provided in the table below.

WORK MATERIAL	ALUMINUM ALLOYS A5052, A7075			
Overhang Length	Spindle Speed	Feed Rate	a_p Axial Depth	a_e Radial Depth
~3D	×1	×1~1.5(※)	×1	×1
4D	×0.9	×0.9~1.2(※)	×1	×1
5D	×0.75	×0.75	×1	×1
6D	×0.6	×0.6	×1	×1
7D	×0.45	×0.4	×0.95	×0.95
8D	×0.35	×0.3	×0.9	×0.9

(※)For high efficiency milling, set the feed rate higher. For improved surface finish and/or longer tool life, reduce the feed rate.



Milling Conditions for DLC-CFB

◆Finishing (overhang length 6D or below)

WORK MATERIAL		ALUMINUM ALLOYS A5052				ALUMINUM ALLOYS A7075			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3020-0300	**R1**	53,000	4,800	0.05	0.04	53,000	4,000	0.05	0.04
3030-0450	**R1.5**	42,100	5,040	0.06	0.06	42,100	4,200	0.06	0.06
3040-0600	**R2**	29,400	5,280	0.08	0.08	29,400	4,400	0.08	0.08
3060-0900	**R3**	17,600	5,520	0.1	0.12	17,600	4,600	0.1	0.12
3080-1200	**R4**	14,600	5,520	0.1	0.2	14,600	4,600	0.1	0.2
3100-1500	**R5**	11,700	5,640	0.1	0.2	11,700	4,700	0.1	0.2
3120-1800	**R6**	8,800	5,760	0.1	0.24	8,800	4,800	0.1	0.24

Adjustments are recommended when finishing with an overhang of over 6 x D.

◆Deep and high efficiency roughing (overhang length 3D or below for straight type)

This parameter is effective in using the machine that has low acceleration and applying complex milling path that repeats accelerating/braking frequently.

WORK MATERIAL		ALUMINUM ALLOYS A5052				ALUMINUM ALLOYS A7075			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3020-0300	**R1**	30,000	3,000	0.4	0.8	30,000	2,500	0.4	0.8
3030-0450	**R1.5**	20,000	3,000	0.6	1.2	20,000	2,500	0.6	1.2
3040-0600	**R2**	15,000	3,000	0.8	1.6	15,000	2,500	0.8	1.6
3060-0900	**R3**	10,000	3,000	1.2	2.4	10,000	2,500	1.2	2.4
3080-1200	**R4**	7,100	2,820	1.6	3.2	7,100	2,350	1.6	3.2
3100-1500	**R5**	5,400	2,700	2	4	5,400	2,250	2	4
3120-1800	**R6**	4,500	2,700	2.4	4.8	4,500	2,250	2.4	4.8

Note:
- Fix the work piece firmly, and use a machine that has high rigidity and generates a low level of vibration especially under high efficienct deep milling condition in roughing process.
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- Decrease both spindle speed and feed rate 10% for slope milling.
- Decrease both spindle speed and feed rate to meet required precision and to prevent the shank making contact with the work piece.
- Recommend water soluble or oil coolant.
- A long overhang may cause tool deflection, leaving uncut material.

Mold Milling Example for Plastic Container
DLC-CFB R4 × L12

A5052



Work Size : 130 x 105 x 95 mm
Pocket Size : ϕ80.5 x Depth 25 mm
Coolant : Water Soluble (Through Spindle)

Tool after milling



More tool life left

No.	Milling Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Milling Spot	Cycle Time (h:min)
1	Roughing	DLC-CFB 3080-1200	8,100	4,320	0.8	2.4	0.01	Pocket & Half Pocket	1:05
2	Finishing				0.0001 (Cusp Height)	0.05	0	Pocket	2:58
								Total	4:03

HFB



HARDMAX 4 Flute Ball End Mills

R1～R6


Super MG | HARD MAX | 40° | R ±0.005 (R1～R1.5) | R ±0.007 (R2～R3) | R ±0.01 (R4～R6) | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
			●	●	●	●	●										

Features

Dramatically improved the milling efficiency. Maximum 27 times higher chip evacuation compared to conventional tool.
New ball tip design offers polish-less bottom surface finishing.
Affordable pricing.
Diameter Tolerance: 0/-0.02

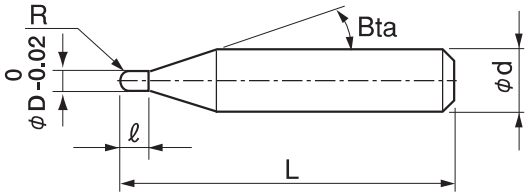

The shank taper angle shown is not an exact value.

Total 8 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
HFB 4020-0300	R1	3	16°	50	4	—
HFB 4020-0300-6	R1	3	16°	50	6	—
HFB 4030-0450	R1.5	4.5	16°	60	6	—
HFB 4040-0600	R2	6	16°	70	6	—
HFB 4060-0900	R3	9	—	80	6	—
HFB 4080-1200	R4	12	—	90	8	—
HFB 4100-1500	R5	15	—	100	10	—
HFB 4120-1800	R6	18	—	110	12	—

HFB-S



HARDMAX 4 Flute Short Shank Ball End Mills

R1～R6


Super MG | HARD MAX | 40° | R ±0.005 (R1～R1.5) | R ±0.007 (R2～R3) | R ±0.01 (R4～R6) | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material															
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
			●	●	●	●	●										

Features

Compatible with shrink-fit toolholder systems for high efficiency.
A shorter overhang offers higher feed rates and precision.
Diameter Tolerance: 0/-0.02

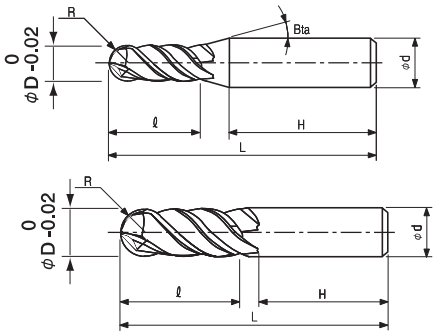

The shank taper angle shown is not an exact value.

Total 7 models

Unit (mm)

Model Number	Radius of Ball Nose R	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
HFB 4020-0300S	R1	3	16°	40	4	31.0	—
HFB 4030-0450S	R1.5	4.5	16°	40	4	30.5	—
HFB 4040-0600S	R2	6	16°	45	6	32.5	—
HFB 4060-0900S	R3	9	—	50	6	34.5	—
HFB 4080-1200S	R4	12	—	60	8	40.5	—
HFB 4100-1500S	R5	15	—	60	10	35.5	—
HFB 4120-1800S	R6	18	—	60	12	31.5	—

Milling Conditions for HFB / HFB-S

◆Roughing

WORK MATERIAL		PREHARDENED STEELS NAK80 (35~45HRC) Coolant: Water Soluble / Air Blow / Oil Mist				HARDENED STEELS STAVAX / SKD61 (45~55HRC) Coolant: Air Blow / Oil Mist			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-0300	**R1**	20,000	1,500	0.5	0.8	16,000	1,500	0.6	0.9
4030-0450	**R1.5**	16,000	2,000	0.6	0.9	10,500	1,500	0.9	1.35
4040-0600	**R2**	15,000	3,000	0.4	0.8	9,000	3,000	0.7	1.4
4060-0900	**R3**	9,000	2,500	0.5	1	8,000	3,500	0.6	1.8
4080-1200	**R4**	CFB Series are Recommended				6,200	3,000	0.75	2.1
4100-1500	**R5**					4,500	2,700	0.85	2.5
4120-1800	**R6**					3,750	2,700	0.95	3

WORK MATERIAL		HARDENED STEELS YXR33 / SKD11 (55~60HRC) Coolant: Air Blow / Oil Mist				HARDENED STEELS HAP10 / SKD11 / YXR7 (60~65HRC) Coolant: Air Blow / Oil Mist			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-0300	**R1**	10,000	1,500	0.4	0.8	8,500	1,200	0.3	0.7
4030-0450	**R1.5**	6,500	1,500	0.6	1.2	5,500	1,200	0.5	1.1
4040-0600	**R2**	5,500	1,750	0.6	1.2	6,200	2,000	0.45	1
4060-0900	**R3**	4,500	1,750	0.6	1.5	5,000	2,000	0.45	1.2
4080-1200	**R4**	3,750	1,500	0.7	1.75	4,500	1,800	0.5	1.4
4100-1500	**R5**	3,000	1,500	0.75	2	3,600	1,800	0.6	1.6
4120-1800	**R6**	2,500	1,500	0.9	2.4	3,000	1,800	0.7	1.8

WORK MATERIAL		HARDENED STEELS HAP72 (65~70HRC) Coolant: Air Blow / Oil Mist			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-0300	**R1**	10,500	750	0.2	0.6
4030-0450	**R1.5**	7,000	750	0.25	0.8
4040-0600	**R2**	7,500	1,200	0.2	0.6
4060-0900	**R3**	5,000	1,500	0.3	0.9
4080-1200	**R4**	4,000	1,500	0.3	1
4100-1500	**R5**	3,000	1,500	0.3	1.2
4120-1800	**R6**	2,500	1,300	0.3	1.4

Milling Conditions for HFB / HFB-S

Please adjust milling parameter according to overhang length, referring to the following table.

Radius of Ball Nose R1 (ϕ4 shank), R1.5

Overhang Length	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
ϕD×5 or below	×1	×1	×1	×1
～ϕD×6	×0.9	×0.9	×0.95	×0.95
～ϕD×7	×0.8	×0.8	×0.9	×0.95
～ϕD×8	×0.7	×0.7	×0.85	×0.9
～ϕD×9	×0.65	×0.6	×0.8	×0.9
～ϕD×10	×0.55	×0.5	×0.75	×0.85

Radius of Ball Nose R1 (ϕ6 shank)

Overhang Length	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
ϕD×6	×1	×1	×1	×1
～ϕD×7	×0.85	×0.9	×0.95	×0.95
～ϕD×8	×0.7	×0.8	×0.9	×0.9
～ϕD×9	×0.55	×0.75	×0.85	×0.9
～ϕD×10	×0.4	×0.65	×0.8	×0.85

Radius of Ball Nose R1.5 (Short shank)

Overhang Length	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
ϕD×5 or below	×1	×1	×1	×1
～ϕD×6	×0.55	×0.3	×0.4	×0.55

Radius of Ball Nose R2 or above

Overhang Length	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)
ϕD×3 or below	×1	×1	×1	×1
～ϕD×3.5	×1	×0.85	×0.85	×0.9
～ϕD×4	×1	×0.8	×0.7	×0.8
～ϕD×4.5	×0.85	×0.55	×0.6	×0.75
～ϕD×5	×0.7	×0.35	×0.6	×0.75
～ϕD×5.5	×0.55	×0.25	×0.55	×0.7
～ϕD×6	×0.4	×0.15	×0.5	×0.7


* Refer to next page for finishing condition.

HFB Series
SKD11(60HRC)
Milling Video

Milling Conditions for HFB / HFB-S

◆Finishing (overhang length 6D or below)


WORK MATERIAL		PREHARDENED STEELS / HARDENED STEELS (35~60HRC) Coolant: Oil Mist			
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-0300	**R1**	26,000	2,000	0.02	0.06
4030-0450	**R1.5**	25,000	1,800	0.03	0.07
4040-0600	**R2**	22,500	1,500	0.04	0.08
4060-0900	**R3**	15,000	1,000	0.06	0.12
4080-1200	**R4**	11,250	750	0.08	0.16
4100-1500	**R5**	9,000	600	0.1	0.2
4120-1800	**R6**	7,500	500	0.12	0.24



Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- Adjustments are recommended when finishing with an overhang of over 6xD.
- Recommend air blow or oil mist. For materials under 45HRC, recommend water soluble coolant.


Feature 1 Special Design Achieves Outstanding Chip Evacuation

HFB Design

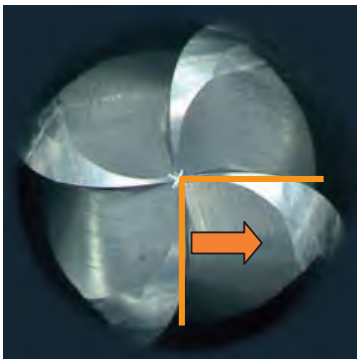




Flat (Non-rolled up) chip shape shows smooth chip evacuation.

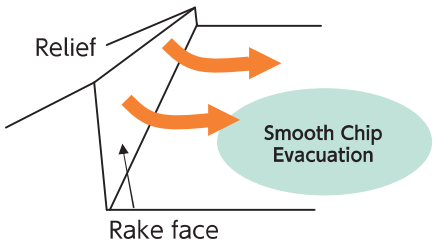


Conventional Design

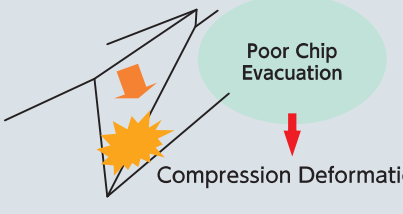



◎ Smooth chip evacuation achieves more stable milling.

	HFB	Competitor A	Competitor B
Tip Point			
Milling Surface			
Chip Condition			

Tool	R2
Work Material	YXR33 (58HRC)
Spindle Speed	6,000 min^{-1}
Feed Rate	2,400 mm/min (Slotting : 1,200 mm/min)
a_p	1 mm (0.25D) D : Outside diameter
a_e	1 mm (0.25D) D : Outside diameter
Overhang Length	15 mm
Coolant	Air Blow (Through Spindle)
Pocket Size	100 mm × 20 mm × 6 mm (X × Y × Z)
Cycle Time	28.2 min

The large pocket design of the HFB promotes better chip evacuation and longer tool life when compared to a conventional design which shows premature damage.


Feature 2　Polish-less Milling by 4 Tip Grooves

STAVAX (53HRC) Milling Example: Flat Surface Finishing HFB (R3)

HFB　R3
Max Roughness
Rz:0.9 μm




Conventional
2 Flutes
Max Roughness
Rz:6.43 μm

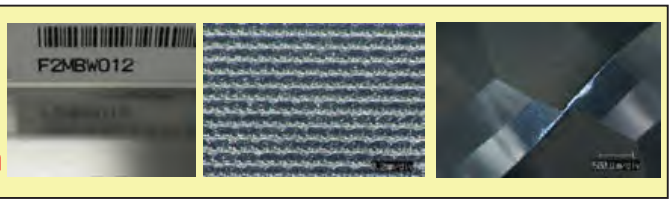

Spindle Speed	12,800 min^{-1}
Feed Rate	2,500 mm/min
a_p	0.06 mm (0.01D)
a_e	0.12 mm (0.02D)
Coolant	Oil Mist

4 grooves on the tip point help surface finishing process. Max roughness values was 0.9 μm on 1 hour testing.
The tool condition is better than conventional 2 Flutes.

Tip Point

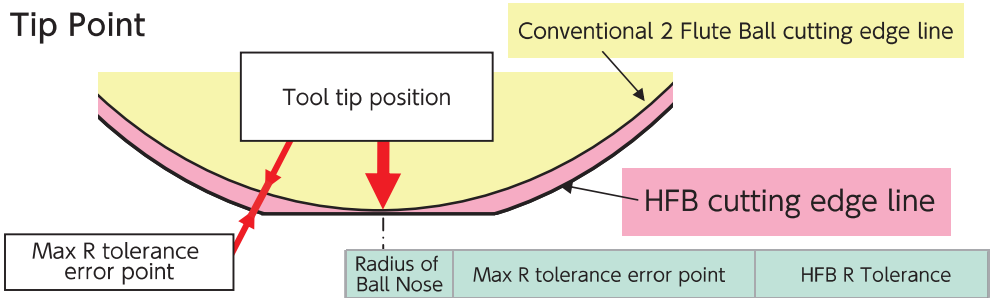

Radius of Ball Nose	Max R tolerance error point	HFB R Tolerance
R2・R3	+5 μm or below	±7 μm
R4・R5	+7 μm or below	±10 μm
R6	+10 μm or below	

4 Tip Point Grooves



Smooth chip evacuation reduces damage at the tip.

HGLB



HMGCOAT 2 Flute Long Neck Ball End Mills for Hard Materials


R0.05～R3

Super MG | HMG COAT | Back Taper Geometry


Back taper geometry does not apply to R0.4 or below, ℓ1 / φD ≦ 10

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
		○	●	●	●	★	★										

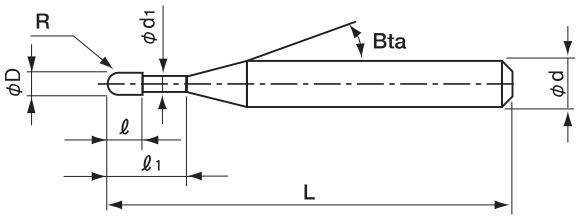

The shank taper angle shown is not an exact value.



◆New geometry with higher resistance to chipping

Optimized rake angle and relief angle for milling hard materials of 60HRC or more


HGLB



HWLB



Tool Angle HGLB > HWLB

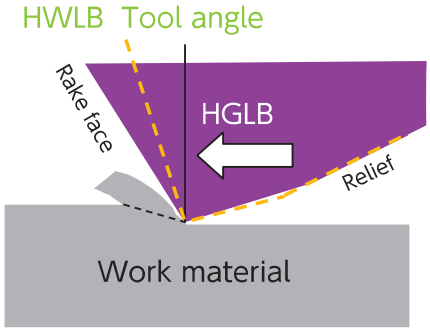

◆ High Precision

HGLB

Unit (mm)

Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy	Shank Diameter Tolerance	Helix Angle
R0.05 ～ 0.075	0/-0.008	± 0.002	0/-0.004 (h4)	30°
R0.1 ～ R1		± 0.003		
R1.5 ～ R2	0/-0.01			
R2.5 ～ R3		± 0.005		

Spur gear die　Milling example
HGB / HGLB　R0.5 • R1 • R1.5

HAP72　(68HRC)



4 Flute / 6 Flute Radius End Mills for Hard Materials

HMERS



Ball End Mills for Hard Materials

HGB



Long Neck Ball End Mills for Hard Materials

HGLB



Coolant : Air Blow (Through Spindle)
Work size : ϕ 50.4 × Depth 11 mm

Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m)	Milling Method
Roughing	HGB R1.5	8,280	1,140	0.12	0.55	0.02	1:40	Roughing
Semi-Finishing	HGLB R1 × EL6	12,250	1,800	0.06	0.3	0.02	0:11	Rest machining
Semi-Finishing			1,800	0.06	0.05	0.005	0:50	Semi-Finishing
Finishing			900	0.00015 Cusp Height	—	0	0:09	45° surface / Finishing
Finishing	HMERS ϕ3 × CR0.1	8,600	465 1,500	2	1	0	0:02	Above the gear teeth / Finishing
Finishing			465 1,500	0.0002 Cusp Height	1	0	0:01	Bottom surface of cylindrical part / Finishing
Finishing	HGLB R0.5 × EL6	20,000	800	0.00015 Cusp Height	—	0	0:55	Gear wall / Finishing
Finishing			800	0.005	0.02	0	1:37	Gear bottom/ Finishing

Total　5:25


Wear comparison　Milling example
HGLB　R1 × EL6

HAP72　(68HRC)


Tools after milling



Conventional



HGLB

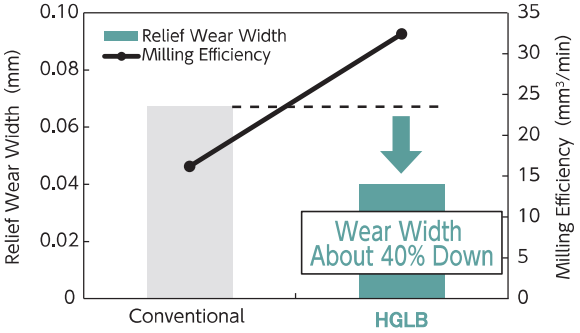

HGLB mills twice as efficient as the conventional tool.

Tool	Conventional HSLB	HGLB 2020-060
Spindle Speed	9,200 min^{-1}	12,250 min^{-1}
Feed Rate	900 mm/min	1,800 mm/min
Axial Depth a_p	0.06 mm	
Radial Depth a_e	0.3 mm	
Coolant	Air Blow (Through Spindle)	
Milling Shape	Square Pocket (20 x 15 x Depth 2 mm) × 2 Pockets	
Cycle Time	76 min	50 min

Milling Efficiency (mm^3/min) = Feed Rate × a_p × a_e

Finishing process comparison of HWLB and HGLB
HWLB / HGLB R0.5 × EL10


STAVAX (52HRC)

- Pocket Size
  6 × 6 × D0.2 mm
- Coolant : Oil Mist

Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time (min)
22,000	600	0.01	0.01	180


HWLB

1 pocket 90min | 2 pocketsl 180min

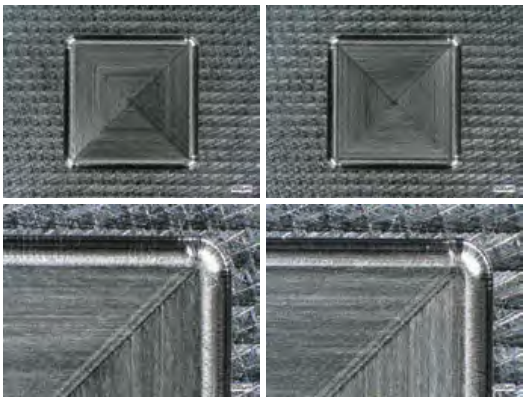

HGLB

1 pocket 90min | 2 pocketsl 180min

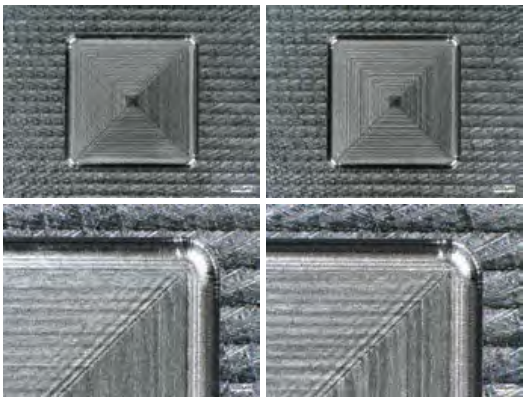

Surface finish on STAVAX with the HWLB is smoother than that of the HGLB.

HWLB

After milling 180 min



HGLB

After milling 180 min



Wearing at the tip is similar, however, the HWLB has less wear on the radius part.

The HWLB is recommended for STAVAX milling as opposed to the HGLB.

(★ Highly Recommended ● Recommended ○ Suggested)

Model Number			Features	Ball tip design		Copper	Carbon Steels	Prehardened Steels	Hardened Steels ~50 HRC	~55 HRC	~60 HRC	~65 HRC	~70 HRC	Page
HMG COAT	HGLB		Best suited for Hard Materials	Super Negative				○	●	●	●	★	★	G-1
HMW COAT	HWLB		For Hard Materials	Negative		○	○	●	★	★	★	●	●	G-13
UTW COAT	CWLB		Multi-purpose Excellent surface quality	Neutral		●	★	★	●					G-45

Total 155 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
HGLB 2001-002	R0.05	0.2	0.08	0.095	16°	45	4	—	0.22	0.24	0.26	0.28	0.31
HGLB 2001-003		0.3				45	4	—	0.33	0.36	0.38	0.40	0.44
HGLB 2001-005		0.5				45	4	—	0.55	0.58	0.61	0.64	0.68
HGLB 20015-003	R0.075	0.3	0.12	0.135	16°	45	4	—	0.35	0.37	0.39	0.41	0.44
HGLB 20015-005		0.5				45	4	—	0.56	0.59	0.62	0.64	0.69
HGLB 20015-0075		0.75				45	4	—	0.83	0.86	0.90	0.93	1.00
HGLB 20015-010		1				45	4	—	1.09	1.13	1.17	1.21	1.30
HGLB 2002-003	R0.1	0.3	0.16	0.19	16°	45	4	—	0.42	0.44	0.46	0.48	0.52
HGLB 2002-005		0.5				45	4	—	0.63	0.66	0.68	0.71	0.76
HGLB 2002-0075		0.75				45	4	—	0.89	0.93	0.96	0.99	1.07
HGLB 2002-010		1				45	4	—	1.15	1.20	1.24	1.28	1.37
HGLB 2002-015		1.5				45	4	—	1.66	1.72	1.78	1.84	1.97
HGLB 2002-020		2				45	4	—	2.18	2.25	2.33	2.41	2.58
HGLB 2003-005	R0.15	0.5	0.24	0.29	16°	45	4	—	0.63	0.65	0.68	0.70	0.75
HGLB 2003-0075		0.75				45	4	—	0.89	0.92	0.96	0.99	1.05
HGLB 2003-010		1				45	4	—	1.15	1.19	1.23	1.27	1.36
HGLB 2003-015		1.5				45	4	—	1.66	1.72	1.77	1.83	1.96
HGLB 2003-020		2				45	4	—	2.18	2.25	2.32	2.40	2.57
HGLB 2003-025		2.5				45	4	—	2.70	2.78	2.87	2.97	3.18
HGLB 2003-030		3				45	4	—	3.21	3.32	3.42	3.54	3.80
HGLB 2004-005	R0.2	0.5	0.32	0.39	16°	45	4	—	0.63	0.65	0.67	0.70	0.74
HGLB 2004-0075		0.75				45	4	—	0.89	0.92	0.95	0.98	1.04
HGLB 2004-010		1				45	4	—	1.15	1.19	1.23	1.26	1.35
HGLB 2004-010-6		1				50	6	—	1.15	1.19	1.23	1.26	1.35
HGLB 2004-0125		1.25				45	4	—	1.40	1.45	1.49	1.54	1.64
HGLB 2004-015		1.5				45	4	—	1.66	1.71	1.77	1.82	1.95
HGLB 2004-015-6		1.5				50	6	—	1.66	1.71	1.77	1.82	1.95
HGLB 2004-020		2				45	4	—	2.18	2.25	2.32	2.39	2.56
HGLB 2004-020-6		2				50	6	—	2.18	2.25	2.32	2.39	2.56
HGLB 2004-025		2.5				45	4	—	2.70	2.78	2.87	2.96	3.17
HGLB 2004-025-6		2.5				50	6	—	2.70	2.78	2.87	2.96	3.17
HGLB 2004-030		3				45	4	—	3.21	3.31	3.42	3.53	3.79
HGLB 2004-030-6		3				50	6	—	3.21	3.31	3.42	3.53	3.79
HGLB 2004-035		3.5				45	4	—	3.73	3.84	3.97	4.10	4.40
HGLB 2004-040		4				45	4	—	4.24	4.38	4.52	4.67	5.01
HGLB 2005-010	R0.25	1	0.4	0.49	16°	45	4	—	1.15	1.19	1.22	1.26	1.34
HGLB 2005-015		1.5				45	4	—	1.65	1.71	1.76	1.82	1.94
HGLB 2005-020		2				45	4	—	2.18	2.24	2.31	2.39	2.55
HGLB 2005-025		2.5				45	4	—	2.69	2.78	2.86	2.96	3.16
HGLB 2005-030		3				45	4	—	3.21	3.31	3.41	3.53	3.77
HGLB 2005-035		3.5				45	4	—	3.73	3.84	3.96	4.09	4.39
HGLB 2005-040		4				45	4	—	4.24	4.37	4.51	4.66	5.00
HGLB 2005-045		4.5				45	4	—	4.76	4.91	5.06	5.23	5.61
HGLB 2005-050		5				45	4	—	5.27	5.44	5.61	5.80	6.22
HGLB 2005-060		6				45	4	—	6.30	6.50	6.71	6.94	7.45

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
HGLB 2006-010	R0.3	1	0.48	0.59	16°	45	4	—	1.14	1.18	1.22	1.25	1.33
HGLB 2006-015		1.5				45	4	—	1.65	1.71	1.76	1.81	1.93
HGLB 2006-015-6		1.5				50	6	—	1.65	1.71	1.76	1.81	1.93
HGLB 2006-020		2				45	4	—	2.17	2.24	2.31	2.38	2.54
HGLB 2006-020-6		2				50	6	—	2.17	2.24	2.31	2.38	2.54
HGLB 2006-025		2.5				45	4	—	2.69	2.77	2.86	2.95	3.15
HGLB 2006-025-6		2.5				50	6	—	2.69	2.77	2.86	2.95	3.15
HGLB 2006-030		3				45	4	—	3.21	3.31	3.41	3.52	3.76
HGLB 2006-030-6		3				50	6	—	3.21	3.31	3.41	3.52	3.76
HGLB 2006-035		3.5				45	4	—	3.72	3.84	3.96	4.09	4.38
HGLB 2006-040		4				45	4	—	4.24	4.37	4.51	4.66	4.99
HGLB 2006-045		4.5				45	4	—	4.76	4.90	5.06	5.23	5.60
HGLB 2006-050		5				45	4	—	5.27	5.44	5.61	5.80	6.21
HGLB 2006-055		5.5				45	4	—	5.79	5.97	6.16	6.37	6.82
HGLB 2006-060		6				45	4	—	6.30	6.50	6.71	6.93	7.43
HGLB 2006-080		8				45	4	—	8.37	8.63	8.91	9.21	9.88
HGLB 2006-100		10				45	4	—	10.43	10.76	11.11	11.49	12.33
HGLB 2008-020	R0.4	2	0.64	0.79	16°	45	4	—	2.17	2.23	2.30	2.37	2.52
HGLB 2008-025		2.5				45	4	—	2.69	2.77	2.85	2.94	3.13
HGLB 2008-030		3				45	4	—	3.21	3.30	3.40	3.50	3.74
HGLB 2008-040		4				45	4	—	4.24	4.36	4.50	4.64	4.97
HGLB 2008-050		5				45	4	—	5.27	5.43	5.60	5.78	6.19
HGLB 2008-060		6				45	4	—	6.30	6.49	6.70	6.92	7.41
HGLB 2008-070		7				45	4	—	7.33	7.56	7.80	8.06	8.64
HGLB 2008-080		8				45	4	—	8.36	8.62	8.90	9.20	9.86
HGLB 2010-020	R0.5	2	0.8	0.98	16°	45	4	—	2.18	2.24	2.30	2.36	2.51
HGLB 2010-020-6		2				50	6	—	2.18	2.24	2.30	2.36	2.51
HGLB 2010-025		2.5				45	4	—	2.70	2.77	2.85	2.93	3.12
HGLB 2010-030		3				45	4	—	3.21	3.30	3.40	3.50	3.73
HGLB 2010-030-6		3				50	6	—	3.21	3.30	3.40	3.50	3.73
HGLB 2010-040		4				45	4	—	4.24	4.37	4.50	4.64	4.96
HGLB 2010-040-6		4				50	6	—	4.24	4.37	4.50	4.64	4.96
HGLB 2010-050		5				45	4	—	5.28	5.43	5.60	5.78	6.18
HGLB 2010-050-6		5				50	6	—	5.28	5.43	5.60	5.78	6.18
HGLB 2010-060		6				45	4	—	6.31	6.50	6.70	6.92	7.40
HGLB 2010-060-6		6				50	6	—	6.31	6.50	6.70	6.92	7.40
HGLB 2010-070		7				45	4	—	7.34	7.56	7.80	8.06	8.63
HGLB 2010-070-6		7				50	6	—	7.34	7.56	7.80	8.06	8.63
HGLB 2010-080		8				45	4	—	8.37	8.63	8.90	9.20	9.85
HGLB 2010-080-6		8				50	6	—	8.37	8.63	8.90	9.20	9.85
HGLB 2010-100		10				45	4	—	10.43	10.76	11.10	11.47	12.30
HGLB 2010-100-6		10				50	6	—	10.43	10.76	11.10	11.47	12.30
HGLB 2010-120		12				45	4	—	12.50	12.89	13.30	13.75	14.75
HGLB 2010-140		14				45	4	—	14.56	15.02	15.51	16.03	17.19
HGLB 2010-160		16				50	4	—	16.62	17.15	17.71	18.31	19.64

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
HGLB 2015-030	R0.75	3	1.2	1.47	16°	45	4	—	3.10	3.18	3.26	3.35	3.55
HGLB 2015-030-6		3				50	6	—	3.10	3.18	3.26	3.35	3.55
HGLB 2015-040		4				45	4	—	4.13	4.24	4.36	4.49	4.77
HGLB 2015-060		6				45	4	—	6.19	6.37	6.56	6.76	7.22
HGLB 2015-060-6		6				50	6	—	6.19	6.37	6.56	6.76	7.22
HGLB 2015-080		8				45	4	—	8.25	8.50	8.76	9.04	9.67
HGLB 2015-080-6		8				50	6	—	8.25	8.50	8.76	9.04	9.67
HGLB 2015-100		10				45	4	—	10.32	10.63	10.96	11.32	12.11
HGLB 2015-100-6		10				50	6	—	10.32	10.63	10.96	11.32	12.11
HGLB 2015-120		12				45	4	—	12.38	12.76	13.16	13.60	14.56
HGLB 2015-120-6		12				50	6	—	12.38	12.76	13.16	13.60	14.56
HGLB 2015-140		14				45	4	—	14.44	14.89	15.36	15.87	17.01
HGLB 2015-160		16				50	4	—	16.50	17.02	17.57	18.15	19.46
HGLB 2015-200		20				60	4	—	20.63	21.28	21.97	22.71	24.35
HGLB 2020-030	R1	3	1.6	1.98	16°	45	4	—	3.07	3.14	3.21	3.29	3.47
HGLB 2020-030-6		3				50	6	—	3.07	3.14	3.21	3.29	3.47
HGLB 2020-040		4				45	4	—	4.10	4.20	4.31	4.43	4.70
HGLB 2020-040-6		4				50	6	—	4.10	4.20	4.31	4.43	4.70
HGLB 2020-060		6				45	4	—	6.16	6.33	6.51	6.71	7.14
HGLB 2020-060-6		6				50	6	—	6.16	6.33	6.51	6.71	7.14
HGLB 2020-080		8				45	4	—	8.23	8.46	8.72	8.99	9.59
HGLB 2020-080-6		8				50	6	—	8.23	8.46	8.72	8.99	9.59
HGLB 2020-100		10				45	4	—	10.29	10.59	10.92	11.26	12.04
HGLB 2020-100-6		10				50	6	—	10.29	10.59	10.92	11.26	12.04
HGLB 2020-120		12				45	4	—	12.35	12.72	13.12	13.54	14.48
HGLB 2020-120-6		12				50	6	—	12.35	12.72	13.12	13.54	14.48
HGLB 2020-140		14				45	4	—	14.41	14.85	15.32	15.82	16.93
HGLB 2020-160		16				45	4	—	16.48	16.98	17.52	18.10	19.38
HGLB 2020-200		20				60	4	—	20.60	21.24	21.92	22.65	No Interference
HGLB 2020-250		25				60	4	—	25.76	26.56	27.42	28.34	No Interference
HGLB 2020-300		30				70	4	—	30.92	31.89	32.93	No Interference	No Interference
HGLB 2030-060	R1.5	6	2.4	2.95	16°	60	6	—	6.20	6.35	6.52	6.69	7.09
HGLB 2030-080		8				60	6	—	8.26	8.48	8.72	8.97	9.54
HGLB 2030-100		10				60	6	—	10.32	10.61	10.92	11.25	11.99
HGLB 2030-120		12				60	6	—	12.38	12.74	13.12	13.53	14.43
HGLB 2030-140		14				60	6	—	14.45	14.87	15.32	15.80	16.88
HGLB 2030-160		16				60	6	—	16.51	17.00	17.52	18.08	19.33
HGLB 2030-180		18				60	6	—	18.57	19.13	19.72	20.36	21.78
HGLB 2030-200		20				70	6	—	20.64	21.26	21.92	22.64	24.22
HGLB 2030-220		22				70	6	—	22.70	23.39	24.12	24.91	26.67
HGLB 2030-250		25				70	6	—	25.79	26.58	27.43	28.33	30.34
HGLB 2030-270		27				70	6	—	27.86	28.71	29.63	30.61	No Interference
HGLB 2030-300		30				70	6	—	30.95	31.91	32.93	34.02	No Interference

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
HGLB 2040-080	R2	8	3.2	3.95	16°	70	6	—	8.24	8.45	8.67	8.90	9.43
HGLB 2040-100		10				70	6	—	10.31	10.58	10.87	11.18	11.88
HGLB 2040-120		12				70	6	—	12.37	12.71	13.07	13.46	14.32
HGLB 2040-140		14				70	6	—	14.43	14.84	15.27	15.74	16.77
HGLB 2040-160		16				70	6	—	16.49	16.97	17.47	18.01	19.22
HGLB 2040-180		18				70	6	—	18.56	19.10	19.67	20.29	No Interference
HGLB 2040-200		20				70	6	—	20.62	21.23	21.87	22.57	No Interference
HGLB 2040-220		22				70	6	—	22.68	23.36	24.08	24.85	No Interference
HGLB 2040-250		25				70	6	—	25.78	26.55	27.38	28.26	No Interference
HGLB 2040-270		27				70	6	—	27.84	28.68	29.58	30.54	No Interference
HGLB 2040-300		30				70	6	—	30.93	31.87	32.88	No Interference	No Interference
HGLB 2040-350		35				80	6	—	36.09	37.20	38.38	No Interference	No Interference
HGLB 2040-400		40				90	6	—	41.25	42.52	No Interference	No Interference	No Interference
HGLB 2060-100	R3	10	4.8	5.95	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HGLB 2060-150		15				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HGLB 2060-180		18				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HGLB 2060-200		20				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HGLB 2060-250		25				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HGLB 2060-300		30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HGLB 2060-350		35				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HGLB 2060-400		40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HGLB 2060-500		50				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for HGLB

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-002	R0.05	0.2	48,000	200	0.005	0.01	48,000	200	0.005	0.01	48,000	150	0.003	0.006	40,000	120	0.002	0.004
2001-003		0.3	48,000	200	0.005	0.01	48,000	200	0.005	0.01	48,000	150	0.003	0.006	40,000	120	0.002	0.004
2001-005		0.5	48,000	200	0.005	0.01	48,000	200	0.005	0.01	48,000	150	0.003	0.006	40,000	120	0.002	0.004
20015-003	R0.075	0.3	48,000	230	0.007	0.014	48,000	230	0.007	0.014	48,000	170	0.005	0.01	40,000	135	0.003	0.006
20015-005		0.5	48,000	230	0.007	0.014	48,000	230	0.007	0.014	48,000	170	0.005	0.01	40,000	135	0.003	0.006
20015-0075		0.75	48,000	230	0.007	0.014	48,000	230	0.007	0.014	48,000	170	0.005	0.01	40,000	135	0.003	0.006
20015-010		1	38,400	160	0.005	0.01	38,400	160	0.005	0.01	38,400	120	0.003	0.007	32,000	90	0.002	0.004
2002-003	R0.1	0.3	44,000	250	0.01	0.03	42,000	250	0.01	0.03	40,000	200	0.008	0.024	36,000	150	0.006	0.018
2002-005		0.5	44,000	250	0.01	0.03	42,000	250	0.01	0.03	40,000	200	0.008	0.024	36,000	150	0.006	0.018
2002-0075		0.75	44,000	250	0.01	0.03	42,000	250	0.01	0.03	40,000	200	0.008	0.024	36,000	150	0.006	0.018
2002-010		1	44,000	250	0.01	0.03	42,000	250	0.01	0.03	40,000	200	0.008	0.024	36,000	150	0.006	0.018
2002-015		1.5	35,200	175	0.008	0.023	33,600	175	0.008	0.023	32,000	140	0.006	0.018	28,800	100	0.004	0.012
2002-020		2	35,200	120	0.003	0.008	33,600	100	0.003	0.008	32,000	90	0.003	0.008	28,800	70	0.002	0.006
2003-005	R0.15	0.5	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2003-0075		0.75	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2003-010		1	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2003-015		1.5	44,000	400	0.01	0.03	42,000	350	0.01	0.03	40,000	300	0.01	0.03	36,000	250	0.008	0.024
2003-020		2	35,200	280	0.008	0.023	33,600	245	0.008	0.023	32,000	210	0.008	0.023	28,800	175	0.006	0.018
2003-025		2.5	35,200	185	0.006	0.017	33,600	165	0.006	0.017	32,000	150	0.006	0.017	28,800	115	0.005	0.014
2003-030		3	35,200	140	0.004	0.01	33,600	125	0.004	0.01	32,000	110	0.004	0.01	28,800	85	0.003	0.009
2004-005	R0.2	0.5	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-0075		0.75	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-010		1	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-0125		1.25	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-015		1.5	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-020		2	44,000	600	0.015	0.045	42,000	550	0.015	0.045	40,000	500	0.013	0.036	36,000	350	0.01	0.027
2004-025		2.5	35,200	420	0.011	0.034	33,600	385	0.011	0.034	32,000	350	0.01	0.027	28,800	250	0.008	0.02
2004-030		3	35,200	330	0.008	0.024	33,600	310	0.008	0.024	32,000	280	0.008	0.022	28,000	200	0.006	0.016
2004-035		3.5	35,200	300	0.007	0.022	31,900	280	0.007	0.022	30,400	250	0.007	0.02	26,600	175	0.005	0.014
2004-040		4	35,200	270	0.006	0.019	30,240	250	0.006	0.019	28,800	220	0.006	0.018	25,200	150	0.004	0.012
2005-010	R0.25	1	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2005-015		1.5	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2005-020		2	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2005-025		2.5	44,000	900	0.02	0.065	40,000	800	0.015	0.05	36,000	600	0.015	0.05	30,000	400	0.015	0.03
2005-030		3	32,700	450	0.01	0.04	31,500	400	0.01	0.03	30,000	300	0.008	0.03	24,000	200	0.007	0.015
2005-035		3.5	32,700	450	0.01	0.04	31,500	400	0.01	0.03	30,000	300	0.008	0.03	24,000	200	0.007	0.015
2005-040		4	32,700	450	0.01	0.04	31,500	400	0.01	0.03	30,000	300	0.008	0.03	24,000	200	0.007	0.015
2005-045		4.5	29,430	405	0.008	0.03	28,350	360	0.008	0.025	27,000	270	0.006	0.025	21,600	180	0.005	0.013
2005-050		5	26,160	360	0.005	0.02	25,200	320	0.005	0.02	24,000	240	0.004	0.02	19,200	160	0.003	0.01
2005-060		6	26,160	360	0.005	0.02	25,200	320	0.005	0.02	24,000	240	0.004	0.02	19,200	160	0.003	0.01

Milling Conditions for HGLB


WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2006-010	R0.3	1	40,000	1,400	0.045	0.15	36,000	1,500	0.03	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2006-015		1.5	40,000	1,400	0.03	0.13	36,000	1,300	0.03	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2006-020		2	40,000	1,400	0.03	0.13	36,000	1,300	0.03	0.13	32,000	1,000	0.02	0.1	25,000	600	0.02	0.1
2006-025		2.5	40,000	1,200	0.025	0.1	36,000	1,100	0.025	0.1	32,000	900	0.02	0.1	25,000	500	0.02	0.1
2006-030		3	40,000	1,200	0.025	0.1	36,000	1,100	0.025	0.1	32,000	900	0.02	0.1	25,000	500	0.02	0.1
2006-035		3.5	40,000	1,100	0.023	0.09	34,000	950	0.023	0.09	32,000	800	0.018	0.09	25,000	450	0.015	0.09
2006-040		4	40,000	1,000	0.02	0.08	32,000	800	0.02	0.08	32,000	700	0.015	0.07	25,000	400	0.01	0.075
2006-045		4.5	32,000	600	0.01	0.07	28,000	600	0.01	0.05	25,600	500	0.01	0.05	20,000	300	0.005	0.05
2006-050		5	32,000	600	0.01	0.07	28,000	600	0.01	0.05	25,600	500	0.01	0.05	20,000	300	0.005	0.05
2006-055		5.5	32,000	600	0.01	0.07	28,000	600	0.01	0.05	25,600	500	0.01	0.05	20,000	300	0.005	0.05
2006-060		6	32,000	600	0.01	0.07	28,000	600	0.01	0.05	25,600	500	0.01	0.05	20,000	300	0.005	0.05
2006-080		8	25,600	480	0.008	0.02	22,400	480	0.008	0.02	20,480	350	0.007	0.02	16,000	210	0.004	0.01
2006-100		10	20,480	390	0.006	0.02	17,920	390	0.006	0.02	16,400	250	0.005	0.02	12,800	150	0.003	0.01
2008-020	R0.4	2	35,000	1,600	0.06	0.21	30,000	1,600	0.04	0.17	26,000	1,350	0.04	0.15	20,000	700	0.02	0.12
2008-025		2.5	35,000	1,600	0.06	0.21	30,000	1,600	0.04	0.17	26,000	1,350	0.04	0.15	20,000	700	0.02	0.12
2008-030		3	35,000	1,600	0.06	0.21	30,000	1,600	0.04	0.17	26,000	1,350	0.04	0.15	20,000	700	0.02	0.12
2008-040		4	35,000	1,600	0.06	0.21	30,000	1,600	0.04	0.17	26,000	1,350	0.04	0.15	20,000	700	0.02	0.12
2008-050		5	31,500	1,300	0.04	0.17	27,500	1,300	0.03	0.15	23,400	1,000	0.03	0.11	18,000	530	0.015	0.09
2008-060		6	28,000	1,000	0.02	0.12	25,000	1,000	0.02	0.12	20,800	675	0.02	0.075	16,000	350	0.01	0.06
2008-070		7	25,200	900	0.02	0.11	22,500	900	0.02	0.11	18,700	600	0.018	0.068	14,400	330	0.009	0.05
2008-080		8	22,400	800	0.02	0.1	20,000	800	0.02	0.1	16,640	540	0.016	0.06	12,800	300	0.008	0.048
2010-020	R0.5	2	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-025		2.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
2010-030		3	30,000	1,750	0.1	0.3	24,000	2,000	0.1	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2010-040		4	30,000	1,750	0.1	0.3	24,000	2,000	0.1	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2010-050		5	30,000	1,750	0.1	0.3	24,000	2,000	0.1	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
2010-060		6	30,000	1,150	0.06	0.23	21,500	1,250	0.03	0.17	19,700	1,050	0.025	0.15	14,500	525	0.025	0.15
2010-070		7	27,000	980	0.04	0.19	20,000	920	0.02	0.15	19,000	770	0.02	0.14	14,200	380	0.02	0.14
2010-080		8	24,000	800	0.025	0.155	18,500	580	0.015	0.12	18,400	480	0.015	0.12	13,800	240	0.015	0.12
2010-100		10	22,000	600	0.018	0.13	14,800	430	0.01	0.09	14,700	360	0.01	0.09	14,700	360	0.01	0.09
2010-120		12	14,150	320	0.015	0.12	13,400	380	0.008	0.08	13,300	290	0.008	0.08	13,300	290	0.008	0.08
2010-140		14	13,500	280	0.012	0.1	12,000	350	0.007	0.08	12,000	220	0.007	0.08	12,000	220	0.007	0.08
2010-160		16	12,150	250	0.011	0.09	10,800	320	0.006	0.07	10,800	200	0.006	0.07	10,800	200	0.006	0.07

Milling Conditions for HGLB

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2015-030	R0.75	3	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-040		4	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
2015-060		6	30,000	2,450	0.15	0.45	17,000	2,000	0.07	0.31	15,000	1,750	0.04	0.24	11,250	875	0.04	0.24
2015-080		8	23,500	1,300	0.1	0.37	15,000	1,250	0.045	0.25	14,000	1,050	0.03	0.21	10,500	525	0.03	0.21
2015-100		10	23,500	1,300	0.1	0.37	15,000	1,250	0.045	0.25	14,000	1,050	0.03	0.21	10,500	525	0.03	0.21
2015-120		12	13,100	480	0.03	0.21	13,000	580	0.02	0.17	13,000	480	0.02	0.17	9,750	240	0.02	0.17
2015-140		14	11,200	400	0.025	0.19	10,900	490	0.015	0.145	10,900	390	0.015	0.145	8,200	190	0.015	0.145
2015-160		16	10,000	360	0.023	0.17	9,800	440	0.014	0.13	9,800	350	0.014	0.13	7,380	170	0.014	0.13
2015-200		20	8,900	320	0.02	0.15	8,700	390	0.012	0.12	8,700	310	0.012	0.12	6,560	150	0.012	0.12
2020-030	R1	3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	14,700	2,100	0.15	0.35	12,250	1,800	0.08	0.35
2020-040		4	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	14,700	2,100	0.15	0.35	12,250	1,800	0.08	0.35
2020-060		6	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	14,700	2,100	0.15	0.3	12,250	1,800	0.06	0.3
2020-080		8	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	14,700	2,100	0.15	0.3	12,250	1,800	0.06	0.3
2020-100		10	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	14,700	2,100	0.15	0.3	12,250	1,800	0.06	0.3
2020-120		12	19,500	1,350	0.12	0.45	12,400	1,350	0.06	0.34	13,800	1,320	0.09	0.27	11,500	1,100	0.045	0.27
2020-140		14	19,500	1,350	0.12	0.45	12,400	1,350	0.06	0.34	13,800	1,320	0.09	0.27	11,500	1,100	0.045	0.27
2020-160		16	10,800	500	0.05	0.3	10,800	600	0.03	0.24	12,840	580	0.06	0.24	10,700	490	0.03	0.24
2020-200		20	10,800	500	0.035	0.25	10,800	450	0.02	0.19	10,270	440	0.04	0.19	8,560	370	0.02	0.19
2020-250		25	9,720	450	0.032	0.23	9,720	410	0.018	0.17	9,250	400	0.036	0.17	7,700	330	0.018	0.17
2020-300		30	8,650	400	0.028	0.2	8,650	360	0.016	0.15	8,200	350	0.032	0.15	6,850	300	0.016	0.15
2030-060	R1.5	6	21,000	3,000	0.4	1	13,250	2,500	0.24	0.55	11,040	2,280	0.24	0.55	9,200	1,900	0.12	0.55
2030-080		8	21,000	3,000	0.4	1	13,250	2,500	0.24	0.55	11,040	2,280	0.24	0.55	9,200	1,900	0.12	0.55
2030-100		10	21,000	3,000	0.3	0.9	12,200	2,300	0.2	0.5	11,040	2,280	0.2	0.5	9,200	1,900	0.1	0.5
2030-120		12	21,000	3,000	0.3	0.9	12,200	2,300	0.2	0.5	11,040	2,280	0.2	0.5	9,200	1,900	0.1	0.5
2030-140		14	21,000	3,000	0.3	0.9	12,200	2,300	0.2	0.5	11,040	2,280	0.2	0.5	9,200	1,900	0.1	0.5
2030-160		16	21,000	3,000	0.3	0.9	12,200	2,300	0.2	0.5	11,040	2,280	0.2	0.5	9,200	1,900	0.1	0.5
2030-180		18	17,750	2,300	0.24	0.8	11,750	1,850	0.18	0.48	10,680	1,830	0.18	0.48	8,900	1,525	0.088	0.48
2030-200		20	14,500	1,600	0.18	0.7	11,350	1,400	0.15	0.45	10,320	1,380	0.15	0.45	8,600	1,150	0.075	0.45
2030-220		22	13,000	1,440	0.16	0.63	11,000	1,020	0.13	0.42	9,960	1,000	0.13	0.42	8,300	830	0.063	0.42
2030-250		25	11,600	1,280	0.14	0.56	10,500	620	0.1	0.38	9,600	610	0.1	0.38	8,000	510	0.05	0.38
2030-270		27	10,500	1,150	0.13	0.51	9,000	540	0.08	0.34	8,200	530	0.08	0.34	6,850	440	0.04	0.34
2030-300		30	9,280	1,020	0.11	0.45	7,500	450	0.06	0.29	6,840	440	0.06	0.29	5,700	370	0.03	0.29

Milling Conditions for HGLB

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2040-080	R2	8	18,000	3,200	0.5	1.3	11,380	2,880	0.36	0.95	9,480	2,400	0.3	0.75	7,900	2,000	0.15	0.75
2040-100		10	18,000	3,200	0.5	1.3	11,380	2,880	0.36	0.95	9,480	2,400	0.3	0.75	7,900	2,000	0.15	0.75
2040-120		12	18,000	3,200	0.4	1.2	11,380	2,880	0.31	0.85	9,480	2,400	0.26	0.7	7,900	2,000	0.13	0.7
2040-140		14	18,000	3,200	0.4	1.2	11,380	2,880	0.31	0.85	9,480	2,400	0.26	0.7	7,900	2,000	0.13	0.7
2040-160		16	18,000	3,200	0.4	1.2	11,380	2,880	0.31	0.85	9,480	2,400	0.26	0.7	7,900	2,000	0.13	0.7
2040-180		18	18,000	3,200	0.4	1.2	11,380	2,880	0.31	0.85	9,480	2,400	0.26	0.7	7,900	2,000	0.13	0.7
2040-200		20	18,000	3,200	0.4	1.2	10,730	1,800	0.21	0.7	8,940	1,500	0.18	0.55	7,450	1,250	0.09	0.55
2040-220		22	15,250	2,250	0.33	1.1	10,730	1,800	0.21	0.7	8,940	1,500	0.18	0.55	7,450	1,250	0.09	0.55
2040-250		25	12,500	1,250	0.25	0.95	10,730	1,800	0.21	0.7	8,940	1,500	0.18	0.55	7,450	1,250	0.09	0.55
2040-270		27	11,500	1,150	0.23	0.9	10,400	1,250	0.18	0.58	8,670	1,050	0.15	0.5	7,250	890	0.075	0.5
2040-300		30	10,630	1,000	0.2	0.76	10,080	780	0.15	0.45	8,400	650	0.12	0.45	7,000	540	0.06	0.45
2040-350		35	9,030	800	0.16	0.61	8,640	730	0.13	0.43	7,200	610	0.11	0.43	6,000	510	0.055	0.43
2040-400		40	8,300	700	0.14	0.54	8,000	700	0.12	0.42	6,650	590	0.11	0.42	5,500	500	0.05	0.42
2060-100	R3	10	14,400	3,200	0.5	1.5	9,140	2,880	0.38	1.05	7,620	2,400	0.32	0.88	6,350	2,000	0.16	0.88
2060-150		15	14,400	3,200	0.5	1.5	9,140	2,880	0.38	1.05	7,620	2,400	0.32	0.88	6,350	2,000	0.16	0.88
2060-180		18	14,400	3,200	0.5	1.5	9,140	2,880	0.38	1.05	7,620	2,400	0.32	0.88	6,350	2,000	0.16	0.88
2060-200		20	14,400	3,200	0.5	1.5	9,000	2,300	0.32	0.95	7,620	2,400	0.32	0.88	6,350	2,000	0.16	0.88
2060-250		25	14,400	3,200	0.5	1.5	8,100	2,000	0.3	0.95	7,500	1,920	0.27	0.805	6,250	1,600	0.135	0.805
2060-300		30	14,400	3,200	0.5	1.5	7,700	1,800	0.26	0.88	7,440	1,500	0.22	0.73	6,200	1,250	0.11	0.73
2060-350		35	9,200	2,050	0.32	1	6,200	1,450	0.21	0.71	6,000	1,200	0.18	0.59	5,000	1,000	0.09	0.59
2060-400		40	7,000	1,050	0.2	0.8	5,600	1,000	0.19	0.64	4,800	950	0.14	0.47	4,000	810	0.07	0.47
2060-500		50	5,600	850	0.16	0.6	4,500	810	0.15	0.52	3,900	780	0.12	0.38	3,200	650	0.06	0.38



Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.

HWLB/HWLB-S

Additional 143 models



HWLB-S Released April 2025

HMWCOAT 2 Flute Long Neck Ball End Mills / Short Shank Long Neck Ball End Mills

R0.05～R3

Super MG | HMW COAT | Back Taper Geometry

Back taper geometry does not apply to below R0.25.
Back taper geometry does not apply to R0.25 ≦ R ≦ R0.45 and ℓ1/φD ≦ 10.

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	★	★	★	●	●	○			○			○	○		


◆ Upgrade

Wear resistance and tool accuracy have been improved with HWLB and CWLB series.

CSELB				HSLB				HGLB
Copper	Raw Materials	～30 HRC	～40 HRC	～50 HRC	～55 HRC	～60 HRC	～65 HRC	～70 HRC

CWLB				HWLB				HGLB
Copper	Raw Materials	～30 HRC	～40 HRC	～50 HRC	～55 HRC	～60 HRC	～65 HRC	～70 HRC

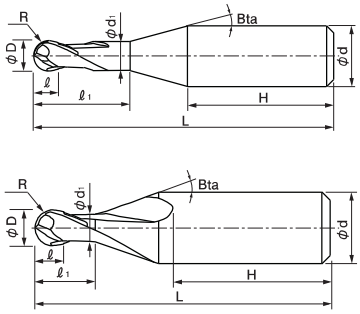



The shank taper angle and shank length shown are not exact values.

◆ Variable rake angle design


With the same tool shape as our long-selling HSLB, the transition from HSLB is made easy.

Tip point

Negative rake angle design prevents fracture and chipping.

Peripheral cutting edge

Slightly negative rake angle design reduces cutting resistance and prevents chattering.

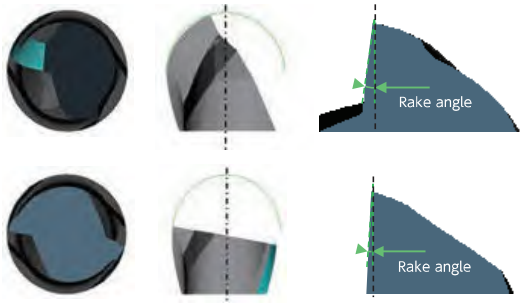

◆ High Precision

Even higher accuracy than before!

Conventional HSLB

Radius of Ball Nose	Ball Radius Accuracy	Diameter Tolerance	Shank Diameter Tolerance
R0.05 ～ R0.075	± 0.002	0/-0.01	0/-0.005
R0.1 ～ R3	± 0.005	0/-0.015	

HWLB


Unit (mm)

Radius of Ball Nose	Ball Radius Accuracy	Diameter Tolerance	Shank Diameter Tolerance	Helix Angle
R0.05 ～ R0.075	± 0.002	0/-0.006	0/-0.004 (h4)	0°
R0.1 ～ R1.25	± 0.003			30°
R1.5 ～ R3		0/-0.009		

Improved wear resistance (50 HRC)

Relief wear width comparison
R0.5 × EL2.5


STAVAX (52 HRC) / SKD61 (50 HRC)




Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Allowance (mm)	Cycle Time 1pc (m:s)
30,000	1,750	0.1	0.3	0.03	22:50

Coolant : Air Blow

STAVAX (52 HRC) 120 min

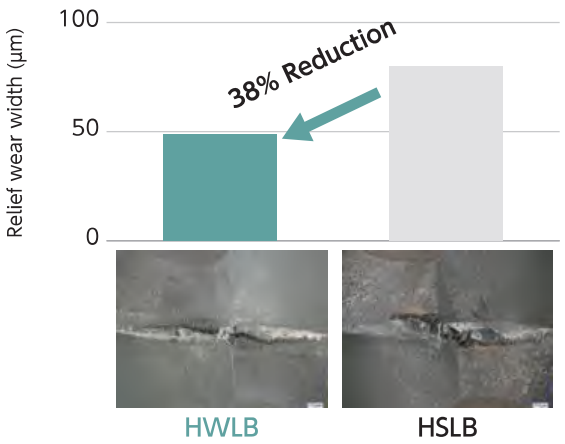

SKD61 (50 HRC) 60 min

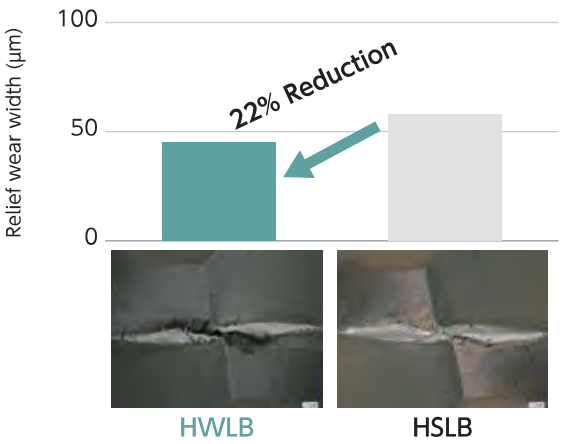

Comparison with competitor's tool for hard materials
R0.5 × EL12




STAVAX (52 HRC)



Pocket Size
φ5 × Depth 0.7 mm

Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Cycle Time 1 Pocket
14,150	320	0.015	0.12	20 min

Coolant : Air Blow


	Tool after milling 20 min x 3 pockets	Diameter reduction amount 20 min x 3 pockets	Work piece dimensional change Actual measurements of circle pocket (mm) 20 min x 3 pockets
HWLB		 −0.0009 mm	
Competitor		 −0.0016 mm	

HWLB achieves less wearing at the peripheral cutting edge which results in smaller dimensional changes on the work piece and excellent milling accuracy.

Improved wear resistance (60 HRC)

Roughing　Wear comparison

HWLB / HSLB and competitor's tool for hard materials　R0.5 × EL2.5　SKD11 (60 HRC)

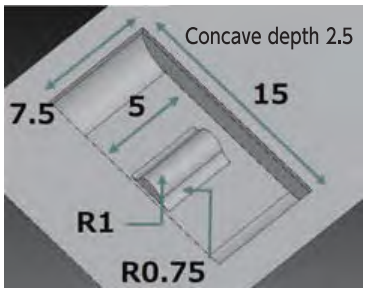



Coolant : Air Blow

Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Allowance (mm)	Cycle Time 1 pc (m:s)
24,000	2,000	0.05	0.2	0.03	16:11

Less tool damage when roughing large areas as compared to the conventional HSLB and the competitor's tool.

Relief wear width (50 min / After milling 3 pockets)

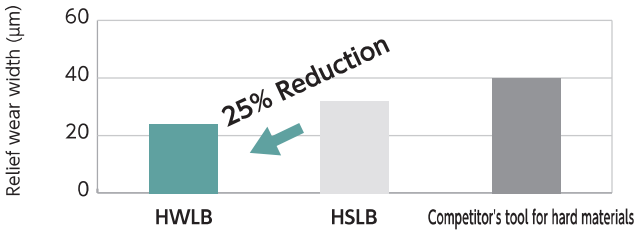


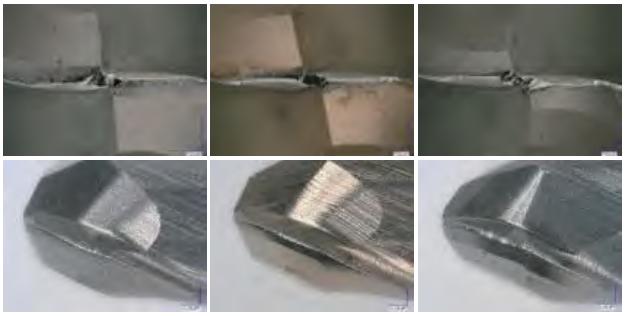

HWLB　HSLB　Competitor's tool for hard materials

Finishing　Milling dimensional error comparison


HWLB / HSLB and competitor's tool for hard materials　R0.5 × EL2.5　SKD11 (60 HRC)

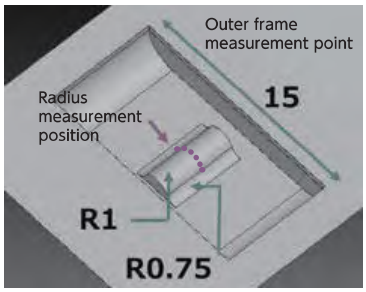

Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Cycle Time 1 pc
24,000	1,000	0.01	0.01	28 min

Coolant : Air Blow

Outer frame change of dimensions after milling 3 pockets(mm)

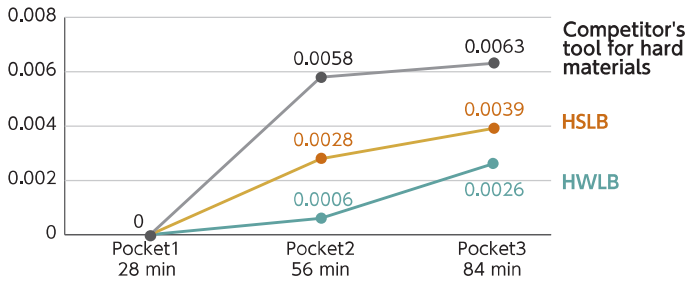


Offers higher milling accuracy as compared to our conventional tools and the competitor's tools, even with hard materials of 60 HRC.


Radius　Pocket 3　Measurement error from the target

Target curve



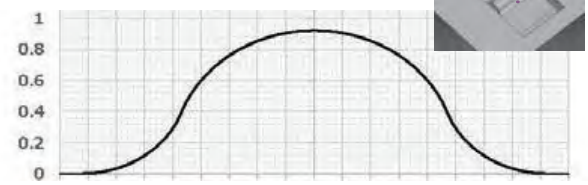

Measurement error from the target

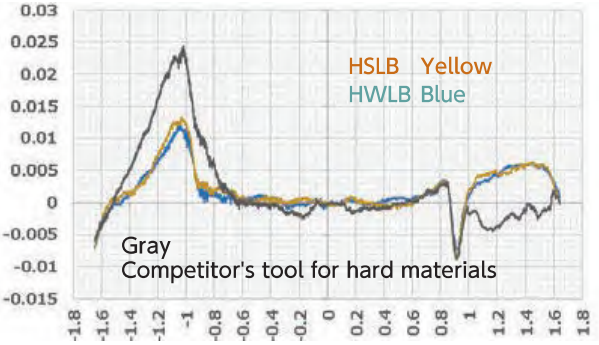



Finishing roughness and dimensional error

Milled surface quality remains very good.
The finishing roughness is almost the same as conventional tools.

Finishing after milling 6 pockets (360min) Surface roughness comparison

HWLB / HSLB R0.5 × EL2.5 STAVAX (52 HRC)






Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Allowance (mm)	Cycle Time 1pc
30,000	1,000	0.01	0.01	0	60 min

Coolant : Oil Mist

Finishing Surface roughness Ra (60 min × 6 Pockets = 360 min)

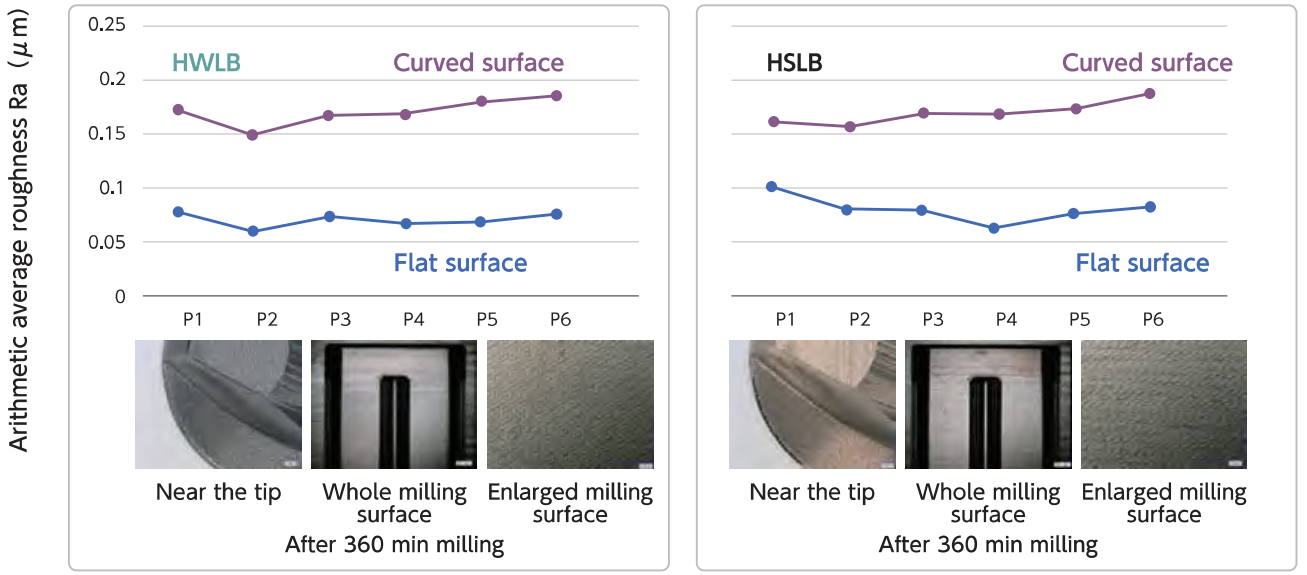



HWLB HSLB

Both HSLB and HWLB maintain excellent surface roughness on flat/curved surfaces until the 6th pocket.
Minimal wear near the tip of the tool allows for continuous milling.

Finishing after milling 6 pockets (360 min) Milling dimensional error comparison

HWLB / HSLB R0.5 × EL2.5 STAVAX (52 HRC)



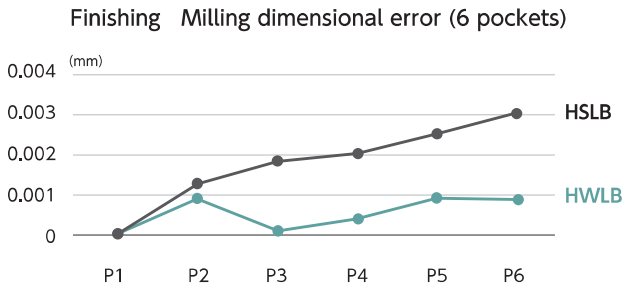

Surface roughness between HSLB and HWLB show minor differences.
Meanwhile HWLB makes smaller milling dimensional error due to the improved wear resistance.

Total 344 models

Unit (mm)

	Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
※	HWLB 2001-002S	O	R0.05	0.2	0.08	0.095	11°	35	4	23.6	—
	HWLB 2001-002			0.2				45	4	33.6	—
※	HWLB 2001-003S	O		0.3				35	4	23.5	—
	HWLB 2001-003			0.3				45	4	33.5	—
※	HWLB 2001-004S	O		0.4				35	4	23.4	—
※	HWLB 2001-005S	O		0.5				35	4	23.3	—
	HWLB 2001-005			0.5				45	4	33.3	—
※	HWLB 20015-003S	O	R0.075	0.3	0.12	0.135	11°	35	4	23.6	—
	HWLB 20015-003			0.3				45	4	33.6	—
※	HWLB 20015-005S	O		0.5				35	4	23.4	—
	HWLB 20015-005			0.5				45	4	33.4	—
※	HWLB 20015-010S	O		1				35	4	22.9	—
	HWLB 20015-010			1				45	4	32.9	—
※	HWLB 2002-003S	O	R0.1	0.3	0.16	0.19	16°	35	4	27.4	—
	HWLB 2002-003			0.3				45	4	37.4	—
※	HWLB 2002-005S	O		0.5				35	4	27.2	—
	HWLB 2002-005			0.5				45	4	37.2	—
※	HWLB 2002-005-6			0.5				50	6	38.4	—
※	HWLB 2002-0075S	O		0.75				35	4	26.9	—
	HWLB 2002-0075			0.75				45	4	36.9	—
※	HWLB 2002-010S	O		1				35	4	26.7	—
	HWLB 2002-010			1				45	4	36.7	—
※	HWLB 2002-010-6			1				50	6	37.9	—
※	HWLB 2002-0125			1.25				45	4	36.4	—
※	HWLB 2002-015S	O		1.5				35	4	26.2	—
	HWLB 2002-015			1.5				45	4	36.2	—
※	HWLB 2002-0175S	O		1.75				35	4	25.9	—
※	HWLB 2002-020S	O		2				35	4	25.7	—
	HWLB 2002-020			2				45	4	35.7	—
	HWLB 2002-025			2.5				45	4	35.2	—
	HWLB 2002-030			3				45	4	34.7	—
※	HWLB 2003-005S	O	R0.15	0.5	0.24	0.29	16°	35	4	27.3	—
	HWLB 2003-005			0.5				45	4	37.3	—
※	HWLB 2003-0075S	O		0.75				35	4	27.1	—
	HWLB 2003-0075			0.75				45	4	37.1	—
※	HWLB 2003-010S	O		1				35	4	26.8	—
	HWLB 2003-010			1				45	4	36.8	—
※	HWLB 2003-010-6			1				50	6	38.1	—
※	HWLB 2003-0125			1.25				45	4	36.6	—
※	HWLB 2003-015S	O		1.5				35	4	26.3	—
	HWLB 2003-015			1.5				45	4	36.3	—
※	HWLB 2003-015-6			1.5				50	6	37.6	—
※	HWLB 2003-020S	O		2				35	4	25.8	—
	HWLB 2003-020			2				45	4	35.8	—

※ Additional model

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HWLB 2001-002S	○	R0.05	0.2	0.22	0.24	0.26	0.28	0.32
HWLB 2001-002			0.2	0.22	0.24	0.26	0.28	0.32
HWLB 2001-003S	○		0.3	0.33	0.36	0.38	0.40	0.45
HWLB 2001-003			0.3	0.33	0.36	0.38	0.40	0.45
HWLB 2001-004S	○		0.4	0.44	0.47	0.50	0.52	0.59
HWLB 2001-005S	○		0.5	0.55	0.58	0.61	0.65	0.73
HWLB 2001-005			0.5	0.55	0.58	0.61	0.65	0.73
HWLB 20015-003S	○	R0.075	0.3	0.37	0.39	0.41	0.43	0.48
HWLB 20015-003			0.3	0.37	0.39	0.41	0.43	0.48
HWLB 20015-005S	○		0.5	0.58	0.61	0.64	0.67	0.75
HWLB 20015-005			0.5	0.58	0.61	0.64	0.67	0.75
HWLB 20015-010S	○		1	1.10	1.16	1.21	1.28	1.44
HWLB 20015-010			1	1.10	1.16	1.21	1.28	1.44
HWLB 2002-003S	○	R0.1	0.3	0.42	0.44	0.46	0.48	0.52
HWLB 2002-003			0.3	0.42	0.44	0.46	0.48	0.52
HWLB 2002-005S	○		0.5	0.63	0.66	0.68	0.71	0.76
HWLB 2002-005			0.5	0.63	0.66	0.68	0.71	0.76
HWLB 2002-005-6			0.5	0.63	0.66	0.68	0.71	0.76
HWLB 2002-0075S	○		0.75	0.89	0.93	0.96	0.99	1.07
HWLB 2002-0075			0.75	0.89	0.93	0.96	0.99	1.07
HWLB 2002-010S	○		1	1.15	1.20	1.24	1.28	1.37
HWLB 2002-010			1	1.15	1.20	1.24	1.28	1.37
HWLB 2002-010-6			1	1.15	1.20	1.24	1.28	1.37
HWLB 2002-0125			1.25	1.40	1.45	1.50	1.55	1.67
HWLB 2002-015S	○		1.5	1.66	1.72	1.78	1.84	1.97
HWLB 2002-015			1.5	1.66	1.72	1.78	1.84	1.97
HWLB 2002-0175S	○		1.75	1.92	1.99	2.05	2.12	2.28
HWLB 2002-020S	○		2	2.18	2.25	2.33	2.41	2.58
HWLB 2002-020			2	2.18	2.25	2.33	2.41	2.58
HWLB 2002-025			2.5	2.70	2.79	2.88	2.98	3.20
HWLB 2002-030			3	3.22	3.32	3.43	3.55	3.81
HWLB 2003-005S	○	R0.15	0.5	0.63	0.65	0.68	0.70	0.75
HWLB 2003-005			0.5	0.63	0.65	0.68	0.70	0.75
HWLB 2003-0075S	○		0.75	0.89	0.92	0.96	0.99	1.05
HWLB 2003-0075			0.75	0.89	0.92	0.96	0.99	1.05
HWLB 2003-010S	○		1	1.15	1.19	1.23	1.27	1.36
HWLB 2003-010			1	1.15	1.19	1.23	1.27	1.36
HWLB 2003-010-6			1	1.15	1.19	1.23	1.27	1.36
HWLB 2003-0125			1.25	1.40	1.45	1.50	1.55	1.66
HWLB 2003-015S	○		1.5	1.66	1.72	1.77	1.83	1.96
HWLB 2003-015			1.5	1.66	1.72	1.77	1.83	1.96
HWLB 2003-015-6			1.5	1.66	1.72	1.77	1.83	1.96
HWLB 2003-020S	○		2	2.18	2.25	2.32	2.40	2.57
HWLB 2003-020			2	2.18	2.25	2.32	2.40	2.57

Next Page ➡

Unit (mm)

	Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
※	HWLB 2003-025S	O	R0.15	2.5	0.24	0.29	16°	35	4	25.3	—
	HWLB 2003-025			2.5				45	4	35.3	—
※	HWLB 2003-030S	O		3				35	4	24.8	—
	HWLB 2003-030			3				45	4	34.8	—
※	HWLB 2003-035			3.5				45	4	34.3	—
	HWLB 2003-040			4				45	4	33.8	—
※	HWLB 2003-045			4.5				45	4	33.3	—
※	HWLB 2003-050			5				45	4	32.8	—
※	HWLB 2004-005S	O	R0.2	0.5	0.32	0.39	16°	35	4	27.5	—
	HWLB 2004-005			0.5				45	4	37.5	—
	HWLB 2004-0075			0.75				45	4	37.3	—
※	HWLB 2004-010S	O		1				35	4	27.0	—
	HWLB 2004-010			1				45	4	37.0	—
	HWLB 2004-010-6			1				50	6	38.3	—
※	HWLB 2004-015S	O		1.5				35	4	26.5	—
	HWLB 2004-015			1.5				45	4	36.5	—
	HWLB 2004-015-6			1.5				50	6	37.8	—
※	HWLB 2004-020S	O		2				35	4	26.0	—
	HWLB 2004-020			2				45	4	36.0	—
	HWLB 2004-020-6			2				50	6	37.3	—
※	HWLB 2004-025S	O		2.5				35	4	25.5	—
	HWLB 2004-025			2.5				45	4	35.5	—
※	HWLB 2004-030S	O		3				35	4	25.0	—
	HWLB 2004-030			3				45	4	35.0	—
	HWLB 2004-030-6			3				50	6	36.3	—
※	HWLB 2004-035S	O		3.5				35	4	24.5	—
	HWLB 2004-035			3.5				45	4	34.5	—
※	HWLB 2004-040S	O		4				35	4	24.0	—
	HWLB 2004-040			4				45	4	34.0	—
※	HWLB 2004-045			4.5				45	4	33.5	—
	HWLB 2004-050			5				45	4	33.0	—
	HWLB 2004-060			6				45	4	32.0	—
※	HWLB 2005-0075S	O	R0.25	0.75	0.4	0.49	16°	35	4	27.5	—
※	HWLB 2005-010S	O		1				35	4	27.2	—
	HWLB 2005-010			1				45	4	37.2	—
※	HWLB 2005-015S	O		1.5				35	4	26.7	—
	HWLB 2005-015			1.5				45	4	36.7	—
	HWLB 2005-015-6			1.5				50	6	38.0	—
※	HWLB 2005-020S	O		2				35	4	26.2	—
	HWLB 2005-020			2				45	4	36.2	—
	HWLB 2005-020-6			2				50	6	37.5	—
※	HWLB 2005-025S	O		2.5				35	4	25.7	—
	HWLB 2005-025			2.5				45	4	35.7	—
※	HWLB 2005-030S	O		3				35	4	25.2	—
	HWLB 2005-030			3				45	4	35.2	—
	HWLB 2005-030-6			3				50	6	36.5	—

※ Additional model

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HWLB 2003-025S	O	R0.15	2.5	2.70	2.78	2.87	2.97	3.18
HWLB 2003-025			2.5	2.70	2.78	2.87	2.97	3.18
HWLB 2003-030S	O		3	3.21	3.32	3.42	3.54	3.80
HWLB 2003-030			3	3.21	3.32	3.42	3.54	3.80
HWLB 2003-035			3.5	3.73	3.85	3.97	4.11	4.41
HWLB 2003-040			4	4.25	4.38	4.52	4.68	5.02
HWLB 2003-045			4.5	4.76	4.91	5.07	5.25	5.63
HWLB 2003-050			5	5.28	5.44	5.62	5.82	6.24
HWLB 2004-005S	O	R0.2	0.5	0.63	0.65	0.68	0.70	0.74
HWLB 2004-005			0.5	0.63	0.65	0.68	0.70	0.74
HWLB 2004-0075			0.75	0.89	0.92	0.95	0.98	1.05
HWLB 2004-010S	O		1	1.15	1.19	1.23	1.27	1.35
HWLB 2004-010			1	1.15	1.19	1.23	1.27	1.35
HWLB 2004-010-6			1	1.15	1.19	1.23	1.27	1.35
HWLB 2004-015S	O		1.5	1.66	1.72	1.77	1.83	1.95
HWLB 2004-015			1.5	1.66	1.72	1.77	1.83	1.95
HWLB 2004-015-6			1.5	1.66	1.72	1.77	1.83	1.95
HWLB 2004-020S	O		2	2.18	2.25	2.32	2.40	2.56
HWLB 2004-020			2	2.18	2.25	2.32	2.40	2.56
HWLB 2004-020-6			2	2.18	2.25	2.32	2.40	2.56
HWLB 2004-025S	O		2.5	2.70	2.78	2.87	2.96	3.18
HWLB 2004-025			2.5	2.70	2.78	2.87	2.96	3.18
HWLB 2004-030S	O		3	3.21	3.31	3.42	3.53	3.79
HWLB 2004-030			3	3.21	3.31	3.42	3.53	3.79
HWLB 2004-030-6			3	3.21	3.31	3.42	3.53	3.79
HWLB 2004-035S	O		3.5	3.73	3.85	3.97	4.10	4.40
HWLB 2004-035			3.5	3.73	3.85	3.97	4.10	4.40
HWLB 2004-040S	O		4	4.25	4.38	4.52	4.67	5.01
HWLB 2004-040			4	4.25	4.38	4.52	4.67	5.01
HWLB 2004-045			4.5	4.76	4.91	5.07	5.24	5.62
HWLB 2004-050			5	5.28	5.44	5.62	5.81	6.24
HWLB 2004-060			6	6.31	6.51	6.72	6.95	7.46
HWLB 2005-0075S	O	R0.25	0.75	0.89	0.92	0.95	0.98	1.03
HWLB 2005-010S	O		1	1.15	1.19	1.22	1.26	1.34
HWLB 2005-010			1	1.15	1.19	1.22	1.26	1.34
HWLB 2005-015S	O		1.5	1.66	1.71	1.76	1.82	1.94
HWLB 2005-015			1.5	1.66	1.71	1.76	1.82	1.94
HWLB 2005-015-6			1.5	1.66	1.71	1.76	1.82	1.94
HWLB 2005-020S	O		2	2.18	2.25	2.31	2.39	2.55
HWLB 2005-020			2	2.18	2.25	2.31	2.39	2.55
HWLB 2005-020-6			2	2.18	2.25	2.31	2.39	2.55
HWLB 2005-025S	O		2.5	2.70	2.78	2.86	2.96	3.17
HWLB 2005-025			2.5	2.70	2.78	2.86	2.96	3.17
HWLB 2005-030S	O		3	3.21	3.31	3.42	3.53	3.78
HWLB 2005-030			3	3.21	3.31	3.42	3.53	3.78
HWLB 2005-030-6			3	3.21	3.31	3.42	3.53	3.78

Next Page ➡

Unit (mm)

	Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
	HWLB 2005-035		R0.25	3.5	0.4	0.49	16°	45	4	34.7	—
※	HWLB 2005-040S	O		4				35	4	24.2	—
	HWLB 2005-040			4				45	4	34.2	—
	HWLB 2005-040-6			4				50	6	35.5	—
※	HWLB 2005-045			4.5				45	4	33.7	—
※	HWLB 2005-050S	O		5				35	4	23.2	—
	HWLB 2005-050			5				45	4	33.2	—
	HWLB 2005-060			6				45	4	32.2	—
※	HWLB 2005-070			7				45	4	31.2	—
	HWLB 2005-080			8				45	4	30.2	—
	HWLB 2005-100			10				50	4	33.2	—
※	HWLB 2006-010S	O	R0.3	1	0.48	0.59	16°	35	4	27.4	—
	HWLB 2006-010			1				45	4	37.4	—
※	HWLB 2006-0125			1.25				45	4	37.2	—
※	HWLB 2006-015S	O		1.5				35	4	26.9	—
	HWLB 2006-015			1.5				45	4	36.9	—
	HWLB 2006-015-6			1.5				50	6	38.2	—
※	HWLB 2006-020S	O		2				35	4	26.4	—
	HWLB 2006-020			2				45	4	36.4	—
	HWLB 2006-020-6			2				50	6	37.7	—
※	HWLB 2006-025S	O		2.5				35	4	25.9	—
	HWLB 2006-025			2.5				45	4	35.9	—
※	HWLB 2006-030S	O		3				35	4	25.4	—
	HWLB 2006-030			3				45	4	35.4	—
	HWLB 2006-030-6			3				50	6	36.7	—
※	HWLB 2006-035S	O		3.5				35	4	24.9	—
	HWLB 2006-035			3.5				45	4	34.9	—
※	HWLB 2006-040S	O		4				35	4	24.4	—
	HWLB 2006-040			4				45	4	34.4	—
	HWLB 2006-040-6			4				50	6	35.7	—
※	HWLB 2006-045			4.5				45	4	33.9	—
※	HWLB 2006-050S	O		5				35	4	23.4	—
	HWLB 2006-050			5				45	4	33.4	—
※	HWLB 2006-050-6			5				50	6	34.7	—
※	HWLB 2006-060S	O		6				35	4	22.4	—
	HWLB 2006-060			6				45	4	32.4	—
	HWLB 2006-060-6			6				50	6	33.7	—
※	HWLB 2006-070			7				45	4	31.4	—
	HWLB 2006-080			8				45	4	30.4	—
※	HWLB 2006-090			9				45	4	29.4	—
	HWLB 2006-100			10				50	4	33.4	—
※	HWLB 2006-100-6			10				50	6	29.7	—
※	HWLB 2006-120			12				50	4	31.4	—
※	HWLB 2007-020		R0.35	2	0.56	0.69	16°	45	4	36.6	—
※	HWLB 2007-040			4				45	4	34.6	—
※	HWLB 2007-060			6				45	4	32.6	—

※ Additional model

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HWLB 2005-035		R0.25	3.5	3.73	3.84	3.97	4.10	4.39
HWLB 2005-040S	○		4	4.24	4.38	4.52	4.67	5.00
HWLB 2005-040			4	4.24	4.38	4.52	4.67	5.00
HWLB 2005-040-6			4	4.24	4.38	4.52	4.67	5.00
HWLB 2005-045			4.5	4.76	4.91	5.07	5.24	5.61
HWLB 2005-050S	○		5	5.28	5.44	5.62	5.80	6.22
HWLB 2005-050			5	5.28	5.44	5.62	5.80	6.22
HWLB 2005-060			6	6.31	6.50	6.72	6.94	7.45
HWLB 2005-070			7	7.34	7.57	7.82	8.08	8.67
HWLB 2005-080			8	8.37	8.63	8.92	9.22	9.90
HWLB 2005-100			10	10.43	10.76	11.12	11.50	12.34
HWLB 2006-010S	○	R0.3	1	1.15	1.18	1.22	1.25	1.33
HWLB 2006-010			1	1.15	1.18	1.22	1.25	1.33
HWLB 2006-0125			1.25	1.39	1.44	1.48	1.53	1.62
HWLB 2006-015S	○		1.5	1.66	1.71	1.76	1.81	1.93
HWLB 2006-015			1.5	1.66	1.71	1.76	1.81	1.93
HWLB 2006-015-6			1.5	1.66	1.71	1.76	1.81	1.93
HWLB 2006-020S	○		2	2.18	2.24	2.31	2.38	2.54
HWLB 2006-020			2	2.18	2.24	2.31	2.38	2.54
HWLB 2006-020-6			2	2.18	2.24	2.31	2.38	2.54
HWLB 2006-025S	○		2.5	2.69	2.77	2.86	2.95	3.15
HWLB 2006-025			2.5	2.69	2.77	2.86	2.95	3.15
HWLB 2006-030S	○		3	3.21	3.31	3.41	3.52	3.77
HWLB 2006-030			3	3.21	3.31	3.41	3.52	3.77
HWLB 2006-030-6			3	3.21	3.31	3.41	3.52	3.77
HWLB 2006-035S	○		3.5	3.73	3.84	3.96	4.09	4.38
HWLB 2006-035			3.5	3.73	3.84	3.96	4.09	4.38
HWLB 2006-040S	○		4	4.24	4.37	4.51	4.66	4.99
HWLB 2006-040			4	4.24	4.37	4.51	4.66	4.99
HWLB 2006-040-6			4	4.24	4.37	4.51	4.66	4.99
HWLB 2006-045			4.5	4.76	4.90	5.06	5.23	5.60
HWLB 2006-050S	○		5	5.27	5.44	5.61	5.80	6.21
HWLB 2006-050			5	5.27	5.44	5.61	5.80	6.21
HWLB 2006-050-6			5	5.27	5.44	5.61	5.80	6.21
HWLB 2006-060S	○		6	6.30	6.50	6.71	6.94	7.44
HWLB 2006-060			6	6.30	6.50	6.71	6.94	7.44
HWLB 2006-060-6			6	6.30	6.50	6.71	6.94	7.44
HWLB 2006-070			7	7.34	7.57	7.81	8.08	8.66
HWLB 2006-080			8	8.37	8.63	8.91	9.21	9.88
HWLB 2006-090			9	9.40	9.70	10.01	10.35	11.11
HWLB 2006-100			10	10.43	10.76	11.11	11.49	12.33
HWLB 2006-100-6			10	10.43	10.76	11.11	11.49	12.33
HWLB 2006-120			12	12.49	12.89	13.31	13.77	14.78
HWLB 2007-020		R0.35	2	2.17	2.24	2.30	2.37	2.53
HWLB 2007-040			4	4.24	4.37	4.51	4.65	4.98
HWLB 2007-060			6	6.30	6.50	6.71	6.93	7.43

Next Page ➡

Unit (mm)

	Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
※	HWLB 2008-015		R0.4	1.5	0.64	0.79	16°	45	4	37.3	—
※	HWLB 2008-020S	○		2				35	4	26.8	—
	HWLB 2008-020			2				45	4	36.8	—
	HWLB 2008-020-6			2				50	6	38.0	—
※	HWLB 2008-025			2.5				45	4	36.3	—
※	HWLB 2008-030S	○		3				35	4	25.8	—
	HWLB 2008-030			3				45	4	35.8	—
	HWLB 2008-030-6			3				50	6	37.0	—
※	HWLB 2008-040S	○		4				35	4	24.8	—
	HWLB 2008-040			4				45	4	34.8	—
	HWLB 2008-040-6			4				50	6	36.0	—
	HWLB 2008-050			5				45	4	33.8	—
※	HWLB 2008-060S	○		6				35	4	22.8	—
	HWLB 2008-060			6				45	4	32.8	—
※	HWLB 2008-070			7				45	4	31.8	—
	HWLB 2008-080			8				45	4	30.8	—
	HWLB 2008-100			10				50	4	33.8	—
	HWLB 2008-120			12				50	4	31.8	—
※	HWLB 2008-160			16				50	4	27.8	—
※	HWLB 2009-040		R0.45	4	0.72	0.89	16°	45	4	35.0	—
※	HWLB 2009-080			8				45	4	31.0	—
※	HWLB 2009-120			12				50	4	32.0	—
※	HWLB 2010-015S	○	R0.5	1.5	0.8	0.98	16°	35	4	27.6	—
※	HWLB 2010-015			1.5				45	4	37.6	—
※	HWLB 2010-020S	○		2				35	4	27.1	—
	HWLB 2010-020			2				45	4	37.1	—
※	HWLB 2010-025S	○		2.5				35	4	26.6	—
	HWLB 2010-025			2.5				45	4	36.6	—
※	HWLB 2010-030S	○		3				35	4	26.1	—
	HWLB 2010-030			3				45	4	36.1	—
	HWLB 2010-030-6			3				50	6	37.4	—
※	HWLB 2010-040S	○		4				35	4	25.1	—
	HWLB 2010-040			4				45	4	35.1	—
	HWLB 2010-040-6			4				50	6	36.4	—
	HWLB 2010-050			5				45	4	34.1	—
	HWLB 2010-050-6			5				50	6	35.4	—
※	HWLB 2010-060S	○		6				35	4	23.1	—
	HWLB 2010-060			6				45	4	33.1	—
	HWLB 2010-060-6			6				50	6	34.4	—
	HWLB 2010-070			7				45	4	32.1	—
※	HWLB 2010-070-6			7				50	6	33.4	—
※	HWLB 2010-080S	○		8				40	4	26.1	—
	HWLB 2010-080			8				45	4	31.1	—
	HWLB 2010-080-6			8				50	6	32.4	—

※ Additional model

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HWLB 2008-015		R0.4	1.5	1.65	1.70	1.75	1.80	1.91
HWLB 2008-020S	○		2	2.17	2.24	2.30	2.37	2.52
HWLB 2008-020			2	2.17	2.24	2.30	2.37	2.52
HWLB 2008-020-6			2	2.17	2.24	2.30	2.37	2.52
HWLB 2008-025			2.5	2.69	2.77	2.85	2.94	3.13
HWLB 2008-030S	○		3	3.21	3.30	3.40	3.51	3.74
HWLB 2008-030			3	3.21	3.30	3.40	3.51	3.74
HWLB 2008-030-6			3	3.21	3.30	3.40	3.51	3.74
HWLB 2008-040S	○		4	4.24	4.37	4.50	4.65	4.97
HWLB 2008-040			4	4.24	4.37	4.50	4.65	4.97
HWLB 2008-040-6			4	4.24	4.37	4.50	4.65	4.97
HWLB 2008-050			5	5.27	5.43	5.60	5.78	6.19
HWLB 2008-060S	○		6	6.30	6.50	6.70	6.92	7.42
HWLB 2008-060			6	6.30	6.50	6.70	6.92	7.42
HWLB 2008-070			7	7.33	7.56	7.80	8.06	8.64
HWLB 2008-080			8	8.36	8.62	8.90	9.20	9.86
HWLB 2008-100			10	10.43	10.75	11.10	11.48	12.31
HWLB 2008-120			12	12.49	12.88	13.30	13.75	14.76
HWLB 2008-160			16	16.62	17.14	17.71	18.31	19.65
HWLB 2009-040		R0.45	4	4.24	4.36	4.50	4.64	4.96
HWLB 2009-080			8	8.36	8.62	8.90	9.19	9.85
HWLB 2009-120			12	12.49	12.88	13.30	13.75	14.75
HWLB 2010-015S	○	R0.5	1.5	1.66	1.71	1.75	1.80	1.90
HWLB 2010-015			1.5	1.66	1.71	1.75	1.80	1.90
HWLB 2010-020S	○		2	2.18	2.24	2.30	2.36	2.51
HWLB 2010-020			2	2.18	2.24	2.30	2.36	2.51
HWLB 2010-025S	○		2.5	2.70	2.77	2.85	2.93	3.12
HWLB 2010-025			2.5	2.70	2.77	2.85	2.93	3.12
HWLB 2010-030S	○		3	3.21	3.30	3.40	3.50	3.73
HWLB 2010-030			3	3.21	3.30	3.40	3.50	3.73
HWLB 2010-030-6			3	3.21	3.30	3.40	3.50	3.73
HWLB 2010-040S	○		4	4.24	4.37	4.50	4.64	4.96
HWLB 2010-040			4	4.24	4.37	4.50	4.64	4.96
HWLB 2010-040-6			4	4.24	4.37	4.50	4.64	4.96
HWLB 2010-050			5	5.28	5.43	5.60	5.78	6.18
HWLB 2010-050-6			5	5.28	5.43	5.60	5.78	6.18
HWLB 2010-060S	○		6	6.31	6.50	6.70	6.92	7.40
HWLB 2010-060			6	6.31	6.50	6.70	6.92	7.40
HWLB 2010-060-6			6	6.31	6.50	6.70	6.92	7.40
HWLB 2010-070			7	7.34	7.56	7.80	8.06	8.63
HWLB 2010-070-6			7	7.34	7.56	7.80	8.06	8.63
HWLB 2010-080S	○		8	8.37	8.63	8.90	9.20	9.85
HWLB 2010-080			8	8.37	8.63	8.90	9.20	9.85
HWLB 2010-080-6			8	8.37	8.63	8.90	9.20	9.85

Next Page ➡

Unit (mm)

	Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
	HWLB 2010-090		R0.5	9	0.8	0.98	16°	45	4	30.1	—
※	HWLB 2010-100S	○		10				40	4	24.1	—
	HWLB 2010-100			10				45	4	29.1	—
	HWLB 2010-100-6			10				50	6	30.4	—
	HWLB 2010-120			12				45	4	27.1	—
	HWLB 2010-140			14				50	4	30.1	—
	HWLB 2010-140-6			14				60	6	36.4	—
	HWLB 2010-160			16				50	4	28.1	—
	HWLB 2010-180			18				55	4	31.1	—
	HWLB 2010-200			20				55	4	29.1	—
※	HWLB 2010-220-6			22				70	6	38.4	—
※	HWLB 2012-020		R0.6	2	0.96	1.19	16°	45	4	37.6	—
	HWLB 2012-030			3				45	4	36.6	—
	HWLB 2012-040			4				45	4	35.6	—
	HWLB 2012-060			6				45	4	33.6	—
	HWLB 2012-080			8				45	4	31.6	—
	HWLB 2012-100			10				45	4	29.6	—
	HWLB 2012-120			12				45	4	27.6	—
※	HWLB 2012-140			14				50	4	30.6	—
	HWLB 2012-160			16				50	4	28.6	—
※	HWLB 2014-060		R0.7	6	1.12	1.37	16°	45	4	34.0	—
※	HWLB 2014-080			8				45	4	32.0	—
※	HWLB 2014-120			12				45	4	28.0	—
※	HWLB 2015-030S	○	R0.75	3	1.2	1.47	16°	35	4	27.2	—
	HWLB 2015-030			3				45	4	37.2	—
※	HWLB 2015-040S	○		4				35	4	26.2	—
	HWLB 2015-040			4				45	4	36.2	—
※	HWLB 2015-060S	○		6				35	4	24.2	—
	HWLB 2015-060			6				45	4	34.2	—
	HWLB 2015-060-6			6				50	6	35.4	—
※	HWLB 2015-080S	○		8				40	4	27.2	—
	HWLB 2015-080			8				45	4	32.2	—
	HWLB 2015-080-6			8				50	6	33.4	—
※	HWLB 2015-100S	○		10				40	4	25.2	—
	HWLB 2015-100			10				45	4	30.2	—
	HWLB 2015-100-6			10				50	6	31.4	—
	HWLB 2015-120			12				45	4	28.2	—
	HWLB 2015-140			14				50	4	31.2	—
	HWLB 2015-160			16				50	4	29.2	—
※	HWLB 2015-160-6			16				60	6	35.4	—
	HWLB 2015-180			18				55	4	32.2	—
	HWLB 2015-200			20				55	4	30.2	—
※	HWLB 2015-220			22				55	4	28.2	—
	HWLB 2015-250			25				65	4	35.2	—
※	HWLB 2015-300			30				70	4	35.2	—

※ Additional model

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HWLB 2010-090		R0.5	9	9.40	9.69	10.00	10.34	11.08
HWLB 2010-100S	○		10	10.43	10.76	11.10	11.47	12.30
HWLB 2010-100			10	10.43	10.76	11.10	11.47	12.30
HWLB 2010-100-6			10	10.43	10.76	11.10	11.47	12.30
HWLB 2010-120			12	12.50	12.89	13.30	13.75	14.75
HWLB 2010-140			14	14.56	15.02	15.51	16.03	17.19
HWLB 2010-140-6			14	14.56	15.02	15.51	16.03	17.19
HWLB 2010-160			16	16.62	17.15	17.71	18.31	19.64
HWLB 2010-180			18	18.68	19.28	19.91	20.58	22.09
HWLB 2010-200			20	20.75	21.41	22.11	22.86	24.54
HWLB 2010-220-6			22	22.81	23.54	24.31	25.14	26.98
HWLB 2012-020		R0.6	2	2.03	2.08	2.13	2.19	2.32
HWLB 2012-030			3	3.07	3.15	3.24	3.33	3.54
HWLB 2012-040			4	4.10	4.21	4.34	4.47	4.76
HWLB 2012-060			6	6.16	6.34	6.54	6.75	7.21
HWLB 2012-080			8	8.22	8.47	8.74	9.02	9.66
HWLB 2012-100			10	10.29	10.60	10.94	11.30	12.10
HWLB 2012-120			12	12.35	12.73	13.14	13.58	14.55
HWLB 2012-140			14	14.41	14.86	15.34	15.85	17.00
HWLB 2012-160			16	16.47	16.99	17.54	18.13	19.45
HWLB 2014-060		R0.7	6	6.19	6.37	6.57	6.77	7.23
HWLB 2014-080			8	8.26	8.50	8.77	9.05	9.68
HWLB 2014-120			12	12.38	12.76	13.17	13.60	14.57
HWLB 2015-030S	○	R0.75	3	3.10	3.18	3.26	3.35	3.55
HWLB 2015-030			3	3.10	3.18	3.26	3.35	3.55
HWLB 2015-040S	○		4	4.13	4.24	4.36	4.49	4.77
HWLB 2015-040			4	4.13	4.24	4.36	4.49	4.77
HWLB 2015-060S	○		6	6.19	6.37	6.56	6.76	7.22
HWLB 2015-060			6	6.19	6.37	6.56	6.76	7.22
HWLB 2015-060-6			6	6.19	6.37	6.56	6.76	7.22
HWLB 2015-080S	○		8	8.25	8.50	8.76	9.04	9.67
HWLB 2015-080			8	8.25	8.50	8.76	9.04	9.67
HWLB 2015-080-6			8	8.25	8.50	8.76	9.04	9.67
HWLB 2015-100S	○		10	10.32	10.63	10.96	11.32	12.11
HWLB 2015-100			10	10.32	10.63	10.96	11.32	12.11
HWLB 2015-100-6			10	10.32	10.63	10.96	11.32	12.11
HWLB 2015-120			12	12.38	12.76	13.16	13.60	14.56
HWLB 2015-140			14	14.44	14.89	15.36	15.87	17.01
HWLB 2015-160			16	16.50	17.02	17.57	18.15	19.46
HWLB 2015-160-6			16	16.50	17.02	17.57	18.15	19.46
HWLB 2015-180			18	18.57	19.15	19.77	20.43	21.90
HWLB 2015-200			20	20.63	21.28	21.97	22.71	24.35
HWLB 2015-220			22	22.69	23.41	24.17	24.98	No Interference
HWLB 2015-250			25	25.79	26.60	27.47	28.40	No Interference
HWLB 2015-300			30	30.94	31.93	32.97	34.09	No Interference

Next Page ➡

Unit (mm)

	Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
	HWLB 2016-040		R0.8	4	1.28	1.58	16°	45	4	36.3	—
	HWLB 2016-080			8				45	4	32.3	—
	HWLB 2016-120			12				45	4	28.3	—
	HWLB 2016-160			16				50	4	29.3	—
	HWLB 2016-200			20				55	4	30.3	—
※	HWLB 2018-040		R0.9	4	1.44	1.78	16°	45	4	36.7	—
	HWLB 2018-060			6				45	4	34.7	—
※	HWLB 2018-080			8				45	4	32.7	—
	HWLB 2018-100			10				45	4	30.7	—
※	HWLB 2018-120			12				45	4	28.7	—
	HWLB 2018-160			16				50	4	29.7	—
	HWLB 2018-200			20				55	4	30.7	—
	HWLB 2018-300			30				70	4	35.7	—
※	HWLB 2020-030S	○	R1	3	1.6	1.98	16°	35	4	28.1	—
	HWLB 2020-030			3				45	4	38.1	—
※	HWLB 2020-040S	○		4				35	4	27.1	—
	HWLB 2020-040			4				45	4	37.1	—
	HWLB 2020-040-6			4				50	6	38.4	—
※	HWLB 2020-060S	○		6				35	4	25.1	—
	HWLB 2020-060			6				45	4	35.1	—
	HWLB 2020-060-6			6				50	6	36.4	—
※	HWLB 2020-080S	○		8				40	4	28.1	—
	HWLB 2020-080			8				45	4	33.1	—
	HWLB 2020-080-6			8				50	6	34.4	—
※	HWLB 2020-100S	○		10				40	4	26.1	—
	HWLB 2020-100			10				45	4	31.1	—
	HWLB 2020-100-6			10				50	6	32.4	—
※	HWLB 2020-120S	○		12				40	4	24.1	—
	HWLB 2020-120			12				45	4	29.1	—
	HWLB 2020-120-6			12				50	6	30.4	—
※	HWLB 2020-140S	○		14				45	4	27.1	—
	HWLB 2020-140			14				50	4	32.1	—
※	HWLB 2020-160S	○		16				45	4	25.1	—
	HWLB 2020-160			16				50	4	30.1	—
	HWLB 2020-160-6			16				60	6	36.4	—
※	HWLB 2020-180S	○		18				45	4	23.1	—
	HWLB 2020-180			18				55	4	33.1	—
※	HWLB 2020-200S	○		20				50	4	26.1	—
	HWLB 2020-200			20				55	4	31.1	—
	HWLB 2020-200-6			20				70	6	42.4	—
	HWLB 2020-220			22				60	4	34.1	—
	HWLB 2020-250			25				65	4	36.1	—
※	HWLB 2020-250-6			25				80	6	47.4	—
	HWLB 2020-300			30				70	4	36.1	—
※	HWLB 2020-300-6			30				80	6	42.4	—

※ Additional model

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HWLB 2016-040		R0.8	4	4.11	4.22	4.34	4.46	4.74
HWLB 2016-080			8	8.23	8.48	8.74	9.02	9.64
HWLB 2016-120			12	12.36	12.74	13.14	13.57	14.53
HWLB 2016-160			16	16.49	17.00	17.54	18.12	19.42
HWLB 2016-200			20	20.61	21.26	21.94	22.68	No Interference
HWLB 2018-040		R0.9	4	4.11	4.21	4.33	4.45	4.72
HWLB 2018-060			6	6.17	6.34	6.53	6.72	7.17
HWLB 2018-080			8	8.23	8.47	8.73	9.00	9.61
HWLB 2018-100			10	10.29	10.60	10.93	11.28	12.06
HWLB 2018-120			12	12.36	12.73	13.13	13.56	14.51
HWLB 2018-160			16	16.48	16.99	17.53	18.11	19.40
HWLB 2018-200			20	20.61	21.25	21.93	22.67	No Interference
HWLB 2018-300			30	30.92	31.90	32.94	No Interference	No Interference
HWLB 2020-030S	○	R1	3	3.07	3.14	3.21	3.29	3.47
HWLB 2020-030			3	3.07	3.14	3.21	3.29	3.47
HWLB 2020-040S	○		4	4.10	4.21	4.32	4.43	4.70
HWLB 2020-040			4	4.10	4.21	4.32	4.43	4.70
HWLB 2020-040-6			4	4.10	4.21	4.32	4.43	4.70
HWLB 2020-060S	○		6	6.17	6.33	6.52	6.71	7.14
HWLB 2020-060			6	6.17	6.33	6.52	6.71	7.14
HWLB 2020-060-6			6	6.17	6.33	6.52	6.71	7.14
HWLB 2020-080S	○		8	8.23	8.46	8.72	8.99	9.59
HWLB 2020-080			8	8.23	8.46	8.72	8.99	9.59
HWLB 2020-080-6			8	8.23	8.46	8.72	8.99	9.59
HWLB 2020-100S	○		10	10.29	10.59	10.92	11.27	12.04
HWLB 2020-100			10	10.29	10.59	10.92	11.27	12.04
HWLB 2020-100-6			10	10.29	10.59	10.92	11.27	12.04
HWLB 2020-120S	○		12	12.35	12.72	13.12	13.54	14.49
HWLB 2020-120			12	12.35	12.72	13.12	13.54	14.49
HWLB 2020-120-6			12	12.35	12.72	13.12	13.54	14.49
HWLB 2020-140S	○		14	14.42	14.85	15.32	15.82	16.93
HWLB 2020-140			14	14.42	14.85	15.32	15.82	16.93
HWLB 2020-160S	○		16	16.48	16.98	17.52	18.10	19.38
HWLB 2020-160			16	16.48	16.98	17.52	18.10	19.38
HWLB 2020-160-6			16	16.48	16.98	17.52	18.10	19.38
HWLB 2020-180S	○		18	18.54	19.11	19.72	20.37	No Interference
HWLB 2020-180			18	18.54	19.11	19.72	20.37	No Interference
HWLB 2020-200S	○		20	20.60	21.24	21.92	22.65	No Interference
HWLB 2020-200			20	20.60	21.24	21.92	22.65	No Interference
HWLB 2020-200-6			20	20.60	21.24	21.92	22.65	24.28
HWLB 2020-220			22	22.67	23.37	24.12	24.93	No Interference
HWLB 2020-250			25	25.76	26.57	27.43	28.35	No Interference
HWLB 2020-250-6			25	25.76	26.57	27.43	28.35	30.39
HWLB 2020-300			30	30.92	31.89	32.93	No Interference	No Interference
HWLB 2020-300-6			30	30.92	31.89	32.93	34.04	36.51

Next Page ➡

Unit (mm)

	Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
	HWLB 2020-350		R1	35	1.6	1.98	16°	80	4	41.1	—
	HWLB 2020-400			40				80	4	36.1	—
	HWLB 2025-060		R1.25	6	2	2.45	16°	45	4	36.0	—
	HWLB 2025-100			10				45	4	32.0	—
	HWLB 2025-150			15				50	4	32.0	—
	HWLB 2025-200			20				55	4	32.0	—
	HWLB 2025-250			25				65	4	37.0	—
※	HWLB 2025-300			30				70	4	37.0	—
	HWLB 2030-060-3		R1.5	6	2.4	2.95	—	60	3	51.5	—
※	HWLB 2030-060-4S	O		6			16°	35	4	26.9	—
	HWLB 2030-060-4			6				60	4	51.9	—
	HWLB 2030-060			6				60	6	48.2	—
※	HWLB 2030-080-4S	O		8				40	4	29.9	—
	HWLB 2030-080			8				60	6	46.2	—
※	HWLB 2030-100-4S	O		10				40	4	27.9	—
	HWLB 2030-100			10				60	6	44.2	—
※	HWLB 2030-120-4S	O		12				40	4	25.9	—
	HWLB 2030-120			12				60	6	42.2	—
	HWLB 2030-140			14				60	6	40.2	—
※	HWLB 2030-160-4S	O		16				45	4	26.9	—
	HWLB 2030-160			16				60	6	38.2	—
	HWLB 2030-180			18				60	6	36.2	—
※	HWLB 2030-200-4S	O		20				50	4	27.9	—
	HWLB 2030-200			20				70	6	44.2	—
※	HWLB 2030-220			22				70	6	42.2	—
	HWLB 2030-250			25				70	6	39.2	—
	HWLB 2030-300			30				70	6	34.2	—
	HWLB 2030-350			35				80	6	39.2	—
	HWLB 2030-400			40				80	6	34.2	—
※	HWLB 2035-100		R1.75	10	2.8	3.45	16°	60	6	45.1	—
※	HWLB 2035-200			20				65	6	40.1	—
※	HWLB 2035-300			30				70	6	35.1	—
※	HWLB 2040-080-4S	O	R2	8	3.2	3.95	—	35	4	24.8	—
	HWLB 2040-080-4			8				70	4	59.8	—
	HWLB 2040-080			8			16°	70	6	58.0	—
※	HWLB 2040-100-4S	O		10			—	40	4	30.0	—
	HWLB 2040-100			10			16°	70	6	56.0	—
※	HWLB 2040-120-4S	O		12			—	40	4	28.0	—
	HWLB 2040-120			12			16°	70	6	54.0	—
	HWLB 2040-140			14				70	6	52.0	—
※	HWLB 2040-160-4S	O		16			—	45	4	29.0	—
	HWLB 2040-160			16			16°	70	6	50.0	—
	HWLB 2040-180			18				70	6	48.0	—
※	HWLB 2040-200-4S	O		20			—	50	4	30.0	—
	HWLB 2040-200			20			16°	70	6	46.0	—

※ Additional model

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HWLB 2020-350		R1	35	36.08	37.21	38.43	No Interference	No Interference
HWLB 2020-400			40	41.23	42.54	No Interference	No Interference	No Interference
HWLB 2025-060		R1.25	6	6.21	6.37	6.55	6.74	7.15
HWLB 2025-100			10	10.34	10.63	10.95	11.29	12.05
HWLB 2025-150			15	15.49	15.96	16.45	16.98	No Interference
HWLB 2025-200			20	20.65	21.28	21.96	22.68	No Interference
HWLB 2025-250			25	25.81	26.61	27.46	No Interference	No Interference
HWLB 2025-300			30	30.96	31.93	No Interference	No Interference	No Interference
HWLB 2030-060-3		R1.5	6	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2030-060-4S	○		6	6.19	6.35	6.51	6.69	7.09
HWLB 2030-060-4			6	6.19	6.35	6.51	6.69	7.09
HWLB 2030-060			6	6.19	6.35	6.51	6.69	7.09
HWLB 2030-080-4S	○		8	8.26	8.48	8.72	8.97	9.54
HWLB 2030-080			8	8.26	8.48	8.72	8.97	9.54
HWLB 2030-100-4S	○		10	10.32	10.61	10.92	11.25	No Interference
HWLB 2030-100			10	10.32	10.61	10.92	11.25	11.98
HWLB 2030-120-4S	○		12	12.38	12.74	13.12	13.52	No Interference
HWLB 2030-120			12	12.38	12.74	13.12	13.52	14.43
HWLB 2030-140			14	14.45	14.87	15.32	15.80	16.88
HWLB 2030-160-4S	○		16	16.51	17.00	17.52	No Interference	No Interference
HWLB 2030-160			16	16.51	17.00	17.52	18.08	19.33
HWLB 2030-180			18	18.57	19.13	19.72	20.36	21.77
HWLB 2030-200-4S	○		20	20.63	21.26	No Interference	No Interference	No Interference
HWLB 2030-200			20	20.63	21.26	21.92	22.63	24.22
HWLB 2030-220			22	22.70	23.39	24.12	24.91	26.67
HWLB 2030-250			25	25.79	26.58	27.42	28.33	30.34
HWLB 2030-300			30	30.95	31.91	32.93	34.02	No Interference
HWLB 2030-350			35	36.10	37.23	38.43	39.71	No Interference
HWLB 2030-400			40	41.26	42.55	43.93	No Interference	No Interference
HWLB 2035-100		R1.75	10	10.31	10.59	10.88	11.21	11.92
HWLB 2035-200			20	20.62	21.23	21.89	22.59	24.16
HWLB 2035-300			30	30.93	31.88	32.89	33.98	No Interference
HWLB 2040-080-4S	○	R2	8	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2040-080-4			8	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2040-080			8	8.24	8.45	8.67	8.90	9.43
HWLB 2040-100-4S	○		10	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2040-100			10	10.30	10.58	10.87	11.18	11.88
HWLB 2040-120-4S	○		12	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2040-120			12	12.37	12.71	13.07	13.46	14.32
HWLB 2040-140			14	14.43	14.84	15.27	15.73	16.77
HWLB 2040-160-4S	○		16	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2040-160			16	16.49	16.97	17.47	18.01	19.22
HWLB 2040-180			18	18.56	19.10	19.67	20.29	No Interference
HWLB 2040-200-4S	○		20	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2040-200			20	20.62	21.22	21.87	22.57	No Interference

Next Page ➡

Unit (mm)

	Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shank Length H	Suggested Retail Price ¥
※	HWLB 2040-220		R2	22	3.2	3.95	16°	70	6	44.0	—
※	HWLB 2040-250-4S	○		25			—	55	4	30.0	—
	HWLB 2040-250			25			16°	70	6	41.0	—
※	HWLB 2040-300-4S	○		30			—	60	4	30.0	—
	HWLB 2040-300			30			16°	70	6	36.0	—
	HWLB 2040-350			35				80	6	41.0	—
	HWLB 2040-400			40				90	6	46.0	—
	HWLB 2040-450			45				90	6	41.0	—
※	HWLB 2040-500			50				100	6	46.0	—
※	HWLB 2040-600			60				120	6	56.0	—
	HWLB 2050-100		R2.5	10	4	4.95	16°	70	6	57.9	—
	HWLB 2050-150			15				70	6	52.9	—
	HWLB 2050-200			20				70	6	47.9	—
	HWLB 2050-250			25				70	6	42.9	—
	HWLB 2050-300			30				80	6	47.9	—
※	HWLB 2050-400			40				90	6	47.9	—
	HWLB 2060-100		R3	10	4.8	5.95	—	80	6	65.6	—
※	HWLB 2060-150S	○		15				45	6	30.0	—
	HWLB 2060-150			15				80	6	65.0	—
※	HWLB 2060-200S	○		20				50	6	30.0	—
	HWLB 2060-200			20				80	6	60.0	—
	HWLB 2060-250			25				80	6	55.0	—
※	HWLB 2060-300S	○		30				60	6	30.0	—
	HWLB 2060-300			30				80	6	50.0	—
	HWLB 2060-350			35				80	6	45.0	—
	HWLB 2060-400			40				90	6	50.0	—
	HWLB 2060-450			45				100	6	55.0	—
	HWLB 2060-500			50				120	6	70.0	—
	HWLB 2060-600			60				120	6	60.0	—

※ Additional model

Unit (mm)

Model Number	Short Shank	Radius of Ball Nose R	Effective Length ℓ1	Effective Length by Inclined Angles				
				30′	1°	1°30′	2°	3°
HWLB 2040-220		R2	22	22.68	23.35	24.07	24.84	No Interference
HWLB 2040-250-4S	○		25	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2040-250			25	25.78	26.55	27.37	28.26	No Interference
HWLB 2040-300-4S	○		30	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2040-300			30	30.93	31.87	32.88	No Interference	No Interference
HWLB 2040-350			35	36.09	37.20	38.38	No Interference	No Interference
HWLB 2040-400			40	41.25	42.52	No Interference	No Interference	No Interference
HWLB 2040-450			45	46.40	47.85	No Interference	No Interference	No Interference
HWLB 2040-500			50	51.56	53.17	No Interference	No Interference	No Interference
HWLB 2040-600			60	61.87	No Interference	No Interference	No Interference	No Interference
HWLB 2050-100		R2.5	10	10.29	10.55	10.82	11.11	11.77
HWLB 2050-150			15	15.45	15.87	16.32	16.81	No Interference
HWLB 2050-200			20	20.60	21.19	21.82	No Interference	No Interference
HWLB 2050-250			25	25.76	26.52	No Interference	No Interference	No Interference
HWLB 2050-300			30	30.92	31.84	No Interference	No Interference	No Interference
HWLB 2050-400			40	41.23	No Interference	No Interference	No Interference	No Interference
HWLB 2060-100		R3	10	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-150S	○		15	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-150			15	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-200S	○		20	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-200			20	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-250			25	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-300S	○		30	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-300			30	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-350			35	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-400			40	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-450			45	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-500			50	No Interference	No Interference	No Interference	No Interference	No Interference
HWLB 2060-600			60	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for HWLB / HWLB-S

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001	R0.05	0.2	48,000	55	0.002	0.002	48,000	45	0.002	0.002	48,000	45	0.002	0.002	36,000	22	0.002	0.002
		0.3	48,000	55	0.002	0.002	48,000	45	0.002	0.002	48,000	45	0.002	0.002	36,000	22	0.002	0.002
		0.4	48,000	50	0.002	0.002	48,000	40	0.002	0.002	48,000	40	0.002	0.002	36,000	20	0.002	0.002
		0.5	48,000	35	0.002	0.002	48,000	35	0.002	0.002	48,000	35	0.002	0.002	36,000	17	0.002	0.002
20015	R0.075	0.3	48,000	90	0.004	0.004	48,000	70	0.004	0.004	48,000	70	0.004	0.004	36,000	35	0.004	0.004
		0.5	48,000	60	0.004	0.004	48,000	50	0.004	0.004	48,000	50	0.004	0.004	36,000	25	0.004	0.004
		1	48,000	60	0.001	0.002	48,000	20	0.001	0.002	48,000	20	0.001	0.002	36,000	10	0.001	0.002
2002	R0.1	0.3	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
		0.5	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
		0.75	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
		1	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
		1.25	60,000	160	0.002	0.004	54,000	140	0.001	0.002	54,000	95	0.001	0.002	40,500	45	0.001	0.002
		1.5	60,000	130	0.002	0.003	48,000	80	0.001	0.002	48,000	65	0.001	0.002	36,000	30	0.001	0.002
		1.75	60,000	110	0.001	0.002	48,000	60	0.001	0.001	48,000	50	0.001	0.001	36,000	25	0.001	0.001
		2	60,000	90	0.001	0.002	48,000	50	0.001	0.001	48,000	40	0.001	0.001	36,000	20	0.001	0.001
		2.5	46,850	60	0.001	0.001	40,450	30	0.001	0.001	40,450	20	0.001	0.001	30,350	10	0.001	0.001
		3	33,750	30	0.001	0.001	33,600	20	0.001	0.001	33,600	15	0.001	0.001	25,200	7	0.001	0.001
2003	R0.15	0.5	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		0.75	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		1	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		1.25	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		1.5	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		2	60,000	210	0.004	0.007	45,000	190	0.003	0.005	43,500	110	0.002	0.004	32,500	55	0.002	0.004
		2.5	51,250	175	0.003	0.005	38,500	135	0.002	0.004	37,750	85	0.001	0.003	28,300	40	0.001	0.003
		3	42,500	140	0.002	0.004	32,000	80	0.002	0.004	32,000	65	0.001	0.002	24,000	30	0.001	0.002
		3.5	33,200	90	0.002	0.003	27,300	60	0.002	0.003	27,200	40	0.001	0.002	20,400	20	0.001	0.002
		4	23,900	45	0.001	0.001	22,550	30	0.001	0.001	22,300	20	0.001	0.001	16,720	10	0.001	0.001
		4.5	22,500	40	0.001	0.001	21,300	30	0.001	0.001	20,900	20	0.001	0.001	15,700	10	0.001	0.001
		5	21,000	30	0.001	0.001	20,000	20	0.001	0.001	19,500	10	0.001	0.001	14,600	5	0.001	0.001
2004	R0.2	0.5	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		0.75	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		1	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		1.5	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		2	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		2.5	45,000	360	0.007	0.012	34,500	300	0.005	0.008	32,500	190	0.004	0.007	24,300	95	0.004	0.007
		3	40,000	250	0.005	0.008	31,900	210	0.004	0.008	30,500	160	0.003	0.005	22,800	80	0.003	0.005
		3.5	36,000	210	0.004	0.007	28,700	180	0.003	0.006	27,400	140	0.002	0.004	20,550	70	0.002	0.004
		4	32,000	180	0.003	0.005	25,500	150	0.002	0.004	24,300	120	0.002	0.004	18,200	60	0.002	0.004
		4.5	28,500	150	0.002	0.004	23,500	125	0.002	0.003	22,400	100	0.001	0.003	16,800	50	0.001	0.003
		5	25,000	120	0.002	0.003	21,500	100	0.001	0.002	20,500	80	0.001	0.002	15,350	40	0.001	0.002
		6	18,000	60	0.001	0.002	18,000	60	0.001	0.002	17,000	45	0.001	0.002	12,750	20	0.001	0.002
2005	R0.25	0.75	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		1	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		1.5	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		2	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		2.5	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		3	40,000	500	0.01	0.02	31,000	400	0.007	0.01	28,550	230	0.005	0.008	21,400	115	0.005	0.008
		3.5	36,350	340	0.007	0.017	29,000	270	0.005	0.008	27,100	160	0.003	0.006	20,300	80	0.003	0.006
		4	32,700	180	0.005	0.015	27,150	150	0.003	0.008	25,650	100	0.002	0.005	19,900	50	0.002	0.005
		4.5	29,900	150	0.004	0.01	25,700	130	0.002	0.007	24,500	85	0.002	0.004	18,350	43	0.002	0.004
		5	27,000	135	0.003	0.008	24,200	110	0.002	0.005	23,500	75	0.002	0.004	17,600	35	0.002	0.004
		6	21,350	90	0.002	0.005	21,300	75	0.001	0.003	21,300	50	0.001	0.002	16,000	25	0.001	0.002
		7	18,600	75	0.001	0.004	18,600	55	0.001	0.002	18,600	35	0.001	0.002	13,950	17	0.001	0.002
		8	15,900	60	0.001	0.003	15,900	40	0.001	0.002	15,900	25	0.001	0.002	11,950	12	0.001	0.002
		10	14,900	50	0.001	0.002	13,600	20	0.001	0.001	13,600	15	0.001	0.001	10,200	7	0.001	0.001

Milling Conditions for HWLB / HWLB-S

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2006	R0.3	1	40,000	1,400	0.045	0.15	30,000	1,500	0.03	0.13	26,500	1,000	0.015	0.09	20,000	500	0.015	0.09
		1.25	40,000	1,250	0.035	0.14	30,000	1,350	0.025	0.11	26,500	900	0.01	0.08	20,000	450	0.01	0.08
		1.5	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
		2	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
		2.5	40,000	800	0.02	0.1	30,000	800	0.015	0.09	26,500	520	0.008	0.065	20,000	260	0.008	0.065
		3	40,000	800	0.02	0.1	30,000	800	0.015	0.09	26,500	520	0.008	0.065	20,000	260	0.008	0.065
		3.5	40,000	500	0.015	0.09	30,000	500	0.01	0.075	26,500	340	0.006	0.05	20,000	170	0.006	0.05
		4	40,000	500	0.015	0.09	30,000	500	0.01	0.075	26,500	340	0.006	0.05	20,000	170	0.006	0.05
		4.5	32,000	400	0.01	0.075	25,000	390	0.007	0.05	23,000	260	0.005	0.04	18,000	130	0.005	0.04
		5	32,000	400	0.01	0.075	25,000	390	0.007	0.05	23,000	260	0.005	0.04	18,000	130	0.005	0.04
		6	24,000	300	0.007	0.06	21,000	320	0.005	0.04	19,500	210	0.004	0.03	15,000	105	0.004	0.03
		7	20,000	250	0.006	0.05	18,500	280	0.004	0.03	17,500	180	0.003	0.02	13,100	90	0.003	0.02
		8	16,000	200	0.005	0.05	16,000	240	0.003	0.02	16,000	160	0.003	0.02	12,000	80	0.003	0.02
		9	15,450	185	0.004	0.035	15,450	200	0.002	0.017	15,450	135	0.002	0.017	11,580	65	0.002	0.017
		10	14,900	175	0.003	0.02	14,900	175	0.002	0.015	14,900	115	0.002	0.015	11,100	55	0.002	0.015
		12	13,800	150	0.002	0.015	13,800	110	0.001	0.01	13,800	70	0.001	0.01	10,350	35	0.001	0.01
2007	R0.35	2	37,000	1,350	0.045	0.17	28,500	1,400	0.03	0.135	25,000	900	0.015	0.1	18,750	450	0.015	0.1
		4	31,250	920	0.035	0.15	25,750	975	0.025	0.12	23,750	650	0.012	0.09	17,800	325	0.012	0.09
		6	25,500	500	0.025	0.13	23,000	550	0.02	0.11	22,500	400	0.01	0.08	16,850	200	0.01	0.08
2008	R0.4	1.5	35,000	1,700	0.065	0.22	27,000	1,700	0.045	0.18	23,500	1,050	0.022	0.13	17,500	520	0.022	0.13
		2	35,000	1,600	0.06	0.21	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
		2.5	35,000	1,500	0.055	0.2	27,000	1,500	0.035	0.16	23,500	950	0.018	0.11	17,500	480	0.018	0.11
		3	35,000	1,400	0.05	0.19	27,000	1,400	0.03	0.15	23,500	900	0.015	0.1	17,500	450	0.015	0.1
		4	35,000	1,200	0.04	0.17	27,000	1,200	0.025	0.135	23,500	600	0.012	0.095	17,500	300	0.012	0.095
		5	31,500	900	0.03	0.15	25,000	900	0.02	0.12	22,000	500	0.01	0.085	16,500	250	0.01	0.085
		6	28,000	600	0.02	0.12	23,000	600	0.012	0.095	20,500	400	0.006	0.065	15,500	200	0.006	0.065
		7	23,750	460	0.016	0.105	20,500	480	0.009	0.08	18,750	340	0.005	0.062	14,000	170	0.005	0.062
		8	19,500	330	0.012	0.095	18,000	375	0.007	0.07	17,000	285	0.005	0.06	12,750	140	0.005	0.06
		10	15,000	260	0.01	0.085	14,700	340	0.005	0.06	14,650	225	0.004	0.05	11,000	110	0.004	0.05
		12	14,000	220	0.005	0.06	13,700	290	0.003	0.04	13,650	140	0.002	0.03	10,250	70	0.002	0.03
		16	13,300	185	0.003	0.02	11,100	150	0.001	0.013	11,100	90	0.001	0.013	8,300	45	0.001	0.013
2009	R0.45	4	32,500	1,650	0.08	0.25	25,500	1,800	0.04	0.18	22,000	1,300	0.02	0.13	16,500	650	0.02	0.13
		8	25,500	700	0.015	0.11	18,500	500	0.01	0.09	18,500	420	0.01	0.09	13,850	210	0.01	0.09
		12	15,000	280	0.01	0.09	13,300	300	0.006	0.07	13,300	220	0.006	0.07	10,000	110	0.006	0.07
2010	R0.5	1.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	880	0.05	0.2
		2	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
		2.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
		3	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
		4	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
		5	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
		6	30,000	1,150	0.06	0.23	21,500	1,250	0.03	0.17	19,700	1,050	0.025	0.15	14,500	525	0.025	0.15
		7	24,250	800	0.04	0.19	20,000	900	0.02	0.14	19,000	750	0.02	0.14	14,250	375	0.02	0.14
		8	24,000	800	0.025	0.155	18,500	580	0.015	0.12	18,400	480	0.015	0.12	13,800	240	0.015	0.12
		9	23,000	700	0.021	0.14	16,650	500	0.012	0.1	16,550	420	0.012	0.1	12,400	210	0.012	0.1
		10	22,000	600	0.018	0.13	14,800	430	0.01	0.09	14,700	360	0.01	0.09	11,100	180	0.01	0.09
		12	14,150	320	0.015	0.12	13,400	380	0.008	0.08	13,300	290	0.008	0.08	9,950	145	0.008	0.08
		14	13,500	280	0.012	0.1	12,000	350	0.007	0.08	12,000	220	0.007	0.08	9,000	110	0.007	0.08
		16	12,750	240	0.008	0.08	10,500	250	0.005	0.045	10,500	160	0.005	0.045	7,850	80	0.005	0.045
		18	12,350	220	0.006	0.065	9,750	200	0.004	0.035	9,750	130	0.004	0.035	7,300	65	0.004	0.035
		20	12,000	200	0.005	0.03	9,000	150	0.003	0.02	9,000	100	0.003	0.02	6,750	50	0.003	0.02
		22	12,000	150	0.003	0.02	9,000	110	0.002	0.012	9,000	75	0.002	0.012	6,750	35	0.002	0.012
2012	R0.6	2	30,000	2,000	0.12	0.36	20,000	2,000	0.06	0.24	17,500	1,750	0.036	0.2	13,100	880	0.036	0.2
		3	30,000	2,000	0.12	0.36	20,000	2,000	0.06	0.24	17,500	1,750	0.036	0.2	13,100	875	0.036	0.2
		4	30,000	2,000	0.12	0.36	20,000	2,000	0.06	0.24	17,500	1,750	0.036	0.2	13,100	875	0.036	0.2
		6	30,000	2,000	0.12	0.36	20,000	2,000	0.06	0.24	17,500	1,750	0.036	0.2	13,100	875	0.036	0.2
		8	20,200	800	0.05	0.23	16,600	900	0.025	0.17	15,850	750	0.025	0.17	11,900	375	0.025	0.17
		10	15,500	480	0.03	0.18	15,500	580	0.015	0.13	15,350	480	0.015	0.13	11,500	240	0.015	0.13
		12	12,400	360	0.02	0.15	12,400	430	0.01	0.095	12,250	360	0.01	0.095	9,200	180	0.01	0.095
		14	11,850	320	0.018	0.14	11,200	380	0.008	0.085	11,100	290	0.008	0.085	8,300	145	0.008	0.085
		16	11,300	280	0.014	0.12	10,000	360	0.007	0.08	10,000	230	0.007	0.08	7,500	115	0.007	0.08


Milling Conditions for HWLB / HWLB-S

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2014	R0.7	6	25,200	2,000	0.13	0.42	17,150	2,000	0.065	0.27	15,000	1,750	0.036	0.23	11,250	875	0.036	0.23
		8	25,200	1,300	0.08	0.32	15,350	1,250	0.04	0.23	14,050	1,050	0.03	0.2	10,550	525	0.03	0.2
		12	13,500	450	0.035	0.21	12,500	460	0.025	0.18	12,000	300	0.02	0.16	9,000	150	0.02	0.16
2015	R0.75	3	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
		4	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
		6	30,000	2,450	0.15	0.45	17,000	2,000	0.07	0.31	15,000	1,750	0.04	0.24	11,250	875	0.04	0.24
		8	23,500	1,300	0.1	0.37	15,000	1,250	0.045	0.25	14,000	1,050	0.03	0.21	10,500	525	0.03	0.21
		10	23,500	560	0.035	0.23	15,000	680	0.025	0.2	14,000	580	0.025	0.2	10,500	290	0.025	0.2
		12	13,100	480	0.03	0.21	13,000	580	0.02	0.17	13,000	480	0.02	0.17	9,750	240	0.02	0.17
		14	11,200	400	0.025	0.19	10,900	485	0.015	0.145	10,900	385	0.015	0.145	8,200	190	0.015	0.145
		16	9,350	320	0.02	0.17	8,850	390	0.012	0.13	8,800	290	0.012	0.13	6,600	145	0.012	0.13
		18	9,150	300	0.019	0.165	8,400	370	0.011	0.125	8,400	255	0.011	0.125	6,300	125	0.011	0.125
		20	9,000	280	0.018	0.16	8,000	350	0.01	0.12	8,000	220	0.01	0.12	6,000	110	0.01	0.12
		22	8,580	245	0.014	0.13	7,150	320	0.008	0.12	7,150	165	0.008	0.12	5,350	80	0.008	0.12
		25	8,100	210	0.01	0.11	6,250	220	0.006	0.09	6,250	120	0.005	0.08	4,700	60	0.005	0.08
		30	7,600	175	0.006	0.04	5,370	135	0.004	0.03	5,370	75	0.003	0.03	4,000	35	0.003	0.03
2016	R0.8	4	30,000	2,500	0.25	0.58	17,500	2,100	0.12	0.4	15,300	1,800	0.06	0.3	11,500	900	0.06	0.3
		8	30,000	2,500	0.16	0.48	17,500	2,100	0.08	0.32	15,300	1,800	0.05	0.275	11,500	900	0.05	0.275
		12	13,500	500	0.04	0.245	13,500	600	0.024	0.19	13,400	490	0.024	0.19	10,050	245	0.024	0.19
		16	10,800	375	0.03	0.21	10,800	450	0.016	0.15	10,700	370	0.016	0.15	8,000	185	0.016	0.15
		20	10,300	330	0.025	0.19	9,750	400	0.013	0.13	9,650	230	0.013	0.13	8,000	115	0.013	0.13
2018	R0.9	4	30,000	2,700	0.28	0.65	15,000	2,000	0.14	0.48	13,000	1,750	0.07	0.34	9,750	875	0.07	0.34
		6	30,000	2,700	0.18	0.54	15,000	2,000	0.07	0.34	13,000	1,750	0.04	0.26	9,750	875	0.04	0.26
		8	30,000	2,700	0.18	0.54	15,000	2,000	0.07	0.34	13,000	1,750	0.04	0.26	9,750	875	0.04	0.26
		10	25,750	2,000	0.14	0.48	14,400	1,650	0.06	0.32	12,900	1,425	0.035	0.24	9,700	713	0.035	0.24
		12	21,500	1,350	0.1	0.41	13,800	1,350	0.05	0.29	12,800	1,100	0.03	0.23	9,600	550	0.03	0.23
		16	15,550	390	0.032	0.23	11,700	490	0.016	0.18	11,150	400	0.01	0.14	8,400	200	0.01	0.14
		20	9,300	350	0.027	0.21	9,050	420	0.014	0.15	9,000	330	0.009	0.12	6,750	165	0.009	0.12
		30	8,000	240	0.015	0.15	7,000	250	0.009	0.07	7,000	160	0.006	0.06	5,250	80	0.006	0.06
2020	R1	3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
		4	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
		6	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
		8	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
		10	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
		12	19,500	1,350	0.12	0.45	12,400	1,350	0.06	0.34	11,500	1,100	0.045	0.27	8,650	550	0.045	0.27
		14	19,500	1,350	0.12	0.45	12,400	1,350	0.06	0.34	11,500	1,100	0.045	0.27	8,650	550	0.045	0.27
		16	10,800	500	0.05	0.3	10,800	600	0.03	0.24	10,700	490	0.03	0.24	8,000	245	0.03	0.24
		18	9,700	435	0.04	0.28	9,700	520	0.025	0.22	9,650	430	0.025	0.22	7,250	215	0.025	0.22
		20	8,650	375	0.035	0.25	8,650	450	0.02	0.19	8,560	370	0.02	0.19	6,400	185	0.02	0.19
		22	8,450	350	0.032	0.245	8,200	440	0.018	0.18	8,200	330	0.018	0.18	6,150	165	0.018	0.18
		25	8,250	320	0.03	0.24	7,800	440	0.016	0.16	7,800	290	0.016	0.16	5,850	145	0.016	0.16
		30	7,850	280	0.024	0.2	7,000	350	0.014	0.16	7,000	220	0.014	0.16	5,250	110	0.014	0.16
		35	7,450	240	0.016	0.16	6,150	250	0.01	0.09	6,150	160	0.01	0.09	4,600	80	0.01	0.09
		40	7,000	200	0.01	0.06	5,250	150	0.006	0.04	5,250	100	0.006	0.04	3,950	50	0.006	0.04
2025	R1.25	6	25,000	3,000	0.35	0.85	12,400	2,200	0.17	0.6	11,000	1,850	0.1	0.45	8,250	920	0.1	0.45
		10	25,000	3,000	0.24	0.76	12,400	2,200	0.13	0.51	11,000	1,850	0.08	0.38	8,250	920	0.08	0.38
		15	17,300	1,400	0.145	0.57	11,000	1,400	0.08	0.44	10,300	1,140	0.06	0.35	7,700	570	0.06	0.35
		20	9,600	520	0.06	0.38	9,600	630	0.04	0.31	9,600	510	0.04	0.31	7,200	255	0.04	0.31
		25	6,900	375	0.042	0.32	6,900	450	0.024	0.235	6,840	370	0.024	0.235	5,150	185	0.024	0.235
		30	6,500	320	0.025	0.24	6,200	400	0.02	0.22	6,200	280	0.02	0.22	4,650	140	0.02	0.22

Milling Conditions for HWLB / HWLB-S

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030	R1.5	6	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
		8	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
		10	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
		12	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
		14	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
		16	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
		18	17,750	2,180	0.24	0.8	9,800	1,800	0.13	0.57	8,900	1,500	0.08	0.47	6,650	760	0.08	0.47
		20	14,500	1,360	0.18	0.7	9,250	1,400	0.1	0.5	8,600	1,150	0.075	0.45	6,450	575	0.075	0.45
		22	11,250	940	0.12	0.57	8,625	1,000	0.07	0.44	8,300	830	0.06	0.41	6,200	410	0.06	0.41
		25	8,000	520	0.07	0.45	8,000	630	0.05	0.38	8,000	510	0.05	0.38	6,000	255	0.05	0.38
		30	5,750	375	0.05	0.38	5,750	450	0.03	0.29	5,700	370	0.03	0.29	4,275	185	0.03	0.29
		35	5,550	335	0.045	0.36	5,350	440	0.025	0.27	5,350	310	0.025	0.27	4,000	155	0.025	0.27
		40	5,350	300	0.04	0.34	4,900	390	0.02	0.24	4,850	250	0.02	0.24	3,650	125	0.02	0.24
2035	R1.75	10	19,000	3,000	0.35	1.05	10,000	2,200	0.17	0.75	8,400	1,900	0.11	0.61	6,300	950	0.11	0.61
		20	19,000	3,000	0.35	1.05	10,000	2,200	0.17	0.75	8,400	1,900	0.11	0.61	6,300	950	0.11	0.61
		30	6,900	520	0.08	0.52	6,900	630	0.06	0.45	6,900	510	0.06	0.45	5,200	255	0.06	0.45
2040	R2	8	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
		10	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
		12	18,000	3,200	0.4	1.2	9,000	2,300	0.2	0.85	7,900	2,000	0.13	0.7	5,900	1,000	0.13	0.7
		14	18,000	3,200	0.4	1.2	9,000	2,300	0.2	0.85	7,900	2,000	0.13	0.7	5,900	1,000	0.13	0.7
		16	18,000	3,200	0.4	1.2	9,000	2,300	0.2	0.85	7,900	2,000	0.13	0.7	5,900	1,000	0.13	0.7
		18	18,000	3,200	0.4	1.2	9,000	2,300	0.2	0.85	7,900	2,000	0.13	0.7	5,900	1,000	0.13	0.7
		20	18,000	3,200	0.4	1.2	9,000	2,300	0.2	0.85	7,900	2,000	0.13	0.7	5,900	1,000	0.13	0.7
		22	15,000	2,350	0.32	1.05	8,500	1,850	0.16	0.75	7,650	1,600	0.11	0.6	5,750	810	0.11	0.6
		25	12,500	1,500	0.25	0.95	8,000	1,450	0.13	0.7	7,450	1,250	0.09	0.55	5,600	625	0.09	0.55
		30	7,000	550	0.1	0.6	7,000	660	0.06	0.45	7,000	540	0.06	0.45	5,250	270	0.06	0.45
		35	6,000	520	0.09	0.59	6,000	630	0.055	0.43	6,000	510	0.055	0.43	4,500	255	0.055	0.43
		40	4,300	375	0.065	0.5	4,300	450	0.04	0.39	4,300	370	0.04	0.39	3,200	185	0.04	0.39
		45	4,150	330	0.058	0.47	4,000	440	0.033	0.36	4,000	300	0.033	0.36	3,000	150	0.033	0.36
		50	4,000	300	0.053	0.44	3,750	400	0.03	0.33	3,750	260	0.03	0.33	2,800	130	0.03	0.33
		60	3,900	280	0.048	0.4	3,500	350	0.028	0.3	3,500	220	0.028	0.3	2,600	110	0.028	0.3
2050	R2.5	10	14,400	3,200	0.5	1.5	7,200	2,300	0.25	1.05	6,350	2,000	0.16	0.88	4,750	1,000	0.16	0.88
		15	14,400	3,200	0.5	1.5	7,200	2,300	0.25	1.05	6,350	2,000	0.16	0.88	4,750	1,000	0.16	0.88
		20	14,400	3,200	0.5	1.5	7,200	2,300	0.25	1.05	6,350	2,000	0.16	0.88	4,750	1,000	0.16	0.88
		25	12,200	2,350	0.405	1.35	6,800	1,850	0.205	0.95	6,250	1,600	0.135	0.805	4,650	800	0.135	0.805
		30	10,000	1,500	0.31	1.2	6,400	1,450	0.16	0.88	6,200	1,250	0.11	0.73	4,650	625	0.11	0.73
		40	6,000	570	0.125	0.78	6,000	690	0.08	0.625	6,000	570	0.08	0.625	4,500	285	0.08	0.625
2060	R3	10	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		15	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		20	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		25	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		30	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		35	11,000	2,750	0.48	1.6	6,100	2,050	0.25	1.05	5,500	1,800	0.175	0.8	4,150	900	0.175	0.8
		40	9,000	2,050	0.375	1.35	5,750	1,600	0.2	0.8	5,350	1,400	0.15	0.65	4,000	700	0.15	0.65
		45	7,000	1,300	0.26	1.1	5,350	1,150	0.15	0.55	5,150	1,000	0.125	0.45	3,850	500	0.125	0.45
		50	5,000	600	0.15	0.9	5,000	720	0.1	0.3	5,000	600	0.1	0.3	3,750	300	0.1	0.3
		60	3,600	430	0.105	0.75	3,600	510	0.08	0.22	3,550	435	0.08	0.22	2,650	215	0.08	0.22

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering and red-hot occur.
- Every coolant offers stable milling.



HSLB

HARDMAX 2 Flute Long Neck Ball End Mills



From April 2026, and once stocks have been depleted, these series will only be manufactured on demand.

R0.05～R3

Super MG | HARD MAX | Shank Dia 0/-0.005 | Back Taper Geometry

Back taper geometry does not apply to R0.4 or below, and ℓ1 / φD ≦ 10.

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	●	○		○			○			○	○		

Features

1 Variable rake angle design
Optimized rake angles are designed from the ball tip to the peripheral cutting edge.


2 HARDMAX coating
HARDMAX coating offers heat resistance, durability and lubricity at a high level.

3 Suitable for various coolant types.
Every coolant offers stable milling.


Tip point : Negative

Peripheral cutting edge: Slightly negative



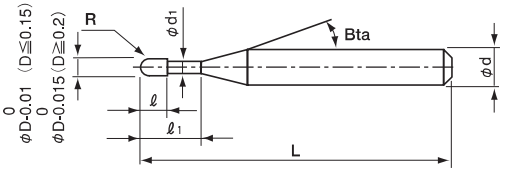

The shank taper angle shown is not an exact value.



Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy	Helix Angle
R0.05～R0.075	0/-0.01	±0.002	0°
R0.1～R3	0/-0.015	±0.005	30°

Total 125 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
HSLB 2001-002	R0.05	0.2	0.08	0.095	11°	45	4	—	0.21	0.23	0.25	0.27	0.31
HSLB 2001-003		0.3				45	4	—	0.32	0.35	0.37	0.40	0.45
HSLB 2001-005		0.5				45	4	—	0.54	0.57	0.61	0.64	0.72
HSLB 20015-003	R0.075	0.3	0.12	0.135	11°	45	4	—	0.36	0.38	0.40	0.42	0.47
HSLB 20015-005		0.5				45	4	—	0.57	0.60	0.63	0.67	0.75
HSLB 2002-003	R0.1	0.3	0.16	0.19	16°	45	4	—	0.39	0.42	0.44	0.46	0.50
HSLB 2002-005		0.5				45	4	—	0.61	0.64	0.66	0.69	0.74
HSLB 2002-010		1				45	4	—	1.13	1.18	1.22	1.26	1.35
HSLB 2002-015		1.5				45	4	—	1.64	1.71	1.76	1.82	1.96
HSLB 2002-020		2				45	4	—	2.16	2.24	2.31	2.39	2.57
HSLB 2003-005	R0.15	0.5	0.24	0.29	16°	45	4	—	0.60	0.63	0.66	0.68	0.73
HSLB 2003-0075		0.75				45	4	—	0.87	0.91	0.94	0.97	1.04
HSLB 2003-010		1				45	4	—	1.13	1.18	1.22	1.26	1.34
HSLB 2003-015		1.5				45	4	—	1.64	1.70	1.76	1.82	1.94
HSLB 2003-020		2				45	4	—	2.16	2.24	2.31	2.38	2.56
HSLB 2003-030		3				45	4	—	3.20	3.30	3.41	3.52	3.78
HSLB 2003-040		4				45	4	—	4.23	4.37	4.51	4.66	5.00
HSLB 2004-005	R0.2	0.5	0.32	0.39	16°	45	4	—	0.60	0.63	0.65	0.68	0.72
HSLB 2004-0075		0.75				45	4	—	0.86	0.90	0.93	0.96	1.03
HSLB 2004-010		1				45	4	—	1.13	1.17	1.21	1.25	1.33
HSLB 2004-015		1.5				45	4	—	1.64	1.70	1.75	1.81	1.93
HSLB 2004-020		2				45	4	—	2.16	2.23	2.30	2.38	2.55
HSLB 2004-030		3				45	4	—	3.20	3.30	3.40	3.52	3.77
HSLB 2004-040		4				45	4	—	4.23	4.36	4.50	4.66	4.99
HSLB 2004-060		6				45	4	—	6.29	6.49	6.70	6.93	7.44
HSLB 2005-010	R0.25	1	0.4	0.49	16°	45	4	—	1.12	1.17	1.21	1.24	1.32
HSLB 2005-015		1.5				45	4	—	1.63	1.70	1.75	1.80	1.92
HSLB 2005-020		2				45	4	—	2.16	2.23	2.30	2.37	2.54
HSLB 2005-030		3				45	4	—	3.20	3.29	3.40	3.51	3.76
HSLB 2005-040		4				45	4	—	4.23	4.36	4.50	4.65	4.98
HSLB 2005-060		6				45	4	—	6.29	6.49	6.70	6.93	7.43
HSLB 2006-010	R0.3	1	0.48	0.59	16°	45	4	—	1.12	1.16	1.20	1.24	1.31
HSLB 2006-015		1.5				45	4	—	1.63	1.69	1.74	1.80	1.91
HSLB 2006-015-6		1.5				50	6	—	1.63	1.69	1.74	1.80	1.91
HSLB 2006-020		2				45	4	—	2.15	2.23	2.29	2.36	2.52
HSLB 2006-025		2.5				45	4	—	2.67	2.76	2.84	2.93	3.14
HSLB 2006-030		3				45	4	—	3.19	3.29	3.39	3.50	3.75
HSLB 2006-030-6		3				50	6	—	3.19	3.29	3.39	3.50	3.75
HSLB 2006-040		4				45	4	—	4.23	4.36	4.49	4.64	4.97
HSLB 2006-050		5				45	4	—	5.26	5.42	5.59	5.78	6.20
HSLB 2006-060		6				45	4	—	6.29	6.49	6.69	6.92	7.42
HSLB 2006-080		8				45	4	—	8.35	8.61	8.90	9.20	9.87
HSLB 2006-100		10				50	4	—	10.41	10.74	11.10	11.47	12.31
HSLB 2006-100-6		10				50	6	—	10.41	10.74	11.10	11.47	12.31

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
HSLB 2008-020	R0.4	2	0.64	0.79	16°	45	4	—	2.15	2.22	2.28	2.35	2.50
HSLB 2008-030		3				45	4	—	3.19	3.28	3.38	3.49	3.73
HSLB 2008-040		4				45	4	—	4.22	4.35	4.48	4.63	4.95
HSLB 2008-060		6				45	4	—	6.29	6.48	6.68	6.91	7.40
HSLB 2008-080		8				45	4	—	8.35	8.61	8.89	9.18	9.84
HSLB 2008-100		10				50	4	—	10.41	10.74	11.09	11.46	12.29
HSLB 2010-020	R0.5	2	0.8	0.98	16°	45	4	—	2.16	2.22	2.28	2.35	2.49
HSLB 2010-025		2.5				45	4	—	2.68	2.76	2.83	2.92	3.11
HSLB 2010-030		3				45	4	—	3.20	3.29	3.38	3.49	3.72
HSLB 2010-030-6		3				50	6	—	3.20	3.29	3.38	3.49	3.72
HSLB 2010-040		4				45	4	—	4.23	4.35	4.49	4.63	4.94
HSLB 2010-040-6		4				50	6	—	4.23	4.35	4.49	4.63	4.94
HSLB 2010-050		5				45	4	—	5.26	5.42	5.59	5.77	6.16
HSLB 2010-060		6				45	4	—	6.29	6.48	6.69	6.90	7.39
HSLB 2010-060-6		6				50	6	—	6.29	6.48	6.69	6.90	7.39
HSLB 2010-070		7				45	4	—	7.32	7.55	7.79	8.04	8.61
HSLB 2010-080		8				45	4	—	8.36	8.61	8.89	9.18	9.84
HSLB 2010-100		10				45	4	—	10.42	10.74	11.09	11.46	12.28
HSLB 2010-100-6		10				50	6	—	10.42	10.74	11.09	11.46	12.28
HSLB 2010-120		12				45	4	—	12.48	12.87	13.29	13.74	14.73
HSLB 2010-140		14				50	4	—	14.54	15.00	15.49	16.01	17.18
HSLB 2010-160		16				50	4	—	16.61	17.13	17.69	18.29	19.62
HSLB 2010-200		20				55	4	—	20.73	21.39	22.09	22.85	24.52
HSLB 2012-040	R0.6	4	0.96	1.19	16°	45	4	—	4.08	4.20	4.32	4.45	4.75
HSLB 2012-060		6				45	4	—	6.15	6.33	6.52	6.73	7.19
HSLB 2012-080		8				45	4	—	8.21	8.46	8.72	9.01	9.64
HSLB 2015-030	R0.75	3	1.2	1.47	16°	45	4	—	3.08	3.16	3.24	3.33	3.53
HSLB 2015-040		4				45	4	—	4.11	4.23	4.34	4.47	4.76
HSLB 2015-060		6				45	4	—	6.18	6.35	6.55	6.75	7.20
HSLB 2015-060-6		6				50	6	—	6.18	6.35	6.55	6.75	7.20
HSLB 2015-080		8				45	4	—	8.24	8.48	8.75	9.03	9.65
HSLB 2015-100		10				45	4	—	10.30	10.61	10.95	11.30	12.10
HSLB 2015-100-6		10				50	6	—	10.30	10.61	10.95	11.30	12.10
HSLB 2015-120		12				45	4	—	12.37	12.74	13.15	13.58	14.55
HSLB 2015-160		16				50	4	—	16.49	17.00	17.55	18.14	19.44
HSLB 2015-180		18				55	4	—	18.55	19.13	19.75	20.41	21.89
HSLB 2015-200		20				55	4	—	20.62	21.26	21.95	22.69	24.34
HSLB 2016-040	R0.8	4	1.28	1.58	16°	45	4	—	4.09	4.20	4.32	4.45	4.72
HSLB 2016-080		8				45	4	—	8.22	8.46	8.72	9.00	9.62
HSLB 2016-120		12				45	4	—	12.35	12.72	13.12	13.55	14.51

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
HSLB 2020-030	R1	3	1.6	1.98	16°	45	4	—	3.06	3.13	3.20	3.28	3.46
HSLB 2020-040		4				45	4	—	4.09	4.19	4.30	4.42	4.68
HSLB 2020-040-6		4				50	6	—	4.09	4.19	4.30	4.42	4.68
HSLB 2020-060		6				45	4	—	6.15	6.32	6.50	6.70	7.13
HSLB 2020-060-6		6				50	6	—	6.15	6.32	6.50	6.70	7.13
HSLB 2020-080		8				45	4	—	8.21	8.45	8.70	8.97	9.58
HSLB 2020-100		10				45	4	—	10.28	10.58	10.90	11.25	12.02
HSLB 2020-100-6		10				50	6	—	10.28	10.58	10.90	11.25	12.02
HSLB 2020-120		12				45	4	—	12.34	12.71	13.10	13.53	14.47
HSLB 2020-120-6		12				50	6	—	12.34	12.71	13.10	13.53	14.47
HSLB 2020-140		14				50	4	—	14.40	14.84	15.31	15.80	16.92
HSLB 2020-160		16				50	4	—	16.46	16.97	17.51	18.08	19.36
HSLB 2020-200		20				55	4	—	20.59	21.23	21.91	22.64	No Interference
HSLB 2020-250		25				65	4	—	25.75	26.55	27.41	28.33	No Interference
HSLB 2020-300		30				70	4	—	30.90	31.88	32.91	No Interference	No Interference
HSLB 2030-060	R1.5	6	2.4	2.95	16°	60	6	—	6.19	6.34	6.51	6.68	7.08
HSLB 2030-060-4		6				60	4	—	6.19	6.34	6.51	6.68	7.08
HSLB 2030-080		8				60	6	—	8.25	8.47	8.71	8.96	9.53
HSLB 2030-100		10				60	6	—	10.31	10.60	10.91	11.24	11.98
HSLB 2030-120		12				60	6	—	12.38	12.73	13.11	13.52	14.42
HSLB 2030-140		14				60	6	—	14.44	14.86	15.31	15.79	16.87
HSLB 2030-160		16				60	6	—	16.50	16.99	17.51	18.07	19.32
HSLB 2030-200		20				70	6	—	20.63	21.25	21.91	22.63	24.21
HSLB 2030-250		25				70	6	—	25.78	26.57	27.42	28.32	30.33
HSLB 2030-300		30				70	6	—	30.94	31.90	32.92	34.01	No Interference
HSLB 2040-080	R2	8	3.2	3.95	16°	70	6	—	8.23	8.44	8.66	8.89	9.42
HSLB 2040-080-4		8			—	70	4	—	No Interference	No Interference	No Interference	No Interference	No Interference
HSLB 2040-100		10			16°	70	6	—	10.30	10.57	10.86	11.17	11.87
HSLB 2040-120		12				70	6	—	12.36	12.70	13.06	13.45	14.31
HSLB 2040-160		16				70	6	—	16.49	16.96	17.46	18.00	19.21
HSLB 2040-200		20				70	6	—	20.61	21.22	21.86	22.56	No Interference
HSLB 2040-250		25				70	6	—	25.77	26.54	27.37	28.25	No Interference
HSLB 2040-300		30				70	6	—	30.93	31.87	32.87	No Interference	No Interference
HSLB 2040-400		40				90	6	—	41.24	42.51	No Interference	No Interference	No Interference
HSLB 2050-100	R2.5	10	4	4.95	16°	70	6	—	10.28	10.54	10.81	11.10	11.76
HSLB 2050-200		20				70	6	—	20.60	21.19	21.82	No Interference	No Interference
HSLB 2060-100	R3	10	4.8	5.95	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HSLB 2060-150		15				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HSLB 2060-200		20				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HSLB 2060-300		30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
HSLB 2060-400		40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for HSLB

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001	**R0.05**	0.2	48,000	55	0.002	0.002	48,000	45	0.002	0.002	48,000	45	0.002	0.002	36,000	22	0.002	0.002
		0.3	48,000	55	0.002	0.002	48,000	45	0.002	0.002	48,000	45	0.002	0.002	36,000	22	0.002	0.002
		0.5	48,000	35	0.002	0.002	48,000	35	0.002	0.002	48,000	35	0.002	0.002	36,000	17	0.002	0.002
20015	**R0.075**	0.3	48,000	90	0.004	0.004	48,000	70	0.004	0.004	48,000	70	0.004	0.004	36,000	35	0.004	0.004
		0.5	48,000	60	0.004	0.004	48,000	50	0.004	0.004	48,000	50	0.004	0.004	36,000	25	0.004	0.004
2002	**R0.1**	0.3	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
		0.5	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
		1	60,000	200	0.003	0.005	60,000	200	0.002	0.003	60,000	130	0.002	0.003	45,000	65	0.002	0.003
		1.5	60,000	130	0.002	0.003	48,000	80	0.001	0.002	48,000	65	0.001	0.002	36,000	30	0.001	0.002
		2	60,000	90	0.001	0.002	48,000	50	0.001	0.001	48,000	40	0.001	0.001	36,000	20	0.001	0.001
2003	**R0.15**	0.5	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		0.75	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		1	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		1.5	60,000	350	0.006	0.008	45,000	310	0.004	0.007	43,500	180	0.003	0.005	32,500	90	0.003	0.005
		2	60,000	210	0.004	0.007	45,000	190	0.003	0.005	43,500	110	0.002	0.004	32,500	55	0.002	0.004
		3	42,500	140	0.002	0.004	32,000	80	0.002	0.004	32,000	65	0.001	0.002	24,000	30	0.001	0.002
		4	23,900	45	0.001	0.001	22,550	30	0.001	0.001	22,300	20	0.001	0.001	16,720	10	0.001	0.001
2004	**R0.2**	0.5	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		0.75	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		1	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		1.5	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		2	50,000	500	0.01	0.02	37,500	420	0.007	0.012	35,000	240	0.005	0.008	26,250	120	0.005	0.008
		3	40,000	250	0.005	0.008	31,900	210	0.004	0.008	30,500	160	0.003	0.005	22,800	80	0.003	0.005
		4	32,000	180	0.003	0.005	25,500	150	0.002	0.004	24,300	120	0.002	0.004	18,200	60	0.002	0.004
		6	18,000	60	0.001	0.002	18,000	60	0.001	0.002	17,000	45	0.001	0.002	12,750	20	0.001	0.002
2005	**R0.25**	1	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		1.5	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		2	44,000	650	0.015	0.04	33,000	530	0.01	0.02	30,000	300	0.007	0.01	22,500	150	0.007	0.01
		3	40,000	500	0.01	0.02	31,000	400	0.007	0.01	28,550	230	0.005	0.008	21,400	115	0.005	0.008
		4	32,700	180	0.005	0.015	27,150	150	0.003	0.008	25,650	100	0.002	0.005	19,900	50	0.002	0.005
		6	21,350	90	0.002	0.005	21,300	75	0.001	0.003	21,300	50	0.001	0.002	16,000	25	0.001	0.002

Milling Conditions for HSLB


WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2006	R0.3	1	40,000	1,400	0.045	0.15	30,000	1,500	0.03	0.13	26,500	1,000	0.015	0.09	20,000	500	0.015	0.09
		1.5	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
		2	40,000	1,100	0.03	0.13	30,000	1,200	0.02	0.1	26,500	800	0.01	0.075	20,000	400	0.01	0.075
		2.5	40,000	800	0.02	0.1	30,000	800	0.015	0.09	26,500	520	0.008	0.065	20,000	260	0.008	0.065
		3	40,000	800	0.02	0.1	30,000	800	0.015	0.09	26,500	520	0.008	0.065	20,000	260	0.008	0.065
		4	40,000	500	0.015	0.09	30,000	500	0.01	0.075	26,500	340	0.006	0.05	20,000	170	0.006	0.05
		5	32,000	400	0.01	0.075	25,000	390	0.007	0.05	23,000	260	0.005	0.04	18,000	130	0.005	0.04
		6	24,000	300	0.007	0.06	21,000	320	0.005	0.04	19,500	210	0.004	0.03	15,000	105	0.004	0.03
		8	16,000	200	0.005	0.05	16,000	240	0.003	0.02	16,000	160	0.003	0.02	12,000	80	0.003	0.02
		10	14,900	175	0.003	0.02	14,900	175	0.002	0.015	14,900	115	0.002	0.015	11,100	55	0.002	0.015
2008	R0.4	2	35,000	1,600	0.06	0.21	27,000	1,600	0.04	0.17	23,500	1,000	0.02	0.12	17,500	500	0.02	0.12
		3	35,000	1,400	0.05	0.19	27,000	1,400	0.03	0.15	23,500	900	0.015	0.1	17,500	450	0.015	0.1
		4	35,000	1,200	0.04	0.17	27,000	1,200	0.025	0.135	23,500	600	0.012	0.095	17,500	300	0.012	0.095
		6	28,000	600	0.02	0.12	23,000	600	0.012	0.095	20,500	400	0.006	0.065	15,500	200	0.006	0.065
		8	19,500	330	0.012	0.095	18,000	375	0.007	0.07	17,000	285	0.005	0.06	12,750	140	0.005	0.06
		10	15,000	260	0.01	0.085	14,700	340	0.005	0.06	14,650	225	0.004	0.05	11,000	110	0.004	0.05
2010	R0.5	2	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
		2.5	30,000	1,750	0.2	0.4	24,000	2,000	0.1	0.3	21,000	1,750	0.05	0.2	16,000	875	0.05	0.2
		3	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
		4	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
		5	30,000	1,750	0.1	0.3	24,000	2,000	0.05	0.2	21,000	1,750	0.03	0.17	16,000	875	0.03	0.17
		6	30,000	1,150	0.06	0.23	21,500	1,250	0.03	0.17	19,700	1,050	0.025	0.15	14,500	525	0.025	0.15
		7	24,250	800	0.04	0.19	20,000	900	0.02	0.14	19,000	750	0.02	0.14	14,250	375	0.02	0.14
		8	24,000	800	0.025	0.155	18,500	580	0.015	0.12	18,400	480	0.015	0.12	13,800	240	0.015	0.12
		10	22,000	600	0.018	0.13	14,800	430	0.01	0.09	14,700	360	0.01	0.09	11,100	180	0.01	0.09
		12	14,150	320	0.015	0.12	13,400	380	0.008	0.08	13,300	290	0.008	0.08	9,950	145	0.008	0.08
		14	13,500	280	0.012	0.1	12,000	350	0.007	0.08	12,000	220	0.007	0.08	9,000	110	0.007	0.08
		16	12,750	240	0.008	0.08	10,500	250	0.005	0.045	10,500	160	0.005	0.045	7,850	80	0.005	0.045
		20	12,000	200	0.005	0.03	9,000	150	0.003	0.02	9,000	100	0.003	0.02	6,750	50	0.003	0.02
2012	R0.6	4	30,000	2,000	0.12	0.36	20,000	2,000	0.06	0.24	17,500	1,750	0.036	0.2	13,100	875	0.036	0.2
		6	30,000	2,000	0.12	0.36	20,000	2,000	0.06	0.24	17,500	1,750	0.036	0.2	13,100	875	0.036	0.2
		8	20,200	800	0.05	0.23	16,600	900	0.025	0.17	15,850	750	0.025	0.17	11,900	375	0.025	0.17

Milling Conditions for HSLB

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2015	R0.75	3	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
		4	30,000	2,450	0.25	0.55	17,000	2,000	0.12	0.4	15,000	1,750	0.06	0.29	11,250	875	0.06	0.29
		6	30,000	2,450	0.15	0.45	17,000	2,000	0.07	0.31	15,000	1,750	0.04	0.24	11,250	875	0.04	0.24
		8	23,500	1,300	0.1	0.37	15,000	1,250	0.045	0.25	14,000	1,050	0.03	0.21	10,500	525	0.03	0.21
		10	23,500	1,300	0.1	0.37	15,000	1,250	0.045	0.25	14,000	1,050	0.03	0.21	10,500	525	0.03	0.21
		12	13,100	480	0.03	0.21	13,000	580	0.02	0.17	13,000	480	0.02	0.17	9,750	240	0.02	0.17
		16	9,350	320	0.02	0.17	8,850	390	0.012	0.13	8,800	290	0.012	0.13	6,600	145	0.012	0.13
		18	9,150	300	0.019	0.165	8,400	370	0.011	0.125	8,400	255	0.011	0.125	6,300	125	0.011	0.125
		20	9,000	280	0.018	0.16	8,000	350	0.01	0.12	8,000	220	0.01	0.12	6,000	110	0.01	0.12
2016	R0.8	4	30,000	2,500	0.25	0.58	17,500	2,100	0.12	0.4	15,300	1,800	0.06	0.3	11,500	900	0.06	0.3
		8	30,000	2,500	0.16	0.48	17,500	2,100	0.08	0.32	15,300	1,800	0.05	0.275	11,500	900	0.05	0.275
		12	13,500	500	0.04	0.245	13,500	600	0.024	0.19	13,400	490	0.024	0.19	10,050	245	0.024	0.19
2020	R1	3	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
		4	28,000	2,900	0.3	0.7	14,000	2,100	0.15	0.5	12,250	1,800	0.08	0.35	9,200	900	0.08	0.35
		6	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
		8	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
		10	28,000	2,900	0.2	0.6	14,000	2,100	0.1	0.4	12,250	1,800	0.06	0.3	9,200	900	0.06	0.3
		12	19,500	1,350	0.12	0.45	12,400	1,350	0.06	0.34	11,500	1,100	0.045	0.27	8,650	550	0.045	0.27
		14	19,500	1,350	0.12	0.45	12,400	1,350	0.06	0.34	11,500	1,100	0.045	0.27	8,650	550	0.045	0.27
		16	10,800	500	0.05	0.3	10,800	600	0.03	0.24	10,700	490	0.03	0.24	8,000	245	0.03	0.24
		20	8,650	375	0.035	0.25	8,650	450	0.02	0.19	8,560	370	0.02	0.19	6,400	185	0.02	0.19
		25	8,250	320	0.03	0.24	7,800	440	0.016	0.16	7,800	290	0.016	0.16	5,850	145	0.016	0.16
		30	7,850	280	0.024	0.2	7,000	350	0.014	0.16	7,000	220	0.014	0.16	5,250	110	0.014	0.16
2030	R1.5	6	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
		8	21,000	3,000	0.4	1	10,500	2,200	0.2	0.7	9,200	1,900	0.12	0.55	6,900	950	0.12	0.55
		10	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
		12	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
		14	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
		16	21,000	3,000	0.3	0.9	10,500	2,200	0.15	0.65	9,200	1,900	0.1	0.5	6,900	950	0.1	0.5
		20	14,500	1,360	0.18	0.7	9,250	1,400	0.1	0.5	8,600	1,150	0.075	0.45	6,450	575	0.075	0.45
		25	8,000	520	0.07	0.45	8,000	630	0.05	0.38	8,000	510	0.05	0.38	6,000	255	0.05	0.38
		30	5,750	375	0.05	0.38	5,750	450	0.03	0.29	5,700	370	0.03	0.29	4,275	185	0.03	0.29

Milling Conditions for HSLB

WORK MATERIAL			PREHARDENED STEELS HARDENED STEELS NAK / STAVAX (~55HRC)				HARDENED STEELS SKD11 (55~62HRC)				HARDENED STEELS HAP10 (62~66HRC)				HARDENED STEELS HAP72 (66~70HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2040	R2	8	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
		10	18,000	3,200	0.5	1.3	9,000	2,300	0.25	0.95	7,900	2,000	0.15	0.75	5,900	1,000	0.15	0.75
		12	18,000	3,200	0.4	1.2	9,000	2,300	0.2	0.85	7,900	2,000	0.13	0.7	5,900	1,000	0.13	0.7
		16	18,000	3,200	0.4	1.2	9,000	2,300	0.2	0.85	7,900	2,000	0.13	0.7	5,900	1,000	0.13	0.7
		20	18,000	3,200	0.4	1.2	9,000	2,300	0.2	0.85	7,900	2,000	0.13	0.7	5,900	1,000	0.13	0.7
		25	12,500	1,500	0.25	0.95	8,000	1,450	0.13	0.7	7,450	1,250	0.09	0.55	5,600	625	0.09	0.55
		30	7,000	550	0.1	0.6	7,000	660	0.06	0.45	7,000	540	0.06	0.45	5,250	270	0.06	0.45
		40	4,300	375	0.065	0.5	4,300	450	0.04	0.39	4,300	370	0.04	0.39	3,200	185	0.04	0.39
2050	R2.5	10	14,400	3,200	0.5	1.5	7,200	2,300	0.25	1.05	6,350	2,000	0.16	0.88	4,750	1,000	0.16	0.88
		20	14,400	3,200	0.5	1.5	7,200	2,300	0.25	1.05	6,350	2,000	0.16	0.88	4,750	1,000	0.16	0.88
2060	R3	10	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		15	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		20	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		30	13,000	3,500	0.6	1.8	6,500	2,500	0.3	1.3	5,700	2,200	0.2	1	4,300	1,100	0.2	1
		40	9,000	2,050	0.375	1.35	5,750	1,600	0.2	0.8	5,350	1,400	0.15	0.65	4,000	700	0.15	0.65



Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- Every coolant offers stable milling.

CWLB NEW



Released September 2023

UTWCOAT 2 Flute Long Neck Ball End Mills

R0.05～R3

Super MG | UTW COAT | Back Taper Geometry

Back taper geometry does not apply to R0.05 - R0.15.


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
★	★	★	●					○	●		●			○	○		

◆ Upgrade

Wear resistance and tool accuracy have been improved with HWLB and CWLB series.

	Copper	Raw Materials	～30 HRC	～40 HRC	～50 HRC	～55 HRC	～60 HRC	～65 HRC	～70 HRC
CSELB / HSLB / HGLB									
CWLB / HWLB / HGLB									

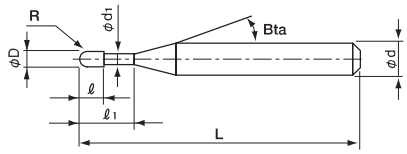



The shank taper angle shown is not an exact value.

◆ Longer tool life and improved mirror surface finish

Longer tool life and improved mirror surface finish on SCM Prehardened Steels compared to conventional tools.

Longer tool life


New Coating
UTWCOAT

＋

Improved mirror surface finish

Tool tip has a micro flatland design reducing milling surface roughness.

※Micro flatland design at the tip does not apply to below R0.1.



◆ High Precision

Even higher accuracy than before!

Conventional CSELB

Radius of Ball Nose	Ball Radius Accuracy	Diameter Tolerance	Shank Diameter Tolerance
R0.05 ～ R0.075	± 0.002	0/-0.01	0/-0.005
R0.1 ～ R1.25	± 0.005	0/-0.015	
R1.5 ～ R2			
R2.5 ～ R3			

CWLB

Unit (mm)


Radius of Ball Nose	Ball Radius Accuracy	Diameter Tolerance	Shank Diameter Tolerance	Helix Angle
R0.05 ～ R0.075	± 0.002	0/-0.006	0/-0.004 (h4)	0°
R0.1 ～ R1.25	± 0.003			
R1.5 ～ R2	± 0.004	0/-0.009		30°
R2.5 ～ R3	± 0.005			

PXA30 (30 HRC) Finishing

Longer tool life and improved mirror surface finish

Flat surface finishing - Tool wear and milling surface comparison
R0.5 × EL6 PXA30 (30 HRC)


Spindle Speed	20,000 min^{-1}
Feed Rate	500 mm/min
a_p Axial Depth	0.03 mm
a_e Radial Depth	0.03 mm
Cycle Time	120 min




Work Size
15 × 10 × 0.06 mm

Coolant :
Water Soluble


Milling time and transition of Ra (Unit μm)

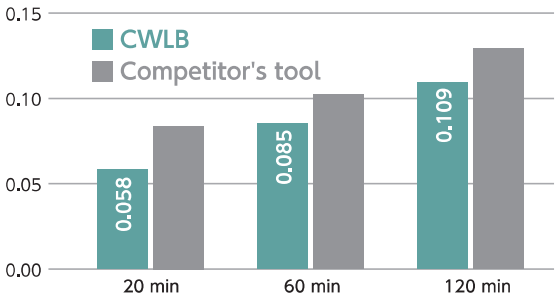

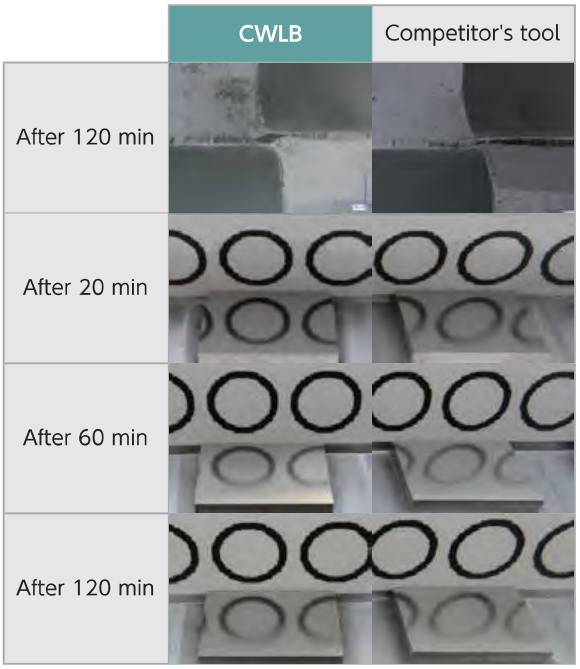


Normal wear on both CWLB and the competitor's tools, and still functional after 120 minutes of milling.
Meanwhile CWLB offers better milling surface.

Curved surface finishing - Tool wear and milling surface comparison
R0.5 × EL6 PXA30 (30 HRC)

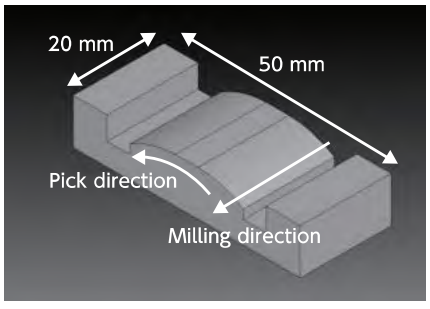

Coolant :
Water Soluble

Spindle Speed	20,000 min^{-1}
Feed Rate	500 mm/min
a_p Axial Depth	0.03 mm
a_e Radial Depth	0.03 mm
Cycle Time	120 min

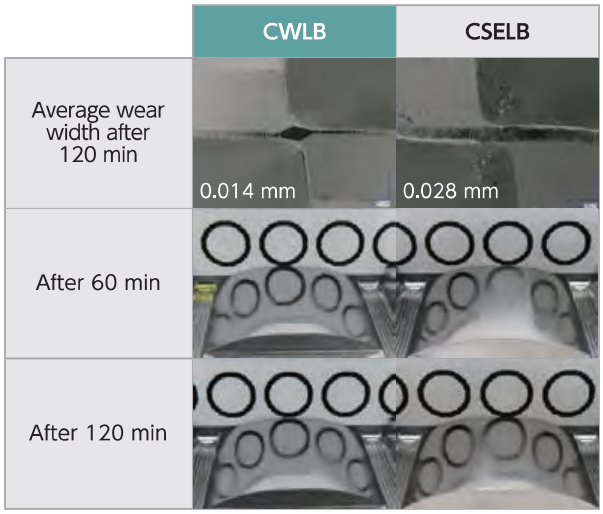

CWLB offers better milling surface on both flat and curved surfaces.

NAK80 (40 HRC) Finishing

Longer tool life and improved mirror surface finish

Finishing - Tool wear and milling surface comparison
R0.5 × EL6

NAK80 (40 HRC)


Spindle Speed	20,000 min^{-1}
Feed Rate	500 mm/min
a_p Axial Depth	0.02 mm
a_e Radial Depth	0.02 mm
Cycle Time	135 min



Work Size
18 × 12 × 5 mm

Coolant :
Water Soluble

Milling time and transition of Ra (Unit μm)

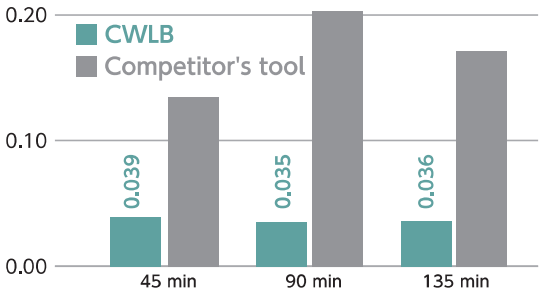

	CWLB	Competitor's tool
Average tip point wear width after 135 min	0.007 mm	0.013 mm
After 135 min		
After 135 min		

※ Pocket wall removed for better visibility


CWLB offers better milling surface and wear resistance even on NAK80

Carbon Steels S50C Roughing

Longer tool life

Roughing - Tool damage comparison
R1.5 × EL12

Carbon Steels S50C



Work Size
200 × 105 × 1.12 mm

Coolant :
Water Soluble
(Through Spindle)

Spindle Speed	22,000 min^{-1}
Feed Rate	2,300 mm/min
a_p Axial Depth	0.28 mm
a_e Radial Depth	0.7 mm
Cycle Time	60 min

	CWLB	CSELB	Competitor's tool
After 60 min			

CWLB offers excellent wear resistance even on Carbon Steel Roughing

Carbon Steels S50C Finishing

Longer tool life

Finishing - Tool wear and surface roughness comparison
R0.5 × EL6

Carbon Steels S50C

Spindle Speed	20,000 min^{-1}
Feed Rate	500 mm/min
a_p Axial Depth	0.02 mm
a_e Radial Depth	0.02 mm
Cycle Time	135 min




Work Size
18 × 12 × 5 mm

Coolant :
Water Soluble

	CWLB	CSELB
Average tip point wear width after 135 min	0.025 mm	0.036 mm
After 135 min		

Milling time and transition of Ra (Unit μm)

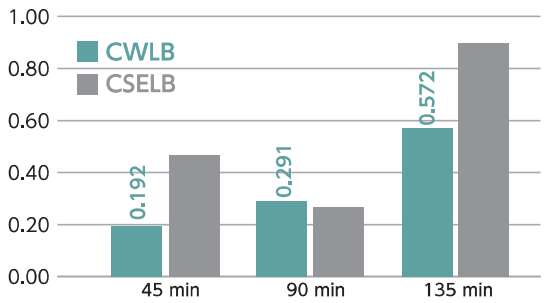

CWLB offers excellent wear resistance on Carbon Steels finishing

Copper C1100 Finishing

Longer tool life and improved mirror surface finish

Finishing - Tool wear and milling surface comparison
R0.5 × EL6

Copper C1100

Spindle Speed	20,000 min^{-1}
Feed Rate	500 mm/min
a_p Axial Depth	0.02 mm
a_e Radial Depth	0.02 mm
Cycle Time	135 min



Work Size
18 × 12 × 5 mm

Coolant :
Oil Mist

	CWLB	Competitor's tool
Average tip point wear width after 135 min	0.009 mm	0.019 mm
After 90 min		
After 135 min		

※ Pocket wall removed for better visibility

CWLB offers excellent wear resistance and milling surface

Total 190 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CWLB 2001-002	R0.05	0.2	0.08	0.095	11°	45	4	—	0.23	0.25	0.27	0.28	0.32
CWLB 2001-003		0.3				45	4	—	0.34	0.36	0.38	0.40	0.46
CWLB 2001-005		0.5				45	4	—	0.55	0.58	0.61	0.65	0.73
CWLB 20015-003	R0.075	0.3	0.12	0.135	11°	45	4	—	0.37	0.39	0.41	0.43	0.48
CWLB 20015-005		0.5				45	4	—	0.58	0.61	0.64	0.67	0.76
CWLB 20015-010		1				45	4	—	1.10	1.16	1.22	1.28	1.44
CWLB 2002-003	R0.1	0.3	0.16	0.19	11°	45	4	—	0.43	0.45	0.47	0.49	0.55
CWLB 2002-005		0.5				45	4	—	0.63	0.66	0.69	0.73	0.81
CWLB 2002-0075		0.75				45	4	—	0.89	0.94	0.98	1.03	1.16
CWLB 2002-010		1				45	4	—	1.16	1.21	1.27	1.34	1.50
CWLB 2002-015		1.5				45	4	—	1.67	1.75	1.83	1.93	2.17
CWLB 2002-020		2				45	4	—	2.19	2.30	2.41	2.54	2.85
CWLB 2002-030		3				45	4	—	3.24	3.39	3.57	3.76	4.22
CWLB 2003-005	R0.15	0.5	0.24	0.29	11°	45	4	—	0.63	0.66	0.69	0.72	0.80
CWLB 2003-0075		0.75				45	4	—	0.89	0.93	0.97	1.02	1.14
CWLB 2003-010		1				45	4	—	1.15	1.21	1.26	1.33	1.48
CWLB 2003-015		1.5				45	4	—	1.66	1.74	1.83	1.92	2.15
CWLB 2003-020		2				45	4	—	2.19	2.29	2.40	2.53	2.83
CWLB 2003-025		2.5				45	4	—	2.71	2.84	2.98	3.14	3.52
CWLB 2003-030		3				45	4	—	3.23	3.39	3.56	3.75	4.20
CWLB 2003-040		4				45	4	—	4.28	4.49	4.72	4.97	5.57
CWLB 2003-050		5				45	4	—	5.33	5.59	5.87	6.19	6.94
CWLB 2004-005	R0.2	0.5	0.32	0.39	11°	45	4	—	0.63	0.66	0.68	0.71	0.78
CWLB 2004-0075		0.75				45	4	—	0.89	0.93	0.97	1.01	1.12
CWLB 2004-010		1				45	4	—	1.15	1.20	1.26	1.32	1.46
CWLB 2004-010-6		1				50	6	—	1.15	1.20	1.26	1.32	1.46
CWLB 2004-015		1.5				45	4	—	1.66	1.74	1.82	1.91	2.13
CWLB 2004-020		2				45	4	—	2.18	2.29	2.40	2.52	2.81
CWLB 2004-020-6		2				50	6	—	2.18	2.29	2.40	2.52	2.81
CWLB 2004-025		2.5				45	4	—	2.71	2.83	2.97	3.13	3.50
CWLB 2004-030		3				45	4	—	3.23	3.38	3.55	3.74	4.18
CWLB 2004-030-6		3				50	6	—	3.23	3.38	3.55	3.74	4.18
CWLB 2004-035		3.5				45	4	—	3.76	3.93	4.13	4.35	4.87
CWLB 2004-040		4				45	4	—	4.28	4.48	4.71	4.96	5.55
CWLB 2004-050		5				45	4	—	5.33	5.58	5.86	6.18	6.92
CWLB 2004-060		6				45	4	—	6.37	6.68	7.02	7.40	8.29
CWLB 2005-010	R0.25	1	0.4	0.49	11°	45	4	—	1.15	1.20	1.25	1.31	1.45
CWLB 2005-015		1.5				45	4	—	1.66	1.73	1.81	1.90	2.11
CWLB 2005-020		2				45	4	—	2.18	2.28	2.39	2.51	2.80
CWLB 2005-020-6		2				50	6	—	2.18	2.28	2.39	2.51	2.80
CWLB 2005-025		2.5				45	4	—	2.71	2.83	2.97	3.12	3.48
CWLB 2005-030		3				45	4	—	3.23	3.38	3.54	3.73	4.17
CWLB 2005-030-6		3				50	6	—	3.23	3.38	3.54	3.73	4.17
CWLB 2005-040		4				45	4	—	4.28	4.48	4.70	4.95	5.54
CWLB 2005-040-6		4				50	6	—	4.28	4.48	4.70	4.95	5.54
CWLB 2005-050		5				45	4	—	5.32	5.58	5.86	6.17	6.90
CWLB 2005-060		6				45	4	—	6.37	6.68	7.01	7.39	8.27
CWLB 2005-080		8				45	4	—	8.46	8.87	9.32	9.82	11.01
CWLB 2005-100		10				50	4	—	10.56	11.07	11.63	12.26	13.75

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CWLB 2006-010	R0.3	1	0.48	0.59	11°	45	4	—	1.15	1.19	1.24	1.30	1.43
CWLB 2006-015		1.5				45	4	—	1.66	1.73	1.80	1.89	2.09
CWLB 2006-020		2				45	4	—	2.18	2.28	2.38	2.50	2.78
CWLB 2006-020-6		2				50	6	—	2.18	2.28	2.38	2.50	2.78
CWLB 2006-025		2.5				45	4	—	2.70	2.82	2.96	3.11	3.46
CWLB 2006-030		3				45	4	—	3.23	3.37	3.54	3.72	4.15
CWLB 2006-030-6		3				50	6	—	3.23	3.37	3.54	3.72	4.15
CWLB 2006-035		3.5				45	4	—	3.75	3.92	4.12	4.33	4.83
CWLB 2006-040		4				45	4	—	4.27	4.47	4.69	4.94	5.52
CWLB 2006-040-6		4				50	6	—	4.27	4.47	4.69	4.94	5.52
CWLB 2006-050		5				45	4	—	5.32	5.57	5.85	6.16	6.89
CWLB 2006-060		6				45	4	—	6.37	6.67	7.00	7.38	8.26
CWLB 2006-060-6		6				50	6	—	6.37	6.67	7.00	7.38	8.26
CWLB 2006-080		8				45	4	—	8.46	8.87	9.32	9.81	10.99
CWLB 2006-100		10				50	4	—	10.56	11.06	11.63	12.25	13.73
CWLB 2008-020	R0.4	2	0.64	0.79	11°	45	4	—	2.18	2.27	2.37	2.48	2.74
CWLB 2008-020-6		2				50	6	—	2.18	2.27	2.37	2.48	2.74
CWLB 2008-030		3				45	4	—	3.22	3.36	3.52	3.70	4.11
CWLB 2008-030-6		3				50	6	—	3.22	3.36	3.52	3.70	4.11
CWLB 2008-040		4				45	4	—	4.27	4.46	4.68	4.92	5.48
CWLB 2008-040-6		4				50	6	—	4.27	4.46	4.68	4.92	5.48
CWLB 2008-050		5				45	4	—	5.32	5.56	5.83	6.13	6.85
CWLB 2008-060		6				45	4	—	6.36	6.66	6.99	7.35	8.22
CWLB 2008-080		8				45	4	—	8.46	8.86	9.30	9.79	10.96
CWLB 2008-100		10				50	4	—	10.55	11.06	11.61	12.23	13.70
CWLB 2008-120		12				50	4	—	12.65	13.25	13.92	14.67	16.43
CWLB 2010-020	R0.5	2	0.8	0.98	11°	45	4	—	2.18	2.27	2.37	2.47	2.72
CWLB 2010-025		2.5				45	4	—	2.71	2.82	2.94	3.08	3.41
CWLB 2010-030		3				45	4	—	3.23	3.37	3.52	3.69	4.09
CWLB 2010-030-6		3				50	6	—	3.23	3.37	3.52	3.69	4.09
CWLB 2010-040		4				45	4	—	4.28	4.47	4.68	4.91	5.46
CWLB 2010-040-6		4				50	6	—	4.28	4.47	4.68	4.91	5.46
CWLB 2010-050		5				45	4	—	5.32	5.57	5.83	6.13	6.83
CWLB 2010-060		6				45	4	—	6.37	6.66	6.99	7.35	8.20
CWLB 2010-060-6		6				50	6	—	6.37	6.66	6.99	7.35	8.20
CWLB 2010-070		7				45	4	—	7.42	7.76	8.14	8.57	9.57
CWLB 2010-080		8				45	4	—	8.47	8.86	9.30	9.79	10.94
CWLB 2010-080-6		8				50	6	—	8.47	8.86	9.30	9.79	10.94
CWLB 2010-090		9				45	4	—	9.51	9.96	10.46	11.00	12.31
CWLB 2010-100		10				45	4	—	10.56	11.06	11.61	12.22	13.68
CWLB 2010-100-6		10				50	6	—	10.56	11.06	11.61	12.22	13.68
CWLB 2010-120		12				45	4	—	12.65	13.26	13.92	14.66	16.42
CWLB 2010-120-6		12				50	6	—	12.65	13.26	13.92	14.66	16.42
CWLB 2010-140		14				50	4	—	14.75	15.45	16.23	17.10	19.15
CWLB 2010-160		16				50	4	—	16.84	17.65	18.55	19.54	21.89
CWLB 2010-180		18				55	4	—	18.94	19.85	20.86	21.98	24.63
CWLB 2010-200		20				55	4	—	21.03	22.05	23.17	24.41	27.37

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CWLB 2012-030	R0.6	3	0.96	1.19	11°	45	4	—	3.13	3.25	3.39	3.55	3.93
CWLB 2012-040		4				45	4	—	4.17	4.35	4.55	4.77	5.30
CWLB 2012-060		6				45	4	—	6.27	6.55	6.86	7.21	8.03
CWLB 2012-080		8				45	4	—	8.36	8.75	9.17	9.65	10.77
CWLB 2012-100		10				45	4	—	10.45	10.94	11.48	12.09	13.51
CWLB 2012-120		12				45	4	—	12.55	13.14	13.80	14.52	16.25
CWLB 2012-160		16				50	4	—	16.74	17.54	18.42	19.40	21.73
CWLB 2015-030	R0.75	3	1.2	1.47	11°	45	4	—	3.17	3.30	3.43	3.58	3.94
CWLB 2015-040		4				45	4	—	4.22	4.39	4.59	4.80	5.31
CWLB 2015-060		6				45	4	—	6.31	6.59	6.90	7.24	8.05
CWLB 2015-060-6		6				50	6	—	6.31	6.59	6.90	7.24	8.05
CWLB 2015-080		8				45	4	—	8.41	8.79	9.21	9.68	10.79
CWLB 2015-080-6		8				50	6	—	8.41	8.79	9.21	9.68	10.79
CWLB 2015-100		10				45	4	—	10.50	10.99	11.52	12.12	13.53
CWLB 2015-100-6		10				50	6	—	10.50	10.99	11.52	12.12	13.53
CWLB 2015-120		12				45	4	—	12.60	13.18	13.83	14.55	16.26
CWLB 2015-140		14				50	4	—	14.69	15.38	16.14	16.99	19.00
CWLB 2015-160		16				50	4	—	16.78	17.58	18.46	19.43	21.74
CWLB 2015-180		18				55	4	—	18.88	19.78	20.77	21.87	24.48
CWLB 2015-200		20				55	4	—	20.97	21.97	23.08	24.31	No Interference
CWLB 2015-250		25				65	4	—	26.21	27.47	28.86	30.40	No Interference
CWLB 2016-040	R0.8	4	1.28	1.58	11°	45	4	—	4.19	4.36	4.55	4.76	5.26
CWLB 2016-080		8				45	4	—	8.38	8.76	9.17	9.64	10.74
CWLB 2016-120		12				45	4	—	12.57	13.15	13.80	14.51	16.21
CWLB 2016-160		16				50	4	—	16.75	17.54	18.42	19.39	21.69
CWLB 2016-200		20				55	4	—	20.94	21.94	23.04	24.26	No Interference
CWLB 2018-060	R0.9	6	1.44	1.78	11°	45	4	—	6.28	6.55	6.85	7.18	7.96
CWLB 2018-080		8				45	4	—	8.37	8.75	9.16	9.61	10.70
CWLB 2018-120		12				45	4	—	12.56	13.14	13.78	14.49	16.18
CWLB 2020-030	R1	3	1.6	1.98	11°	45	4	—	3.13	3.24	3.36	3.49	3.81
CWLB 2020-040		4				45	4	—	4.18	4.34	4.52	4.71	5.18
CWLB 2020-040-6		4				50	6	—	4.18	4.34	4.52	4.71	5.18
CWLB 2020-060		6				45	4	—	6.27	6.54	6.83	7.15	7.92
CWLB 2020-060-6		6				50	6	—	6.27	6.54	6.83	7.15	7.92
CWLB 2020-080		8				45	4	—	8.37	8.73	9.14	9.59	10.66
CWLB 2020-080-6		8				50	6	—	8.37	8.73	9.14	9.59	10.66
CWLB 2020-100		10				45	4	—	10.46	10.93	11.45	12.03	13.40
CWLB 2020-100-6		10				50	6	—	10.46	10.93	11.45	12.03	13.40
CWLB 2020-120		12				45	4	—	12.55	13.13	13.76	14.47	16.14
CWLB 2020-120-6		12				50	6	—	12.55	13.13	13.76	14.47	16.14
CWLB 2020-140		14				50	4	—	14.65	15.32	16.07	16.90	18.87
CWLB 2020-160		16				50	4	—	16.74	17.52	18.38	19.34	No Interference
CWLB 2020-160-6		16				60	6	—	16.74	17.52	18.38	19.34	21.61
CWLB 2020-180		18				55	4	—	18.84	19.72	20.70	21.78	No Interference
CWLB 2020-200		20				55	4	—	20.93	21.92	23.01	24.22	No Interference
CWLB 2020-200-6		20				70	6	—	20.93	21.92	23.01	24.22	27.09
CWLB 2020-250		25				65	4	—	26.17	27.41	28.79	No Interference	No Interference
CWLB 2020-300		30				70	4	—	31.40	32.90	34.56	No Interference	No Interference
CWLB 2020-350		35				80	4	—	36.64	38.40	No Interference	No Interference	No Interference
CWLB 2020-400		40				80	4	—	41.87	43.89	No Interference	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CWLB 2025-060	R1.25	6	2	2.45	11°	45	4	—	6.34	6.60	6.88	7.19	7.94
CWLB 2025-100		10				45	4	—	10.53	10.99	11.50	12.07	13.41
CWLB 2025-150		15				50	4	—	15.76	16.48	17.28	18.16	No Interference
CWLB 2025-200		20				55	4	—	21.00	21.98	23.06	No Interference	No Interference
CWLB 2030-060-3	R1.5	6	2.4	2.95	—	60	3	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2030-060-4		6			11°	60	4	—	6.32	6.56	6.83	7.13	7.84
CWLB 2030-060		6				60	6	—	6.32	6.56	6.83	7.13	7.84
CWLB 2030-080		8				60	6	—	8.42	8.76	9.14	9.57	10.58
CWLB 2030-100		10				60	6	—	10.51	10.96	11.45	12.00	13.31
CWLB 2030-120		12				60	6	—	12.60	13.16	13.77	14.44	16.05
CWLB 2030-140		14				60	6	—	14.70	15.35	16.08	16.88	18.79
CWLB 2030-160		16				60	6	—	16.79	17.55	18.39	19.32	21.53
CWLB 2030-200		20				70	6	—	20.98	21.94	23.01	24.19	27.01
CWLB 2030-250		25				70	6	—	26.21	27.44	28.79	30.29	No Interference
CWLB 2030-300		30				70	6	—	31.45	32.93	34.57	36.38	No Interference
CWLB 2030-350		35				80	6	—	36.68	38.42	40.35	42.48	No Interference
CWLB 2030-400		40				80	6	—	41.92	43.92	46.12	No Interference	No Interference
CWLB 2040-080-4	R2	8	3.2	3.95	—	70	4	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2040-080		8			11°	70	6	—	8.39	8.71	9.06	9.46	10.39
CWLB 2040-100		10				70	6	—	10.48	10.91	11.37	11.89	13.13
CWLB 2040-120		12				70	6	—	12.58	13.10	13.69	14.33	15.87
CWLB 2040-140		14				70	6	—	14.67	15.30	16.00	16.77	18.61
CWLB 2040-160		16				70	6	—	16.77	17.50	18.31	19.21	No Interference
CWLB 2040-200		20				70	6	—	20.95	21.89	22.93	24.08	No Interference
CWLB 2040-250		25				70	6	—	26.19	27.39	28.71	30.18	No Interference
CWLB 2040-300		30				70	6	—	31.42	32.88	34.49	No Interference	No Interference
CWLB 2040-350		35				80	6	—	36.66	38.37	40.27	No Interference	No Interference
CWLB 2040-400		40				90	6	—	41.89	43.87	No Interference	No Interference	No Interference
CWLB 2040-450		45				90	6	—	47.13	49.36	No Interference	No Interference	No Interference
CWLB 2050-100	R2.5	10	4	4.95	11°	70	6	—	10.46	10.86	11.30	11.79	No Interference
CWLB 2050-150		15				70	6	—	15.69	16.35	17.08	No Interference	No Interference
CWLB 2050-200		20				70	6	—	20.93	21.84	No Interference	No Interference	No Interference
CWLB 2050-250		25				70	6	—	26.17	27.34	No Interference	No Interference	No Interference
CWLB 2050-300		30				80	6	—	31.40	No Interference	No Interference	No Interference	No Interference
CWLB 2060-100	R3	10	4.8	5.95	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-150		15				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-200		20				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-250		25				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-300		30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-350		35				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-400		40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-450		45				100	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-500		50				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CWLB 2060-600		60				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for CWLB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-002	R0.05	0.2	54,000	85	0.004	0.004	54,000	85	0.004	0.004	48,000	55	0.002	0.002	48,000	55	0.002	0.002
2001-003		0.3	54,000	85	0.004	0.004	54,000	85	0.004	0.004	48,000	55	0.002	0.002	48,000	55	0.002	0.002
2001-005		0.5	54,000	75	0.004	0.004	54,000	75	0.004	0.004	48,000	35	0.002	0.002	48,000	35	0.002	0.002
20015-003	R0.075	0.3	54,000	160	0.007	0.009	54,000	160	0.007	0.009	48,000	90	0.004	0.004	48,000	90	0.004	0.004
20015-005		0.5	54,000	140	0.007	0.009	54,000	140	0.007	0.009	48,000	60	0.004	0.004	48,000	60	0.004	0.004
20015-010		1	54,000	100	0.003	0.005	54,000	100	0.003	0.005	48,000	60	0.001	0.002	48,000	60	0.001	0.002
2002-003	R0.1	0.3	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
2002-005		0.5	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
2002-0075		0.75	60,000	300	0.007	0.021	60,000	320	0.007	0.015	60,000	300	0.007	0.021	60,000	270	0.005	0.015
2002-010		1	60,000	250	0.006	0.018	60,000	250	0.005	0.015	60,000	250	0.006	0.018	60,000	220	0.005	0.015
2002-015		1.5	48,000	200	0.005	0.015	48,000	180	0.004	0.012	60,000	200	0.005	0.015	48,000	170	0.004	0.012
2002-020		2	48,000	150	0.003	0.009	48,000	150	0.003	0.009	60,000	150	0.003	0.009	48,000	120	0.003	0.007
2002-030		3	33,000	50	0.002	0.003	33,000	50	0.002	0.003	33,000	50	0.002	0.003	33,000	50	0.002	0.002
2003-005	R0.15	0.5	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
2003-0075		0.75	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
2003-010		1	43,000	450	0.01	0.03	43,000	450	0.008	0.024	54,000	400	0.01	0.03	43,000	400	0.007	0.021
2003-015		1.5	43,000	400	0.008	0.024	43,000	400	0.007	0.021	54,000	400	0.008	0.024	43,000	400	0.006	0.018
2003-020		2	40,000	300	0.006	0.018	40,000	300	0.006	0.018	50,000	300	0.007	0.021	40,000	300	0.005	0.015
2003-025		2.5	40,000	250	0.005	0.015	40,000	250	0.005	0.015	46,000	250	0.005	0.015	40,000	250	0.004	0.012
2003-030		3	38,000	200	0.004	0.012	38,000	200	0.004	0.012	42,000	200	0.004	0.012	38,000	200	0.004	0.008
2003-040		4	35,000	100	0.003	0.009	35,000	100	0.003	0.009	35,000	100	0.003	0.009	32,000	100	0.003	0.005
2003-050		5	26,000	60	0.003	0.004	26,000	60	0.003	0.004	26,000	60	0.003	0.004	26,000	60	0.003	0.003
2004-005	R0.2	0.5	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2004-0075		0.75	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2004-010		1	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2004-015		1.5	35,000	900	0.02	0.06	35,000	900	0.016	0.033	50,000	550	0.02	0.06	35,000	500	0.012	0.036
2004-020		2	35,000	600	0.015	0.045	35,000	600	0.011	0.033	50,000	500	0.015	0.045	35,000	400	0.01	0.03
2004-025		2.5	35,000	450	0.012	0.036	35,000	450	0.01	0.03	46,000	450	0.012	0.036	35,000	360	0.01	0.025
2004-030		3	35,000	400	0.01	0.03	35,000	400	0.008	0.024	42,000	400	0.01	0.03	35,000	330	0.007	0.021
2004-035		3.5	35,000	350	0.007	0.02	35,000	350	0.006	0.018	38,000	350	0.007	0.021	35,000	300	0.007	0.018
2004-040		4	35,000	300	0.005	0.015	35,000	300	0.005	0.015	35,000	300	0.005	0.015	35,000	250	0.005	0.015
2004-050		5	30,000	160	0.003	0.01	30,000	160	0.003	0.01	30,000	160	0.003	0.01	30,000	150	0.003	0.008
2004-060		6	23,000	90	0.003	0.005	23,000	90	0.003	0.005	23,000	90	0.003	0.005	23,000	80	0.003	0.004
2005-010	R0.25	1	34,000	1,300	0.035	0.105	34,000	1,300	0.03	0.06	45,000	900	0.03	0.09	32,000	900	0.02	0.06
2005-015		1.5	34,000	1,000	0.03	0.09	34,000	1,000	0.025	0.05	45,000	800	0.025	0.075	32,000	800	0.018	0.054
2005-020		2	34,000	800	0.025	0.075	34,000	800	0.023	0.046	45,000	700	0.022	0.066	32,000	700	0.016	0.048
2005-025		2.5	34,000	700	0.02	0.06	34,000	700	0.015	0.045	45,000	600	0.018	0.054	32,000	600	0.015	0.045
2005-030		3	32,000	550	0.016	0.048	32,000	550	0.012	0.036	41,000	550	0.014	0.042	31,000	500	0.012	0.036
2005-040		4	31,000	450	0.012	0.036	31,000	450	0.01	0.03	35,000	450	0.01	0.03	30,000	390	0.01	0.03
2005-050		5	29,000	340	0.007	0.021	29,000	340	0.007	0.021	29,000	340	0.006	0.018	29,000	300	0.006	0.018
2005-060		6	24,000	220	0.006	0.018	24,000	220	0.006	0.018	24,000	220	0.005	0.015	24,000	200	0.005	0.015
2005-080		8	19,000	130	0.004	0.012	19,000	130	0.004	0.012	19,000	130	0.003	0.009	19,000	110	0.003	0.009
2005-100		10	17,000	100	0.003	0.009	17,000	100	0.003	0.009	17,000	100	0.002	0.006	17,000	80	0.002	0.006

Milling Conditions for CWLB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2006-010	R0.3	1	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
2006-015		1.5	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
2006-020		2	33,000	1,400	0.045	0.135	33,000	1,400	0.036	0.072	40,000	1,200	0.045	0.09	30,000	1,200	0.036	0.054
2006-025		2.5	33,000	1,100	0.04	0.12	33,000	1,200	0.033	0.066	40,000	1,000	0.04	0.08	30,000	1,100	0.033	0.053
2006-030		3	33,000	900	0.035	0.105	33,000	900	0.025	0.066	40,000	800	0.03	0.075	30,000	900	0.026	0.052
2006-035		3.5	32,000	900	0.03	0.09	32,000	800	0.022	0.066	38,000	650	0.025	0.075	28,000	720	0.02	0.06
2006-040		4	31,000	700	0.027	0.081	31,000	700	0.02	0.06	35,000	560	0.022	0.066	28,000	600	0.018	0.054
2006-050		5	29,000	440	0.018	0.054	29,000	440	0.015	0.045	29,000	440	0.015	0.045	26,000	440	0.012	0.036
2006-060		6	24,000	380	0.012	0.036	24,000	380	0.012	0.036	24,000	380	0.01	0.03	24,000	380	0.008	0.024
2006-080		8	18,000	240	0.008	0.024	18,000	240	0.008	0.024	18,000	240	0.006	0.018	18,000	240	0.005	0.015
2006-100		10	15,000	160	0.006	0.018	15,000	160	0.006	0.018	15,000	160	0.004	0.012	15,000	160	0.003	0.01
2008-020	R0.4	2	30,000	2,200	0.1	0.3	30,000	1,800	0.06	0.12	35,000	1,800	0.07	0.14	25,000	1,700	0.07	0.1
2008-030		3	30,000	1,700	0.08	0.24	30,000	1,600	0.05	0.1	35,000	1,600	0.06	0.12	25,000	1,500	0.06	0.09
2008-040		4	30,000	1,400	0.07	0.21	30,000	1,300	0.04	0.1	35,000	1,300	0.05	0.12	25,000	1,200	0.045	0.09
2008-050		5	30,000	1,100	0.06	0.18	30,000	1,100	0.035	0.1	30,000	1,100	0.04	0.12	25,000	1,000	0.04	0.08
2008-060		6	27,000	900	0.04	0.12	27,000	900	0.025	0.075	27,000	800	0.03	0.09	23,000	800	0.023	0.069
2008-080		8	19,000	450	0.02	0.06	19,000	450	0.02	0.06	19,000	450	0.015	0.045	19,000	450	0.01	0.03
2008-100		10	15,000	350	0.012	0.036	15,000	350	0.012	0.036	15,000	300	0.01	0.03	15,000	300	0.007	0.021
2008-120		12	14,000	300	0.01	0.03	14,000	300	0.01	0.03	14,000	240	0.006	0.018	14,000	240	0.006	0.018
2010-020	R0.5	2	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.09	0.18	22,000	1,600	0.09	0.13
2010-025		2.5	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.09	0.18	22,000	1,600	0.09	0.13
2010-030		3	30,000	1,800	0.11	0.33	24,000	1,600	0.07	0.14	30,000	1,500	0.08	0.16	21,500	1,400	0.08	0.12
2010-040		4	30,000	1,700	0.09	0.27	24,000	1,500	0.065	0.13	30,000	1,300	0.075	0.15	21,500	1,300	0.075	0.1
2010-050		5	30,000	1,600	0.08	0.24	24,000	1,400	0.06	0.12	30,000	1,200	0.07	0.14	21,500	1,200	0.06	0.09
2010-060		6	30,000	1,400	0.06	0.18	18,000	1,200	0.04	0.12	30,000	1,100	0.06	0.12	21,500	1,100	0.05	0.1
2010-070		7	27,000	1,200	0.05	0.15	17,000	1,000	0.03	0.09	24,000	800	0.04	0.12	20,000	900	0.03	0.09
2010-080		8	24,000	1,000	0.04	0.12	16,500	900	0.027	0.081	18,500	620	0.035	0.1	18,500	580	0.025	0.1
2010-090		9	22,000	720	0.035	0.11	15,500	700	0.02	0.08	16,500	550	0.025	0.1	16,500	500	0.02	0.08
2010-100		10	20,000	650	0.03	0.09	15,000	500	0.018	0.072	14,800	490	0.02	0.08	14,800	430	0.015	0.06
2010-120		12	18,000	600	0.02	0.08	15,000	500	0.016	0.064	13,400	380	0.01	0.05	13,400	380	0.008	0.04
2010-140		14	16,000	530	0.015	0.06	14,000	460	0.015	0.06	12,000	350	0.008	0.04	12,000	350	0.006	0.03
2010-160		16	14,000	460	0.014	0.056	14,000	460	0.014	0.056	10,500	250	0.005	0.025	10,500	250	0.005	0.025
2010-180		18	13,500	440	0.012	0.06	13,500	440	0.012	0.06	9,500	200	0.004	0.02	9,500	200	0.004	0.02
2010-200		20	13,000	430	0.008	0.04	13,000	430	0.008	0.04	9,000	150	0.003	0.015	9,000	150	0.003	0.015
2012-030	R0.6	3	30,000	2,000	0.13	0.39	30,000	1,600	0.09	0.18	30,000	1,600	0.1	0.2	18,000	1,600	0.1	0.15
2012-040		4	30,000	1,800	0.12	0.36	20,000	1,500	0.08	0.16	30,000	1,400	0.09	0.18	18,000	1,400	0.09	0.13
2012-060		6	30,000	1,600	0.09	0.27	20,000	1,200	0.07	0.14	30,000	1,100	0.08	0.16	18,000	1,100	0.08	0.12
2012-080		8	25,000	1,200	0.06	0.18	15,000	900	0.05	0.12	20,000	800	0.06	0.15	16,500	750	0.05	0.11
2012-100		10	20,000	900	0.05	0.15	13,500	650	0.035	0.11	16,000	640	0.045	0.12	15,500	550	0.03	0.09
2012-120		12	16,500	600	0.035	0.12	12,500	480	0.025	0.1	12,000	440	0.03	0.12	12,500	430	0.018	0.072
2012-160		16	13,000	470	0.018	0.072	11,500	440	0.018	0.072	10,000	350	0.01	0.05	10,000	350	0.01	0.05


Milling Conditions for CWLB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2015-030		3	30,000	2,000	0.15	0.45	30,000	1,600	0.12	0.24	30,000	1,700	0.12	0.24	18,000	1,500	0.12	0.18
2015-040		4	30,000	1,800	0.14	0.42	30,000	1,500	0.11	0.22	30,000	1,600	0.11	0.22	18,000	1,400	0.11	0.17
2015-060		6	30,000	1,800	0.12	0.36	23,000	1,300	0.1	0.2	30,000	1,400	0.1	0.2	15,000	1,200	0.1	0.16
2015-080		8	30,000	1,600	0.11	0.33	18,000	1,100	0.08	0.16	30,000	1,200	0.08	0.2	14,000	1,000	0.08	0.16
2015-100		10	23,000	1,200	0.09	0.27	15,000	850	0.06	0.15	23,500	900	0.06	0.18	14,000	700	0.05	0.15
2015-120	**R0.75**	12	16,000	900	0.07	0.21	13,000	600	0.05	0.15	13,000	650	0.05	0.15	13,000	550	0.03	0.12
2015-140		14	14,500	700	0.05	0.19	10,500	550	0.04	0.12	10,500	500	0.04	0.12	10,500	470	0.025	0.1
2015-160		16	13,000	650	0.04	0.16	10,000	550	0.03	0.12	8,850	400	0.03	0.12	8,850	390	0.02	0.08
2015-180		18	12,000	580	0.03	0.15	10,000	510	0.025	0.1	8,500	350	0.018	0.09	8,500	360	0.014	0.07
2015-200		20	10,500	530	0.02	0.1	9,200	470	0.02	0.1	8,000	320	0.12	0.06	8,000	320	0.012	0.06
2015-250		25	9,000	440	0.014	0.07	8,750	440	0.014	0.07	7,250	250	0.008	0.04	7,250	250	0.006	0.03
2016-040		4	30,000	2,000	0.16	0.48	30,000	1,600	0.12	0.24	30,000	1,800	0.12	0.36	18,000	1,400	0.1	0.2
2016-080		8	30,000	1,700	0.15	0.45	15,000	1,100	0.1	0.2	30,000	1,500	0.12	0.24	13,500	1,000	0.08	0.24
2016-120	**R0.8**	12	23,000	1,200	0.1	0.3	11,000	700	0.06	0.18	18,000	1,000	0.06	0.18	12,500	650	0.04	0.16
2016-160		16	15,000	800	0.05	0.2	10,000	530	0.034	0.13	10,000	530	0.035	0.14	9,000	420	0.02	0.1
2016-200		20	11,000	580	0.034	0.17	9,400	490	0.025	0.12	8,500	400	0.018	0.09	7,800	380	0.014	0.07
2018-060		6	30,000	1,800	0.18	0.52	24,000	1,500	0.15	0.29	30,000	1,700	0.16	0.4	14,000	1,200	0.13	0.27
2018-080	**R0.9**	8	30,000	1,800	0.17	0.5	18,000	1,200	0.13	0.26	30,000	1,700	0.16	0.32	12,000	1,000	0.11	0.26
2018-120		12	24,000	1,450	0.12	0.36	13,000	1,000	0.08	0.2	18,000	1,100	0.09	0.23	12,000	750	0.07	0.21
2020-030		3	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
2020-040		4	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
2020-060		6	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	14,000	1,100	0.15	0.4
2020-080		8	30,000	2,000	0.2	0.6	30,000	2,000	0.18	0.36	30,000	2,000	0.16	0.56	12,000	950	0.12	0.4
2020-100		10	30,000	2,000	0.2	0.6	30,000	2,000	0.17	0.36	30,000	2,000	0.13	0.45	10,800	850	0.1	0.4
2020-120		12	30,000	2,000	0.18	0.54	30,000	2,000	0.12	0.36	30,000	2,000	0.1	0.35	10,800	850	0.08	0.32
2020-140	**R1**	14	22,000	1,450	0.15	0.5	22,000	1,450	0.11	0.33	20,000	1,300	0.08	0.24	10,800	850	0.06	0.24
2020-160		16	15,000	1,000	0.1	0.4	15,000	1,000	0.07	0.28	10,800	700	0.06	0.18	10,800	600	0.03	0.15
2020-180		18	13,500	900	0.08	0.32	13,500	900	0.06	0.24	9,700	600	0.05	0.15	9,700	520	0.025	0.12
2020-200		20	12,000	800	0.07	0.28	12,000	800	0.05	0.2	8,650	500	0.04	0.16	8,650	450	0.02	0.1
2020-250		25	9,000	600	0.04	0.2	9,000	600	0.035	0.17	7,800	440	0.025	0.1	7,800	440	0.016	0.08
2020-300		30	7,000	470	0.035	0.17	7,000	470	0.03	0.15	7,000	350	0.02	0.08	7,000	350	0.01	0.05
2020-350		35	6,500	430	0.03	0.15	6,500	430	0.025	0.12	6,150	250	0.015	0.06	6,150	250	0.008	0.04
2020-400		40	6,500	430	0.02	0.1	6,500	430	0.02	0.1	5,250	150	0.01	0.05	5,250	150	0.006	0.03
2025-060		6	27,000	2,300	0.28	0.75	27,000	2,300	0.25	0.5	27,000	2,300	0.25	0.75	13,000	1,100	0.21	0.63
2025-100	**R1.25**	10	25,000	2,100	0.26	0.67	25,000	2,100	0.23	0.46	24,000	2,200	0.2	0.65	11,000	930	0.14	0.44
2025-150		15	22,000	1,950	0.23	0.59	22,000	1,950	0.15	0.45	20,000	1,600	0.13	0.42	9,000	720	0.08	0.32
2025-200		20	11,000	1,150	0.14	0.38	11,000	1,150	0.1	0.3	8,000	600	0.06	0.24	7,600	470	0.04	0.12

Milling Conditions for CWLB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030-060	R1.5	6	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76
2030-080		8	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76
2030-100		10	22,000	2,300	0.28	0.8	22,000	2,300	0.28	0.8	24,000	2,500	0.25	0.75	13,000	1,200	0.25	0.76
2030-120		12	22,000	2,300	0.28	0.7	22,000	2,300	0.28	0.7	20,000	2,100	0.2	0.65	10,700	1,000	0.18	0.54
2030-140		14	20,000	2,100	0.24	0.6	20,000	2,100	0.24	0.6	18,000	1,850	0.18	0.5	9,400	800	0.16	0.48
2030-160		16	20,000	2,100	0.24	0.6	20,000	2,100	0.24	0.6	16,000	1,650	0.16	0.5	9,000	700	0.14	0.42
2030-200		20	14,000	1,800	0.2	0.45	14,000	1,800	0.2	0.45	11,000	1,000	0.12	0.36	7,000	600	0.1	0.3
2030-250		25	8,000	1,250	0.16	0.32	8,000	1,250	0.16	0.32	6,400	510	0.08	0.24	5,600	390	0.06	0.18
2030-300		30	6,000	1,000	0.1	0.3	6,000	1,000	0.1	0.3	4,600	450	0.05	0.2	3,900	370	0.04	0.12
2030-350		35	5,500	800	0.07	0.28	5,500	800	0.07	0.28	3,300	320	0.04	0.16	2,900	270	0.03	0.1
2030-400		40	4,500	700	0.05	0.25	4,500	700	0.05	0.25	2,700	240	0.03	0.12	2,300	210	0.02	0.08
2040-080	R2	8	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
2040-100		10	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
2040-120		12	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	9,700	1,500	0.28	0.85
2040-140		14	21,000	2,630	0.35	1.1	21,000	2,630	0.35	1.1	15,000	2,150	0.3	1.1	9,700	1,200	0.28	0.8
2040-160		16	18,000	2,250	0.3	1	18,000	2,250	0.3	1	15,000	2,150	0.3	0.9	8,000	1,000	0.2	0.6
2040-200		20	15,000	1,900	0.3	0.9	15,000	1,900	0.3	0.9	12,000	1,750	0.2	0.7	7,000	750	0.15	0.45
2040-250		25	12,000	1,550	0.25	0.7	12,000	1,550	0.25	0.7	9,000	1,300	0.15	0.5	6,000	560	0.12	0.36
2040-300		30	7,000	1,400	0.2	0.5	7,000	1,400	0.2	0.5	7,000	850	0.1	0.3	5,000	460	0.08	0.2
2040-350		35	6,000	1,200	0.2	0.4	6,000	1,200	0.2	0.4	4,800	450	0.1	0.25	4,000	370	0.07	0.17
2040-400		40	4,000	1,000	0.11	0.33	4,000	1,000	0.11	0.33	3,450	400	0.06	0.24	2,900	270	0.06	0.15
2040-450		45	3,800	760	0.08	0.32	3,800	760	0.08	0.32	2,700	300	0.05	0.2	2,300	240	0.04	0.12
2050-100	R2.5	10	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,750	2,400	0.45	1.4	8,800	1,800	0.42	1.2
2050-150		15	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,750	2,400	0.45	1.4	7,800	1,300	0.34	1
2050-200		20	14,000	2,600	0.37	1.2	15,600	2,600	0.37	1.2	12,000	1,800	0.36	1.1	6,300	830	0.27	0.75
2050-250		25	12,000	2,000	0.33	1.1	12,000	2,000	0.33	1.1	9,600	1,350	0.25	1	5,700	750	0.25	0.67
2050-300		30	9,600	1,800	0.31	0.9	9,600	1,800	0.31	0.9	8,400	1,100	0.23	0.8	5,000	650	0.2	0.5
2060-100	R3	10	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
2060-150		15	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
2060-200		20	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	6,500	1,300	0.4	1.4
2060-250		25	13,000	2,600	0.45	1.5	13,000	2,600	0.45	1.5	10,000	1,800	0.4	1.3	5,300	840	0.32	0.9
2060-300		30	10,000	2,100	0.4	1.3	10,000	2,100	0.4	1.3	8,000	1,350	0.3	1.1	4,700	750	0.3	0.8
2060-350		35	8,000	1,800	0.38	1.1	8,000	1,800	0.38	1.1	7,000	1,100	0.26	0.9	4,200	670	0.25	0.6
2060-400		40	7,000	1,800	0.36	0.9	7,000	1,800	0.36	0.9	6,000	900	0.23	0.75	3,700	550	0.2	0.4
2060-450		45	5,800	1,700	0.33	0.75	5,800	1,700	0.33	0.75	4,600	670	0.19	0.6	3,200	470	0.15	0.3
2060-500		50	4,000	1,500	0.3	0.6	4,000	1,500	0.3	0.6	3,200	450	0.15	0.4	2,800	400	0.1	0.2
2060-600		60	2,700	1,000	0.21	0.42	2,700	1,000	0.21	0.42	2,300	320	0.1	0.3	1,950	270	0.08	0.16

Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed,or when chattering and red-hot occur.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.



CSELB

UTCOAT 2 Flute Long Neck Ball End Mills




From April 2026, and once stocks have been depleted, these series will only be manufactured on demand.

R0.05～R3


Super MG | UT COAT | Shank Dia 0/-0.005 | Back Taper Geometry

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	●		●			○	○		

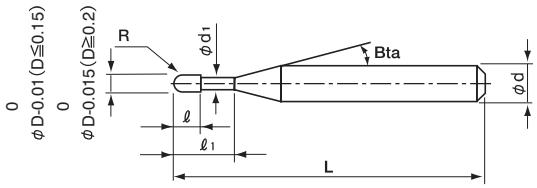

The shank taper angle shown is not an exact value.




Radius of Ball Nose	Diameter Tolerance	Ball Radius Accuracy	Helix Angle
R0.05～R0.075	0/-0.01	±0.002	0°
R0.1～R3	0/-0.015	±0.005	30°


3 features of CSELB

Reduce cutting resistance and designed to improve surface quality.
Recommended for milling on hardened steels (55HRC) - sticky materials, materials that prone to chatter marks.


Less resistance on curved surface shape

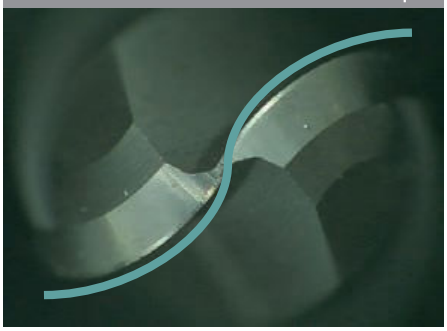


Small relief surface

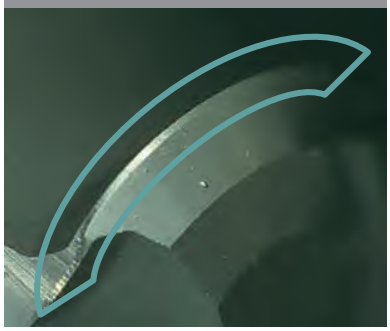

Tip design with excellent cutting performance

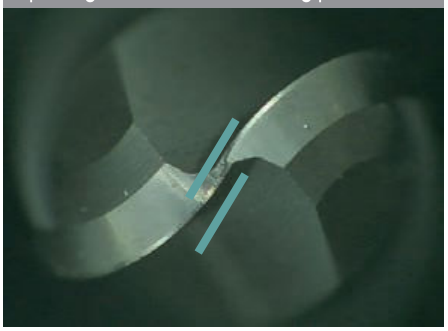

Wheel shape PX5 (30HRC)

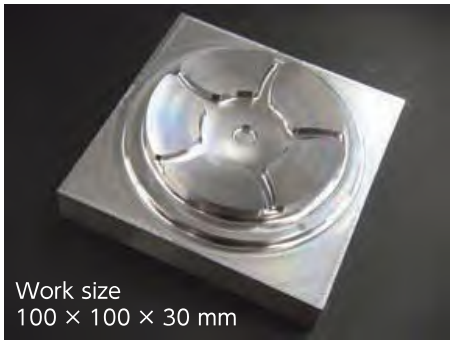

Coolant : Water soluble

Tool

2 flute ball
CSEB (F-25)



2 flute long neck ball
CSELB




4 flute highly efficient long neck radius
CRRS (D-93)



No	Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m:s)
1	Roughing	CSEB R3	11,000	2,300	0.55	1.7	0.1	0:56:56
2		CSELB R2 × EL12	18,000	2,400	0.4	1.2	0.03	0:00:43
3	Semi-finishing	CSELB R2 × EL12	18,000	3,000	0.18	–	0.03	0:13:08
4					0.2	–	0.03	0:01:54
5					–	0.12	0.03	0:18:57
6		CSELB R1 × EL8	30,000	2,000	0.1	0.1	0.03	0:17:26

No	Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Cycle Time (h:m:s)
7	Finishing	CRRS ϕ6 × CR1	8,000	1,000	0.05	1	0	0:14:00
8		CSELB R1 × EL8	30,000	2,000	0.04	–	–	2:31:37
9					0.04	–	–	0:16:16
10					–	0.03	–	0:59:37
11					0.04	0.04	–	0:02:11
							Total	5:52:45

Measurement of finishing roughness

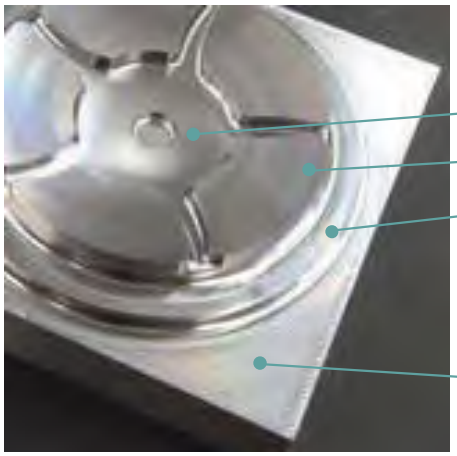

CSELB Long neck ball R1 × EL8

Center	Ra 0.396
Radius	Ra 0.421
Side	Ra 0.118

CRRS 4 flute highly efficient long neck radius ϕ6 × CR1

Flat surface	Ra 0.091

Finishing with CSEB / CSELB offers uniform milling surface.

Total 325 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CSELB 2001-002	R0.05	0.2	0.08	0.095	11°	45	4	—	0.22	0.24	0.26	0.28	0.31
CSELB 2001-003		0.3				45	4	—	0.33	0.35	0.38	0.40	0.45
CSELB 2001-005		0.5				45	4	—	0.54	0.58	0.61	0.64	0.72
CSELB 20015-003	R0.075	0.3	0.12	0.135	11°	45	4	—	0.36	0.38	0.40	0.42	0.48
CSELB 20015-005		0.5				45	4	—	0.58	0.60	0.63	0.67	0.75
CSELB 20015-010		1				45	4	—	1.10	1.15	1.21	1.28	1.43
CSELB 2002-003	R0.1	0.3	0.16	0.19	11°	45	4	—	0.40	0.42	0.44	0.46	0.52
CSELB 2002-005		0.5				45	4	—	0.61	0.64	0.67	0.71	0.79
CSELB 2002-005-6		0.5				50	6	—	0.61	0.64	0.67	0.71	0.79
CSELB 2002-0075		0.75				45	4	—	0.87	0.92	0.96	1.01	1.13
CSELB 2002-010		1				45	4	—	1.14	1.19	1.25	1.32	1.48
CSELB 2002-010-6		1				50	6	—	1.14	1.19	1.25	1.32	1.48
CSELB 2002-0125		1.25				45	4	—	1.39	1.45	1.53	1.61	1.80
CSELB 2002-015		1.5				45	4	—	1.65	1.73	1.81	1.91	2.14
CSELB 2002-015-6		1.5				50	6	—	1.65	1.73	1.81	1.91	2.14
CSELB 2002-0175		1.75				45	4	—	1.91	2.00	2.10	2.22	2.49
CSELB 2002-020		2				45	4	—	2.17	2.28	2.39	2.52	2.83
CSELB 2002-020-6		2				50	6	—	2.17	2.28	2.39	2.52	2.83
CSELB 2002-0225		2.25				45	4	—	2.43	2.55	2.68	2.83	3.17
CSELB 2002-025		2.5				45	4	—	2.69	2.83	2.97	3.13	3.51
CSELB 2002-030		3				45	4	—	3.22	3.37	3.55	3.74	4.20
CSELB 2003-005	R0.15	0.5	0.24	0.29	11°	45	4	—	0.61	0.64	0.67	0.70	0.77
CSELB 2003-006		0.6				45	4	—	0.71	0.75	0.78	0.82	0.91
CSELB 2003-0075		0.75				45	4	—	0.87	0.91	0.95	1.00	1.12
CSELB 2003-010		1				45	4	—	1.13	1.19	1.24	1.31	1.46
CSELB 2003-010-6		1				50	6	—	1.13	1.19	1.24	1.31	1.46
CSELB 2003-0125		1.25				45	4	—	1.38	1.45	1.52	1.60	1.78
CSELB 2003-015		1.5				45	4	—	1.64	1.72	1.81	1.90	2.12
CSELB 2003-015-6		1.5				50	6	—	1.64	1.72	1.81	1.90	2.12
CSELB 2003-0175		1.75				45	4	—	1.91	2.00	2.10	2.21	2.47
CSELB 2003-020		2				45	4	—	2.17	2.27	2.38	2.51	2.81
CSELB 2003-020-6		2				50	6	—	2.17	2.27	2.38	2.51	2.81
CSELB 2003-0225		2.25				45	4	—	2.43	2.55	2.67	2.82	3.15
CSELB 2003-025		2.5				45	4	—	2.69	2.82	2.96	3.12	3.49
CSELB 2003-030		3				45	4	—	3.22	3.37	3.54	3.73	4.18
CSELB 2003-040		4				45	4	—	4.26	4.47	4.70	4.95	5.55
CSELB 2003-050		5				45	4	—	5.31	5.57	5.85	6.17	6.92

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CSELB 2004-005		0.5				45	4	—	0.61	0.63	0.66	0.69	0.76
CSELB 2004-0075		0.75				45	4	—	0.87	0.91	0.95	0.99	1.10
CSELB 2004-010		1				45	4	—	1.13	1.18	1.24	1.30	1.44
CSELB 2004-010-6		1				50	6	—	1.13	1.18	1.24	1.30	1.44
CSELB 2004-0125		1.25				45	4	—	1.38	1.44	1.51	1.59	1.76
CSELB 2004-015		1.5				45	4	—	1.64	1.72	1.80	1.89	2.11
CSELB 2004-015-6		1.5				50	6	—	1.64	1.72	1.80	1.89	2.11
CSELB 2004-0175		1.75				45	4	—	1.90	1.99	2.09	2.19	2.45
CSELB 2004-020		2				45	4	—	2.17	2.27	2.38	2.50	2.79
CSELB 2004-020-6		2				50	6	—	2.17	2.27	2.38	2.50	2.79
CSELB 2004-0225	R0.2	2.25	0.32	0.39	11°	45	4	—	2.43	2.54	2.67	2.80	3.13
CSELB 2004-025		2.5				45	4	—	2.69	2.82	2.95	3.11	3.48
CSELB 2004-025-6		2.5				50	6	—	2.69	2.82	2.95	3.11	3.48
CSELB 2004-030		3				45	4	—	3.21	3.36	3.53	3.72	4.16
CSELB 2004-030-6		3				50	6	—	3.21	3.36	3.53	3.72	4.16
CSELB 2004-035		3.5				45	4	—	3.74	3.91	4.11	4.33	4.85
CSELB 2004-040		4				45	4	—	4.26	4.46	4.69	4.94	5.53
CSELB 2004-040-6		4				50	6	—	4.26	4.46	4.69	4.94	5.53
CSELB 2004-045		4.5				45	4	—	4.78	5.01	5.27	5.55	6.21
CSELB 2004-050		5				45	4	—	5.31	5.56	5.84	6.16	6.90
CSELB 2004-060		6				45	4	—	6.35	6.66	7.00	7.38	8.27
CSELB 2005-010		1				45	4	—	1.13	1.17	1.23	1.28	1.42
CSELB 2005-0125		1.25				45	4	—	1.38	1.43	1.50	1.57	1.74
CSELB 2005-015		1.5				45	4	—	1.64	1.71	1.79	1.88	2.09
CSELB 2005-015-6		1.5				50	6	—	1.64	1.71	1.79	1.88	2.09
CSELB 2005-0175		1.75				45	4	—	1.90	1.98	2.08	2.18	2.43
CSELB 2005-020		2				45	4	—	2.16	2.26	2.37	2.49	2.77
CSELB 2005-020-6		2				50	6	—	2.16	2.26	2.37	2.49	2.77
CSELB 2005-0225		2.25				45	4	—	2.42	2.53	2.65	2.79	3.11
CSELB 2005-025		2.5				45	4	—	2.68	2.81	2.94	3.10	3.45
CSELB 2005-025-6		2.5				50	6	—	2.68	2.81	2.94	3.10	3.45
CSELB 2005-030		3				45	4	—	3.21	3.36	3.52	3.70	4.14
CSELB 2005-030-6	R0.25	3	0.4	0.49	11°	50	6	—	3.21	3.36	3.52	3.70	4.14
CSELB 2005-035		3.5				45	4	—	3.73	3.91	4.10	4.31	4.82
CSELB 2005-040		4				45	4	—	4.25	4.46	4.68	4.92	5.51
CSELB 2005-040-6		4				50	6	—	4.25	4.46	4.68	4.92	5.51
CSELB 2005-045		4.5				45	4	—	4.78	5.00	5.26	5.53	6.19
CSELB 2005-050		5				45	4	—	5.30	5.55	5.83	6.14	6.88
CSELB 2005-055		5.5				45	4	—	5.83	6.10	6.41	6.75	7.56
CSELB 2005-060		6				45	4	—	6.35	6.65	6.99	7.36	8.25
CSELB 2005-070		7				45	4	—	7.40	7.75	8.14	8.58	9.62
CSELB 2005-080		8				45	4	—	8.44	8.85	9.30	9.80	10.99
CSELB 2005-090		9				45	4	—	9.49	9.95	10.46	11.02	12.35
CSELB 2005-100		10				50	4	—	10.54	11.05	11.61	12.24	13.72

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CSELB 2006-010	R0.3	1	0.48	0.59	11°	45	4	—	1.12	1.17	1.22	1.27	1.40
CSELB 2006-0125		1.25				45	4	—	1.37	1.43	1.49	1.56	1.73
CSELB 2006-015		1.5				45	4	—	1.63	1.70	1.78	1.87	2.07
CSELB 2006-015-6		1.5				50	6	—	1.63	1.70	1.78	1.87	2.07
CSELB 2006-0175		1.75				45	4	—	1.90	1.98	2.07	2.17	2.41
CSELB 2006-020		2				45	4	—	2.16	2.25	2.36	2.48	2.75
CSELB 2006-020-6		2				50	6	—	2.16	2.25	2.36	2.48	2.75
CSELB 2006-0225		2.25				45	4	—	2.42	2.53	2.65	2.78	3.09
CSELB 2006-025		2.5				45	4	—	2.68	2.80	2.94	3.08	3.44
CSELB 2006-025-6		2.5				50	6	—	2.68	2.80	2.94	3.08	3.44
CSELB 2006-030		3				45	4	—	3.21	3.35	3.51	3.69	4.12
CSELB 2006-030-6		3				50	6	—	3.21	3.35	3.51	3.69	4.12
CSELB 2006-035		3.5				45	4	—	3.73	3.90	4.09	4.30	4.81
CSELB 2006-040		4				45	4	—	4.25	4.45	4.67	4.91	5.49
CSELB 2006-040-6		4				50	6	—	4.25	4.45	4.67	4.91	5.49
CSELB 2006-045		4.5				45	4	—	4.78	5.00	5.25	5.52	6.18
CSELB 2006-050		5				45	4	—	5.30	5.55	5.83	6.13	6.86
CSELB 2006-050-6		5				50	6	—	5.30	5.55	5.83	6.13	6.86
CSELB 2006-055		5.5				45	4	—	5.82	6.10	6.40	6.74	7.54
CSELB 2006-060		6				45	4	—	6.35	6.65	6.98	7.35	8.23
CSELB 2006-060-6		6				50	6	—	6.35	6.65	6.98	7.35	8.23
CSELB 2006-065		6.5				45	4	—	6.87	7.20	7.56	7.96	8.91
CSELB 2006-070		7				45	4	—	7.39	7.75	8.14	8.57	9.60
CSELB 2006-080		8				45	4	—	8.44	8.85	9.29	9.79	10.97
CSELB 2006-080-6		8				50	6	—	8.44	8.85	9.29	9.79	10.97
CSELB 2006-090		9				45	4	—	9.49	9.94	10.45	11.01	12.34
CSELB 2006-100		10				50	4	—	10.53	11.04	11.60	12.23	13.71
CSELB 2006-100-6		10				50	6	—	10.53	11.04	11.60	12.23	13.71
CSELB 2006-120		12				50	4	—	12.63	13.24	13.92	14.66	16.44
CSELB 2007-020	R0.35	2	0.56	0.69	11°	45	4	—	2.16	2.25	2.35	2.46	2.73
CSELB 2007-040		4				45	4	—	4.25	4.45	4.66	4.90	5.47
CSELB 2007-060		6				45	4	—	6.34	6.64	6.97	7.34	8.21
CSELB 2007-080		8				45	4	—	8.44	8.84	9.28	9.78	10.95
CSELB 2008-020	R0.4	2	0.64	0.79	11°	45	4	—	2.15	2.24	2.34	2.45	2.72
CSELB 2008-020-6		2				50	6	—	2.15	2.24	2.34	2.45	2.72
CSELB 2008-030		3				45	4	—	3.20	3.34	3.50	3.67	4.09
CSELB 2008-030-6		3				50	6	—	3.20	3.34	3.50	3.67	4.09
CSELB 2008-040		4				45	4	—	4.25	4.44	4.65	4.89	5.45
CSELB 2008-040-6		4				50	6	—	4.25	4.44	4.65	4.89	5.45
CSELB 2008-050		5				45	4	—	5.29	5.54	5.81	6.11	6.82
CSELB 2008-060		6				45	4	—	6.34	6.64	6.97	7.33	8.19
CSELB 2008-060-6		6				50	6	—	6.34	6.64	6.97	7.33	8.19
CSELB 2008-070		7				45	4	—	7.39	7.74	8.12	8.55	9.56
CSELB 2008-080		8				45	4	—	8.44	8.84	9.28	9.77	10.93
CSELB 2008-080-6		8				50	6	—	8.44	8.84	9.28	9.77	10.93
CSELB 2008-090		9				45	4	—	9.48	9.93	10.43	10.99	12.30
CSELB 2008-100		10				50	4	—	10.53	11.03	11.59	12.21	13.67
CSELB 2008-100-6		10				50	6	—	10.53	11.03	11.59	12.21	13.67
CSELB 2008-120		12				45	4	—	12.62	13.23	13.90	14.64	16.41
CSELB 2008-160		16				50	4	—	16.81	17.62	18.52	19.52	21.88

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CSELB 2009-020		2				45	4	—	2.15	2.24	2.34	2.44	2.70
CSELB 2009-040		4				45	4	—	4.25	4.44	4.65	4.88	5.44
CSELB 2009-060		6				45	4	—	6.34	6.63	6.96	7.32	8.17
CSELB 2009-080		8				45	4	—	8.43	8.83	9.27	9.76	10.91
CSELB 2009-100	R0.45	10	0.72	0.89	11°	45	4	—	10.53	11.03	11.58	12.19	13.65
CSELB 2009-120		12				45	4	—	12.62	13.23	13.89	14.63	16.39
CSELB 2009-140		14				50	4	—	14.72	15.42	16.20	17.07	19.13
CSELB 2009-160		16				50	4	—	16.81	17.62	18.51	19.51	21.87
CSELB 2009-180		18				55	4	—	18.90	19.82	20.83	21.95	24.60
CSELB 2010-020		2				45	4	—	2.17	2.25	2.35	2.45	2.70
CSELB 2010-025		2.5				45	4	—	2.69	2.80	2.92	3.06	3.39
CSELB 2010-030		3				45	4	—	3.21	3.35	3.50	3.67	4.07
CSELB 2010-030-6		3				50	6	—	3.21	3.35	3.50	3.67	4.07
CSELB 2010-040		4				45	4	—	4.26	4.45	4.66	4.89	5.44
CSELB 2010-040-6		4				50	6	—	4.26	4.45	4.66	4.89	5.44
CSELB 2010-050		5				45	4	—	5.31	5.55	5.81	6.11	6.81
CSELB 2010-050-6		5				50	6	—	5.31	5.55	5.81	6.11	6.81
CSELB 2010-060		6				45	4	—	6.35	6.65	6.97	7.33	8.18
CSELB 2010-060-6		6				50	6	—	6.35	6.65	6.97	7.33	8.18
CSELB 2010-070		7				45	4	—	7.40	7.74	8.12	8.55	9.55
CSELB 2010-070-6		7				50	6	—	7.40	7.74	8.12	8.55	9.55
CSELB 2010-080		8				45	4	—	8.45	8.84	9.28	9.76	10.92
CSELB 2010-080-6	R0.5	8	0.8	0.98	11°	50	6	—	8.45	8.84	9.28	9.76	10.92
CSELB 2010-090		9				45	4	—	9.49	9.94	10.44	10.98	12.29
CSELB 2010-100		10				45	4	—	10.54	11.04	11.59	12.20	13.65
CSELB 2010-100-6		10				50	6	—	10.54	11.04	11.59	12.20	13.65
CSELB 2010-120		12				45	4	—	12.64	13.24	13.90	14.64	16.39
CSELB 2010-120-6		12				50	6	—	12.64	13.24	13.90	14.64	16.39
CSELB 2010-140		14				50	4	—	14.73	15.43	16.21	17.08	19.13
CSELB 2010-140-6		14				60	6	—	14.73	15.43	16.21	17.08	19.13
CSELB 2010-160		16				50	4	—	16.82	17.63	18.53	19.52	21.87
CSELB 2010-160-6		16				60	6	—	16.82	17.63	18.53	19.52	21.87
CSELB 2010-180		18				55	4	—	18.92	19.83	20.84	21.95	24.61
CSELB 2010-200		20				55	4	—	21.01	22.03	23.15	24.39	27.35
CSELB 2010-200-6		20				70	6	—	21.01	22.03	23.15	24.39	27.35
CSELB 2010-220-6		22				70	6	—	23.11	24.22	25.46	26.83	30.08
CSELB 2012-025		2.5				45	4	—	2.58	2.68	2.80	2.92	3.22
CSELB 2012-040		4				45	4	—	4.15	4.33	4.53	4.75	5.27
CSELB 2012-060		6				45	4	—	6.25	6.53	6.84	7.19	8.01
CSELB 2012-060-6		6				50	6	—	6.25	6.53	6.84	7.19	8.01
CSELB 2012-080		8				45	4	—	8.34	8.73	9.15	9.63	10.75
CSELB 2012-080-6		8				50	6	—	8.34	8.73	9.15	9.63	10.75
CSELB 2012-100		10				45	4	—	10.44	10.92	11.46	12.06	13.49
CSELB 2012-100-6	R0.6	10	0.96	1.19	11°	50	6	—	10.44	10.92	11.46	12.06	13.49
CSELB 2012-120		12				45	4	—	12.53	13.12	13.78	14.50	16.23
CSELB 2012-120-6		12				50	6	—	12.53	13.12	13.78	14.50	16.23
CSELB 2012-140		14				50	4	—	14.62	15.32	16.09	16.94	18.96
CSELB 2012-160		16				50	4	—	16.72	17.52	18.40	19.38	21.70
CSELB 2012-160-6		16				60	6	—	16.72	17.52	18.40	19.38	21.70
CSELB 2012-180		18				55	4	—	18.81	19.71	20.71	21.82	24.44
CSELB 2012-200		20				60	4	—	20.91	21.91	23.02	24.25	27.18

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CSELB 2014-060	R0.7	6	1.12	1.37	11°	45	4	—	6.30	6.58	6.89	7.23	8.04
CSELB 2014-080		8				45	4	—	8.39	8.77	9.20	9.67	10.78
CSELB 2014-120		12				45	4	—	12.58	13.17	13.82	14.54	16.26
CSELB 2014-160		16				50	4	—	16.77	17.56	18.44	19.42	21.74
CSELB 2015-030	R0.75	3	1.2	1.47	11°	45	4	—	3.15	3.28	3.41	3.56	3.92
CSELB 2015-040		4				45	4	—	4.20	4.37	4.57	4.78	5.29
CSELB 2015-060		6				45	4	—	6.29	6.57	6.88	7.22	8.03
CSELB 2015-060-6		6				50	6	—	6.29	6.57	6.88	7.22	8.03
CSELB 2015-080		8				45	4	—	8.39	8.77	9.19	9.66	10.77
CSELB 2015-080-6		8				50	6	—	8.39	8.77	9.19	9.66	10.77
CSELB 2015-100		10				45	4	—	10.48	10.97	11.50	12.09	13.50
CSELB 2015-100-6		10				50	6	—	10.48	10.97	11.50	12.09	13.50
CSELB 2015-120		12				45	4	—	12.58	13.16	13.81	14.53	16.24
CSELB 2015-120-6		12				50	6	—	12.58	13.16	13.81	14.53	16.24
CSELB 2015-140		14				50	4	—	14.67	15.36	16.12	16.97	18.98
CSELB 2015-160		16				50	4	—	16.76	17.56	18.43	19.41	21.72
CSELB 2015-160-6		16				60	6	—	16.76	17.56	18.43	19.41	21.72
CSELB 2015-180		18				55	4	—	18.86	19.76	20.75	21.85	24.46
CSELB 2015-200		20				55	4	—	20.95	21.95	23.06	24.28	No Interference
CSELB 2015-200-6		20				60	6	—	20.95	21.95	23.06	24.28	27.19
CSELB 2015-220		22				55	4	—	23.05	24.15	25.37	26.72	No Interference
CSELB 2015-250		25				65	4	—	26.19	27.45	28.84	30.38	No Interference
CSELB 2015-300		30				70	4	—	31.42	32.94	34.61	36.47	No Interference
CSELB 2016-040	R0.8	4	1.28	1.58	11°	45	4	—	4.17	4.34	4.53	4.74	5.24
CSELB 2016-080		8				45	4	—	8.36	8.74	9.15	9.61	10.71
CSELB 2016-120		12				45	4	—	12.55	13.13	13.77	14.49	16.19
CSELB 2016-160		16				50	4	—	16.74	17.53	18.40	19.37	21.66
CSELB 2016-200		20				55	4	—	20.92	21.92	23.02	24.24	No Interference
CSELB 2018-040	R0.9	4	1.44	1.78	11°	45	4	—	4.17	4.33	4.51	4.72	5.20
CSELB 2018-060		6				45	4	—	6.26	6.53	6.83	7.15	7.94
CSELB 2018-080		8				45	4	—	8.35	8.73	9.14	9.59	10.68
CSELB 2018-100		10				45	4	—	10.45	10.92	11.45	12.03	13.41
CSELB 2018-120		12				45	4	—	12.54	13.12	13.76	14.47	16.15
CSELB 2018-160		16				50	4	—	16.73	17.52	18.38	19.34	21.63
CSELB 2018-180		18				55	4	—	18.82	19.71	20.69	21.78	No Interference
CSELB 2018-200		20				55	4	—	20.92	21.91	23.00	24.22	No Interference
CSELB 2018-220		22				60	4	—	23.01	24.11	25.32	26.66	No Interference
CSELB 2018-250		25				65	4	—	26.15	27.40	28.78	30.32	No Interference
CSELB 2018-300		30				70	4	—	31.39	32.90	34.56	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CSELB 2020-030	R1	3	1.6	1.98	11°	45	4	—	3.11	3.22	3.34	3.48	3.79
CSELB 2020-040		4				45	4	—	4.16	4.32	4.50	4.70	5.16
CSELB 2020-040-6		4				50	6	—	4.16	4.32	4.50	4.70	5.16
CSELB 2020-060		6				45	4	—	6.26	6.52	6.81	7.13	7.90
CSELB 2020-060-6		6				50	6	—	6.26	6.52	6.81	7.13	7.90
CSELB 2020-080		8				45	4	—	8.35	8.72	9.12	9.57	10.64
CSELB 2020-080-6		8				50	6	—	8.35	8.72	9.12	9.57	10.64
CSELB 2020-100		10				45	4	—	10.44	10.91	11.43	12.01	13.38
CSELB 2020-100-6		10				50	6	—	10.44	10.91	11.43	12.01	13.38
CSELB 2020-120		12				45	4	—	12.54	13.11	13.74	14.45	16.12
CSELB 2020-120-6		12				50	6	—	12.54	13.11	13.74	14.45	16.12
CSELB 2020-130		13				45	4	—	13.59	14.21	14.90	15.67	17.49
CSELB 2020-140		14				50	4	—	14.63	15.31	16.06	16.89	18.85
CSELB 2020-160		16				50	4	—	16.73	17.51	18.37	19.32	No Interference
CSELB 2020-160-6		16				60	6	—	16.73	17.51	18.37	19.32	21.59
CSELB 2020-180		18				55	4	—	18.82	19.70	20.68	21.76	No Interference
CSELB 2020-200		20				55	4	—	20.91	21.90	22.99	24.20	No Interference
CSELB 2020-200-6		20				70	6	—	20.91	21.90	22.99	24.20	27.07
CSELB 2020-220		22				60	4	—	23.01	24.10	25.30	26.64	No Interference
CSELB 2020-250		25				65	4	—	26.15	27.39	28.77	No Interference	No Interference
CSELB 2020-250-6		25				80	6	—	26.15	27.39	28.77	30.29	33.92
CSELB 2020-270		27				65	4	—	28.24	29.59	31.08	No Interference	No Interference
CSELB 2020-300		30				70	4	—	31.38	32.89	34.55	No Interference	No Interference
CSELB 2020-300-6		30				80	6	—	31.38	32.89	34.55	36.39	No Interference
CSELB 2020-320		32				70	4	—	33.48	35.08	36.86	No Interference	No Interference
CSELB 2020-350		35				80	4	—	36.62	38.38	No Interference	No Interference	No Interference
CSELB 2020-350-6		35				80	6	—	36.62	38.38	40.32	42.48	No Interference
CSELB 2020-400		40				80	4	—	41.85	43.87	No Interference	No Interference	No Interference
CSELB 2020-400-6		40				90	6	—	41.85	43.87	46.10	48.58	No Interference
CSELB 2025-060	R1.25	6	2	2.45	11°	45	4	—	6.33	6.58	6.86	7.17	7.92
CSELB 2025-080		8				45	4	—	8.42	8.78	9.17	9.61	10.66
CSELB 2025-100		10				45	4	—	10.51	10.97	11.48	12.05	13.39
CSELB 2025-150		15				50	4	—	15.75	16.47	17.26	18.14	No Interference
CSELB 2025-200		20				55	4	—	20.98	21.96	23.04	No Interference	No Interference
CSELB 2025-250		25				65	4	—	26.22	27.45	28.82	No Interference	No Interference
CSELB 2025-300		30				70	4	—	31.45	32.95	No Interference	No Interference	No Interference
CSELB 2025-350		35				70	4	—	36.69	38.44	No Interference	No Interference	No Interference
CSELB 2030-060	R1.5	6	2.4	2.95	11°	60	6	—	6.31	6.55	6.82	7.12	7.83
CSELB 2030-060-3		6			—	60	3	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2030-060-4		6			11°	60	4	—	6.31	6.55	6.82	7.12	7.83
CSELB 2030-080		8				60	6	—	8.41	8.75	9.13	9.56	10.57
CSELB 2030-100		10				60	6	—	10.50	10.95	11.44	12.00	13.30
CSELB 2030-120		12				60	6	—	12.60	13.15	13.76	14.43	16.04
CSELB 2030-140		14				60	6	—	14.69	15.34	16.07	16.87	18.78
CSELB 2030-150		15				60	6	—	15.74	16.44	17.22	18.09	20.15
CSELB 2030-160		16				60	6	—	16.78	17.54	18.38	19.31	21.52
CSELB 2030-180		18				60	6	—	18.88	19.74	20.69	21.75	24.26
CSELB 2030-200		20				70	6	—	20.97	21.94	23.00	24.19	27.00
CSELB 2030-220		22				70	6	—	23.07	24.13	25.31	26.62	29.73
CSELB 2030-250		25				70	6	—	26.21	27.43	28.78	30.28	No Interference
CSELB 2030-270		27				70	6	—	28.30	29.63	31.09	32.72	No Interference
CSELB 2030-300		30				70	6	—	31.44	32.92	34.56	36.38	No Interference
CSELB 2030-320		32				80	6	—	33.54	35.12	36.87	38.81	No Interference
CSELB 2030-350		35				80	6	—	36.68	38.42	40.34	42.47	No Interference
CSELB 2030-400		40				80	6	—	41.91	43.91	46.12	No Interference	No Interference

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CSELB 2035-100	R1.75	10	2.8	3.45	11°	60	6	—	10.49	10.93	11.41	11.94	13.21
CSELB 2035-150		15				60	6	—	15.72	16.42	17.19	18.04	20.06
CSELB 2035-200		20				65	6	—	20.96	21.91	22.96	24.13	No Interference
CSELB 2035-250		25				70	6	—	26.19	27.40	28.74	30.23	No Interference
CSELB 2035-300		30				70	6	—	31.43	32.90	34.52	36.32	No Interference
CSELB 2035-400		40				90	6	—	41.90	43.88	46.08	No Interference	No Interference
CSELB 2035-450		45				90	6	—	47.13	49.38	No Interference	No Interference	No Interference
CSELB 2040-080	R2	8	3.2	3.95	11°	70	6	—	8.38	8.70	9.06	9.45	10.39
CSELB 2040-080-4		8			—	70	4	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2040-100		10			11°	70	6	—	10.48	10.90	11.37	11.89	13.12
CSELB 2040-120		12				70	6	—	12.57	13.10	13.68	14.33	15.86
CSELB 2040-140		14				70	6	—	14.67	15.30	15.99	16.76	18.60
CSELB 2040-150		15				70	6	—	15.71	16.39	17.15	17.98	19.97
CSELB 2040-160		16				70	6	—	16.76	17.49	18.30	19.20	No Interference
CSELB 2040-180		18				70	6	—	18.85	19.69	20.61	21.64	No Interference
CSELB 2040-200		20				70	6	—	20.95	21.89	22.93	24.08	No Interference
CSELB 2040-220		22				70	6	—	23.04	24.08	25.24	26.52	No Interference
CSELB 2040-250		25				70	6	—	26.18	27.38	28.70	30.17	No Interference
CSELB 2040-270		27				70	6	—	28.28	29.58	31.01	No Interference	No Interference
CSELB 2040-300		30				70	6	—	31.42	32.87	34.48	No Interference	No Interference
CSELB 2040-320		32				80	6	—	33.51	35.07	36.79	No Interference	No Interference
CSELB 2040-350		35				80	6	—	36.65	38.37	40.26	No Interference	No Interference
CSELB 2040-400		40				90	6	—	41.89	43.86	No Interference	No Interference	No Interference
CSELB 2040-450		45				90	6	—	47.12	49.35	No Interference	No Interference	No Interference
CSELB 2040-500		50				100	6	—	52.36	54.85	No Interference	No Interference	No Interference
CSELB 2040-600		60				120	6	—	62.83	No Interference	No Interference	No Interference	No Interference
CSELB 2050-100	R2.5	10	4	4.95	11°	70	6	—	10.45	10.85	11.29	11.78	No Interference
CSELB 2050-150		15				70	6	—	15.69	16.35	17.07	No Interference	No Interference
CSELB 2050-200		20				70	6	—	20.92	21.84	No Interference	No Interference	No Interference
CSELB 2050-250		25				70	6	—	26.16	27.33	No Interference	No Interference	No Interference
CSELB 2050-300		30				80	6	—	31.39	No Interference	No Interference	No Interference	No Interference
CSELB 2050-350		35				80	6	—	36.63	No Interference	No Interference	No Interference	No Interference
CSELB 2050-400		40				90	6	—	41.86	No Interference	No Interference	No Interference	No Interference
CSELB 2050-450		45				100	6	—	47.10	No Interference	No Interference	No Interference	No Interference
CSELB 2050-500		50				100	6	—	52.33	No Interference	No Interference	No Interference	No Interference
CSELB 2060-100	R3	10	4.8	5.95	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-150		15				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-180		18				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-200		20				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-220		22				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-250		25				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-270		27				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-300		30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-320		32				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-350		35				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-400		40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-450		45				100	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-500		50				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CSELB 2060-600		60				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for CSELB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-002	R0.05	0.2	54,000	85	0.004	0.004	54,000	85	0.004	0.004	48,000	55	0.002	0.002	48,000	55	0.002	0.002
2001-003		0.3	54,000	85	0.004	0.004	54,000	85	0.004	0.004	48,000	55	0.002	0.002	48,000	55	0.002	0.002
2001-005		0.5	54,000	75	0.004	0.004	54,000	75	0.004	0.004	48,000	35	0.002	0.002	48,000	35	0.002	0.002
20015-003	R0.075	0.3	54,000	160	0.007	0.009	54,000	160	0.007	0.009	48,000	90	0.004	0.004	48,000	90	0.004	0.004
20015-005		0.5	54,000	140	0.007	0.009	54,000	140	0.007	0.009	48,000	60	0.004	0.004	48,000	60	0.004	0.004
20015-010		1	54,000	100	0.003	0.005	54,000	100	0.003	0.005	48,000	60	0.001	0.002	48,000	60	0.001	0.002
2002-003	R0.1	0.3	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
2002-005		0.5	60,000	350	0.008	0.024	60,000	350	0.008	0.016	60,000	300	0.008	0.024	60,000	300	0.006	0.018
2002-0075		0.75	60,000	300	0.007	0.021	60,000	320	0.007	0.015	60,000	300	0.007	0.021	60,000	270	0.005	0.015
2002-010		1	60,000	250	0.006	0.018	60,000	250	0.005	0.015	60,000	250	0.006	0.018	60,000	220	0.005	0.015
2002-0125		1.25	54,000	225	0.005	0.016	54,000	215	0.004	0.013	60,000	225	0.005	0.016	54,000	195	0.004	0.013
2002-015		1.5	48,000	200	0.005	0.015	48,000	180	0.004	0.012	60,000	200	0.005	0.015	48,000	170	0.004	0.012
2002-0175		1.75	48,000	175	0.004	0.012	48,000	165	0.003	0.01	60,000	175	0.004	0.012	48,000	145	0.003	0.009
2002-020		2	48,000	150	0.003	0.009	48,000	150	0.003	0.009	60,000	150	0.003	0.009	48,000	120	0.003	0.007
2002-0225		2.25	44,000	125	0.003	0.007	44,000	125	0.003	0.007	53,000	125	0.002	0.007	44,000	110	0.002	0.005
2002-025		2.5	40,000	100	0.003	0.006	40,000	100	0.003	0.006	46,000	100	0.002	0.006	40,000	100	0.002	0.004
2002-030		3	33,000	50	0.002	0.003	33,000	50	0.002	0.003	33,000	50	0.002	0.003	33,000	50	0.002	0.002
2003-005	R0.15	0.5	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
2003-006		0.6	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
2003-0075		0.75	43,000	500	0.012	0.036	43,000	500	0.012	0.024	54,000	450	0.012	0.036	43,000	450	0.008	0.024
2003-010		1	43,000	450	0.01	0.03	43,000	450	0.008	0.024	54,000	400	0.01	0.03	43,000	400	0.007	0.021
2003-0125		1.25	43,000	425	0.009	0.027	43,000	425	0.007	0.022	54,000	400	0.009	0.027	43,000	400	0.006	0.019
2003-015		1.5	43,000	400	0.008	0.024	43,000	400	0.007	0.021	54,000	400	0.008	0.024	43,000	400	0.006	0.018
2003-0175		1.75	41,500	350	0.007	0.021	41,500	350	0.006	0.019	52,000	350	0.007	0.022	41,500	350	0.005	0.016
2003-020		2	40,000	300	0.006	0.018	40,000	300	0.006	0.018	50,000	300	0.007	0.021	40,000	300	0.005	0.015
2003-0225		2.25	40,000	275	0.005	0.016	40,000	275	0.005	0.016	48,000	275	0.006	0.018	40,000	275	0.004	0.013
2003-025		2.5	40,000	250	0.005	0.015	40,000	250	0.005	0.015	46,000	250	0.005	0.015	40,000	250	0.004	0.012
2003-030		3	38,000	200	0.004	0.012	38,000	200	0.004	0.012	42,000	200	0.004	0.012	38,000	200	0.004	0.008
2003-040		4	35,000	100	0.003	0.009	35,000	100	0.003	0.009	35,000	100	0.003	0.009	32,000	100	0.003	0.005
2003-050		5	26,000	60	0.003	0.004	26,000	60	0.003	0.004	26,000	60	0.003	0.004	26,000	60	0.003	0.003
2004-005	R0.2	0.5	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2004-0075		0.75	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2004-010		1	35,000	1,200	0.03	0.09	35,000	1,200	0.02	0.04	50,000	650	0.025	0.075	35,000	650	0.015	0.045
2004-0125		1.25	35,000	1,050	0.025	0.075	35,000	1,050	0.018	0.036	50,000	600	0.022	0.067	35,000	575	0.013	0.04
2004-015		1.5	35,000	900	0.02	0.06	35,000	900	0.016	0.033	50,000	550	0.02	0.06	35,000	500	0.012	0.036
2004-0175		1.75	35,000	750	0.017	0.052	35,000	750	0.013	0.033	50,000	525	0.017	0.052	35,000	450	0.011	0.033
2004-020		2	35,000	600	0.015	0.045	35,000	600	0.011	0.033	50,000	500	0.015	0.045	35,000	400	0.01	0.03
2004-0225		2.25	35,000	525	0.013	0.04	35,000	525	0.01	0.031	48,000	475	0.013	0.04	35,000	380	0.01	0.027
2004-025		2.5	35,000	450	0.012	0.036	35,000	450	0.01	0.03	46,000	450	0.012	0.036	35,000	360	0.01	0.025
2004-030		3	35,000	400	0.01	0.03	35,000	400	0.008	0.024	42,000	400	0.01	0.03	35,000	330	0.007	0.021
2004-035		3.5	35,000	350	0.007	0.02	35,000	350	0.006	0.018	38,000	350	0.007	0.021	35,000	300	0.007	0.018
2004-040		4	35,000	300	0.005	0.015	35,000	300	0.005	0.015	35,000	300	0.005	0.015	35,000	250	0.005	0.015
2004-045		4.5	32,000	230	0.004	0.012	32,000	230	0.004	0.012	32,000	230	0.004	0.012	32,000	200	0.004	0.01
2004-050		5	30,000	160	0.003	0.01	30,000	160	0.003	0.01	30,000	160	0.003	0.01	30,000	150	0.003	0.008
2004-060		6	23,000	90	0.003	0.005	23,000	90	0.003	0.005	23,000	90	0.003	0.005	23,000	80	0.003	0.004

Milling Conditions for CSELB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2005-010	R0.25	1	34,000	1,300	0.035	0.105	34,000	1,300	0.03	0.06	45,000	900	0.03	0.09	32,000	900	0.02	0.06
2005-0125		1.25	34,000	1,150	0.032	0.097	34,000	1,150	0.027	0.055	45,000	850	0.027	0.082	32,000	850	0.019	0.057
2005-015		1.5	34,000	1,000	0.03	0.09	34,000	1,000	0.025	0.05	45,000	800	0.025	0.075	32,000	800	0.018	0.054
2005-0175		1.75	34,000	900	0.027	0.082	34,000	900	0.024	0.048	45,000	750	0.023	0.07	32,000	750	0.017	0.051
2005-020		2	34,000	800	0.025	0.075	34,000	800	0.023	0.046	45,000	700	0.022	0.066	32,000	700	0.016	0.048
2005-0225		2.25	34,000	750	0.022	0.067	34,000	750	0.019	0.045	45,000	650	0.02	0.06	32,000	650	0.015	0.046
2005-025		2.5	34,000	700	0.02	0.06	34,000	700	0.015	0.045	45,000	600	0.018	0.054	32,000	600	0.015	0.045
2005-030		3	32,000	550	0.016	0.048	32,000	550	0.012	0.036	41,000	550	0.014	0.042	31,000	500	0.012	0.036
2005-035		3.5	32,000	500	0.014	0.042	32,000	500	0.011	0.033	38,000	500	0.012	0.036	30,500	450	0.01	0.03
2005-040		4	31,000	450	0.012	0.036	31,000	450	0.01	0.03	35,000	450	0.01	0.03	30,000	390	0.01	0.03
2005-045		4.5	30,000	390	0.01	0.03	30,000	390	0.008	0.024	32,000	390	0.008	0.024	29,500	350	0.008	0.024
2005-050		5	29,000	340	0.007	0.021	29,000	340	0.007	0.021	29,000	340	0.006	0.018	29,000	300	0.006	0.018
2005-055		5.5	26,000	280	0.007	0.021	26,000	280	0.007	0.021	26,000	280	0.006	0.018	26,000	250	0.006	0.018
2005-060		6	24,000	220	0.006	0.018	24,000	220	0.006	0.018	24,000	220	0.005	0.015	24,000	200	0.005	0.015
2005-070		7	21,000	180	0.005	0.015	21,000	180	0.005	0.015	21,000	180	0.004	0.012	21,000	160	0.004	0.012
2005-080		8	19,000	130	0.004	0.012	19,000	130	0.004	0.012	19,000	130	0.003	0.009	19,000	110	0.003	0.009
2005-090		9	18,000	120	0.003	0.009	18,000	120	0.003	0.009	18,000	120	0.002	0.008	18,000	100	0.002	0.008
2005-100		10	17,000	100	0.003	0.009	17,000	100	0.003	0.009	17,000	100	0.002	0.006	17,000	80	0.002	0.006
2006-010	R0.3	1	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
2006-0125		1.25	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
2006-015		1.5	33,000	1,500	0.05	0.15	33,000	1,500	0.04	0.08	40,000	1,300	0.045	0.09	30,000	1,300	0.04	0.06
2006-0175		1.75	33,000	1,450	0.047	0.142	33,000	1,450	0.038	0.076	40,000	1,250	0.045	0.09	30,000	1,250	0.038	0.057
2006-020		2	33,000	1,400	0.045	0.135	33,000	1,400	0.036	0.072	40,000	1,200	0.045	0.09	30,000	1,200	0.036	0.054
2006-0225		2.25	33,000	1,250	0.042	0.127	33,000	1,300	0.034	0.069	40,000	1,100	0.042	0.085	30,000	1,150	0.034	0.053
2006-025		2.5	33,000	1,100	0.04	0.12	33,000	1,200	0.033	0.066	40,000	1,000	0.04	0.08	30,000	1,100	0.033	0.053
2006-030		3	33,000	900	0.035	0.105	33,000	900	0.025	0.066	40,000	800	0.03	0.075	30,000	900	0.026	0.052
2006-035		3.5	32,000	900	0.03	0.09	32,000	800	0.022	0.066	38,000	650	0.025	0.075	28,000	720	0.02	0.06
2006-040		4	31,000	700	0.027	0.081	31,000	700	0.02	0.06	35,000	560	0.022	0.066	28,000	600	0.018	0.054
2006-045		4.5	29,000	500	0.024	0.072	29,000	550	0.017	0.051	32,000	500	0.018	0.054	26,000	500	0.015	0.045
2006-050		5	29,000	440	0.018	0.054	29,000	440	0.015	0.045	29,000	440	0.015	0.045	26,000	440	0.012	0.036
2006-055		5.5	26,000	410	0.016	0.048	26,000	410	0.014	0.042	26,000	410	0.014	0.042	25,000	410	0.01	0.03
2006-060		6	24,000	380	0.012	0.036	24,000	380	0.012	0.036	24,000	380	0.01	0.03	24,000	380	0.008	0.024
2006-065		6.5	22,000	340	0.011	0.033	22,000	340	0.011	0.033	22,000	340	0.009	0.027	22,000	340	0.007	0.021
2006-070		7	21,000	310	0.01	0.03	21,000	310	0.01	0.03	21,000	310	0.008	0.024	21,000	310	0.006	0.018
2006-080		8	18,000	240	0.008	0.024	18,000	240	0.008	0.024	18,000	240	0.006	0.018	18,000	240	0.005	0.015
2006-090		9	16,000	180	0.007	0.021	16,000	180	0.007	0.021	16,000	180	0.005	0.015	16,000	180	0.004	0.012
2006-100		10	15,000	160	0.006	0.018	15,000	160	0.006	0.018	15,000	160	0.004	0.012	15,000	160	0.003	0.01
2006-120		12	14,000	150	0.005	0.015	14,000	150	0.005	0.015	14,000	150	0.003	0.009	14,000	150	0.002	0.008
2007-020	R0.35	2	32,000	1,800	0.07	0.21	32,000	1,600	0.05	0.1	38,000	1,600	0.06	0.12	28,000	1,600	0.05	0.075
2007-040		4	32,000	1,000	0.05	0.15	32,000	900	0.03	0.09	34,000	800	0.04	0.12	28,000	800	0.03	0.06
2007-060		6	26,000	550	0.022	0.066	26,000	550	0.018	0.054	26,000	500	0.018	0.054	23,000	500	0.014	0.042
2007-080		8	19,000	340	0.012	0.036	19,000	340	0.012	0.036	19,000	320	0.01	0.03	19,000	320	0.008	0.024

Milling Conditions for CSELB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2008-020	R0.4	2	30,000	2,200	0.1	0.3	30,000	1,800	0.06	0.12	35,000	1,800	0.07	0.14	25,000	1,700	0.07	0.1
2008-030		3	30,000	1,700	0.08	0.24	30,000	1,600	0.05	0.1	35,000	1,600	0.06	0.12	25,000	1,500	0.06	0.09
2008-040		4	30,000	1,400	0.07	0.21	30,000	1,300	0.04	0.1	35,000	1,300	0.05	0.12	25,000	1,200	0.045	0.09
2008-050		5	30,000	1,100	0.06	0.18	30,000	1,100	0.035	0.1	30,000	1,100	0.04	0.12	25,000	1,000	0.04	0.08
2008-060		6	27,000	900	0.04	0.12	27,000	900	0.025	0.075	27,000	800	0.03	0.09	23,000	800	0.023	0.069
2008-070		7	24,000	700	0.025	0.075	24,000	700	0.022	0.066	24,000	600	0.02	0.06	21,000	600	0.015	0.045
2008-080		8	19,000	450	0.02	0.06	19,000	450	0.02	0.06	19,000	450	0.015	0.045	19,000	450	0.01	0.03
2008-090		9	18,000	400	0.016	0.048	18,000	400	0.016	0.048	18,000	360	0.013	0.039	18,000	360	0.009	0.027
2008-100		10	15,000	350	0.012	0.036	15,000	350	0.012	0.036	15,000	300	0.01	0.03	15,000	300	0.007	0.021
2008-120		12	14,000	300	0.01	0.03	14,000	300	0.01	0.03	14,000	240	0.006	0.018	14,000	240	0.006	0.018
2008-160		16	13,500	240	0.006	0.018	13,500	240	0.006	0.018	13,500	190	0.003	0.01	13,500	190	0.003	0.01
2009-020	R0.45	2	30,000	2,100	0.11	0.33	30,000	1,600	0.07	0.14	33,000	1,700	0.08	0.16	24,000	1,600	0.08	0.12
2009-040		4	30,000	1,600	0.08	0.24	30,000	1,500	0.055	0.12	33,000	1,400	0.06	0.14	24,000	1,300	0.05	0.1
2009-060		6	27,000	1,100	0.06	0.18	27,000	1,100	0.035	0.1	27,000	850	0.04	0.12	22,000	800	0.034	0.1
2009-080		8	22,000	710	0.03	0.09	22,000	700	0.023	0.069	22,000	560	0.021	0.063	18,500	550	0.017	0.051
2009-100		10	18,000	500	0.02	0.06	18,000	500	0.018	0.054	18,000	430	0.015	0.045	18,000	430	0.01	0.03
2009-120		12	16,000	420	0.015	0.045	16,000	420	0.015	0.045	16,000	350	0.009	0.027	16,000	350	0.007	0.021
2009-140		14	14,000	380	0.012	0.042	14,000	380	0.012	0.042	14,000	280	0.006	0.018	14,000	280	0.006	0.018
2009-160		16	13,500	360	0.01	0.04	13,500	360	0.01	0.04	13,500	200	0.004	0.016	13,500	200	0.004	0.016
2009-180		18	13,000	340	0.006	0.024	13,000	340	0.006	0.024	13,000	120	0.003	0.012	13,000	120	0.003	0.012
2010-020	R0.5	2	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.09	0.18	22,000	1,600	0.09	0.13
2010-025		2.5	30,000	2,000	0.12	0.36	30,000	1,600	0.08	0.16	30,000	1,600	0.09	0.18	22,000	1,600	0.09	0.13
2010-030		3	30,000	1,800	0.11	0.33	24,000	1,600	0.07	0.14	30,000	1,500	0.08	0.16	21,500	1,400	0.08	0.12
2010-040		4	30,000	1,700	0.09	0.27	24,000	1,500	0.065	0.13	30,000	1,300	0.075	0.15	21,500	1,300	0.075	0.1
2010-050		5	30,000	1,600	0.08	0.24	24,000	1,400	0.06	0.12	30,000	1,200	0.07	0.14	21,500	1,200	0.06	0.09
2010-060		6	30,000	1,400	0.06	0.18	18,000	1,200	0.04	0.12	30,000	1,100	0.06	0.12	21,500	1,100	0.05	0.1
2010-070		7	27,000	1,200	0.05	0.15	17,000	1,000	0.03	0.09	24,000	800	0.04	0.12	20,000	900	0.03	0.09
2010-080		8	24,000	1,000	0.04	0.12	16,500	900	0.027	0.081	18,500	620	0.035	0.1	18,500	580	0.025	0.1
2010-090		9	22,000	720	0.035	0.11	15,500	700	0.02	0.08	16,500	550	0.025	0.1	16,500	500	0.02	0.08
2010-100		10	20,000	650	0.03	0.09	15,000	500	0.018	0.072	14,800	490	0.02	0.08	14,800	430	0.015	0.06
2010-120		12	18,000	600	0.02	0.08	15,000	500	0.016	0.064	13,400	380	0.01	0.05	13,400	380	0.008	0.04
2010-140		14	16,000	530	0.015	0.06	14,000	460	0.015	0.06	12,000	350	0.008	0.04	12,000	350	0.006	0.03
2010-160		16	14,000	460	0.014	0.056	14,000	460	0.014	0.056	10,500	250	0.005	0.025	10,500	250	0.005	0.025
2010-180		18	13,500	440	0.012	0.06	13,500	440	0.012	0.06	9,500	200	0.004	0.02	9,500	200	0.004	0.02
2010-200		20	13,000	430	0.008	0.04	13,000	430	0.008	0.04	9,000	150	0.003	0.015	9,000	150	0.003	0.015
2010-220		22	12,000	380	0.007	0.035	12,000	380	0.007	0.035	8,500	120	0.002	0.01	8,500	120	0.002	0.01
2012-025	R0.6	2.5	30,000	2,000	0.13	0.39	30,000	1,600	0.09	0.18	30,000	1,600	0.1	0.2	18,000	1,600	0.1	0.15
2012-040		4	30,000	1,800	0.12	0.36	20,000	1,500	0.08	0.16	30,000	1,400	0.09	0.18	18,000	1,400	0.09	0.13
2012-060		6	30,000	1,600	0.09	0.27	20,000	1,200	0.07	0.14	30,000	1,100	0.08	0.16	18,000	1,100	0.08	0.12
2012-080		8	25,000	1,200	0.06	0.18	15,000	900	0.05	0.12	20,000	800	0.06	0.15	16,500	750	0.05	0.11
2012-100		10	20,000	900	0.05	0.15	13,500	650	0.035	0.11	16,000	640	0.045	0.12	15,500	550	0.03	0.09
2012-120		12	16,500	600	0.035	0.12	12,500	480	0.025	0.1	12,000	440	0.03	0.12	12,500	430	0.018	0.072
2012-140		14	14,500	520	0.025	0.1	12,500	480	0.022	0.088	11,000	400	0.015	0.06	11,500	370	0.014	0.056
2012-160		16	13,000	470	0.018	0.072	11,500	440	0.018	0.072	10,000	350	0.01	0.05	10,000	350	0.01	0.05
2012-180		18	12,000	460	0.014	0.07	11,250	440	0.014	0.07	9,500	260	0.008	0.04	9,500	260	0.007	0.035
2012-200		20	11,000	440	0.013	0.065	11,000	440	0.013	0.065	9,000	220	0.006	0.03	9,000	220	0.005	0.025

Milling Conditions for CSELB


WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2014-060	R0.7	6	30,000	1,700	0.11	0.33	23,000	1,500	0.08	0.16	30,000	1,300	0.09	0.18	16,000	1,200	0.09	0.13
2014-080		8	30,000	1,400	0.09	0.27	17,000	1,000	0.06	0.15	30,000	1,000	0.07	0.17	15,000	900	0.06	0.12
2014-120		12	17,000	900	0.06	0.18	13,000	600	0.04	0.12	13,000	580	0.045	0.14	12,500	550	0.03	0.1
2014-160		16	12,500	540	0.028	0.12	11,000	500	0.024	0.1	9,500	380	0.016	0.08	9,500	380	0.015	0.06
2015-030	R0.75	3	30,000	2,000	0.15	0.45	30,000	1,600	0.12	0.24	30,000	1,700	0.12	0.24	18,000	1,500	0.12	0.18
2015-040		4	30,000	1,800	0.14	0.42	30,000	1,500	0.11	0.22	30,000	1,600	0.11	0.22	18,000	1,400	0.11	0.17
2015-060		6	30,000	1,800	0.12	0.36	23,000	1,300	0.1	0.2	30,000	1,400	0.1	0.2	15,000	1,200	0.1	0.16
2015-080		8	30,000	1,600	0.11	0.33	18,000	1,100	0.08	0.16	30,000	1,200	0.08	0.2	14,000	1,000	0.08	0.16
2015-100		10	23,000	1,200	0.09	0.27	15,000	850	0.06	0.15	23,500	900	0.06	0.18	14,000	700	0.05	0.15
2015-120		12	16,000	900	0.07	0.21	13,000	600	0.05	0.15	13,000	650	0.05	0.15	13,000	550	0.03	0.12
2015-140		14	14,500	700	0.05	0.19	10,500	550	0.04	0.12	10,500	500	0.04	0.12	10,500	470	0.025	0.1
2015-160		16	13,000	650	0.04	0.16	10,000	550	0.03	0.12	8,850	400	0.03	0.12	8,850	390	0.02	0.08
2015-180		18	12,000	580	0.03	0.15	10,000	510	0.025	0.1	8,500	350	0.018	0.09	8,500	360	0.014	0.07
2015-200		20	10,500	530	0.02	0.1	9,200	470	0.02	0.1	8,000	320	0.012	0.06	8,000	320	0.012	0.06
2015-220		22	10,000	500	0.015	0.075	9,000	460	0.015	0.075	7,500	270	0.01	0.05	7,500	270	0.008	0.04
2015-250		25	9,000	440	0.014	0.07	8,750	440	0.014	0.07	7,250	250	0.008	0.04	7,250	250	0.006	0.03
2015-300		30	8,500	420	0.012	0.06	8,500	420	0.012	0.06	7,000	130	0.006	0.03	7,000	130	0.004	0.02
2016-040	R0.8	4	30,000	2,000	0.16	0.48	30,000	1,600	0.12	0.24	30,000	1,800	0.12	0.36	18,000	1,400	0.1	0.2
2016-080		8	30,000	1,700	0.15	0.45	15,000	1,100	0.1	0.2	30,000	1,500	0.12	0.24	13,500	1,000	0.08	0.24
2016-120		12	23,000	1,200	0.1	0.3	11,000	700	0.06	0.18	18,000	1,000	0.06	0.18	12,500	650	0.04	0.16
2016-160		16	15,000	800	0.05	0.2	10,000	530	0.034	0.13	10,000	530	0.035	0.14	9,000	420	0.02	0.1
2016-200		20	11,000	580	0.034	0.17	9,400	490	0.025	0.12	8,500	400	0.018	0.09	7,800	380	0.014	0.07
2018-040	R0.9	4	30,000	2,000	0.18	0.54	30,000	1,800	0.16	0.32	30,000	1,900	0.16	0.48	16,000	1,300	0.14	0.28
2018-060		6	30,000	1,800	0.18	0.52	24,000	1,500	0.15	0.29	30,000	1,700	0.16	0.4	14,000	1,200	0.13	0.27
2018-080		8	30,000	1,800	0.17	0.5	18,000	1,200	0.13	0.26	30,000	1,700	0.16	0.32	12,000	1,000	0.11	0.26
2018-100		10	30,000	1,800	0.16	0.48	15,000	1,100	0.11	0.23	24,000	1,400	0.12	0.28	12,000	900	0.09	0.23
2018-120		12	24,000	1,450	0.12	0.36	13,000	1,000	0.08	0.2	18,000	1,100	0.09	0.23	12,000	750	0.07	0.21
2018-160		16	15,000	900	0.07	0.3	12,000	750	0.05	0.18	15,000	750	0.04	0.14	9,500	480	0.025	0.11
2018-180		18	13,000	800	0.06	0.24	11,000	650	0.04	0.16	11,000	600	0.035	0.14	8,800	440	0.02	0.1
2018-200		20	11,500	650	0.05	0.2	9,500	600	0.03	0.15	8,500	450	0.025	0.11	8,300	420	0.018	0.08
2018-220		22	10,000	590	0.035	0.18	8,500	550	0.03	0.14	8,000	400	0.02	0.1	7,800	400	0.015	0.075
2018-250		25	8,000	500	0.035	0.17	8,000	480	0.025	0.12	7,000	350	0.018	0.09	7,000	350	0.012	0.06
2018-300		30	7,500	450	0.025	0.13	7,500	420	0.02	0.08	6,500	280	0.014	0.07	6,500	280	0.008	0.04

Milling Conditions for CSELB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2020-030	R1	3	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
2020-040		4	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	16,000	1,300	0.17	0.5
2020-060		6	30,000	2,000	0.2	0.6	30,000	2,000	0.21	0.42	30,000	2,000	0.2	0.6	14,000	1,100	0.15	0.4
2020-080		8	30,000	2,000	0.2	0.6	30,000	2,000	0.18	0.36	30,000	2,000	0.16	0.56	12,000	950	0.12	0.4
2020-100		10	30,000	2,000	0.2	0.6	30,000	2,000	0.14	0.42	30,000	2,000	0.13	0.45	10,800	850	0.1	0.4
2020-120		12	30,000	2,000	0.18	0.54	30,000	2,000	0.12	0.36	30,000	2,000	0.1	0.35	10,800	850	0.08	0.32
2020-130		13	26,000	1,700	0.17	0.52	26,000	1,700	0.11	0.34	25,000	1,600	0.09	0.3	10,800	850	0.07	0.28
2020-140		14	22,000	1,450	0.15	0.5	22,000	1,450	0.11	0.33	20,000	1,300	0.08	0.24	10,800	850	0.06	0.24
2020-160		16	15,000	1,000	0.1	0.4	15,000	1,000	0.07	0.28	10,800	700	0.06	0.18	10,800	600	0.03	0.15
2020-180		18	13,500	900	0.08	0.32	13,500	900	0.06	0.24	9,700	600	0.05	0.15	9,700	520	0.025	0.12
2020-200		20	12,000	800	0.07	0.28	12,000	800	0.05	0.2	8,650	500	0.04	0.16	8,650	450	0.02	0.1
2020-220		22	10,500	700	0.05	0.25	10,500	700	0.04	0.2	8,200	470	0.03	0.12	8,200	440	0.018	0.09
2020-250		25	9,000	600	0.04	0.2	9,000	600	0.035	0.17	7,800	440	0.025	0.1	7,800	440	0.016	0.08
2020-270		27	8,000	530	0.037	0.18	8,000	530	0.032	0.16	7,400	390	0.022	0.09	7,400	390	0.013	0.06
2020-300		30	7,000	470	0.035	0.17	7,000	470	0.03	0.15	7,000	350	0.02	0.08	7,000	350	0.01	0.05
2020-320		32	6,750	450	0.032	0.16	6,750	450	0.027	0.13	6,550	300	0.017	0.07	6,550	300	0.009	0.04
2020-350		35	6,500	430	0.03	0.15	6,500	430	0.025	0.12	6,150	250	0.015	0.06	6,150	250	0.008	0.04
2020-400		40	6,500	430	0.02	0.1	6,500	430	0.02	0.1	5,250	150	0.01	0.05	5,250	150	0.006	0.03
2025-060	R1.25	6	27,000	2,300	0.28	0.75	27,000	2,300	0.25	0.5	27,000	2,300	0.25	0.75	13,000	1,100	0.21	0.63
2025-080		8	27,000	2,300	0.28	0.75	27,000	2,300	0.25	0.5	27,000	2,300	0.25	0.75	13,000	1,100	0.21	0.63
2025-100		10	25,000	2,100	0.26	0.67	25,000	2,100	0.23	0.46	24,000	2,200	0.2	0.65	11,000	930	0.14	0.44
2025-150		15	22,000	1,950	0.23	0.59	22,000	1,950	0.15	0.45	20,000	1,600	0.13	0.42	9,000	720	0.08	0.32
2025-200		20	11,000	1,150	0.14	0.38	11,000	1,150	0.1	0.3	8,000	600	0.06	0.24	7,600	470	0.04	0.12
2025-250		25	8,300	1,000	0.09	0.27	8,300	1,000	0.06	0.24	6,200	450	0.045	0.18	5,800	400	0.03	0.1
2025-300		30	7,000	700	0.06	0.24	7,000	700	0.05	0.2	5,000	380	0.03	0.12	4,800	360	0.022	0.088
2025-350		35	5,500	530	0.04	0.2	5,500	530	0.035	0.17	4,200	300	0.025	0.1	4,200	270	0.015	0.06
2030-060	R1.5	6	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76
2030-080		8	24,000	2,500	0.32	0.9	24,000	2,500	0.32	0.9	24,000	2,500	0.3	0.9	14,000	1,400	0.25	0.76
2030-100		10	22,000	2,300	0.28	0.8	22,000	2,300	0.28	0.8	24,000	2,500	0.25	0.75	13,000	1,200	0.25	0.76
2030-120		12	22,000	2,300	0.28	0.7	22,000	2,300	0.28	0.7	20,000	2,100	0.2	0.65	10,700	1,000	0.18	0.54
2030-140		14	20,000	2,100	0.24	0.6	20,000	2,100	0.24	0.6	18,000	1,850	0.18	0.5	9,400	800	0.16	0.48
2030-150		15	20,000	2,100	0.24	0.6	20,000	2,100	0.24	0.6	17,000	1,750	0.17	0.5	9,200	750	0.14	0.42
2030-160		16	20,000	2,100	0.24	0.6	20,000	2,100	0.24	0.6	16,000	1,650	0.16	0.5	9,000	700	0.14	0.42
2030-180		18	17,000	1,950	0.22	0.5	17,000	1,950	0.22	0.5	13,500	1,300	0.14	0.43	8,000	650	0.12	0.36
2030-200		20	14,000	1,800	0.2	0.45	14,000	1,800	0.2	0.45	11,000	1,000	0.12	0.36	7,000	600	0.1	0.3
2030-220		22	11,000	1,500	0.18	0.38	11,000	1,500	0.18	0.38	8,700	750	0.1	0.3	6,300	490	0.08	0.24
2030-250		25	8,000	1,250	0.16	0.32	8,000	1,250	0.16	0.32	6,400	510	0.08	0.24	5,600	390	0.06	0.18
2030-270		27	7,000	1,100	0.13	0.31	7,000	1,100	0.13	0.31	5,500	480	0.06	0.22	4,700	380	0.05	0.15
2030-300		30	6,000	1,000	0.1	0.3	6,000	1,000	0.1	0.3	4,600	450	0.05	0.2	3,900	370	0.04	0.12
2030-320		32	5,700	900	0.085	0.29	5,700	900	0.085	0.29	3,900	380	0.045	0.18	3,400	320	0.035	0.11
2030-350		35	5,500	800	0.07	0.28	5,500	800	0.07	0.28	3,300	320	0.04	0.16	2,900	270	0.03	0.1
2030-400		40	4,500	700	0.05	0.25	4,500	700	0.05	0.25	2,700	240	0.03	0.12	2,300	210	0.02	0.08

Milling Conditions for CSELB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				CARBON STEELS / ALLOY STEELS S45C / S50C / SK / SCM (~325HB)				PREHARDENED STEELS NAK80 / STAVAX / HPM38 (30~45HRC)				HARDENED STEELS STAVAX / HPM38 / SKD61 (45~55HRC)			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2035-100	R1.75	10	24,000	2,700	0.35	1	24,000	2,700	0.35	1	21,000	2,400	0.35	1	12,000	1,700	0.3	0.9
2035-150		15	20,000	2,200	0.29	0.8	20,000	2,200	0.29	0.8	17,000	2,000	0.25	0.7	9,100	1,000	0.19	0.57
2035-200		20	15,000	1,800	0.24	0.6	15,000	1,800	0.24	0.6	12,000	1,450	0.14	0.45	6,800	600	0.13	0.39
2035-250		25	10,000	1,600	0.2	0.47	10,000	1,600	0.2	0.47	8,500	950	0.12	0.34	6,000	540	0.09	0.27
2035-300		30	6,900	1,200	0.18	0.36	6,900	1,200	0.18	0.36	5,500	480	0.09	0.24	4,800	380	0.06	0.18
2035-400		40	4,500	780	0.07	0.3	4,500	780	0.07	0.3	3,000	310	0.04	0.18	2,800	260	0.035	0.11
2035-450		45	3,900	680	0.06	0.26	3,900	680	0.06	0.26	2,300	240	0.03	0.14	2,000	200	0.025	0.1
2040-080	R2	8	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
2040-100		10	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	11,000	2,000	0.34	1
2040-120		12	24,000	2,900	0.4	1.2	24,000	2,900	0.4	1.2	18,000	2,400	0.4	1.2	9,700	1,500	0.28	0.85
2040-140		14	21,000	2,630	0.35	1.1	21,000	2,630	0.35	1.1	15,000	2,150	0.3	1.1	9,700	1,200	0.28	0.8
2040-150		15	19,000	2,350	0.32	1	19,000	2,350	0.32	1	15,000	2,150	0.3	1	8,800	1,100	0.24	0.7
2040-160		16	18,000	2,250	0.3	1	18,000	2,250	0.3	1	15,000	2,150	0.3	0.9	8,000	1,000	0.2	0.6
2040-180		18	16,500	2,050	0.3	0.95	16,500	2,050	0.3	0.95	13,500	1,950	0.25	0.8	7,500	850	0.17	0.5
2040-200		20	15,000	1,900	0.3	0.9	15,000	1,900	0.3	0.9	12,000	1,750	0.2	0.7	7,000	750	0.15	0.45
2040-220		22	13,500	1,700	0.27	0.8	13,500	1,700	0.27	0.8	10,500	1,500	0.17	0.6	6,500	650	0.13	0.4
2040-250		25	12,000	1,550	0.25	0.7	12,000	1,550	0.25	0.7	9,000	1,300	0.15	0.5	6,000	560	0.12	0.36
2040-270		27	9,500	1,450	0.22	0.6	9,500	1,450	0.22	0.6	8,000	1,050	0.12	0.4	5,500	510	0.1	0.28
2040-300		30	7,000	1,400	0.2	0.5	7,000	1,400	0.2	0.5	7,000	850	0.1	0.3	5,000	460	0.08	0.2
2040-320		32	6,500	1,300	0.2	0.45	6,500	1,300	0.2	0.45	5,900	650	0.1	0.27	4,500	410	0.075	0.18
2040-350		35	6,000	1,200	0.2	0.4	6,000	1,200	0.2	0.4	4,800	450	0.1	0.25	4,000	370	0.07	0.17
2040-400		40	4,000	1,000	0.11	0.33	4,000	1,000	0.11	0.33	3,450	400	0.06	0.24	2,900	270	0.06	0.15
2040-450		45	3,800	760	0.08	0.32	3,800	760	0.08	0.32	2,700	300	0.05	0.2	2,300	240	0.04	0.12
2040-500		50	3,400	680	0.07	0.28	3,400	680	0.07	0.28	2,000	240	0.04	0.16	1,700	190	0.03	0.12
2040-600		60	3,000	600	0.05	0.2	3,000	600	0.05	0.2	1,800	220	0.03	0.12	1,600	170	0.02	0.08
2050-100	R2.5	10	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,750	2,400	0.45	1.4	8,800	1,800	0.42	1.2
2050-150		15	18,000	3,000	0.5	1.5	18,000	3,000	0.5	1.5	13,750	2,400	0.45	1.4	7,800	1,300	0.34	1
2050-200		20	14,000	2,600	0.37	1.2	15,600	2,600	0.37	1.2	12,000	1,800	0.36	1.1	6,300	830	0.27	0.75
2050-250		25	12,000	2,000	0.33	1.1	12,000	2,000	0.33	1.1	9,600	1,350	0.25	1	5,700	750	0.25	0.67
2050-300		30	9,600	1,800	0.31	0.9	9,600	1,800	0.31	0.9	8,400	1,100	0.23	0.8	5,000	650	0.2	0.5
2050-350		35	8,400	1,700	0.3	0.75	8,400	1,700	0.3	0.75	7,200	850	0.2	0.6	4,400	530	0.16	0.33
2050-400		40	5,500	1,500	0.25	0.5	4,800	1,500	0.25	0.5	3,800	440	0.13	0.35	3,300	390	0.09	0.22
2050-450		45	4,000	1,200	0.2	0.42	4,000	1,200	0.2	0.42	3,300	400	0.11	0.3	2,800	330	0.08	0.18
2050-500		50	3,200	1,000	0.16	0.37	3,200	1,000	0.16	0.37	2,750	350	0.08	0.27	2,350	270	0.07	0.15
2060-100	R3	10	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
2060-150		15	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,500	1,800	0.5	1.5
2060-180		18	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	7,000	1,500	0.45	1.45
2060-200		20	16,000	3,100	0.6	1.8	16,000	3,100	0.6	1.8	11,000	2,310	0.55	1.7	6,500	1,300	0.4	1.4
2060-220		22	14,500	2,850	0.52	1.6	14,500	2,850	0.52	1.6	10,500	2,050	0.47	1.5	5,900	1,050	0.36	1.1
2060-250		25	13,000	2,600	0.45	1.5	13,000	2,600	0.45	1.5	10,000	1,800	0.4	1.3	5,300	840	0.32	0.9
2060-270		27	11,500	2,350	0.42	1.4	11,500	2,350	0.42	1.4	9,000	1,550	0.35	1.2	5,000	790	0.31	0.85
2060-300		30	10,000	2,100	0.4	1.3	10,000	2,100	0.4	1.3	8,000	1,350	0.3	1.1	4,700	750	0.3	0.8
2060-320		32	9,000	1,950	0.39	1.2	9,000	1,950	0.39	1.2	7,500	1,200	0.28	1	4,400	710	0.27	0.7
2060-350		35	8,000	1,800	0.38	1.1	8,000	1,800	0.38	1.1	7,000	1,100	0.26	0.9	4,200	670	0.25	0.6
2060-400		40	7,000	1,800	0.36	0.9	7,000	1,800	0.36	0.9	6,000	900	0.23	0.75	3,700	550	0.2	0.4
2060-450		45	5,800	1,700	0.33	0.75	5,800	1,700	0.33	0.75	4,600	670	0.19	0.6	3,200	470	0.15	0.3
2060-500		50	4,000	1,500	0.3	0.6	4,000	1,500	0.3	0.6	3,200	450	0.15	0.4	2,800	400	0.1	0.2
2060-600		60	2,700	1,000	0.21	0.42	2,700	1,000	0.21	0.42	2,300	320	0.1	0.3	1,950	270	0.08	0.16



Note:
・Decrease the feed rate more than 50% from the milling parameters when slot milling.
・Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
・Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
・Recommend wet coolant for Copper.

DCLB



Diamond Coated 2 Flute Long Neck Ball End Mills for Graphite Milling

R0.2～R3


MG DIA 35° R ±0.01 Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○	★	○	○	●				○

Features

Diamond coated 2 flute long neck ball end mills for Graphite Electrodes.
A highly adhesive coating base, offers long tool life and excellent wear resistance.

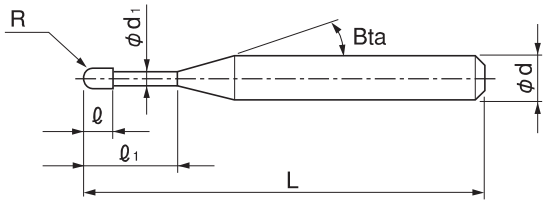

The shank taper angle shown is not an exact value.

Total 68 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles 30′	1°	1°30′	2°	3°
DCLB 2004-0020	R0.2	2	0.32	0.37	16°	45	4	—	2.24	2.41	2.54	2.65	2.85
DCLB 2004-0030		3				45	4	—	3.33	3.52	3.67	3.80	4.08
DCLB 2004-0040		4				45	4	—	4.39	4.61	4.78	4.94	5.30
DCLB 2004-0050		5				45	4	—	5.45	5.69	5.88	6.08	6.52
DCLB 2005-0020	R0.25	2	0.4	0.47	16°	45	4	—	2.29	2.49	2.64	2.78	3.01
DCLB 2005-0030		3				45	4	—	3.39	3.61	3.79	3.95	4.24
DCLB 2005-0060		6				45	4	—	6.59	6.89	7.13	7.37	7.91
DCLB 2005-0100		10				45	4	—	10.78	11.16	11.53	11.93	12.80
DCLB 2006-0020	R0.3	2	0.48	0.57	16°	45	4	—	2.33	2.55	2.73	2.89	3.16
DCLB 2006-0030		3				45	4	—	3.44	3.70	3.90	4.08	4.40
DCLB 2006-0040		4				45	4	—	4.53	4.82	5.05	5.24	5.62
DCLB 2006-0060		6				45	4	—	6.67	7.01	7.28	7.52	8.07
DCLB 2006-0100		10				45	4	—	10.89	11.31	11.68	12.08	12.96
DCLB 2006-0120		12				45	4	—	12.98	13.44	13.88	14.36	15.41
DCLB 2008-0100	R0.4	10	0.64	0.77	16°	45	4	—	10.88	11.30	11.67	12.07	12.94
DCLB 2008-0120		12				50	4	—	12.97	13.43	13.87	14.34	15.39
DCLB 2008-0160		16				50	4	—	17.13	17.69	18.27	18.90	20.28

Next Page ➡

Diamond Coated 2 Flute Long Neck Ball End Mills for Graphite Milling

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
DCLB 2010-0030	R0.5	3	0.8	0.96	16°	45	4	—	3.45	3.69	3.89	4.06	4.37
DCLB 2010-0050		5				45	4	—	5.61	5.91	6.16	6.37	6.81
DCLB 2010-0060		6				45	4	—	6.67	7.01	7.27	7.51	8.04
DCLB 2010-0080		8				45	4	—	8.79	9.17	9.47	9.78	10.48
DCLB 2010-0100		10	1.5			60	4	—	10.89	11.31	11.67	12.06	12.93
DCLB 2010-0100-08		10	0.8			45	4	—	10.89	11.31	11.67	12.06	12.93
DCLB 2010-0120		12				50	4	—	12.98	13.44	13.87	14.34	15.38
DCLB 2010-0160		16				50	4	—	17.14	17.70	18.27	18.89	20.27
DCLB 2010-0200		20	1.5			60	4	—	21.28	21.95	22.68	23.45	25.17
DCLB 2015-0060	R0.75	6	1.2	1.44	16°	45	4	—	6.14	6.32	6.51	6.71	7.16
DCLB 2015-0100		10				45	4	—	10.27	10.58	10.91	11.27	12.06
DCLB 2015-0160		16				50	4	—	16.46	16.97	17.51	18.10	19.40
DCLB 2020-0040	R1	4	1.6	1.9	16°	45	4	—	4.13	4.23	4.34	4.46	4.73
DCLB 2020-0060		6				45	4	—	6.19	6.36	6.54	6.74	7.17
DCLB 2020-0080		8				45	4	—	8.25	8.49	8.74	9.02	9.62
DCLB 2020-0100		10				45	4	—	10.31	10.62	10.94	11.29	12.07
DCLB 2020-0120		12				45	4	—	12.38	12.75	13.15	13.57	14.52
DCLB 2020-0160		16				50	4	—	16.50	17.01	17.55	18.12	19.41
DCLB 2020-0200-16		20				60	4	—	20.63	21.27	21.95	22.68	No Interference
DCLB 2020-0200		20	3			70	4	—	20.63	21.27	21.95	22.68	No Interference
DCLB 2020-0250		25	1.6			65	4	—	25.79	26.59	27.45	28.37	No Interference
DCLB 2020-0250-30		25	3			65	4	—	25.79	26.59	27.45	28.37	No Interference
DCLB 2020-0300-16		30	1.6			70	4	—	30.94	31.92	32.95	No Interference	No Interference
DCLB 2020-0300		30	3			70	4	—	30.94	31.92	32.95	No Interference	No Interference
DCLB 2020-0350		35		1.91	16°	70	4	—	36.09	37.23	38.45	No Interference	No Interference
DCLB 2020-0400		40	1.6			80	4	—	41.25	42.55	No Interference	No Interference	No Interference
DCLB 2030-0160	R1.5	16	2.4	2.9	16°	60	6	—	16.49	16.98	17.50	18.06	19.30
DCLB 2030-0200		20				60	6	—	20.61	21.23	21.90	22.61	24.20
DCLB 2030-0250		25				70	6	—	25.77	26.56	27.40	28.30	30.31
DCLB 2030-0300		30	4.5			80	4	—	30.93	No Interference	No Interference	No Interference	No Interference
DCLB 2030-0300-S6		30	2.4			80	6	—	30.93	31.88	32.90	34.00	No Interference
DCLB 2030-0400-S6		40				80	6	—	41.24	42.53	43.91	No Interference	No Interference
DCLB 2030-0400		40	4.5			80	4	—	41.24	No Interference	No Interference	No Interference	No Interference
DCLB 2040-0160	R2	16	3.2	3.9	16°	70	6	—	16.47	16.94	17.45	17.99	19.19
DCLB 2040-0200		20				70	6	—	20.60	21.20	21.85	22.54	No Interference
DCLB 2040-0250		25				70	6	—	25.75	26.53	27.35	28.24	No Interference
DCLB 2040-0300		30				70	6	—	30.91	31.85	32.85	No Interference	No Interference
DCLB 2040-0300-60		30	6		–	100	4	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2040-0400-S6		40	3.2		16°	90	6	—	41.22	42.50	No Interference	No Interference	No Interference
DCLB 2040-0400		40	6		–	100	4	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2040-0500-S6		50	3.2		16°	100	6	—	51.54	53.15	No Interference	No Interference	No Interference
DCLB 2040-0500		50	6		–	100	4	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2040-0600		60		3.91	–	100	4	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2050-0200	R2.5	20	4	4.8	16°	70	6	—	20.76	21.36	21.99	No Interference	No Interference
DCLB 2050-0300		30				80	6	—	31.08	32.00	No Interference	No Interference	No Interference
DCLB 2060-0300	R3	30	4.8	5.7	–	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2060-0400		40				100	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2060-0500		50				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2060-0600		60				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2060-0700		70		5.71	–	120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
DCLB 2060-0800		80				120	6	—	No Interference	No Interference	No Interference	No Interference	No Interference


Milling Conditions for DCLB

WORK MATERIAL			GRAPHITE			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2004-0020	R0.2	2	33,500	1,100	0.1	0.04
2004-0030		3	33,500	1,100	0.09	0.04
2004-0040		4	33,500	1,100	0.08	0.04
2004-0050		5	33,500	1,100	0.06	0.04
2005-0020	R0.25	2	33,500	1,200	0.11	0.05
2005-0030		3	33,500	1,200	0.1	0.05
2005-0060		6	33,500	1,200	0.07	0.05
2005-0100		10	33,500	1,200	0.03	0.05
2006-0020	R0.3	2	33,500	1,300	0.15	0.06
2006-0030		3	33,500	1,300	0.13	0.06
2006-0040		4	33,500	1,300	0.12	0.06
2006-0060		6	33,500	1,300	0.1	0.06
2006-0100		10	33,500	1,300	0.04	0.06
2006-0120		12	33,500	1,300	0.04	0.06
2008-0100	R0.4	10	33,500	1,400	0.13	0.08
2008-0120		12	33,500	1,400	0.1	0.08
2008-0160		16	33,500	1,400	0.08	0.08
2010-0030	R0.5	3	33,500	1,500	0.2	0.1
2010-0050		5	33,500	1,500	0.19	0.1
2010-0060		6	33,500	1,500	0.19	0.1
2010-0080		8	33,500	1,500	0.18	0.1
2010-0100 (-08)		10	33,500	1,500	0.16	0.1
2010-0120		12	33,500	1,500	0.15	0.1
2010-0160		16	33,500	1,500	0.12	0.1
2010-0200		20	33,500	1,500	0.1	0.1
2015-0060	R0.75	6	30,000	1,500	0.35	0.15
2015-0100		10	30,000	1,500	0.3	0.15
2015-0160		16	30,000	1,500	0.25	0.15
2020-0040	R1	4	27,000	1,500	0.5	0.2
2020-0060		6	27,000	1,500	0.49	0.2
2020-0080		8	27,000	1,500	0.48	0.2
2020-0100		10	27,000	1,500	0.46	0.2
2020-0120		12	27,000	1,500	0.43	0.2
2020-0160		16	27,000	1,500	0.38	0.2
2020-0200 (-16)		20	27,000	1,500	0.24	0.2
2020-0250 (-30)		25	27,000	1,500	0.19	0.2
2020-0300 (-16)		30	27,000	1,500	0.12	0.2
2020-0350		35	27,000	1,500	0.11	0.2
2020-0400		40	27,000	1,500	0.09	0.2

Milling Conditions for DCLB

WORK MATERIAL			GRAPHITE			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2030-0160	R1.5	16	18,000	1,650	0.5	0.45
2030-0200		20	18,000	1,650	0.44	0.45
2030-0250		25	18,000	1,650	0.36	0.45
2030-0300 (-S6)		30	18,000	1,650	0.3	0.45
2030-0400 (-S6)		40	18,000	1,650	0.2	0.45
2040-0160	R2	16	13,500	1,750	0.7	0.6
2040-0200		20	13,500	1,750	0.65	0.6
2040-0250		25	13,500	1,750	0.55	0.6
2040-0300		30	13,500	1,750	0.5	0.6
2040-0300 (-60)		30	13,500	1,750	0.5	0.6
2040-0400 (-S6)		40	13,500	1,750	0.4	0.6
2040-0500 (-S6)		50	13,500	1,750	0.24	0.6
2040-0600		60	13,500	1,750	0.18	0.6
2050-0200	R2.5	20	10,800	1,600	0.8	0.75
2050-0300		30	10,800	1,600	0.6	0.75
2060-0300	R3	30	9,000	1,400	0.9	0.9
2060-0400		40	9,000	1,400	0.75	0.9
2060-0500		50	9,000	1,400	0.6	0.9
2060-0600		60	9,000	1,400	0.51	0.9
2060-0700		70	9,000	1,400	0.4	0.9
2060-0800		80	9,000	1,400	0.23	0.9

Note:
・Use a milling machine dedicated for Graphite.
・Decrease the feed rate more than 50% from the milling parameters when slot milling.
・Recommend air blow for Graphite.



DLCLB



DLCCOAT 2 Flute Long Neck Ball End Mills for Copper Electrode Milling

R0.05～R3


Super MG | DLC | 30° | R ±0.002 (R0.05～R0.2) | R ±0.003 (R0.25～R2) | R ±0.004 (R3) | Shank Dia 0/-0.004 | Back Taper Geometry

Back taper geometry does not apply to R0.15 or below.

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									●		★						

Label Sample




#001 φD0.597 R+0.001/−0.001

Diameter and Ball Radius accuracy measurements are printed on the label to support High Precision milling.

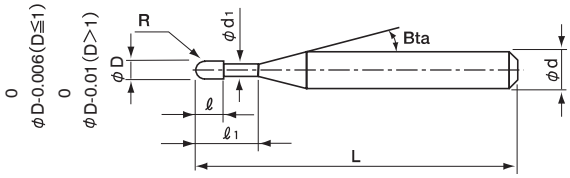


The shank taper angle shown is not an exact value.



Total 71 models


Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
DLCLB 2001-003	R0.05	0.3	0.08	0.095	11°	45	4	—
DLCLB 2001-005		0.5				45	4	—
DLCLB 20015-003	R0.075	0.3	0.12	0.14	11°	45	4	—
DLCLB 20015-005		0.5				45	4	—
DLCLB 20015-010		1				45	4	—
DLCLB 2002-003	R0.1	0.3	0.16	0.19	11°	45	4	—
DLCLB 2002-005		0.5				45	4	—
DLCLB 2002-010		1				45	4	—
DLCLB 2002-015		1.5				45	4	—

Best wedge angle for copper milling

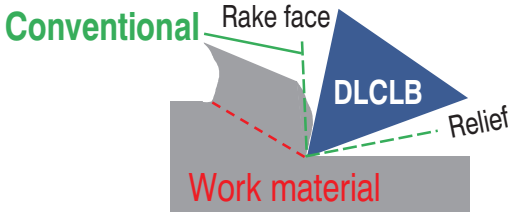

Wedge angle
DLCLB < Conventional

Near Diamond hardness DLC coating

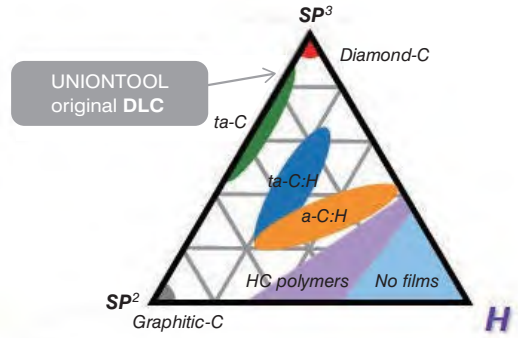

The hard DLC was developed by our in-house coating furnace.

High accuracy

Tolerance settings that enable high accuracy milling (mm)

Ball Radius Accuracy	D ≦ R0.5	D > R0.5
Diameter Tolerance	0/-0.006	0/-0.01

Ball Radius Accuracy	R0.05 ~ R0.2	R0.25 ~ R2	R3
Radius Accuracy	± 0.002	± 0.003	± 0.004
Shank Diameter Tolerance	0/-0.004		

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Effective Length by Inclined Angles				
			30′	1°	1°30′	2°	3°
DLCLB 2001-003	R0.05	0.3	0.34	0.36	0.39	0.41	0.46
DLCLB 2001-005		0.5	0.55	0.59	0.62	0.65	0.73
DLCLB 20015-003	R0.075	0.3	0.36	0.38	0.40	0.42	0.47
DLCLB 20015-005		0.5	0.57	0.60	0.63	0.66	0.74
DLCLB 20015-010		1	1.09	1.15	1.21	1.27	1.43
DLCLB 2002-003	R0.1	0.3	0.41	0.43	0.45	0.47	0.53
DLCLB 2002-005		0.5	0.62	0.65	0.68	0.72	0.80
DLCLB 2002-010		1	1.14	1.20	1.26	1.33	1.49
DLCLB 2002-015		1.5	1.67	1.75	1.84	1.94	2.17

Next Page ➡

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
DLCLB 2003-006	R0.15	0.6	0.24	0.29	11°	45	4	—
DLCLB 2003-010		1				45	4	—
DLCLB 2003-015		1.5				45	4	—
DLCLB 2003-020		2				45	4	—
DLCLB 2004-010	R0.2	1	0.32	0.39	11°	45	4	—
DLCLB 2004-020		2				45	4	—
DLCLB 2004-030		3				45	4	—
DLCLB 2004-040		4				45	4	—
DLCLB 2005-010	R0.25	1	0.4	0.49	11°	45	4	—
DLCLB 2005-020		2				45	4	—
DLCLB 2005-030		3				45	4	—
DLCLB 2005-040		4				45	4	—
DLCLB 2005-050		5				45	4	—
DLCLB 2006-010	R0.3	1	0.48	0.59	11°	45	4	—
DLCLB 2006-020		2				45	4	—
DLCLB 2006-030		3				45	4	—
DLCLB 2006-040		4				45	4	—
DLCLB 2006-050		5				45	4	—
DLCLB 2006-060		6				45	4	—
DLCLB 2008-020	R0.4	2	0.64	0.79	11°	45	4	—
DLCLB 2008-030		3				45	4	—
DLCLB 2008-040		4				45	4	—
DLCLB 2008-060		6				45	4	—
DLCLB 2008-080		8				45	4	—
DLCLB 2010-020	R0.5	2	0.8	0.98	11°	45	4	—
DLCLB 2010-030		3				45	4	—
DLCLB 2010-040		4				45	4	—
DLCLB 2010-050		5				45	4	—
DLCLB 2010-060		6				45	4	—
DLCLB 2010-080		8				45	4	—
DLCLB 2010-100		10				45	4	—
DLCLB 2010-120		12				45	4	—

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Effective Length by Inclined Angles				
			30′	1°	1°30′	2°	3°
DLCLB 2003-006	R0.15	0.6	0.72	0.75	0.79	0.83	0.92
DLCLB 2003-010		1	1.14	1.19	1.25	1.32	1.47
DLCLB 2003-015		1.5	1.67	1.74	1.83	1.93	2.15
DLCLB 2003-020		2	2.19	2.29	2.41	2.53	2.84
DLCLB 2004-010	R0.2	1	1.14	1.19	1.24	1.30	1.45
DLCLB 2004-020		2	2.19	2.29	2.40	2.52	2.82
DLCLB 2004-030		3	3.23	3.39	3.56	3.74	4.19
DLCLB 2004-040		4	4.28	4.49	4.71	4.96	5.56
DLCLB 2005-010	R0.25	1	1.14	1.18	1.24	1.29	1.43
DLCLB 2005-020		2	2.18	2.28	2.39	2.51	2.80
DLCLB 2005-030		3	3.23	3.38	3.55	3.73	4.17
DLCLB 2005-040		4	4.28	4.48	4.70	4.95	5.54
DLCLB 2005-050		5	5.33	5.58	5.86	6.17	6.91
DLCLB 2006-010	R0.3	1	1.14	1.18	1.23	1.28	1.41
DLCLB 2006-020		2	2.18	2.28	2.38	2.50	2.78
DLCLB 2006-030		3	3.23	3.38	3.54	3.72	4.15
DLCLB 2006-040		4	4.28	4.48	4.70	4.94	5.52
DLCLB 2006-050		5	5.32	5.57	5.85	6.16	6.89
DLCLB 2006-060		6	6.37	6.67	7.01	7.38	8.26
DLCLB 2008-020	R0.4	2	2.18	2.27	2.37	2.48	2.75
DLCLB 2008-030		3	3.22	3.37	3.52	3.70	4.12
DLCLB 2008-040		4	4.27	4.47	4.68	4.92	5.48
DLCLB 2008-060		6	6.37	6.66	6.99	7.36	8.22
DLCLB 2008-080		8	8.46	8.86	9.30	9.79	10.96
DLCLB 2010-020	R0.5	2	2.19	2.28	2.37	2.48	2.73
DLCLB 2010-030		3	3.24	3.37	3.53	3.70	4.10
DLCLB 2010-040		4	4.28	4.47	4.68	4.92	5.47
DLCLB 2010-050		5	5.33	5.57	5.84	6.14	6.84
DLCLB 2010-060		6	6.38	6.67	6.99	7.35	8.21
DLCLB 2010-080		8	8.47	8.87	9.31	9.79	10.95
DLCLB 2010-100		10	10.57	11.07	11.62	12.23	13.68
DLCLB 2010-120		12	12.66	13.26	13.93	14.67	16.42

Next Page ➡

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
DLCLB 2015-040	R0.75	4	1.2	1.47	11°	45	4	—
DLCLB 2015-060		6				45	4	—
DLCLB 2015-120		12				50	4	—
DLCLB 2015-180		18				55	4	—
DLCLB 2020-040	R1	4	1.6	1.98	11°	45	4	—
DLCLB 2020-060		6				45	4	—
DLCLB 2020-080		8				45	4	—
DLCLB 2020-100		10				45	4	—
DLCLB 2020-120		12				50	4	—
DLCLB 2020-140		14				50	4	—
DLCLB 2020-160		16				50	4	—
DLCLB 2020-200		20				55	4	—
DLCLB 2020-250		25				65	4	—
DLCLB 2030-100	R1.5	10	2.4	2.95	11°	60	6	—
DLCLB 2030-120		12				60	6	—
DLCLB 2030-140		14				60	6	—
DLCLB 2030-160		16				60	6	—
DLCLB 2030-200		20				70	6	—
DLCLB 2030-250		25				70	6	—
DLCLB 2030-300		30				70	6	—
DLCLB 2040-100	R2	10	3.2	3.95	11°	70	6	—
DLCLB 2040-150		15				70	6	—
DLCLB 2040-200		20				70	6	—
DLCLB 2040-250		25				70	6	—
DLCLB 2040-300		30				70	6	—
DLCLB 2040-400		40				80	6	—
DLCLB 2060-100	R3	10	4.8	5.95	—	80	6	—
DLCLB 2060-150		15				80	6	—
DLCLB 2060-200		20				80	6	—
DLCLB 2060-300		30				80	6	—

Unit (mm)


Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Effective Length by Inclined Angles				
			30′	1°	1°30′	2°	3°
DLCLB 2015-040	R0.75	4	4.21	4.39	4.58	4.80	5.31
DLCLB 2015-060		6	6.31	6.59	6.89	7.23	8.04
DLCLB 2015-120		12	12.59	13.18	13.83	14.55	16.26
DLCLB 2015-180		18	18.87	19.77	20.76	21.86	24.47
DLCLB 2020-040	R1	4	4.18	4.34	4.51	4.71	5.18
DLCLB 2020-060		6	6.27	6.53	6.82	7.15	7.92
DLCLB 2020-080		8	8.36	8.73	9.14	9.59	10.66
DLCLB 2020-100		10	10.46	10.93	11.45	12.02	13.39
DLCLB 2020-120		12	12.55	13.12	13.76	14.46	16.13
DLCLB 2020-140		14	14.65	15.32	16.07	16.90	18.87
DLCLB 2020-160		16	16.74	17.52	18.38	19.34	No Interference
DLCLB 2020-200		20	20.93	21.91	23.00	24.21	No Interference
DLCLB 2020-250		25	26.16	27.41	28.78	No Interference	No Interference
DLCLB 2030-100	R1.5	10	10.51	10.96	11.46	12.01	13.32
DLCLB 2030-120		12	12.61	13.16	13.77	14.45	16.06
DLCLB 2030-140		14	14.70	15.36	16.08	16.89	18.80
DLCLB 2030-160		16	16.80	17.56	18.39	19.32	21.54
DLCLB 2030-200		20	20.98	21.95	23.02	24.20	27.01
DLCLB 2030-250		25	26.22	27.44	28.79	30.30	No Interference
DLCLB 2030-300		30	31.45	32.94	34.57	36.39	No Interference
DLCLB 2040-100	R2	10	10.49	10.91	11.38	11.90	13.14
DLCLB 2040-150		15	15.73	16.41	17.16	18.00	19.99
DLCLB 2040-200		20	20.96	21.90	22.94	24.09	No Interference
DLCLB 2040-250		25	26.20	27.39	28.72	30.19	No Interference
DLCLB 2040-300		30	31.43	32.89	34.50	No Interference	No Interference
DLCLB 2040-400		40	41.90	43.87	No Interference	No Interference	No Interference
DLCLB 2060-100	R3	10	No Interference	No Interference	No Interference	No Interference	No Interference
DLCLB 2060-150		15	No Interference	No Interference	No Interference	No Interference	No Interference
DLCLB 2060-200		20	No Interference	No Interference	No Interference	No Interference	No Interference
DLCLB 2060-300		30	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for DLCLB

WORK MATERIAL			COPPER / ALUMINUM ALLOYS				TUNGSTEN COPPER			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2001-003	**R0.05**	0.3	43,600	220	0.01	0.01	32,700	160	0.008	0.008
2001-005		0.5	43,600	160	0.007	0.007	32,700	110	0.005	0.005
20015-003	**R0.075**	0.3	43,600	250	0.015	0.02	32,700	190	0.012	0.016
20015-005		0.5	43,600	220	0.015	0.02	32,700	150	0.012	0.016
20015-010		1	43,600	160	0.007	0.01	32,700	120	0.006	0.008
2002-003	**R0.1**	0.3	43,600	550	0.025	0.05	32,700	380	0.02	0.04
2002-005		0.5	43,600	550	0.025	0.05	32,700	380	0.02	0.04
2002-010		1	43,600	440	0.02	0.04	32,700	270	0.015	0.03
2002-015		1.5	32,900	250	0.015	0.03	24,700	120	0.008	0.02
2003-006	**R0.15**	0.6	43,600	760	0.03	0.07	32,700	550	0.03	0.07
2003-010		1	43,600	760	0.03	0.07	32,700	550	0.03	0.07
2003-015		1.5	43,600	550	0.025	0.05	32,700	290	0.02	0.05
2003-020		2	39,200	390	0.02	0.03	29,400	200	0.01	0.02
2004-010	**R0.2**	1	43,600	1,090	0.05	0.1	32,700	760	0.04	0.08
2004-020		2	43,600	650	0.035	0.06	32,700	380	0.02	0.05
2004-030		3	35,000	470	0.02	0.04	29,200	230	0.01	0.03
2004-040		4	27,300	270	0.008	0.015	19,600	110	0.005	0.01
2005-010	**R0.25**	1	43,600	1,420	0.08	0.15	32,700	890	0.08	0.15
2005-020		2	43,600	870	0.08	0.15	32,700	550	0.08	0.15
2005-030		3	38,200	650	0.06	0.1	29,500	390	0.06	0.08
2005-040		4	32,700	440	0.04	0.08	24,000	220	0.025	0.05
2005-050		5	27,300	330	0.02	0.04	19,600	160	0.01	0.02
2006-010	**R0.3**	1	43,600	1,870	0.12	0.2	32,700	1,400	0.12	0.2
2006-020		2	43,600	1,750	0.12	0.2	32,700	1,310	0.12	0.2
2006-030		3	43,600	1,090	0.1	0.14	32,700	760	0.08	0.1
2006-040		4	32,700	760	0.07	0.1	27,300	440	0.04	0.06
2006-050		5	29,500	650	0.05	0.08	24,000	330	0.02	0.04
2006-060		6	27,300	550	0.04	0.06	21,800	220	0.01	0.03
2008-020	**R0.4**	2	43,600	2,820	0.15	0.3	32,700	1,980	0.15	0.3
2008-030		3	43,600	2,180	0.15	0.3	32,700	1,530	0.15	0.3
2008-040		4	38,200	1,750	0.12	0.2	29,500	1,090	0.1	0.16
2008-060		6	32,700	1,090	0.08	0.15	21,800	550	0.05	0.1
2008-080		8	23,800	760	0.05	0.06	17,300	320	0.02	0.025
2010-020	**R0.5**	2	39,100	2,740	0.25	0.4	30,000	2,050	0.25	0.4
2010-030		3	39,100	2,740	0.25	0.4	30,000	1,960	0.25	0.4
2010-040		4	39,100	2,350	0.2	0.4	29,500	1,560	0.2	0.4
2010-050		5	38,200	2,180	0.16	0.3	29,500	1,530	0.12	0.25
2010-060		6	34,500	1,840	0.14	0.3	26,200	1,150	0.1	0.25
2010-080		8	27,300	1,090	0.12	0.2	19,600	550	0.06	0.1
2010-100		10	20,300	810	0.08	0.15	16,200	300	0.03	0.05
2010-120		12	13,100	490	0.06	0.1	9,800	160	0.015	0.04

Milling Conditions for DLCLB


WORK MATERIAL			COPPER / ALUMINUM ALLOYS				TUNGSTEN COPPER			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2015-040	**R0.75**	4	25,500	2,270	0.3	0.6	21,300	1,700	0.3	0.6
2015-060		6	25,500	2,040	0.3	0.6	21,300	1,530	0.3	0.6
2015-120		12	17,500	1,090	0.15	0.3	13,100	550	0.1	0.2
2015-180		18	8,500	590	0.08	0.12	6,800	170	0.02	0.06
2020-040	**R1**	4	18,700	2,490	0.45	0.8	14,000	1,500	0.45	0.8
2020-060		6	18,700	2,080	0.45	0.8	14,000	1,250	0.45	0.8
2020-080		8	18,700	1,800	0.4	0.8	13,500	1,200	0.4	0.8
2020-100		10	18,700	1,700	0.3	0.6	13,500	1,190	0.25	0.5
2020-120		12	16,800	1,470	0.3	0.6	12,600	950	0.25	0.5
2020-140		14	15,000	1,250	0.28	0.5	11,200	750	0.18	0.4
2020-160		16	13,100	1,090	0.25	0.5	9,800	550	0.12	0.25
2020-200		20	10,000	800	0.15	0.3	8,000	350	0.06	0.1
2020-250		25	6,700	500	0.08	0.15	5,000	170	0.03	0.05
2030-100	**R1.5**	10	15,000	2,550	0.6	1.2	12,000	1,800	0.6	1.2
2030-120		12	15,000	2,550	0.6	1.2	11,800	1,740	0.6	1.2
2030-140		14	15,000	2,510	0.6	1.2	11,700	1,670	0.6	1.2
2030-160		16	14,200	2,140	0.6	1	10,700	1,600	0.5	1
2030-200		20	12,700	1,910	0.5	0.8	9,500	1,110	0.4	0.6
2030-250		25	10,100	1,520	0.4	0.6	8,400	760	0.2	0.3
2030-300		30	8,700	1,310	0.2	0.4	6,500	550	0.08	0.15
2040-100	**R2**	10	11,500	2,880	0.8	1.6	8,600	2,010	0.8	1.6
2040-150		15	11,500	2,670	0.8	1.6	8,600	1,880	0.8	1.6
2040-200		20	11,500	2,460	0.8	1.6	8,200	1,640	0.8	1.2
2040-250		25	10,300	2,210	0.6	1.2	6,700	1,270	0.5	1
2040-300		30	9,000	1,800	0.5	1	5,300	900	0.3	0.5
2040-400		40	6,000	900	0.4	0.8	3,800	380	0.15	0.3
2060-100	**R3**	10	10,000	4,190	1	2.2	7,500	3,150	1	2.2
2060-150		15	10,000	4,190	1	2.2	7,500	2,800	1	2.2
2060-200		20	10,000	3,000	1	2	7,500	2,000	0.7	1.5
2060-300		30	10,000	3,000	0.8	1.6	7,000	1,800	0.4	0.8




Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed, or when chattering occurs.
- Recommend wet coolant for Copper and Tungsten-Copper.

Milling Example of Copper Electrode Model DLCLB R1 × EL16

Tough Pitch Copper C1100

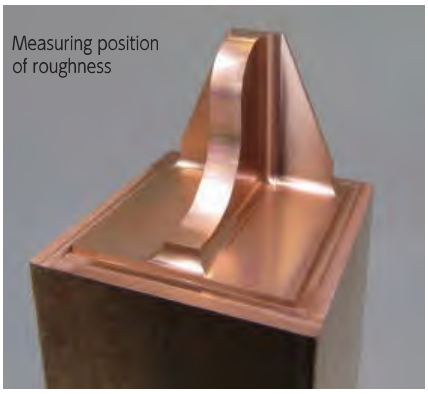


Model Size : 20 x 20 x Depth 16 mm
Coolant : Oil Mist

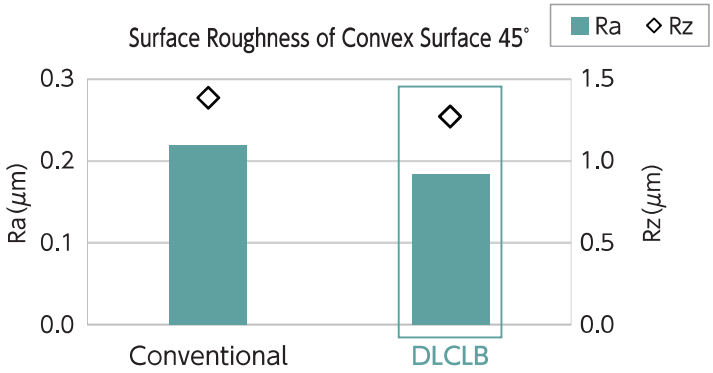


Improved surface roughness compared to the conventional model.

No	Milling Process	Milling Method	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Overhang Length (mm)	Cycle Time (h:m:s)
1	Roughing	Contour Milling	10,800	1,090	0.25	0.5	24	1:31:59
2	Semi-finishing		10,800	1,090	0.05	0.05		1:31:15
3	Finishing		13,090	545	0.0001 (Cusp Height)	0.03		1:15:26
							Total	4:18:40

Conventional

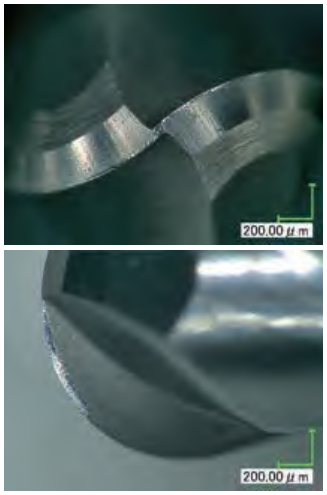

DLCLB

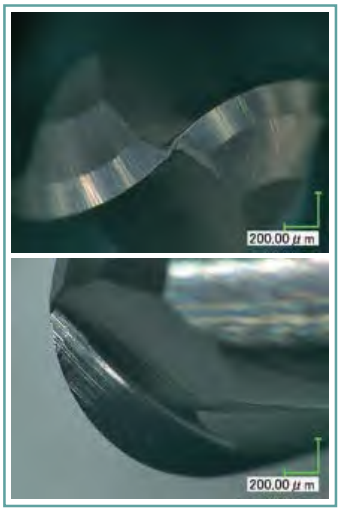

Tools after milling

DLCLB has less wear and damage after 4 hours of milling, and enables stable milling throughout the long cycle time.

DLCLB series Introduction Video

DLCLB Milling example — Tungsten Copper (Cu30 : W70)



Work Size 50 × 50 × 50 mm
Coolant : Oil Mist

DLCLB series
Housing-rib
Electrode Milling Video

No	Milling Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm / min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Allowance (mm)	Cycle Time (h:m:s)
1	Roughing	**R1.5 × EL10**	12,000	1,800	0.6	1.2	0.1	0:19:07
2	Roughing	**R0.75 × EL6**	21,300	1,530	0.3	0.6	0.1	0:21:34
3	Semi-finishing Flat surface	**R1 × EL6**	14,000	1,250	0.05	0.1	0.05	0:32:15
4	Semi-finishing Convex Pocket	**R0.5 × EL5**	29,500	1,530	0.05	0.06	0.05	1:43:09
5	Semi-finishing Corner	**R0.4 × EL6**	21,800	550	0.06	0.06	0.05	1:10:33
6	Finishing Flat surface	**R1 × EL6**	14,000	1,250	0.05	0.04	0	1:25:15
7	Finishing Convex Pocket	**R0.5 × EL5**	29,500	1,530	0.05	0.028	0	1:37:19
8	Finishing Cylinder corner	**R0.3 × EL5**	24,000	330	0.0002 Cusp Height	0.0002 Cusp Height	0	4:54:10

Total 12:03:22

DLC coating offers high wear resistance and is suited even for Tungsten Copper that is hard to mill.

DLCLB Milling example — Aluminum A7075




Work Size 50 × 50 × 50 mm
Coolant : Water Soluble

Reflection of the background



The surface finish is of such high quality that the letters reflect perfectly in it.

Surface roughness



Average of 3 positions
Ra 0.03 μm

No	Milling Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm / min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Allowance (mm)	Cycle Time (h:m:s)
1	Roughing	**R1.5 × EL10**	15,000	2,550	0.6	1.2	0.1	0:17:49
2	Roughing	**R0.75 × EL6**	25,500	2,040	0.3	0.6	0.1	0:20:22
3	Semi-finishing Flat surface	**R1 × EL6**	18,700	2,100	0.05	0.1	0.05	0:25:06
4	Semi-finishing Convex Pocket	**R0.5 × EL5**	30,000	1,700	0.05	0.06	0.05	0:53:17
5	Semi-finishing Corner	**R0.4 × EL6**	30,000	1,000	0.06	0.06	0.05	0:17:02
6	Finishing Flat surface	**R1 × EL6**	18,700	2,100	0.05	0.04	0	1:06:03
7	Finishing Convex Pocket	**R0.5 × EL5**	30,000	1,700	0.05	0.028	0	1:31:32
8	Finishing Cylinder corner	**R0.3 × EL5**	30,000	650	0.0002 Cusp Height	0.0002 Cusp Height	0	2:40:18

Total 7:31:29

Suited even for Aluminum milling as the cutting edge is sharper than normal endmills for Steels.

CPRB



NON-COAT 2 Flute Long Neck Ball End Mills for Plastic Milling

R0.2～R3


MG | 30° | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○		●	★					

Features

Long neck ball design for milling Plastics.
Designed especially for deep rib milling using an undercut form.

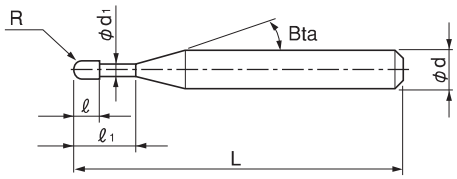

The shank taper angle shown is not an exact value.

Total 80 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CPRB 2004-1	R0.2	1	0.4	0.36	11°	45	4	—
CPRB 2004-2		2				45	4	—
CPRB 2004-3		3				45	4	—
CPRB 2005-2	R0.25	2	0.8	0.46	11°	45	4	—
CPRB 2005-4		4				45	4	—
CPRB 2005-6		6				45	4	—
CPRB 2005-8		8				45	4	—
CPRB 2005-10		10				50	4	—
CPRB 2006-2	R0.3	2	1	0.56	11°	45	4	—
CPRB 2006-4		4				45	4	—
CPRB 2006-6		6				45	4	—
CPRB 2006-8		8				45	4	—
CPRB 2008-2	R0.4	2	1.1	0.76	11°	45	4	—
CPRB 2008-4		4				45	4	—
CPRB 2008-6		6				45	4	—
CPRB 2008-8		8				45	4	—
CPRB 2008-10		10				50	4	—

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CPRB 2010-3	R0.5	3	1.2	0.93	11°	45	4	—
CPRB 2010-4		4				45	4	—
CPRB 2010-6		6				45	4	—
CPRB 2010-8		8				45	4	—
CPRB 2010-10		10				45	4	—
CPRB 2010-12		12				45	4	—
CPRB 2010-14		14				50	4	—
CPRB 2010-16		16				50	4	—
CPRB 2010-20		20				55	4	—
CPRB 2012-8	R0.6	8	1.3	1.13	11°	45	4	—
CPRB 2012-12		12				45	4	—
CPRB 2014-8	R0.7	8	1.4	1.33	11°	45	4	—
CPRB 2014-12		12				45	4	—
CPRB 2014-16		16				50	4	—
CPRB 2015-6	R0.75	6	1.45	1.43	11°	45	4	—
CPRB 2015-8		8				45	4	—
CPRB 2015-10		10				45	4	—
CPRB 2015-12		12				45	4	—
CPRB 2015-16		16				50	4	—
CPRB 2015-20		20				55	4	—
CPRB 2016-8	R0.8	8	1.5	1.5	11°	45	4	—
CPRB 2016-12		12				45	4	—
CPRB 2016-16		16				50	4	—
CPRB 2016-20		20				55	4	—
CPRB 2018-8	R0.9	8	1.6	1.7	11°	45	4	—
CPRB 2018-12		12				45	4	—
CPRB 2018-16		16				50	4	—
CPRB 2018-20		20				55	4	—
CPRB 2020-4	R1	4	1.7	1.9	11°	45	4	—
CPRB 2020-6		6				45	4	—
CPRB 2020-8		8				45	4	—
CPRB 2020-10		10				45	4	—
CPRB 2020-12		12				45	4	—
CPRB 2020-14		14				50	4	—
CPRB 2020-16		16				50	4	—
CPRB 2020-20		20				55	4	—
CPRB 2020-22		22				60	4	—
CPRB 2020-25		25				65	4	—
CPRB 2020-30		30				70	4	—

Next Page ➡


Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CPRB 2030-8	R1.5	8	2.5	2.9	11°	60	6	—
CPRB 2030-10		10				60	6	—
CPRB 2030-12		12				60	6	—
CPRB 2030-16		16				60	6	—
CPRB 2030-20		20				70	6	—
CPRB 2030-25		25				70	6	—
CPRB 2030-30		30				70	6	—
CPRB 2030-35		35				80	6	—
CPRB 2040-10	R2	10	3	3.8	11°	70	6	—
CPRB 2040-12		12				70	6	—
CPRB 2040-16		16				70	6	—
CPRB 2040-20		20				70	6	—
CPRB 2040-25		25				70	6	—
CPRB 2040-30		30				70	6	—
CPRB 2040-35		35				80	6	—
CPRB 2040-40		40				90	6	—
CPRB 2040-45		45				90	6	—
CPRB 2040-50		50				100	6	—
CPRB 2050-20	R2.5	20	3.5	4.8	11°	70	6	—
CPRB 2050-25		25				70	6	—
CPRB 2050-30		30				80	6	—
CPRB 2050-35		35				80	6	—
CPRB 2060-30	R3	30	6	5.8	—	80	6	—
CPRB 2060-50		50			—	120	6	—

Milling Conditions for CPRB

WORK MATERIAL		ALUMINUM ALLOYS			PLASTICS		
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)
2004	R0.2	35,000	560	0.005~0.01	35,000	1,100	0.07~0.2
2005	R0.25	35,000	700	0.003~0.01	28,000	1,200	0.08~0.25
2006	R0.3	35,000	910	0.006~0.03	24,000	1,200	0.1 ~0.3
2008	R0.4	26,000	940	0.006~0.05	18,000	900	0.13~0.4
2010	R0.5	21,000	970	0.005~0.08	14,000	700	0.17~0.5
2012	R0.6	18,000	1,010	0.04 ~0.09	12,000	600	0.2 ~0.6
2014	R0.7	15,000	1,020	0.05 ~0.1	10,000	500	0.23~0.7
2015	R0.75	14,000	1,010	0.06 ~0.12	9,500	480	0.25~0.75
2016	R0.8	13,000	1,010	0.08 ~0.13	9,000	450	0.27~0.8
2018	R0.9	12,000	1,060	0.09 ~0.15	8,000	400	0.3 ~0.9
2020	R1	11,000	1,100	0.03 ~0.21	7,000	350	0.33~1
2030	R1.5	6,900	760	0.03 ~0.23	4,800	240	0.5 ~1.5
2040	R2	5,200	690	0.01 ~0.28	3,600	180	0.6 ~2
2050	R2.5	4,200	590	0.16 ~0.31	2,900	150	0.8 ~2.5
2060	R3	3,500	550	0.22 ~0.36	2,400	120	1 ~3

Slotting



Note:
・Adjust the axial depth (ap) based on the effective length and milling condition.
・Recommend water soluble coolant for Aluminum Alloys and Copper.
・Recommend air blow for Plastics.
・Remove chips from the work piece to keep the milling surface quality.
・If chips clog on the tool, stop the operation and remove them accordingly.

CFLB




UTCOAT 3 Flute Long Neck Ball End Mills

R0.3~R3

Super MG | UT COAT | 30° | R ±0.005 (R0.3~R1.5) | R ±0.007 (R2~R3) | Shank Dia 0/-0.005 | Variable Pitch (R2~R3)

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	●		●	○		●	●		

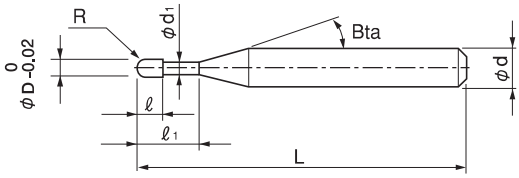

Features

Suited for various heat-resistant alloys including Titanium and Inconel due to large chip pocket, variable pitch and high lubricity coating.
Tip groove design offers clean milling surfaces even for Copper, Aluminum and Acrylic.
※ Except for R0.75 or below


Copper C1100


Acrylic


Aluminum A7075

3 series of tip groove ball

Raw materials — 40 — 50 — 55 — 60 — 65 Hardness (HRC)



CFB 3 flute ball, Flute design: Positive
CFLB 3 flute long neck ball

HFB 4 flute ball, Flute design: Negative



3 flute ball CFB series (F-33) and 4 flute ball HFB series for hard materials (F-43) are also available.



Total 47 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Effective Length by Inclined Angles				
									30′	1°	1°30′	2°	3°
CFLB 3006-020	R0.3	2	0.48	0.58	16°	50	4	—	2.16	2.23	2.30	2.37	2.53
CFLB 3006-030		3				50	4	—	3.20	3.30	3.40	3.51	3.76
CFLB 3006-040		4				50	4	—	4.23	4.36	4.50	4.65	4.98
CFLB 3006-060		6				50	4	—	6.30	6.49	6.70	6.93	7.43
CFLB 3008-040	R0.4	4	0.64	0.78	16°	50	4	—	4.23	4.36	4.49	4.64	4.96
CFLB 3008-060		6				50	4	—	6.29	6.49	6.69	6.91	7.41
CFLB 3008-080		8				50	4	—	8.36	8.62	8.89	9.19	9.85
CFLB 3010-025	R0.5	2.5	0.8	0.96	16°	50	4	—	2.71	2.79	2.87	2.95	3.14
CFLB 3010-030		3				50	4	—	3.23	3.32	3.42	3.52	3.75
CFLB 3010-040		4				50	4	—	4.26	4.38	4.52	4.66	4.98
CFLB 3010-050		5				50	4	—	5.29	5.45	5.62	5.80	6.20
CFLB 3010-060		6				50	4	—	6.32	6.51	6.72	6.94	7.42
CFLB 3010-080		8				50	4	—	8.39	8.64	8.92	9.21	9.87
CFLB 3010-100		10				50	4	—	10.45	10.77	11.12	11.49	12.32
CFLB 3010-120		12				50	4	—	12.51	12.90	13.32	13.77	14.76
CFLB 3015-040	R0.75	4	1.2	1.43	16°	50	4	—	4.18	4.29	4.41	4.54	4.83
CFLB 3015-060		6				50	4	—	6.24	6.42	6.61	6.82	7.28
CFLB 3015-080		8				50	4	—	8.30	8.55	8.82	9.10	9.73
CFLB 3015-100		10				50	4	—	10.37	10.68	11.02	11.38	12.18
CFLB 3015-120		12				50	4	—	12.43	12.81	13.22	13.65	14.62
CFLB 3015-160		16				50	4	—	16.56	17.07	17.62	18.21	19.52
CFLB 3020-040	R1	4	1.6	1.83	16°	50	4	—	4.35	4.46	4.58	4.71	4.99
CFLB 3020-060		6				50	4	—	6.41	6.59	6.78	6.99	7.44
CFLB 3020-080		8				50	4	—	8.48	8.72	8.98	9.26	9.89
CFLB 3020-100		10				50	4	—	10.54	10.85	11.18	11.54	12.33
CFLB 3020-120		12				50	4	—	12.60	12.98	13.38	13.82	14.78
CFLB 3020-140		14				50	4	—	14.66	15.11	15.59	16.09	17.23
CFLB 3020-160		16				50	4	—	16.73	17.24	17.79	18.37	19.68
CFLB 3020-180		18				55	4	—	18.79	19.37	19.99	20.65	No Interference
CFLB 3020-200		20				55	4	—	20.85	21.50	22.19	22.93	No Interference
CFLB 3030-080	R1.5	8	2.4	2.73	16°	60	6	—	8.64	8.87	9.13	9.39	9.99
CFLB 3030-100		10				60	6	—	10.70	11.00	11.33	11.67	12.44
CFLB 3030-120		12				60	6	—	12.77	13.14	13.53	13.96	14.89
CFLB 3030-160		16				60	6	—	16.89	17.39	17.93	18.50	19.78
CFLB 3030-200		20				70	6	—	21.02	21.65	22.33	23.06	24.68
CFLB 3030-250		25				70	6	—	26.17	26.98	27.83	28.75	No Interference
CFLB 3040-100	R2	10	3.2	3.63	16°	70	6	—	10.87	11.16	11.47	11.80	12.54
CFLB 3040-120		12				70	6	—	12.93	13.29	13.67	14.08	14.99
CFLB 3040-160		16				70	6	—	17.06	17.55	18.07	18.63	19.89
CFLB 3040-200		20				70	6	—	21.18	21.81	22.47	23.19	No Interference
CFLB 3040-250		25				70	6	—	26.34	27.13	27.98	28.88	No Interference
CFLB 3040-300		30				70	6	—	31.50	32.45	33.48	No Interference	No Interference
CFLB 3060-200	R3	20	4.8	5.42	—	80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CFLB 3060-250		25				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CFLB 3060-300		30				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CFLB 3060-350		35				80	6	—	No Interference	No Interference	No Interference	No Interference	No Interference
CFLB 3060-400		40				90	6	—	No Interference	No Interference	No Interference	No Interference	No Interference

Milling Conditions for CFLB


WORK MATERIAL			COPPER ALUMINUM ALLOYS C1100 / A5052 / A7075 etc.				CARBON STEELS / ALLOY STEELS / PREHARDENED STEELS S50C / NAK80 etc. (~45HRC)				HARDENED STEELS STAVAX / SKD61 etc. (~55HRC)			
Coolant			WET				WET／DRY				WET／DRY			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3006-020	**R0.3**	2	30,000	1,000	0.03	0.13	30,000	1,000	0.03	0.13	30,000	700	0.03	0.13
3006-030		3	30,000	1,000	0.03	0.13	30,000	1,000	0.03	0.13	30,000	700	0.03	0.13
3006-040		4	30,000	700	0.02	0.1	30,000	700	0.02	0.1	30,000	480	0.02	0.1
3006-060		6	30,000	475	0.01	0.05	30,000	475	0.01	0.05	30,000	300	0.01	0.05
3008-040	**R0.4**	4	30,000	1,250	0.04	0.17	30,000	1,250	0.04	0.17	30,000	850	0.04	0.17
3008-060		6	30,000	1,000	0.03	0.14	30,000	1,000	0.03	0.14	30,000	680	0.03	0.14
3008-080		8	27,000	770	0.018	0.12	27,000	770	0.018	0.12	27,000	510	0.018	0.12
3010-025	**R0.5**	2.5	30,000	1,500	0.05	0.21	30,000	1,500	0.05	0.21	30,000	1,000	0.05	0.21
3010-030		3	30,000	1,500	0.05	0.21	30,000	1,500	0.05	0.21	30,000	1,000	0.05	0.21
3010-040		4	30,000	1,500	0.05	0.21	30,000	1,500	0.05	0.21	30,000	1,000	0.05	0.21
3010-050		5	30,000	1,500	0.05	0.21	30,000	1,500	0.05	0.21	30,000	1,000	0.05	0.21
3010-060		6	30,000	1,500	0.04	0.19	30,000	1,500	0.04	0.19	30,000	1,000	0.04	0.19
3010-080		8	25,200	1,200	0.03	0.17	25,200	1,200	0.03	0.17	25,200	800	0.03	0.17
3010-100		10	24,100	930	0.023	0.15	24,100	930	0.023	0.15	24,100	620	0.023	0.155
3010-120		12	23,000	660	0.017	0.135	23,000	660	0.017	0.135	23,000	440	0.017	0.135
3015-040	**R0.75**	4	30,000	2,500	0.075	0.32	30,000	2,500	0.075	0.32	30,000	1,700	0.075	0.32
3015-060		6	30,000	2,500	0.075	0.32	30,000	2,500	0.075	0.32	30,000	1,700	0.075	0.32
3015-080		8	30,000	2,500	0.075	0.32	30,000	2,500	0.075	0.32	30,000	1,700	0.075	0.32
3015-100		10	24,000	2,000	0.05	0.26	24,000	2,000	0.05	0.26	24,000	1,350	0.05	0.26
3015-120		12	20,800	1,400	0.035	0.25	20,800	1,400	0.035	0.25	20,800	925	0.035	0.23
3015-160		16	17,500	800	0.025	0.24	17,500	800	0.025	0.24	17,500	500	0.017	0.2
3020-040	**R1**	4	30,000	3,200	0.2	0.6	30,000	3,200	0.2	0.6	30,000	2,500	0.2	0.6
3020-060		6	30,000	3,200	0.2	0.6	30,000	3,200	0.2	0.6	30,000	2,500	0.2	0.6
3020-080		8	30,000	3,200	0.2	0.6	30,000	3,200	0.2	0.6	29,150	2,400	0.2	0.6
3020-100		10	27,000	3,000	0.2	0.6	27,000	3,000	0.2	0.6	24,300	2,000	0.2	0.6
3020-120		12	21,600	2,400	0.15	0.5	21,600	2,400	0.15	0.5	21,000	1,600	0.14	0.5
3020-140		14	16,200	1,600	0.12	0.45	16,200	1,600	0.12	0.45	16,200	1,200	0.08	0.35
3020-160		16	12,600	1,200	0.1	0.4	12,600	1,200	0.1	0.4	12,600	1,200	0.05	0.3
3020-180		18	12,350	1,060	0.07	0.375	12,350	1,060	0.07	0.375	12,350	900	0.035	0.285
3020-200		20	12,050	930	0.04	0.35	12,050	930	0.04	0.35	12,050	600	0.017	0.27
3030-080	**R1.5**	8	24,000	4,000	0.3	0.9	24,000	4,000	0.3	0.9	21,600	2,700	0.3	0.9
3030-100		10	24,000	4,000	0.3	0.9	24,000	4,000	0.3	0.9	21,600	2,700	0.3	0.9
3030-120		12	24,000	3,600	0.3	0.9	24,000	3,600	0.3	0.9	21,600	2,450	0.3	0.9
3030-160		16	16,800	2,800	0.27	0.85	16,800	2,800	0.27	0.85	15,100	1,900	0.27	0.85
3030-200		20	12,000	2,000	0.24	0.75	12,000	2,000	0.24	0.75	10,800	1,350	0.24	0.75
3030-250		25	8,400	1,200	0.15	0.65	8,400	1,200	0.15	0.65	7,500	800	0.15	0.65

Milling Conditions for CFLB

WORK MATERIAL			TITANIUM ALLOYS STAINLESS STEELS Ti-6Al-4V / SUS etc.				HEAT RESISTANT ALLOYS Inconel718			
Coolant			WET				WET			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3006-020	R0.3	2	20,000	1,000	0.015	0.09	9,000	225	0.015	0.09
3006-030		3	20,000	1,000	0.015	0.09	7,500	185	0.012	0.08
3006-040		4	20,000	700	0.01	0.07	4,500	100	0.01	0.07
3006-060		6	20,000	200	0.005	0.035	2,400	30	0.004	0.035
3008-040	R0.4	4	20,000	1,250	0.02	0.12	10,000	310	0.02	0.12
3008-060		6	20,000	950	0.013	0.075	7,200	200	0.013	0.075
3008-080		8	18,000	600	0.007	0.06	4,450	95	0.007	0.06
3010-025	R0.5	2.5	20,000	1,500	0.025	0.15	10,000	375	0.025	0.15
3010-030		3	20,000	1,500	0.025	0.15	10,000	375	0.025	0.15
3010-040		4	20,000	1,500	0.025	0.15	9,000	330	0.025	0.15
3010-050		5	20,000	1,500	0.025	0.15	7,500	280	0.02	0.14
3010-060		6	20,000	1,500	0.02	0.14	6,000	220	0.02	0.13
3010-080		8	16,800	1,200	0.015	0.12	3,500	110	0.015	0.11
3010-100		10	16,050	930	0.011	0.1	3,350	85	0.011	0.095
3010-120		12	15,300	660	0.008	0.095	3,200	60	0.008	0.085
3015-040	R0.75	4	20,000	2,500	0.035	0.22	9,000	380	0.03	0.22
3015-060		6	20,000	2,500	0.035	0.22	9,000	380	0.03	0.22
3015-080		8	20,000	2,500	0.035	0.22	6,000	250	0.025	0.18
3015-100		10	16,000	2,000	0.025	0.19	4,500	170	0.02	0.17
3015-120		12	14,000	1,370	0.02	0.18	4,100	135	0.017	0.17
3015-160		16	12,000	730	0.013	0.17	3,600	100	0.013	0.165
3020-040	R1	4	20,000	3,200	0.1	0.43	12,000	1,000	0.1	0.4
3020-060		6	20,000	3,200	0.1	0.43	12,000	1,000	0.1	0.4
3020-080		8	20,000	3,200	0.1	0.43	10,800	900	0.1	0.4
3020-100		10	18,000	3,000	0.1	0.43	9,000	750	0.08	0.36
3020-120		12	14,400	2,400	0.075	0.38	7,200	600	0.08	0.34
3020-140		14	10,800	1,600	0.06	0.34	5,400	400	0.07	0.32
3020-160		16	8,400	1,200	0.05	0.34	4,200	300	0.06	0.3
3020-180		18	8,250	1,000	0.035	0.26	4,100	250	0.035	0.26
3020-200		20	8,050	800	0.017	0.245	4,000	200	0.015	0.23
3030-080	R1.5	8	16,000	4,000	0.15	0.65	8,000	1,000	0.15	0.65
3030-100		10	16,000	4,000	0.15	0.65	7,200	900	0.15	0.65
3030-120		12	16,000	3,600	0.15	0.65	7,200	800	0.15	0.65
3030-160		16	11,200	2,800	0.135	0.62	4,800	600	0.12	0.55
3030-200		20	8,000	2,000	0.12	0.58	3,600	400	0.1	0.52
3030-250		25	5,600	1,200	0.075	0.46	2,800	300	0.09	0.48

Milling Conditions for CFLB

WORK MATERIAL			COPPER ALUMINUM ALLOYS C1100 / A5052 / A7075 etc.				CARBON STEELS / ALLOY STEELS / PREHARDENED STEELS S50C / NAK80 etc. (~45HRC)				HARDENED STEELS STAVAX / SKD61 etc. (~55HRC)			
Coolant			WET				WET／DRY				WET／DRY			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3040-100	R2	10	18,000	4,000	0.4	1.2	18,000	4,000	0.4	1.2	16,200	2,700	0.4	1.2
3040-120		12	18,000	4,000	0.4	1.2	18,000	4,000	0.4	1.2	16,200	2,700	0.4	1.2
3040-160		16	16,200	3,600	0.4	1.2	16,200	3,600	0.4	1.2	14,600	2,450	0.4	1.2
3040-200		20	13,500	3,000	0.4	1.2	13,500	3,000	0.4	1.2	12,200	2,000	0.4	1.2
3040-250		25	9,900	2,200	0.32	1.05	9,900	2,200	0.32	1.05	8,900	1,450	0.32	1.05
3040-300		30	7,200	1,400	0.2	0.85	7,200	1,400	0.2	0.85	6,500	950	0.2	0.85
3060-200	R3	20	12,000	4,000	0.6	1.8	12,000	4,000	0.6	1.8	10,800	2,700	0.6	1.8
3060-250		25	10,500	3,500	0.6	1.8	10,500	3,500	0.6	1.8	9,450	2,350	0.6	1.8
3060-300		30	9,000	3,000	0.6	1.8	9,000	3,000	0.6	1.8	8,100	2,000	0.6	1.8
3060-350		35	7,500	2,500	0.6	1.8	7,500	2,500	0.5	1.6	6,750	1,650	0.5	1.6
3060-400		40	6,000	2,000	0.4	1.4	6,000	2,000	0.4	1.4	5,400	1,350	0.4	1.4



Note:
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machines maximum speed, or when the tool is chattering and heats up to a red color.
- Recommend wet coolant for Copper.
- DRY: air blow, WET: water soluble or oil coolant.

Milling Conditions for CFLB


WORK MATERIAL			TITANIUM ALLOYS STAINLESS STEELS Ti-6Al-4V / SUS etc.				HEAT RESISTANT ALLOYS Inconel718			
Coolant			WET				WET			
Model Number	Radius of Ball Nose (mm)	Effective Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3040-100	R2	10	12,000	4,000	0.2	0.87	6,000	1,000	0.2	0.85
3040-120		12	12,000	4,000	0.2	0.87	6,000	1,000	0.2	0.85
3040-160		16	10,800	3,600	0.2	0.87	5,400	900	0.2	0.85
3040-200		20	9,000	3,000	0.2	0.87	4,500	750	0.17	0.76
3040-250		25	6,600	2,200	0.16	0.78	2,700	400	0.14	0.68
3040-300		30	4,800	1,400	0.1	0.62	2,100	300	0.12	0.63
3060-200	R3	20	8,000	4,000	0.3	1.3	3,600	900	0.3	1.3
3060-250		25	7,000	3,500	0.3	1.3	3,300	820	0.27	1.2
3060-300		30	6,000	3,000	0.3	1.3	3,000	750	0.25	1.17
3060-350		35	5,000	2,500	0.25	1.15	2,400	570	0.23	1.1
3060-400		40	4,000	2,000	0.2	1.05	1,800	400	0.21	1.04


Tool Life Comparison with Conventional Model (2 flutes) R0.3 x EL3 S50C


S50C Pocket Milling

■ Milling Conditions

Spindle Speed	30,000 min^{-1}
Feed Rate	1,000 mm/min
a_p	0.03 mm
a_e	0.13 mm
Coolant	Air Blow (Through Spindle)
Overhang Length	12 mm
Pocket Size	ϕ5 × Depth 3 mm
Cycle Time	14 min/pocket

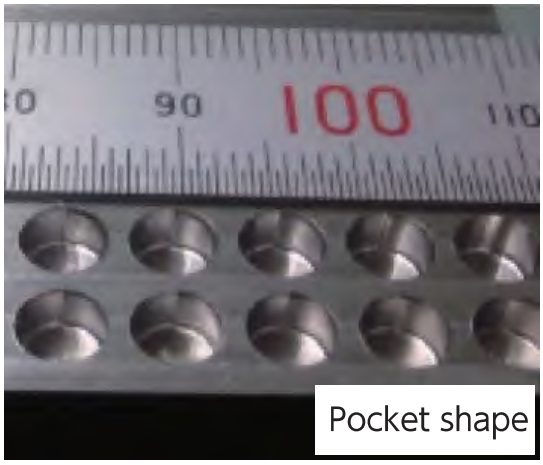

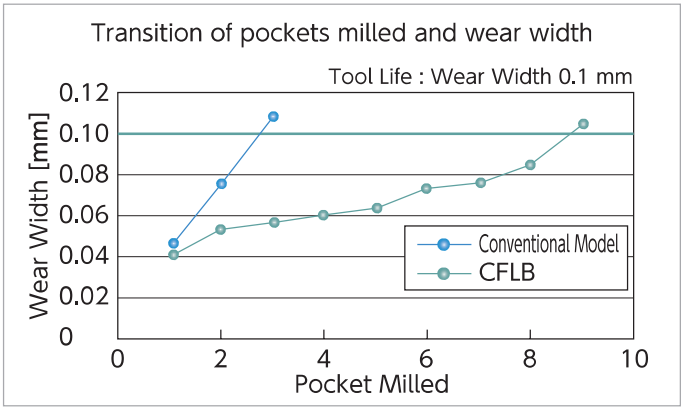

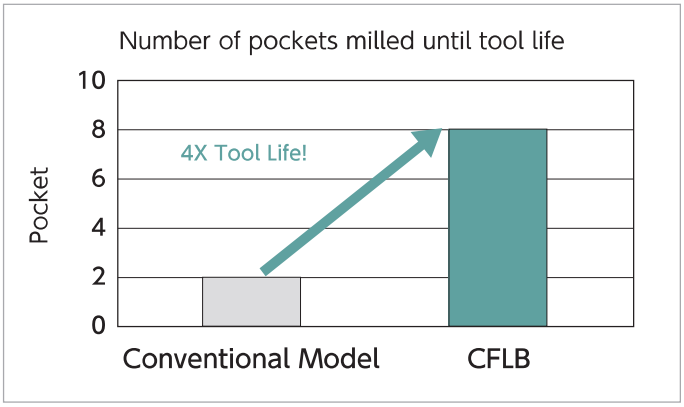

HTNB



HARDMAX 2 Flute Taper Neck Ball End Mills

R0.1～R2

Super MG | HARD MAX | 30° | R ±0.005 | Shank Dia 0/-0.005 | Back Taper Geometry

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	●	●		○			●			○	○		

Total 245 models


Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Shape	Suggested Retail Price ¥
HTNB 2002-015-1	R0.1	30′	1.5	—	0.16	—	16°	50	4	A	—
HTNB 2002-020-1			2					50	4		—
HTNB 2002-030-1			3					50	4		—
HTNB 2002-015-2		1°	1.5					50	4		—
HTNB 2002-020-2			2					50	4		—
HTNB 2002-030-2			3					50	4		—
HTNB 2002-015-3		1°30′	1.5					50	4		—
HTNB 2002-020-3			2					50	4		—
HTNB 2002-030-3			3					50	4		—
HTNB 2003-020-1	R0.15	30′	2	—	0.24	—	16°	50	4	A	—
HTNB 2003-030-1			3					50	4		—
HTNB 2003-020-2		1°	2					50	4		—
HTNB 2003-030-2			3					50	4		—
HTNB 2003-020-3		1°30′	2					50	4		—
HTNB 2003-030-3			3					50	4		—
HTNB 2004-030-1	R0.2	30′	3	—	0.32	—	16°	50	4	A	—
HTNB 2004-040-1			4					50	4		—
HTNB 2004-060-1			6					50	4		—
HTNB 2004-030-2		1°	3					50	4		—
HTNB 2004-040-2			4					50	4		—
HTNB 2004-060-2			6					50	4		—
HTNB 2004-030-3		1°30′	3					50	4		—
HTNB 2004-040-3			4					50	4		—
HTNB 2004-060-3			6					50	4		—

Features


Taper Neck design offers high rigidity.
Stable milling and excellent surface even on deep milling.
HARDMAX coat offers heat resistance, toughness and lubricity at a high level.
Suitable for hard materials up to 65HRC.

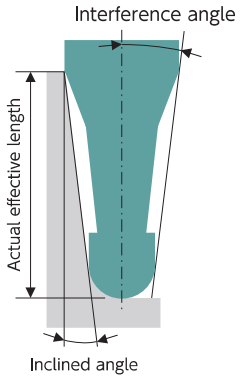


Shape A

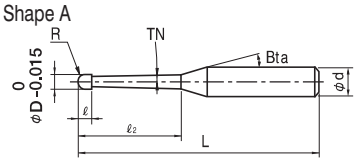

Shape B



Shape C

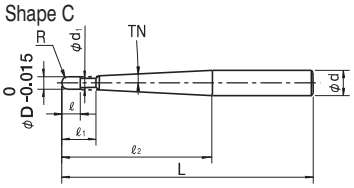

The shank taper angle shown is not an exact value.

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ2	Interference Angle	Effective Length by Inclined Angles — : Interference				
					30′	1°	1°30′	2°	3°
HTNB 2002-015-1	R0.1	30′	1.5	13.36°	—	1.50	1.55	1.60	1.72
HTNB 2002-020-1			2	12.63°	—	2.01	2.08	2.15	2.31
HTNB 2002-030-1			3	11.37°	—	3.05	3.15	3.26	3.50
HTNB 2002-015-2		1°	1.5	13.41°	—	—	1.51	1.56	1.68
HTNB 2002-020-2			2	12.69°	—	—	2.03	2.10	2.25
HTNB 2002-030-2			3	11.46°	—	—	3.06	3.17	3.40
HTNB 2002-015-3		1°30′	1.5	13.46°	—	—	—	1.53	1.64
HTNB 2002-020-3			2	12.76°	—	—	—	2.04	2.19
HTNB 2002-030-3			3	11.56°	—	—	—	3.08	3.31
HTNB 2003-020-1	R0.15	30′	2	12.62°	—	2.01	2.08	2.15	2.30
HTNB 2003-030-1			3	11.34°	—	3.05	3.15	3.25	3.49
HTNB 2003-020-2		1°	2	12.68°	—	—	2.03	2.10	2.25
HTNB 2003-030-2			3	11.43°	—	—	3.06	3.17	3.40
HTNB 2003-020-3		1°30′	2	12.75°	—	—	—	2.05	2.19
HTNB 2003-030-3			3	11.52°	—	—	—	3.08	3.31
HTNB 2004-030-1	R0.2	30′	3	11.30°	—	3.04	3.14	3.25	3.48
HTNB 2004-040-1			4	10.23°	—	4.08	4.21	4.35	4.67
HTNB 2004-060-1			6	8.60°	—	6.14	6.34	6.56	7.04
HTNB 2004-030-2		1°	3	11.38°	—	—	3.06	3.17	3.39
HTNB 2004-040-2			4	10.33°	—	—	4.10	4.23	4.54
HTNB 2004-060-2			6	8.72°	—	—	6.16	6.37	6.84
HTNB 2004-030-3		1°30′	3	11.48°	—	—	—	3.08	3.30
HTNB 2004-040-3			4	10.44°	—	—	—	4.12	4.42
HTNB 2004-060-3			6	8.84°	—	—	—	6.19	6.64

Next Page ➡

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ2	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shape	Suggested Retail Price ¥
HTNB 2005-040-1	R0.25	30′	4	—	0.4	—	16°	50	4	A	—
HTNB 2005-060-1			6					50	4		—
HTNB 2005-080-1			8					50	4		—
HTNB 2005-100-1			10					50	4		—
HTNB 2005-040-2		1°	4					50	4		—
HTNB 2005-060-2			6					50	4		—
HTNB 2005-080-2			8					50	4		—
HTNB 2005-100-2			10					50	4		—
HTNB 2005-040-3		1°30′	4					50	4		—
HTNB 2005-060-3			6					50	4		—
HTNB 2005-080-3			8					50	4		—
HTNB 2005-100-3			10					50	4		—
HTNB 2006-040-1	R0.3	30′	4	0.9	0.48	0.56	16°	50	4	B	—
HTNB 2006-060-1			6					50	4		—
HTNB 2006-080-1			8					50	4		—
HTNB 2006-100-1			10					50	4		—
HTNB 2006-120-1			12					50	4		—
HTNB 2006-140-1			14					50	4		—
HTNB 2006-160-1			16					50	4		—
HTNB 2006-200-1			20					50	4		—
HTNB 2006-040-2		1°	4					50	4		—
HTNB 2006-060-2			6					50	4		—
HTNB 2006-080-2			8					50	4		—
HTNB 2006-100-2			10					50	4		—
HTNB 2006-120-2			12					50	4		—
HTNB 2006-140-2			14					50	4		—
HTNB 2006-160-2			16					50	4		—
HTNB 2006-200-2			20					50	4		—
HTNB 2006-040-3		1°30′	4					50	4		—
HTNB 2006-060-3			6					50	4		—
HTNB 2006-080-3			8					50	4		—
HTNB 2006-100-3			10					50	4		—
HTNB 2006-120-3			12					50	4		—
HTNB 2006-140-3			14					50	4		—
HTNB 2006-160-3			16					50	4		—
HTNB 2006-200-3			20					50	4		—
HTNB 2006-080-4		2°	8					50	4		—
HTNB 2006-120-4			12					50	4		—
HTNB 2006-200-4			20					50	4		—
HTNB 2006-080-6		3°	8					50	4		—
HTNB 2006-120-6			12					50	4		—
HTNB 2006-200-6			20					50	4		—
HTNB 2006-120-10		5°	12					50	4		—
HTNB 2006-200-10			20					50	4		—

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Interference Angle	Effective Length by Inclined Angles — : Interference				
					30′	1°	1°30′	2°	3°
HTNB 2005-040-1	R0.25	30′	4	10.17°	—	4.08	4.21	4.35	4.66
HTNB 2005-060-1			6	8.52°	—	6.14	6.34	6.55	7.03
HTNB 2005-080-1			8	7.33°	—	8.21	8.48	8.76	9.41
HTNB 2005-100-1			10	6.43°	—	10.27	10.61	10.97	11.78
HTNB 2005-040-2		1°	4	10.27°	—	—	4.10	4.23	4.54
HTNB 2005-060-2			6	8.64°	—	—	6.16	6.37	6.84
HTNB 2005-080-2			8	7.45°	—	—	8.23	8.51	9.13
HTNB 2005-100-2			10	6.55°	—	—	10.30	10.65	11.43
HTNB 2005-040-3		1°30′	4	10.38°	—	—	—	4.12	4.41
HTNB 2005-060-3			6	8.76°	—	—	—	6.19	6.64
HTNB 2005-080-3			8	7.57°	—	—	—	8.26	8.86
HTNB 2005-100-3			10	6.67°	—	—	—	10.33	11.09
HTNB 2006-040-1	R0.3	30′	4	10.10°	—	4.08	4.21	4.34	4.65
HTNB 2006-060-1			6	8.44°	—	6.14	6.34	6.55	7.03
HTNB 2006-080-1			8	7.24°	—	8.21	8.47	8.76	9.40
HTNB 2006-100-1			10	6.33°	—	10.27	10.61	10.97	11.77
HTNB 2006-120-1			12	5.63°	—	12.34	12.74	13.18	14.14
HTNB 2006-140-1			14	5.07°	—	14.39	14.87	15.37	16.51
HTNB 2006-160-1			16	4.61°	—	16.46	17.01	17.59	18.89
HTNB 2006-200-1			20	3.90°	—	20.60	21.28	22.01	23.64
HTNB 2006-040-2		1°	4	10.21°	—	—	4.10	4.23	4.53
HTNB 2006-060-2			6	8.55°	—	—	6.17	6.37	6.83
HTNB 2006-080-2			8	7.36°	—	—	8.23	8.51	9.13
HTNB 2006-100-2			10	6.45°	—	—	10.30	10.65	11.43
HTNB 2006-120-2			12	5.74°	—	—	12.37	12.79	13.72
HTNB 2006-140-2			14	5.18°	—	—	14.43	14.93	16.03
HTNB 2006-160-2			16	4.71°	—	—	16.50	17.07	18.32
HTNB 2006-200-2			20	3.99°	—	—	20.64	21.34	22.92
HTNB 2006-040-3		1°30′	4	10.31°	—	—	—	4.12	4.41
HTNB 2006-060-3			6	8.67°	—	—	—	6.19	6.64
HTNB 2006-080-3			8	7.48°	—	—	—	8.26	8.86
HTNB 2006-100-3			10	6.57°	—	—	—	10.34	11.09
HTNB 2006-120-3			12	5.86°	—	—	—	12.40	13.31
HTNB 2006-140-3			14	5.29°	—	—	—	14.46	15.52
HTNB 2006-160-3			16	4.82°	—	—	—	16.54	17.76
HTNB 2006-200-3			20	4.09°	—	—	—	20.67	22.19
HTNB 2006-080-4		2°	8	7.60°	—	—	—	—	8.59
HTNB 2006-120-4			12	5.98°	—	—	—	—	12.89
HTNB 2006-200-4			20	4.19°	—	—	—	—	21.49
HTNB 2006-080-6		3°	8	7.86°	—	—	—	—	—
HTNB 2006-120-6			12	6.23°	—	—	—	—	—
HTNB 2006-200-6			20	4.41°	—	—	—	—	—
HTNB 2006-120-10		5°	12	6.82°	—	—	—	—	—
HTNB 2006-200-10			20	4.92°	—	—	—	—	—

Next Page ➡

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Shape	Suggested Retail Price ¥
HTNB 2008-060-1	R0.4	30'	6	1.2	0.64	0.76	16°	50	4	B	—
HTNB 2008-080-1			8					50	4		—
HTNB 2008-120-1			12					60	4		—
HTNB 2008-160-1			16					60	4		—
HTNB 2008-060-2		1°	6					50	4		—
HTNB 2008-080-2			8					50	4		—
HTNB 2008-120-2			12					60	4		—
HTNB 2008-160-2			16					60	4		—
HTNB 2008-060-3		1°30′	6					50	4		—
HTNB 2008-080-3			8					50	4		—
HTNB 2008-120-3			12					60	4		—
HTNB 2008-160-3			16					60	4		—
HTNB 2010-060-1	R0.5	30′	6	1.5	0.8	0.95	16°	50	4	B	—
HTNB 2010-080-1			8					50	4		—
HTNB 2010-100-1			10					50	4		—
HTNB 2010-120-1			12					50	4		—
HTNB 2010-140-1			14					50	4		—
HTNB 2010-160-1			16					50	4		—
HTNB 2010-180-1			18					50	4		—
HTNB 2010-200-1			20					60	4		—
HTNB 2010-220-1			22					60	4		—
HTNB 2010-260-1			26					65	4		—
HTNB 2010-300-1			30					70	4		—
HTNB 2010-320-1			32					70	4		—
HTNB 2010-360-1			36					80	4		—

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Interference Angle	Effective Length by Inclined Angles — : Interference				
					30′	1°	1°30′	2°	3°
HTNB 2008-060-1	R0.4	30'	6	8.26°	—	6.14	6.34	6.54	7.01
HTNB 2008-080-1			8	7.04°	—	8.21	8.47	8.75	9.38
HTNB 2008-120-1			12	5.44°	—	12.33	12.74	13.17	14.13
HTNB 2008-160-1			16	4.43°	—	16.47	17.01	17.59	18.88
HTNB 2008-060-2		1°	6	8.37°	—	—	6.17	6.37	6.82
HTNB 2008-080-2			8	7.16°	—	—	8.23	8.51	9.12
HTNB 2008-120-2			12	5.55°	—	—	12.37	12.79	13.72
HTNB 2008-160-2			16	4.53°	—	—	16.50	17.06	18.31
HTNB 2008-060-3		1°30′	6	8.49°	—	—	—	6.20	6.64
HTNB 2008-080-3			8	7.28°	—	—	—	8.26	8.86
HTNB 2008-120-3			12	5.67°	—	—	—	12.40	13.30
HTNB 2008-160-3			16	4.63°	—	—	—	16.54	17.75
HTNB 2010-060-1	R0.5	30′	6	8.06°	—	6.14	6.33	6.54	7.00
HTNB 2010-080-1			8	6.84°	—	8.21	8.47	8.75	9.37
HTNB 2010-100-1			10	5.93°	—	10.27	10.60	10.96	11.74
HTNB 2010-120-1			12	5.24°	—	12.33	12.73	13.16	14.11
HTNB 2010-140-1			14	4.69°	—	14.39	14.85	15.35	16.47
HTNB 2010-160-1			16	4.25°	—	16.46	17.00	17.58	18.86
HTNB 2010-180-1			18	3.88°	—	18.51	19.12	19.77	21.21
HTNB 2010-200-1			20	3.57°	—	20.60	21.27	22.00	23.61
HTNB 2010-220-1			22	3.31°	—	22.66	23.41	24.20	25.98
HTNB 2010-260-1			26	2.88°	—	26.79	27.67	28.62	No Interference
HTNB 2010-300-1			30	2.55°	—	30.90	31.93	33.02	No Interference
HTNB 2010-320-1			32	2.41°	—	32.98	34.07	35.24	No Interference
HTNB 2010-360-1			36	2.18°	—	37.11	38.34	39.66	No Interference

Next Page ➡

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Shape	Suggested Retail Price ¥
HTNB 2010-060-2	R0.5	1°	6	1.5	0.8	0.95	16°	50	4	B	—
HTNB 2010-080-2			8					50	4		—
HTNB 2010-100-2			10					50	4		—
HTNB 2010-120-2			12					50	4		—
HTNB 2010-140-2			14					50	4		—
HTNB 2010-160-2			16					50	4		—
HTNB 2010-180-2			18					50	4		—
HTNB 2010-200-2			20					60	4		—
HTNB 2010-220-2			22					60	4		—
HTNB 2010-260-2			26					65	4		—
HTNB 2010-300-2			30					70	4		—
HTNB 2010-320-2			32					70	4		—
HTNB 2010-360-2			36					80	4		—
HTNB 2010-060-3		1°30′	6					50	4		—
HTNB 2010-080-3			8					50	4		—
HTNB 2010-100-3			10					50	4		—
HTNB 2010-120-3			12					50	4		—
HTNB 2010-140-3			14					50	4		—
HTNB 2010-160-3			16					50	4		—
HTNB 2010-180-3			18					50	4		—
HTNB 2010-200-3			20					60	4		—
HTNB 2010-220-3			22					60	4		—
HTNB 2010-260-3			26					65	4		—
HTNB 2010-300-3			30					70	4		—
HTNB 2010-320-3			32					70	4		—
HTNB 2010-360-3			36					80	4		—
HTNB 2010-120-4		2°	12					50	4		—
HTNB 2010-160-4			16					50	4		—
HTNB 2010-200-4			20					60	4		—
HTNB 2010-300-4			30					70	4		—
HTNB 2010-120-6		3°	12					50	4		—
HTNB 2010-160-6			16					50	4		—
HTNB 2010-200-6			20					60	4		—
HTNB 2010-298-6			29.8				—	70	4	C	—
HTNB 2010-120-10		5°	12				16°	50	4	B	—
HTNB 2010-200-10			20					70	6		—

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Interference Angle	Effective Length by Inclined Angles — : Interference				
					30′	1°	1°30′	2°	3°
HTNB 2010-060-2	R0.5	1°	6	8.17°	—	—	6.18	6.38	6.82
HTNB 2010-080-2			8	6.95°	—	—	8.24	8.51	9.12
HTNB 2010-100-2			10	6.04°	—	—	10.31	10.66	11.42
HTNB 2010-120-2			12	5.35°	—	—	12.38	12.79	13.72
HTNB 2010-140-2			14	4.79°	—	—	14.45	14.93	16.02
HTNB 2010-160-2			16	4.34°	—	—	16.51	17.07	18.31
HTNB 2010-180-2			18	3.97°	—	—	18.58	19.21	20.61
HTNB 2010-200-2			20	3.65°	—	—	20.64	21.35	22.91
HTNB 2010-220-2			22	3.39°	—	—	22.71	23.48	25.21
HTNB 2010-260-2			26	2.95°	—	—	26.85	27.76	No Interference
HTNB 2010-300-2			30	2.62°	—	—	30.97	32.03	No Interference
HTNB 2010-320-2			32	2.48°	—	—	33.05	34.18	No Interference
HTNB 2010-360-2			36	2.24°	—	—	37.18	38.46	No Interference
HTNB 2010-060-3		1°30′	6	8.28°	—	—	—	6.21	6.65
HTNB 2010-080-3			8	7.06°	—	—	—	8.28	8.87
HTNB 2010-100-3			10	6.16°	—	—	—	10.35	11.10
HTNB 2010-120-3			12	5.45°	—	—	—	12.42	13.32
HTNB 2010-140-3			14	4.90°	—	—	—	14.47	15.52
HTNB 2010-160-3			16	4.44°	—	—	—	16.56	17.77
HTNB 2010-180-3			18	4.06°	—	—	—	18.61	19.97
HTNB 2010-200-3			20	3.74°	—	—	—	20.70	22.21
HTNB 2010-220-3			22	3.47°	—	—	—	22.77	24.44
HTNB 2010-260-3			26	3.03°	—	—	—	26.91	28.88
HTNB 2010-300-3			30	2.69°	—	—	—	31.03	No Interference
HTNB 2010-320-3			32	2.55°	—	—	—	33.11	No Interference
HTNB 2010-360-3			36	2.30°	—	—	—	37.25	No Interference
HTNB 2010-120-4		2°	12	5.57°	—	—	—	—	12.88
HTNB 2010-160-4			16	4.55°	—	—	—	—	17.18
HTNB 2010-200-4			20	3.84°	—	—	—	—	21.48
HTNB 2010-300-4			30	2.77°	—	—	—	—	No Interference
HTNB 2010-120-6		3°	12	5.82°	—	—	—	—	—
HTNB 2010-160-6			16	4.77°	—	—	—	—	—
HTNB 2010-200-6			20	4.05°	—	—	—	—	—
HTNB 2010-298-6			29.8	—	—	—	—	—	—
HTNB 2010-120-10		5°	12	6.38°	—	—	—	—	—
HTNB 2010-200-10			20	6.35°	—	—	—	—	—

Next Page ➡

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Shape	Suggested Retail Price ¥
HTNB 2015-100-1	R0.75	30′	10	2.25	1.2	1.42	16°	60	4	B	—
HTNB 2015-120-1			12					60	4		—
HTNB 2015-160-1			16					60	4		—
HTNB 2015-200-1			20					60	4		—
HTNB 2015-220-1			22					60	4		—
HTNB 2015-260-1			26					70	4		—
HTNB 2015-300-1			30					70	4		—
HTNB 2015-360-1			36					80	4		—
HTNB 2015-100-2		1°	10					60	4		—
HTNB 2015-120-2			12					60	4		—
HTNB 2015-160-2			16					60	4		—
HTNB 2015-200-2			20					60	4		—
HTNB 2015-260-2			26					70	4		—
HTNB 2015-300-2			30					70	4		—
HTNB 2015-360-2			36					80	4		—
HTNB 2015-100-3		1°30′	10					60	4		—
HTNB 2015-120-3			12					60	4		—
HTNB 2015-160-3			16					60	4		—
HTNB 2015-200-3			20					60	4		—
HTNB 2015-260-3			26					70	4		—
HTNB 2015-300-3			30					70	4		—
HTNB 2015-360-3			36					80	4		—
HTNB 2015-120-4		2°	12					60	4		—
HTNB 2015-160-4			16					60	4		—
HTNB 2015-200-4			20					60	4		—
HTNB 2015-300-4			30					70	6		—
HTNB 2015-120-6		3°	12					60	4		—
HTNB 2015-160-6			16					60	4		—
HTNB 2015-200-6			20					60	4		—
HTNB 2015-300-6			30					70	6		—

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Interference Angle	Effective Length by Inclined Angles — : Interference				
					30′	1°	1°30′	2°	3°
HTNB 2015-100-1	R0.75	30′	10	5.36°	—	10.27	10.59	10.93	11.70
HTNB 2015-120-1			12	4.69°	—	12.33	12.72	13.14	14.08
HTNB 2015-160-1			16	3.75°	—	16.46	16.99	17.56	18.82
HTNB 2015-200-1			20	3.12°	—	20.59	21.26	21.98	23.57
HTNB 2015-220-1			22	2.88°	—	22.66	23.39	24.18	No Interference
HTNB 2015-260-1			26	2.50°	—	26.79	27.66	28.60	No Interference
HTNB 2015-300-1			30	2.20°	—	30.92	31.93	33.01	No Interference
HTNB 2015-360-1			36	1.87°	—	37.11	38.33	No Interference	No Interference
HTNB 2015-100-2		1°	10	5.46°	—	—	10.31	10.65	11.39
HTNB 2015-120-2			12	4.79°	—	—	12.38	12.78	13.69
HTNB 2015-160-2			16	3.83°	—	—	16.51	17.06	18.29
HTNB 2015-200-2			20	3.20°	—	—	20.65	21.34	22.89
HTNB 2015-260-2			26	2.56°	—	—	26.85	27.76	No Interference
HTNB 2015-300-2			30	2.26°	—	—	30.98	32.03	No Interference
HTNB 2015-360-2			36	1.92°	—	—	37.18	No Interference	No Interference
HTNB 2015-100-3		1°30′	10	5.57°	—	—	—	10.36	11.09
HTNB 2015-120-3			12	4.89°	—	—	—	12.43	13.31
HTNB 2015-160-3			16	3.92°	—	—	—	16.57	17.76
HTNB 2015-200-3			20	3.28°	—	—	—	20.71	22.21
HTNB 2015-260-3			26	2.63°	—	—	—	26.91	No Interference
HTNB 2015-300-3			30	2.32°	—	—	—	31.05	No Interference
HTNB 2015-360-3			36	1.98°	—	—	—	No Interference	No Interference
HTNB 2015-120-4		2°	12	4.98°	—	—	—	—	12.90
HTNB 2015-160-4			16	4.02°	—	—	—	—	17.20
HTNB 2015-200-4			20	3.36°	—	—	—	—	21.50
HTNB 2015-300-4			30	3.84°	—	—	—	—	32.25
HTNB 2015-120-6		3°	12	5.21°	—	—	—	—	—
HTNB 2015-160-6			16	4.22°	—	—	—	—	—
HTNB 2015-200-6			20	3.55°	—	—	—	—	—
HTNB 2015-300-6			30	4.04°	—	—	—	—	—

Next Page ➡

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Shape	Suggested Retail Price ¥
HTNB 2020-120-1	R1	30′	12	3	1.6	1.91	16°	60	4	B	—
HTNB 2020-160-1			16					60	4		—
HTNB 2020-200-1			20					60	4		—
HTNB 2020-220-1			22					60	4		—
HTNB 2020-240-1			24					60	4		—
HTNB 2020-260-1			26					60	4		—
HTNB 2020-280-1			28					70	4		—
HTNB 2020-300-1			30					70	4		—
HTNB 2020-320-1			32					70	4		—
HTNB 2020-340-1			34					70	4		—
HTNB 2020-360-1			36					80	4		—
HTNB 2020-400-1			40					80	4		—
HTNB 2020-100-2		1°	10					60	4		—
HTNB 2020-120-2			12					60	4		—
HTNB 2020-160-2			16					60	4		—
HTNB 2020-200-2			20					60	4		—
HTNB 2020-220-2			22					60	4		—
HTNB 2020-240-2			24					60	4		—
HTNB 2020-260-2			26					60	4		—
HTNB 2020-280-2			28					70	4		—
HTNB 2020-300-2			30					70	4		—
HTNB 2020-320-2			32					70	4		—
HTNB 2020-340-2			34					70	4		—
HTNB 2020-360-2			36					80	4		—
HTNB 2020-400-2			40					80	4		—
HTNB 2020-100-3		1°30′	10					60	4		—
HTNB 2020-120-3			12					60	4		—
HTNB 2020-160-3			16					60	4		—
HTNB 2020-200-3			20					60	4		—
HTNB 2020-220-3			22					60	4		—
HTNB 2020-240-3			24					60	4		—
HTNB 2020-260-3			26					60	4		—
HTNB 2020-280-3			28					70	4		—
HTNB 2020-300-3			30					70	4		—
HTNB 2020-320-3			32					70	4		—
HTNB 2020-340-3			34					70	4		—
HTNB 2020-360-3			36					80	4		—
HTNB 2020-400-3			40					80	4		—
HTNB 2020-120-4		2°	12					60	4		—
HTNB 2020-160-4			16					60	4		—
HTNB 2020-200-4			20					60	4		—
HTNB 2020-300-4			30					70	6		—
HTNB 2020-400-4			40					80	6		—
HTNB 2020-120-6		3°	12					60	4		—
HTNB 2020-160-6			16					60	4		—
HTNB 2020-200-6			20					60	4		—
HTNB 2020-300-6			30					70	6		—
HTNB 2020-400-6			40					80	6		—

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Interference Angle	Effective Length by Inclined Angles — : Interference				
					30′	1°	1°30′	2°	3°
HTNB 2020-120-1	R1	30′	12	4.05°	—	12.34	12.72	13.14	14.05
HTNB 2020-160-1			16	3.19°	—	16.47	16.99	17.55	18.80
HTNB 2020-200-1			20	2.63°	—	20.60	21.26	21.97	No Interference
HTNB 2020-220-1			22	2.42°	—	22.66	23.39	24.17	No Interference
HTNB 2020-240-1			24	2.23°	—	24.73	25.53	26.38	No Interference
HTNB 2020-260-1			26	2.08°	—	26.79	27.66	28.59	No Interference
HTNB 2020-280-1			28	1.94°	—	28.86	29.80	No Interference	No Interference
HTNB 2020-300-1			30	1.83°	—	30.92	31.93	No Interference	No Interference
HTNB 2020-320-1			32	1.72°	—	32.99	34.07	No Interference	No Interference
HTNB 2020-340-1			34	1.63°	—	35.05	36.20	No Interference	No Interference
HTNB 2020-360-1			36	1.54°	—	37.12	38.33	No Interference	No Interference
HTNB 2020-400-1			40	1.40°	—	41.25	No Interference	No Interference	No Interference
HTNB 2020-100-2		1°	10	4.77°	—	—	10.34	10.66	11.40
HTNB 2020-120-2			12	4.13°	—	—	12.40	12.80	13.69
HTNB 2020-160-2			16	3.26°	—	—	16.53	17.08	18.29
HTNB 2020-200-2			20	2.69°	—	—	20.67	21.35	No Interference
HTNB 2020-220-2			22	2.48°	—	—	22.73	23.49	No Interference
HTNB 2020-240-2			24	2.29°	—	—	24.80	25.63	No Interference
HTNB 2020-260-2			26	2.13°	—	—	26.87	27.77	No Interference
HTNB 2020-280-2			28	2.00°	—	—	28.94	29.91	No Interference
HTNB 2020-300-2			30	1.88°	—	—	31.00	No Interference	No Interference
HTNB 2020-320-2			32	1.77°	—	—	33.07	No Interference	No Interference
HTNB 2020-340-2			34	1.67°	—	—	35.14	No Interference	No Interference
HTNB 2020-360-2			36	1.59°	—	—	37.20	No Interference	No Interference
HTNB 2020-400-2			40	1.44°	—	—	No Interference	No Interference	No Interference
HTNB 2020-100-3		1°30′	10	4.83°	—	—	—	10.38	11.09
HTNB 2020-120-3			12	4.22°	—	—	—	12.46	13.33
HTNB 2020-160-3			16	3.34°	—	—	—	16.60	17.78
HTNB 2020-200-3			20	2.76°	—	—	—	20.74	No Interference
HTNB 2020-220-3			22	2.54°	—	—	—	22.81	No Interference
HTNB 2020-240-3			24	2.35°	—	—	—	24.88	No Interference
HTNB 2020-260-3			26	2.19°	—	—	—	26.95	No Interference
HTNB 2020-280-3			28	2.05°	—	—	—	29.02	No Interference
HTNB 2020-300-3			30	1.93°	—	—	—	No Interference	No Interference
HTNB 2020-320-3			32	1.82°	—	—	—	No Interference	No Interference
HTNB 2020-340-3			34	1.72°	—	—	—	No Interference	No Interference
HTNB 2020-360-3			36	1.63°	—	—	—	No Interference	No Interference
HTNB 2020-400-3			40	1.48°	—	—	—	No Interference	No Interference
HTNB 2020-120-4		2°	12	4.29°	—	—	—	—	12.97
HTNB 2020-160-4			16	3.41°	—	—	—	—	17.26
HTNB 2020-200-4			20	2.83°	—	—	—	—	No Interference
HTNB 2020-300-4			30	3.52°	—	—	—	—	32.31
HTNB 2020-400-4			40	2.78°	—	—	—	—	No Interference
HTNB 2020-120-6		3°	12	4.48°	—	—	—	—	—
HTNB 2020-160-6			16	3.58°	—	—	—	—	—
HTNB 2020-200-6			20	2.98°	—	—	—	—	—
HTNB 2020-300-6			30	3.71°	—	—	—	—	—
HTNB 2020-400-6			40	2.94°	—	—	—	—	—

Next Page ➡

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Shape	Suggested Retail Price ¥
HTNB 2030-200-1	R1.5	30′	20	4.5	2.4	2.89	16°	60	6	B	—
HTNB 2030-220-1			22					60	6		—
HTNB 2030-260-1			26					70	6		—
HTNB 2030-300-1			30					70	6		—
HTNB 2030-320-1			32					70	6		—
HTNB 2030-360-1			36					80	6		—
HTNB 2030-400-1			40					80	6		—
HTNB 2030-420-1			42					90	6		—
HTNB 2030-520-1			52					100	6		—
HTNB 2030-200-2		1°	20					60	6		—
HTNB 2030-260-2			26					70	6		—
HTNB 2030-300-2			30					70	6		—
HTNB 2030-320-2			32					70	6		—
HTNB 2030-360-2			36					80	6		—
HTNB 2030-400-2			40					80	6		—
HTNB 2030-420-2			42					90	6		—
HTNB 2030-480-2			48					100	6		—
HTNB 2030-520-2			52					100	6		—
HTNB 2030-620-2			62					100	6		—
HTNB 2030-200-3		1°30′	20					60	6		—
HTNB 2030-260-3			26					70	6		—
HTNB 2030-300-3			30					70	6		—
HTNB 2030-320-3			32					70	6		—
HTNB 2030-360-3			36					80	6		—
HTNB 2030-400-3			40					80	6		—
HTNB 2030-420-3			42					90	6		—
HTNB 2030-580-3			58					100	6		—
HTNB 2040-300-1	R2	30′	30	6	3.2	3.87	16°	80	6	B	—
HTNB 2040-400-1			40					80	6		—
HTNB 2040-620-1			62					120	6		—
HTNB 2040-200-2		1°	20					80	6		—
HTNB 2040-300-2			30					80	6		—
HTNB 2040-360-2			36					80	6		—
HTNB 2040-400-2			40					80	6		—
HTNB 2040-600-2			60					120	6		—
HTNB 2040-410-3		1°30′	41					80	6		—
HTNB 2040-600-3			60					120	8		—
HTNB 2040-800-3			80				—	130	8	C	—

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ_2	Interference Angle	Effective Length by Inclined Angles — : Interference				
					30′	1°	1°30′	2°	3°
HTNB 2030-200-1	R1.5	30′	20	3.71°	—	20.59	21.23	21.92	23.46
HTNB 2030-220-1			22	3.43°	—	22.65	23.36	24.13	25.83
HTNB 2030-260-1			26	2.97°	—	26.78	27.63	28.54	No Interference
HTNB 2030-300-1			30	2.62°	—	30.91	31.90	32.96	No Interference
HTNB 2030-320-1			32	2.48°	—	32.98	34.04	35.17	No Interference
HTNB 2030-360-1			36	2.23°	—	37.11	38.30	39.58	No Interference
HTNB 2030-400-1			40	2.03°	—	41.23	42.57	44.00	No Interference
HTNB 2030-420-1			42	1.94°	—	43.30	44.70	No Interference	No Interference
HTNB 2030-520-1			52	1.60°	—	53.62	55.38	No Interference	No Interference
HTNB 2030-200-2		1°	20	3.79°	—	—	20.66	21.33	22.83
HTNB 2030-260-2			26	3.04°	—	—	26.87	27.75	29.72
HTNB 2030-300-2			30	2.69°	—	—	31.00	32.03	No Interference
HTNB 2030-320-2			32	2.54°	—	—	33.07	34.17	No Interference
HTNB 2030-360-2			36	2.29°	—	—	37.20	38.44	No Interference
HTNB 2030-400-2			40	2.08°	—	—	41.33	42.72	No Interference
HTNB 2030-420-2			42	1.99°	—	—	43.40	No Interference	No Interference
HTNB 2030-480-2			48	1.77°	—	—	49.60	No Interference	No Interference
HTNB 2030-520-2			52	1.64°	—	—	53.74	No Interference	No Interference
HTNB 2030-620-2			62	1.39°	—	—	No Interference	No Interference	No Interference
HTNB 2030-200-3		1°30′	20	3.88°	—	—	—	20.75	22.20
HTNB 2030-260-3			26	3.12°	—	—	—	26.96	28.87
HTNB 2030-300-3			30	2.76°	—	—	—	31.09	No Interference
HTNB 2030-320-3			32	2.61°	—	—	—	33.16	No Interference
HTNB 2030-360-3			36	2.35°	—	—	—	37.30	No Interference
HTNB 2030-400-3			40	2.14°	—	—	—	41.44	No Interference
HTNB 2030-420-3			42	2.05°	—	—	—	43.51	No Interference
HTNB 2030-580-3			58	1.53°	—	—	—	No Interference	No Interference
HTNB 2040-300-1	R2	30′	30	1.88°	—	30.91	31.88	No Interference	No Interference
HTNB 2040-400-1			40	1.43°	—	41.23	No Interference	No Interference	No Interference
HTNB 2040-620-1			62	0.94°	—	No Interference	No Interference	No Interference	No Interference
HTNB 2040-200-2		1°	20	2.81°	—	—	20.67	21.32	No Interference
HTNB 2040-300-2			30	1.93°	—	—	31.00	No Interference	No Interference
HTNB 2040-360-2			36	1.63°	—	—	37.21	No Interference	No Interference
HTNB 2040-400-2			40	1.47°	—	—	No Interference	No Interference	No Interference
HTNB 2040-600-2			60	1.00°	—	—	No Interference	No Interference	No Interference
HTNB 2040-410-3		1°30′	41	1.48°	—	—	—	No Interference	No Interference
HTNB 2040-600-3			60	1.92°	—	—	—	No Interference	No Interference
HTNB 2040-800-3			80	—	—	—	—	No Interference	No Interference

Milling Conditions for HTNB

WORK MATERIAL				COPPER / CARBON STEELS Cu / S45C / S50C					PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				
Model Number	Radius of Ball Nose (mm)	Neck Taper Angle	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth	
							Roughing (mm)	Finishing (mm)				Roughing (mm)	Finishing (mm)
2002	R0.1	1°30′ or below	1.5	42,000	640	0.008	0.02	0.015	29,000	430	0.006	0.02	0.015
			2	33,000	370	0.006	0.02	0.011	23,500	260	0.005	0.02	0.011
			3	27,000	270	0.002	0.02	0.01	19,000	165	0.001	0.02	0.009
2003	R0.15	1°30′ or below	2	36,000	650	0.009	0.03	0.018	25,200	400	0.007	0.03	0.016
			3	33,000	500	0.004	0.03	0.015	23,000	330	0.003	0.03	0.014
2004	R0.2	1°30′ or below	3	42,000	1,300	0.018	0.04	0.031	29,000	800	0.014	0.04	0.028
			4	33,000	800	0.008	0.04	0.024	23,000	520	0.006	0.04	0.023
			6	27,000	550	0.005	0.04	0.02	19,000	330	0.004	0.04	0.017
2005	R0.25	1°30′ or below	4	36,000	1,330	0.02	0.05	0.037	28,000	870	0.016	0.05	0.031
			6	29,000	900	0.012	0.05	0.031	23,000	650	0.009	0.05	0.028
			8	23,500	600	0.007	0.05	0.026	19,000	450	0.006	0.05	0.024
			10	20,000	480	0.004	0.05	0.024	18,000	380	0.003	0.05	0.021
2006	R0.3	1°30′ or below	4	44,000	2,340	0.032	0.06	0.053	32,500	1,500	0.025	0.06	0.046
			6	36,000	1,500	0.018	0.06	0.042	29,000	1,100	0.014	0.06	0.038
			8	28,500	1,150	0.018	0.06	0.04	24,000	770	0.014	0.06	0.032
			10	28,500	950	0.014	0.06	0.033	24,000	720	0.011	0.06	0.03
			12	28,500	950	0.009	0.06	0.033	24,000	720	0.007	0.06	0.03
			14	26,500	800	0.007	0.06	0.03	23,000	660	0.005	0.06	0.029
			16	25,000	700	0.005	0.06	0.028	22,000	600	0.004	0.06	0.027
			20	20,000	400	0.003	0.06	0.02	17,000	330	0.002	0.06	0.019
		2° or above	8	28,500	1,380	0.022	0.09	0.048	24,000	920	0.017	0.09	0.038
			12	28,500	1,140	0.011	0.09	0.04	24,000	860	0.008	0.09	0.036
			20	20,000	480	0.004	0.09	0.024	17,000	400	0.002	0.09	0.024
2008	R0.4	1°30′ or below	6	36,000	2,000	0.023	0.08	0.056	24,000	1,300	0.019	0.08	0.054
			8	28,500	1,500	0.023	0.08	0.053	20,000	950	0.019	0.08	0.048
			12	28,500	1,200	0.018	0.08	0.042	16,500	600	0.014	0.08	0.036
			16	25,000	900	0.01	0.08	0.036	15,000	500	0.008	0.08	0.033
2010	R0.5	1°30′ or below	6	35,000	2,900	0.05	0.1	0.083	23,000	1,850	0.04	0.1	0.08
			8	28,000	2,200	0.05	0.1	0.079	19,000	1,500	0.04	0.1	0.079
			10	24,000	1,800	0.035	0.1	0.075	17,000	1,300	0.03	0.1	0.076
			12	19,000	1,360	0.027	0.1	0.072	14,000	1,000	0.022	0.1	0.071
			14	18,000	1,200	0.025	0.1	0.067	13,000	900	0.02	0.1	0.069
			16	18,000	1,150	0.025	0.1	0.064	13,000	850	0.02	0.1	0.065
			18	17,500	1,120	0.018	0.1	0.064	12,500	800	0.013	0.1	0.064
			20	17,000	1,080	0.016	0.1	0.064	12,000	780	0.013	0.1	0.064
			22	17,000	1,080	0.016	0.1	0.064	12,000	780	0.013	0.1	0.064
			26	16,000	1,000	0.015	0.1	0.063	11,000	700	0.012	0.1	0.064
			29.8	13,400	840	0.012	0.1	0.063	10,000	620	0.01	0.1	0.062
			30	13,400	840	0.012	0.1	0.063	10,000	620	0.01	0.1	0.062
			32	12,000	750	0.011	0.1	0.063	9,000	550	0.009	0.1	0.061
			36	10,000	620	0.009	0.1	0.062	7,000	420	0.007	0.1	0.06
		2° or above	12	19,000	1,632	0.032	0.15	0.086	14,000	1,200	0.026	0.15	0.086
			16	18,000	1,380	0.03	0.15	0.077	13,000	1,020	0.024	0.15	0.078
			20	17,000	1,300	0.019	0.15	0.076	12,000	920	0.016	0.15	0.077
			29.8	13,400	1,000	0.014	0.15	0.075	10,000	740	0.012	0.15	0.074
			30	13,400	1,000	0.014	0.15	0.075	10,000	740	0.012	0.15	0.074

Milling Conditions for HTNB

WORK MATERIAL				HARDENED STEELS SKD / SKT (45~55HRC)					HARDENED STEELS SKD / SKS (55~65HRC)				
Model Number	Radius of Ball Nose (mm)	Neck Taper Angle	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth	
							Roughing (mm)	Finishing (mm)				Roughing (mm)	Finishing (mm)
2002	R0.1	1°30′ or below	1.5	28,000	330	0.006	0.016	0.012	28,000	260	0.005	0.012	0.009
			2	22,000	210	0.004	0.016	0.01	22,000	190	0.004	0.012	0.009
			3	17,500	150	0.001	0.016	0.009	17,500	130	0.001	0.012	0.007
2003	R0.15	1°30′ or below	2	23,500	350	0.006	0.024	0.015	23,500	300	0.005	0.018	0.013
			3	21,500	250	0.003	0.024	0.012	21,500	200	0.002	0.018	0.009
2004	R0.2	1°30′ or below	3	27,000	670	0.012	0.032	0.025	27,000	500	0.01	0.024	0.019
			4	22,000	430	0.006	0.032	0.02	22,000	380	0.005	0.024	0.017
			6	18,000	300	0.004	0.032	0.017	18,000	260	0.003	0.024	0.014
2005	R0.25	1°30′ or below	4	27,500	650	0.014	0.04	0.024	27,500	625	0.011	0.03	0.023
			6	22,000	530	0.008	0.04	0.024	22,000	500	0.007	0.03	0.023
			8	17,000	380	0.005	0.04	0.022	17,000	350	0.004	0.03	0.021
			10	16,000	330	0.002	0.04	0.021	16,000	300	0.002	0.03	0.019
2006	R0.3	1°30′ or below	4	25,500	850	0.022	0.048	0.033	25,500	713	0.018	0.036	0.028
			6	21,000	700	0.012	0.048	0.033	21,000	550	0.01	0.036	0.026
			8	17,000	510	0.012	0.048	0.03	17,000	425	0.01	0.036	0.025
			10	17,000	470	0.009	0.048	0.028	16,000	390	0.008	0.036	0.024
			12	16,000	400	0.006	0.048	0.025	15,000	350	0.005	0.036	0.023
			14	15,500	370	0.004	0.048	0.024	14,500	320	0.004	0.036	0.022
			16	15,000	350	0.003	0.048	0.023	14,500	300	0.003	0.036	0.021
			20	12,000	200	0.001	0.048	0.017	11,000	180	0.001	0.036	0.016
		2° or above	8	17,000	610	0.014	0.06	0.036	17,000	510	0.012	0.048	0.03
			12	16,000	480	0.007	0.06	0.03	15,000	420	0.006	0.048	0.028
			20	12,000	240	0.001	0.06	0.02	11,000	210	0.001	0.048	0.019
2008	R0.4	1°30′ or below	6	21,000	900	0.016	0.064	0.043	21,000	800	0.013	0.048	0.038
			8	17,000	680	0.016	0.064	0.04	17,000	600	0.013	0.048	0.035
			12	14,000	480	0.012	0.064	0.034	14,000	420	0.01	0.048	0.03
			16	13,000	420	0.006	0.064	0.032	12,500	350	0.006	0.048	0.028
2010	R0.5	1°30′ or below	6	23,000	1,500	0.034	0.08	0.065	22,000	1,200	0.028	0.06	0.055
			8	19,000	1,130	0.034	0.08	0.059	18,000	920	0.028	0.06	0.051
			10	16,000	950	0.027	0.08	0.059	15,500	770	0.022	0.06	0.05
			12	12,600	760	0.019	0.08	0.06	12,600	615	0.015	0.06	0.049
			14	12,000	700	0.017	0.08	0.058	12,000	540	0.014	0.06	0.045
			16	12,000	700	0.017	0.08	0.058	12,000	540	0.014	0.06	0.045
			18	11,000	640	0.011	0.08	0.058	11,000	490	0.01	0.06	0.045
			20	11,000	640	0.011	0.08	0.058	11,000	490	0.009	0.06	0.045
			22	11,000	640	0.011	0.08	0.058	11,000	490	0.009	0.06	0.045
			26	10,000	570	0.01	0.08	0.057	10,000	460	0.009	0.06	0.046
			29.8	9,500	530	0.009	0.08	0.055	9,500	410	0.008	0.06	0.043
			30	9,500	530	0.009	0.08	0.055	9,500	410	0.008	0.06	0.043
			32	9,000	490	0.008	0.08	0.054	9,000	380	0.007	0.06	0.042
			36	7,000	380	0.006	0.08	0.054	7,000	280	0.005	0.06	0.04
		2° or above	12	12,600	910	0.023	0.1	0.072	12,600	740	0.018	0.08	0.059
			16	12,000	840	0.02	0.1	0.07	12,000	650	0.017	0.08	0.054
			20	11,000	770	0.013	0.1	0.07	11,000	590	0.011	0.08	0.054
			29.8	9,500	640	0.011	0.1	0.067	9,500	490	0.01	0.08	0.052
			30	9,500	640	0.011	0.1	0.067	9,500	490	0.01	0.08	0.052

Milling Conditions for HTNB


WORK MATERIAL				COPPER / CARBON STEELS Cu / S45C / S50C					PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				
Model Number	Radius of Ball Nose (mm)	Neck Taper Angle	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth	
							Roughing (mm)	Finishing (mm)				Roughing (mm)	Finishing (mm)
2015	R0.75	1°30′ or below	10	20,000	2,300	0.065	0.15	0.115	13,000	1,600	0.05	0.15	0.123
			12	18,000	2,000	0.055	0.15	0.111	13,000	1,500	0.045	0.15	0.115
			16	16,000	1,600	0.05	0.15	0.1	12,000	1,200	0.03	0.15	0.1
			20	14,000	1,400	0.035	0.15	0.1	10,000	950	0.025	0.15	0.095
			22	14,000	1,400	0.035	0.15	0.1	10,000	950	0.025	0.15	0.095
			26	12,000	1,200	0.025	0.15	0.1	10,000	900	0.02	0.15	0.09
			30	10,000	950	0.02	0.15	0.095	8,000	700	0.015	0.15	0.088
			36	10,000	950	0.02	0.15	0.095	7,000	600	0.015	0.15	0.086
		2° or above	12	18,000	2,400	0.066	0.225	0.133	13,000	1,800	0.054	0.225	0.138
			16	16,000	1,920	0.06	0.225	0.12	12,000	1,440	0.036	0.225	0.12
			20	14,000	1,680	0.042	0.225	0.12	10,000	1,140	0.03	0.225	0.114
			30	10,000	1,140	0.024	0.225	0.114	8,000	840	0.018	0.225	0.105
2020	R1	1°30′ or below	10	19,000	3,300	0.11	0.2	0.174	12,000	2,100	0.1	0.2	0.175
			12	17,000	2,900	0.09	0.2	0.171	12,000	2,000	0.095	0.2	0.167
			16	15,000	2,350	0.081	0.2	0.157	11,000	1,700	0.065	0.2	0.155
			20	11,000	1,600	0.068	0.2	0.145	8,400	1,100	0.055	0.2	0.131
			22	11,000	1,600	0.063	0.2	0.145	8,400	1,050	0.05	0.2	0.125
			24	11,000	1,500	0.063	0.2	0.136	8,400	1,050	0.05	0.2	0.125
			26	10,000	1,350	0.063	0.2	0.135	7,350	900	0.05	0.2	0.122
			28	10,000	1,350	0.05	0.2	0.135	7,350	870	0.038	0.2	0.118
			30	10,000	1,350	0.05	0.2	0.135	7,350	870	0.038	0.2	0.118
			32	10,000	1,350	0.041	0.2	0.135	7,350	850	0.032	0.2	0.116
			34	10,000	1,350	0.041	0.2	0.135	7,000	800	0.032	0.2	0.114
			36	10,000	1,350	0.041	0.2	0.135	7,000	800	0.032	0.2	0.114
			40	10,000	1,350	0.041	0.2	0.135	7,000	800	0.032	0.3	0.114
		2° or above	12	17,000	3,480	0.108	0.3	0.205	12,000	2,400	0.114	0.3	0.2
			16	15,000	2,820	0.097	0.3	0.188	11,000	2,040	0.078	0.3	0.185
			20	11,000	1,920	0.082	0.3	0.175	8,400	1,320	0.066	0.3	0.157
			30	10,000	1,620	0.06	0.3	0.162	7,350	1,040	0.046	0.3	0.141
			40	10,000	1,620	0.049	0.3	0.135	7,000	960	0.038	0.3	0.135
2030	R1.5	1°30′ or below	20	11,000	2,350	0.095	0.3	0.214	8,400	1,500	0.075	0.3	0.179
			22	11,000	2,350	0.09	0.3	0.214	8,400	1,500	0.071	0.3	0.179
			26	10,000	2,050	0.085	0.3	0.205	7,600	1,300	0.068	0.3	0.171
			30	10,000	2,000	0.081	0.3	0.2	7,500	1,250	0.065	0.3	0.167
			32	10,000	1,900	0.081	0.3	0.19	7,500	1,200	0.065	0.3	0.16
			36	9,000	1,700	0.073	0.3	0.189	6,000	950	0.058	0.3	0.158
			40	8,500	1,600	0.065	0.3	0.188	6,000	950	0.053	0.3	0.158
			42	8,500	1,600	0.063	0.3	0.188	6,000	950	0.05	0.3	0.158
			48	8,500	1,570	0.052	0.3	0.185	6,000	920	0.042	0.3	0.153
			52	8,500	1,550	0.045	0.3	0.182	6,000	900	0.036	0.3	0.15
			62	5,600	930	0.035	0.3	0.166	5,000	700	0.025	0.3	0.14

Milling Conditions for HTNB

WORK MATERIAL				HARDENED STEELS SKD / SKT (45~55HRC)					HARDENED STEELS SKD / SKS (55~65HRC)				
Model Number	Radius of Ball Nose (mm)	Neck Taper Angle	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth	
							Roughing (mm)	Finishing (mm)				Roughing (mm)	Finishing (mm)
2015	R0.75	1°30′ or below	10	13,000	1,200	0.04	0.12	0.092	13,000	950	0.035	0.09	0.073
			12	11,000	950	0.035	0.12	0.086	11,000	750	0.03	0.09	0.068
			16	11,000	900	0.03	0.12	0.082	11,000	750	0.025	0.09	0.068
			20	10,000	800	0.02	0.12	0.08	10,000	650	0.018	0.09	0.065
			22	10,000	800	0.02	0.12	0.08	10,000	650	0.018	0.09	0.065
			26	9,000	700	0.017	0.12	0.078	9,000	600	0.015	0.09	0.067
			30	8,000	600	0.013	0.12	0.075	8,000	500	0.013	0.09	0.063
			36	7,000	500	0.013	0.12	0.071	7,000	400	0.013	0.09	0.057
		2° or above	12	11,000	1,140	0.042	0.15	0.104	11,000	900	0.036	0.12	0.082
			16	11,000	1,080	0.036	0.15	0.098	11,000	900	0.03	0.12	0.082
			20	10,000	960	0.024	0.15	0.096	10,000	780	0.022	0.12	0.078
			30	8,000	720	0.016	0.15	0.09	8,000	600	0.016	0.12	0.075
2020	R1	1°30′ or below	10	12,000	1,800	0.074	0.16	0.15	12,000	1,350	0.064	0.12	0.113
			12	10,500	1,430	0.065	0.16	0.136	10,500	1,070	0.055	0.12	0.102
			16	10,500	1,360	0.056	0.16	0.13	10,500	1,070	0.046	0.12	0.102
			20	9,450	1,150	0.048	0.16	0.122	9,450	920	0.038	0.12	0.097
			22	9,450	1,150	0.043	0.16	0.122	9,450	920	0.036	0.12	0.097
			24	8,400	1,020	0.043	0.16	0.121	8,400	800	0.036	0.12	0.095
			26	8,400	1,020	0.043	0.16	0.121	8,400	800	0.036	0.12	0.095
			28	7,350	850	0.033	0.16	0.116	7,350	690	0.028	0.12	0.094
			30	7,350	850	0.033	0.16	0.116	7,350	690	0.028	0.12	0.094
			32	7,350	850	0.028	0.16	0.116	7,350	690	0.023	0.12	0.094
			34	6,500	745	0.028	0.16	0.115	6,500	610	0.023	0.12	0.094
			36	6,500	745	0.028	0.16	0.115	6,500	610	0.023	0.12	0.094
			40	6,500	745	0.028	0.16	0.115	6,500	610	0.023	0.12	0.094
		2° or above	12	10,500	1,720	0.078	0.2	0.164	10,500	1,280	0.066	0.16	0.122
			16	10,500	1,630	0.067	0.2	0.155	10,500	1,280	0.055	0.16	0.122
			20	9,450	1,380	0.058	0.2	0.146	9,450	1,100	0.046	0.16	0.117
			30	7,350	1,020	0.04	0.2	0.139	7,350	830	0.034	0.16	0.113
			40	6,500	890	0.034	0.2	0.135	6,500	730	0.028	0.16	0.113
2030	R1.5	1°30′ or below	20	8,000	1,400	0.065	0.24	0.175	8,000	1,200	0.053	0.18	0.15
			22	8,000	1,400	0.062	0.24	0.175	8,000	1,200	0.05	0.18	0.15
			26	7,500	1,200	0.06	0.24	0.16	7,500	1,050	0.048	0.18	0.14
			30	7,000	1,100	0.057	0.24	0.157	7,000	980	0.047	0.18	0.14
			32	7,000	1,100	0.056	0.24	0.157	7,000	950	0.046	0.18	0.136
			36	6,000	950	0.05	0.24	0.158	6,000	800	0.042	0.18	0.133
			40	5,500	850	0.045	0.24	0.155	5,500	750	0.038	0.18	0.136
			42	5,500	850	0.043	0.24	0.155	5,500	750	0.036	0.18	0.136
			48	5,500	820	0.035	0.24	0.149	5,500	720	0.03	0.18	0.131
			52	5,500	800	0.031	0.24	0.145	5,500	700	0.026	0.18	0.127
			62	4,700	600	0.023	0.24	0.128	4,700	530	0.021	0.18	0.113

Milling Conditions for HTNB

WORK MATERIAL				COPPER / CARBON STEELS Cu / S45C / S50C					PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				
Model Number	Radius of Ball Nose (mm)	Neck Taper Angle	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth	
							Roughing (mm)	Finishing (mm)				Roughing (mm)	Finishing (mm)
2040	R2	1°30′ or below	20	8,400	1,900	0.125	0.4	0.226	5,400	1,030	0.096	0.4	0.191
			30	7,600	1,600	0.1	0.4	0.211	4,800	850	0.083	0.4	0.177
			36	6,900	1,400	0.094	0.4	0.203	3,900	650	0.074	0.4	0.167
			40	6,500	1,300	0.086	0.4	0.2	3,900	650	0.068	0.4	0.167
			41	6,500	1,300	0.086	0.4	0.2	3,900	650	0.068	0.4	0.167
			60	4,300	780	0.063	0.4	0.181	3,300	500	0.05	0.4	0.152
			62	4,300	750	0.063	0.4	0.174	3,300	480	0.05	0.4	0.145
			80	4,300	750	0.063	0.4	0.174	3,300	480	0.05	0.4	0.145
Radial Depth (mm)			Roughing	Neck Taper Angle 1°30′ or below $a_e \leqq 0.1D$, Neck Taper Angle 2° or above $a_e \leqq 0.15D$					Neck Taper Angle 1°30′ or below $a_e \leqq 0.1D$, Neck Taper Angle 2° or above $a_e \leqq 0.15D$				
			Finishing	$a_e \leqq Vf / n$									



D : Outside Diameter (mm)
n : Spindle Speed
Vf : Feed Rate

Milling Conditions for HTNB

WORK MATERIAL				HARDENED STEELS SKD / SKT (45~55HRC)					HARDENED STEELS SKD / SKS (55~65HRC)				
Model Number	Radius of Ball Nose (mm)	Neck Taper Angle	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth	
							Roughing (mm)	Finishing (mm)				Roughing (mm)	Finishing (mm)
2040	R2	1°30′ or below	**20**	5,200	980	0.085	0.32	0.188	5,200	840	0.066	0.24	0.162
			30	4,500	770	0.074	0.32	0.171	4,500	690	0.059	0.24	0.153
			36	3,900	670	0.065	0.32	0.172	3,900	560	0.052	0.24	0.144
			40	3,600	600	0.059	0.32	0.167	3,600	530	0.048	0.24	0.147
			41	3,600	600	0.059	0.32	0.167	3,600	530	0.048	0.24	0.147
			60	3,100	450	0.043	0.32	0.145	3,100	400	0.036	0.24	0.129
			62	3,100	420	0.043	0.32	0.135	3,100	380	0.036	0.24	0.123
			80	2,900	340	0.035	0.32	0.117	2,500	200	0.02	0.24	0.08
Radial Depth (mm)			Roughing	Neck Taper Angle 1°30′ or below $a_e \leqq 0.08D$, Neck Taper Angle 2° or above $a_e \leqq 0.1D$					Neck Taper Angle 1°30′ or below $a_e \leqq 0.06D$, Neck Taper Angle 2° or above $a_e \leqq 0.08D$				
			Finishing	$a_e \leqq Vf / n$									

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- The neck length and taper angle may affect the milling parameters. In operation, fine adjustments may be required.
- Recommend air blow or oil mist.
- Recommend oil coolant for Stainless Steels and Heat Resistant Alloys.
- Recommend wet coolant for Copper.

DCTNB



Diamond Coated 2 Flute Taper Neck Ball End Mills for Graphite Milling

R0.5~R1


MG | DIA | 35° | R ±0.01 | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
									○	★	○	○	●				○

Features

2 Flute Diamond coated Taper Neck Ball End Mills for Graphite Electrodes.
Taper Neck design improves the tool rigidity and provides high-efficiency & high-precision milling.
Original and optimized Diamond coating offers outstanding resistance to wear on Graphite.
Excellent adhesion coating with long-life tool design.

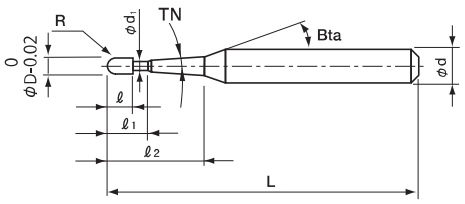

The shank taper angle shown is not an exact value.




Total 15 models

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ2	Effective Length ℓ1	Length of Cut ℓ	Neck Diameter φd1	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥	Interference Angle	Effective Length by Inclined Angles – : Interference				
												30′	1°	1°30′	2°	3°
DCTNB 2010-200-1.8	R0.5	0.9°	20	4	0.8	0.96	16°	80	6	—	5.25°	–	20.24	20.90	21.61	23.20
DCTNB 2010-250-1.8			25					80	6	—	4.48°	–	25.27	26.10	26.99	28.98
DCTNB 2010-400-1.8			40					100	6	—	3.11°	–	40.36	41.70	43.13	46.32
DCTNB 2010-600-1.8			60					120	6	—	2.21°	–	60.49	62.50	64.65	No Interference
DCTNB 2010-700-1.8			70					120	6	—	1.93°	–	70.55	72.90	No Interference	No Interference
DCTNB 2010-800-1.8			80					140	6	—	1.72°	–	80.62	83.30	No Interference	No Interference
DCTNB 2010-900-1.8			90					150	6	—	1.54°	–	90.68	93.71	No Interference	No Interference
DCTNB 2020-200-1.8	R1	0.9°	20	7	1.6	1.9	16°	80	6	—	4.55°	–	20.34	21.00	21.69	23.25
DCTNB 2020-250-1.8			25					80	6	—	3.84°	–	25.38	26.20	27.08	29.03
DCTNB 2020-400-1.8			40					100	6	—	2.61°	–	40.47	41.80	43.22	No Interference
DCTNB 2020-450-1.8			45					100	6	—	2.36°	–	45.51	47.00	48.60	No Interference
DCTNB 2020-600-1.8			60					120	6	—	1.83°	–	60.59	62.59	No Interference	No Interference
DCTNB 2020-700-1.8			70					120	6	—	1.59°	–	70.66	73.00	No Interference	No Interference
DCTNB 2020-800-1.8			80					140	6	—	1.41°	–	80.72	No Interference	No Interference	No Interference
DCTNB 2020-10001.8			100					150	6	—	1.15°	–	100.85	No Interference	No Interference	No Interference

Milling Conditions for DCTNB

WORK MATERIAL			GRAPHITE			
Model Number	Radius of Ball Nose (mm)	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
2010-200-1.8	R0.5	20	30,000	1,500	0.1	0.12
2010-250-1.8		25	30,000	1,500	0.08	0.12
2010-400-1.8		40	27,000	1,200	0.07	0.12
2010-600-1.8		60	23,000	800	0.06	0.12
2010-700-1.8		70	20,000	600	0.05	0.12
2010-800-1.8		80	18,000	500	0.04	0.12
2010-900-1.8		90	15,000	400	0.03	0.12
2020-200-1.8	R1	20	27,000	2,000	0.24	0.5
2020-250-1.8		25	27,000	2,000	0.19	0.5
2020-400-1.8		40	27,000	2,000	0.13	0.4
2020-450-1.8		45	27,000	2,000	0.11	0.4
2020-600-1.8		60	23,000	1,500	0.1	0.3
2020-700-1.8		70	20,000	1,200	0.09	0.3
2020-800-1.8		80	17,000	900	0.09	0.2
2020-10001.8		100	14,000	600	0.09	0.2



Note:
- Use a milling machine dedicated for Graphite.
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Recommend air blow for Graphite.

Other series for Graphite milling

Square / Long Neck Square

(★ Highly Recommended ● Recommended ○ Suggested)

Number of Flutes, Tool Type	Model Number	Appearance	Coating	Size	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Hard Brittle (Non-Metallic) Materials	Page
2 flutes Square	DCES 2000		DIA	φ0.2～φ6	○	★	○	○	●	○	A-35
4 flutes Square	DCES 4000		DIA	φ3～φ10	○	★	○	○	●	○	A-93
2 flutes Long Neck Square	DCLS		DIA	φ0.4～φ6	○	★	○	○	●	○	B-25

Long Neck Radius

4 flutes Long Neck Radius	DCLRS		DIA	φ1～φ6	○	★	○	○	●	○	D-99

Ball / Long Neck Ball / Taper Neck Ball

2 flutes Ball	DCB		DIA	R0.5～R6	○	★	○	○	●	○	F-31
2 flutes Long Neck Ball	DCLB		DIA	R0.2～R3	○	★	○	○	●	○	G-73
2 flutes Taper Neck Ball	DCTNB		DIA	R0.5～R1	○	★	○	○	●	○	H-21

HFTNB



HARDMAX 3 Flute Taper Neck Ball End Mills

R0.5～R2


Super MG | HARD MAX | 40° | R ±0.005 (R0.5～R1.5) | R ±0.007 (R2) | Shank Dia 0/-0.005 | Back Taper Geometry | Variable Pitch

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
○	○	●	●	●	●	●		○						○	○		

Features


3 Flute Taper Neck Ball End Mills for Hard Materials.
The negative rake angle design improves wear resistance.
Back taper design reduces cutting resistance.
Suitable for both roughing and finishing. Diameter Tolerance : 0/-0.015.

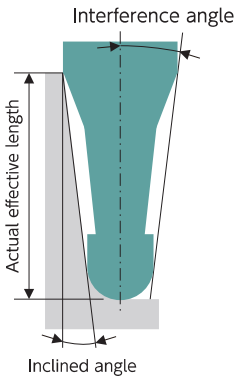

Shape A

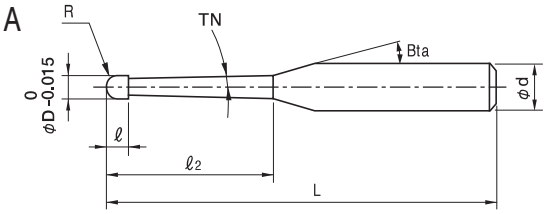

Shape B

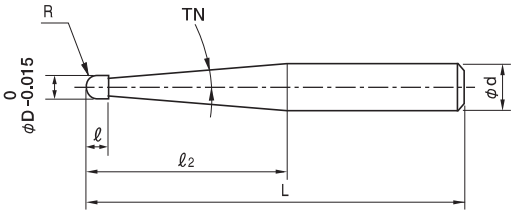

The shank taper angle shown is not an exact value.

■ Variable Pitch design
Minimizing vibration and chattering



※ Variable Pitch $\alpha \neq \beta \neq \gamma$

■ A wide choice of Taper Neck Angles
Useful sizes: 0.4° • 0.9° • 1.4° • 1.9° • 2.9°
Using with HTNRS, Taper Neck Radius End Mill, offers higher efficient milling.
Refer to page E-1 for HTNRS.

Total 75 models

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ2	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shape	Suggested Retail Price ¥	Interference Angle	Effective Length by Inclined Angles — : Interference				
											30′	1°	1°30′	2°	3°
HFTNB 3010-080-08	R0.5	0.4°	8	0.8	16°	60	6	A	—	8.82°	8.05	8.30	8.57	8.85	9.48
HFTNB 3010-100-08			10			60	6		—	7.89°	10.07	10.38	10.71	11.07	11.87
HFTNB 3010-120-08			12			60	6		—	7.13°	12.08	12.46	12.86	13.29	14.26
HFTNB 3010-160-08			16			60	6		—	5.98°	16.10	16.61	17.16	17.74	19.03
HFTNB 3010-200-08			20			60	6		—	5.15°	20.13	20.77	21.45	22.18	23.81
HFTNB 3010-260-08			26			70	6		—	4.26°	26.17	27.00	27.89	28.85	30.97
HFTNB 3010-300-08			30			70	6		—	3.82°	30.19	31.16	32.19	33.29	35.75
HFTNB 3010-060-18		0.9°	6			60	6		—	10.11°	—	6.06	6.25	6.45	6.90
HFTNB 3010-080-18			8			60	6		—	8.94°	—	8.07	8.33	8.60	9.21
HFTNB 3010-100-18			10			60	6		—	8.01°	—	10.08	10.41	10.75	11.53
HFTNB 3010-120-18			12			60	6		—	7.25°	—	12.10	12.49	12.91	13.84
HFTNB 3010-160-18			16			60	6		—	6.10°	—	16.12	16.65	17.21	18.47
HFTNB 3010-200-18			20			60	6		—	5.26°	—	20.15	20.81	21.52	23.09
HFTNB 3010-260-18			26			70	6		—	4.36°	—	26.19	27.05	27.98	30.03
HFTNB 3010-300-18			30			70	6		—	3.91°	—	30.21	31.21	32.28	34.66
HFTNB 3010-100-28		1.4°	10			60	6		—	8.13°	—	—	10.10	10.43	11.18
HFTNB 3010-120-28			12			60	6		—	7.38°	—	—	12.11	12.52	13.42
HFTNB 3010-160-28			16			60	6		—	6.22°	—	—	16.14	16.68	17.90
HFTNB 3010-200-28			20			60	6		—	5.37°	—	—	20.17	20.85	22.38
HFTNB 3010-260-28			26			70	6		—	4.46°	—	—	26.21	27.10	29.09
HFTNB 3015-100-08	R0.75	0.4°	10	1.2	16°	60	6	A	—	7.55°	10.11	10.41	10.74	11.09	11.87
HFTNB 3015-160-08			16			60	6		—	5.64°	16.14	16.65	17.18	17.75	19.03
HFTNB 3015-200-08			20			60	6		—	4.82°	20.17	20.80	21.48	22.20	23.81
HFTNB 3015-300-08			30			70	6		—	3.54°	30.23	31.19	32.21	33.31	35.75
HFTNB 3015-100-18		0.9°	10			60	6		—	7.66°	—	10.13	10.45	10.79	11.54
HFTNB 3015-160-18			16			60	6		—	5.75°	—	16.17	16.69	17.24	18.48
HFTNB 3015-200-18			20			60	6		—	4.93°	—	20.19	20.85	21.55	23.11
HFTNB 3015-300-18			30			70	6		—	3.63°	—	30.26	31.25	32.31	34.67
HFTNB 3015-100-28		1.4°	10			60	6		—	7.79°	—	—	10.15	10.48	11.21
HFTNB 3015-160-28			16			60	6		—	5.87°	—	—	16.19	16.73	17.93
HFTNB 3015-200-28			20			60	6		—	5.03°	—	—	20.22	20.90	22.41
HFTNB 3015-300-28			30			80	6		—	3.72°	—	—	30.28	31.31	33.60

Next Page ➡

Unit (mm)

Model Number	Radius of Ball Nose R	Neck Taper Angle TN	Neck Length ℓ2	Length of Cut ℓ	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shape	Suggested Retail Price ¥	Interference Angle	Effective Length by Inclined Angles – : Interference				
											30′	1°	1°30′	2°	3°
HFTNB 3020-120-08	R1	0.4°	12	1.6	16°	60	6	A	—	6.40°	12.12	12.49	12.87	13.29	14.22
HFTNB 3020-160-08			16			60	6		—	5.27°	16.15	16.64	17.17	17.73	18.99
HFTNB 3020-200-08			20			60	6		—	4.47°	20.17	20.80	21.46	22.18	23.77
HFTNB 3020-220-08			22			70	6		—	4.16°	22.18	22.87	23.61	24.40	26.16
HFTNB 3020-260-08			26			70	6		—	3.65°	26.21	27.03	27.90	28.84	30.93
HFTNB 3020-300-08			30			70	6		—	3.25°	30.23	31.18	32.20	33.29	35.71
HFTNB 3020-320-08			32			80	6		—	3.08°	32.25	33.26	34.35	35.51	38.09
HFTNB 3020-360-08			36			80	6		—	2.79°	36.26	37.40	38.63	39.94	No Interference
HFTNB 3020-400-08			40			80	6		—	2.55°	40.30	41.57	42.94	44.40	No Interference
HFTNB 3020-120-18		0.9°	12			60	6		—	6.52°	—	12.15	12.52	12.93	13.83
HFTNB 3020-160-18			16			60	6		—	5.38°	—	16.17	16.68	17.23	18.46
HFTNB 3020-200-18			20			60	6		—	4.57°	—	20.20	20.85	21.54	23.08
HFTNB 3020-260-18			26			70	6		—	3.74°	—	26.24	27.09	28.00	30.02
HFTNB 3020-300-18			30			70	6		—	3.33°	—	30.26	31.25	32.30	34.65
HFTNB 3020-360-18			36			80	6		—	2.86°	—	36.30	37.49	38.76	No Interference
HFTNB 3020-400-18			40			80	6		—	2.62°	—	40.33	41.65	43.06	No Interference
HFTNB 3020-500-18			50			100	6		—	2.16°	—	50.39	52.05	53.83	No Interference
HFTNB 3020-160-28		1.4°	16			60	6		—	5.49°	—	—	16.20	16.73	17.92
HFTNB 3020-200-28			20			60	6		—	4.68°	—	—	20.23	20.90	22.40
HFTNB 3020-260-28			26			70	6		—	3.83°	—	—	26.27	27.15	29.11
HFTNB 3020-300-28			30			70	6		—	3.41°	—	—	30.30	31.32	33.59
HFTNB 3020-400-28			40			80	6		—	2.69°	—	—	40.36	41.73	No Interference
HFTNB 3020-620-38		1.9°	62		—	100	6	B	—	—	—	—	—	No Interference	No Interference
HFTNB 3020-410-58		2.9°	41			80	6		—	—	—	—	—	—	No Interference
HFTNB 3030-200-08	R1.5	0.4°	20	2.4	16°	60	6	A	—	3.67°	20.23	20.84	21.49	22.19	23.75
HFTNB 3030-260-08			26			70	6		—	2.94°	26.27	27.07	27.93	28.86	No Interference
HFTNB 3030-300-08			30			70	6		—	2.60°	30.29	31.23	32.23	33.30	No Interference
HFTNB 3030-320-08			32			80	6		—	2.46°	32.31	33.31	34.38	35.52	No Interference
HFTNB 3030-360-08			36			80	6		—	2.21°	36.31	37.45	38.65	39.95	No Interference
HFTNB 3030-400-08			40			80	6		—	2.01°	40.36	41.62	42.97	44.41	No Interference
HFTNB 3030-200-18		0.9°	20			60	6		—	3.76°	—	20.27	20.90	21.58	23.09
HFTNB 3030-300-18			30			70	6		—	2.67°	—	30.34	31.31	32.34	No Interference
HFTNB 3030-400-18			40			80	6		—	2.07°	—	40.40	41.71	43.11	No Interference
HFTNB 3030-500-18			50			100	6		—	1.69°	—	50.46	52.11	No Interference	No Interference
HFTNB 3030-600-18			60			100	6		—	1.43°	—	60.52	No Interference	No Interference	No Interference
HFTNB 3030-400-28		1.4°	40			80	6		—	2.12°	—	—	40.45	41.80	No Interference
HFTNB 3030-500-28			50			100	6		—	1.74°	—	—	50.51	No Interference	No Interference
HFTNB 3030-650-28			65		—	100	6	B	—	—	—	—	No Interference	No Interference	No Interference
HFTNB 3040-300-18	R2	0.9°	30	6	16°	80	6	A	—	1.90°	—	30.51	31.47	No Interference	No Interference
HFTNB 3040-400-18			40			80	6		—	1.45°	—	40.58	No Interference	No Interference	No Interference
HFTNB 3040-500-18			50			100	6		—	1.18°	—	50.64	No Interference	No Interference	No Interference
HFTNB 3040-600-18			60			100	6		—	0.99°	—	No Interference	No Interference	No Interference	No Interference
HFTNB 3040-480-28		1.4°	48		—	80	6	B	—	—	—	—	No Interference	No Interference	No Interference


Milling Conditions for HFTNB

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Radius of Ball Nose (mm)	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3010	R0.5	6	14,500	1,300	0.1	0.2	14,500	1,250	0.06	0.12	14,500	1,200	0.04	0.08
		8	14,000	1,200	0.09	0.18	13,750	1,160	0.06	0.1	13,500	1,120	0.04	0.06
		10	13,300	1,000	0.08	0.16	12,650	1,000	0.05	0.09	12,000	1,000	0.04	0.05
		12	13,000	870	0.07	0.14	12,000	850	0.04	0.08	11,000	880	0.03	0.05
		16	12,500	680	0.05	0.1	10,250	600	0.04	0.06	8,000	550	0.03	0.04
		20	12,000	600	0.04	0.08	9,500	500	0.03	0.06	7,000	400	0.02	0.04
		26	11,700	520	0.03	0.06	8,600	370	0.02	0.04	5,500	220	0.02	0.03
		30	11,500	500	0.02	0.05	8,250	350	0.02	0.04	5,000	200	0.02	0.03
3015	R0.75	10	12,000	1,230	0.13	0.3	11,500	1,100	0.09	0.2	11,000	1,100	0.06	0.14
		16	11,200	930	0.1	0.25	10,600	910	0.07	0.16	10,000	900	0.05	0.11
		20	10,800	750	0.08	0.22	9,500	700	0.06	0.14	8,200	680	0.04	0.09
		30	10,000	550	0.06	0.16	8,300	450	0.04	0.1	6,600	380	0.03	0.08
3020	R1	12	10,300	1,200	0.16	0.38	10,150	1,130	0.12	0.25	10,000	1,100	0.1	0.18
		16	10,000	1,100	0.15	0.35	9,900	1,100	0.1	0.23	9,800	1,050	0.09	0.16
		20	9,500	950	0.15	0.32	9,300	940	0.1	0.21	9,000	930	0.08	0.15
		22	9,400	900	0.14	0.3	9,100	850	0.09	0.2	8,600	840	0.08	0.14
		26	9,300	750	0.12	0.28	8,700	730	0.08	0.2	8,000	700	0.07	0.13
		30	9,200	630	0.11	0.25	8,400	590	0.08	0.17	7,500	550	0.05	0.1
		32	8,800	580	0.1	0.24	8,200	550	0.07	0.16	7,300	480	0.04	0.1
		36	8,700	570	0.09	0.22	7,900	510	0.07	0.16	7,000	450	0.04	0.1
		40	8,300	500	0.08	0.2	7,500	450	0.06	0.15	6,600	400	0.04	0.1
		41	8,300	500	0.08	0.2	7,500	450	0.06	0.15	6,600	400	0.04	0.1
		50	8,000	430	0.06	0.15	6,700	340	0.04	0.12	5,300	250	0.03	0.1
		62	7,500	350	0.04	0.1	6,000	350	0.04	0.13	5,000	300	0.02	0.05
3030	R1.5	20	9,000	1,150	0.25	0.48	8,900	1,100	0.18	0.36	8,800	1,100	0.12	0.25
		26	8,600	1,000	0.22	0.42	8,300	1,000	0.16	0.32	8,200	980	0.11	0.22
		30	8,400	950	0.21	0.4	8,100	930	0.15	0.3	7,800	920	0.1	0.21
		32	8,300	900	0.2	0.37	7,800	860	0.14	0.28	7,400	840	0.09	0.2
		36	8,100	800	0.18	0.35	7,400	720	0.13	0.26	6,800	680	0.08	0.2
		40	8,000	720	0.17	0.33	7,000	630	0.12	0.24	6,000	550	0.08	0.19
		50	7,600	570	0.14	0.28	6,400	450	0.09	0.2	5,200	400	0.06	0.17
		60	7,200	480	0.12	0.24	6,000	400	0.07	0.18	4,700	320	0.05	0.16
		65	7,200	480	0.12	0.24	6,000	400	0.07	0.18	4,700	320	0.05	0.16

Milling Conditions for HFTNB

WORK MATERIAL			PREHARDENED STEELS / HARDENED STEELS NAK / SKD (30~45HRC)				HARDENED STEELS SKD / SKT (45~55HRC)				HARDENED STEELS SKD / SKH (55~65HRC)			
Model Number	Radius of Ball Nose (mm)	Neck Length (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
3040	**R2**	30	8,000	1,100	0.35	0.55	7,800	1,050	0.24	0.4	7,600	1,000	0.16	0.33
		40	7,500	930	0.3	0.48	7,300	900	0.2	0.35	7,000	900	0.15	0.3
		48	7,200	750	0.26	0.42	6,500	650	0.16	0.3	5,800	600	0.13	0.27
		50	7,200	750	0.26	0.42	6,500	650	0.16	0.3	5,800	600	0.13	0.27
		60	7,000	600	0.22	0.36	6,000	520	0.13	0.26	5,000	440	0.11	0.25

Note:
- Decrease both spindle speed and feed rate proportionally when the milling parameters exceed the machine's maximum spindle speed.
- Decrease the feed rate more than 50% from the milling parameters when slot milling.
- Every coolant offers stable milling.



Roughness Comparison
HFTNB R1 × Neck Length 20 × Neck Taper Angle 0.4°

SKD61 (48HRC)



Work Size : 30 x 50 x 40 mm

Measurement Spot	Surface Roughness Ra (μm)	
	HFTNB	Competitor
①	**0.353**	0.451
②	**0.480**	0.865
③	**0.200**	0.270
④	**0.168**	0.248

Better surface roughness compared to competitor's!

No.	Milling Process	Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Allowance (mm)	Coolant	Cycle Time (h:m:s)
1	Roughing	HSLB 2060-200 (R3 x EL20)	13,000	3,500	0.6	0.6	0.05	Air Blow	0:25:33
2	Semi-finishing	HSLB 2030-200 (R1.5 x EL20)	14,500	1,360	0.18	0.1	0.02		0:49:48
3	Finishing	HFTNB 3020-200-08 / Competitor (R1 x Neck Length 20 x Neck Taper Angle 0.4°)	4,650	940	0.05	0.05	0		2:29:29
								Total	3:44:50


Taper Pocket Milling Examples
HFTNB R1 × Neck Length 30 × Neck Taper Angle 0.9°

SKD61 (50HRC)

Milling Shape : Taper Pocket 25 x 5 x Depth 4 mm Wall Inclined Angle 1°

Tools after milling


HFTNB

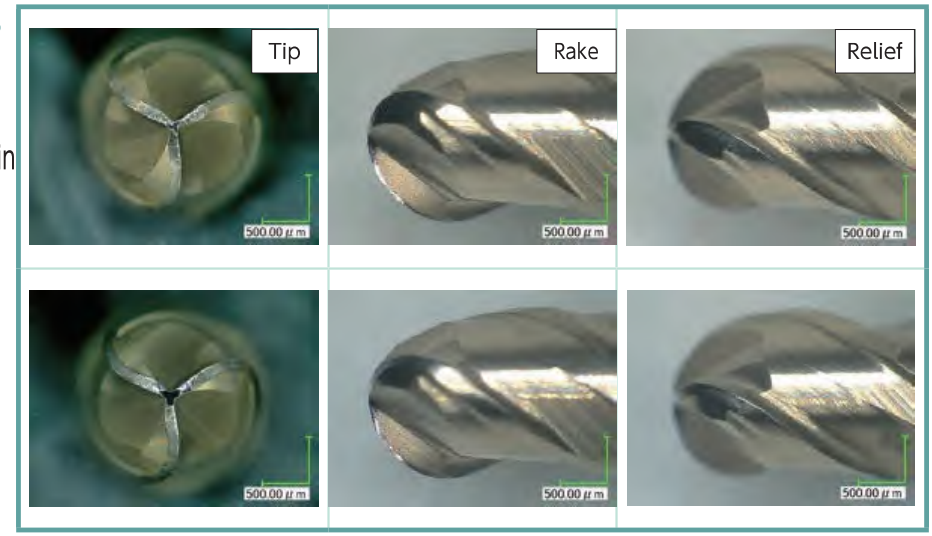

After 40 min


After 120 min

Normal wear condition after 120 min milling. No chipping or any damages.

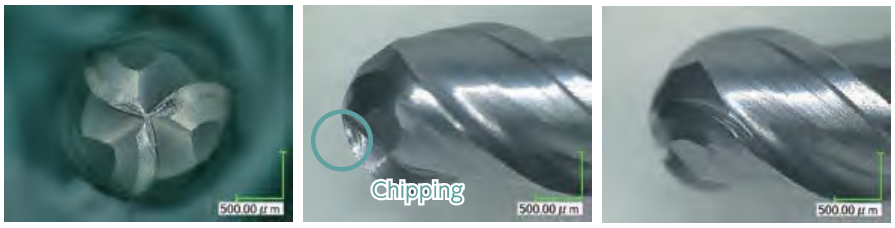

Competitor A After 40 min

Chipping on the cutting edges of all 3 flutes after 40 min.

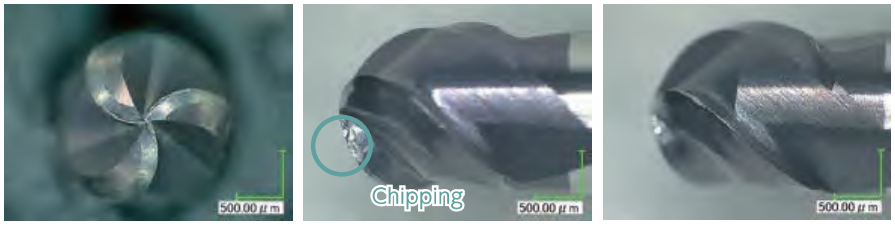

Competitor B After 40 min

Large chipping on the cutting edge after 40 min. Chipping also on the other 2 flutes.

High durability throughout the long cycle time.

Tool	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Coolant	Cycle Time
HFTNB 3020-300-18	8,400	590	0.08	0.17	Air Blow	40 min / pocket

C-CTE2000



UTCOAT 2 Flute Taper End Mills

φ0.2～φ2.5


Super MG | UT COAT | 25° φ0.2～φ0.4 | 30° φ0.5～φ2.5 | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○			○						

Features

Extensive line up of tapered design from 30′ to 15° of half included angle.
Refer to page I-5 for 4 flute C-CTE.

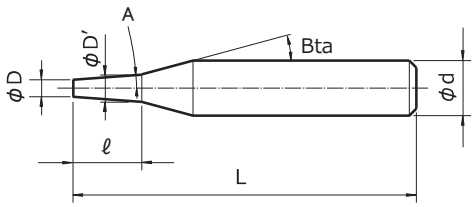

The shank taper angle shown is not an exact value.

Total 108 models

Unit (mm)

Model Number	Tip Diameter φD	Half Included Angle A	Length of Cut ℓ	Dia. at Large End φD′	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CTE 2002-1	0.2	30′	0.8	0.21	16°30′	38	3	—
C-CTE 2002-2		1°		0.23	17°	38	3	—
C-CTE 2002-3		1°30′		0.24	17°30′	38	3	—
C-CTE 2002-4		2°		0.26	18°	38	3	—
C-CTE 2002-6		3°		0.28	19°	38	3	—
C-CTE 2002-8		4°		0.31	20°	38	3	—
C-CTE 2002-10		5°		0.34	21°	38	3	—
C-CTE 2002-14		7°		0.40	23°	38	3	—
C-CTE 2002-20		10°		0.48	11°	38	3	—
C-CTE 2003-1	0.3	30′	1.2	0.32	16°30′	38	3	—
C-CTE 2003-2		1°		0.34	17°	38	3	—
C-CTE 2003-3		1°30′		0.36	17°30′	38	3	—
C-CTE 2003-4		2°		0.38	18°	38	3	—
C-CTE 2003-6		3°		0.43	19°	38	3	—
C-CTE 2003-8		4°		0.47	20°	38	3	—
C-CTE 2003-10		5°		0.51	21°	38	3	—
C-CTE 2003-14		7°		0.59	23°	38	3	—
C-CTE 2003-20		10°		0.72	11°	38	3	—

Next Page ➡

Unit (mm)

Model Number	Tip Diameter φD	Half Included Angle A	Length of Cut ℓ	Dia. at Large End φD′	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CTE 2004-1	0.4	30′	1.6	0.43	16°30′	38	3	—
C-CTE 2004-2		1°		0.46	17°	38	3	—
C-CTE 2004-3		1°30′		0.48	17°30′	38	3	—
C-CTE 2004-4		2°		0.51	18°	38	3	—
C-CTE 2004-6		3°		0.57	19°	38	3	—
C-CTE 2004-8		4°		0.62	20°	38	3	—
C-CTE 2004-10		5°		0.68	21°	38	3	—
C-CTE 2004-14		7°		0.79	23°	38	3	—
C-CTE 2004-20		10°		0.96	11°	38	3	—
C-CTE 2005-1	0.5	30′	2	0.53	16°30′	38	3	—
C-CTE 2005-2		1°		0.57	17°	38	3	—
C-CTE 2005-3		1°30′		0.60	17°30′	38	3	—
C-CTE 2005-4		2°		0.64	18°	38	3	—
C-CTE 2005-6		3°		0.71	19°	38	3	—
C-CTE 2005-8		4°		0.78	20°	38	3	—
C-CTE 2005-10		5°		0.85	21°	38	3	—
C-CTE 2005-14		7°		0.99	23°	38	3	—
C-CTE 2005-20		10°		1.21	11°	38	3	—
C-CTE 2005-24		12°		1.35	13°	38	3	—
C-CTE 2005-30		15°		1.57	16°	38	3	—
C-CTE 2006-1	0.6	30′	2	0.63	16°30′	38	3	—
C-CTE 2006-2		1°		0.67	17°	38	3	—
C-CTE 2006-3		1°30′		0.70	17°30′	38	3	—
C-CTE 2006-4		2°		0.74	18°	38	3	—
C-CTE 2006-5		2°30′		0.77	18°30′	38	3	—
C-CTE 2006-6		3°		0.81	19°	38	3	—
C-CTE 2006-10		5°		0.95	21°	38	3	—
C-CTE 2006-14		7°		1.09	23°	38	3	—
C-CTE 2006-20		10°		1.31	11°	38	3	—
C-CTE 2006-24		12°		1.45	13°	38	3	—
C-CTE 2006-30		15°		1.67	16°	38	3	—
C-CTE 2008-1	0.8	30′	3	0.85	16°30′	38	3	—
C-CTE 2008-2		1°		0.90	17°	38	3	—
C-CTE 2008-3		1°30′		0.96	17°30′	38	3	—
C-CTE 2008-4		2°		1.01	18°	38	3	—
C-CTE 2008-5		2°30′		1.06	18°30′	38	3	—
C-CTE 2008-6		3°		1.11	19°	38	3	—
C-CTE 2008-10		5°		1.32	21°	38	3	—
C-CTE 2008-14		7°		1.54	23°	38	3	—
C-CTE 2008-20		10°		1.86	11°	38	3	—
C-CTE 2008-24		12°		2.08	13°	38	3	—
C-CTE 2008-30		15°		2.41	16°	38	3	—
C-CTE 2010-1	1	30′	4	1.07	16°30′	45	4	—
C-CTE 2010-2		1°		1.14	17°	45	4	—
C-CTE 2010-3		1°30′		1.21	17°30′	45	4	—

Next Page ➡

Unit (mm)

Model Number	Tip Diameter φD	Half Included Angle A	Length of Cut ℓ	Dia. at Large End φD′	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-CTE 2010-4	1	2°	4	1.28	18°	45	4	—
C-CTE 2010-5		2°30′		1.35	18°30′	45	4	—
C-CTE 2010-6		3°		1.42	19°	45	4	—
C-CTE 2010-8		4°		1.56	20°	45	4	—
C-CTE 2010-10		5°		1.70	21°	45	4	—
C-CTE 2010-14		7°		1.98	8°	45	4	—
C-CTE 2010-20		10°		2.41	11°	45	4	—
C-CTE 2010-24		12°		2.70	13°	45	4	—
C-CTE 2010-30		15°		3.14	16°	50	6	—
C-CTE 2015-1	1.5	30′	5	1.59	16°30′	45	4	—
C-CTE 2015-2		1°		1.67	17°	45	4	—
C-CTE 2015-3		1°30′		1.76	17°30′	45	4	—
C-CTE 2015-4		2°		1.85	18°	45	4	—
C-CTE 2015-5		2°30′		1.94	18°30′	45	4	—
C-CTE 2015-6		3°		2.02	19°	45	4	—
C-CTE 2015-8		4°		2.20	20°	45	4	—
C-CTE 2015-10		5°		2.37	21°	45	4	—
C-CTE 2015-14		7°		2.73	8°	45	4	—
C-CTE 2015-20		10°		3.26	11°	45	4	—
C-CTE 2015-24		12°		3.63	13°	45	4	—
C-CTE 2015-30		15°		4.18	16°	50	6	—
C-CTE 2020-1	2	30′	6	2.10	16°30′	45	4	—
C-CTE 2020-2		1°		2.21	17°	45	4	—
C-CTE 2020-3		1°30′		2.31	17°30′	45	4	—
C-CTE 2020-4		2°		2.42	18°	45	4	—
C-CTE 2020-5		2°30′		2.52	18°30′	45	4	—
C-CTE 2020-6		3°		2.63	19°	45	4	—
C-CTE 2020-8		4°		2.84	20°	45	4	—
C-CTE 2020-10		5°		3.05	21°	45	4	—
C-CTE 2020-14		7°		3.47	8°	45	4	—
C-CTE 2020-20		10°		4.12	11°	50	6	—
C-CTE 2020-24		12°		4.55	13°	50	6	—
C-CTE 2020-30		15°		5.22	16°	50	6	—
C-CTE 2025-1	2.5	30′	8	2.64	16°30′	45	4	—
C-CTE 2025-2		1°		2.78	17°	45	4	—
C-CTE 2025-3		1°30′		2.92	17°30′	45	4	—
C-CTE 2025-4		2°		3.06	18°	45	4	—
C-CTE 2025-5		2°30′		3.20	18°30′	45	4	—
C-CTE 2025-6		3°		3.34	19°	45	4	—
C-CTE 2025-8		4°		3.62	20°	45	4	—
C-CTE 2025-10		5°		3.90	6°	45	4	—
C-CTE 2025-14		7°		4.45	8°	45	6	—
C-CTE 2025-20		10°		5.32	11°	50	6	—
C-CTE 2025-24		12°		5.90	13°	50	8	—
C-CTE 2025-30		15°		6.79	16°	50	8	—


Milling Conditions for C-CTE (2 Flutes)

WORK MATERIAL		CARBON STEELS ALLOY STEELS (~325HB)		TOOL STEELS PREHARDENED STEELS (30~40HRC)		PREHARDENED STEELS HARDENED STEELS (40~50HRC)	
Model Number	Tip Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
2002	**0.2**	32,000	45	25,000	30	18,000	20
2003	**0.3**	30,000	50	23,000	30	16,200	25
2004	**0.4**	28,000	60	21,000	35	14,500	25
2005	**0.5**	25,500	70	19,100	40	12,700	25
2006	**0.6**	21,300	70	15,900	40	10,600	25
2008	**0.8**	15,900	100	11,900	60	8,000	40
2010	**1**	12,800	150	9,600	110	6,400	70
2015	**1.5**	8,500	150	6,400	110	4,300	70
2020	**2**	6,400	150	4,800	110	3,200	70
2025	**2.5**	5,100	150	3,800	110	2,600	70

Milling Amount for Side Milling (mm)

ℓ = Length of Cut

Δt = tan Half Included Taper Angle $\times$ 0.9 ℓ



Note:
- Recommend water soluble or oil coolant.
- Recommend wet coolant for Copper.

C-CTE4000



UTCOAT 4 Flute Taper End Mills

φ3～φ10

Super MG | UT COAT | 30° | Flatland | ±5′ | Shank Dia 0/-0.005


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○			○						


Features

Extensive line up of tapered design from 30′ to 7° of half included angle.
Refer to page I-1 for 2 flute C-CTE.

Shape A

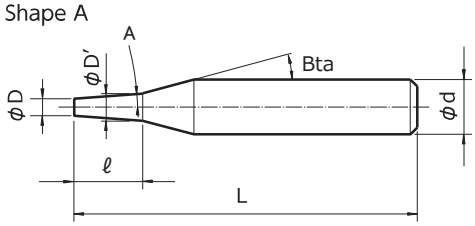

Shape B (Inverse Diameter)

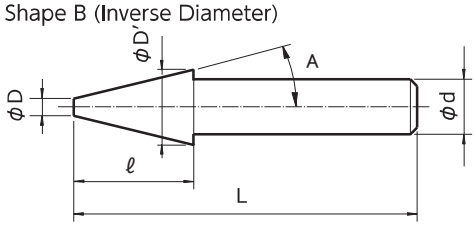

The shank taper angle shown is not an exact value.

Total 46 models

Unit (mm)

Model Number	Tip Diameter φD	Half Included Angle A	Length of Cut ℓ	Dia. at Large End φD′	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shape	Suggested Retail Price ¥
C-CTE 4030-1	3	30′	10	3.17	16°30′	50	6	A	—
C-CTE 4030-2		1°		3.35	17°	50	6		—
C-CTE 4030-3		1°30′		3.52	17°30′	50	6		—
C-CTE 4030-4		2°		3.70	18°	50	6		—
C-CTE 4030-5		2°30′		3.87	18°30′	50	6		—
C-CTE 4030-6		3°		4.05	19°	50	6		—
C-CTE 4030-10		5°		4.75	21°	50	6		—
C-CTE 4030-14		7°		5.46	8°	50	6		—
C-CTE 4040-1	4	30′	15	4.26	16°30′	50	6	A	—
C-CTE 4040-2		1°		4.52	17°	50	6		—
C-CTE 4040-3		1°30′		4.79	17°30′	50	6		—
C-CTE 4040-4		2°		5.05	18°	50	6		—
C-CTE 4040-5		2°30′		5.31	18°30′	50	6		—
C-CTE 4040-6		3°		5.57	4°	50	6		—
C-CTE 4040-10		5°		6.63	21°	50	8		—
C-CTE 4040-14		7°		7.68	8°	50	8		—

Next Page ➡

Unit (mm)

Model Number	Tip Diameter φD	Half Included Angle A	Length of Cut ℓ	Dia. at Large End φD′	Shank Taper Angle Bta	Overall Length L	Shank Diameter φd	Shape	Suggested Retail Price ¥
C-CTE 4050-1	5	30′	20	5.35	16°30′	60	6	A	—
C-CTE 4050-2		1°		5.70	17°	60	6		—
C-CTE 4050-3		1°30′		6.05	17°30′	60	8		—
C-CTE 4050-4		2°		6.40	18°	60	8		—
C-CTE 4050-5		2°30′		6.75	18°30′	60	8		—
C-CTE 4050-6		3°		7.10	19°	60	8		—
C-CTE 4050-10		5°		8.50	21°	60	10		—
C-CTE 4050-14		7°		9.91	8°	60	10		—
C-CTE 4060-1	6	30′	20	6.35	16°30′	60	8	A	—
C-CTE 4060-2		1°		6.70	17°	60	8		—
C-CTE 4060-3		1°30′		7.05	17°30′	60	8		—
C-CTE 4060-4		2°		7.40	18°	60	8		—
C-CTE 4060-5		2°30′		7.75	3°30′	60	8		—
C-CTE 4060-6		3°		8.10	19°	60	10		—
C-CTE 4060-10		5°		9.50	6°	60	10		—
C-CTE 4060-14		7°		10.91	8°	60	12		—
C-CTE 4080-1	8	30′	25	8.44	16°30′	70	10	A	—
C-CTE 4080-2		1°		8.87	17°	70	10		—
C-CTE 4080-3		1°30′		9.31	17°30′	70	10		—
C-CTE 4080-4		2°		9.75	3°	70	10		—
C-CTE 4080-5		2°30′		10.18	18°30′	75	12		—
C-CTE 4080-6		3°		10.62	19°	75	12		—
C-CTE 4080-10		5°		12.37	—	90	12	B	—
C-CTE 4100-1	10	30′	35	10.61	16°30′	90	12	A	—
C-CTE 4100-2		1°		11.22	17°	90	12		—
C-CTE 4100-3		1°30′		11.83	2°30′	90	12		—
C-CTE 4100-4		2°		12.44	—	90	12	B	—
C-CTE 4100-5		2°30′		13.05	—	90	12		—
C-CTE 4100-6		3°		13.67	—	90	12		—
C-CTE 4100-10		5°		16.12	—	90	16		—


Milling Conditions for C-CTE (4 Flutes)

WORK MATERIAL		CARBON STEELS ALLOY STEELS (~325HB)		TOOL STEELS PREHARDENED STEELS (30~40HRC)		PREHARDENED STEELS HARDENED STEELS (40~50HRC)	
Model Number	Tip Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
4030	**3**	4,200	200	3,200	150	2,100	90
4040	**4**	3,200	200	2,400	150	1,600	90
4050	**5**	2,600	200	1,900	150	1,300	90
4060	**6**	2,100	200	1,600	150	1,100	90
4080	**8**	1,600	200	1,200	150	800	90
4100	**10**	1,300	200	1,000	150	600	90

Milling Amount for Side Milling (mm)


ℓ = Length of Cut

Δt = tan Half Included Taper Angle × 0.9 ℓ




Note:
- Recommend water soluble or oil coolant.
- Recommend wet coolant for Copper.

Milling Example of Convex and Concave　　STAVAX (52HRC)

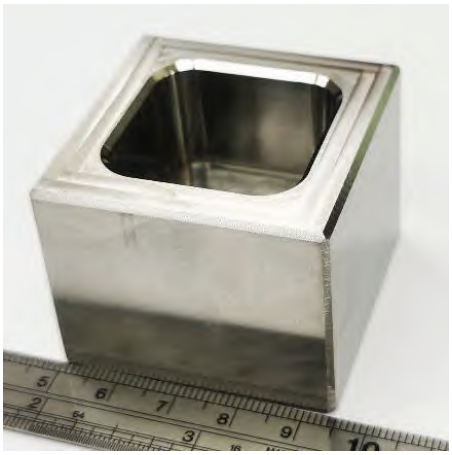

4 Flute Highly Efficient Radius HRRS

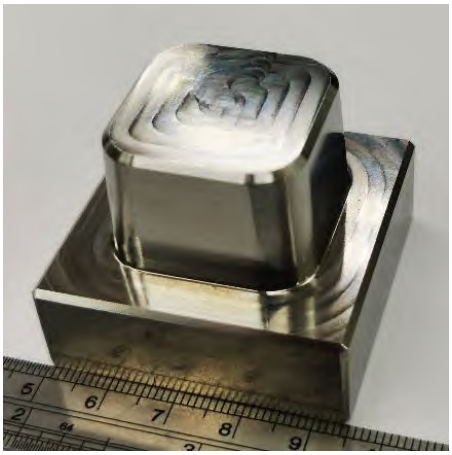

4 Flute Taper End Mill C-CTE4000

Work Size
45 × 45 × 35 mm









No chattering with both side of work and corner. Uniform milling surface.

Tool		Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p (mm)	a_e (mm)	Cycle Time
4 Flute Highly Efficient Radius HRRS	ϕ6 × CR0.5	6,500	600	0.02	2.5	3 min 7 sec
4 Flute Taper End Mill C-CTE4000	ϕ6 × Half Included Angle 3°	2,200	300	20	0.03	1 min 43 sec

COVB



UTCOAT 4 Flute Oval Barrel Form


Super MG | UT COAT | Form ±0.01 | Shank Dia 0/-0.005


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	Hardened Steels ~55HRC	Hardened Steels ~60HRC	Hardened Steels ~65HRC	Hardened Steels ~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	●		●			○	○		

Features

Broad range of application available with UTCOAT.
Suitable for narrow interference area with small inclined angle.



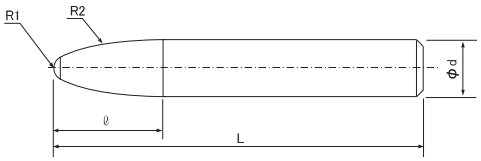

Total 4 models


Unit (mm)

Model Number	Tip R R1	Barrel R R2	Length of Cut ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
COVB 4020-85	R1	R85	19.2	60	6	—
COVB 4020-90		R90	23.9	70	8	—
COVB 4040-80	R2	R80	23.4	80	10	—
COVB 4040-80-12		R80	26.6	80	12	—

Milling Conditions for COVB

WORK MATERIAL			ALUMINUM ALLOYS A7075				PREHARDENED STEELS PXA30 (30~45HRC)				HARDENED STEELS SKD61 / STAVAX (45~55HRC)			
Model Number	Tip R (mm)	Barrel R (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-85	R1	R85	10,500	2,400	2.85	0.1	4,700	1,070	2.4	0.1	3,800	900	1.9	0.07
4020-90		R90	9,250	2,200	3.6	0.1	4,250	980	2.9	0.1	3,500	850	2.4	0.07
4040-80	R2	R80	8,000	2,000	3.5	0.1	3,800	900	3	0.1	3,200	800	2.4	0.07
4040-80-12		R80	6,750	1,800	4	0.1	3,350	900	3.4	0.1	2,900	750	2.7	0.07

Note:
・Set spindle speed, feed rate, and axial depth (a_p) in accordance with the required surface quality.



CSTB



UTCOAT 4 Flute Standard Taper Barrel Form


Super MG | UT COAT | Form ±0.01 | Shank Dia 0/-0.005


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	●		●			○	○		

Features

Broad range of application available with UTCOAT.
Suitable for finishing on straight and inclined walls with larger barrel R.



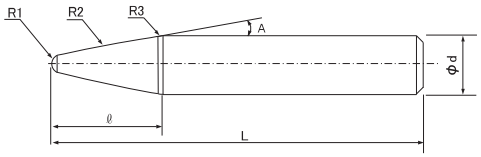

Total 5 models


Unit (mm)

Model Number	Half Included Angle A	Tip R R1	Barrel R R2	Third R R3	Length of Cut ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
CSTB 4020-200-30	15°	R1	R200	R3	8.6	60	6	—
CSTB 4030-250-40	20°	R1.5	R250	R4	8.7	70	8	—
CSTB 4040-250-40	20°	R2	R250	R5	10.7	80	10	—
CSTB 4060-250-45	22.5°	R3	R250	R6	10.7	100	12	—
CSTB 4020-200-85	42.5°	R1	R200	R1	6.4	100	12	—

Milling Conditions for CSTB

WORK MATERIAL			ALUMINUM ALLOYS A7075				PREHARDENED STEELS PXA30 (30~45HRC)				HARDENED STEELS SKD61 / STAVAX (45~55HRC)			
Model Number	Tip R (mm)	Barrel R (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-200-30	**R1**	R200	18,000	2,400	2.85	0.1	11,500	1,800	1.9	0.075	9,000	1,440	1.5	0.075
4030-250-40	**R1.5**	R250	15,600	2,400	2.85	0.1	10,300	1,600	2.4	0.075	8,000	1,200	2	0.075
4040-250-40	**R2**	R250	13,200	2,400	2.85	0.1	9,100	1,600	2.4	0.075	7,000	1,200	2	0.075
4060-250-45	**R3**	R250	10,800	2,400	2.85	0.1	8,000	1,600	2.4	0.075	6,000	1,200	2	0.075
4020-200-85	**R1**	R200	10,800	1,200	2.85	0.1	8,000	700	2	0.075	6,000	500	2	0.05

Note:
・Set spindle speed, feed rate, and axial depth (a_p) in accordance with the required surface quality.



CWTB



UTCOAT 4 Flute Wide Taper Barrel Form

Super MG | UT COAT | Form ±0.01 | Shank Dia 0/-0.005


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~ 50HRC	Hardened Steels ~ 55HRC	Hardened Steels ~ 60HRC	Hardened Steels ~ 65HRC	Hardened Steels ~ 70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	●	●				○	●		●			○	○		

Features

Broad range of application available with UTCOAT.
Suitable for finishing on flat surface with wide taper angle.



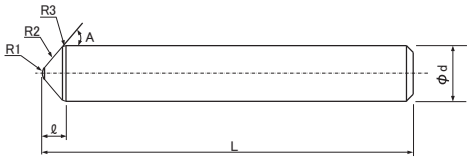

Total 2 models


Unit (mm)

Model Number	Half Included Angle A	Tip R R1	Barrel R R2	Third R R3	Length of Cut ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CWTB 4020-200-100	50°	R1	R200	R1	4.3	80	10	—
CWTB 4020-250-130	65°		R250		2.8	80	10	—

Milling Conditions for CWTB

WORK MATERIAL			ALUMINUM ALLOYS A7075				PREHARDENED STEELS PXA30 (30~45HRC)				HARDENED STEELS SKD61 / STAVAX (45~55HRC)			
Model Number	Tip R (mm)	Barrel R (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	a_p Axial Depth (mm)	a_e Radial Depth (mm)
4020-200-100	R1	R200	20,000	5,000	0.2	4	12,000	2,400	0.1	4	9,000	1,100	0.075	4
4020-250-130		R250	20,000	5,000	0.1	2.5	12,000	2,400	0.1	2.5	9,000	1,100	0.075	2.5

Note:
・Set spindle speed, feed rate, and radial depth (a_e) in accordance with the required surface quality.



SV



NON-COAT 2 Flute Spiral Cutter for Chamfering

φ3～φ12


Super MG | 30° | Flatland | Shank Dia 0/-0.005


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ~50HRC	~55HRC	~60HRC	~65HRC	~70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●						○	○		○	○					

Features

Spiral type chamfering cutter.
Half included angle 45°.
By applying a spiral peripheral cutting edge, burrs are greatly reduced when compared to a straight cutting edge design.

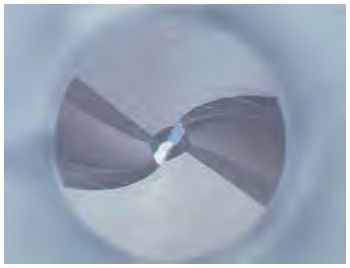

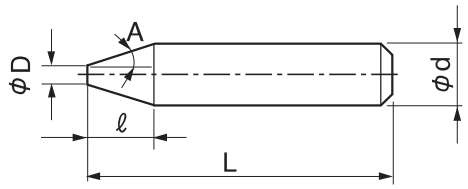

Total 6 models

Unit (mm)

Model Number	Tip Diameter φD	Length of Cut ℓ	Overall Length L	Half Included Angle A	Shank Diameter φd	Suggested Retail Price ¥
SV 2030	0.8	1.1	40	45°	3	—
SV 2040		1.6	45		4	—
SV 2060	1	2.5	50		6	—
SV 2080		3.5	60		8	—
SV 2100		4.5	70		10	—
SV 2120		5.5	75		12	—

Milling Conditions for SV

WORK MATERIAL		CARBON STEELS S45C / S50C (~225HB)		ALLOY STEELS SK / SCM / SUS (225~325HB)		PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)	
Model Number	Shank Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
2030	**3**	2,700~5,300	59~86	2,100~4,200	46~67	1,600~3,200	35~51
2040	**4**	2,000~4,000	48~68	1,600~3,200	38~54	1,200~2,400	29~41
2060	**6**	1,300~2,700	36~49	1,100~2,100	31~42	800~1,600	22~30
2080	**8**	1,000~2,000	32~42	800~1,600	26~34	600~1,200	22~30
2100	**10**	800~1,600	30~37	640~1,300	23~29	600~1,200	17~22
2120	**12**	700~1,300	28~35	530~1,100	21~27	400~ 800	17~22

Milling Amount (mm)

$a_p = 0.1D$

a_p : Axial Depth (mm)



Note:
・The figures listed above are for nominal diameters. Adjust the spindle speed and feed rate according to the correct diameter.
・Recommend slot milling with the tip flutes. Decrease the feed rate 50% from the milling parameters in this case.
・Recommend water soluble or oil coolant.

UTDF



UTCOAT 2 Flute UNIMAX Flat Drills

φ2～φ12


Super MG | UT COAT | 30° | Flatland | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																	
Structural Steels SS400	Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	○						●	●								

Features

Available to a wide variety of applications by the 180° point angle.
The helix angle of 30° offers excellent chip evacuation, stable and highly efficient pilot hole drilling.
New web-thinning design for improved chip evacuation and sharpness.
Double-margin will guide the tool into inner wall and achieve high-straightness drilling to non-planar surface.
Size M4 - M12 for drilling pilot holes before tapping.

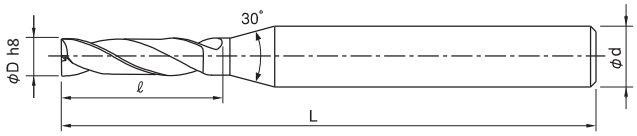


Outside Diameter	Diameter Tolerance (h8)
φD ≦ 3	0/-0.014
3 < φD ≦ 6	0/-0.018
6 < φD ≦ 10	0/-0.022
10 < φD ≦ 12	0/-0.027

Feature1 : Helix angle 30°



Excellent chip evacuation with 30° helix angle


Feature2 : Double-margin



Double-margin


High-straightness drilling

Feature3 : A wide variety of applications

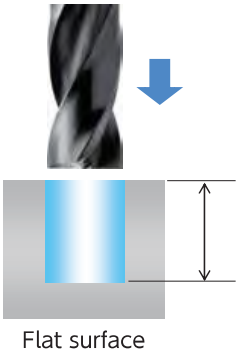

Hole depth: 2D or below (ℓ/D=4)
1D or below (ℓ/D=2)

Flat surface

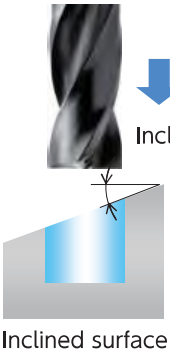

Inclined angle θ

Inclined surface

Designed for drilling on flat, inclined or curved surfaces.

Total 21 models

Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
UTDF 2200-080	2	8	50	4	—
UTDF 2250-100	2.5	10	50	4	—
UTDF 2300-120	3	12	60	6	—
UTDF 2330-132	3.3	13.2	60	6	—
UTDF 2400-160	4	16	60	6	—
UTDF 2420-168	4.2	16.8	60	6	—
UTDF 2500-200	5	20	60	6	—
UTDF 2510-204	5.1	20.4	60	6	—
UTDF 2600-240	6	24	60	6	—
UTDF 2650-130	6.5	13	70	8	—
UTDF 2680-272	6.8	27.2	70	8	—
UTDF 2700-280	7	28	80	8	—
UTDF 2800-320	8	32	80	8	—
UTDF 2850-340	8.5	34	80	10	—
UTDF 2860-344	8.6	34.4	80	10	—
UTDF 2900-360	9	36	80	10	—
UTDF 2950-190	9.5	19	90	10	—
UTDF 21000-400	10	40	90	10	—
UTDF 21030-412	10.3	41.2	90	12	—
UTDF 21100-220	11	22	100	12	—
UTDF 21200-480	12	48	100	12	—

*Contact our sales for the custom size tool.

Drilling Conditions for UTDF

Flat Surface

WORK MATERIAL			CARBON STEELS STRUCTURAL STEELS GRAY CAST IRON S50C / SS400 / FC250		ALLOY STEELS SCM415		PREHARDENED STEELS NAK80		DUCTILE IRON FCD		ALUMINUM ALLOYS A5052 / A7075		ALUMINUM CAST ADC12	
Model Number	Diameter φD (mm)	Flute Length ℓ (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
2200-080	**2**	8	15,000	900	12,900	740	6,000	160	12,900	660	25,200	2,070	18,900	1,340
2250-100	**2.5**	10	12,000	880	10,320	730	4,800	160	10,320	660	20,160	2,070	15,120	1,340
2300-120	**3**	12	10,000	860	8,600	710	4,000	150	8,600	630	16,800	1,970	12,600	1,280
2330-132	**3.3**	13.2	9,090	860	7,820	710	3,640	150	7,820	630	15,280	1,970	11,460	1,280
2400-160	**4**	16	7,500	830	6,450	690	3,000	150	6,450	610	12,600	1,900	9,450	1,230
2420-168	**4.2**	16.8	7,150	830	6,150	690	2,860	150	6,150	610	12,000	1,900	9,000	1,230
2500-200	**5**	20	6,000	800	5,160	660	2,400	140	5,160	590	10,080	1,840	7,560	1,190
2510-204	**5.1**	20.4	5,880	800	5,060	660	2,350	140	5,060	590	9,880	1,840	7,400	1,190
2600-240	**6**	24	5,000	770	4,300	640	2,000	140	4,300	560	8,400	1,770	6,300	1,140
2650-130	**6.5**	13	4,620	770	3,970	640	1,850	140	3,970	560	7,750	1,770	5,820	1,140
2680-272	**6.8**	27.2	4,420	770	3,800	640	1,770	140	3,800	560	7,420	1,770	5,560	1,140
2700-280	**7**	28	4,290	760	3,680	630	1,710	140	3,680	560	7,200	1,770	5,400	1,140
2800-320	**8**	32	3,750	730	3,230	600	1,500	130	3,230	540	6,300	1,670	4,730	1,080
2850-340	**8.5**	34	3,530	730	3,040	600	1,420	130	3,040	540	5,930	1,670	4,450	1,080
2860-344	**8.6**	34.4	3,490	720	3,000	600	1,400	130	3,000	540	5,860	1,670	4,400	1,080
2900-360	**9**	36	3,330	720	2,870	590	1,330	120	2,870	530	5,600	1,670	4,200	1,080
2950-190	**9.5**	19	3,160	700	2,720	580	1,260	120	2,720	520	5,300	1,620	3,980	1,050
21000-400	**10**	40	3,000	690	2,580	570	1,200	120	2,580	510	5,040	1,580	3,780	1,020
21030-412	**10.3**	41.2	2,920	690	2,510	570	1,170	120	2,510	510	4,900	1,580	3,670	1,020
21100-220	**11**	22	2,730	670	2,350	550	1,090	110	2,350	500	4,580	1,540	3,440	1,000
21200-480	**12**	48	2,500	650	2,150	540	1,000	110	2,150	480	4,200	1,490	3,150	960

Drilling Conditions for UTDF


Inclined Surface ($\theta \leqq 30°$)

WORK MATERIAL			CARBON STEELS STRUCTURAL STEELS GRAY CAST IRON S50C / SS400 / FC250		ALLOY STEELS SCM415		PREHARDENED STEELS NAK80		DUCTILE IRON FCD		ALUMINUM ALLOYS A5052 / A7075		ALUMINUM CAST ADC12	
Model Number	Diameter ϕD (mm)	Flute Length ℓ (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
2200-080	**2**	8	15,000	270	12,900	220	6,000	48	12,900	190	25,200	620	18,900	400
2250-100	**2.5**	10	12,000	260	10,320	220	4,800	48	10,320	190	20,160	620	15,120	400
2300-120	**3**	12	10,000	250	8,600	210	4,000	45	8,600	180	16,800	590	12,600	380
2330-132	**3.3**	13.2	9,090	250	7,820	210	3,640	45	7,820	180	15,280	590	11,460	380
2400-160	**4**	16	7,500	240	6,450	200	3,000	45	6,450	180	12,600	570	9,450	360
2420-168	**4.2**	16.8	7,150	240	6,150	200	2,860	45	6,150	180	12,000	570	9,000	360
2500-200	**5**	20	6,000	240	5,160	190	2,400	42	5,160	170	10,080	550	7,560	350
2510-204	**5.1**	20.4	5,880	230	5,060	190	2,350	42	5,060	170	9,880	550	7,400	350
2600-240	**6**	24	5,000	230	4,300	190	2,000	42	4,300	160	8,400	530	6,300	340
2650-130	**6.5**	13	4,620	230	3,970	190	1,850	42	3,970	160	7,750	530	5,820	340
2680-272	**6.8**	27.2	4,420	230	3,800	190	1,770	42	3,800	160	7,420	530	5,560	340
2700-280	**7**	28	4,290	230	3,680	190	1,710	42	3,680	160	7,200	530	5,400	340
2800-320	**8**	32	3,750	210	3,230	180	1,500	39	3,230	160	6,300	500	4,730	320
2850-340	**8.5**	34	3,530	210	3,040	180	1,420	39	3,040	160	5,930	500	4,450	320
2860-344	**8.6**	34.4	3,490	210	3,000	180	1,400	39	3,000	160	5,860	500	4,400	320
2900-360	**9**	36	3,330	210	2,870	180	1,330	38	2,870	160	5,600	500	4,200	320
2950-190	**9.5**	19	3,160	210	2,720	170	1,260	36	2,720	150	5,300	490	3,980	310
21000-400	**10**	40	3,000	200	2,580	170	1,200	36	2,580	150	5,040	470	3,780	300
21030-412	**10.3**	41.2	2,920	200	2,510	170	1,170	36	2,510	150	4,900	470	3,670	300
21100-220	**11**	22	2,730	200	2,350	160	1,090	34	2,350	140	4,580	460	3,440	290
21200-480	**12**	48	2,500	190	2,150	160	1,000	33	2,150	140	4,200	440	3,150	280

Drilling Conditions for UTDF

Inclined Surface ($\theta > 30°$)

WORK MATERIAL			CARBON STEELS STRUCTURAL STEELS GRAY CAST IRON S50C / SS400 / FC250		ALLOY STEELS SCM415		PREHARDENED STEELS NAK80		DUCTILE IRON FCD		ALUMINUM ALLOYS A5052 / A7075		ALUMINUM CAST ADC12	
Model Number	Diameter φD (mm)	Flute Length ℓ (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
2200-080	**2**	8	10,500	90	9,030	74	4,200	16	9,030	66	17,640	200	13,230	130
2250-100	**2.5**	10	8,400	90	7,220	74	3,360	16	7,220	66	14,110	200	10,580	130
2300-120	**3**	12	7,000	86	6,020	71	2,800	15	6,020	63	11,760	190	8,820	120
2330-132	**3.3**	13.2	6,370	86	5,480	71	2,550	15	5,480	63	10,700	190	8,030	120
2400-160	**4**	16	5,250	83	4,520	69	2,100	15	4,520	61	8,820	190	6,620	120
2420-168	**4.2**	16.8	5,010	83	4,310	69	2,010	15	4,310	61	8,400	190	6,300	120
2500-200	**5**	20	4,200	80	3,620	66	1,680	14	3,620	59	7,060	180	5,300	110
2510-204	**5.1**	20.4	4,120	80	3,540	66	1,650	14	3,540	59	6,920	180	5,190	110
2600-240	**6**	24	3,500	77	3,010	64	1,400	14	3,010	56	5,880	170	4,410	110
2650-130	**6.5**	13	3,230	77	2,780	64	1,290	14	2,780	56	5,430	170	4,070	110
2680-272	**6.8**	27.2	3,100	77	2,660	64	1,240	14	2,660	56	5,200	170	3,900	110
2700-280	**7**	28	3,000	77	2,580	64	1,200	14	2,580	56	5,040	170	3,780	110
2800-320	**8**	32	2,630	73	2,270	60	1,050	13	2,270	54	4,410	160	3,320	100
2850-340	**8.5**	34	2,480	73	2,130	60	1,000	13	2,130	54	4,160	160	3,120	100
2860-344	**8.6**	34.4	2,440	73	2,100	60	980	13	2,100	54	4,100	160	3,080	100
2900-360	**9**	36	2,330	73	2,010	60	930	13	2,010	54	3,920	160	2,940	100
2950-190	**9.5**	19	2,210	71	1,900	58	880	12	1,900	53	3,710	150	2,790	100
21000-400	**10**	40	2,100	69	1,810	57	840	12	1,810	51	3,530	150	2,650	100
21030-412	**10.3**	41.2	2,050	69	1,760	57	820	12	1,760	51	3,430	150	2,570	100
21100-220	**11**	22	1,910	67	1,640	55	760	11	1,640	49	3,210	140	2,400	90
21200-480	**12**	48	1,750	65	1,510	54	700	11	1,510	48	2,940	140	2,210	90

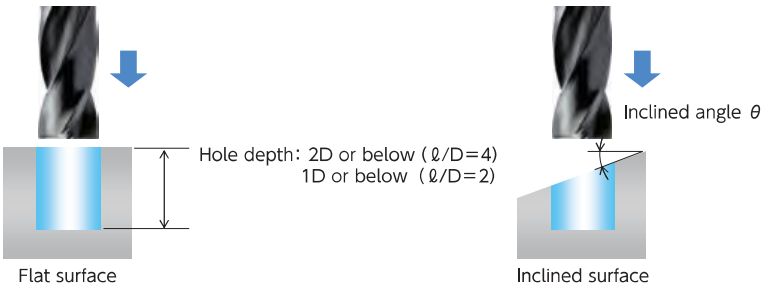


Note:
- These milling parameters are for reference only.
- Adjust the parameters in accordance with the machine rigidity, workpiece clamping condition and shape.
- Recommend water soluble or oil coolant.
- Step milling is recommended in case of clogging.


UTDF Inclined Surface Drilling Example
ϕ3.5 × Flute Length 14 mm (Prototype)

SS400

Work Shape

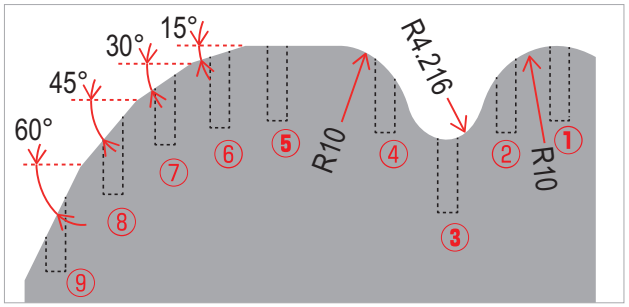

Coolant : Water Soluble (Nozzle)
Work Size : 40 × 75 × 60 mm

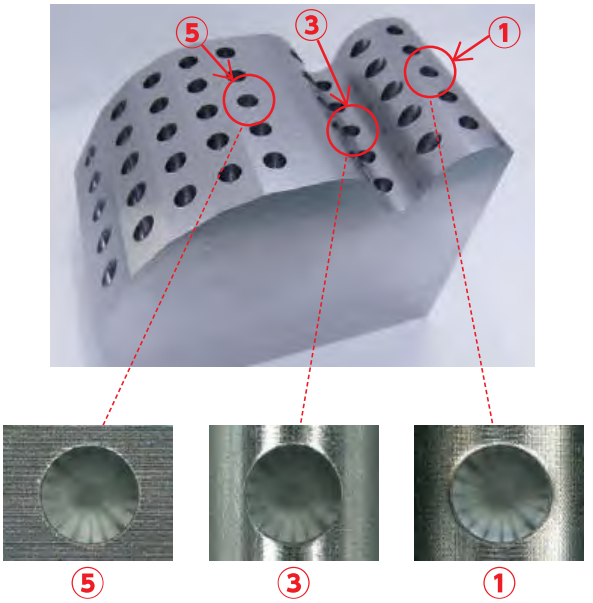

Each hole after drilling

Drilling spot	Surface	Spindle Speed (min^{-1})	Feed Rate (min/min)	Drilling Depth (The Deepest spot) (mm)
1	Curved surface (Top)	7,000	450	7
2	Curved surface (45°)		270	
3	Curved surface (Top)		450	
4	Curved surface (45°)		270	
5	Flat Surface		450	
6	Inclined Surface (15°)		320	
7	Inclined Surface (30°)		320	
8	Inclined Surface (45°)		270	
9	Inclined Surface (60°)		225	

*Contact our sales for the custom size tool.

Excellent drilling performance with less burrs.

UTDF Inclined Surface Drilling Video

Tool After Drilling ϕ 2 × Flute Length 8 mm

A5052

Surface	Spindle Speed	Feed Rate	Drilling Depth	Number of Holes	Coolant
Flat Surface	23,100 min^{-1}	830 mm/min	4 mm	100 holes	Water Soluble (Nozzle)

Comparison of Tip Damage after 100 hits

UTDF



Competitor



More tool-life left without adhesion after drilling 100 holes.

Chip adhesion

UTDSX



UT MICRO COAT 2 Flute UNIMAX Drills with Short Flute

φ0.3～φ2

Super MG | MICRO COAT | 30° | X Thinning | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material														
Structural Steels SS400	Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	●	○	Contact sales when drilling over 45HRC.					○	●		○			○	○		

Total 35 models

Unit (mm)


Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UTDSX 2030-015	0.3	1.5	38	3	—
UTDSX 2035-018	0.35	1.8	38	3	—
UTDSX 2040-020	0.4	2	38	3	—
UTDSX 2045-023	0.45	2.3	38	3	—
UTDSX 2050-025	0.5	2.5	38	3	—
UTDSX 2055-028	0.55	2.8	38	3	—
UTDSX 2060-030	0.6	3	38	3	—
UTDSX 2065-033	0.65	3.3	38	3	—
UTDSX 2070-035	0.7	3.5	38	3	—
UTDSX 2075-038	0.75	3.8	38	3	—
UTDSX 2080-040	0.8	4	38	3	—
UTDSX 2085-043	0.85	4.3	38	3	—
UTDSX 2090-045	0.9	4.5	38	3	—
UTDSX 2095-048	0.95	4.8	38	3	—
UTDSX 2100-050	1	5	38	3	—
UTDSX 2105-053	1.05	5.3	38	3	—
UTDSX 2110-055	1.1	5.5	38	3	—
UTDSX 2115-058	1.15	5.8	38	3	—
UTDSX 2120-060	1.2	6	38	3	—
UTDSX 2125-063	1.25	6.3	38	3	—
UTDSX 2130-065	1.3	6.5	38	3	—
UTDSX 2135-068	1.35	6.8	38	3	—
UTDSX 2140-070	1.4	7	38	3	—
UTDSX 2145-073	1.45	7.3	38	3	—
UTDSX 2150-075	1.5	7.5	38	3	—
UTDSX 2155-078	1.55	7.8	38	3	—
UTDSX 2160-080	1.6	8	38	3	—
UTDSX 2165-083	1.65	8.3	38	3	—
UTDSX 2170-085	1.7	8.5	38	3	—
UTDSX 2175-088	1.75	8.8	38	3	—
UTDSX 2180-090	1.8	9	38	3	—
UTDSX 2185-093	1.85	9.3	38	3	—
UTDSX 2190-095	1.9	9.5	38	3	—
UTDSX 2195-098	1.95	9.8	38	3	—
UTDSX 2200-100	2	10	38	3	—

Features


A highly efficient and economic drill for both mass and prototype production of parts.
UT MICRO COAT offers excellent performance for cutting soft materials.
The new drill design and X thinning offer stable drilling performance with increased tool life.
The 130° point angle ensures reduced burring of the drilled hole.
The high rigidity short flute is perfect for high accuracy drilling and pilot hole drilling.

Diameter Tolerance: 0/-0.01 mm
Point Angle: 130°

■ϕ0.3~ϕ0.65

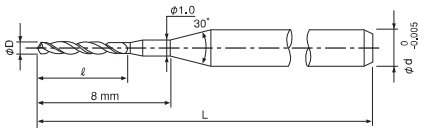


■ϕ0.7~ϕ2.0



Drilling Conditions for UTDSX

WORK MATERIAL	STRUCTUAL STEELS SS400		CARBON STEELS S50C		ALLOY STEELS SCM / SUS		ALUMINUM ALLOYS A5052 / ADC12	
Velocity	*Vc*=20~35 m/min		*Vc*=20~35 m/min		*Vc*=15~20 m/min		*Vc*=20~60 m/min	
Diameter ϕD (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
0.3	20,000	100	20,000	100	16,000	80	20,000	200
0.4	17,400	130	17,400	180	12,000	90	20,000	440
0.5	15,900	150	15,900	250	9,500	100	20,000	680
0.6	14,100	170	14,100	300	8,000	110	20,000	920
0.7	12,800	180	12,800	340	6,700	110	20,000	1,160
0.8	11,900	200	11,900	380	6,300	120	20,000	1,400
0.9	10,500	200	10,500	390	6,000	130	17,500	1,430
1	9,500	200	9,500	400	6,000	150	16,000	1,500
1.5	7,300	220	7,300	500	4,500	180	13,000	1,960
2	5,600	230	5,600	560	3,000	160	9,500	2,030
Peck Amount	0.3D		0.5D		0.3D		1.0D	

Note:
・Recommend shallower drilling than flute length (under ϕ1: 1D, ϕ1 and over: 0.5D).
・Recommend water soluble or oil coolant.
・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.



C-UMD



UT MICRO COAT 2 Flute UNIMAX Drills


φ0.1～φ3

Super MG | MICRO COAT | 24° | Shank Dia 0/-0.005


Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material														
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	～55HRC	～60HRC	～65HRC	～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
●	●	○	Contact sales when drilling over 45HRC.					○	●		○			○	○		


■φ 0.1 ～φ 0.25

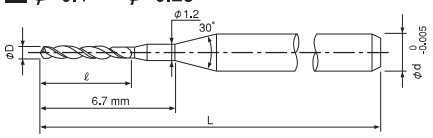

■φ 0.26 ～φ 0.65

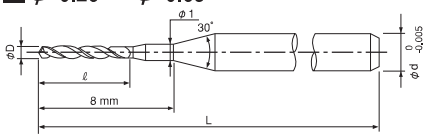

■φ 0.66 ～φ 3



Actual tool geometries for some specifications and tolerances may differ from above drawings. φ3 is Straight type.

Diameter Tolerance : φD ≦φ 3 : φD $^{0}_{-0.01}$
Point Angle : 150°

Total 225 models

Unit (mm)

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-UMD 2010-012	0.1	1.2	38	3	—
C-UMD 2011-012	0.11	1.2	38	3	—
C-UMD 2012-014	0.12	1.4	38	3	—
C-UMD 2013-014	0.13	1.4	38	3	—
C-UMD 2014-014	0.14	1.4	38	3	—
C-UMD 2015-020	0.15	2	38	3	—
C-UMD 2016-020	0.16	2	38	3	—
C-UMD 2017-020	0.17	2	38	3	—
C-UMD 2018-020	0.18	2	38	3	—
C-UMD 2019-020	0.19	2	38	3	—
C-UMD 2020-025	0.2	2.5	38	3	—
C-UMD 2021-025	0.21	2.5	38	3	—
C-UMD 2022-025	0.22	2.5	38	3	—
C-UMD 2023-025	0.23	2.5	38	3	—
C-UMD 2024-025	0.24	2.5	38	3	—
C-UMD 2025-030	0.25	3	38	3	—
C-UMD 2026-030	0.26	3	38	3	—
C-UMD 2027-030	0.27	3	38	3	—
C-UMD 2028-030	0.28	3	38	3	—
C-UMD 2029-030	0.29	3	38	3	—
C-UMD 2030-050	0.3	5	38	3	—
C-UMD 2031-050	0.31	5	38	3	—
C-UMD 2032-050	0.32	5	38	3	—
C-UMD 2033-050	0.33	5	38	3	—

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-UMD 2034-050	0.34	5	38	3	—
C-UMD 2035-060	0.35	6	38	3	—
C-UMD 2036-060	0.36	6	38	3	—
C-UMD 2037-060	0.37	6	38	3	—
C-UMD 2038-060	0.38	6	38	3	—
C-UMD 2039-060	0.39	6	38	3	—
C-UMD 2040-070	0.4	7	38	3	—
C-UMD 2041-070	0.41	7	38	3	—
C-UMD 2042-070	0.42	7	38	3	—
C-UMD 2043-070	0.43	7	38	3	—
C-UMD 2044-070	0.44	7	38	3	—
C-UMD 2045-070	0.45	7	38	3	—
C-UMD 2046-070	0.46	7	38	3	—
C-UMD 2047-070	0.47	7	38	3	—
C-UMD 2048-070	0.48	7	38	3	—
C-UMD 2049-070	0.49	7	38	3	—
C-UMD 2050-070	0.5	7	38	3	—
C-UMD 2051-070	0.51	7	38	3	—
C-UMD 2052-070	0.52	7	38	3	—
C-UMD 2053-070	0.53	7	38	3	—
C-UMD 2054-070	0.54	7	38	3	—
C-UMD 2055-070	0.55	7	38	3	—
C-UMD 2056-070	0.56	7	38	3	—
C-UMD 2057-070	0.57	7	38	3	—

Next Page ➡

Unit (mm)

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-UMD 2058-070	0.58	7	38	3	—
C-UMD 2059-070	0.59	7	38	3	—
C-UMD 2060-070	0.6	7	38	3	—
C-UMD 2061-070	0.61	7	38	3	—
C-UMD 2062-070	0.62	7	38	3	—
C-UMD 2063-070	0.63	7	38	3	—
C-UMD 2064-070	0.64	7	38	3	—
C-UMD 2065-070	0.65	7	38	3	—
C-UMD 2066-070	0.66	7	38	3	—
C-UMD 2067-070	0.67	7	38	3	—
C-UMD 2068-070	0.68	7	38	3	—
C-UMD 2069-070	0.69	7	38	3	—
C-UMD 2070-080	0.7	8	38	3	—
C-UMD 2071-080	0.71	8	38	3	—
C-UMD 2072-080	0.72	8	38	3	—
C-UMD 2073-080	0.73	8	38	3	—
C-UMD 2074-080	0.74	8	38	3	—
C-UMD 2075-080	0.75	8	38	3	—
C-UMD 2076-080	0.76	8	38	3	—
C-UMD 2077-080	0.77	8	38	3	—
C-UMD 2078-080	0.78	8	38	3	—
C-UMD 2079-080	0.79	8	38	3	—
C-UMD 2080-100	0.8	10	38	3	—
C-UMD 2081-100	0.81	10	38	3	—
C-UMD 2082-100	0.82	10	38	3	—
C-UMD 2083-100	0.83	10	38	3	—
C-UMD 2084-100	0.84	10	38	3	—
C-UMD 2085-100	0.85	10	38	3	—
C-UMD 2086-100	0.86	10	38	3	—
C-UMD 2087-100	0.87	10	38	3	—
C-UMD 2088-100	0.88	10	38	3	—
C-UMD 2089-100	0.89	10	38	3	—
C-UMD 2090-100	0.9	10	38	3	—
C-UMD 2091-100	0.91	10	38	3	—
C-UMD 2092-100	0.92	10	38	3	—
C-UMD 2093-100	0.93	10	38	3	—
C-UMD 2094-100	0.94	10	38	3	—
C-UMD 2095-100	0.95	10	38	3	—
C-UMD 2096-100	0.96	10	38	3	—
C-UMD 2097-100	0.97	10	38	3	—
C-UMD 2098-100	0.98	10	38	3	—
C-UMD 2099-100	0.99	10	38	3	—
C-UMD 2100-100	1	10	38	3	—
C-UMD 2101-100	1.01	10	38	3	—
C-UMD 2102-100	1.02	10	38	3	—
C-UMD 2103-100	1.03	10	38	3	—

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-UMD 2104-100	1.04	10	38	3	—
C-UMD 2105-100	1.05	10	38	3	—
C-UMD 2106-100	1.06	10	38	3	—
C-UMD 2107-100	1.07	10	38	3	—
C-UMD 2108-100	1.08	10	38	3	—
C-UMD 2109-100	1.09	10	38	3	—
C-UMD 2110-100	1.1	10	38	3	—
C-UMD 2111-100	1.11	10	38	3	—
C-UMD 2112-100	1.12	10	38	3	—
C-UMD 2113-100	1.13	10	38	3	—
C-UMD 2114-100	1.14	10	38	3	—
C-UMD 2115-100	1.15	10	38	3	—
C-UMD 2116-100	1.16	10	38	3	—
C-UMD 2117-100	1.17	10	38	3	—
C-UMD 2118-100	1.18	10	38	3	—
C-UMD 2119-100	1.19	10	38	3	—
C-UMD 2120-100	1.2	10	38	3	—
C-UMD 2121-100	1.21	10	38	3	—
C-UMD 2122-100	1.22	10	38	3	—
C-UMD 2123-100	1.23	10	38	3	—
C-UMD 2124-100	1.24	10	38	3	—
C-UMD 2125-100	1.25	10	38	3	—
C-UMD 2126-100	1.26	10	38	3	—
C-UMD 2127-100	1.27	10	38	3	—
C-UMD 2128-100	1.28	10	38	3	—
C-UMD 2129-100	1.29	10	38	3	—
C-UMD 2130-100	1.3	10	38	3	—
C-UMD 2131-100	1.31	10	38	3	—
C-UMD 2132-100	1.32	10	38	3	—
C-UMD 2133-100	1.33	10	38	3	—
C-UMD 2134-100	1.34	10	38	3	—
C-UMD 2135-100	1.35	10	38	3	—
C-UMD 2136-100	1.36	10	38	3	—
C-UMD 2137-100	1.37	10	38	3	—
C-UMD 2138-100	1.38	10	38	3	—
C-UMD 2139-100	1.39	10	38	3	—
C-UMD 2140-100	1.4	10	38	3	—
C-UMD 2141-100	1.41	10	38	3	—
C-UMD 2142-100	1.42	10	38	3	—
C-UMD 2143-100	1.43	10	38	3	—
C-UMD 2144-100	1.44	10	38	3	—
C-UMD 2145-100	1.45	10	38	3	—
C-UMD 2146-100	1.46	10	38	3	—
C-UMD 2147-100	1.47	10	38	3	—
C-UMD 2148-100	1.48	10	38	3	—
C-UMD 2149-100	1.49	10	38	3	—

Next Page ➡

Unit (mm)

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-UMD 2150-100	1.5	10	38	3	—
C-UMD 2151-100	1.51	10	38	3	—
C-UMD 2152-100	1.52	10	38	3	—
C-UMD 2153-100	1.53	10	38	3	—
C-UMD 2154-100	1.54	10	38	3	—
C-UMD 2155-100	1.55	10	38	3	—
C-UMD 2156-100	1.56	10	38	3	—
C-UMD 2157-100	1.57	10	38	3	—
C-UMD 2158-100	1.58	10	38	3	—
C-UMD 2159-100	1.59	10	38	3	—
C-UMD 2160-120	1.6	12	38	3	—
C-UMD 2161-120	1.61	12	38	3	—
C-UMD 2162-120	1.62	12	38	3	—
C-UMD 2163-120	1.63	12	38	3	—
C-UMD 2164-120	1.64	12	38	3	—
C-UMD 2165-120	1.65	12	38	3	—
C-UMD 2166-120	1.66	12	38	3	—
C-UMD 2167-120	1.67	12	38	3	—
C-UMD 2168-120	1.68	12	38	3	—
C-UMD 2169-120	1.69	12	38	3	—
C-UMD 2170-120	1.7	12	38	3	—
C-UMD 2171-120	1.71	12	38	3	—
C-UMD 2172-120	1.72	12	38	3	—
C-UMD 2173-120	1.73	12	38	3	—
C-UMD 2174-120	1.74	12	38	3	—
C-UMD 2175-120	1.75	12	38	3	—
C-UMD 2176-120	1.76	12	38	3	—
C-UMD 2177-120	1.77	12	38	3	—
C-UMD 2178-120	1.78	12	38	3	—
C-UMD 2179-120	1.79	12	38	3	—
C-UMD 2180-120	1.8	12	38	3	—
C-UMD 2181-120	1.81	12	38	3	—
C-UMD 2182-120	1.82	12	38	3	—
C-UMD 2183-120	1.83	12	38	3	—
C-UMD 2184-120	1.84	12	38	3	—
C-UMD 2185-120	1.85	12	38	3	—
C-UMD 2186-120	1.86	12	38	3	—
C-UMD 2187-120	1.87	12	38	3	—
C-UMD 2188-120	1.88	12	38	3	—
C-UMD 2189-120	1.89	12	38	3	—
C-UMD 2190-120	1.9	12	38	3	—
C-UMD 2191-120	1.91	12	38	3	—
C-UMD 2192-120	1.92	12	38	3	—

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
C-UMD 2193-120	1.93	12	38	3	—
C-UMD 2194-120	1.94	12	38	3	—
C-UMD 2195-120	1.95	12	38	3	—
C-UMD 2196-120	1.96	12	38	3	—
C-UMD 2197-120	1.97	12	38	3	—
C-UMD 2198-120	1.98	12	38	3	—
C-UMD 2199-120	1.99	12	38	3	—
C-UMD 2200-120	2	12	38	3	—
C-UMD 2205-120	2.05	12	38	3	—
C-UMD 2210-120	2.1	12	38	3	—
C-UMD 2212-120	2.12	12	38	3	—
C-UMD 2213-120	2.13	12	38	3	—
C-UMD 2214-120	2.14	12	38	3	—
C-UMD 2215-120	2.15	12	38	3	—
C-UMD 2220-120	2.2	12	38	3	—
C-UMD 2225-120	2.25	12	38	3	—
C-UMD 2229-120	2.29	12	38	3	—
C-UMD 2230-120	2.3	12	38	3	—
C-UMD 2231-120	2.31	12	38	3	—
C-UMD 2232-120	2.32	12	38	3	—
C-UMD 2235-120	2.35	12	38	3	—
C-UMD 2239-120	2.39	12	38	3	—
C-UMD 2240-120	2.4	12	38	3	—
C-UMD 2241-120	2.41	12	38	3	—
C-UMD 2242-120	2.42	12	38	3	—
C-UMD 2245-120	2.45	12	38	3	—
C-UMD 2250-120	2.5	12	38	3	—
C-UMD 2255-120	2.55	12	38	3	—
C-UMD 2256-120	2.56	12	38	3	—
C-UMD 2257-120	2.57	12	38	3	—
C-UMD 2260-120	2.6	12	38	3	—
C-UMD 2265-120	2.65	12	38	3	—
C-UMD 2270-120	2.7	12	38	3	—
C-UMD 2275-120	2.75	12	38	3	—
C-UMD 2277-120	2.77	12	38	3	—
C-UMD 2278-120	2.78	12	38	3	—
C-UMD 2279-120	2.79	12	38	3	—
C-UMD 2280-120	2.8	12	38	3	—
C-UMD 2285-120	2.85	12	38	3	—
C-UMD 2290-120	2.9	12	38	3	—
C-UMD 2295-120	2.95	12	38	3	—
C-UMD 2300-120	3	12	38	3	—

Drilling Conditions for C-UMD

WORK MATERIAL	CARBON STEELS S45C / S50C (~225HB)		ALLOY STEELS SK / SCM / SUS (225~325HB)		PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)		ALUMINUM ALLOYS A5052 etc.	
Velocity	*Vc*=25~40 m/min		*Vc*=15~25 m/min		*Vc*=10~15 m/min		*Vc*=20~60 m/min	
Diameter ϕD (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
0.3	20,000	40	15,900	30	10,600	10	20,000	400
0.4	17,400	50	11,800	40	8,000	20	19,900	690
0.5	15,900	80	9,500	50	6,400	30	20,000	1,000
0.6	14,100	80	7,900	40	5,300	20	19,900	1,050
0.7	12,800	90	6,800	50	4,500	20	19,900	1,120
0.8	11,900	100	6,000	50	4,000	20	19,900	1,190
0.9	10,500	100	6,200	50	3,500	20	17,600	1,220
1	9,500	100	6,400	60	3,200	20	15,900	1,270
2	5,600	170	3,200	100	1,600	20	9,500	950
3	3,700	150	2,700	110	1,600	20	6,400	640

Note:
・Recommend step amount 0.1D-0.2D. Recommend 0.2D-0.5D for Aluminum Alloys.
・Recommend water soluble or oil coolant.
・Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

Drilling Example 1 SUS304

Comments

● Tip Damage :

Damage by chipping can be seen on the Carbide Drill. The High-Speed Steel Drill exhibits wear on the top chisel line and corners. Compared to the Carbide Drill, damage is greater.
The High-Speed Steel Drill also has the work material adhering to it.

● Hole Position :


The solid carbide drill has minimal deflection when compared to a High Speed steel model, through the entire drilling cycle.

Drilling Condition




Tool :	ϕ0.6 × Flute Length 7 mm
Work Material :	SUS304 (1.4301)
Spindle Speed :	8,000 min^{-1}
Velocity :	15 m/min
Z Feed Rate :	50 mm/min
Chip Load :	0.00625 mm/rev
Peck Amount :	0.12 mm/time
Hole Depth :	2.4 mm
Number of Holes :	500 holes
Drilling Time :	25 min/100 holes
Overhang Length :	10 mm
Coolant :	Water Soluble (Nozzle)

Process Form





＊Blind Hole Step Process

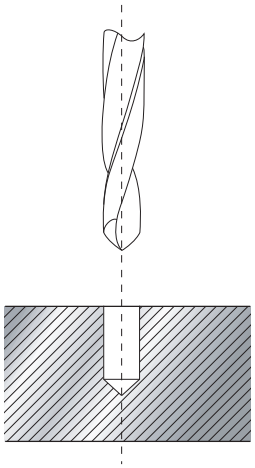

Comparison of Tip Damage

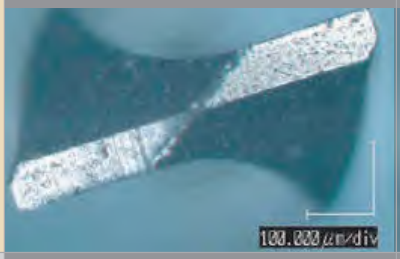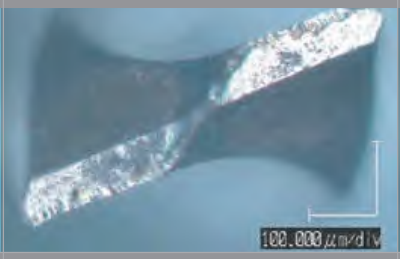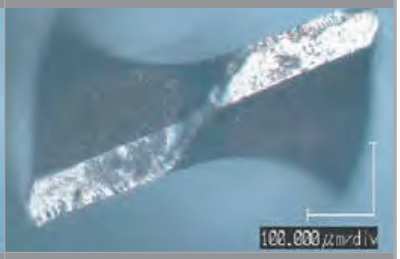	Before use	After 250 hits	After 500 hits
UT C-UMD 2060-070 ϕ0.6 Flute Length 7 mm Ti-Composite Membrane			
Competitor A High Speed Steel Drill ϕ0.6 Flute Length 7 mm TiN			

Comparison of Hole Position

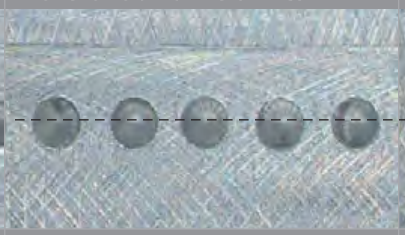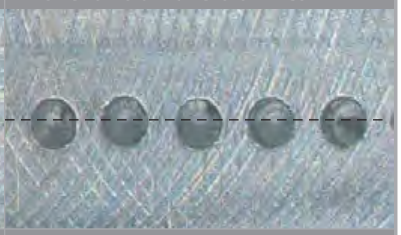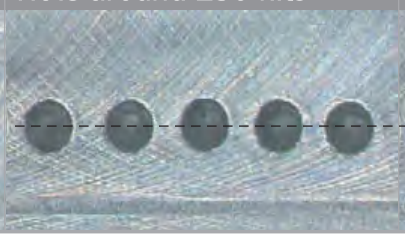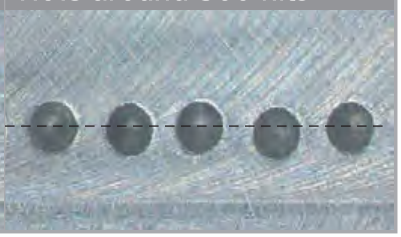
	Hole around 1 hit	Hole around 250 hits	Hole around 500 hits
UT C-UMD 2060-070 ϕ0.6 Flute Length 7 mm Ti-Composite Membrane			
Competitor A High Speed Steel Drill ϕ0.6 Flute Length 7 mm TiN			

Drilling Example 2

SUS304

ϕ0.1 Drilling (about 800 holes)



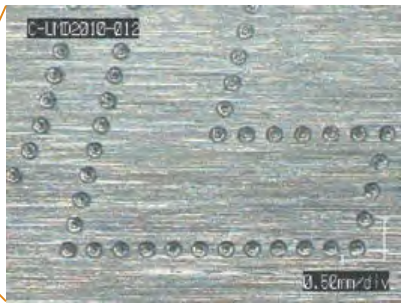

	Spindle Speed (min⁻¹)	Feed Rate (mm/min)	Peck Amount (mm/time)	Hole Depth (mm)	Drilling Time	Coolant	Note
Acrylic ϕ0.1							
C-UMDϕ0.1	20,000	20	0.02	1.00	1 h 30 min	Air Blow	Without pilot hole drilling
SUS304 (1.4301) ϕ0.1							
Center Drill + Chamfering C-UMDϕ0.2	10,000	2	0.01	0.05	2 h 50 min	Water Souble	
Drilling C-UMDϕ0.1	12,000	4	0.02	0.20	3 h 27 min	Water Souble	
Aluminum (A5052) ϕ0.2							
C-UMDϕ0.2	16,000	80	0.04	1.50	2 h 50 min	Water Souble	Using back-up board
NAK55 (AISI P21) ϕ0.3							
C-UMDϕ0.3	15,000	15	0.06	1.50	3 h 35 min	Water Souble	With pilot hole drilling
SUS304 (1.4301) ϕ0.3							
C-UMDϕ0.3	16,000	30	0.06	1.50	2 h 24 min	Water Souble	With pilot hole drilling

UTDLX



UT MICRO COAT 2 Flute UNIMAX Drills with Long Flute

φ0.3～φ3

Super MG | MICRO COAT | 30° | X Thinning | Shank Dia 0/-0.005

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)


Work Material														
Structural Steels SS400	Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels ～50HRC	Hardened Steels ～55HRC	Hardened Steels ～60HRC	Hardened Steels ～65HRC	Hardened Steels ～70HRC	Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics
●	●	●	○	Contact sales when drilling over 45HRC.					○	●		○		

Work Material						
Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials			
○	○					

Features

A highly efficient and economic drill for both mass and prototype production of parts.
UT MICRO COAT offers excellent performance for cutting soft materials.
The new drill design and X thinning offer stable drilling performance with increased tool life.
The 130° point angle ensures reduced burring of the drilled hole.
With an aspect ratio of 15:1, the drill is ideal for deep hole drilling, that requires high accuracy.

Diameter Tolerance: 0/-0.01 mm
Point Angle: 130°

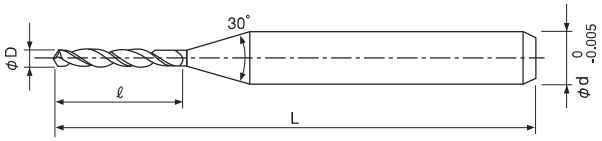

Total 55 models

Unit (mm)

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UTDLX 2030-045	0.3	4.5	38	3	—
UTDLX 2035-053	0.35	5.3	38	3	—
UTDLX 2040-060	0.4	6	38	3	—
UTDLX 2045-068	0.45	6.8	38	3	—
UTDLX 2050-075	0.5	7.5	38	3	—
UTDLX 2055-083	0.55	8.3	38	3	—
UTDLX 2060-090	0.6	9	45	3	—
UTDLX 2065-098	0.65	9.8	45	3	—
UTDLX 2070-105	0.7	10.5	45	3	—
UTDLX 2075-113	0.75	11.3	45	3	—
UTDLX 2080-120	0.8	12	45	3	—
UTDLX 2085-128	0.85	12.8	45	3	—

Next Page ➡


Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
UTDLX 2090-135	0.9	13.5	45	3	—
UTDLX 2095-143	0.95	14.3	45	3	—
UTDLX 2100-150	1	15	50	3	—
UTDLX 2105-158	1.05	15.8	50	3	—
UTDLX 2110-165	1.1	16.5	50	3	—
UTDLX 2115-173	1.15	17.3	50	3	—
UTDLX 2120-180	1.2	18	50	3	—
UTDLX 2125-188	1.25	18.8	50	3	—
UTDLX 2130-195	1.3	19.5	50	3	—
UTDLX 2135-203	1.35	20.3	60	3	—
UTDLX 2140-210	1.4	21	60	3	—
UTDLX 2145-218	1.45	21.8	60	3	—
UTDLX 2150-225	1.5	22.5	60	3	—
UTDLX 2155-233	1.55	23.3	60	3	—
UTDLX 2160-240	1.6	24	60	3	—
UTDLX 2165-248	1.65	24.8	60	3	—
UTDLX 2170-255	1.7	25.5	60	3	—
UTDLX 2175-263	1.75	26.3	60	3	—
UTDLX 2180-270	1.8	27	60	3	—
UTDLX 2185-278	1.85	27.8	60	3	—
UTDLX 2190-285	1.9	28.5	60	3	—
UTDLX 2195-293	1.95	29.3	60	3	—
UTDLX 2200-300	2	30	60	3	—
UTDLX 2205-308	2.05	30.8	80	3	—
UTDLX 2210-315	2.1	31.5	80	3	—
UTDLX 2215-323	2.15	32.3	80	3	—
UTDLX 2220-330	2.2	33	80	3	—
UTDLX 2225-338	2.25	33.8	80	3	—
UTDLX 2230-345	2.3	34.5	80	3	—
UTDLX 2235-353	2.35	35.3	80	3	—
UTDLX 2240-360	2.4	36	80	3	—
UTDLX 2245-368	2.45	36.8	80	3	—
UTDLX 2250-375	2.5	37.5	80	3	—
UTDLX 2255-383	2.55	38.3	80	3	—
UTDLX 2260-390	2.6	39	80	3	—
UTDLX 2265-398	2.65	39.8	80	3	—
UTDLX 2270-405	2.7	40.5	80	3	—
UTDLX 2275-413	2.75	41.3	80	3	—
UTDLX 2280-420	2.8	42	80	3	—
UTDLX 2285-428	2.85	42.8	80	3	—
UTDLX 2290-435	2.9	43.5	80	3	—
UTDLX 2295-443	2.95	44.3	80	3	—
UTDLX 2300-450	3	45	80	3	—

Drilling Conditions for UTDLX

WORK MATERIAL	STRUCTUAL STEELS SS400		CARBON STEELS S50C		ALLOY STEELS SCM / SUS		ALUMINUM ALLOYS A5052	
Velocity	Vc=20~40 m/min		Vc=20~40 m/min		Vc=15~40 m/min		Vc=25~60 m/min	
Diameter (mm)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)	Spindle Speed (min^{-1})	Feed Rate (mm/min)
0.3	20,000	50	20,000	50	16,000	40	20,000	650
0.35	19,000	60	19,000	60	13,600	50	20,000	700
0.4	18,000	80	18,000	80	11,900	50	20,000	800
0.45	17,000	100	17,000	100	10,600	60	20,000	850
0.5	16,000	120	16,000	120	9,500	60	20,000	920
0.55	15,000	140	15,000	140	9,000	70	20,000	1,050
0.6	14,100	140	14,100	140	7,900	70	19,900	1,150
0.7	12,800	140	12,800	140	6,800	70	19,900	1,230
0.8	11,900	140	11,900	140	6,000	70	19,900	1,310
0.9	10,500	140	10,500	140	6,200	70	17,600	1,350
1	9,500	150	9,500	150	6,400	70	15,900	1,400
1.5	7,200	150	7,200	150	5,500	70	12,000	1,470
2	5,600	150	5,600	150	5,000	70	9,500	1,590
2.5	4,500	150	4,500	150	4,400	70	7,600	1,640
3	4,000	150	4,000	150	3,800	70	6,400	1,700
Peck Amount	0.5D		0.3D		0.1D		0.3D	


Note:
- Apply pre-drilling more than 3D depth before deep drilling. Recommend UTDSX for pre-drilling.
- Recommend shallower drilling than flute length (under ϕ1: 1D, ϕ1 and over: 0.5D).
- Recommend water soluble or oil coolant.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

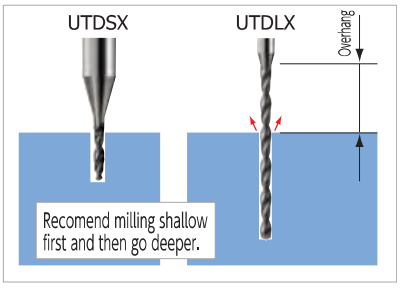

Comparison of UTD (Carbide) and HSS Drill Bit SUS420J2 (Raw Material)


UTD can drill more than 2X holes compared to an HSS model

Tool Size	ϕ1.32 × 12 (UTD proto type)
Spindle Speed	5,000 min^{-1} (*Vc* : 21 m/min)
Feed Rate	200 mm/min (f : 0.04 m/rev.)
Peck Amount	1.3 mm
Depth	7 mm blind hole

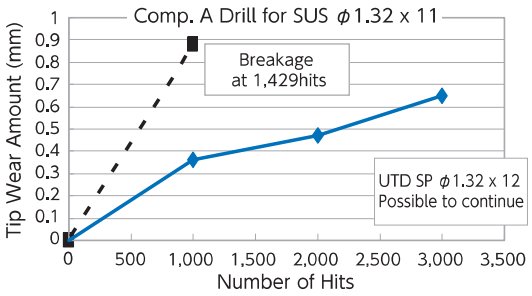

Flank wear comparison with HSS

UTD prototype

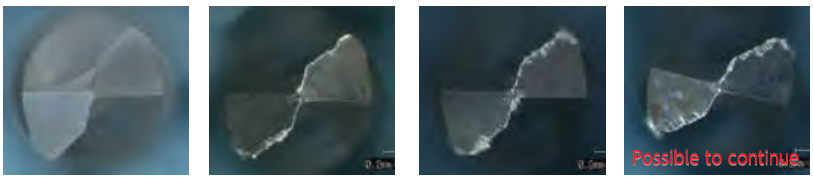


HSS Drill (Competitor A: ϕ3 shank diameter with TiN coating for SUS)




Drilling test with various materials (Comparison of with / without thinning)

Smooth chip evacuation using the X-thinning design, offers greater resistance to breakage and more accurate drilling


Drill Size : ϕ1.0 x 15
Tool : UTDLX 2100-150 (with thinning)
Prototype : ϕ1.0 x 15 (without thinning)



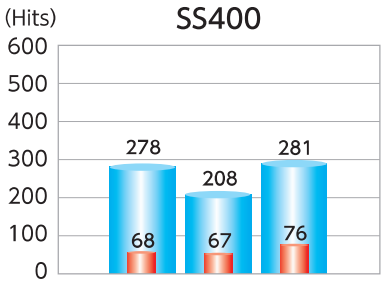


Spindle Speed	9,500 min^{-1} (*Vc* : 30 m/min)
Feed Rate	400 mm/min (f : 0.042 mm/rev.)
Peck Amount	0.2 mm
Depth	14 mm blind hole



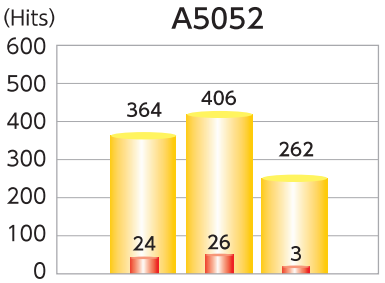

Spindle Speed	15,900 min^{-1} (*Vc* : 50 m/min)
Feed Rate	1,500 mm/min (f : 0.094 mm/rev.)
Peck Amount	0.7 mm
Depth	14 mm blind hole



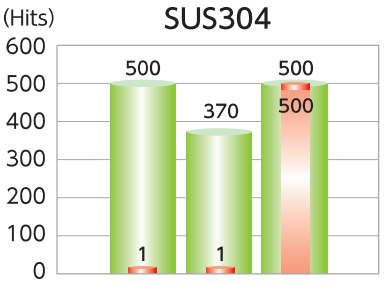

Spindle Speed	6,400 min^{-1} (*Vc* : 20 m/min)
Feed Rate	150 mm/min (f : 0.023 mm/rev.)
Peck Amount	0.2 mm
Depth	14 mm blind hole



PMD STD



P Series Non-coat Gun Barrel Drill Overall Length 38.1 x Shank Diameter 3.175 mm


φ0.02～φ0.1

h4 tolerance | 3.175 shank | Shrink-fit compatible

Refer to page 25 for material applications.

Features

Flute length L/D 10D
Diameter tolerance 0/-3μm
4-facet drill point

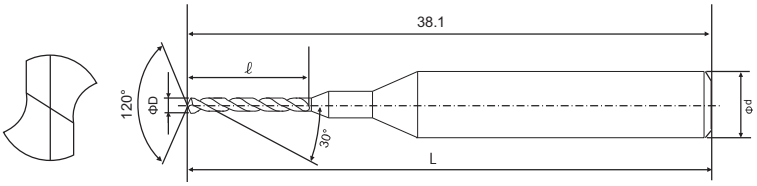

Total 17 models

Unit (mm)

Product Code	Model Number	Diameter φD	Diameter Tolerance	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
140-0001	PMD STD 0.02 x 0.2	0.020	+0.000/-0.003	0.2	38.1	3.175	—
140-0002	PMD STD 0.025 x 0.3	0.025		0.3			—
140-0003	PMD STD 0.03 x 0.3	0.030		0.3			—
140-0004	PMD STD 0.035 x 0.4	0.035		0.4			—
140-0005	PMD STD 0.04 x 0.4	0.040		0.4			—
140-0006	PMD STD 0.045 x 0.5	0.045		0.5			—
140-0007	PMD STD 0.05 x 0.5	0.050		0.5			—
140-0008	PMD STD 0.055 x 0.6	0.055		0.6			—
140-0009	PMD STD 0.06 x 0.6	0.060		0.6			—
140-0010	PMD STD 0.065 x 0.7	0.065		0.7			—
140-0011	PMD STD 0.07 x 0.7	0.070		0.7			—
140-0012	PMD STD 0.075 x 0.8	0.075		0.8			—
140-0013	PMD STD 0.08 x 0.8	0.080		0.8			—
140-0014	PMD STD 0.085 x 0.9	0.085		0.9			—
140-0015	PMD STD 0.09 x 0.9	0.090		0.9			—
140-0016	PMD STD 0.095 x 10	0.095		1.0			—
140-0017	PMD STD 0.1 x 10	0.100		1.0			—

P Series Drill Features

Ultra-precision drill that utilizes the technology cultivated with PCB drills.
All sizes with diameter tolerance 0/-0.003 and shank diameter tolerance h4 can be used with shrink-fit holders.



φ0.03 Drill



φ0.03 Drill

φ0.5mm
Mechanical pencil

PMD PLT



P Series Non-coat Gun Barrel Drill Overall Length 38.1 x Shank Diameter 3.175 mm

φ0.02～φ0.1

h4 tolerance | 3.175 shank | Shrink-fit compatible

Refer to page 25 for material applications.

Features

For pilot drilling
Flute Length L/D 2D
Diameter tolerance 0/-3μm
4-facet drill point

Total 11 models

Unit (mm)

Product Code	Model Number	Diameter φD	Diameter Tolerance	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
※1	PMD PLT 0.02 X 0.04	0.020	※1	0.04	38.1	3.175	※1
※1	PMD PLT 0.0225 X 0.045	0.0225		0.045			※1
140-0018	PMD PLT 0.025 X 0.05	0.025	-0.003/-0.006	0.05			—
140-0019	PMD PLT 0.03 X 0.06	0.030	-0.005/-0.008	0.06			—
140-0020	PMD PLT 0.04 X 0.08	0.040		0.08			—
140-0021	PMD PLT 0.05 X 0.10	0.050		0.10			—
140-0022	PMD PLT 0.06 X 0.12	0.060		0.12			—
140-0023	PMD PLT 0.07 X 0.14	0.070		0.14			—
140-0024	PMD PLT 0.08 X 0.16	0.080		0.16			—
140-0025	PMD PLT 0.09 X 0.18	0.090		0.18			—
140-0026	PMD PLT 0.1 X 0.20	0.100		0.20			—

※ 1 These sizes are special items. Please contact our sales representative for details.
※ 2 Special sizes can be manufactured upon request. Please contact our sales representative for details.


PSM



P Series Non-coat Gun Barrel Drill Overall Length 38.1 x Shank Diameter 3.175 mm

h4 tolerance | 3.175 shank | Shrink-fit compatible






Refer to page 25 for material applications.

Features

For Chamfering・Counter sink・Center drill
Taper angle 90°

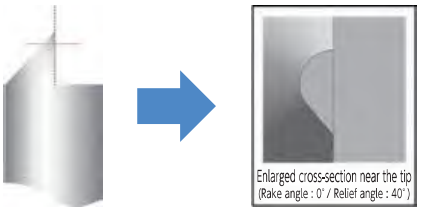

Total 1 model

Unit (mm)

Product Code	Model Number	Diameter φD	Half Included Angle α / 2	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
141-9001	PSM N603A 1.0 90°	1.0	45°	38.1	3.175	—

※ Special sizes can be manufactured upon request. Please contact our sales representative for details.

ϕ0.06 Ultrafine hole processing on super engineering plastic


Tool

Center PSM N603A 1.0 × 90° (Center depth 0.003 mm)
Pilot PMD PLT 0.06 × 0.12 (Pilot depth 0.009 mm)
Through PMD STD 0.06 × 0.6

Drilling condition

Drilling depth	0.4 mm
Hole wall pitch	0.0415 mm
Spindle speed	20,000 min^{-1}
Feed rate	10 mm/min
Peck Amount	0.005 mm/time
Hit count	961 hits
Coolant	Oil mist

Work surface

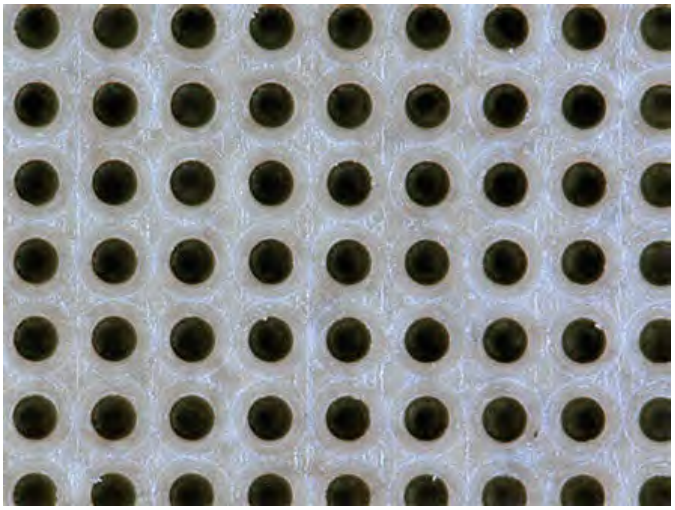


Hole diameter Avg ± 3σ ϕ0.0578 ± 0.0006


Hole registration accuracy

	Entry side	Exit side
Avg + 3σ (mm)	0.0021	0.0028
Max (mm)	0.0021	0.0041

Entry side

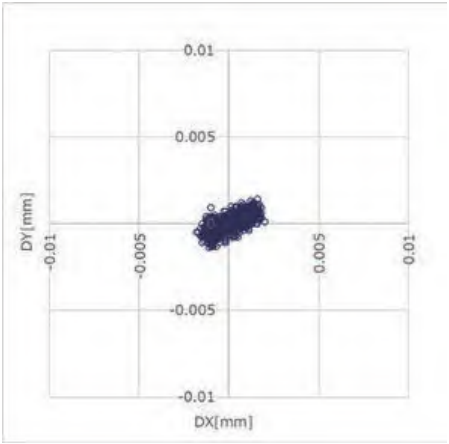

Exit side

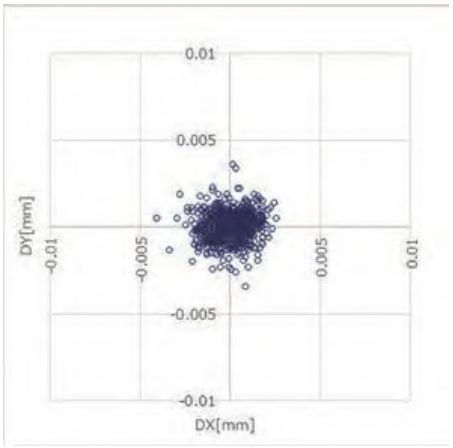

OPTECH-MES/MES-D50



Non-contact dynamic run out measurement of the tool with Micro Eyes !

Features

- **Diameter & Run-out detection improves the milling quality and stability.**
  Allowing the process to operate at the optimum condition by controlling the Machine spindle & tool setting.
- **Prevents problems with tool life by detecting the tool tip.**
  Detects tool damage & wear on micro tools.


Measuring example

■ End mill Measuring Accuracy (Diameter)

Spindle speed (min^{-1})	End mill size (mm)					
	ϕ0.2	ϕ0.5	ϕ0.9	ϕ2.0	ϕ2.5	ϕ3.0
0	-1	0	0	1	1	0
30,000	-1	0	-1	0	-1	-1
60,000	-1	-1	-2	–	–	–
120,000	-1	–	–	–	–	–


Unit (μm)

■ Tool tip detection repeatability

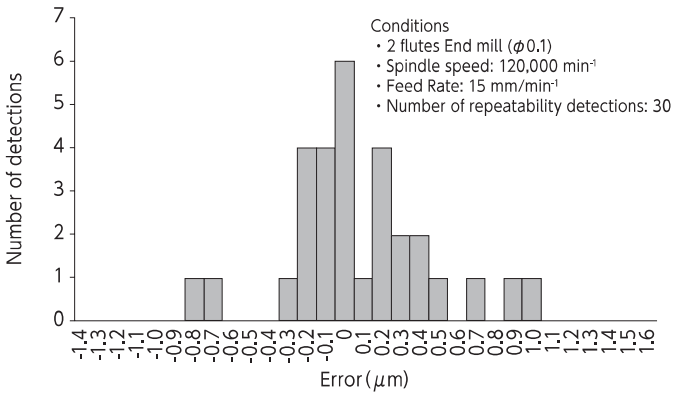


Dimensions Plan (mm)

■ OPTECH-MES (sensor)

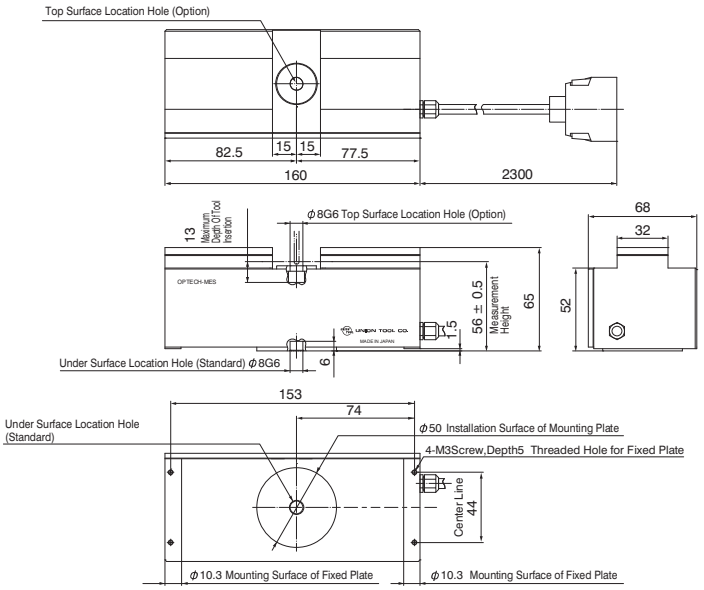

■ MES-D50 (display)

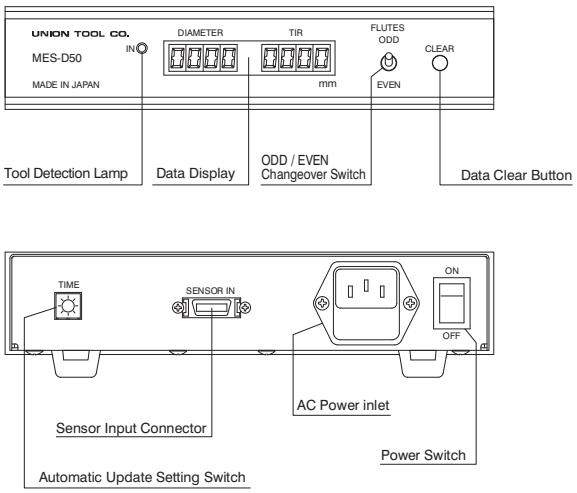

■ Optech Series OPTECH-MES/MES-D50

Items	Specification	
Measuring Items	• Tool Diameter, Dynamic run-out (Even number of flutes) • Diameter including dynamic run-out (Odd number of flutes) • Spindle run-out by pin gauge • Tool Tip Detection	
Measuring Range	ϕ0.05 ~ϕ3.0 (mm)	
Range of Runout Measurement	0 ~ 0.099 (mm)	
Resolution	1 (μm)	
Measuring Accuracy※1	Diameter	2 (μm) (ϕ0.05 ~ϕ1.5 (mm))
		4 (μm) (ϕ1.5 ~ϕ3.0 (mm))
	Run-out	within 2 (μm)
	Tool Tip Detection※2 (Repeatability)	3 (μm) (Diameter below ϕ0.2 (mm), Square End mills, Radius End mills)
		2 (μm) (Diameter below ϕ3.0 (mm), Ball End mills, Drills)
Measuring Spindle Rotation	• within 120,000 (min^{-1}) (ϕ0.05 ~ϕ0.1 (mm) or below) • within 60,000 (min^{-1}) (ϕ0.1 ~ϕ1.0 (mm) or below) • within 30,000 (min^{-1}) (ϕ1.0 ~ϕ3.0 (mm) or below)	
Tool Tip Measurement Position※3	56 mm ± 0.5 mm from bottom surface of the detector	
Measuring Point Range	within ± 0.02 (mm) ※4	
Dimensions/Mass	• Sensor : W160 × D68 × H65 (mm) 0.7 (kg) • Display : W200 × D200 × H42 (mm) 1.6 (kg)	
Display	• Diameter, Run-out display (Diameter, TIR), 4 digits each • Tool tip detection indicator (IN) Lamp ON	
Functions	• Odd/even cutters switch (ODD/EVEN) • Data refresh interval (TIME) • No/Yes: Approximately 0.5s, 1.0s, 1.5s, 2.0s • Clear (CLR)	
Power Source	AC100 ~ 240 (V) 50/60 Hz	
Cable Length	2.3 (m)	

※1 Quantization errors are not included.
※2 Lamp lights when the tool is detected. Check the scale on milling machine for the actual value.
※3 Absolute position is different on individual tool. Adjust/Assemble the position within 56 ± 0.5mm.
※4 Set the tool position within ± 0.02 mm (XY direction) from the center of gauge hole.

1 Calculation of Milling Conditions

Proper tool selection, machine condition, feed and speeds are essential for successful milling. The optimum machining conditions are calculated using the formulas below.

Formulas for calculation of end milling conditions

1. Velocity : V_c (m/min)

$$V_c = \frac{\pi \times D \times n}{1000}$$

π = 3.14 (Circular Constant)
D = Outside Diameter (mm)
n = Spindle Speed (min^{-1})

2. Spindle Speed : n (min^{-1})

$$n = \frac{1000 \times V_c}{\pi \times D}$$

V_c = Velocity (m/min)
π = 3.14 (Circular Constant)
D = Outside Diameter (mm)

3. Feed Rate : V_f (mm/min)

$$V_f = n \times z \times f_z$$

n = Spindle Speed (min^{-1})
z = Number of flutes
f_z = Feed per tooth (mm/t)

4. Feed per tooth : f_z (mm/t)

$$f_z = \frac{V_f}{n \times z}$$


V_f = Feed Rate (mm/min)
n = Spindle Speed (min^{-1})
z = Number of flutes

Explanation of terms used parameters

1. Velocity V_c [Unit : m/min] :
The milling distance of an optional point on the circumference per unit (1 minute)

Related Value
- Diameter ϕD [mm] : Twice the distance from the center of a circle (radius)
- π : Circular constant = 3.14 (Unit : Nil)
- Spindle Speed n [min^{-1}] : Revolutions per minute
  [min^{-1}] = [rpm ; revolutions per minute]

● Length of Circumference = Diameter × pi : πD [mm]
● Velocity V_c : Milling length per minute = Length of circumference × Spindle rotation speed



$$V_c = \pi \times D\ [mm] \times n\ [min^{-1}] \rightarrow V_c = \frac{\pi \times D\ [mm] \times n\ [min^{-1}]}{1000}\ [m/min]$$


Unit Conversion : 1 mm = 1/1000 m therefore....
D [mm] = D/1000 [m]

2. Feed per tooth f_z [Unit : mm/t]

Related Value
- Feed Rate V_f [mm/min] : Amount of feed per minute
- Spindle Speed n [min^{-1}] : Revolutions per minute
  [min^{-1}] = [rpm ; revolutions per minute]
- Number of Flutes z : Number of flutes

● The amount of feed per rotation is described below. (rev = revolution)

In case of 2 flutes

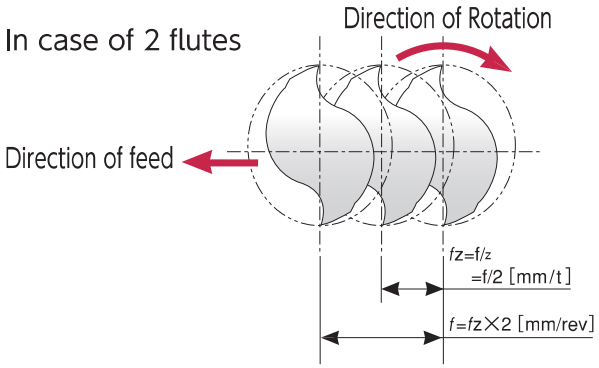

$$f = \frac{V_f\ [mm/min]}{n\ [rev/min]} = \frac{V_f}{n}\left[\frac{mm}{min}\right] \times \left[\frac{mm}{rev}\right] = \frac{V_f}{n}\ [mm/rev]$$

※ [min^{-1}] = [rev/min]

●The amount of feed per flute is calculated using the feed rate divided by the number of flutes.

$$f_z = \frac{f\ [mm/rev]}{z} = \frac{V_f}{n \times z}\ [mm/t]$$

2 Using the Parameter Chart

example 1

<How to calculate spindle speed and feed rate>

For example: C-CES2080 NAK55 (39HRC) high speed milling

(1) Determine the velocity V_c based on the type of work material or its hardness. Parameter chart on page A-26 shows V_c = 200 m/min.

(2) We know the Outside diameter, we can set spindle speed (n) and feed rate (V_f). NAK55 is in the Prehardened Steel column. Velocity V_c is 200 m/min. From the table, the Outside diameter (D) is 8.0 mm, then n = 7900 min^{-1} and V_f = 405 mm/mim.

(3) Set the Z-axis cutting depth to approximately half of the outside diameter.

example 2

<How to calculate feed rate>

● Case 1. You want to work on S50C with a C-CES2030 End Mill, but the milling machine has 3,500 min^{-1} maximum Spindle capability only. What is the feed rate with the conditions given?

Based on a feed per tooth 0.0135 mm/t

V_f : = ($n \times z \times f_z$) = (3,500 × 2 × 0.0135) = 94.5

n : Spindle speed

z : Number of flutes

f_z : Feed per tooth

n = 3,500 min^{-1}, V_f : = 94.5 mm/min.

<How to calculate the spindle speed>

● Case 2. You want to work on NAK80 with a C-CES2100 End Mill at velocity 22 m/min. What is the spindle speed for this application?

$$n = \frac{1000V_c}{\pi D} = \frac{1000 \times 22}{3.14 \times 10} = 700 \text{ min}^{-1}$$

● Case 3. Calculating the spindle speed when side milling using C-CTE 4100-3

Work material: Carbon Steel

Velocity: 40 m/min.


Outside Diameter D is calculated about 1/3 to 1/2 of cutting depth from bottom.

For example: If the blade length is 35 mm, cutting depth is 18 mm.

Outside Diameter D1 = (1/3 Axial Depth a_p × tan (half included angle))×2 + tip diameter

= (1/3×18×tan 1.5°)×2+ϕ10

≒10.3




Spindle speed: $n = \frac{1000V_c}{\pi D} = \frac{1000 \times 40}{3.14 \times 10.3}$


= 1,237 min^{-1}

Diagram of End Mill Virtual Diameter

BALL TYPE END MILLS



SQUARE TYPE END MILLS



BALL END MILL VIRTUAL DIAMETER

$: \phi d = 2\sqrt{a_p(2R-a_p)}$

Square type diameter equals to the virtual diameter. Ball type virtual diameter will be depending on the contact point with work material and milling depth. The velocity of Ball End Mill can be calculated by using the virtual diameter.

Velocity of virtual diameter (V) can be calculated by the following formula.

V_C (m/min) $= \pi \times \phi$d (mm) $\times$ n (min^{-1}) /1000

Ex.) With virtual diameter ϕ1 mm and spindle speed 30,000 (min^{-1})

V_C (m/min) is; V_C (m/min) $= 3.14 \times \phi 1$ (mm) $\times$ 30,000 (min^{-1}) /1000

$= 94.2$ m/min

Virtual Diameter of Ball End Mill (mm) a_p : Axial Depth (mm)

(Unit : mm)

R \ a_p	0.005	0.01	0.02	0.03	0.04	0.05	0.1	0.15	0.2	0.25	0.3	0.4
R0.03	0.033	0.045	0.057	0.060	—	—	—	—	—	—	—	—
R0.05	0.044	0.060	0.080	0.092	0.098	0.100	—	—	—	—	—	—
R0.1	0.062	0.087	0.120	0.143	0.160	0.173	0.200	—	—	—	—	—
R0.15	0.077	0.108	0.150	0.180	0.204	0.224	0.283	0.300	—	—	—	—
R0.2	0.089	0.125	0.174	0.211	0.240	0.265	0.346	0.387	0.400	—	—	—
R0.25	0.099	0.140	0.196	0.237	0.271	0.300	0.400	0.458	0.490	0.500	—	—
R0.3	0.109	0.154	0.215	0.262	0.299	0.332	0.447	0.520	0.566	0.592	0.600	—
R0.4	0.126	0.178	0.250	0.304	0.349	0.387	0.529	0.624	0.693	0.742	0.775	0.800
R0.5	0.141	0.199	0.280	0.341	0.392	0.436	0.600	0.714	0.800	0.866	0.917	0.980
R0.6	0.155	0.218	0.307	0.375	0.431	0.480	0.663	0.794	0.894	0.975	1.039	1.131
R0.7	0.167	0.236	0.332	0.405	0.466	0.520	0.721	0.866	0.980	1.072	1.149	1.265
R0.8	0.179	0.252	0.356	0.434	0.500	0.557	0.775	0.933	1.058	1.162	1.249	1.386
R0.9	0.189	0.268	0.377	0.461	0.531	0.592	0.825	0.995	1.131	1.245	1.342	1.497
R1	0.200	0.282	0.398	0.486	0.560	0.624	0.872	1.054	1.200	1.323	1.428	1.600
R1.5	0.245	0.346	0.488	0.597	0.688	0.768	1.077	1.308	1.497	1.658	1.800	2.040
R2	0.283	0.399	0.564	0.690	0.796	0.889	1.249	1.520	1.744	1.936	2.107	2.400
R2.5	0.316	0.447	0.631	0.772	0.891	0.995	1.400	1.706	1.960	2.179	2.375	2.713
R3	0.346	0.489	0.692	0.846	0.977	1.091	1.536	1.873	2.154	2.398	2.615	2.993
R4	0.400	0.565	0.799	0.978	1.129	1.261	1.778	2.170	2.498	2.784	3.040	3.487
R5	0.447	0.632	0.894	1.094	1.262	1.411	1.990	2.431	2.800	3.122	3.412	3.919
R6	0.490	0.693	0.979	1.198	1.383	1.546	2.182	2.666	3.072	3.428	3.747	4.308

R \ a_p	0.5	0.6	0.7	0.8	0.9	1	1.5	2	2.5	3
R0.5	1.000	—	—	—	—	—	—	—	—	—
R0.6	1.183	1.200	—	—	—	—	—	—	—	—
R0.7	1.342	1.386	1.400	—	—	—	—	—	—	—
R0.8	1.483	1.549	1.587	1.600	—	—	—	—	—	—
R0.9	1.612	1.697	1.755	1.789	1.800	—	—	—	—	—
R1	1.732	1.833	1.908	1.960	1.990	2.000	—	—	—	—
R1.5	2.236	2.400	2.538	2.653	2.750	2.828	3.000	—	—	—
R2	2.646	2.857	3.040	3.200	3.341	3.464	3.873	4.000	—	—
R2.5	3.000	3.250	3.470	3.666	3.842	4.000	4.583	4.899	5.000	—
R3	3.317	3.600	3.852	4.079	4.285	4.472	5.196	5.657	5.916	6.000
R4	3.873	4.214	4.521	4.800	5.056	5.292	6.245	6.928	7.416	7.746
R5	4.359	4.750	5.103	5.426	5.724	6.000	7.141	8.000	8.660	9.165
R6	4.796	5.231	5.625	5.987	6.321	6.633	7.937	8.944	9.747	10.392

End Mills' Production Flow


We can flexibly deal with highly accurate grinding and complicated shape machining using our in-house developed production facilities at Mitsuke Factory, our factory dedicated to end mill manufacturing, located in Niigata Prefecture. We also develop inspection equipment for various processes and precise radius measuring instruments for ball end mills internally under our strict quality control system.

Material Accepting Inspection

Chamfering


Shouldering

Shank Diameter Finishing






Groove Grinding



Washing



Coating




Radius Inspection



Marking

Final Inspection

Packaging and Labeling

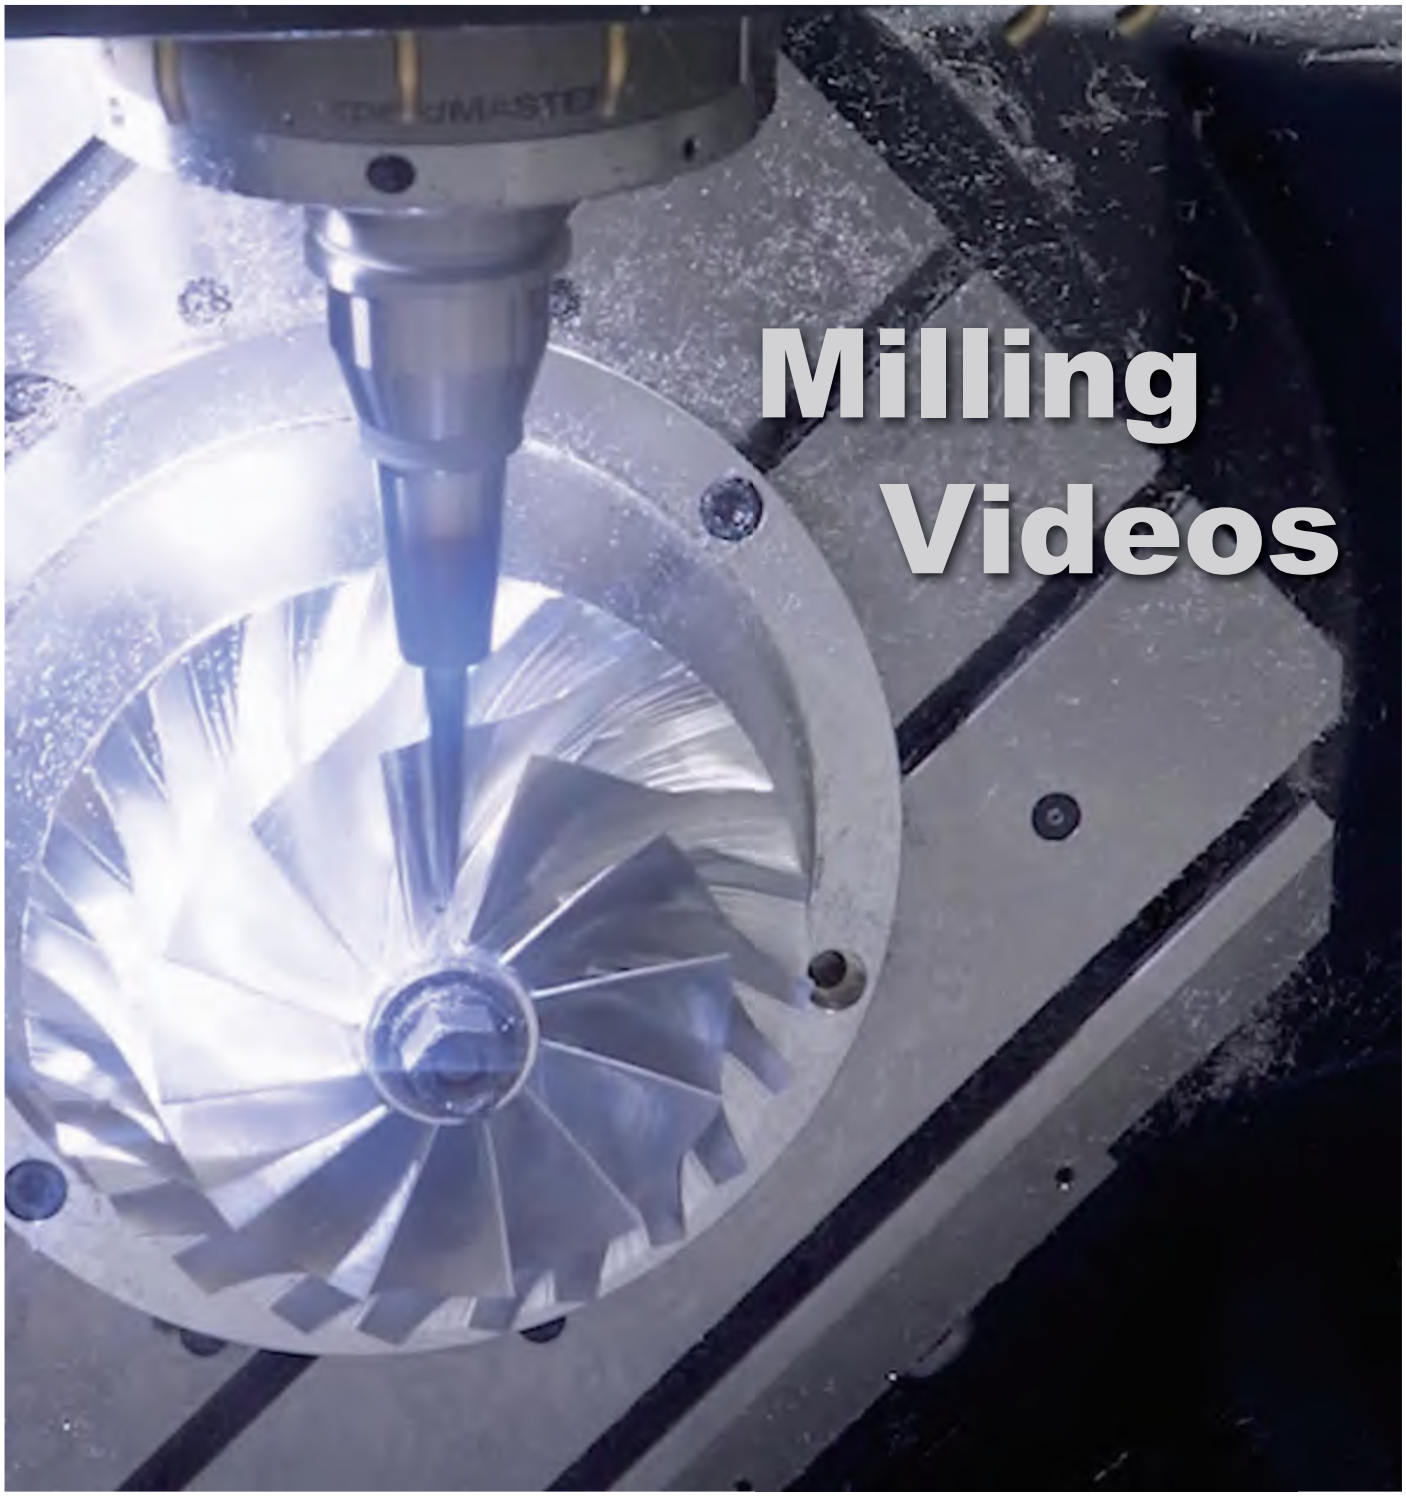

Please check it out

UNION TOOL GROUP

HEADQUARTERS
6-17-1 Minami-Ohi, Shinagawa-ku, Tokyo 140-0013, JAPAN
Tel: 81-3-5493-1023　Fax: 81-3-5493-1014

NAGAOKA FACTORY
TECHNICAL CENTER
NAGAOKA SALES OFFICE
2706-6 Togawa, Settaya-machi, Nagaoka-shi, Niigata 940-1104, JAPAN

MITSUKE FACTORY
3-1 Shinko-cho, Mitsuke-shi, Niigata 954-0076, JAPAN

KITAKANTO SALES OFFICE
Takasago Building Takasaki Nishiguchi 5F 5B-1, 46-2 Asahi-cho,
Takasaki-shi, Gunma 370-0052, JAPAN

SHIZUOKA SALES OFFICE
3-4-5 Sakurazutsumi, Nagaizumi-cho, Sunto-gun,
Shizuoka 411-0951, JAPAN

ANJO SALES OFFICE
Mikawa Anjo Hills 2F-A, 2-1-1 Mikawa Anjo-cho, Anjo-shi,
Aichi 446-0056, JAPAN

NAGOYA SALES OFFICE
8F NISSAY Ichinomiya BLDG, 1-2-8 Shinsei, Ichinomiya-shi,
Aichi 491-0912, JAPAN

OSAKA SALES OFFICE
picAsso Mikuni Building, 3-9-14 Niitaka, Yodogawa-ku, Osaka-shi,
Osaka 532-0033, JAPAN

FUKUOKA SALES OFFICE
207, Abundant 86, 4-3-9 Hakataeki-Minami, Hakata-ku, Fukuoka-shi,
Fukuoka 812-0016, JAPAN

U.S. UNION TOOL, INC.
(U.S. HEADQUARTERS)
1260 N. Fee Ana Street, Anaheim, CA 92807-1817 U.S.A.
Tel: 1-714-521-6242　Fax: 1-714-521-8642
NORTHERN CALIFORNIA REGIONAL SERVICE CENTER
(Customer Service, Santa Clara, California)
1805 Little Orchard Street, Suite 120, San Jose, CA 95125 U.S.A.
Tel: 1-408-982-0205　Fax: 1-408-982-0320
UPPER MIDWEST REGIONAL SERVICE CENTER
(Customer Service, Minneapolis, Minnesota)
155 Bridgepoint Drive, Unit 3 South St. Paul, MN 55075 U.S.A.
Tel: 1-651-552-0440　Fax: 1-651-552-0435

TAIWAN UNION TOOL CORP.
No.180, Zhong-Zun Street., 14 Neighborhood, Bin-Hai Vil.,
Lu-Zhu Dist., Taoyuan City, 338 TAIWAN
Tel: 886-3-354-3111　Fax: 886-3-354-3110

UNION TOOL EUROPE S.A.
Avenue des Champs-Montants 14aCH-2074 Marin /
Neuchatel SWITZERLAND
Tel: 41-32-756-6633

UNION TOOL (SHANGHAI) Co., LTD.
No.9-10, Lane 385, Gaoji Road, Sijing High New Technology
Development Zone, Songjiang District, Shanghai, 201601 CHINA
Tel: 86-21-5762-8577　Fax: 86-21-5762-8436

UNION TOOL HONG KONG LTD.
Unit 2803 & 05, 28/F, Peninsula Tower, 538 Castle Peak Road,
Cheung Sha Wan, Kowloon, HONG KONG
Tel: 852-2370-3012　Fax: 852-2370-2111

DONGGUAN UNION TOOL LTD.
No.5, Hong Jin Road, Hongmei Town,
Dongguan City, Guangdong Province 523160, CHINA
Tel: 86-769-8884-8900　Tel: 86-769-8884-8901
Fax: 86-769-8884-8296

UNION TOOL SINGAPORE PTE LTD.
140 Paya Lebar Road #08-17, AZ @ Paya Lebar, SINGAPORE 409015
Tel: 65-6846-9309　Fax: 65-6846-0197

UNION TOOL (THAILAND) CO., LTD.
55/73 Moo 15 Bangsaothong Sub-District, Bangsaothong District,
Samutprakarn 10570 THAILAND
Tel: 66-2-130-0908　Fax: 66-2-130-0909

Scan here to view
1. Website catalogs
2. Catalog revision information

UNION TOOL CO.

https://www.uniontool.co.jp/en/

Price & Specifications are subject to change without notice.

2511 EN8 11KA