

FROG





Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640

www.depurecousa.com
info@depurecousa.com

 Power: 2.2 HP

 Liquid capacity: 34 gal
Solid capacity: 11 gal

 Sucking time: 34 gal/30 sec
Dumping time: 74 gal/60 sec



Reverse Flow
Discharge system




P12352: Oil Kit Ø 2 in




2 By-Pass motors
Dumping time 74 gal/60 sec




P09679: PPL Filter (150 µ)
+ Metal separation basket

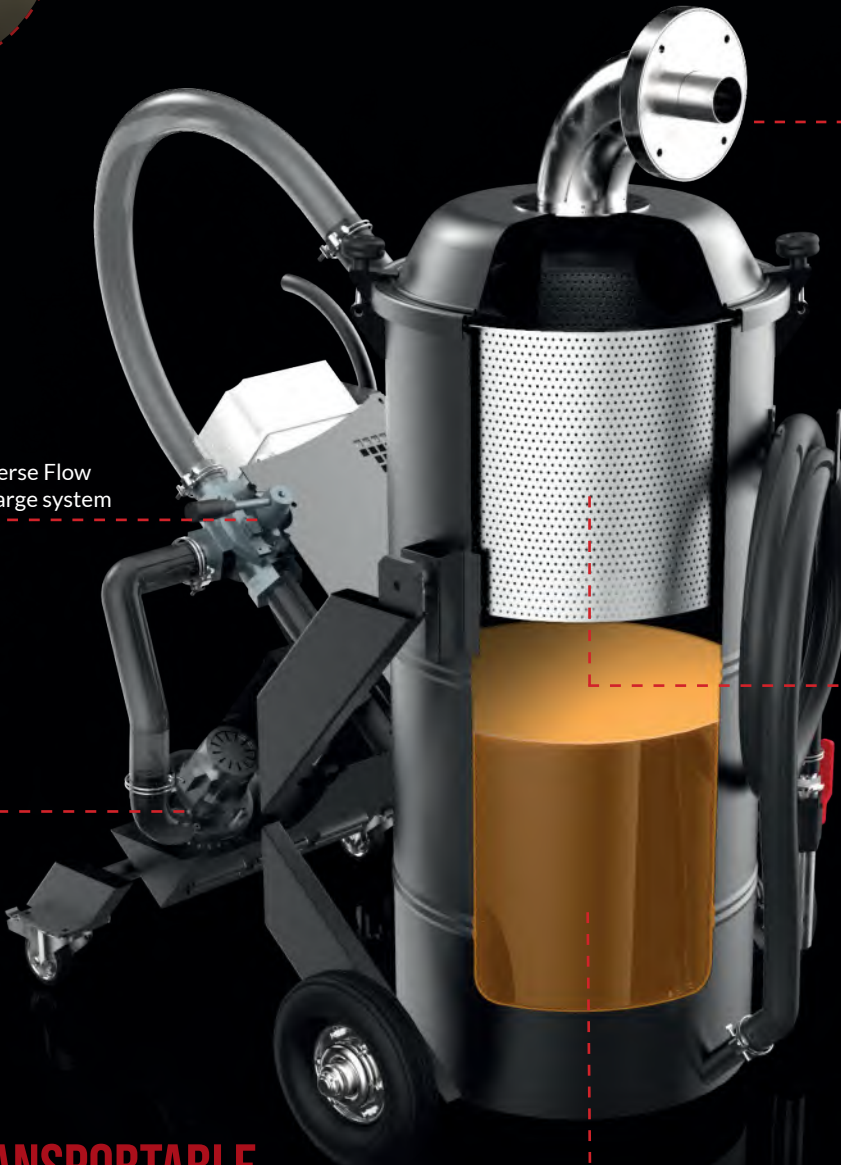

HIGHLY TRANSPORTABLE



46.46 in



27.56 in

51.91 in



Weight: 209 lbs

PUMP: Immersion
discharging pump
Suction time 34 gal/30 sec



SPEC SHEET

	Units	FROG
Motors Type		2 - By-Pass
Power	HP	2,2
Voltage Frequency	V Hz	110/60
Maximum vacuum	inH2O	98
Maximum air flow	CFM	224
Inlet	Ø in	2
Noise level - (EN ISO 3744)	dB(A)	70
Liquid capacity	gal	34
Solid capacity	gal	11
Dimensions	in	27.56 x 46.46
Hight	In	51.97
Weight	lb	209
Suction time	gal/sec	34/30
Dumping time	gal/sec	34/50
Oil filter		Included
Discharge type		Reverse flow

INCLUDED



Oil & swarf KIT
Ø 2 in



PPL disposal filter 150 µ efficiency

ACCESSORIES



Oil & swarf KIT PRO
Ø 2 in



COMPLETE METALWORKING SOLUTIONS
 (800) 991-4225 www.ahbinc.com
 ISO Certified customerservice@ahbinc.com