

# RAM OIL 10000 AV





**AHB**  
TOOLING & MACHINERY


COMPLETE METALWORKING SOLUTIONS  
(800) 991-4225 [www.ahbinc.com](http://www.ahbinc.com)  
ISO Certified [customerservice@ahbinc.com](mailto:customerservice@ahbinc.com)

**Depureco Industrial Vacuums USA**

19121 Marketplace Avenue, Building 1, Suite 165  
Plum Creek Business Park • Kyle • TX 78640

 Power: 7.5 HP

 Liquid capacity: 264 gal  
Solid capacity: 18 gal

 Sucking time: 264 gal/220 sec  
Dumping time: 264 gal/200 sec



Rotary vane pump  
**314 inH2O**




360° rotating inlet Ø2 in





PPL Filter (150 μ)  
+ Metal separation basket




External discharge pump



Inspection door

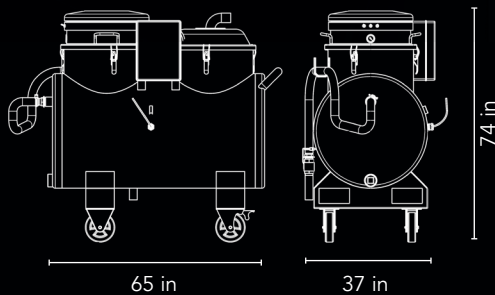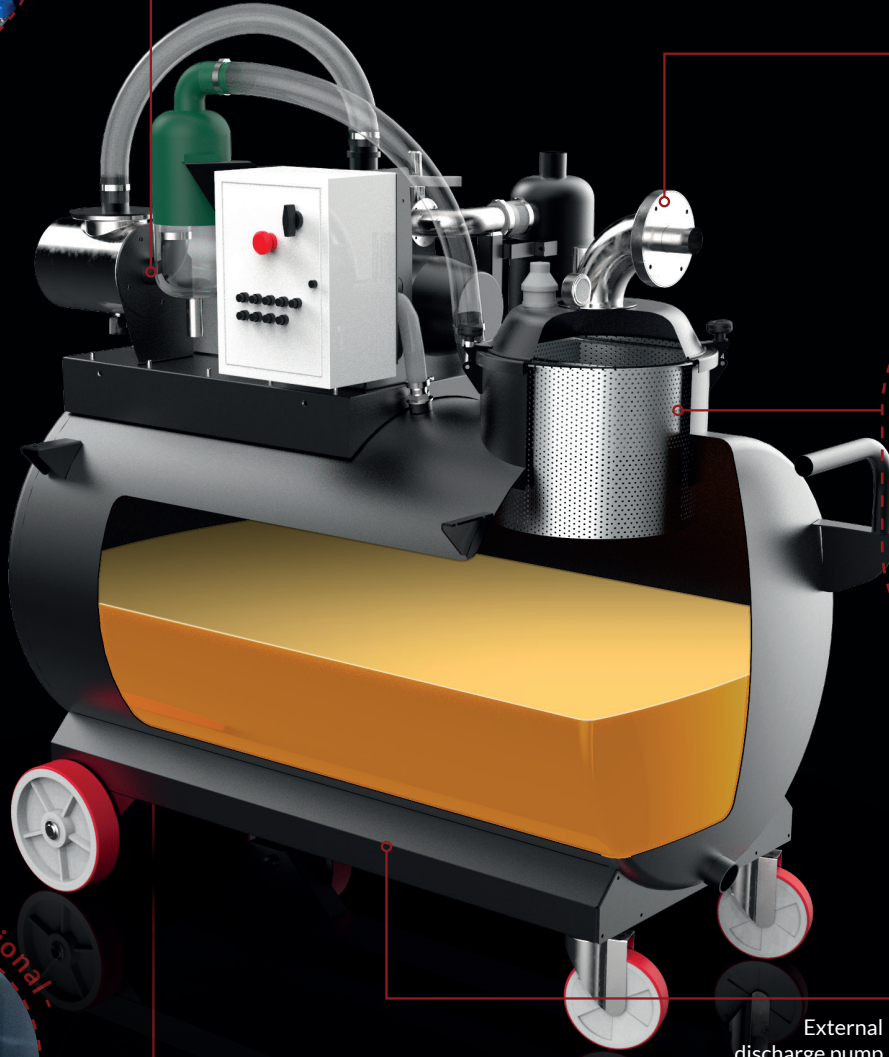

 **Weight: 1015 lbs**

# SPEC SHEET

	Units	RAM OIL 280
Motors   Type		Side channel blower
Power	HP	7.5
Voltage   Frequency	V Hz	480/60
Maximum vacuum in continuous	inH2O	314
Maximum air flow	CFM	176
Inlet	Ø in	2
Noise level - (EN ISO 3744)	dB(A)	82
Liquid capacity	gal	264
Solid capacity	gal	18
Dimensions	in	37 x 65
Hight	In	74
Weight	lb	1015
Suction time	gal/sec	264/220
Dumping time	gal/sec	264/200
Discharge system		
Type		Reverse flow

## INCLUDED




**PPL disposal filter 150  
μ efficiency**



**TNT filter**

## ACCESSORIES



**Oil & swart KIT PRO**