



INDUSTRIAL DOWNDRAFT TABLES

3X4, 3X6, 3X8, 4X4, 4X6, 4X8, 5X10



Diversitech's DD series of industrial downdraft tables are the trusted choice of North America's largest manufacturers, and are built to withstand the most demanding applications. Any fumes, smoke or dust from your production activities can be captured right as they are produced, before compromising your indoor air quality. Your choice of standard table sizes range from 3'x4' to 5'x10', and larger worksurfaces can be easily created by "mirroring" multiple tables.

All downdraft tables come fitted with multi-stage spark arrestance baffles, dual 10" diameter exhaust silencers and an automatic reverse-pulse filter cleaning system to help reduce maintenance requirements. Many options and accessories are available for the DD series of downdraft tables, and tables can be custom configured and built-to-order in almost any configuration.

Flexible, all-in-one, downdraft solution for dust, smoke, or fumes produced from welding, grinding, deburring, cutting, sanding, finishing, soldering, painting, or mixing.

Features:

- High capture face velocity (250fpm)
- Multi-stage spark arrestance baffling
- Industrial swivel-casters
- Reverse pulse cleaning system

Benefits:








- Hands-free capture-at-source
- Low maintenance, automatic self-cleaning system included
- Complies with OSHA guidelines for safe capture of dust, smoke, and weld fumes



COMPLETE METALWORKING SOLUTIONS
(800) 991-4225 www.ahbinc.com
ISO Certified customerservice@ahbinc.com



The Industrial Downdraft Family

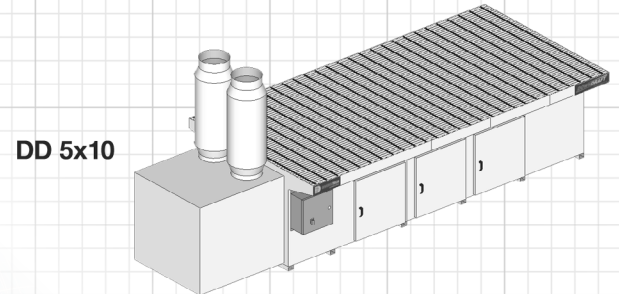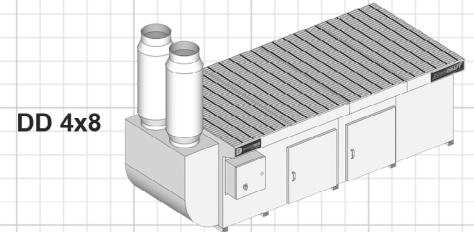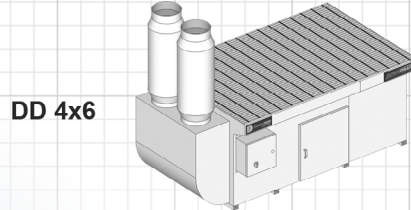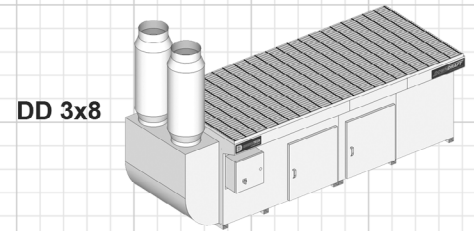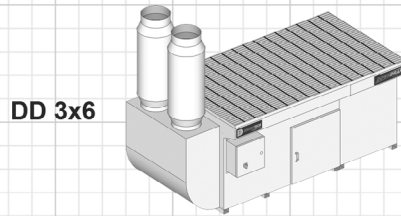

Welding, Grinding & Deburring Kit:

- Side and back walls
- Metal mesh pre-filter
- Grounding lug



Plasma Cutting Kit:

- 2" high steel bar grating
- Slag collection baffle with 3/4" gravel
- Metal mesh pre-filter



VOC & Paint Kit:

- Side and back walls
- Paint arrestor pre-filter
- Reversible carbon canister afterfilter



Clean Air Workstation:

- Side and back walls (48" high w/top cover)
- Dust & vapor proof light kit
- Backdraft hood





Primary Filters

After Filters

NANOTECH XV


MERV 15 efficient cartridge filter captures particles at the submicron level, and surface-loading technology allows dust to be easily dislodged during cleaning with compressed air.



EFFICIENCY: MERV 15
FILTER MEDIA: NANOFIBER
MEDIA AREA: 140 SQ.FT.
COATING: FIRE RETARDANT
END CAP: OPEN/CLOSED
CLEANING METHOD: COMPRESSED AIR
MAX TEMP: 180° F / 82° C
FLANGE: YES

HEPA

MERV 17 efficient cartridge filter captures particles at the submicron level, it provides the highest level of filtration efficiency 99.97% at 0.3 micron.



EFFICIENCY: MERV 17
FILTER MEDIA: HEPA
MEDIA AREA: 24" x 24" x 11½"
COATING: NONE
END CAP: N/A
CLEANING METHOD: DISPOSABLE
MAX TEMP: 175° F / 82° C
FLANGE: NONE

POLYTECH XI

High strength, high efficiency (MERV 11) cartridge filter made from 100% spun-bond polyester that lowers costs, by allowing for water-based cleaning of captured contaminants.



EFFICIENCY: MERV 11
FILTER MEDIA: SPUNBOND POLY
MEDIA AREA: 55 SQ.FT.
COATING: WATER REPELLENT
END CAP: OPEN/CLOSED
CLEANING METHOD: AIR + WATER WASH
MAX TEMP: 180° F / 82° C
FLANGE: YES

CARBOTECH 50

Reusable steel canister filled with 50lbs of activated carbon to filter VOC fumes and odors. Double the filter life by flipping the canister top-to-bottom, allowing for adequate contaminant distribution through the media.




WEIGHT: 50LBS
FILTER MEDIA: CARBON
MEDIA THICKNESS: 2.6"
COVER: 3/4" ANTIBACTERIAL
END CAP: TWIST LOCK REMOVABLE
CLEANING METHOD: NONE
MAX TEMP: 175° F / 80° C
FLANGE: NONE

IMPORTANT : If your equipment was purchased after November 15, 2018, a Replacement Filter Card, featuring filter details and simple instructions to easily order replacement filters, will be located on the filter door.

Specifications

Model	Motor (H.P)	Power				Nominal Airflow (CFM)	Static Pressure (in.)	Face Velocity (FPM)	Noise @5ft (dB)
		Phase (hz)	@230V F.L.A (amps)	@460V F.L.A (amps)	@575V F.L.A (amps)				
Industrial Downdraft Tables, three phase									
DD-3X4	5.0	3P/60Hz	15.2	7.6	6.1	4300	4.0	450	79
DD-3X6	5.0	3P/60Hz	15.2	7.6	6.1	4300	4.0	325	79
	7.5	3P/60Hz	22.0	11.0	9.0	4800	4.0	375	81
DD-3X8	7.5	3P/60Hz	22.0	11.0	9.0	4800	4.0	330	81
	10.0	3P/60Hz	28.0	14.0	11.0	5050	4.0	338	83
Industrial Multi-operator Downdraft Tables, three phase									
DD-4X4	5.0	3P/60Hz	15.2	7.6	6.1	4300	4.0	425	79
DD-4X6	7.5	3P/60Hz	22.0	11.0	9.0	4800	4.0	325	81
	10.0	3P/60Hz	28.0	14.0	11.0	5050	4.0	375	83
DD-4X8	10.0	3P/60Hz	28.0	14.0	11.0	5050	4.0	300	83
DD-5X10	15.0	3P/60Hz	42.0	21.0	17.0	8600	4.0	330	85

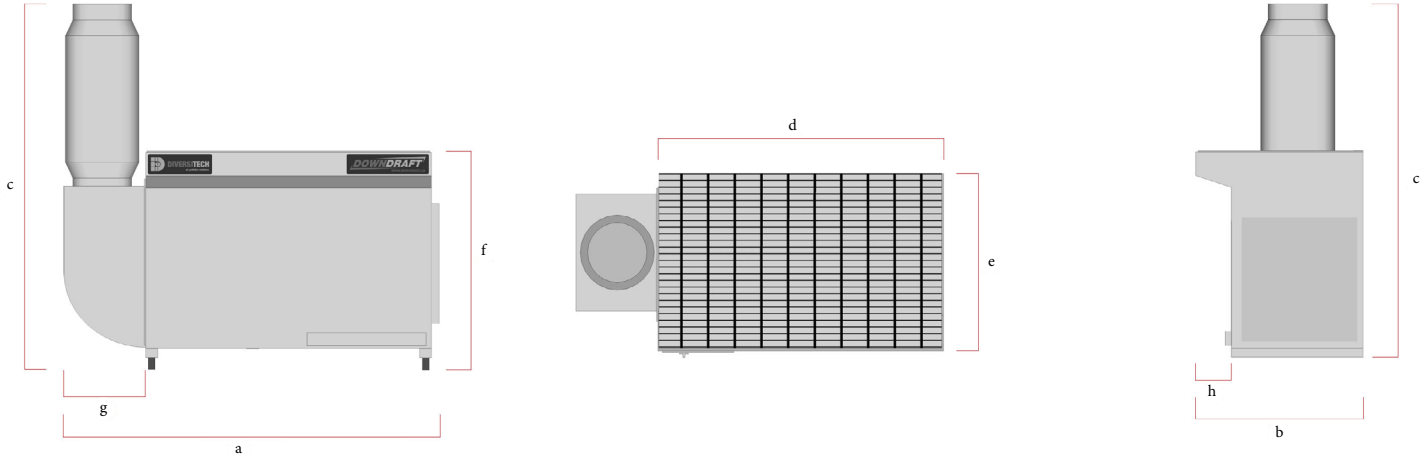

Dimensions **

Model	Exhaust Diameter (in.)	Footprint (in.)			Worksurface (in.)		Table Height [f/S&B/CAW]	Net Weight (lbs.)	Exhaust [g]	Overhang [h] (in.)
		Length [b]	Width [a]	Height [c]	Length [e]	Width [d]				
Downdraft Tables, Standard Size										
DD-3X4	10 x 2	43	62	68.5	42	48	36/69/84	258	14	6
DD-3X6	10 x 2	43	87	68.5	42	72	36/69/84	329	14	6
DD-3X8	10 x 2	43	111	68.5	42	96	36/69/84	421	14	6
DD-4X4	10 x 2	49	63	68.5	48	48	36/69/84	621	14	6 x 2
DD-4X6	10 x 2	49	87	68.5	48	72	36/69/84	729	14	6 x 2
DD-4X8	10 x 2	49	111	68.5	48	96	36/69/84	875	14	6 x 2
DD-5X10	10 x 2	61	155	68.5	60	120	36/69/84	1107	34	12 x 2
Downdraft Tables, extended overhang										
DD-3X4-EO	10 x 2	49	63	68.5	48	48	36/69/84	258	14	12
DD-3X6-EO	10 x 2	49	87	68.5	48	72	36/69/84	329	14	12
DD-3X8-EO	10 x 2	49	111	68.5	48	96	36/69/84	421	14	12
DD-4X4-EO	10 x 2	61	63	68.5	60	48	36/69/84	621	14	12 x 2
DD-4X6-EO	10 x 2	61	87	68.5	60	72	36/69/84	729	14	12 x 2

** Product dimensions are based on base-models and may vary depending on selected product features. Please contact us for an accurate shipping quote.

HEAD OFFICE
1200 55th Avenue
Montreal, QC H8T 3J8

DISTRIBUTION CENTERS
CANADA Montreal, QC Toronto, ON
UNITED STATES Trenton, NJ Chicago, IL Reno, NV

AHB
TOOLING & MACHINERY
COMPLETE METALWORKING SOLUTIONS
(800) 991-4225 www.ahbinc.com
ISO Certified customerservice@ahbinc.com