



# DOSATRON®

WATER POWERED DOSING TECHNOLOGY


## 9 GPM: D14MZ520

### Product Specifications

<b>Dilution Range:</b>	1:20 to 1:5 (5% to 20%)
<b>Water Flow Range:</b>	0.05 to 9 GPM
<b>Operating Pressure Range:</b>	7 to 57 PSI
<b>Available Housing Materials:</b>	<ul style="list-style-type: none"><li>• Polypropylene (Standard Blue)</li><li>• PVDF (White)</li></ul>
<b>Dimensions:</b>	26 1/8" x 6 5/16"
<b>Weight:</b>	8.8 lbs
<b>Connection Size:</b>	3/4" NPT
<b>Maximum Temperature:</b>	104° F
<b>Included Accessories:</b>	6' clear suction tube, strainer, weight, mounting bracket and operating manual
<b>Recommended Accessories:</b>	IPK34



## Basic Installation

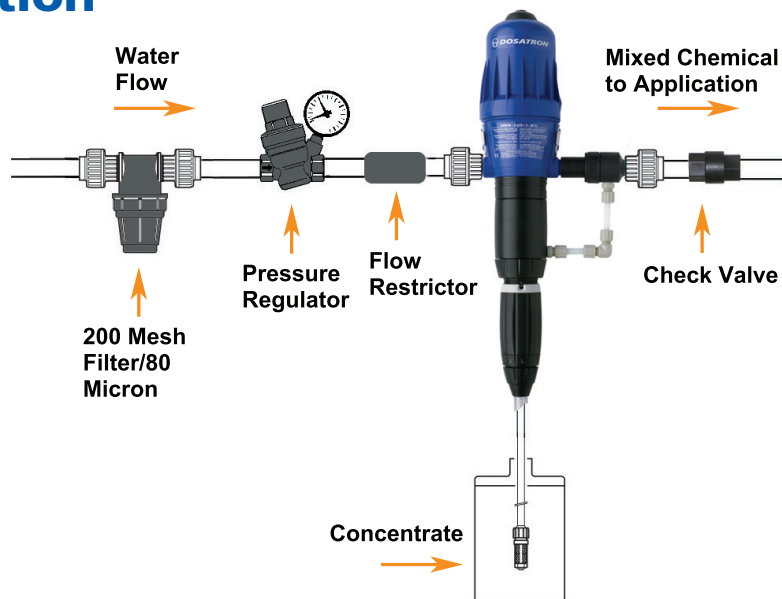

**Dosatron International**  
**2090 Sunnydale Blvd. • Clearwater, FL, USA**  
**800-523-8499 • [www.dosatronusa.com](http://www.dosatronusa.com)**

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards by Dosatron International S.A.S., part of United Technologies Corporation, U.S.A.