



MistBuster® 850 - Next Generation

Model	MB850
Airflow	Variable to 850 cfm
Cabinet	16 gauge steel cabinet with powder coated chemical resistant baked enamel, available in ivory or gray textured finish
Power Input	115 Vac, 60 Hz, 1 ph, 3.5 amps 240 Vac, 60 Hz, 1 ph, 1.7 amps
Efficiency	Ultimate efficiency up to 99.6% on all submicron particles as measured by independent lab test in accordance with ASHRAE standard 52.2 at 500 CFM.
Filtration Stages	1st Stage: 2" baffled inertial impinger 2nd Stage: 2" aluminum mesh impinger 3rd Stage: DuroClean (Long Life) Electronic Cell 4th Stage: MistBuster (High-Efficiency) Cell 5th Stage: Optional MistBuster (High-Efficiency) Cell 6th Stage: Optional HEPA filter 99.97% efficiency, ESF Filter, or Carbon Module
Features	Two self-regulating, dual voltage solid state power supply Patented water/oil coolant collector selector Backward curved, vibration-free, direct drive motorized impeller rated at 850 cfm @ .7" W.C. Ten-foot power cord with molded plug Quick release connectors for fast, easy side panel access
Dimensions	Cabinet: 27.10"L x 13.44"W X 27.42"H
Inlet Opening	16.62" x 9.08"
Weight	99 lbs installed; 111 lbs shipping (2 Cells) 113 lbs installed; 125 lbs shipping (3 Cells)
Accessories	Machine Mount Stand Pedestal Stand Ceiling Mount Kit Wall Mount Kit Plenum Diffuser HEPA Postfilter ESF Postfilter Carbon Module

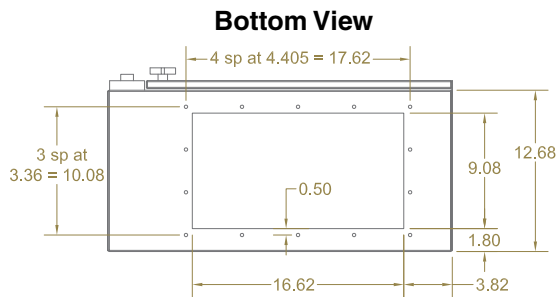

Specifications subject to change without notice.

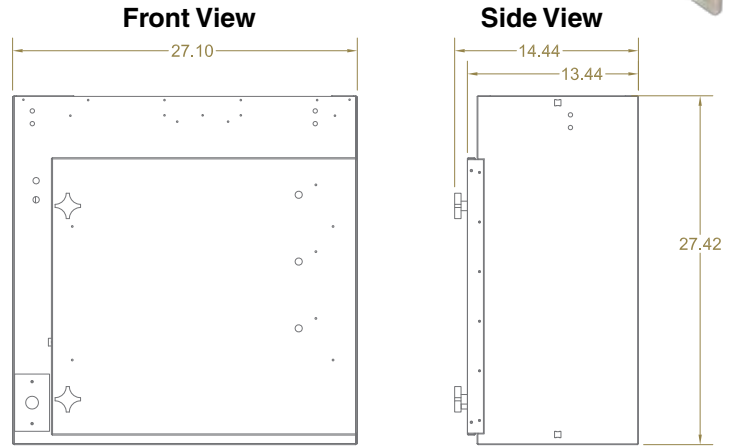

Electrical components isolated from air stream



Patented coolant selectors



Quarter-turn quick-release fastener



**AIR QUALITY
ENGINEERING**

7140 Northland Drive North, Brooklyn Park, MN 55428-1520, USA
TOLL FREE: 800-991-4225 EMAIL: customerservice@ahbinc.com