




The Freddy Tramp Oil Separator is designed to remove tramp oil from coolants in a variety of applications, including machine tool sumps, component washing systems and quench tanks.

Freddy

TRAMP OIL SEPARATOR


The Tramp Oil Separator runs continuously, separating the oil from the coolant or water whilst the host machine is in operation.

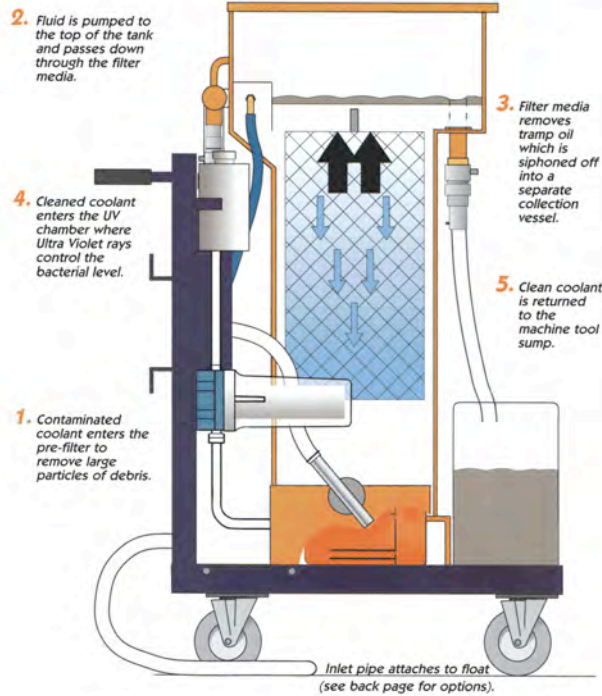

Accessories

Ultraviolet Biological Control System

Versatile Suction Inlet System

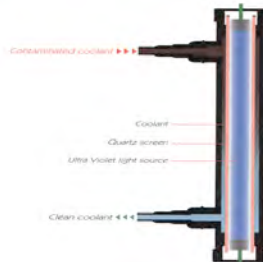

Models	Suction Lift (Ft)	Processing Rate (GPM)	Hold-Up Volume (Gals)	Dimensions (L W H)	Weight (Pounds)	Price	Add for UV
Air	10	2	15	26 x 20 x 48	110 Dry 265 Wet	\$6,250.00	\$770.00
Electric	6	2	15	27 x 20 x 48	110 Dry 265 Wet	\$5,900.00	\$770.00

(Specifications and Prices subject to change without notice)