

Single Tank Ultrasonic Cleaner with Power Lift Agitation

	SHP ^{31G} 1500	SHP ^{40G} 2000	SHP ^{105G} 4500	SHP ^{106G} 4500	SHP ^{165G} 7000	SHP ^{245G} 10000
Electrical Requirements	1500 Watts	2000 Watts	4500 Watts	4500 Watts	7000 Watts	12000 Watts
Electrical Heat Req	1200 Watts	2800 Watts	7500 Watts	7500 Watts	12000 Watts	18000 Watts
Tank Capacity	31 Gallons	40 Gallons	105 Gallons	106 Gallons	165 Gallons	245 Gallons
Effective Cleaning Volume	16"x16"x16"	22"x14"x16"	44"x20"x18"	29"x29"x20"	52"x22"x22"	52"x32"x24"
Tank Size LxWxH	19"x19"x20"	26"x18"x20"	48"x23"x22"	32"x32"x24"	56"x26"x26"	56"x36"x28"

Ultrasonic Frequency 40KHz

Stainless Steel 12GG SSTL 304

*Ask about our Weir, Skimmer, Spray Bar, and Filtration solutions!

Superior Upgrades

- ▶ Temperature Rating
- ▶ Tuning
- ▶ Ultrasonic Frequency
- ▶ Sweep
- ▶ Voltage



SharpSones™

Standard Transducer

160° f Max

Auto Frequency

28KHz 32 KHz 40KHz

60KHz 135KHHz

Electronic

120 / 240 V SP

2 Year Warranty
Origin USA



SonoBar™

Ultrasonic Bar

170° f Max

Auto Power


28KHz 32 KHz 40KHz

60KHz 135KHHz

Electronic

120 / 240 V SP

2 Year Warranty
Origin USA

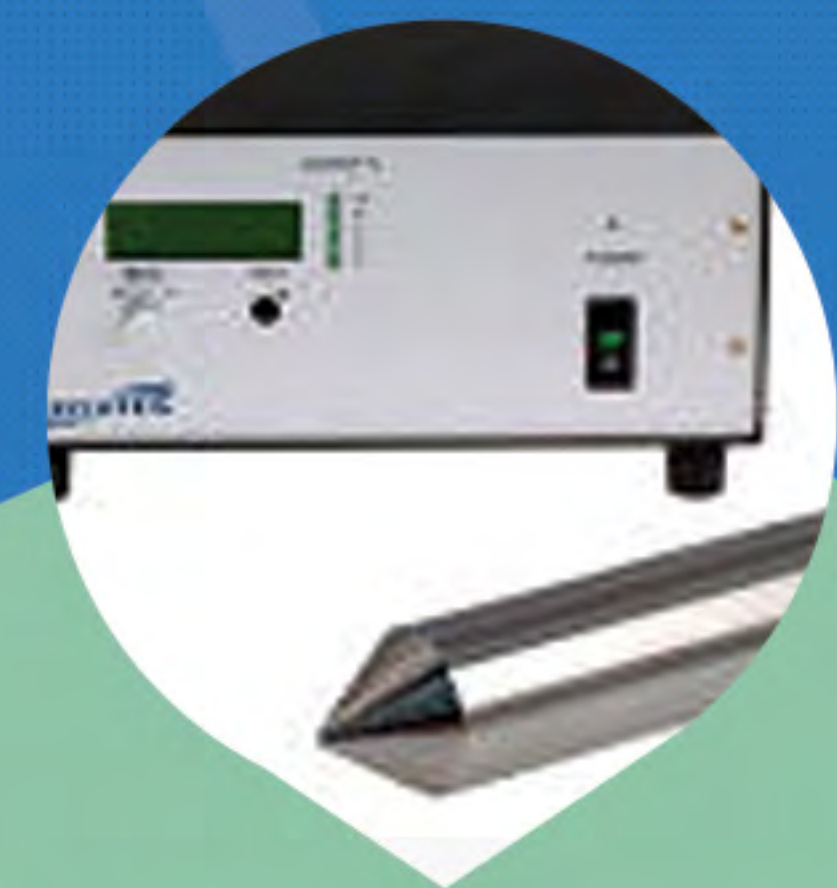

VibraRods™

Ultrasonic Rod

210° f Max

Auto Frequency + Power

28KHz 32 KHz 40KHz

Superior Mechanical

210 / 240 V SP

2 Year Warranty
Origin Germany



Medical



Aerospace



Automotive



Military



Industrial

