

Cosen's engineering department offers innovative answers to all your cutting problems. We can custom tailor sawing machines to complex and difficult sawing applications. Cosen also offers complete material handling systems. Contact Cosen for all your sawing needs.

COSEN SAWING MACHINE SERIES

1. Programmable Production: SNC, NC Series (Page 1)

C-tech Series: C-tech 2, C-tech 3, C-tech 5

SNC Series: R-250NC, C-260NC, C-325NC, C-400NC,
C-460NC, C-320GNC, C-420NC, C-520NC,
C-560NC, C-7652NC, C-620NC, C-800NC

2. Automatic Production: AH-Series (Page 3)

Roller-Feed: AH-250R, AH-360C

Shuttle-Feed: AH-250H, AH-300H, AH-320H, AH-400H,
AH-460H

3. Vertical Tilt Frame Series: Double Miter Cutting (Page 4)

SV-510DM

4. Swivel Head Miter Series (Page 5)

**MH-460M, MH-500M, SH-460M, SH-500M, C-500MNC,
SH-650M, C-650MNC, SH-700M, SH-800DM, C-800DMNC,
CNC-800DMNC, SH-1000DM, SH-1500DM**

5. Manual Series (Page 6)

Manual Series: MH-1016JA

SH Series: SH-1016JA

6. Billet Series: Heavy-duty Straight Cut-off (Page 7)

**SH-4030, SH-360C, SH-5542, SH-7050, SH-7550S, SH-7662,
SH-8580D, SH-1010, SH-1311P, SH-1313, SH-1713, SH-2020**

7. Plate/Block Series: Heavy-duty Traversing Head Vertical Saw (Page 9)

Servo motor driven saw frame:

SV-4060, SV-5060, SV-7060, SV-86110, SV-80130, SV-130160

Hydraulic cylinder driven saw frame:

SV-3055H, SV-6066H, SV-20130H, SV-40130H

8. Custom Design



**PRODUCTIVITY
PERFORMANCE
DEDICATION**

**COSEN SAWS,
THE PINNACLE OF CUTTING PERFORMANCE**



COSEN MACHINERY

<http://www.cosen.com>

E-Mail: info@cosensaws.com

DISTRIBUTED BY:



CAT NO. 1208-GENERAL



Programmable Production : SNC, NC Series

SNC SERIES

All SNC series saws have a combination of features that all users demand. The SNC-100 control system is available on both Hinge and Dual Column type machines. Rugged, Dependable, and Advanced Technology, are all words that describe every Cosen SNC-100 Series Sawing Machine. All SNC-100 and NC control system machines are designed with high production and precision in mind. Cosen Sawing Machines offer 'German' quality, precision and dependability at an affordable price.



C-520NC



C-260NC/C-325NC

SNC-100 FEATURES INCLUDE:

- 5.7" touch screen.
- Mitsubishi PLC controller.
- Stored program(s) may be easily recalled and executed at will.
- Blade speed display.
- Blade life indicator.
- Error code display provides simplified self-diagnostics.
- Blade life timer.

R-250NC



C-420NC



C-TECH C2

C-TECH SERIES

All C-TECH series machines featuring the NC control system allow for automatic first (square) cut and 99-jobs storage plus all the other features of the SNC-100 control system. The saw frame rides on linear guide way. This design gives the saw frame a rigid base thereby ensuring the smoothest feeding, highest precision and lowest friction guide system available today. Cosen saws are designed for speed, precision and a long service life.



Smart NC-100 (SNC100) technology provides most of the benefits of NC controlled saws at a mere fraction of the cost. SNC100 controls are programmable up to 100 different jobs including quantity and length of cut. The control automatically compensates for Kerf loss after data input and requires no manual calculation of number of times to index. The control also automatically shuts down the machine, blade motor and hydraulic, once the programmed number of cuts or out of stock situation has been achieved. The system includes an error feed back function enabling rapid troubleshooting through a comprehensive list of error codes to be displayed in the event of a malfunction.

Model	R-250NC	C-260NC	C-325NC	C-400NC	C-460NC	C-320GNC	C-420NC	C-520NC	C-7656NC	C-620NC
Max. Capacity	10" (250mm)	10.2" (260mm)	12.8" (325mm)	16" (400mm)	18" (460mm)	12.8" (325mm)	16.5" (420mm)	20.5" (520mm)	22" (560mm)	24.4" (620mm)
(HxW)	9" x 10" (230 x 250mm)	10.2" x 11.8" (260x300mm)	12.8" x 15" (325x380mm)	16" x 16" (400 x 400mm)	18" x 18" (460 x 460mm)	12.8" x 15" (325x380mm)	16.5" x 16.5" (420 x 420mm)	20.5" x 22" (520 x 560mm)	22" x 30" (560 x 760mm)	24.4" x 30" (620 x 760mm)
Blade size (LxWxT)	11'x1"x0.035" (3350x27x0.9mm)	144" x 1.3" x 0.042" (3660x34x1.1mm)	150" x 1.3" x 0.042" (3820x34x1.1mm)	15'x1.6"x0.050" (4570x41x1.3mm)	15'4"x1.6"x0.050" (4240x41x1.3mm)	166.9"x1.3"x0.042" (4240x34x1.1mm)	15'7.8"x1.6"x0.050" (4770x41x1.3mm)	19'10"x2.1"x0.060" (6040x54x1.6mm)	21'10"x2.1"x0.060" (6665x54x1.6mm)	23'7"x2.1"x0.063" (7200x54x1.6mm)
Blade motor	2HP	5HP	5HP	7.5HP	7.5HP	5HP	7.5HP	7.5HP	10HP	10HP
Weight	1546lbs (700kgs)	3315lbs (1500kgs)	3960lbs (1800kgs)	6050lbs (2750kgs)	6380lbs (2900kgs)	4840lbs (2200kgs)	7260lbs (3300kgs)	9460lbs (4300kgs)	11880lbs(5400kgs)	11880lbs(5400kgs)
Floor Space (LxW)	73" X35" (1850 x 900mm)	85" x 86" (2160x2185mm)	80.5" x 79.3" (2045x2015mm)	96" x 91" (2450 x 2310mm)	96" x 91" (2450 x 2310mm)	95.2" x 79.5" (2420 x 2020mm)	98" x 93" (2490 x 2360mm)	125" x 89" (3175 x 2261mm)	92" x 153" (2330 x 3890mm)	86.6" x 145.6" (2200 x 3700mm)

* Machine may be shown with some optional accessories.

* Design & specifications are subject to change without notice.

C-tech 2	C-tech 3	C-tech 5
10.2" (260mm)	14.2" (360mm)	22" (560mm)
10.2" (260mm)	14.2" (360mm)	22" (560mm)
10.2"x13.4" (260 x 300mm)	14.2"x15.7" (360 x 400mm)	22"x23.6" (560x600mm)
161.4"x1.3"x0.042" (4100x34x1.1mm)	192"x1.61"x0.051" (4880x41x1.3mm)	248"x2.1"x0.063" (6300x54x1.6mm)
5HP	7.5 HP	10HP
3740lbs (1700kgs)	5500lbs (2500kgs)	8580lbs (3900kgs)
82.7" x 70" (2100 x 1780mm)	82.7" x 109" (2100 x 2770mm)	86.2"x132.6" (2190x3370mm)

Automatic Production : AH-Series

AH-320H/C-320GNC

AH series Bandsaws offer dependability, precision, ruggedness at an affordable price. Ideal for job shops or production facilities requiring long term reliability.



AH-250H/AH-300H

Cosen H-type machines utilize hydraulic shuttle feed system, which offers extremely tight tolerances in both cutting repeatability and accuracy even at high cutting rates. These machines are built for high to extreme production needs.

Roller-type Bandsaws are low cost machines that allow many low to medium volume jobs to be brought in house. Although these machines are low cost they offer the same high quality and precision available in all Cosen Sawing Machines.



AH-460H

Model	AH-250H	AH-300H	AH-320H	AH-400H	AH-460H
Max. Capacity	●	10" (250mm)	12" (300mm)	12.6" (320mm)	16" (400mm)
	■	10" (250mm)	12" (300mm)	12.6" (320mm)	16" (400mm)
	■ (HxW)	10"x11" (250 x 280mm)	12"x13.4" (300 x 340mm)	12.6"x15" (320 x 380mm)	16"x16" (400 x 400mm)
Blade size (LxWxT)	11'6"x1.3"x0.042" (3505x34x1.1mm)	12'6.4"x1.3"x0.042" (3820x34x1.1mm)	13'11"x1.3"x0.042" (4240x34x1.1mm)	15'1.6"x0.050" (4570x41x1.3mm)	15'4"x1.6"x0.050" (4670x41x1.3mm)
Blade motor	3HP	5HP	5HP	7.5HP	7.5HP
Weight	3520lbs (1600kgs)	3740lbs (1700kgs)	4840lbs (2200kgs)	5500lbs (2500kgs)	6600lbs (3000kgs)
Floor Space (LxWxH)	74.5"x72.5"x62" (1890x1850x1580mm)	74.5"x75"x66.9" (1890x1905x1700mm)	79"x79"x59" (2010x2000x1500mm)	104.4"x94.5"x92.5" (2650x2400x2350mm)	104.4"x94.5"x92.5" (2650x2400x2350mm)

* Machine may be shown with some optional accessories.

* Design & specification are subject to change without notice.

AH-250R

Model	AH-250R	AH-360C
Max. Capacity	●	10" (250mm)
	■	9"x9" (230x230mm)
	■ (HxW)	9"x10" (230x250mm)
Blade size (LxWxT)	132"x1"x0.035" (3350x27x0.9mm)	162"x1.33"x0.042" (4115x34x1.06mm)
Blade motor	2HP	5HP
Weight	1276lbs (580kgs)	1760lbs (800kgs)
Floor space (LxWxH)	73"x35"x41" (1850x900x1040mm)	90"x47"x63" (2286x1194x1600mm)

* Machine may be shown with some optional accessories.
* Design & specification are subject to change without notice.



Vertical Tilt frame Series: Double Miter Cutting

Built with durability and performance in mind, Cosen SV-510DM allows the user to cut at any angle between 90 deg (straight cut) and 45 deg (miter cut) in both directions. The precision pivot system facilitates easy and accurate adjustment for angle cuts. While the standard 1 1/4" blade feature is preferred when cutting thick-walled and harder material, a 5 Hp fluid drive is especially helpful providing significant torque at all speed ranges. Also because the blade is fluid driven there are no belts to wear out or slip, no pulleys to replace, no pinion gear to wear and no backlash from the ring and pinion drive. Hydraulic Driven Cast iron guide arms with cross member support is rigidly supported by a heavy-duty linear guide to assure straight cuts and eliminate vibration for longer blade life. The cross member provides remarkably increased support for the upper guide assembly. The result is improved accuracy and significantly faster cutting on larger and/or harder material.



SV-510DM

Model	SV-510DM	
Max. Capacity	Angle	0
	●	45
	■ (HxW)	18" x 18" (510x460mm)
Blade size (LxWxT)	15"x1.3"x0.042" (4570x34x1.1mm)	
Blade motor	5 HP	
Weight	3190lbs (1450kgs)	
Shipping space(LxWxH)	113"x90"x89" (2870x2290x2260mm)	

* Machine may be shown with optional accessories.

* Design & specifications are subject to change without notice.

Swivel Head Miter Series

SWIVEL-HEAD MITER SERIES

Cosen offers various functional band saws with capacities from 460mm (18") to over 1500mm (59") in manual, semi-automatic, and NC automatic types. Mitering is available from 45° ~ 60° single-sided mitering or double-sided mitering. This series is tailored towards structural cutting applications, including fabricators that process medium to large structural material. Cosen's heavy-duty miter-cutting band saws satisfy all your structural cutting needs!

C-500MNC



SH-650M



C-800DMNC



SH-1000DM



SH-460M

SEMI-AUTOMATIC HEAVY DUTY MITER BAND SAWS

Model	SH-650M			SH-700DM			SH-1000DM			SH-1500DM			
	Angle	0°	45° (Forward)	60° (Forward)	0°	45° (F/B)	60° (Forward)	90°	45° (F/B)	60° (Backward)	90°	45° (F/B)	60° (Backward)
Max. Capacity	●	16.5"(420mm)	16"(400mm)	10"(250mm)	17.7"(450mm)	17.7"(450mm)	11.8"(300mm)	26"(660mm)	23"(620mm)	15.7"(400mm)	33.5"(850mm)	31.5"(800mm)	22.8"(580mm)
	■	16"(400mm)	16"(400mm)	10"(250mm)	17.7"(450mm)	17.7"(450mm)	11.8"(300mm)	23"(620mm)	22"(560mm)	15.7"(400mm)	33.5"(850mm)	31.5"(800mm)	22.8"(580mm)
	(HxW)	15"x25.6" (380x650mm)	16"x16" (400x400mm)	16"x10" (400x250mm)	17.7"x27.5" (450x700mm)	17.7"x20.5" (450x520mm)	17.7"x11.8" (450x300mm)	20.5"x40" (520x1020mm)	20.5"x24.4" (520x620mm)	21.3"x15.7" (540x400mm)	29.5"x59" (750x1500mm)	29.5"x35.4" (750x900mm)	29.5"x22.8" (750x580mm)
Blade size (LxWxT)		17'5"x1.3"x0.042" (5300x34x1.1mm)		19'x1.6"x0.050" (5800x41x1.3mm)		27'3"x2.1"x0.063" (8300x54x1.6mm)		39'x2.6"x0.063" (11880x67x1.6mm)					
Blade motor		5HP		7.5HP		10HP		15HP					
Weight		3300lbs (1500kgs)		5280lbs (2400kgs)		12254lbs (5570kgs)		46200 lbs (21000kgs)					
Floor space (LxWxH)		90.6"x114"x98.4" (2300x2900x2500mm)		106.3"x124"x107" (2700x3150x2720mm)		148"x154"x109" (3750x3900x2765mm)		203"x219"x165" (5160x5550x4200mm)					

20 JOB PROGRAMMABLE MITER BAND SAWS

Model	C-500MNC		C-650MNC		SH-800DM/C-800DMNC/CNC-800DM				
	Angle	0°	45° (Forward)	0°	45° (Forward)	60° (Forward)	0°	45° (F/B)	60° (Backward)
Max. Capacity	●	13"(330mm)	11.5"(290mm)	16.5"(420mm)	16"(400mm)	10"(250mm)	20"(500mm)	17.7"(450mm)	16"(400mm)
	■	11"(280mm)	10.5"(265mm)	16"(400mm)	16"(400mm)	10"(250mm)	16"(400mm)	16"(400mm)	16"(400mm)
	(HxW)	11"x19.7" (280x500mm)	10.5"x10.5" (265x265mm)	15"x25.6" (380x650mm)	16"x16" (400x400mm)	16"x10" (400x250mm)	16"x31" (400x800mm)	16"x21" (400x550mm)	16"x9" (400x400mm)
Blade size (LxWxT)		15'4"x1.3"x0.042" (4670x34x1.1mm)		17'5"x1.6"x0.050" (5300x41x1.3mm)		21'8"x2.1"x0.050" (6600x54x1.3mm)			
Blade motor		5HP		7.5HP		7.5 HP			
Weight		3745lbs (1700kgs)		6600lbs (3000kgs)		Auto: 14080lbs(6400kgs) SH: 9,900lbs (4500kgs)			
Floor space (LxWxH)		114"x102"x86.6" (2900x2600x2200mm)		141.7"x114"x98.4" (3600x2900x2500mm)		Auto:204.7"x139"x107"(5200x3530x2725mm) SH:122.8"x139"x107"(3120x3530x2725mm)			

SMALL MITER-CUT BAND SAWS

Model	SH-500M / MH-500M		SH-460M / MH-460M		
	Angle	0°	60° (Forward)	0°	60° (Backward)
Max. Capacity	●	13"(330mm)	8.7"(220mm)	10"(250mm)	4.3"(110mm)
	■	11"(280mm)	7.9"(200mm)	10"(250mm)	4.3"(110mm)
	(HxW)	11"x19.7" (280x500mm)	11"x7.9" (280x200mm)	9"x18.1" (230x460mm)	9"x4.3" (230x110mm)
Blade size (LxWxT)		13'7"x1"x0.035" (4150x27x0.9mm)		11'6"x1"x0.035" (3505x27x0.9mm)	
Blade motor		3HP		2HP	
Weight		MH:2079lbs(945kgs) SH:2178lbs(990kgs)		MH:1430lbs(650kgs) SH:1518lbs(690kgs)	
Floor space (LxWxH)		74"x107"x82" (1870x2715x2085mm)		55"x74.8"x66.9" (1400x1900x1700mm)	

* Machine may be shown with some optional accessories.
* Design & specification are subject to change without notice.
* SH-800DM: Semi-automatic heavy duty miter band saw

MANUAL SERIES

MH series saws offer the best value in any manual general-purpose saw made today. Industrial duty, reliability, and affordability allow any job shop, tool room, or secondary production job to be handled efficiently and precisely. SH series machines offer the added value of automatic head return and hydraulic clamping (select models).

MH-1016JA

Model	MH-1016JA / SH-1016JA		
	Vise angle	0°	45° Vise
Max. Capacity	●	10" (250mm)	9" (230mm)
	■	9" (230mm)	6.5" (165mm)
	(HxW)	9"x14.5" (230x370mm)	6.5"x9" (165x230mm)
Blade size (LxWxT)	132"x1"x0.035" (3350x27x0.9mm)		
Blade motor	2HP		
Weight	1170lbs (532kgs)		
Floor space (LxWxH)	67"x31"x48" (1700x787x1220mm)		

* Machine may be shown with some optional accessories.
* Design & specification are subject to change without notice.




Billet Series



SH-4030



SH-5542

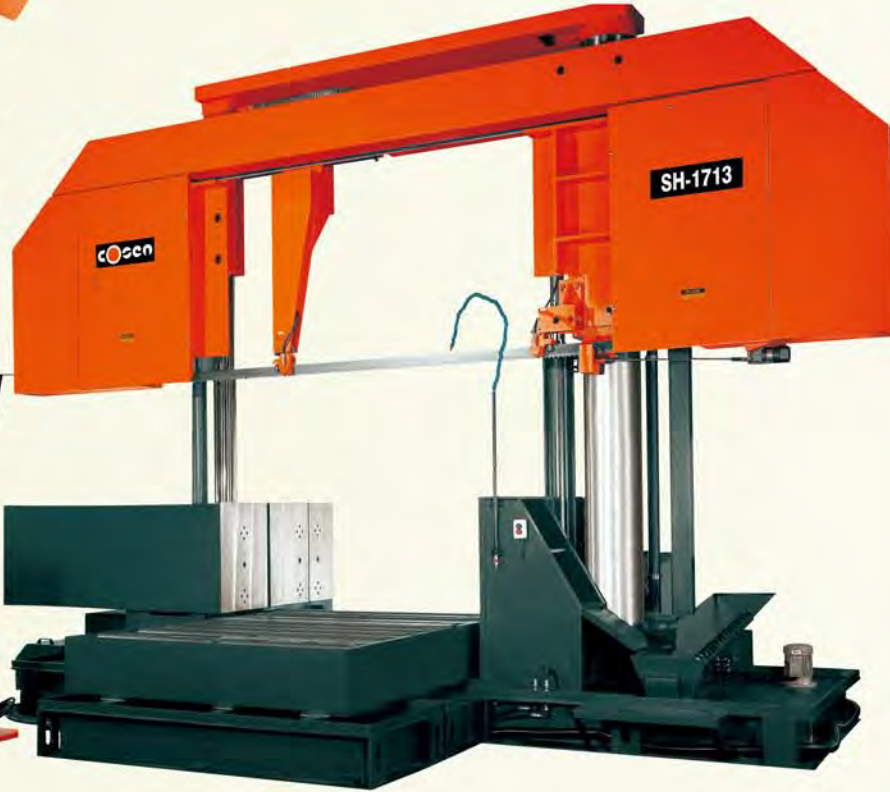


SH-1713

If you are looking for large material cutting, then Cosen Billet Saw Series are your answer. Massive, dependable, and precise are just a few words that describe Cosen Billet Saws. Available in capacities up to 126" X 126" there is nothing that a Cosen Billet Saw can't cut.



C-800NC

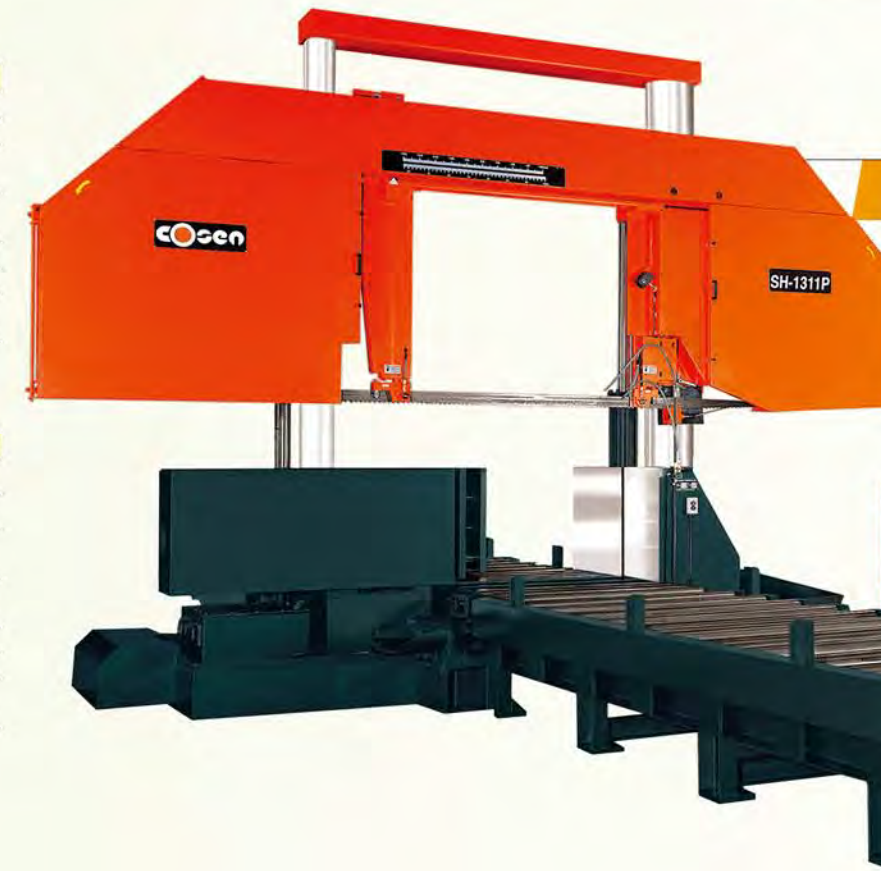

SH-1311P

Model	SH-4030	SH-360C	SH-5542	SH-7050	SH-7550S	SH-7656	SH-7662	SH-1000F
Max. Capacity	●	12" (300mm)	14" (360mm)	16.5" (420mm)	20" (500mm)	20" (500mm)	22" (560mm)	26" (660mm)
	■	12" (300mm)	14" (360mm)	16.5" (420mm)	20" (500mm)	20" (500mm)	22" (560mm)	23.2" (590mm)
	■ (HxW)	12"x15.7" (300x400mm)	14"x16.5" (360x420mm)	16.5"x21.6" (420x550mm)	20"x27.6" (500x700mm)	20"x29.5" (500x750mm)	22"x30" (560x760mm)	24.4"x30" (620x760mm)
Blade size (LxWxT)	12'6.4"x1.3"x0.042" (3820x34x1.1mm)	13'6"x1.3"x0.042" (4115x34x1.1mm)	17'4.7"x1.6"x0.050" (5300x41x1.3mm)	21'5"x1.6"x0.050" (5450x41x1.3mm)	23'8"x2.1"x0.063" (6040x54x1.6mm)	26'2.4"x2.1"x0.063" (6665x54x1.6mm)	28'3"x2.1"x0.063" (7200x54x1.6mm)	31'5"x2.1"x0.063" (8000x54x1.6mm)
Blade motor	5HP	5HP	7.5HP	7.5HP	7.5HP	10HP	10HP	10HP
Work bed height	29.1" (740mm)	26" (660mm)	27.5" (700mm)	27.5" (700mm)	27.5" (700mm)	27.5" (700mm)	23.6" (600mm)	25.6" (650mm)
Floor space(LxWxH)	31.5"x75"x67" (800x1905x1700 mm)	47"x90"x63" (1195x2286x1600mm)	43.3"x100.4"x74.8" (1100x2550x1900mm)	35.5"x126"x84.6" (900x3200x2150mm)	55.5"x124"x79" (1410x3150x2010mm)	55"x130"x96.5" (1400x3300x2450mm)	47.2"x140"x93" (1200x3560x2360mm)	54"x157.5"x103" (1370x4000x2620mm)

* Machine may be shown with some optional accessories.
* Design & specification are subject to change without notice.

Model	C-800NC	SH-8580D	SH-1080D	SH-1010W	SH-1311P	SH-1313	SH-1713	SH-2020D
Max. Capacity	●	31.5" (800mm)	31.5" (800mm)	31.5" (800mm)	40" (1000mm)	43.3" (1100mm)	51" (1300mm)	78.7" (2000mm)
	■	31.5" (800mm)	31.5" (800mm)	31.5" (800mm)	40" (1000mm)	43.3" (1100mm)	51" (1300mm)	78.7" (2000mm)
	■ (HxW)	31.5"x33.5" (800x850mm)	31.5"x33.5" (800x850mm)	31.5"x39.4" (800x1000mm)	40"x40" (1000x1000mm)	43.3"x51.2" (1100 x 1300mm)	51"x51" (1300 x 1300mm)	51.2"x67" (1300x1700mm)
Blade size (LxWxT)	326.8"x2.6"x0.063" (8300x67x1.6mm)	326.8"x2.6"x0.063" (8300x67x1.6mm)	346.5"x2.6"x0.063" (8800x67x1.6mm)	370"x2.6"x0.063" (9400x67x1.6mm)	433"x3.1"x0.063" (11000x80x1.6mm)	484"x3.1"x0.063" (12300x80x1.6mm)	512"x3.1"x0.063" (13000x80x1.6mm)	626.7"x3.1"x0.063" (15920x80x1.6mm)
Blade motor	10HP	10HP	15HP	15HP	15HP	20HP	20HP (15KW)	25HP
Work bed height	24.8" (630mm)	24.8" (630mm)	25.2" (640mm)	24.4" (620mm)	24.4" (620mm)	24.4" (620mm)	24.4" (620mm)	32.6" (830mm)
Floor space(WxLxH)	153"x92"x116" (3890x2330x2940mm)	153"x92"x116" (3890x2330x2940mm)	169"x90"x105" (4293x2286x2667mm)	204.7"x90.6"x106.3" (5200x2300x2700mm)	86.6"x193"x137.8" (2200x4900x3500mm)	3000x5542x3900mm (118"x218"x153.5")	118"x232"x166.5" (3000x5892x4228mm)	260"x250"x228" (6600x6340x5800mm)


* Machine may be shown with some optional accessories.
* Design & specification are subject to change without notice.

Plate/Block Series :

Heavy-duty Traversing Head Vertical Saw

Cosen Plate Saws are available in various sizes of throat and bed length. Cosen plate saws offer many advantages over our competition with minimum floor space usage through traveling head design and blade deviation monitor. The biggest advantage Cosen Plate Sawing Systems offer: high quality, high precision, fast cutting rates, and affordable price.

SV-3055H

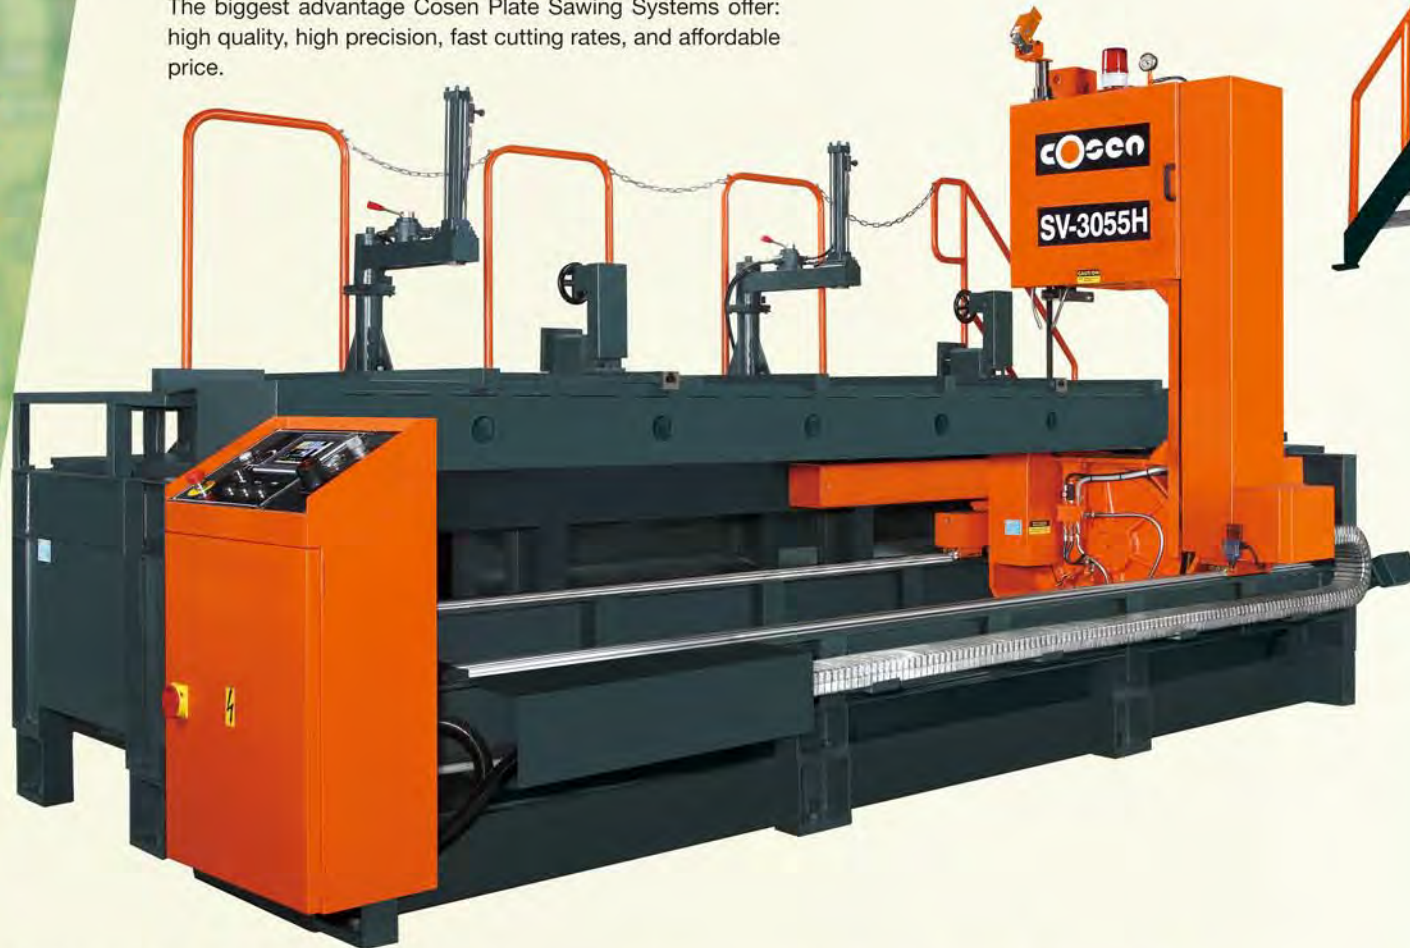

SV-4060



SV-80130



- with Servo Motor Driven Saw Frame

Mode	SV-4060	SV-5060	SV-7060	SV-86110	SV-80130	SV-130160
Capacity	Height	18" (460mm)	20" (500mm)	27.6" (700mm)	34" (860mm)	51" (1300mm)
	Throat	26" (660mm)	26" (660mm)	23.6" (600mm)	43" (1100mm)	63" (1600mm)
	Cutting Length	79"-276" (2000-7000mm)	79"-276" (2000-7000mm)	79"-276" (2000-7000mm)	79"-276" (2000-7000mm)	79"-276" (2000-7000mm)
Blade Size	229"x2.1"x0.063" (5815x54x1.6mm)	233"x2.1"x0.063" (5915x54x1.6mm)	248.6"x2.1"x0.063" (6315x54x1.6mm)	293"x2.6"x0.063" (7440x67x1.6mm)	299"x2.6"x0.063" (7600x67x1.6mm)	394"x3.1"x0.063" (10000x80x1.6mm)
Blade Motor	7.5HP	10HP	15HP	15HP	15HP	20HP
Floor space(LxWxH)	354"x138"x138" (9000x3500x3500mm)	354"x138"x140" (9000x3500x3550mm)	342.5"x155"x145.7" (8700x3940x3700mm)	431"x165"x162" (10950x4200x4120mm)	362"x165"x155" (9200x4200x3950mm)	374"x210"x190" (9500x5350x4830mm)

- with Hydraulic Cylinder Driven Saw Frame

Mode	SV-3055H	SV-6066H	SV-20130H	SV-40130H	
Capacity	Height	11.8" (300mm)	23.6" (600mm)	8" (200mm)	15.7" (400mm)
	Throat	21.6" (550mm)	26" (660mm)	51" (1300mm)	51" (1300mm)
	Cutting Length	by order (max.98.4" (2500mm))			
Blade Size	175.2"x1.6"x0.050" (4450x41x1.3mm)	237.8"x2.1"x0.063" (6040x54x1.6mm)	244"x1.6"x0.050" (6200x41x1.3mm)	261.8"x1.6"x0.050" (6650x41x1.3mm)	
Blade Motor	7.5HP	10HP	7.5HP	10HP	
Floor space(LxWxH)	cutting length: 59" (1500mm) 130"x59"x96.6" (3300x1500x2455mm)	cutting length: 98.4" (2500mm) 209"x86.6"x126" (5320x2200x3200mm)	cutting length: 51.2" (1300mm) 118"x110"x83" (3000x2800x2100mm)	cutting length: 98.4" (2500mm) 185"x125"x100" (4700x3188x2535mm)	

* Accept customer special order.

* Machine may be shown with some optional accessories.

* Design & specification are subject to change without notice.