WJF-RO-03-T

Reverse Osmosis System

The Ebbco CLS-RO-O3-T system is used to lower the operating costs of the Ebbco Closed Loop System in applications where make-up water quality is poor. Reverse Osmosis Systems are typically recommended when make up water is greater than 250 ppm total dissolved solids.

The Ebbco CLS-RO system is comprised of three main components:

300 GA

Reverse Osmosis Unit (RO)

Ozone Generation Module

300 Gallon Holding Tank.




Ebbco inc.

Specifications

RO Unit

System Dimensions	17"L x 7"W x 32"H
Gallons Per Day	up to 200
Designed PSI @ Flow Rate	85 PSI
Standard Voltage Options	115 vac/1Phase/60Hz
	230vac/1Phase/60Hz
Ozone	
Moel	WJF-200-CD
Production Rate	50mg/hr @ 5.3scfm
Holding Tank	
Volume	300 Gallons
Consumables:	
Membrane	WJF-RO-300-T-MP
Sediment Filter	WJF-RO03-5M
Activated Carbon Filter	WJF-RO03-AC
Carbon Block	WJF-RO03-CB
Filter Kit—Includes One Sediment	WJF-RO-03-T-FK
Filter, One Activated Carbon Filter	
one Carbon Block	

VALVE FEED HIGH PRESSURE PUMP Ъ CATCHER **TOOLING & MACHINERY COMPLETE METALWORKING SOLUTIONS** (800) 991-4225 www.ahbinc.com

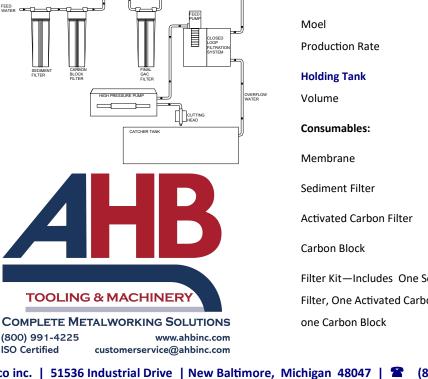

and