



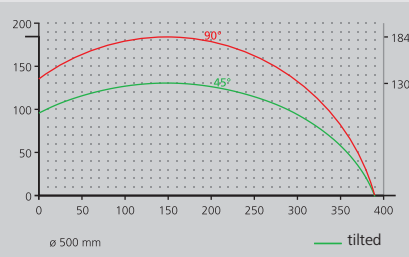

Mitre saw MGS 142/11

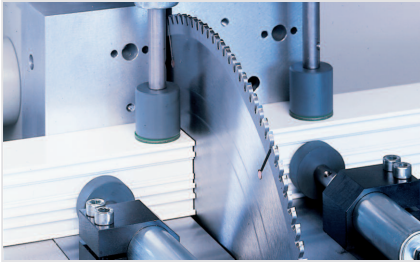

- > The ideal mitre saw for the series production in the industry
- > Automatically opening of safety hood
- > Standard equipped with exhaust connector on the counter plates at bottom and back side
- > Pulsed coolant system
- > Profile feed from the left hand and material stop on the right hand side
- > Standard equipped with saw blade

Technical information

- > Tilting range pneumatic from 90° to 45° (optional)
- > Cutting capacity see cutting diagram
- > Saw blade diameter 500 mm
- > Spindle speed 2800 r.p.m.
- > Power supply 230/400 V, 3~, 50 Hz
- > Power output 4 kW
- > Compressed air supply 7 bar
- > Air consumption per working cycle 20 l without mist spray, 32 l with mist spray
- > Length 910 mm, width 1335 mm, height 1840 mm, weight 580 kg

Optional

- > Hydro-pneumatic saw feed
- > Horizontal material clamping
- > Extraction system
- > Length stop and measuring systems
- > Adjustment of intermediate angles by means of hand wheel and digital display E 111 (not available for MGS 142/31)
- > Roller conveyors
- > Saw blades
- > High performance cutting fluid
- > Motor power output 5.5 kW



Mitre saw MGS 142/21

- > See MGS 142/11, however:
- > Profile feed from the right hand side and material stop from the left hand side

Mitre saw MGS 142/31

- > See MGS 142/21, however:
- > Table separation to obtain best quality of cut. No after cut of saw blade
- > Tilting range 90° fix
- > Length 910 mm, width 1335 mm, height 1840 mm, weight 580 kg

For further information please contact:

- > elumatec GmbH | Pinacher Straße 61 | D 75417 Mühlacker
- > Tel. +49 (0)7041 14-266 | Fax +49 (0)7041 14-282 | sales@elumatec.de

The right to make alterations is reserved

