


| | |
|---|----------------------------|
| 1 | INTERFACE CABLE CONNECTION |
| 2 | AIR IN - 3/4 NPT |
| 3 | ABRASIVE FEED |

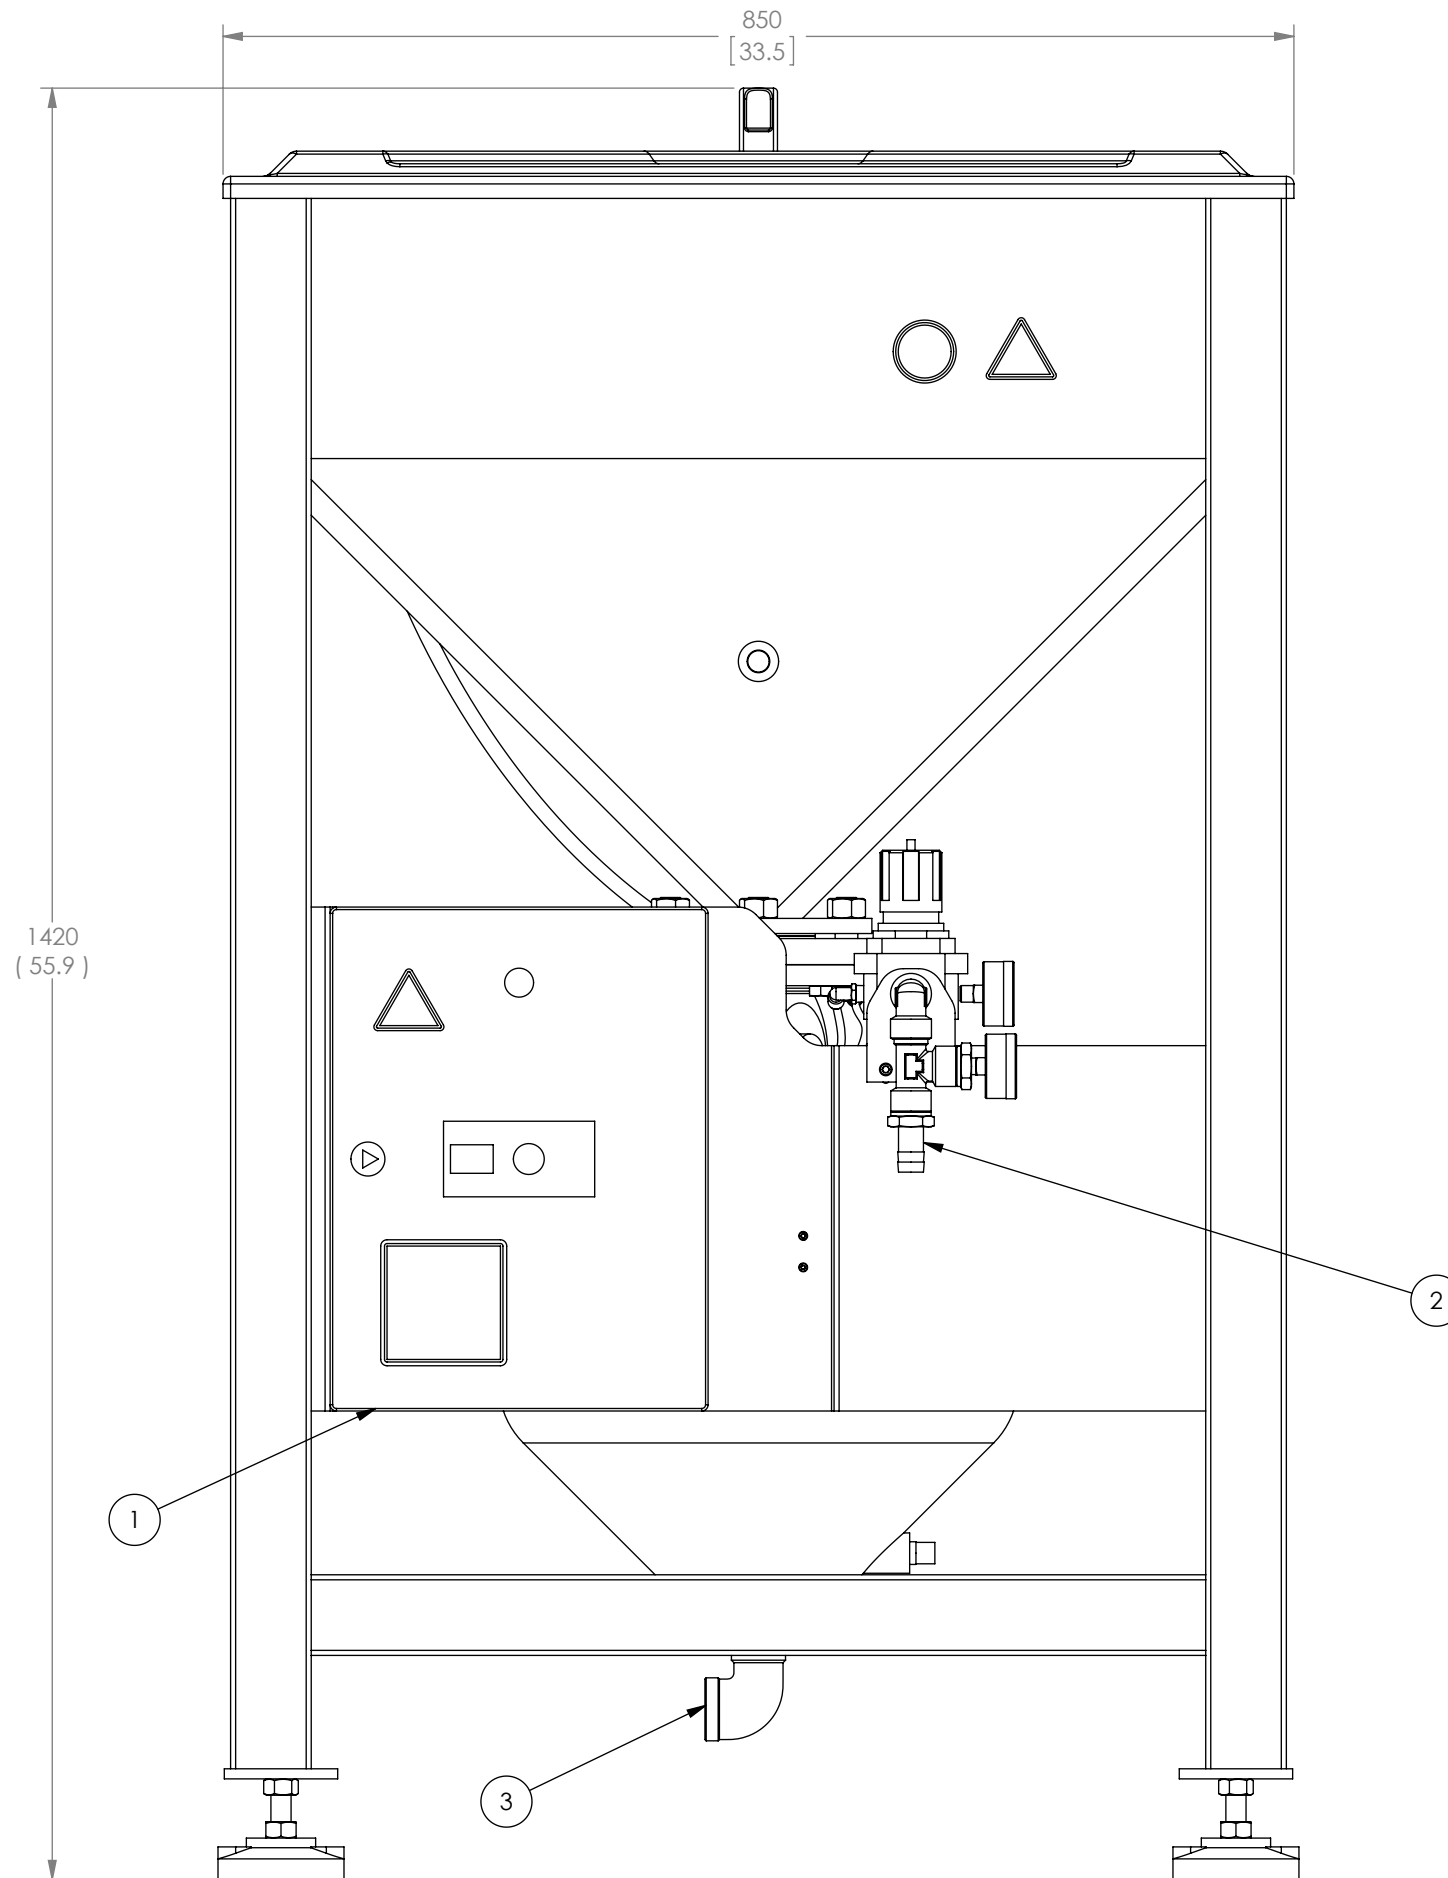

| FACILITY REQUIREMENTS | |
|-----------------------|--|
| AIR | •566 L/MIN @ 5.5 BAR (20 SCFM @ 80 PSI) •AIR MUST BE DRY AND FILTERED TO 10 MICRONS |
| POWER | POWER SUPPLIED BY MAIN SYSTEM |

NOTES:

101. APPROXIMATE EMPTY WEIGHT 112 KG (247 LBS)
102. DIMENSIONS ARE IN MILLIMETERS, DIMENSION IN BRACKETS ARE IN INCHES.

| | | | | |
|------------------------|-----------------------|---|-------------------|--------------------------|
| THIRD ANGLE PROJECTION | | THIS DRAWING IS THE PROPERTY OF FLOW INTERNATIONAL CORPORATION AND IS NOT TO BE COPIED OR REPRODUCED WITHOUT THE WRITTEN CONSENT OF FLOW INTERNATIONAL CORPORATION. | | |
| | MATERIAL | | | |
| DRAWN BY R. MANN | STARTED 10/26/2011 | ENG M.CERAMI | EST WEIGHT N/A | MODELED IN SOLIDWORKS |
| TITLE | | PRE-INSTALL; DUAL STAGE ABT | | |
| REVISION A | SCALE 1:6 | BASE PART NUMBER | 058655 | 1 OF 1 |