


Haeger® 824™ OneTouch™ 5e LITE

Fastener Insertion System Combine Productivity with Versatility and Ease of Setup

The new 824™ OneTouch™ 5e LITE brings you:

- ALL the advantages of the 824™ WindowTouch® 5e.
- A second Automatic Upper Station which changes the upper tools and insertion stations automatically.


Combine the full versatility of Haeger's 824™ WindowTouch® 5e with the productivity of the 824™ OneTouch® 5e. Enjoy fastener detection and stud and standoff length detection on 2 stations.

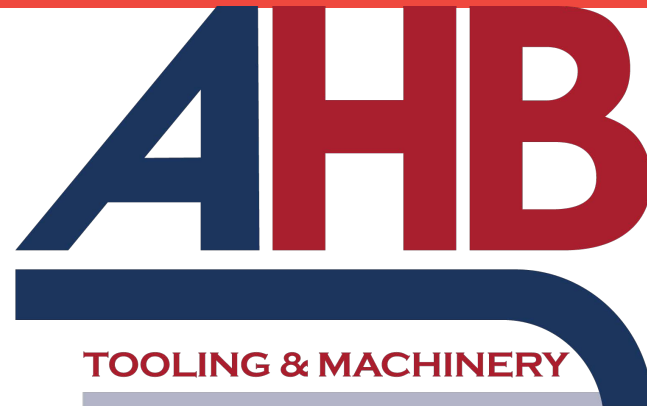

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225
ISO Certified

www.ahbinc.com
customerservice@ahbinc.com

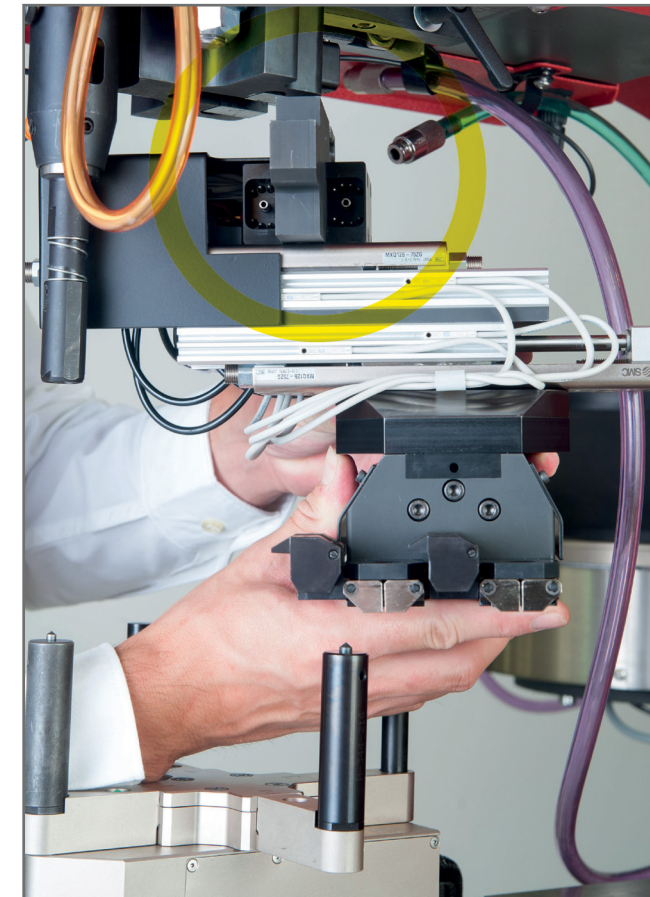

Dual station removed.


1. Easy and Fast Changeover to full 824™ WindowTouch® 5e Versatility.

The dual station Upper Tool changer features integrated connectors allowing for a 10 second changeover to any other tooling setup. No training required.


Specifications

Force Range	Adjustable 800 lbs. (3.6 kN) to 16,000 lbs. (72 kN)
Throat Depth	24" (610 mm)
Stroke Length	Adjustable 0 to 8.5" (0 to 220 mm)
Electrical	208 to 575 V 3 phase - 50 or 60 Hz
Motor	5 HP 3 Phase Low 16 A 208-240 V / High 9.6 A 380-480 V
Oil Tank Reservoir	22 gallons (83 liters)
Speed	up to 1,400 insertions per hour
Repeatability	+/- 2% of force setting
Weight	3,100 lbs. (1,406 kg)
Footprint	59"L x 40"W x 94"H (1499 mm x 1016 mm x 2388 mm)
Fastener Range	.256 to 1/2" (M2 to M12)


For more information on the 824™ OneTouch™ 5e Lite and other Haeger® products, visit our website at www.haeger.com or contact your authorized Haeger® distributor.

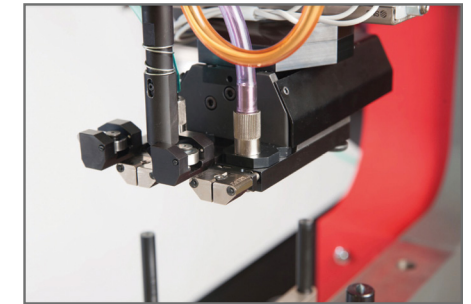

1. FROM STATION 1 TO STATION 2 - OPEN UPPER TOOL.

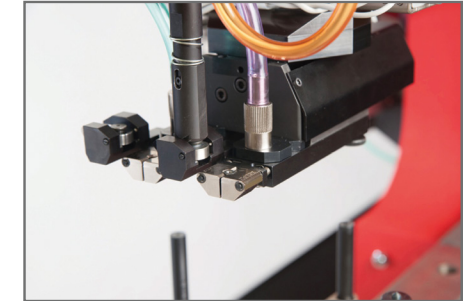

2. PICK UP NEW UPPER TOOL.

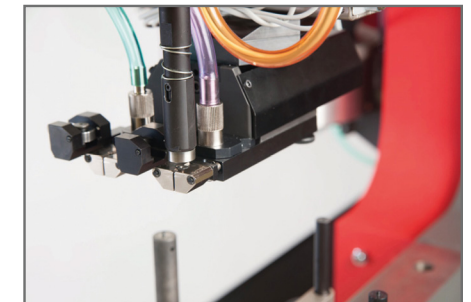

3. CLAMP TOOL AND MOVE INTO POSITION STATION 2.