




ANSI BORING BAR PROGRAM


Expanded
233 New Items

- **STEEL**
- **STEEL WITH COOLANT THRU**
- **CARBIDE**
- **CARBIDE WITH COOLANT THRU**
- **INSERTS**
- **STUB OAL - CARBIDE & CARBIDE COOLANT THRU**
- **MULTIPLE INSERT I.C. SIZES OFFERED ON 1/2" & 5/8" BARS**

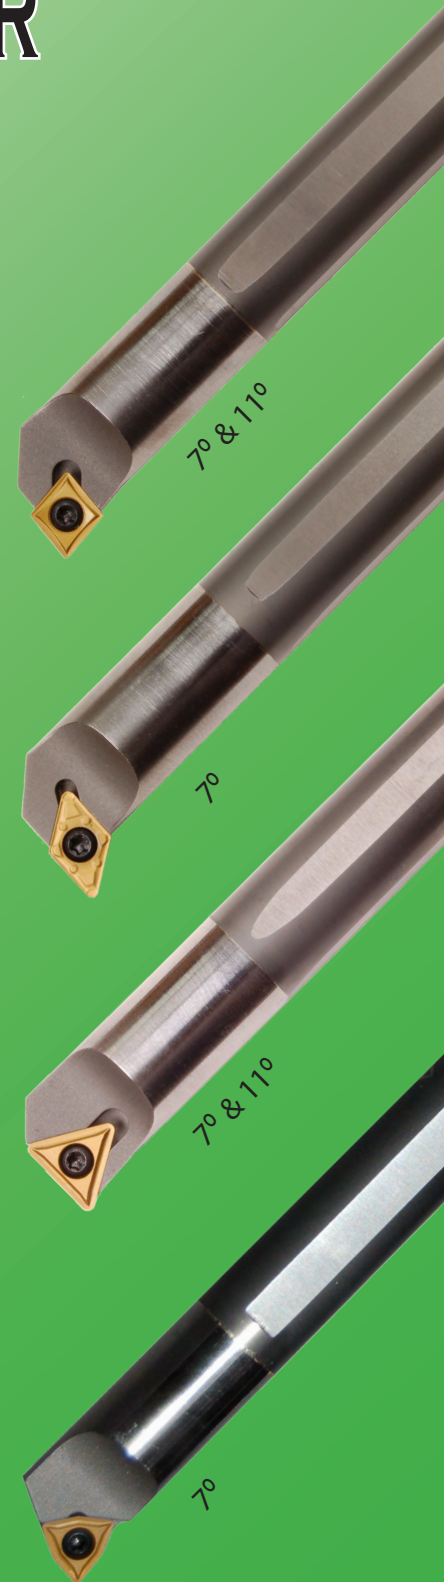



2014

BAR NOMENCLATURE

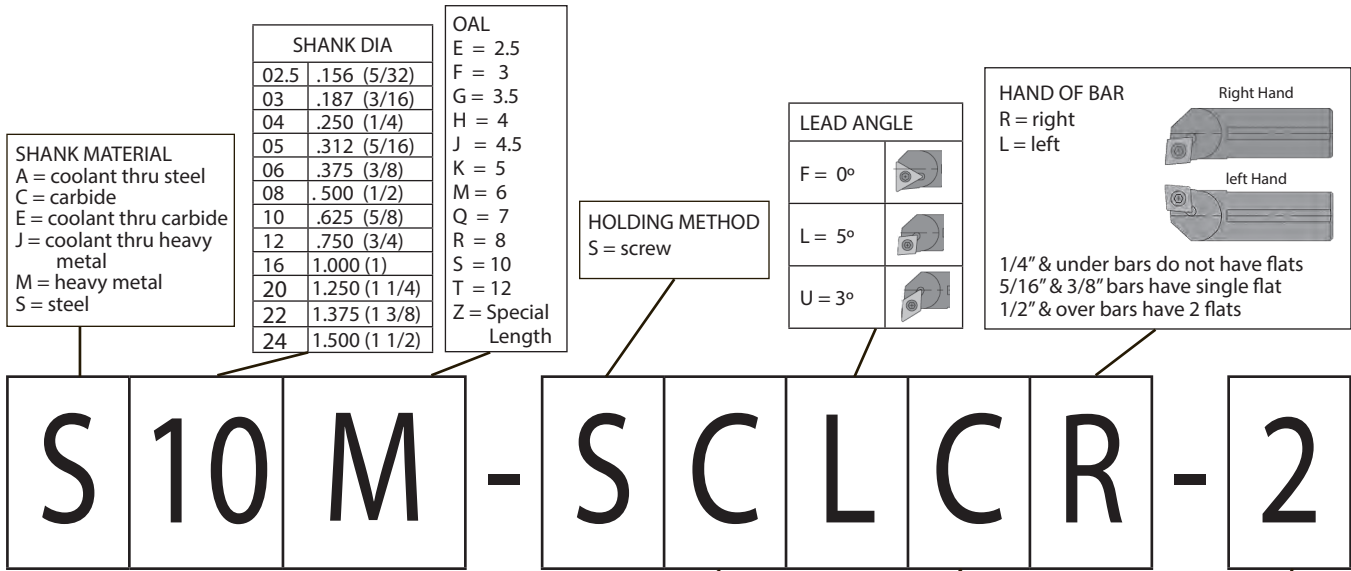

INSERT NOMENCLATURE

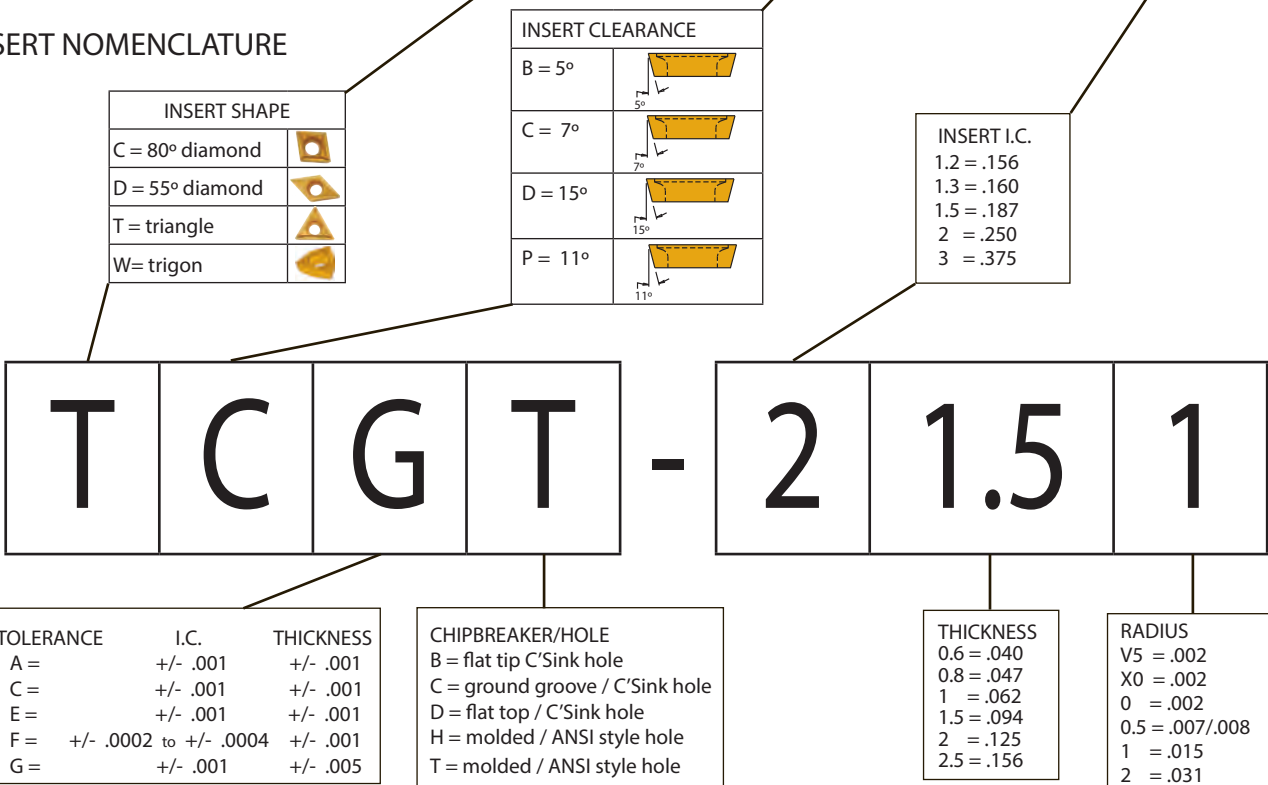

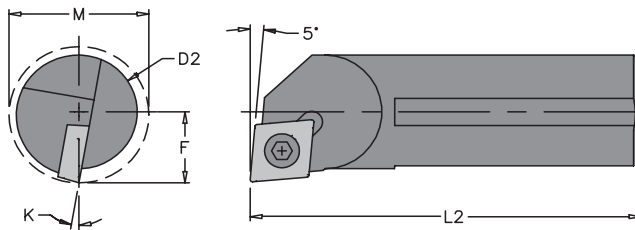

Right hand shown

ALLOY STEEL SHANKS (Series ANSI)

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
S03E SCLDR-1.2	▼	S03E SCLDL-1.2	○	---	.187	.116	.230	2.5	CDHB 1.20.61
S04F SCLDR-1.2	▼	S04F SCLDL-1.2	○	---	.250	.145	.290	3	
S05M SCLDR-1.2	▼	S05M SCLDL-1.2	○	---	.312	.219	.356	6	
S06M SCLCR-2	▼	S06M SCLCL-2	○	12	.375	.250	.480	6	CCGT 21.51
S08R SCLCR-2	▼	S08R SCLCL-2	○	12	.500	.312	.600	8	CCGT 32.51
S08R SCLCR-3	▼	S08R SCLCL-3	○	14	.500	.312	.600	8	CCGT 21.51
S10S SCLCR-2	▼	S10S SCLCL-2	○	8	.625	.406	.770	10	CCGT 21.51
S10S SCLCR-3	▼	S10S SCLCL-3	○	11	.625	.406	.770	10	CCGT 32.51
S12S SCLCR-3	▼	S12S SCLCL-3	○	8	.750	.500	.930	10	
S16T SCLCR-3	▼	S16T SCLCL-3	○	6	1	.640	1.200	12	

ALLOY STEEL SHANKS (Series ANSI) with Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
A05M SCLCR-2	○	A05M SCLCL-2	○	13	.312	.219	.356	6	CCGT 21.51
A06M SCLCR-2	○	A06M SCLCL-2	○	12	.375	.250	.480	6	
A08R SCLCR-2	○	A08R SCLCL-2	○	12	.500	.312	.600	8	
A08R SCLCR-3	○	A08R SCLCL-3	○	14	.500	.312	.600	8	CCGT 32.51
A10S SCLCR-2	○	A10S SCLCL-2	○	8	.625	.406	.770	10	CCGT 21.51
A10S SCLCR-3	○	A10S SCLCL-3	○	11	.625	.406	.770	10	CCGT 32.51
A12S SCLCR-3	○	A12S SCLCL-3	○	8	.750	.500	.930	10	
A16T SCLCR-3	○	A16T SCLCL-3	○	6	1	.640	1.200	12	


CARBIDE SHANKS (Series ANSI) with Alloy Steel Head

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
C02.5H SCLDR-1.2	▼	C02.5H SCLDL-1.2	○	---	.156	.092	.180	4	CDHB 1.20.61
C03H SCLDR-1.2	▼	C03H SCLDL-1.2	○	---	.187	.116	.230	4	
C04M SCLDR-1.2	▼	C04M SCLDL-1.2	○	---	.250	.145	.290	6	
C05M SCLDR-1.2	▼	C05M SCLDL-1.2	○	---	.312	.219	.356	6	CCGT 21.51
C06M SCLCR-2	▼	C06M SCLCL-2	○	12	.375	.250	.480	6	
C08J SCLCR-2	▼	C08J SCLCL-2	○	12	.500	.312	.600	4.5	
C08R SCLCR-2	▼	C08R SCLCL-2	○	12	.500	.312	.600	8	CCGT 32.51
C08J SCLCR-3	▼	C08J SCLCL-3	○	14	.500	.312	.600	4.5	
C08R SCLCR-3	▼	C08R SCLCL-3	○	14	.500	.312	.600	8	
C10Q SCLCR-2	▼	C10Q SCLCL-2	○	8	.625	.406	.770	7	CCGT 21.51
C10S SCLCR-2	▼	C10S SCLCL-2	○	11	.625	.406	.770	10	
C10Q SCLCR-3	▼	C10Q SCLCL-3	○	11	.625	.406	.770	7	
C10S SCLCR-3	▼	C10S SCLCL-3	○	11	.625	.406	.770	10	CCGT 32.51
C12Q SCLCR-3	▼	C12Q SCLCL-3	○	8	.750	.500	.930	7	
C12S SCLCR-3	▼	C12S SCLCL-3	○	8	.750	.500	.930	10	
C16R SCLCR-3	▼	C16R SCLCL-3	○	6	1	.640	1.200	8	CCGT 32.51
C16T SCLCR-3	▼	C16T SCLCL-3	○	6	1	.640	1.200	12	

○ = EXPRESS DELIVERY
▼ = STOCK



Bars with no "K" angles have no flats.

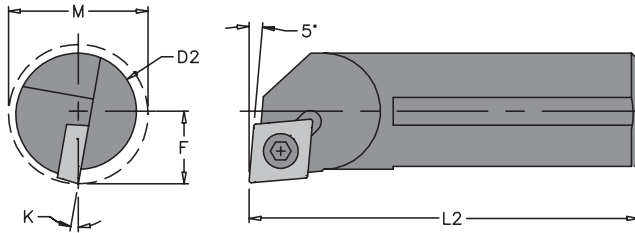


Right hand shown

CARBIDE SHANKS (Series ANSI) with Alloy Steel Head Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
E02.5H SCLDR-1.2	▼	E02.5H SCLDL-1.2	○	---	.156	.092	.180	4	CDHB 1.20-60.5
E03H SCLDR-1.2	▼	E03H SCLDL-1.2	○	---	.187	.116	.230	4	
E04M SCLDR-1.2	▼	E04M SCLDL-1.2	○	---	.250	.145	.290	6	
E05M SCLDR-1.2	▼	E05M SCLDL-1.2	○	---	.312	.219	.356	6	
E06M SCLCR-2	▼	E06M SCLCL-2	○	12	.375	.250	.480	6	CCGT 21.51
E08J SCLCR-2	▼	E08J SCLCL-2	○	14	.500	.312	.600	4.5	
E08R SCLCR-2	▼	E08R SCLCL-2	○	12	.500	.312	.600	8	CCGT 32.51
E08J SCLCR-3	▼	E08J SCLCL-3	○	14	.500	.312	.600	4.5	
E08R SCLCR-3	▼	E08R SCLCL-3	○	14	.500	.312	.600	8	CCGT 21.51
E10Q SCLCR-2	▼	E10Q SCLCL-2	○	8	.625	.406	.770	7	
E10S SCLCR-2	▼	E10S SCLCL-2	○	8	.625	.406	.770	10	CCGT 32.51
E10Q SCLCR-3	▼	E10Q SCLCL-3	○	11	.625	.406	.770	7	
E10S SCLCR-3	▼	E10S SCLCL-3	○	11	.625	.406	.770	10	
E12Q SCLCR-3	▼	E12Q SCLCL-3	○	8	.750	.500	.930	7	
E12S SCLCR-3	▼	E12S SCLCL-3	○	8	.750	.500	.930	10	
E16R SCLCR-3	▼	E16R SCLCL-3	○	6	1	.640	1.200	8	
E16T SCLCR-3	▼	E16T SCLCL-3	○	6	1	.640	1.200	12	

○ = EXPRESS DELIVERY ▼ = STOCK	inserts p.	screws p.	wrenches p.	tech page p.	Bars with no "K" angle have no flats.
-----------------------------------	------------	-----------	-------------	--------------	---------------------------------------

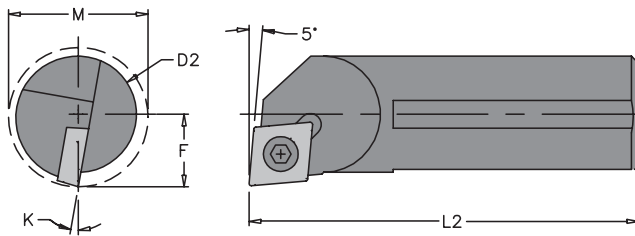

Right hand shown

ALLOY STEEL SHANKS (Series ANSI)

EVEREDE PART NUMBER				K	D2	F	M	L2	
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	INSERTS
S05M SCLPR-2	▼	S05M SCLPL-2	○	13	.312	.219	.356	6	CPGT 21.51
S06M SCLPR-2	▼	S06M SCLPL-2	○	12	.375	.250	.480	6	
S08R SCLPR-2	▼	S08R SCLPL-2	○	12	.500	.312	.600	8	
S08R SCLPR-3	▼	S08R SCLPL-3	○	14	.500	.312	.600	8	CPGT 32.51
S10S SCLPR-2	▼	S10S SCLPL-2	○	8	.625	.406	.770	10	CPGT 21.51
S10S SCLPR-3	▼	S10S SCLPL-3	○	11	.625	.406	.770	10	CPGT 32.51
S12S SCLPR-3	▼	S12S SCLPL-3	○	8	.750	.500	.930	10	
S16T SCLPR-3	▼	S16T SCLPL-3	○	6	1	.640	1.200	12	

ALLOY STEEL SHANKS (Series ANSI) with Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	INSERTS
A05M SCLPR-2	○	A05M SCLPL-2	○	13	.312	.219	.356	6	CPGT 21.51
A06M SCLPR-2	○	A06M SCLPL-2	○	12	.375	.250	.480	6	
A08R SCLPR-2	○	A08R SCLPL-2	○	12	.500	.312	.600	8	
A08R SCLPR-3	○	A08R SCLPL-3	○	14	.500	.312	.600	8	CPGT 32.51
A10S SCLPR-2	○	A10S SCLPL-2	○	8	.625	.406	.770	10	CPGT 21.51
A10S SCLPR-3	○	A10S SCLPL-3	○	11	.625	.406	.770	10	CPGT 32.51
A12S SCLPR-3	○	A12S SCLPL-3	○	8	.750	.500	.930	10	
A16T SCLPR-3	○	A16T SCLPL-3	○	6	1	.640	1.200	12	


CARBIDE SHANKS (Series ANSI) with Alloy Steel Head

EVEREDE PART NUMBER				K	D2	F	M	L2	
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	INSERTS
C05M SCLPR-2	▼	C05M SCLPL-2	○	13	.312	.219	.356	6	CPGT 21.51
C06M SCLPR-2	▼	C06M SCLPL-2	○	12	.375	.250	.480	6	
C08J SCLPR-2	▼	C08J SCLPL-2	○	12	.500	.312	.600	4.5	
C08R SCLPR-2	▼	C08R SCLPL-2	○	12	.500	.312	.600	8	CPGT 32.51
C08J SCLPR-3	▼	C08J SCLPL-3	○	14	.500	.312	.600	4.5	
C08R SCLPR-3	▼	C08R SCLPL-3	○	14	.500	.312	.600	8	
C10Q SCLPR-2	▼	C10Q SCLPL-2	○	8	.625	.406	.770	7	CPGT 21.51
C10S SCLPR-2	▼	C10S SCLPL-2	○	8	.625	.406	.770	10	CPGT 32.51
C10Q SCLPR-3	▼	C10Q SCLPL-3	○	11	.625	.406	.770	7	
C10S SCLPR-3	▼	C10S SCLPL-3	○	11	.625	.406	.770	10	
C12Q SCLPR-3	▼	C12Q SCLPL-3	○	8	.750	.500	.930	7	
C12S SCLPR-3	▼	C12S SCLPL-3	○	8	.750	.500	.930	10	
C16R SCLPR-3	▼	C16R SCLPL-3	○	6	1	.640	1.200	8	
C16T SCLPR-3	▼	C16T SCLPL-3	○	6	1	.640	1.200	12	

○ = EXPRESS DELIVERY
▼ = STOCK



Bars with no "K" angle have no flats.

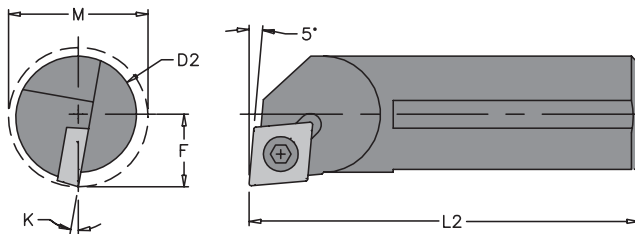


Right hand shown

CARBIDE SHANKS (Series ANSI) with Alloy Steel Head Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
E05M SCLPR-2	▼	E05M SCLPL-2	○	13	.312	.219	.356	6	CPGT 21.51
E06M SCLPR-2	▼	E06M SCLPL-2	○	12	.375	.250	.480	6	
E08J SCLPR-2	▼	E08J SCLPL-2	○	12	.500	.312	.600	4.5	
E08R SCLPR-2	▼	E08R SCLPL-2	○	12	.500	.312	.600	8	
E08J SCLPR-3	▼	E08J SCLPL-3	○	14	.500	.312	.600	4.5	CPGT 32.51
E08R SCLPR-3	▼	E08R SCLPL-3	○	14	.500	.312	.600	8	
E10Q SCLPR-2	▼	E10Q SCLPL-2	○	8	.625	.406	.770	7	CPGT 21.51
E10S SCLPR-2	▼	E10S SCLPL-2	○	8	.625	.406	.770	10	
E10Q SCLPR-3	▼	E10Q SCLPL-3	○	11	.625	.406	.770	7	CPGT 32.51
E10S SCLPR-3	▼	E10S SCLPL-3	○	11	.625	.406	.770	10	
E12Q SCLPR-3	▼	E12Q SCLPL-3	○	8	.750	.500	.930	7	
E12S SCLPR-3	▼	E12S SCLPL-3	○	8	.750	.500	.930	10	
E16R SCLPR-3	▼	E16R SCLPL-3	○	6	1	.640	1.200	8	
E16T SCLPR-3	▼	E16T SCLPL-3	○	6	1	.640	1.200	12	

 ○ = EXPRESS DELIVERY
 ▼ = STOCK


Bars with no "K" angle have no flats.

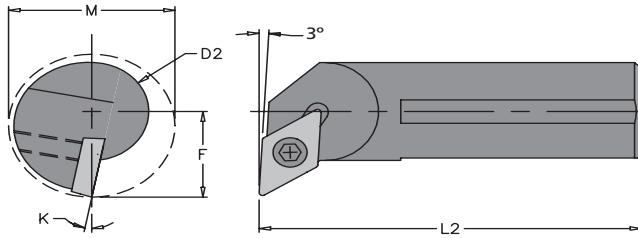

Right hand shown

ALLOY STEEL SHANKS (Series ANSI)

EVEREDE PART NUMBER				K	D2	F	M	L2	
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	INSERTS
S06M SDUCR-2	▼	S06M SDUCL-2	○	11	.375	.350	.600	6	DCGT 21.51
S08R SDUCR-2	▼	S08R SDUCL-2	○	11	.500	.429	.730	8	
S10S SDUCR-2	▼	S10S SDUCL-2	○	10	.625	.459	.850	10	
S12S SDUCR-3	▼	S12S SDUCL-3	○	10	.750	.554	.980	10	DCGT 32.51
S16T SDUCR-3	▼	S16T SDUCL-3	○	6	1	.750	1.500	12	

ALLOY STEEL SHANKS (Series ANSI) with Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	
RIGHT HAND		LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	INSERTS
A06M SDUCR-2	○	A06M SDUCL-2	○	11	.375	.350	.600	6	DCGT 21.51
A08R SDUCR-2	○	A08R SDUCL-2	○	11	.500	.429	.730	8	
A10S SDUCR-2	○	A10S SDUCL-2	○	10	.625	.459	.850	10	
A12S SDUCR-3	○	A12S SDUCL-3	○	10	.750	.554	.980	10	DCGT 32.51
A16T SDUCR-3	○	A16T SDUCL-3	○	6	1	.750	1.500	12	

CARBIDE SHANKS (Series ANSI) with Alloy Steel Head

EVEREDE PART NUMBER				K	D2	F	M	L2	
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	INSERTS
C06M SDUCR-2	▼	C06M SDUCL-2	○	11	.375	.350	.600	6	DCGT 21.51
C08R SDUCR-2	▼	C08R SDUCL-2	○	11	.500	.429	.730	8	
C10S SDUCR-2	▼	C10S SDUCL-2	○	10	.625	.459	.850	10	
C12S SDUCR-3	▼	C12S SDUCL-3	○	10	.750	.554	.980	10	DCGT 32.51
C16T SDUCR-3	▼	C16T SDUCL-3	○	6	1	.750	1.500	12	


CARBIDE SHANKS (Series ANSI) with Alloy Steel Head Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	INSERTS
E06M SDUCR-2	▼	E06M SDUCL-2	○	11	.375	.350	.600	6	DCGT 21.51
E08R SDUCR-2	▼	E08R SDUCL-2	○	11	.500	.429	.730	8	
E10S SDUCR-2	▼	E10S SDUCL-2	○	10	.625	.459	.850	10	
E12S SDUCR-3	▼	E12S SDUCL-3	○	10	.750	.554	.980	10	DCGT 32.51
E16T SDUCR-3	▼	E16T SDUCL-3	○	6	1	.750	1.500	12	

○ = EXPRESS DELIVERY
▼ = STOCK



Bars with no "K" angle have no flats.

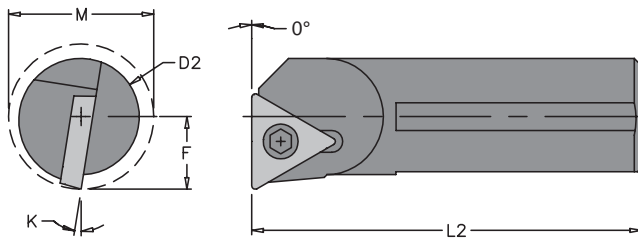

Right hand shown

ALLOY STEEL SHANKS (Series ANSI)

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
S03G STFDR-1.3	▼	S03G STFDL-1.3	○	---	.187	.134	.270	3.5	TDHB 1.30.81
S04H STFDR-1.3	▼	S04H STFDL-1.3	○	---	.250	.156	.300	4	
S05H STFDR-1.3	▼	S05H STFDL-1.3	○	---	.312	.187	.360	4	
S06M STFDR-2	▼	S06M STFCL-2	○	12	.375	.250	.480	6	TCGT 21.51
S08R STFDR-2	▼	S08R STFCL-2	○	12	.500	.312	.600	8	
S08R STFDR-3	▼	S08R STFCL-3	○	14	.500	.312	.600	8	TCGT 32.51
S10S STFDR-2	▼	S10S STFCL-2	○	8	.625	.406	.770	10	TCGT 21.51
S10S STFDR-3	▼	S10S STFCL-3	○	11	.625	.406	.770	10	TCGT 32.51
S12S STFDR-3	▼	S12S STFCL-3	○	8	.750	.500	.930	10	
S16T STFDR-3	▼	S16T STFCL-3	○	6	1	.640	1.200	12	

ALLOY STEEL SHANKS (Series ANSI) with Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
A05H STFDR-1.3	○	A05H STFDL-1.3	○	---	.312	.187	.360	4	TDHB 1.30.81
A06M STFDR-2	○	A06M STFCL-2	○	12	.375	.250	.480	6	TCGT 21.51
A08R STFDR-2	○	A08R STFCL-2	○	12	.500	.312	.600	8	
A08R STFDR-3	○	A08R STFCL-3	○	14	.500	.312	.600	8	TCGT 32.51
A10S STFDR-2	○	A10S STFCL-2	○	8	.625	.406	.770	10	TCGT 21.51
A10S STFDR-3	○	A10S STFCL-3	○	11	.625	.406	.770	10	TCGT 32.51
A12S STFDR-3	○	A12S STFCL-3	○	8	.750	.500	.930	10	
A16T STFDR-3	○	A16T STFCL-3	○	6	1	.640	1.200	12	


CARBIDE SHANKS (Series ANSI) with Alloy Steel Head

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
C03H STFDR-1.3	▼	C03H STFDL-1.3	○	---	.187	.134	.270	4	TDHB 1.30.81
C04H STFDR-1.3	▼	C04H STFDL-1.3	○	---	.250	.156	.300	4	
C05H STFDR-1.3	▼	C05H STFDL-1.3	○	---	.312	.187	.360	4	
C06M STFDR-2	▼	C06M STFCL-2	○	12	.375	.250	.480	6	TCGT 21.51
C08J STFDR-2	▼	C08J STFCL-2	○	12	.500	.312	.600	4.5	
C08R STFDR-2	▼	C08R STFCL-2	○	12	.500	.312	.600	8	TCGT 32.51
C08J STFDR-3	▼	C08J STFCL-3	○	14	.500	.312	.600	4.5	
C08R STFDR-3	▼	C08R STFCL-3	○	14	.500	.312	.600	8	
C10Q STFDR-2	▼	C10Q STFCL-2	○	8	.625	.406	.770	7	TCGT 21.51
C10S STFDR-2	▼	C10S STFCL-2	○	8	.625	.406	.770	10	
C10Q STFDR-3	▼	C10Q STFCL-3	○	11	.625	.406	.770	7	TCGT 32.51
C10S STFDR-3	▼	C10S STFCL-3	○	11	.625	.406	.770	10	
C12Q STFDR-3	▼	C12Q STFCL-3	○	8	.750	.500	.930	7	
C12S STFDR-3	▼	C12S STFCL-3	○	8	.750	.500	.930	10	
C16R STFDR-3	▼	C16R STFCL-3	○	6	1	.640	1.200	8	
C16T STFDR-3	▼	C16T STFCL-3	○	6	1	.640	1.200	12	

○ = EXPRESS DELIVERY
▼ = STOCK



Bars with no "K" angle have no flats.

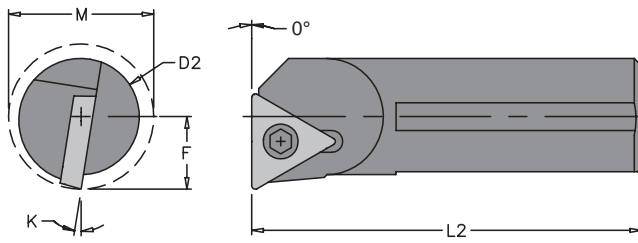

Right hand shown


CARBIDE SHANKS (Series ANSI) with Alloy Steel Head Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
E03H STFDR-1.3	▼	E03H STFDL-1.3	○	---	.187	.134	.270	4	TDHB 1.30.81
E04H STFDR-1.3	▼	E04H STFDL-1.3	○	---	.250	.156	.300	4	
E05H STFDR-1.3	▼	E05H STFDL-1.3	○	---	.312	.187	.360	4	
E06M STFDR-2	▼	E06M STFCL-2	○	12	.375	.250	.480	6	TCGT 21.51
E08J STFDR-2	▼	E08J STFCL-2	○	12	.500	.312	.600	4.5	
E08R STFDR-2	▼	E08R STFCL-3	○	12	.500	.312	.600	8	TCGT 32.51
E08J STFDR-3	▼	E08J STFCL-3	○	14	.500	.312	.600	4.5	
E08R STFDR-3	▼	E08R STFCL-3	○	14	.500	.312	.600	8	TCGT 21.51
E10Q STFDR-2	▼	E10Q STFCL-2	○	8	.625	.406	.770	7	
E10S STFDR-2	▼	E10S STFCL-2	○	8	.625	.406	.770	10	TCGT 32.51
E10Q STFDR-3	▼	E10Q STFCL-3	○	11	.625	.406	.770	7	
E10S STFDR-3	▼	E10S STFCL-3	○	11	.625	.406	.770	10	
E12Q STFDR-3	▼	E12Q STFCL-3	○	8	.750	.500	.930	7	
E12S STFDR-3	▼	E12S STFCL-3	○	8	.750	.500	.930	10	
E16R STFDR-3	▼	E16R STFCL-3	○	6	1	.640	1.200	8	
E16T STFDR-3	▼	E16T STFCL-3	○	6	1	.640	1.200	12	

○ = EXPRESS DELIVERY
▼ = STOCK



Bars with no "K" angle have no flats.

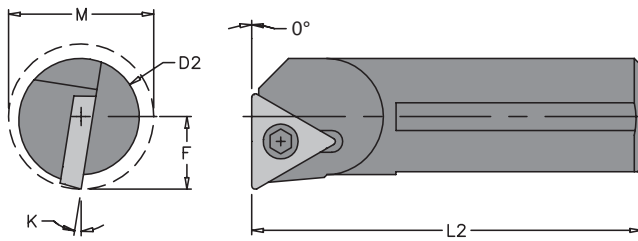

Right hand shown

ALLOY STEEL SHANKS (Series ANSI)

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
S06M STFPR-2	▼	S06M STFPL-2	○	12	.375	.250	.480	6	TPGH 21.51
S08R STFPR-2	▼	S08R STFPL-2	○	12	.500	.312	.600	8	
S08R STFPR-3	▼	S08R STFPL-3	○	14	.500	.312	.600	8	TPGH 32.51
S10S STFPR-2	▼	S10S STFPL-2	○	8	.625	.406	.770	10	TPGH 21.51
S10S STFPR-3	▼	S10S STFPL-3	○	11	.625	.406	.770	10	TPGH 32.51
S12S STFPR-3	▼	S12S STFPL-3	○	8	.750	.500	.930	10	
S16T STFPR-3	▼	S16T STFPL-3	○	6	1	.640	1.200	12	

ALLOY STEEL SHANKS (Series ANSI) with Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
A06M STFPR-2	○	A06M STFPL-2	○	12	.375	.250	.480	6	TPGH 21.51
A08R STFPR-2	○	A08R STFPL-2	○	12	.500	.312	.600	8	
A08R STFPR-3	○	A08R STFPL-3	○	14	.500	.312	.600	8	TPGH 32.51
A10S STFPR-2	○	A10S STFPL-2	○	8	.625	.406	.770	10	TPGH 21.51
A10S STFPR-3	○	A10S STFPL-3	○	11	.625	.406	.770	10	TPGH 32.51
A12S STFPR-3	○	A12S STFPL-3	○	8	.750	.500	.930	10	
A16T STFPR-3	○	A16T STFPL-3	○	6	1	.640	1.200	12	


CARBIDE SHANKS (Series ANSI) with Alloy Steel Head

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
C06M STFPR-2	▼	C06M STFPL-2	○	12	.375	.250	.480	6	TPGH 21.51
C08J STFPR-2	▼	C08J STFPL-2	○	12	.500	.312	.600	4.5	
C08R STFPR-2	▼	C08R STFPL-2	○	12	.500	.312	.600	8	TPGH 32.51
C08J STFPR-3	▼	C08J STFPL-3	○	14	.500	.312	.600	4.5	
C08R STFPR-3	▼	C08R STFPL-3	○	14	.500	.312	.600	8	TPGH 21.51
C10Q STFPR-2	▼	C10Q STFPL-2	○	8	.625	.406	.770	7	
C10S STFPR-2	▼	C10S STFPL-2	○	8	.625	.406	.770	10	
C10Q STFPR-3	▼	C10Q STFPL-3	○	11	.625	.406	.770	7	TPGH 32.51
C10S STFPR-3	▼	C10S STFPL-3	○	11	.625	.406	.770	10	
C12Q STFPR-3	▼	C12Q STFPL-3	○	8	.750	.500	.930	7	
C12S STFPR-3	▼	C12S STFPL-3	○	8	.750	.500	.930	10	TPGH 32.51
C16R STFPR-3	▼	C16R STFPL-3	○	6	1	.640	1.200	8	
C16T STFPR-3	▼	C16T STFPL-3	○	6	1	.640	1.200	12	

○ = EXPRESS DELIVERY
▼ = STOCK



Bars with no "K" angle have no flats.

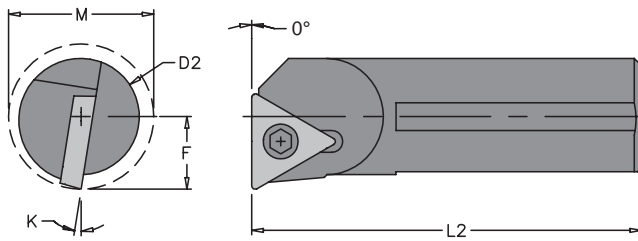


Right hand shown

CARBIDE SHANKS (Series ANSI) with Alloy Steel Head Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
E06M STFPR-2	▼	E06M STFPL-2	○	12	.375	.250	.480	6	TPGH 21.51
E08J STFPR-2	▼	E08J STFPL-2	○	12	.500	.312	.600	4.5	
E08R STFPR-2	▼	E08R STFPL-2	○	12	.500	.312	.600	8	
E08J STFPR-3	▼	E08J STFPL-3	○	14	.500	.312	.600	4.5	TPGH 32.51
E08R STFPR-3	▼	E08R STFPL-3	○	14	.500	.312	.600	8	
E10Q STFPR-2	▼	E10Q STFPL-2	○	8	.625	.406	.770	7	TPGH 21.51
E10S STFPR-2	▼	E10S STFPL-2	○	8	.625	.406	.770	10	
E10Q STFPR-3	▼	E10Q STFPL-3	○	11	.625	.406	.770	7	TPGH 32.51
E10S STFPR-3	▼	E10S STFPL-3	○	11	.625	.406	.770	10	
E12Q STFPR-3	▼	E12Q STFPL-3	○	8	.750	.500	.930	7	
E12S STFPR-3	▼	E12S STFPL-3	○	8	.750	.500	.930	10	
E16R STFPR-3	▼	E16R STFPL-3	○	6	1	.640	1.200	8	
E16T STFPR-3	▼	E16T STFPL-3	○	6	1	.640	1.200	12	

 ○ = EXPRESS DELIVERY
 ▼ = STOCK


Bars with no "K" angle have no flats.

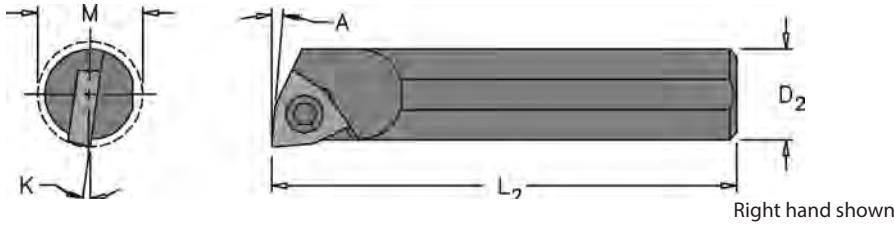

ALLOY STEEL SHANKS (Series ANSI)

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
S03E SWLCR-1.2	▼	S03E SWLCL-1.2	○	20	.187	.115	.230	2.5	WCGT 1.211
S04F SWLCR-1.2	▼	S04F SWLCL-1.2	○	17	.250	.145	.290	3	
S05M SWLCR-1.5	▼	S05M SWLCL-1.5	○	17	.312	.180	.360	6	WCGT 1.51.51
S06M SWLCR-2	▼	S06M SWLCL-2	○	12	.375	.250	.480	6	WCGT 21.51
S08R SWLCR-2	▼	S08R SWLCL-2	○	12	.500	.312	.600	8	
S08R SWLCR-3	▼	S08R SWLCL-3	○	14	.500	.312	.600	8	WCGT 32.51
S10S SWLCR-2	▼	S10S SWLCL-2	○	11	.625	.406	.770	10	WCGT 21.51
S10S SWLCR-3	▼	S10S SWLCL-3	○	11	.625	.406	.770	10	WCGT 32.51
S12S SWLCR-3	▼	S12S SWLCL-3	○	8	.750	.500	.930	10	
S16T SWLCR-3	▼	S16T SWLCL-3	○	6	1	.640	1.200	12	


ALLOY STEEL SHANKS (Series ANSI) with Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
A05M SWLCR-1.5	○	A05M SWLCL-1.5	○	17	.312	.180	.360	6	WCGT 1.51.51
A06M SWLCR-2	○	A06M SWLCL-2	○	12	.375	.250	.480	6	WCGT 21.51
A08R SWLCR-2	○	A08R SWLCL-2	○	12	.500	.312	.600	8	
A08R SWLCR-3	○	A08R SWLCL-3	○	14	.500	.312	.600	8	WCGT 32.51
A10S SWLCR-2	○	A10S SWLCL-2	○	11	.625	.406	.770	10	WCGT 21.51
A10S SWLCR-3	○	A10S SWLCL-3	○	11	.625	.406	.770	10	WCGT 32.51
A12S SWLCR-3	○	A12S SWLCL-3	○	8	.750	.500	.930	10	
A16T SWLCR-3	○	A16T SWLCL-3	○	6	1	.640	1.200	12	





CARBIDE SHANKS (Series ANSI) with Alloy Steel Head

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
C03H SWLCR-1.2	▼	C03H SWLCL-1.2	○	20	.187	.115	.230	4	WCGT 1.211
C04M SWLCR-1.2	▼	C04M SWLCL-1.2	○	17	.250	.145	.290	6	
C05M SWLCR-1.5	▼	C05M SWLCL-1.5	○	17	.312	.180	.360	6	WCGT 1.51.51
C06M SWLCR-2	▼	C06M SWLCL-2	○	12	.375	.250	.480	6	WCGT 21.51
C08J SWLCR-2	▼	C08J SWLCL-2	○	12	.500	.312	.600	4.5	
C08R SWLCR-2	▼	C08R SWLCL-2	○	12	.500	.312	.600	8	WCGT 32.51
C08J SWLCR-3	▼	C08J SWLCL-3	○	12	.500	.312	.600	4.5	
C08R SWLCR-3	▼	C08R SWLCL-3	○	12	.500	.312	.600	8	
C10Q SWLCR-2	▼	C10Q SWLCL-2	○	11	.625	.406	.770	7	WCGT 21.51
C10S SWLCR-2	▼	C10S SWLCL-2	○	11	.625	.406	.770	10	
C10Q SWLCR-3	▼	C10Q SWLCL-3	○	11	.625	.406	.770	7	WCGT 32.51
C10S SWLCR-3	▼	C10S SWLCL-3	○	11	.625	.406	.770	10	
C12Q SWLCR-3	▼	C12Q SWLCL-3	○	8	.750	.500	.930	7	
C12S SWLCR-3	▼	C12S SWLCL-3	○	8	.750	.500	.930	10	
C16R SWLCR-3	▼	C16R SWLCL-3	○	6	1	.640	1.200	8	
C16T SWLCR-3	▼	C16T SWLCL-3	○	6	1	.640	1.200	12	

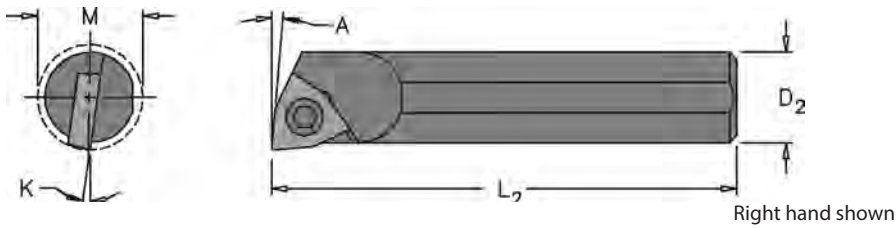○ = EXPRESS DELIVERY ▼ = STOCK	inserts p.	screws p.	wrenches p.	tech page p.	Bars with no "K" angle have no flats.
-----------------------------------	------------	-----------	-------------	--------------	---------------------------------------


CARBIDE SHANKS (Series ANSI) with Alloy Steel Head Coolant Thru

EVEREDE PART NUMBER				K	D2	F	M	L2	INSERTS
RIGHT HAND	DS	LEFT HAND	DS	ANGLE	SHANK DIA	DIM	MIN BORE	OAL	
E03H SWLCR-1.2	▼	E03H SWLCL-1.2	○	20	.187	.115	.230	4	WCGT 1.211
E04M SWLCR-1.2	▼	E04M SWLCL-1.2	○	17	.250	.145	.290	6	
E05M SWLCR-1.5	▼	E05M SWLCL-1.5	○	17	.312	.180	.360	6	WCGT-1.51.51
E06M SWLCR-2	▼	E06M SWLCL-2	○	12	.375	.250	.480	6	WCGT 21.51
E08J SWLCR-2	▼	E08J SWLCL-2	○	12	.500	.312	.600	4.5	
E08R SWLCR-2	▼	E08R SWLCL-2	○	12	.500	.312	.600	8	WCGT 32.51
E08J SWLCR-3	▼	E08J SWLCL-3	○	12	.500	.312	.600	4.5	
E08R SWLCR-3	▼	E08R SWLCL-3	○	12	.500	.312	.600	8	WCGT 21.51
E10Q SWLCR-2	▼	E10Q SWLCL-2	○	11	.625	.406	.770	7	
E10S SWLCR-2	▼	E10S SWLCL-2	○	11	.625	.406	.770	10	WCGT 32.51
E10Q SWLCR-3	▼	E10Q SWLCL-3	○	11	.625	.406	.770	7	
E10S SWLCR-3	▼	E10S SWLCL-3	○	11	.625	.406	.770	10	WCGT 32.51
E12Q SWLCR-3	▼	E12Q SWLCL-3	○	8	.750	.500	.930	7	
E12S SWLCR-3	▼	E12S SWLCL-3	○	8	.750	.500	.930	10	WCGT 32.51
E16R SWLCR-3	▼	E16R SWLCL-3	○	6	1	.640	1.200	8	
E16T SWLCR-3	▼	E16T SWLCL-3	○	6	1	.640	1.200	12	

○ = EXPRESS DELIVERY ▼ = STOCK	 Inserts p.	 screws p.	 wrenches p.	 tech page p.	Bars with no "K" angle have no flats.
-----------------------------------	--	---	---	---	---------------------------------------