

AHB

TOOLING & MACHINERY

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225

ISO Certified

www.ahbinc.com

customerservice@ahbinc.com

SCHUNK 

Superior Clamping and Gripping

T | E | N | D | O[®]

Platinum V2

Newly designed concentric clamping
for ultimate tool performance


T|E|N|D|O® Platinum V2

The most durable, accurate toolholder!

NEW

- Manufactured from highest quality tool steel
- All clamping diameters, multiple gage lengths
- Integral one-piece design
- Direct clamping

Mix and Match! Buy four and get one FREE!

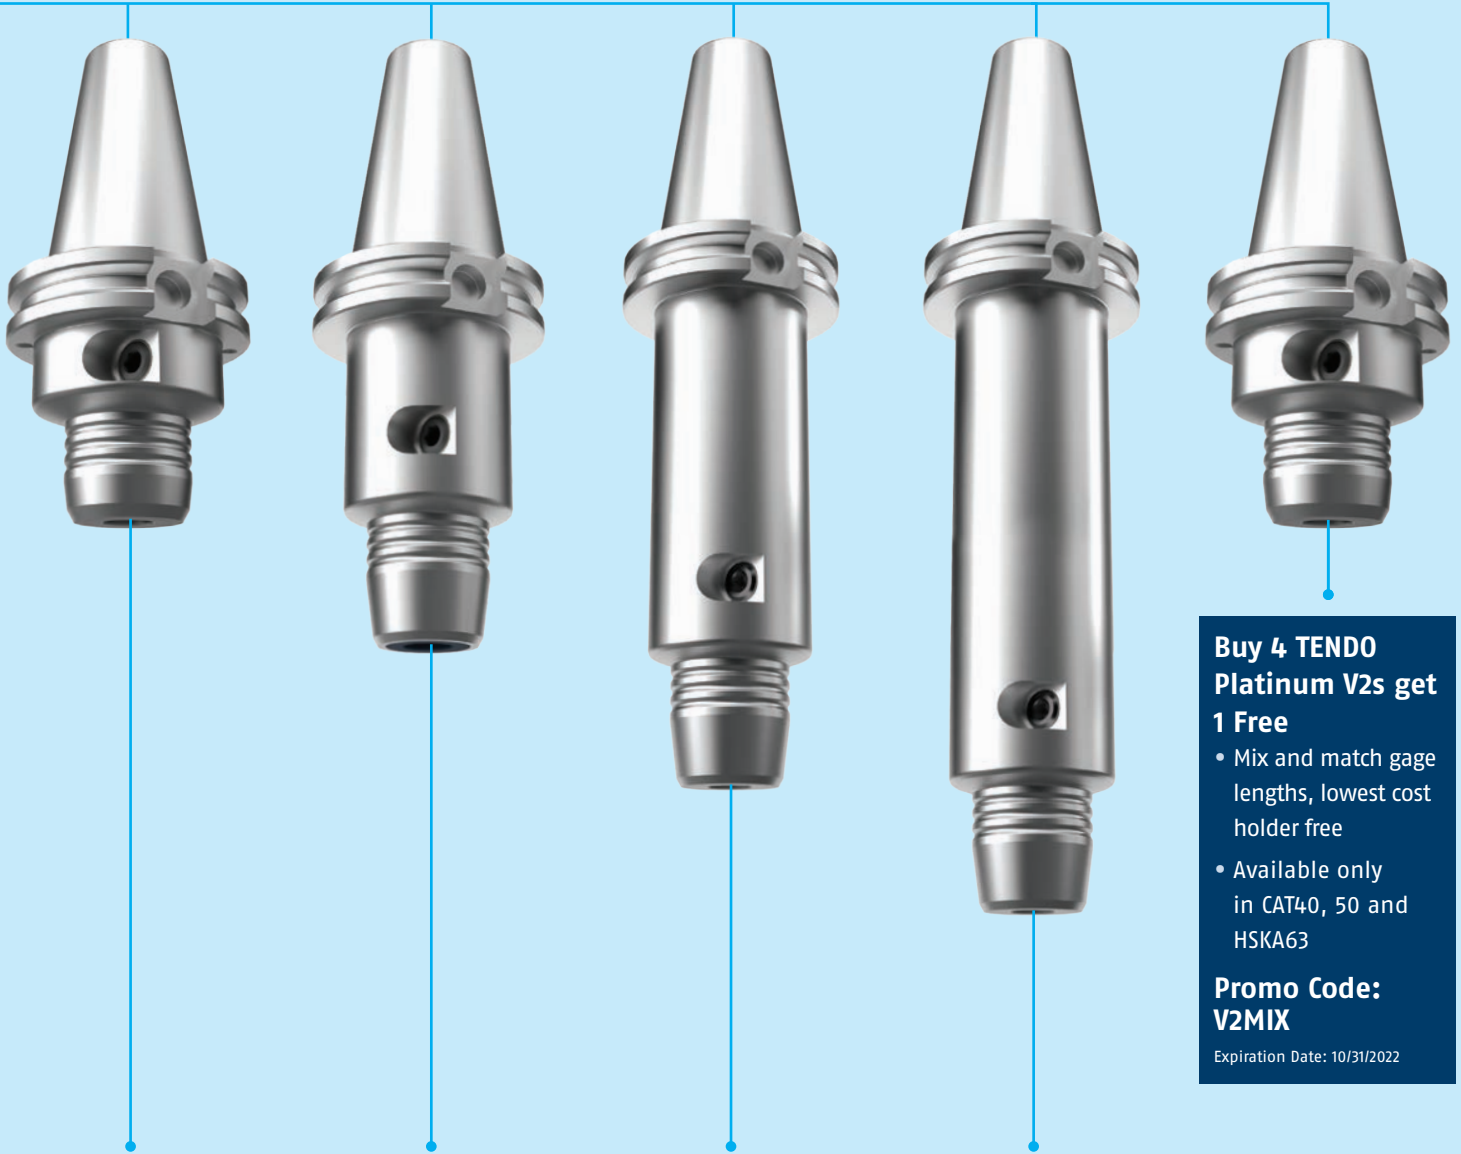

Buy 4 TENDO Platinum V2s get 1 Free

- Mix and match gage lengths, lowest cost holder free
- Available only in CAT40, 50 and HSKA63

Promo Code: V2MIX

Expiration Date: 10/31/2022

Short & Rigid

Optimal for confined areas due to its shorter length

CAT40 2.5"/63.5mm Gage Length. All clamping diameters
\$399.00

CAT50 3.2"/81mm Gage Length. All clamping diameters
\$539.00

4" Gage Length

Excellent in small cavities due to its slim nose

CAT40 4"/101.6mm Gage Length. All clamping diameters
\$479.00

CAT50 4"/101.6mm Gage Length. All clamping diameters
\$600.00

6" Gage Length

Best reach for small spaces due to extended length and slim nose

CAT40 6"/152.4mm Gage Length. All clamping diameters
\$531.00

CAT50 6"/152.4mm Gage Length. All clamping diameters
\$697.00


8" Gage Length

Additional length is perfect for the horizontal machining market

CAT40 8"/203.2mm Gage Length .750".
\$717.00

CAT50 8"/203.2mm Gage Length 1.250".
\$923.00

Introducing the latest in TENDO Technology. Specifically designed for direct tool clamping.

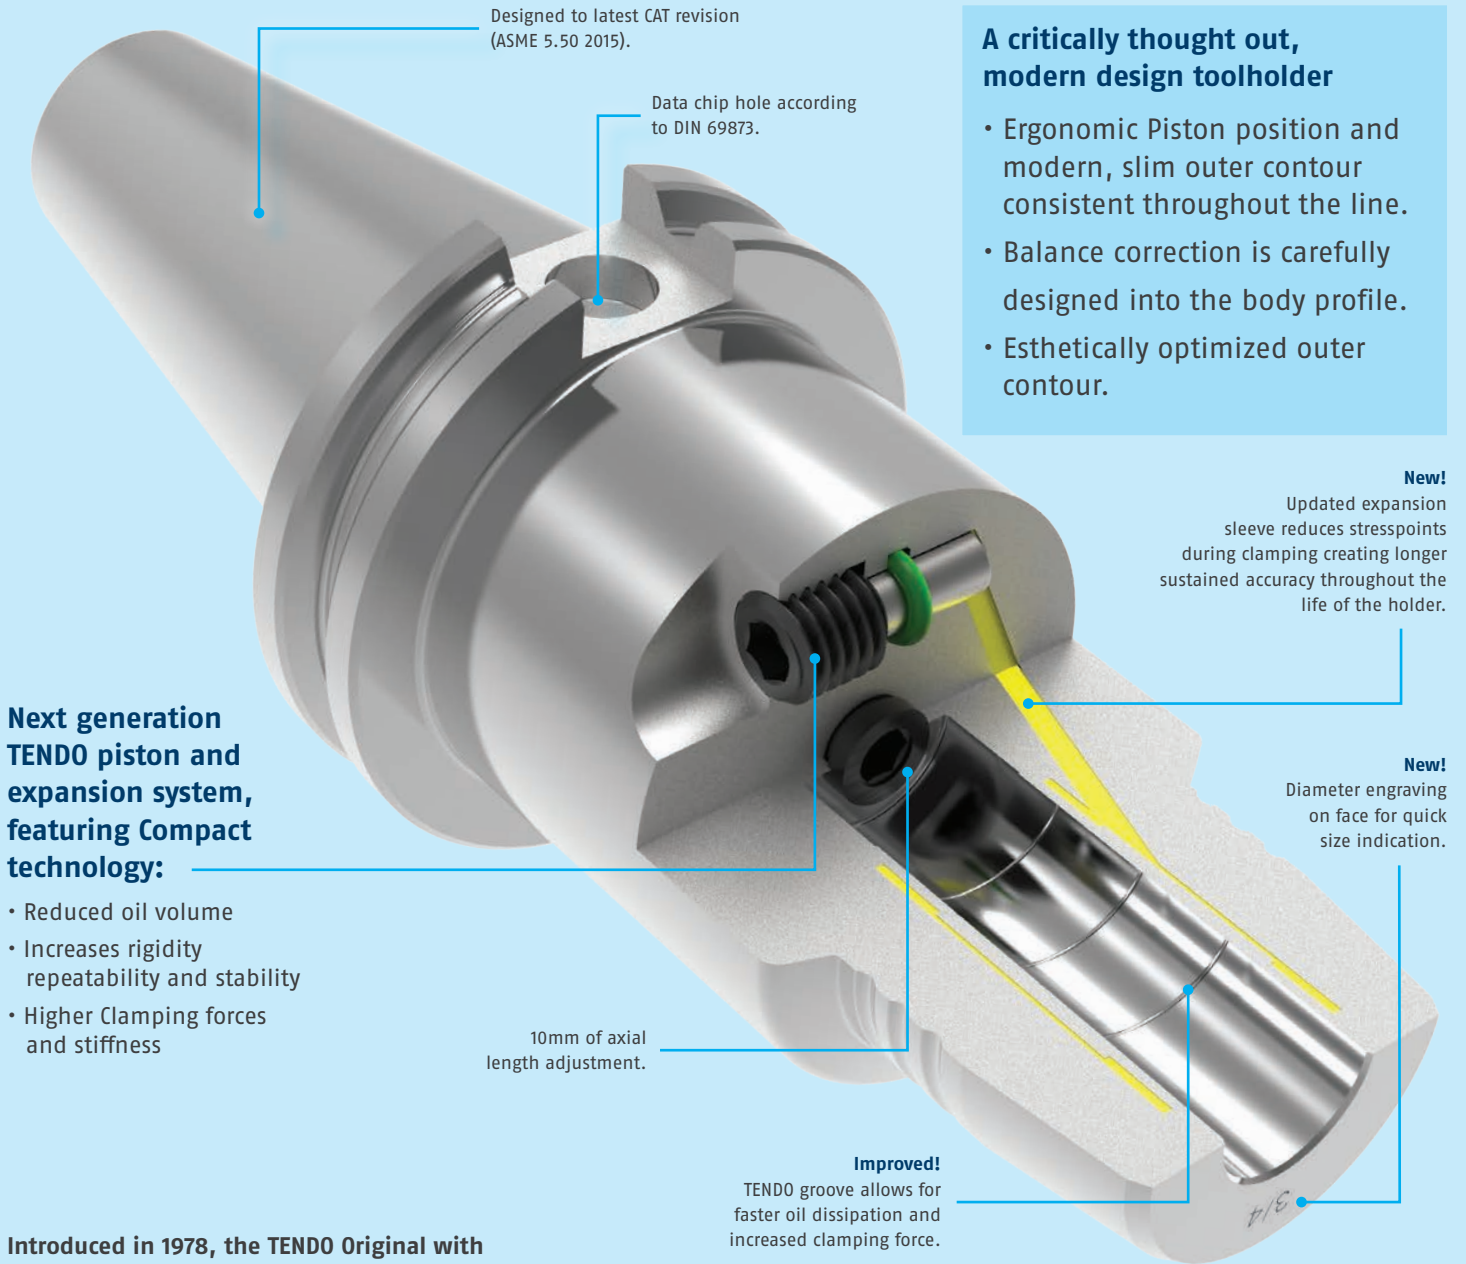

A critically thought out, modern design toolholder

- Ergonomic Piston position and modern, slim outer contour consistent throughout the line.
- Balance correction is carefully designed into the body profile.
- Esthetically optimized outer contour.

Next generation TENDO piston and expansion system, featuring Compact technology:

- Reduced oil volume
- Increases rigidity repeatability and stability
- Higher Clamping forces and stiffness

New!

Updated expansion sleeve reduces stresspoints during clamping creating longer sustained accuracy throughout the life of the holder.

New!

Diameter engraving on face for quick size indication.

Improved!

TENDO groove allows for faster oil dissipation and increased clamping force.

Introduced in 1978, the TENDO Original with three rings was the first to feature:

- Run-out/repeat accuracy ≤ 0.003 mm
- Balance G2.5 25,000 rpm
- No risk of damage when clamped without tool
- All standard shanks, weldon, whistle notch, clamped without damage

Designed and manufactured in the USA, at our state of the art facility in Morrisville, NC



T | E | N | D | O[®]

Hydraulic Expansion Toolholders

"The original" TENDO is the technological leader of hydraulic expansion toolholders from SCHUNK. Universal in use, efficient, and absolutely precise. Profit from the unique features of the TENDO family:

- Maximum true running and repeat accuracy
- Increases the tool's service life
- Excellent vibration damping
- Improved surface quality
- Prevents chipping of tool cutting edge
- Versatile clamping range thanks to intermediate sleeves
- Completely maintenance-free

TENDO with consistent run-out and repeat accuracy for roughing, reaming, and finishing.



Introducing the New, Re-Designed Platinum V2

Designed
and
Proudly



Slim outer profile

Ergonomic actuation | Durable hardened steel body

Dampened clamping system | Highest accuracy

SCHUNK

US Headquarters
211 Kitty Hawk Drive
Morrisville, NC 27560

Follow us

