


RELIABILITYPRODUCTS FOR EVERY PURPOSE

Increased waterjet efficiency
Reduced downtime
Customized to meet your needs

Ideally suited for

Optimizing your abrasive consumption Increasing your garnet capacity

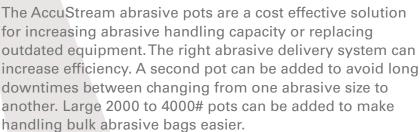

HIGHLIGHTS

- Low level Indicator light
- Pressure regulator with water removal for incoming air
- Single valve operation to pressurize and discharge pot
- · Abrasive rated discharge valving
- Cover and Screen

REQUIREMENTS

- 80 PSI Air
- 115 VAC for level sensor

SIZES AVAILABLE

- 6 cubic foot (as shown above)
- larger sizes available upon request

SPECIFICATIONS

PHYSICAL	Capacity	6 cubic feet
		800 lbs (362.9 kg)
		80 PSI Air
		500 lbs (226.8 kg)
		38 in (965.2 mm)
		31 in (787.4 mm)
		43.5 in (1104.9 mm)
		24 in (609.6 mm)







