

IP67 WATERPROOF DIGITAL CALIPERS

INSIZE PLUS
MADE IN EUROPE

INSPECTION
CERTIFICATE

DATA
OUTPUT IP67
WATERPROOF

- IP67 dust/waterproof
- Resolution .0005"/0.01mm
- Button function: zero, inch/mm, preset, data output
- Battery CR2032
- Automatic power off, move the digital unit to turn on power
- Data output
- Made of stainless steel
- Optional accessory: data output cable (part no. 7315-80 receiver is needed, 7302-80)



1195-150

Starting At
\$ 237.00

Part No.	Range	Accuracy	Remark	List price
1195-150	0-6"/0-150mm	±.0010"	with depth bar	\$ 237.00
1195-200	0-8"/0-200mm	±.0015"	with depth bar	\$ 375.00
1195-300	0-12"/0-300mm	±.0015"	without depth bar	\$ 467.00

DIGITAL CALIPERS

INSPECTION
CERTIFICATE

ATTENTION:
NO DATA OUTPUT

Starting At
\$ 99.70

- Non waterproof
- Zinc alloy housing for digital unit
- Resolution .0005"/0.01mm
- Buttons: zero, on/off, inch/mm
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel



1114-150A

Part No.	Range	Accuracy	List price
1114-150A	0-6"/0-150mm	±.0015"	\$ 99.70
1114-200A	0-8"/0-200mm	±.0015"	\$ 136.00
1114-300A	0-12"/0-300mm	±.0015"	\$ 205.00

CARBON FIBER BORE GAUGES

CARBON FIBER EXTENSION RODS, LIGHT WEIGHT,
NOT EASY TO DEFORM, LOW THERMAL EXPANSION

SPRING LOADED
MEASURING POINT DATA
OUTPUT


Starting At
\$ 5794.00



3522-1500

- Carbon fiber extension rods, light weight, not easy to deform, low thermal expansion
- Carbide measuring faces
- Data output
- Button function: on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement
- Supplied with 400mm (15.7480") setting standard
- Optional accessory: data output cable (part no. 7302-40M), wireless data transmission (transmitter part no. 7315-51 receiver is needed)

spring loaded point, and max./min. value tracking make it easy to find the right measuring position



setting standard (included), used to set the measuring head

Measuring head

Range	Resolution	Accuracy	Repeatability	Weight
16-18"	.00005"/0.001mm	±.00015"	±.00010"	2.2lb

Part No.	Range	Weight	Extension rods (mm)	List price
3522-1000	16-40"	8.4lb	50 (1.9685"), 100 (3.9370"), 200 (7.8740"), 300 (11.8110")	\$ 5794.00
3522-1500	16-60"	9.9lb	50 (1.9685"), 100 (3.9370"), 200 (7.8740"), 300 (11.8110"), 600 (23.6220")	\$ 6466.00
3522-2000	16-80"	11.7lb	50 (1.9685"), 100 (3.9370"), 200 (7.8740"), 300 (11.8110"), 600 (23.6220"), 2 pcs	\$ 7122.00

DIGITAL MICROMETERS/SNAP GAUGES (BASIC TYPE)

ONE TURN OF SLEEVE MAKES .4" SPINDLE FEED,
PRESS THE FORK, THE SPINDLE RETRACTS .12"

MEASUREMENT ACCURACY IS NOT
AFFECTED BY THE USE OF SLEEVE

DATA
OUTPUT NON-ROTATING
SPINDLE

ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF

IP65
WATERPROOF

ATTENTION: RECHARGEABLE BATTERY,
FOR 24 HOURS CONTINUOUS WORKING

INSPECTION
CERTIFICATE


Starting At
\$ 450.00



3358-25

- Absolute encoder, the original data remains after power off
- Resolution .00005"/0.001mm
- One turn of sleeve makes .4" spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts .12"
- Carbide spindle and anvil
- Measuring force 5-10N
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, inch/mm
- Supplied with gauge blocks for zero setting (except 0-1"/0-25mm)
- Power: rechargeable battery, for 24 hours continuous working

alarm when over tolerance



With data interface

Optional accessory:
wireless transmitter, part no. 7315-3350 receiver is needed
data output cable (keyboard format), part no. 7302-3350

Part No.	Range	Accuracy	Repeatability	Measuring faces		List price
				Flatness	Parallelism	
3358-25	0-1"/0-25mm	±.00010"	.00005"	.00002"	.00005"	\$ 450.00
3358-50	1-2"/25-50mm	±.00010"	.00005"	.00002"	.00005"	\$ 522.00

Built-in wireless

Optional accessory:
wireless receiver (keyboard format, connect up to 15 digital indicators), part no. 2134-R1
wireless receiver (serial port format, connect up to 15 digital indicators), part no. 2134-R2

Part No.	Range	Accuracy	Repeatability	Measuring faces		List price
				Flatness	Parallelism	
3358-25WL	0-1"/0-25mm	±.00010"	.00005"	.00002"	.00005"	\$ 503.00
3358-50WL	1-2"/25-50mm	±.00010"	.00005"	.00002"	.00005"	\$ 575.00

DIGITAL RADIUS GAUGE

DATA
OUTPUT

Starting At
\$ 1108.00

- Resolution .001"/0.01mm
- Buttons: on/off, hold, inch/mm, s (select jaws), zero
- Measure radius of internal or external arcs
- Cylindrical measuring jaws, self-positioning
- Display can be rotated by 320°
- Supplied with 5 jaws for different sizes of arc
- Battery CR2032
- Automatic power off (time is adjustable)
- Data output
- Optional accessory: calibration standard (part no. 2183-BLOCK), data output cable (part no. 7315-2183 receiver is needed, 7302-2183)



2511

Part No.	Range of external radius (R1)	Range of internal radius (R2)	Accuracy (inch)	List price
2511	-.2-35.83"/9-110mm	.3-35.83"/7-110mm	±.005R*	\$ 1108.00

*R is the radius to be measured. For example, radius is 4", the accuracy is ±.005x4=±.02"

DIGITAL RADIUS GAUGES

- Measure radius of external arc, arc angle of measured surface should be larger than 60°
- Display radius value, no need to calculate
- Button function: on/off, zero, data preset, inch/mm
- Keep preset data in memory after restart
- CR2032 battery, data output
- Automatic power off (time is adjustable)
- Stainless steel base
- Optional accessory: setting standards, data output cable (part no. 7315-50M receiver is needed, 7302-40M)




2188-55

Starting At
\$ 472.00

Part No.	Range (radius)	Resolution	Accuracy	List price
2188-55	.16-2.09"/4-53mm	.0005"/0.01mm	±.001"	\$ 472.00
2188-143	1.89-5.63"/48-143mm	.0005"/0.01mm	±.0015"	\$ 616.00
2188-233	5.43-9.17"/138-233mm	.0005"/0.01mm	±.0015"	\$ 707.00
2188-323	8.98-12.72"/228-323mm	.0005"/0.01mm	±.002"	\$ 839.00

application



FLATNESS MEASUREMENT STAND

GRANITE PLATE CAN BE CUSTOMIZED ACCORDING TO WORKPIECES

DATA OUTPUT

\$ 1225.00



Optional accessory: data output cable (part no. 7315-50M receiver is needed, 7302-40M, 7305-40M)

Part No.	Digital indicator resolution	Flatness measurement accuracy	Flatness of granite plate	List price
6852-150	.00005"/0.001mm	79µin	79µin	\$ 1225.00

WIRELESS DIGITAL MEASURING TAPES + LASER DISTANCE METERS

Starting At **\$ 134.00**



- Built-in bluetooth or wireless Zigbee transmission
- Display with backlight
- Automatic power off: laser 30s, main unit 180s
- Can work continuously for 5 hours
- Can store 50 groups of measurement data

SPECIFICATION

Part No.	9563-C40	9563-C60	
List price	\$ 134.00	\$ 146.00	
Output	bluetooth (data can be transmitted to APP)		
Digital measuring tape	range	16ft	
	resolution	.001ft, 1/16"	
	accuracy	±1/16"	
	blade width	3/4"	
	horizontal stand-out	5.9ft	
Laser distance meter	range	131ft	196ft
	resolution	.001ft, 1/16"	
	accuracy	±(.12+D/1666)", D: measured distance, unit: ft	
	units	ft, in, ft+in, m	
	laser type	630~670nm, <1mW, class 2	
measurement function	single, continuous, area, volume, pythagoras measurement		
Operation temperature	32~104°F		
Storage temperature	14~140°F		
Power supply	built-in rechargeable lithium battery		
Dimension (L×W×H)	3.7×2.9×2.2"		
Weight	.69lb		

BLUETOOTH DIGITAL LEVEL AND SLOPE METER

MAGNETIC BOTTOM DISPLAY FLIPS OVER WHEN THE BOTTOM FACES UP BACKLIGHT

WORKING TEMPERATURE 23°F ~ 122°F ABSOLUTE LEVEL

\$ 66.80



2198-2

- Used as level and slope meter
- Aluminum frame
- Magnetic bottom
- The display flips over when the bottom faces up
- The backlight is on automatically when in use, and automatically off in 15 seconds after use
- The sea level is permanently set inside the chip, zero setting is not needed when battery is replaced
- Buttons: ON/OFF, ZERO, HOLD, absolute and incremental measurement
- Built-in bluetooth, transmission distance is 49.2ft (under the condition of no obstruction and no electromagnetic interference). Android and iPhone APP are included
- One AAA battery, automatic power off in 5 minutes


Part No.	List price	Range	Resolution	Accuracy
2198-2	\$ 66.80	4×90°	0.1° (= .021in/ft)	at 0° and 90°: ±0.1°; others: ±0.2°

CUTTING TOOLS MICROSCOPE

SPLIT SCREEN DESIGN TAKE PICTURES AND VIDEOS

BUILT-IN SOFTWARE WITHOUT COMPUTER

\$ 8533.00

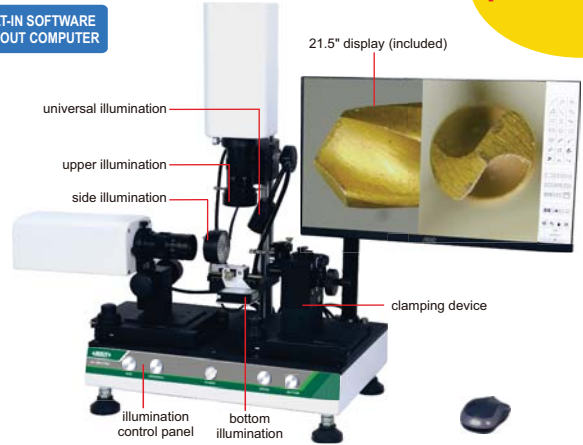

SPECIFICATION

Part No.	ISM-CT820
List price	\$ 8533.00
Cutting tools range	.16~.47" DIA, length 1.18"-2.95"
Lens	step-zoom lens
Output	HDMI
Resolution	1920×1080
Frame rate	60fps
Focus distance	3.35"
View field	.08×.13~.52×.94"
Magnification	20-132X
Power supply	AC 100-240V
Dimension (L×W×H)	17.72×11.81×27.56"
Weight	44.09lb

- Split screen design, zoom in and out independently
- One mouse can operate two cameras
- Display cross hairs
- Brightness, contrast ratio, white balance are adjustable
- Basic measuring tools including point to point, point to line, line to line, angle, three-point circle, etc

STANDARD DELIVERY

Main unit	1 pc
Display	1 pc
32G USB flash disk	1 pc
Mouse	1 pc
HDMI cable	1 pc
Glass calibration plate	1 pc
Anti-dust cover	1 pc

DUAL AXIS DIGITAL LEVEL AND GYRO ANGLE METER

DATA OUTPUT DISPLAY FLIPS OVER WHEN THE BOTTOM FACES UP BACKLIGHT

AUDIBLE ALARM WHEN OUT OF LIMIT ATTENTION: HARD PLASTIC CASE

\$ 249.00

- Single axis/double axis level and slope meter, gyro technique can measure the angle between two planes in any direction
- Hard plastic case, with V-shaped grooves, four magnetic sides
- Display flips over when the bottom faces up
- Audible alarm when out of limit
- Buttons: POWER, ZERO, HOLD, display unit (°, mm/m, %), MENU
- Rechargeable Li-ion battery 3.7V, operation time is 40 hours
- Automatic power off in 30 minutes
- Data output
- Android and iPhone APP are included
- Optional accessory: wired data transmission (part no. 2199-A01), bluetooth (part no. 2199-A02), transmission distance is 32.8ft (under the condition of no obstruction and no electromagnetic interference)



2199-1

Part No.	List price	Range	Resolution	Accuracy
2199-1	\$ 249.00	single axis level: 4×90° dual axis level: ±40°	0.01°	at 0° and 20°: ±0.08° at 20° and 70°: ±0.15° at 70° and 90°: ±0.08°
		gyro angle meter: 360°	0.1°	±0.5°

MEASURING MAGNIFIERS (WITH ILLUMINATION)

Starting At **\$ 35.80**

- Base with scale
- With 5 white LED and 5 UV LED
- Charging port: Type-C
- Work for 1.5h after fully charged




7527-D1

Part No.	List price	Magnification	Lens diameter (D)
7527-D1	\$ 35.80	10X	1.181" DIA
7527-D2	\$ 41.60	10X	1.181" DIA
7527-D1B	\$ 42.90	10X	1.181" DIA

4K CARBON FIBER TELESCOPIC POLE VIDEOSCOPE PART NO. ISV-CF5

IP65
WATERPROOF



\$ 4896.00

- Dual motorized control of lens view, 300° horizontal and vertical 360° rotation
- 4K HD true color camera
- Built-in infrared and white light for night and day use
- Insert SD card and export photos, videos

SPECIFICATION

List price	\$ 4896.00
Display	7" Color Touch LCD (3840x2160)
Function	take photos and videos
Image process	image mirror or flipping, real-time image magnification (1X, 2X, 3X, 4X)
Lens diameter (D)	1.575" DIA
Illumination	infrared and white light LED, manual 5-level brightness adjustment
Wireless transmission	WIFI real-time image transmission
Pole	carbon fiber, can be fixed between 3.28~16.40FT
Power supply	rechargeable battery (18650 lithium battery), power adapter (for continuous working)
Weight	4.41lb

HANDHELD LCR METER PART NO. 9652-RC02

INSPECTION
CERTIFICATE

DATA
OUTPUT



- Automatic measure inductance (L), capacitance (C), resistance (R), impedance (Z), quality factor (Q), dissipation factor (D), phase (θ) and DC resistance (DCR)
- Internal trigger
- Data hold
- Full range open and short compensation
- Equivalent circuit: series and parallel
- Compare main parameter with nominal value and display percent deviation
- Built in USB-C interface for data transmission and charging
- Language: English, Chinese
- LCD touch screen with adjustable backlight
- Automatic power off

SPECIFICATION

List price	\$ 899.00
Measuring parameters	C-D, C-Q, C-R, L-D, L-Q, L-R, L-Rdc, R-Q, R-X, R-Rdc, Rdc, Z-D, Z-Q, Z-R, Z-θd
Range	8 levels, auto range or hold range
Basic accuracy	.2%
Test frequency	50Hz, 60Hz, 100Hz, 120Hz, 200Hz, 400Hz, 500Hz, 1kHz, 2kHz, 4kHz, 5kHz, 10kHz, 20kHz, 40kHz, 50kHz, 100kHz; accuracy .02%
Signal level	.1V, .3V, .7V, 1V; accuracy: 10%
Test speed	slow 2.5 times/sec, fast 10 times/sec
Interface	USB-C interface: support HID and VCOM communication, compatible with SCPI command
Power supply	rechargeable Li-ion battery

\$ 899.00

STANDARD DELIVERY

Main unit	1 pc
Kelvin clip lead	1 pc
SMD tweezers lead	1 pc
Short-circuit plate	1 pc

DC TESLAMETERS

- Measure magnetic induction of DC magnetic field
- Directly display the N/S polarity of the measured magnetic field
- One-key zero function: eliminate the influence of zero drift before measurement
- Maximum value hold: record the maximum value of the changing magnetic field
- Unit switch between mT or G (1mT=10G)
- Auto ranging
- Built-in USB interface for data transmission
- Display with backlight
- Auto power off

Starting At \$ 246.00

DATA
OUTPUT



0501-MA01

SPECIFICATION

Part No.	0501-MA01	0501-MA05
List price	\$ 592.00	\$ 246.00
Range	2000mT	
Resolution	.01mT (0~200mT)	.1mT (200~2000mT)
Accuracy	±1.0%	±2.0% (≤1000mT) ±5.0% (1000mT~2000mT)
Temperature coefficient	±.1%/K	
Zero drift	±.5mT/h	
Interface	USB	
Power supply	3x1.5V AA batteries or USB	
Dimension (LxWxH)	6.50x3.54x1.57"	
Weight	.77lb	

STANDARD DELIVERY

Main unit	1 pc
Radial probe	1 pc
Battery (AA)	3 pcs

DC POWER SUPPLY

- Work condition: temperature 32~104°F, humidity ≤80%RH
- Storage condition: temperature -4~140°F, humidity ≤80%RH
- Four-digit LED display
- Output power display
- Output switch control
- 10mV/1mA high accuracy and resolution
- Panel locking function to prevent misoperation
- USB interface for power supply
- OVP/OCP protection
- 3 shortcut keys for presetting

\$ 152.00



Part No.	List price
9911-PS305-U	\$ 152.00

STANDARD DELIVERY

Main unit	1 pc
Test lead	2 pcs

SPECIFICATION

Voltage	range	30V
	setting resolution	10mV
	setting accuracy	≤.1%+20mV
	readback resolution	10mV
	readback accuracy	≤.1%+20mV
	load regulation	≤.1%+5mV
Current	line regulation	≤.01%+5mV
	ripple	10mVrms
	range	5A
	setting resolution	1mA
	setting accuracy	≤.2%+6mA
	readback resolution	1mA
	readback accuracy	≤.2%+6mA
	load regulation	≤.2%+3mA
OVP	line regulation	≤.2%+3mA
	ripple	8mArms
OCP	0~33V	
Power supply	0~5.5A	
	AC 110V±10%, 50Hz/60Hz	

HANDHELD DC OHMMETER

- Maximum reading: 20000
- Basic accuracy .05%
- 3.5 inch LCD screen with adjustable backlight
- Temperature compensation function
- Full-range short-circuit zero function
- Comparator function: upper and lower limit alarms
- Data hold
- Keyboard lock function
- Automatic power off

\$ 2024.00



Part No.	List price
9650-HA20	\$ 2024.00

STANDARD DELIVERY

Main unit	1 pc
Power adapter	1 pc
Mini USB communication cable	1 pc
Test clip	1 pc

SPECIFICATION

Range	20mΩ~20MΩ
Resolution	.01mΩ~.01MΩ
Range mode	auto range, manual range and nominal range
Test speed	slow: 3t/s, medium speed: 15t/s, fast: 30t/s
Trigger	internal trigger, manual trigger, remote trigger
Interface	Mini USB interface, compatible with SCPI command
Power supply	rechargeable lithium battery (operating time≥8 hours), power adapter-powered

MINI LASER DISTANCE METER

BUILT-IN
BLUETOOTH

\$ 122.00

- Accuracy: ±(.12+D/1666)", D: measured distance, unit: ft
- Laser type: red laser, 24.80~26.38µm, class II, <1mW
- Built-in bluetooth, transmission distance is 32ft (no obstacles, no electromagnetic interference)
- Display with backlight
- Unit: ft, in, ft+in, m
- Distance, area, volume and height measurement
- Automatic power off: laser 30s, main unit 180s



SPECIFICATION

Part No.	9565-E40
List price	\$ 122.00
Measuring range	.65~131ft
Resolution	.001ft, 1/16", .001m
Charging interface	USB (type-C)
Dimension	7.09x1.10x1.57"
Weight	.12lb

STANDARD DELIVERY

Main unit	1 pc
USB charging cable	1 pc

INFRARED AND PENETRATION THERMOMETER

IP65
WATERPROOF

- Can measure the surface and inside temperature of objects
- Low battery display
- Display backlight
- High and low alarm
- Automatic data hold (infrared system)
- Automatic power off (infrared system)
- Unit: °F/°C



\$ 103.00

STANDARD DELIVERY

Main unit	1 pc	Part No.	List price
Battery (AAA)	2 pcs	0321-IT42	\$ 103.00

SPECIFICATION

Infrared system	temperature range	5°F~536°F/-15°C~280°C
	temperature resolution	.1°F/.1°C
	temperature accuracy	±5.4°F (at 5°F~68°F), other range ±(1%+1.8)°F ±3.0°C (at -15°C~20°C), other range ±(1%+1.0)°C
	distance to spot size (D:S)	4:1
	emissivity	0.95 (fixed)
Penetration system	spectral response	8~14µm
	temperature range	-40°F~392°F/-40°C~200°C
	temperature accuracy	±3.6°F (at -40°F~32°F), other range ±(1%+1.8)°F ±2.0°C (at -40°C~0°C), other range ±(1%+1.0)°C
Repeatability	<1.8°F	
Measurement response time	<500ms	
Power supply	2×1.5V AAA batteries	
Dimension	5.51×1.54×.94"	
Weight	.31lb	

MOTORIZED DIGITAL ROCKWELL HARDNESS TESTER

FORCE LOADING BY ELECTRIC MOTOR (WITHOUT WEIGHTS)

TOUCH SCREEN

BUILT-IN BLUETOOTH

INSPECTION CERTIFICATE

- Electronic loading test force, high accuracy of force value, and stable measurement value
- Touch screen operation and display, simple operation interface
- 15 types of Rockwell hardness scales can be tested
- Convertible to various hardness standards such as HB and HV
- 500 sets of storage
- With correction function, the hardness value can be corrected based on the size of the cylinders
- According to ISO 6508

\$ 5334.00



SPECIFICATION

Part No.	HDT-RT151	
List price	\$ 5334.00	
Type	Rockwell	
Measurement range	20~88HRA, 20~100HRB, 20~70HRC	
Hardness scale	with indenter included	HRA, HRB, HRC, HRD, HRF, HRG
	with optional indenter	HRE, HRH, HRK, HRL, HRM, HRP, HRR, HRS, HRV
Preliminary test force	98N/10kgf for Rockwell	
Test force	588N (60kg), 980N (100kg), 1471N (150kg)	
Stage elevation	manual	
Load control	automatic (load/dwell/unload)	
Load dwell time	2~60 second	
Resolution	0.1HR	
Max. workpiece height	9.06"	
Max. testing width	6.69"	
Power supply	100~240V, 50/60Hz	
Dimension	18.70×7.87×27.56"	
Weight	154lb	

THERMOHYGROMETER

BUILT-IN BLUETOOTH

\$ 68.40

- Real-time value/maximum/minimum display
- Unit: °F/°C
- Display backlight
- Automatic power off
- Low battery display
- Over range indicator
- Built-in bluetooth, mobile APP is included

STANDARD DELIVERY

Main unit	1 pc
Battery (AAA)	3 pcs

SPECIFICATION

Temperature range	14°F~140°F/-10°C~60°C
Temperature resolution	.2°F/.1°C
Temperature accuracy	±2.0°F/±1.0°C
Humidity range	0%RH~99.9%RH
Humidity resolution	.1%RH
Humidity accuracy	±5.0%RH
Sampling interval	1s
Power supply	3×AAA batteries, working time≥12h
Operation environment	temperature: 32°F~104°F
	humidity: <90%RH (non-condensing)
Storage environment	temperature: -4°F~140°F
	humidity: <75%RH (non-condensing)
Dimension	5.39×2.16×1.10"
Weight	.22lb



Part No.	List price
0315-HT164	\$ 68.40

PORTABLE CRANE SCALE

ATTENTION: LOW ACCURACY

\$ 59.80

- Zero-setting, subtracting tare value
- Automatic power off
- LCD display, with backlight
- Unit: kg
- Overload indication



SPECIFICATION

Part No.	8604-4
List price	\$ 59.80
Maximum weighing	40kg
Minimum weighing	1kg
Resolution (d)	50g
Accuracy	±50g
Operation temperature	14~113°F
Operation humidity	30%~90%RH
Limited load	50kg
Power supply	2×AAA batteries



PORTABLE LEEB HARDNESS TESTER WITH WIRELESS PROBE

\$ 1003.00

INSPECTION CERTIFICATE

- Bluetooth digital probe
- Universal testing angle, no need to set impact direction
- Based on Leeb (HLD), converted to Vickers (HV), Brinell (HB), Rockwell (HRC, HRB), Shore (HSD) and tensile strength (σb)
- Dual value display, shows both Leeb and converted hardness
- Large LCD display with backlight
- Can choose large font display and statistics display
- Automatically calculate maximum, minimum and average value
- Save 300 data
- Operation temperature: 14°F~113°F
- According to ASTM A956, DIN 50156 GB/T 17394

Part No.	List price
HDT-WP201	\$ 1003.00



SPECIFICATION

Resolution	1HLD/1HV/1HB/0.1HRC/0.1HRB/0.1HSD/1σb
Accuracy	±6HLD (when HLD=800)
Measuring range	HL 170-960/HRC 17-69/HRB 13-101.7/HB 20-655/HV 80-940/HSD 32-99.5/σb (rm) 255-2180N/mm²
Power supply	2×AA battery
Dimension	5.31×3.03×1.26"
Weight	.53lb

