

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225
www.ahbinc.com
ISO Certified
customerservice@ahbinc.cor

LIQUID FILTRATION



(800) 991-4225

www.ahbinc.com • customerservice@ahbinc.com ISO Certified

Standard and Custom Bags

Flange and Ring Type Bags









Size 1 Fits all standard-length housings made by: Eaton, FSI, GAF, Pentair, Rosedale,

Strainrite

Area: 2.5 Sq. Ft. Diameter: 7.05" Length: 16.5"

Size PC2

Fits Cuno Model PC2 housings: Area: 5.0

Area: 5.0 Sq. Ft. Diameter: 9.0" Length: 30.0"

Size C2

Fits all Commercial-Parker filters standard-length housings:

Area: 4.4 Sq. Ft. Diameter: 7.31" Length: 32.0"

Size 2

Fits all double-length housings made by: Eaton, FSI, GAF,

GAF, Pentair, Rosedale, Strainrite

Area: 4.4 Sq. Ft. Diameter: 7.31" Length: 32.0"







Size 3

Fits the following housings:
Eaton,
FSI,
Pentair,
Rosedale Model 4-6

Area: 0.8 Sq. Ft. Diameter: 4.12"
Length: 9.0"

Size PC1

Fits Cuno Model PC1 housings: Area: 2.5 Sq. Ft.

Area: 2.5 Sq. F Diameter: 9.0" Length: 20.0"

Size C1

Fits all Commercial-Parker filters standard-length housings:

Area: 2.0 Sq. Ft. Diameter: 7.31" Length: 16.5"

Size 4

Fits the following housings: Eaton, FSI Model FS-35, Pentair,

Rosedale Model 4-12 Area: 1.3 Sq. Ft. Diameter: 4.12" Length: 14.0"

Flange and Ring Type Bags



Size 12 Fits Rosedale Model LLC-8-30:

Area: 5.6 Sq. Ft. Diameter: 8-3/8" Length:

Size 7

Fits Pentair, Rosedale Model 612:

Area: 1.3 Sq. Ft. Diameter: 5.6" Length:

Size 8

Fits Pentair, Rosedale Model 618:

2.0 Sq. Ft. Area: Diameter: 5.6" Length:

Size 9

Fits Pentair, Rosedale Model 630:

Area: 3.3 Sq. Ft. Diameter: 5.6" Length:

RP1

Fits Ronning Petter Size 1:

Area: 3.5 Sq. Ft. Diameter: 8" Length:

RP2


Diameter: 8" Length: 40"

Tie-On and Special BagsAvailable in standard and custom designs

With or without drawstrings in a variety of sizes



How To Order Filter Bags Build an ordering code as shown in this example.

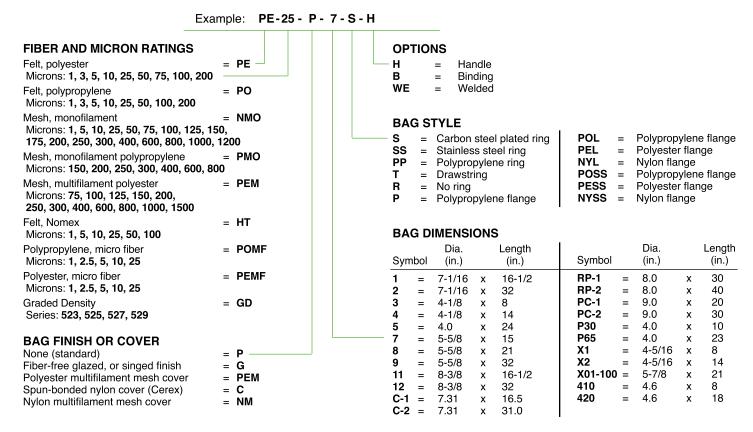


Standard Fibers And Micron Ratings

Construction	Fiber	Available Micron Ratings																				
		1	3	5	10	15	25	50	75	100	125	150	175	200	250	300	400	600	800	1000	1200	1500
Felts	Polyester																					
	Polypropylene																					
	HT-High Temp																					
Multifilament	Polyester																					
Meshes	Nylon																					
Monofilament																						
Meshes	Polypropylene																					

Compatibility and Temperature Limits For Standard Bag Materials

	Compatibility With											
Fiber	Organic Solvents	9		Alkalies	Organic Agents	Oxidizing Agents	Mineral Acids	Temperature- Limitations (max. deg. F)				
Polyester					300							
Polypropylene		Excellent		Exce	ellent	Go	200					
Nylon				Good	Fair	Po	325					

Bag Size	Surface Area (sq. ft.)	Viscosity (cps)	Correction Factor		
		50	4.5		
		100	8.3		
1	2.0	200	16.6		
1 (inner)	1.6	400	27.7		
2	4.4	800	50.0		
2 (inner)	3.6	1000	56.2		
3	0.5	1500	77.2		
4	1.0	2000	113.6		
7	1.8	4000	161.0		
8	2.0	6000	250.0		
9	3.4	8000	325.0		
12	5.6	10000	430.0		



Disclaimer of Warranty To the best of our knowledge, the data contained in this publication is correct: however, we do not assume any liability for the accuracy or completeness of the information. Users should perform their own tests to determine final suitability. Final determination of the suitability of any information or product for the use contemplated by any user, the manner of that use, and whether there is any infringement of patents is the sole responsibility of the user.

5/08

(800) 991-4225