

J Series

Indoor
1/8 – 2 Ton Capacity


Powerful and Portable

These compact chillers are truly a turn-key solution with quick delivery. Its size, portability, simple operation, and ease of maintenance make it the chiller of choice for hundreds of applications. Most models need no special wiring — truly plug and play reliability.

Product Features

- Air-Cooled Condenser, Closed Loop
- Capacities from 2,100 BTU/hr to 24,000 BTU/hr
- Water or Water/Glycol (70/30)
- R134A Refrigerant
- Stainless Cabinet
- Fluid Setpoint 50 – 80°F
- Ambient Temperature Range 50 – 95°F
- Temperature Stability $\pm 3^\circ\text{F}$ (1.5°C) (Optional $\pm 1^\circ\text{F}$)
- Built to UL 1995
- Streamlined Layout for Ease of Maintenance
- 18-Month Parts and Labor Warranty
- 24/7 Service and Support
- Next Day Parts Available

(Fluid temperatures and ambients can vary. Consult factory for the effect on capacity. Stated capacity based on 65°F fluid setpoint and 95°F ambient.)

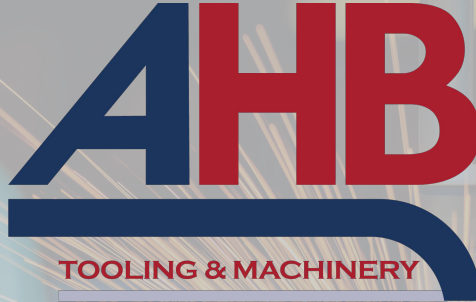

COMPLETE METALWORKING SOLUTIONS
(800) 991-4225 www.ahbinc.com
ISO Certified customerservice@ahbinc.com


Glen
Dimplex
Thermal
Solutions



Koolant
Koolers



- 1 Fill Cap
- 2 Disconnect
- 3 Controller
- 4 Sight Glass
- 5 Discharge Pressure Gauge

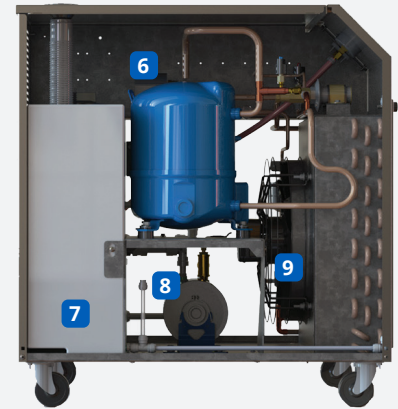

- 6 Compressor
- 7 Tank
- 8 Pump
- 9 Fan

Base Configuration

Digital Controller
Hermetic Compressor
Braze Plate Evaporator
Manual Fluid Bypass Valve
Hot Gas Regulator
Discharge Fluid Pressure Gauge
Seamless, Non-Pressurized, Plastic Tank
Refrigerant and Tank Sight Glasses
Flush Mounted Fill Port
Air Filter

Options

Pump Upgrade Flow for increased flow
Pressure Relief Bypass Valve (PRBV)
Flow Switch for flow monitoring
Auto Water Fill to maintain water level
Anti Backflow
Motorized Hot Gas Bypass Valve
Float Switch to detect low tank fluids
Mounting bracket
Insulation for above 28°F setpoint
cUL Certification

| MODEL | CAPACITY | VOLTAGE | FLA ^a | INLET/OUTLET PORT SIZE | TANK CAPACITY | UNIT DIMENSIONS (LxWxH) | WET CRATED WEIGHT | PUMP STANDARD | | PUMP FLOW UPGRADE ¹ | |
|------------|----------------------------|----------------------------------|----------------------|---------------------------|---------------|----------------------------|----------------------|---------------|-----|-----------------------------------|-----|
| INDOOR | BTU/HR | | AMPS | INCH | GAL | INCH | LBS | GPM | PSI | GPM | PSI |
| JHI-180-M | 2,100 | 115/1/60 | 10.6 | 1/2 | 5 | 21.125x22x28.625 | 290 | 2 | 50 | n/a | n/a |
| JHI-500-M | 4,500 | 115/1/60 230/1/60 | 15.5 8.0 | 1/2 | 5 | 21.125x22x28.625 | 345 | 4 | 50 | n/a | n/a |
| JHI-1000-M | 11,725 11,300 11,300 | 230/1/60 230/3/60 460/3/60 | 17.7 13.6 6.1 | 1/2 | 10 | 25.125x31.125x33.375 | 530 | 4 | 50 | 10 | 35 |
| JHI-1500-M | 18,000 | 230/1/60 230/3/60 460/3/60 | 24.0 16.8 7.5 | 1/2 | 10 | 25.125x31.125x33.375 | 570 | 4 | 50 | 10 | 35 |
| JHI-2000-M | 24,000 | 230/1/60 230/3/60 460/3/60 | 34.0 22.0 10.0 | 1" | 10 | 31.625x33.5x35.675 | 645 | 10 | 35 | 10 | 80 |

List pricing includes standard pump, manual bypass valve, casters, standard packaging, standard tagging, and standard finish.

a) Does not include pump upgrade

1) Pump Pressure PSI Upgrade – in higher pressure applications this option is selected to allow pressure up to 75 PSI. Pressure relief bypass must be added with this option.

