

AHB

**NEED FINANCING?
WE CAN HELP!**

TOOLING & MACHINERY

COMPLETE METALWORKING SOLUTIONS

(800) 991-4225

ISO Certified

www.ahbinc.com

customerservice@ahbinc.com


cHICAGO

DREIS & KRUMP


**WE BUILD 'EM
LIKE THEY HAD
TO LAST FOREVER**

OVER 100 YEARS OF SERVICE



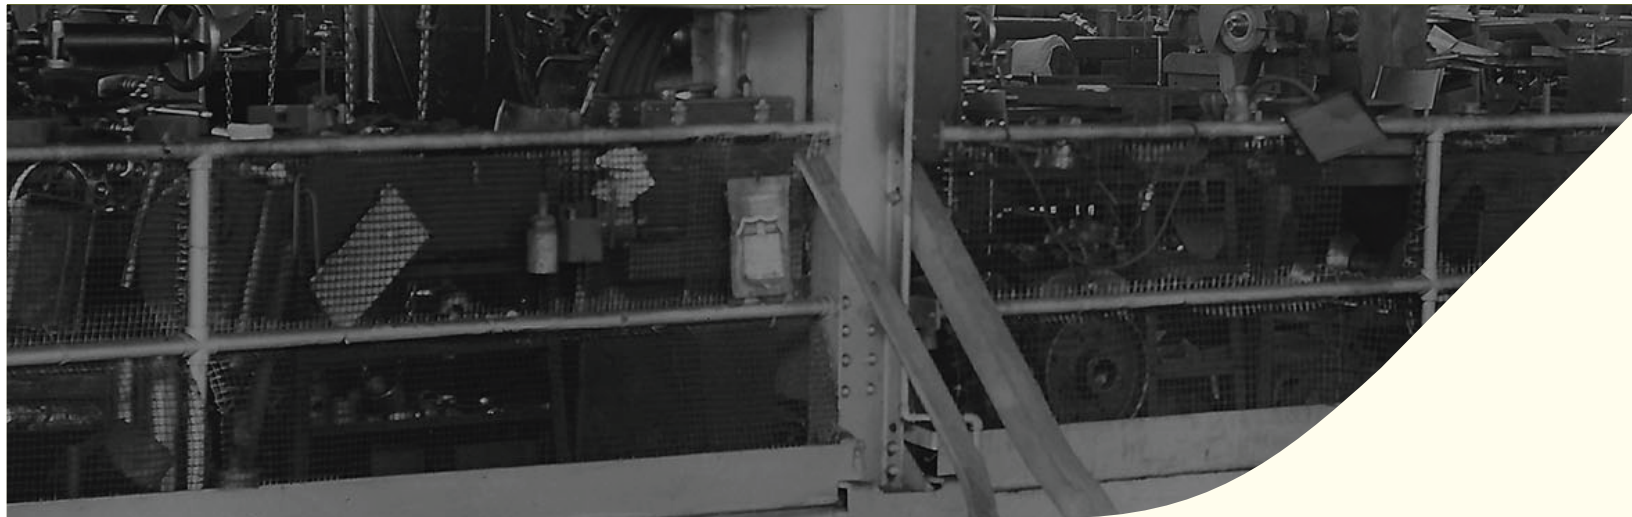

HYDRAULIC LEAF BRAKE

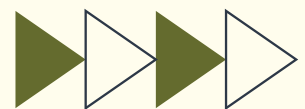

Chicago Dreis & Krump brings power and convenience to its legendary hand brake family because sometimes, for some jobs, you can save time and money with a little extra muscle.

Chicago style hydraulic leaf brakes are now available (standard and box & pan) in a variety of lengths and bending capacities. They're easy to operate. A simple bend control adjustment dial completely eliminates the need for tooling and related time consuming set-ups. These durable, labor saving, high performance work horses are totally self contained.

Best of all, as with every Chicago Dreis & Krump machine, your investment in any of our hydraulic leaf brakes will be a long term, trouble free one. That's a tradition with a time honored track record you can count on.

We've been building in our own special brand of value and dependability for over a century now. The kind you can take to the bank. Quality always costs less in the long run. We've proved it time and time again. Come to Chicago and let us prove it to you.



HYDRAULIC LEAF BRAKES

SPECIFICATIONS

BOX & PAN

ACCESSORIES	Model HBPU	Bending Length	Capacity		Motor HP	Shipping Weight Lbs.	DIMENSIONS		
			Mild Steel*	Stainless Steel#			L	W	S
Radius Nose Bars Insert Bar-1/4" Open End Fingers Extension Fingers Formers	412-6	48"	12 GA	16 GA	2	2,800	78"	48"	54"
	612-6	72"	12 GA	16 GA	2	3,300	102"	48"	54"
	812-6	96"	12 GA	16 GA	3	4,700	125"	48"	57"
	810-6	96"	10 GA	14 GA	5	6,400	125"	48"	57"
	1014-6	120"	14 GA	18 GA	3	5,500	150"	48"	57"
	1010-6	120"	10 GA	14 GA	5	8,800	160"	47"	72"

* Mild Steel: 55,000 PSI tensile

Stainless Steel: 90,000 PSI tensile

FINGER ASSORTMENT					
MODEL BPU	Width and Number of Fingers				
	3"	4"	5"	6"	Total
412-6	5"	2	5	0	12
612-6	5	4	7	1	17
812-6	5	6	9	2	22
810-6	5	6	10	2	22
1014-6	6	10	9	2	28
1010-6	6	10	10	2	28

SPECIFICATIONS

STRAIGHT

ACCESSORIES	Model HSB	Bending Length	Capacity		Motor HP	Shipping Weight Lbs.	DIMENSIONS		
			Mild Steel*	Stainless Steel#			L	W	S
Radius Nose Bars Insert Bar - 1/4" Formers Power Back Gauge	812	97"	12 GA	16 GA	3	4,000	125"	48"	57"
	810	97"	10 GA	14 GA	5	5,800	125"	48"	57"
	1014	121"	14 GA	18 GA	3	4,500	150"	48"	57"
	1010	121"	10 GA	14GA	5	7,100	160"	48"	57"
	1218	145"	18 GA	22GA	3	4,900	174"	48"	57"
	1422	169"	22 GA	26GA	3	5,500	200"	48"	57"


* Mild Steel: 55,000 PSI tensile

Stainless Steel: 90,000 PST tensile

Dreis & Krump reserves the right to discontinue or change specifications, design or material at any time without prior notice or obligation.


WE BUILD 'EM LIKE THEY HAD TO LAST FOREVER

**NEED FINANCING?
WE CAN HELP!**

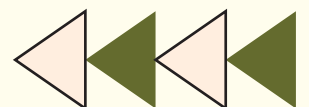



Scan here



Get In Touch



CHICAGO Dreis & Krump
481 S. Governors Hwy. Peotone, IL 60468



800-991-4225